

FCC TEST REPORT(Bluetooth)

for

Meiloon Industrial Co., Ltd.

Home theater with wireless subwoofer

Model Number: ES-SNDBR-2.1-BLK

FCC ID:R48ES21BLK
IC:7190A-ES21BLK

Prepared for : Meiloon Industrial Co., Ltd.
Address : NO.99.Xingfu Road,330 Taoyuan City,TAIWAN
Prepared by : Keyway Testing Technology Co., Ltd.
Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China




Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 16KWE043683F
Date of Test : Apr. 08~Jun.06, 2016
Date of Report : Jun. 06, 2016

TABLE OF CONTENTS

Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function.....	5
2.2. Description of Device (EUT)	5
2.3. Independent Operation Modes	5
2.4. Product Version	6
2.5. Test Facilities	6
2.6. List of Test and Measurement Instruments	7
3. TEST SET-UP AND OPERATION MODES.....	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software.....	8
3.4. Special Accessories and Auxiliary Equipment.....	8
3.5. Countermeasures to Achieve EMC Compliance	8
3.6. Test Environment:	8
4. MAXIMUM PEAK OUTPUT POWER.....	9
4.1. Limits	9
4.2. Test Procedure.....	9
5. EMISSION TEST RESULTS.....	15
5.1. Conducted Emission at the Mains Terminals Test.....	15
5.2. Radiated Emission Test.....	20
6. 20DB & 99% OCCUPY BANDWIDTH	34
6.1. Limits	34
6.2. Test setup	34
7. FREQUENCY SEPARATION.....	41
7.1. Limits	41
7.2. Test setup	41
8. NUMBER OF HOPPING FREQUENCY	48
8.1. Limits	48
8.2. Test setup	48
9. DWELL TIME	50
9.1. Limits	50
9.2. Test setup	50
10. BAND EDGE COMPLIANCE TEST	57
10.1. Limits	57
10.2. Test setup	57
10.3. TEST Procedure	58
11. ANTENNA REQUIREMENTS	67
11.1. Limits	67
11.2. Result	67
12. PHOTOGRAPHS OF TEST SET-UP	68
13. PHOTOGRAPHS OF THE EUT	70

Keyway Testing Technology Co., Ltd.

Applicant:	Meiloon Industrial Co., Ltd.		
Address:	NO.99.Xingfu Road,330 Taoyuan City,TAIWAN		
Manufacturer:	Snap AV		
Address:	1800 Continental Blvd Suite 200 Charlotte, NC 28273 USA		
E.U.T:	Home theater with wireless subwoofer		
Model Number:	ES-SNDBR-2.1-BLK		
Serial Model:	N/A		
Trade Name:		Serial No.:	-----
Date of Receipt:	Apr. 08, 2016	Date of Test:	Apr. 08~Jun. 06, 2016
Test Specification:	FCC Part 15, Subpart C Section 15.247: 2015 ANSI C63.10:2013 RSS-247 Issue 1 May 2015 RSS-Gen Issue 4 November 2014		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
Issue Date: Jun. 06, 2016			
Tested by:	Reviewed by:	Approved by:	
			
Keven Wu / Engineer	Mike Xu / Supervisor	Andy Gao / Supervisor	
Other Aspects: None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207/ RSS-Gen §8.8	PASS
Radiated Emissions	15.205(a)/15.209 15.247(d) / RSS-Gen §6.13	PASS
20dB Bandwidth	15.247(a)(1) / RSS-247 §5.1(1) &RSS-Gen§6.6	PASS
99% Bandwidth	RSS-247 §5.1(1) &RSS-Gen§6.6	PASS
Frequency Separation	15.247(a)(1) / RSS-247 §5.1(2)	PASS
Maximum Peak Output Power	15.247(b)(1) / RSS-247§5.4(2) &RSS-Gen§6.12	PASS
Number of Hopping Frequency	15.247(a)(1)(iii) / RSS-247 §5.1(4)	PASS
Dwell time	15.247(a)(1)(iii) / RSS-247 §5.1(4)	PASS
Emissions from out of band	15.247(d) / RSS-247 §5.5	PASS
Antenna Requirement	15.203/ RSS-Gen§8.3	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Home theater with wireless subwoofer
Model No.:	ES-SNDBR-2.1-BLK
Serial Model:	N/A
Model Difference	N/A
Operation Frequency:	2402MHz ~2480MHz
Channel numbers:	79 Channels
Channel spacing	1MHz
Modulation technology:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Bit Rate of Transmitter	1Mbps/2Mbps/3Mbps
Antenna Type:	Internal antenna
Antenna gain:	1.53 dBi
Power supply:	DC 24V from adapter
Adapter	Adapter 1: Model: F150602-A I/P: 100-240Vac, 50/60Hz, 1.8A; O/P: 24Vdc, 2.5A DC Line: Unshielded, Undetachable, 1.75m Adapter 2: Model:DYS602-240250W I/P: 100-240Vac, 50/60Hz, 1.5A; O/P: 24Vdc, 2.5A DC Line: Unshielded, Undetachable, 1.75m

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work BT mode and Test mode as below:

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	BT link

2.4. Product Version

Product SW version	104-B10021A01V-E
Product HW version	104-B10021A01V-E
Radio SW version	V127
Radio HW version	V127
Test SW Version	B2.4
RF power setting in TEST SW	3dBm

2.5. Test Facilities

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA
Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA
Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.
Registration No.: UA 50207153
Date of registration: July 13, 2011

Certificated by UL, USA
Registration No.: 100567-237
Date of registration: September 1, 2011

Certificated by Intertek
Registration No.: 2011-RTL-L1-31
Date of registration: October 11, 2011

Certificated by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Building 1, Baishun Industrial Zone, Zhangmutou
Town, Dongguan, Guangdong, China

2.6. List of Test and Measurement Instruments

2.6.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 09,16	Apr. 09,17
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 09,16	Apr. 09,17
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 09,16	Apr. 09,17

2.6.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 09,16	Apr. 09,17
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 09,16	Apr. 09,17
Signal Amplifier	SONOMA	310	187016	Apr. 09,16	Apr. 09,17
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 09,16	Apr. 09,17
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 09,16	Apr. 09,17
High Pass filter	Micro	HPM50111	324216	Apr. 09,16	Apr. 09,17
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 09,16	Apr. 09,17
Attenuation	MCE	24-10-34	BN9258	Apr. 02,16	Apr. 02,17
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 02,16	Apr. 02,17


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: Home theater with wireless subwoofer)

3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

Adapter:	Adapter 1: Model: F150602-A I/P: 100-240Vac, 50/60Hz, 1.8A; O/P: 24Vdc, 2.5A DC Line: Unshielded, Undetachable, 1.75m Adapter 2: Model:DYS602-240250W I/P: 100-240Vac, 50/60Hz, 1.5A; O/P: 24Vdc, 2.5A DC Line: Unshielded, Undetachable, 1.75m
----------	--

3.5. Countermeasures to Achieve EMC Compliance

None.

3.6. Test Environment:

Ambient conditions in the test laboratory:

Items	Actual
Temperature (°C)	21~23
Humidity (%RH)	50~65

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limits

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS

4.2. Test Procedure



- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW ≥ RBW
Sweep = auto
Detector function = peak
Trace = max hold



4.3. Test setup





Test data:


1Mbps			
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH00	2402	1.30	30
CH39	2441	1.54	30
CH78	2480	0.74	30
2Mbps			
CH00	2402	1.12	20.96
CH39	2441	1.28	20.96
CH78	2480	0.53	20.96
3Mbps			
CH00	2402	1.23	20.96
CH39	2441	1.44	20.96
CH78	2480	0.63	20.96

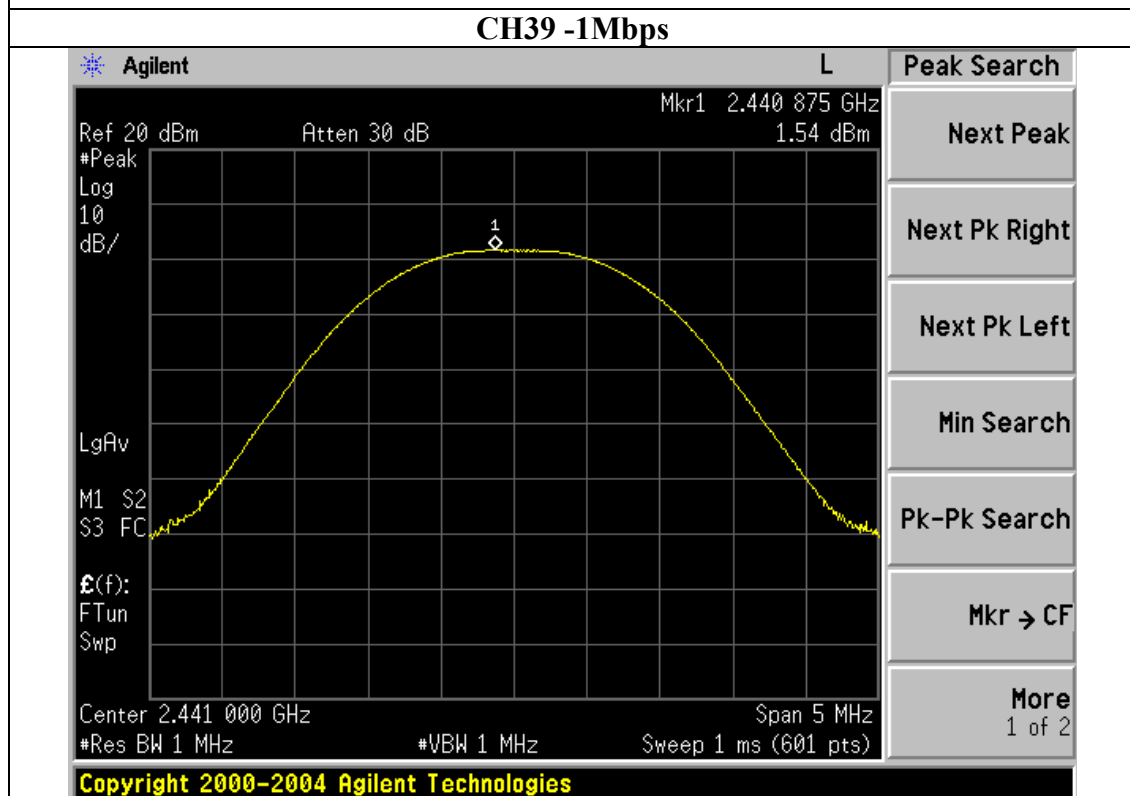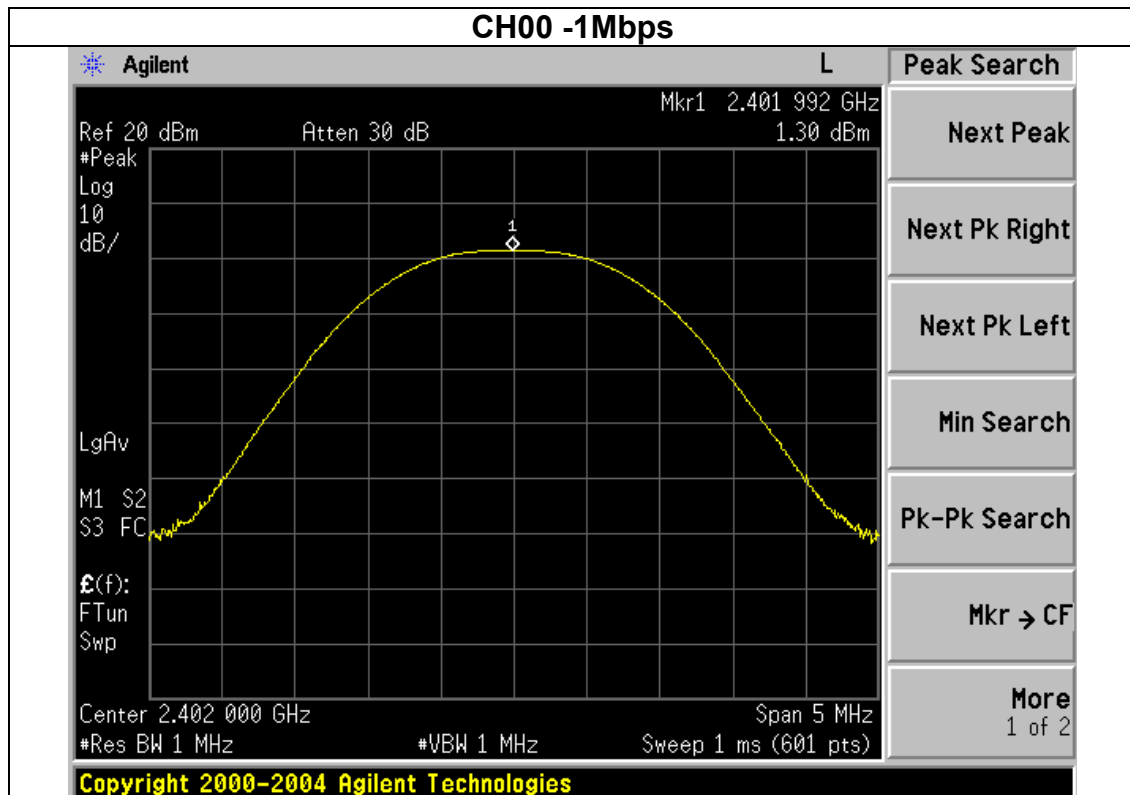

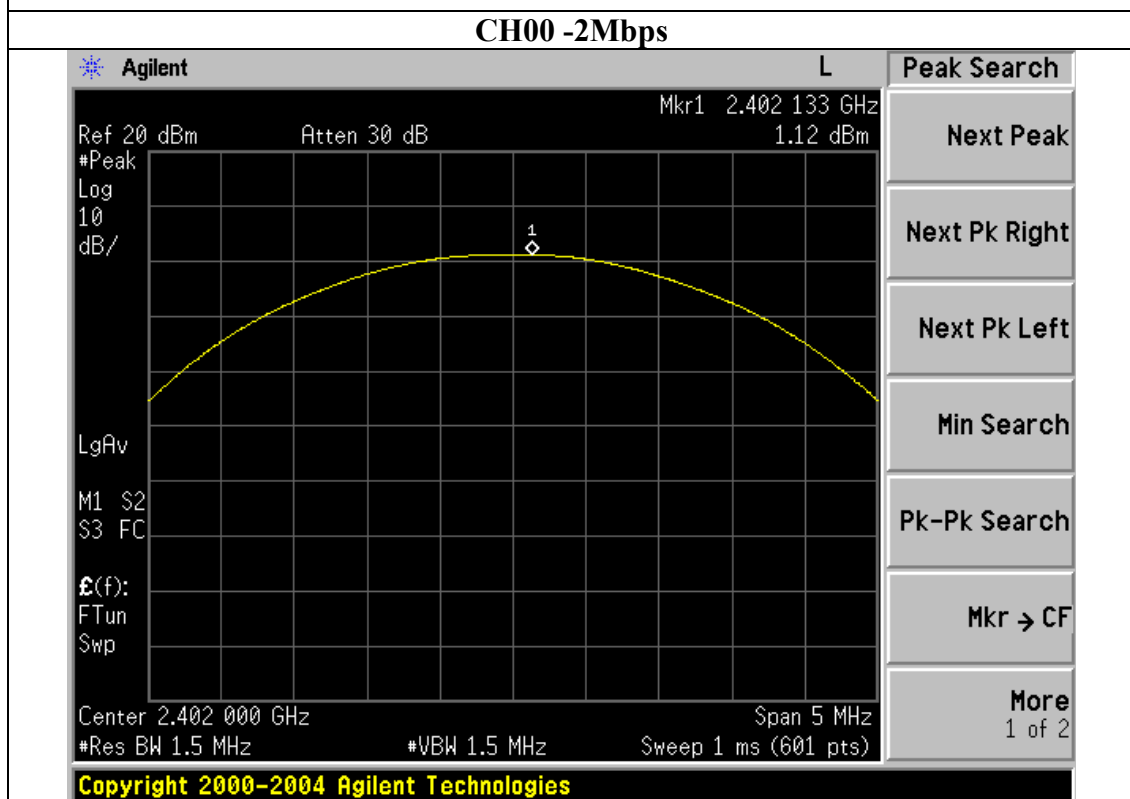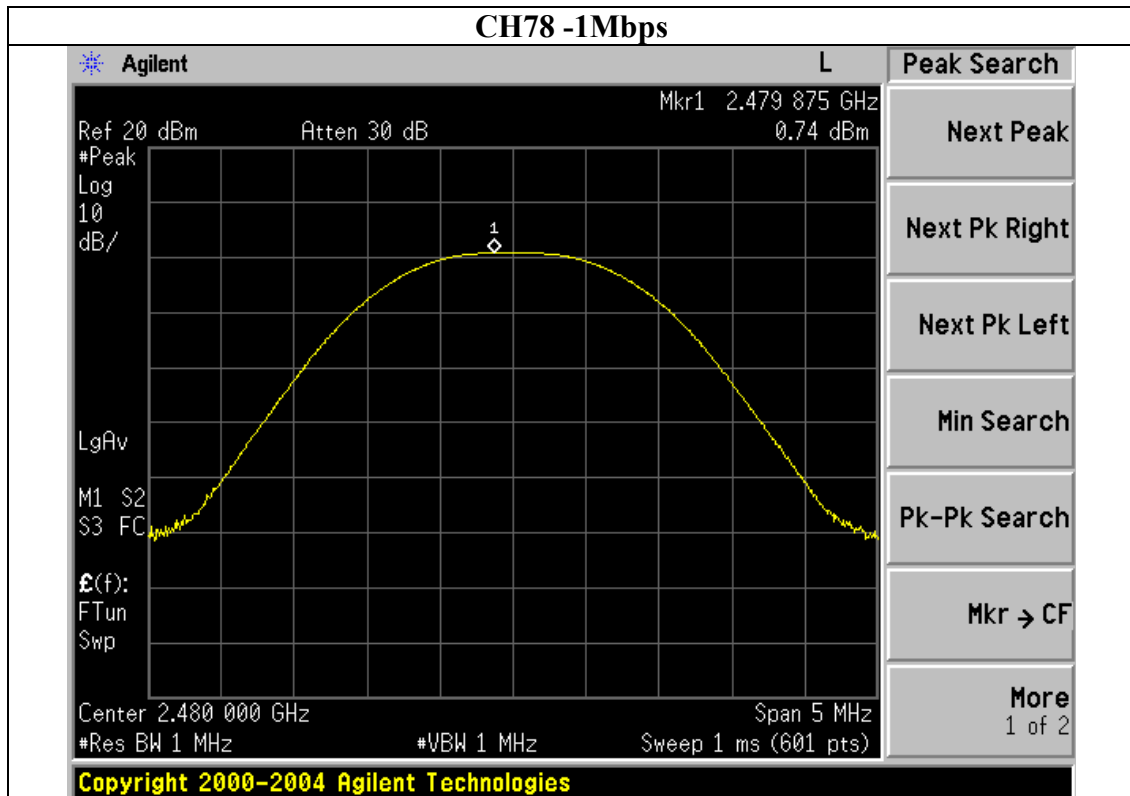

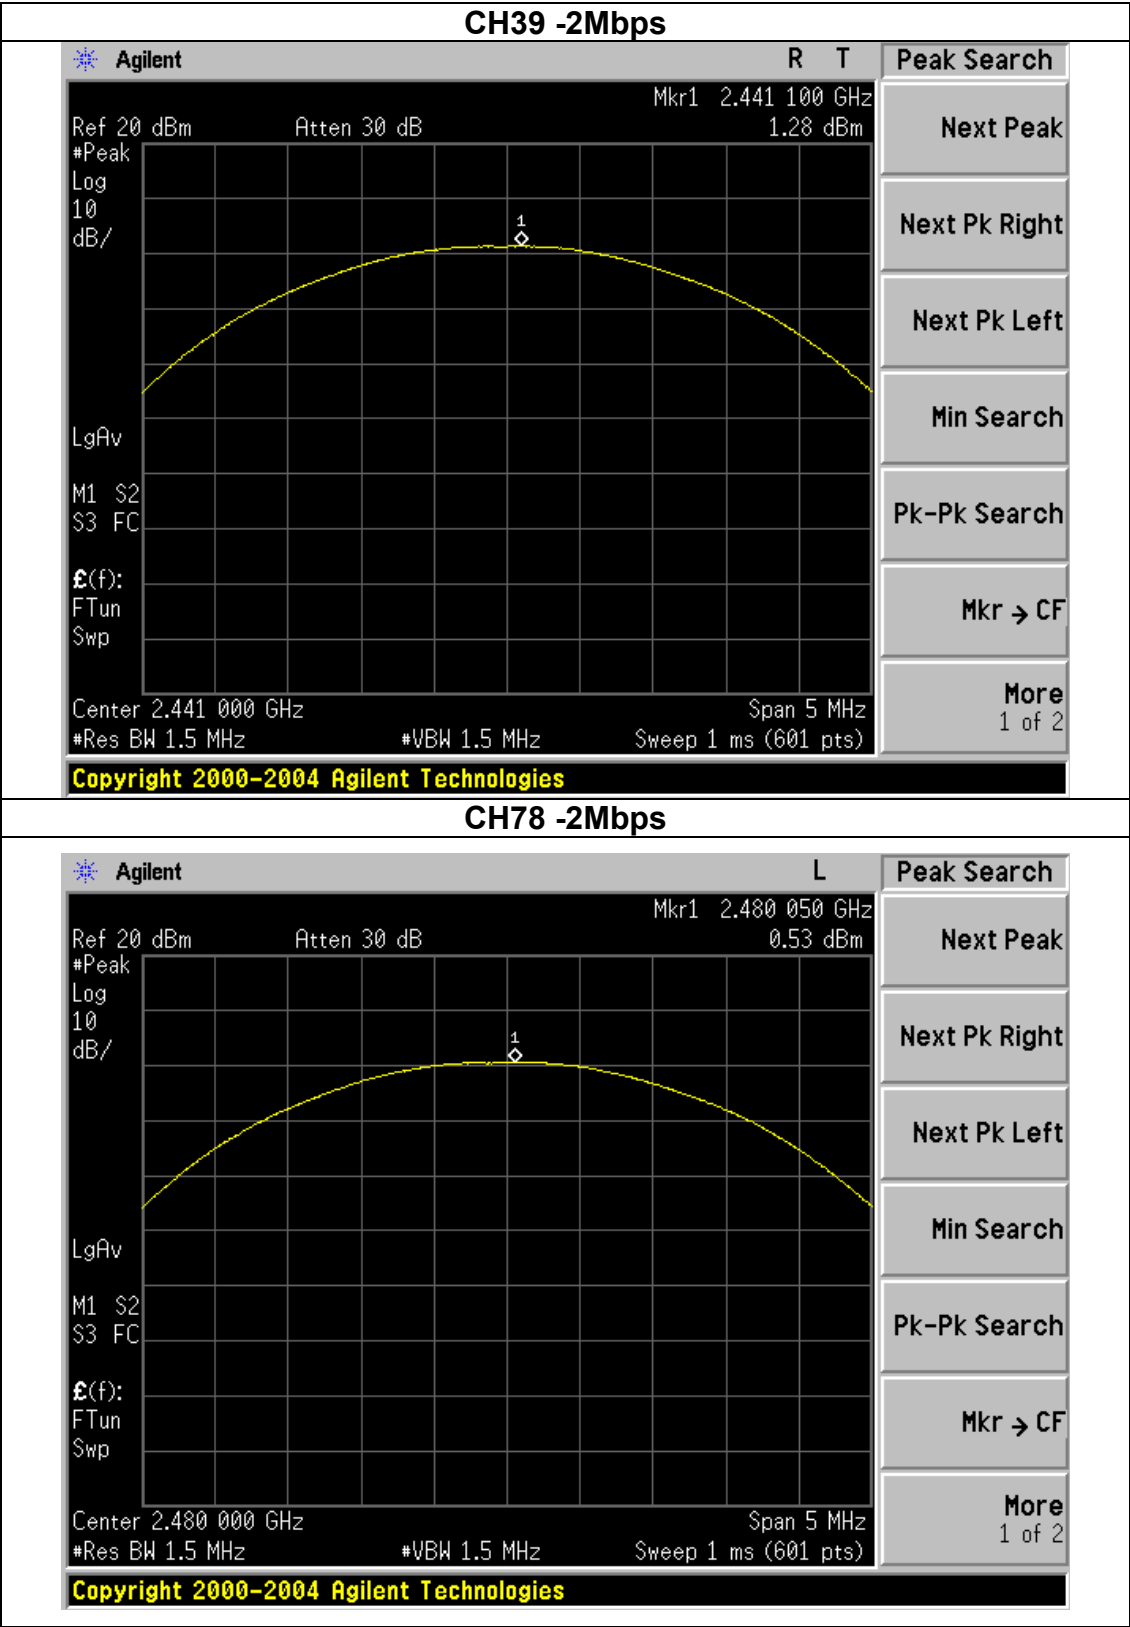

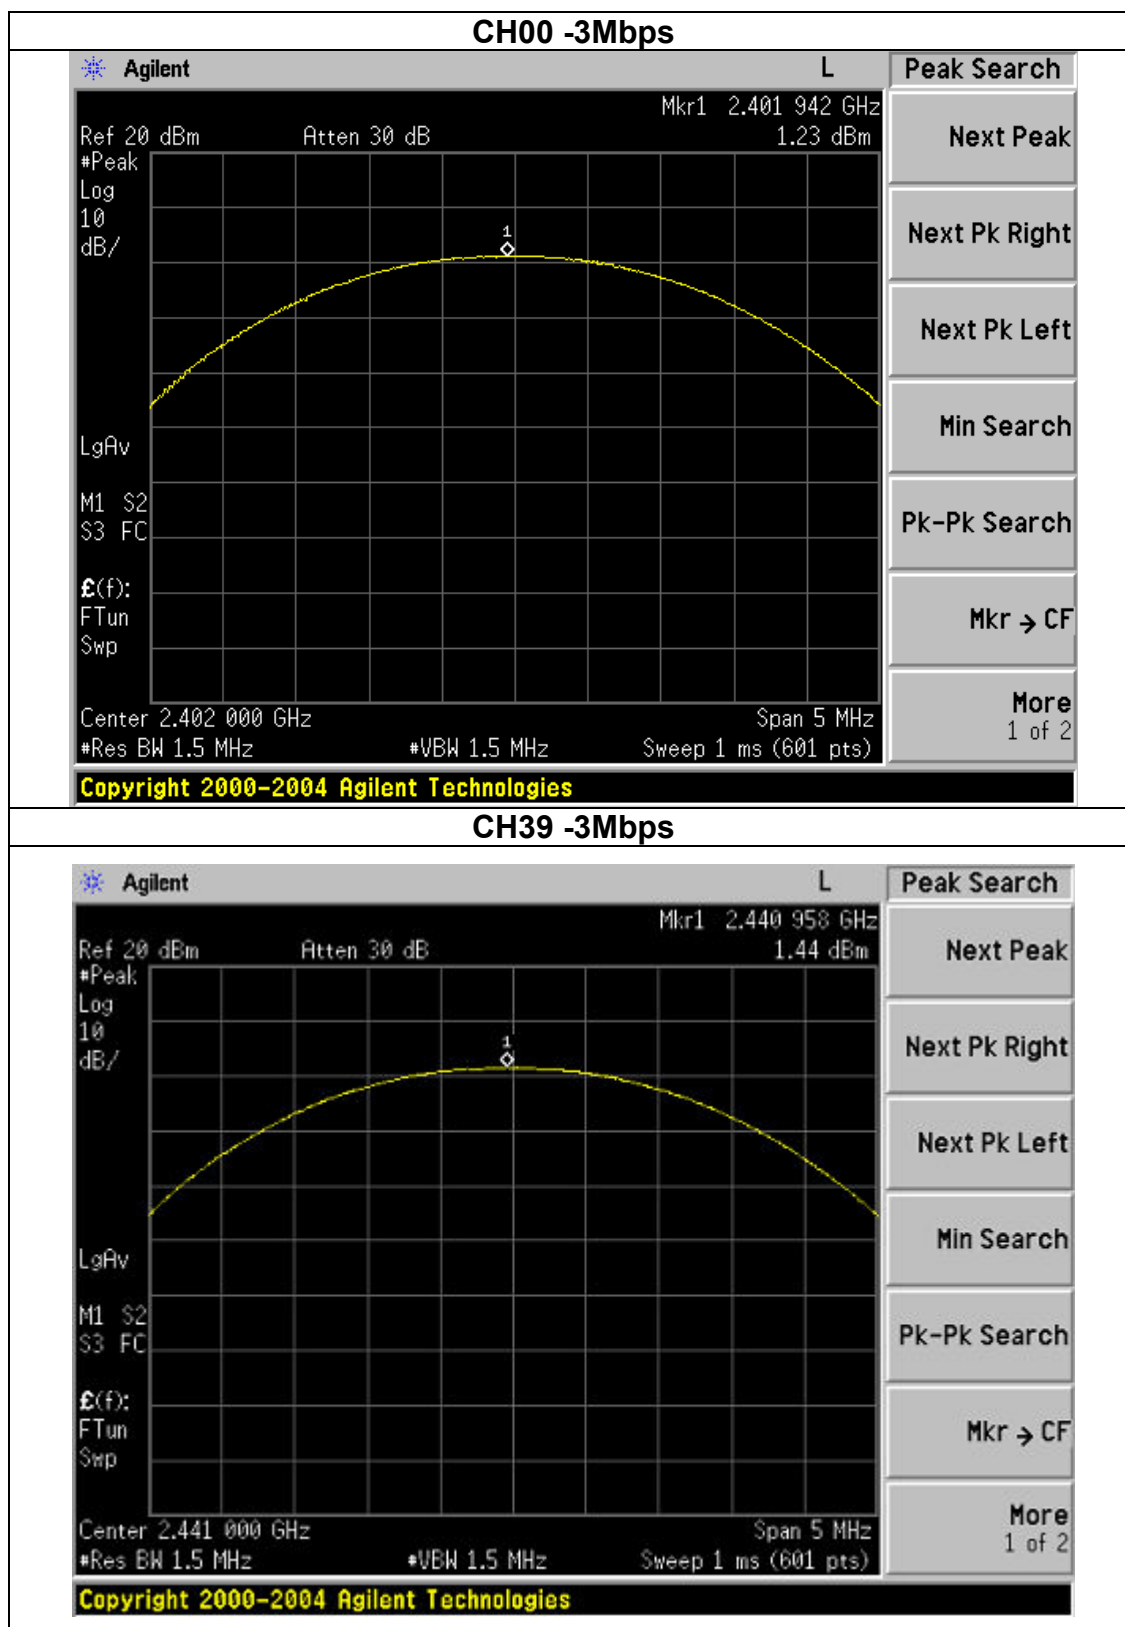

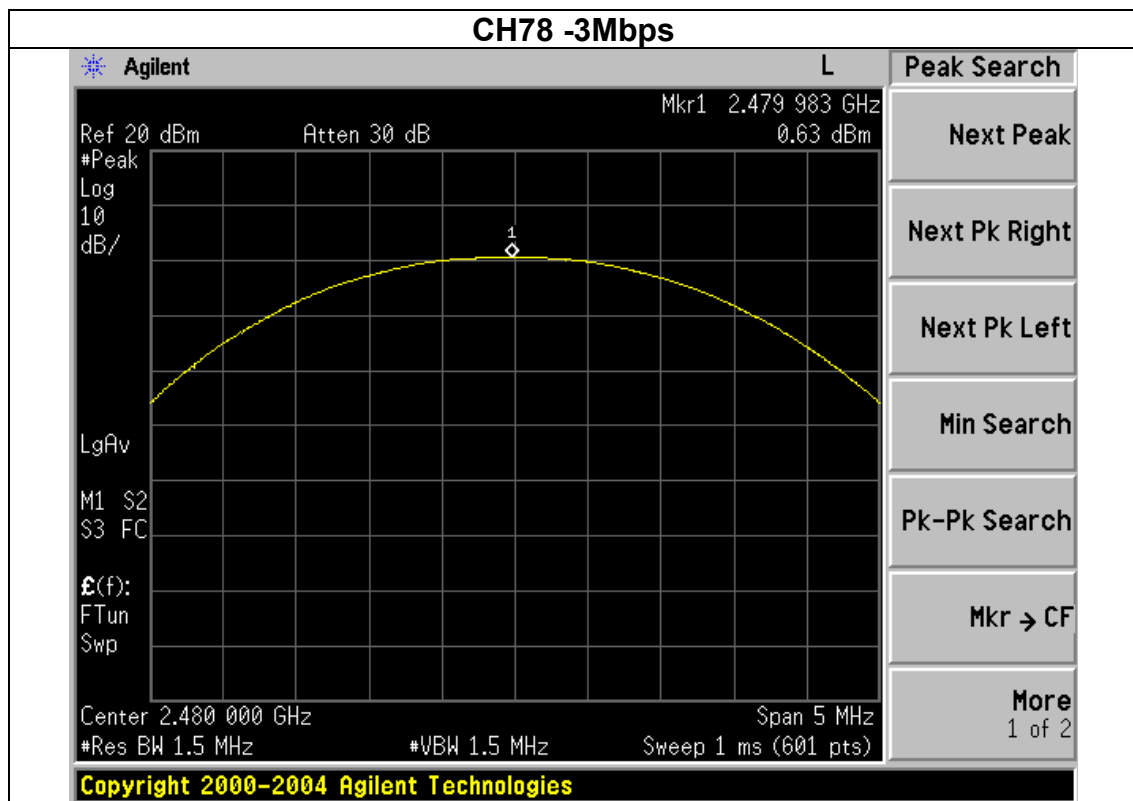

5. EMISSION TEST RESULTS

5.1. Conducted Emission at the Mains Terminals Test

5.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

5.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the center so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.


Pretest for all mode, The test data of the worst case condition(s) was reported on the following page. We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

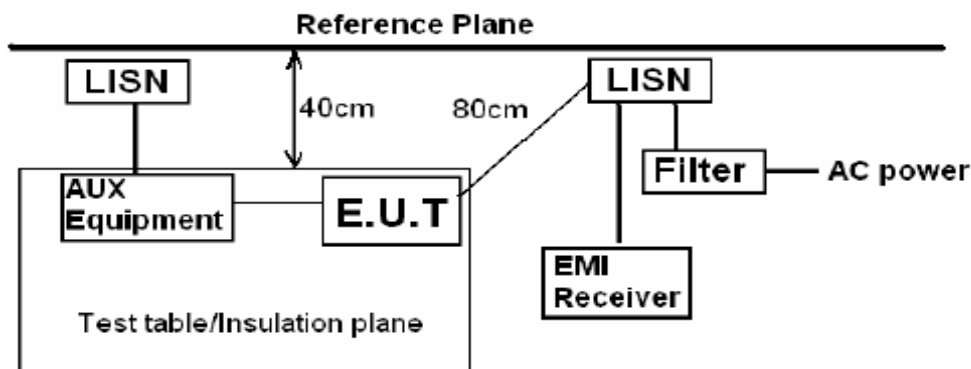

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m


5.1.3. Test result

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 24.0V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 4

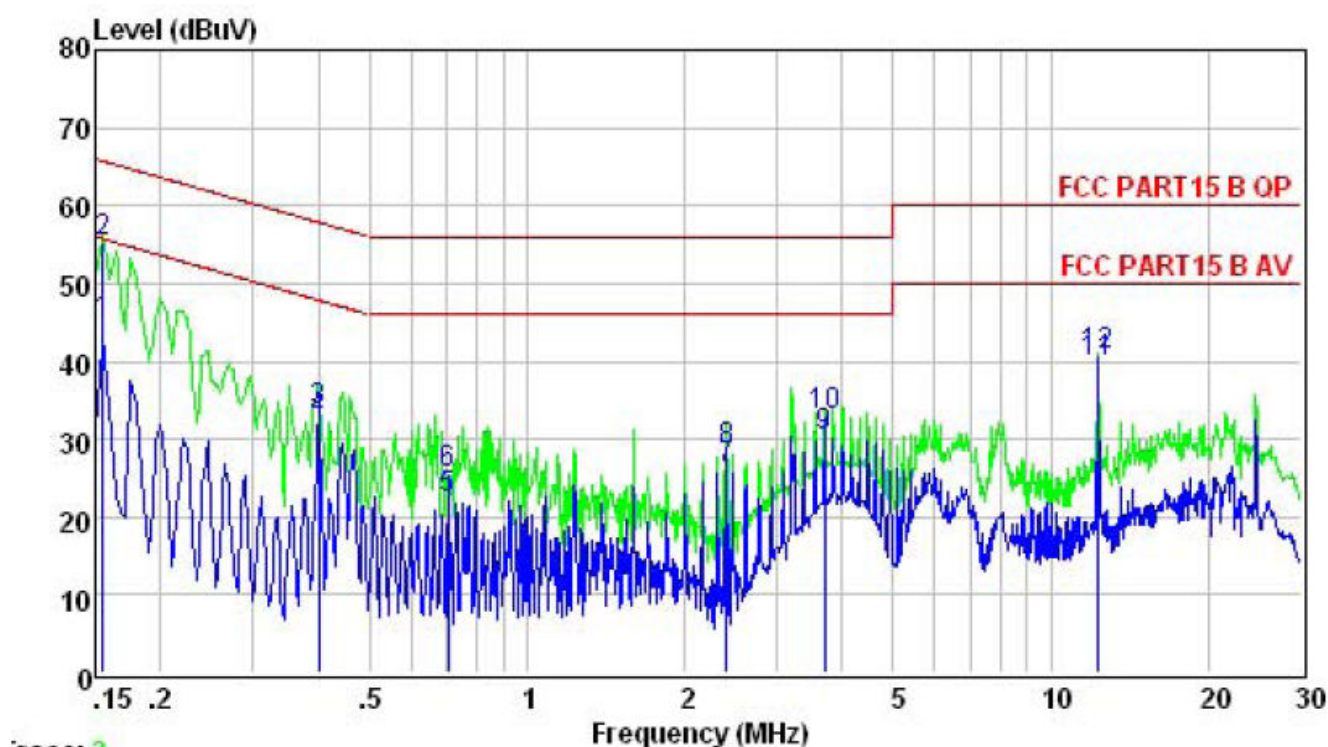


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.155	44.80	55.74	-10.94	Average
2	0.155	55.20	65.74	-10.54	QP
3	0.400	33.54	47.86	-14.32	Average
4	0.400	32.56	57.86	-25.30	QP
5	0.708	22.19	46.00	-23.81	Average
6	0.708	25.64	56.00	-30.36	QP
7	2.396	26.16	46.00	-19.84	Average
8	2.396	28.69	56.00	-27.31	QP
9	3.700	30.34	46.00	-15.66	Average
10	3.700	32.89	56.00	-23.11	QP
11	12.318	39.85	50.00	-10.15	Average
12	12.318	40.79	60.00	-19.21	QP

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 24.0V from Adapter 1 AC 120V/60Hz	Test Mode :	Mode 4

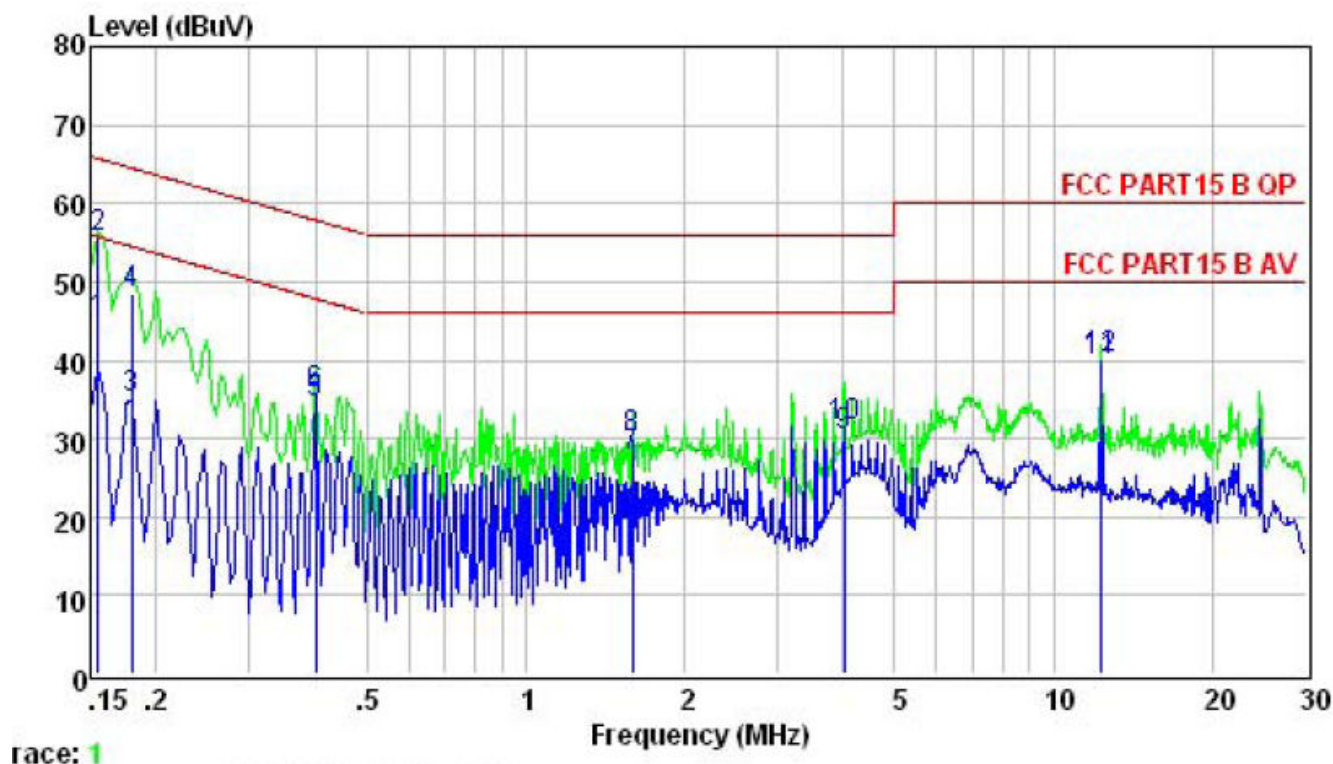


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.155	44.80	55.74	-10.94	Average
2	0.155	55.70	65.74	-10.04	QP
3	0.180	35.03	54.50	-19.47	Average
4	0.180	48.56	64.50	-15.94	QP
5	0.400	34.57	47.86	-13.29	Average
6	0.400	35.69	57.86	-22.17	QP
7	1.593	27.67	46.00	-18.33	Average
8	1.593	30.12	56.00	-25.88	QP
9	4.006	30.36	46.00	-15.64	Average
10	4.006	31.59	56.00	-24.41	QP
11	12.318	39.86	50.00	-10.14	Average
12	12.318	40.12	60.00	-19.88	QP

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 4

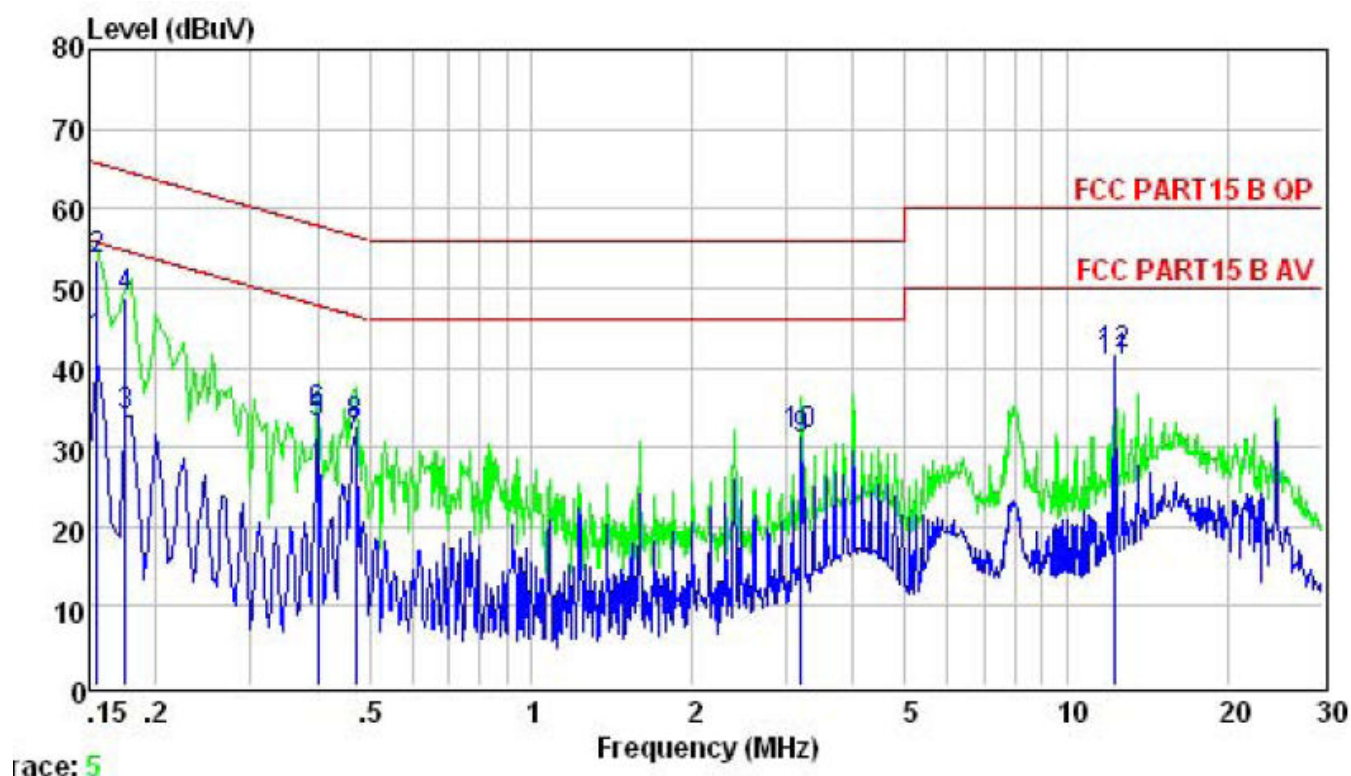

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.155	43.30	55.74	-12.44	Average
2	0.155	53.60	65.74	-12.14	QP
3	0.175	34.03	54.72	-20.69	Average
4	0.175	48.69	64.72	-16.03	QP
5	0.400	32.97	47.86	-14.89	Average
6	0.400	34.21	57.86	-23.65	QP
7	0.471	31.18	46.49	-15.31	Average
8	0.471	32.58	56.49	-23.91	QP
9	3.190	30.93	46.00	-15.07	Average
10	3.190	31.59	56.00	-24.41	QP
11	12.318	40.61	50.00	-9.39	Average
12	12.318	41.52	60.00	-18.48	QP

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V from Adapter 2 AC 120V/60Hz	Test Mode :	Mode 4

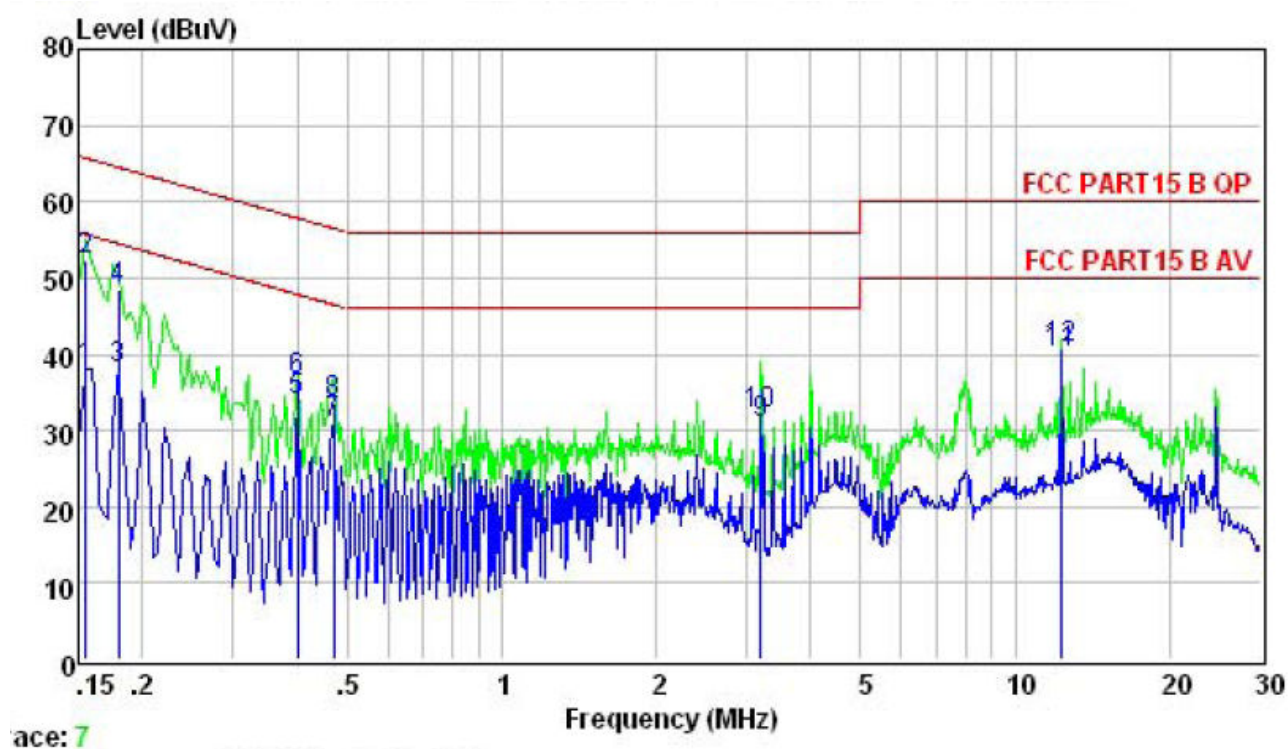

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	Line	Limit	
			dBuV	dB	
1	0.155	38.00	55.74	-17.74	Average
2	0.155	52.36	65.74	-13.38	QP
3	0.180	37.97	54.50	-16.53	Average
4	0.180	48.56	64.50	-15.94	QP
5	0.400	33.80	47.86	-14.06	Average
6	0.400	36.60	57.86	-21.26	QP
7	0.471	30.84	46.49	-15.65	Average
8	0.471	33.56	56.49	-22.93	QP
9	3.190	30.78	46.00	-15.22	Average
10	3.190	32.15	56.00	-23.85	QP
11	12.318	40.10	50.00	-9.90	Average
12	12.318	40.89	60.00	-19.11	QP

5.2. Radiated Emission Test

5.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

5.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

5.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground blow 1G and 1.5m above 1G. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, the EUT was placed on a turn table which was 1.5 m above the ground, for all test, used peak detector.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).

6. We pretest all modulation, The worst was GFSK, the worst data was show in the report.


Radiated Emission Test-Up Frequency Below 30MHz

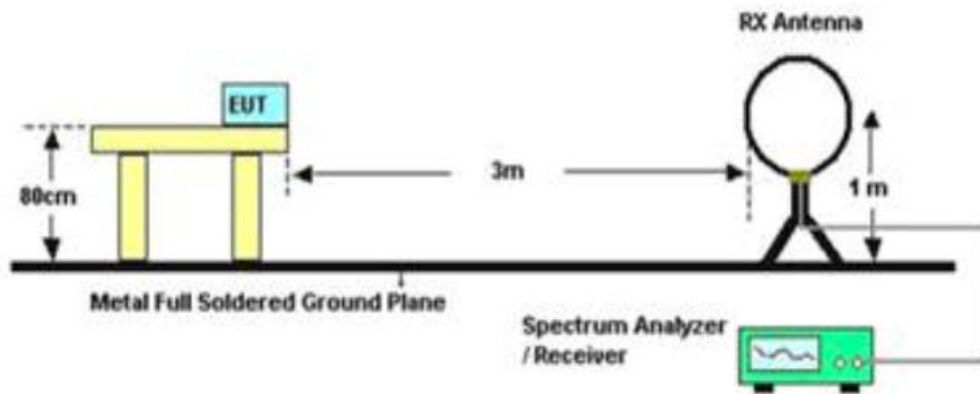

30MHz- 1GHz

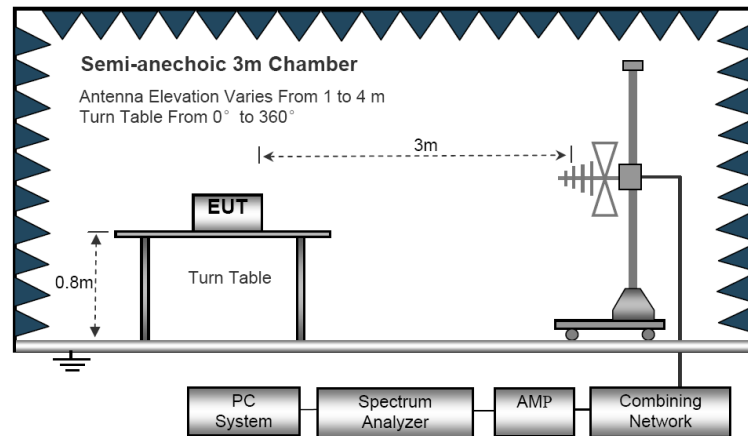

Above 1GHz

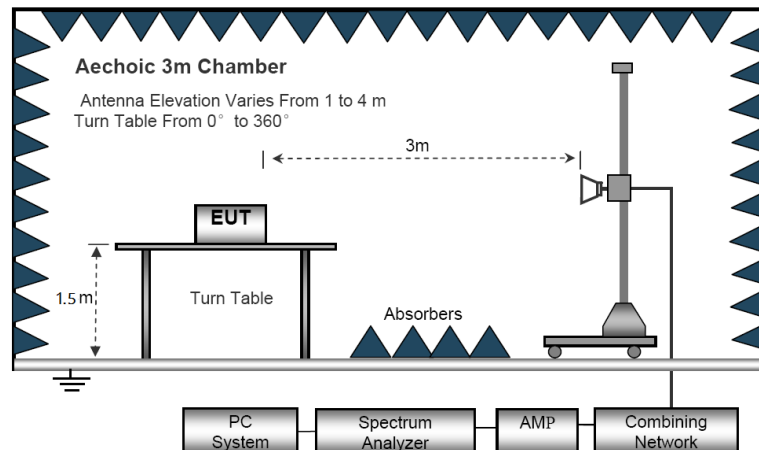

Below 30MHz

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 24V from adapter AC 120V/60Hz		

30- 1GHz

Vertical

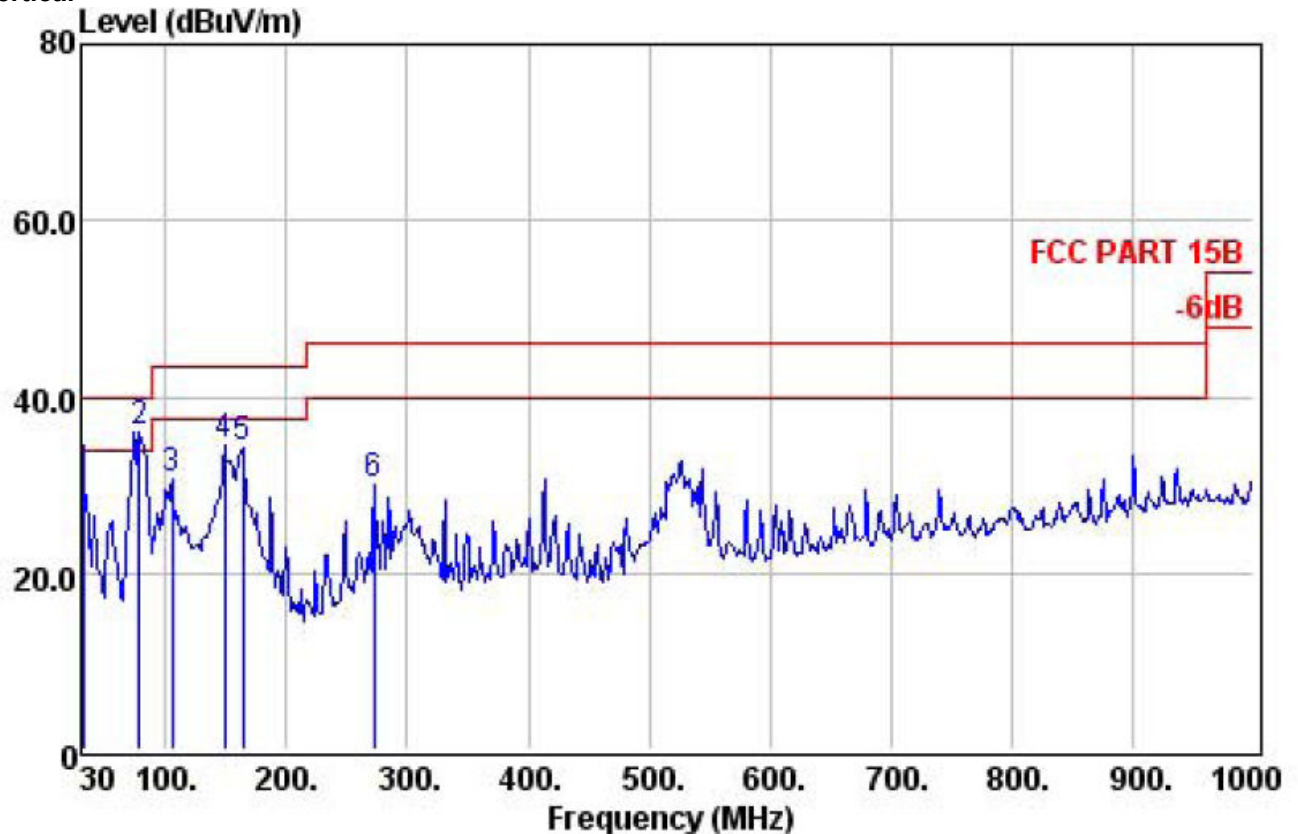

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	!	31.94	31.40	47.55	0.56	34.37	40.00	-5.63 QP
2	!	78.50	31.34	58.61	0.85	36.05	40.00	-3.95 QP
3		105.66	31.33	51.39	1.03	30.52	43.50	-12.98 QP
4		148.34	31.24	55.73	1.22	34.61	43.50	-8.89 QP
5		163.86	31.21	54.64	1.30	34.28	43.50	-9.22 QP
6		272.50	30.95	46.08	1.78	29.90	46.00	-16.10 QP

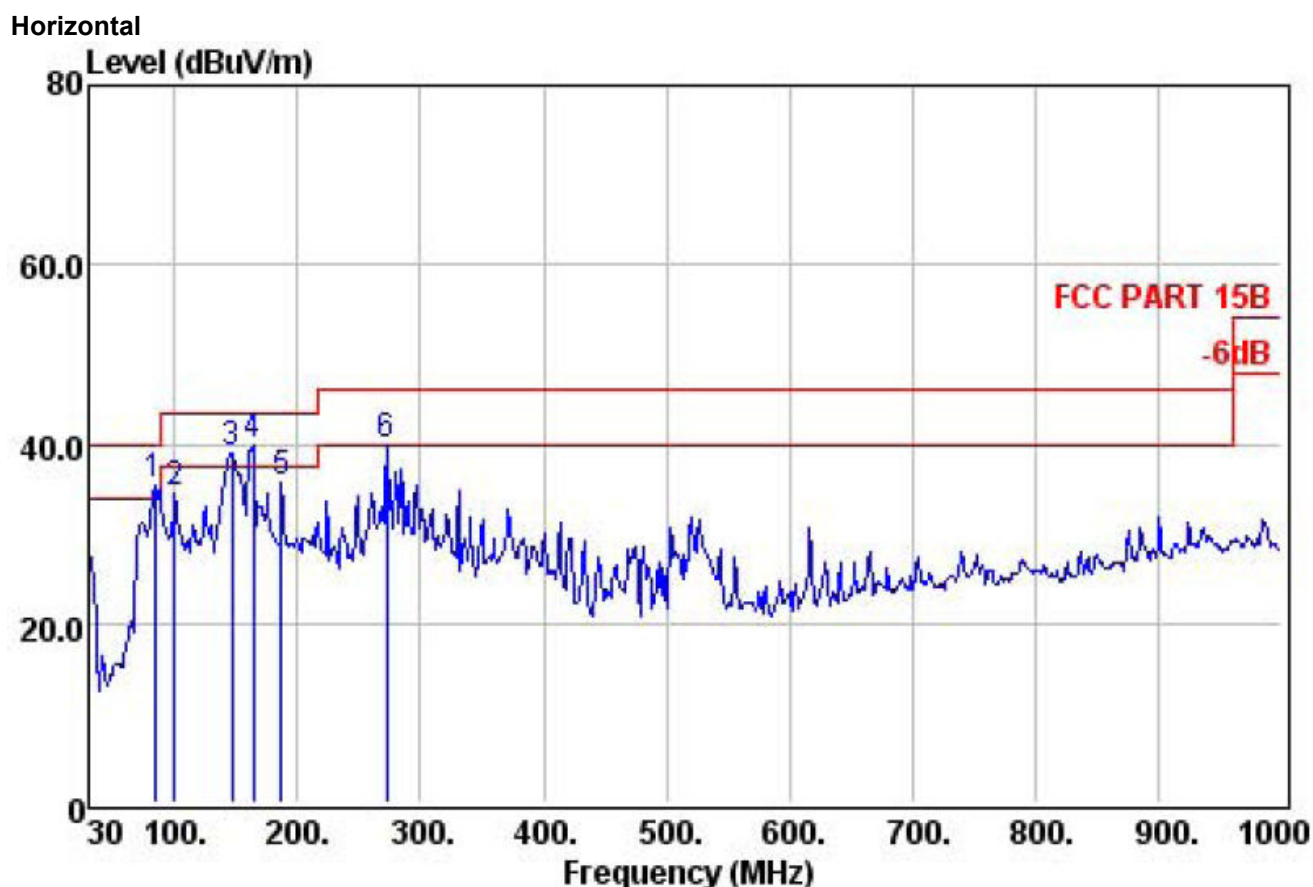

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 !	83.35	31.35	57.53	0.94	35.49	40.00	-4.51	QP
2	99.84	31.35	55.45	0.94	34.63	43.50	-8.87	QP
3 !	146.40	31.23	60.18	1.22	38.95	43.50	-4.55	QP
4 !	163.86	31.21	60.10	1.30	39.74	43.50	-3.76	QP
5	187.14	31.13	55.31	1.39	35.76	43.50	-7.74	QP
6	272.50	30.95	56.00	1.78	39.82	46.00	-6.18	QP

NOTE:


Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

1M(High channel) is the worst mode, only worst case is presented in the report.


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 24V from adapter AC 120V/60Hz		

Vertical

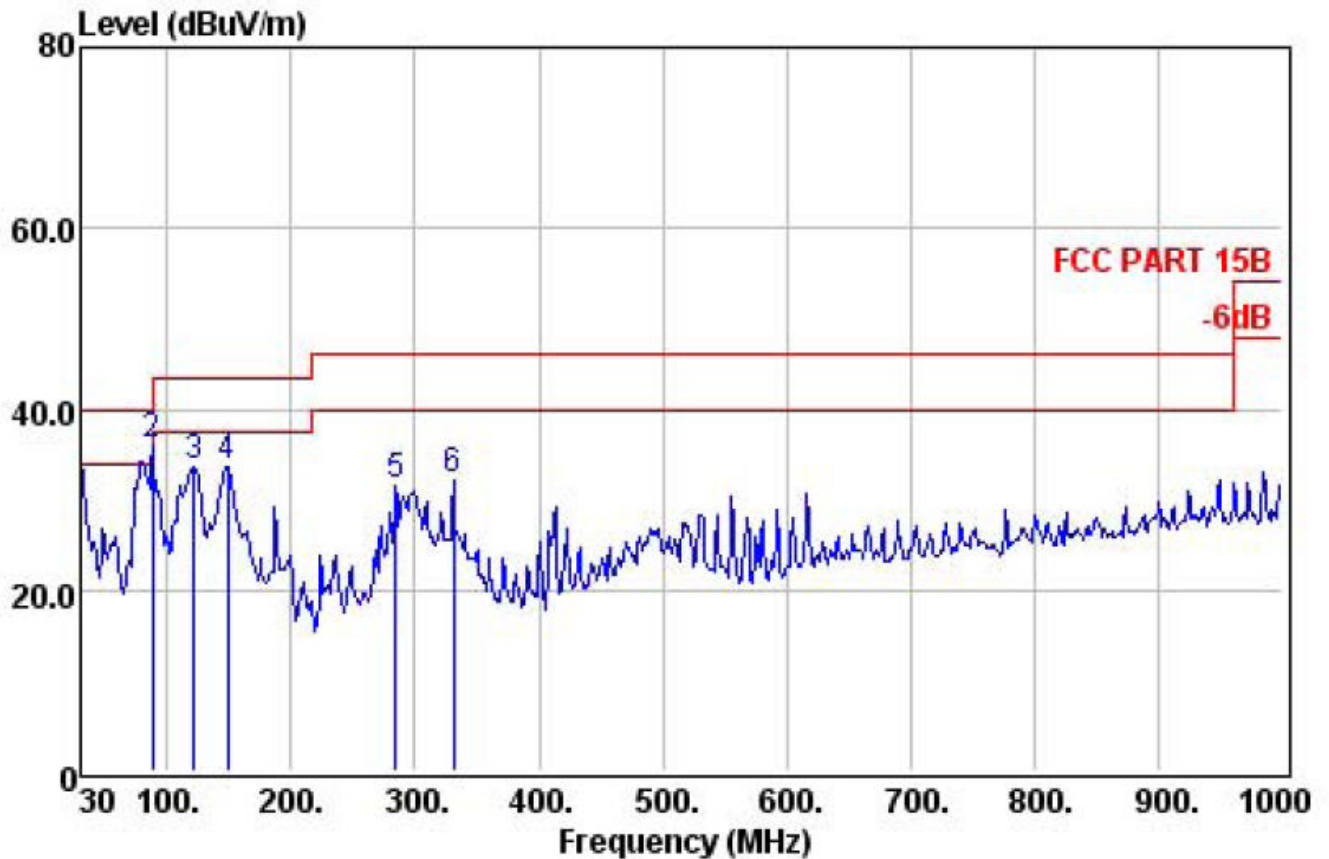

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	!	30.00	31.41	47.36	0.56	35.31	40.00	-4.69 QP
2		88.20	31.35	57.48	0.94	35.97	43.50	-7.53 QP
3		122.15	31.23	55.23	1.12	33.58	43.50	-9.92 QP
4		148.34	31.24	54.69	1.22	33.57	43.50	-9.93 QP
5		284.14	30.94	47.17	1.87	31.39	46.00	-14.61 QP
6		330.70	30.78	46.26	2.02	32.23	46.00	-13.77 QP

Horizontal

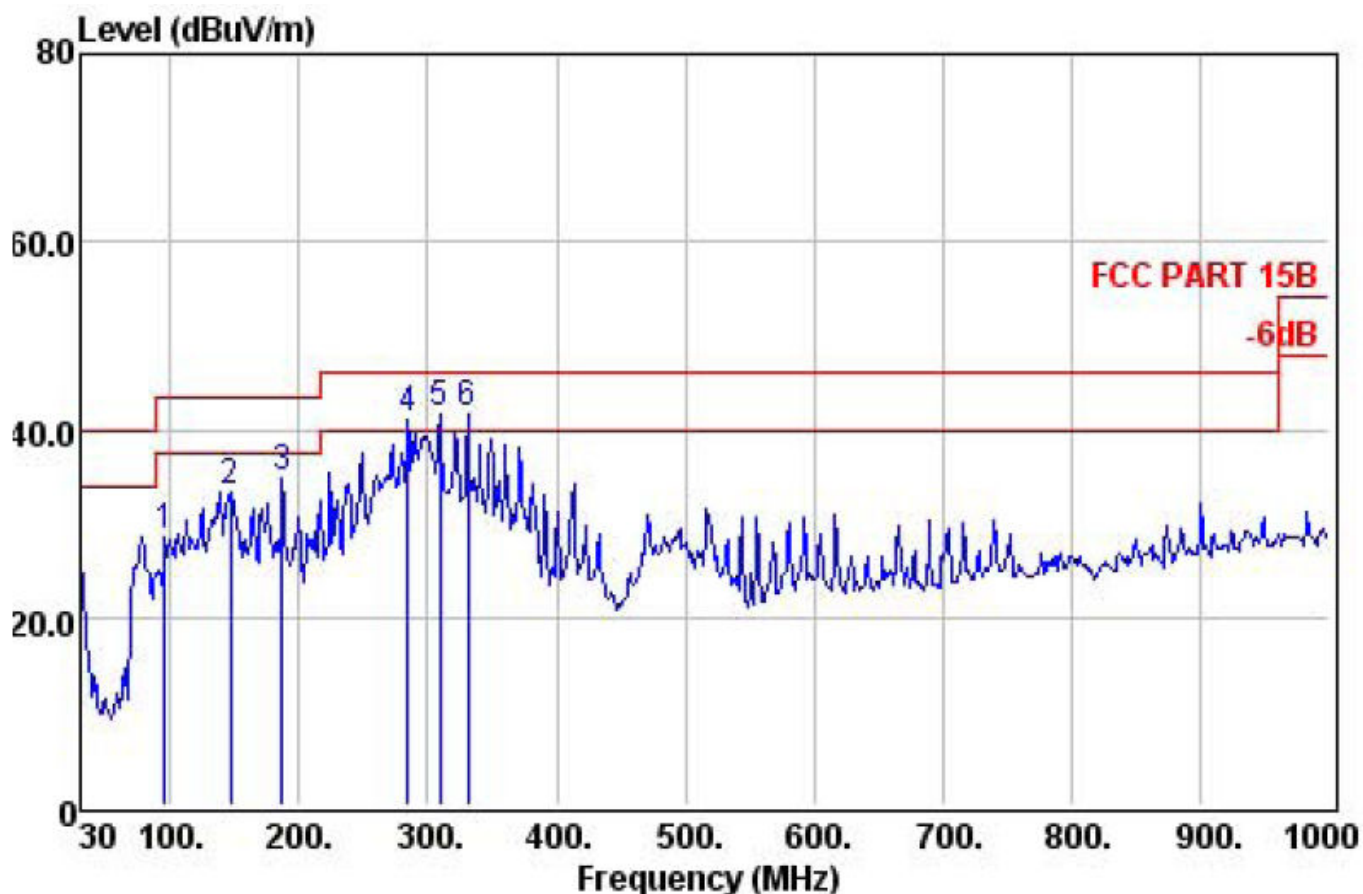

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	95.96	31.35	49.60	0.94	28.59	43.50	-14.91	QP
2	146.40	31.23	54.62	1.22	33.39	43.50	-10.11	QP
3	187.14	31.13	54.42	1.39	34.87	43.50	-8.63	QP
4 !	284.14	30.94	56.69	1.87	40.91	46.00	-5.09	QP
5 !	309.36	30.91	56.54	1.94	41.63	46.00	-4.37	QP
6 !	330.70	30.78	55.55	2.02	41.52	46.00	-4.48	QP

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,


Over Limit= Absolute Level – Limit

1M(High channel) is the worst mode, only worst case is presented in the report.

Above 1GHz


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2402
Test Voltage :	AC 120V/60Hz		

Vertical

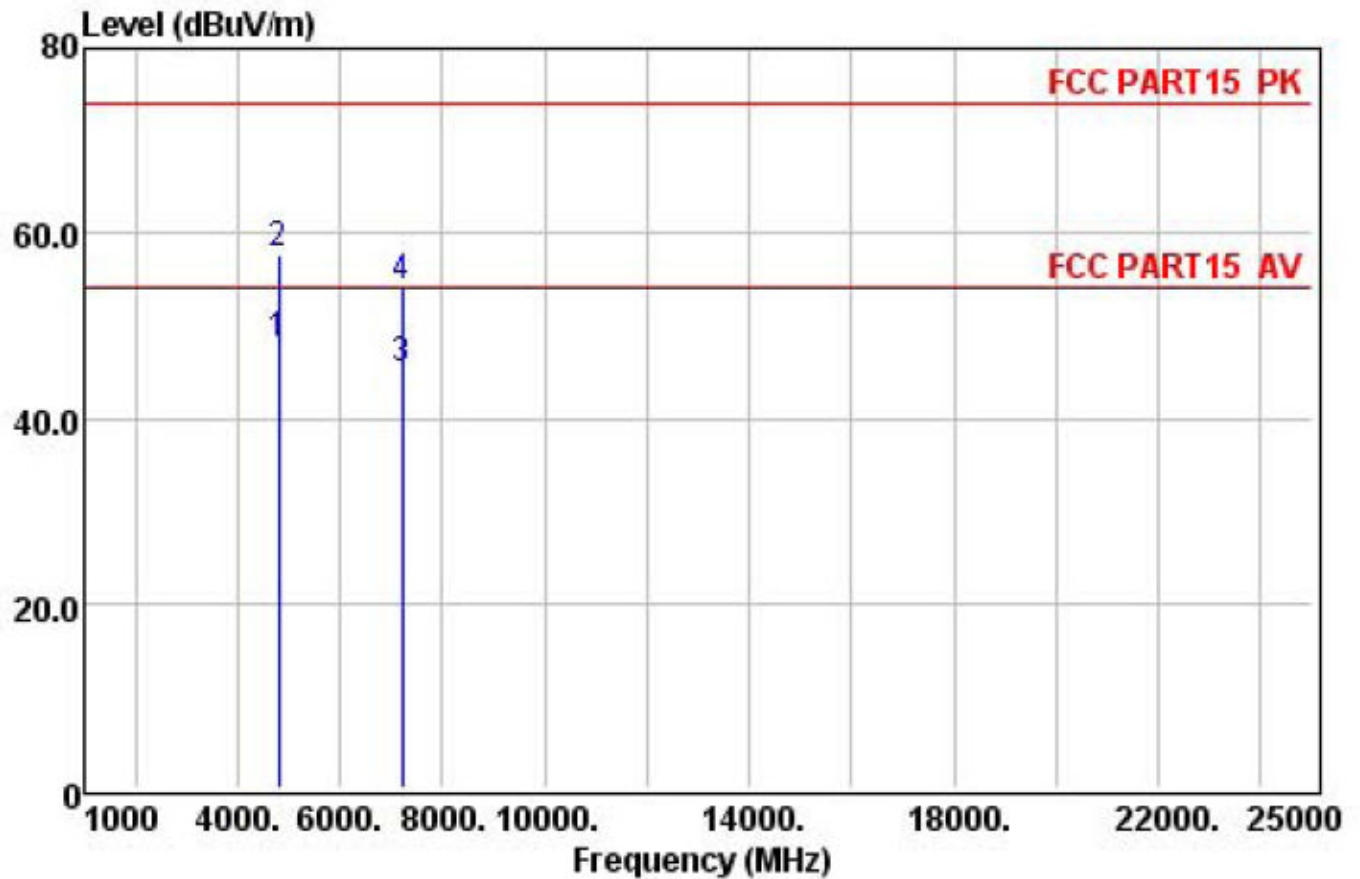

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.00	27.49	30.40	11.96	47.81	54.00	-6.19	Average
2	4804.00	27.49	40.30	11.96	57.71	74.00	-16.29	Peak
3	7206.00	27.94	31.26	16.61	45.21	54.00	-8.79	Average
4	7206.00	27.94	40.15	16.61	54.10	74.00	-19.90	Peak


Horizontal

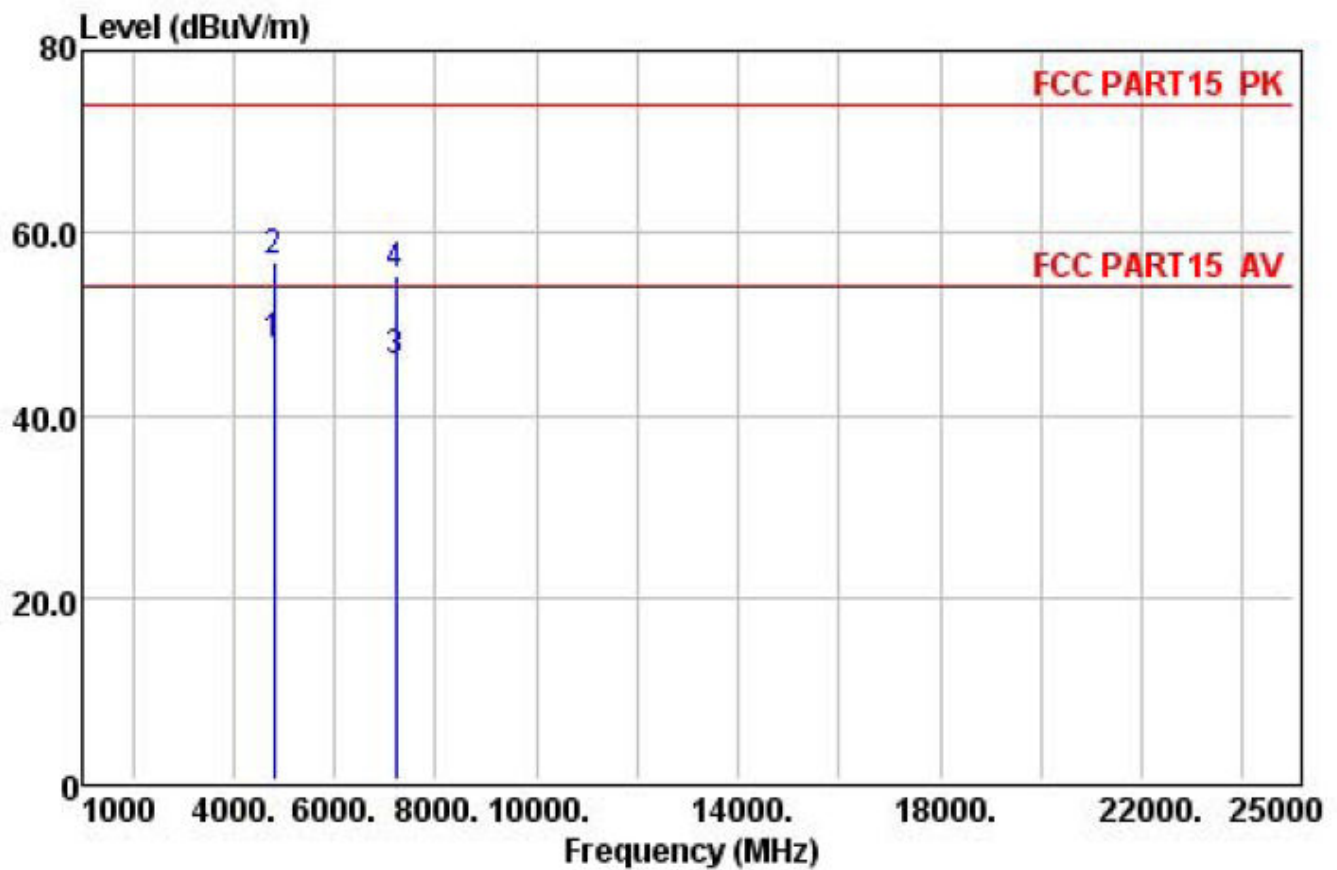


	Preamp	Read	Cable	Limit	Over		
Freq	Factor	Level	Loss	Line	Limit	Remark	
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.00	27.49	30.20	11.96	47.61	54.00	-6.39 Average
2	4804.00	27.49	39.29	11.96	56.70	74.00	-17.30 Peak
3	7206.00	27.94	31.87	16.61	45.82	54.00	-8.18 Average
4	7206.00	27.94	41.36	16.61	55.31	74.00	-18.69 Peak

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2441
Test Voltage :	AC 120V/60Hz		

Vertical

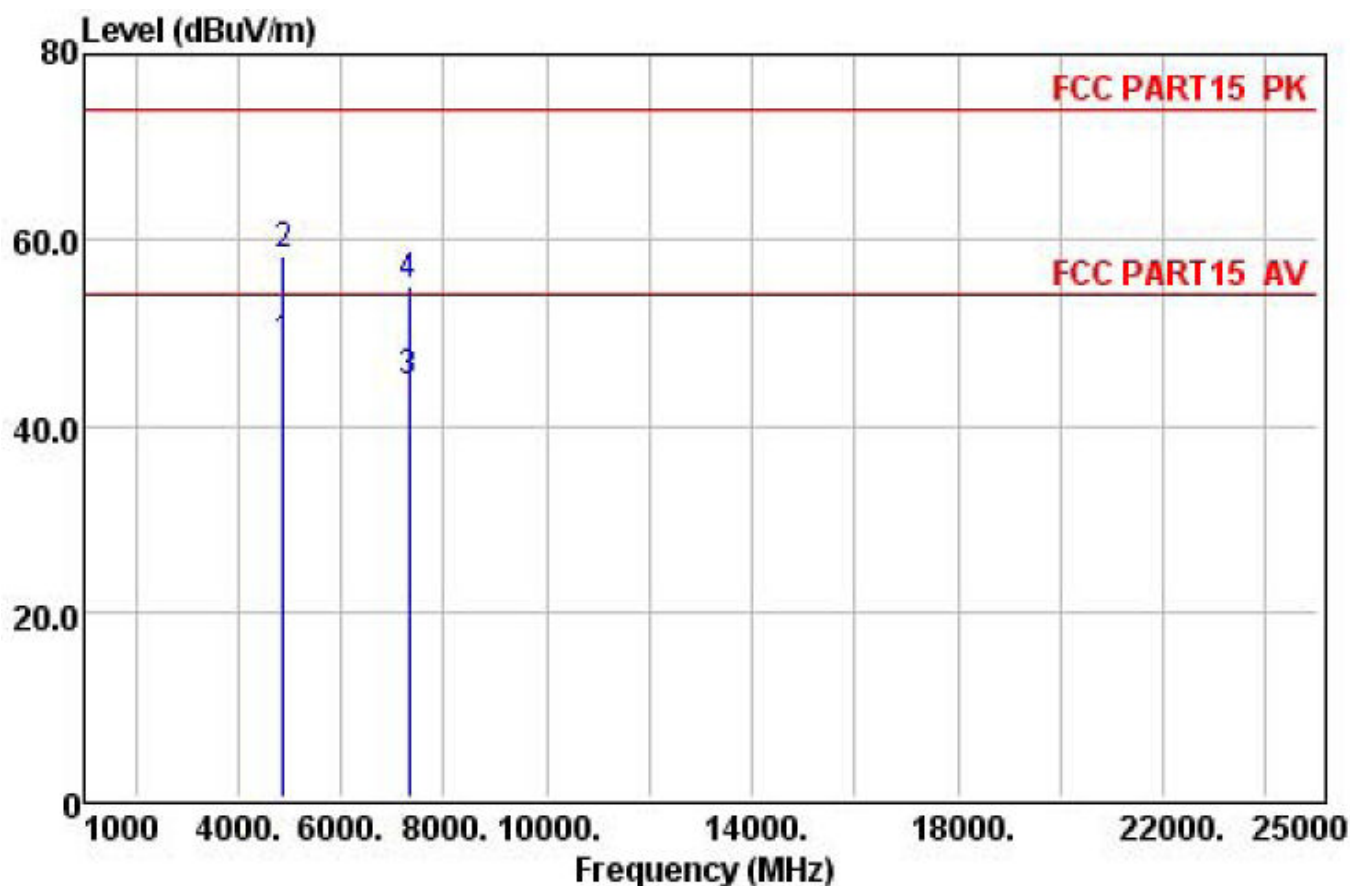


	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4882.00	27.53	31.88	12.14	48.60	54.00	-5.40	Average
2	4882.00	27.53	41.62	12.14	58.34	74.00	-15.66	Peak
3	7323.00	27.96	31.65	16.62	44.64	54.00	-9.36	Average
4	7323.00	27.96	41.97	16.62	54.96	74.00	-19.04	Peak

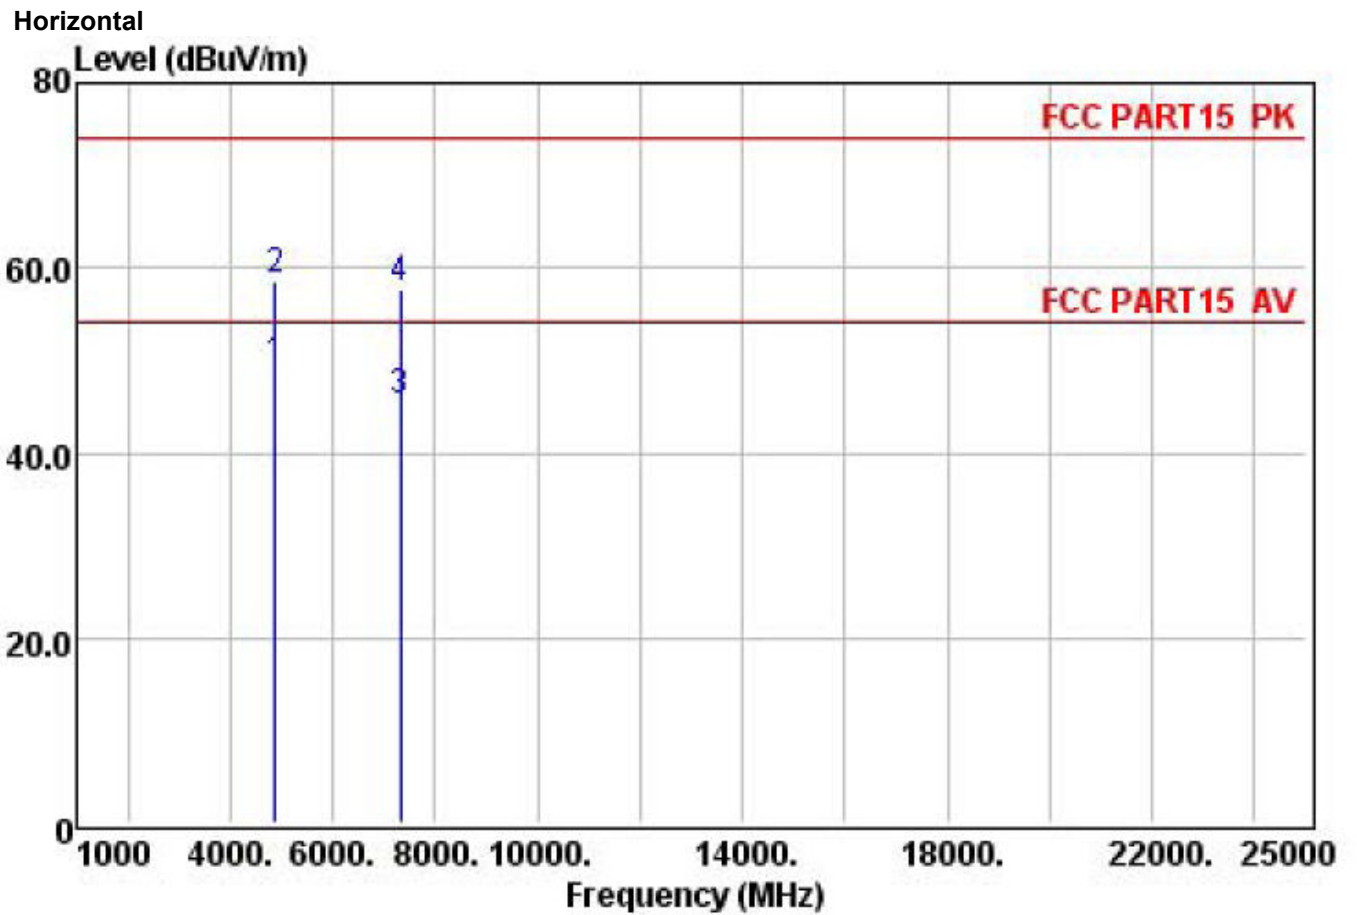

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4882.00	27.53	32.36	12.14	49.08	54.00	-4.92	Average
2	4882.00	27.53	41.88	12.14	58.60	74.00	-15.40	Peak
3	7323.00	27.96	32.46	16.62	45.45	54.00	-8.55	Average
4	7323.00	27.96	44.68	16.62	57.67	74.00	-16.33	Peak


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX-2480
Test Voltage :	AC 120V/60Hz		

Vertical

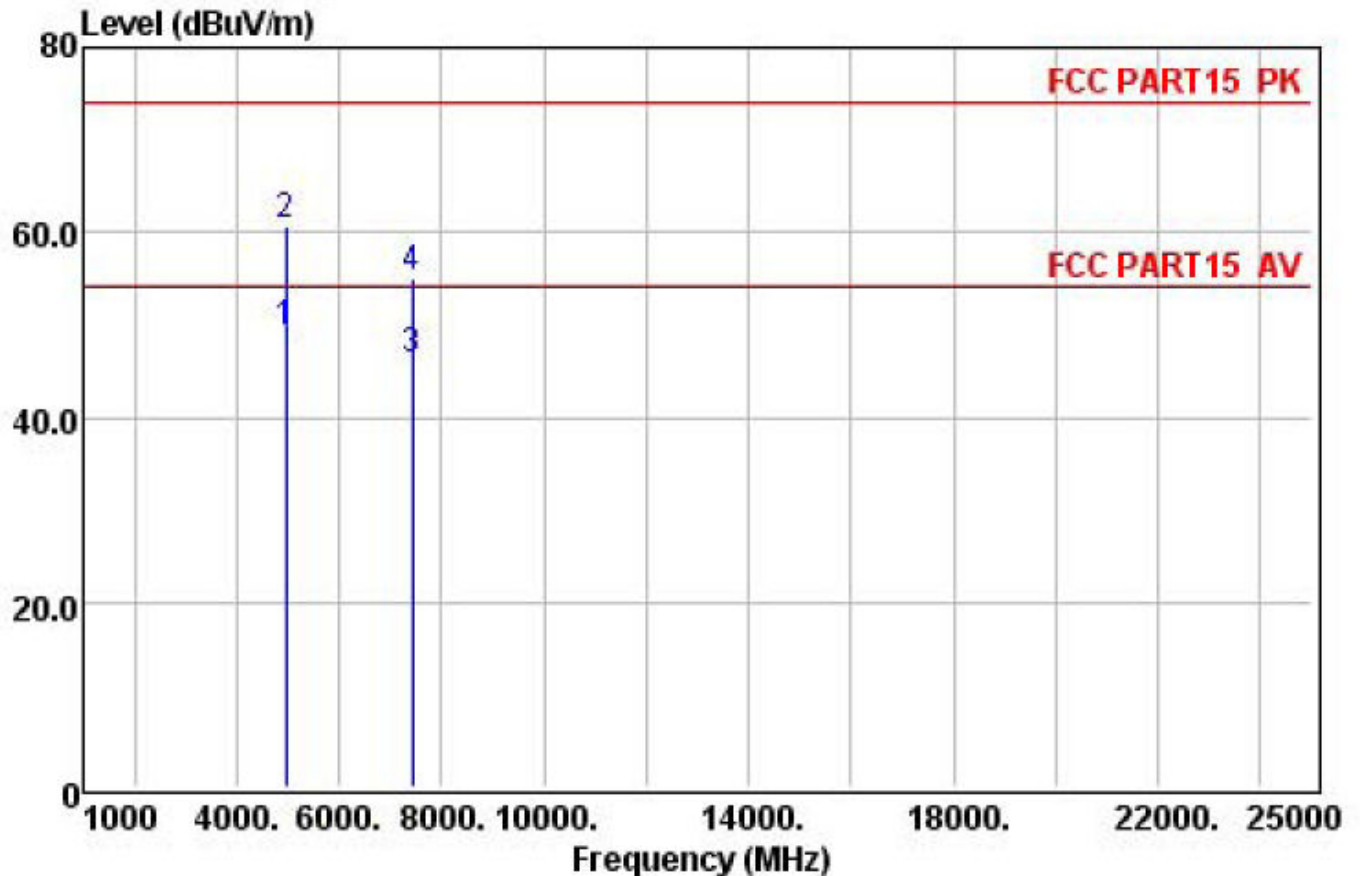

	Preamp Freq	Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.00	27.58	32.97	12.36	49.07	54.00	-4.93	Average
2	4960.00	27.58	44.69	12.36	60.79	74.00	-13.21	Peak
3	7440.00	27.99	32.96	16.62	45.97	54.00	-8.03	Average
4	7440.00	27.99	41.87	16.62	54.88	74.00	-19.12	Peak

Horizontal

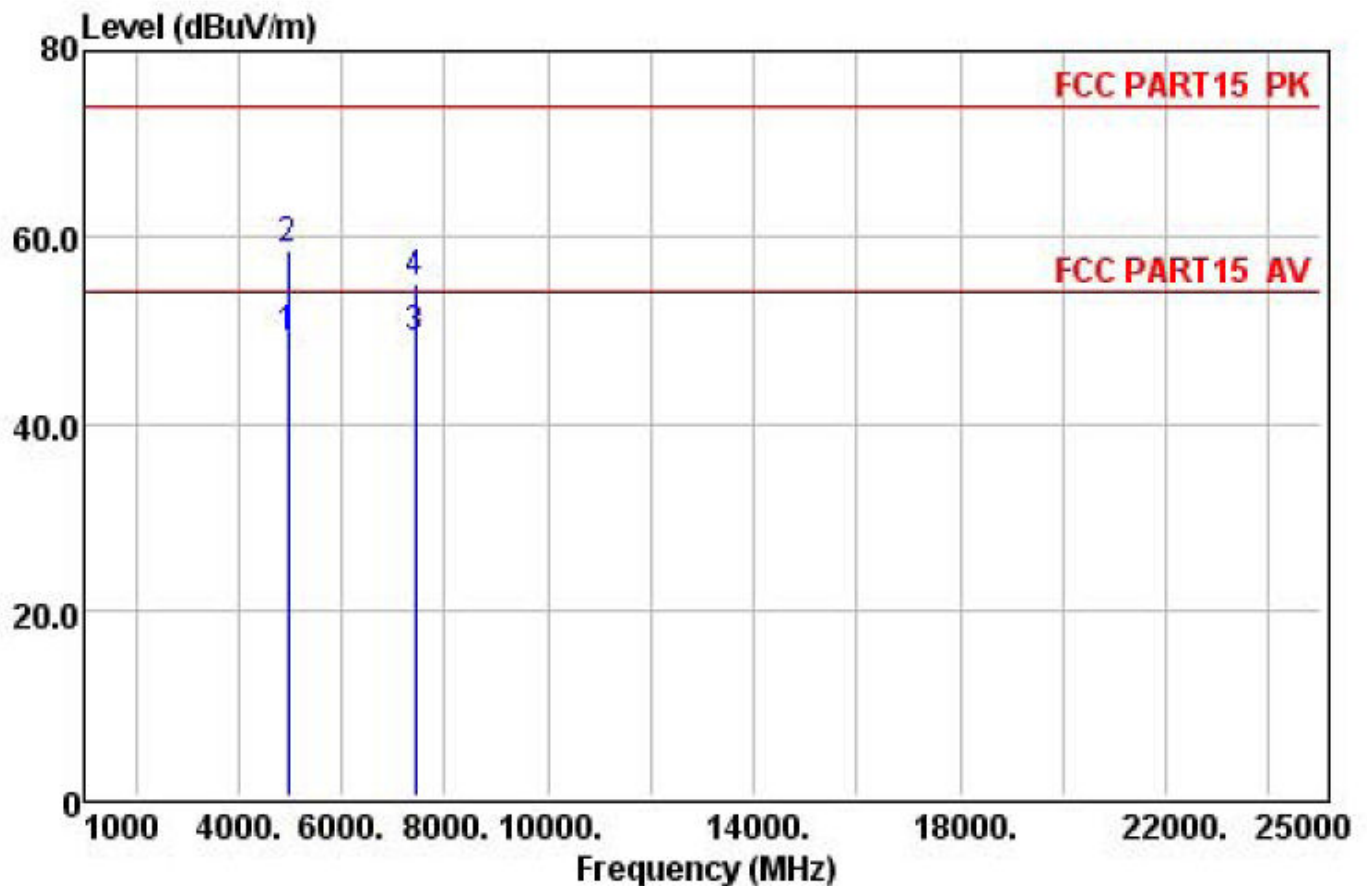

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.00	27.58	32.96	12.36	49.06	54.00	-4.94	Average
2	4960.00	27.58	42.37	12.36	58.47	74.00	-15.53	Peak
3	7440.00	27.99	35.99	16.62	49.00	54.00	-5.00	Average
4	7440.00	27.99	42.09	16.62	55.10	74.00	-18.90	Peak

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

GFSK is the worst mode.

EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)

6. 20DB & 99% OCCUPY BANDWIDTH

6.1. Limits

According to FCC Section 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth($10 \cdot \log 1\% = 20\text{dB}$)taking the RF output power

6.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting.

2. Set the spectrum analyzer:

Span: approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20dB bandwidth

VBW $\geq$ RBW

Sweep=auto


Detector function=peak


Trace=max hold

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /C78(1Mbps)		

Frequency	20dB Bandwidth (kHz)	99% Bandwidth (KHz)	Result
2402 MHz	882.795	832.154	PASS
2441 MHz	868.769	833.533	PASS
2480 MHz	885.517	842.470	PASS


Test plot as follows:

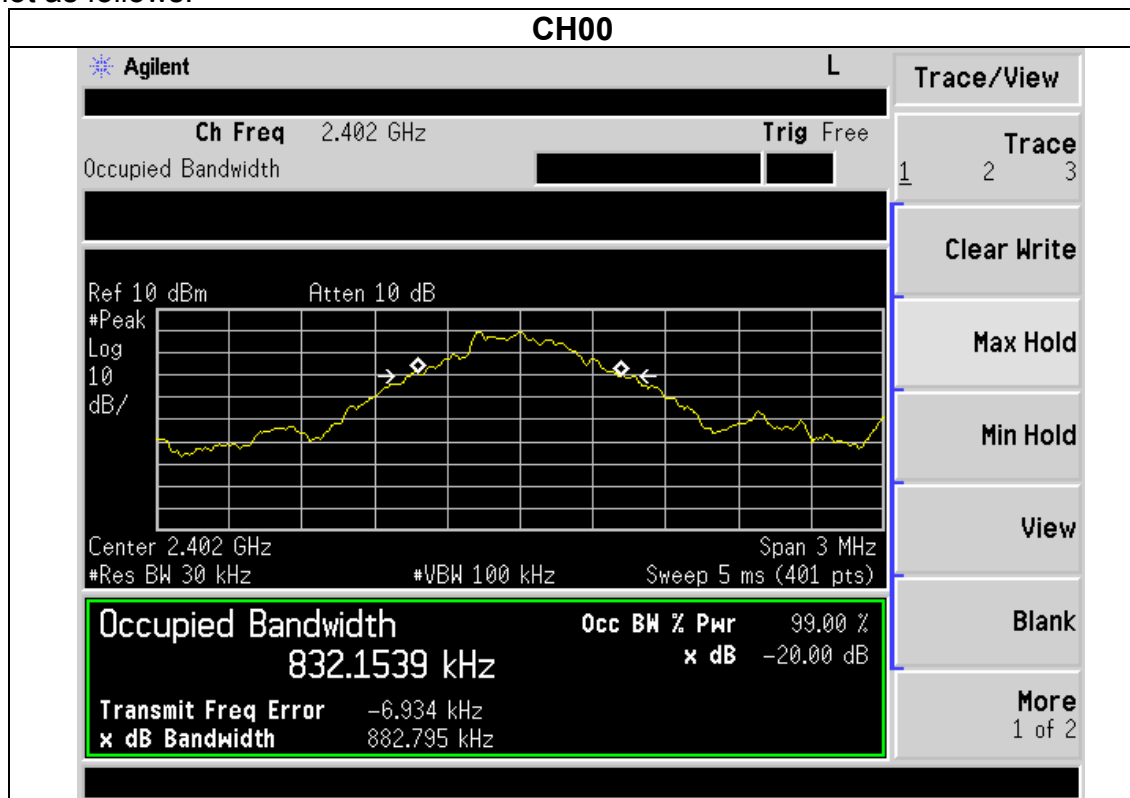


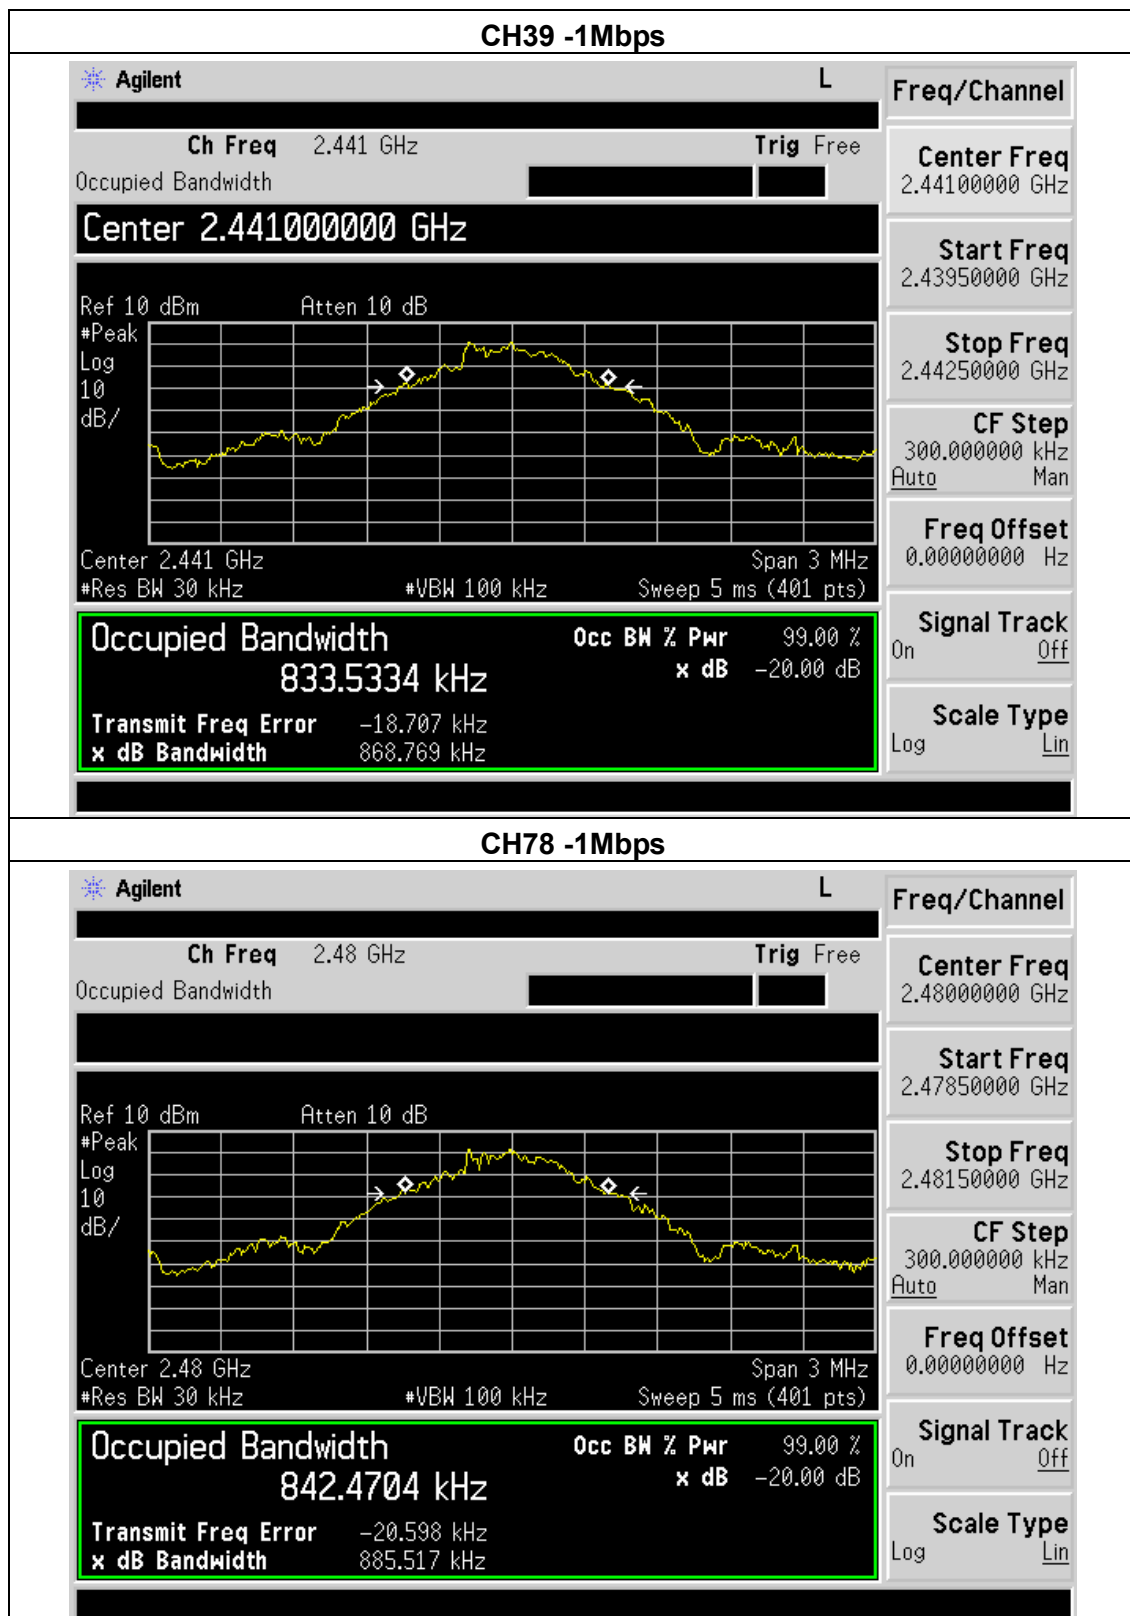

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /C78(2Mbps)		


Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	1.213	1.158	PASS
2441 MHz	1.223	1.162	PASS
2480 MHz	1.208	1.161	PASS

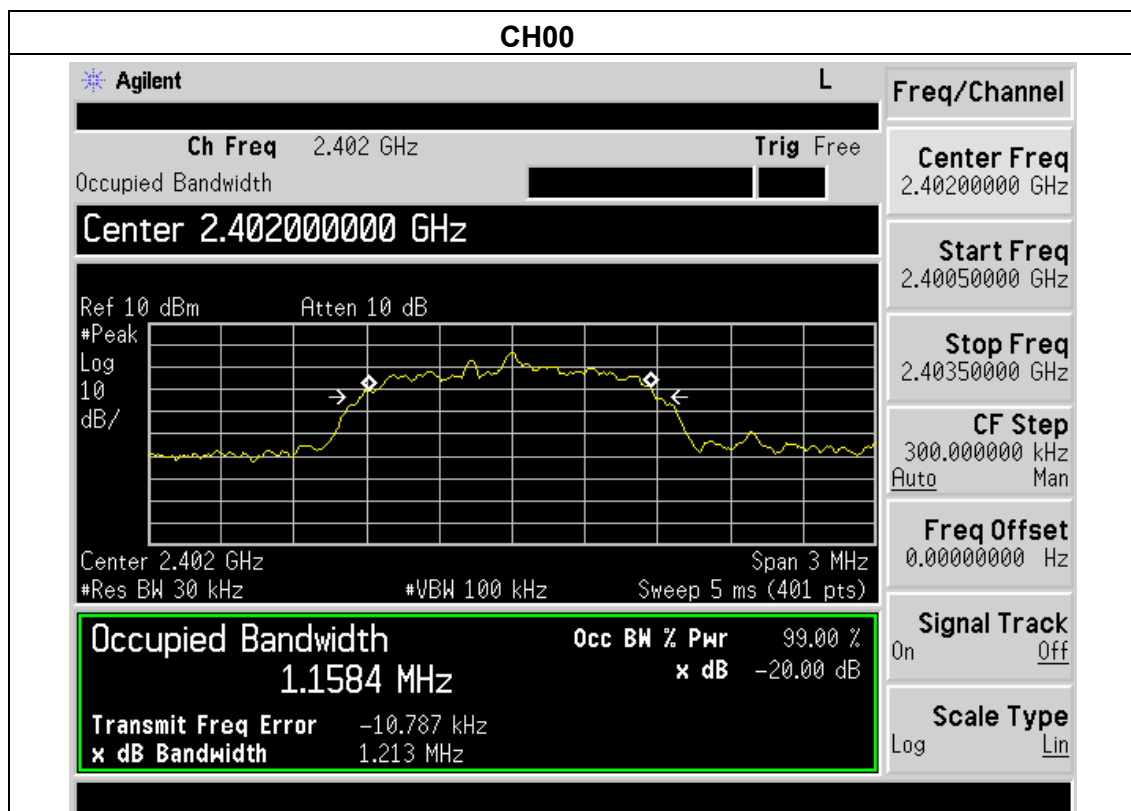


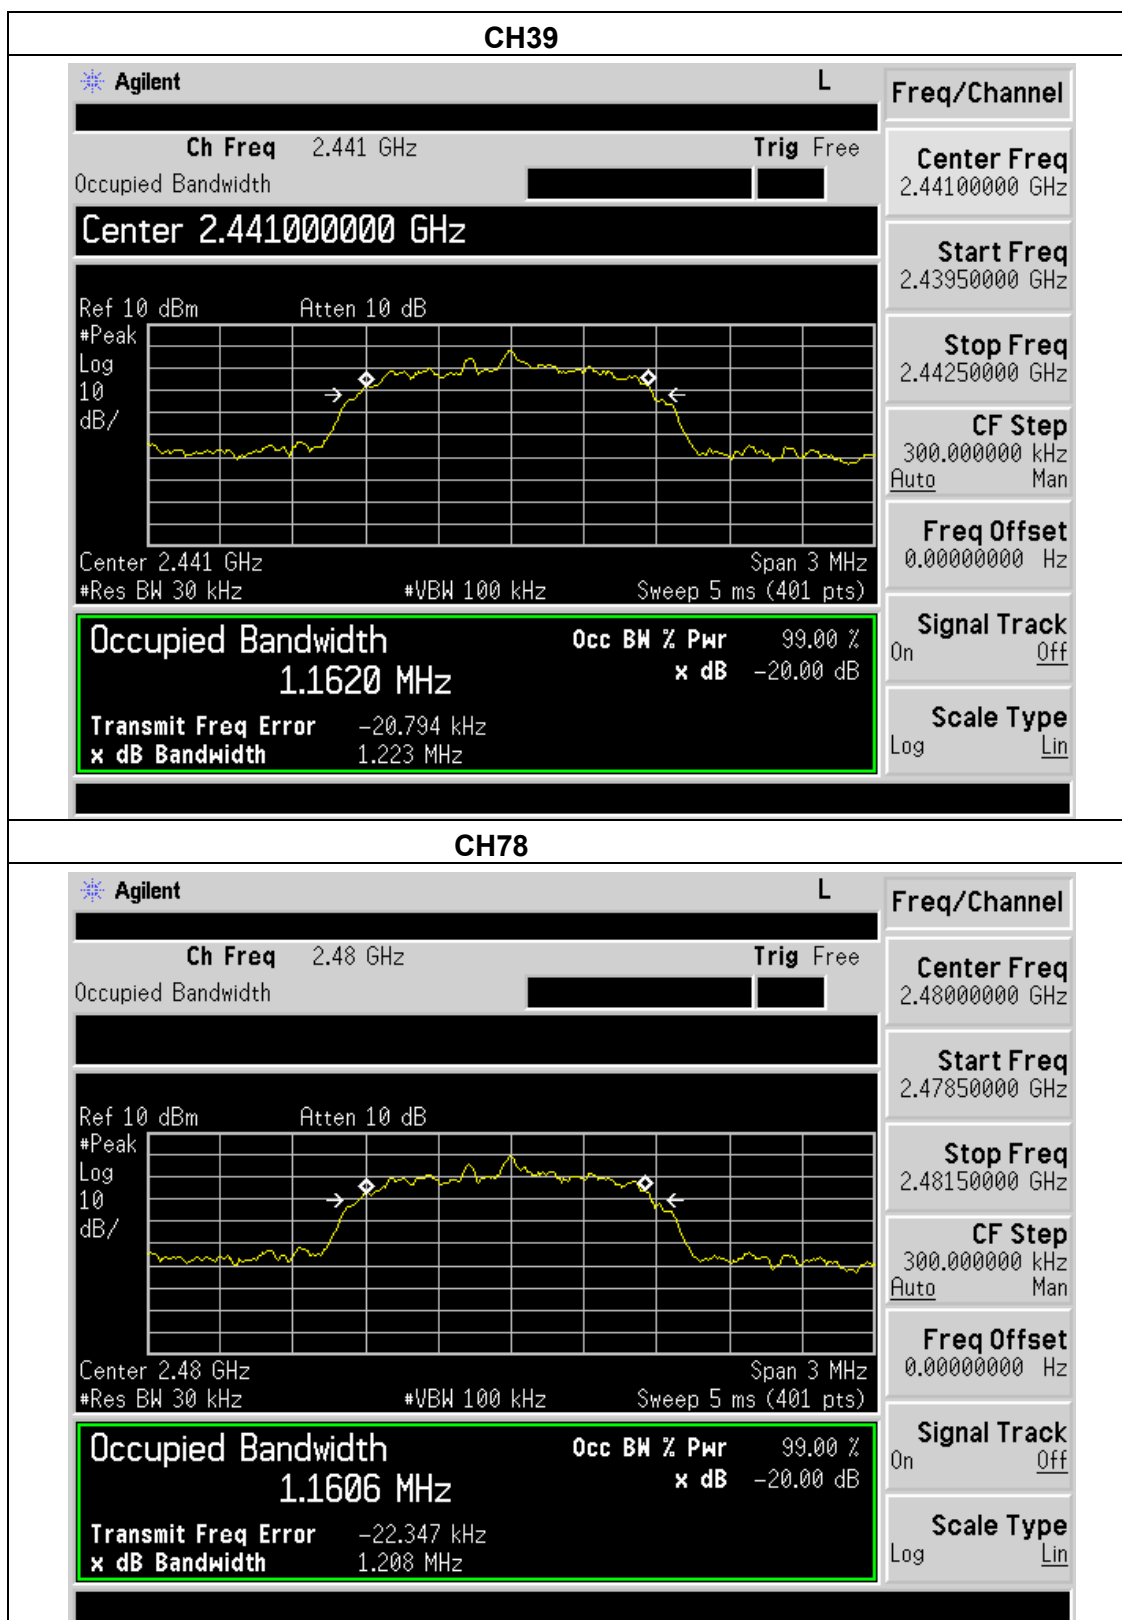

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /CH78(3Mbps)		

Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2402 MHz	1.215	1.153	PASS
2441 MHz	1.226	1.148	PASS
2480 MHz	1.215	1.144	PASS

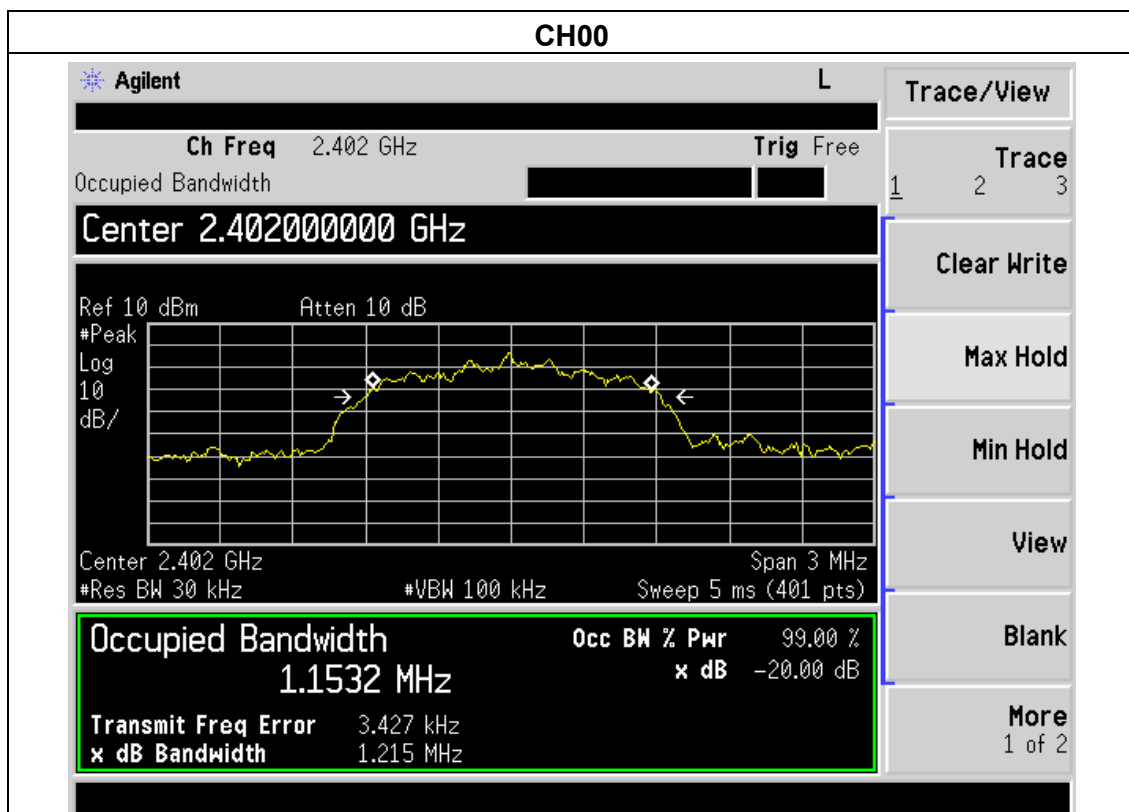

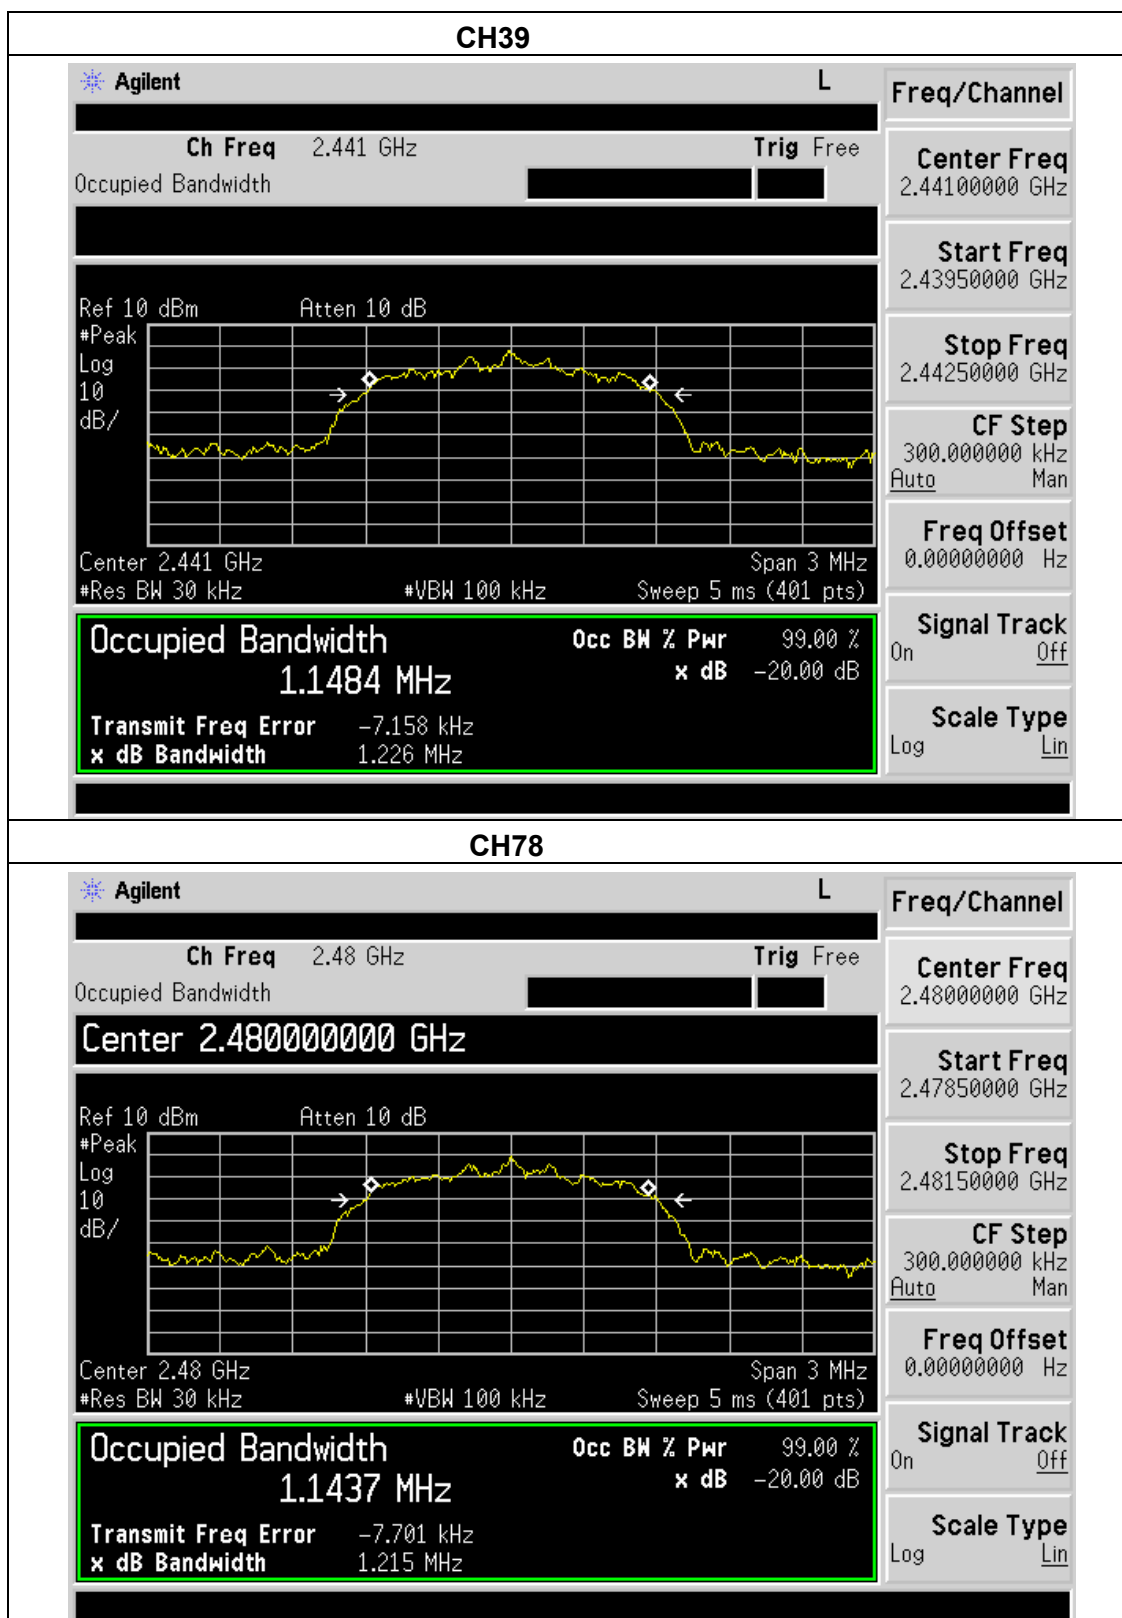

7. FREQUENCY SEPARATION

7.1. Limits

According to FCC Section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: wide enough to capture the peaks of two adjacent channels

RBW $\geq 1\%$ of the span(30KHz)

VBW $\geq$ RBW(100KHz)

Sweep=auto

Detector function=peak

Trace=max hold


Test data:


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /CH78(1Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: > 20dB bandwidth

Test plot as follows:

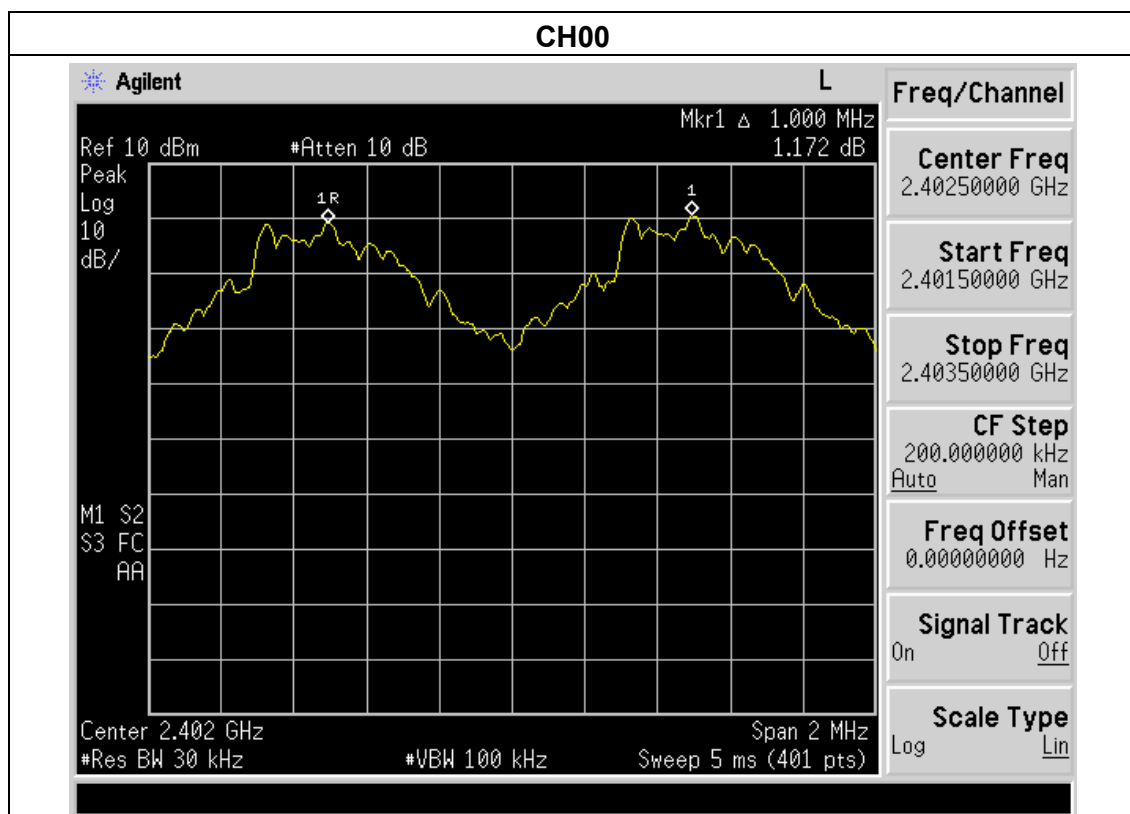


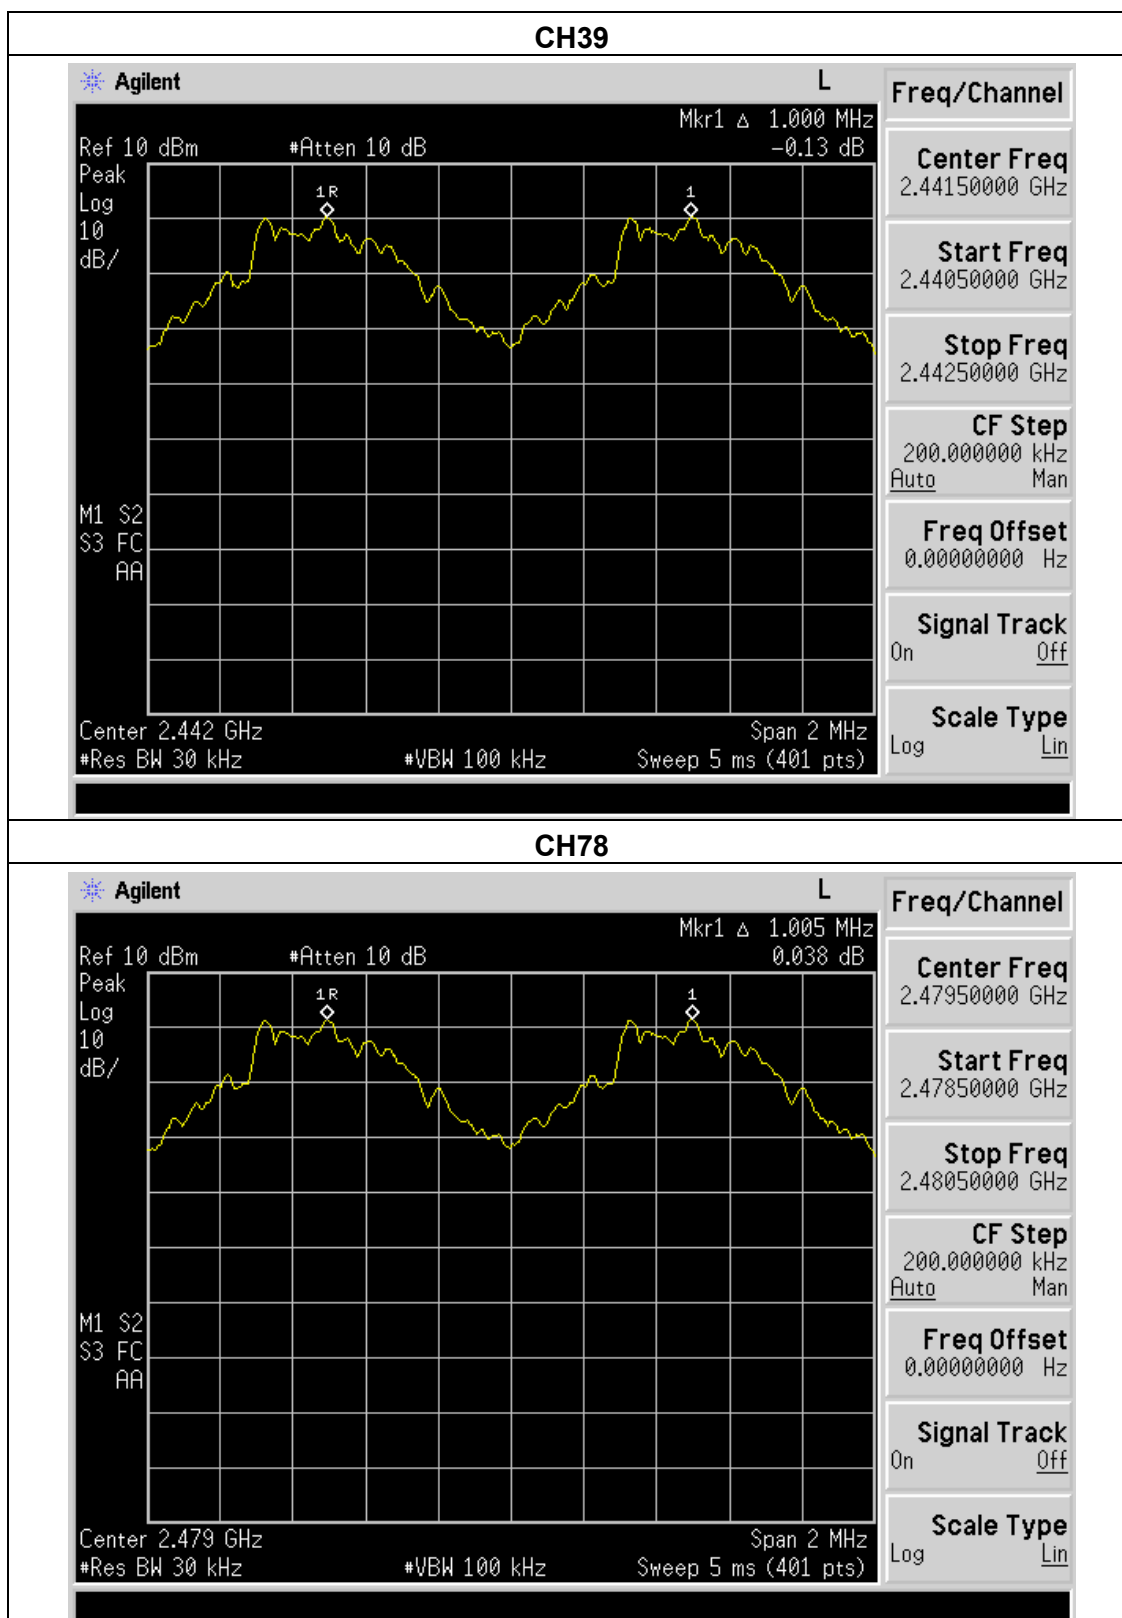


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /CH78(2Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

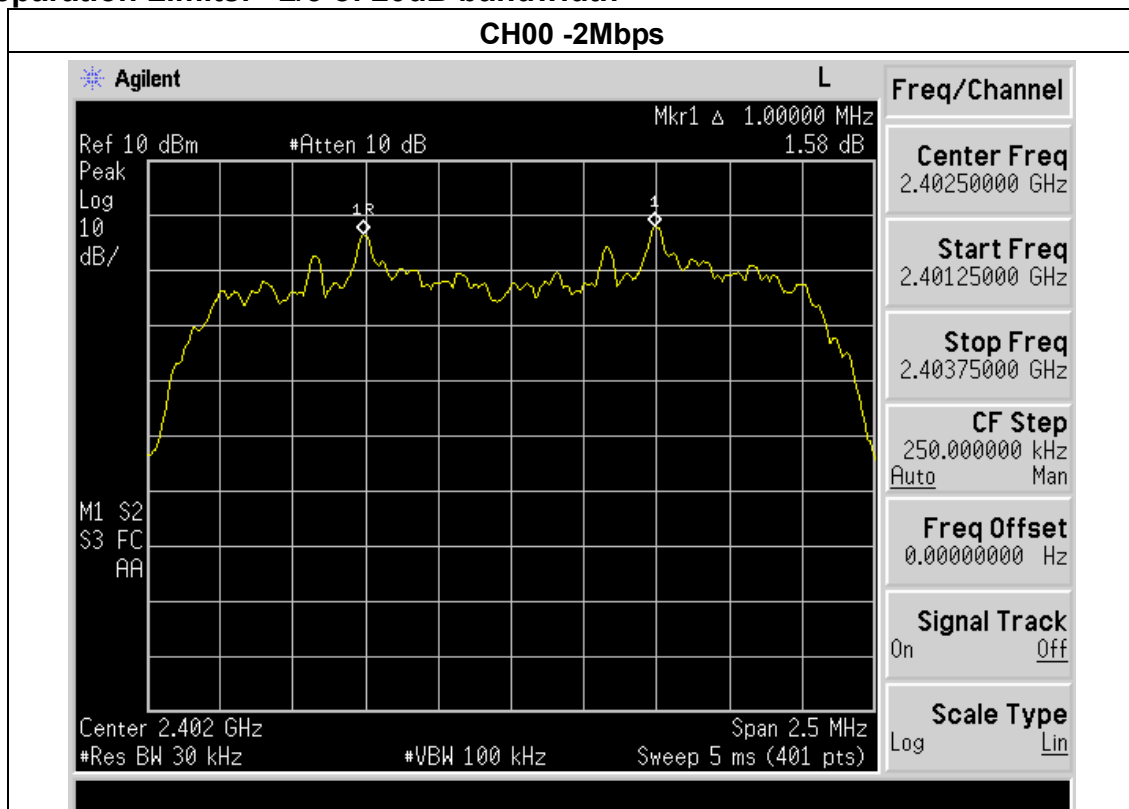


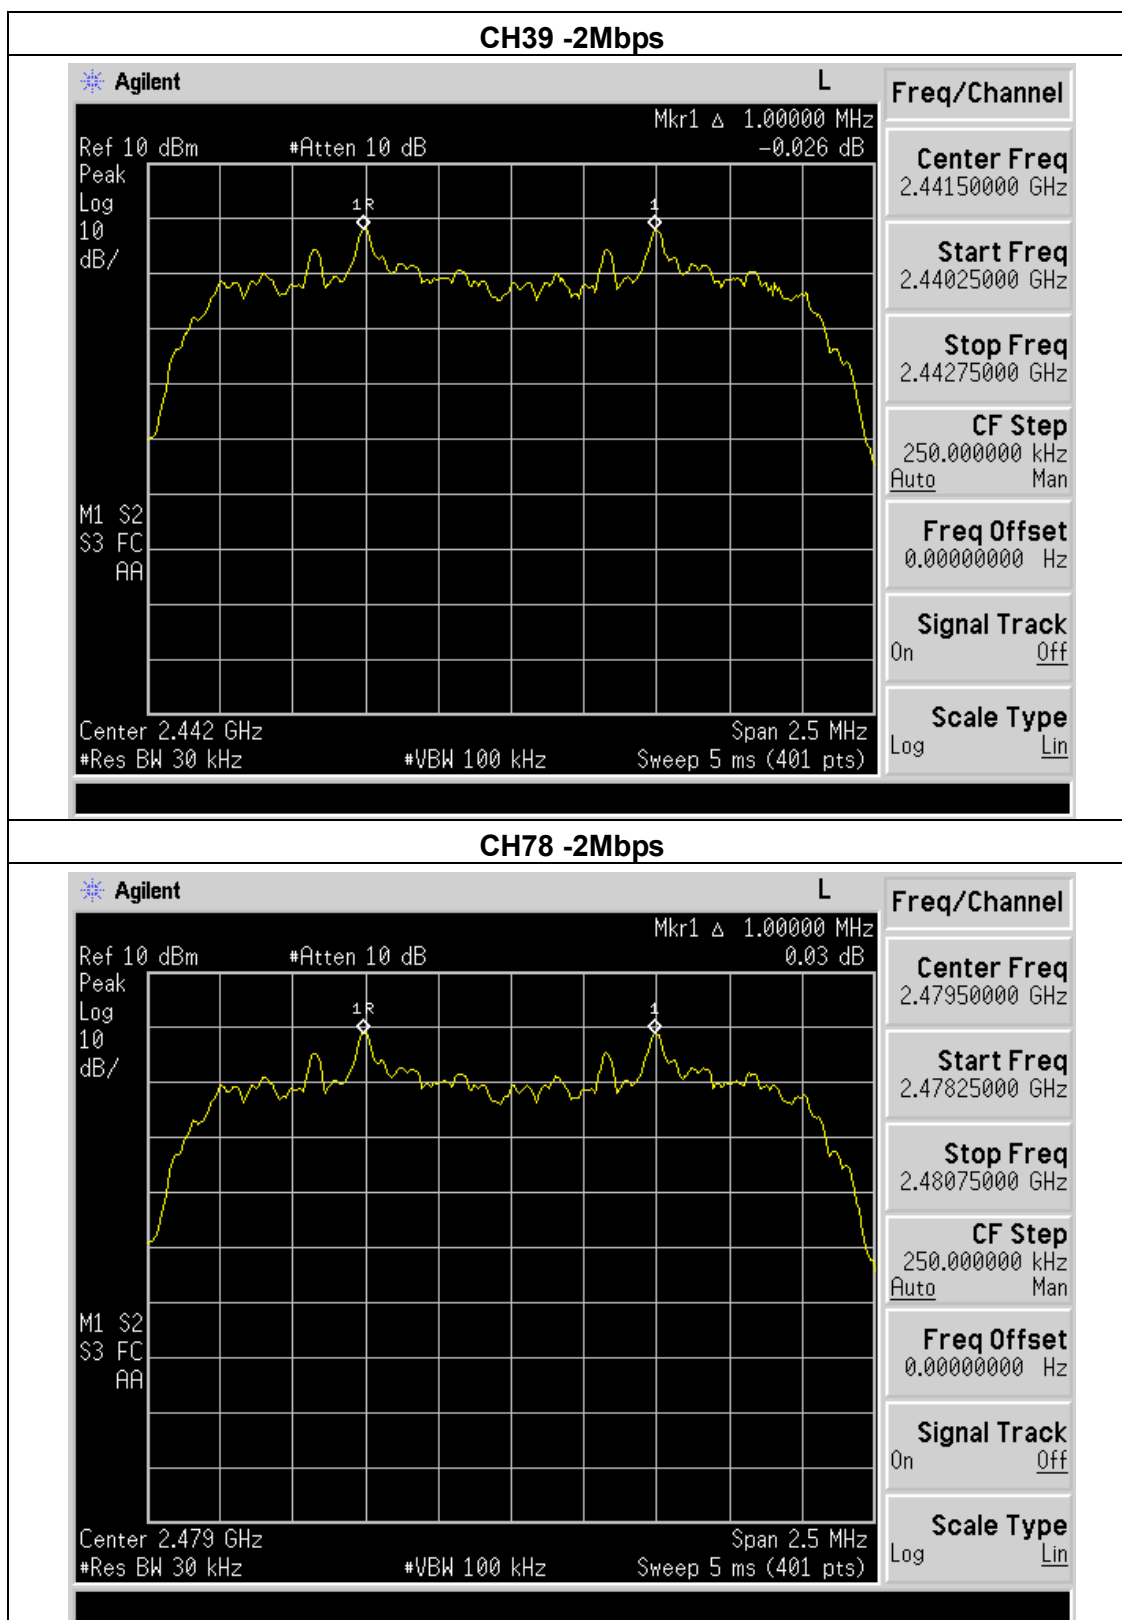


EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	CH00 / CH39 /CH78(3Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.000	Complies
2441 MHz	1.000	Complies
2480 MHz	1.000	Complies


Ch. Separation Limits: >2/3 of 20dB bandwidth

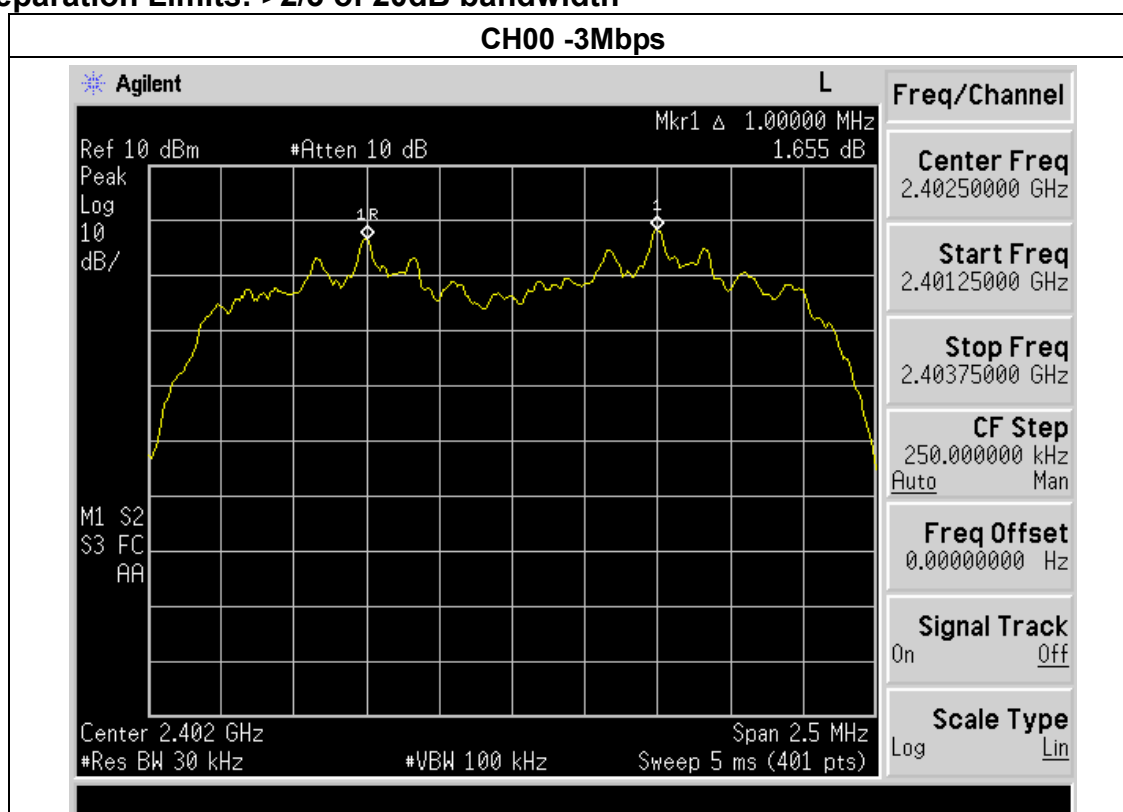

CH39 -3Mbps

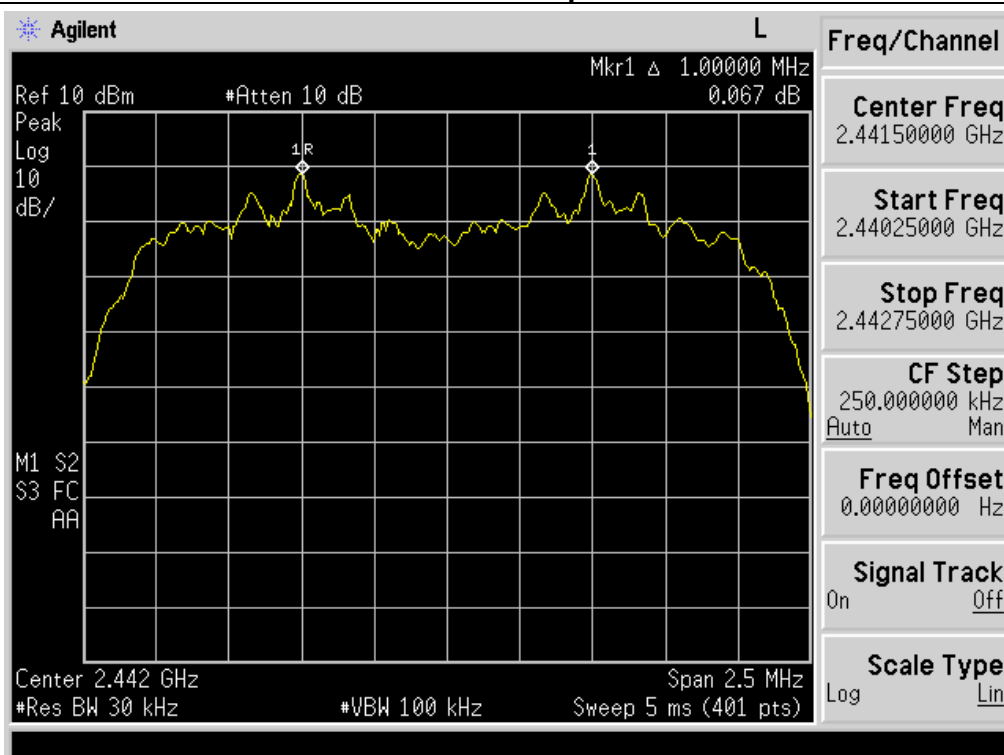

CH78 -3Mbps

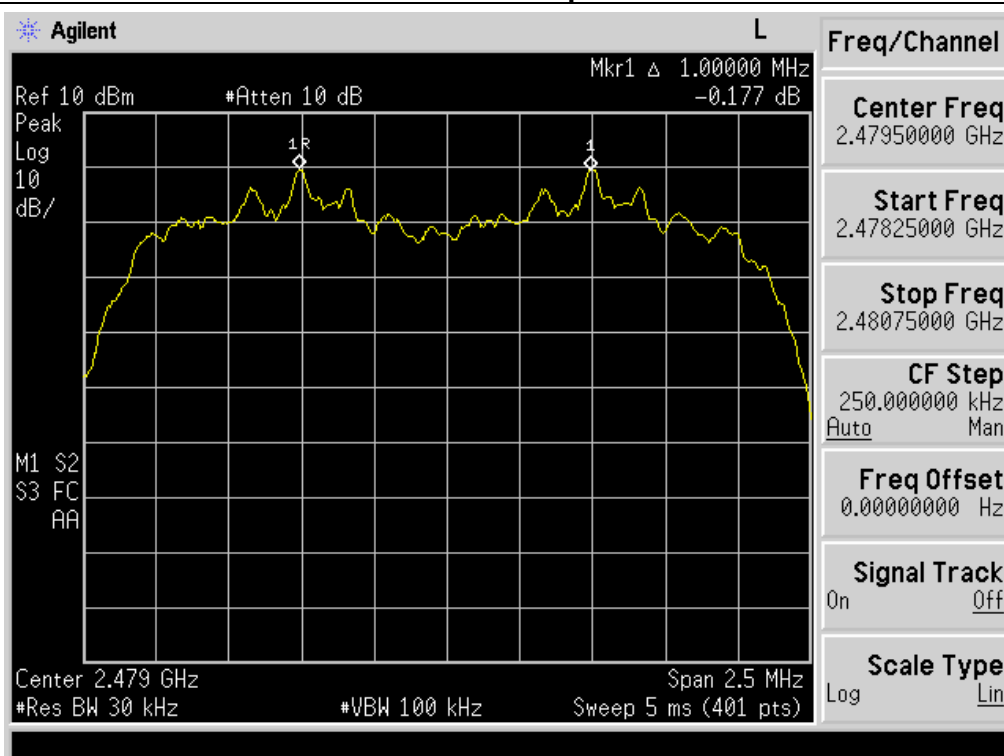

8. NUMBER OF HOPPING FREQUENCY

8.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

8.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: the frequency band of operation

RBW =100KHz

VBW=300KHz

Sweep=auto

Detector function=peak


Trace=max hold

EUT :	Home theater with wireless subwoofer	Model Name :	ES-SNDBR-2.1-BLK
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	1Mbps		

Test data:

Measured channel numbers	Limit	Result
79	≥ 15	PASS

Test plot as follows:

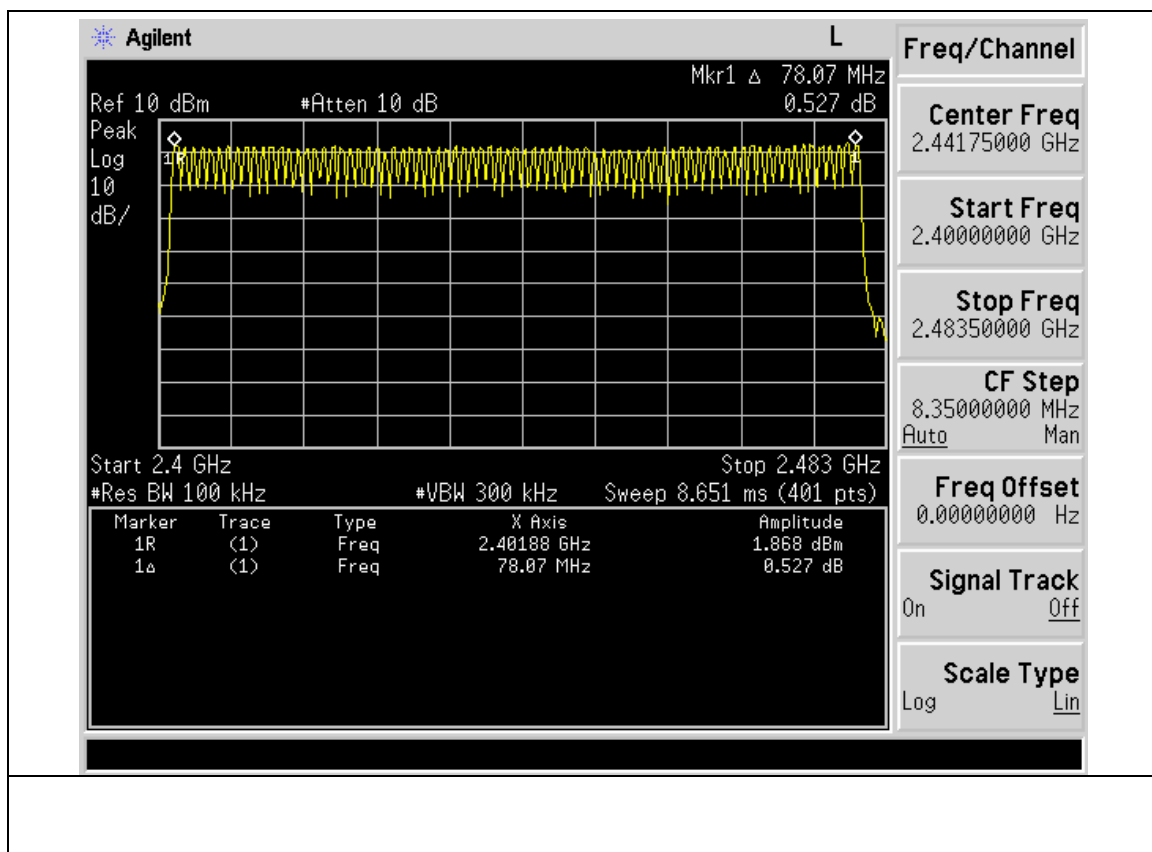

9. DWELL TIME

9.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

9.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode power.

2. Set the spectrum analyzer:

Span= 0Hz, RBW =1000 kHz, VBW = 3000 kHz

Use a video trigger with the trigger level set to enable triggering only on full pulses.

Detector function=peak, Sweep Time is more than once pulse time.

Set the EUT for DH5, DH3 and DH1 packet transmitting

Measure the maximum time duration of one single pulse.

A Period Time = (channel number)*0.4

DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)


DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)



DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

Test data:


Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH1	2441 MHz	0.45	0.14	0.4
2DH1	2441 MHz	0.47	0.15	0.4
3DH1	2441 MHz	0.46	0.15	0.4


Test plot as follows as below:

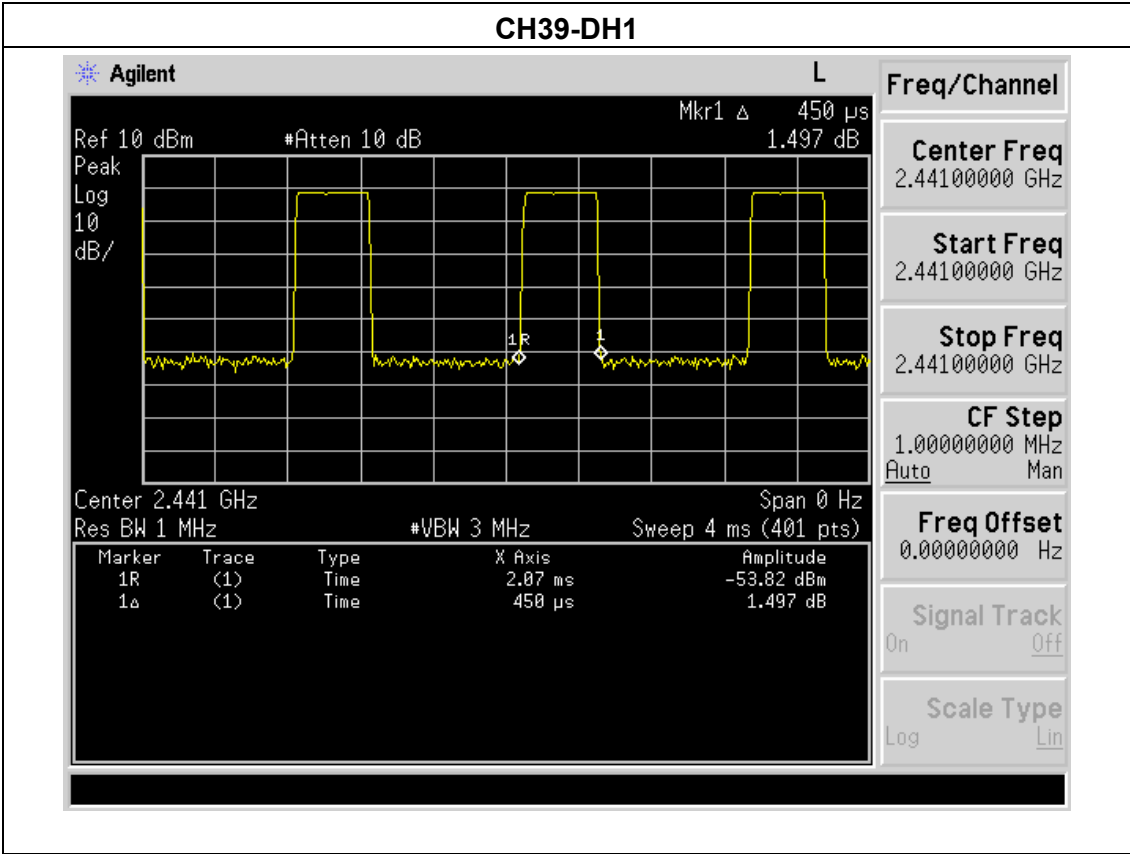

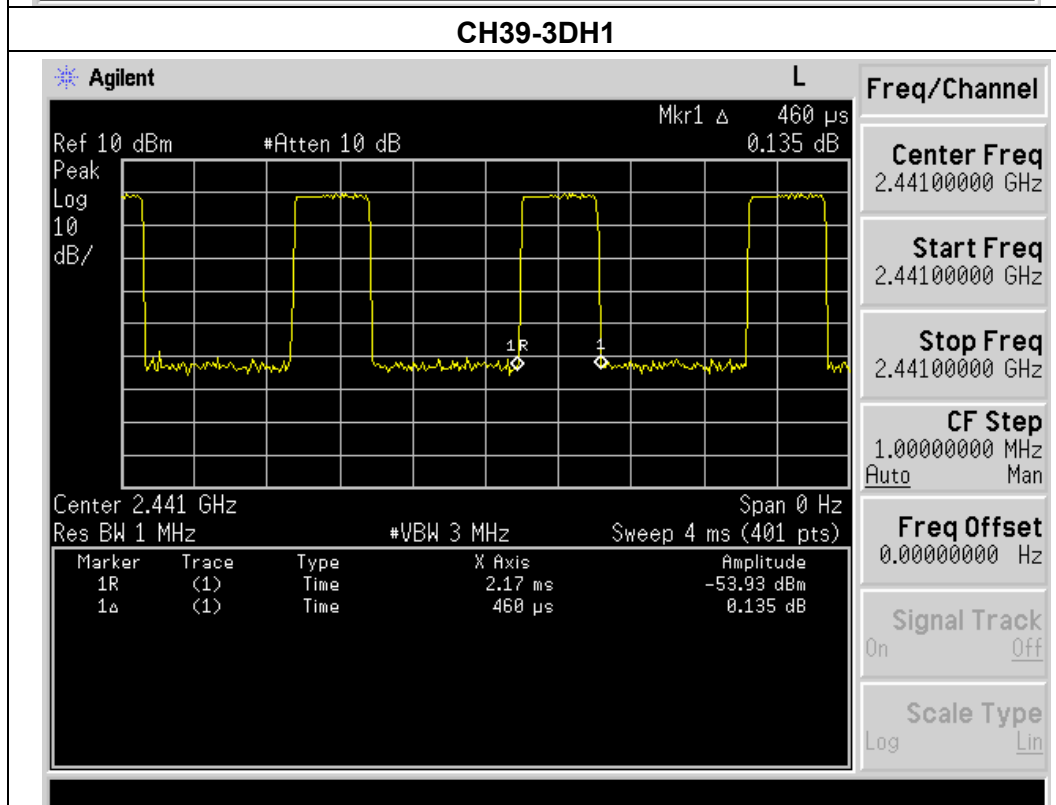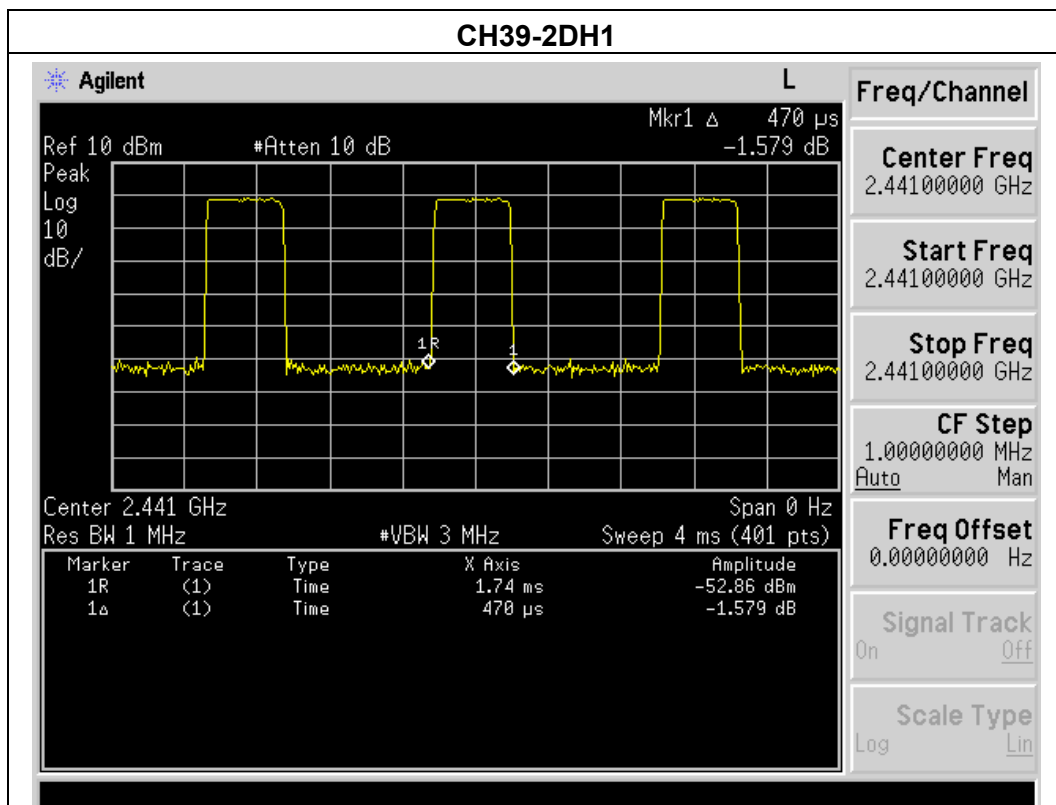



Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH3	2441 MHz	1.70	0.27	0.4
2DH3	2441 MHz	1.72	0.28	0.4
3DH3	2441 MHz	1.71	0.27	0.4

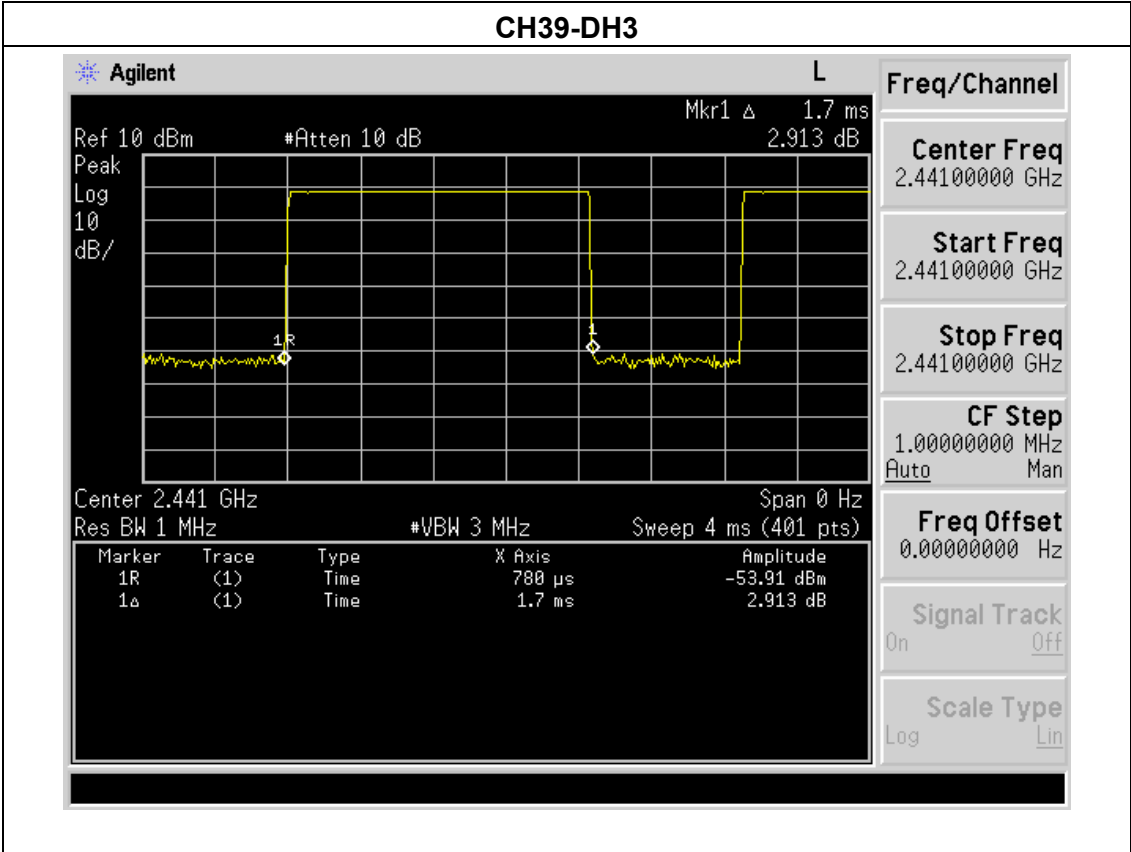

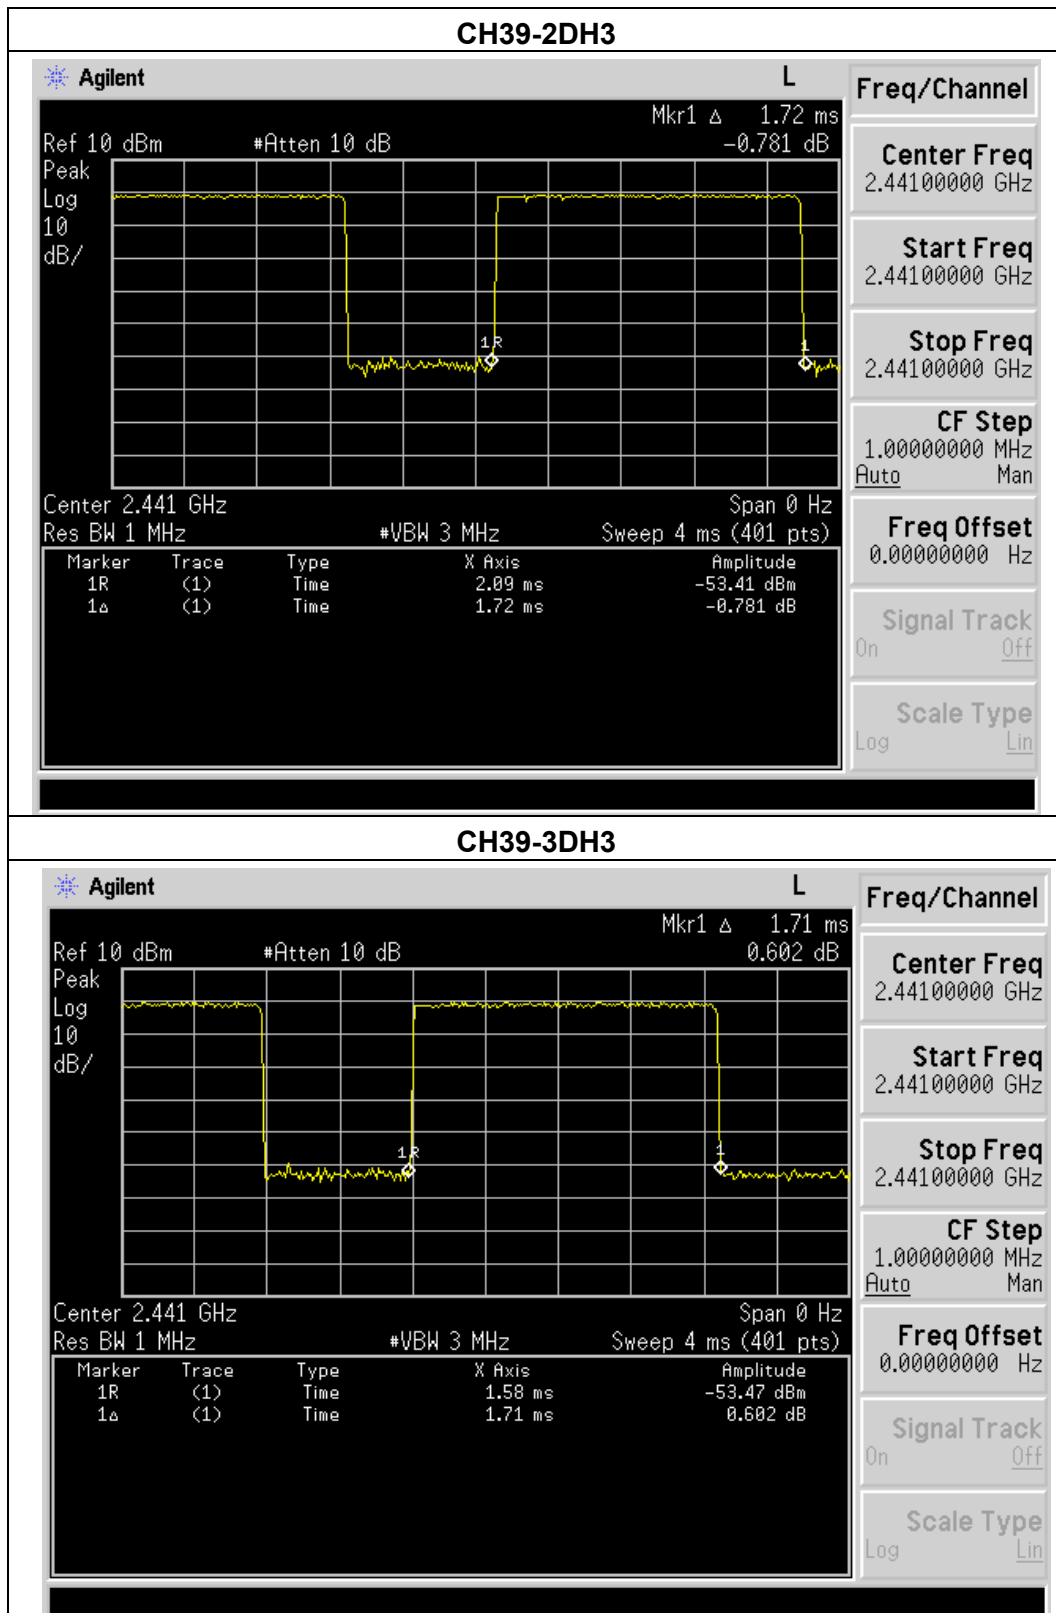

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH5	2441 MHz	2.95	0.31	0.4
2DH5	2441 MHz	2.97	0.32	0.4
3DH5	2441 MHz	2.95	0.31	0.4

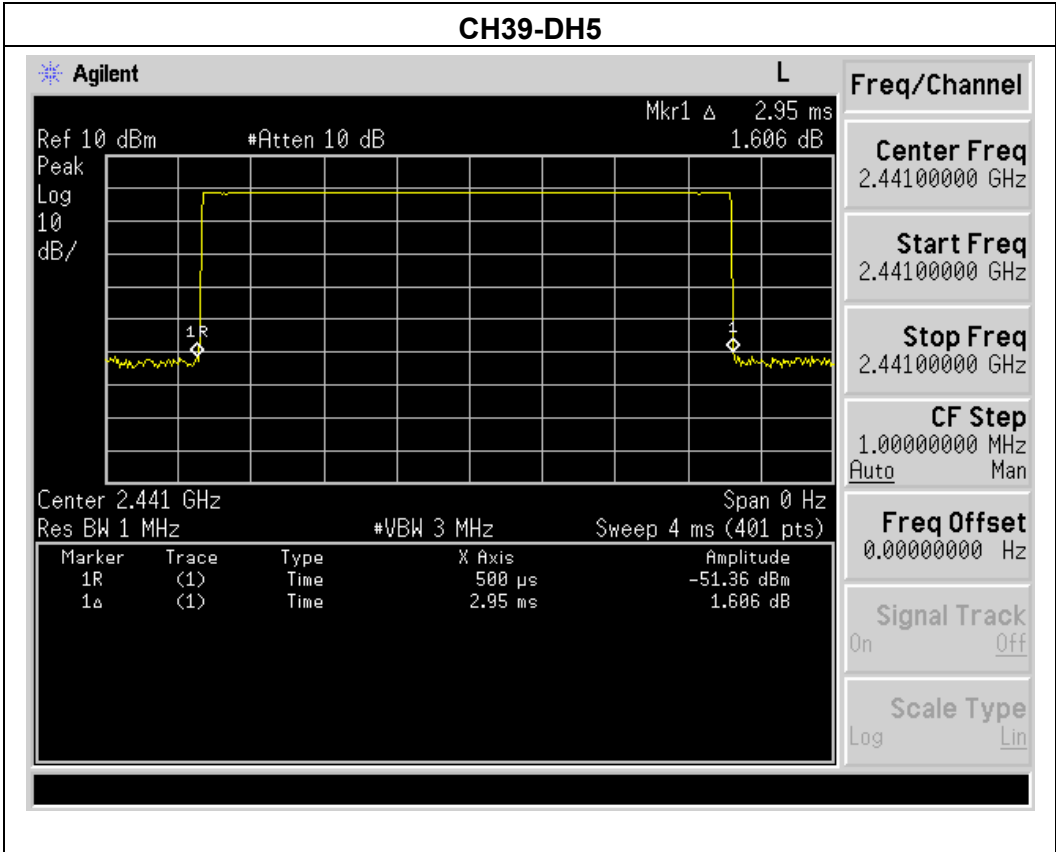

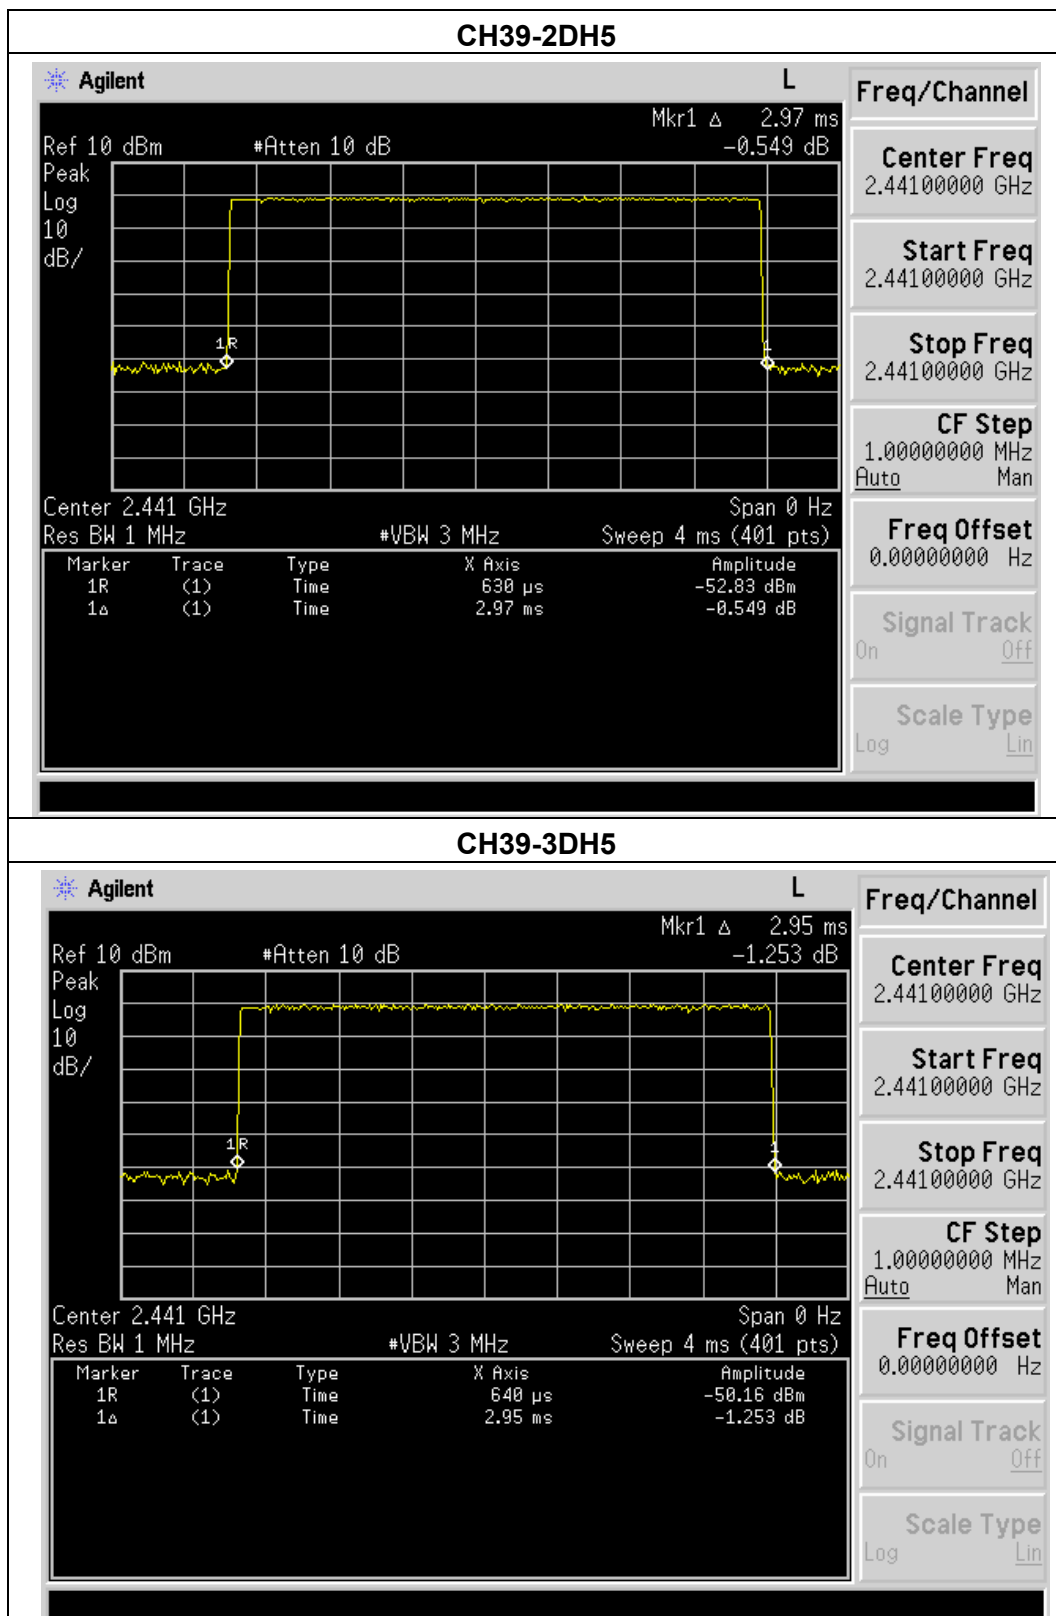

10. BAND EDGE COMPLIANCE TEST

10.1. Limits


According to FCC Section 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF con-ducted or a radiated measurement.

10.2. Test setup

For Conducted Test



For Radiated emission Test

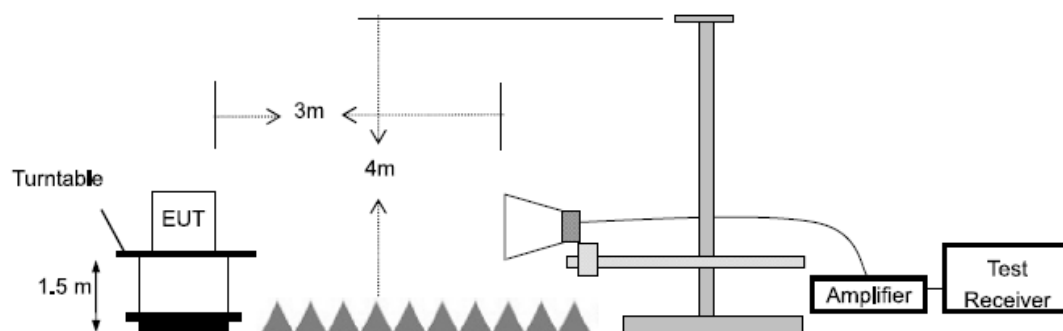

10.3.TEST Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

Test plot as follows:

For radiated test as follows:



Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
1Mbps Non-hopping							
2390	37.96	13.06	51.02	74	-22.98	peak	Vertical
2390	36.24	13.06	49.30	74	-24.70	peak	Horizontal
2483.5	38.29	12.78	51.07	74	-22.93	peak	Vertical
2483.5	38.93	12.78	51.71	74	-22.29	peak	Horizontal
1Mbps hopping							
2390	37.12	13.06	50.18	74	-23.82	peak	Vertical
2390	36.45	13.06	49.51	74	-24.49	peak	Horizontal
2483.5	38.79	12.78	51.57	74	-22.43	peak	Vertical
2483.5	38.56	12.78	51.34	74	-22.66	peak	Horizontal
2Mbps Non-hopping							
2390	35.98	13.06	49.04	74	-24.96	peak	Vertical
2390	37.23	13.06	50.29	74	-23.71	peak	Horizontal
2483.5	37.73	12.78	50.51	74	-23.49	peak	Vertical
2483.5	35.67	12.78	48.45	74	-25.55	peak	Horizontal
2Mbps hopping							
2390	34.34	13.06	47.4	74	-26.6	peak	Vertical
2390	36.98	13.06	50.04	74	-23.96	peak	Horizontal
2483.5	36.14	12.78	48.92	74	-25.08	peak	Vertical
2483.5	37.36	12.78	50.14	74	-23.86	peak	Horizontal
3Mbps Non-hopping							
2390	37.45	13.06	50.51	74	-23.49	peak	Vertical
2390	34.76	13.06	47.82	74	-26.18	peak	Horizontal
2483.5	38.45	12.78	51.23	74	-22.77	peak	Vertical
2483.5	39.33	12.78	52.11	74	-21.89	peak	Horizontal
3Mbps hopping							
2390	33.67	13.06	46.73	74	-27.27	peak	Vertical
2390	35.85	13.06	48.91	74	-25.09	peak	Horizontal
2483.5	36.34	12.78	49.12	74	-24.88	peak	Vertical
2483.5	37.48	12.78	50.26	74	-23.74	peak	Horizontal

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



For conducted test:

Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK Non-hopping			
Left Band	51.05	20	Pass
Right Band	56.98	20	Pass
$\pi/4$ -DQPSK Non-hopping			
Left Band	48.32	20	Pass
Right Band	55.53	20	Pass
8DPSK Non-hopping			
Left Band	49.09	20	Pass
Right Band	58.64	20	Pass
GFSK hopping			
Left Band	52.30	20	Pass
Right Band	60.07	20	Pass
$\pi/4$ -DQPSK hopping			
Left Band	52.73	20	Pass
Right Band	55.96	20	Pass
8DPSK hopping			
Left Band	60.72	20	Pass
Right Band	57.42	20	Pass



BDR mode (GFSK): Band Edge-Left Side

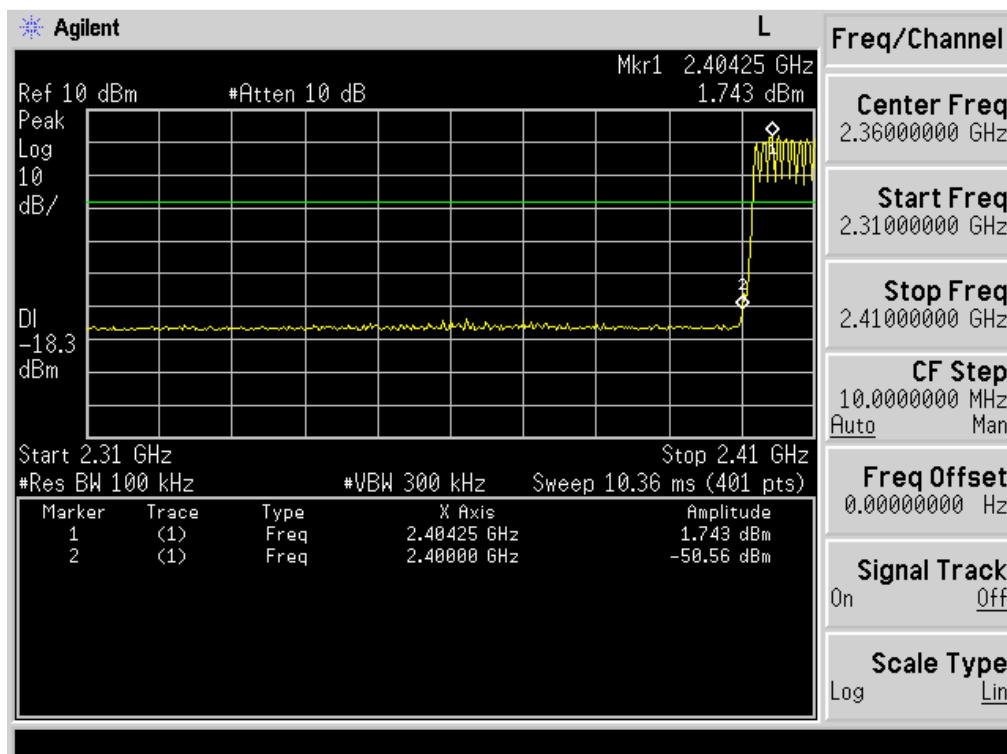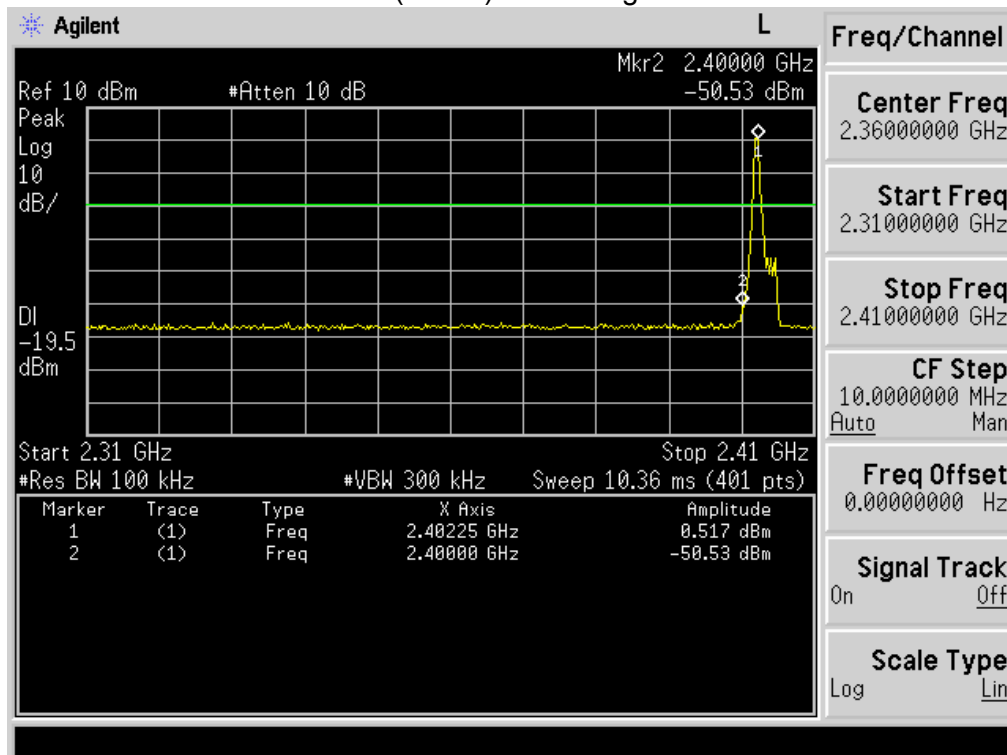



BDR mode (GFSK): Band Edge-Right Side

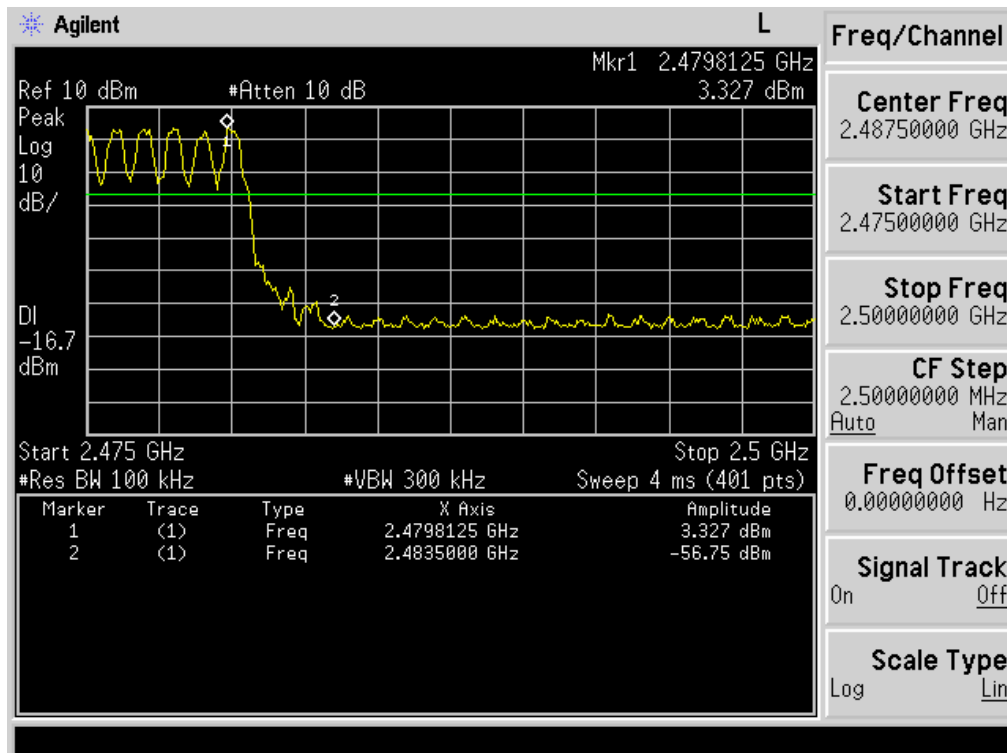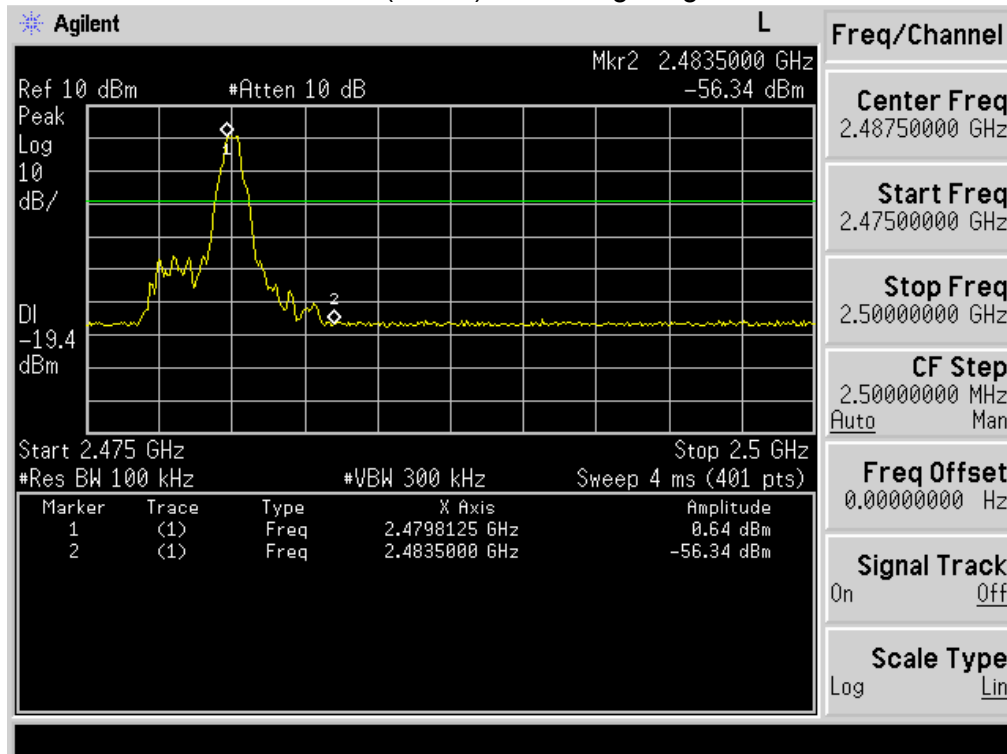



EDR mode ($\pi/4$ -DQPSK): Band Edge-Left Side

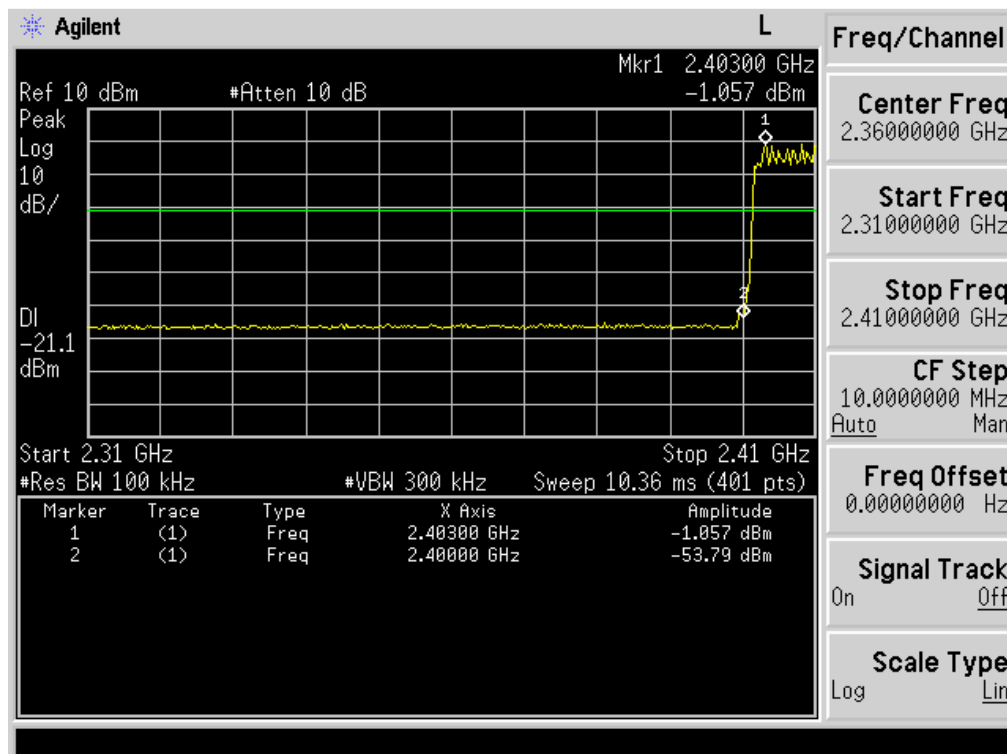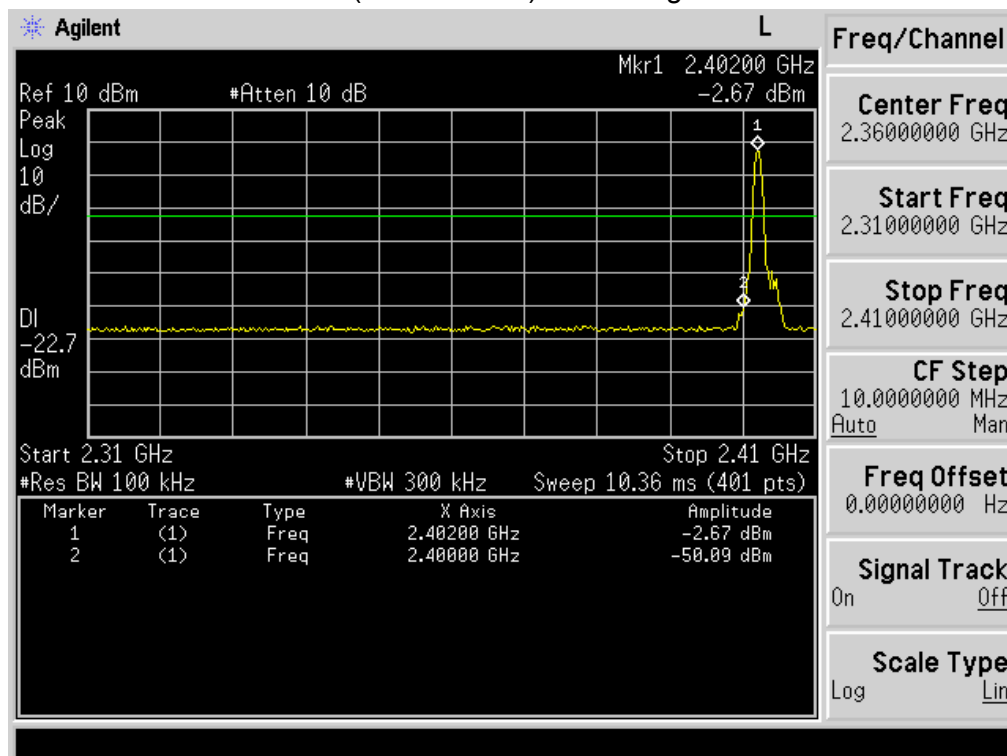



EDR mode ($\pi/4$ -DQPSK): Band Edge- Right Side

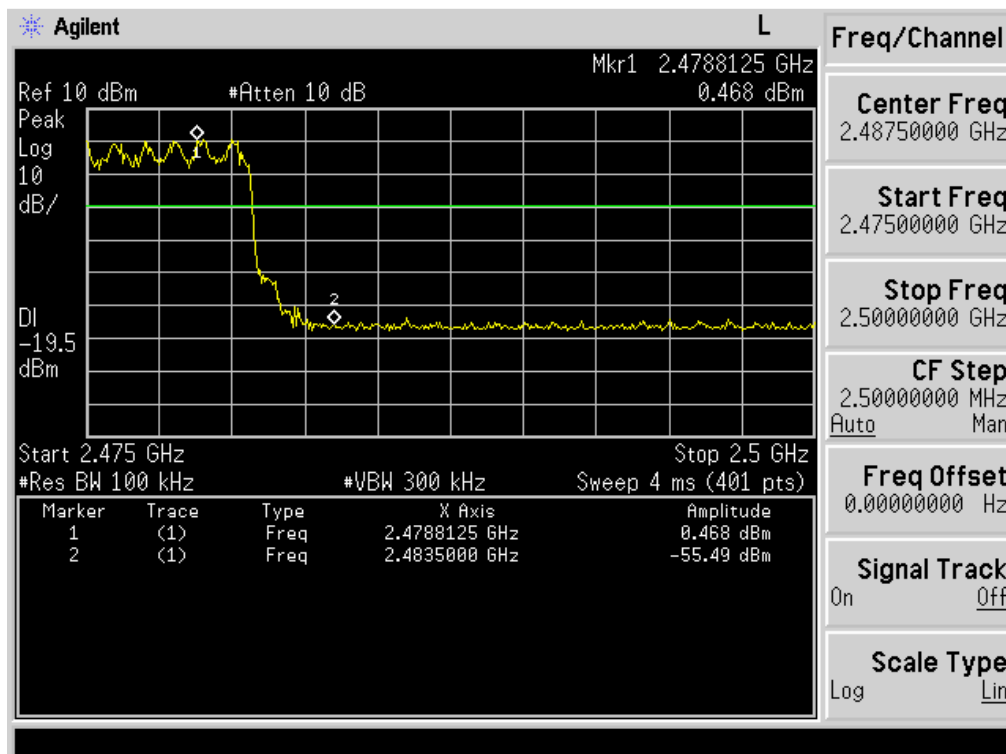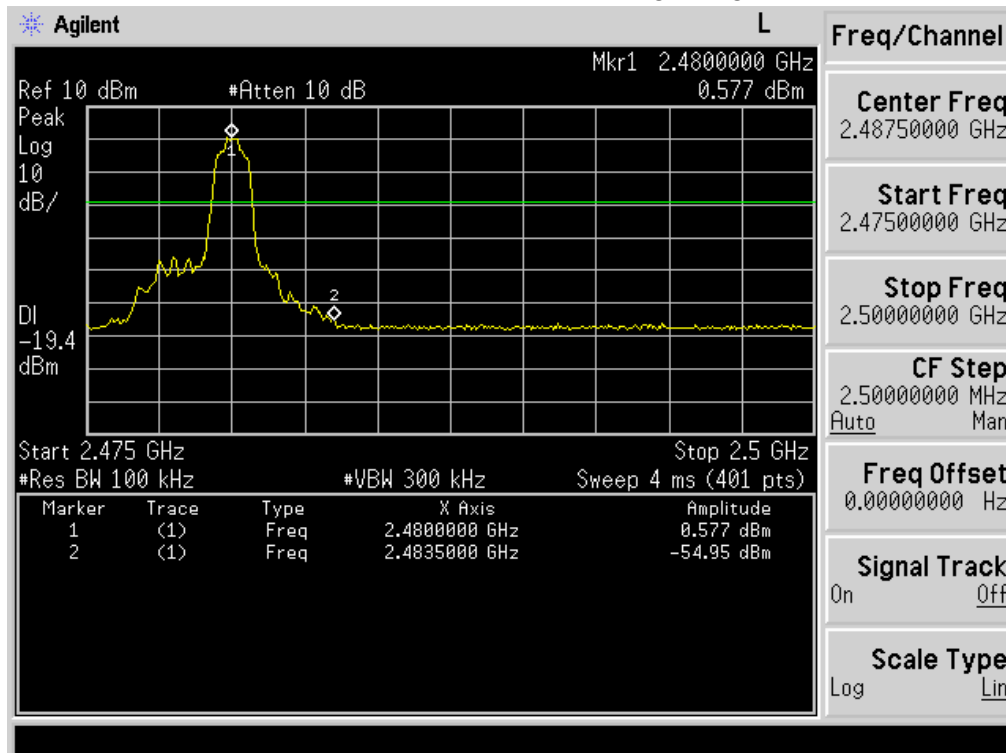

EDR mode(8DPSK): Band Edge-Left Side

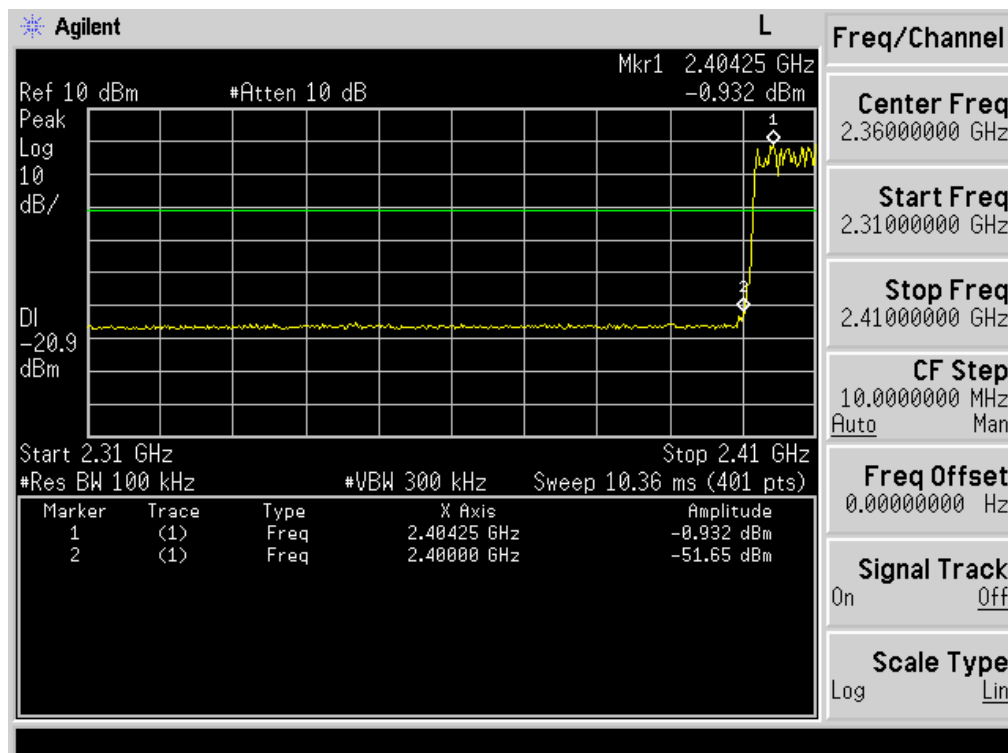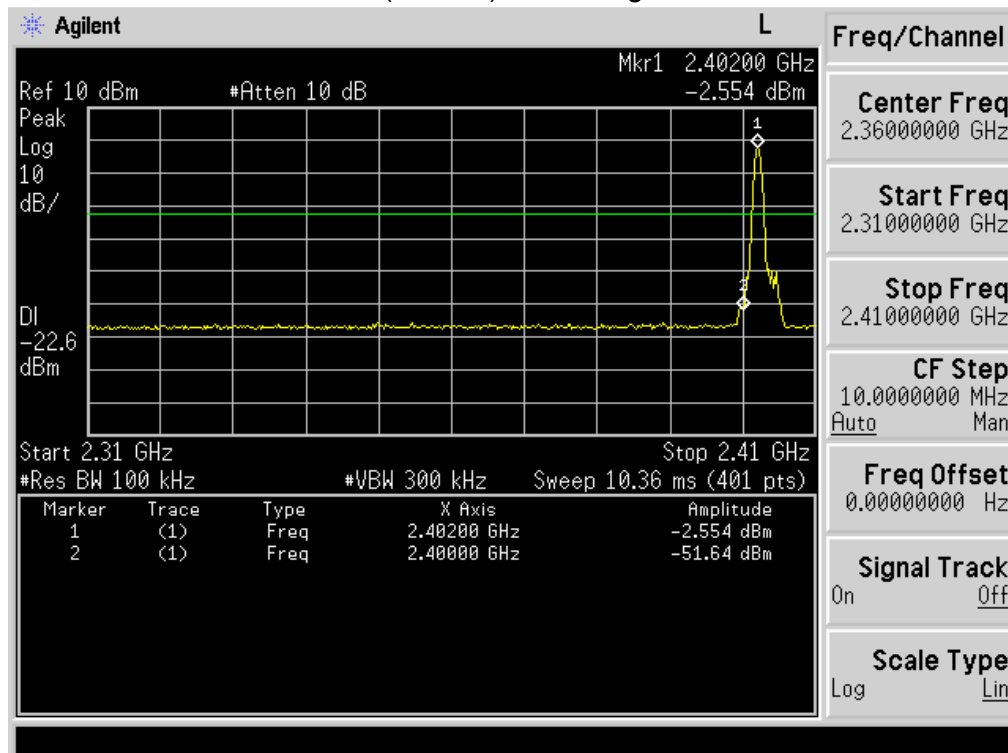

EDR mode(8DPSK): Band Edge-Right Side

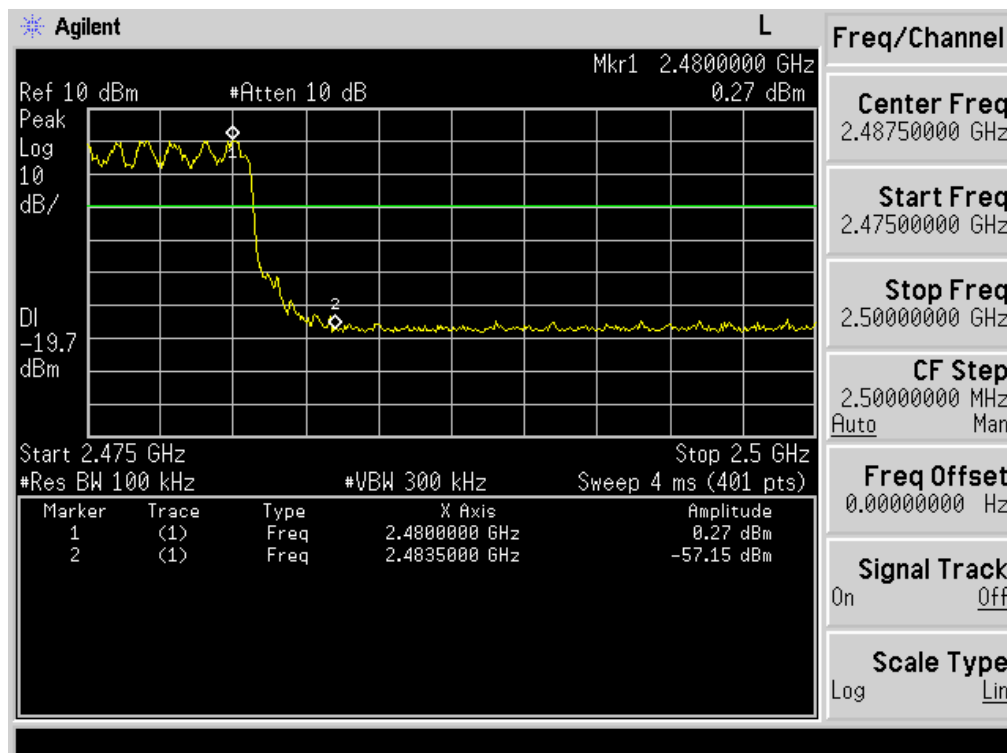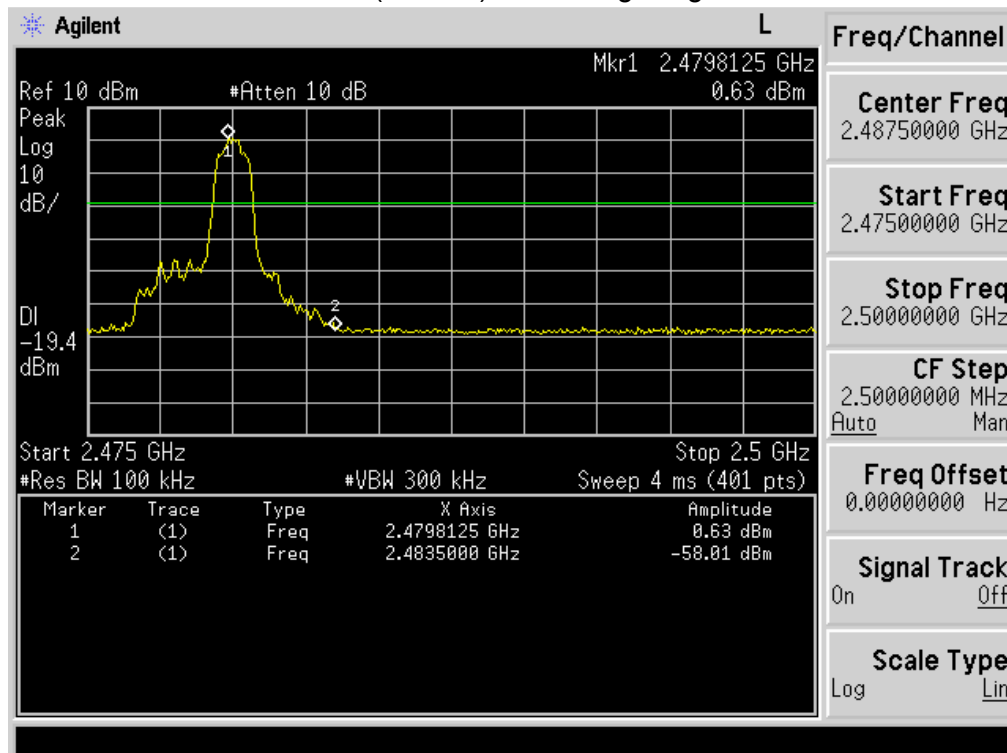

NOTE:

Hopping enabled and disabled have evaluated, and the worst data was reported

11. ANTENNA REQUIREMENTS

11.1.Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are Permanently fixed antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.53dBi.

12. PHOTOGRAPHS OF TEST SET-UP

Radiated Emission Test

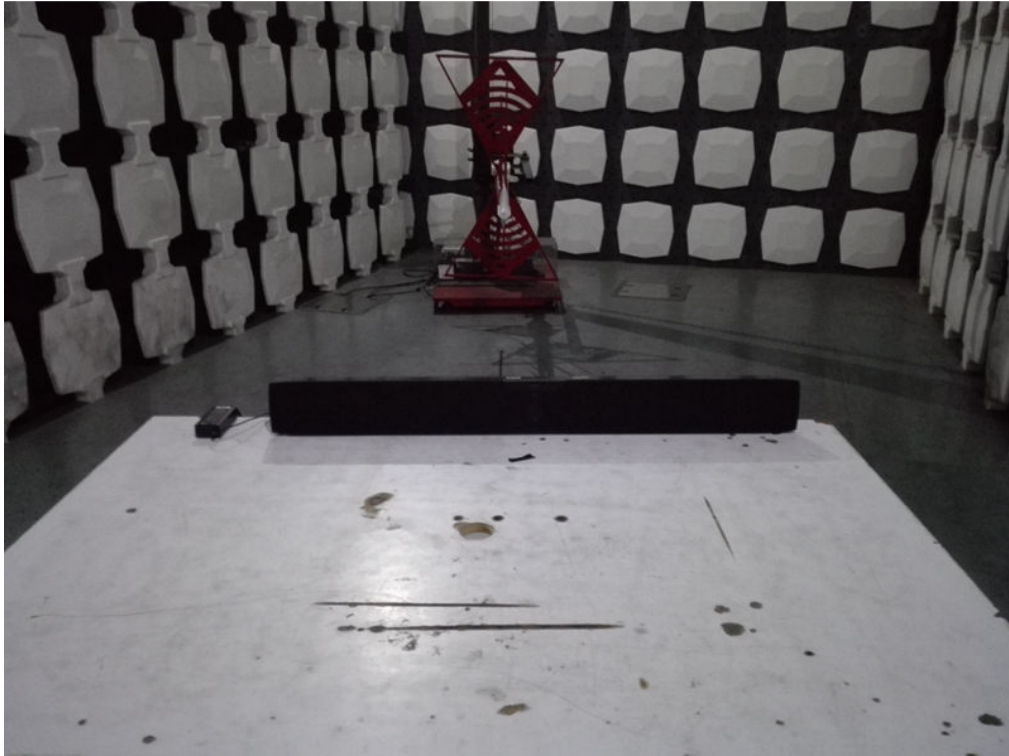

Conducted Emission



13. PHOTOGRAPHS OF THE EUT

Reference to the test report No. 16KWE043692F.
-----End-----