

# FCC Test Report

Product Name	SPEAKER SYSTEM
Model No.	TORSTEN
FCC ID.	R48JMA904

Applicant	Meiloon Industrial Co., Ltd
Address	No.77, Lane 1775, Chuen-Ryh road, Taoyuan City, Taiwan

Date of Receipt	Aug. 30, 2013
Issued Date	Sep. 11, 2013
Report No.	139106R-RFUSP43V01
Report Version	V1.0



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.  
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

# Test Report Certification

Issued Date: Sep. 11, 2013

Report No.: 139106R-RFUSP43V01



Product Name	SPEAKER SYSTEM
Applicant	Meiloon Industrial Co., Ltd
Address	No.77, Lane 1775, Chuen-Ryh road, Taoyuan City, Taiwan
Manufacturer	Klipsch Group, Inc.
Model No.	TORSTEN
FCC ID.	R48JMA904
EUT Rated Voltage	AC 100-240V, 50-60Hz
EUT Test Voltage	AC 120V/ 60Hz
Trade Name	Jamo
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.4: 2003, ANSI C63.10: 2009
Test Result	Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.  
This report must not be used to claim product endorsement by TAF or any agency of the U.S. Government

Documented By :

A handwritten signature in blue ink that reads "Genie Chang".

( Senior Adm. Specialist / Genie Chang )

Tested By :

A handwritten signature in blue ink that reads "Jack Hsu".

( Engineer / Jack Hsu )

Approved By :

A handwritten signature in black ink that reads "Vincent Lin".

( Manager / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description .....	5
1.2. Operational Description .....	7
1.3. Tested System Details .....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. CONDUCTED EMISSION .....</b>	<b>10</b>
2.1. Test Equipment .....	10
2.2. Test Setup .....	10
2.3. Limits .....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission .....	12
<b>3. PEAK POWER OUTPUT .....</b>	<b>14</b>
3.1. Test Equipment .....	14
3.2. Test Setup .....	14
3.3. Limit .....	14
3.4. Test Procedure .....	14
3.5. Uncertainty .....	14
3.6. Test Result of Peak Power Output .....	15
<b>4. RADIATED EMISSION .....</b>	<b>17</b>
4.1. Test Equipment .....	17
4.2. Test Setup .....	17
4.3. Limits .....	18
4.4. Test Procedure .....	19
4.5. Uncertainty .....	19
4.6. Test Result of Radiated Emission .....	20
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>28</b>
5.1. Test Equipment .....	28
5.2. Test Setup .....	28
5.3. Limits .....	28
5.4. Test Procedure .....	28
5.5. Uncertainty .....	28
5.6. Test Result of RF Antenna Conducted Test .....	29
<b>6. BAND EDGE .....</b>	<b>41</b>
6.1. Test Equipment .....	41
6.2. Test Setup .....	42
6.3. Limit .....	43
6.4. Test Procedure .....	43
6.5. Uncertainty .....	43

---

6.6.	Test Result of Band Edge .....	44
7.	<b>CHANNEL NUMBER.....</b>	<b>52</b>
7.1.	Test Equipment .....	52
7.2.	Test Setup .....	52
7.3.	Limit .....	52
7.4.	Test Procedure .....	52
7.5.	Uncertainty .....	52
7.6.	Test Result of Channel Number.....	53
8.	<b>CHANNEL SEPARATION.....</b>	<b>55</b>
8.1.	Test Equipment .....	55
8.2.	Test Setup .....	55
8.3.	Limit .....	55
8.4.	Test Procedure .....	55
8.5.	Uncertainty .....	55
8.6.	Test Result of Channel Separation.....	56
9.	<b>DWELL TIME.....</b>	<b>60</b>
9.1.	Test Equipment .....	60
9.2.	Test Setup .....	60
9.3.	Limit .....	60
9.4.	Test Procedure .....	60
9.5.	Uncertainty .....	60
9.6.	Test Result of Dwell Time .....	61
10.	<b>OCCUPIED BANDWIDTH .....</b>	<b>65</b>
10.1.	Test Equipment .....	65
10.2.	Test Setup .....	65
10.3.	Limits.....	65
10.4.	Test Procedure .....	65
10.5.	Uncertainty .....	65
10.6.	Test Result of Occupied Bandwidth .....	66
11.	<b>EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>72</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	SPEAKER SYSTEM
Trade Name	Jamo
Model No.	TORSTEN
FCC ID.	R48JMA904
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna Type	IFA Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Fiber Cable	Non-Shielded, 1.8m
RCA Cable	Non-Shielded, 1.8m
Power Cable	Non-Shielded, 1.8m
Power Adapter	MFR: EPS, M/N: F150602-A Input: AC 100-240V~1.8A, 50-60Hz Output: DC 18-24V, 3.3-2.5A (TYP. 24V 2.5A) Cable Out: Non-Shielded, 1.8m, with one ferrite core bonded.
Contain Module	SUNITEC / BM153

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Klipsch	N/A	IFA	2.12 dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203.

## Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

## Note:

1. The EUT is a SPEAKER SYSTEM with a built-in Bluetooth transceiver.
2. The speaker system contains an audio module, has been granted under the FCC ID: NKR-SWA9.
3. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
4. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
5. Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through pre-testing, to produce emissions similar to those for 3Mb/s.

Test Mode	Mode 1: Transmit - 1Mbps (GFSK) Mode 2: Transmit - 3Mbps (8DPSK)
-----------	---


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	DVD PLAYER	SONY	BDP-S470	3201179	N/A
2	Fixture	Meiloon	N/A	N/A	N/A
3	Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m

Signal Cable Type		Signal cable Description
A	Fiber Cable	Non-Shielded, 1.8m
B	Signal Cable	Non-Shielded, 0.5m
C	USB Cable	Non-Shielded, 1.0m
D	RCA Cable	Non-Shielded, 1.8m

### 1.4. Configuration of Tested System

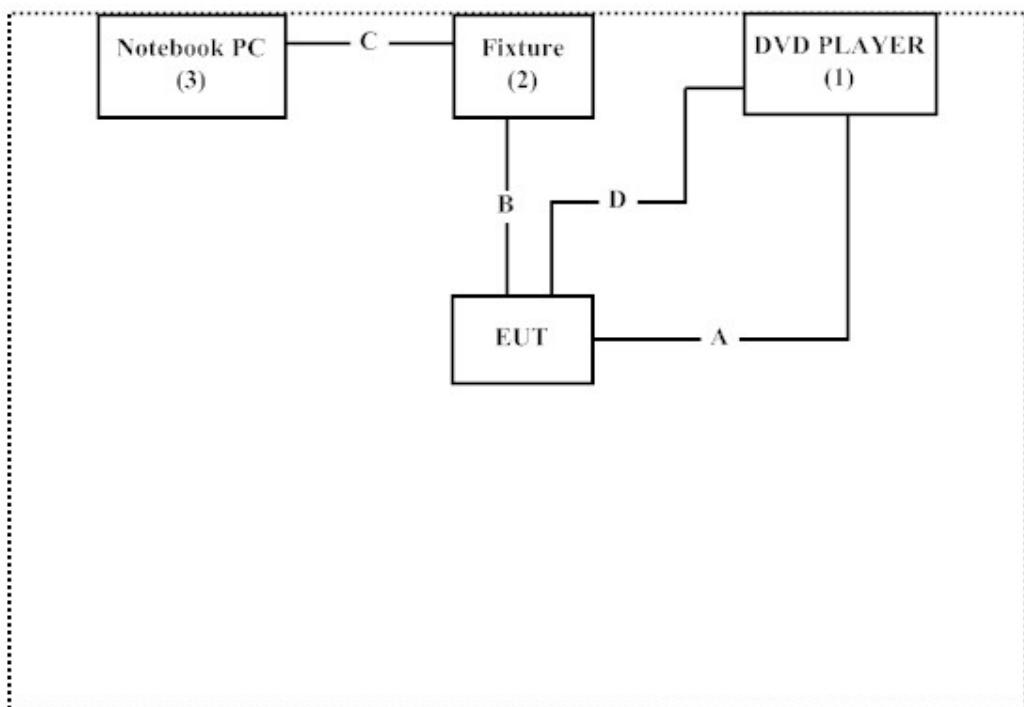

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Execute software “BlueSuite V3.0” on the notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded

from QuieTek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site:  
<http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Site Name: Quietek Corporation  
Site Address: No.5-22, Ruishukeng,  
Linkou Dist. New Taipei City 24451,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2013	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2013	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2013	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2013	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

### 2.2. Test Setup

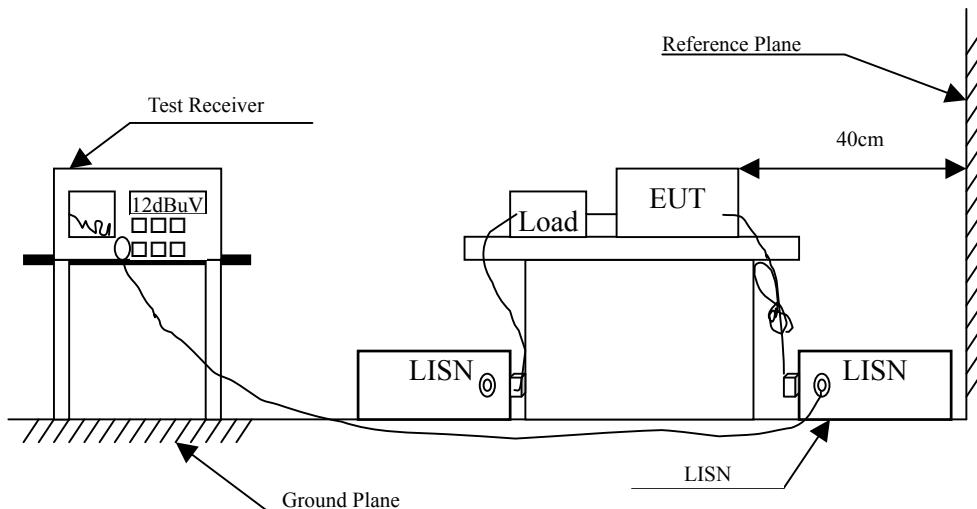

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### 2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 2.5. Uncertainty

± 2.26 dB

## 2.6. Test Result of Conducted Emission

Product : SPEAKER SYSTEM  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.158	9.697	25.360	35.057	-30.714	65.771
0.177	9.698	22.030	31.728	-33.501	65.229
0.220	9.700	17.070	26.770	-37.230	64.000
0.248	9.701	18.490	28.191	-35.009	63.200
0.396	9.708	18.000	27.708	-31.263	58.971
0.681	9.721	5.280	15.001	-40.999	56.000
<b>Average</b>					
0.158	9.697	3.130	12.827	-42.944	55.771
0.177	9.698	0.700	10.398	-44.831	55.229
0.220	9.700	-1.820	7.880	-46.120	54.000
0.248	9.701	0.770	10.471	-42.729	53.200
0.396	9.708	4.480	14.188	-34.783	48.971
0.681	9.721	-3.740	5.981	-40.019	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " **■** " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : SPEAKER SYSTEM  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.162	9.677	33.100	42.777	-22.880	65.657
0.212	9.679	25.610	35.289	-28.940	64.229
0.291	9.683	18.050	27.733	-34.238	61.971
0.396	9.688	21.040	30.728	-28.243	58.971
0.490	9.692	7.120	16.812	-39.474	56.286
0.767	9.714	4.160	13.874	-42.126	56.000
<b>Average</b>					
0.162	9.677	14.540	24.217	-31.440	55.657
0.212	9.679	10.040	19.719	-34.510	54.229
0.291	9.683	9.170	18.853	-33.118	51.971
0.396	9.688	15.120	24.808	-24.163	48.971
0.490	9.692	0.000	9.692	-36.594	46.286
0.767	9.714	0.260	9.974	-36.026	46.000

**Note:**

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


### 3. Peak Power Output

#### 3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2013
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2013

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by "X" are used to measure the final test results.

#### 3.2. Test Setup

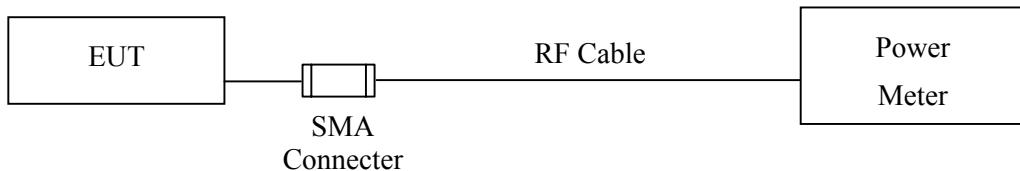

#### 3.3. Limit

The maximum peak power shall be less 1Watt.

#### 3.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

#### 3.5. Uncertainty

± 1.27 dB

### 3.6. Test Result of Peak Power Output

Product : SPEAKER SYSTEM  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	1.21	1 Watt= 30 dBm	Pass
Channel 39	2441.00	0.46	1 Watt= 30 dBm	Pass
Channel 78	2480.00	0.13	1 Watt= 30 dBm	Pass

Product : SPEAKER SYSTEM  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-0.12	1 Watt= 30 dBm	Pass
Channel 39	2441.00	-0.35	1 Watt= 30 dBm	Pass
Channel 78	2480.00	-0.99	1 Watt= 30 dBm	Pass

## 4. Radiated Emission

### 4.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Loop Antenna		Teseq	HLA6120 / 26739	Jul., 2013
	X Bilog Antenna		Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna		Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X Horn Antenna		Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier		Agilent	8447D/2944A09549	Sep., 2013
	X Spectrum Analyzer		Agilent	E4407B / US39440758	May, 2013
	X Test Receiver		R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable		QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X Controller		QuieTek	QTK-CONTROLLER/ CTRL3	N/A
X Coaxial Switch		Anritsu	MP59B/6200265729	N/A	

Note: 1. All equipments are calibrated every one year.


2. The test instruments marked by “X” are used to measure the final test results.

### 4.2. Test Setup

Below 1GHz

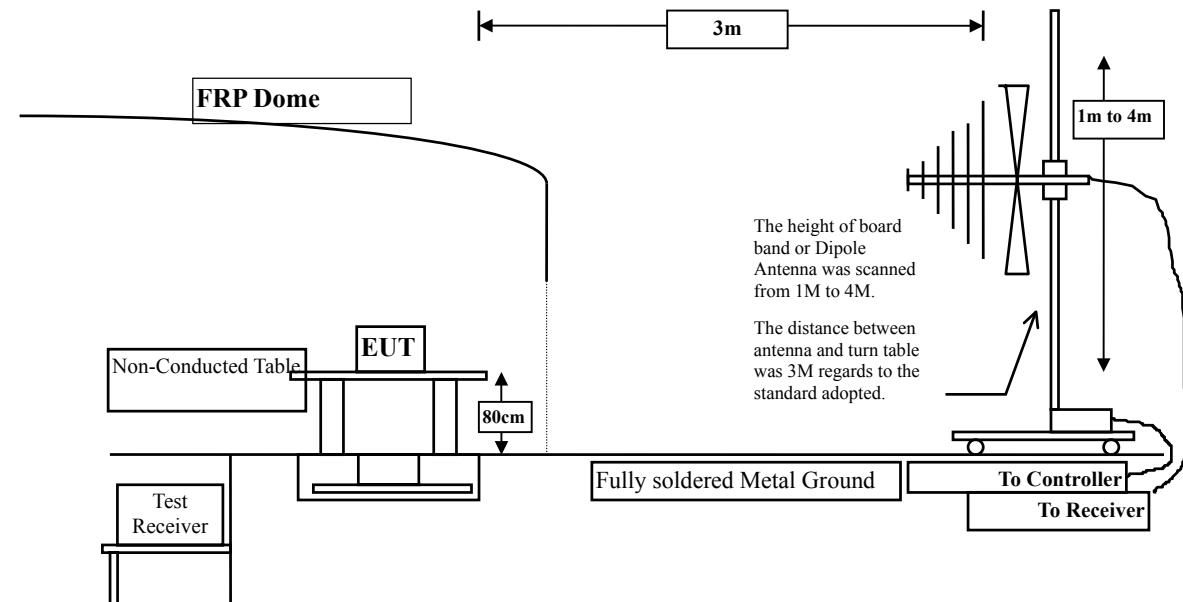

Above 1GHz

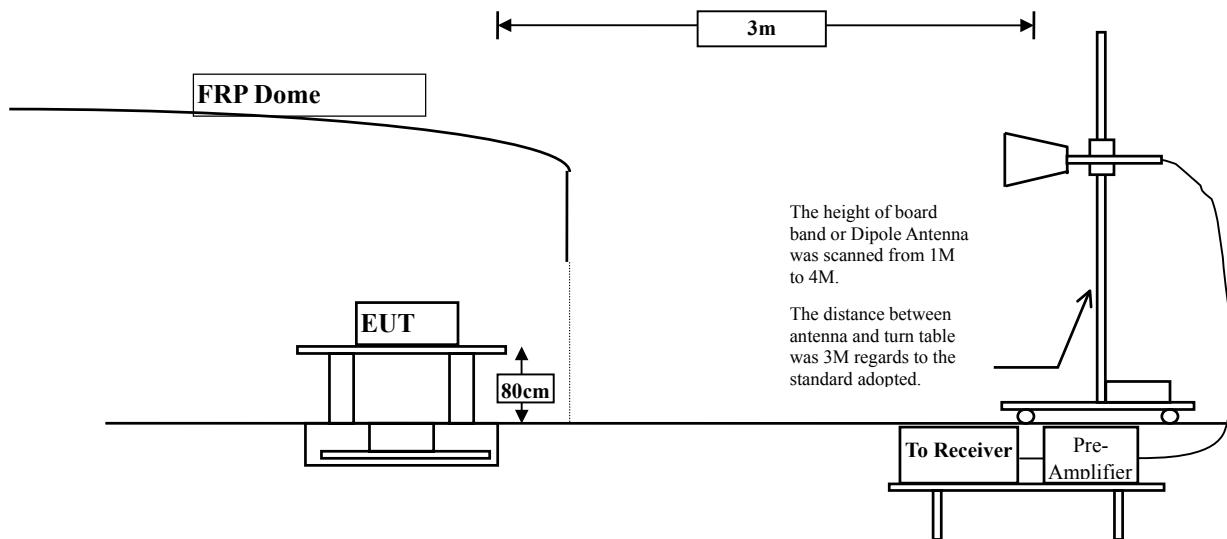

### 4.3. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dBuV) =  $20 \log \text{RF Voltage (uV)}$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

#### 4.4. Test Procedure

The EUT was setup according to [ANSI C63.10, 2009](#) and tested according to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to [ANSI C63.10, 2009](#) on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

##### Horizontal

###### Peak Detector:

4804.000	2.511	40.780	43.290	-30.710	74.000
7206.000	9.511	39.770	49.281	-24.719	74.000
9608.000	10.394	39.460	49.854	-24.146	74.000

###### Average

###### Detector:

--

##### Vertical

###### Peak Detector:

4804.000	2.923	42.040	44.962	-29.038	74.000
7206.000	9.988	40.600	50.589	-23.411	74.000
9608.000	10.847	39.450	50.297	-23.703	74.000

###### Average

###### Detector:

--

##### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4882.000	2.025	41.380	43.405	-30.595	74.000
7323.000	9.762	39.320	49.081	-24.919	74.000
9764.000	9.682	39.240	48.921	-25.079	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4882.000	2.488	42.950	45.438	-28.562	74.000
7323.000	10.375	39.770	50.144	-23.856	74.000
9764.000	10.315	38.670	48.985	-25.015	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4960.000	2.582	41.290	43.872	-30.128	74.000
7440.000	10.555	38.510	49.065	-24.935	74.000
9920.000	10.206	39.540	49.746	-24.254	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4960.000	3.398	42.550	45.949	-28.051	74.000
7440.000	11.214	40.070	51.284	-22.716	74.000
9920.000	11.245	38.850	50.095	-23.905	74.000

**Average**

**Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2402MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4804.000	2.511	40.530	43.040	-30.960	74.000
7206.000	9.511	39.880	49.391	-24.609	74.000
9608.000	10.394	39.140	49.534	-24.466	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4804.000	2.923	42.710	45.632	-28.368	74.000
7206.000	9.988	40.450	50.439	-23.561	74.000
9608.000	10.847	39.400	50.247	-23.753	74.000

**Average**

**Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

### Horizontal

**Peak Detector:**

4882.000	2.025	41.720	43.745	-30.255	74.000
7323.000	9.762	39.050	48.811	-25.189	74.000
9764.000	9.682	38.780	48.461	-25.539	74.000

**Average**

**Detector:**

--

**Vertical**

**Peak Detector:**

4882.000	2.488	42.030	44.518	-29.482	74.000
7323.000	10.375	39.980	50.354	-23.646	74.000
9764.000	10.315	38.360	48.675	-25.325	74.000

**Average**

**Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2480MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4960.000	2.582	41.150	43.732	-30.268	74.000
7440.000	10.555	38.800	49.355	-24.645	74.000
9920.000	10.206	38.620	48.826	-25.174	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4960.000	3.398	41.950	45.349	-28.651	74.000
7440.000	11.214	40.010	51.224	-22.776	74.000
9920.000	11.245	38.550	49.795	-24.205	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : SPEAKER SYSTEM  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
130.880	-7.407	38.581	31.173	-12.327	43.500
245.340	-6.478	41.989	35.511	-10.489	46.000
418.000	-0.231	35.666	35.435	-10.565	46.000
569.320	2.004	33.552	35.556	-10.444	46.000
674.080	2.713	24.060	26.773	-19.227	46.000
935.980	6.760	28.062	34.822	-11.178	46.000
<b>Vertical</b>					
119.240	-3.571	41.861	38.291	-5.209	43.500
202.660	-5.573	41.762	36.190	-7.310	43.500
507.240	0.429	32.520	32.949	-13.051	46.000
749.740	2.023	34.359	36.382	-9.618	46.000
788.540	2.714	31.548	34.262	-11.738	46.000
934.040	2.986	28.208	31.194	-14.806	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : SPEAKER SYSTEM  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
119.240	-7.291	41.768	34.478	-9.022	43.500
270.560	-5.638	46.115	40.477	-5.523	46.000
416.060	-0.221	38.726	38.505	-7.495	46.000
544.100	4.373	31.043	35.416	-10.584	46.000
809.880	6.266	29.244	35.510	-10.490	46.000
910.760	6.484	25.112	31.596	-14.404	46.000
<b>Vertical</b>					
111.480	-3.439	35.723	32.285	-11.215	43.500
245.340	-5.908	35.880	29.972	-16.028	46.000
507.240	0.429	33.126	33.555	-12.445	46.000
639.160	-1.374	26.973	25.599	-20.401	46.000
807.940	3.361	27.956	31.317	-14.683	46.000
961.200	3.310	27.190	30.500	-23.500	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.


## 5. RF Antenna Conducted Test

### 5.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

Note: 1. All equipments are calibrated every one year.  
2. The test instruments Marked "X" are used to measure the final test results.

### 5.2. Test Setup

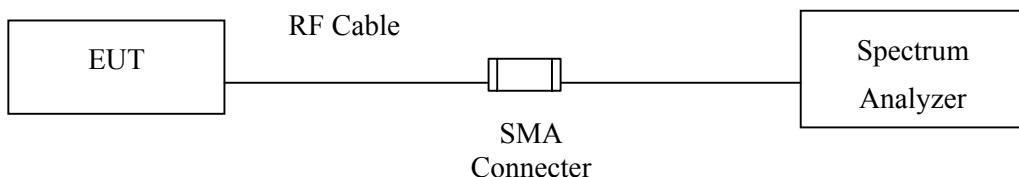

### 5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.


### 5.5. Uncertainty



± 150Hz

## 5.6. Test Result of RF Antenna Conducted Test

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 00:**


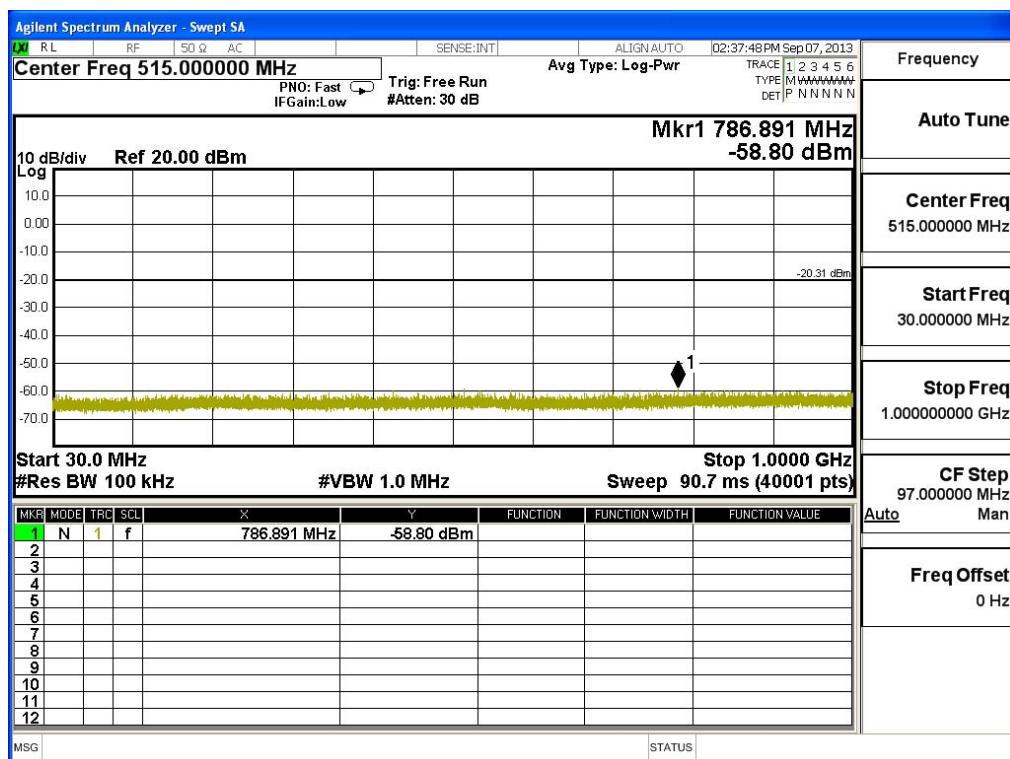


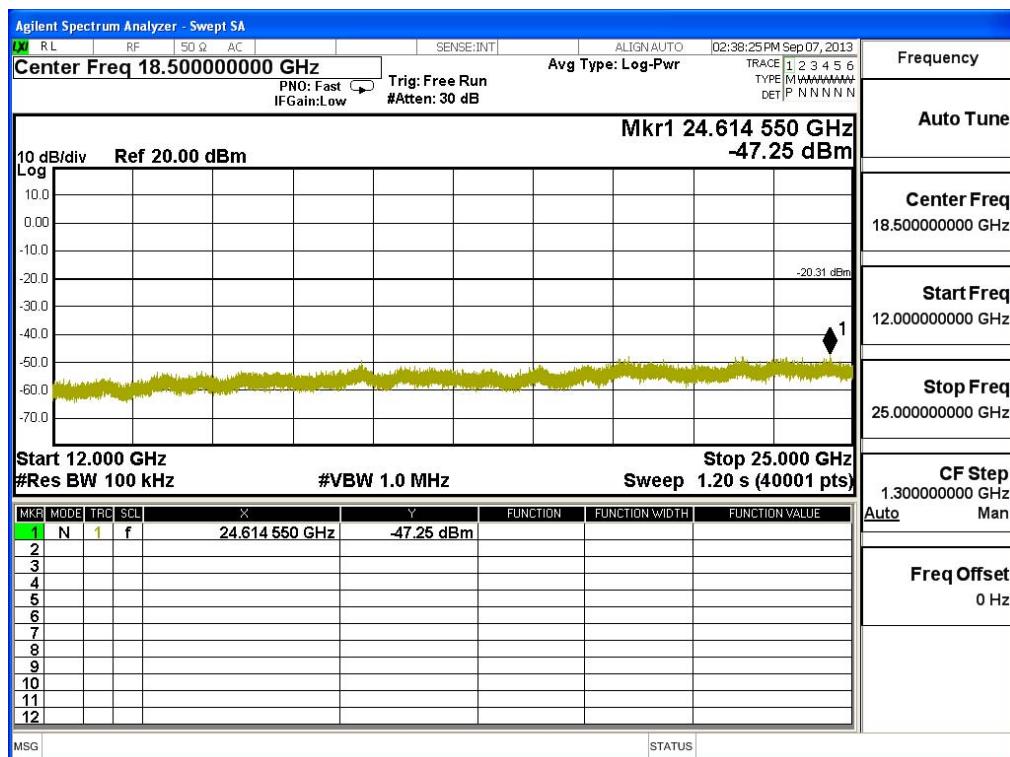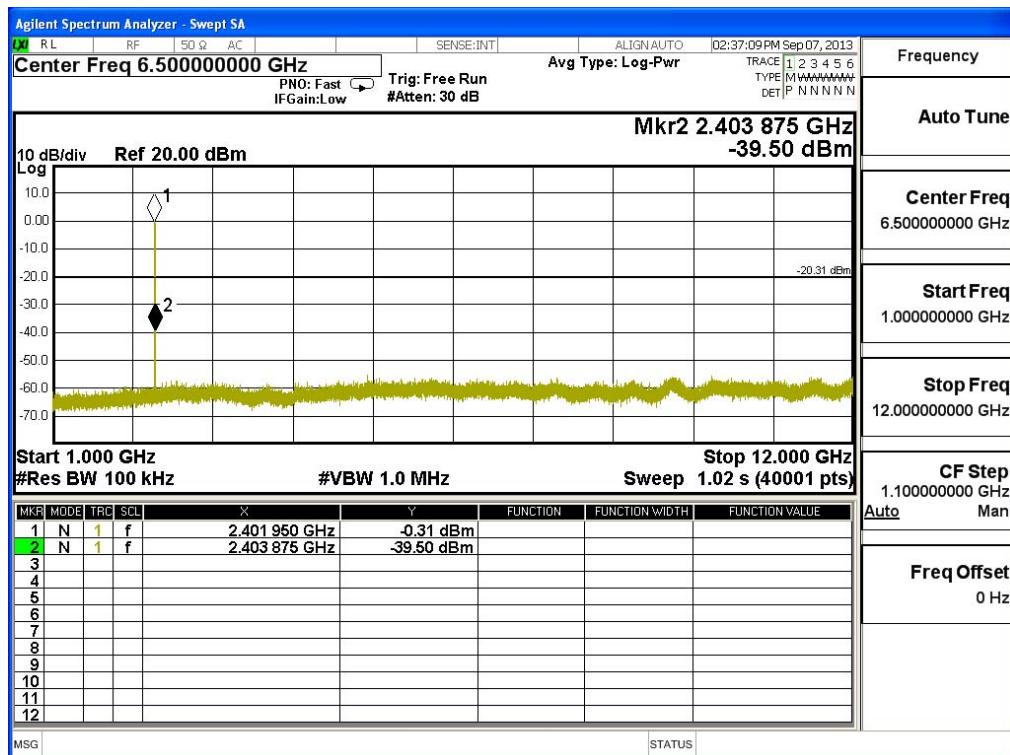

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 39:**


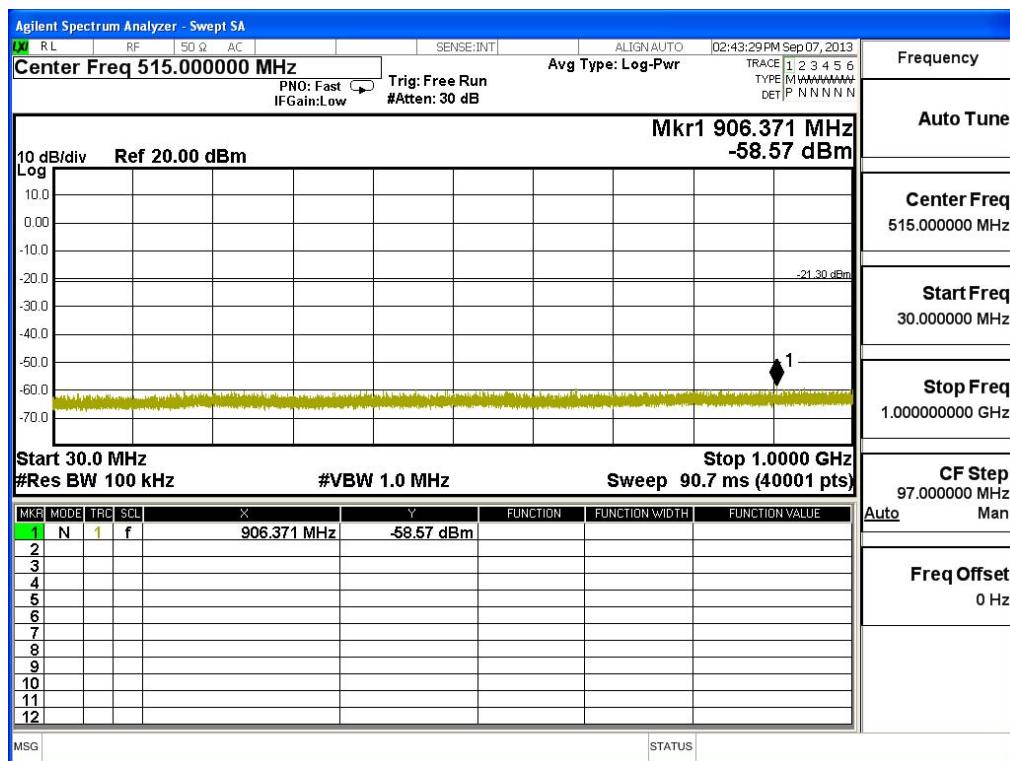


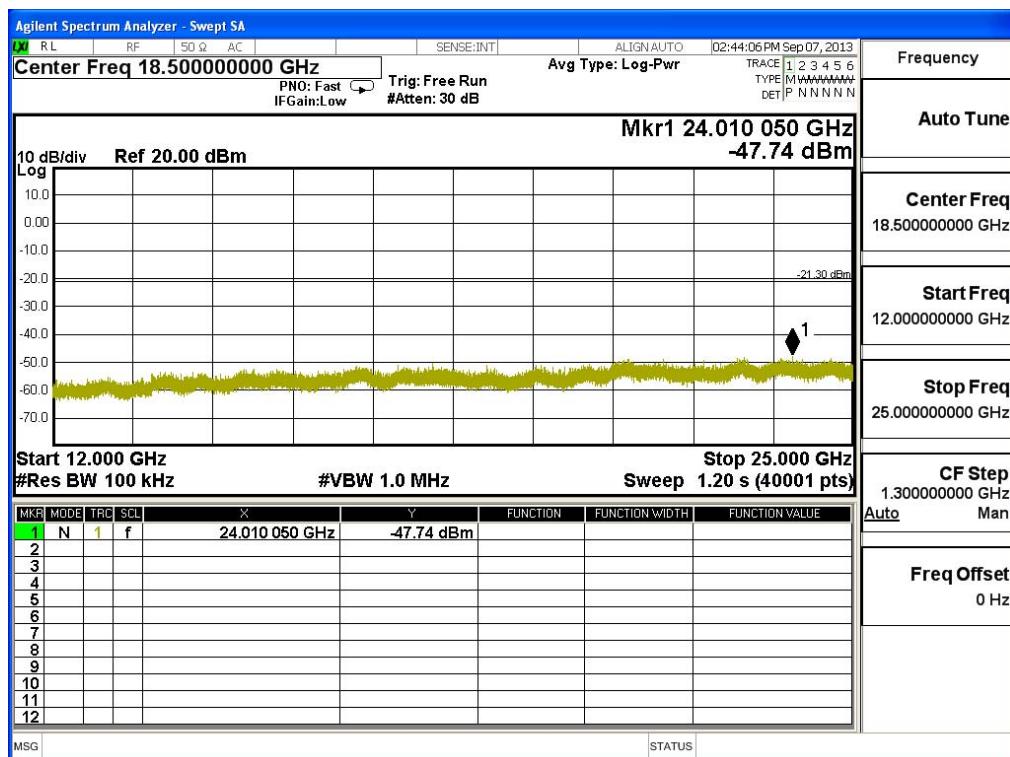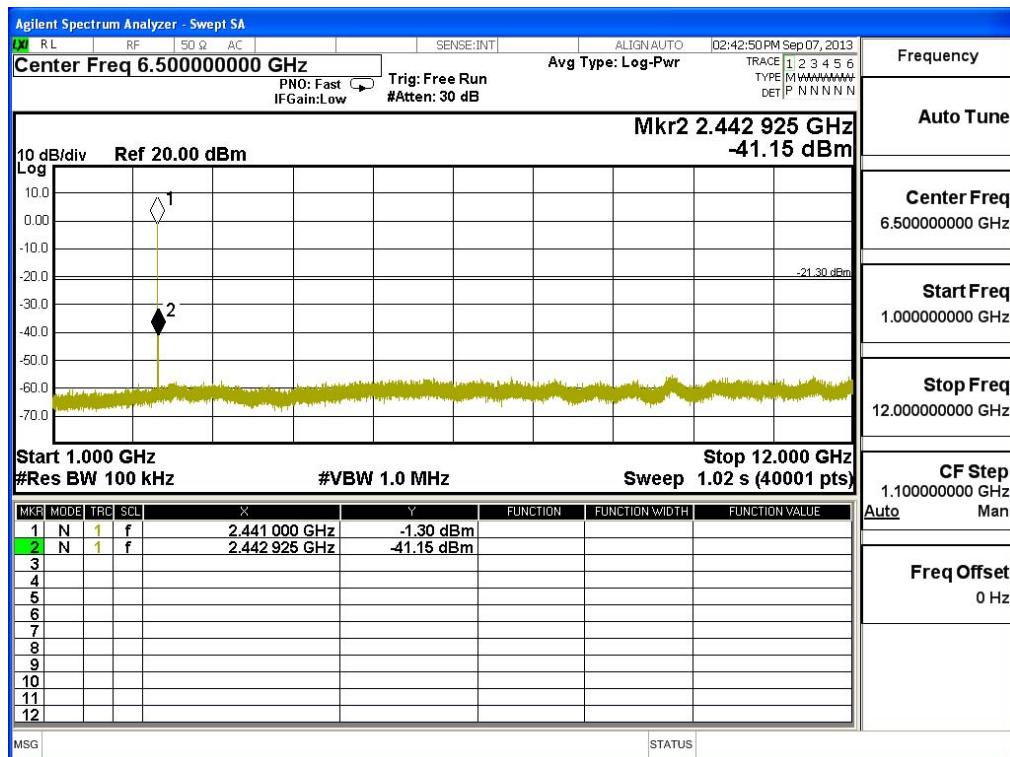

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)


**Figure Channel 78:**


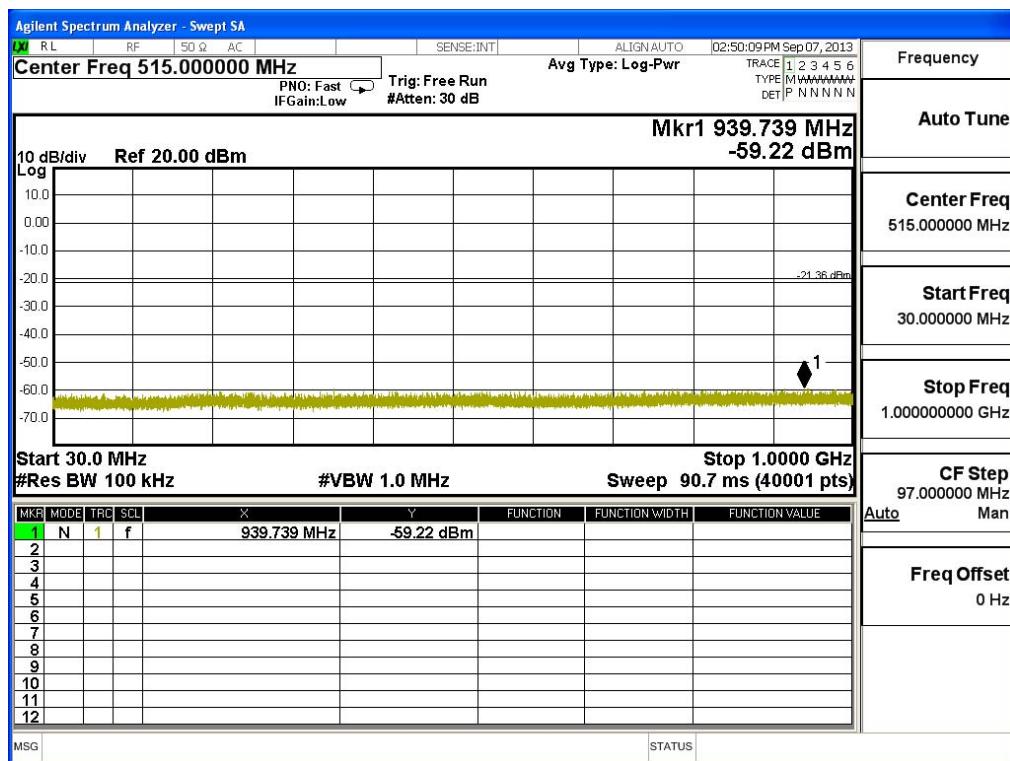


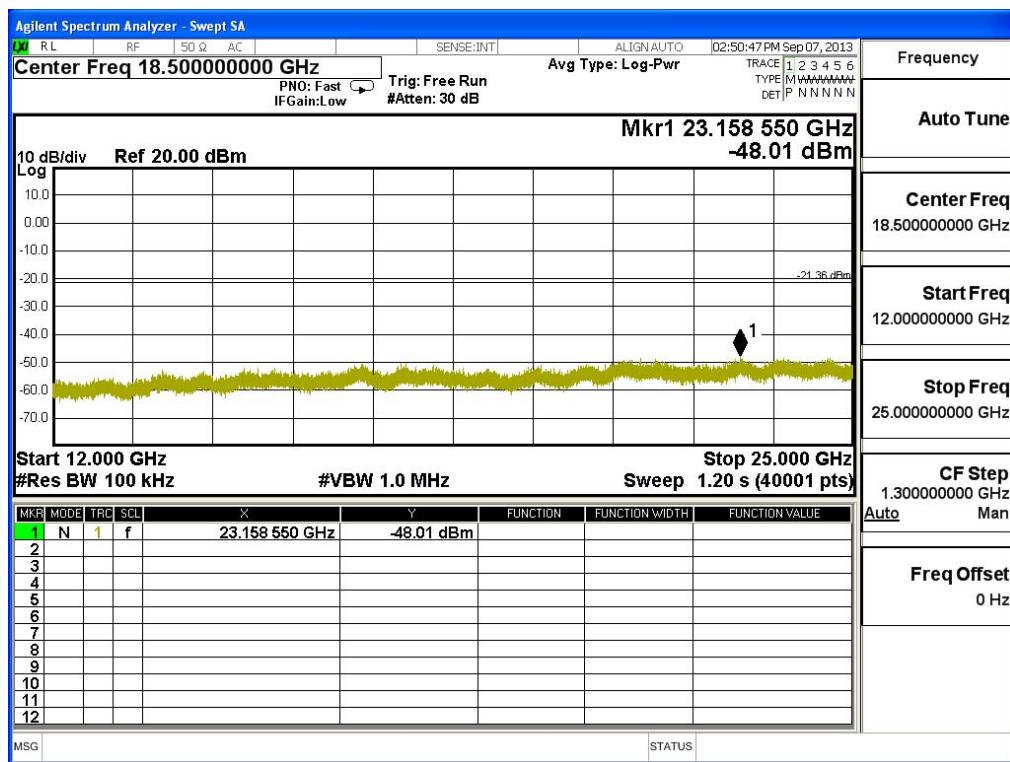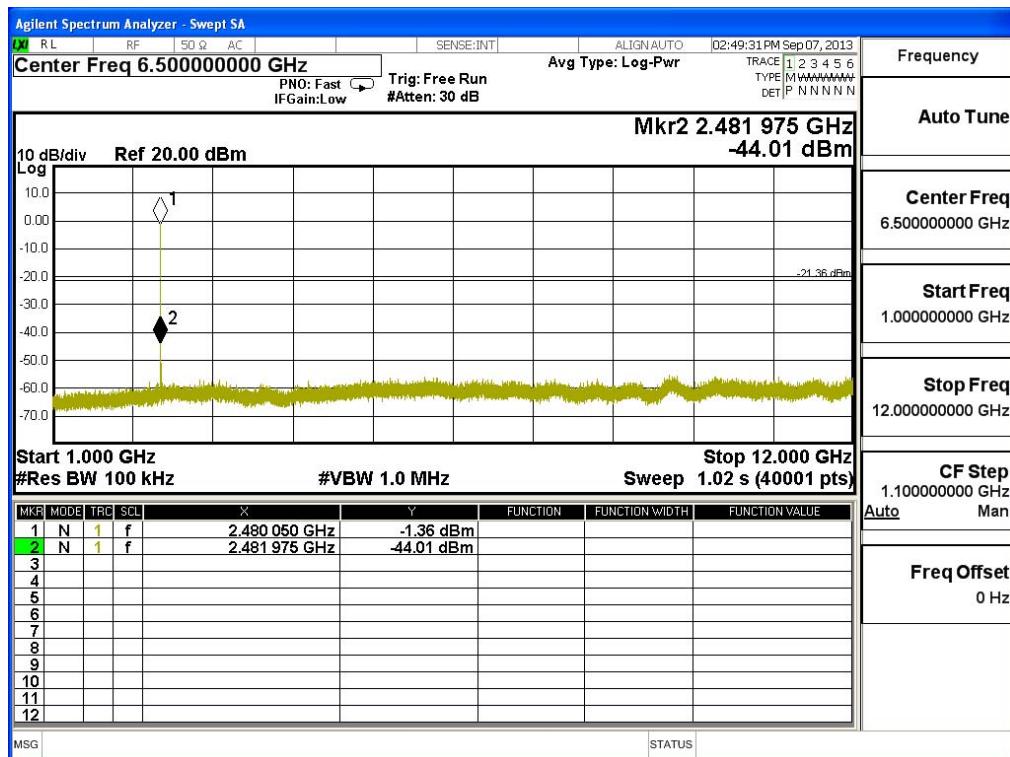

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Figure Channel 00:


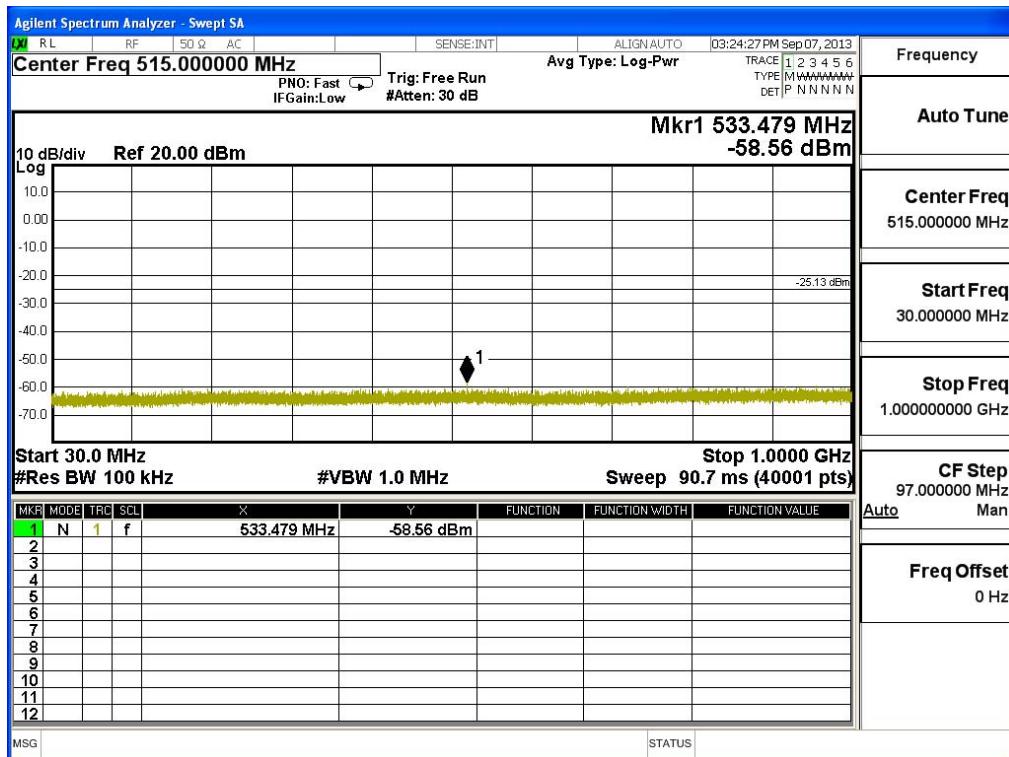


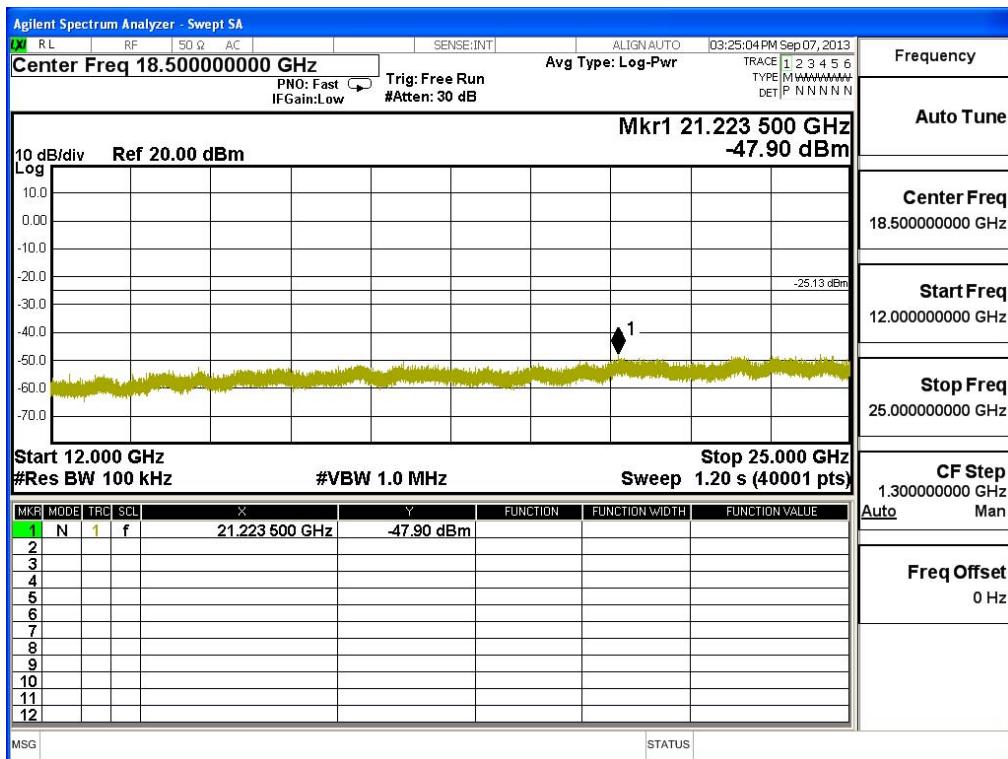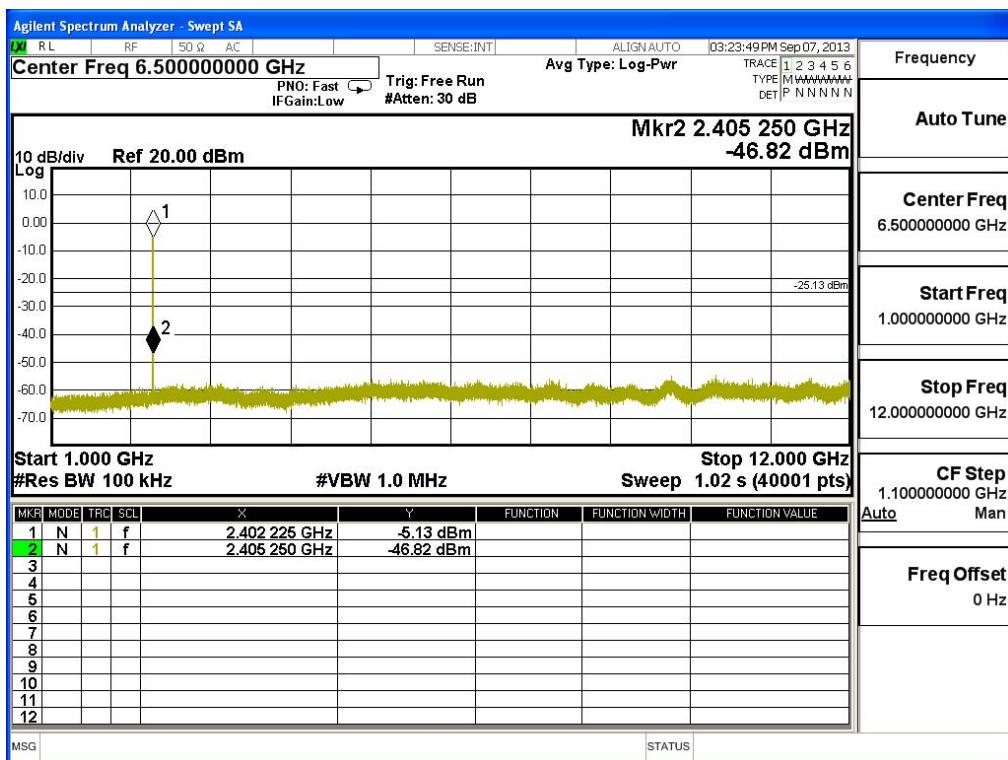

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)


Figure Channel 39:


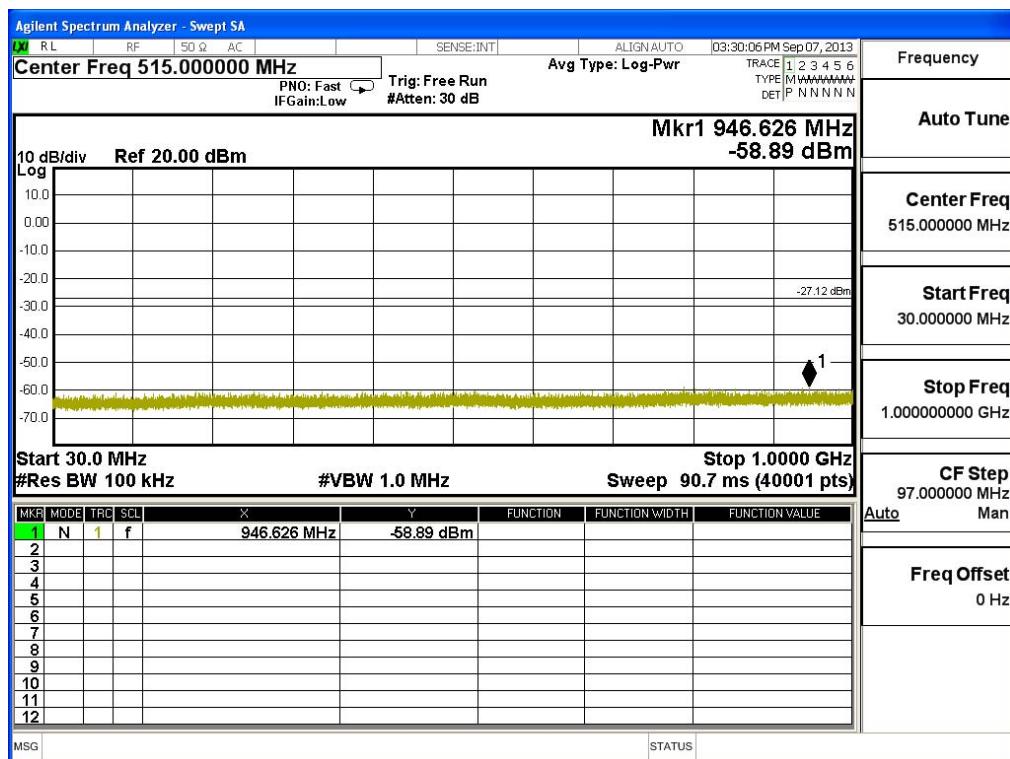


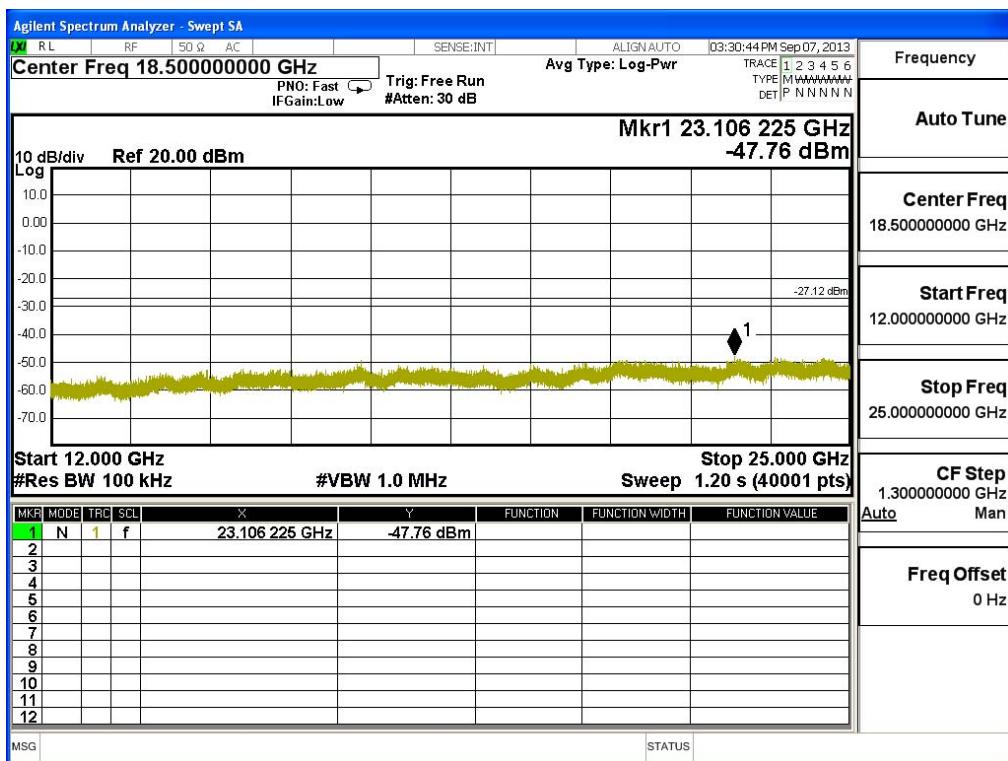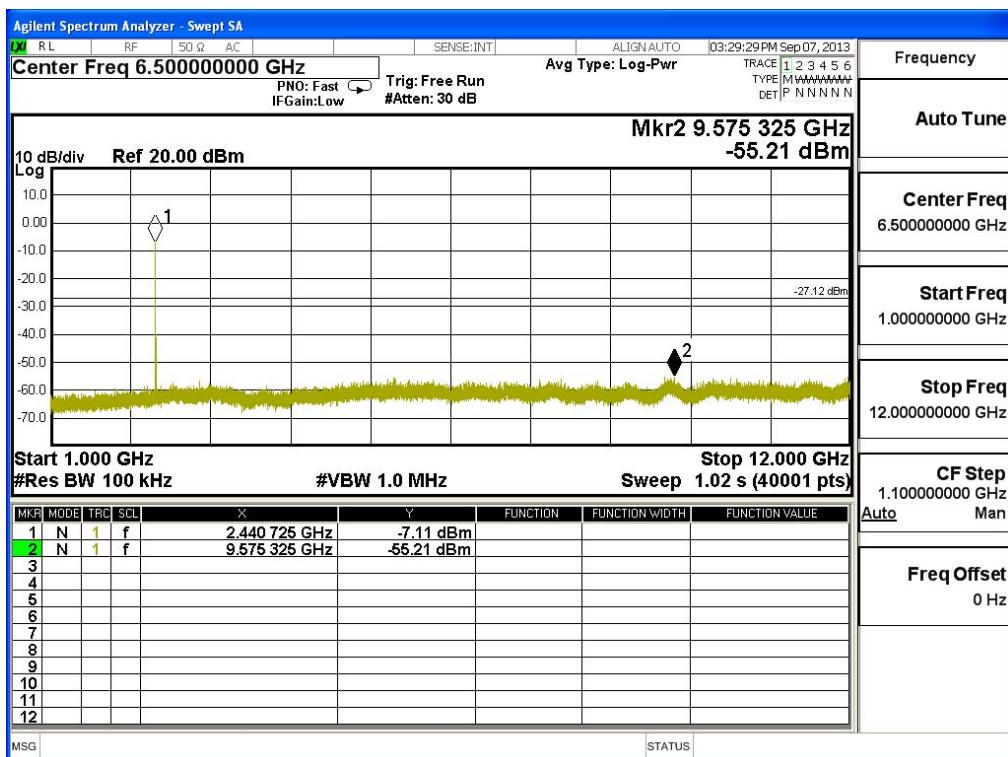

Product : SPEAKER SYSTEM  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

**Figure Channel 78:**

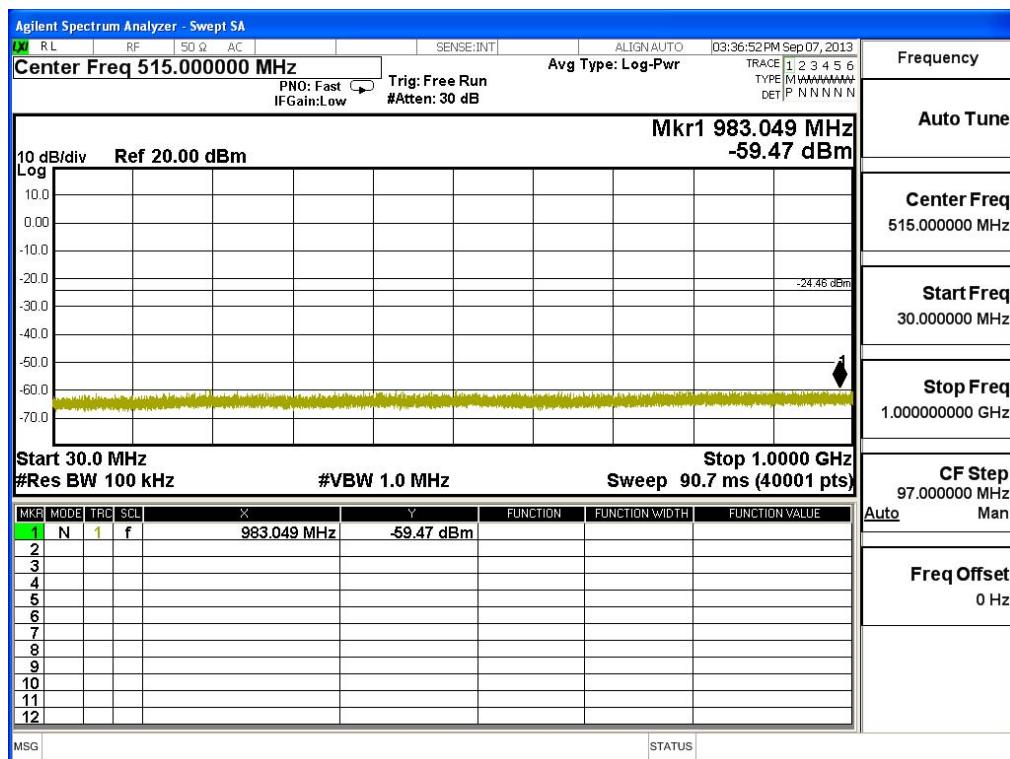

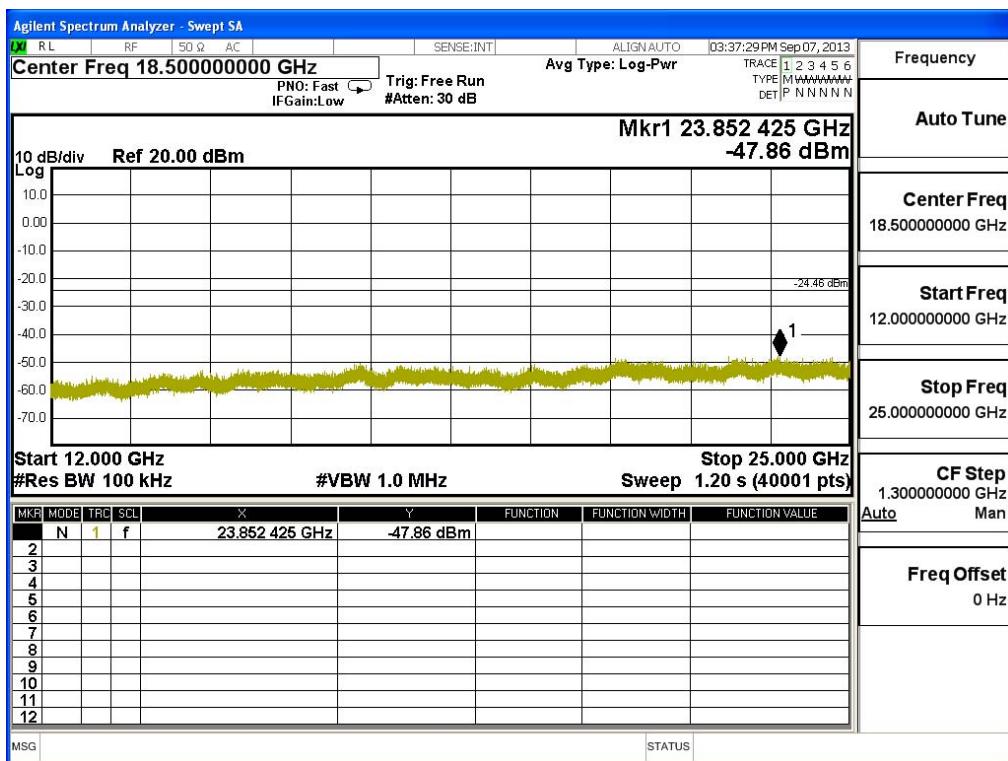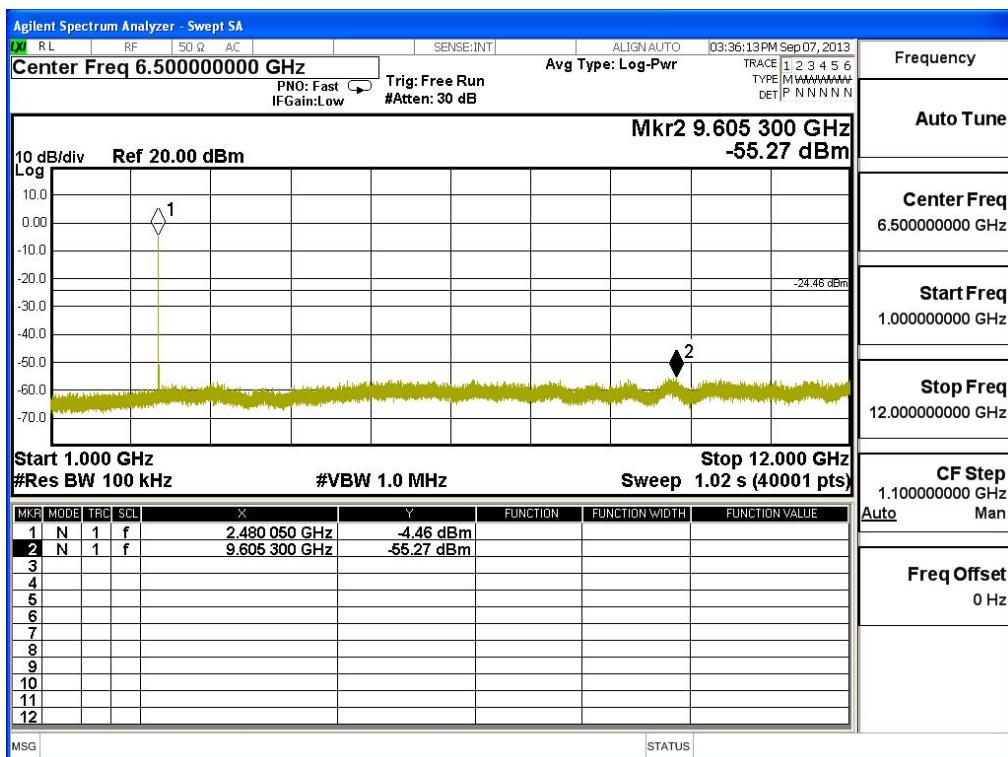

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2013
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2013
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2013

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2013
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2013
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2013
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by "X" are used to measure the final test results.


## 6.2. Test Setup

### RF Conducted Measurement

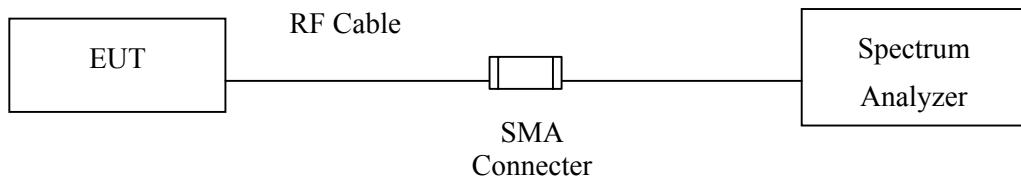

### RF Radiated Measurement:

Above 1GHz

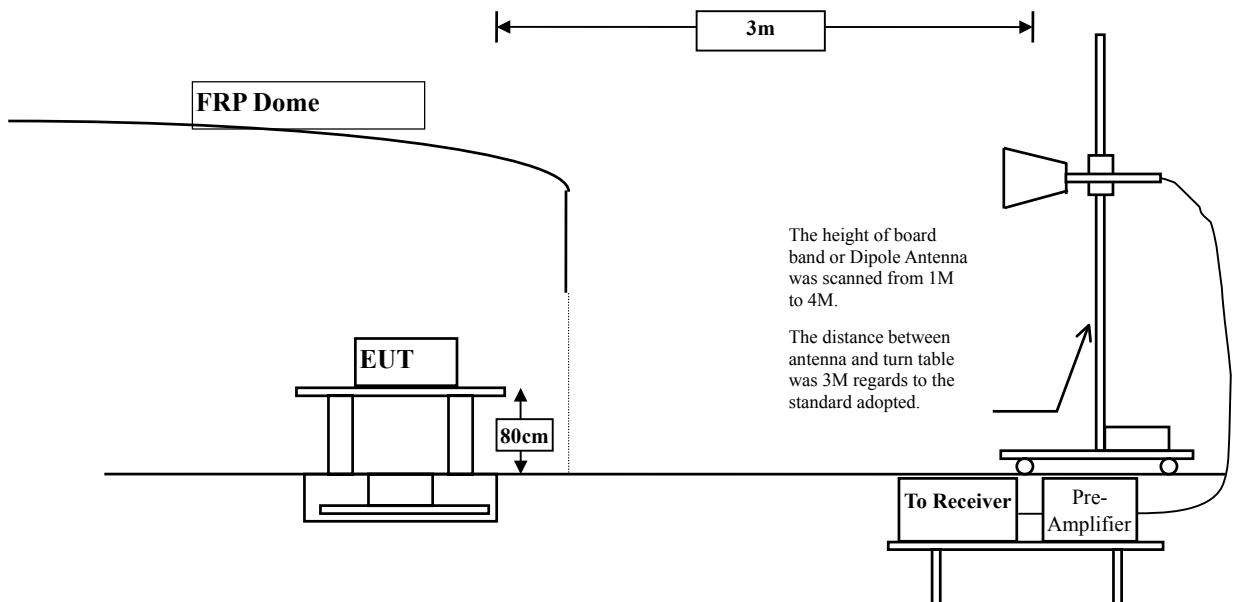

### **6.3. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.4. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : SPEAKER SYSTEM  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

### Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2402	33.755	68.143	101.897	Peak
Horizontal	2402	33.755	55.752	89.506	Average
Vertical	2402	32.241	66.057	98.298	Peak
Vertical	2402	32.241	53.994	86.235	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

### Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2386.4	101.897	49.45	52.447	74.000	Peak
Horizontal	2375.9	89.506	48.27	41.236	54.000	Average
Vertical	2386.4	98.298	49.45	48.848	74.000	Peak
Vertical	2375.9	86.235	48.27	37.965	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$


F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta

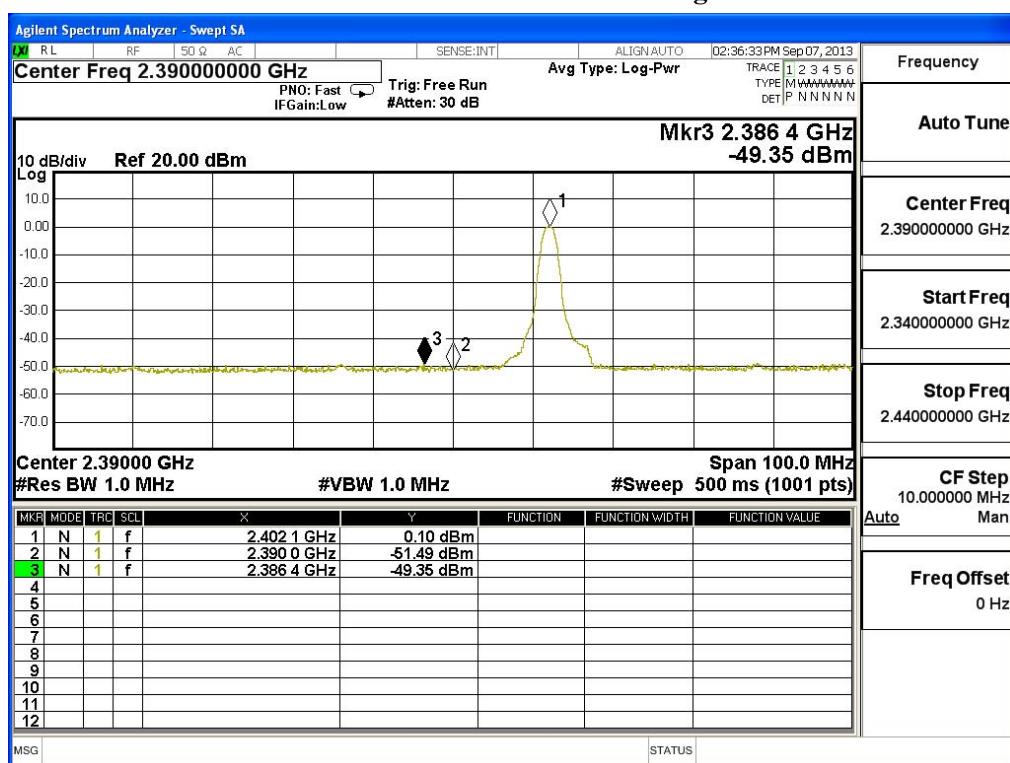

### Average Detector of conducted Band Edge Delta

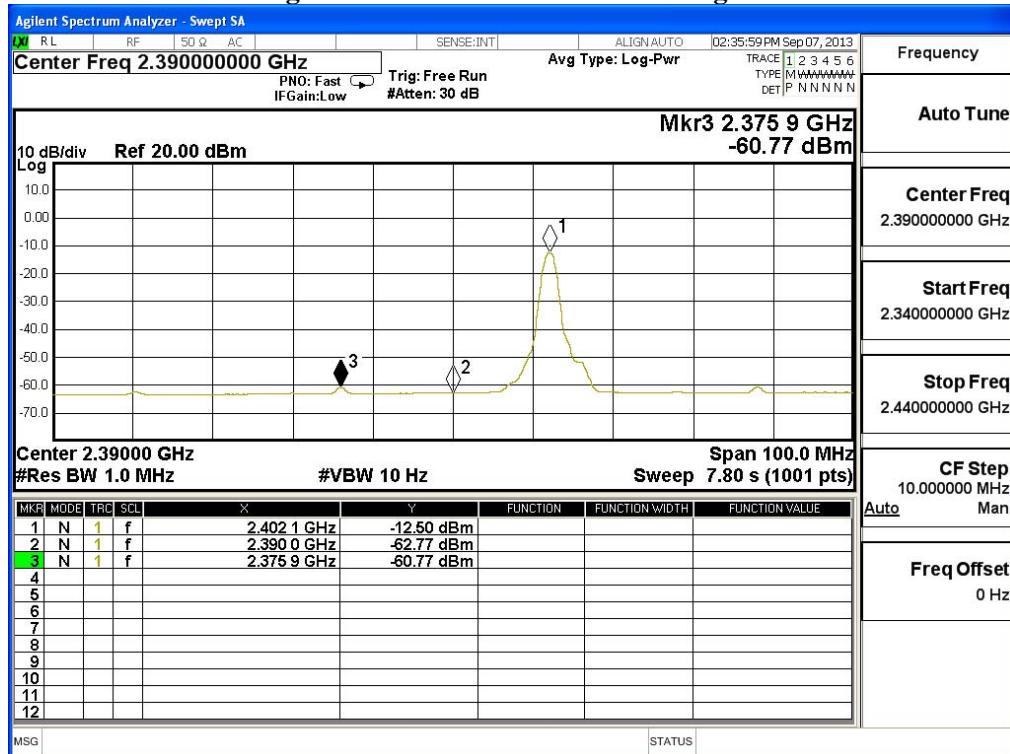

Product : SPEAKER SYSTEM  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

### Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dB(uV/m)]	Detector
Horizontal	2480	33.941	67.688	101.629	Peak
Horizontal	2480	33.941	55.171	89.112	Average
Vertical	2480	32.568	67.361	99.929	Peak
Vertical	2480	32.568	55.162	87.73	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

### Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2483.7	101.629	41.98	59.649	74.000	Peak
Horizontal	2483.5	89.112	40.55	48.562	54.000	Average
Vertical	2483.7	99.929	41.98	57.949	74.000	Peak
Vertical	2483.5	87.73	40.55	47.18	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$


F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta

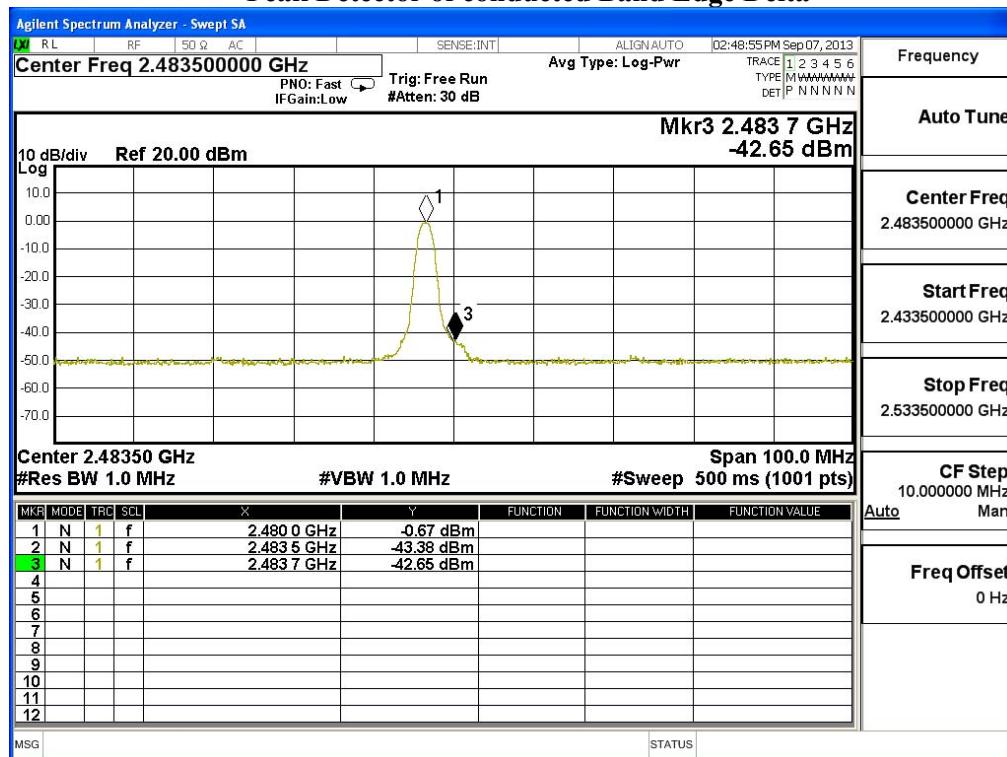

### Average Detector of conducted Band Edge Delta

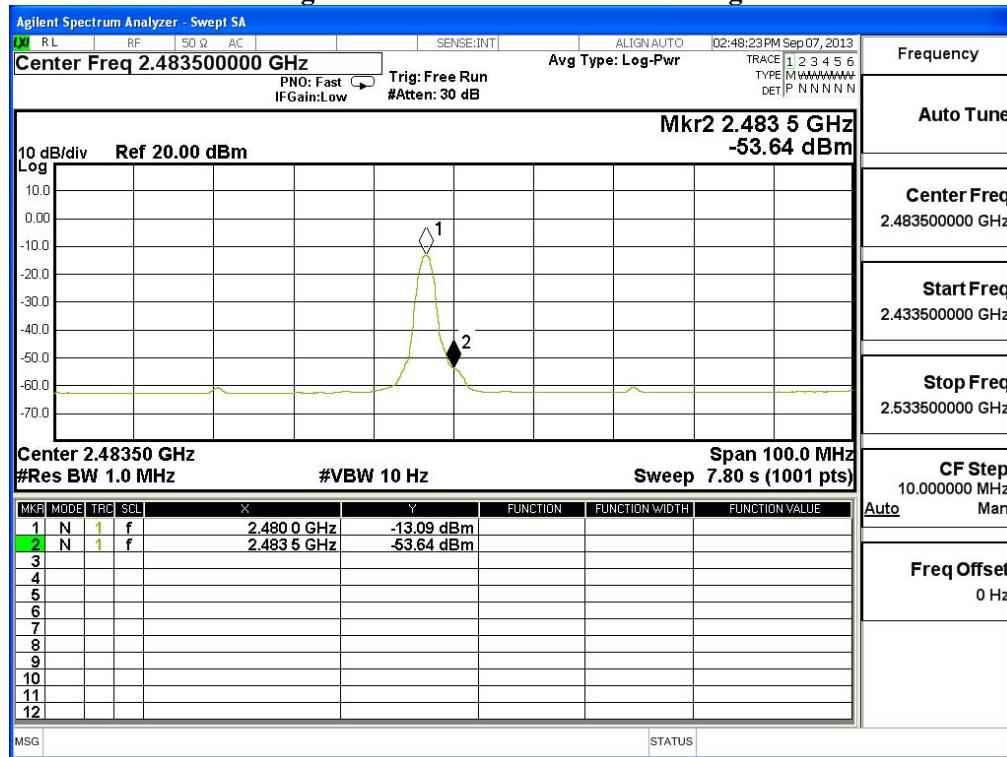

Product : SPEAKER SYSTEM  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

### Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2402	33.755	66.83	100.584	Peak
Horizontal	2402	33.755	52.54	86.294	Average
Vertical	2402	32.241	64.72	96.961	Peak
Vertical	2402	32.241	50.88	83.121	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

### Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2375.8	100.584	48.47	52.114	74.000	Peak
Horizontal	2376	86.294	46.39	39.904	54.000	Average
Vertical	2375.8	96.961	48.47	48.491	74.000	Peak
Vertical	2376	83.121	46.39	36.731	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$


F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta

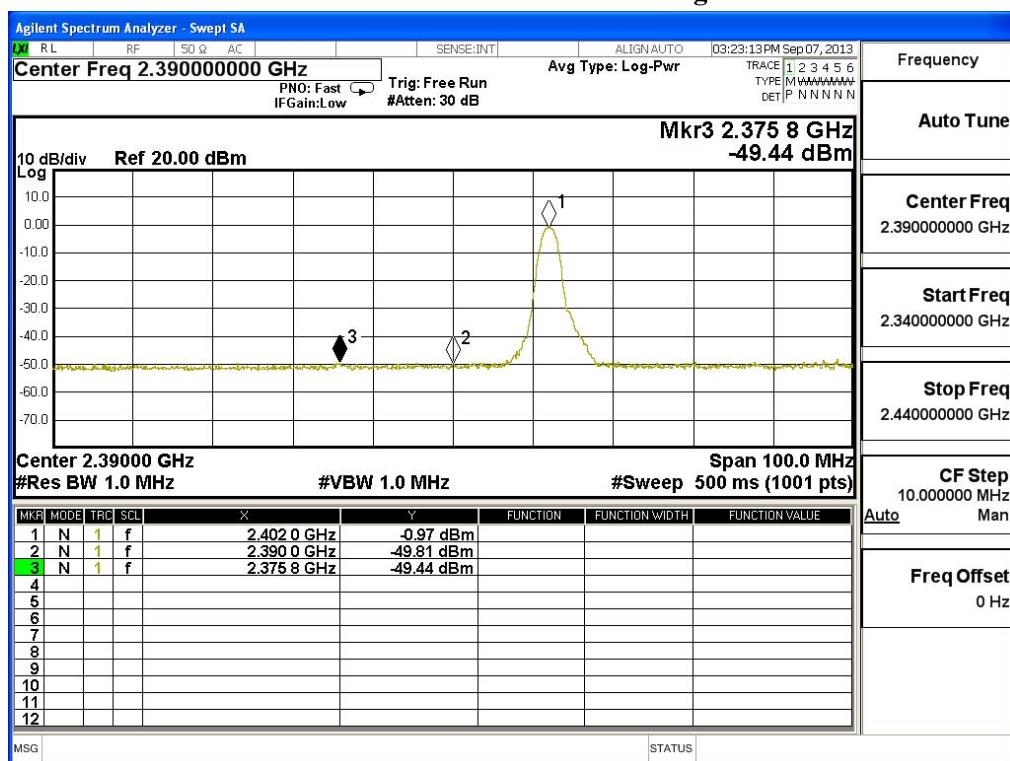

### Average Detector of conducted Band Edge Delta

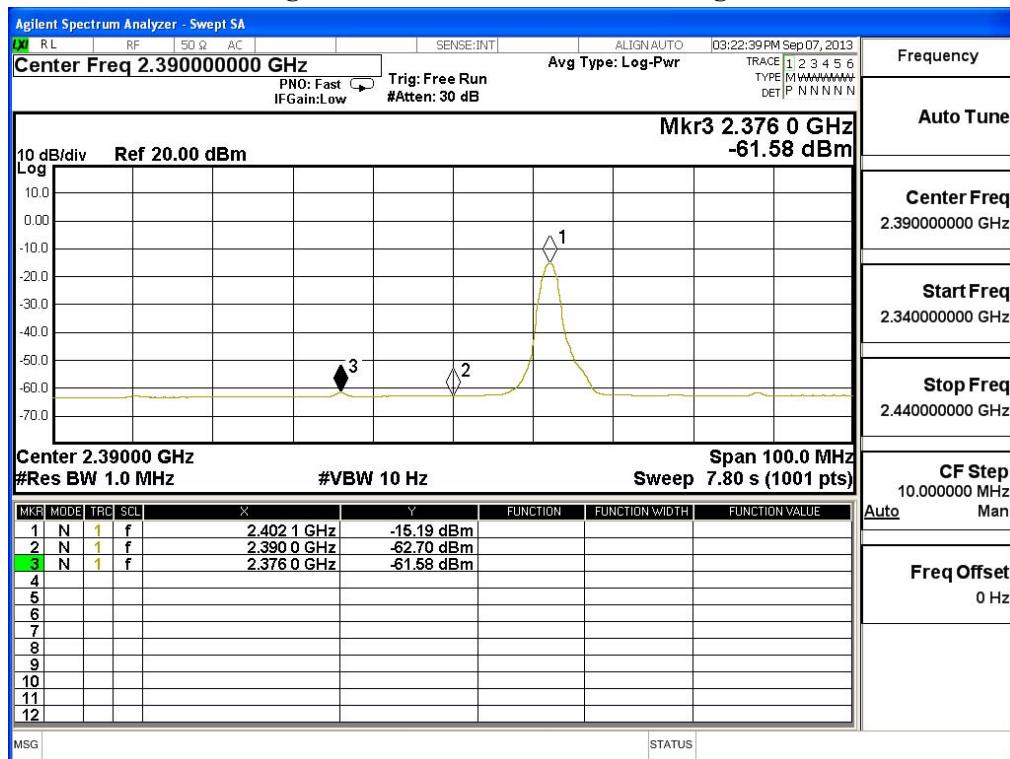

Product : SPEAKER SYSTEM  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

### Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dB(uV/m)]	Detector
Horizontal	2480	33.941	66.00	99.941	Peak
Horizontal	2480	33.941	51.68	85.621	Average
Vertical	2480	32.568	65.53	98.098	Peak
Vertical	2480	32.568	51.36	83.928	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

### Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2483.5	99.941	38.29	61.651	74.000	Peak
Horizontal	2483.5	85.621	36.17	49.451	54.000	Average
Vertical	2483.5	98.098	38.29	59.808	74.000	Peak
Vertical	2483.5	83.928	36.17	47.758	54.000	Average

Note:

The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$

F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)