

# AT7020 Series

## Multilayer Chip Antenna

### Features

- ❖ Monolithic SMD with small, low-profile and light-weight type.
- ❖ Wide bandwidth

### Applications

- ❖ 2.4GHz WLAN, Home RF, Bluetooth Modules, etc.



### Specifications

| Part Number            | Frequency Range (MHz) | Peak Gain (dBi typ.) | Average Gain (dBi typ.) | VSWR   | Impedance |
|------------------------|-----------------------|----------------------|-------------------------|--------|-----------|
| <b>AT7020-B2R4HAA_</b> | 2400~2500             | 2.0 (XZ-V)           | 0.5 (XZ-V)              | 2 max. | 50 Ω      |


Q'ty/Reel (pcs) : 1,000 pcs  
 Operating Temperature Range : -40 ~ +85 °C  
 Storage Temperature Range : -40 ~ +85 °C  
 Power Capacity : 3W max.

### Part Number

AT   7020   -   B   2R4   HAA   □   /LF  
 ①   ②   ③   ④   ⑤   ⑥   ⑦

|                      |                                   |                        |                           |
|----------------------|-----------------------------------|------------------------|---------------------------|
| ① Type               | AT : Antenna                      | ② Dimensions ( L × W ) | 7.0× 2.0 mm               |
| ③ Material Code      | B                                 | ④ Frequency Range      | 2R4=2400MHz               |
| ⑤ Specification Code | HAA                               | ⑥ Packaging            | T: Tape & Reel<br>B: Bulk |
| ⑦ Soldering          | =lead-containing<br>/LF=lead-free |                        |                           |


### Terminal Configuration

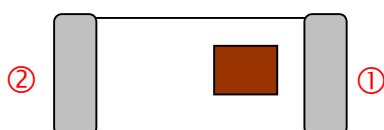


| No. | Terminal Name | No. | Terminal Name |
|-----|---------------|-----|---------------|
| ①   | Feeding Point | ②   | NC            |

## Dimensions and Recommended PC Board Pattern

Unit : mm

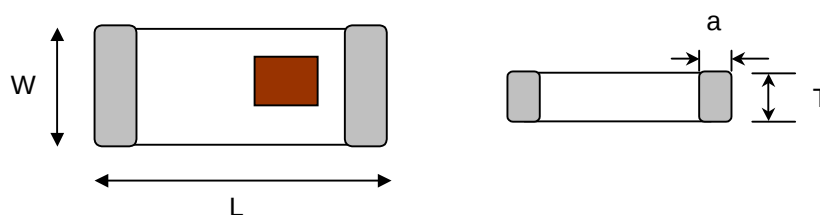


| Mark       | L       | W       | T                | a       |
|------------|---------|---------|------------------|---------|
| Dimensions | 7.0±0.2 | 2.0±0.2 | 1.2+<br>0.1/-0.2 | 0.5±0.3 |

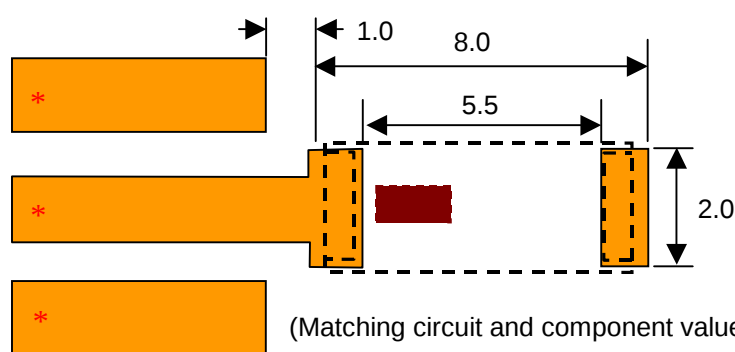



\*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

## Typical Electrical Characteristics (T=25°C)

❖ Test Board

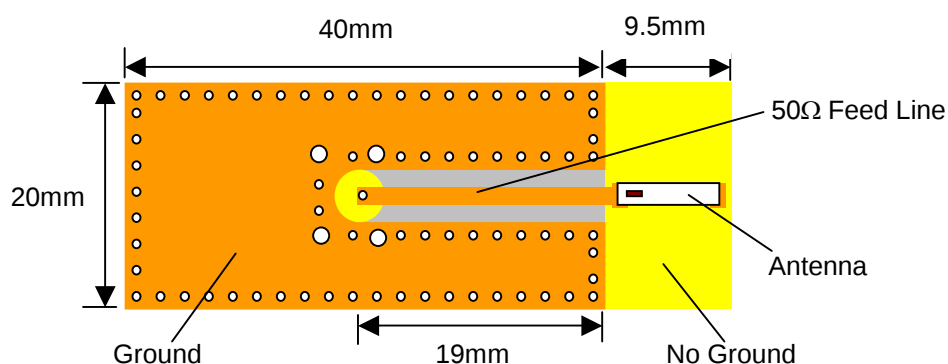


❖Return Loss

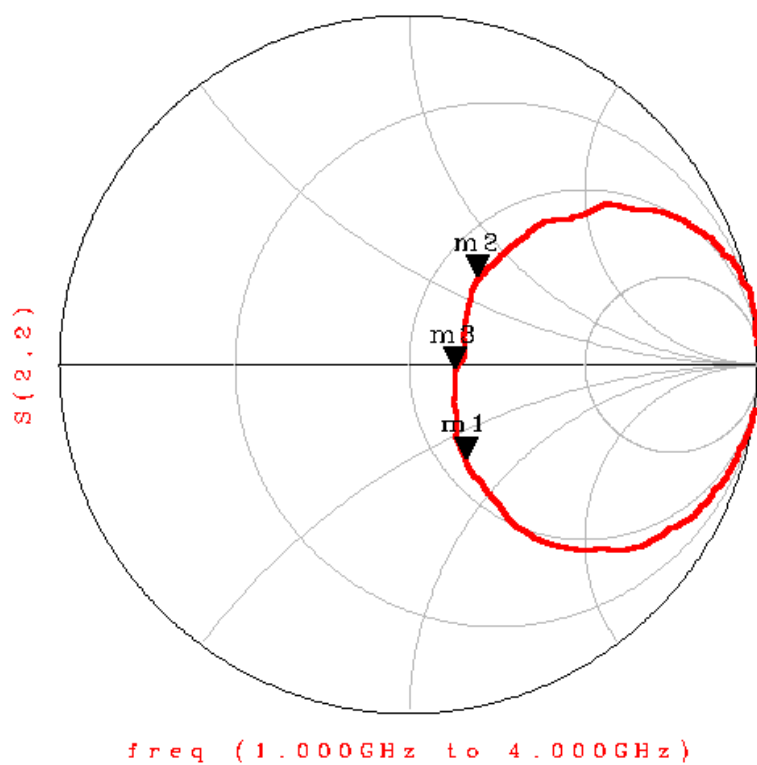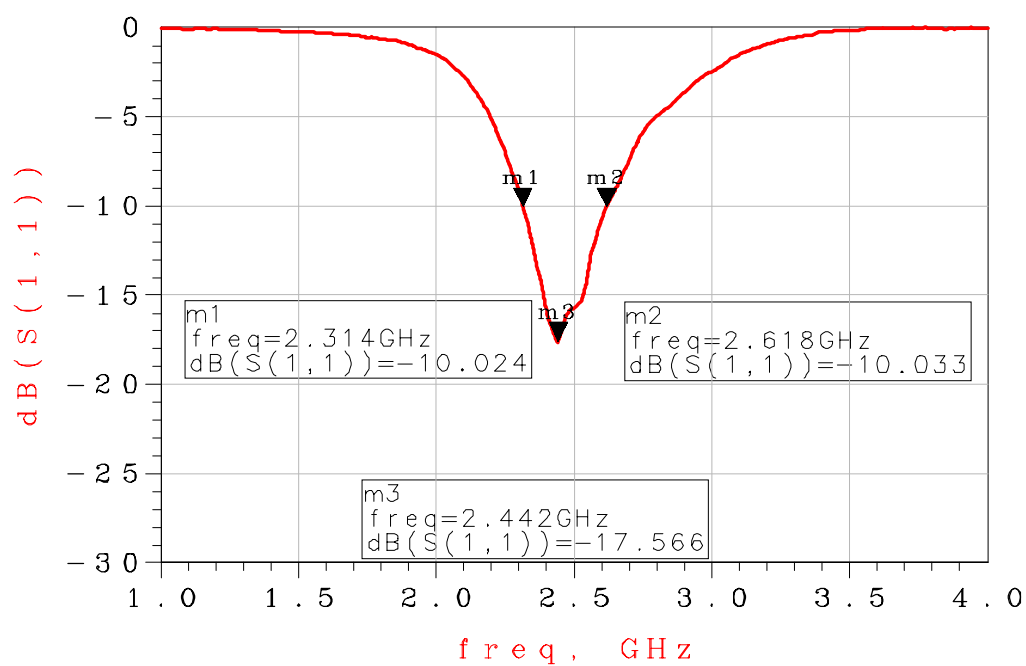


❖ Radiation Patterns


XY-V/XY-H

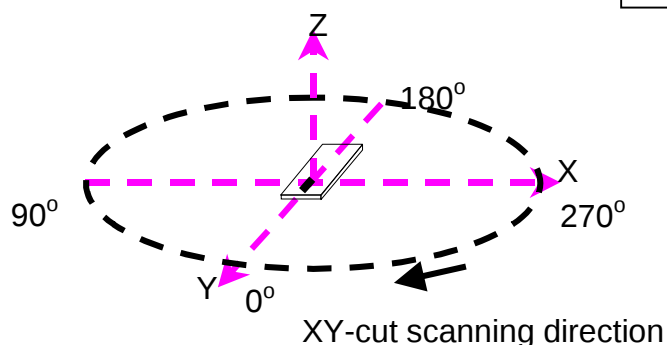


XY cut @2.45GHz  
— Vertical  
..... Horizontal

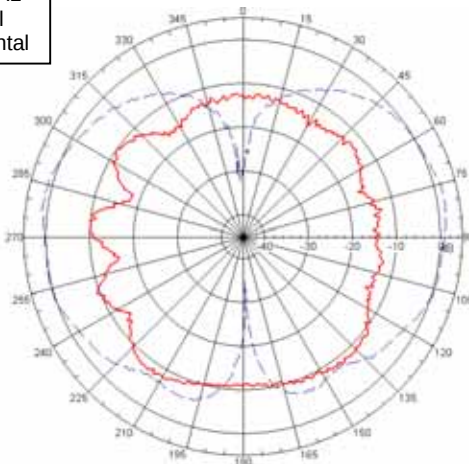


XZ-V/XZ-H

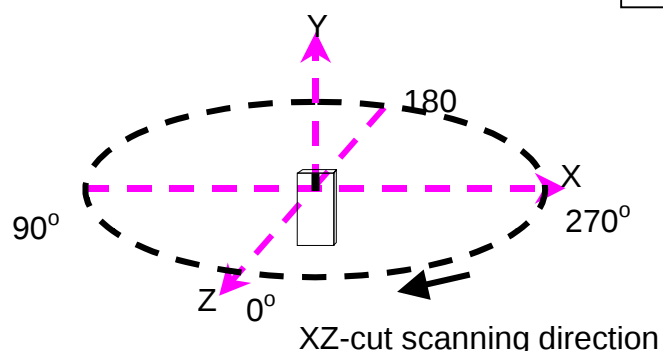


XZ cut @2.45GHz  
— Vertical  
..... Horizontal

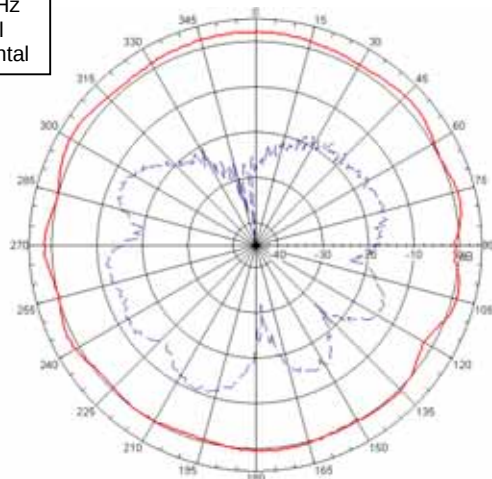

YZ-V/YZ-H

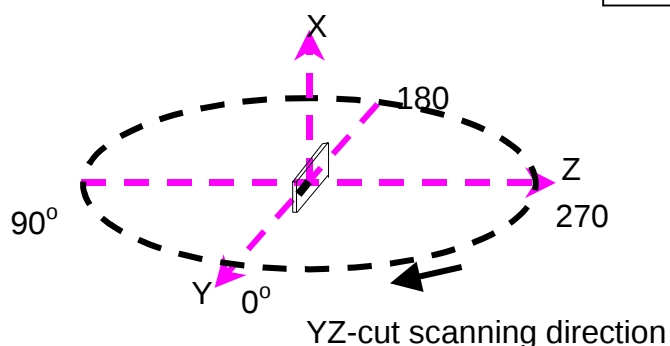

YZ cut @2.45GHz  
— Vertical  
..... Horizontal

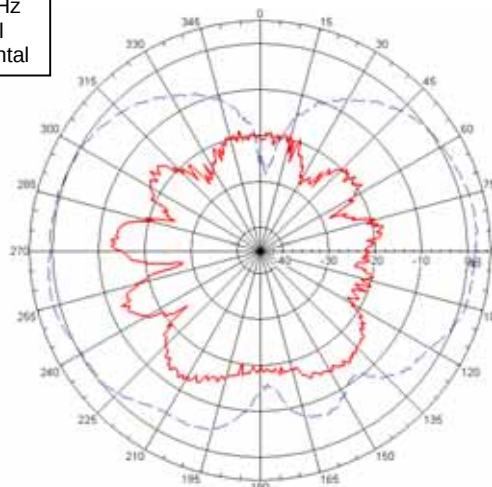

**Advanced Ceramic X Corp.**

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: [acx@acxc.com.tw](mailto:acx@acxc.com.tw) <http://www.acxc.com.tw>