

Test Laboratory: Compliance Certification Services Inc.

D2450V2 SN-728 Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 14.3 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 98.2 V/m; Power Drift = -0.068 dB



Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.24 mW/g

Maximum value of SAR (measured) = 19.3 mW/g

Pin=250mW,d=10mm 2/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 19.8 mW/g

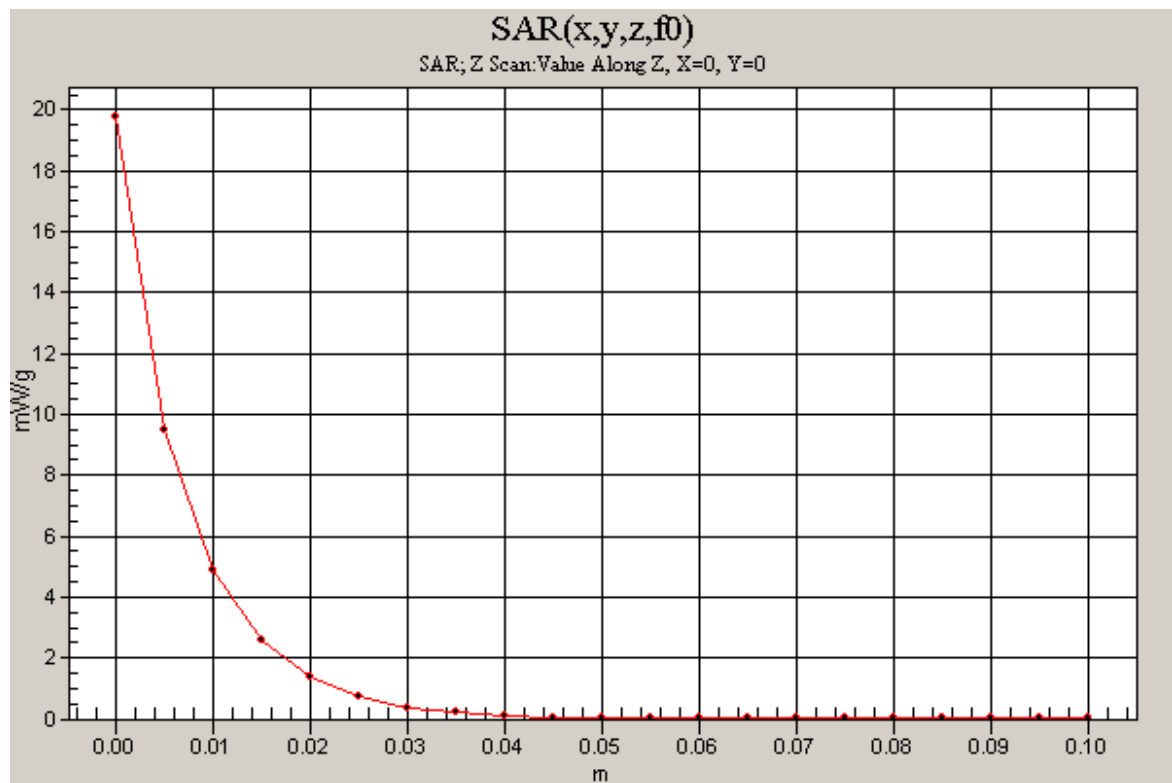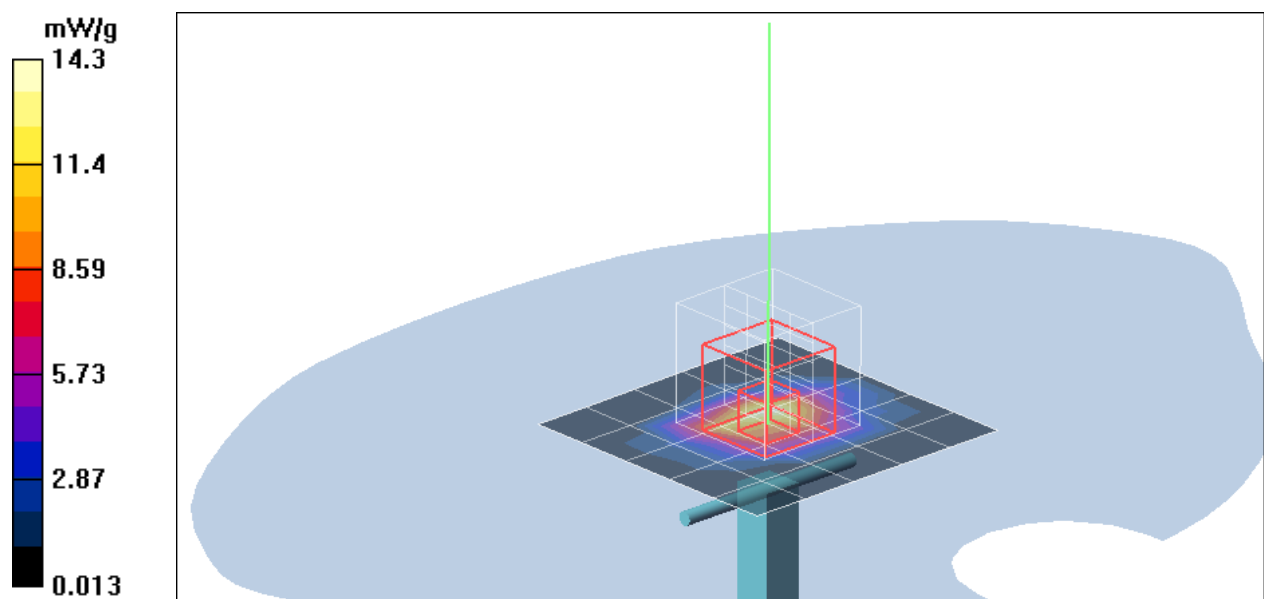

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=1M bit/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.076 mW/g


Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.73 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

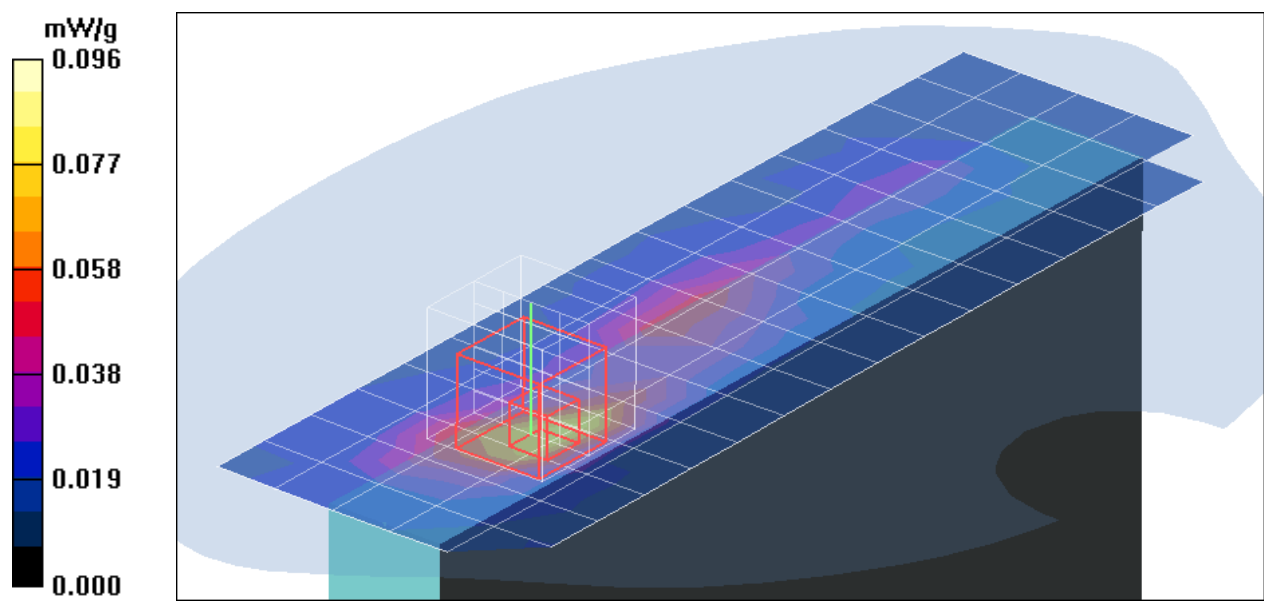

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

co-Location BT+Middle CH Rate=1M bit/Area Scan (6x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.080 mW/g

co-Location BT+Middle CH Rate=1M bit/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.00 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.088 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

co-Location BT+Middle CH Rate=1M bit/Zoom Scan


(5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.00 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.053 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

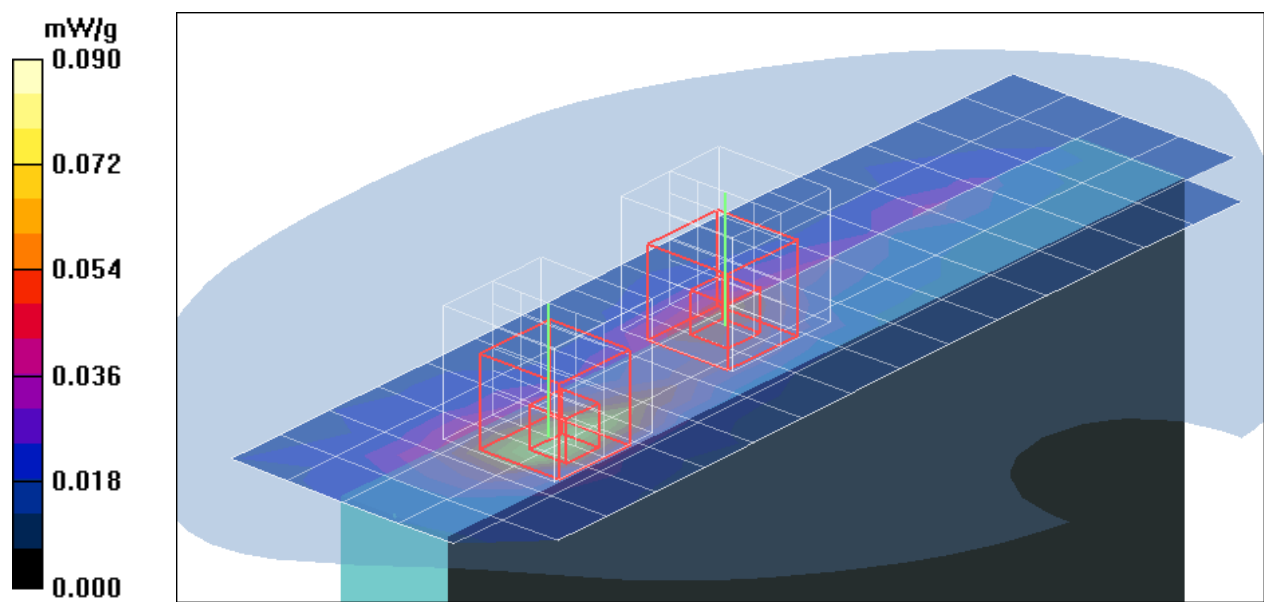

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=6M bit/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.202 mW/g


Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.48 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.216 mW/g

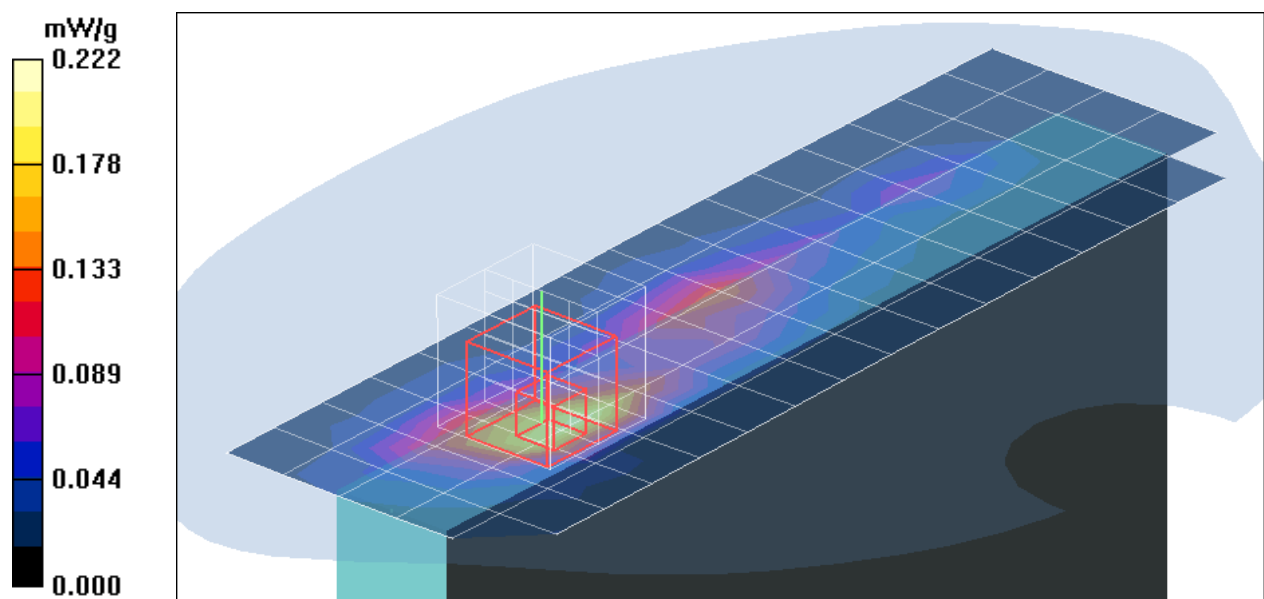

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

co-Location BT+Middle CH Rate=6M bit/Area Scan (6x17x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 mW/g

co-Location BT+Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.85 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.265 W/kg



SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

co-Location BT+Middle CH Rate=6M bit/Z Scan (1x1x11):

Measurement grid: dx=20mm, dy=20mm, dz=10mm

Maximum value of SAR (measured) = 0.357 mW/g

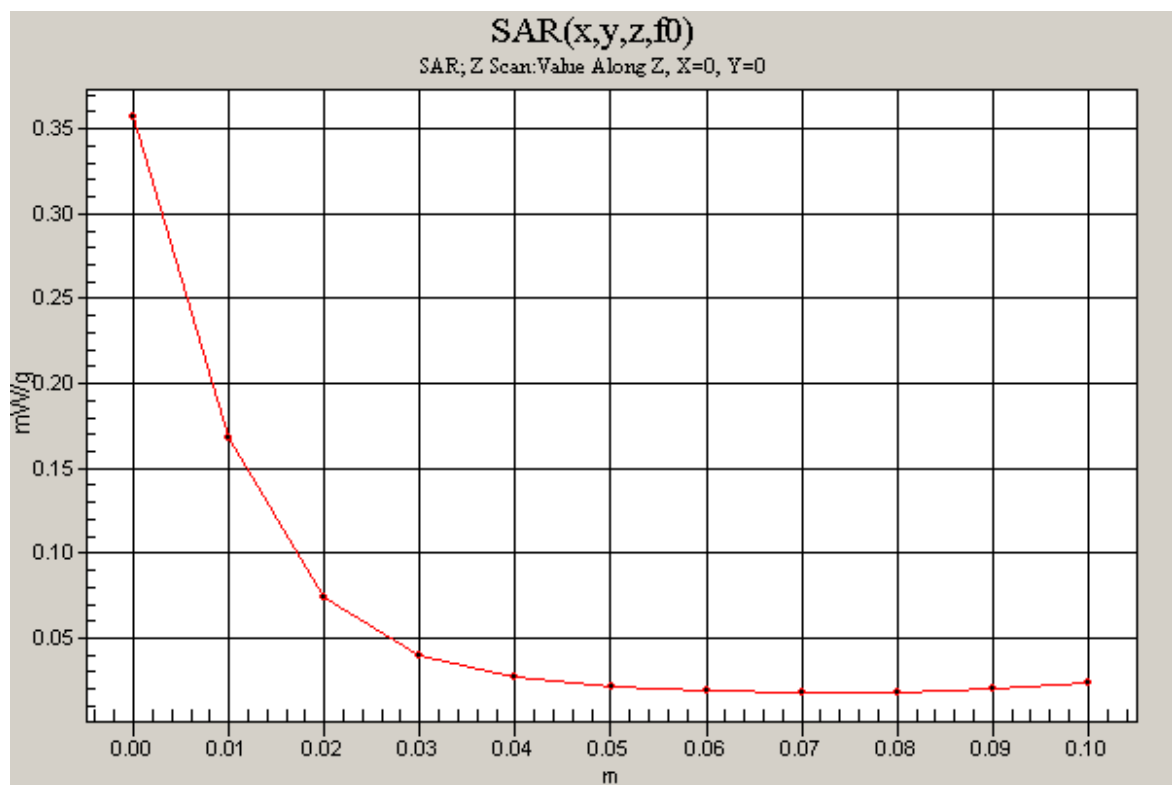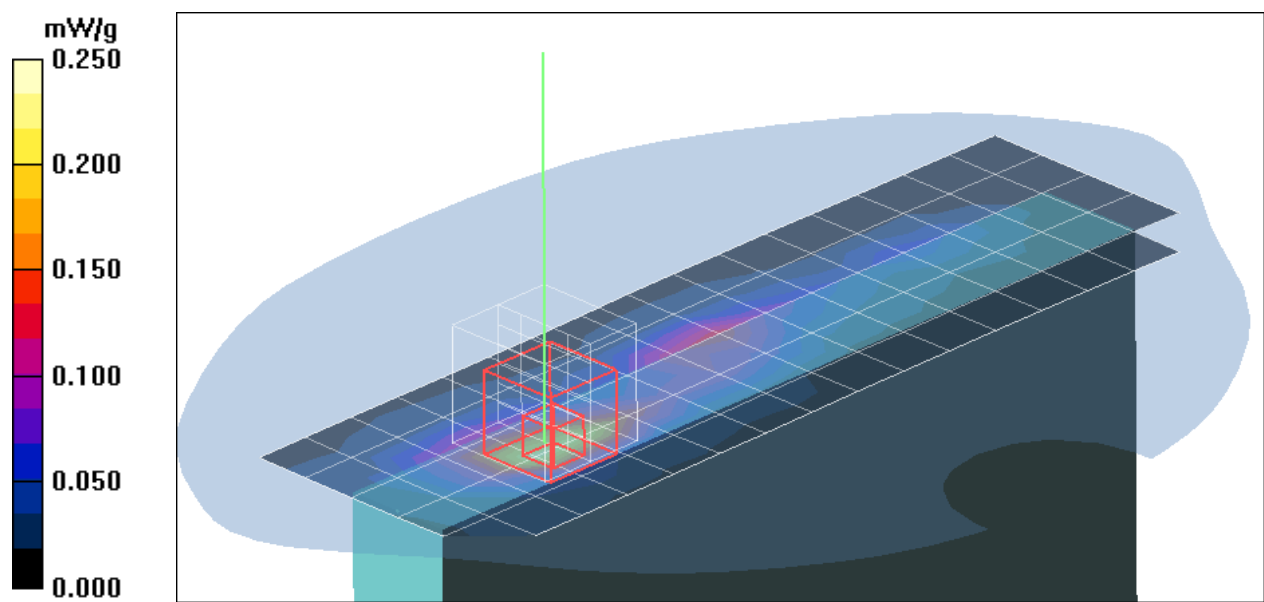

Test Laboratory: Compliance Certification Services Inc.

802.11b Tip edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=1M bit/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g


Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.901 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.002 W/kg

SAR(1 g) = 0.0000178 mW/g; SAR(10 g) = 0.00000254 mW/g

Maximum value of SAR (measured) = 0.002 mW/g

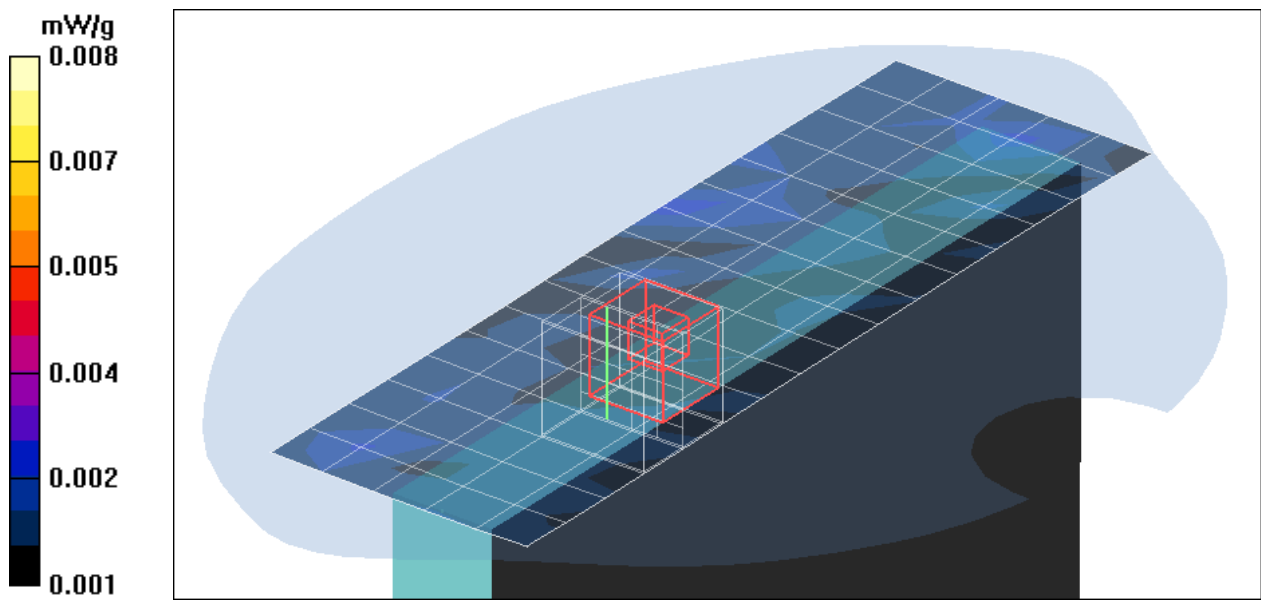

Test Laboratory: Compliance Certification Services Inc.

802.11g Tip edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=6M bit/Area Scan (6x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g


Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.971 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.002 W/kg

SAR(1 g) = 0.000058 mW/g; SAR(10 g) = 0.00000603 mW/g

Maximum value of SAR (measured) = 0.002 mW/g

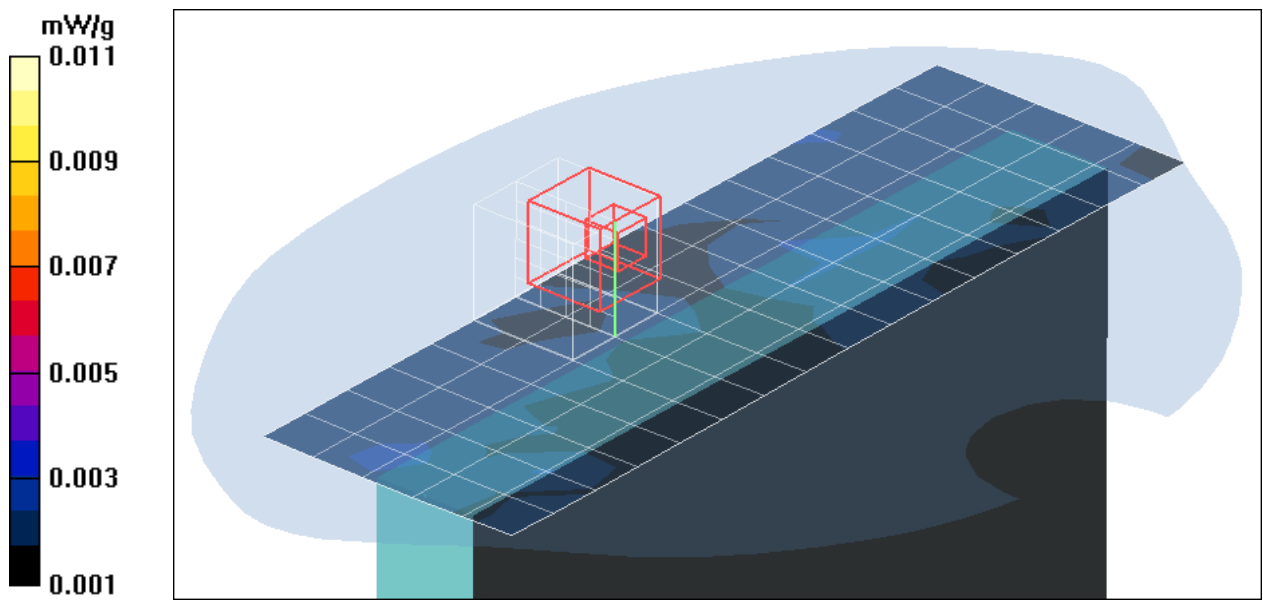

Test Laboratory: Compliance Certification Services Inc.

802.11b Left edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=1M bit/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g


Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0.873 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.002 W/kg

SAR(1 g) = 0.0000616 mW/g; SAR(10 g) = 0.00000635 mW/g

Maximum value of SAR (measured) = 0.003 mW/g

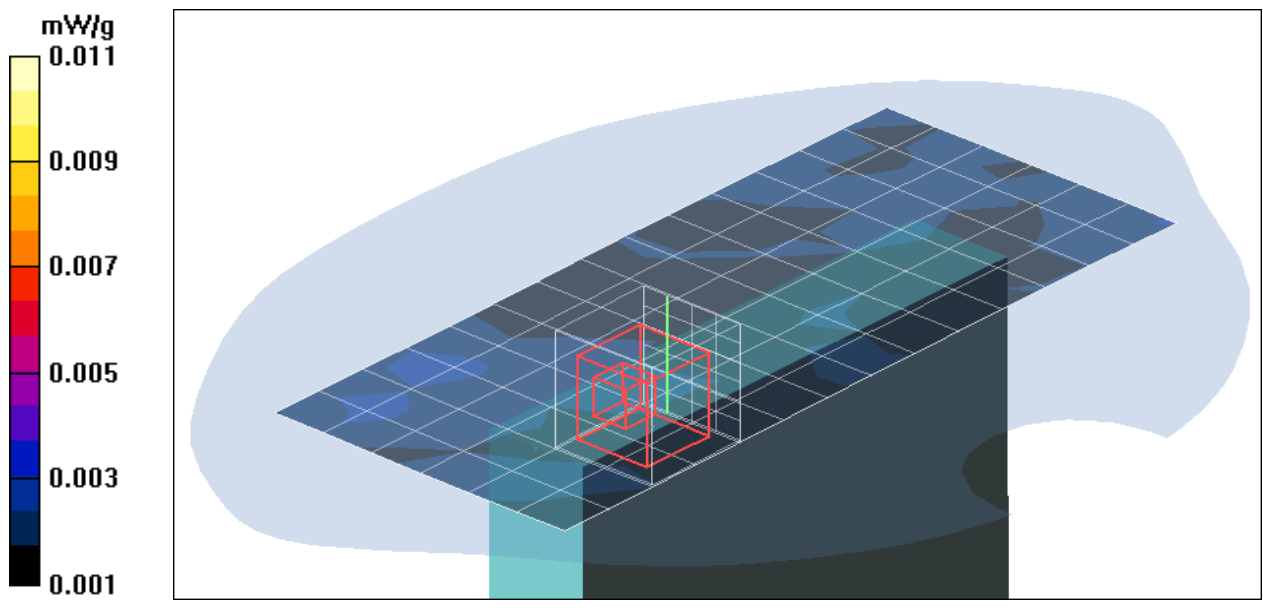

Test Laboratory: Compliance Certification Services Inc.

802.11g Left edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=6M bit/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.004 mW/g


Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.01 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.002 W/kg

SAR(1 g) = 0.00000293 mW/g; SAR(10 g) = 0.000000302 mW/g

Maximum value of SAR (measured) = 0.005 mW/g

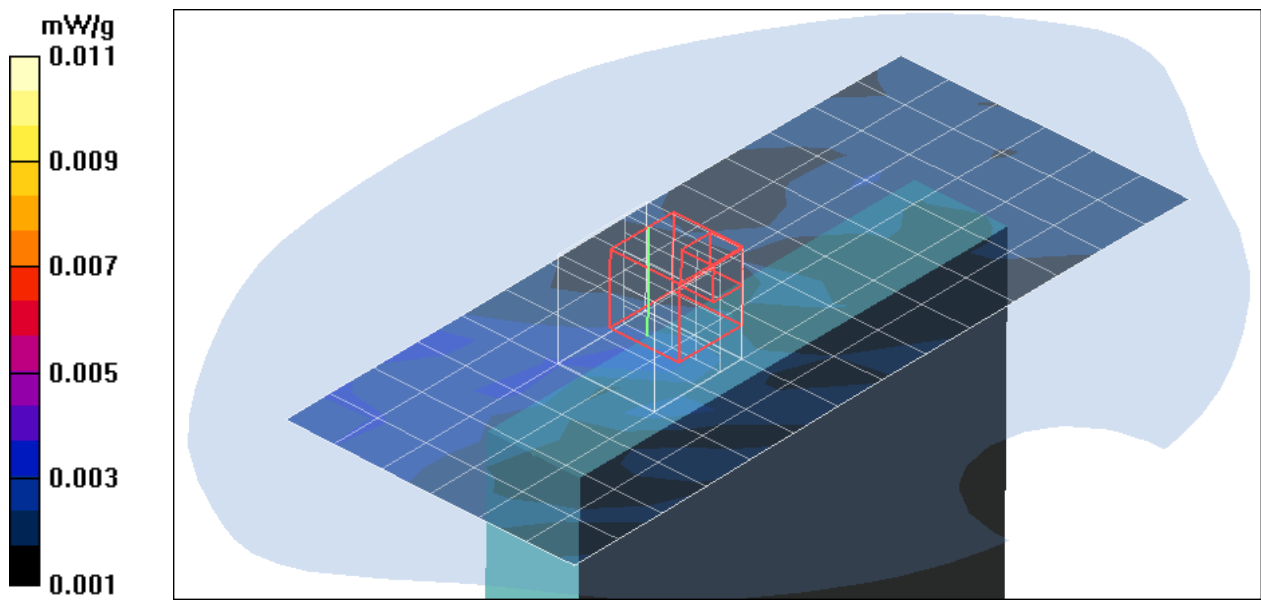

Test Laboratory: Compliance Certification Services Inc.

802.11b Right edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=1M bit/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.007 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.65 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.00576 mW/g; SAR(10 g) = 0.00148 mW/g

Maximum value of SAR (measured) = 0.009 mW/g


Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.65 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.00464 mW/g; SAR(10 g) = 0.00146 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

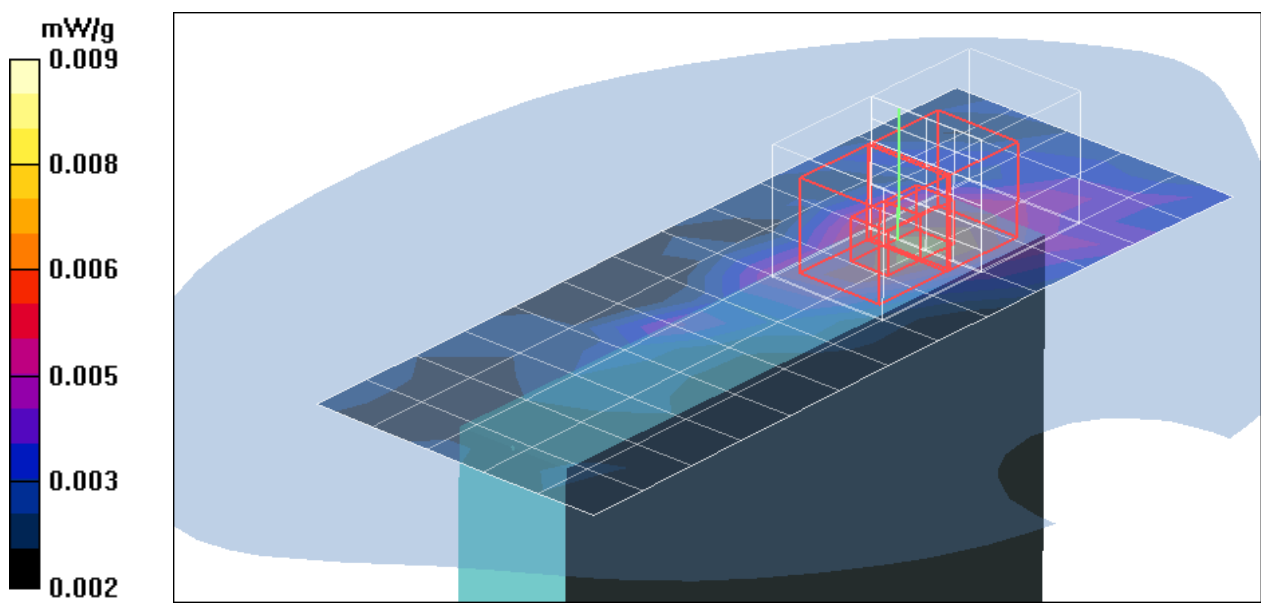

Test Laboratory: Compliance Certification Services Inc.

802.11g Right edge Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=6M bit/Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.015 mW/g


Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.01 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00408 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

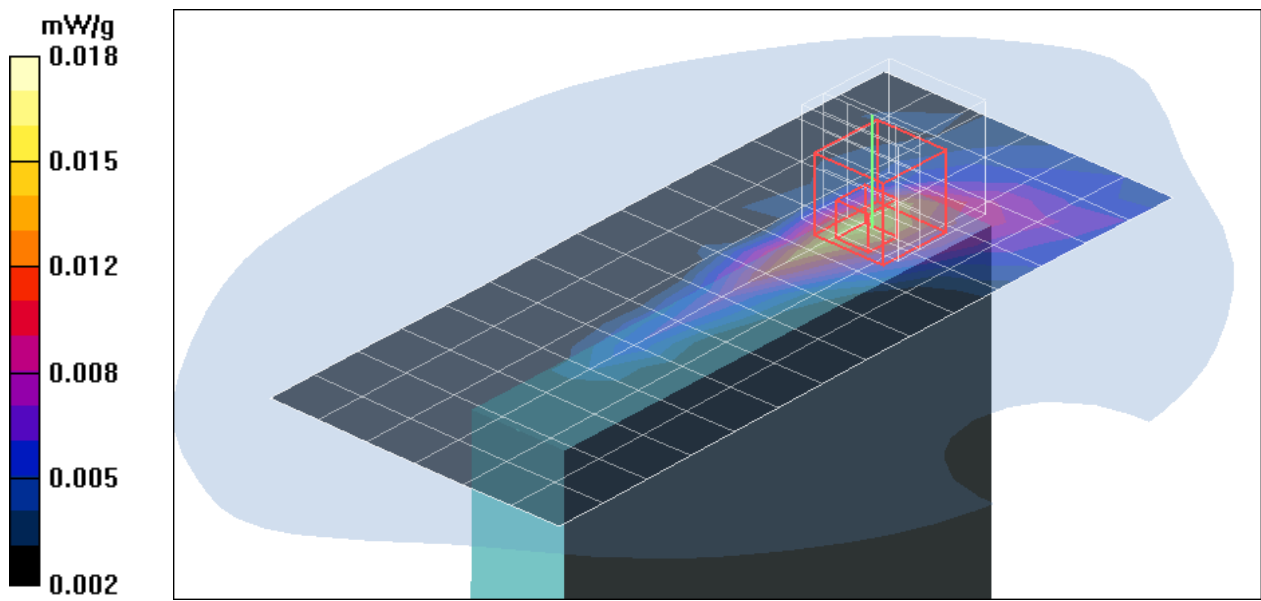

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom Flat Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=1M bit/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.020 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.35 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00524 mW/g

Maximum value of SAR (measured) = 0.029 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 1.35 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 0.028 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00563 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

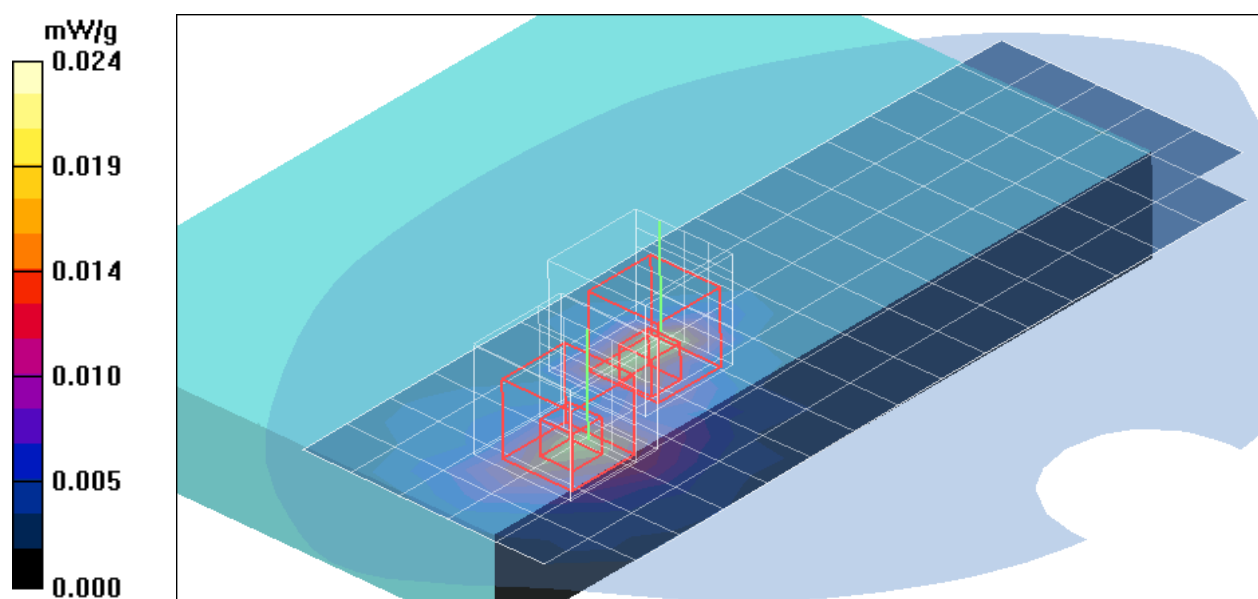

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom Flat Touched mode T7XX

DUT: T7XX; Type: Ultra Mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.97$ mho/m; $\epsilon_r = 50.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.2 deg C; Liquid Temperature: 24.2 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV3 - SN3531; ConvF(7.88, 7.88, 7.88);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 8/29/2007
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Middle CH Rate=6M bit/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.068 mW/g

Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.20 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.097 mW/g

Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 2.20 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

