



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Amtek system Co., Ltd.
Address	: 14F-11, No.79, Sec.1, Hsin Tai Wu Rd., Hsi Chih City, Taipei, Taiwan
Equipment	: Tablet PC
Model No.	: T10x(x=0~9, A~Z)
FCC ID	: R4RT10LX2AIR11
Trade Name	: iTablet

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



Contents

1. Report of Measurements and Examinations	5
1.1 List of Measurements and Examinations	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channels	7
2.3 Test Mode and Test Software	7
2.4 Description of Test System	8
2.5 Connection Diagram of Test System	8
2.6 General Information of Test	9
2.7 Measurement Uncertainty	9
2.8 History of this test report	10
3. Antenna Requirements	11
3.1 Standard Applicable	11
3.2 Antenna Construction and Directional Gain	11
4. Test of Conducted Emission	12
4.1 Test Limit	12
4.2 Test Procedures	12
4.3 Typical Test Setup	13
4.4 Measurement equipment	13
4.5 Test Result and Data	14
4.6 Test Photographs	20
5. Test of Radiated Emission	21
5.1 Test Limit	21
5.2 Test Procedures	21
5.3 Typical Test Setup	22
5.4 Measurement equipment	22
5.5 Test Result and Data	23
5.6 Test Photographs	62
6. 6dB Bandwidth Measurement Data	63
6.1 Test Limit	63
6.2 Test Procedures	63
6.3 Test Setup Layout	63
6.4 Measurement equipment	63
6.5 Test Result and Data	63
7. Band Edges Measurement	76
7.1 Test Limit	76
7.2 Test Procedure	76
7.3 Test Setup Layout	76
7.4 Measurement equipment	76
7.5 Test Result and Data	76
7.6 Restrict Band Emission Measurement Data	93
8. Power Spectral Density	95
8.1 Test Limit	95



8.2	Test Procedures	95
8.3	Test Setup Layout	95
8.4	Measurement equipment	95
8.5	Test Result and Data	95
9.	Restricted Bands of Operation	109
9.1	Labeling Requirement	109
Appendix A. Photographs of EUT		A1 ~ A19



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Amtek system Co., Ltd.
Address	: 14F-11, No.79, Sec.1, Hsin Tai Wu Rd., Hsi Chih City, Taipei, Taiwan
Equipment	: Tablet PC
Model No.	: T10x(x=0~9, A~Z)
FCC ID	: R4RT10LX2AIR11

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2010)**.

The test was carried out on Aug. 08, 2011 at **Cerpass Technology Corp.**

Signature

Hill Chen

Assistant Manager of EMC/RF B.U.



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operating System	Window XP Home
CPU	Intel Diamondville platform Atom N270 533MHz FSB, 512KB, L2 Cache(1.6G)
Chipsets	Core Logic: 945GSE + ICH7-M VGA: 945GSE ultra low power integrated 3D graphics Audio: High Definition Audio
Memory	1x DDRII SODIMM 533/667MHz
Maximum Memory	1GB
BIOS	Insyde UEFI BIOS Boot from USB Plug& Play APM1.2 ACPI2.0
HDD	2.5 inch SATA HDD 80GB default, max 160GB(option) SATA to CF card type II(option)
Video	Intel 945GSE, resolution 1024 x 600 as default
LCD Display	10.2", 1024 x 600 WXGA LCD
Camera	Support SD/MMC card slot
CMOS Camera	Built-in 1.3M pixel camera
Audio	Realtek ALC268Q-GR
AC/DC Adapter	Miniature size compact adapter type AC 100-240 Volt/ DC 12V 3A 36W
Battery Pack	1 removable battery pack
Power Management	Support For ACPI2.0
Physical/ Mechanical	192(L) x 252(W)x 28(H-min) 36(H-mix) mm 1.12kg
Accessory Kit	Stylus pen Power adapter Power Cord Support CD



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n, HT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	12	---

802.11n, HT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---

2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included remote workstation, Monitor, Keyboard, Mouse, Flash Memory, Earphone, and EUT for EMC test. The remote workstation included Notebook.
- Executive program, "WINFCC.EXE" under WIN 7, which generates complete line of continuously repeating "H" pattern was used as the test software.
The program was executed as follows:
 - Turn on the power of all equipment.
 - The PC reads the test program from the hard disk drive and runs it.
 - The PC sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
 - The PC sends "H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
 - The PC sends "H" messages to the printer, then the printer prints them on the paper.
 - The PC sends "H" messages to the modem.
 - Repeat the steps from 2 to 6.
- An executive program, "WINTHRAX.EXE" under WIN 7 was executed to read and write data from USB 2.0 HDD via EUT.
- An executive program, "Color Bar" under WIN 7 was executed to display signal.
- An executive program, "PING.EXE" under WIN 7 was executed to transmit and receive data to the remote workstation through LAN.
- The following test mode and test software was performed for conduction and radiation test:
 - 802.11b/g/n HT20: CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz
 - 802.11n HT40: CH03: 2422MHz, CH06: 2437MHz, CH09: 2452MHz




2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Monitor	PHILIPS	202P73	Power Cable, Unshielding 1.8 m Data Cable, VGA Shielding 1.35 m
Keyboard	DELL	SK-8175	Data Cable, USB Shielding, 1.85m
Mouse	DELL	M-UV83	Data Cable, USB Shielding, 1.85m
Earphone	MIC	MIC-4	Data Cable, Audio Shielding 1.35 m
Flash Memory	TranScend	JF150 1GB	N/A
Remote workstation			
Notebook	SONY	VPCEB25FW	Power Cable, Adapter Unshielding 1.8 m

Use Cable:

Cable	Quantity	Description
RJ45	1	Unshielding, 10.0m

2.5 Connection Diagram of Test System

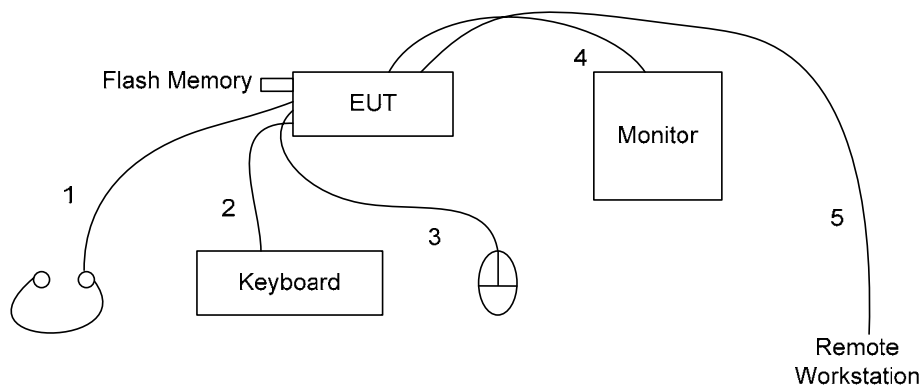

1. The Audio cable is connected from EUT to the Earphone.
 2. The USB cable is connected from EUT to the Keyboard.
 3. The USB cable is connected from EUT to the Mouse.
 4. The VGA cable is connected from EUT to the Monitor.
 5. The RJ45 cable is connected from EUT to the Remote Workstation.
- * The EUT keeps to transmit and receive data via Notebook by Wireless.



2.6 General Information of Test

Test Site :	Cerpass Technology Corp. 2F-11, No. 3, Yuan Qu St., (Nankang Software Park), Taipei, Taiwan 115, R.O.C.
Test Site Location (OATS1-SD):	No. 68-1, Shibachong Si, Shihding Township, Taipei County, Taiwan, R.O.C.
FCC Registration Number :	TW1061, TW1056, 390316, 488071
IC Registration Number :	4934B-1, 4934D-1
VCCI Registration Number :	T-543 for Telecommunication Test C-3328 for Conducted emission test R-3428 for Radiated emission test G-97 for Radiated emission test above 1GHz.
Test Voltage:	AC 120V
Test in Compliance with:	ANSI C63.4-2009 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted: from 150kHz to 30MHz Radiation: from 30MHz to 24620MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.7 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	4.11 dB
		Horizontal	4.10 dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



☐ Additional attachment as following record:

[illegible]



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna R:

Antenna type: Printed Antenna

Antenna Gain: 2.8 dBi

Antenna L:

Antenna type: Printed Antenna

Antenna Gain: 1.38 dBi



4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



4.3 Typical Test Setup

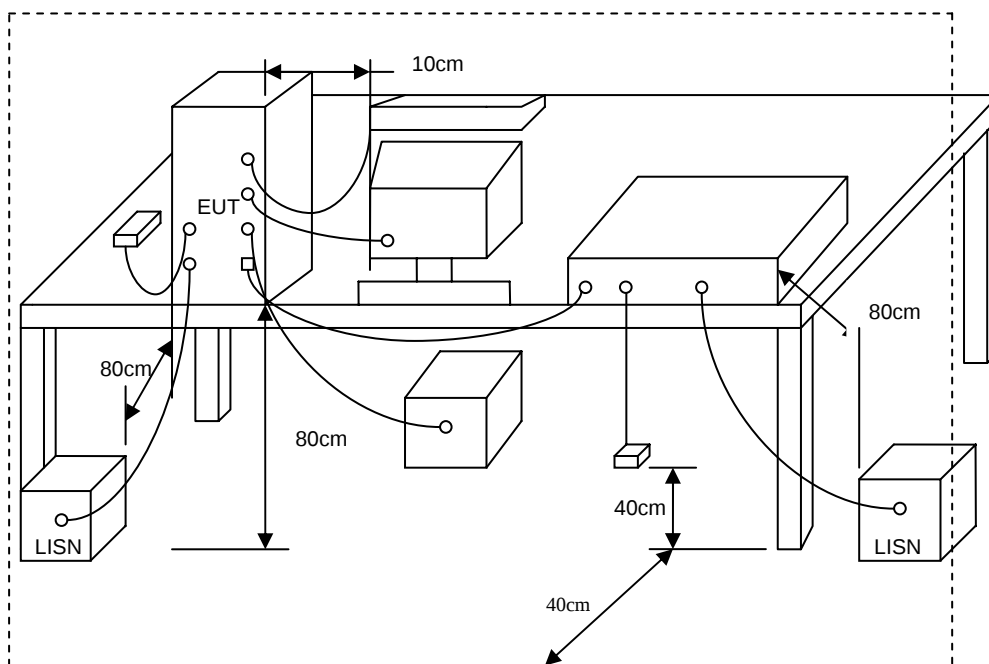


4.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date.
EMI Receiver	R&S	ESCI	100443	2011/02/08	2012/02/07
LISN	Schwarzbeck	NSLK 8127	8127-516	2011/05/05	2012/05/04
LISN	Schwarzbeck	NSLK 8127	8127-568	2010/09/17	2011/09/16



4.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: 802.11g CH1	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

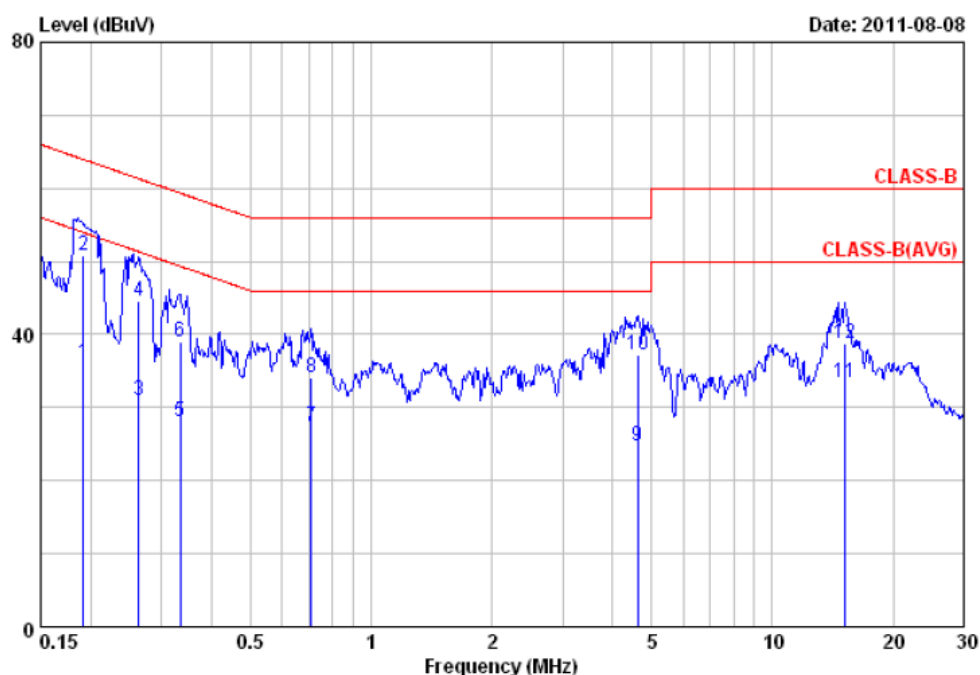


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.89	0.12	36.01	53.98	-17.97	Average
2	0.19	50.65	0.12	50.77	63.98	-13.21	QP
3	0.26	30.90	0.12	31.02	51.34	-20.32	Average
4	0.26	44.36	0.12	44.48	61.34	-16.86	QP
5	0.33	27.96	0.13	28.09	49.35	-21.26	Average
6	0.33	38.77	0.13	38.90	59.35	-20.45	QP
7	0.71	27.14	0.17	27.31	46.00	-18.69	Average
8	0.71	33.92	0.17	34.09	56.00	-21.91	QP
9	4.62	24.44	0.37	24.81	46.00	-21.19	Average
10	4.62	36.79	0.37	37.16	56.00	-18.84	QP
11	15.15	32.66	0.79	33.45	50.00	-16.55	Average
12	15.15	38.01	0.79	38.80	60.00	-21.20	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: 802.11g CH1	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

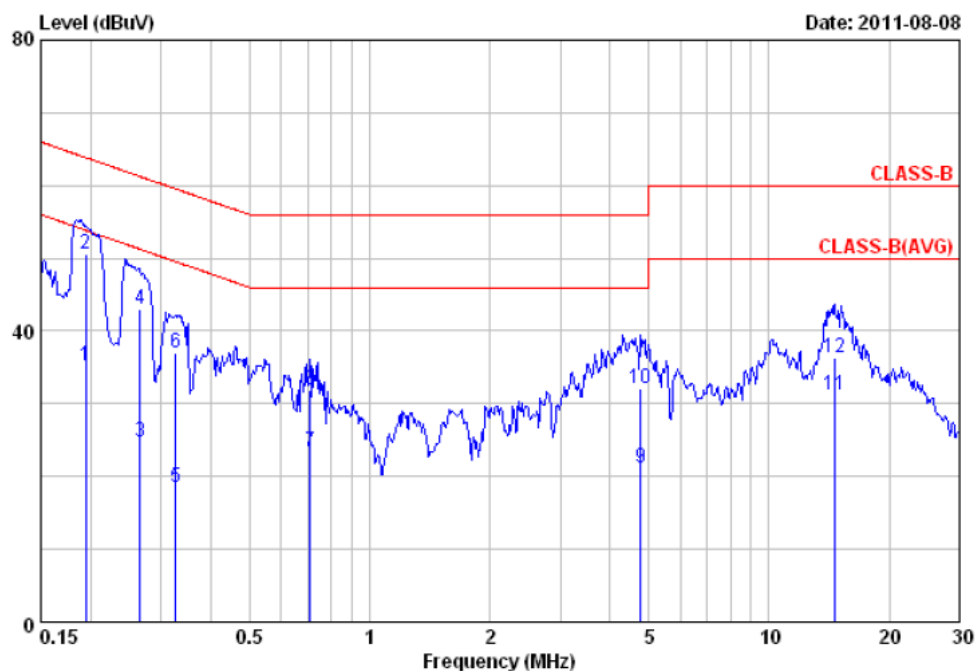


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.07	0.10	35.17	53.84	-18.67	Average
2	0.19	50.38	0.10	50.48	63.84	-13.36	QP
3	0.27	24.74	0.10	24.84	51.25	-26.41	Average
4	0.27	42.80	0.10	42.90	61.25	-18.35	QP
5	0.33	18.36	0.11	18.47	49.53	-31.06	Average
6	0.33	36.99	0.11	37.10	59.53	-22.43	QP
7	0.71	23.19	0.14	23.33	46.00	-22.67	Average
8	0.71	31.76	0.14	31.90	56.00	-24.10	QP
9	4.77	20.84	0.36	21.20	46.00	-24.80	Average
10	4.77	31.66	0.36	32.02	56.00	-23.98	QP
11	14.59	30.49	0.62	31.11	50.00	-18.89	Average
12	14.59	35.64	0.62	36.26	60.00	-23.74	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: 802.11n, HT20 CH1	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

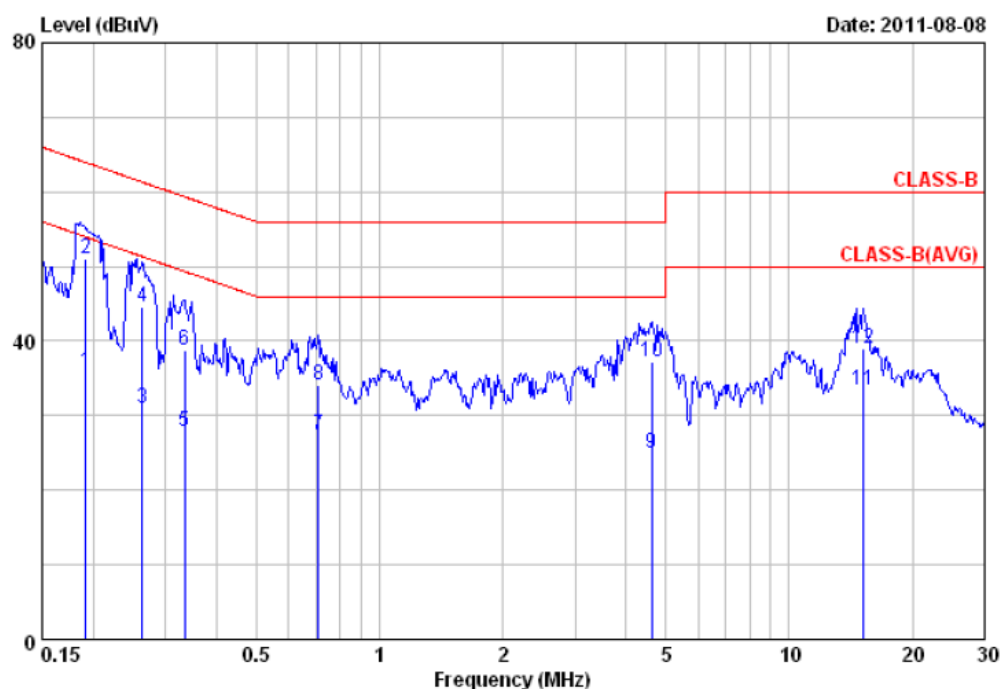


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.85	0.12	35.97	53.98	-18.01	Average
2	0.19	50.98	0.12	51.10	63.98	-12.88	QP
3	0.26	30.93	0.12	31.05	51.34	-20.29	Average
4	0.26	44.38	0.12	44.50	61.34	-16.84	QP
5	0.33	27.65	0.13	27.78	49.35	-21.57	Average
6	0.33	38.73	0.13	38.86	59.35	-20.49	QP
7	0.71	27.16	0.17	27.33	46.00	-18.67	Average
8	0.71	33.96	0.17	34.13	56.00	-21.87	QP
9	4.62	24.50	0.37	24.87	46.00	-21.13	Average
10	4.62	36.85	0.37	37.22	56.00	-18.78	QP
11	15.15	32.61	0.79	33.40	50.00	-16.60	Average
12	15.15	38.11	0.79	38.90	60.00	-21.10	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: 802.11n, HT20 CH1	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

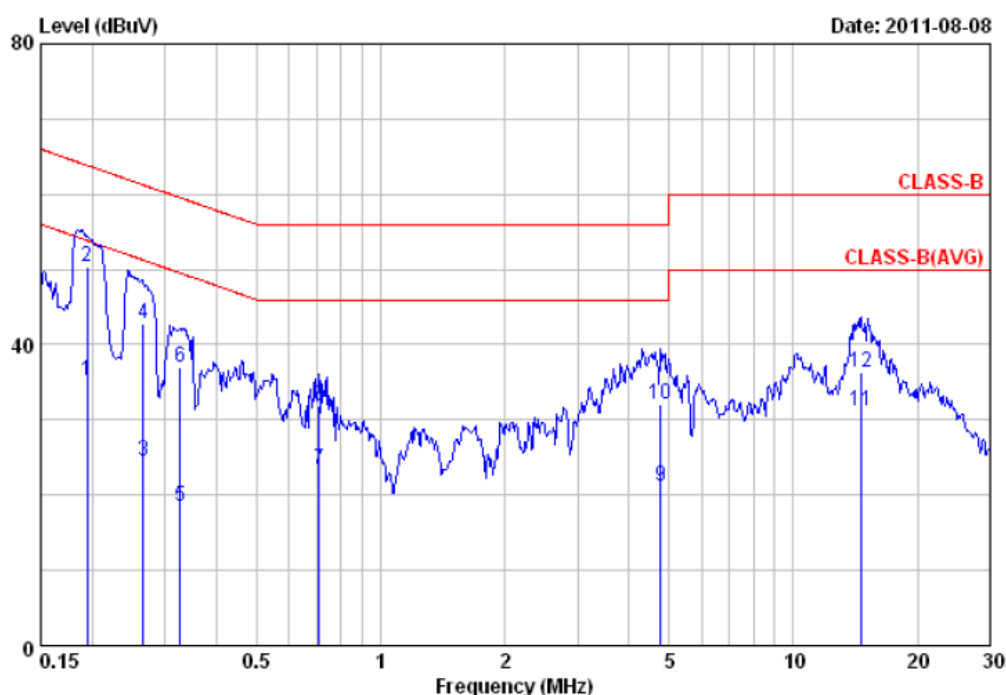


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.15	0.10	35.25	53.84	-18.59	Average
2	0.19	50.37	0.10	50.47	63.84	-13.37	QP
3	0.27	24.46	0.10	24.56	51.25	-26.69	Average
4	0.27	42.74	0.10	42.84	61.25	-18.41	QP
5	0.33	18.46	0.11	18.57	49.53	-30.96	Average
6	0.33	36.87	0.11	36.98	59.53	-22.55	QP
7	0.71	23.36	0.14	23.50	46.00	-22.50	Average
8	0.71	31.78	0.14	31.92	56.00	-24.08	QP
9	4.77	20.85	0.36	21.21	46.00	-24.79	Average
10	4.77	31.62	0.36	31.98	56.00	-24.02	QP
11	14.59	30.53	0.62	31.15	50.00	-18.85	Average
12	14.59	35.67	0.62	36.29	60.00	-23.71	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: 802.11n HT40 CH3	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

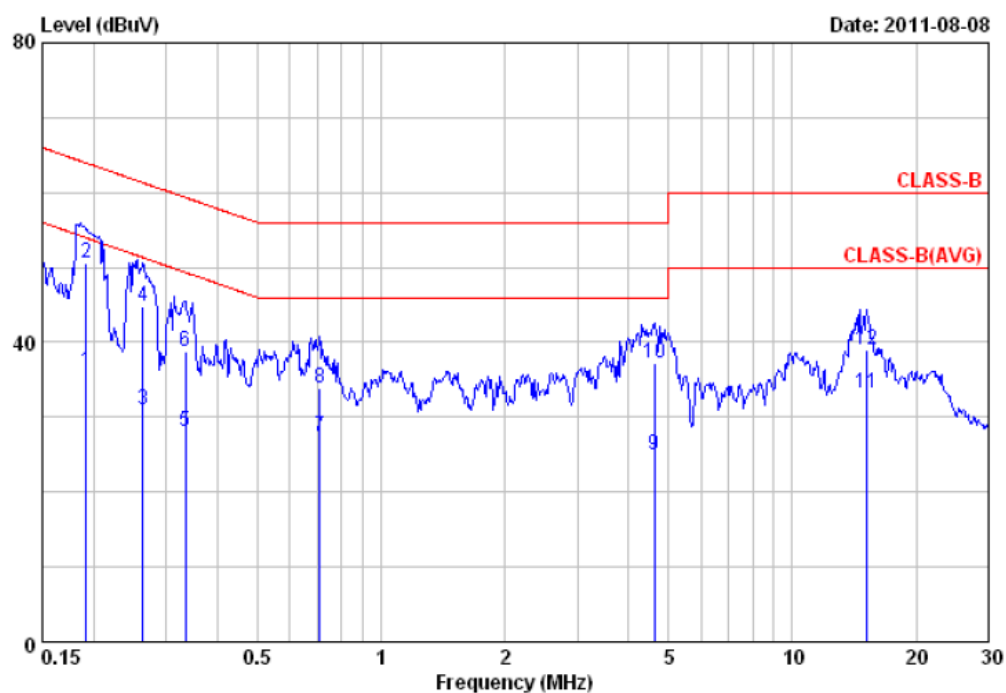


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.93	0.12	36.05	53.98	-17.93	Average
2	0.19	50.45	0.12	50.57	63.98	-13.41	QP
3	0.26	30.85	0.12	30.97	51.34	-20.37	Average
4	0.26	44.58	0.12	44.70	61.34	-16.64	QP
5	0.33	27.95	0.13	28.08	49.35	-21.27	Average
6	0.33	38.74	0.13	38.87	59.35	-20.48	QP
7	0.71	27.16	0.17	27.33	46.00	-18.67	Average
8	0.71	33.62	0.17	33.79	56.00	-22.21	QP
9	4.62	24.50	0.37	24.87	46.00	-21.13	Average
10	4.62	36.85	0.37	37.22	56.00	-18.78	QP
11	15.15	32.41	0.79	33.20	50.00	-16.80	Average
12	15.15	38.11	0.79	38.90	60.00	-21.10	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
5. The data is worse case.



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: 802.11n HT40 CH3	Temperature	: 25 °C
Memo	:	Humidity	: 65 %

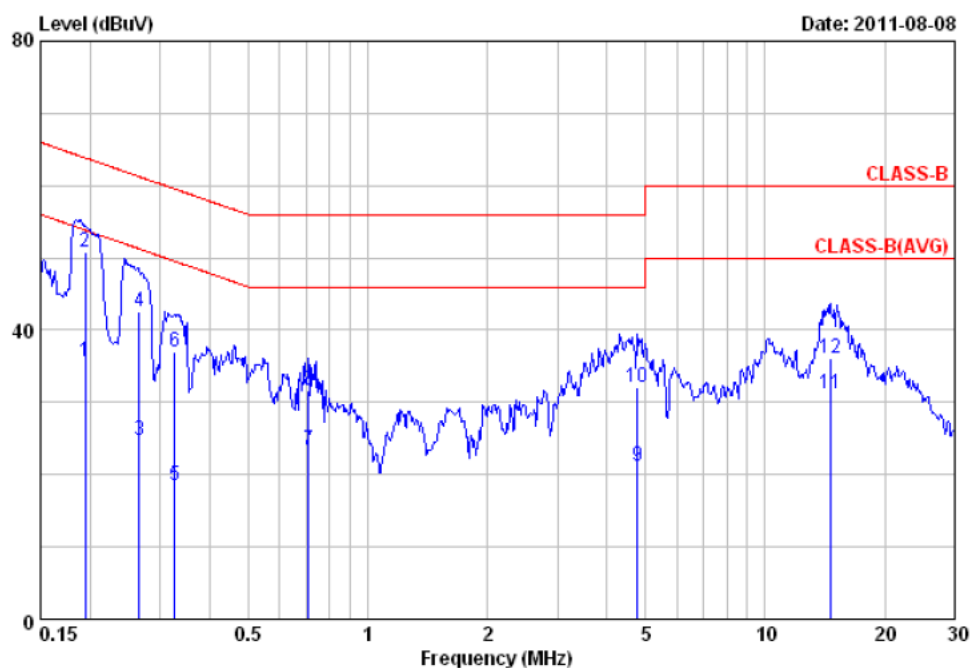

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	0.19	35.50	0.10	35.60	53.84	-18.24	Average
2	0.19	50.77	0.10	50.87	63.84	-12.97	QP
3	0.27	24.73	0.10	24.83	51.25	-26.42	Average
4	0.27	42.57	0.10	42.67	61.25	-18.58	QP
5	0.33	18.32	0.11	18.43	49.53	-31.10	Average
6	0.33	36.87	0.11	36.98	59.53	-22.55	QP
7	0.71	23.20	0.14	23.34	46.00	-22.66	Average
8	0.71	31.46	0.14	31.60	56.00	-24.40	QP
9	4.77	20.85	0.36	21.21	46.00	-24.79	Average
10	4.77	31.62	0.36	31.98	56.00	-24.02	QP
11	14.59	30.53	0.62	31.15	50.00	-18.85	Average
12	14.59	35.47	0.62	36.09	60.00	-23.91	QP

Notes:

1. Result = Read Value + Factor
2. Factor = LISN Factor + Cable Loss
3. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
4. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
5. The data is worse case.

Test engineer:



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated ($\mu V / M$)	Radiated (dB $\mu V / M$)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.


Frequency (MHz)	Distance Meters	Radiated (dB $\mu V / M$)
30-230	10	30
230-1000	10	37

5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.



5.3 Typical Test Setup

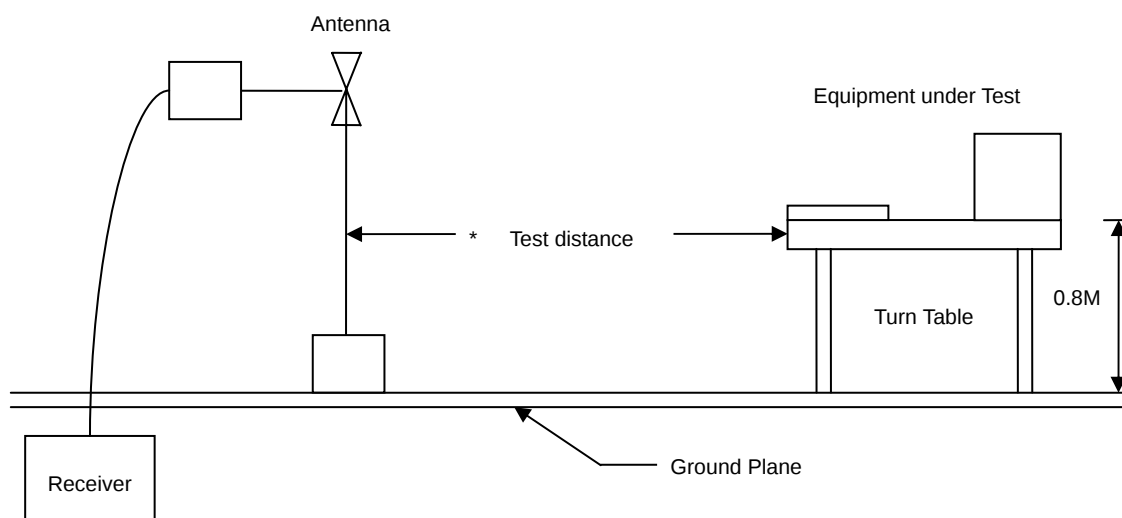


5.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Amplifier	Agilent	8447D	2944A10531	2011/01/21	2012/01/20
Bilog Antenna	Schaffner	CBL6112D	22242	2011/02/09	2012/02/08
EMI Receiver	HP	8546A	3807A00454	2010/09/27	2011/09/26
RF Filter Section	HP	85460A	3704A00386	2010/09/27	2011/09/26
SPECTRUM ANALYZER	R&S	FSP40	100219	2010/11/05	2011/11/04
HORN ANTENNA	EMCO	3115	31589	2011/05/02	2012/05/01
Preamplifier	Agilent	8449B	3008A01954	2011/03/02	2012/03/01



5.5 Test Result and Data

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

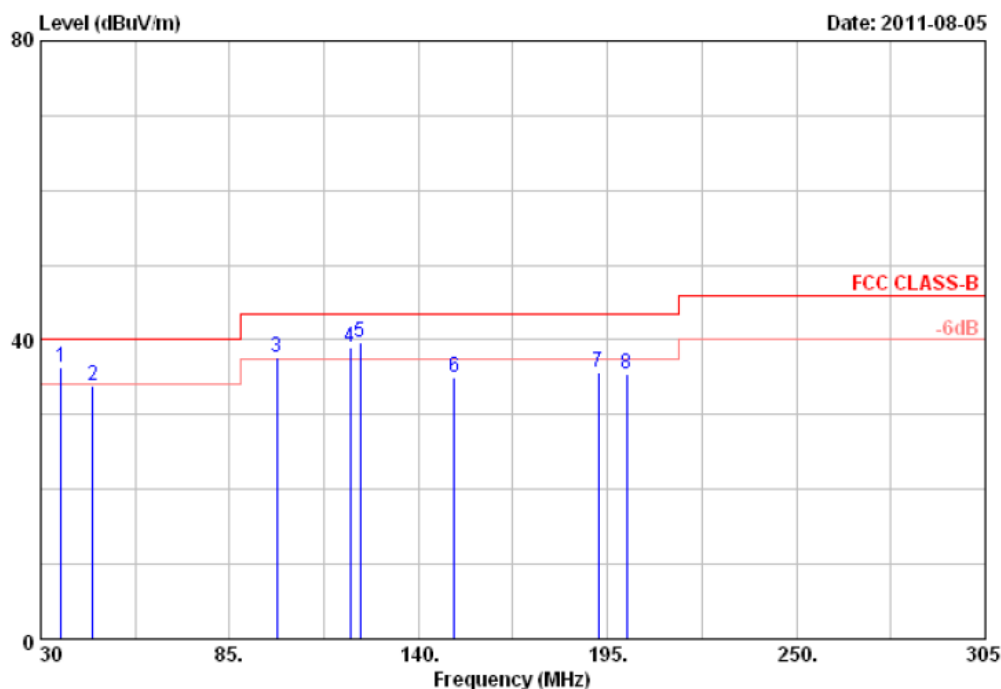


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	30.96	5.35	36.31	40.00	-3.69	QP	100	0
2	45.13	30.37	3.56	33.93	40.00	-6.07	Peak	100	0
3	98.75	37.87	-0.12	37.75	43.50	-5.75	QP	100	0
4	120.20	31.09	7.80	38.89	43.50	-4.61	QP	100	0
5	122.95	33.54	6.10	39.64	43.50	-3.86	QP	100	0
6	150.45	34.14	0.87	35.01	43.50	-8.49	Peak	100	0
7	192.25	35.27	0.41	35.68	43.50	-7.82	Peak	100	0
8	200.50	38.53	-2.99	35.54	43.50	-7.96	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

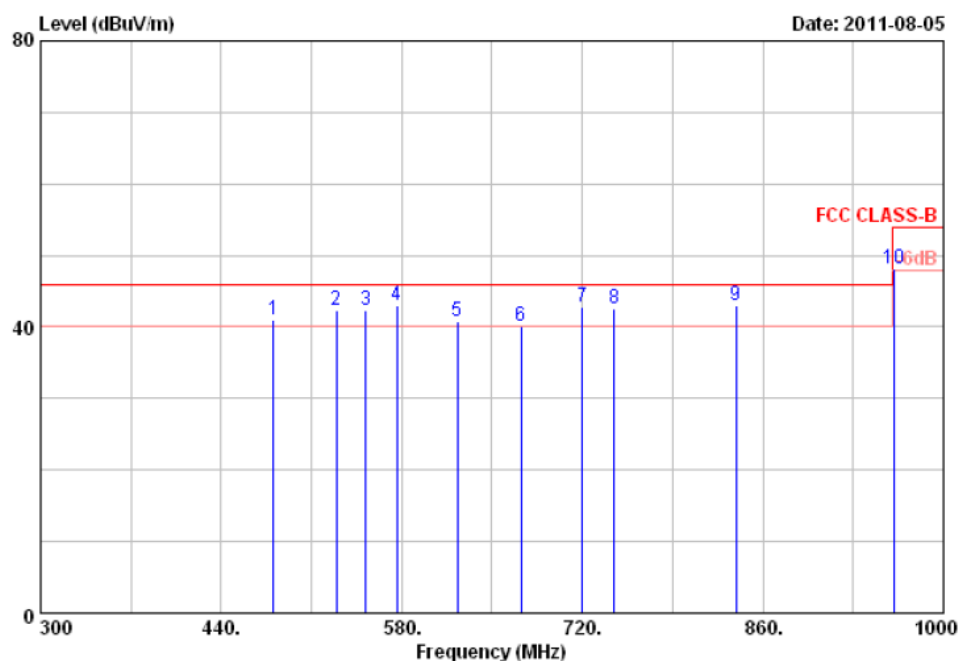


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	480.60	41.60	-0.65	40.95	46.00	-5.05	QP	100	0
2	529.60	37.76	4.47	42.23	46.00	-3.77	QP	100	0
3	552.00	33.52	8.81	42.33	46.00	-3.67	QP	100	0
4	576.50	35.17	7.81	42.98	46.00	-3.02	QP	100	0
5	623.40	37.42	3.45	40.87	46.00	-5.13	QP	100	0
6	672.40	36.20	3.85	40.05	46.00	-5.95	QP	100	0
7	720.00	35.31	7.40	42.71	46.00	-3.29	QP	100	0
8	744.50	32.01	10.61	42.62	46.00	-3.38	QP	100	0
9	839.00	27.72	15.21	42.93	46.00	-3.07	QP	100	0
10	961.50	36.30	11.81	48.11	54.00	-5.89	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

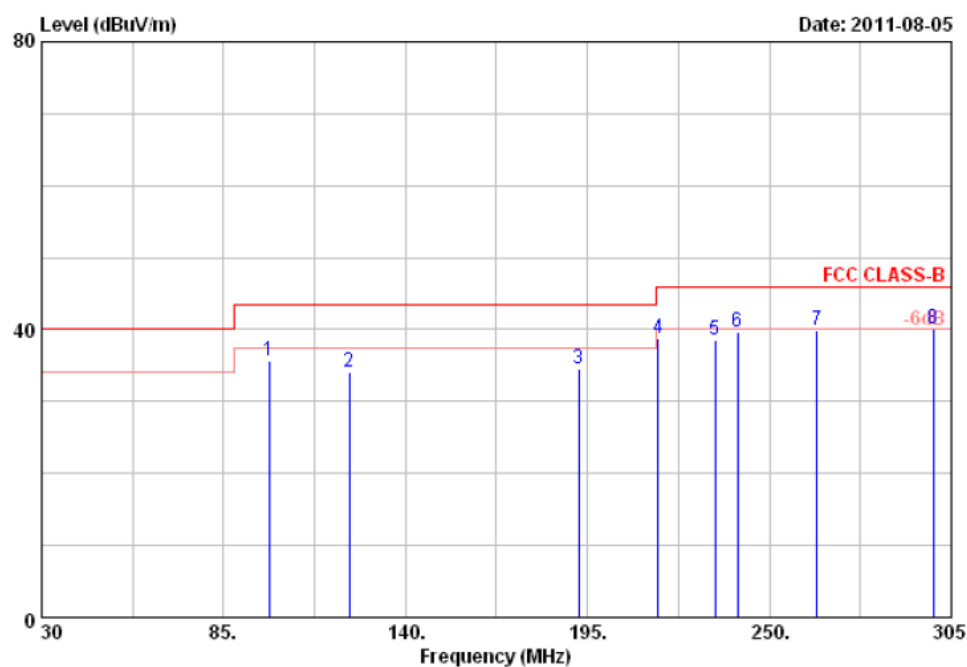


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	98.75	44.27	-8.62	35.65	43.50	-7.85	Peak	100	0
2	122.95	44.02	-9.90	34.12	43.50	-9.38	Peak	100	0
3	192.25	46.38	-11.74	34.64	43.50	-8.86	Peak	100	0
4	216.45	47.69	-8.87	38.82	46.00	-7.18	Peak	100	0
5	233.50	44.61	-6.07	38.54	46.00	-7.46	Peak	100	0
6	240.38	45.77	-6.01	39.76	46.00	-6.24	Peak	100	0
7	264.30	46.67	-6.71	39.96	46.00	-6.04	Peak	100	0
8	299.50	46.22	-6.00	40.22	46.00	-5.78	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

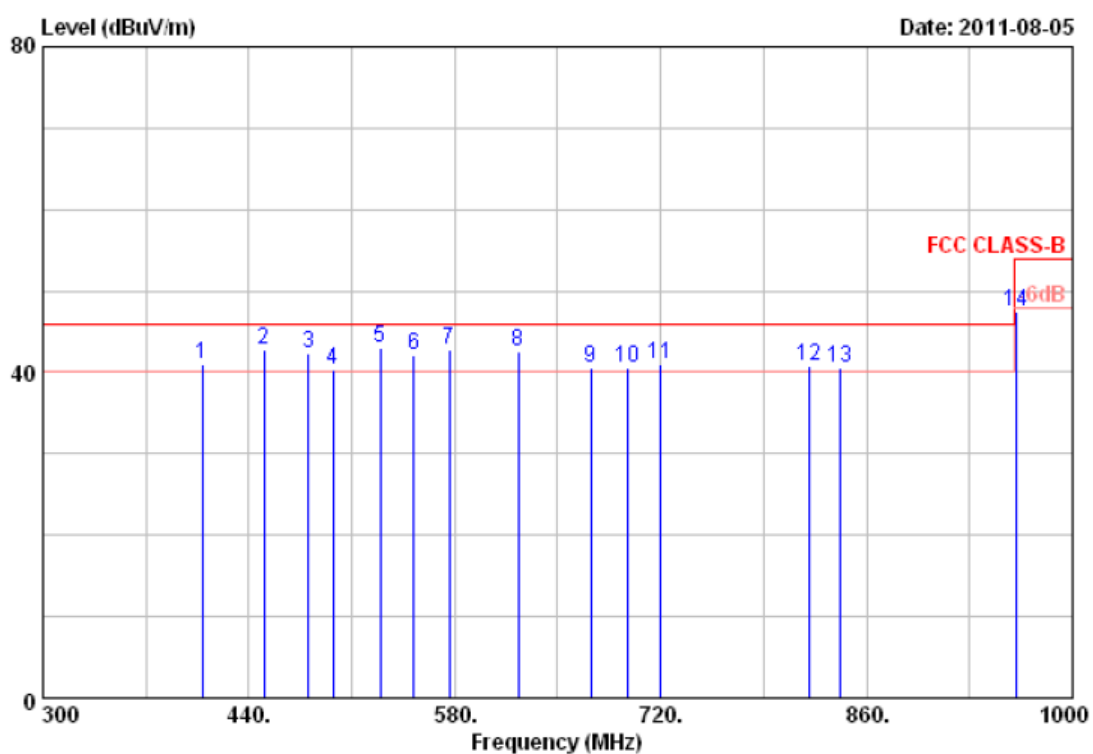

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	408.50	41.95	-1.01	40.94	46.00	-5.06	QP	100	0
2	450.50	41.95	0.89	42.84	46.00	-3.16	QP	100	0
3	480.60	39.82	2.56	42.38	46.00	-3.62	QP	100	0
4	497.40	37.26	3.00	40.26	46.00	-5.74	QP	100	0
5	529.60	38.52	4.46	42.98	46.00	-3.02	QP	100	0
6	552.00	34.91	7.19	42.10	46.00	-3.90	QP	100	0
7	576.50	34.15	8.64	42.79	46.00	-3.21	QP	100	0
8	623.40	35.91	6.61	42.52	46.00	-3.48	QP	100	0
9	672.40	35.28	5.19	40.47	46.00	-5.53	QP	100	0
10	697.60	34.25	6.29	40.54	46.00	-5.46	QP	100	0
11	720.00	35.62	5.32	40.94	46.00	-5.06	QP	100	0




	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
12	821.50	28.30	12.43	40.73	46.00	-5.27	QP	100	0
13	842.50	28.44	12.21	40.65	46.00	-5.35	QP	100	0
14	961.50	38.44	8.94	47.38	54.00	-6.62	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

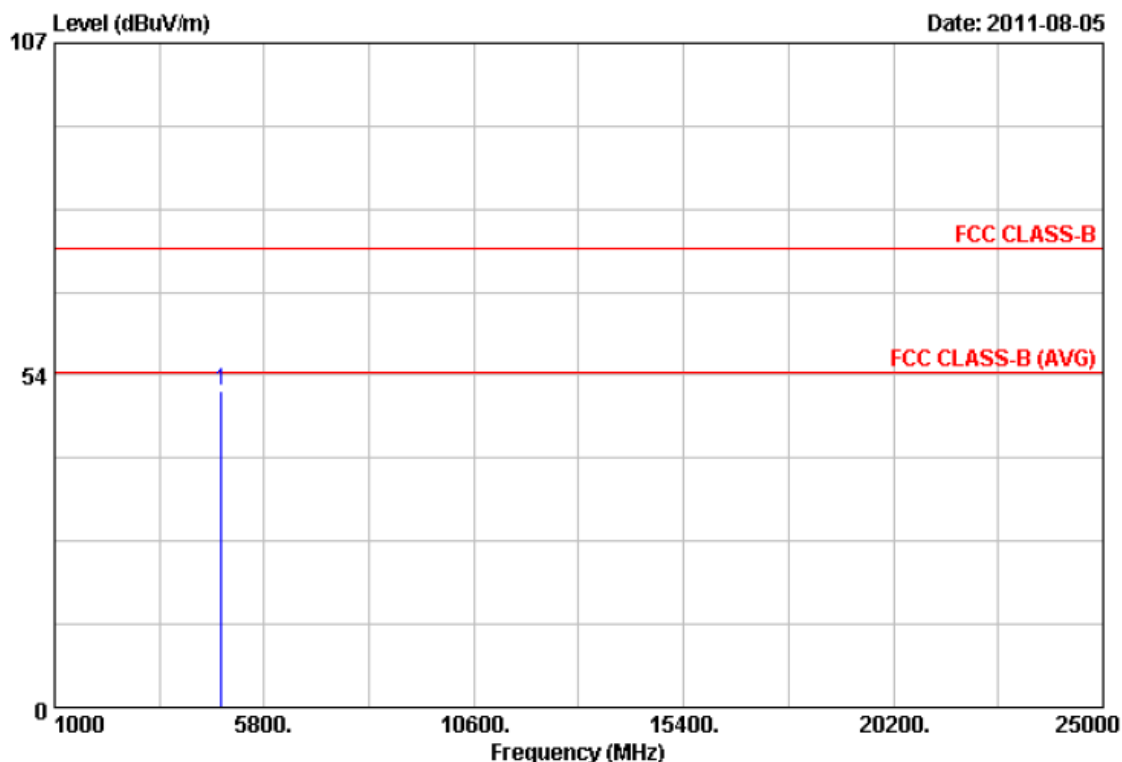


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.08	42.13	8.84	50.97	74.00	-23.03	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

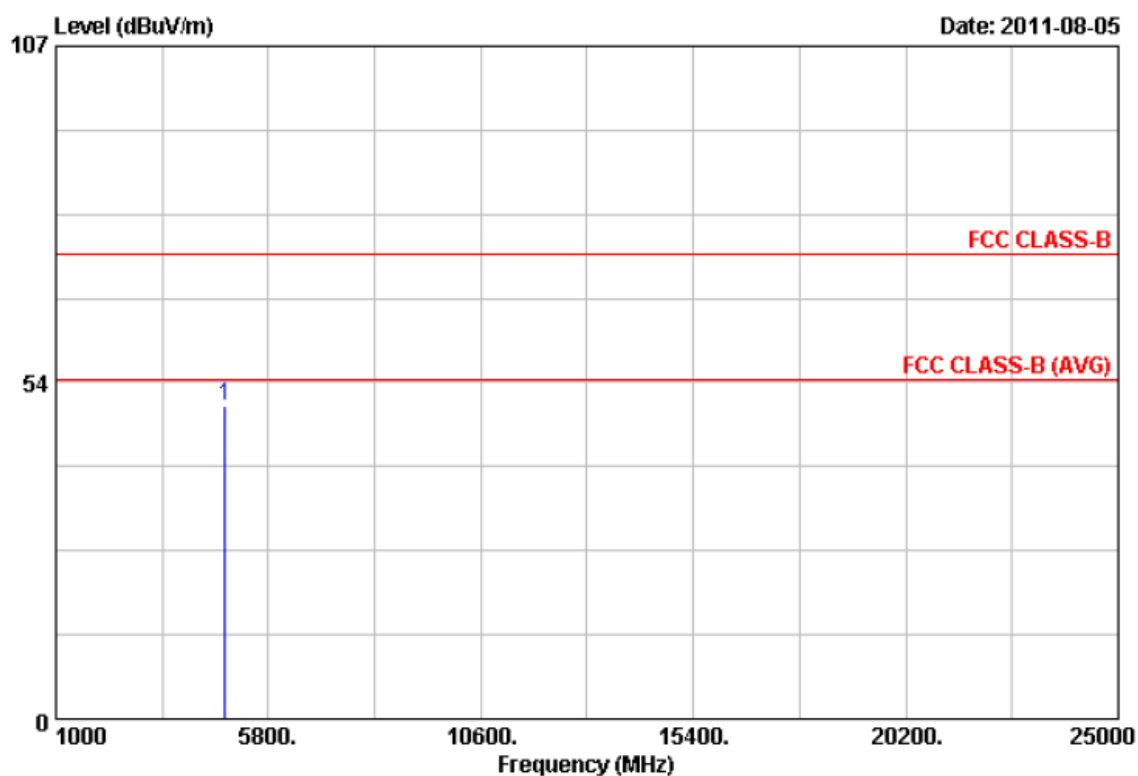


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.93	40.94	8.84	49.78	74.00	-24.22	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

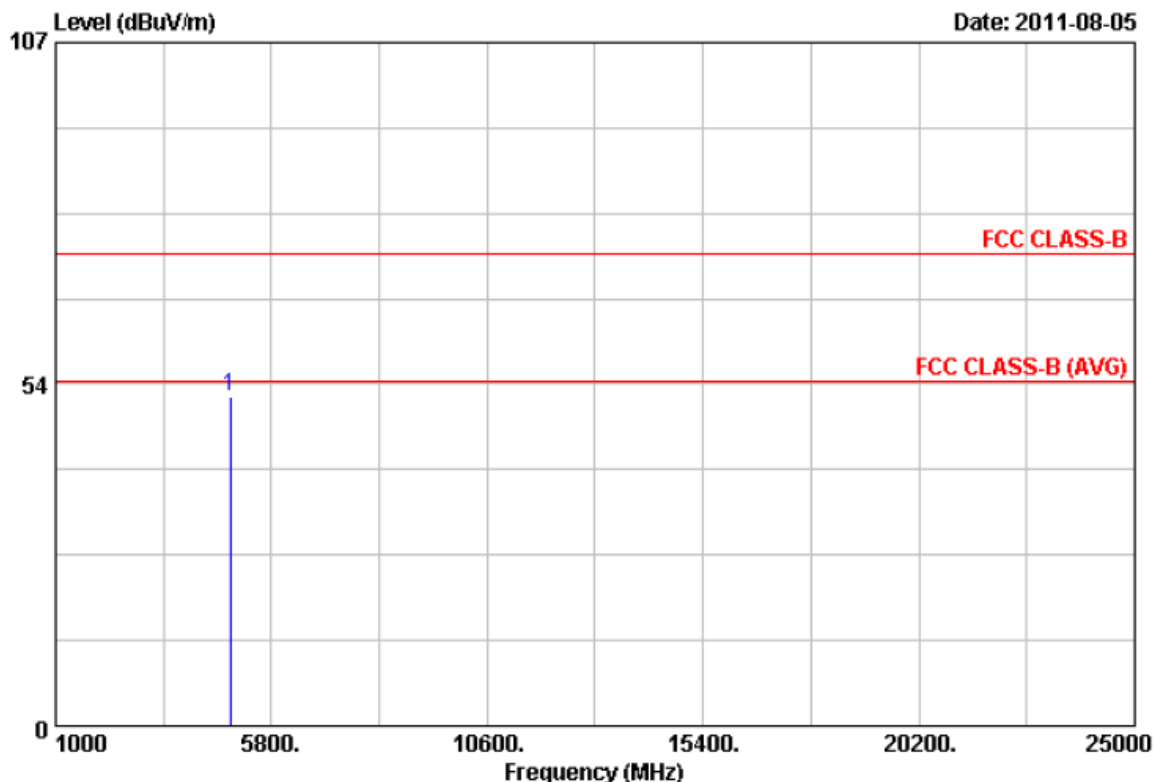


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.37	42.41	9.03	51.44	74.00	-22.56	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

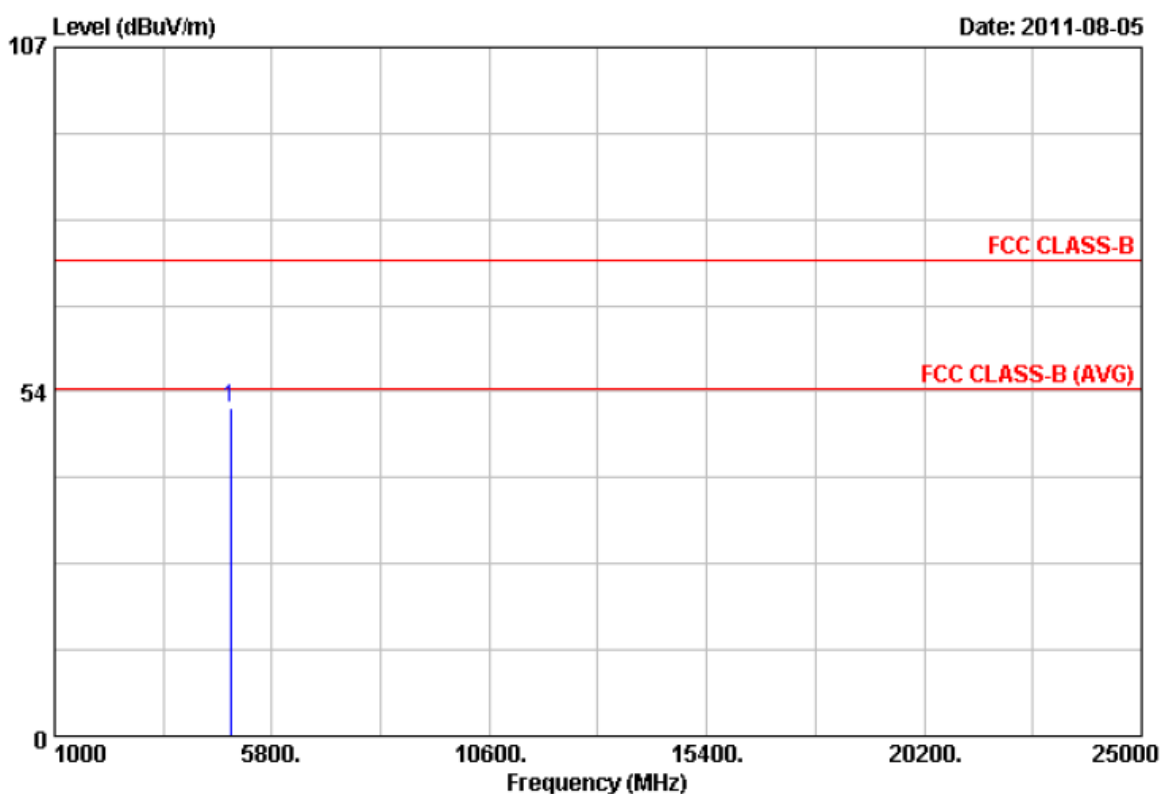


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.66	41.79	9.03	50.82	74.00	-23.18	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

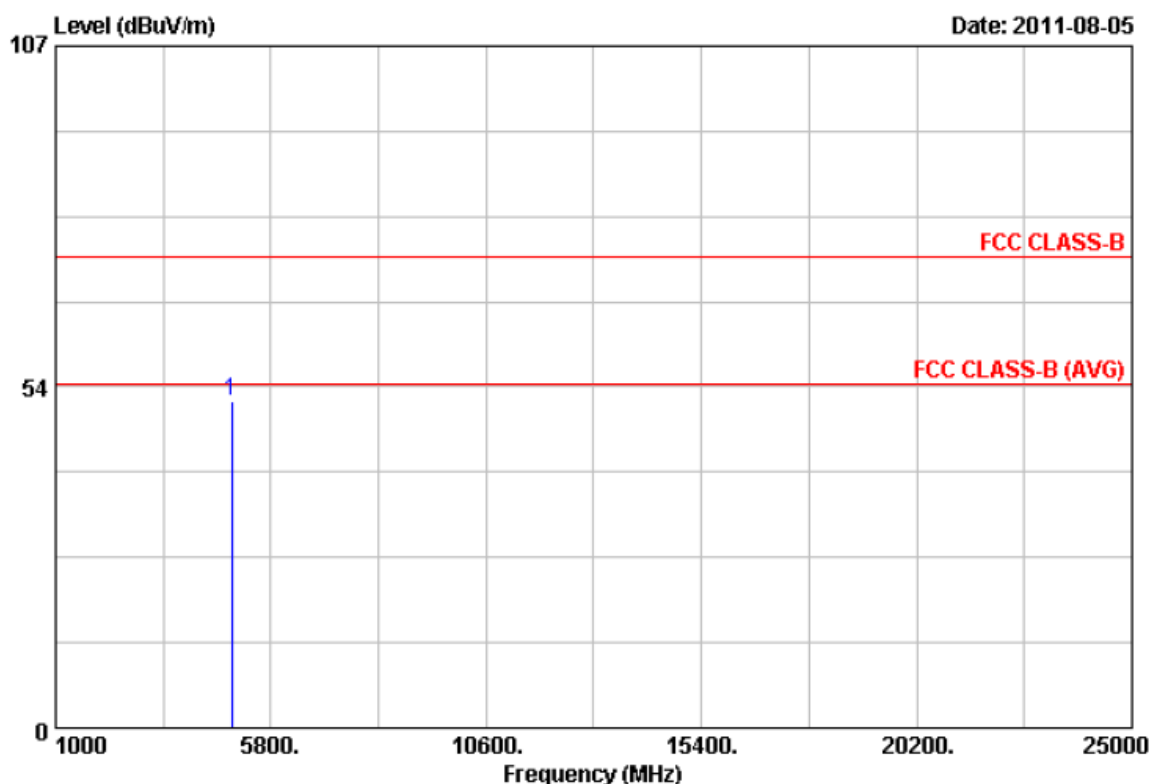


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.98	41.98	9.21	51.19	74.00	-22.81	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11b	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

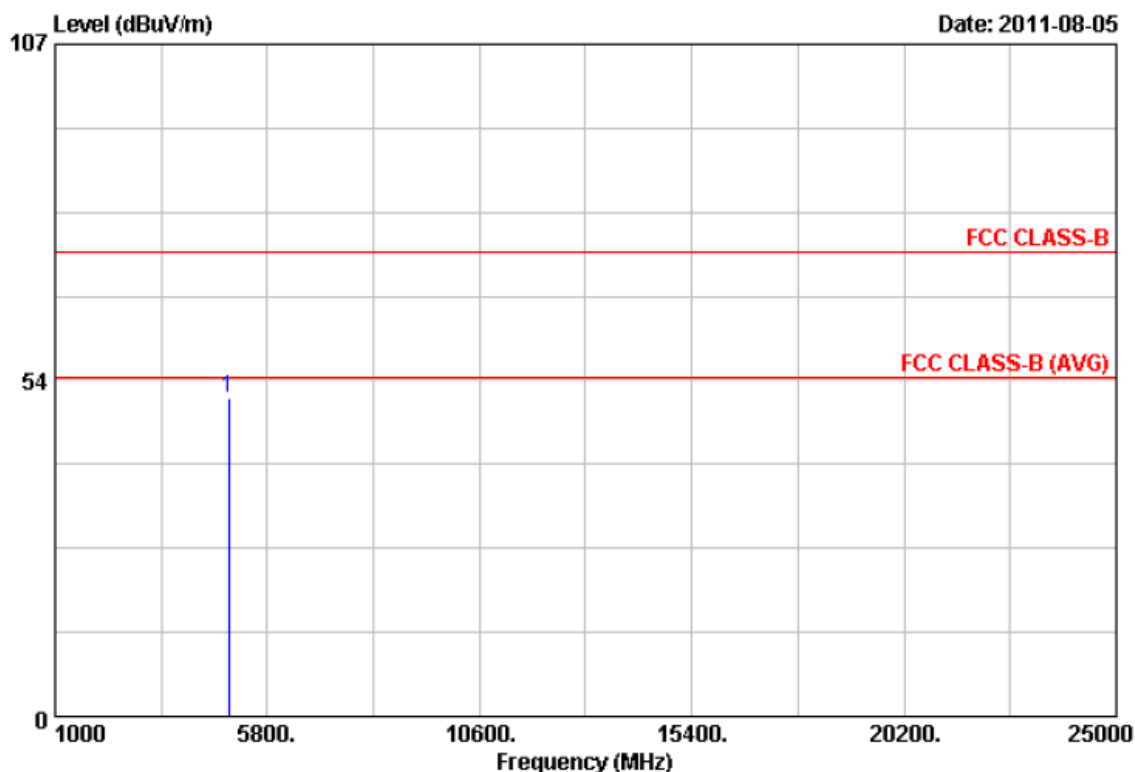


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.92	41.58	9.21	50.79	74.00	-23.21	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

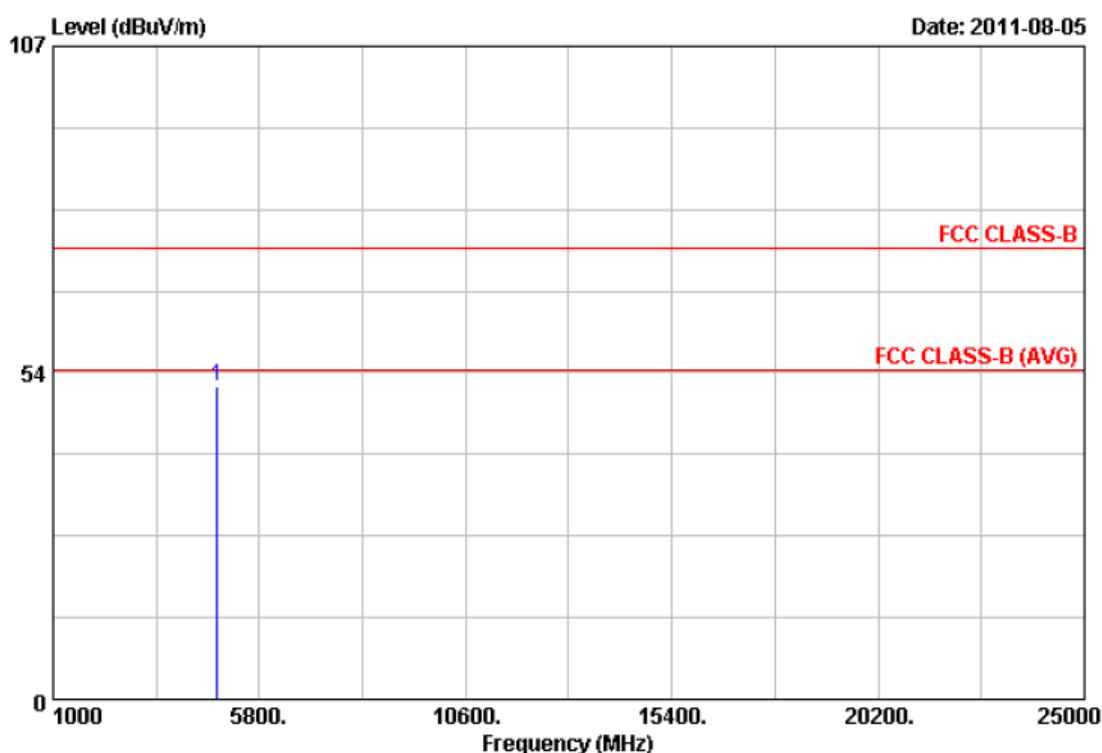


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.65	42.35	8.84	51.19	74.00	-22.81	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

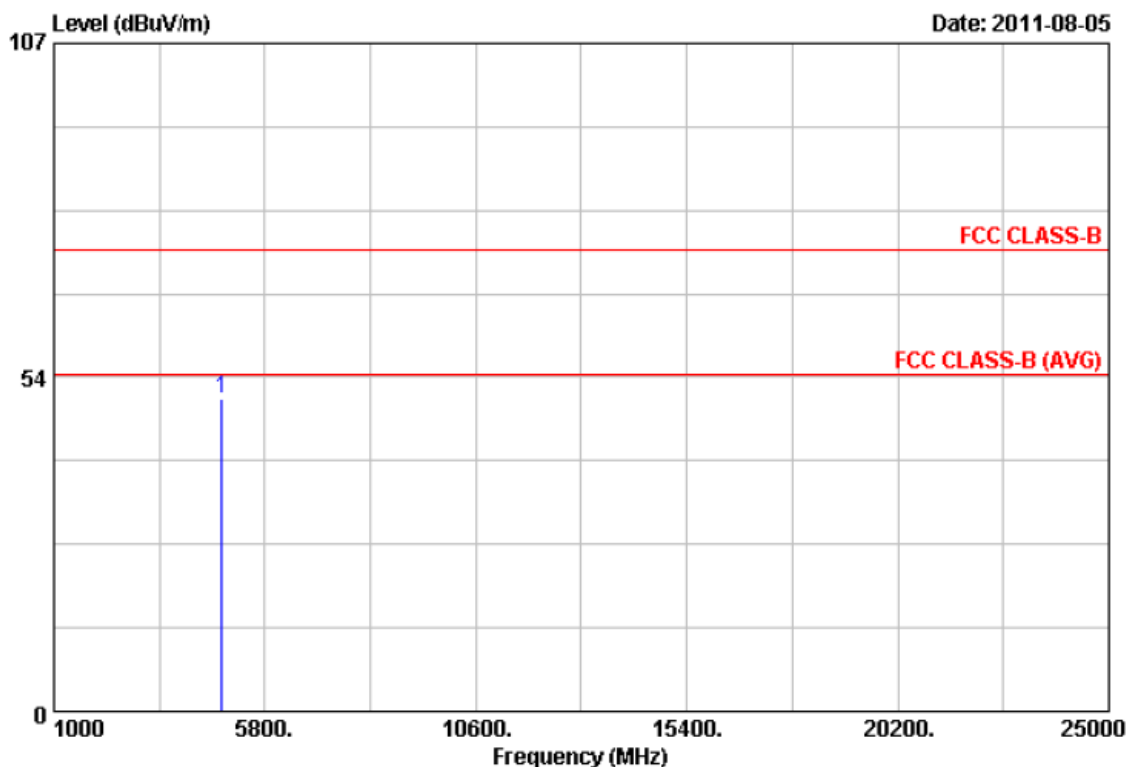


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.81	41.37	8.84	50.21	74.00	-23.79	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

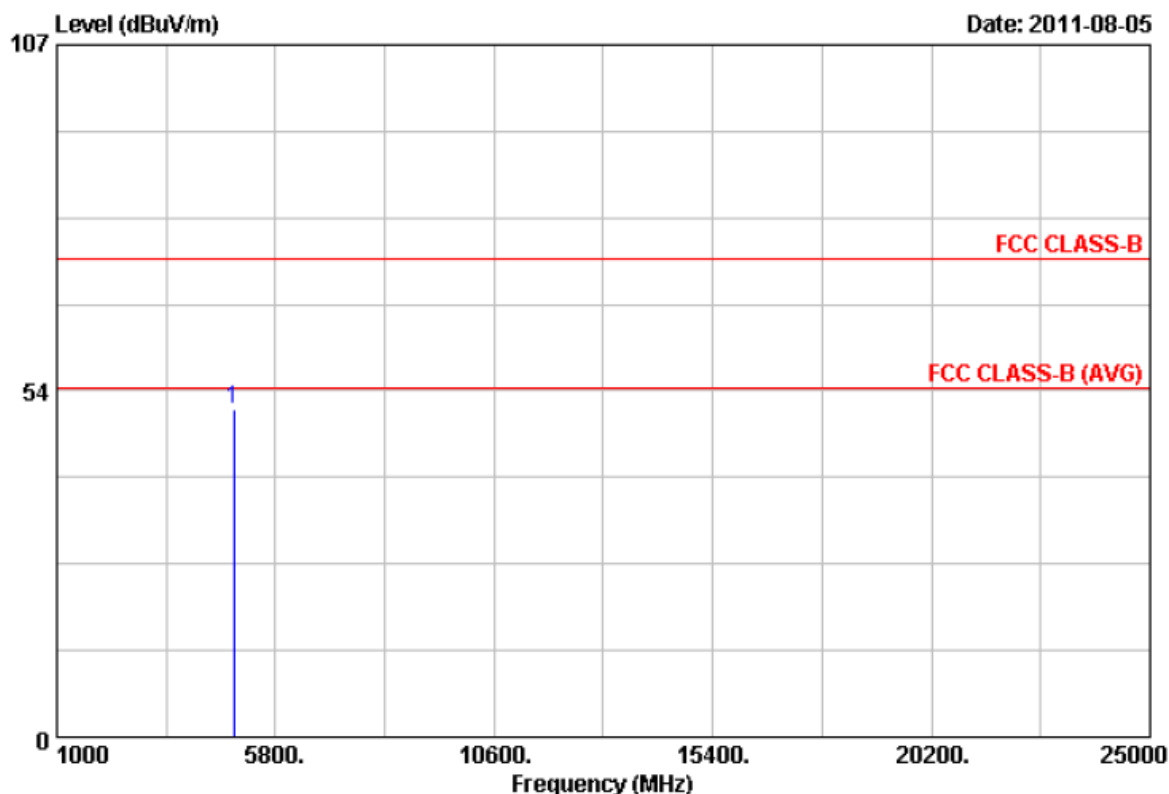


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.64	41.61	9.03	50.64	74.00	-23.36	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

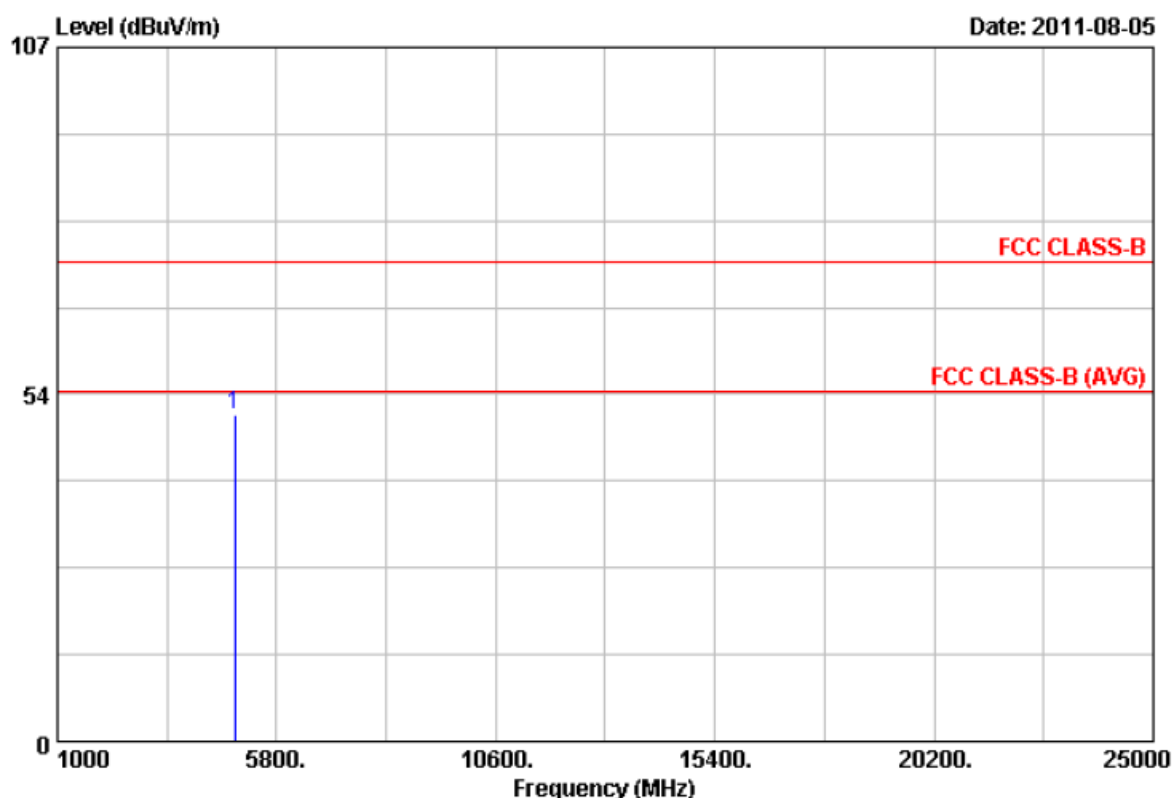


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.52	41.46	9.03	50.49	74.00	-23.51	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

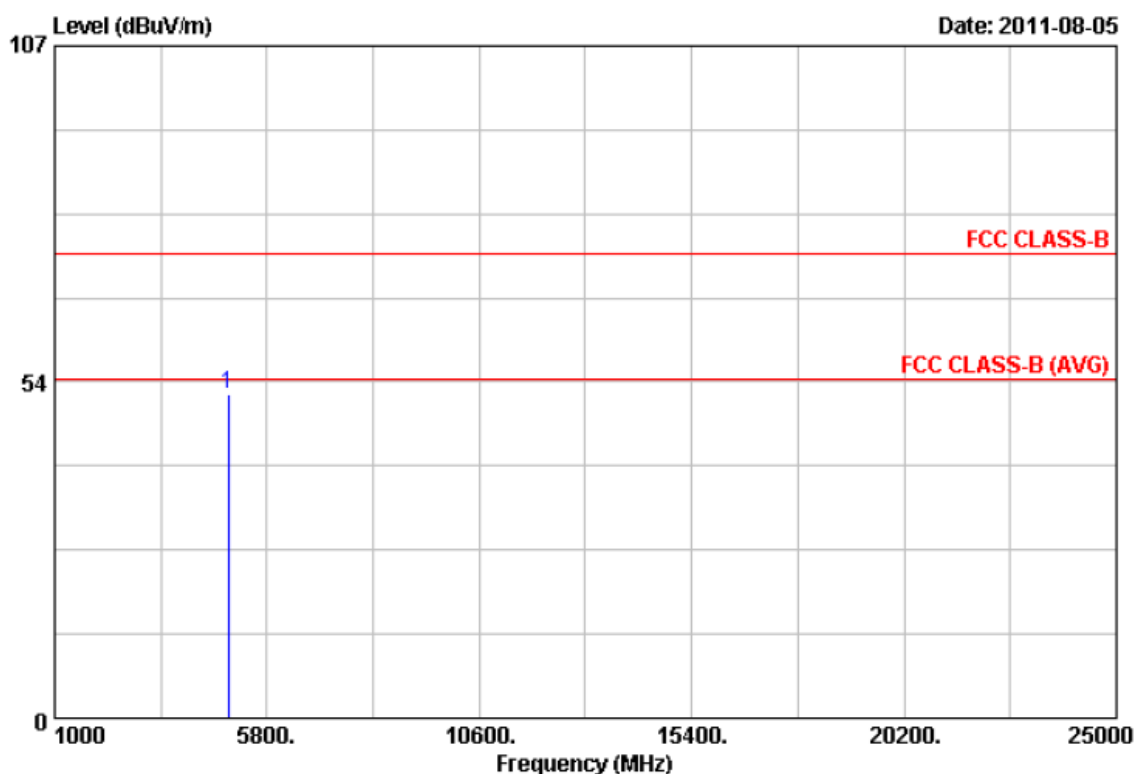


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.64	42.43	9.21	51.64	74.00	-22.36	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11g	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 54 Mbps

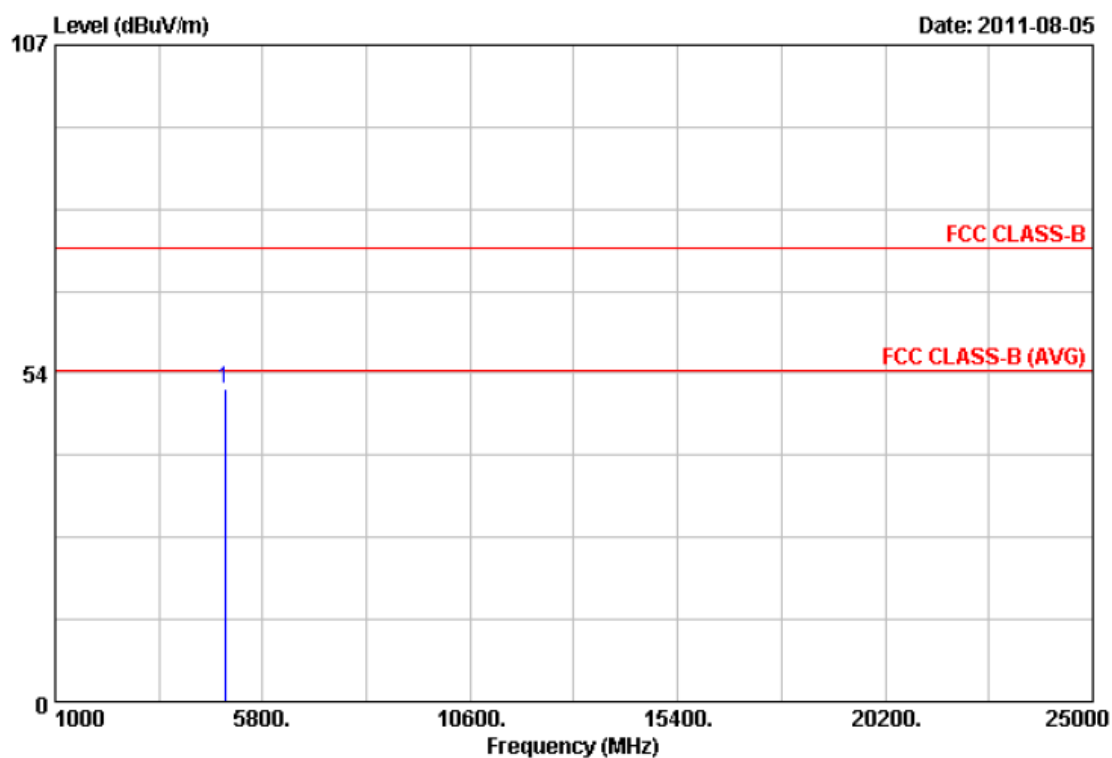


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.51	41.70	9.21	50.91	74.00	-23.09	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

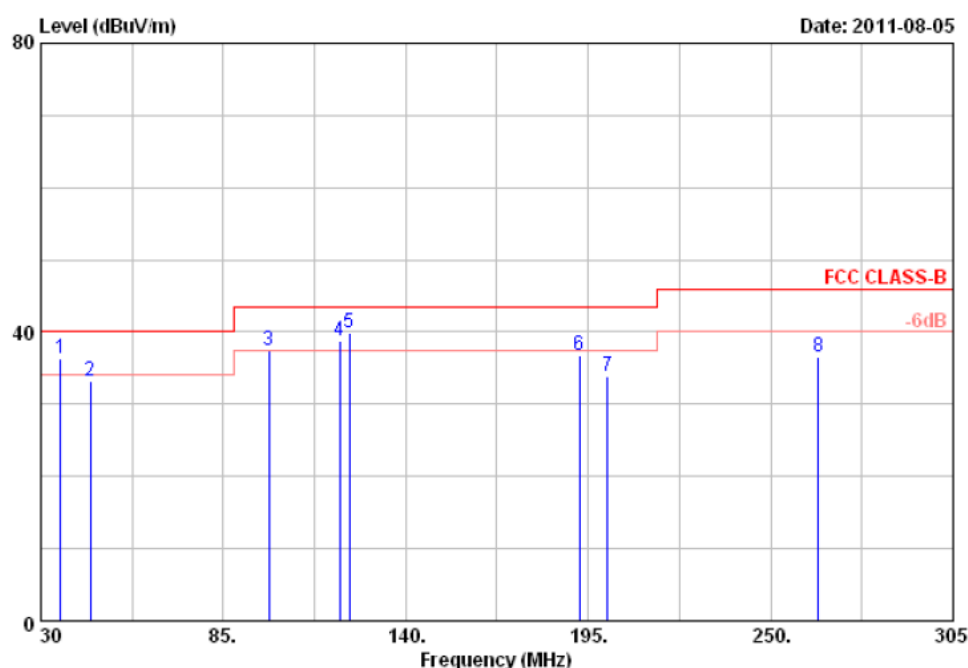


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	36.05	30.87	5.35	36.22	40.00	-3.78	QP	100	0
2	44.85	29.58	3.66	33.24	40.00	-6.76	Peak	100	0
3	98.75	37.64	-0.12	37.52	43.50	-5.98	QP	100	0
4	120.20	30.91	7.80	38.71	43.50	-4.79	QP	100	0
5	122.95	33.75	6.10	39.85	43.50	-3.65	QP	100	0
6	192.25	36.33	0.41	36.74	43.50	-6.76	Peak	100	0
7	200.78	36.88	-2.95	33.93	43.50	-9.57	Peak	100	0
8	264.30	40.64	-4.14	36.50	46.00	-9.50	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

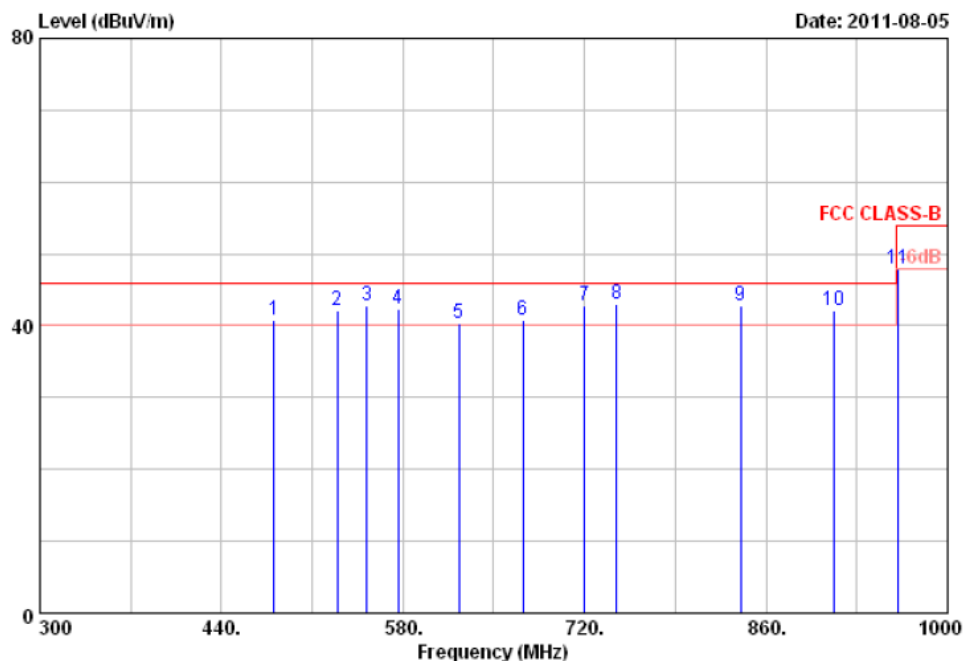


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	480.60	41.41	-0.65	40.76	46.00	-5.24	QP	100	0
2	529.60	37.55	4.47	42.02	46.00	-3.98	QP	100	0
3	552.00	34.02	8.81	42.83	46.00	-3.17	QP	100	0
4	576.50	34.54	7.81	42.35	46.00	-3.65	QP	100	0
5	623.40	36.94	3.45	40.39	46.00	-5.61	QP	100	0
6	672.40	36.95	3.85	40.80	46.00	-5.20	QP	100	0
7	720.00	35.37	7.40	42.77	46.00	-3.23	QP	100	0
8	744.50	32.38	10.61	42.99	46.00	-3.01	QP	100	0
9	840.40	27.31	15.58	42.89	46.00	-3.11	QP	100	0
10	912.50	28.99	13.07	42.06	46.00	-3.94	QP	100	0
11	961.50	36.06	11.81	47.87	54.00	-6.13	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

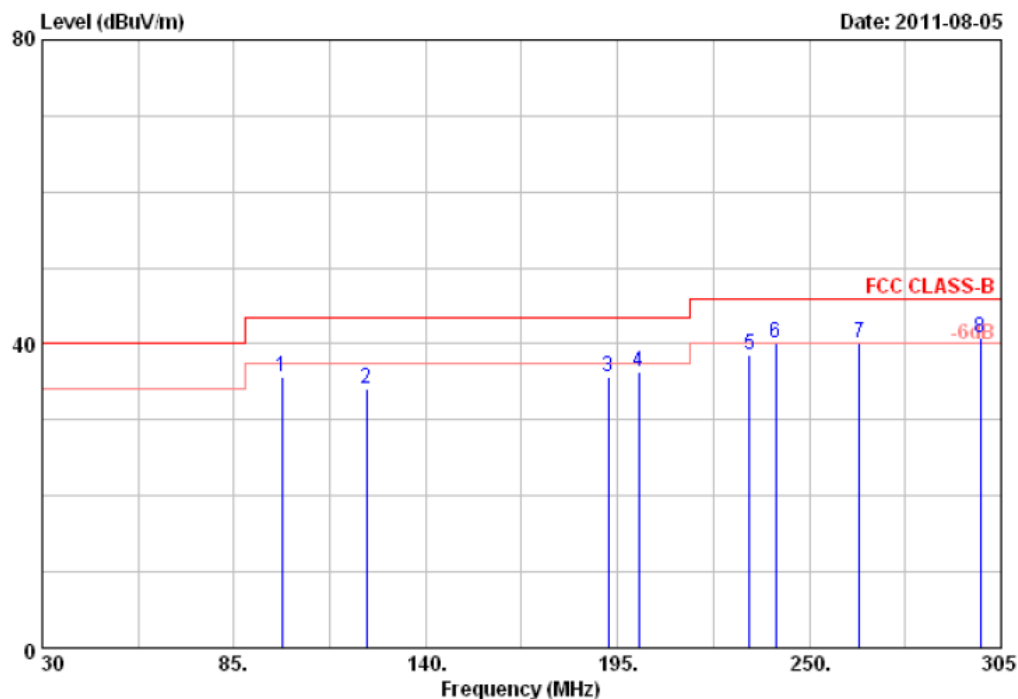


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	98.75	44.37	-8.62	35.75	43.50	-7.75	Peak	100	0
2	122.95	44.01	-9.90	34.11	43.50	-9.39	Peak	100	0
3	192.25	47.34	-11.74	35.60	43.50	-7.90	Peak	100	0
4	201.05	47.49	-11.16	36.33	43.50	-7.17	Peak	100	0
5	232.95	44.65	-6.10	38.55	46.00	-7.45	Peak	100	0
6	240.38	46.04	-6.01	40.03	46.00	-5.97	QP	100	0
7	264.30	46.81	-6.71	40.10	46.00	-5.90	QP	100	0
8	298.95	46.81	-5.95	40.86	46.00	-5.14	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

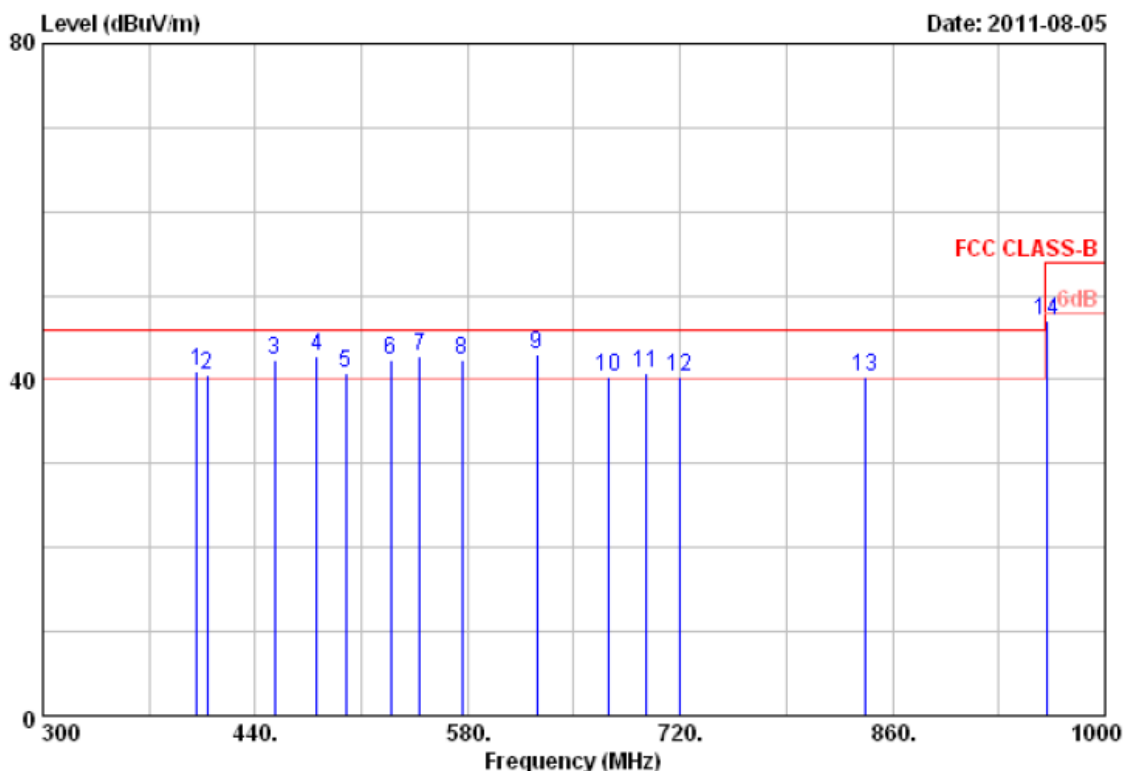

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	401.50	41.20	-0.17	41.03	46.00	-4.97	QP	100	0
2	408.50	41.67	-1.01	40.66	46.00	-5.34	QP	100	0
3	452.60	41.49	0.87	42.36	46.00	-3.64	QP	100	0
4	480.60	40.23	2.56	42.79	46.00	-3.21	QP	100	0
5	499.50	37.99	2.81	40.80	46.00	-5.20	QP	100	0
6	529.60	37.98	4.46	42.44	46.00	-3.56	QP	100	0
7	548.50	36.22	6.57	42.79	46.00	-3.21	QP	100	0
8	576.50	33.67	8.64	42.31	46.00	-3.69	QP	100	0
9	625.50	36.36	6.56	42.92	46.00	-3.08	QP	100	0
10	672.40	35.10	5.19	40.29	46.00	-5.71	QP	100	0
11	697.60	34.46	6.29	40.75	46.00	-5.25	QP	100	0




	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
12	720.00	34.94	5.32	40.26	46.00	-5.74	QP	100	0
13	842.50	28.15	12.21	40.36	46.00	-5.64	QP	100	0
14	961.50	38.09	8.94	47.03	54.00	-6.97	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

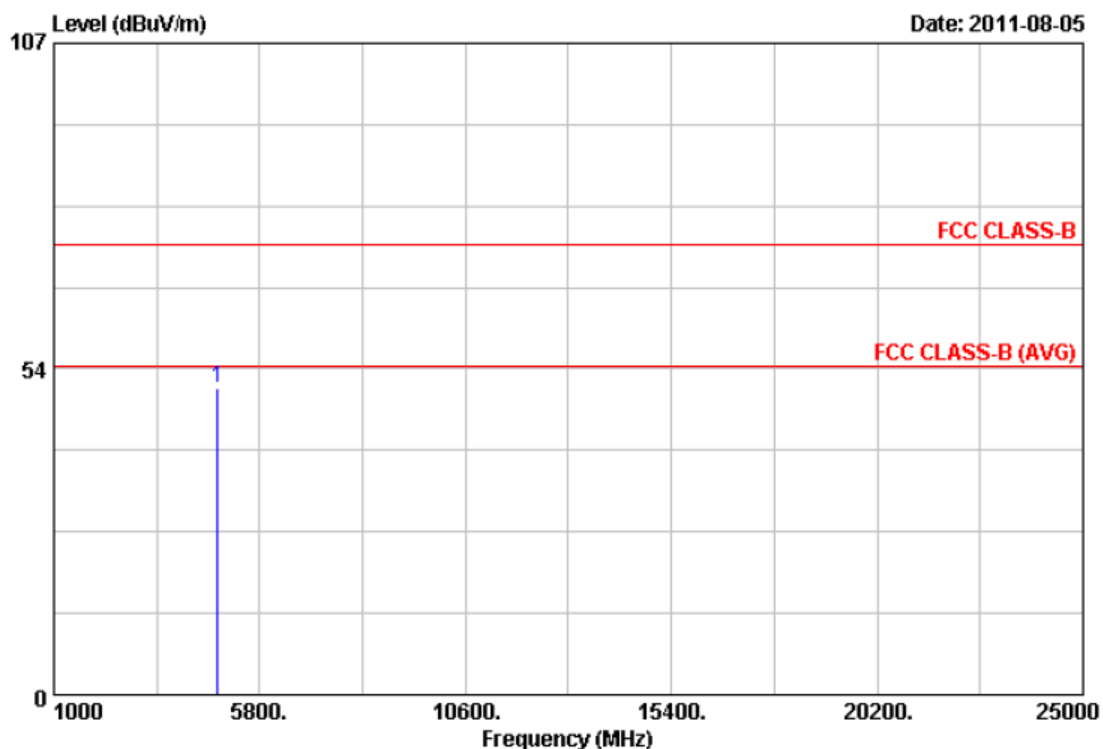


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4823.75	41.64	8.84	50.48	74.00	-23.52	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 1	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

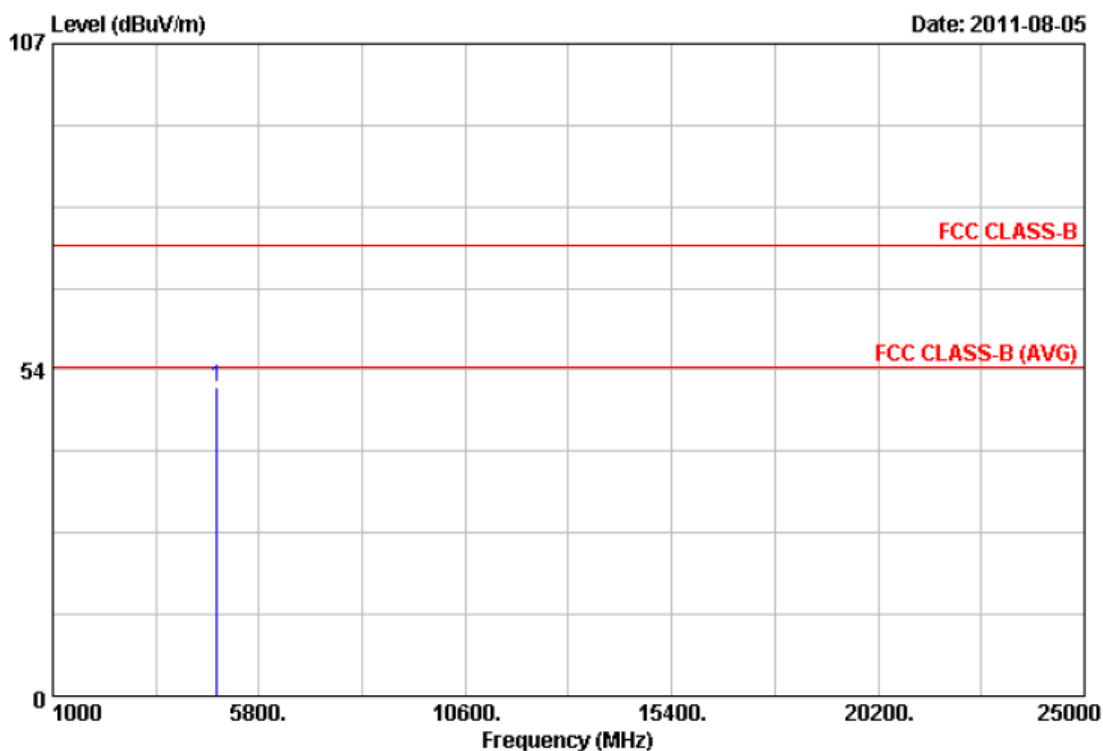


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4824.29	41.77	8.84	50.61	74.00	-23.39	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

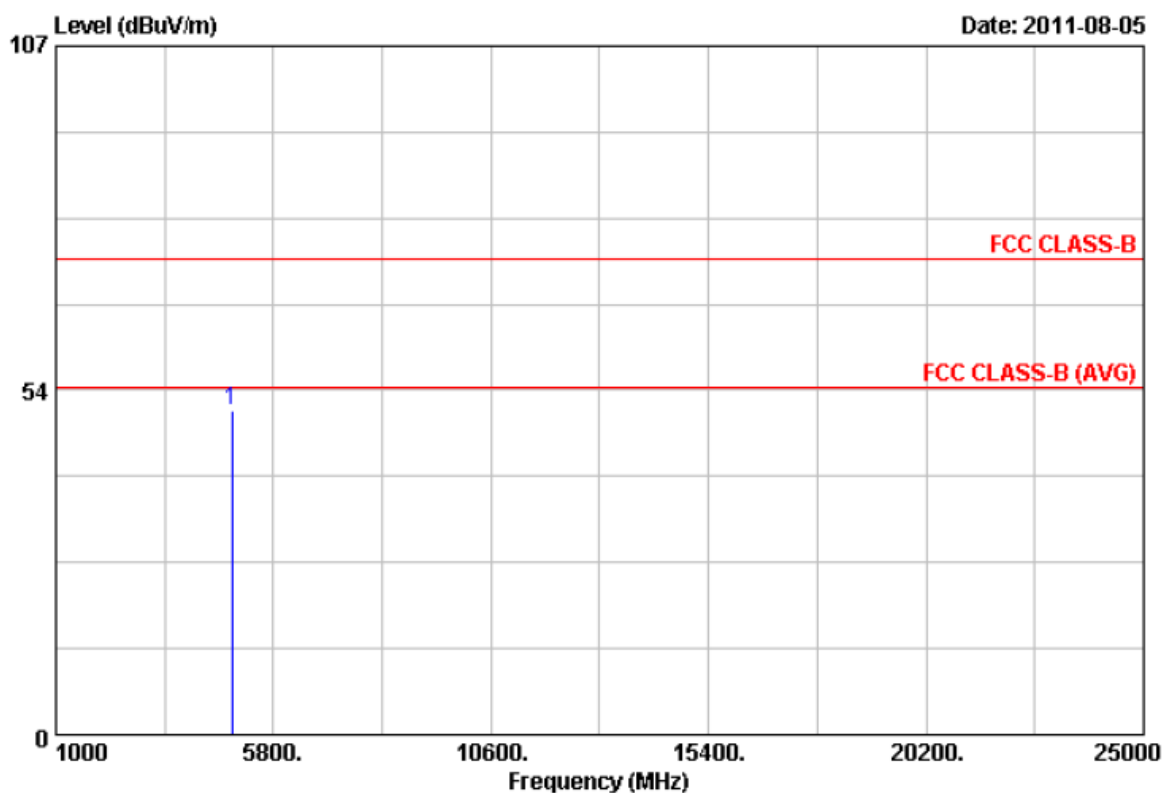


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.79	41.27	9.03	50.30	74.00	-23.70	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

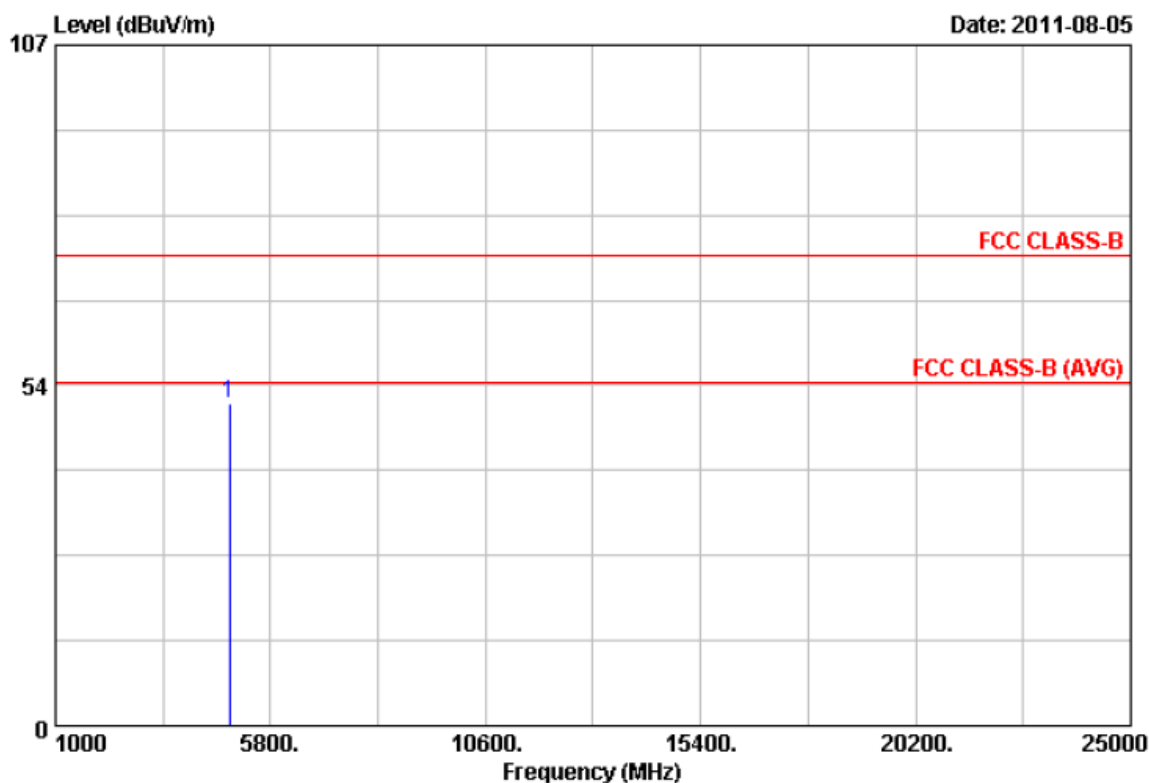


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4874.42	41.55	9.03	50.58	74.00	-23.42	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

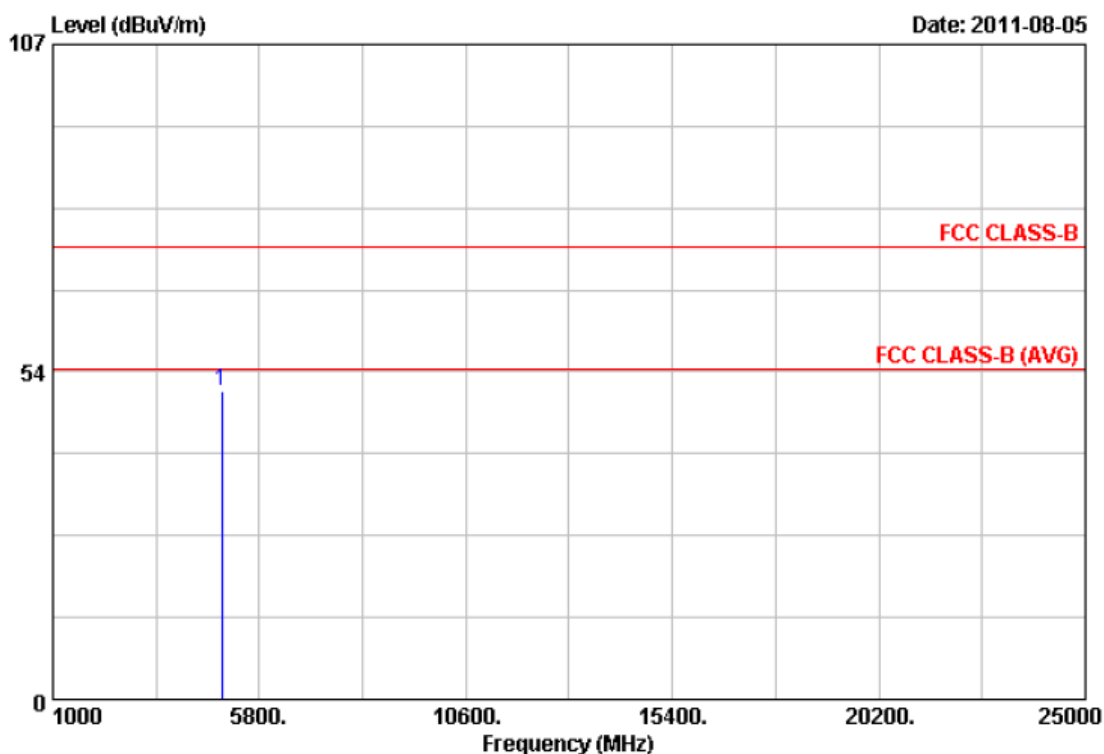


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.99	41.28	9.21	50.49	74.00	-23.51	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 11	Humidity	: 65 %
Modulation Type	: 802.11n HT20	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 130 Mbps

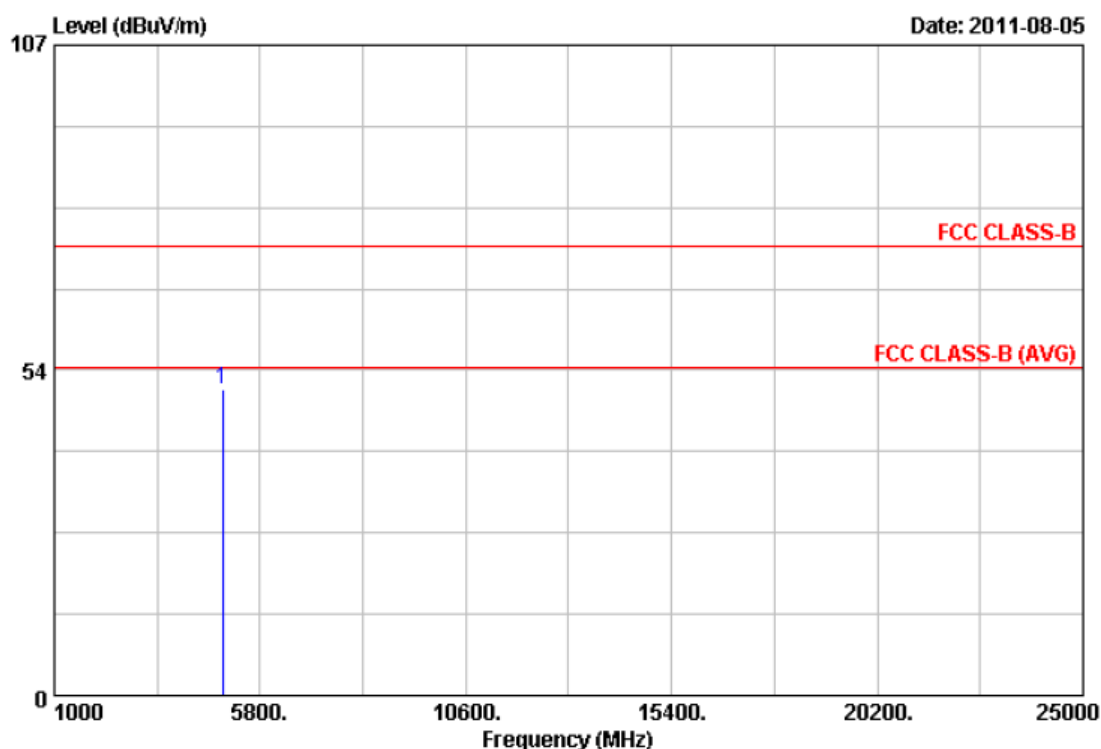


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4923.91	41.09	9.21	50.30	74.00	-23.70	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

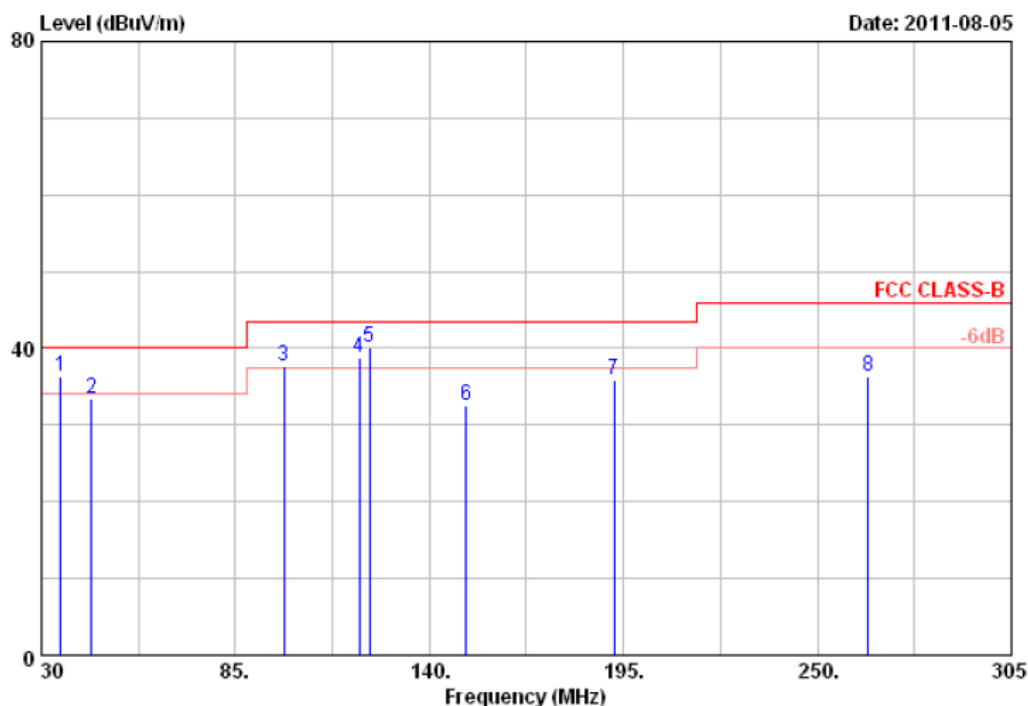


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	35.50	30.01	6.25	36.26	40.00	-3.74	QP	100	0
2	44.30	30.31	3.12	33.43	40.00	-6.57	Peak	100	0
3	98.75	37.83	-0.12	37.71	43.50	-5.79	QP	100	0
4	120.20	30.90	7.80	38.70	43.50	-4.80	QP	100	0
5	122.95	34.00	6.10	40.10	43.50	-3.40	QP	100	0
6	150.45	31.62	0.87	32.49	43.50	-11.01	Peak	100	0
7	192.25	35.53	0.41	35.94	43.50	-7.56	Peak	100	0
8	264.30	40.56	-4.14	36.42	46.00	-9.58	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

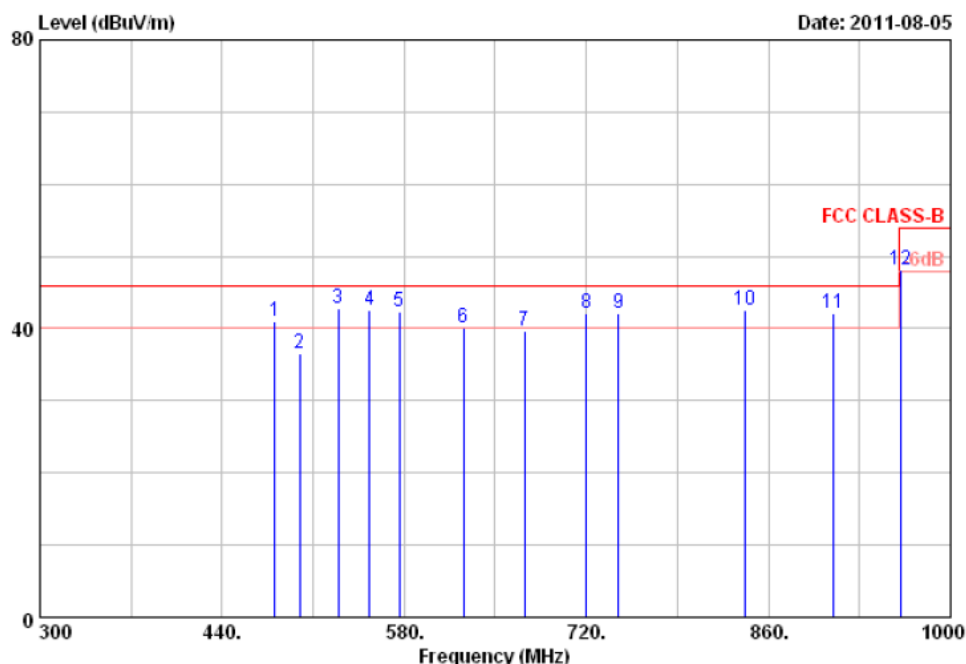


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	480.60	41.57	-0.65	40.92	46.00	-5.08	QP	100	0
2	499.50	37.40	-0.90	36.50	46.00	-9.50	Peak	100	0
3	529.60	38.21	4.47	42.68	46.00	-3.32	QP	100	0
4	553.40	32.98	9.55	42.53	46.00	-3.47	QP	100	0
5	576.50	34.61	7.81	42.42	46.00	-3.58	QP	100	0
6	625.50	36.52	3.54	40.06	46.00	-5.94	QP	100	0
7	672.40	35.90	3.85	39.75	46.00	-6.25	Peak	100	0
8	720.00	34.81	7.40	42.21	46.00	-3.79	QP	100	0
9	744.50	31.60	10.61	42.21	46.00	-3.79	QP	100	0
10	842.50	27.18	15.42	42.60	46.00	-3.40	QP	100	0
11	910.40	29.56	12.66	42.22	46.00	-3.78	QP	100	0
12	961.50	36.39	11.81	48.20	54.00	-5.80	QP	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

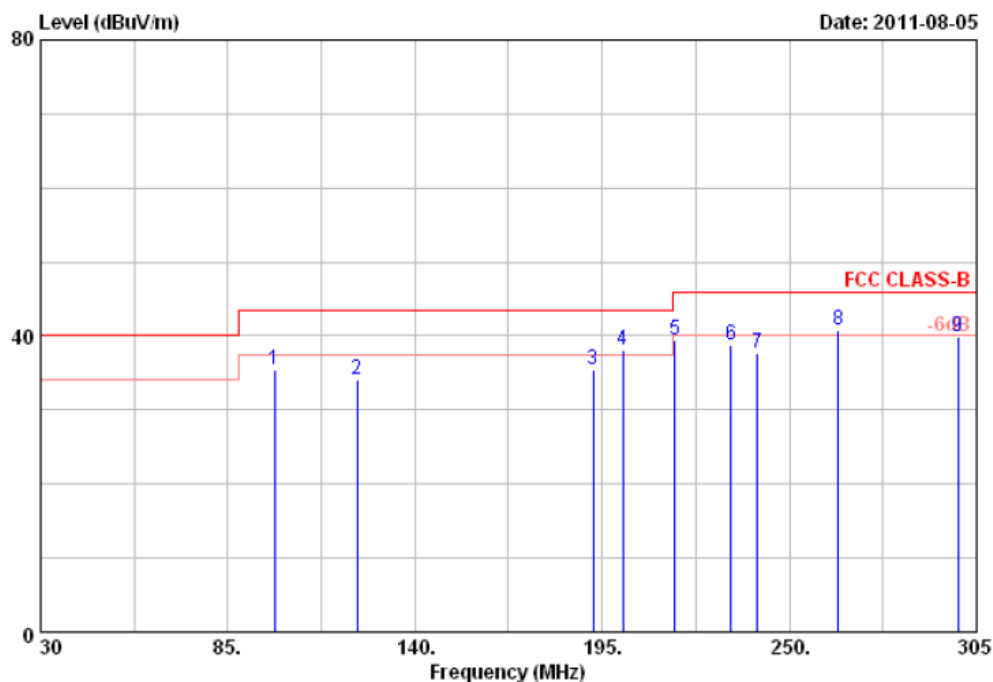


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	98.75	44.04	-8.62	35.42	43.50	-8.08	Peak	100	0
2	122.95	44.05	-9.90	34.15	43.50	-9.35	Peak	100	0
3	192.25	47.10	-11.74	35.36	43.50	-8.14	Peak	100	0
4	201.05	49.35	-11.16	38.19	43.50	-5.31	QP	100	0
5	216.45	48.29	-8.87	39.42	46.00	-6.58	Peak	100	0
6	232.95	44.92	-6.10	38.82	46.00	-7.18	Peak	100	0
7	240.65	43.66	-5.99	37.67	46.00	-8.33	Peak	100	0
8	264.30	47.53	-6.71	40.82	46.00	-5.18	QP	100	0
9	299.50	45.89	-6.00	39.89	46.00	-6.11	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same, so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g/n mode at channel 1, 6, 11 or 3, 6, 9 (for HT40) are almost the same below 1GHz, so that the channel 1 or 3 (for HT40) was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 25 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

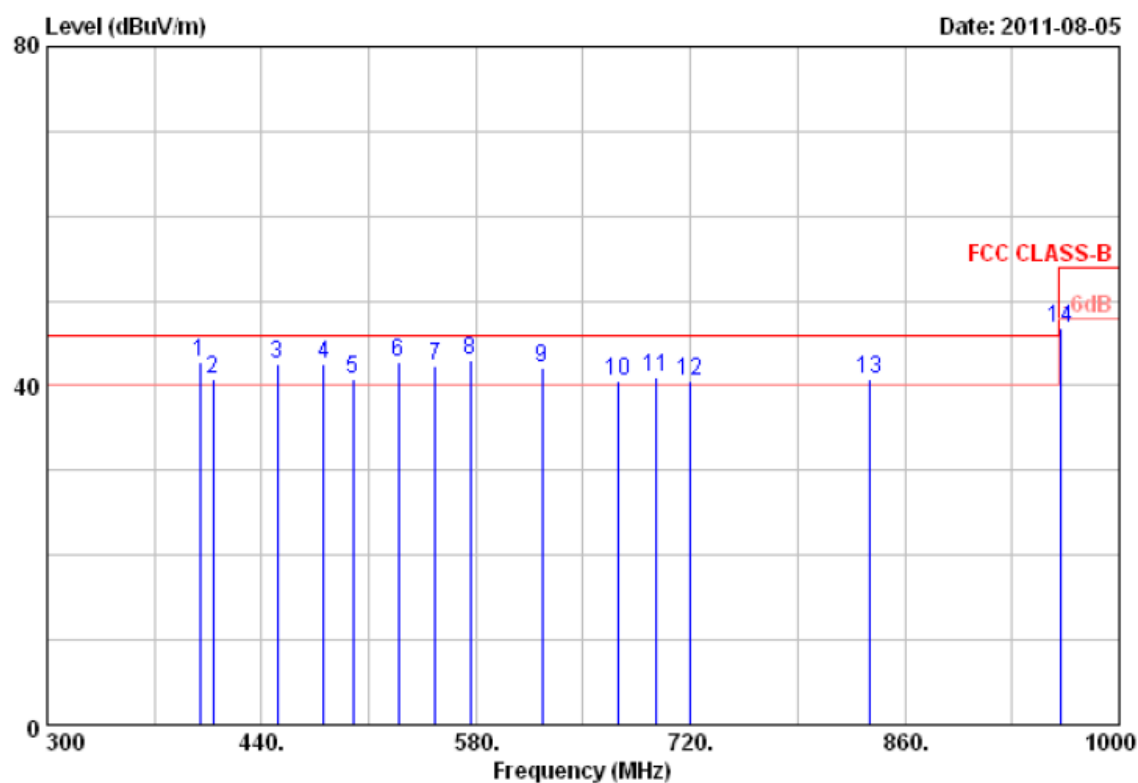

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	399.40	43.38	-0.49	42.89	46.00	-3.11	QP	100	0
2	408.50	41.90	-1.01	40.89	46.00	-5.11	QP	100	0
3	450.50	41.65	0.89	42.54	46.00	-3.46	QP	100	0
4	480.60	40.09	2.56	42.65	46.00	-3.35	QP	100	0
5	499.50	37.86	2.81	40.67	46.00	-5.33	QP	100	0
6	529.60	38.34	4.46	42.80	46.00	-3.20	QP	100	0
7	553.40	34.56	7.83	42.39	46.00	-3.61	QP	100	0
8	576.50	34.30	8.64	42.94	46.00	-3.06	QP	100	0
9	623.40	35.42	6.61	42.03	46.00	-3.97	QP	100	0
10	672.40	35.32	5.19	40.51	46.00	-5.49	QP	100	0
11	697.60	34.72	6.29	41.01	46.00	-4.99	QP	100	0




12	720.00	35.34	5.32	40.66	46.00	-5.34	QP	100	0
13	837.60	27.63	13.26	40.89	46.00	-5.11	QP	100	0
14	961.50	37.84	8.94	46.78	54.00	-7.22	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g/n mode are all the same,so the 802.11g/n mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g/n mode at channel 1,6,11 or 3,6,9(for HT40) are almost the same below 1GHz,so that the channel 1 or 3(for HT40)was chosen as representative in final test.
6. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

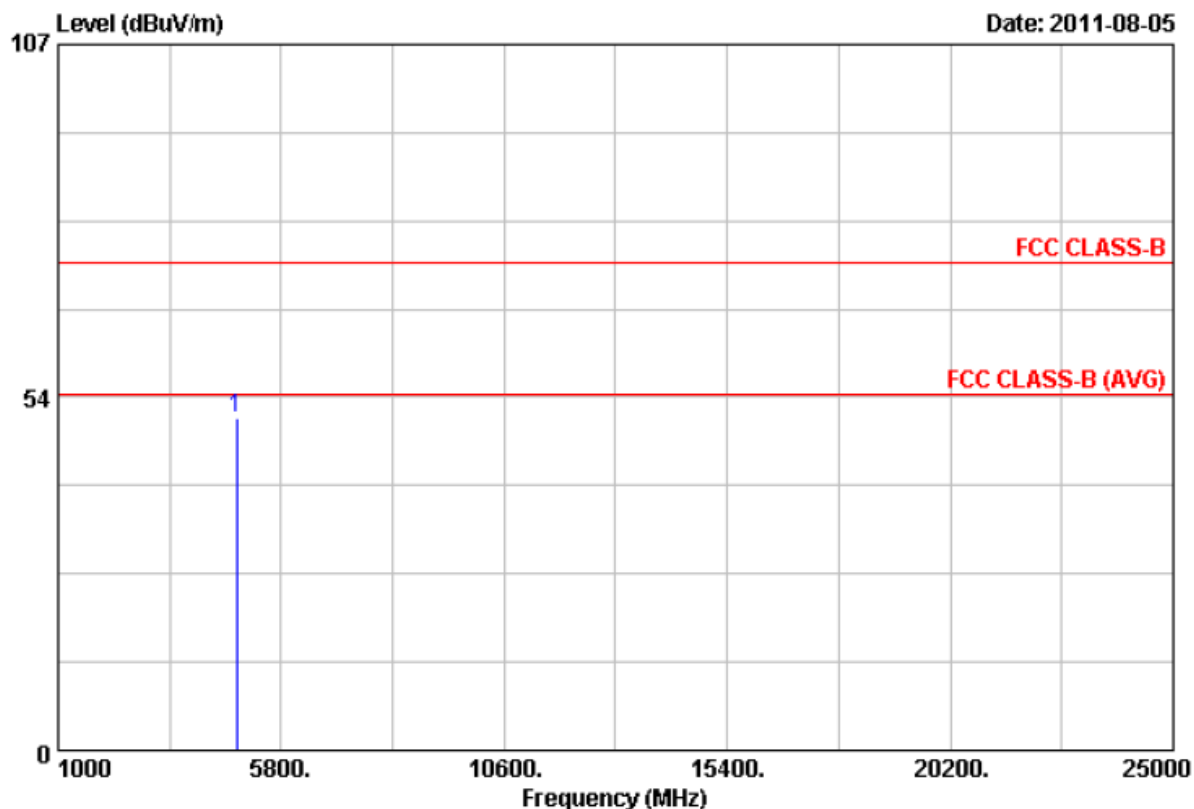


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4844.11	41.43	8.92	50.35	74.00	-23.65	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 3	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

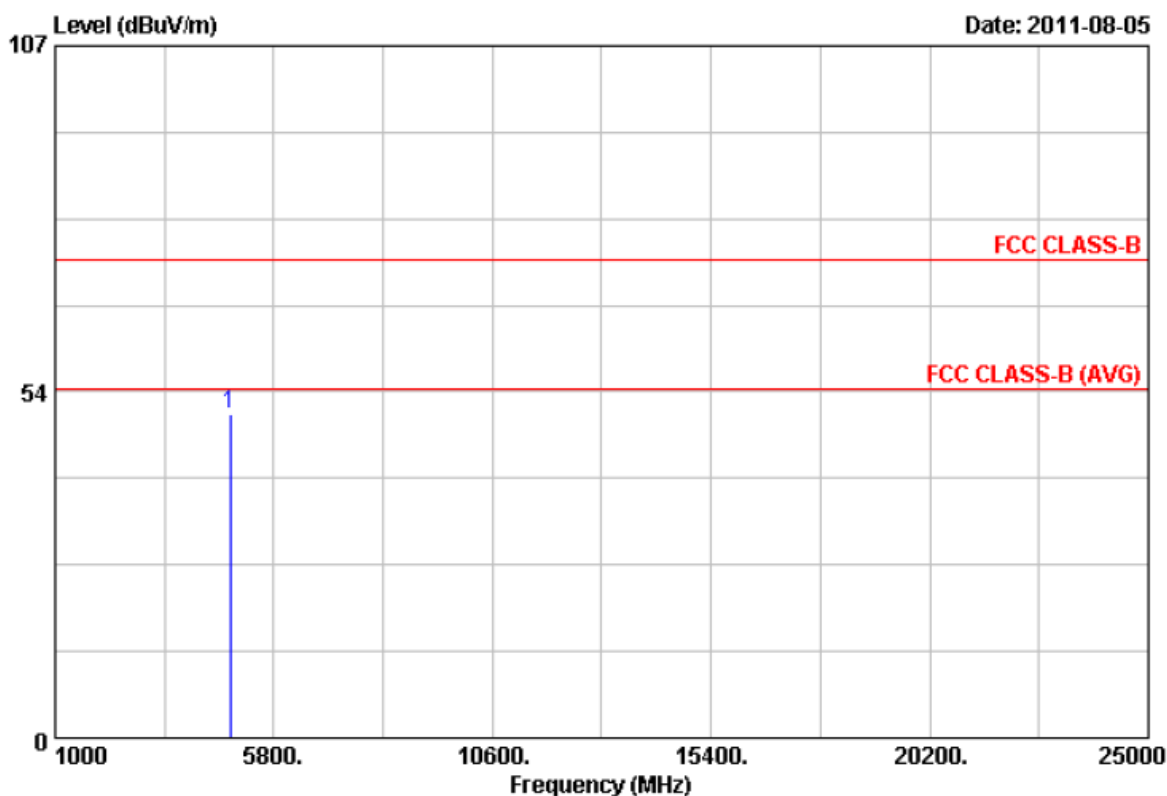


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4844.47	41.14	8.92	50.06	74.00	-23.94	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

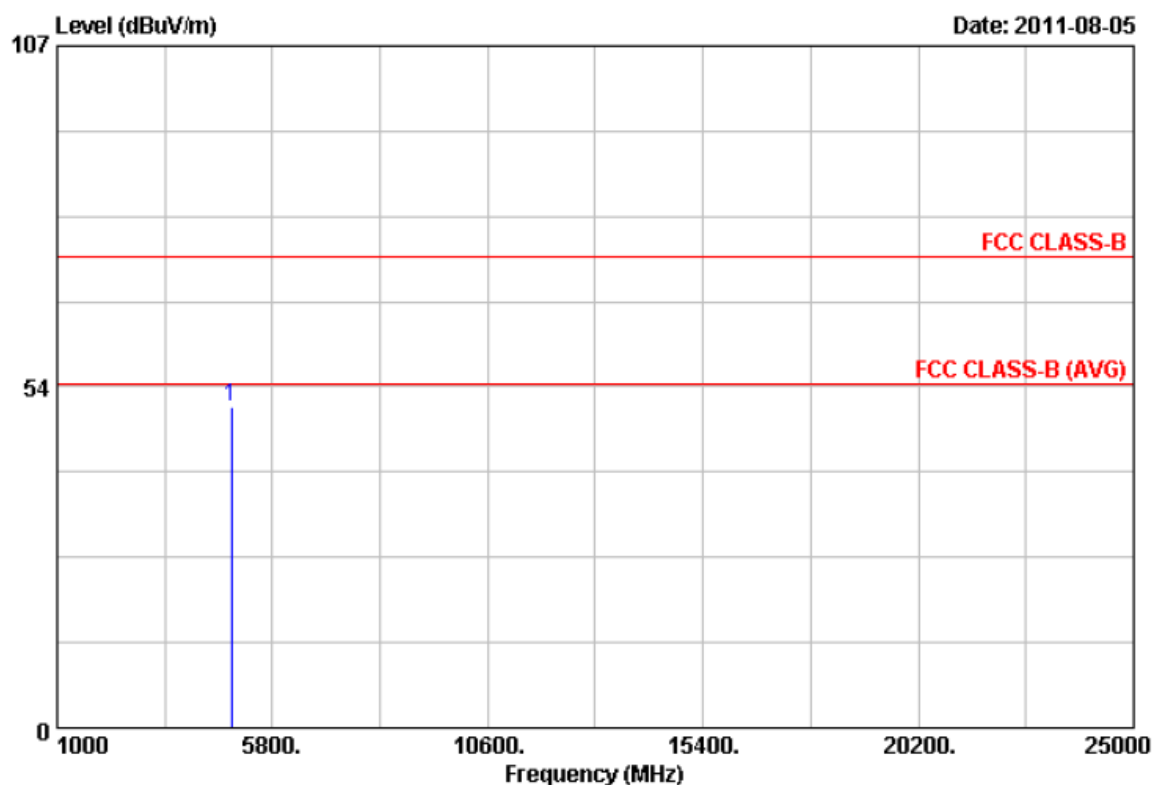


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.63	41.41	9.03	50.44	74.00	-23.56	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 6	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

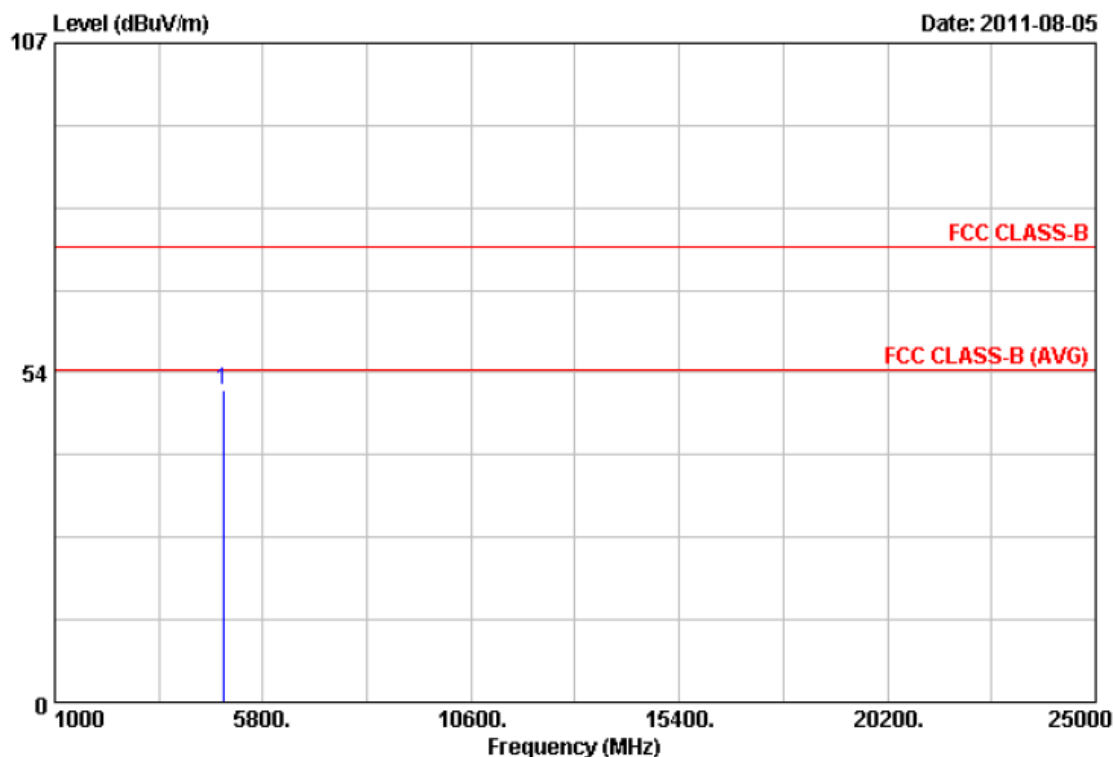


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4873.98	41.70	9.03	50.73	74.00	-23.27	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 9	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

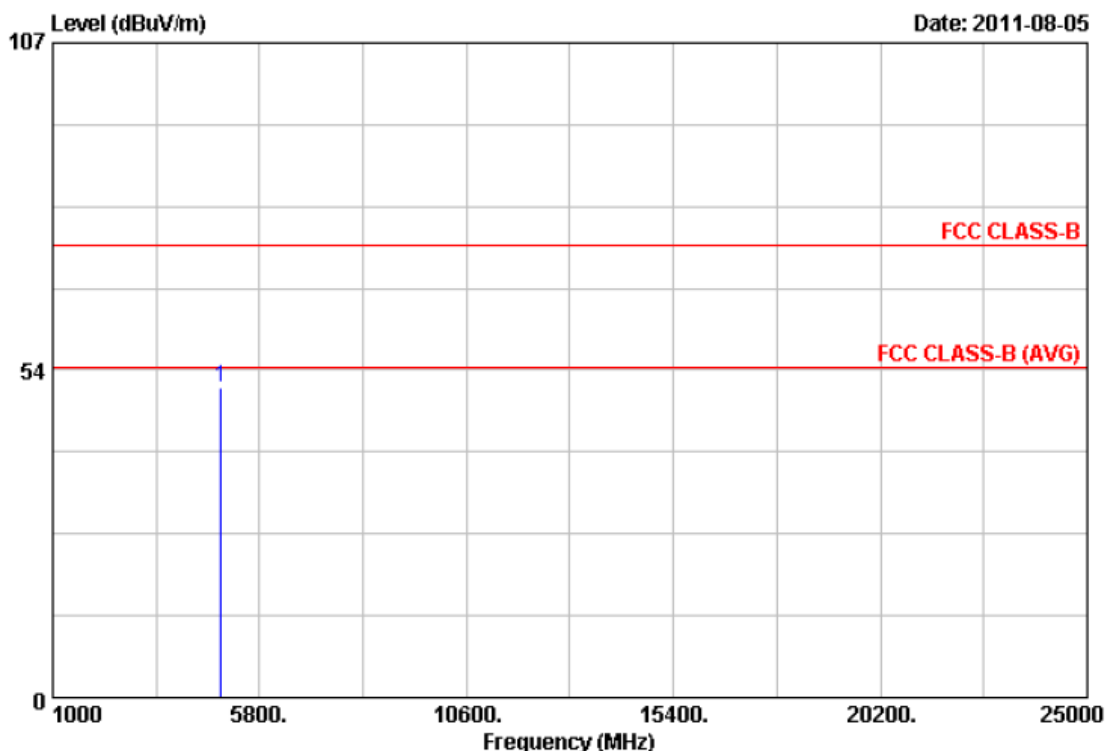


Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4903.84	41.65	9.14	50.79	74.00	-23.21	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300KHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Transmit / Receive	Temperature	: 26 °C
Operation Channel	: 9	Humidity	: 65 %
Modulation Type	: 802.11n HT40	Atmospheric Pressure	: 1000 hPa
Memo	:	Rate	: 270 Mbps

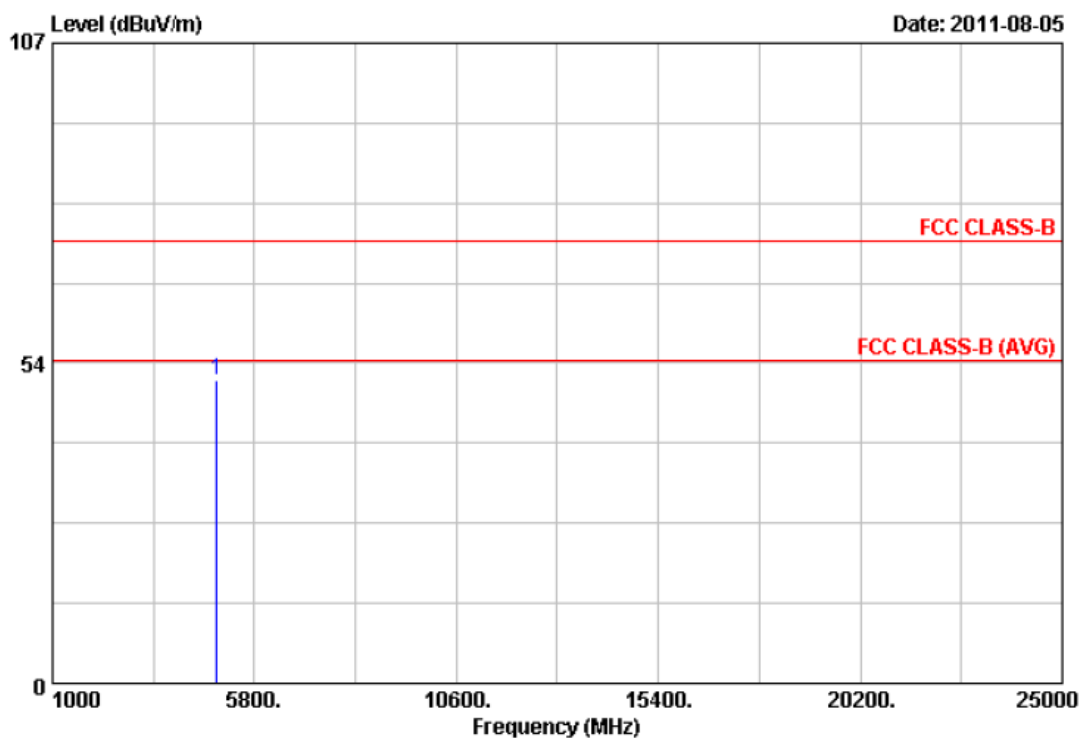

Item	Freq	Read Value	Factor	Result	Limit	Margin	Remark	Ant Pos	Tab Pos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	Deg
1	4904.30	41.40	9.15	50.55	74.00	-23.45	Peak	100	0

Notes:

1. Result = Read Value + Factor
2. Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.
7. The data is worse case.

Test engineer: Ben



6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2011/05/05	2012/05/04

6.5 Test Result and Data

Test Date: Aug. 04, 2011

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65%


Modulation Standard	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	
			ANT R	ANT L
802.11b (11Mbps)	01	2412	11.1	11.1
	06	2437	11.0	11.1
	11	2462	11.1	11.1
802.11g (54Mbps)	01	2412	15.7	15.7
	06	2437	15.7	15.8
	11	2462	15.7	15.7
802.11n HT20 (130Mbps)	01	2412	15.0	17.2
	06	2437	15.1	16.4
	11	2462	15.1	17.2
802.11n HT40 (270Mbps)	03	2422	36.2	35.6
	06	2437	36.2	36.2
	09	2452	36.2	35.2



Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 01

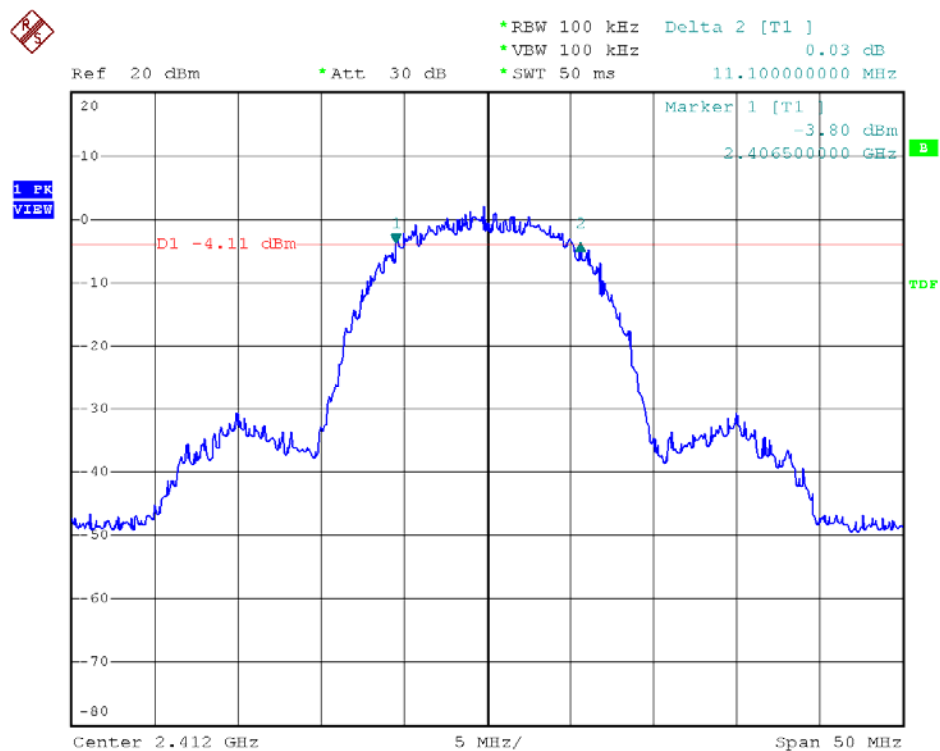


Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 06

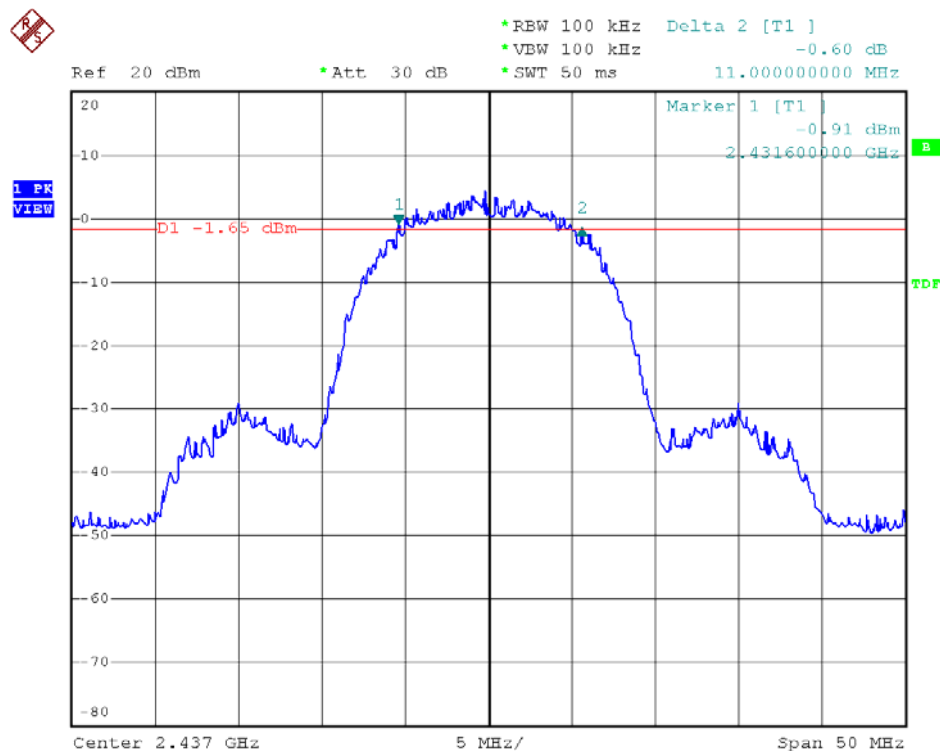




Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 11

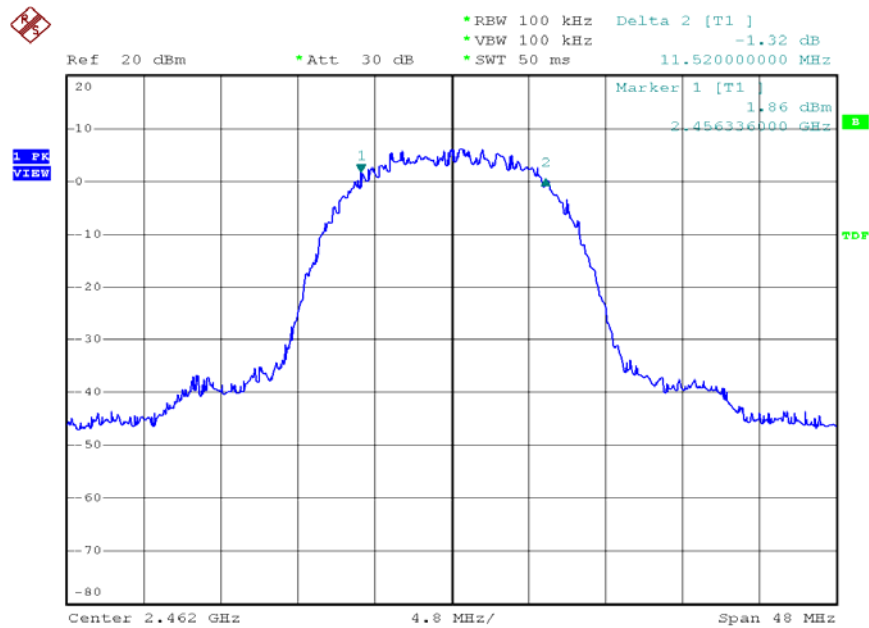


Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 01

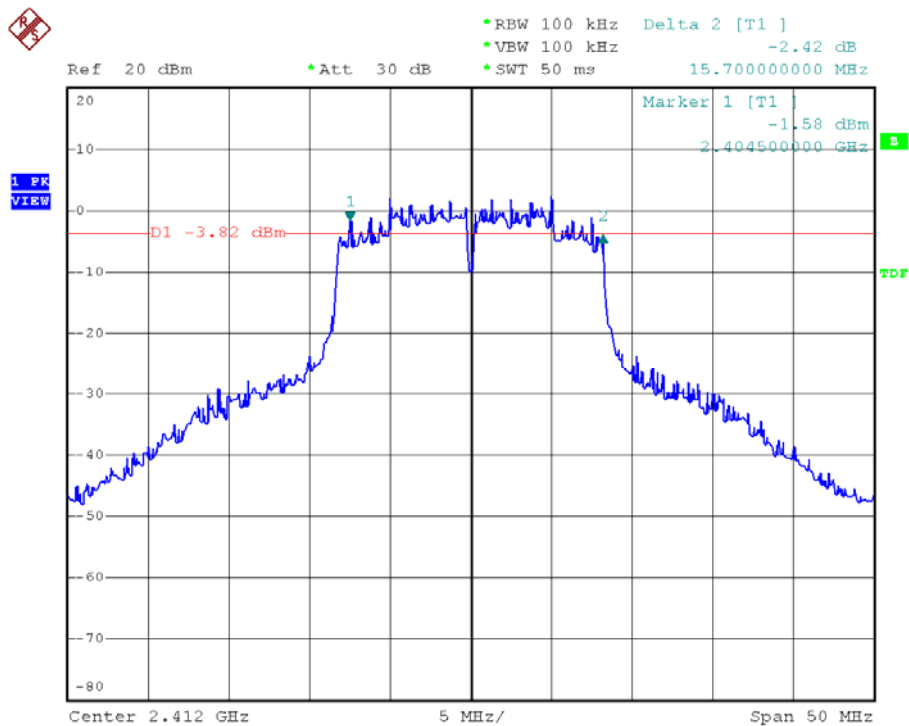




Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 06

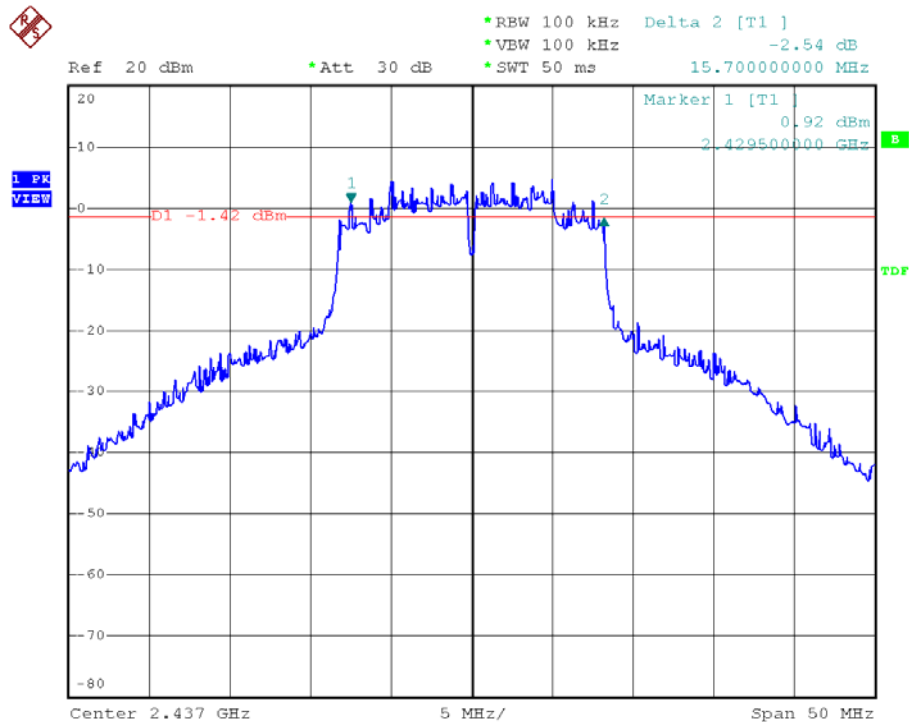


Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 11

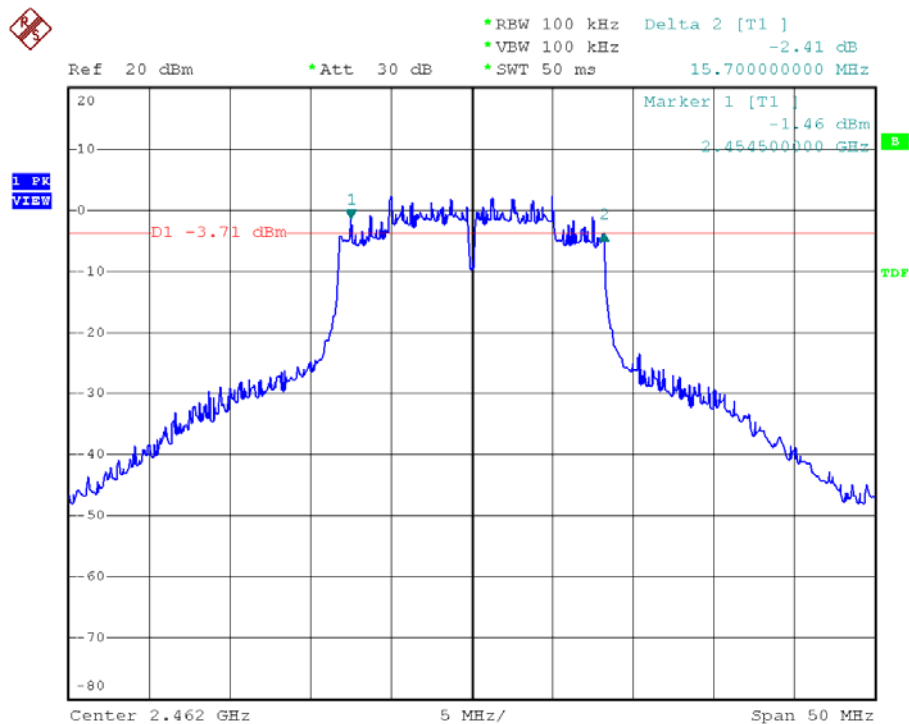




Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 01

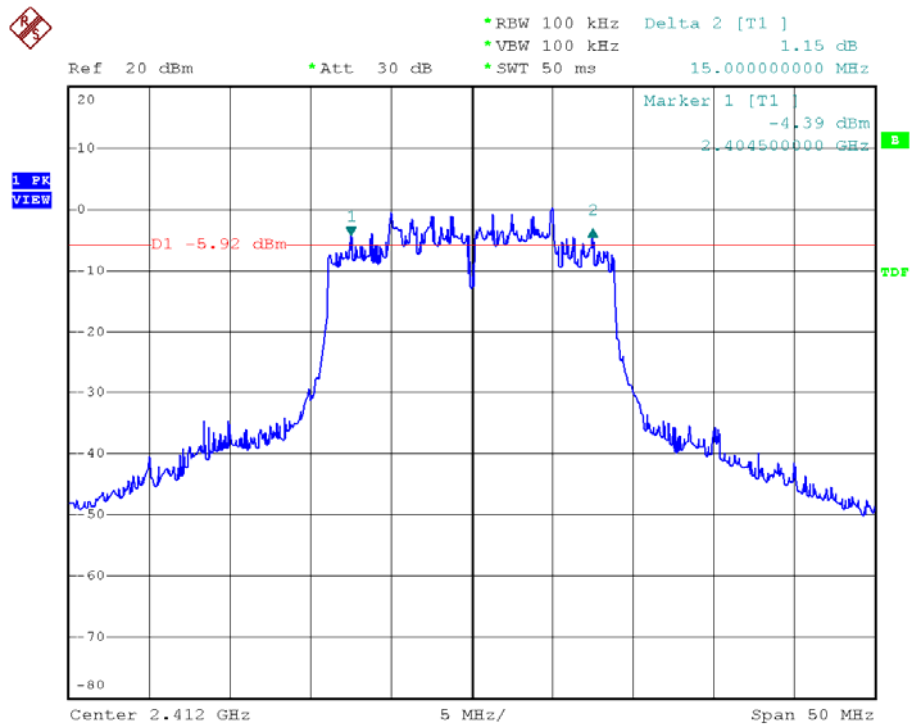


Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 06

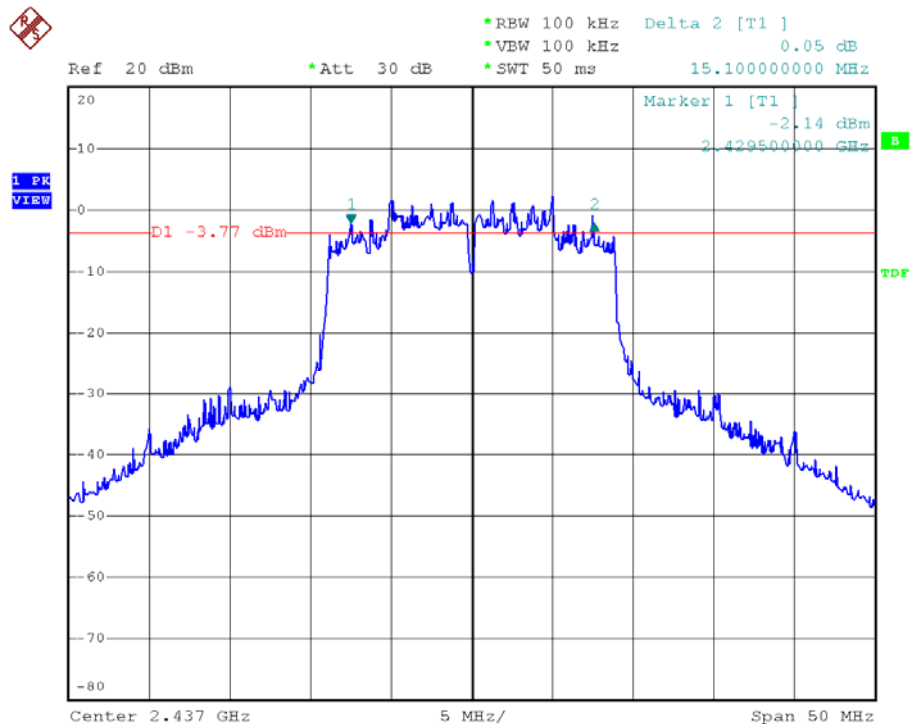




Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 11

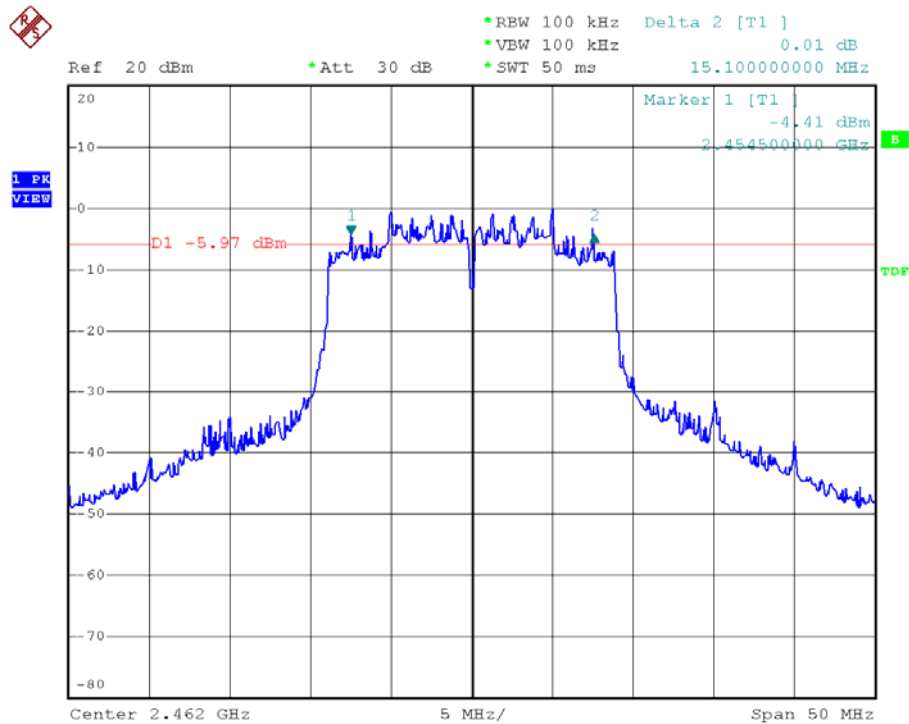


Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 03

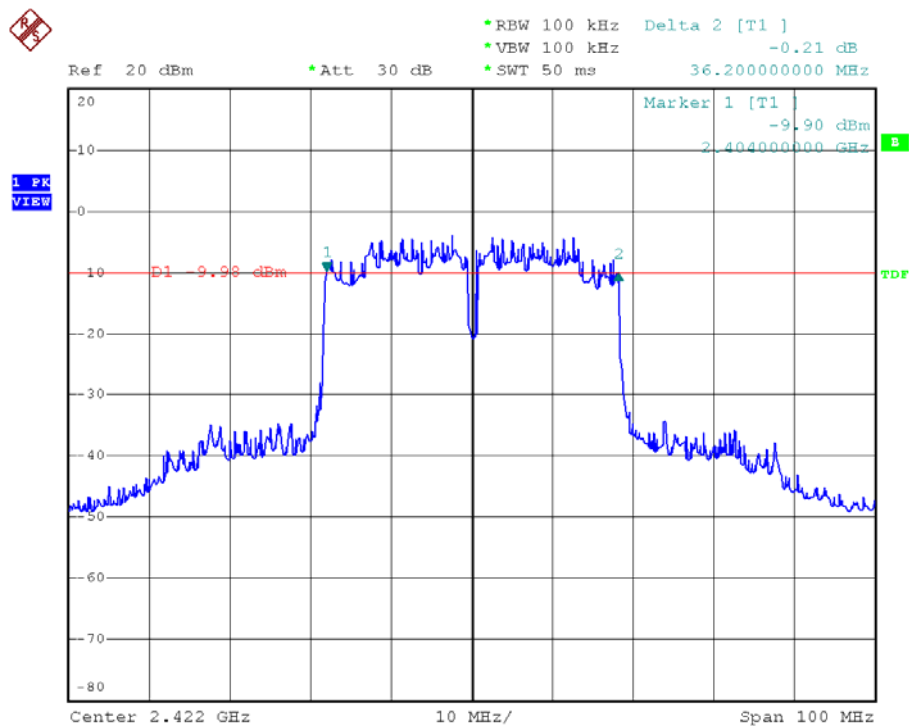




Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 06

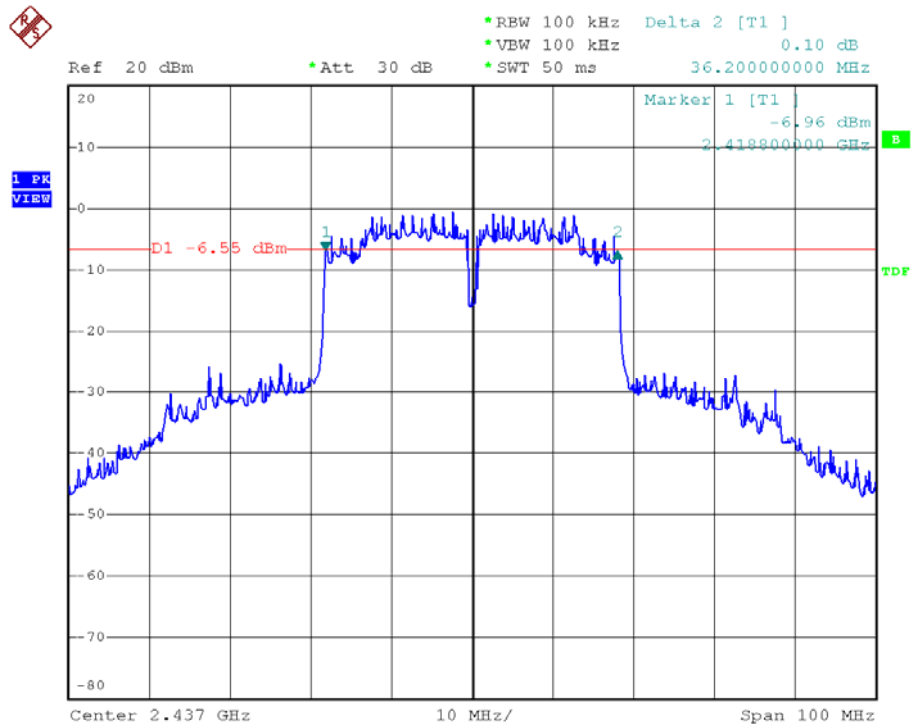


Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 09

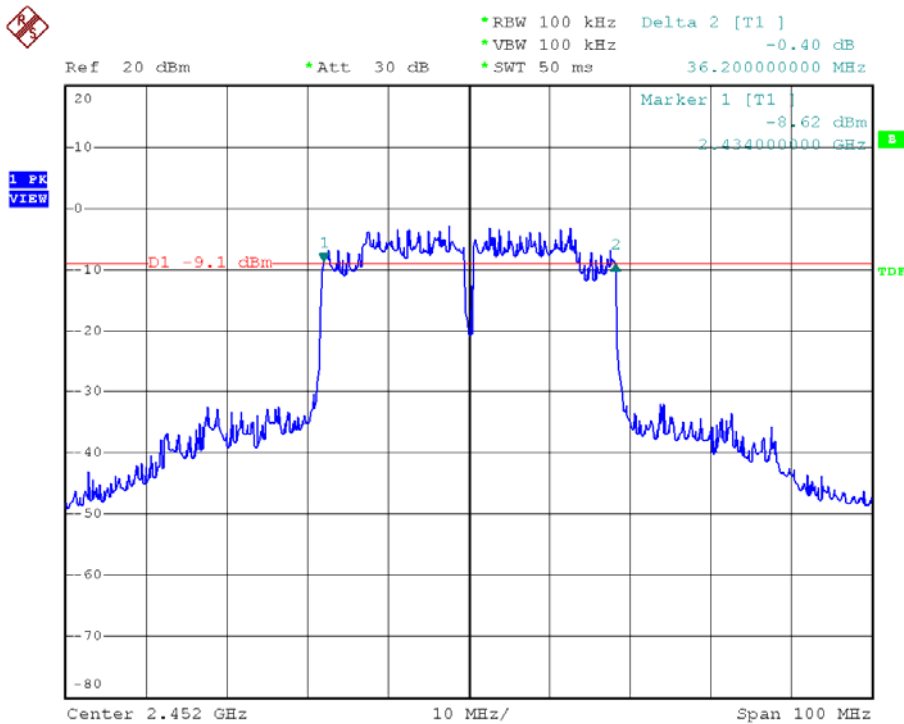




Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 01

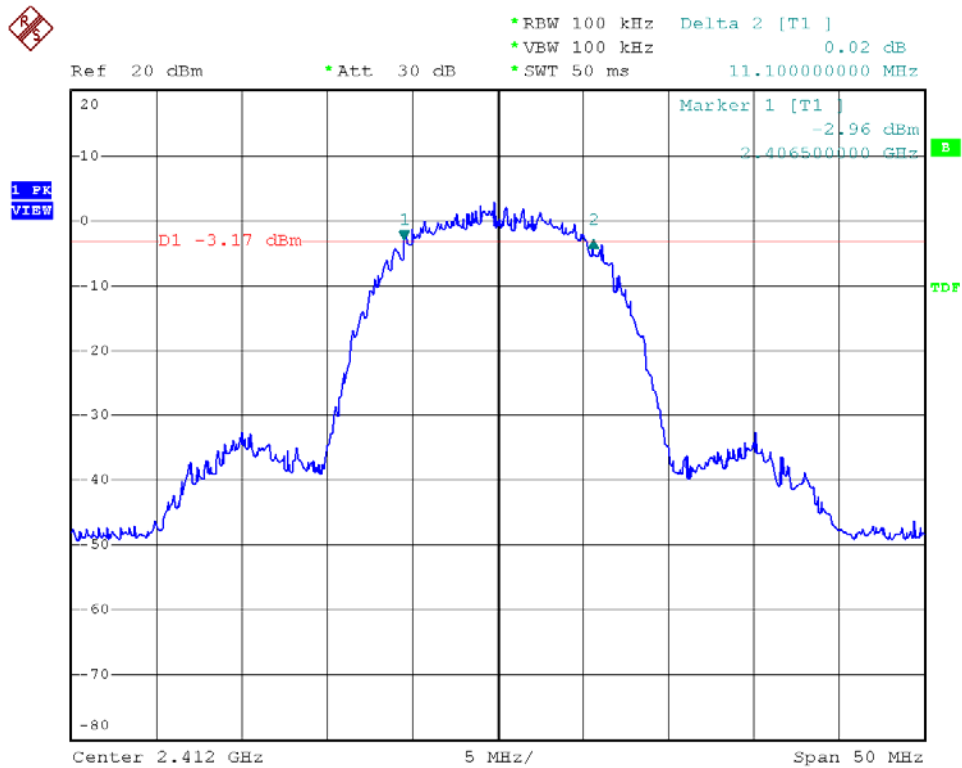


Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 06

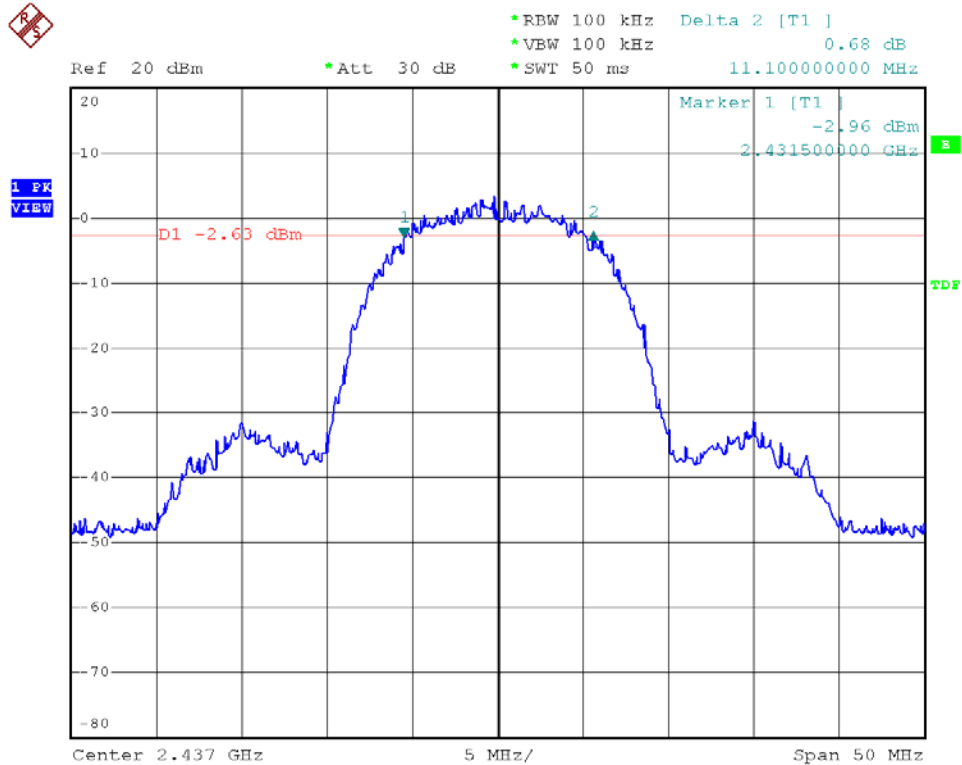




Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 11

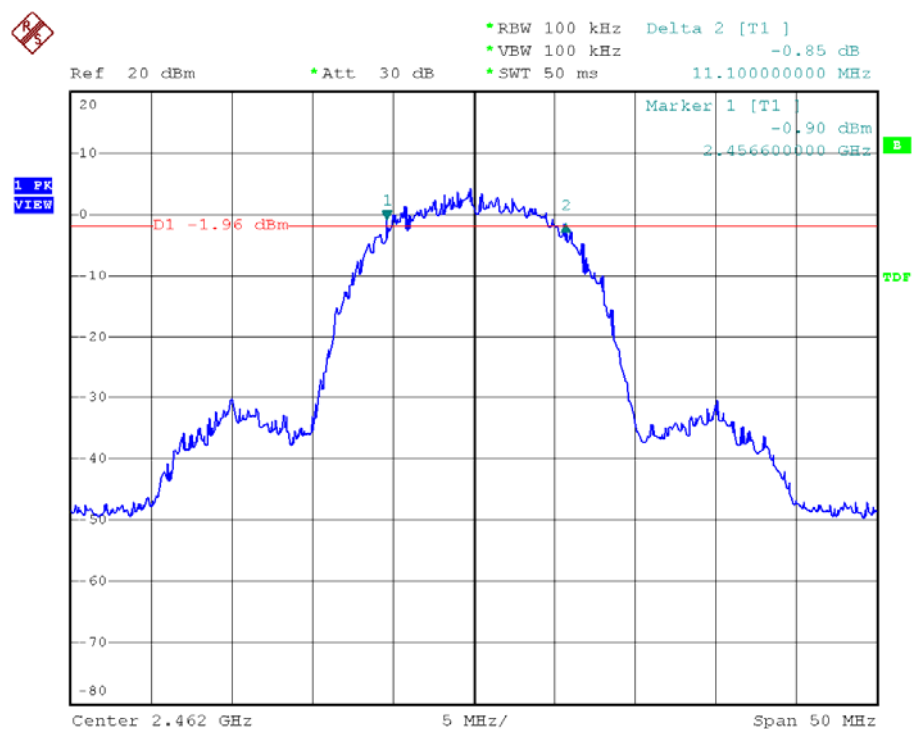


Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 01

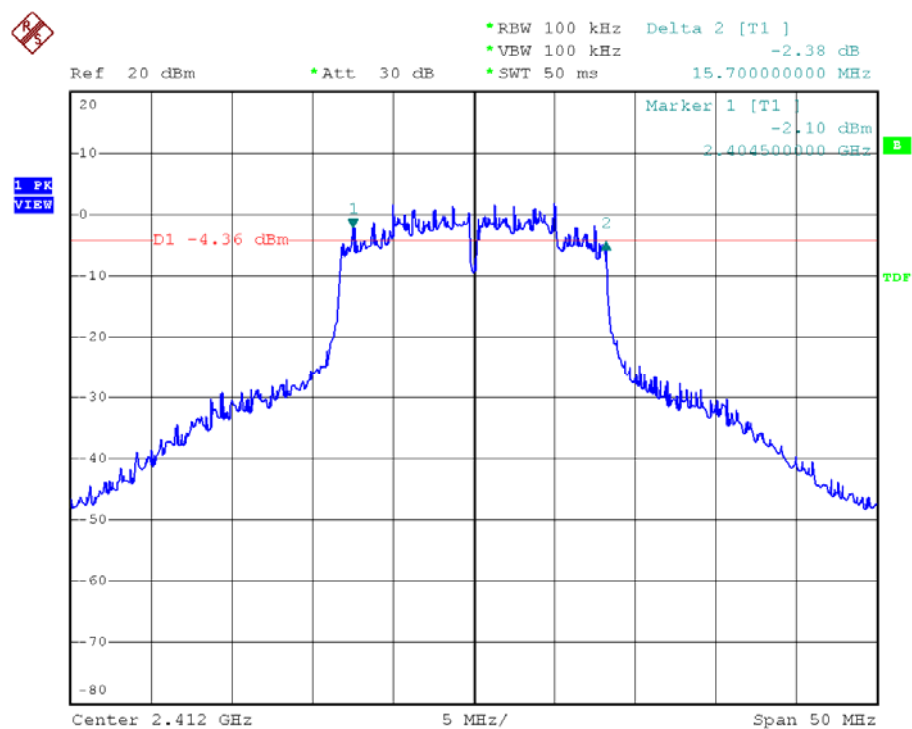




Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 06

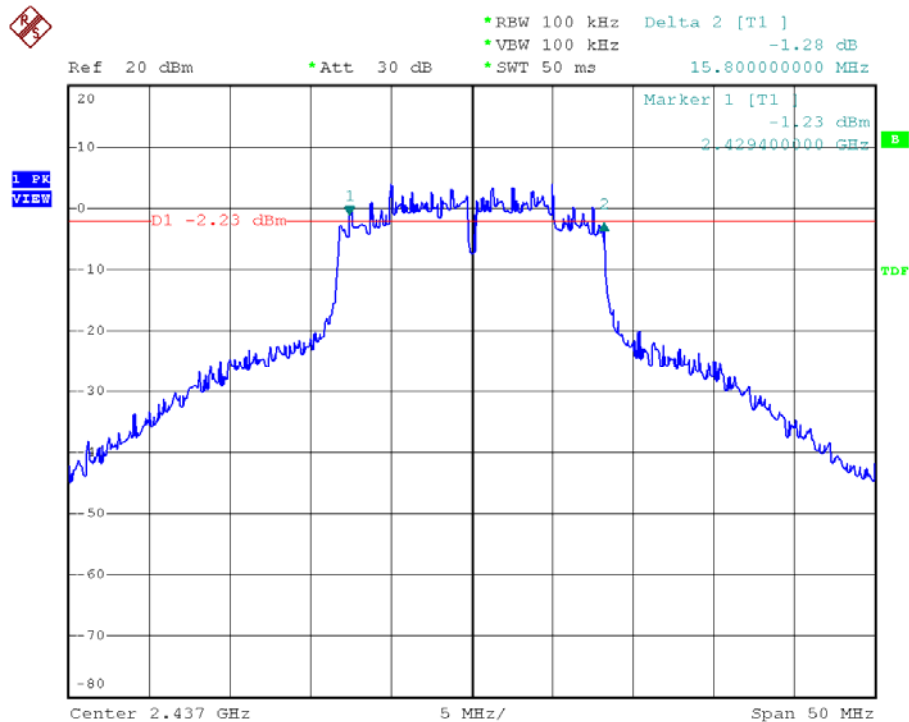


Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 11

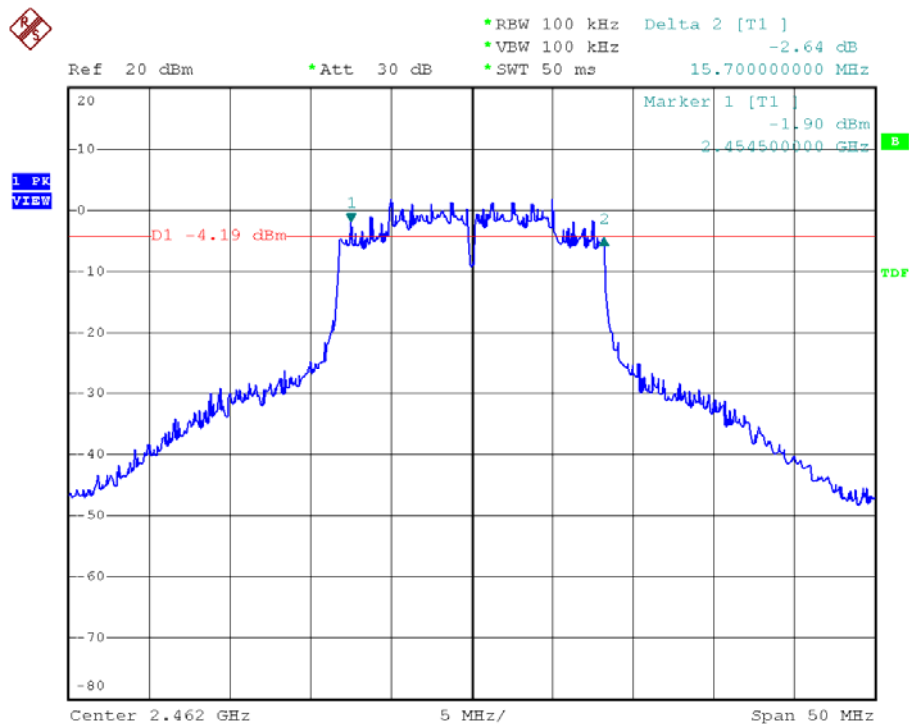




Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 01

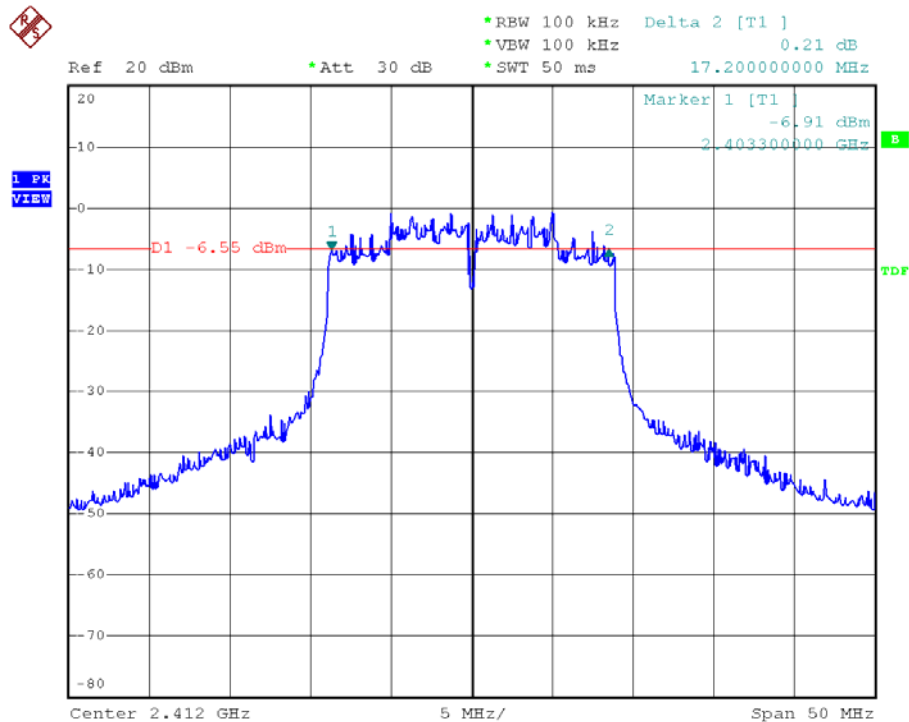


Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 06

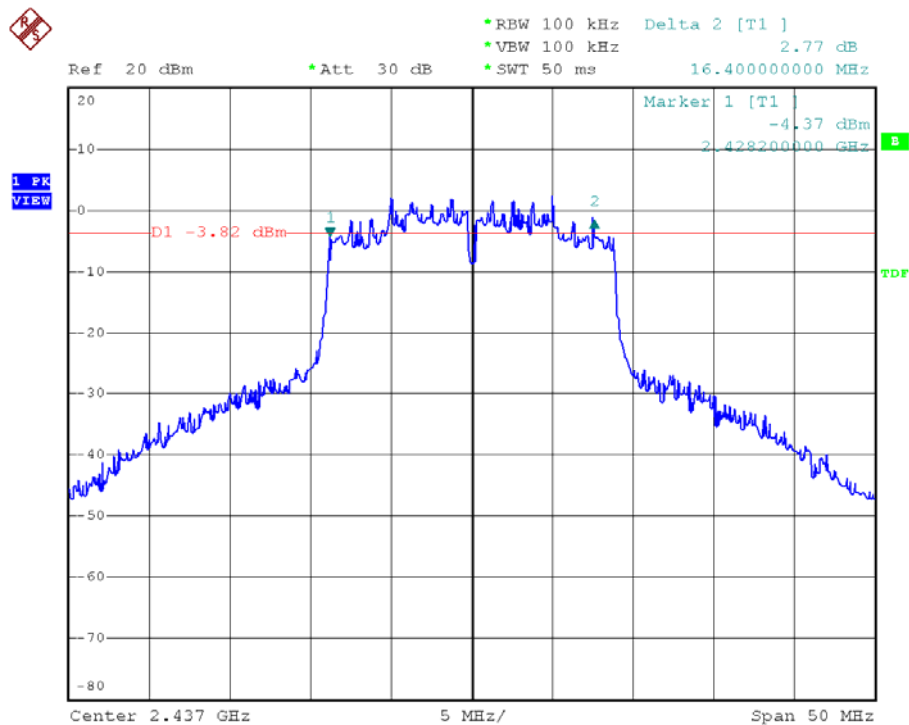




Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 11

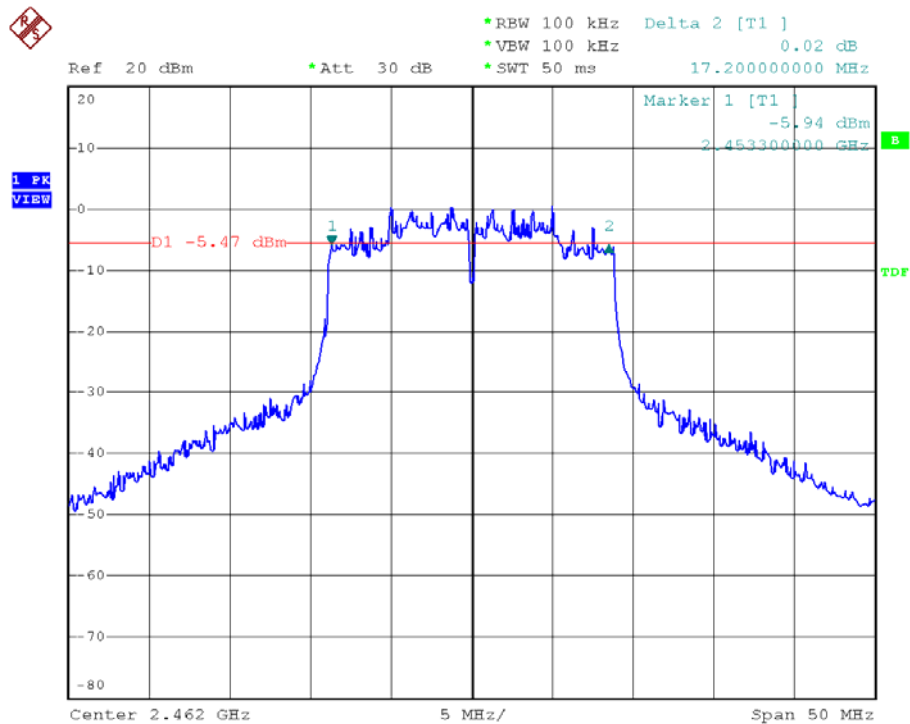


Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 03

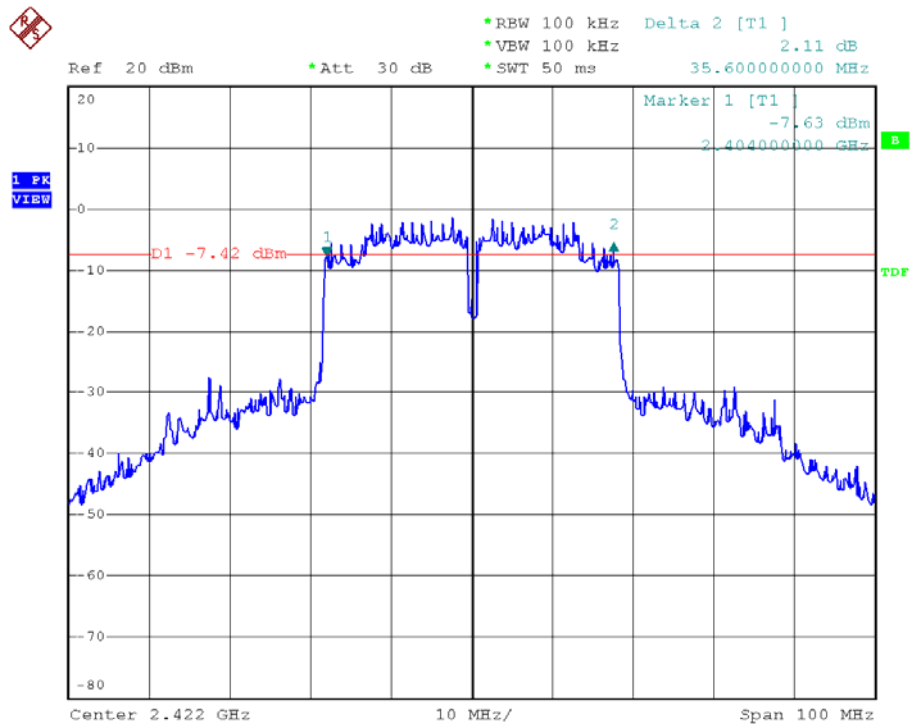




Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 06

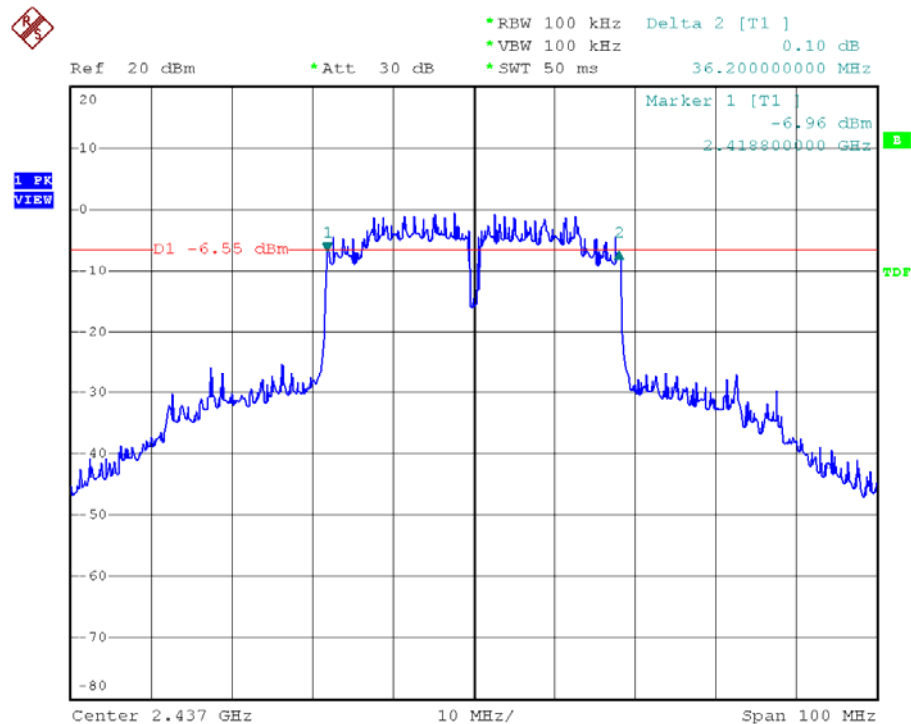

Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 09

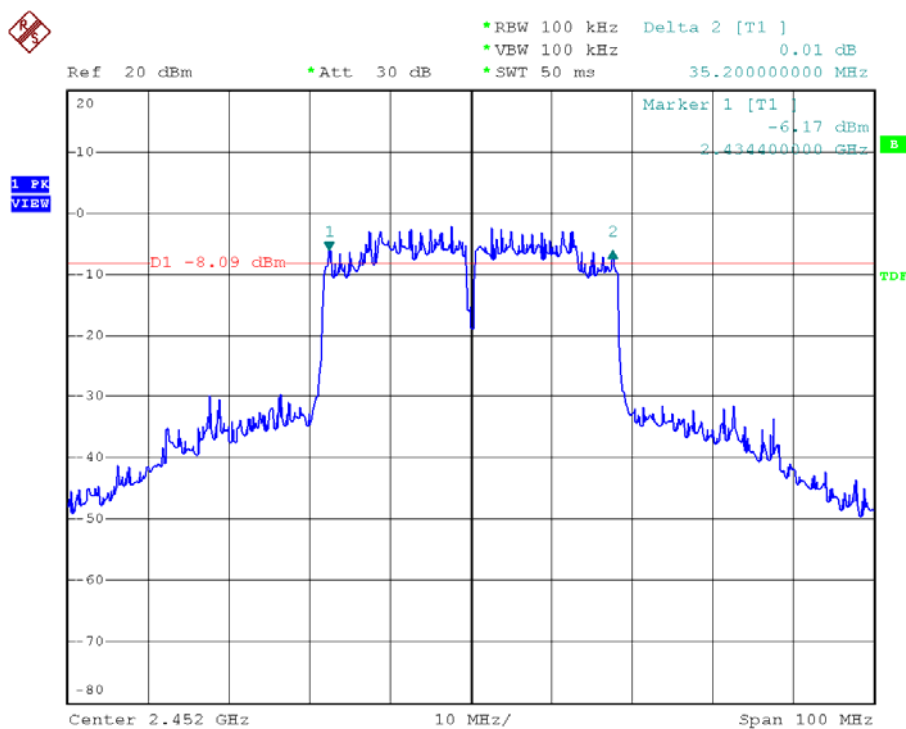



7. Band Edges Measurement


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2011/05/05	2012/05/04

7.5 Test Result and Data

Test Date: Aug. 04, 2011

Temperature: 25



Atmospheric pressure: 1020 hPa

Humidity: 65%

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)		maximum value (dBm)	
			ANT R	ANT L	ANT R	ANT L
802.11b (11Mbps)	01	2412	2397.0	2397.0	-29.89	-34.20
	11	2462	2860.0	2860.0	-49.05	-48.02
802.11g (54Mbps)	01	2412	2399.6	2399.6	-26.14	-27.89
	11	2462	2483.7	2483.7	-43.72	-44.57
802.11n HT20 (130Mbps)	01	2412	2397.0	2399.4	-31.69	-32.03
	11	2462	2483.7	2483.7	-42.59	-44.64
802.11n HT40 (270Mbps)	03	2422	2389.6	2398.2	-28.75	-26.63
	09	2452	2484.5	2484.5	-30.10	-28.78





Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 01

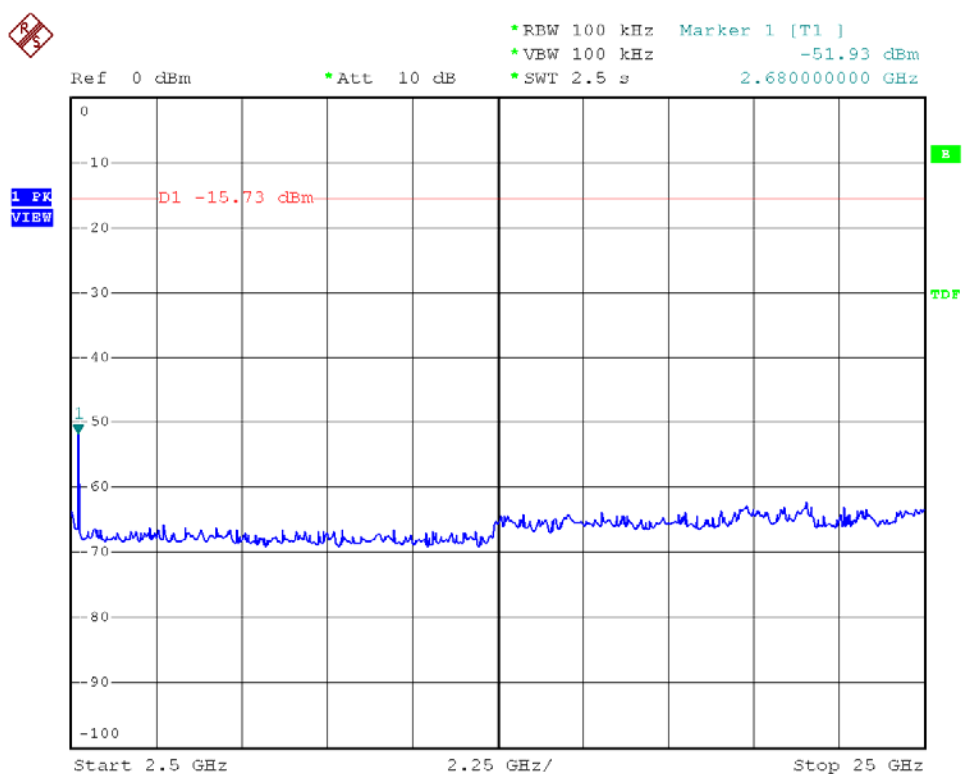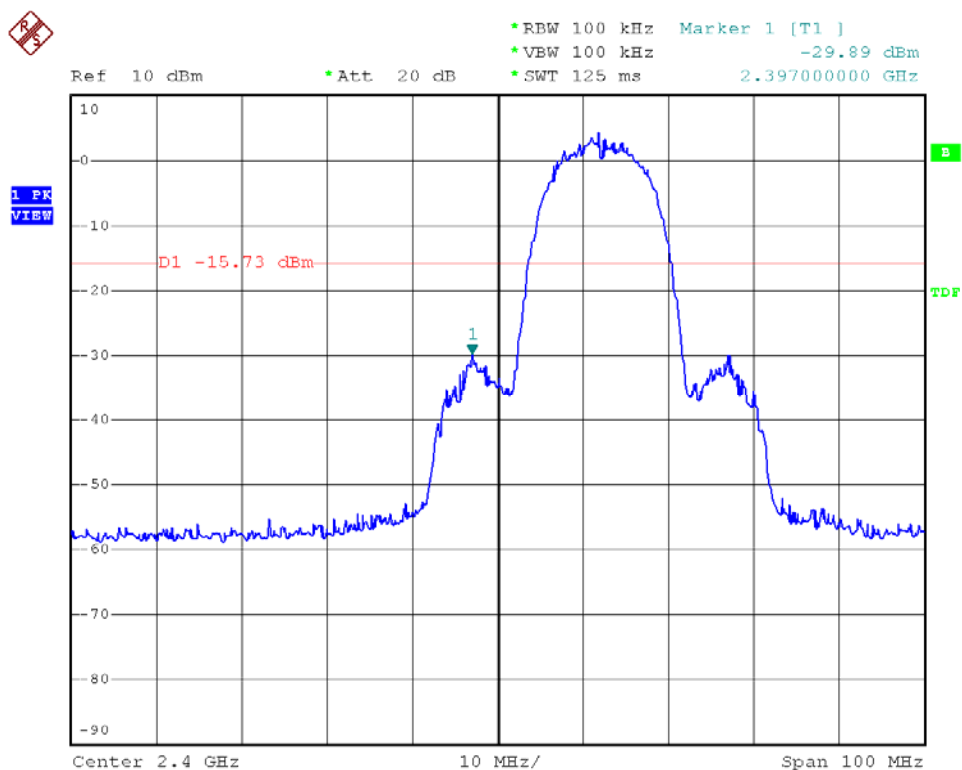





Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 11

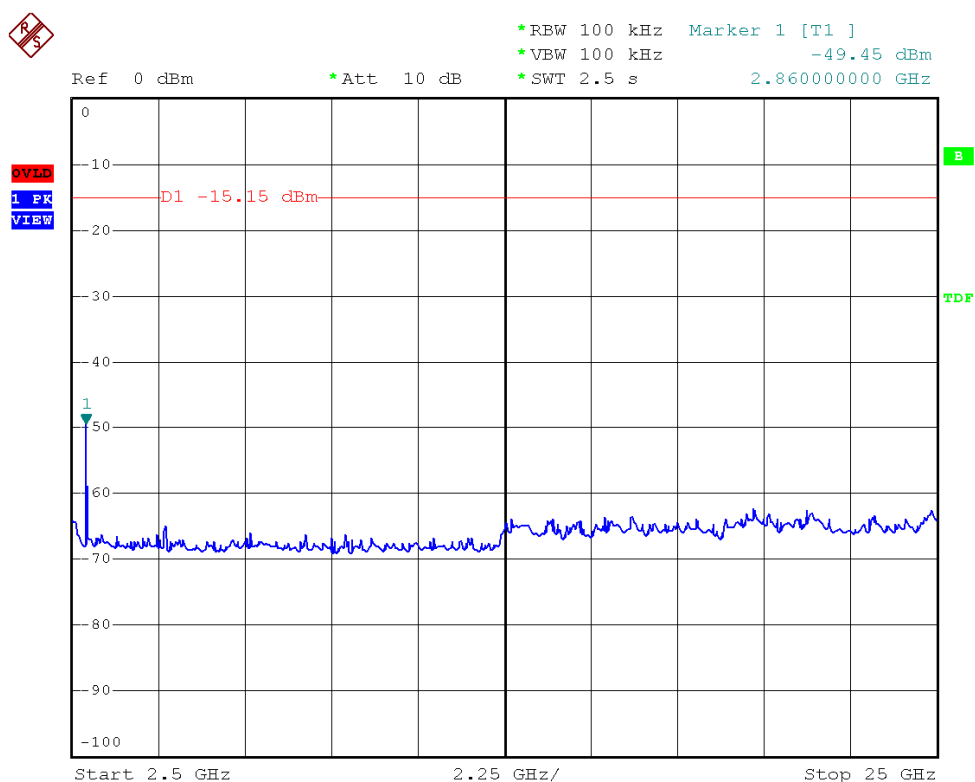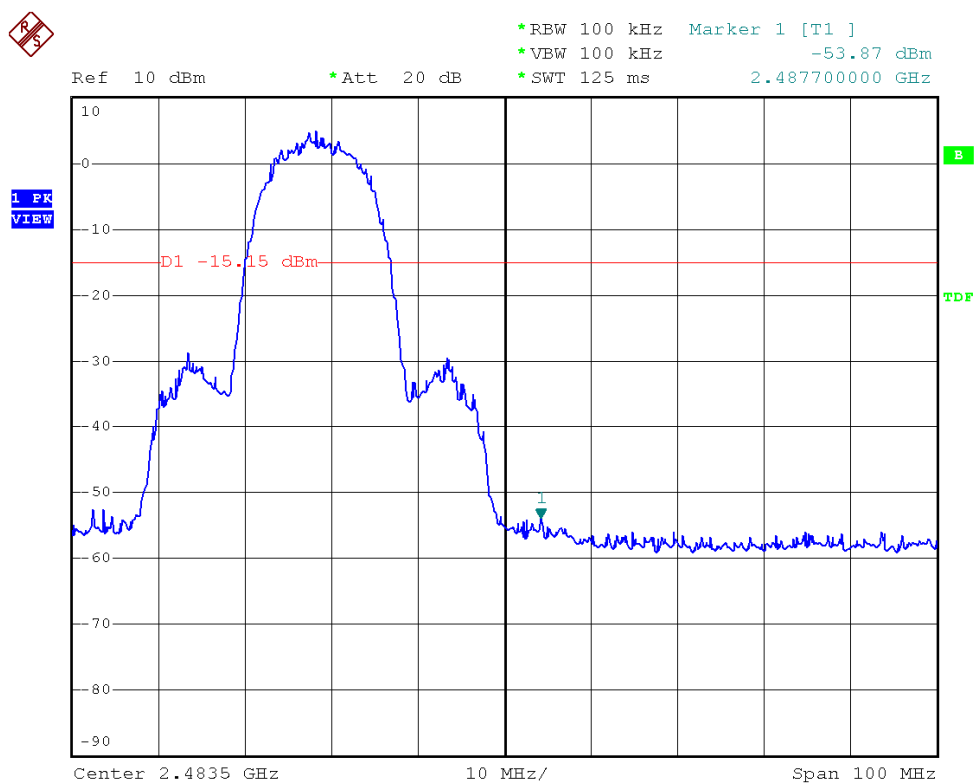





Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 01

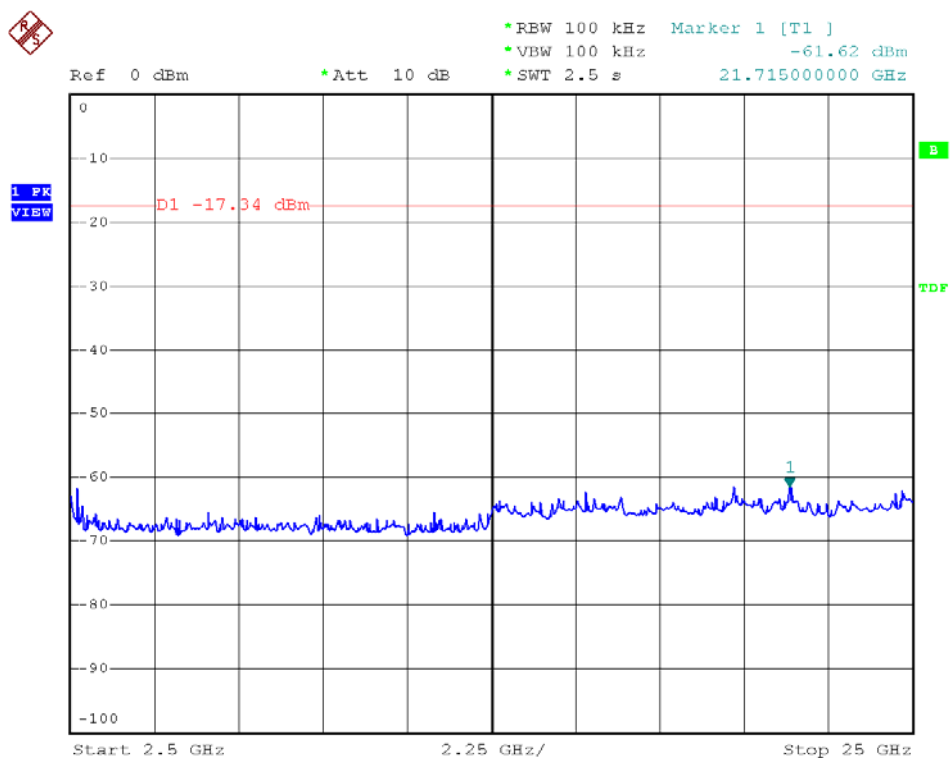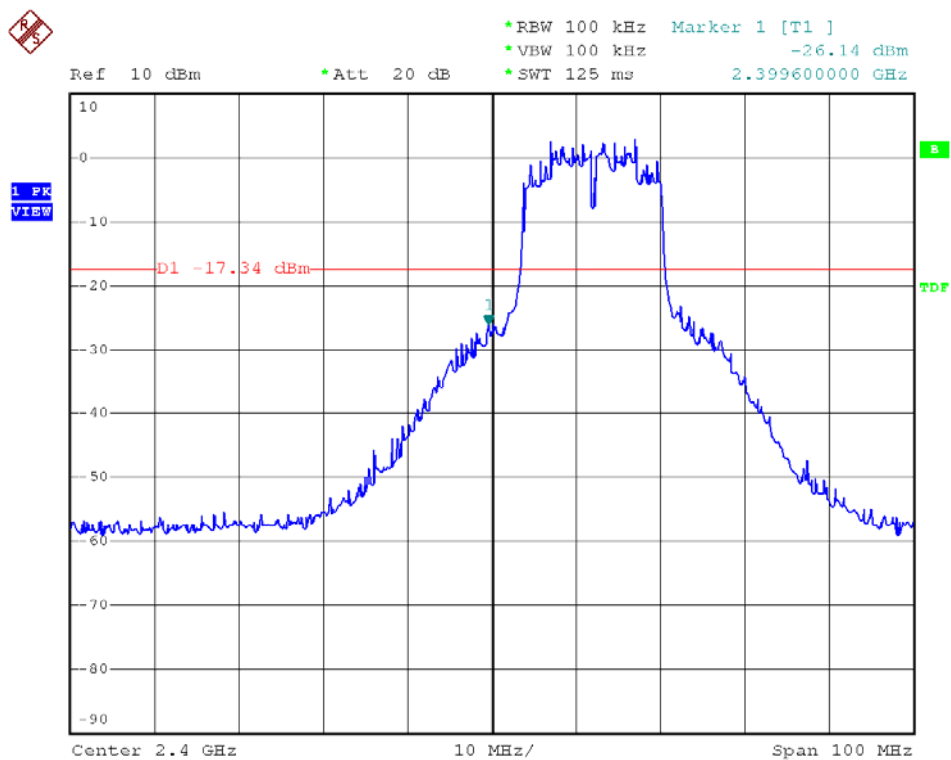





Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 11

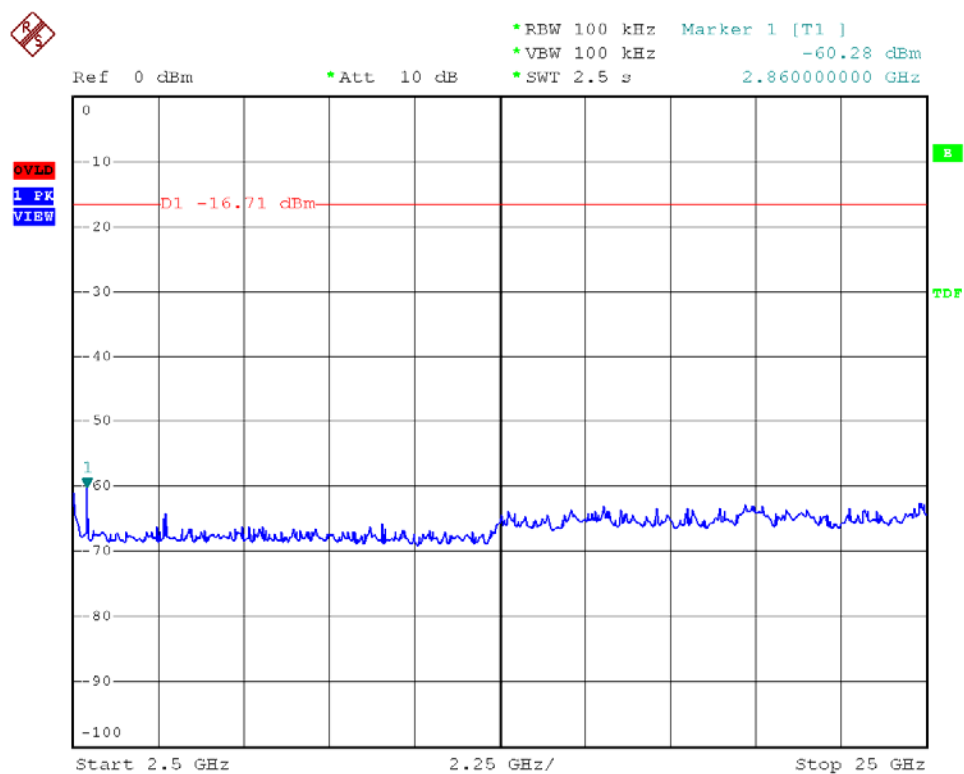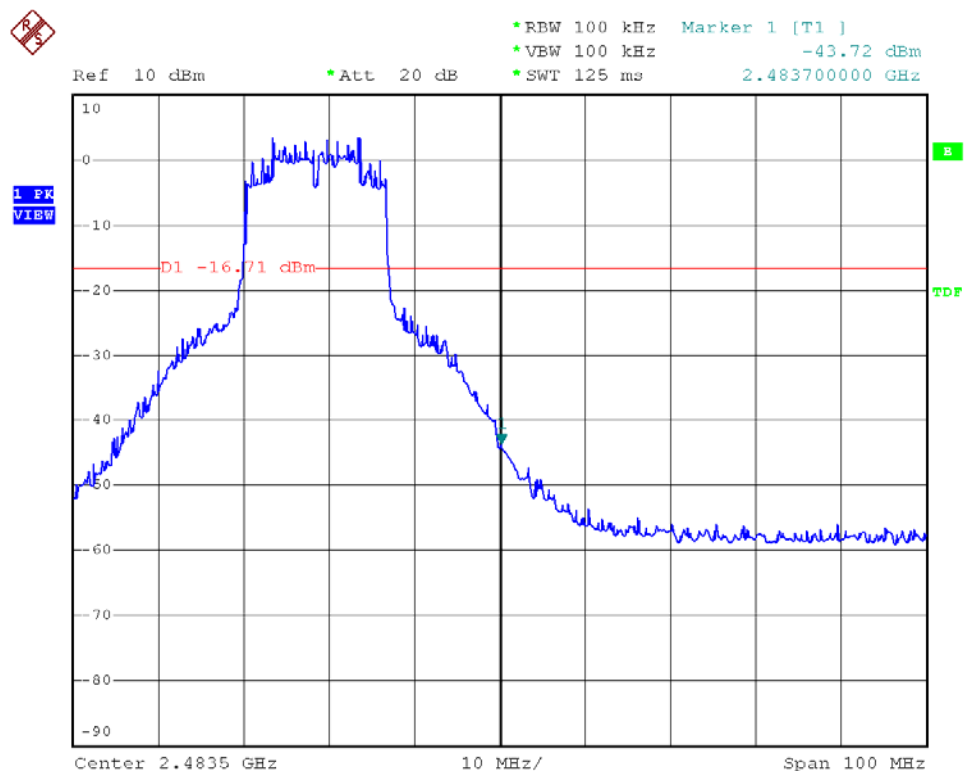





Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 01

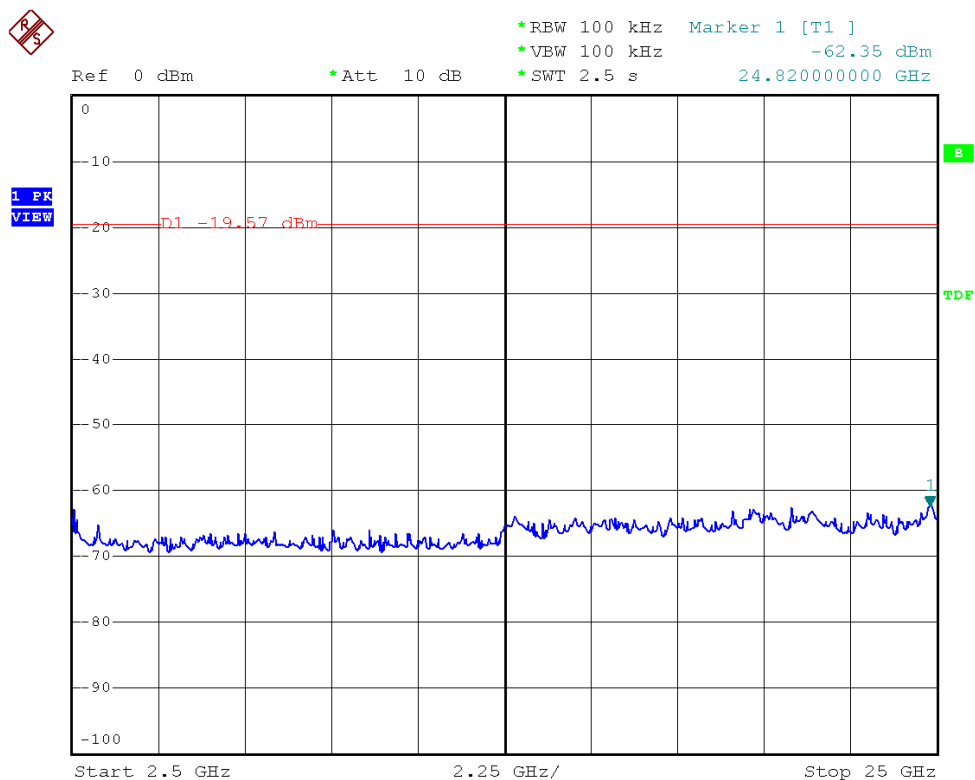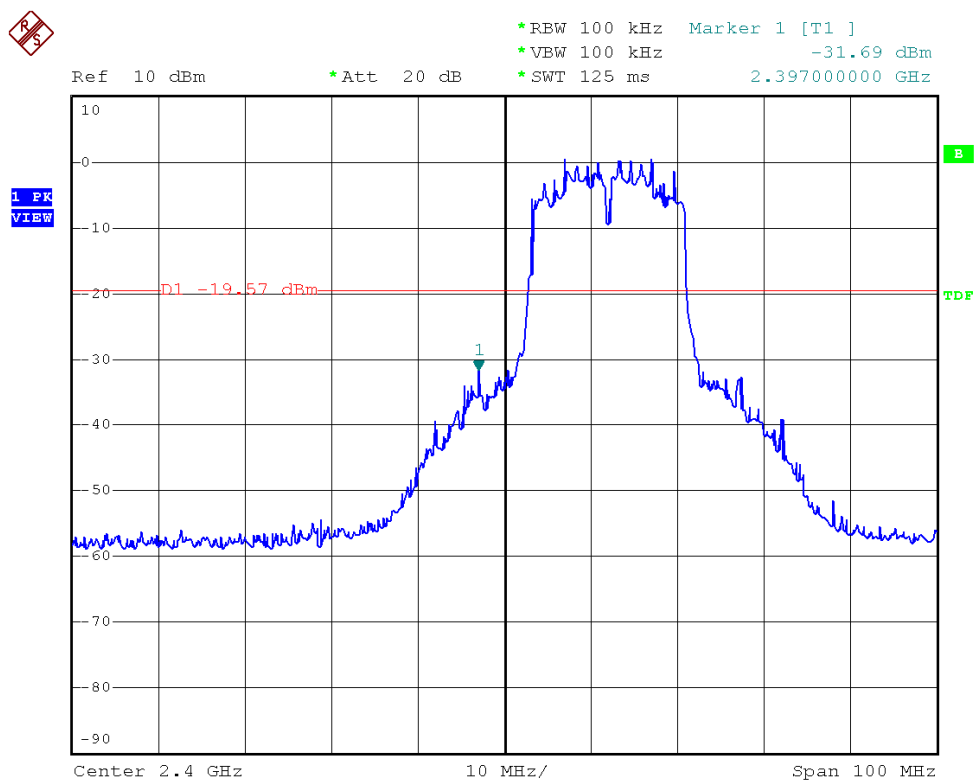





Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 11

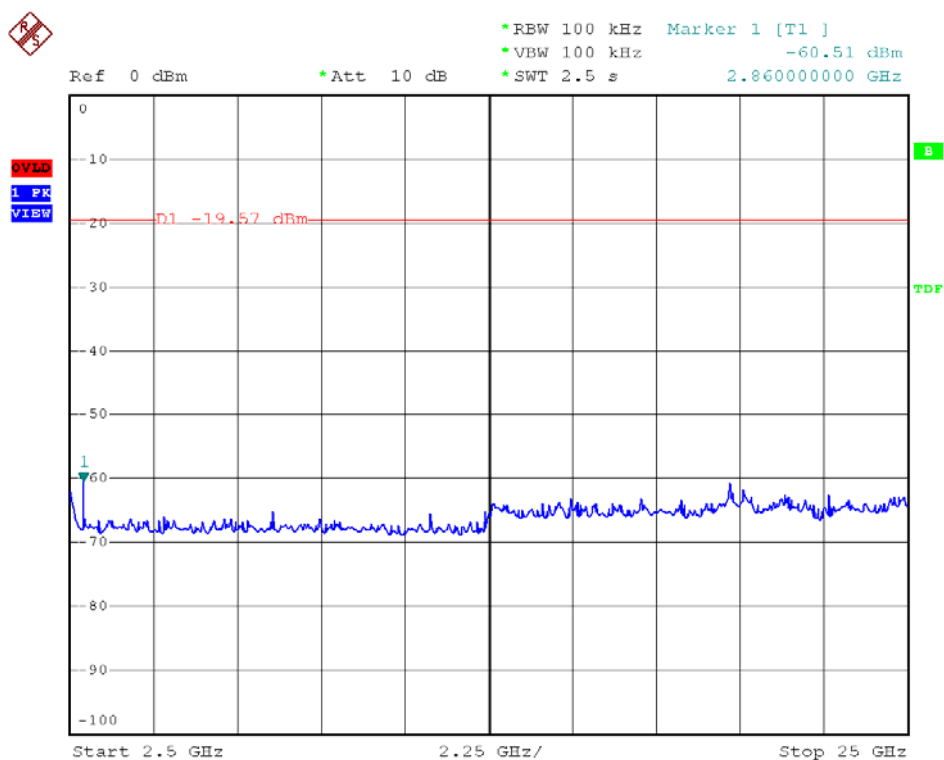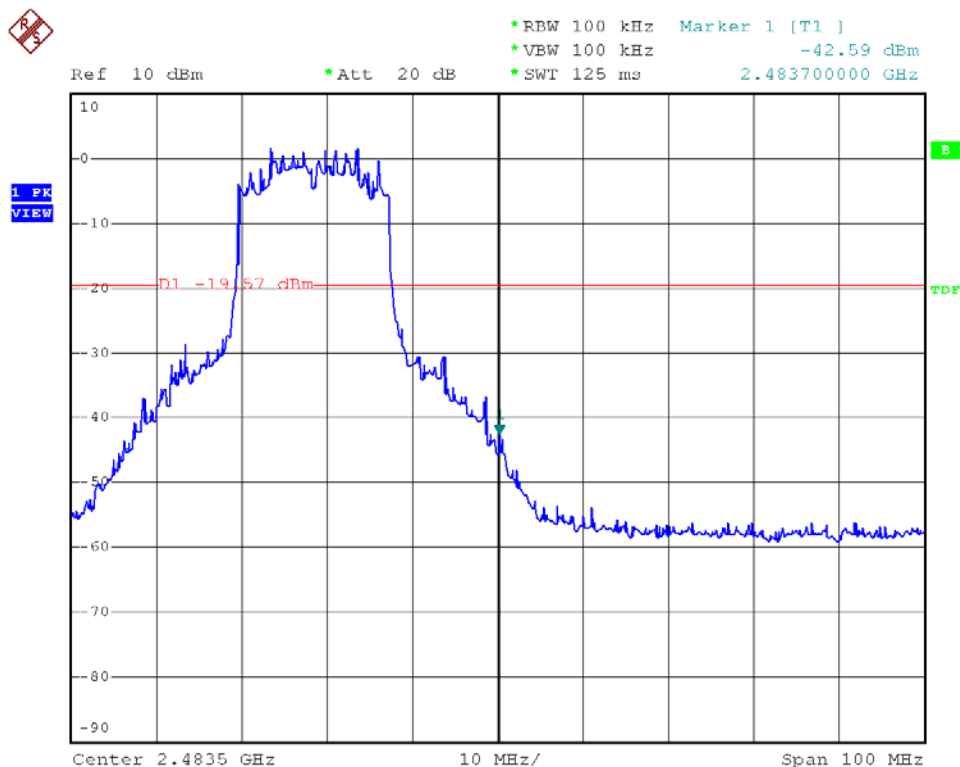





Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 03

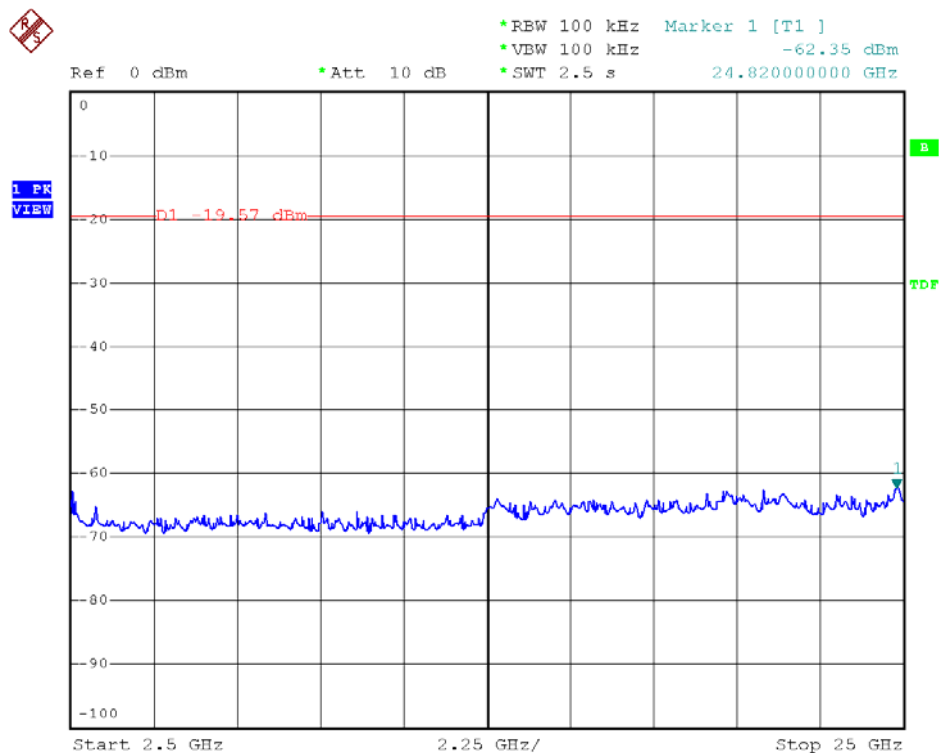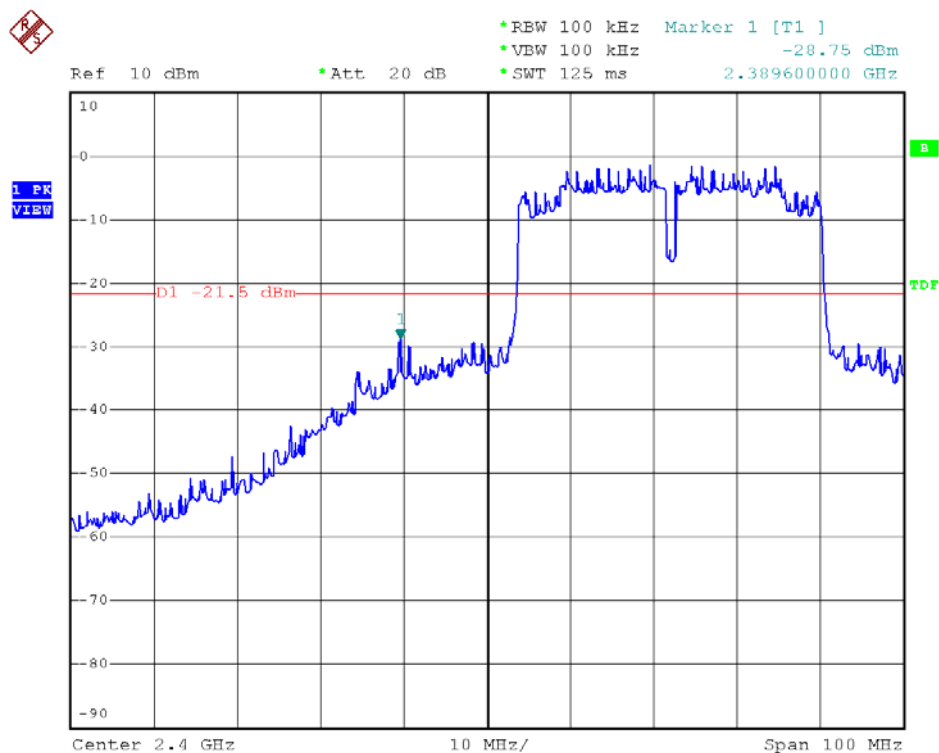





Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 09

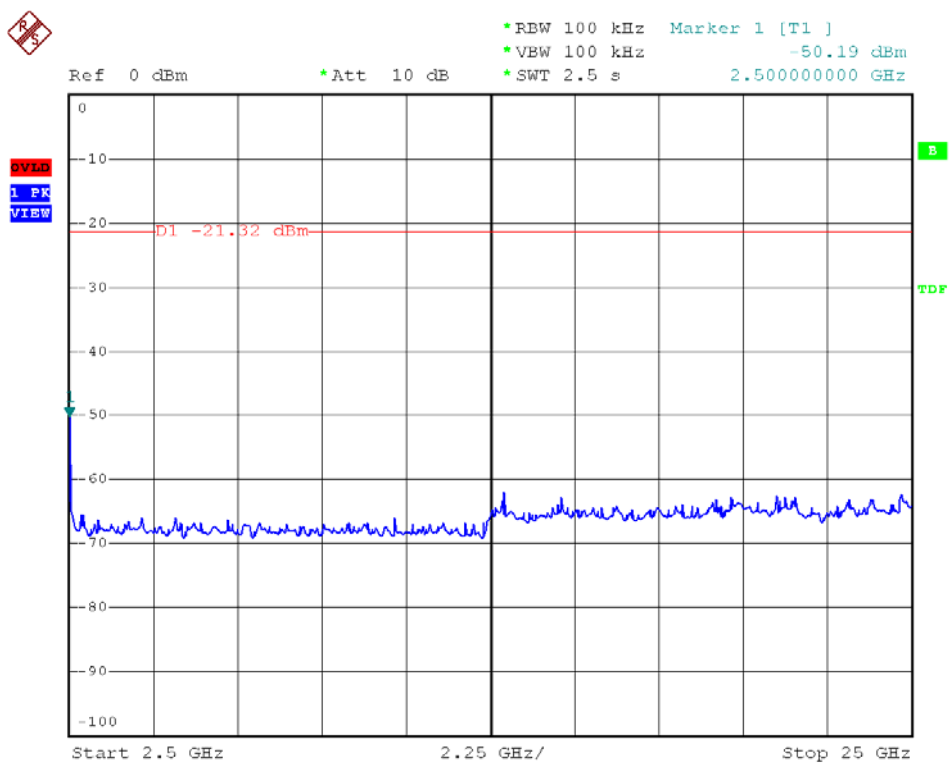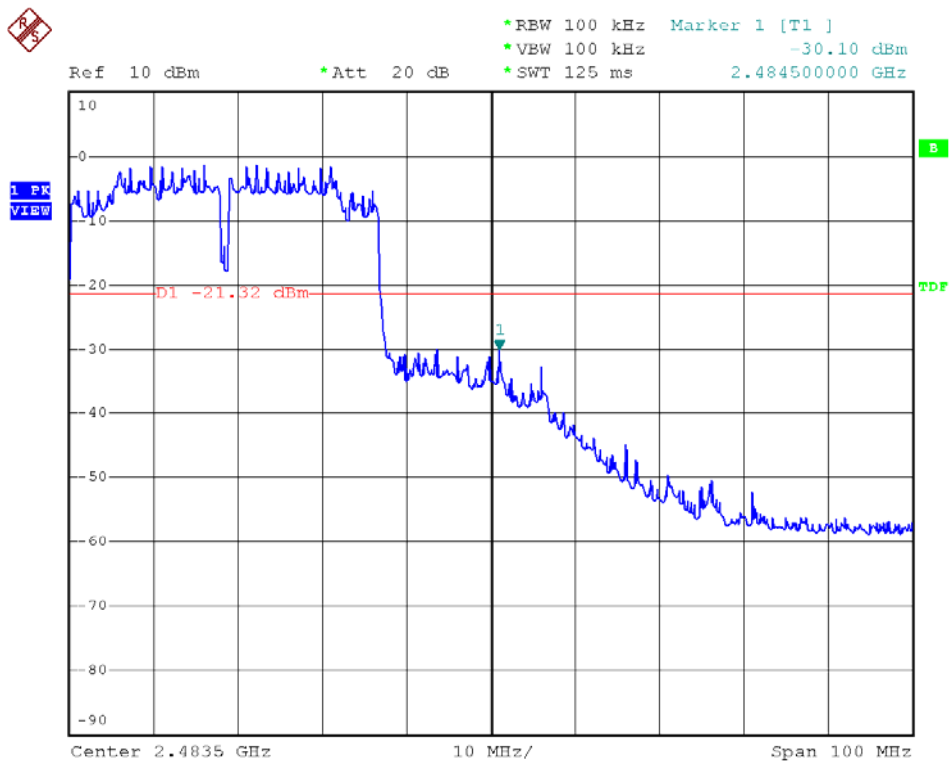





Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 01

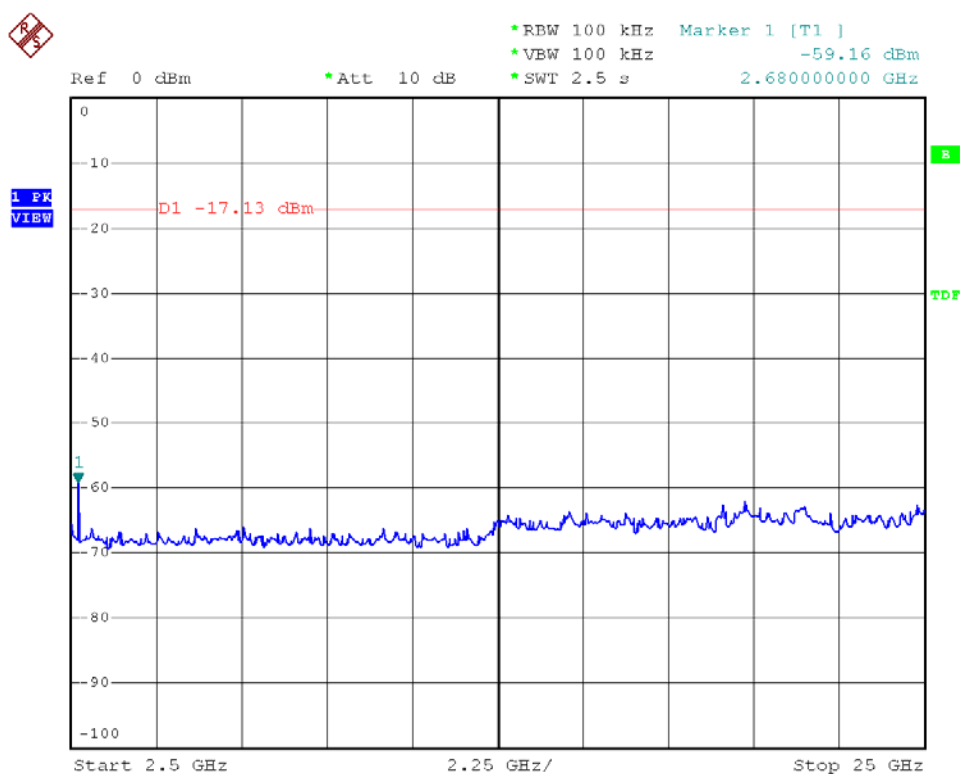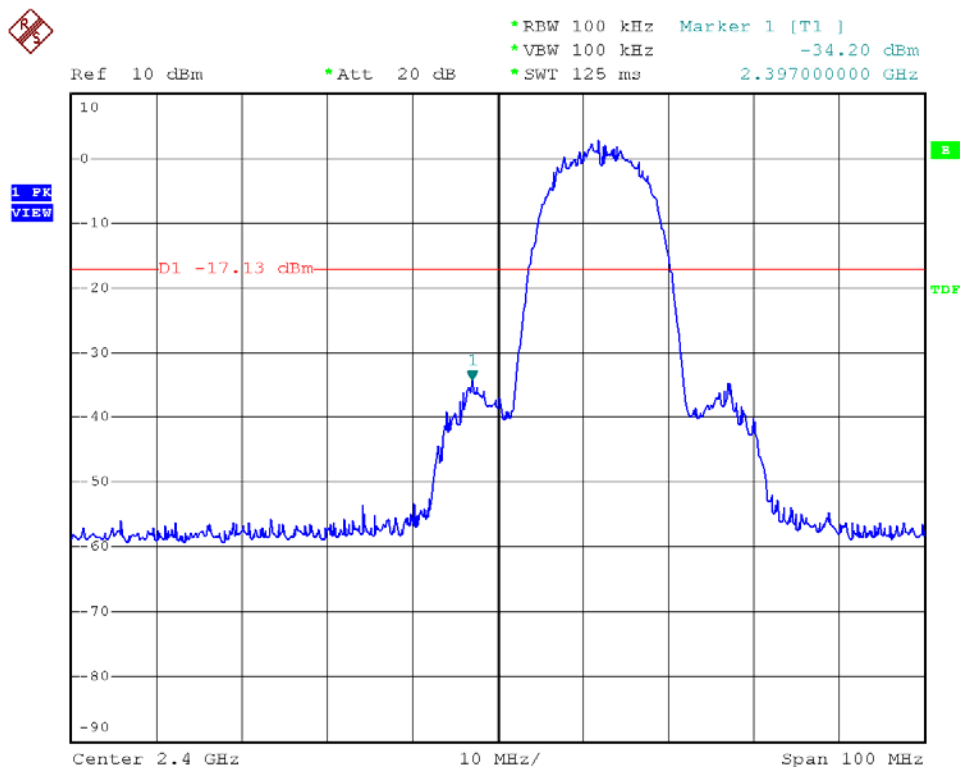





Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 11

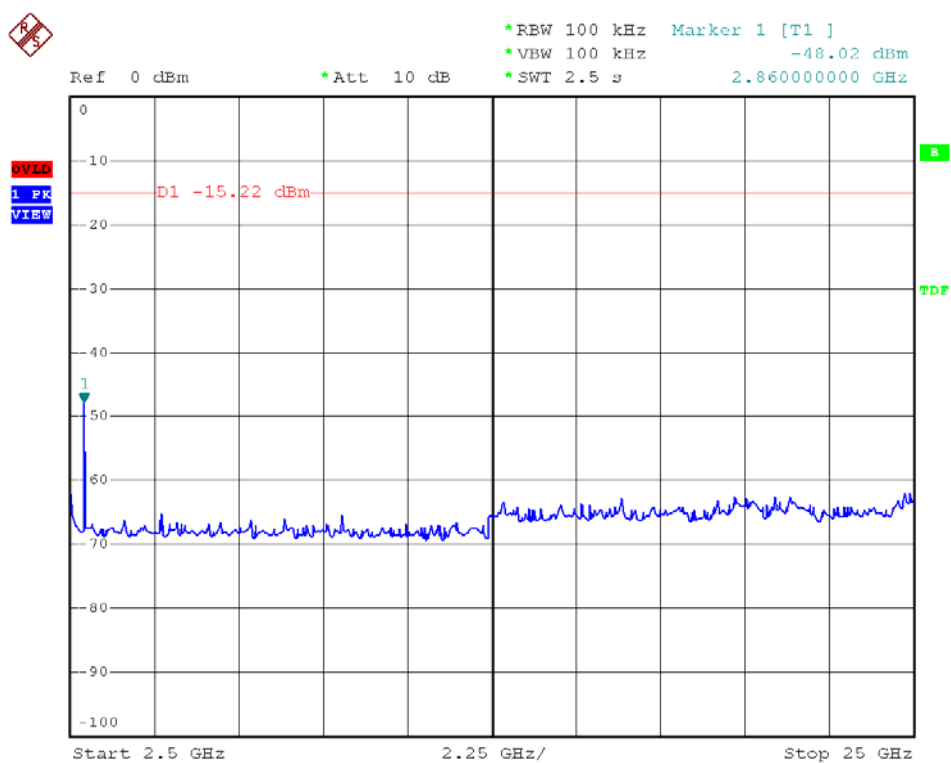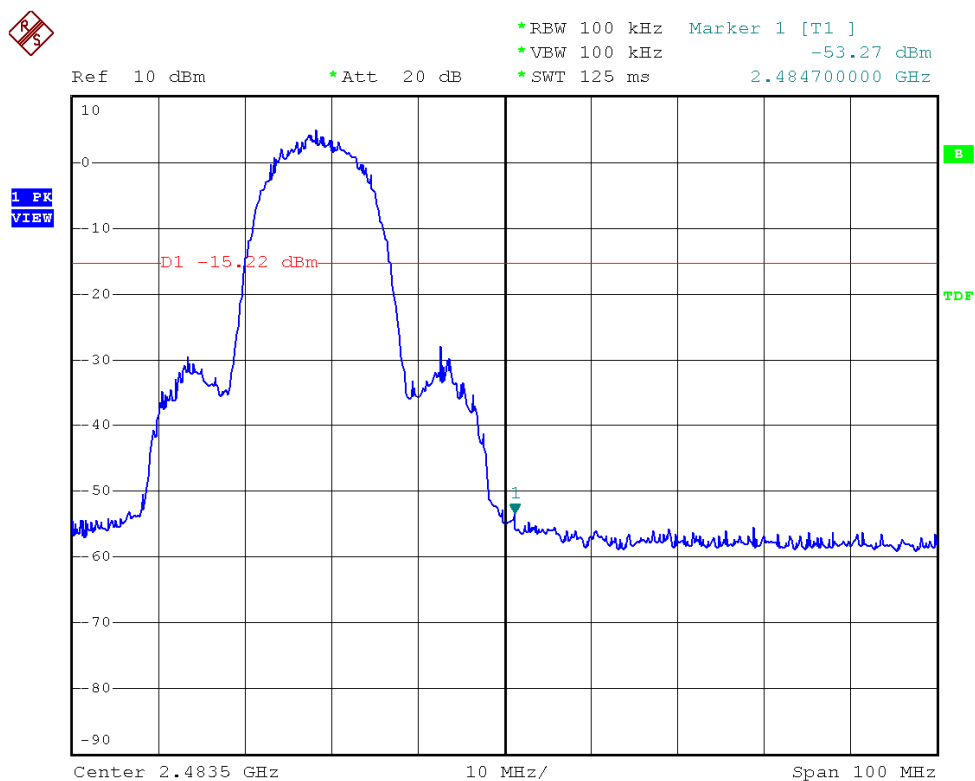





Modulation Standard: 802.11g (54Mbps), ANT L

Channel: 01

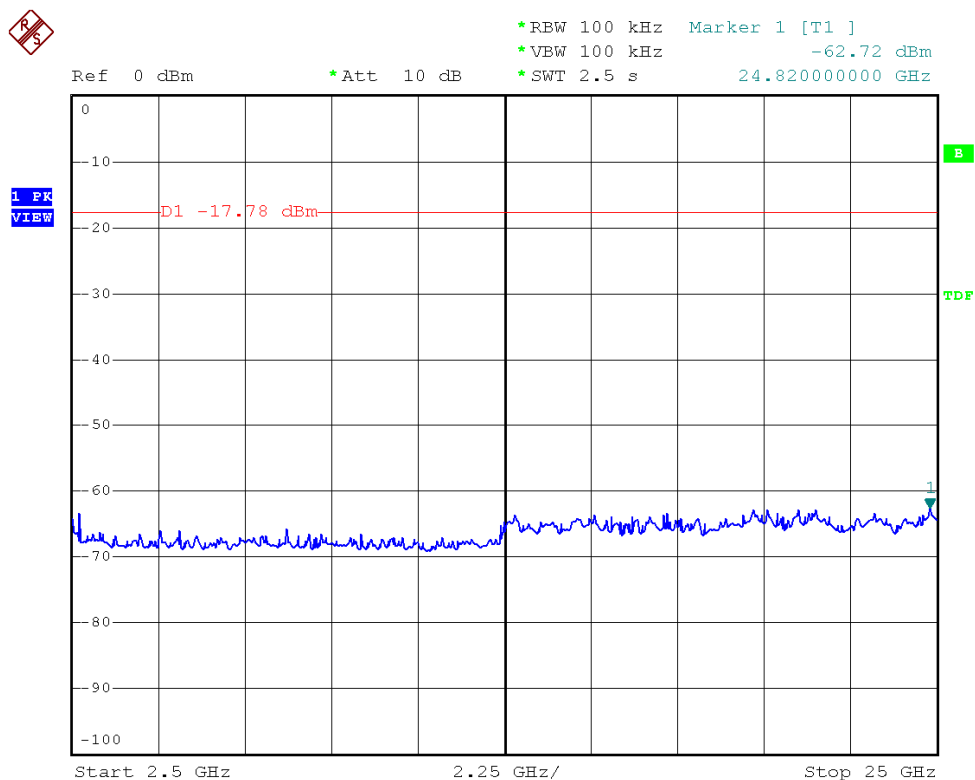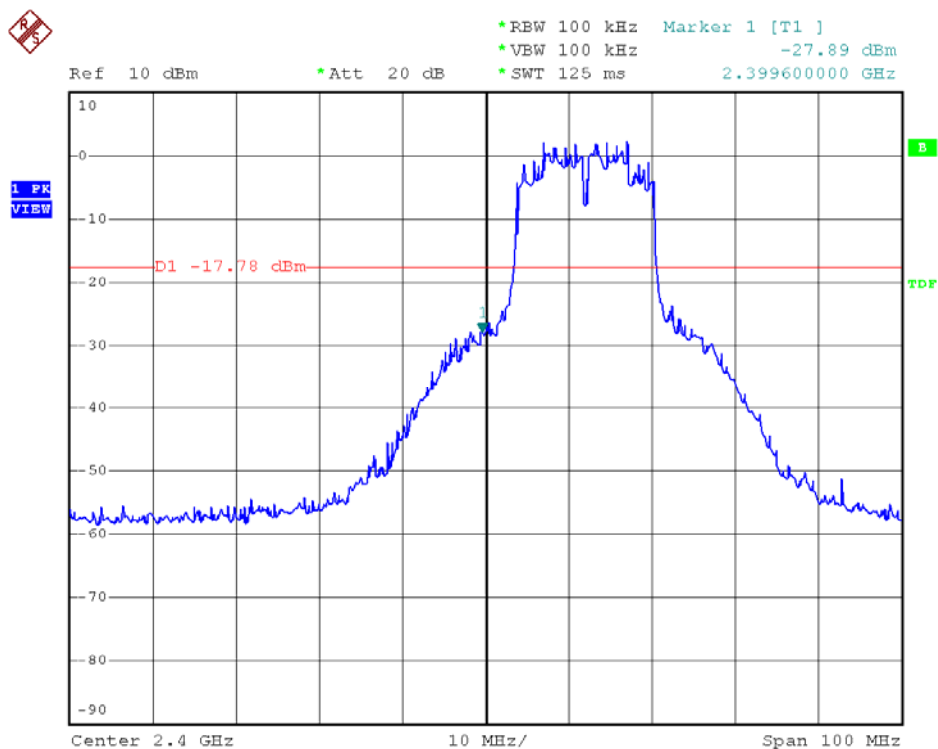





Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 11

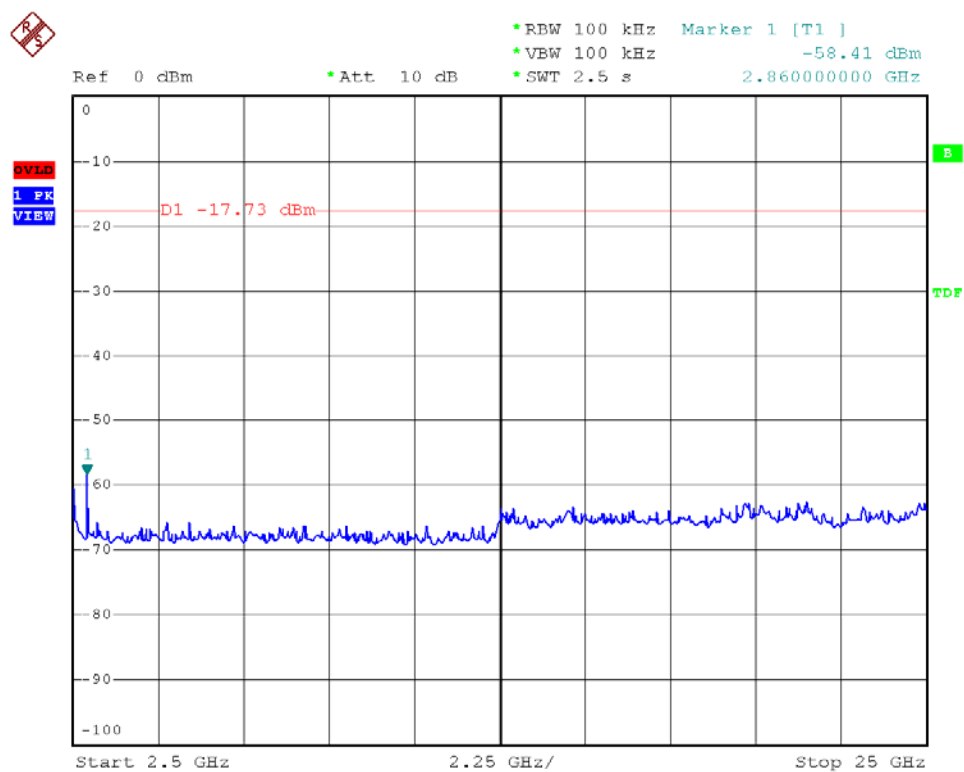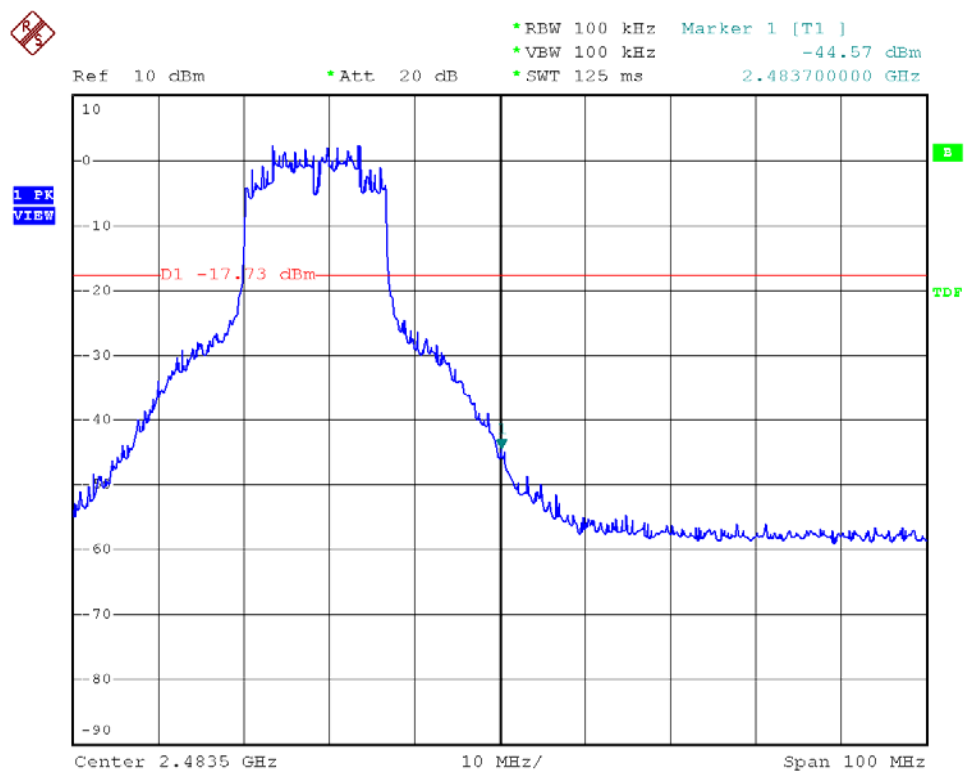





Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 01

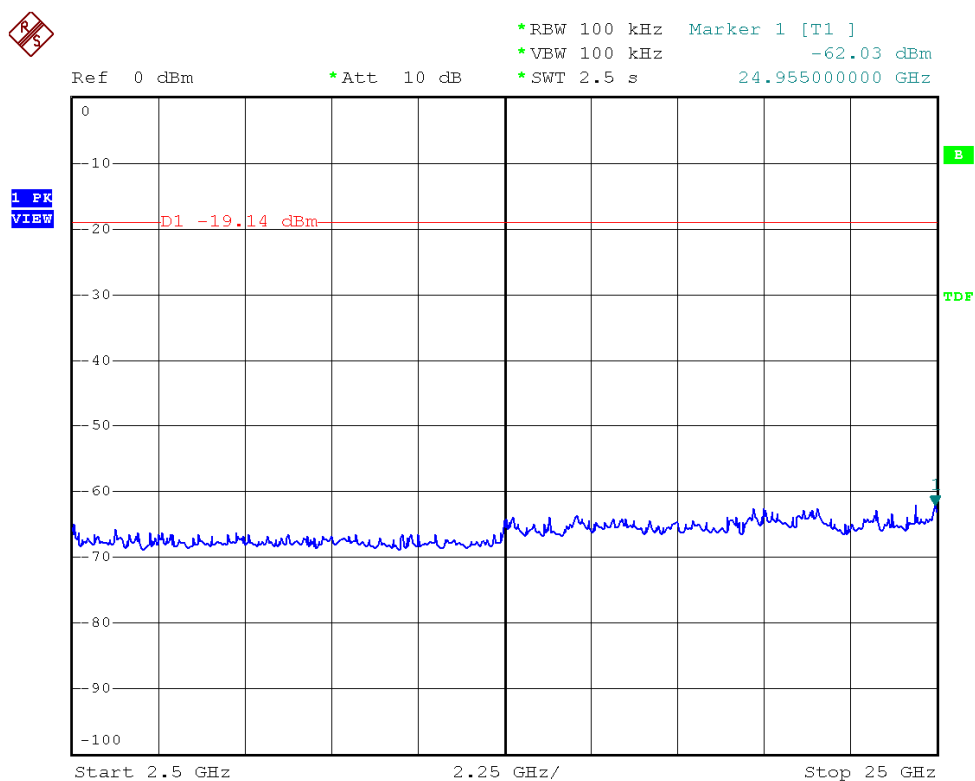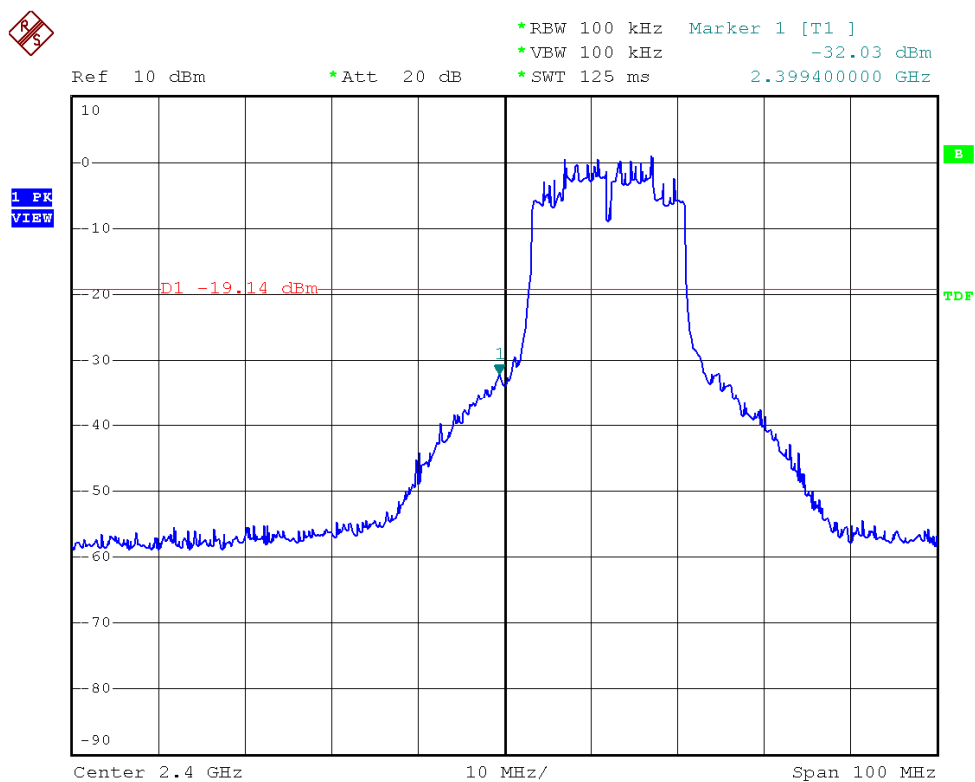





Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 11

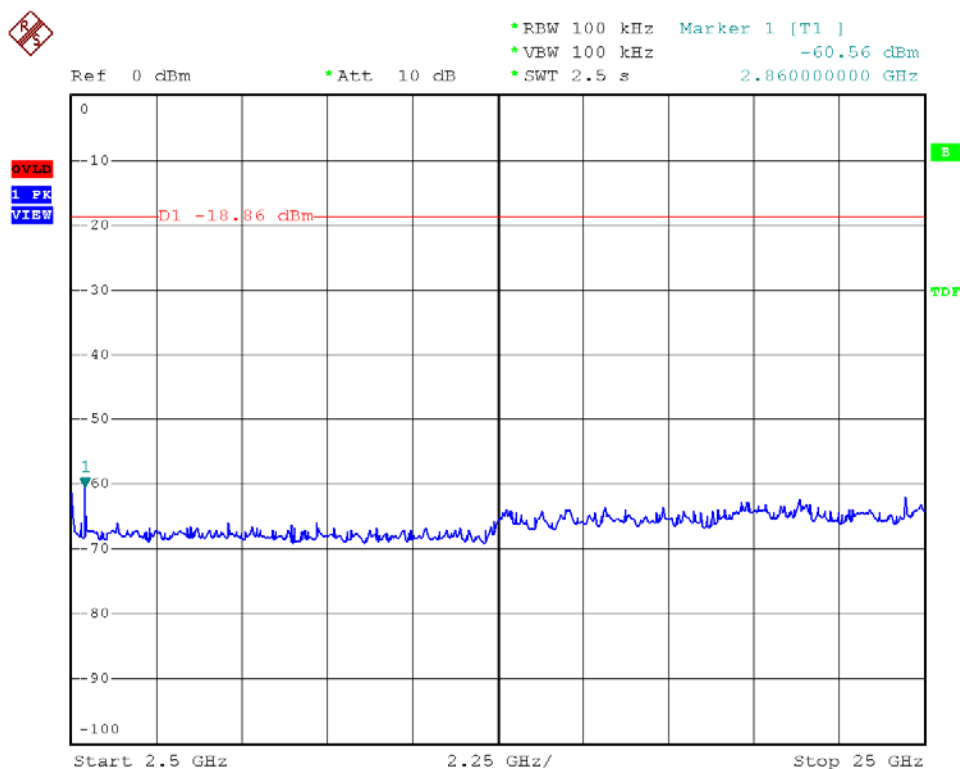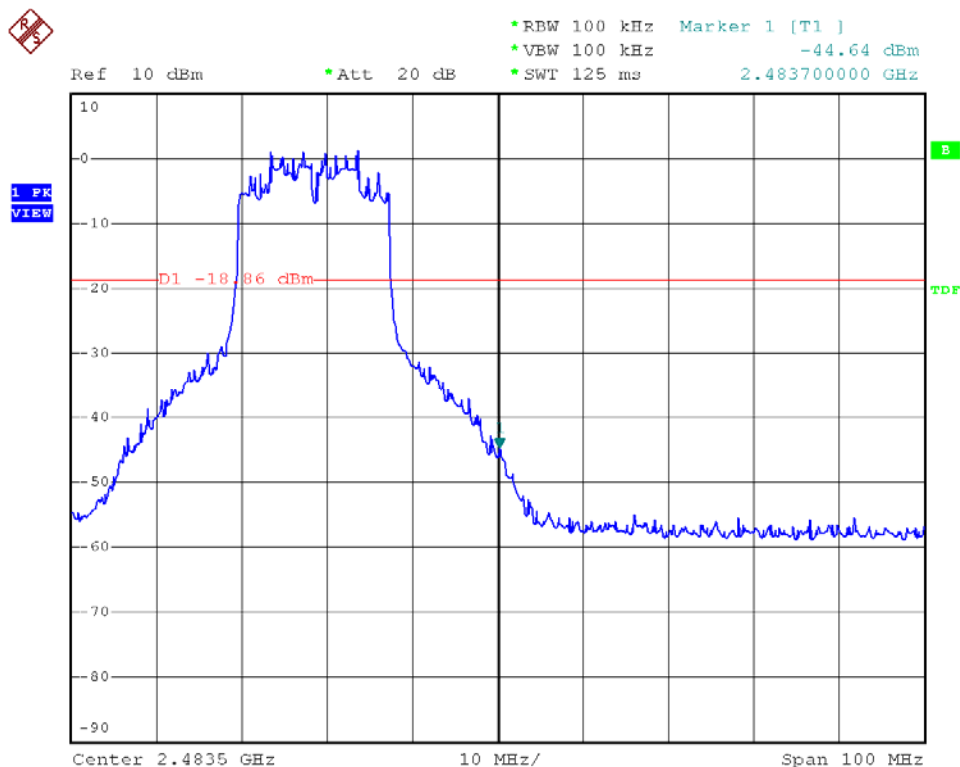





Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 03

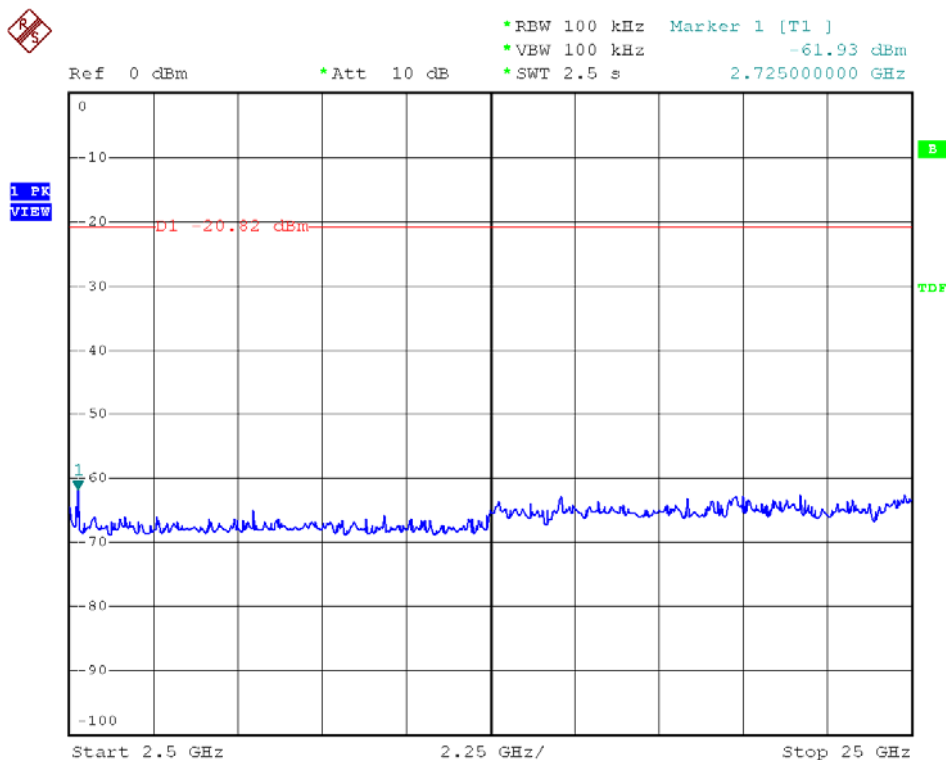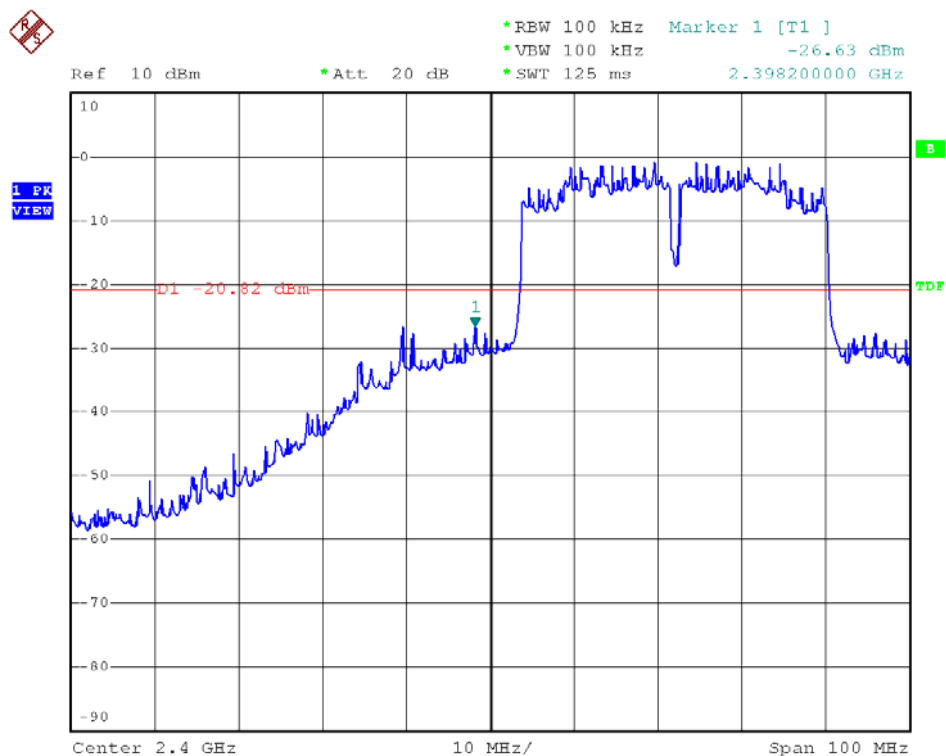



Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 09

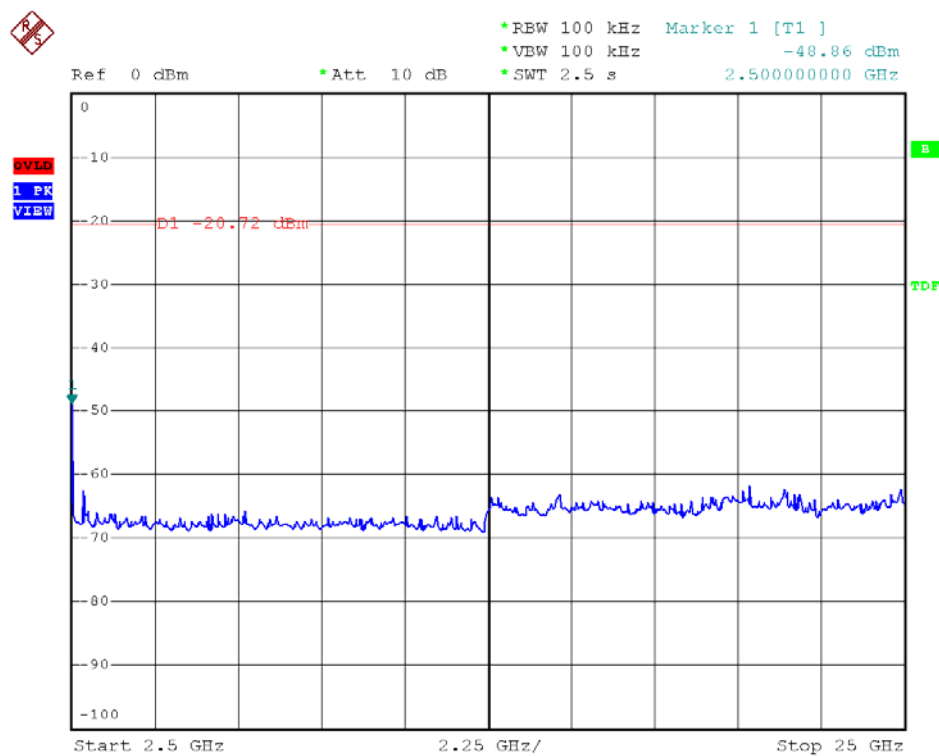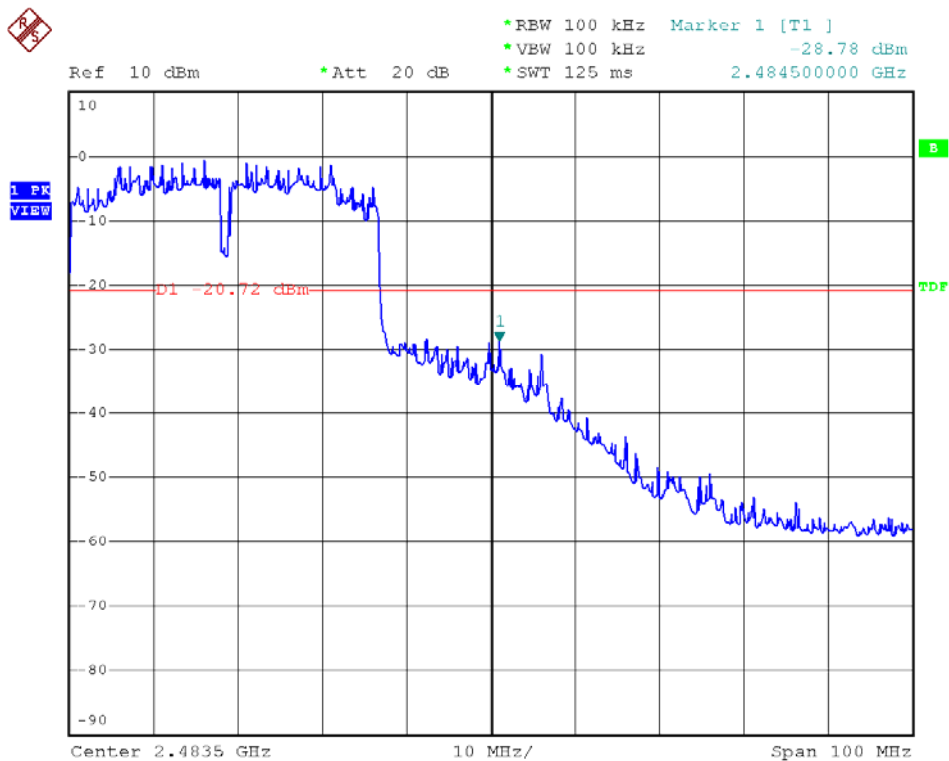



7.6 Restrict Band Emission Measurement Data

Test Date : Aug. 05, 2011
Temperature : 25
Humidity : 70 %
Atmospheric Pressure : 1020 hPa
Test Mode :

Modulation Standard: IEEE 802.11b (11Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2389.76	H	52.24	-0.34	51.90	Peak	74	54	-22.10	153	1.00
2389.82	H	37.79	-0.34	37.45	Ave	74	54	-16.55	153	1.00
2388.54	V	51.27	-0.35	50.92	Peak	74	54	-23.08	161	1.00
2389.56	V	38.00	-0.34	37.66	Ave	74	54	-16.34	161	1.00
Channel 11						Fundamental Frequency: 2462 MHz				
2484.80	H	52.30	0.01	52.31	Peak	74	54	-21.69	152	1.00
2483.57	H	38.19	0.00	38.19	Ave	74	54	-15.81	152	1.00
2483.55	V	52.72	0.00	52.72	Peak	74	54	-21.28	140	1.00
2483.57	V	38.35	0.00	38.35	Ave	74	54	-15.65	140	1.00

Modulation Standard: IEEE 802.11g (54Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2389.76	H	63.16	-0.34	62.82	Peak	74	54	-11.18	153	1.00
2389.82	H	44.22	-0.34	43.88	Ave	74	54	-10.12	153	1.00
2389.76	V	64.09	-0.34	63.75	Peak	74	54	-10.25	160	1.00
2389.82	V	44.96	-0.34	44.62	Ave	74	54	-9.38	160	1.00
Channel 11						Fundamental Frequency: 2462 MHz				
2483.55	H	62.11	0.00	62.11	Peak	74	54	-11.89	156	1.00
2483.57	H	45.18	0.00	45.18	Ave	74	54	-8.82	156	1.00
2483.74	V	63.75	0.00	63.75	Peak	74	54	-10.25	141	1.00
2483.57	V	46.57	0.00	46.57	Ave	74	54	-7.43	141	1.00

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



Test Date : Aug. 05, 2011
Temperature : 25
Humidity : 70 %
Atmospheric Pressure : 1020 hPa
Test Mode :

Modulation Standard: IEEE 802.11n HT20 (130Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2389.87	H	56.27	-0.34	55.93	Peak	74	54	-18.07	156	1.00
2389.82	H	41.03	-0.34	40.69	Ave	74	54	-13.31	156	1.00
2389.76	V	57.85	-0.34	57.51	Peak	74	54	-16.49	160	1.00
2389.82	V	42.10	-0.34	41.76	Ave	74	54	-12.24	160	1.00
Channel 11						Fundamental Frequency: 2462 MHz				
2483.66	H	60.83	0.00	60.83	Peak	74	54	-13.17	152	1.00
2483.57	H	42.18	0.00	42.18	Ave	74	54	-11.82	152	1.00
2483.74	V	61.32	0.00	61.32	Peak	74	54	-12.68	173	1.00
2483.57	V	42.99	0.00	42.99	Ave	74	54	-11.01	173	1.00

Modulation Standard: IEEE 802.11n HT40 (270Mbps)

Channel 3						Fundamental Frequency: 2422 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.48	H	66.02	-0.36	65.66	Peak	74	54	-8.34	152	1.00
2389.82	H	48.36	-0.34	48.02	Ave	74	54	-5.98	152	1.00
2385.99	V	68.74	-0.36	68.38	Peak	74	54	-5.62	154	1.00
2389.56	V	51.21	-0.34	50.87	Ave	74	54	-3.13	154	1.00
Channel 9						Fundamental Frequency: 2452 MHz				
2484.50	H	68.44	0.01	68.45	Peak	74	54	-5.55	156	1.00
2483.57	H	49.84	0.00	49.84	Ave	74	54	-4.16	156	1.00
2483.85	V	70.37	0.00	70.37	Peak	74	54	-3.63	142	1.00
2483.57	V	50.86	0.00	50.86	Ave	74	54	-3.14	142	1.00

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



8. Power Spectral Density


8.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

8.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- The power spectral density was measured and recorded.
- The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

8.3 Test Setup Layout



8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	10047	2011/05/05	2012/05/04

8.5 Test Result and Data

Test Date: Aug. 04, 2011

Temperature: 25

Atmospheric pressure: 1020 hPa

Humidity: 65 %

Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	
			ANT R	ANT L
802.11b (11Mbps)	01	2412	-9.19	-11.10
	06	2437	-8.77	-9.93
	11	2462	-8.68	-9.26
802.11g (54Mbps)	01	2412	-12.34	-13.00
	06	2437	-10.27	-10.90
	11	2462	-11.68	-12.62



Test Date: Aug. 04, 2011

Temperature: 25


Atmospheric pressure: 1020 hPa

Humidity: 65 %


Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)		
			ANT R	ANT L	R+L
802.11n HT20 (130Mbps)	01	2412	-14.47	-15.25	-11.83
	06	2437	-12.43	-13.45	-9.90
	11	2462	-13.31	-15.23	-11.15
802.11n HT40 (270Mbps)	03	2422	-19.31	-19.43	-16.36
	06	2437	-17.63	-17.65	-14.63
	09	2452	-19.16	-19.22	-16.18



Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 01

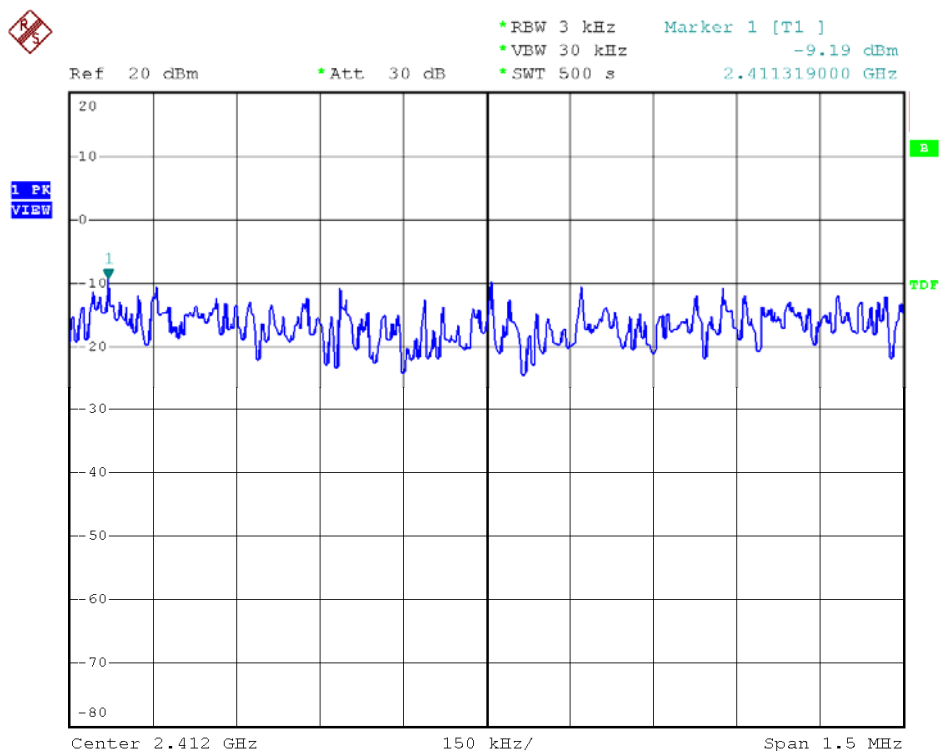


Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 06

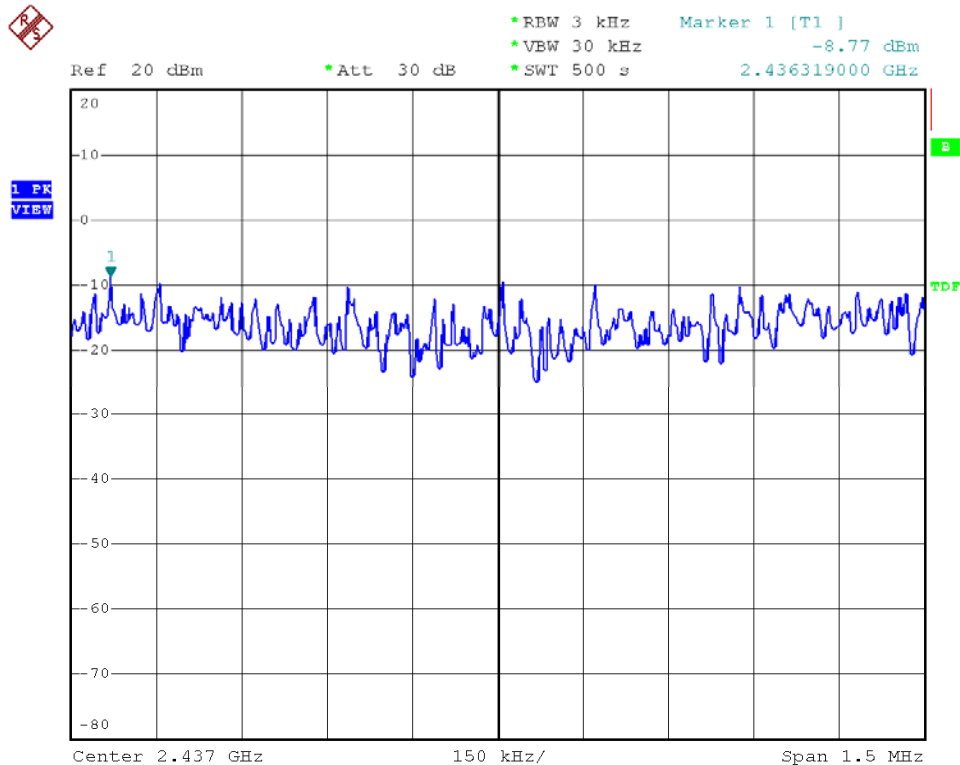




Modulation Standard: 802.11b (11Mbps), ANT R
Channel: 11

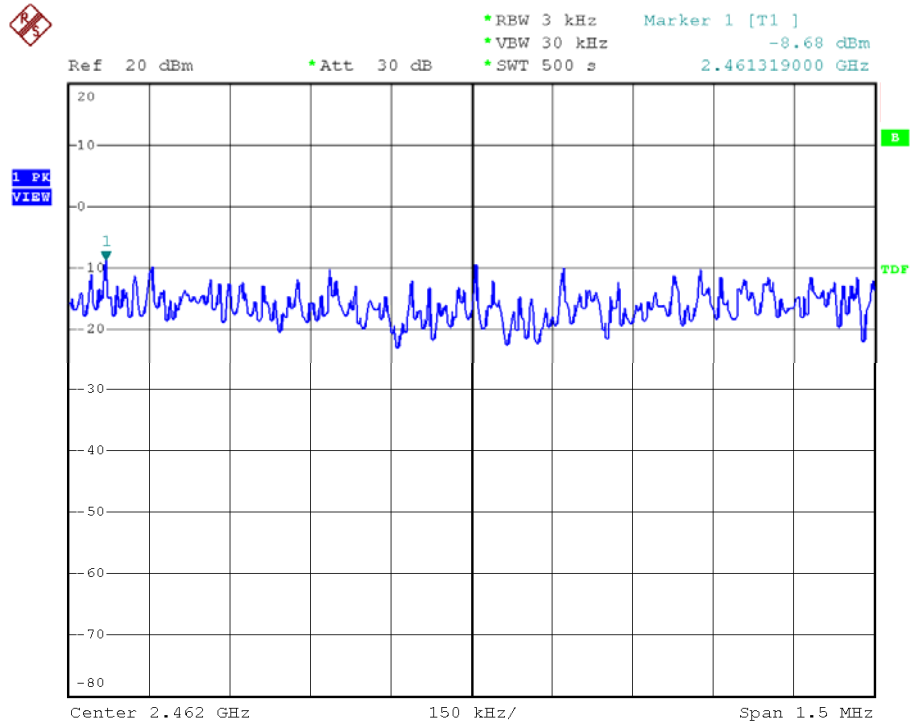


Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 01

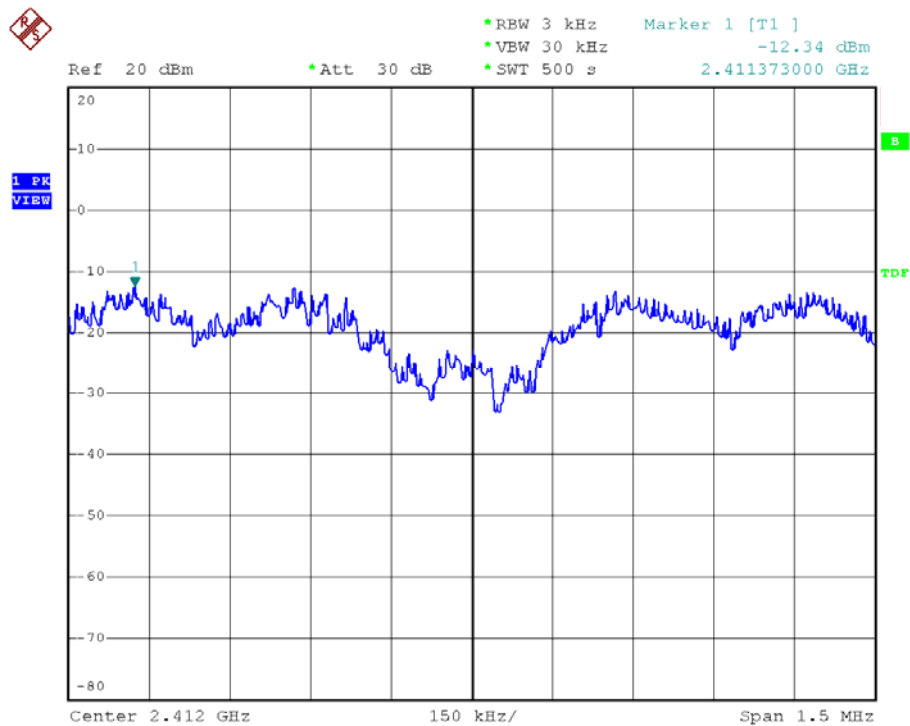




Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 06

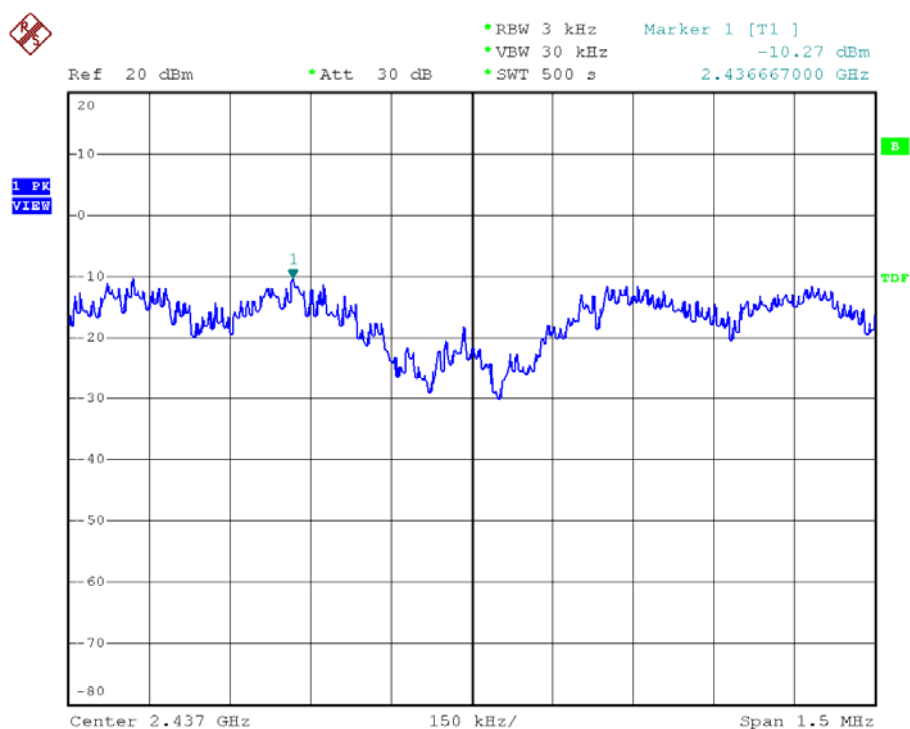


Modulation Standard: 802.11g (54Mbps), ANT R
Channel: 11

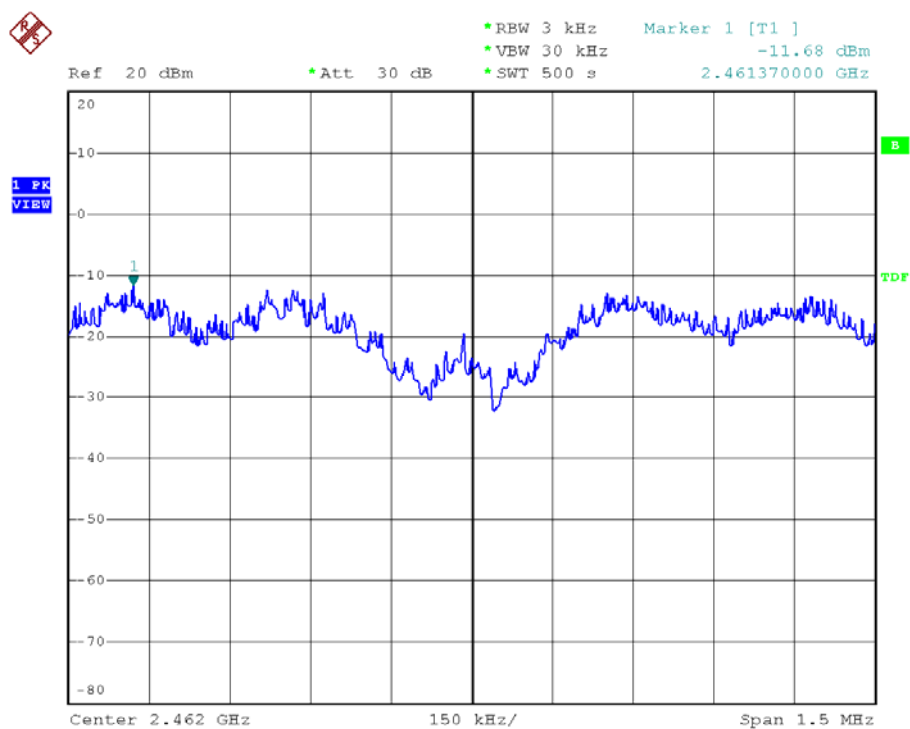




Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 01

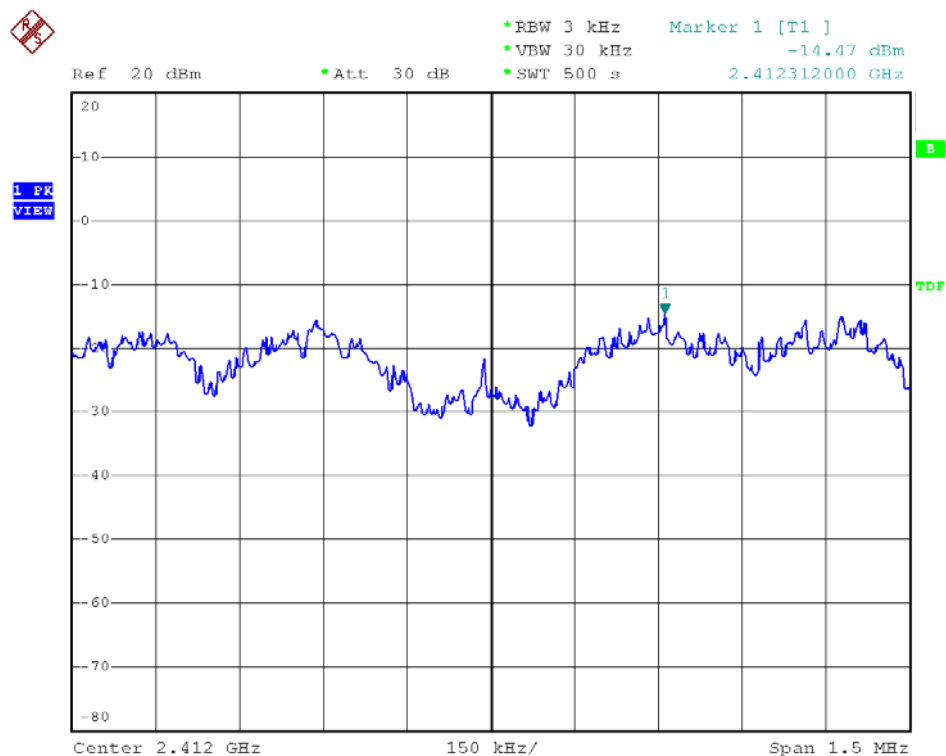


Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 06

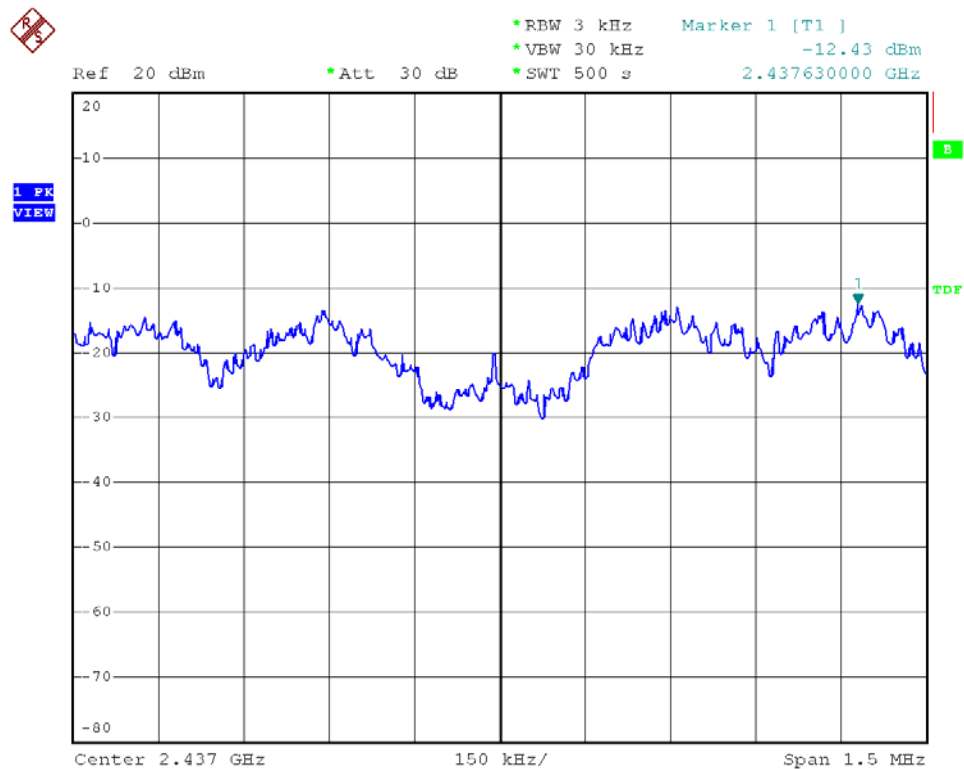



Modulation Standard: 802.11n HT20 (130Mbps), ANT R
Channel: 11

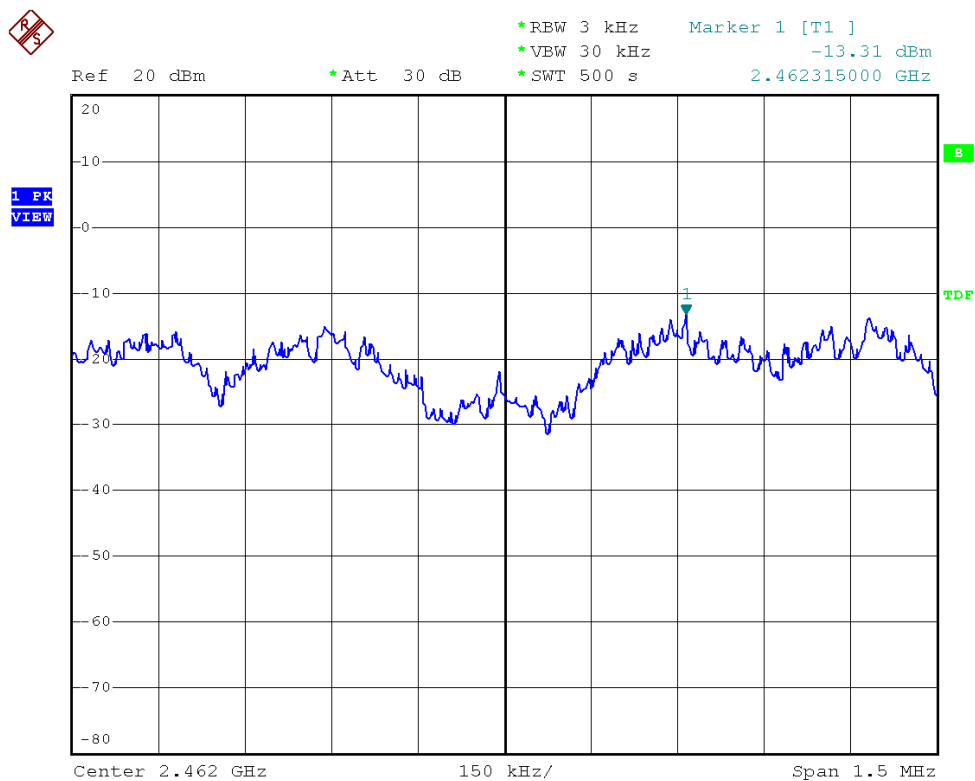


Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 03






Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 06

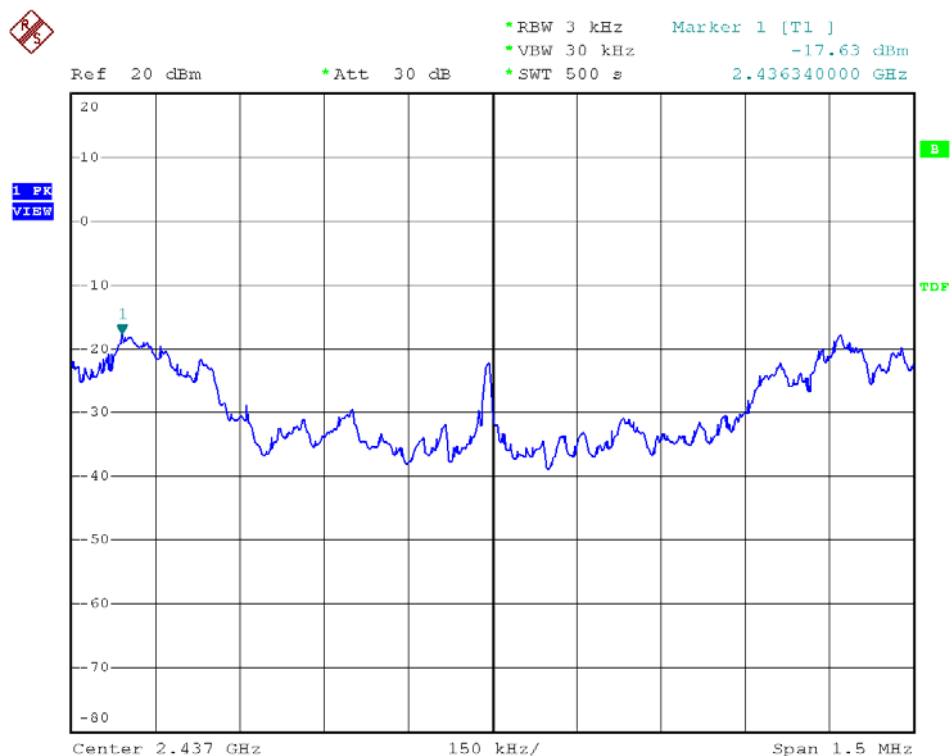


Modulation Standard: 802.11n HT40 (270Mbps), ANT R
Channel: 09

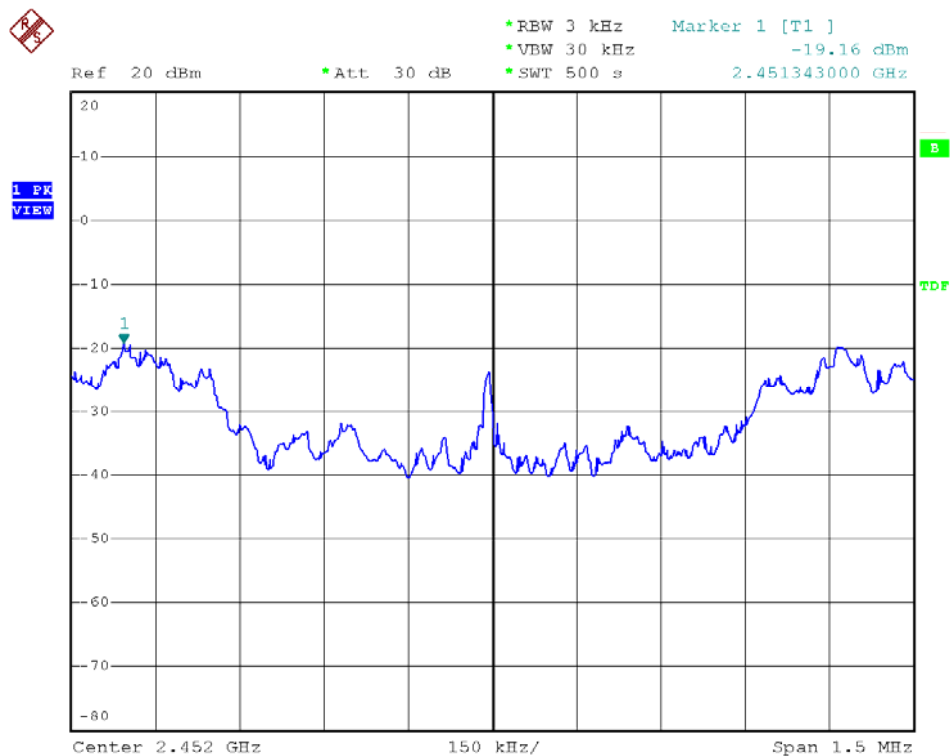




Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 01

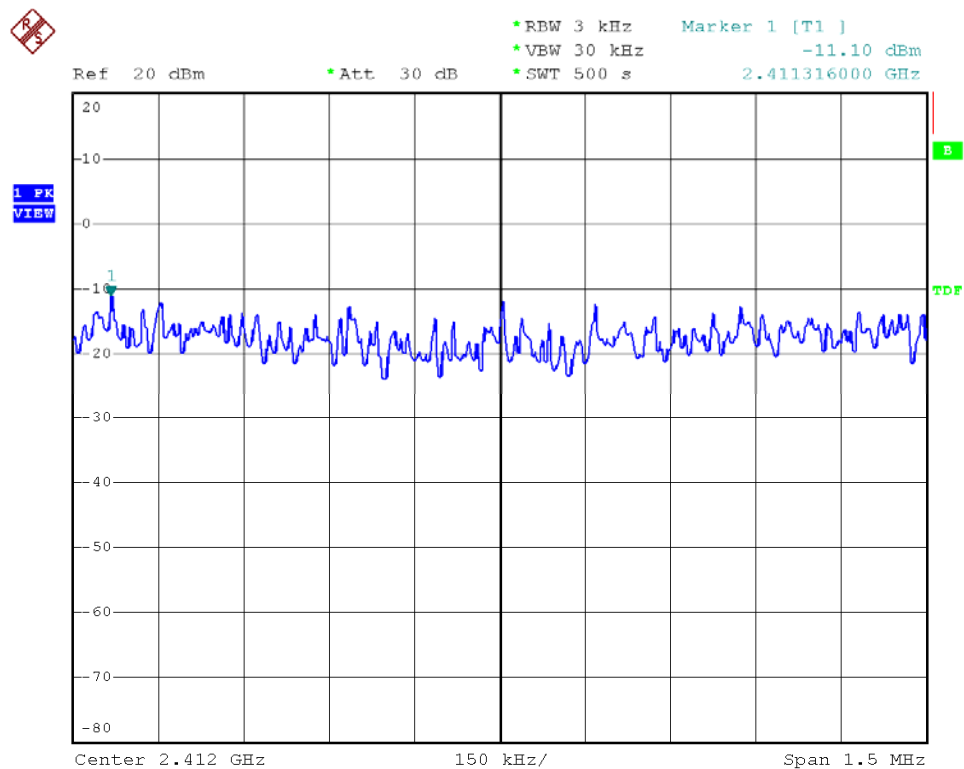


Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 06

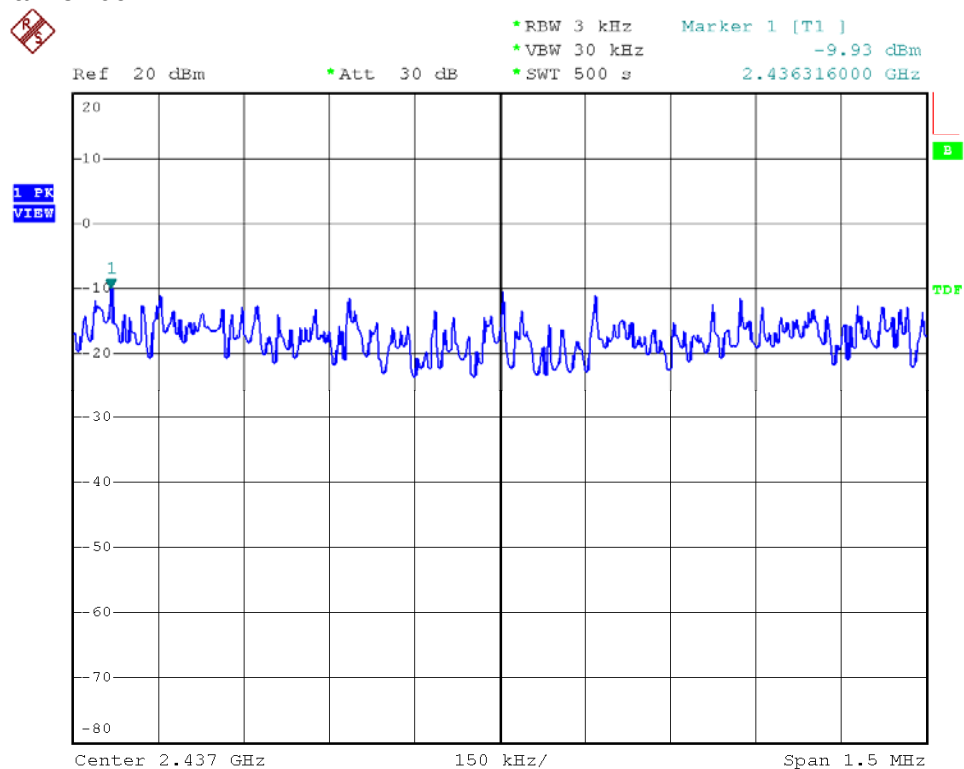




Modulation Standard: 802.11b (11Mbps), ANT L
Channel: 11

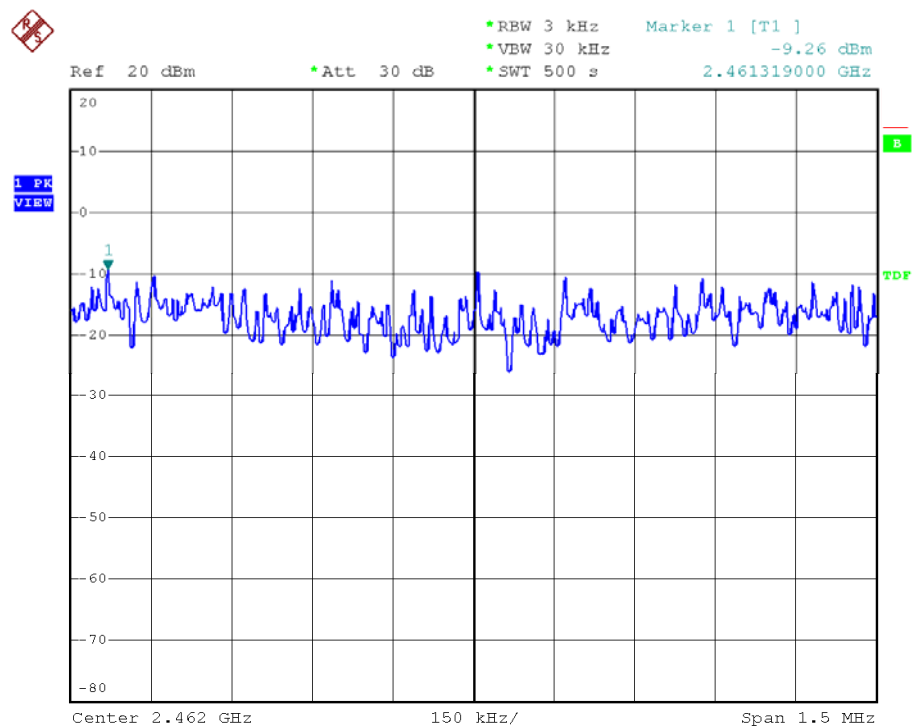


Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 01

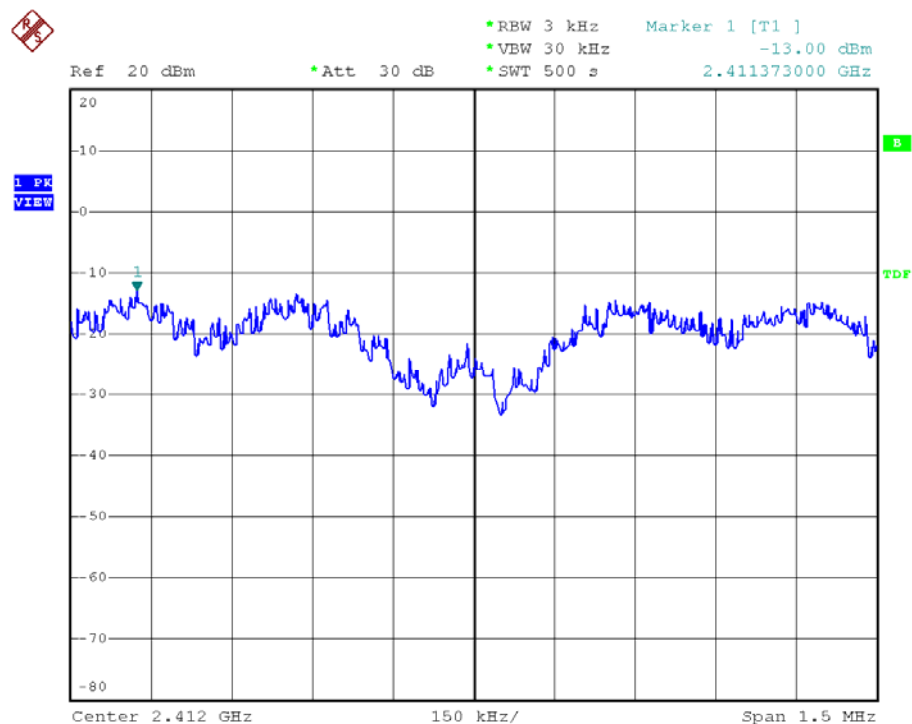




Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 06

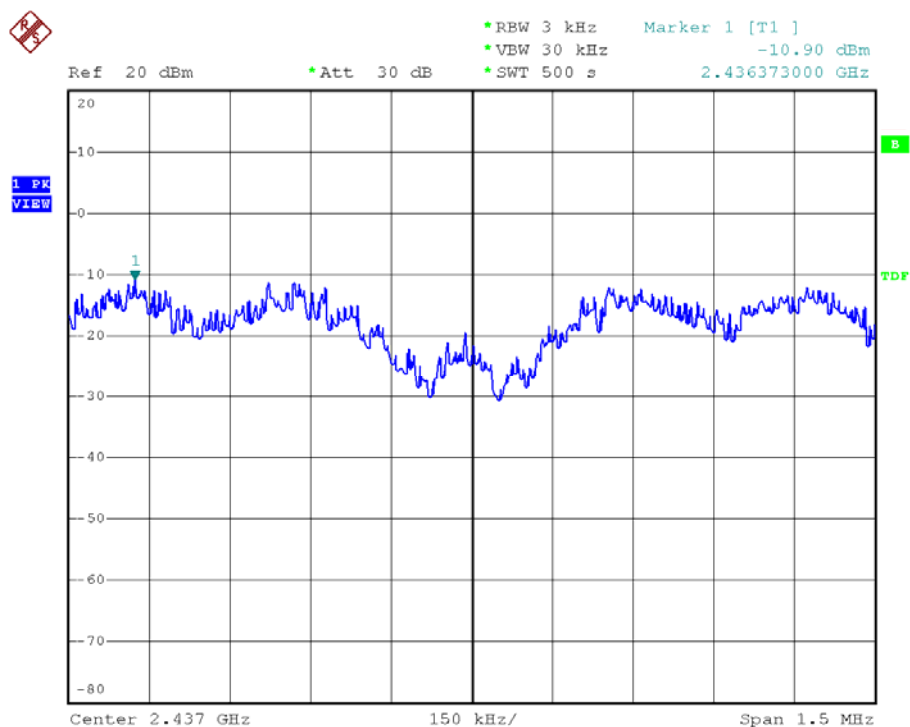


Modulation Standard: 802.11g (54Mbps), ANT L
Channel: 11

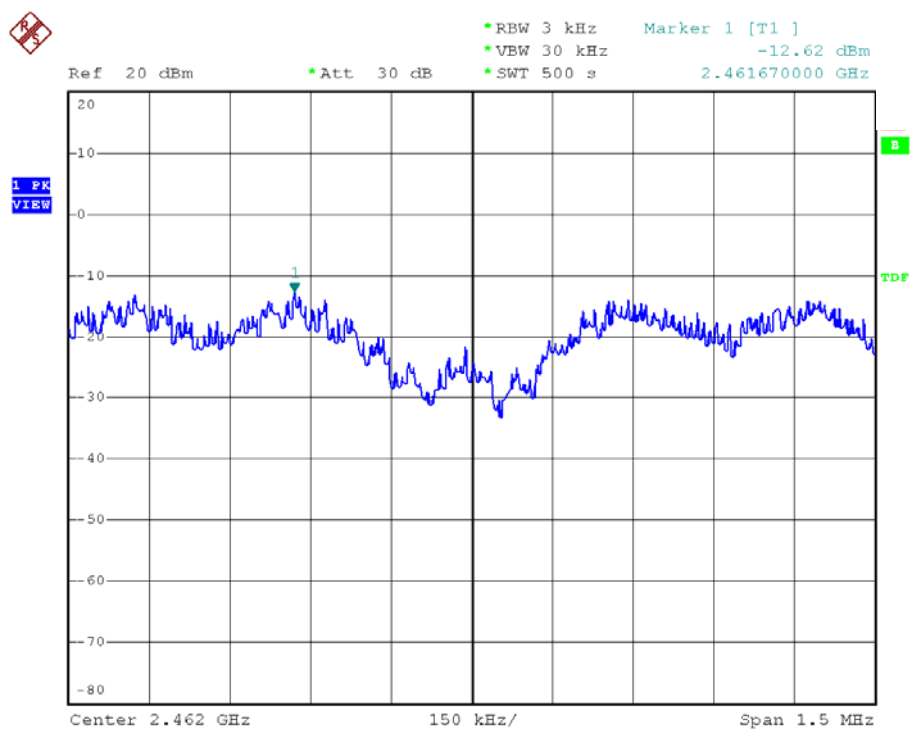




Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 01

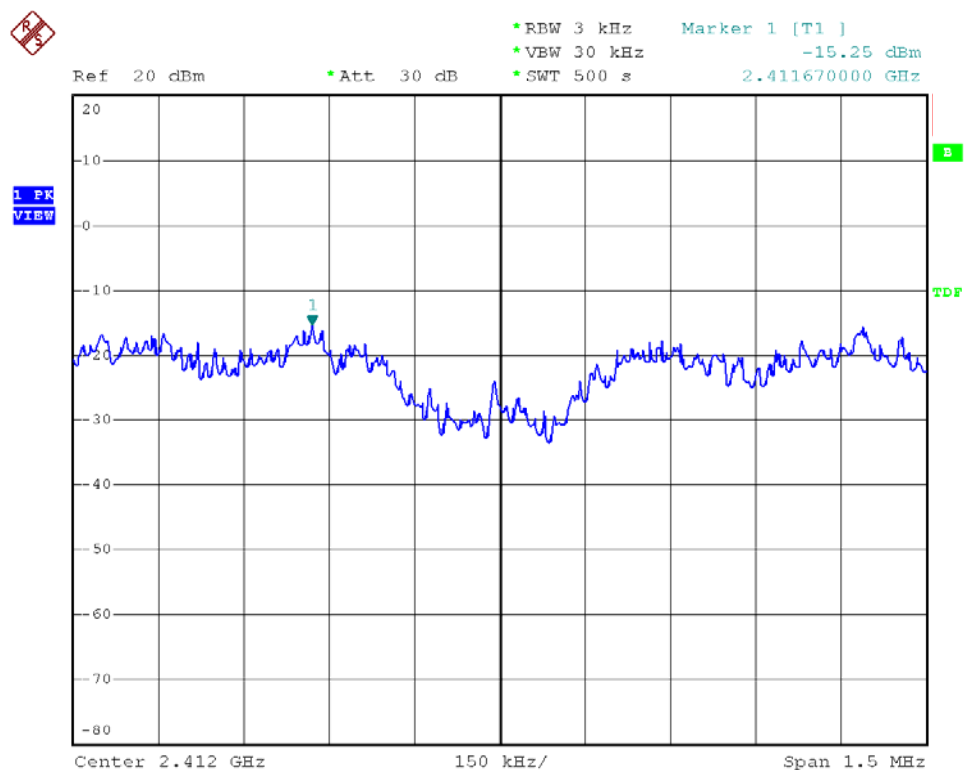


Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 06

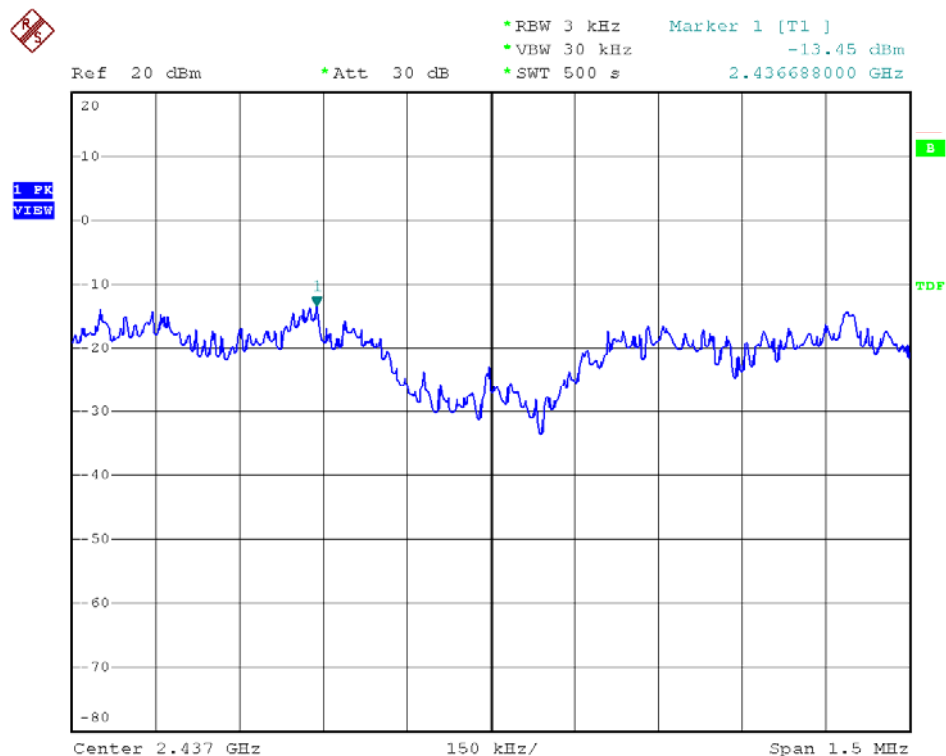




Modulation Standard: 802.11n HT20 (130Mbps), ANT L
Channel: 11

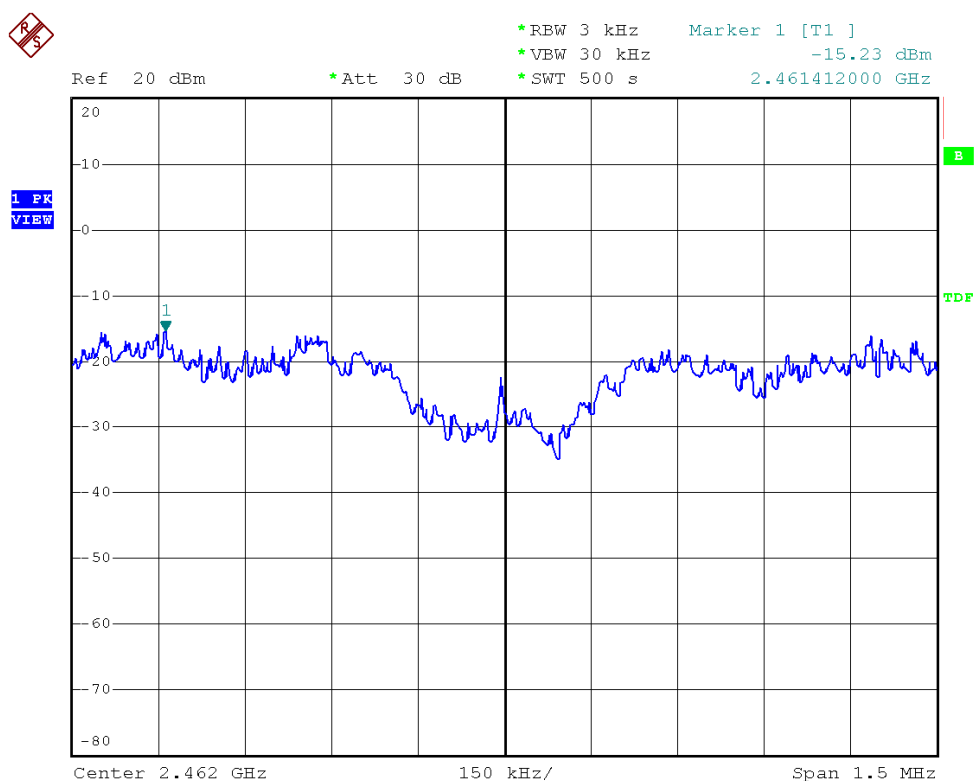


Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 03

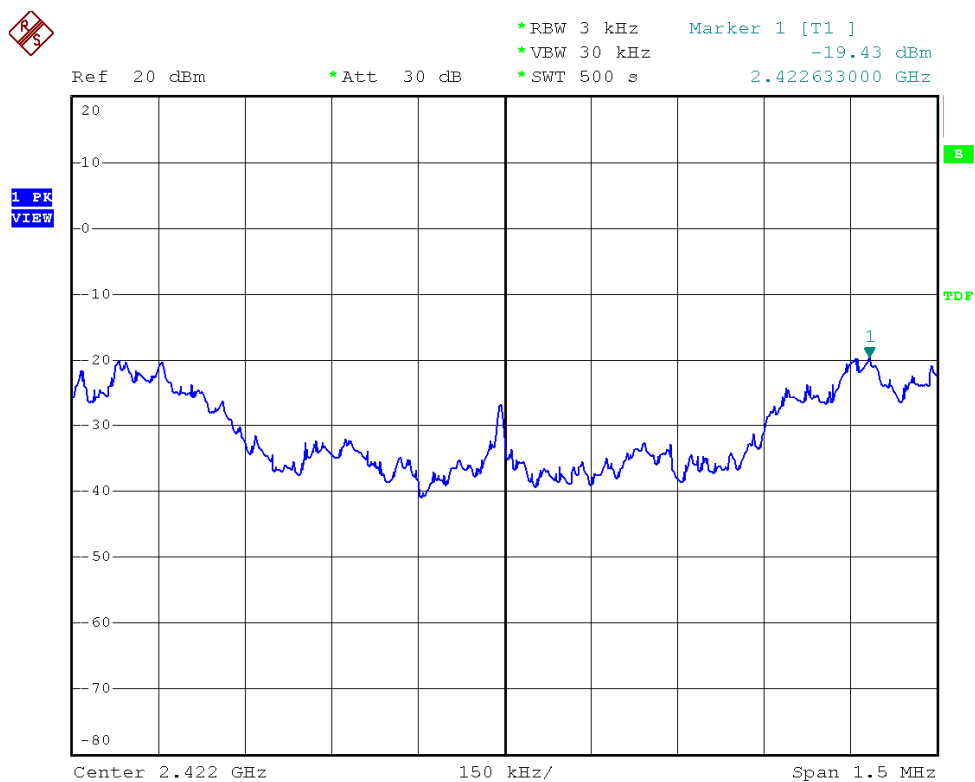




Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 06

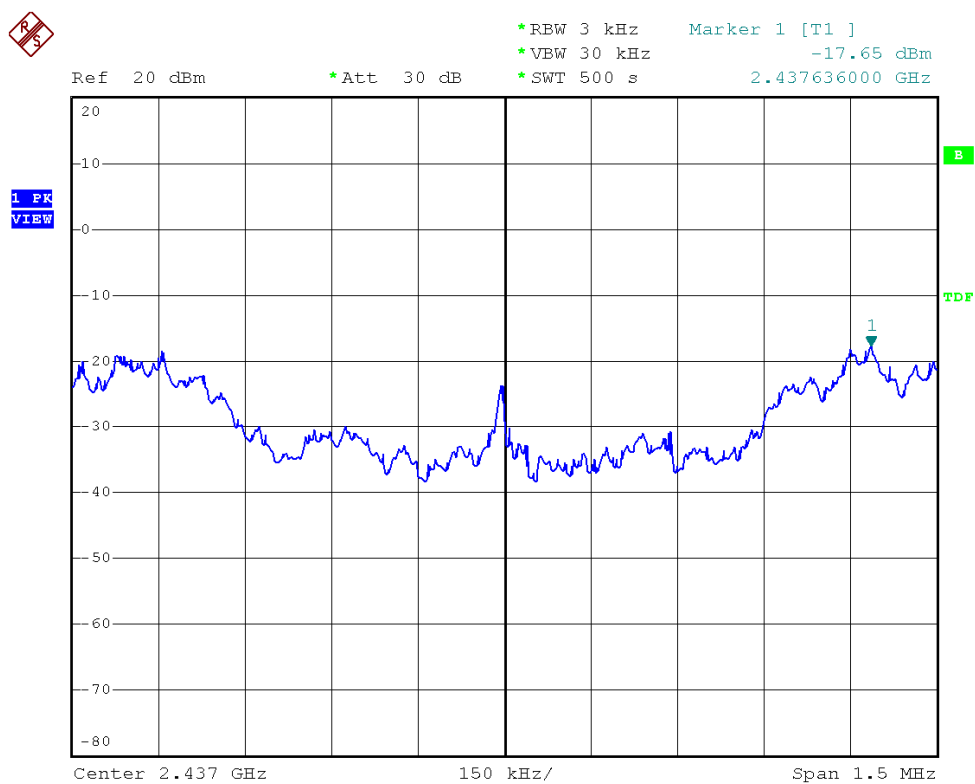

Modulation Standard: 802.11n HT40 (270Mbps), ANT L
Channel: 09

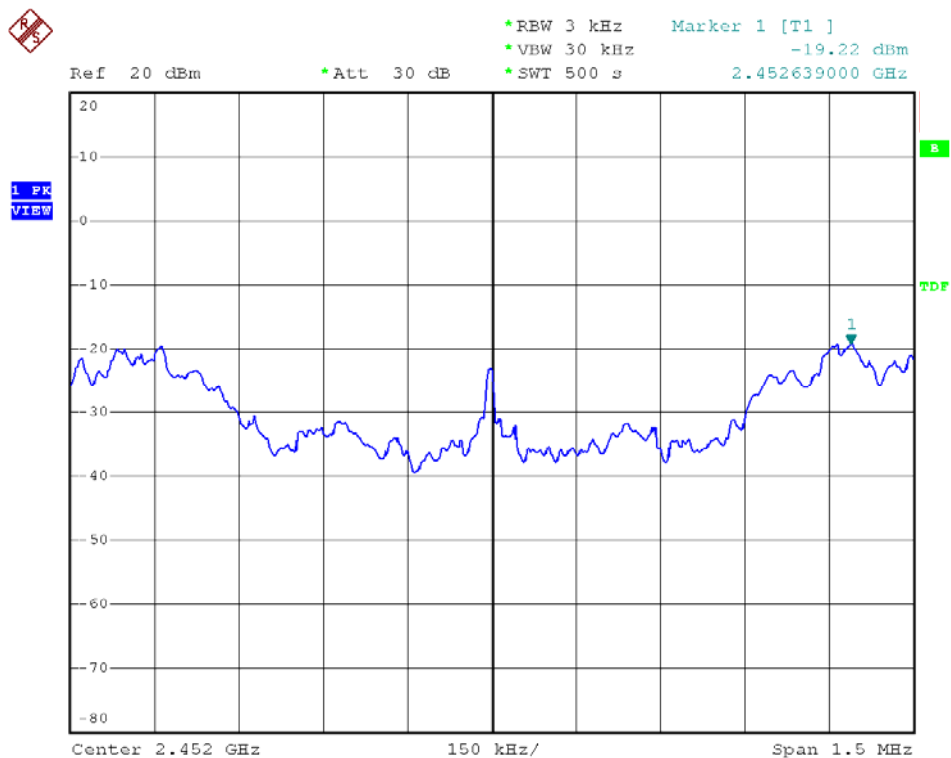



9. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

9.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.