



FCC CERTIFICATION TEST REPORT

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	2/F, F Building, Hougang Industrial Zone, Shigang, Huangshi West Road, Baiyun District, Guangzhou, China
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	2/F, F Building, Hougang Industrial Zone, Shigang, Huangshi West Road, Baiyun District, Guangzhou, China
Equipment under Test	:	Streaming Music Receiver
Model No.	:	F3081S, F3082S, F3083S, F3084S, F3085S, F3086S, F3087S, F3088S, F3089S, F4081S, F4082S, F4083S, F4084S, F4085S, F4086S, F4087S, F4088S, F4089S
FCC ID	:	R56-F30814
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10:2020
Report No.	:	DDT-RE24061713-2E08
Issue Date	:	2024/08/20
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd.
Address of Laboratory	:	Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT.....	9
2.3.	Assistant equipment used for test.....	9
2.4.	Block diagram of EUT configuration for test	10
2.5.	Test environment conditions	10
2.6.	Deviations of test standard.....	10
2.7.	Test laboratory	11
2.8.	Measurement uncertainty.....	11
3.	Equipment Used During Conductive Test.....	12
4.	6 dB Bandwidth	13
4.1.	Block diagram of test setup.....	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	17
5.1.	Block diagram of test setup.....	17
5.2.	Limits	17
5.3.	Test procedure	17
5.4.	Test result.....	18
5.5.	Test graphs	19
6.	Maximum Peak Output Power	21
6.1.	Block diagram of test setup.....	21
6.2.	Limits	21
6.3.	Test procedure	21
6.4.	Test result.....	22
6.5.	Test graphs	23
7.	Power Spectral Density.....	25
7.1.	Block diagram of test setup.....	25
7.2.	Limits	25
7.3.	Test procedure	25
7.4.	Test result.....	26
7.5.	Test graphs	27
8.	Band Edge Compliance (Conducted Method)	29

8.1.	Block diagram of test setup.....	29
8.2.	Limits	29
8.3.	Test procedure	29
8.4.	Test result.....	30
8.5.	Test graphs	31
9.	RF Conducted Spurious Emissions	33
9.1.	Block diagram of test setup.....	33
9.2.	Limits	33
9.3.	Test procedure	33
9.4.	Test result.....	34
9.5.	Test graphs	35
10.	Duty Cycle	41
10.1.	Block diagram of test setup.....	41
10.2.	Limit	41
10.3.	Test procedure	41
10.4.	Test result.....	42
10.5.	Test graphs	43
11.	Radiated Emission	45
11.1.	Test equipment.....	45
11.2.	Block diagram of test setup.....	46
11.3.	Limit	47
11.4.	Test Procedure.....	49
11.5.	Test result.....	50
12.	Emissions in Restricted Frequency Bands	67
12.1.	Test equipment.....	67
12.2.	Block diagram of test setup.....	68
12.3.	Limit	68
12.4.	Test procedure	68
12.5.	Test result.....	68
13.	Power Line Conducted Emission	77
13.1.	Test equipment.....	77
13.2.	Block diagram of test setup.....	77
13.3.	Power line conducted emission limits	77
13.4.	Test procedure	78
13.5.	Test result.....	78
14.	Antenna Requirements	83
14.1.	Limit	83
14.2.	Result	83

15.	Test Setup Photograph	84
16.	Photos of the EUT	86

Test Report Declare

Applicant	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Applicant	:	2/F, F Building, Hougang Industrial Zone, Shigang, Huangshi West Road, Baiyun District, Guangzhou, China
Equipment under Test	:	Streaming Music Receiver
Model No.	:	F3081S, F3082S, F3083S, F3084S, F3085S, F3086S, F3087S, F3088S, F3089S, F4081S, F4082S, F4083S, F4084S, F4085S, F4086S, F4087S, F4088S, F4089S
Manufacturer	:	Guangzhou FiiO Electronics Technology Co., Ltd.
Address of Manufacturer	:	2/F, F Building, Hougang Industrial Zone, Shigang, Huangshi West Road, Baiyun District, Guangzhou, China

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C

Test Procedure Used:

ANSI C63.10:2020

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No.:	DDT-RE24061713-2E08		
Date of Receipt:	2024/06/25	Date of Test:	2024/06/25~2024/08/20

Prepared By:**Jacky Huang/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/08/20	

1. Summary of Test Results

Description of Test Item	Standard	Result
6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2)	Pass
Peak Output Power	FCC Part 15: 15.247(b)(3)	Pass
Power Spectral Density	FCC Part 15:15.247(e)	Pass
Band Edge Compliance (conducted method)	FCC Part 15: 15.247(d)	Pass
RF Conducted Spurious Emissions	FCC Part 15: 15.247(d)	Pass
Radiation Emission	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	Pass
Emission in Restricted Frequency Bands	FCC Part 15: 15.205 FCC Part 15: 15.209 FCC Part 15: 15.247(d)	Pass
Power Line Conducted Emission	FCC Part 15: 15.207(a)	Pass
Antenna Requirement	FCC Part 15: 15.203	Pass

2. General Test Information

2.1. Description of EUT

EUT Name	: Streaming Music Receiver
Model Number	: F3081S, F3082S, F3083S, F3084S, F3085S, F3086S, F3087S, F3088S, F3089S, F4081S, F4082S, F4083S, F4084S, F4085S, F4086S, F4087S, F4088S, F4089S
Model Difference	: Only the model name is different, any other is the same. The test model is F3081S.
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V powered by an external adapter
Radio Specification	: Bluetooth (BR/EDR/LE), WLAN (2.4 GHz): IEEE 802.11b/g/n, WLAN (5 GHz): IEEE 802.11a/n/ac
Operation Frequency	: Bluetooth (BR/EDR/LE): 2402 MHz-2480 MHz IEEE 802.11b/g/n: 2412 MHz to 2462 MHz, IEEE 802.11a/n/ac: 5180 MHz to 5240 MHz, 5260 MHz to 5320 MHz, 5500 MHz to 5720 MHz, 5745 MHz to 5825 MHz
Modulation	: Bluetooth BR/EDR: GFSK, $\pi/4$ -DQPSK, 8DPSK Bluetooth LE: GFSK IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g/a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Note 1: This report only for Bluetooth LE 1Mbps, 2 Mbps.

Note 2: Simultaneously transmission condition: N/A

Note 3: Antenna information:

Bluetooth Antenna information	
Antenna Type	: FPC
Antenna Gain (dBi)	: 2.02

Note 4: Bluetooth LE Channel information:

Bluetooth LE 1Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474

9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		
Bluetooth LE 2Mbps Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	14	2430	28	2458
1	2404	15	2432	29	2460
2	2406	16	2434	30	2462
3	2408	17	2436	31	2464
4	2410	18	2438	32	2466
5	2412	19	2440	33	2468
6	2414	20	2442	34	2470
7	2416	21	2444	35	2472
8	2418	22	2446	36	2474
9	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		
The channels denoted with the grey background are excluded, because they are primary advertising channel only for the Bluetooth LE 1Mbps according to the Bluetooth Core Specification.					

Note 5: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.


2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
Adapter	/	/	/
Remote controller	/	/	/
Type-C cable	/	/	/

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Laptop	Lenovo	X201	N/A	00154-290-415-484

2.4. Block diagram of EUT configuration for test

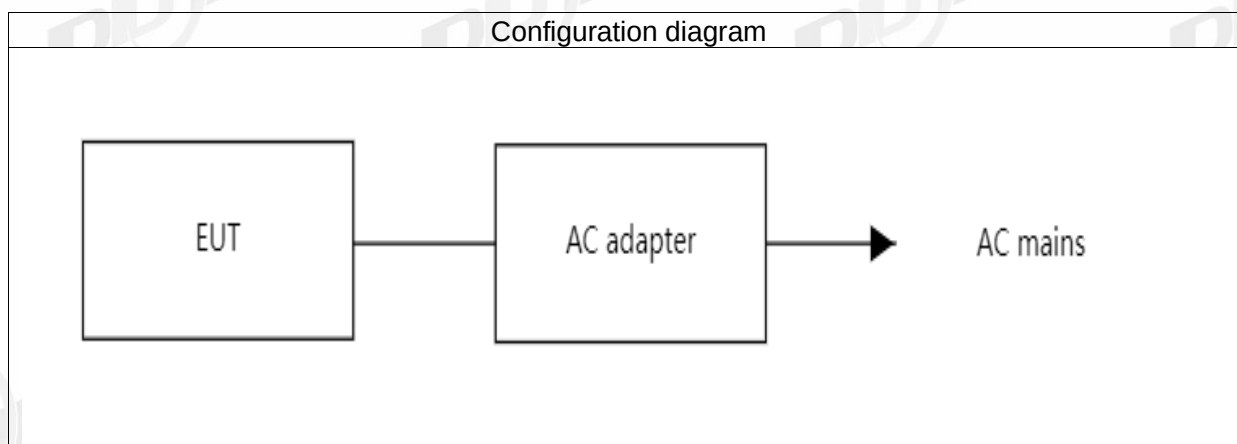

The Putty.exe was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
BLE_1M	Default	CH0	2402
	Default	CH19	2440
	Default	CH39	2480
BLE_2M	Default	CH1	2404
	Default	CH19	2440
	Default	CH38	2478

2.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.6. Deviations of test standard

No deviation.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Unit 2, Building 1, No.17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method)
	5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$);
	1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
	1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date	Cal. Interval
☑RF Connected Test (RF Measurement System 2#)					
SPECTRUM ANALYZER	R&S	FSU26	201124	2024/07/11	1 Year
Power Sensor	R&S	NRP-Z22	101254	2024/07/11	1 Year
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A

Note: The conductive method test date is 2024-07-05.

4. 6 dB Bandwidth

4.1. Block diagram of test setup

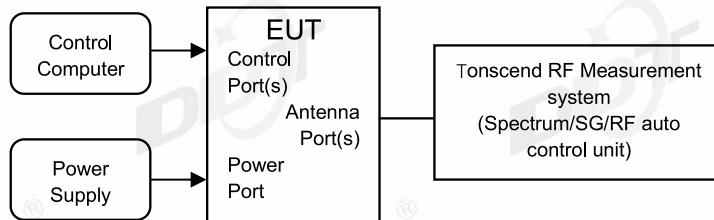

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure


- (1) The test according to ANSI C63.10-2020 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:


RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report.

4.4. Test result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.71	2401.64	2402.35	0.5	PASS
		2440	0.71	2439.64	2440.36	0.5	PASS
		2480	0.72	2479.65	2480.36	0.5	PASS
BLE_2M	Ant1	2404	1.10	2403.45	2404.56	0.5	PASS
		2440	1.11	2439.45	2440.56	0.5	PASS
		2478	1.10	2477.47	2478.57	0.5	PASS


4.5. Test graphs

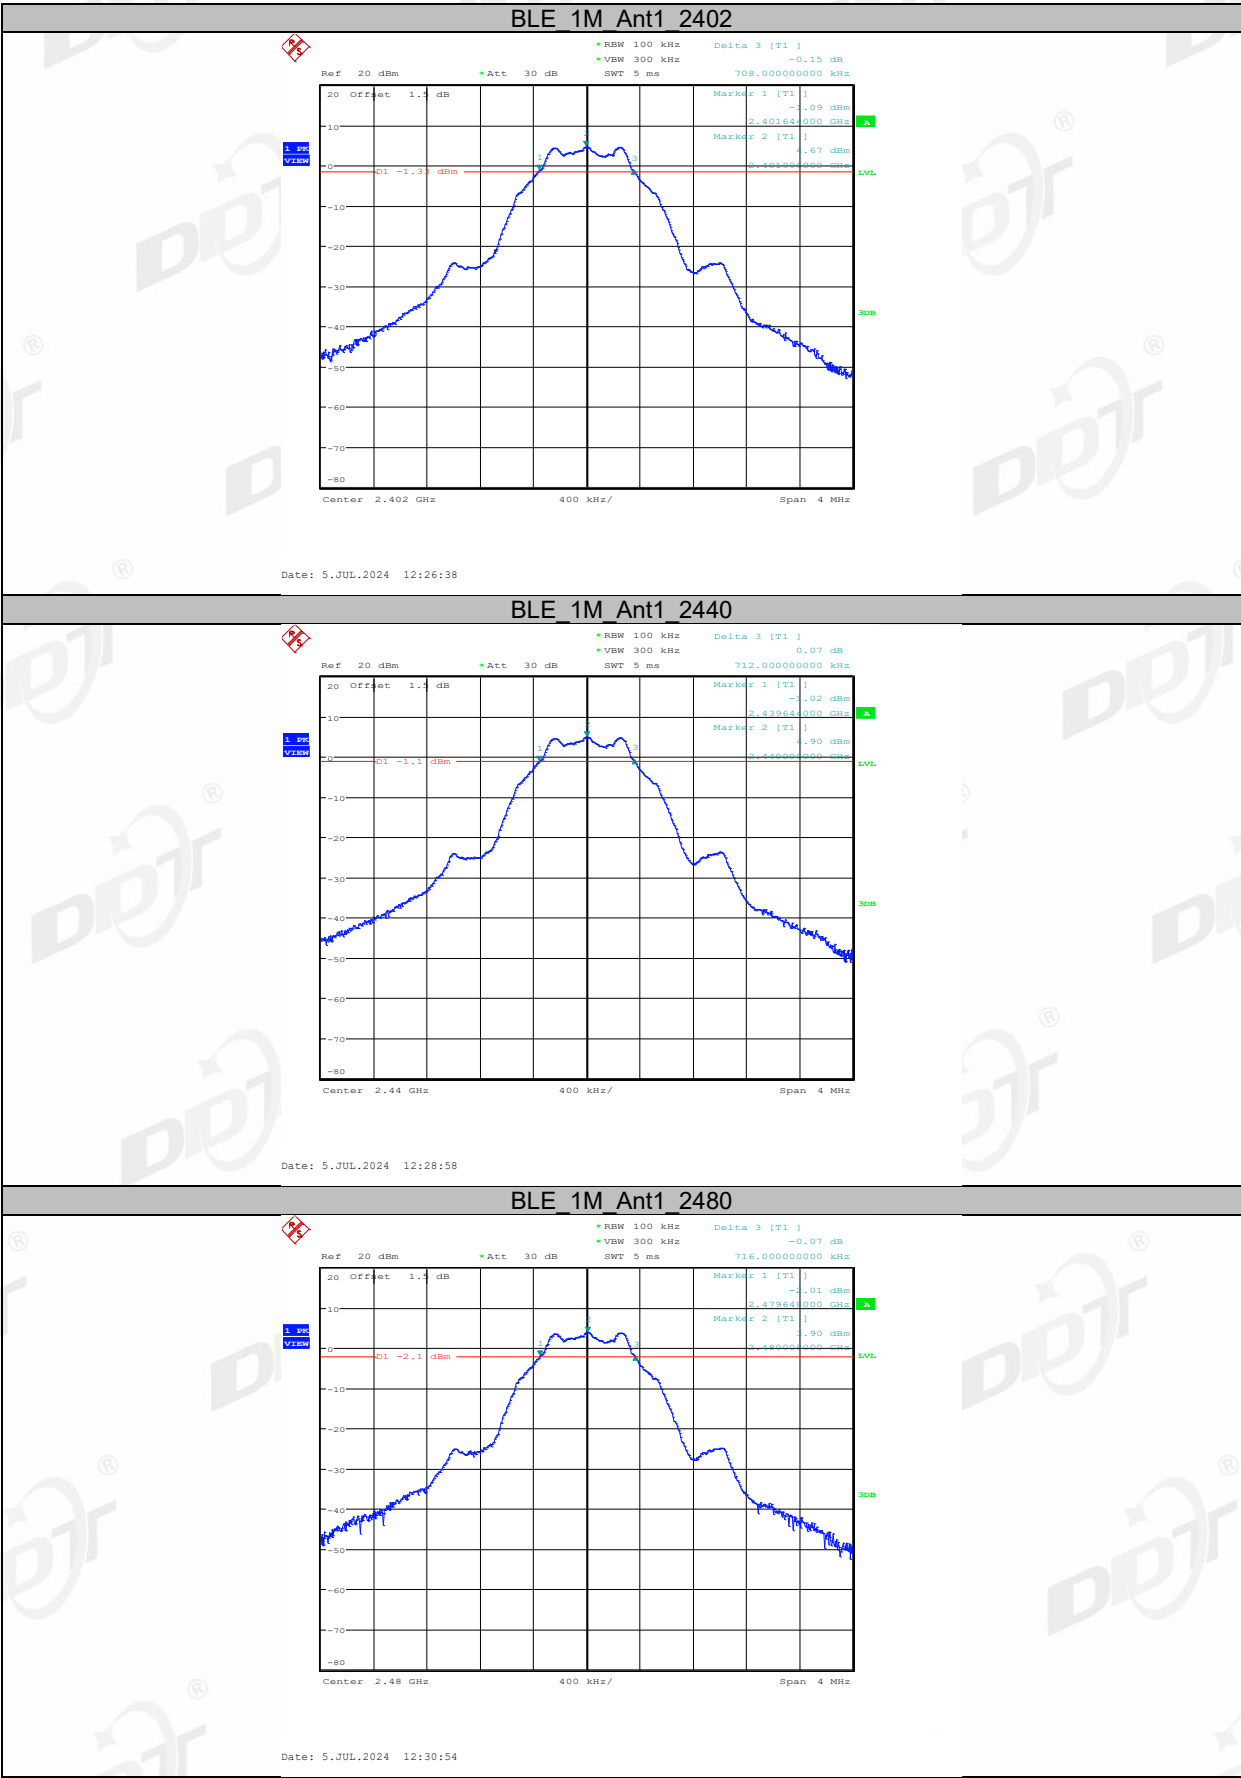

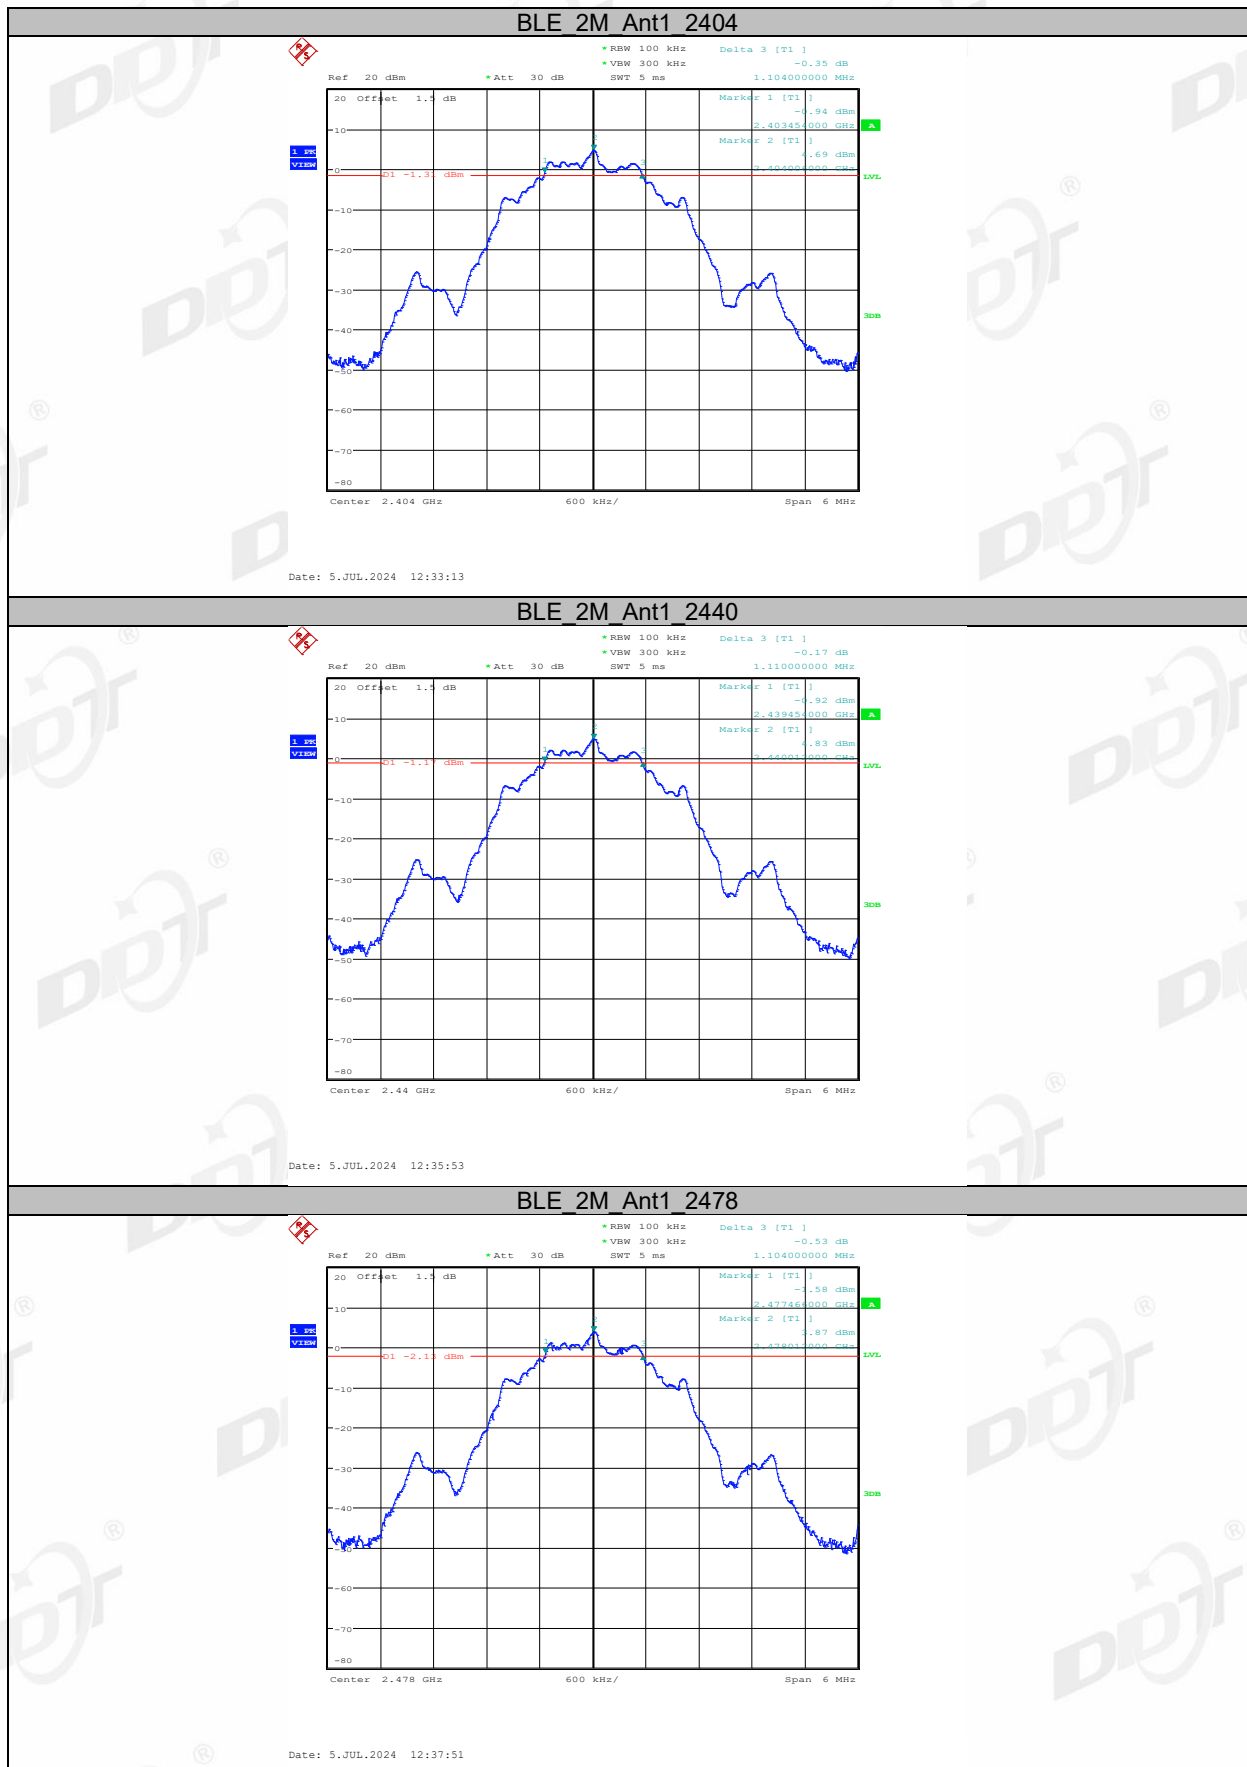

5. 99% Bandwidth

5.1. Block diagram of test setup

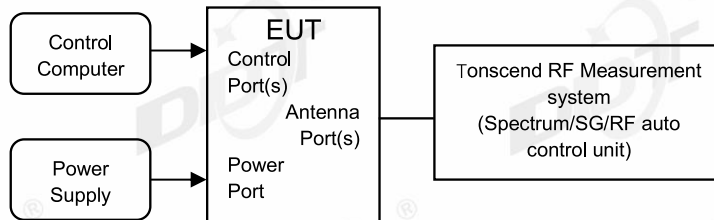

5.2. Limits

Just for Report.

5.3. Test procedure


- (1) The test according to ANSI C63.10-2020 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.

5.4. Test result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.064	2401.4760	2402.5400	---	---
		2440	1.064	2439.4800	2440.5440	---	---
		2480	1.060	2479.4880	2480.5480	---	---
BLE_2M	Ant1	2404	2.082	2402.9740	2405.0560	---	---
		2440	2.076	2438.9800	2441.0560	---	---
		2478	2.082	2476.9800	2479.0620	---	---


5.5. Test graphs

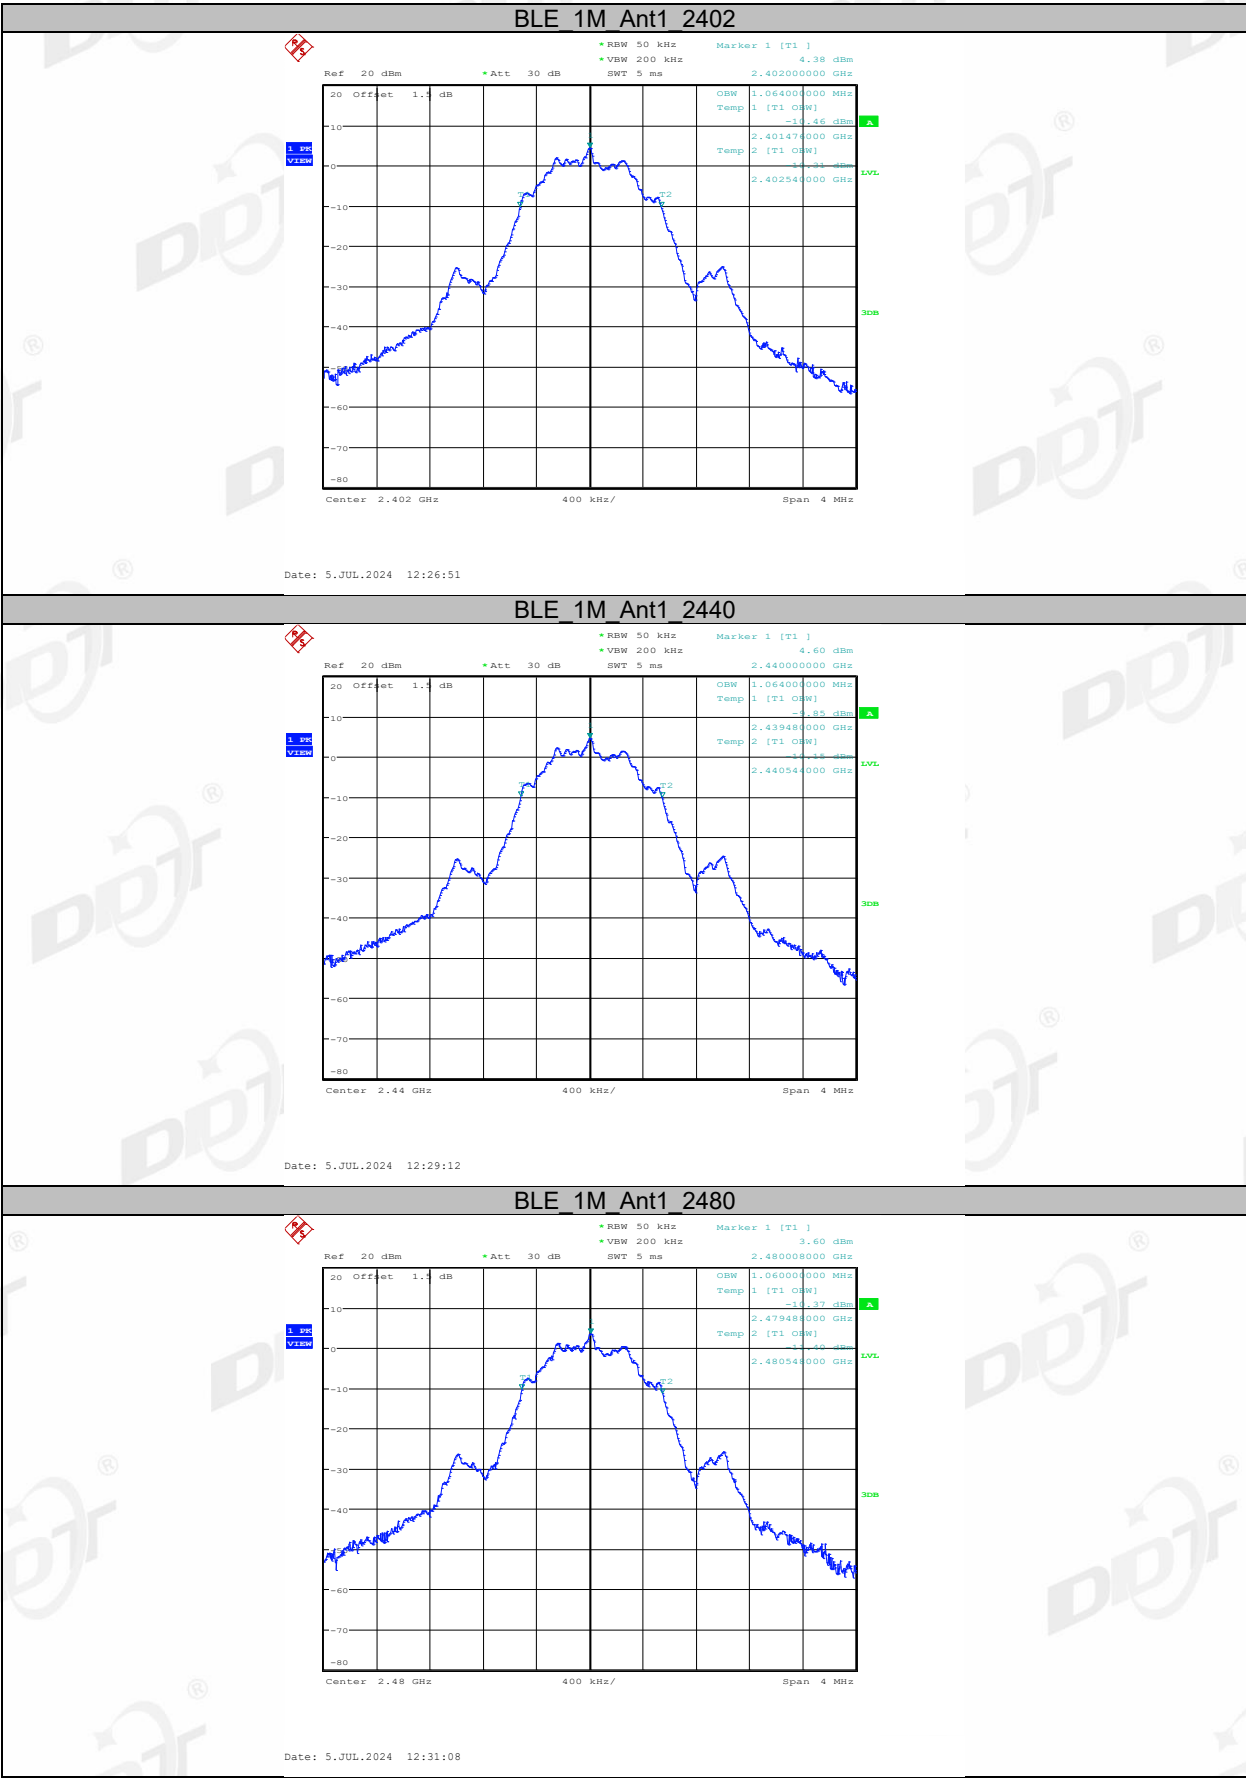

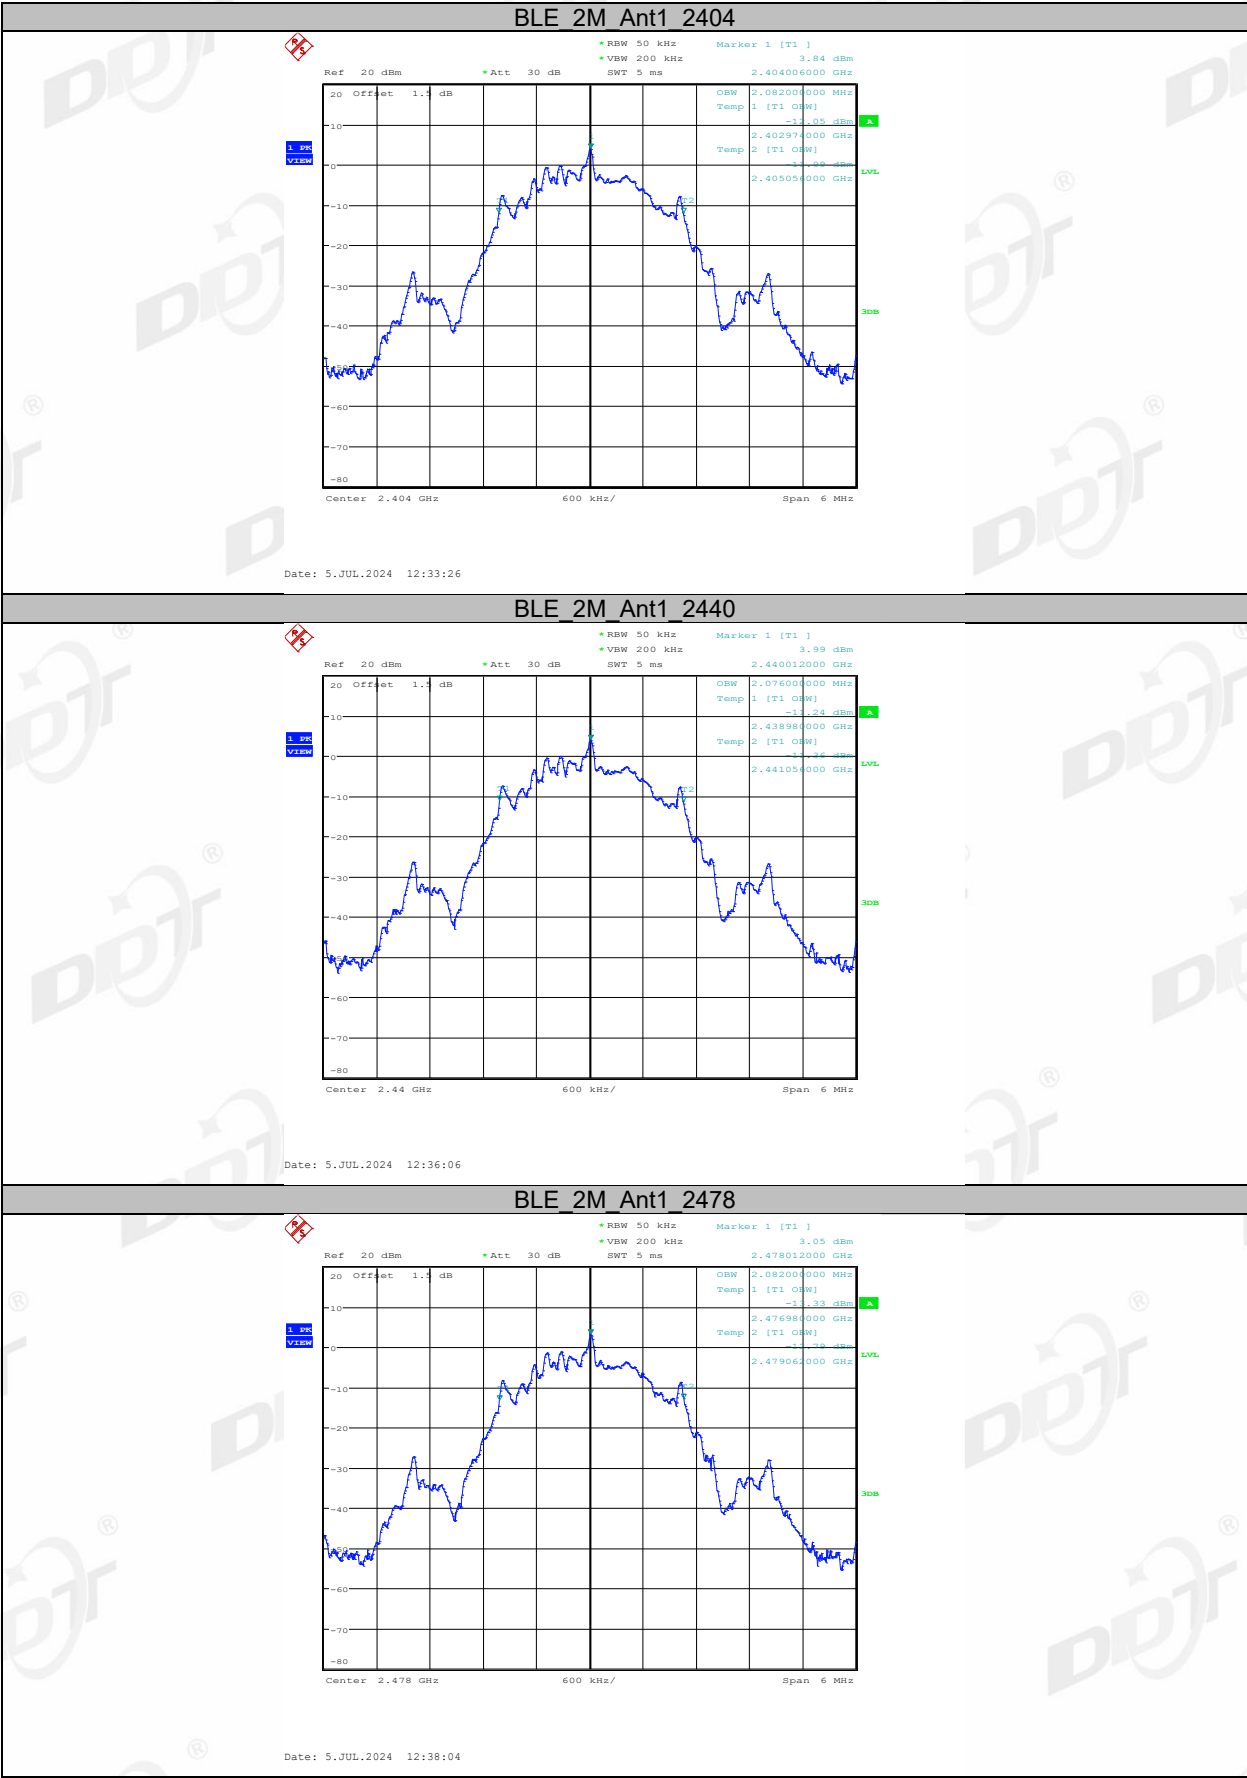

6. Maximum Peak Output Power

6.1. Block diagram of test setup

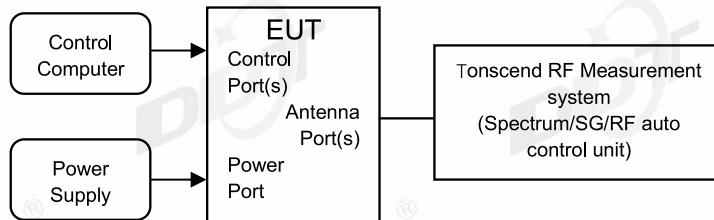

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi, the e.i.r.p shall not exceed 4W.

6.3. Test procedure


- (1) The test according to ANSI C63.10-2020 clause 11.9.1.1.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	≥DTS bandwidth
VBW:	≥3 x RBW
Span	≥3 x RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, use peak marker function to determine the peak amplitude level.

6.4. Test result

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_1M	Ant1	2402	5.93	≤30	7.95	≤36	PASS
		2440	6.09	≤30	8.11	≤36	PASS
		2480	5.11	≤30	7.13	≤36	PASS
BLE_2M	Ant1	2404	5.76	≤30	7.78	≤36	PASS
		2440	5.90	≤30	7.92	≤36	PASS
		2478	4.94	≤30	6.96	≤36	PASS


6.5. Test graphs

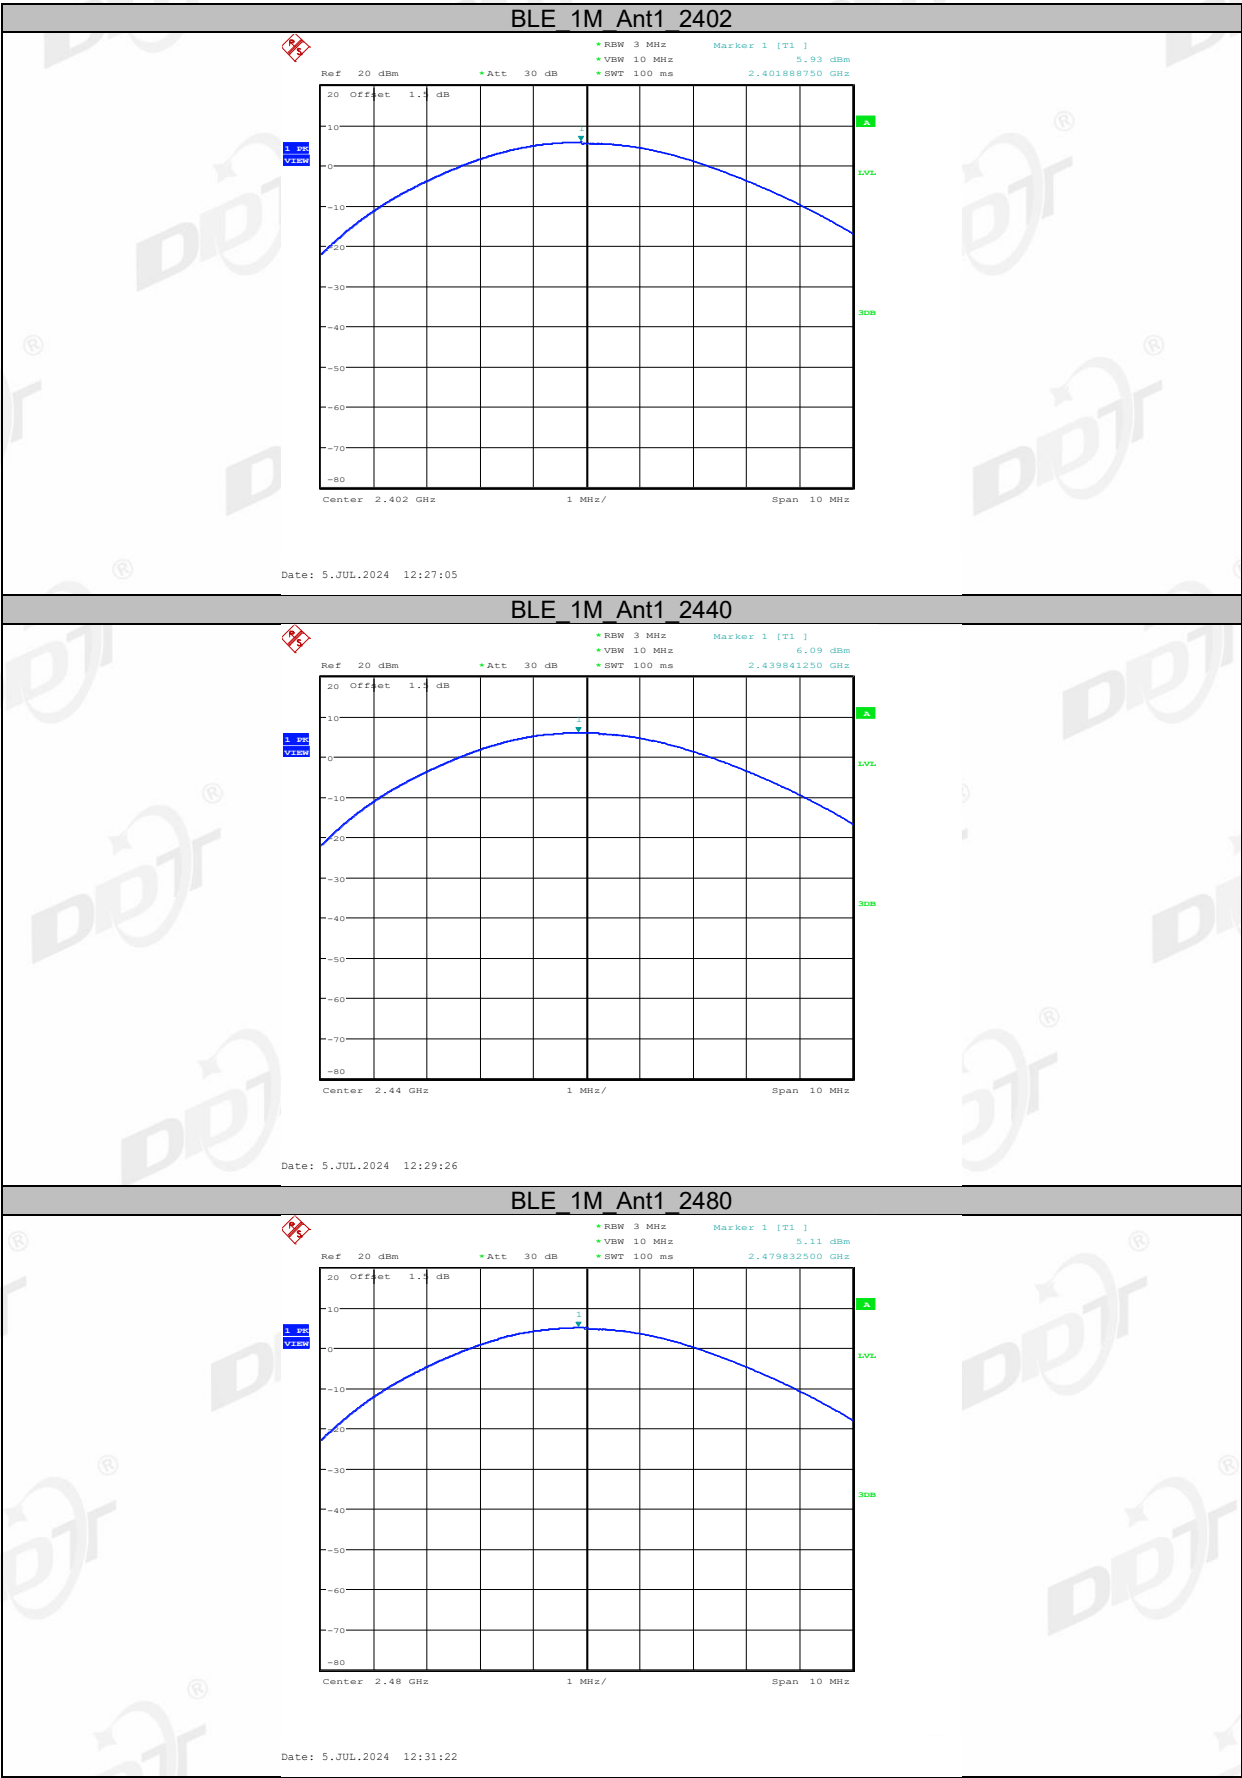

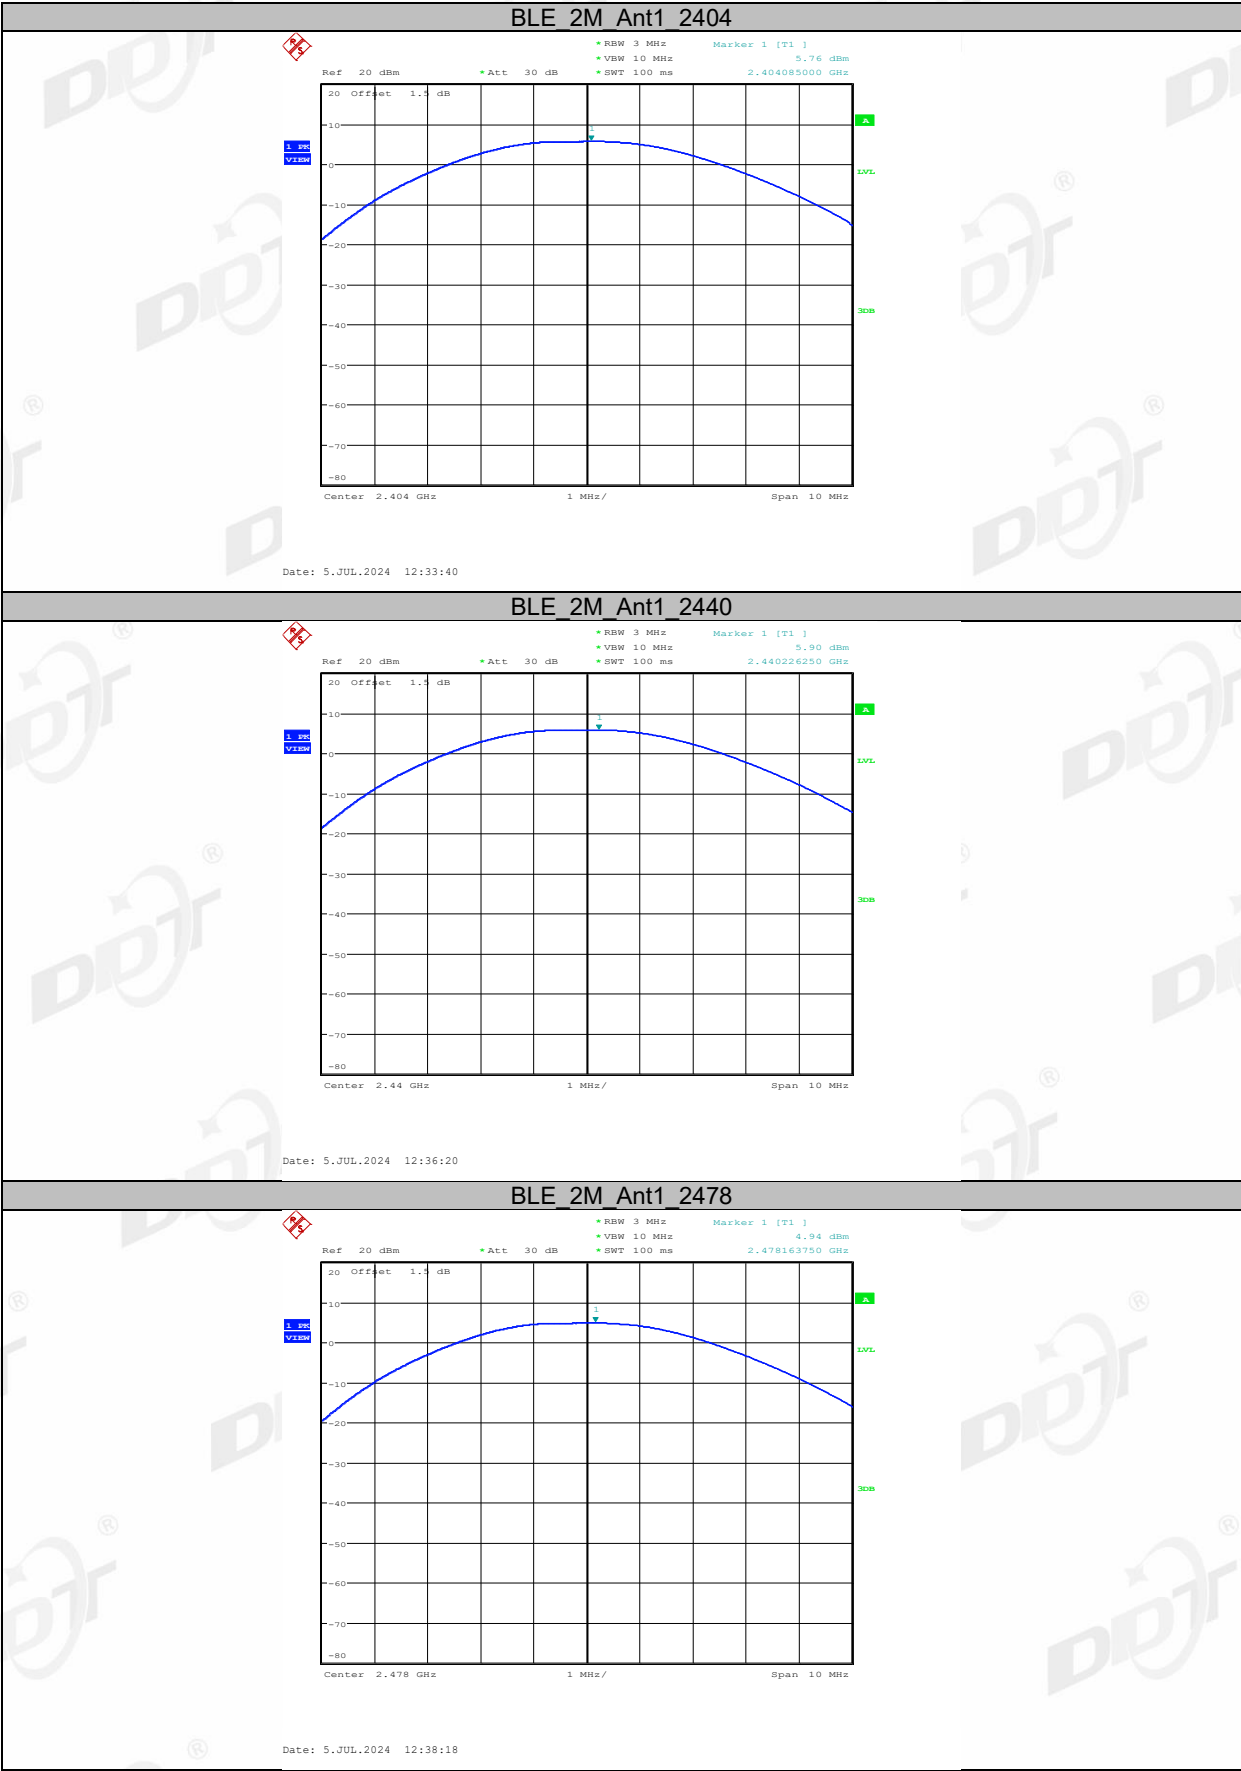

7. Power Spectral Density

7.1. Block diagram of test setup

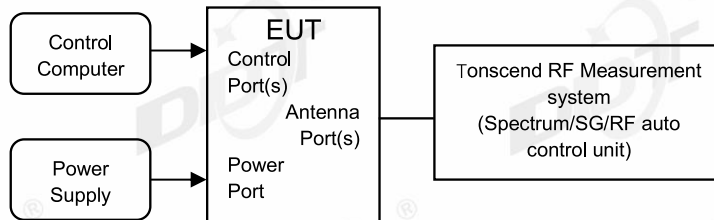

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure


- (1) The test according to ANSI C63.10-2020 clause 11.10.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (6) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.11	≤8.00	PASS
		2440	-8.96	≤8.00	PASS
		2480	-9.81	≤8.00	PASS
BLE_2M	Ant1	2404	-11.67	≤8.00	PASS
		2440	-11.58	≤8.00	PASS
		2478	-12.42	≤8.00	PASS


7.5. Test graphs

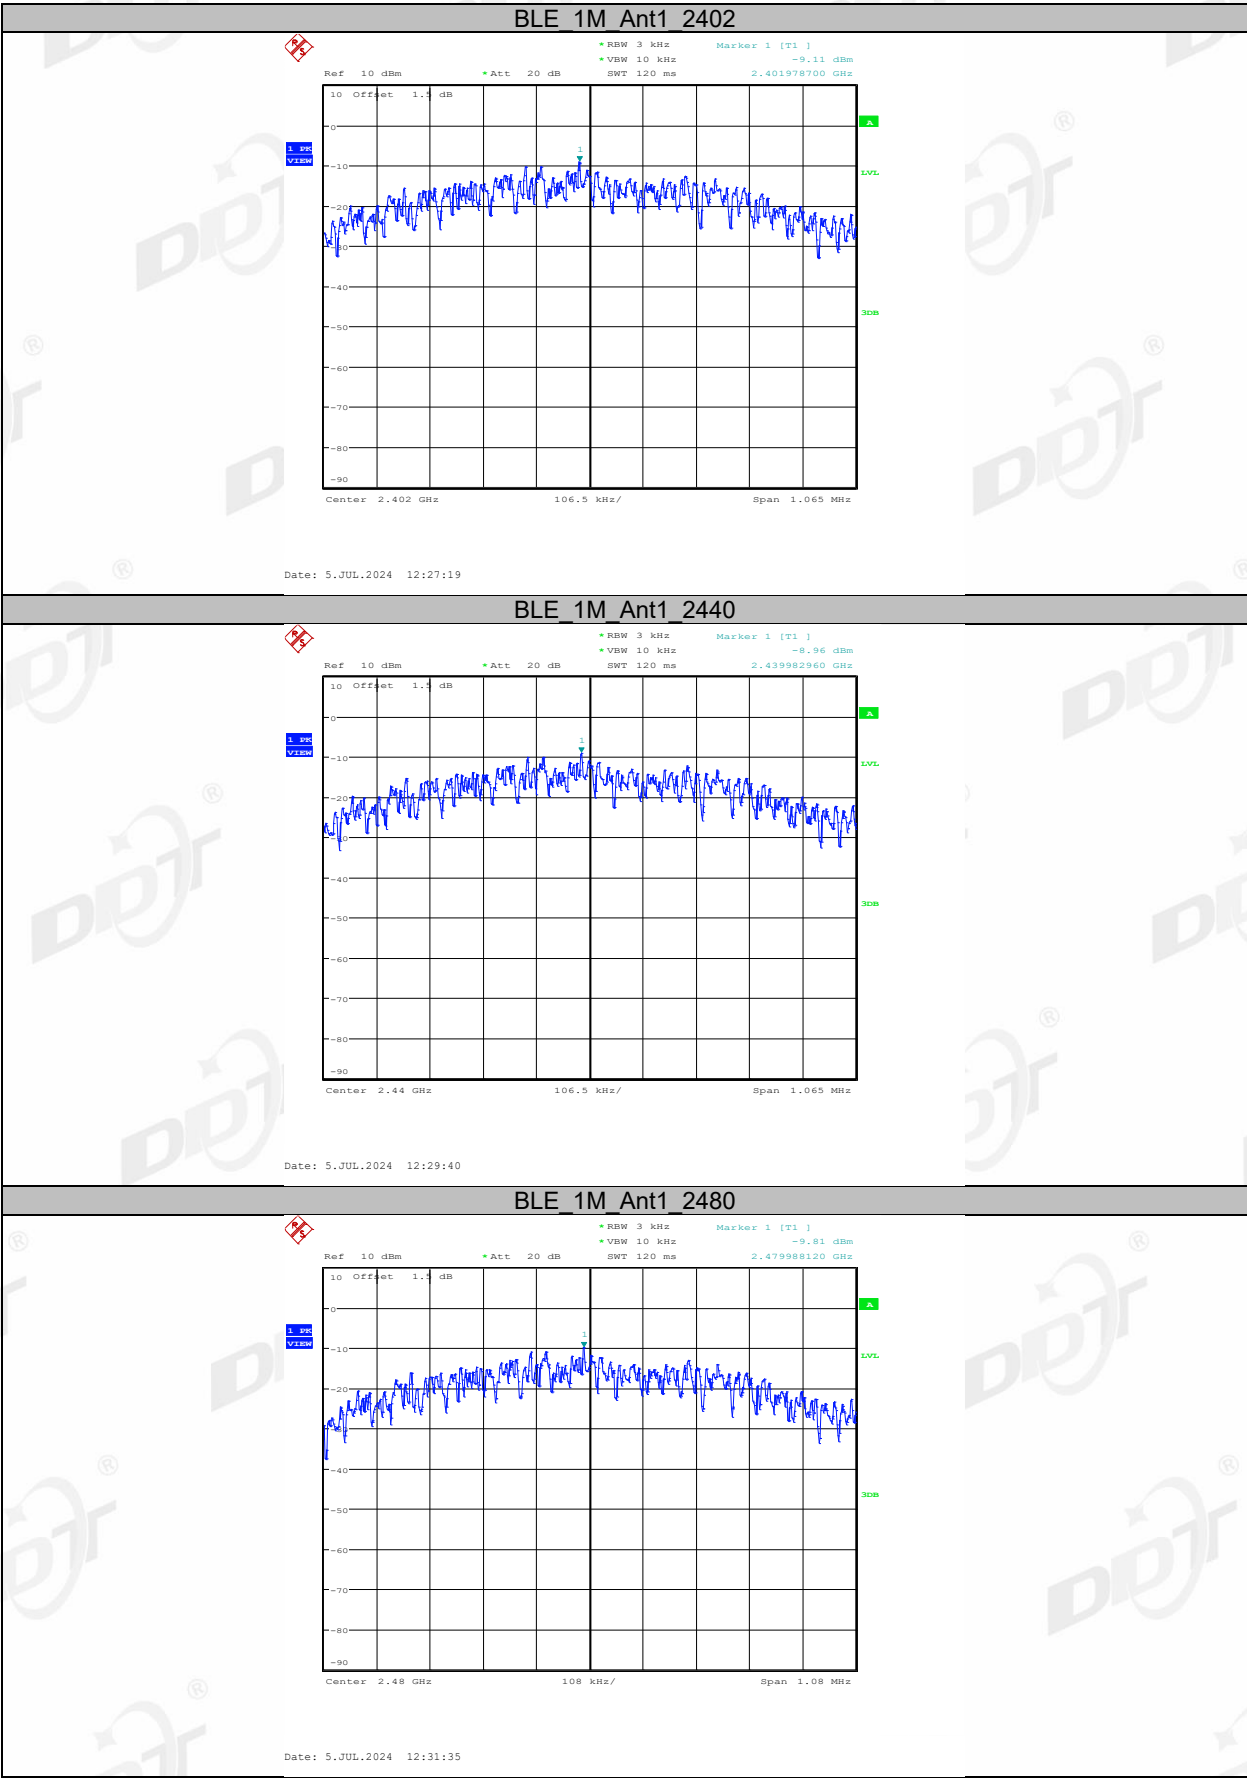

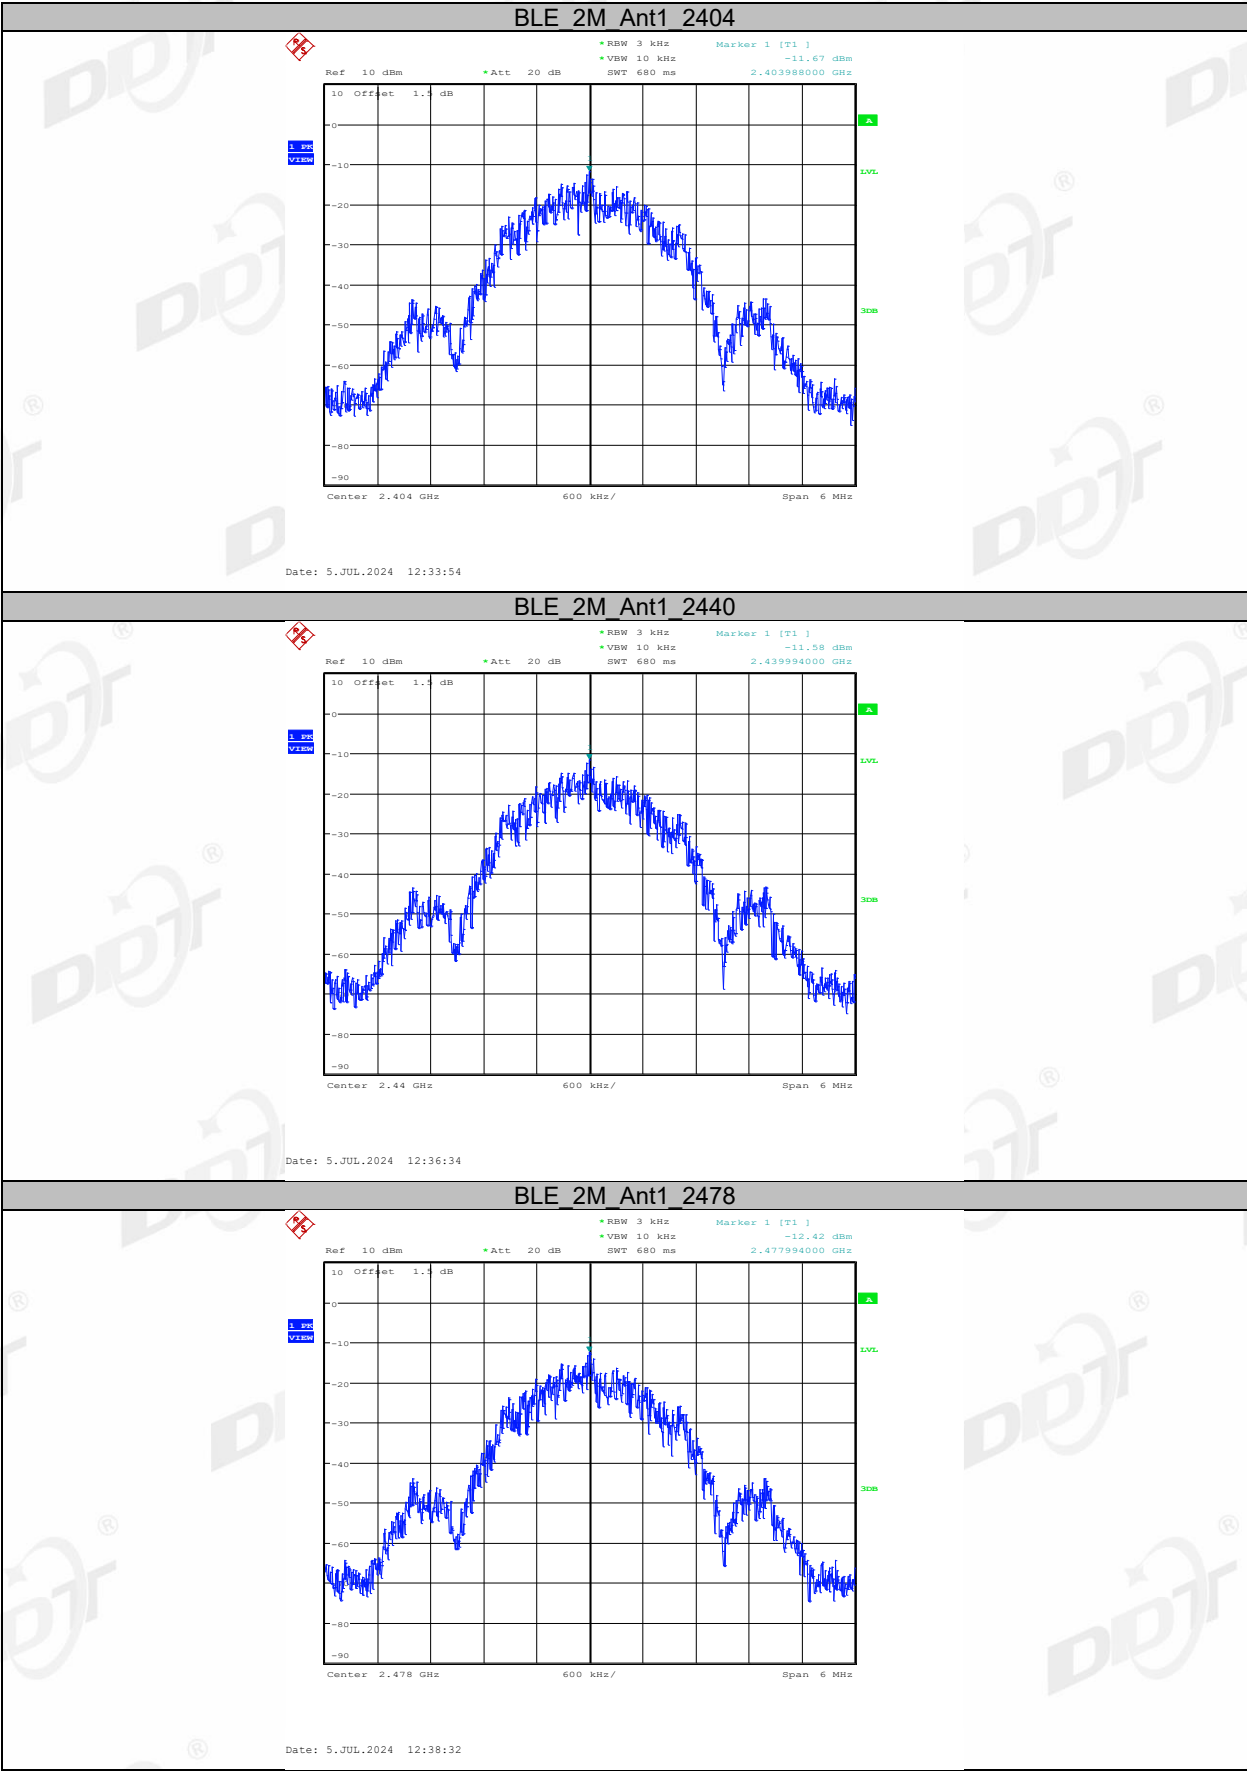

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

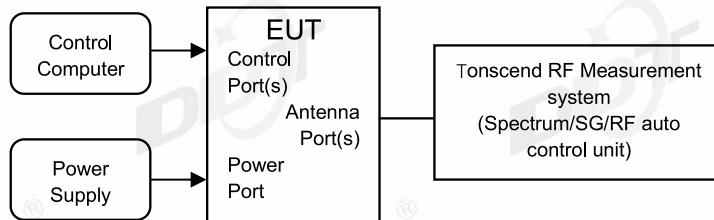

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure


- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

8.4. Test result

EUT Set Mode	Channel or Frequency	Measured Range	Verdict
BLE_1M	2402	2.310 GHz - 2.410 GHz	Pass
	2480	2.470 GHz - 2.500 GHz	Pass
BLE_2M	2404	2.310 GHz - 2.410 GHz	Pass
	2478	2.470 GHz - 2.500 GHz	Pass

8.5. Test graphs

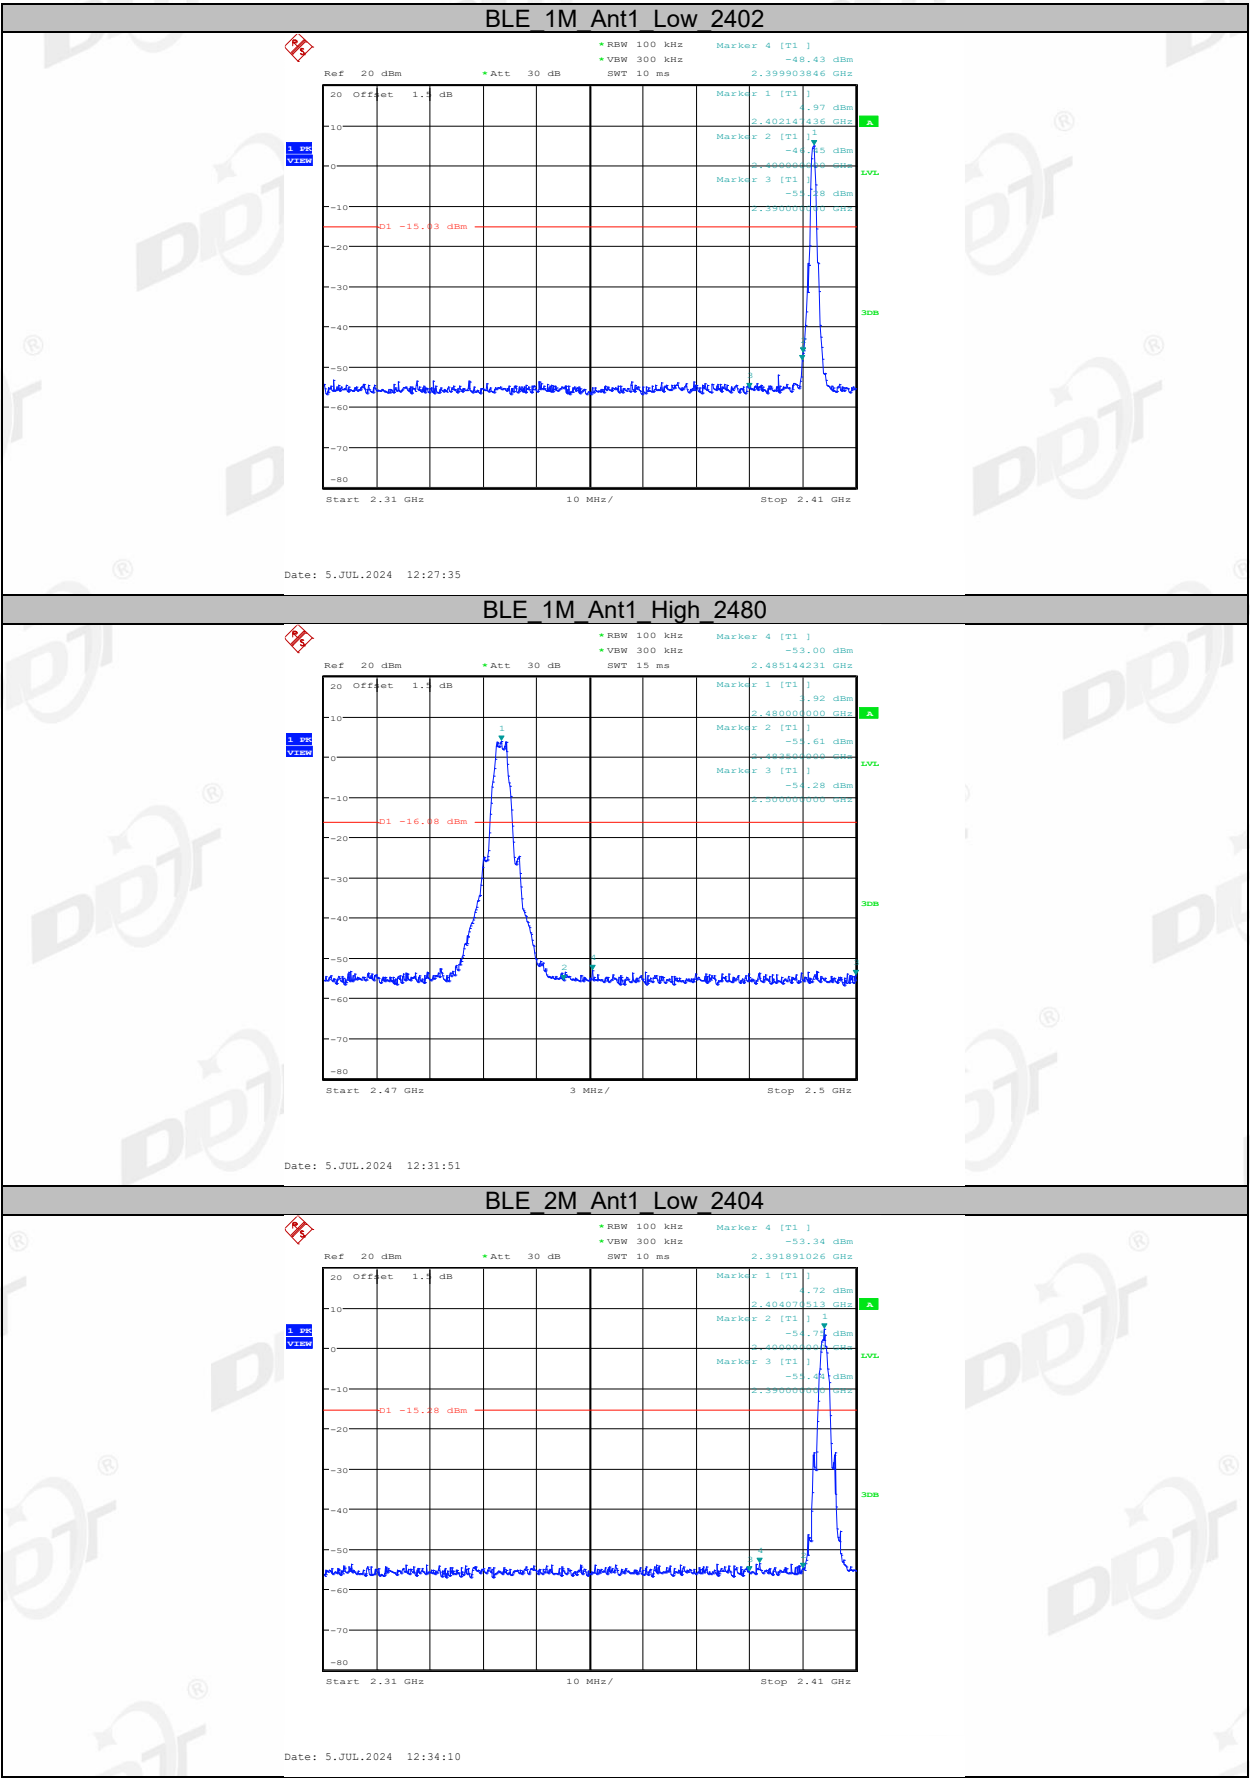

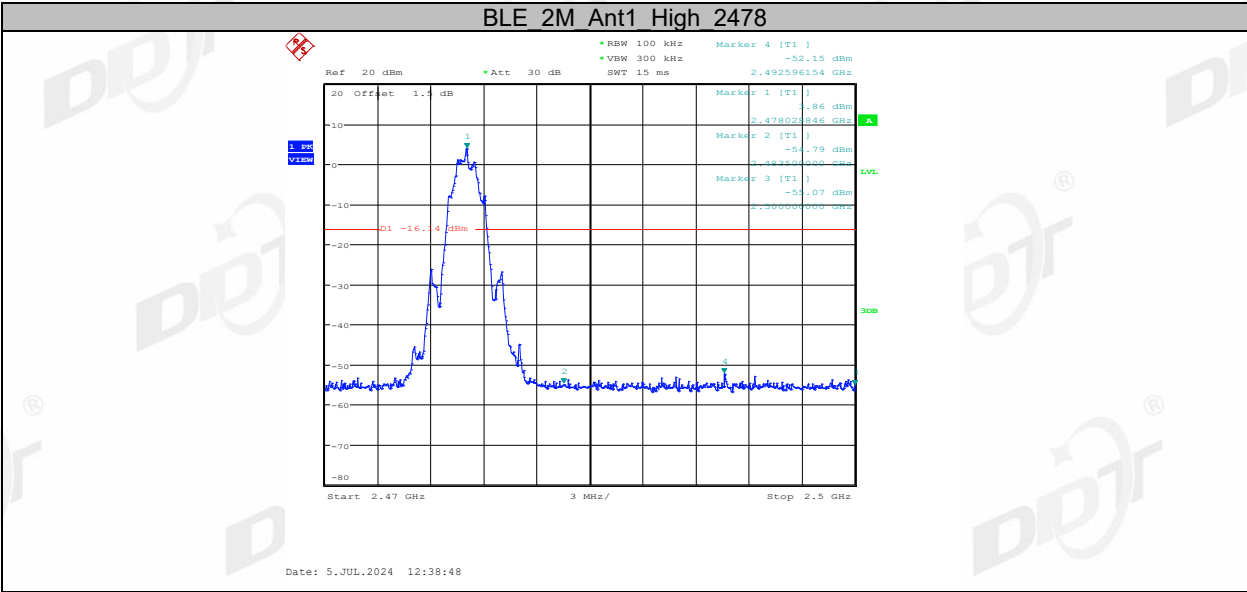

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as 8.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result

Mode	Frequency (MHz)	Verdict
BLE_1M	2402	Pass
	2440	Pass
	2480	Pass
BLE_2M	2404	Pass
	2440	Pass
	2478	Pass

9.5. Test graphs

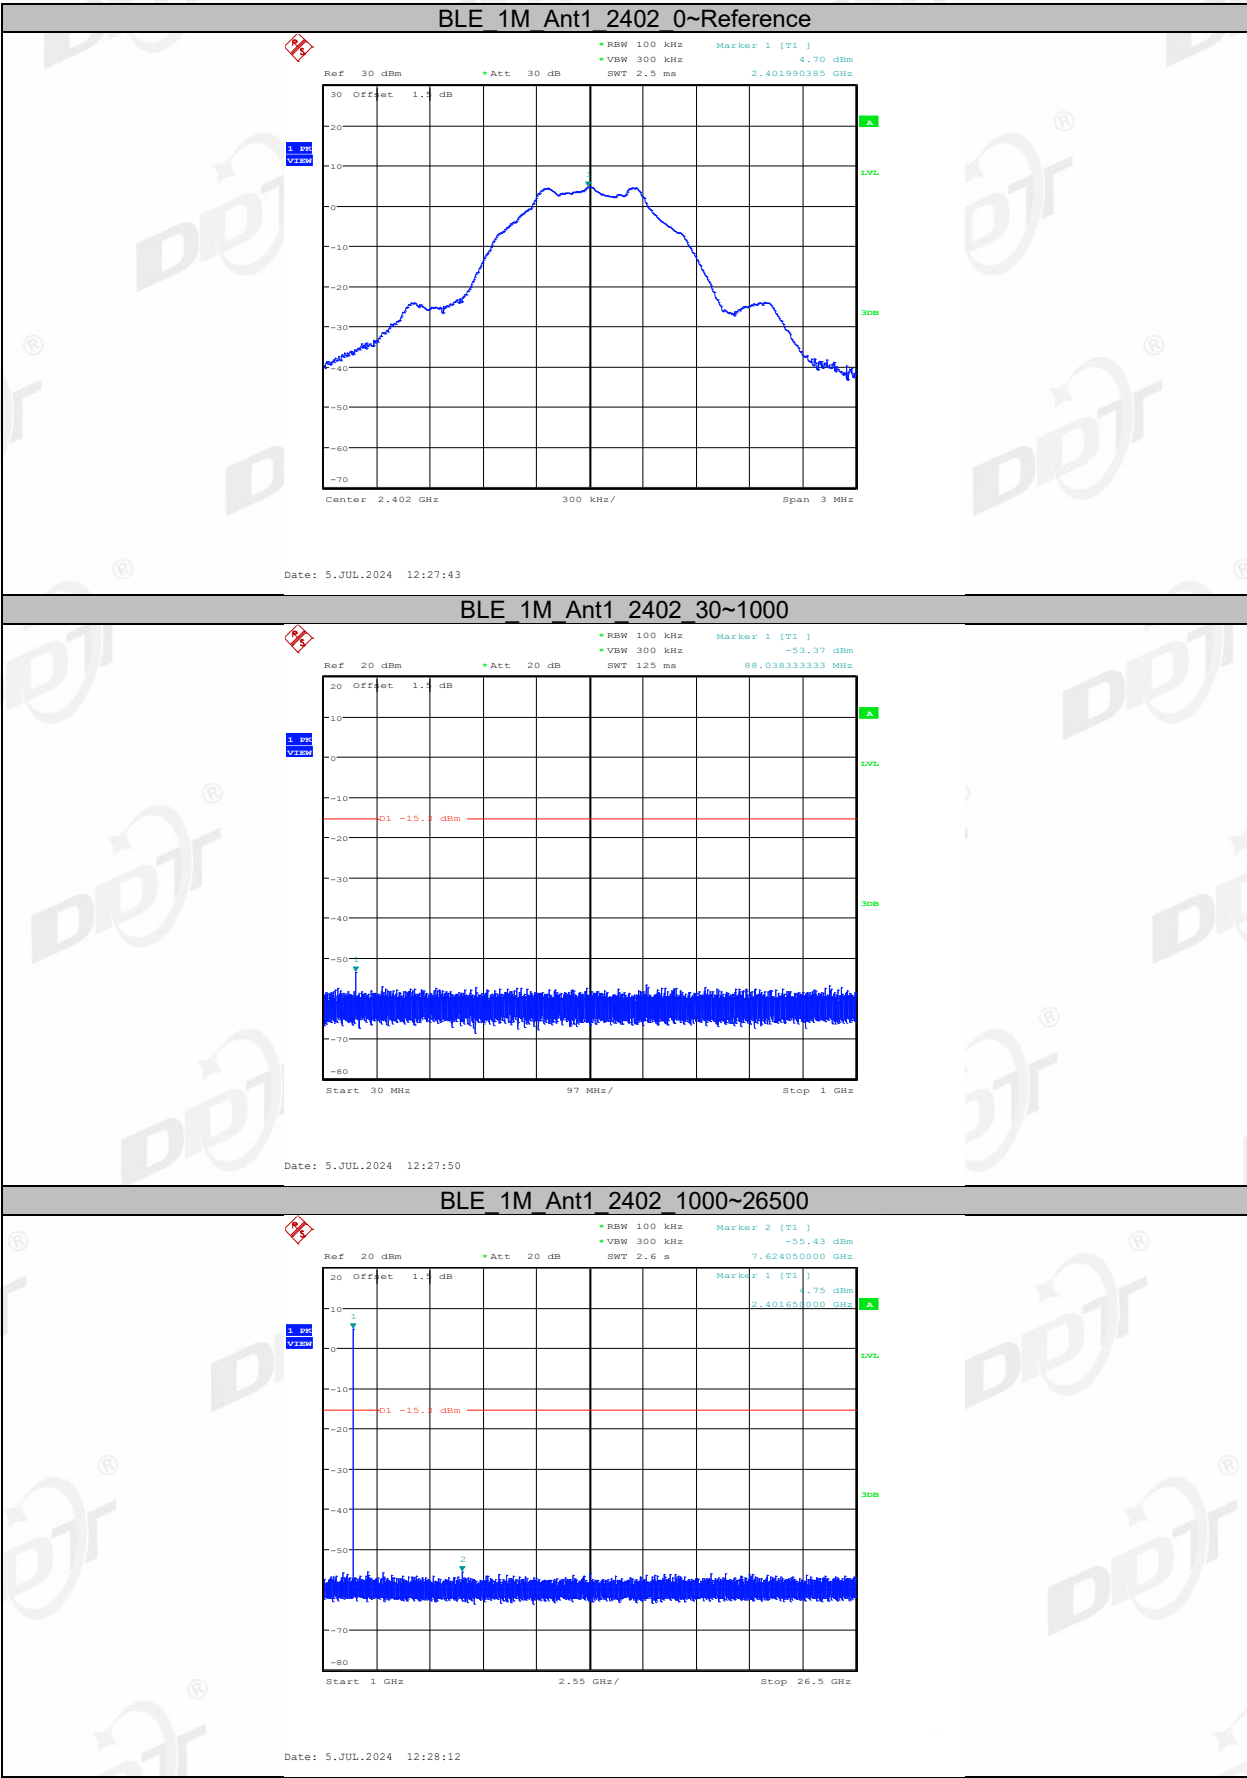


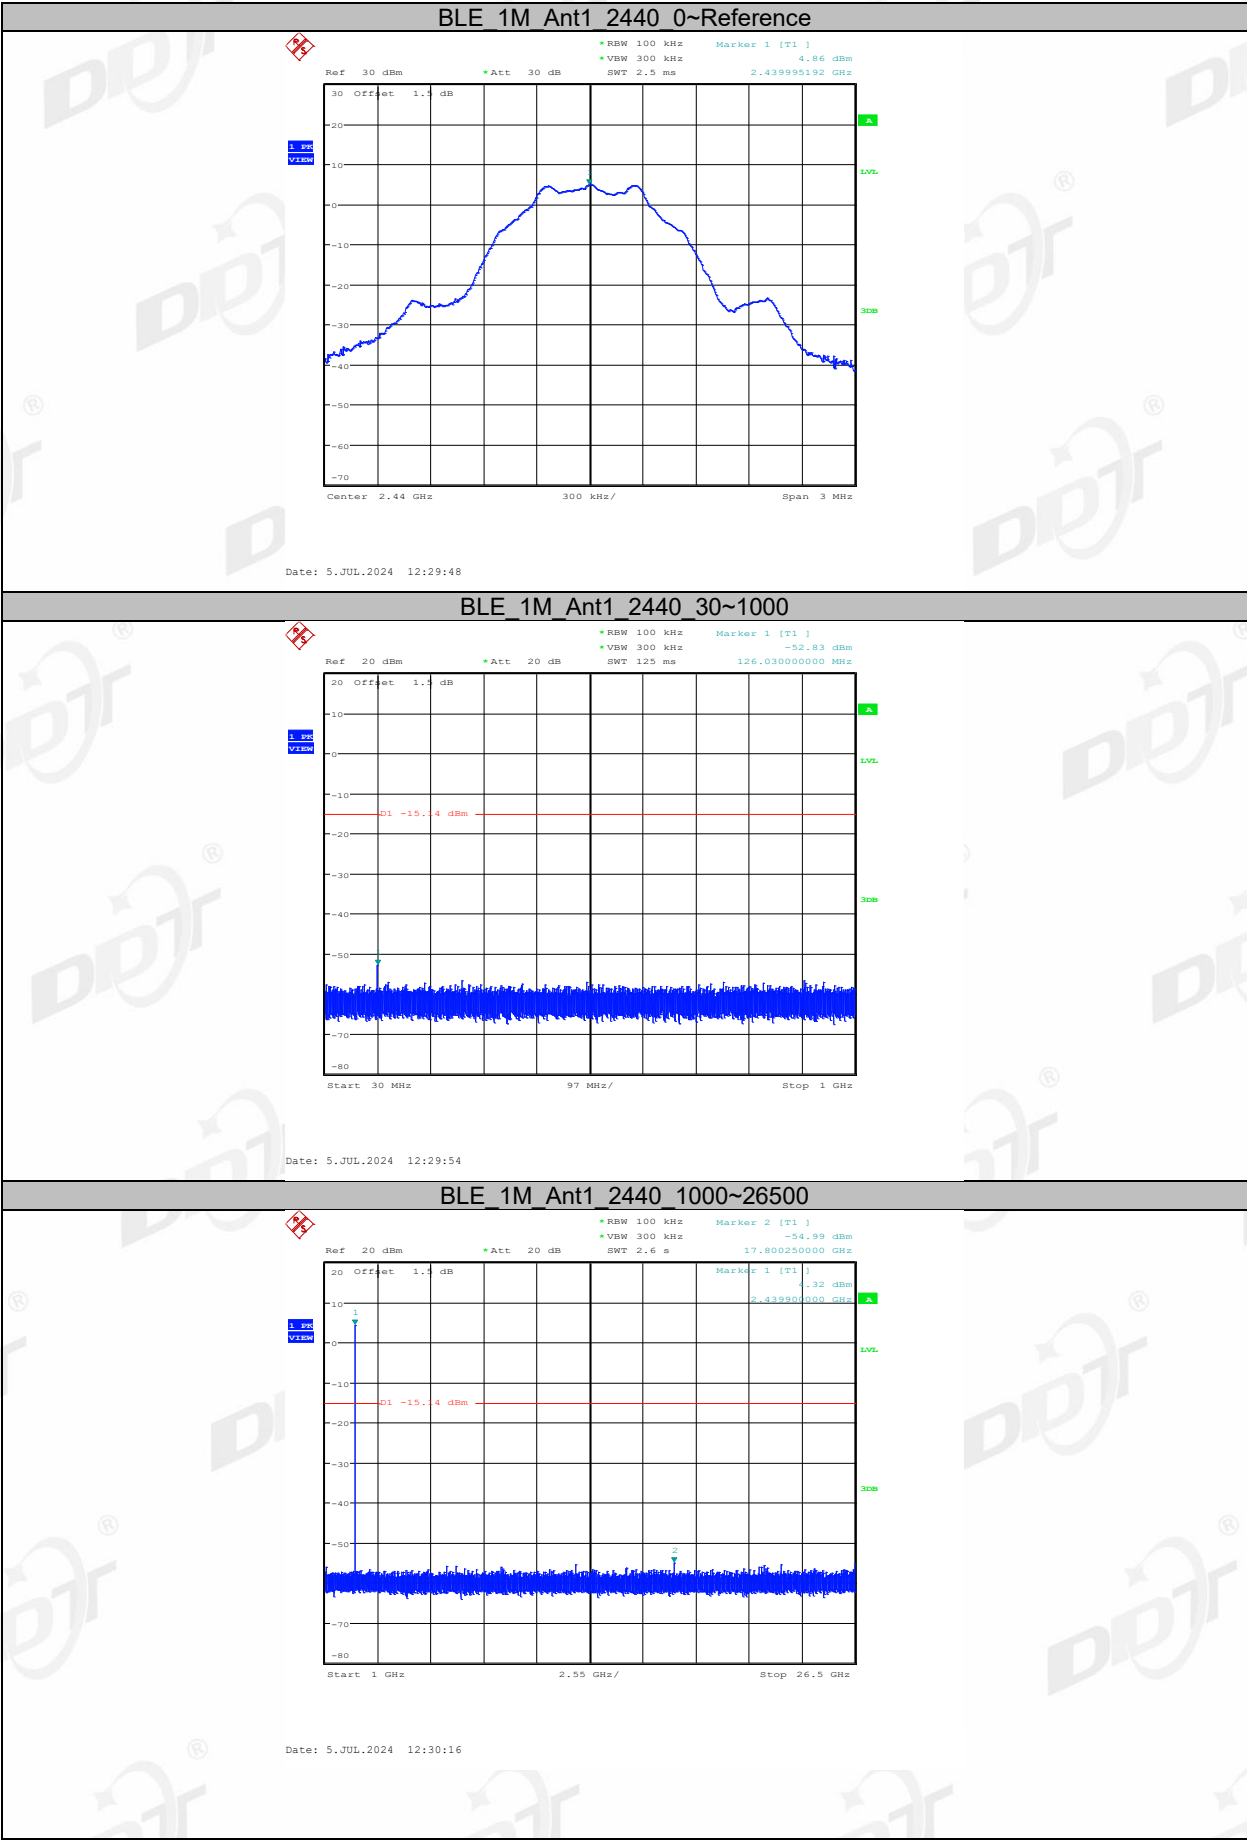

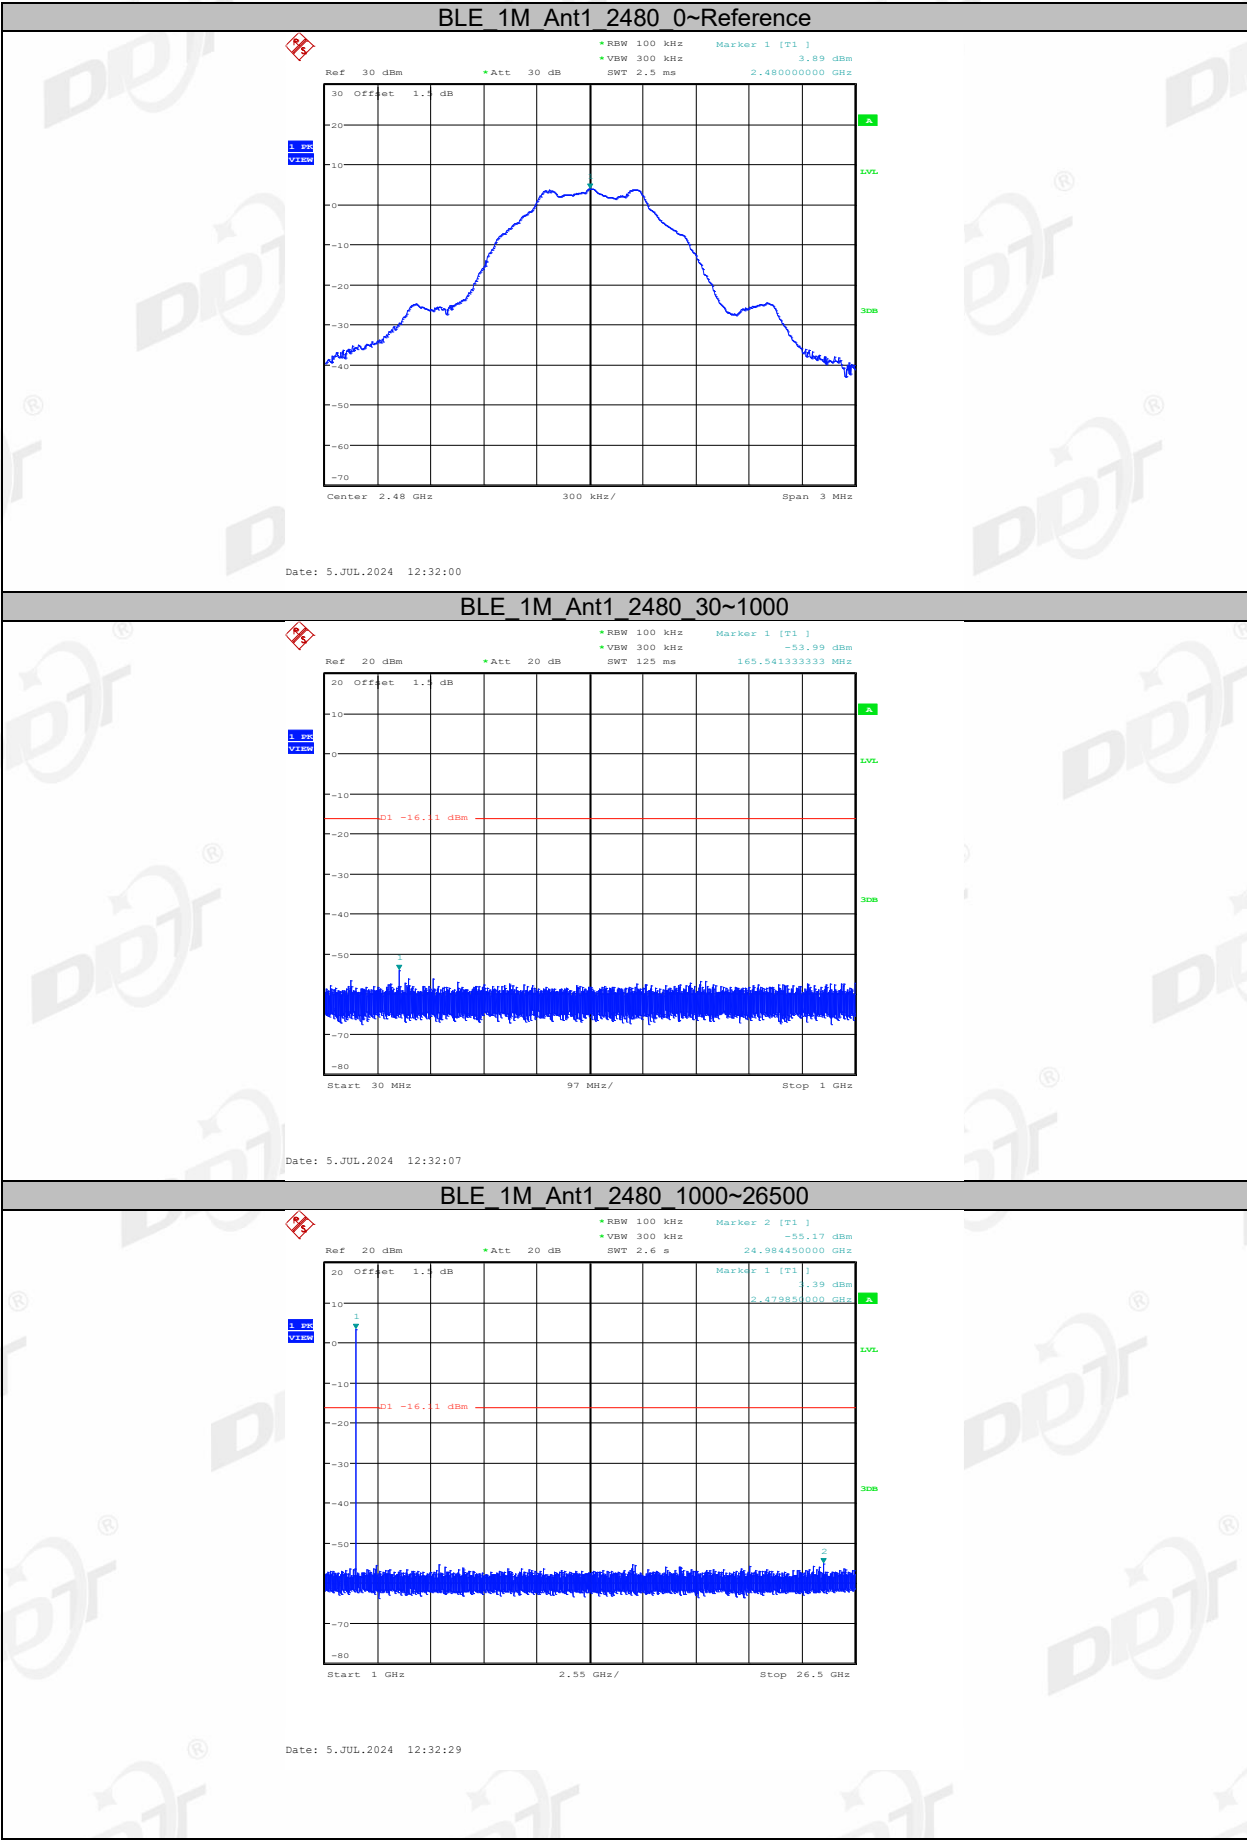






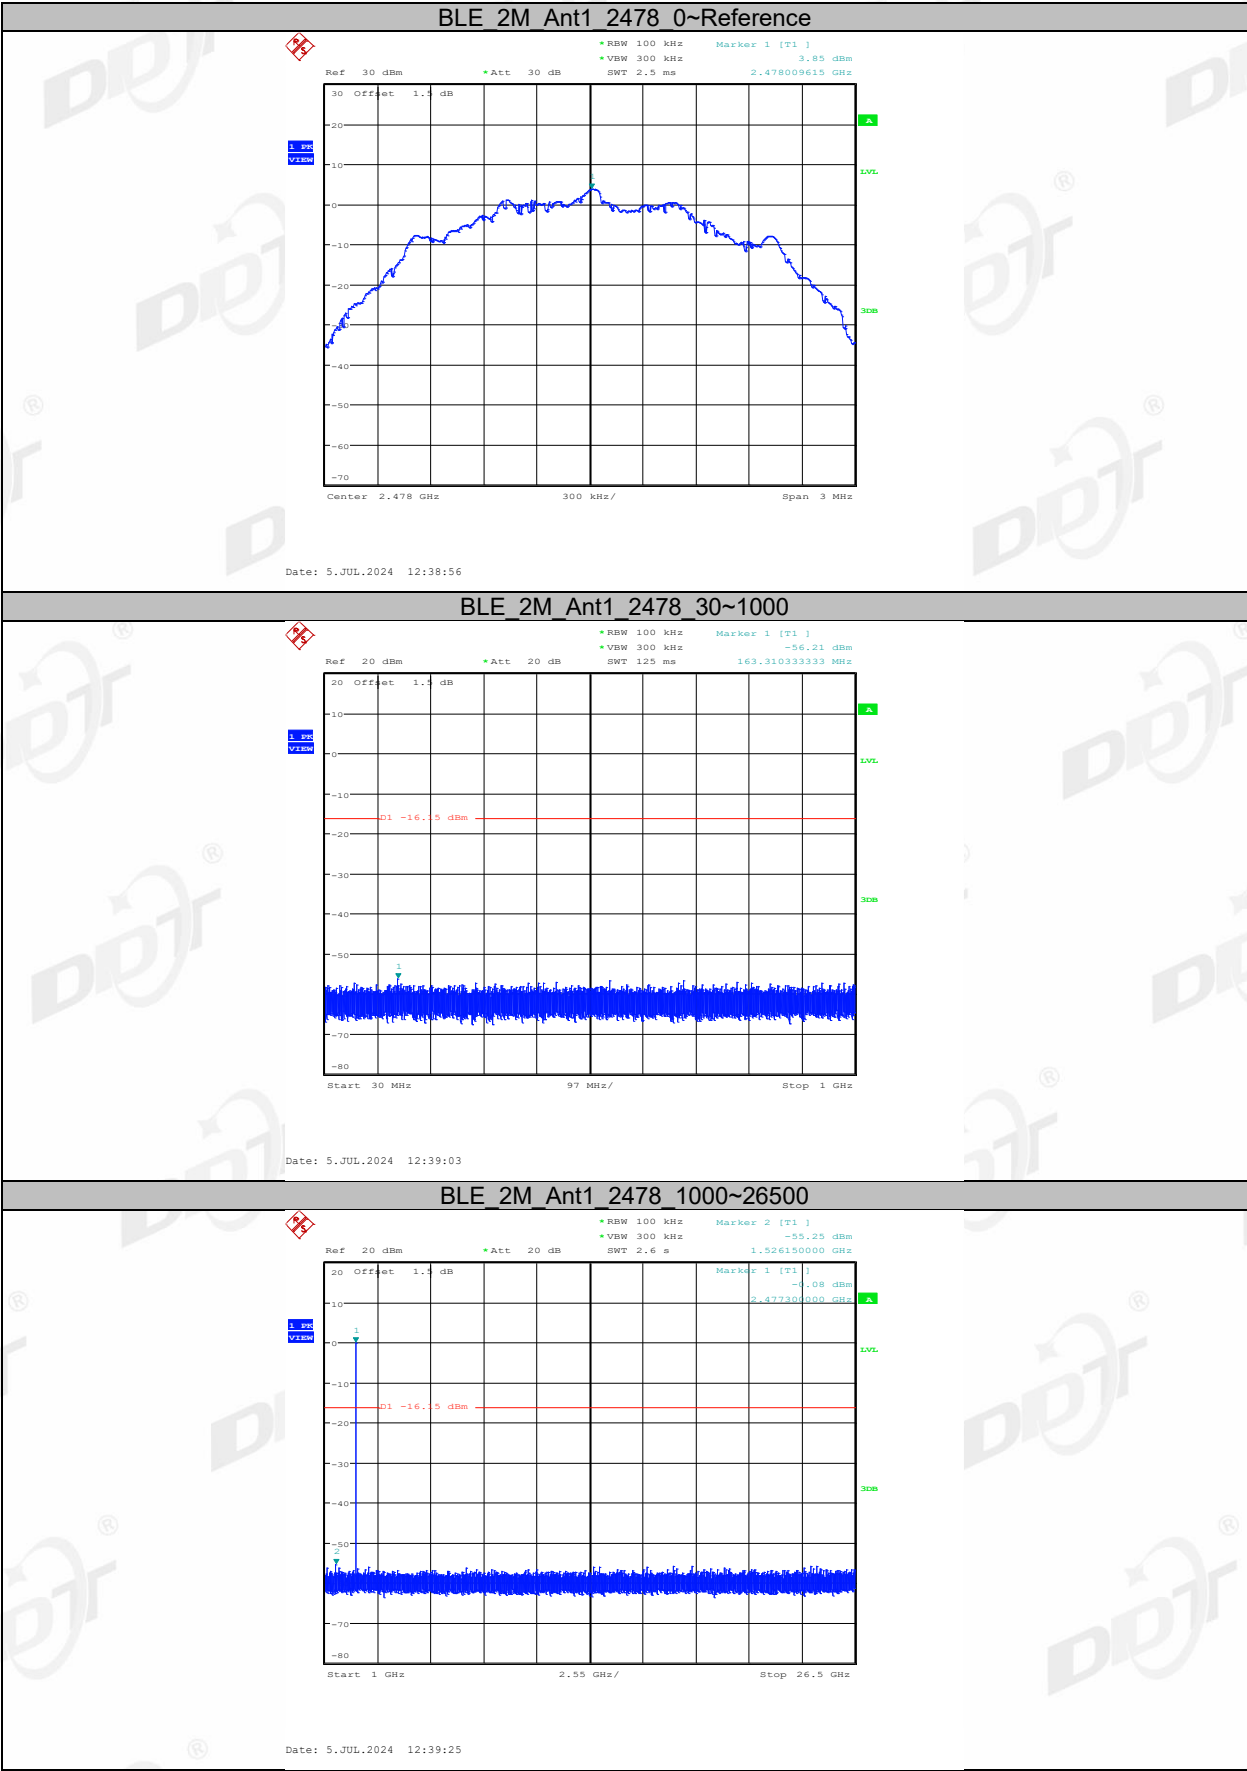

10. Duty Cycle

10.1. Block diagram of test setup

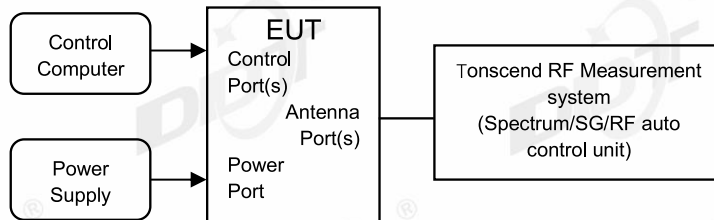

10.2. Limit

Just for Report.

10.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset. set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
$$\text{Duty cycle} = \text{Pulse's on time} / \text{Burst cycle}$$

10.4. Test result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.08
		2440	0.39	0.63	61.90	2.08
		2480	0.39	0.63	61.90	2.08
BLE_2M	Ant1	2404	0.21	0.63	33.33	4.77
		2440	0.21	0.63	33.33	4.77
		2478	0.21	0.63	33.33	4.77

10.5. Test graphs






11. Radiated Emission

11.1. Test equipment


Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	2 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year

11.2. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

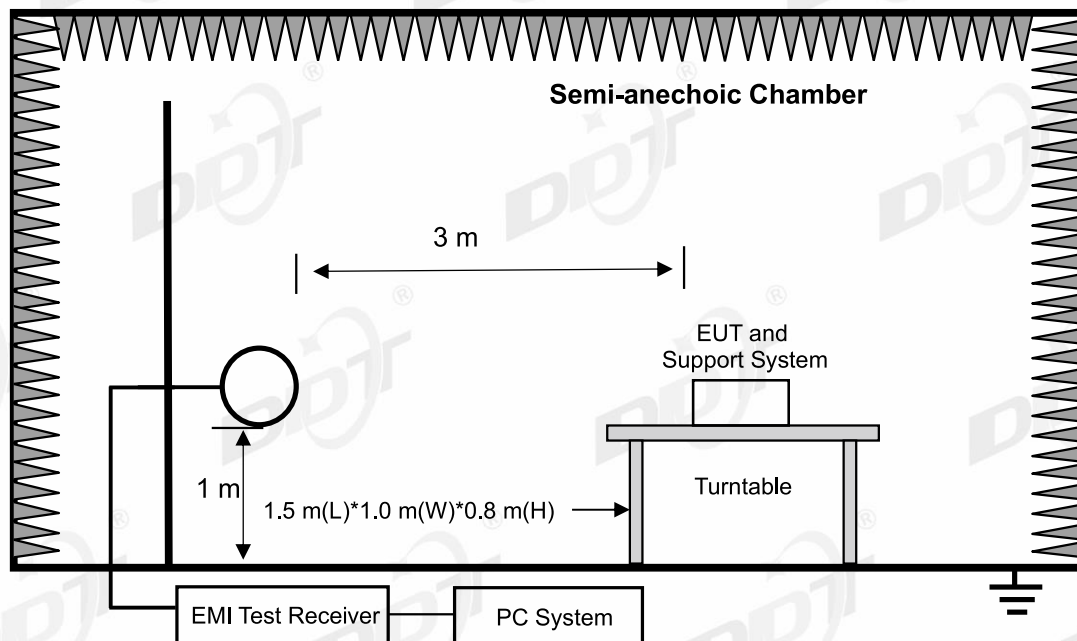

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

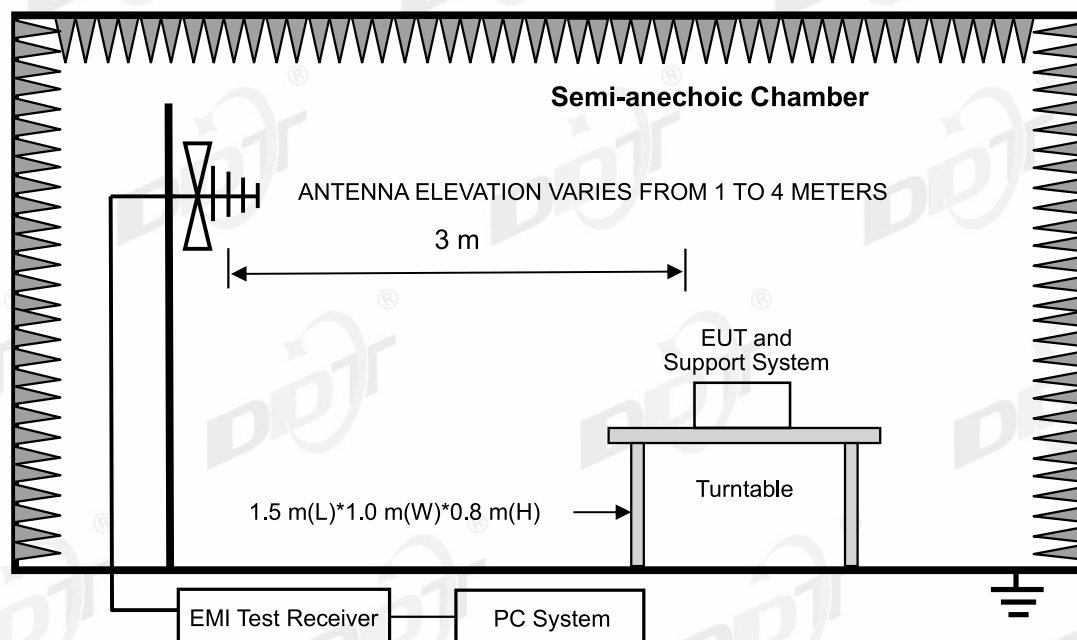

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

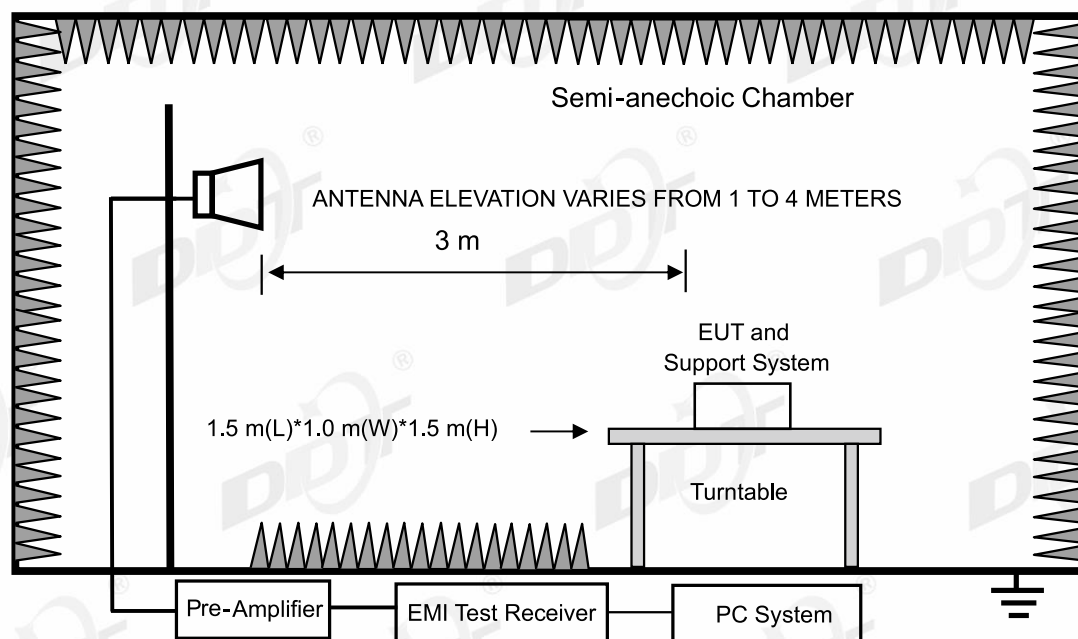

Note: Install an appropriate filter at the input of the measurement system power amplifier. This filter can attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter had been characterized, and the attenuation loss factors had been accounted for in the measurement results.

11.3. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

11.4. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1 G and 150 cm above the ground plane inside a semi-anechoic chamber for above 1 G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the

antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

11.5. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with GFSK 1M, the worst case is reported)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in BLE 1M/2M Tx 2440 MHz mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission Test Result (below 1 GHz)
TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-20

Tested By:

Gen Liu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24061713-2E\FCC BELOW 1G\20240820-195343_H

Memo:

Sample Number:S24061713-002 Power Setting:NA

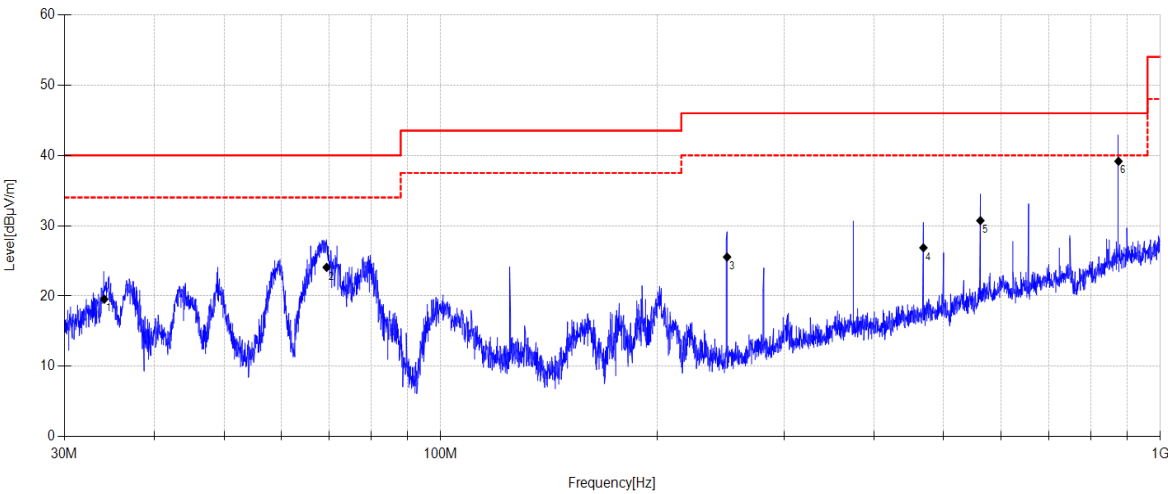

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.083	35.17	11.55	3.78	19.56	40.00	20.44	QP	Horizontal
2	69.443	40.44	10.19	4.02	24.08	40.00	15.92	QP	Horizontal
3	250.020	39.31	11.70	4.99	25.55	46.00	20.45	QP	Horizontal
4	468.619	35.12	15.83	5.88	26.87	46.00	19.13	QP	Horizontal
5	562.333	36.49	17.91	6.23	30.73	46.00	15.27	QP	Horizontal
6	874.657	39.76	21.49	7.14	39.16	46.00	6.84	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-20

Tested By:

Gen Liu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24061713-2E\FCC BELOW 1G\20240820-195403_V

Memo:

Sample Number:S24061713-002 Power Setting:NA

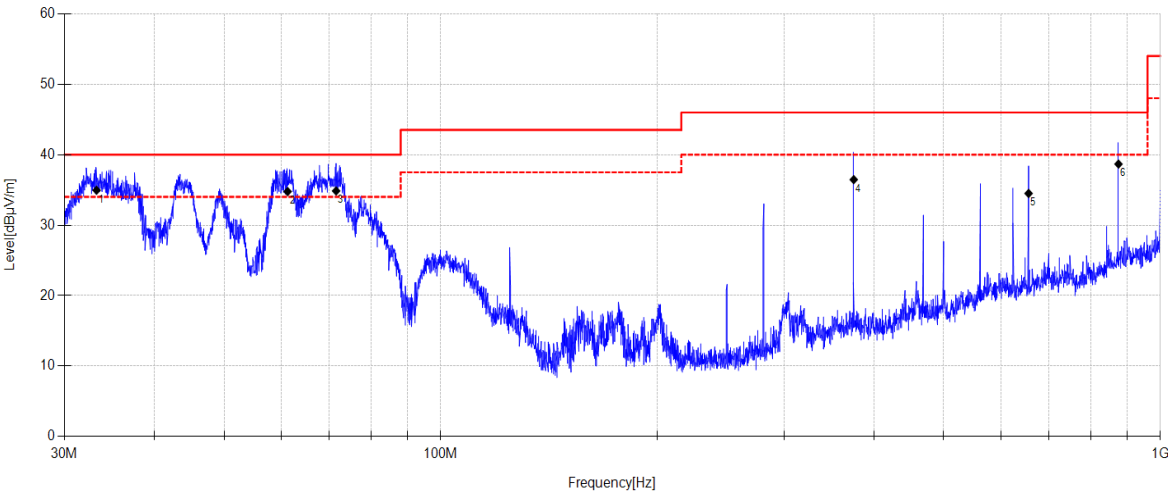

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.257	51.05	11.07	3.78	34.95	40.00	5.05	QP	Vertical
2	61.295	48.9	12.52	3.97	34.77	40.00	5.23	QP	Vertical
3	71.568	51.83	9.56	4.03	34.86	40.00	5.14	QP	Vertical
4	374.959	45.69	15.40	5.52	36.46	46.00	9.54	QP	Vertical
5	656.125	39.31	18.54	6.55	34.50	46.00	11.50	QP	Vertical
6	874.657	39.27	21.49	7.14	38.67	46.00	7.33	QP	Vertical

Note:


1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-08-20
Tested By: Gen Liu
EUT: Streaming Music Receiver
Model Number: F3081S
Test Mode: BLE2M TX mode
Power Supply: AC 120V/60Hz
Condition: Temp:24.5°C;Humi:47.4%
Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC BELOW 1G\20240820-195433_H
Memo: Sample Number:S24061713-002 Power Setting:NA

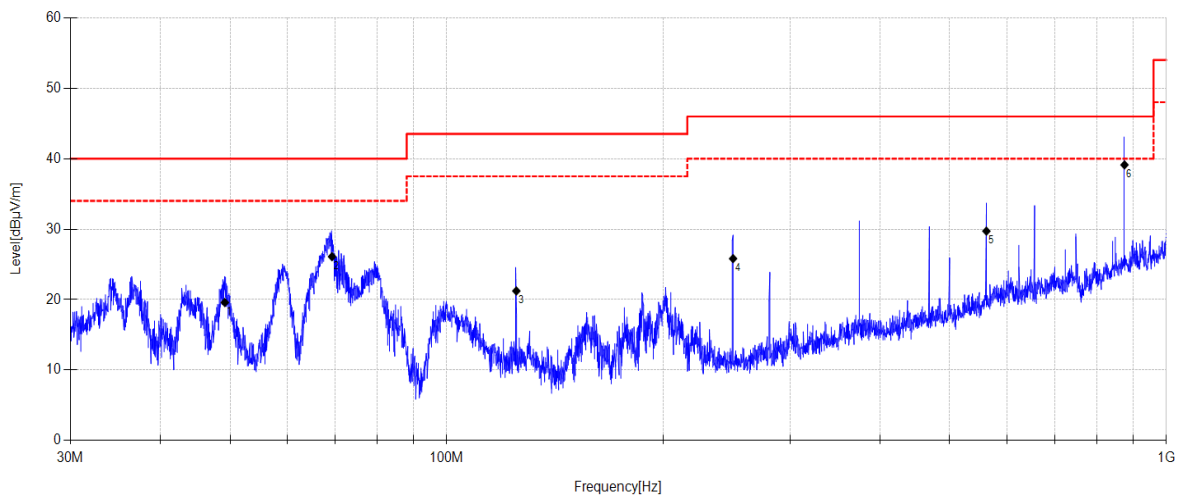

Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	49.182	33.67	12.75	3.88	19.59	40.00	20.41	QP	Horizontal
2	69.297	42.36	10.29	4.02	26.10	40.00	13.90	QP	Horizontal
3	124.971	38.8	8.91	4.35	21.23	43.50	22.27	QP	Horizontal
4	250.020	39.58	11.70	4.99	25.82	46.00	20.18	QP	Horizontal
5	562.333	35.48	17.91	6.23	29.72	46.00	16.28	QP	Horizontal
6	874.657	39.72	21.49	7.14	39.12	46.00	6.88	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-08-20

Tested By:

Gen Liu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24061713-2E\FCC BELOW 1G\20240820-195452_V

Memo:

Sample Number:S24061713-002 Power Setting:NA

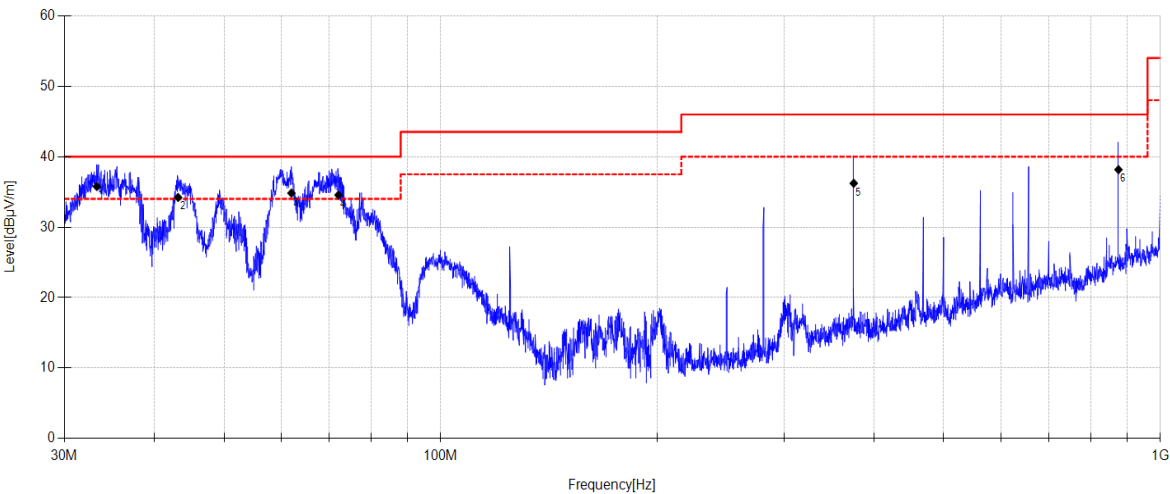

Data List									
NO.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	33.280	51.86	11.08	3.78	35.77	40.00	4.23	QP	Vertical
2	43.168	48.35	12.83	3.84	34.22	40.00	5.78	QP	Vertical
3	62.030	48.69	12.79	3.97	34.83	40.00	5.17	QP	Vertical
4	72.122	51.53	9.55	4.03	34.56	40.00	5.44	QP	Vertical
5	374.959	45.45	15.40	5.52	36.22	46.00	9.78	QP	Vertical
6	874.657	38.76	21.49	7.14	38.16	46.00	7.84	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result (above 1 GHz)
TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 Tested By: Genliu
EUT: Streaming Music Receiver Model Number: F3081S
Test Mode: BLE1M TX 2402MHz mode Power Supply: AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\7
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

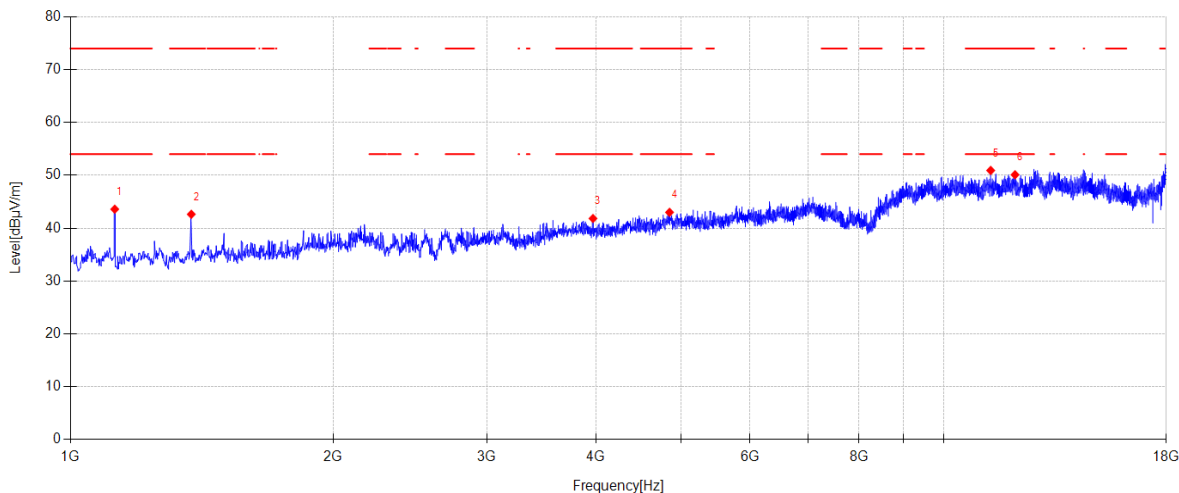

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1124.100	52.77	24.64	3.08	-36.90	43.59	74.00	30.41	PK	Horizontal
2	1375.700	51.09	24.95	3.52	-36.93	42.63	74.00	31.37	PK	Horizontal
3	3968.200	46.17	31.03	5.06	-40.43	41.83	74.00	32.17	PK	Horizontal
4	4855.600	43.86	33.71	5.56	-40.13	43.00	74.00	31.00	PK	Horizontal
5	11325.800	42.59	39.23	8.34	-39.24	50.92	74.00	23.08	PK	Horizontal
6	12077.200	41.61	39.28	8.80	-39.59	50.10	74.00	23.90	PK	Horizontal

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2402MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\8

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

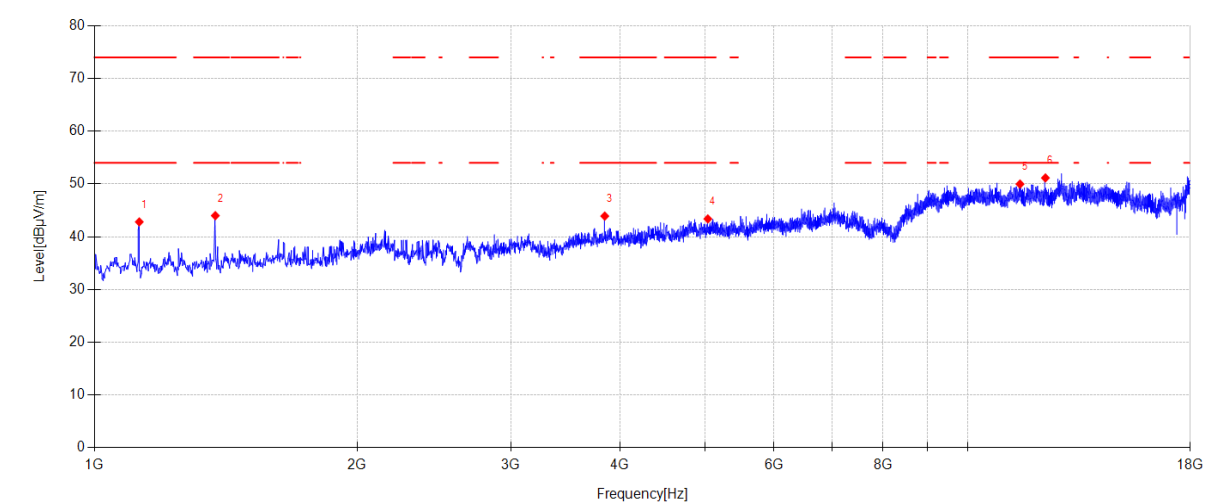

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	51.97	24.65	3.09	-36.90	42.81	74.00	31.19	PK	Vertical
2	1375.700	52.45	24.95	3.52	-36.93	43.99	74.00	30.01	PK	Vertical
3	3842.400	48.31	30.87	5.08	-40.35	43.91	74.00	30.09	PK	Vertical
4	5042.600	44.49	33.29	5.67	-40.07	43.38	74.00	30.62	PK	Vertical
5	11487.300	41.65	39.21	8.44	-39.32	49.98	74.00	24.02	PK	Vertical
6	12282.900	42.62	39.30	8.90	-39.67	51.15	74.00	22.85	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2440MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT19

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

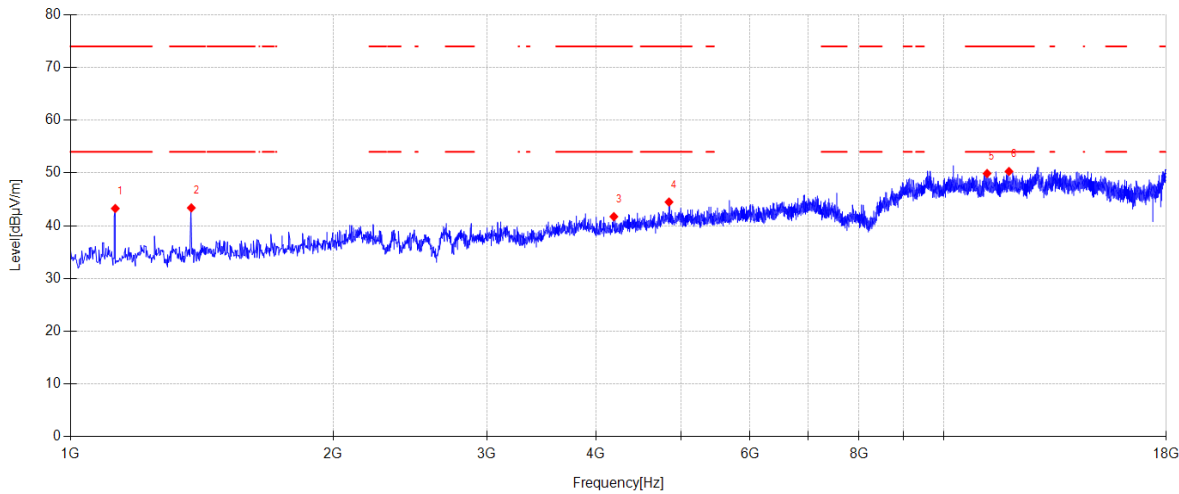

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	52.43	24.65	3.09	-36.90	43.27	74.00	30.73	PK	Horizontal
2	1375.700	51.84	24.95	3.52	-36.93	43.38	74.00	30.62	PK	Horizontal
3	4192.600	45.74	31.20	5.17	-40.38	41.73	74.00	32.27	PK	Horizontal
4	4848.800	45.30	33.77	5.56	-40.14	44.49	74.00	29.51	PK	Horizontal
5	11218.700	41.62	39.20	8.27	-39.19	49.90	74.00	24.10	PK	Horizontal
6	11886.800	42.21	38.90	8.69	-39.51	50.29	74.00	23.71	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2440MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\10

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

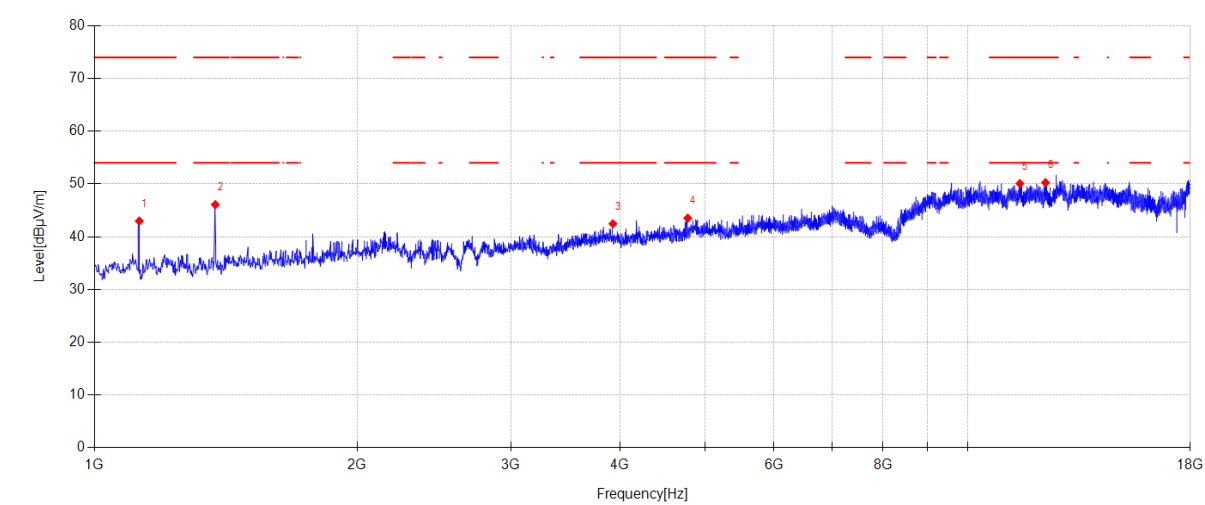

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	52.13	24.65	3.09	-36.90	42.97	74.00	31.03	PK	Vertical
2	1375.700	54.55	24.95	3.52	-36.93	46.09	74.00	27.91	PK	Vertical
3	3925.700	46.65	31.15	5.06	-40.40	42.46	74.00	31.54	PK	Vertical
4	4782.500	45.73	32.43	5.52	-40.16	43.52	74.00	30.48	PK	Vertical
5	11483.900	41.75	39.22	8.43	-39.32	50.08	74.00	23.92	PK	Vertical
6	12286.300	41.72	39.30	8.91	-39.67	50.26	74.00	23.74	PK	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2480MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\11

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

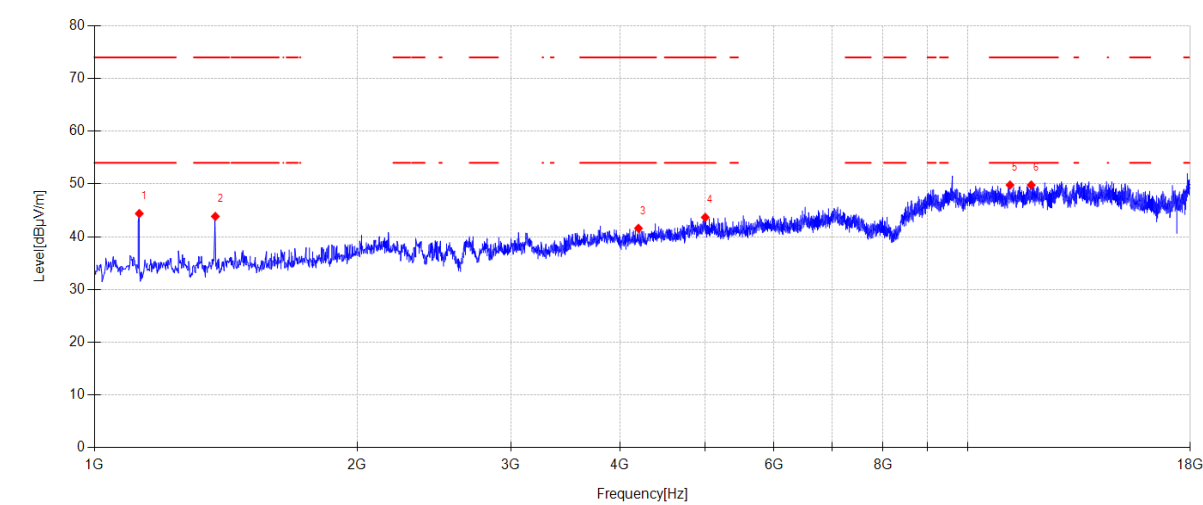

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	53.55	24.65	3.09	-36.90	44.39	74.00	29.61	PK	Horizontal
2	1375.700	52.31	24.95	3.52	-36.93	43.85	74.00	30.15	PK	Horizontal
3	4199.400	45.61	31.20	5.17	-40.38	41.60	74.00	32.40	PK	Horizontal
4	5008.600	44.88	33.22	5.65	-40.08	43.67	74.00	30.33	PK	Horizontal
5	11188.100	41.52	39.21	8.25	-39.18	49.80	74.00	24.20	PK	Horizontal
6	11830.700	41.73	38.90	8.65	-39.48	49.80	74.00	24.20	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2480MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\12

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

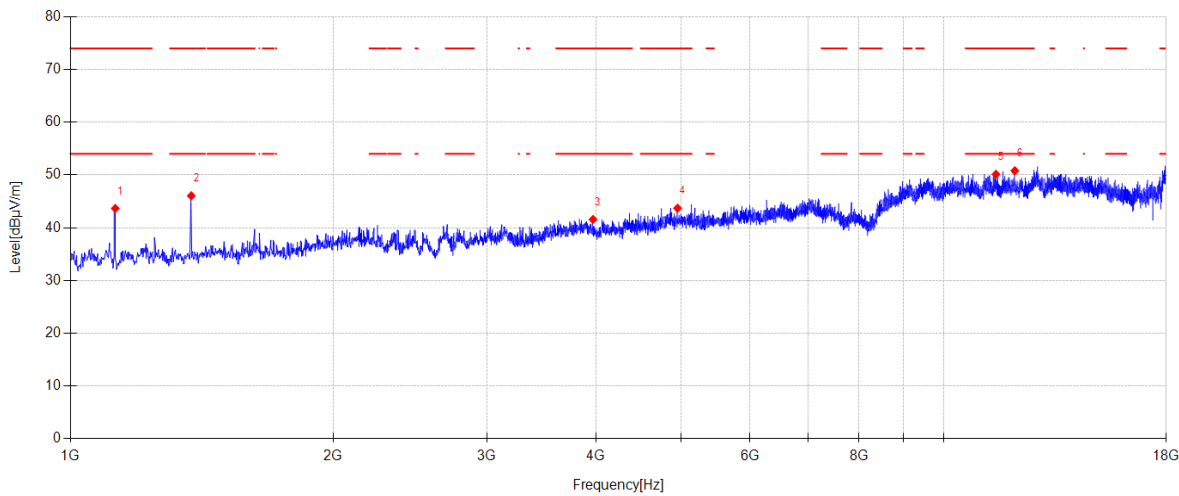

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	52.82	24.65	3.09	-36.90	43.66	74.00	30.34	PK	Vertical
2	1375.700	54.51	24.95	3.52	-36.93	46.05	74.00	27.95	PK	Vertical
3	3968.200	45.92	31.03	5.06	-40.43	41.58	74.00	32.42	PK	Vertical
4	4959.300	45.05	33.12	5.63	-40.10	43.70	74.00	30.30	PK	Vertical
5	11485.600	41.79	39.21	8.44	-39.32	50.12	74.00	23.88	PK	Vertical
6	12070.400	42.32	39.27	8.80	-39.59	50.80	74.00	23.20	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2404MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\13

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

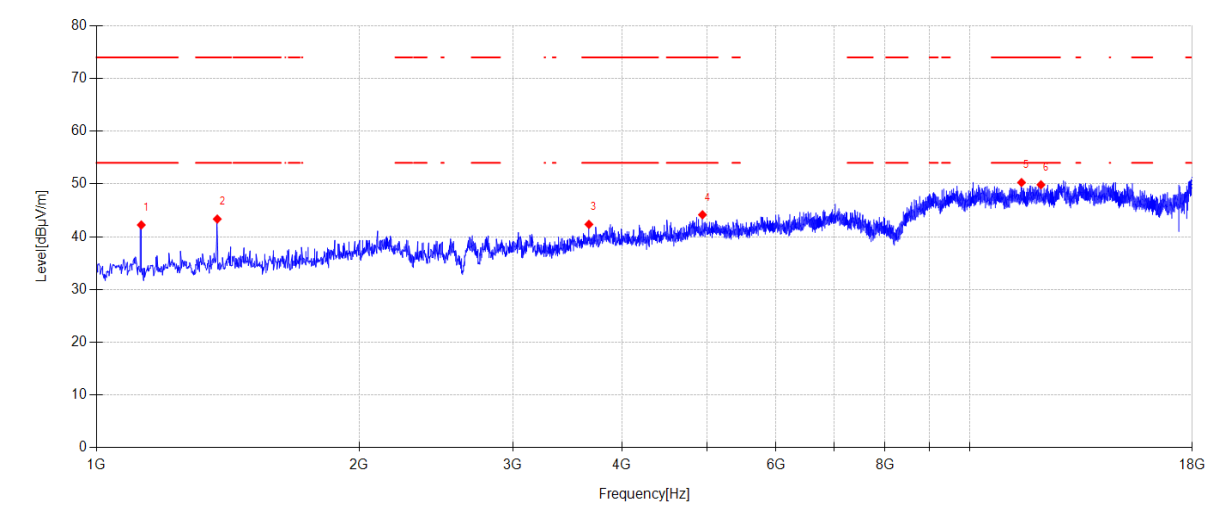

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	51.39	24.65	3.09	-36.90	42.23	74.00	31.77	PK	Horizontal
2	1375.700	51.81	24.95	3.52	-36.93	43.35	74.00	30.65	PK	Horizontal
3	3665.600	47.22	30.26	5.11	-40.25	42.34	74.00	31.66	PK	Horizontal
4	4945.700	45.55	33.09	5.62	-40.10	44.16	74.00	29.84	PK	Horizontal
5	11472.000	41.93	39.23	8.43	-39.31	50.28	74.00	23.72	PK	Horizontal
6	12075.500	41.36	39.28	8.80	-39.59	49.85	74.00	24.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2404MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\14

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

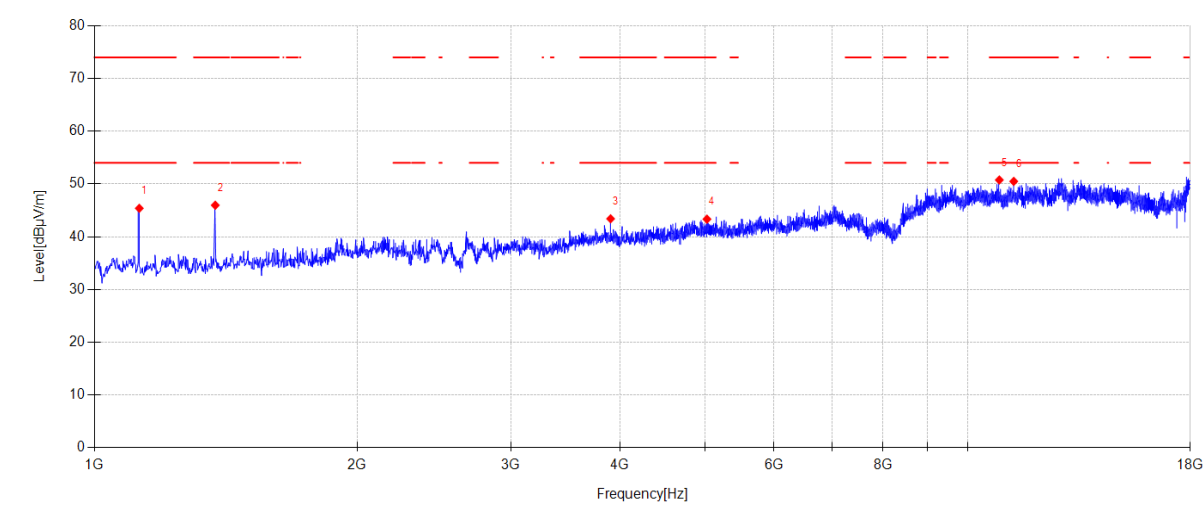

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	54.55	24.65	3.09	-36.90	45.39	74.00	28.61	PK	Vertical
2	1375.700	54.43	24.95	3.52	-36.93	45.97	74.00	28.03	PK	Vertical
3	3901.900	47.52	31.20	5.07	-40.39	43.40	74.00	30.60	PK	Vertical
4	5030.700	44.48	33.26	5.67	-40.08	43.33	74.00	30.67	PK	Vertical
5	10877.000	42.41	39.32	8.07	-39.04	50.76	74.00	23.24	PK	Vertical
6	11298.600	42.20	39.20	8.32	-39.23	50.49	74.00	23.51	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2440MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\15

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

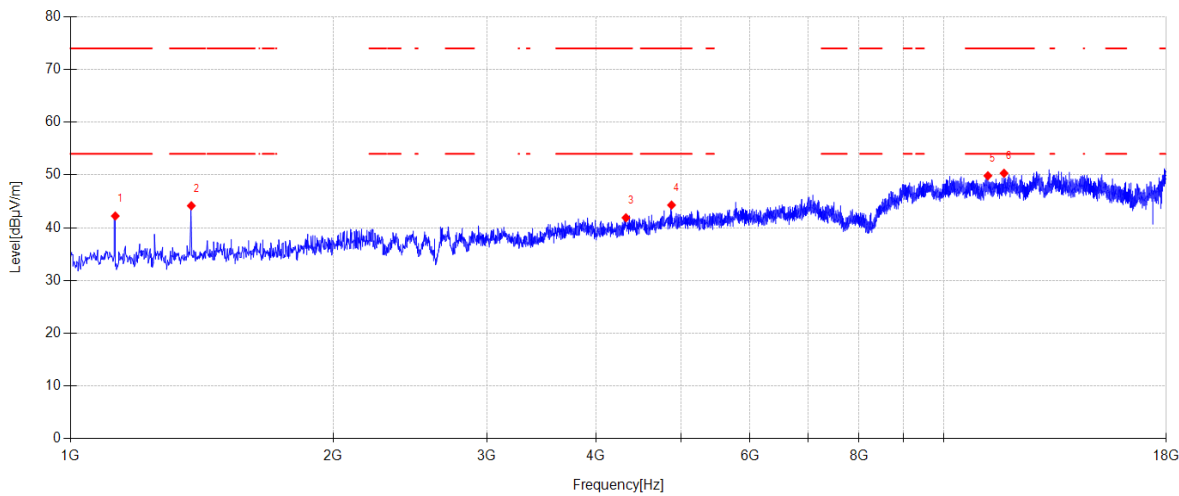

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	51.38	24.65	3.09	-36.90	42.22	74.00	31.78	PK	Horizontal
2	1375.700	52.62	24.95	3.52	-36.93	44.16	74.00	29.84	PK	Horizontal
3	4328.600	45.37	31.60	5.25	-40.33	41.89	74.00	32.11	PK	Horizontal
4	4881.100	45.53	33.30	5.58	-40.12	44.29	74.00	29.71	PK	Horizontal
5	11242.500	41.57	39.20	8.28	-39.20	49.85	74.00	24.15	PK	Horizontal
6	11732.100	42.19	38.97	8.59	-39.43	50.32	74.00	23.68	PK	Horizontal

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2440MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT16

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

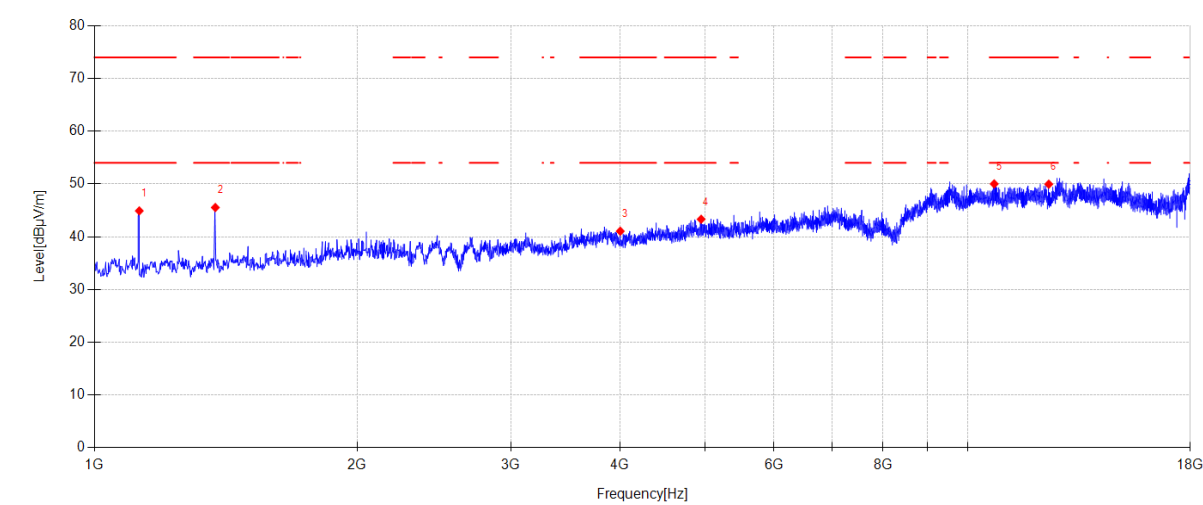

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	54.06	24.65	3.09	-36.90	44.90	74.00	29.10	PK	Vertical
2	1375.700	54.00	24.95	3.52	-36.93	45.54	74.00	28.46	PK	Vertical
3	4002.200	45.55	30.90	5.05	-40.45	41.05	74.00	32.95	PK	Vertical
4	4954.200	44.68	33.11	5.62	-40.10	43.31	74.00	30.69	PK	Vertical
5	10730.800	41.60	39.40	8.00	-38.99	50.01	74.00	23.99	PK	Vertical
6	12391.700	41.41	39.30	8.96	-39.71	49.96	74.00	24.04	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2478MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\17

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

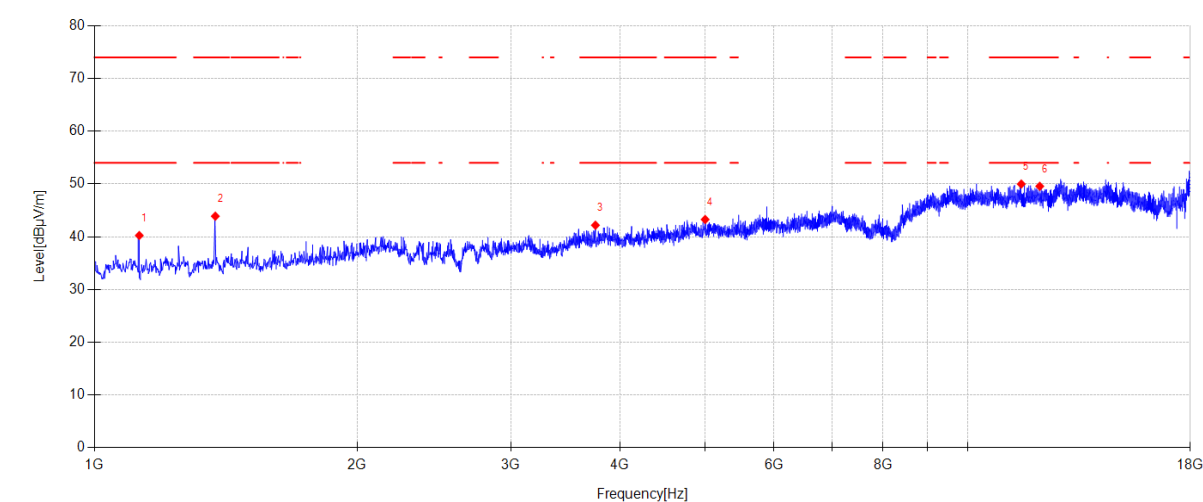

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	49.40	24.65	3.09	-36.90	40.24	74.00	33.76	PK	Horizontal
2	1375.700	52.35	24.95	3.52	-36.93	43.89	74.00	30.11	PK	Horizontal
3	3748.900	46.89	30.50	5.09	-40.30	42.18	74.00	31.82	PK	Horizontal
4	5006.900	44.49	33.21	5.65	-40.08	43.27	74.00	30.73	PK	Horizontal
5	11524.700	41.72	39.15	8.46	-39.34	49.99	74.00	24.01	PK	Horizontal
6	12101.000	41.05	39.30	8.81	-39.60	49.56	74.00	24.44	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2478MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT18

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

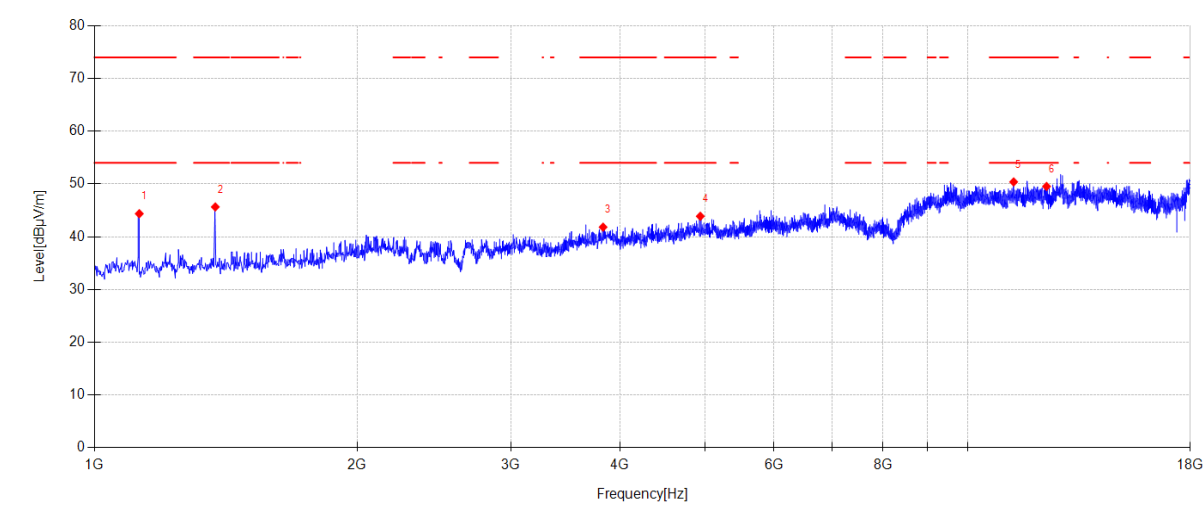

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1125.800	53.52	24.65	3.09	-36.90	44.36	74.00	29.64	PK	Vertical
2	1375.700	54.11	24.95	3.52	-36.93	45.65	74.00	28.35	PK	Vertical
3	3825.400	46.28	30.80	5.08	-40.34	41.82	74.00	32.18	PK	Vertical
4	4944.000	45.27	33.09	5.62	-40.10	43.88	74.00	30.12	PK	Vertical
5	11295.200	42.10	39.20	8.32	-39.23	50.39	74.00	23.61	PK	Vertical
6	12318.600	40.99	39.30	8.92	-39.68	49.53	74.00	24.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

12. Emissions in Restricted Frequency Bands

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	2025/03/31	1 Year
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2025/04/22	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2025/04/22	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2025/09/11	2 Year
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2025/04/26	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2025/07/08	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2025/04/22	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2025/09/18	2 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2025/03/31	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2025/03/31	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2025/07/11	2 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2025/03/31	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2025/03/31	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2025/03/31	1 Year
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2025/03/31	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2025/03/31	1 Year

12.2. Block diagram of test setup

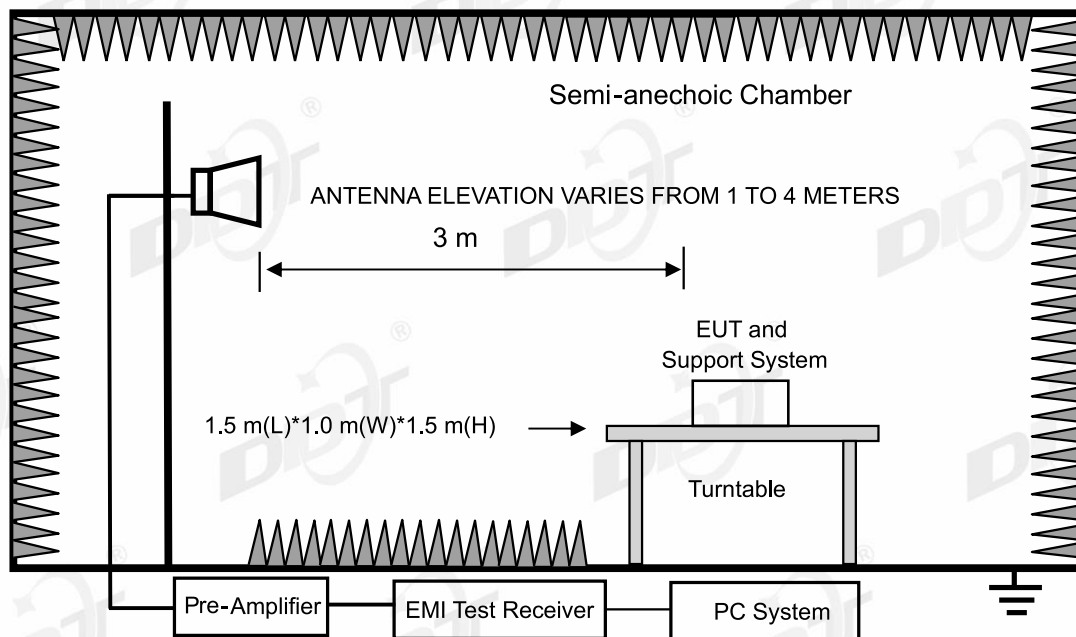

12.3. Limit

All restriction band should comply with 15.209 and RSS-Gen section 8.9 limits, other emission should be at least 20 dB below the fundamental.

12.4. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.


12.5. Test result

Pass. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE2M TX 2478MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\19
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

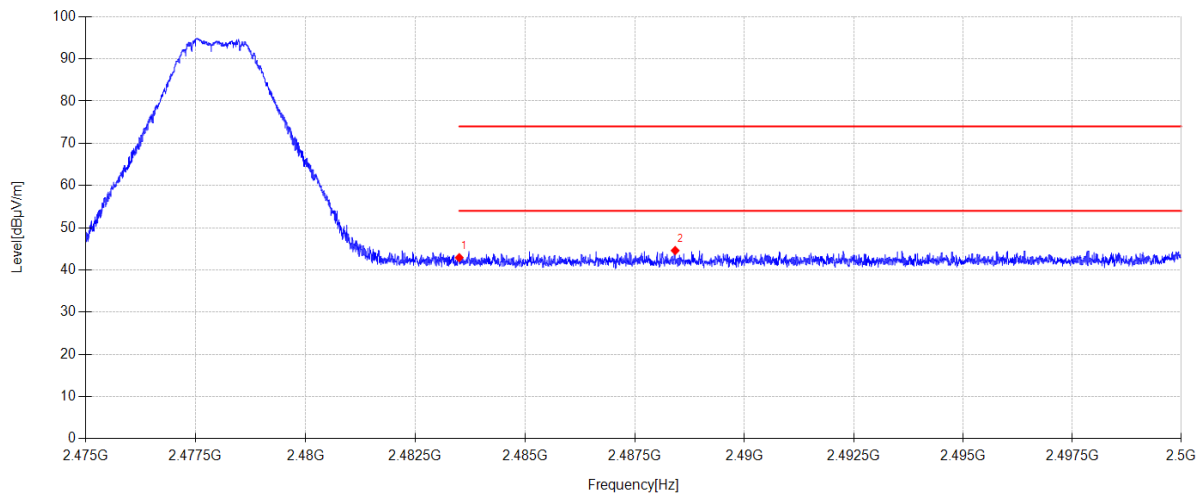

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.76	27.53	3.62	0.00	42.91	74.00	31.09	PK	Horizontal
2	2488.423	13.43	27.55	3.62	0.00	44.60	74.00	29.40	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE2M TX 2478MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\20
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

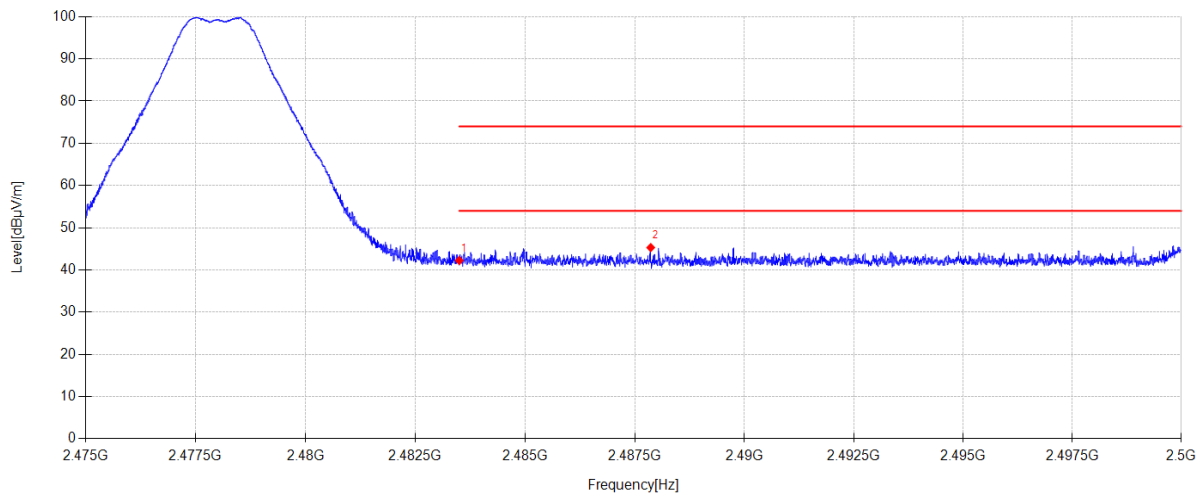

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.09	27.53	3.62	0.00	42.24	74.00	31.76	PK	Vertical
2	2487.865	14.13	27.55	3.62	0.00	45.30	74.00	28.70	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE1M TX 2480MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\21
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

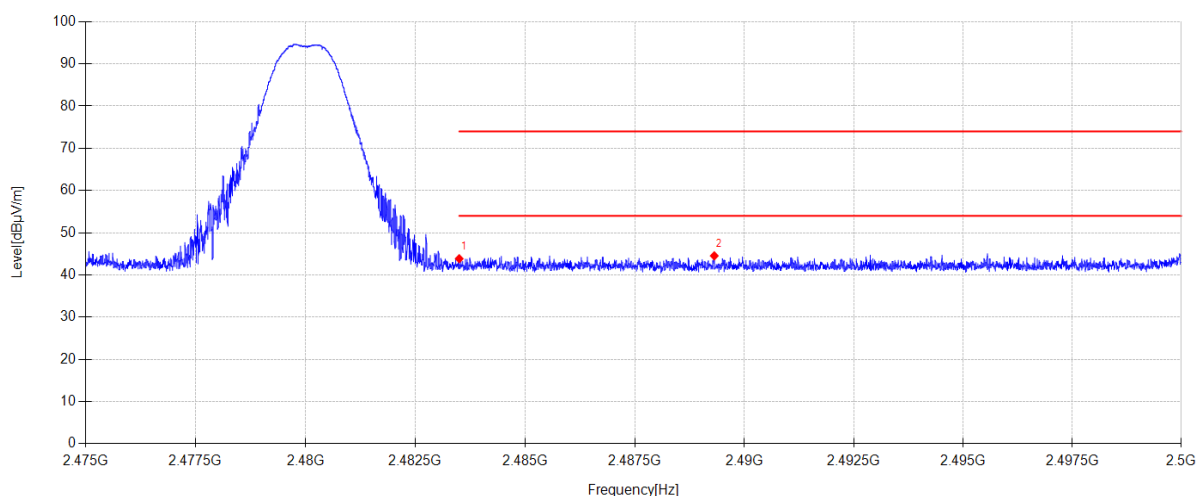

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.70	27.53	3.62	0.00	43.85	74.00	30.15	PK	Horizontal
2	2489.315	13.35	27.56	3.62	0.00	44.53	74.00	29.47	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE1M TX 2480MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\22

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

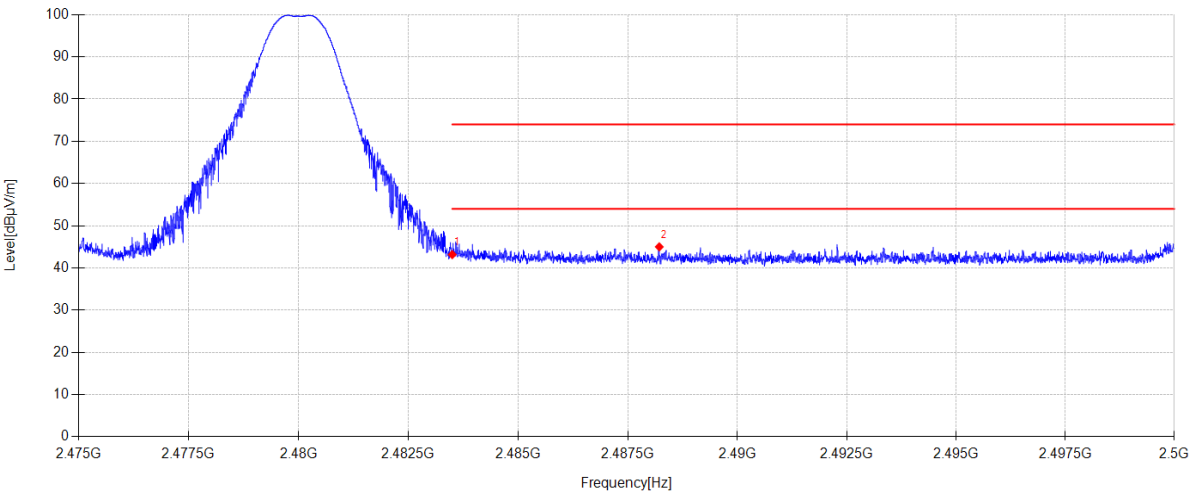

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.02	27.53	3.62	0.00	43.17	74.00	30.83	PK	Vertical
2	2488.220	13.83	27.55	3.62	0.00	45.00	74.00	29.00	PK	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE1M TX 2402MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\35
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

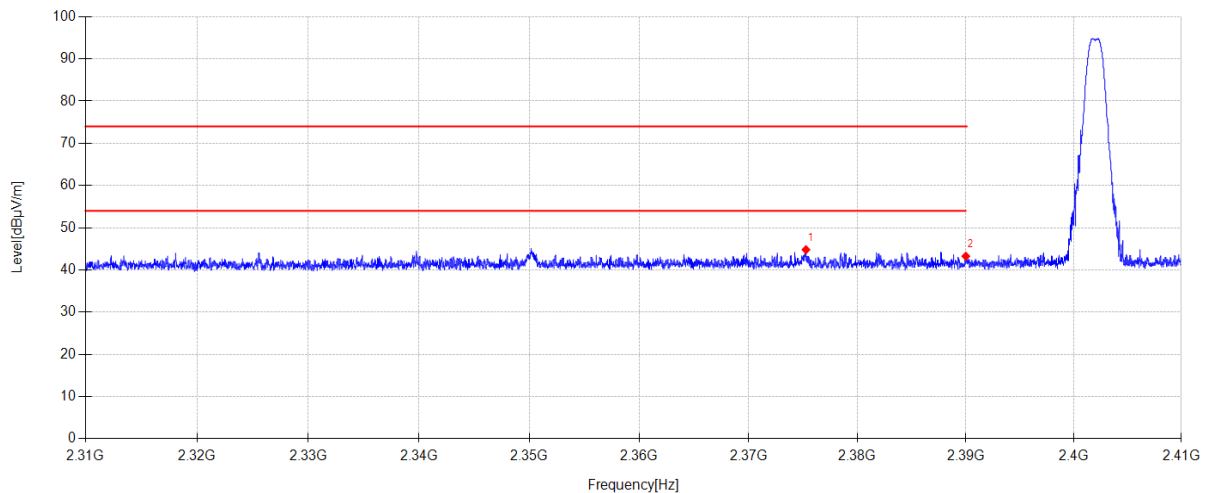

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2375.270	14.04	27.20	3.56	0.00	44.80	74.00	29.20	PK	Horizontal
2	2390.000	12.42	27.26	3.57	0.00	43.25	74.00	30.75	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE1M TX 2402MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\36
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

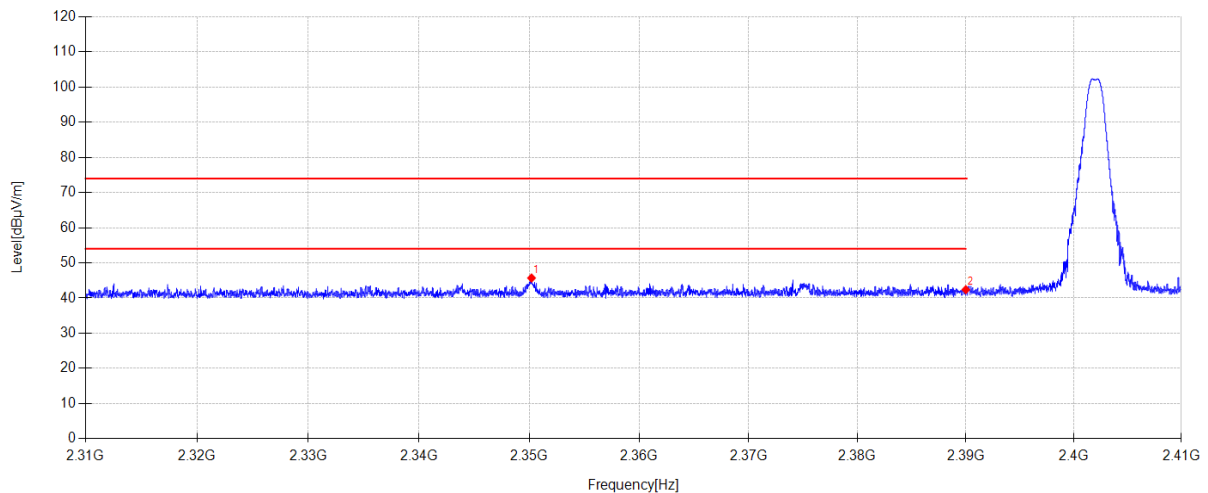

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2350.200	15.05	27.10	3.55	0.00	45.70	74.00	28.30	PK	Vertical
2	2390.000	11.57	27.26	3.57	0.00	42.40	74.00	31.60	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2024-07-20 **Tested By:** Genliu
EUT: Streaming Music Receiver **Model Number:** F3081S
Test Mode: BLE2M TX 2404MHz mode **Power Supply:** AC120V/60Hz
Condition: Temp:24.5°C;Humi:47.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\37
Memo: Sample Number:S24061713-002 Power Setting:NA

Test Graph

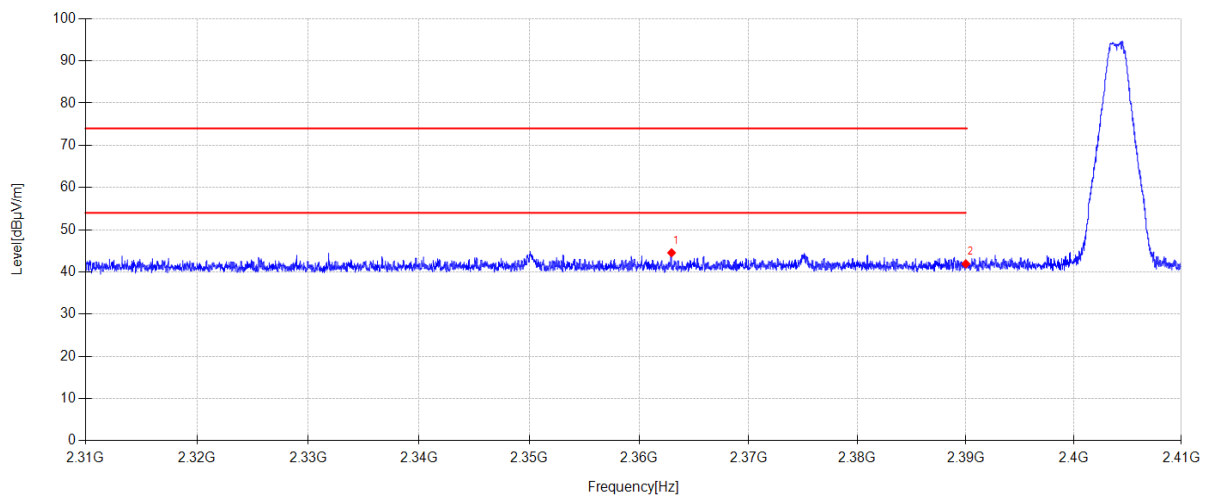

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2362.960	13.84	27.15	3.55	0.00	44.54	74.00	29.46	PK	Horizontal
2	2390.000	11.09	27.26	3.57	0.00	41.92	74.00	32.08	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

Streaming Music Receiver

Model Number:

F3081S

Test Mode:

BLE2M TX 2404MHz mode

Power Supply:

AC120V/60Hz

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24061713-2E\FCC ABOVE 1G BT\38

Memo:

Sample Number:S24061713-002 Power Setting:NA

Test Graph

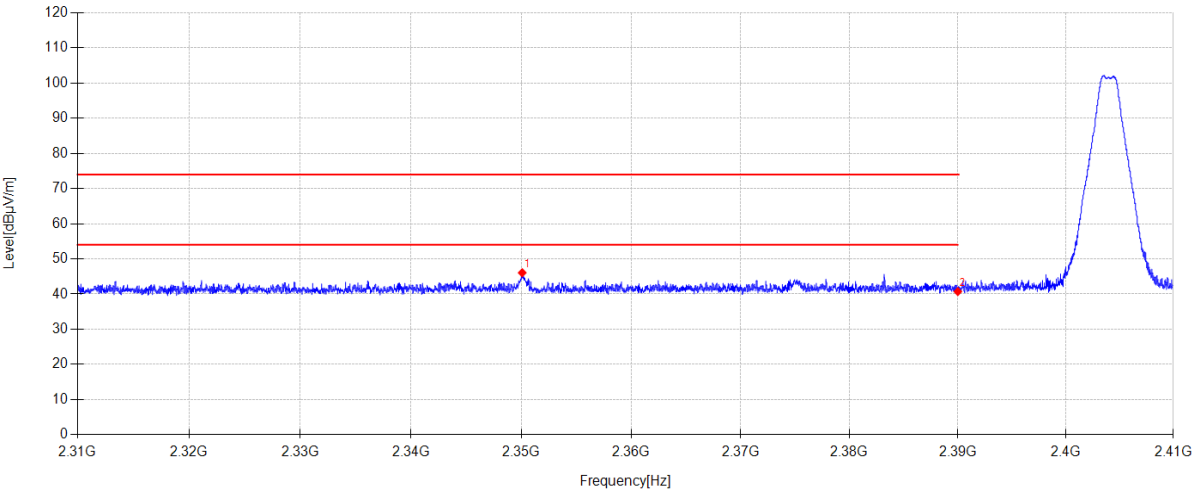

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2350.080	15.41	27.10	3.55	0.00	46.06	74.00	27.94	PK	Vertical
2	2390.000	9.88	27.26	3.57	0.00	40.71	74.00	33.29	PK	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Power Line Conducted Emission

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
Conducted Radiated Software	Audix	E3	DDT-ZC00562	/	/
Three-phase artificial power network	SCHWARZBECK	NSLK 8163	DDT-ZC01572	2025/07/08	1 Year
Two Line V-Network	R&S	ENV216	DDT-ZC02059	2025/07/08	1 Year
RF Cable	Yuhu Technology	Z806-NJ-NJ-6M	DDT-ZC02004	2025/07/08	1 Year
Δ -shaped artificial power network	SCHWARZBECK	PVDC 8301	DDT-ZC03939	2025/03/31	1 Year
EMI Test Receiver	R&S	ESCI/E3	DDT-ZC01297	2025/07/08	1 Year
Pulse Limiter	SCHWARZBECK	VTSD 9561	DDT-ZC02128	2025/07/08	1 Year
Two Line V-Network	R&S	ENV216	DDT-ZC02056	2025/07/08	1 Year

13.2. Block diagram of test setup

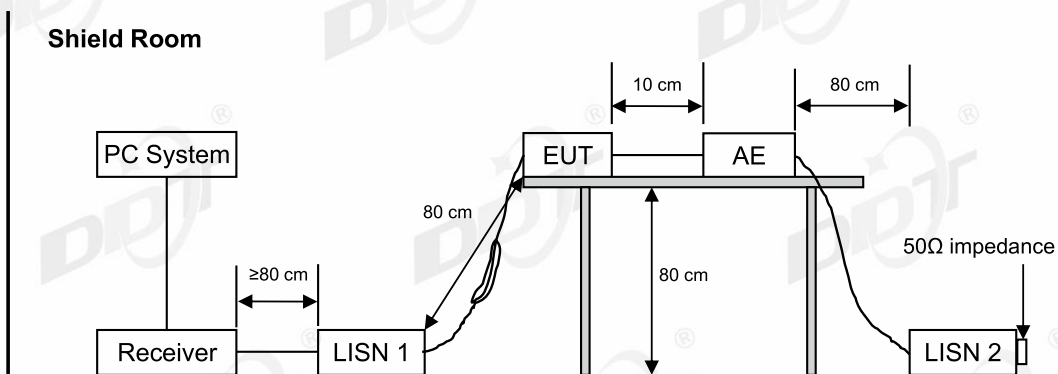

13.3. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

13.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80 cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

13.5. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room
Test Date : 2024-07-24
EUT : Streaming Music Receiver
Power Supply : AC 120V/60Hz
Condition : Temp:21.5°C,Humi:51.8%
Memo :

D:\2024 Report Date\Q24061713-2E\FCC CE.EM6
Tested By : Genliu
Model Number : F3081S
Test Mode : BLE1M mode
LISN : 2023 ENV 216 3#/LINE

Data: 6

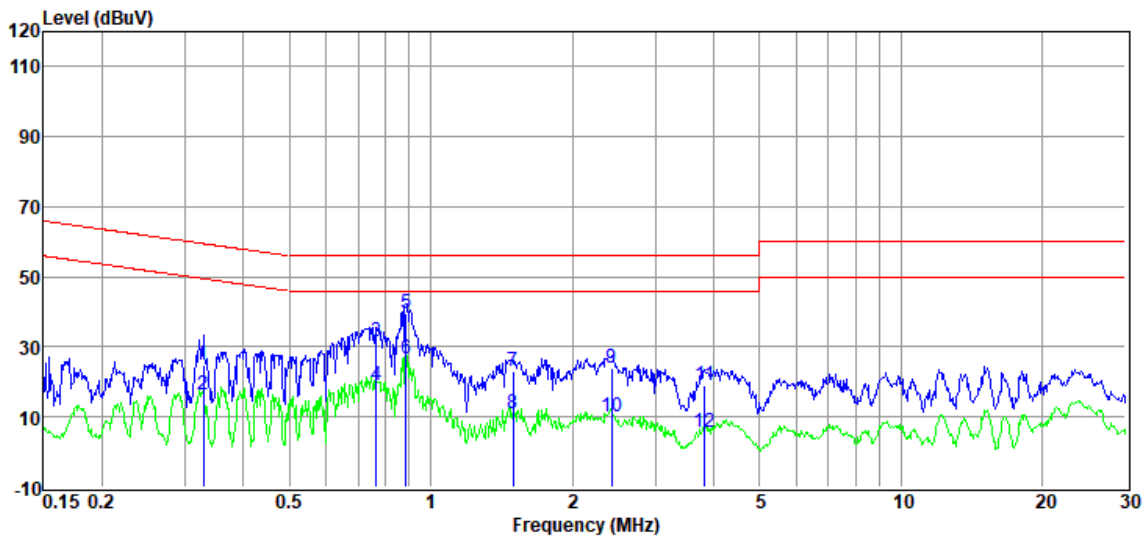

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.33	5.13	9.74	0.12	9.95	24.94	59.49	-34.55	QP	LINE
2	0.33	-3.45	9.74	0.12	9.95	16.36	49.49	-33.13	Average	LINE
3	0.77	11.52	9.89	0.17	9.97	31.55	56.00	-24.45	QP	LINE
4	0.77	-1.10	9.89	0.17	9.97	18.93	46.00	-27.07	Average	LINE
5	0.88	19.61	9.73	0.21	9.97	39.52	56.00	-16.48	QP	LINE
6	0.88	6.74	9.73	0.21	9.97	26.65	46.00	-19.35	Average	LINE
7	1.50	3.14	9.47	0.26	9.98	22.85	56.00	-33.15	QP	LINE
8	1.50	-8.53	9.47	0.26	9.98	11.18	46.00	-34.82	Average	LINE
9	2.42	3.86	9.75	0.26	10.00	23.87	56.00	-32.13	QP	LINE
10	2.42	-9.85	9.75	0.26	10.00	10.16	46.00	-35.84	Average	LINE
11	3.82	-0.80	9.76	0.27	10.01	19.24	56.00	-36.76	QP	LINE
12	3.82	-14.33	9.76	0.27	10.01	5.71	46.00	-40.29	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room

D:\2024 Report Date\Q24061713-2E\FCC CE.EM6

Test Date : 2024-07-24

Tested By : Genliu

EUT : Streaming Music Receiver

Model Number : F3081S

Power Supply : AC 120V/60Hz


Test Mode : BLE1M mode

Condition : Temp:21.5°C,Humi:51.8%

LISN : 2023 ENV 216 3#/NEUTRAL

Memo :

Data: 8

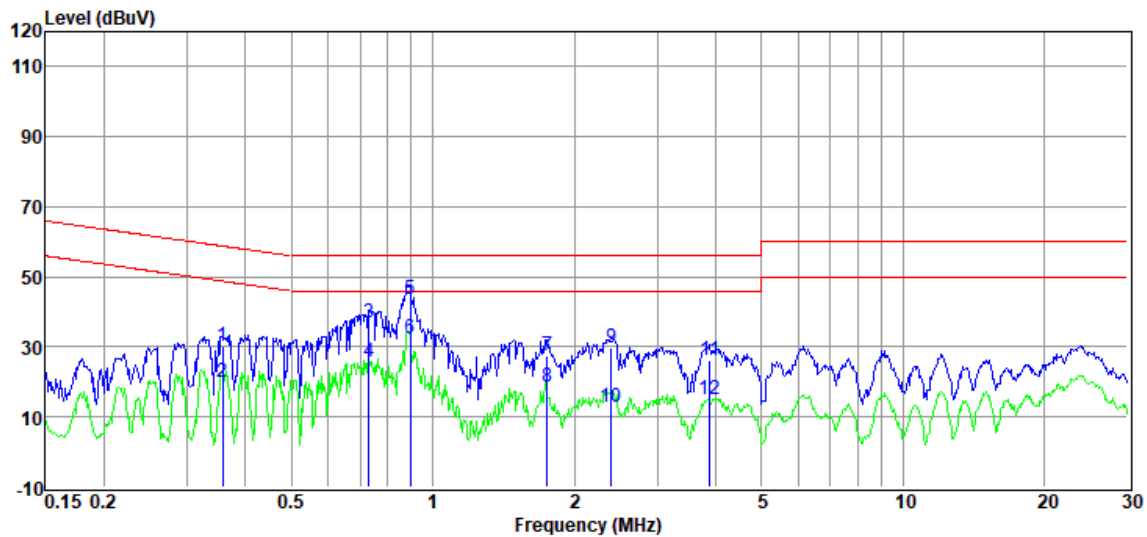

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.36	10.18	9.97	0.12	9.95	30.22	58.78	-28.56	QP	NEUTRAL
2	0.36	-0.19	9.97	0.12	9.95	19.85	48.78	-28.93	Average	NEUTRAL
3	0.73	16.84	9.83	0.15	9.96	36.78	56.00	-19.22	QP	NEUTRAL
4	0.73	5.72	9.83	0.15	9.96	25.66	46.00	-20.34	Average	NEUTRAL
5	0.89	23.19	10.05	0.22	9.97	43.43	56.00	-12.57	QP	NEUTRAL
6	0.89	12.04	10.05	0.22	9.97	32.28	46.00	-13.72	Average	NEUTRAL
7	1.75	7.28	10.01	0.26	9.99	27.54	56.00	-28.46	QP	NEUTRAL
8	1.75	-1.87	10.01	0.26	9.99	18.39	46.00	-27.61	Average	NEUTRAL
9	2.40	9.58	9.70	0.26	10.00	29.54	56.00	-26.46	QP	NEUTRAL
10	2.40	-7.03	9.70	0.26	10.00	12.93	46.00	-33.07	Average	NEUTRAL
11	3.88	6.51	9.50	0.27	10.01	26.29	56.00	-29.71	QP	NEUTRAL
12	3.88	-4.91	9.50	0.27	10.01	14.87	46.00	-31.13	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room

D:\2024 Report Date\Q24061713-2E\FCC CE.EM6

Test Date : 2024-07-24

Tested By : Genliu

EUT : Streaming Music Receiver

Model Number : F3081S

Power Supply : AC 120V/60Hz


Test Mode : BLE2M mode

Condition : Temp:21.5°C,Humi:51.8%

LISN : 2023 ENV 216 3#/NEUTRAL

Memo :

Data: 10

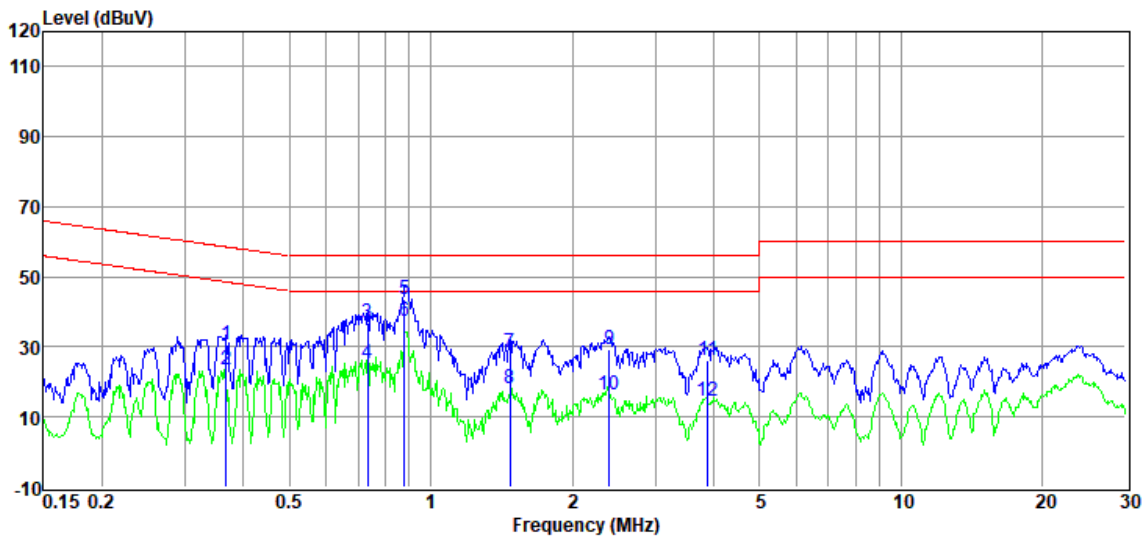

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.37	10.50	9.97	0.12	9.95	30.54	58.56	-28.02	QP	NEUTRAL
2	0.37	3.51	9.97	0.12	9.95	23.55	48.56	-25.01	Average	NEUTRAL
3	0.74	16.86	9.84	0.16	9.96	36.82	56.00	-19.18	QP	NEUTRAL
4	0.74	5.50	9.84	0.16	9.96	25.46	46.00	-20.54	Average	NEUTRAL
5	0.88	23.28	10.04	0.21	9.97	43.50	56.00	-12.50	QP	NEUTRAL
6	0.88	17.35	10.04	0.21	9.97	37.57	46.00	-8.43	Average	NEUTRAL
7	1.47	8.09	9.98	0.26	9.98	28.31	56.00	-27.69	QP	NEUTRAL
8	1.47	-2.03	9.98	0.26	9.98	18.19	46.00	-27.81	Average	NEUTRAL
9	2.40	9.55	9.70	0.26	10.00	29.51	56.00	-26.49	QP	NEUTRAL
10	2.40	-3.49	9.70	0.26	10.00	16.47	46.00	-29.53	Average	NEUTRAL
11	3.88	6.43	9.50	0.27	10.01	26.21	56.00	-29.79	QP	NEUTRAL
12	3.88	-5.04	9.50	0.27	10.01	14.74	46.00	-31.26	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 6# Shield Room

D:\2024 Report Date\Q24061713-2E\FCC CE.EM6

Test Date : 2024-07-24

Tested By : Genliu

EUT : Streaming Music Receiver

Model Number : F3081S

Power Supply : AC 120V/60Hz


Test Mode : BLE2M mode

Condition : Temp:21.5°C,Humi:51.8%

LISN : 2023 ENV 216 3#/LINE

Memo :

Data: 12

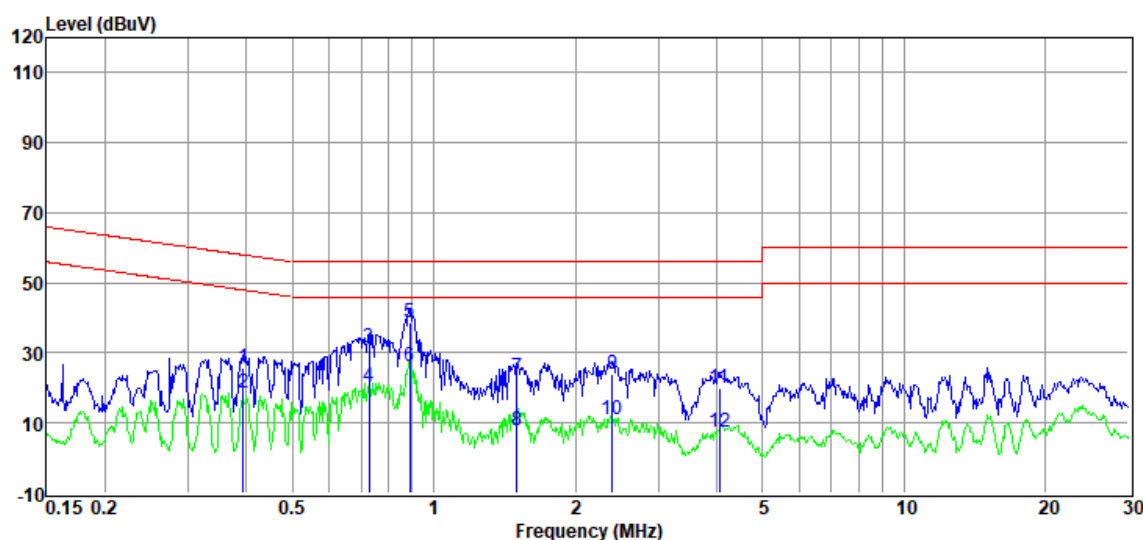

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.39	5.60	9.97	0.13	9.95	25.65	57.99	-32.34	QP	LINE
2	0.39	-1.29	9.97	0.13	9.95	18.76	47.99	-29.23	Average	LINE
3	0.73	11.88	9.69	0.15	9.96	31.68	56.00	-24.32	QP	LINE
4	0.73	0.37	9.69	0.15	9.96	20.17	46.00	-25.83	Average	LINE
5	0.89	18.92	9.72	0.21	9.97	38.82	56.00	-17.18	QP	LINE
6	0.89	6.36	9.72	0.21	9.97	26.26	46.00	-19.74	Average	LINE
7	1.50	3.16	9.47	0.26	9.98	22.87	56.00	-33.13	QP	LINE
8	1.50	-11.74	9.47	0.26	9.98	7.97	46.00	-38.03	Average	LINE
9	2.40	3.92	9.75	0.26	10.00	23.93	56.00	-32.07	QP	LINE
10	2.40	-9.00	9.75	0.26	10.00	11.01	46.00	-34.99	Average	LINE
11	4.05	-0.26	9.79	0.27	10.01	19.81	56.00	-36.19	QP	LINE
12	4.05	-12.55	9.79	0.27	10.01	7.52	46.00	-38.48	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

14. Antenna Requirements

14.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Result

The antenna used for this product as Antenna information described in section 2.1 of this report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

16. Photos of the EUT

Please refer to appendix I.

END OF REPORT