

Page: 1 of 646

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT





FCC Applicant: Cisco Systems Inc.

> 125 West Tasman Dr, Bldg. P, San Jose, California, 95134

USA

Product Name: FM4500FIBER-HW

Cisco Fluidmesh FM4500 FIBER **Brand Name:**

Model No.: FM4500F

Model Difference: N/A

ER/2021/A0118 **Report Number:**

FCC ID R5SX500F

March 23, 2022 **Issue Date:**

February 1, 2022~March 11, 2022 Date of Test:

Date of EUT Received: October 28, 2021

Approved By

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.407.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Page: 2 of 646

Revision History					
Report Number Revision Description Issue Date Revised By Ren					Remark
ER/2021/A0118	00	Original.	March 23, 2022	Karen Huang	

Note:

1. The remark "*" indicates modification of the report upon requests from certification body.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd. No.134 Wu Kuno Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan/新士市五股區新士產業園區五工股 134 號

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 3 of 646

Contents

1	GENERAL INFORMATION	5
2	1.1 Product Description 1.2 Modulation & Data Rate 1.3 DFS Firmware version: 1.4 FCC WLAN 5GHz: 1.5 Antenna Designation 1.6 Test Methodology of Applied Standards 1.7 Test Facility 1.8 Special Accessories 1.9 Equipment Modifications SUMMARY OF TEST RESULT	5 6 7 8 8 8
3	MEASUREMENT UNCERTAINTY	9
4	TPC AND DFS MEASUREMENT	10
	4.1 TPC Requirements	
5	4.2 DFS: Standard Applicable	
6	TEST SETUP	
7	TEST EQUIPMENT USED:	
8	DESCRIPTION OF EUT:	
9	RADAR TYPE WAVEFORM CALIBRATION AT DFS DETECTION THESHOLD	
10	CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME MEASUREMENT (RADAR TYPE 0)	
11	NON-OCCUPANCY PERIOD MEASUREMENT	
	UNII DETECTION BANDWIDTH MEASUREMENT	
-	12.1 Test Result	
13	CHANNEL AVAILABILITY CHECK MEASUREMENT	34
14	IN SERVICE MONITORING (FM-OMNI 5 KIT ANTENNA)	35
	14.1 HT20_5320MHz	71
	14.3 HT40_5310MHz 14.4 HT40_5510MHz	
	14.5 VHT80 5530MHz	179

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd. No.134 Wu Kuno Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan/新士市五股區新士產業園區五工股 134 號



Page: 4 of 646

15	IN SE	RVICE MONITORING (FM-SHARK-DUAL)	215
	15.1	HT20 5320MHz	215
	15.2	HT20 5500MHz	251
	15.3	HT40 5310MHz	287
	15.4	HT40 5510MHz	323
	15.5	VHT80 5290MHz	359
	15.6	VHT80_5530MHz	395
16		RVICE MONITORING (FM-TUBE)	
	16.1	HT20 5320MHz	431
	16.2	HT20 5500MHz	467
		HT40 5310MHz	
		HT40 5510MHz	
	10.0	VHT80 5290MHz	3/3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd. No.134 Wu Kuno Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan/新士市五股區新士產業園區五工股 134 號



Page: 5 of 646

GENERAL INFORMATION

1.1 **Product Description**

Product Name:	FM4500FIBER-HW
Brand Name:	Cisco Fluidmesh FM4500 FIBER
Model No.:	FM4500F
Model Difference:	N/A
Hardware Version:	N/A
Firmware Version:	N/A
EUT Series No.:	4501150798
Power Supply:	56Vdc

1.2 **Modulation & Data Rate**

Modulation type:	64QAM, 16QAM, QPSK, BPSK for OFDM
	256QAM for OFDM in 802.11ac only
	802.11 n_20MHz: 6.5 - 144.4 Mbps
	802.11 n_40MHz: 13.5 - 300 Mbps
Transition Rate:	802.11 ac_20MHz: 6.5 - 173.4 Mbps
	802.11 ac_40MHz: 13.5 - 400 Mbps
	802.11 ac_80MHz: 29.3 - 866.6 Mbps

DFS Firmware version: 1.3

Firmware	upgrade
Upload and upgrade the firmware using a firmw Firmware upgrades are available to registered WARNING: POWERING OFF OR UNPLUGGII FIRMWARE UPGRADE PROCEDURE WILL P	users at www.fluidmesh.com. NG A FLUIDMESH UNIT DURING A
Current version:	9.3-lc7
Select the firmware file to up 選擇檔案 未選擇任	pload and start the upgrade: 何檔案

Upgrade

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCSTaiwan** Left.***

No.134Wet Were Peach New Taiwan** Left.**

Term Left.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 6 of 646

FCC WLAN 5GHz: 1.4

Wi-Fi	Frequency Range	Channels	Rated Power(Avg) (dBm) (Worst Case)	Modulation Technology
	5180~5240	4	9.90 dBm	OFDM
n_HT/	5260~5320	4	10.53 dBm	OFDM
ac_VHT 20M	5500~5700	11	10.31 dBm	OFDM
	5745-5825	5	18.03 dBm	OFDM
	5190~5230	2	9.96 dBm	OFDM
n_HT/	5270~5310	2	12.31 dBm	OFDM
ac_VHT 40M	5510~5670	5	12.33 dBm	OFDM
	5755-5795	2	17.59 dBm	OFDM
	5210	1	7.29 dBm	OFDM
ac_VHT	5290	1	0.13 dBm	OFDM
80M	5530~5610	2	12.01 dBm	OFDM
	5775	1	15.92 dBm	OFDM

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd. No.134 Wu Kuno Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan/新士市五股區新士產業園區五工股 134 號



Page: 7 of 646

1.5 **Antenna Designation**

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)	Directional Gain (dBi)
			5150~5250	4.0	7.52
Omni-direction	Fluidmesh	FM-OMNI-5-V	5250~5350	4.0	7.52
Omni-direction	riulamesn	FIVI-OIVIIVI-3-V	5470~5725	4.0	7.52
			5725~5850	4.0	7.52
			5150~5250	5.0	7.52
Omni direction	Fluidmesh	EM OMNI S LI	5250~5350	5.0	7.52
Omni-direction	riulamesn	FM-OMNI-5-H	5470~5725	5.0	7.52
			NI-5-V 5250~5350 5470~5725 5725~5850 5150~5250 5250~5350 5470~5725 5725~5850 5150~5250 5250~5350	5.0	7.52
		uidmesh FM-SHARK-DUAL 5250~535	5150~5250	13.0	16.01
Omni direction	Fluidmank FM OLIADIC		5250~5350	13.0	16.01
Omni-direction	riulamesn		5470~5725	13.0	16.01
			5725~5850	13.0	16.01
			5150~5250	14.6	17.61
Directional	Fluidmesh	FM-TUBE	5250~5350	14.6	17.61
	riulumesh	FIVI-1 UDE	5470~5725	14.6	17.61
			5725~5850	14.6	17.61

Note:

- 1. Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the lowest gain as worst case scenarios.
- 2. Antenna information is provided by the applicant.



Page: 8 of 646

1.6 **Test Methodology of Applied Standards**

FCC Part 15, Subpart E §15.407

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

1.7 **Test Facility**

Laboratory	Test Site Address	Test Site Name	FCC Designa- tion number	IC CAB identifier
	-	SAC 1		
		SAC 3		
		Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1		
	Industrial Park, Wuku District, New	Conducted 2	TW0027	
	Taipei City, Taiwan.	Conducted 3		
		Conducted 4		
		Conducted 5		
SGS Taiwan Ltd.		Conducted 6		
_		Conduction C	TW0028	TW3702
Central RF Lab. (TAF code 3702)		SAC C		
		SAC D		
		SAC G		
	No 2 Kaji 1at Dd. Cujahan Diatriat	Conducted A		
	No.2, Keji 1st Rd., Guishan District,	Conducted B		
	Taoyuan City, Taiwan 333	Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.8 **Special Accessories**

There are no special accessories used while test was conducted.

1.9 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 646

SUMMARY OF TEST RESULT

FCC Rules	Description Of Test	Result
§15.407(h) FCC KDB 905462 D02	TPC and DFS Measurement	Compliant

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		nty
TPC and DFS Measurement	+/-	0.88	Hz
Temperature	+/-	0.4	°C
Humidity	+/-	3.5	%
DC / AC Power Source	+/-	1	%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnirecentions of the content of the con



Page: 10 of 646

TPC AND DFS MEASUREMENT

4.1 **TPC Requirements**

According to Part 15.407 (h)(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

Result: Yes, The EUT equipped with TPC function.

4.2 **DFS: Standard Applicable**

According to §15.407(h)(2) and FCC KDB 905462 D02, Radar Detection Function of Dynamic Frequency Selection (DFS).

Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is −64 dBm. For devices that operate with less than 200 mW e.i.r.p. and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is −62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

- Operational Modes. The DFS requirement applies to the following operational modes: (i)
 - (a) The requirement for channel availability check time applies in the master operational mode.
 - (b) The requirement for channel move time applies in both the master and slave operational modes.
- Channel Availability Check Time. A U-NII device shall check if there is a radar system (ii) already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.
- Channel Move Time. After a radar's presence is detected, all transmissions shall (iii) cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 646

Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnirecentions of the content of the con



Page: 12 of 646

APPLICABLE STANDARDS

Table 1: Applicability of DFS requirements prior to use of a channel

		Operational Mode			
Requirement	Master	Client(without radar detection)	Client(with radar detection)		
Non-occupancy Period	Yes	Not required	Yes		
DFS Detection Threshold	Yes	Not required	Yes		
Channel Availability Check Time	Yes	Not required	Not required		
U-NII Detection Band- width	Yes	Not required	Yes		

Table 2: Applicability of DFS requirements during normal operation

	Operational Mode				
Requirement	Master Device or Client with Radar Detection	Client Without Radar Detection			
DFS Detection Threshold	Yes	Not required			
Cannel Closing Transmission time	Yes	Yes			
Channel Move time	Yes	Yes			
U-NII Detection Bandwidth	Yes	Not required			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnirecentions of the content of the con



Page: 13 of 646

Additional requirements for devices with multiple bandwidth mode	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Perfor- mance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Trans- mission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 646

Table 4: DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 646

Table 5: Radar Test Waveforms Short Pulse Radar

Radar	Pulse	PRI	Number of Pulses	Minimum	Minimum		
Type	Width	(µsec)		Percentage of	Number		
	(µsec)			Successful	of		
				Detection	Trials		
0	1	1428	18	See Note 1	See Note		
					1		
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup $ \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{sec}}} \right) \right\} $	60%	30		
2	1-5	150-230	23-29	60%	30		
3	6-10	200-500	16-18	60%	30		
4	11-20	200-500	12-16	60%	30		
Aggregate (Aggregate (Radar Types 1-4) 80% 120						

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Long Pulse Radar

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful	Minimum Number of Trials
	4 /	` ′		•		Detection	
5	50-100	5-20	1000- 2000	1-3	8-20	80%	30

Frequency Hopping Radar

Radar	Pulse	PRI	Pulses	Hopping	Hopping	Minimum	Minimum
Type	Width	(µsec)	per	Rate	Sequence	Percentage of	Number of
	(µsec)		Hop	(kHz)	Length	Successful	Trials
					(msec)	Detection	
6	1	333	9	0.333	300	70%	30

The applicant of this given application confirms that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnirecentions of the content of the con


台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 t (886-2) 2299-3279 www.sgs.com.tw



Page: 16 of 646

Setup for Master with injection at the Master (Radiated)

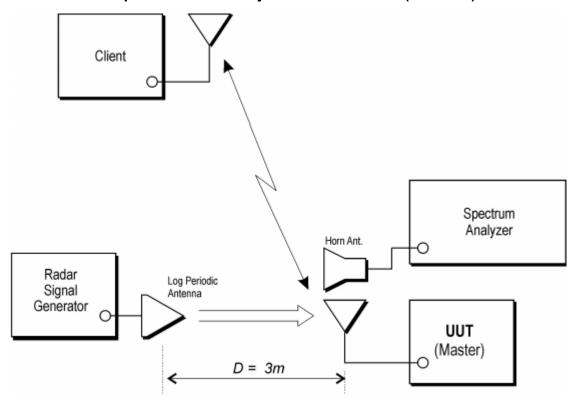

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCSTaiwan** Left.***

No.134Wet Were Peach New Taiwan** Left.**

Term Left.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 17 of 646

7 **TEST EQUIPMENT USED:**

Radiated Emission Test Site: FAC 3							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Horn antenna	ETS.LINDGREN	3117	139056	11/25/2021	11/24/2022		
Horn antenna	ETS.LINDGREN	3117	135200	12/27/2021	12/26/2022		
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60242081	09/30/2021	09/29/2022		
Signal Generator	KEYSIGHT	N5182B	MY61252553	09/22/2021	09/21/2022		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCS Taiwan Ltd. No.134 Wu Kuno Road. New Taipei Industrial Park. Wuku District. New Taipei City. Taiwan/新士市五股區新士產業園區五工股 134 號 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 18 of 646

8 DESCRIPTION OF EUT:

EUT operates over below frequency ranges.

UNII-Band					
\boxtimes	UNII-2A (5250-5350 MHz)				
\boxtimes	UNII-2C (5470-5725 MHz)				

And is a Master device with radar detection and DFS capability

The EUT utilizes below architecture and nominal channel bandwidths.

802.11	20M	40M	80M	160M
а		N/A	N/A	N/A
n	\boxtimes	\boxtimes	N/A	N/A
ac	\boxtimes	\boxtimes	\boxtimes	
ax				

Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.

The rated output power of the master unit is $\ge 23 \text{dBm}(\text{EIRP})$. therefore the required interference threshold level is -64dBm. after correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is -64dBm.

The rated output power of the master unit is <23 dBm(EIRP).therefore the required interference threshold level is -62dBm.after correction for antenna gain and procedural adjustments, the required threshold at the antenna port is -62dBm.

While calibrate the path on antenna port of DFS test equipment (master), measurements equipments (spectrum) is ensured to be 50 Ohms, and therefore verification on antenna gain measurement can be ignored.

The EUT uses one transmitter/receiver chains and one receive only chain, each connected to an antenna to perform radiated tests.

The Slave device associated with the EUT during these tests does not have radar detection capability.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 19 of 646

9 RADAR TYPE WAVEFORM CALIBRATION AT DFS DETECTION THESHOLD

HT20_5320MHz_Radar_Type 0


HT20 5320MHz Radar Type 1-A



HT20 5320MHz Radar Type 1-B



HT20 5320MHz Radar Type 2

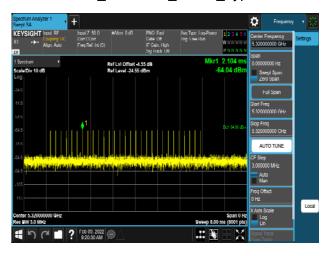

HT20 5320MHz Radar Type 3



HT20 5320MHz Radar Type 4



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemniication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



HT20 5320MHz_Radar_Type 5

1 1 C 2 Peb UH, ZUZZ 922-33 AM

HT20_5320MHz_Radar_Type 6

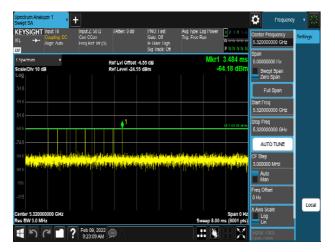


HT20 5500MHz Radar Type 0



Page: 20 of 646


Report No.: ER/2021/A0118

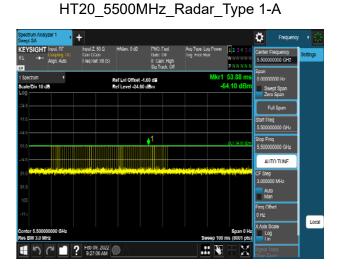

HT20_5500MHz_Radar_Type 1-B



HT20 5500MHz Radar Type 2

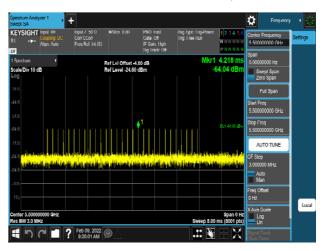

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions at <a href="http://www.sgs.com.tw/T relections of the content of the sand conditions of Elections of Elect



HT20 5500MHz_Radar_Type 3

1 1 C 2 Peb UH, ZUZZ 9:28:24 AM III ₹

HT20_5500MHz_Radar_Type 4

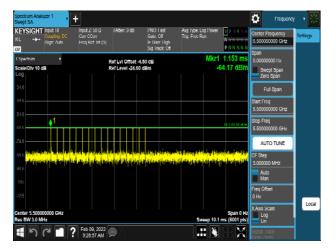

HT20 5500MHz Radar Type 5



HT20 5500MHz Radar Type 6

Page: 21 of 646


Report No.: ER/2021/A0118



HT40_5310MHz_Radar_Type 0



HT40 5310MHz Radar Type 1-A

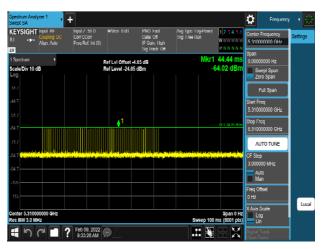

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions at <a href="http://www.sgs.com.tw/T relections of the content of the sand conditions of Elections of Elect



HT40 5310MHz Radar Type 1-B

1 9 C 7 Peb UH, ZUZZ 8.33:55 AM III ₹

HT40_5310MHz_Radar_Type 2




HT40 5310MHz Radar Type 3



HT40 5310MHz Radar Type 4

Page: 22 of 646


Report No.: ER/2021/A0118

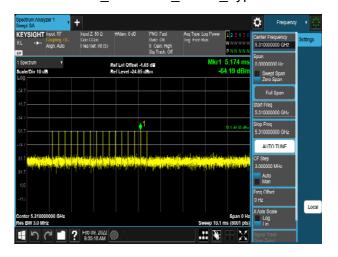

HT40_5310MHz_Radar_Type 5



HT40 5310MHz Radar Type 6

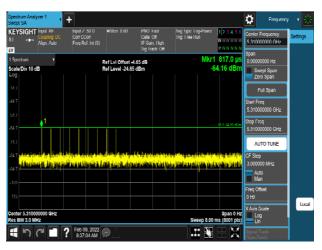

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions at <a href="http://www.sgs.com.tw/T relections of the content of the sand conditions of Elections of Elect