

FCC Test Report

Report No.: RFBHAT-WTW-P20121068A-2

FCC ID: R68OQ845US

Test Model: Open-Q 845 uSOM

Received Date: Jul. 14, 2022

Test Date: Aug. 02 ~ Aug. 22, 2022

Issued Date: Oct. 06, 2022

Applicant: Lantronix, Inc.

Address: 7535 Irvine Center Drive, Suite 100, Irvine, CA 92618 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and References	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard	16
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results	34
4.3 Conducted Output Power Measurement	36
4.3.1 Limits of Conducted Output Power Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments	36
4.3.4 Test Procedures.....	36
4.3.5 Deviation from Test Standard	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Results	37
5 Pictures of Test Arrangements.....	39
Annex A- Band Edge Measurement	40
Appendix – Information of the Testing Laboratories	44

Release Control Record

Issue No.	Description	Date Issued
RFBHAT-WTW-P20121068A-2	Original Release	Oct. 06, 2022

1 Certificate of Conformity

Product: Open-Q 845 uSOM
Brand: Lantronix
Test Model: Open-Q 845 uSOM
Sample Status: Engineering Sample
Applicant: Lantronix, Inc.
Test Date: Aug. 02 ~ Aug. 22, 2022
Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Lena Wang
Prepared by : _____, **Date:** Oct. 06, 2022
Lena Wang / Specialist

Jeremy Lin
Approved by : _____, **Date:** Oct. 06, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -24.03 dB at 0.61800 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.6 dB at 2390.00 MHz.
15.247(d)	Antenna Port Emission	N/A	Refer to Note 1
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note 1
---	Occupied Bandwidth Measurement	N/A	Refer to Note 1
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	Refer to Note 1
15.203	Antenna Requirement	N/A	Refer to Note 1

Note:

1. This report is a partial report, only test item of AC Power Conducted Emission, Conducted power and Radiated Emissions tests were performed for this report. Other testing data please refer to original report no.: RFBHAT-WTW-P20121068-2.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Open-Q 845 uSOM
Brand	Lantronix
Test Model	Open-Q 845 uSOM
Status of EUT	Engineering Sample
Power Supply Rating	12 Vdc (Adapter)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 400 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20), VHT20 7 for 802.11n (HT40), VHT40
Output Power	CDD Mode: 420.377 mW Beamforming Mode: 317.282 mW
Antenna Type	Refer to Note as below
Antenna Connector	Refer to Note as below
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. This report is issued as a supplementary report to BV CPS report no. RFBHAT-WTW-P20121068-2. The difference compared with original report are adding antenna, therefore only test item of AC Power Conducted Emission, Conducted power and Radiated Emissions tests were performed for this report.
2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function	CDD Mode	Beamforming Mode
802.11b	2TX	Support	Not Support
802.11g	2TX	Support	Not Support
802.11n (HT20)	2TX	Support	Support
802.11n (HT40)	2TX	Support	Support
VHT20	2TX	Support	Support
VHT40	2TX	Support	Support

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 256QAM for VHT20 / VHT40, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

3. The following antennas were provided to the EUT. (Ant. B is new)

Ant. A		
Ant. Type	Flexible Dipole Antenna	
Connector Type	U.FL	
Antenna Gain (dBi)		
Item	2.4~2.5G	4.9~5.8G
Ant 1	3.32	6.11
Ant 2	3.32	6.11
Ant. B		
Brand	Fractus Antennas	
Model	FR05-S1-NO-1-003	
Ant. Type	Chip Monopole	
Connector Type	SMA	
Antenna Gain (dBi)		
	2.4~2.5G	4.9~5.8G
	3.9	6

4. Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
6. BT, 2.4G and 5GHz WLAN can transmit simultaneously. The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1 GHz **RE $<$ 1G**: Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: "-" means no effect.

NOTE: Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst fundamental frequency emission level.

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	6	DSSS	DBPSK	1.0

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	VHT20	1 to 11	1, 11	OFDM	BPSK	6.5
-	VHT40	3 to 9	3, 9	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE \geq 1G	23 deg. C, 73 % RH	120 Vac, 60 Hz	Rex Wang
RE<1G	21 deg. C, 68 % RH	120 Vac, 60 Hz	Rex Wang
PLC	25 deg. C, 75 % RH	120 Vac, 60 Hz	Rex Wang
APCM	25 deg. C, 60 % RH	120 Vac, 60 Hz	Jisyong Wang

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.175/12.35 = 0.986$

802.11g: Duty cycle = $2.02/2.065 = 0.978$, Duty factor = $10 * \log(1/0.978) = 0.10$

VHT20: Duty cycle = $1.9/1.965 = 0.967$, Duty factor = $10 * \log(1/0.967) = 0.15$

VHT40: Duty cycle = $0.935/1.012 = 0.924$, Duty factor = $10 * \log(1/0.924) = 0.34$

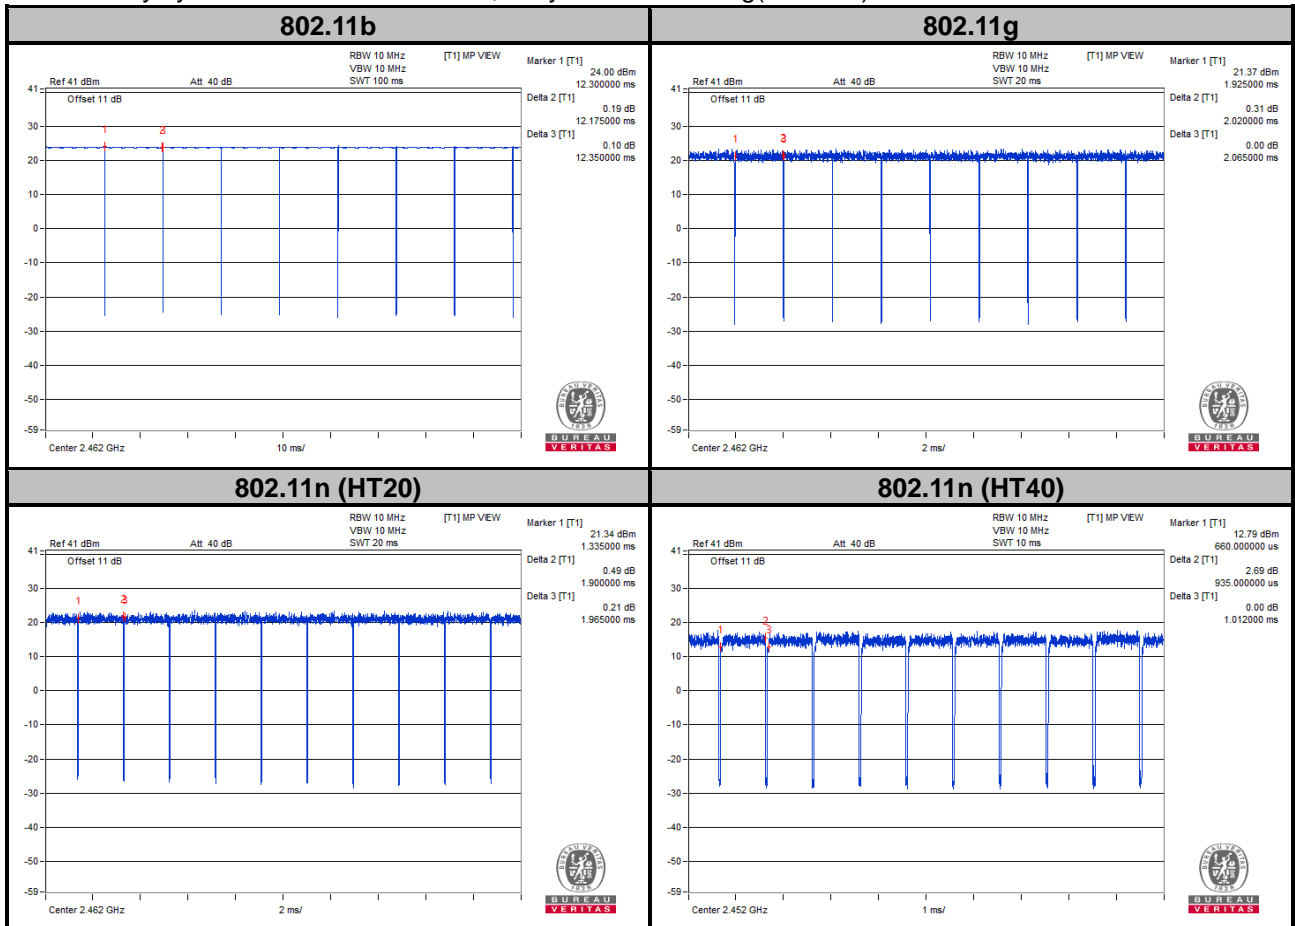

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Jig	N/A	N/A	N/A	N/A	Provided by client
B	Adapter	YINGHUIYUAN	YHY-12003000	N/A	N/A	Provided by client
C	Notebook	Dell	E5420	FHP75S1	N/A	--

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Adapter Cable	1	1.2	Y	1	Provided by client
2.	Power Cable	1	1.15	N	0	Provided by client
3.	USB Type C Cable	1	1	Y	0	--

3.4.1 Configuration of System under Test

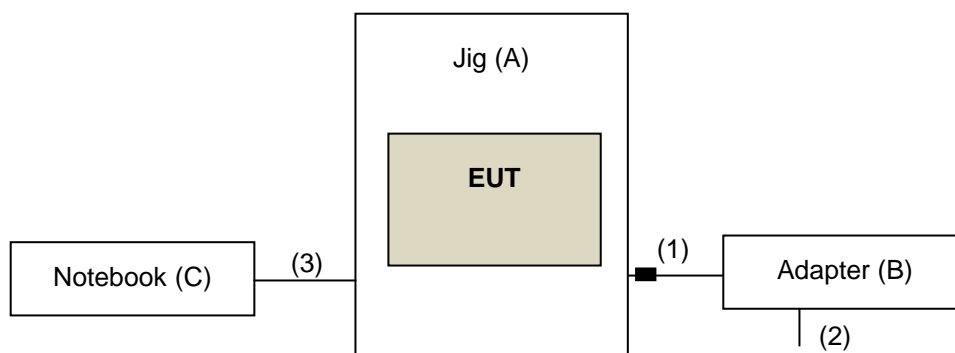

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Test Receiver Agilent	N9038A	MY51210203	Sep. 22, 2021	Sep. 21, 2022
Spectrum Analyzer R&S	FSW43	101867	Jan. 07, 2022	Jan. 06, 2023
Pre-amplifier EMCI	EMC001340	980201	Sep. 15, 2021	Sep. 14, 2022
Pre-amplifier EMCI	EMC001340	980201	Sep. 15, 2021	Sep. 14, 2022
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 15, 2022	Jan. 14, 2023
Preamplifier Agilent	8447D	2944A10638	May 14, 2022	May 13, 2023
Bi_Log Antenna Schwarzbeck	VULB9168	9168-160	Oct. 28, 2021	Oct. 27, 2022
RF Coaxial Cable WOKEN	8D-FB	Cable-CH9-01	May 14, 2022	May 13, 2023
Horn Antenna Schwarzbeck	9120D	9120D-1169	Nov. 14, 2021	Nov. 13, 2022
Preamplifier Agilent	8449B	3008A02367	Feb. 16, 2022	Feb. 15, 2023
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM- SM8000	CABLE-CH9-02 (248780+171006)	Jan. 15, 2022	Jan. 14, 2023
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9- (250795/4)	Jan. 15, 2022	Jan. 14, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 10, 2022	Jan. 09, 2023
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 10, 2022	Jan. 09, 2023
Boresight antenna tower fixture BV	BAF-02	5	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa 966 chamber 4.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 510 kHz ;
VHT20: RBW = 1 MHz, VBW = 1 kHz ; VHT40: RBW = 1 MHz, VBW = 2 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

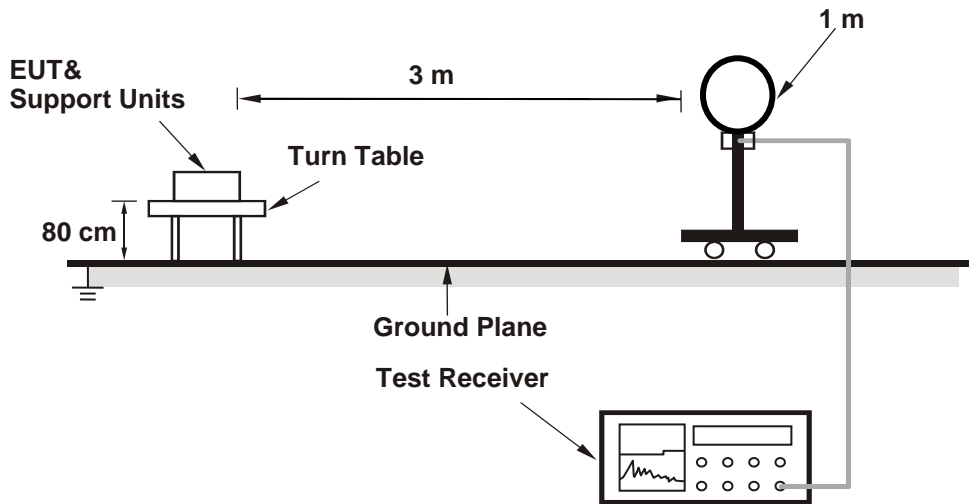

<Radiated Emission 30 MHz to 1 GHz>

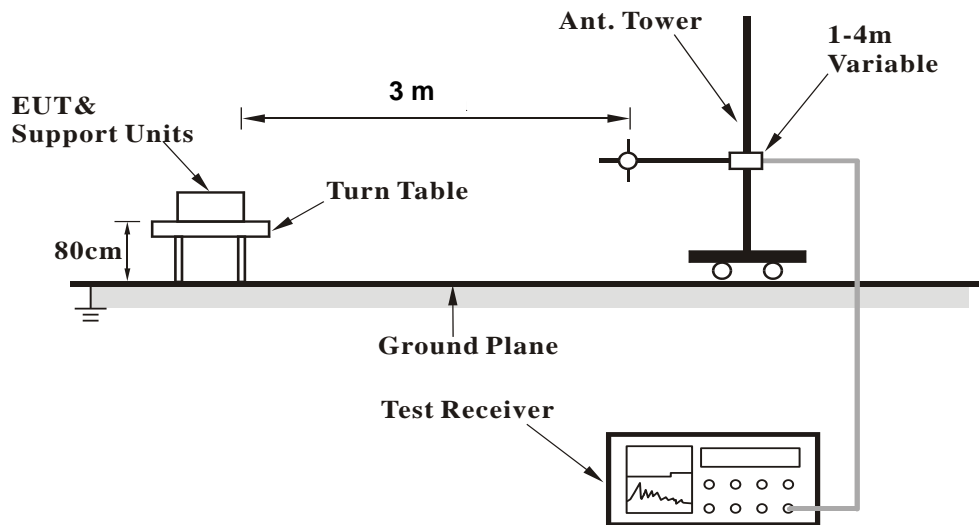

<Radiated Emission above 1 GHz>

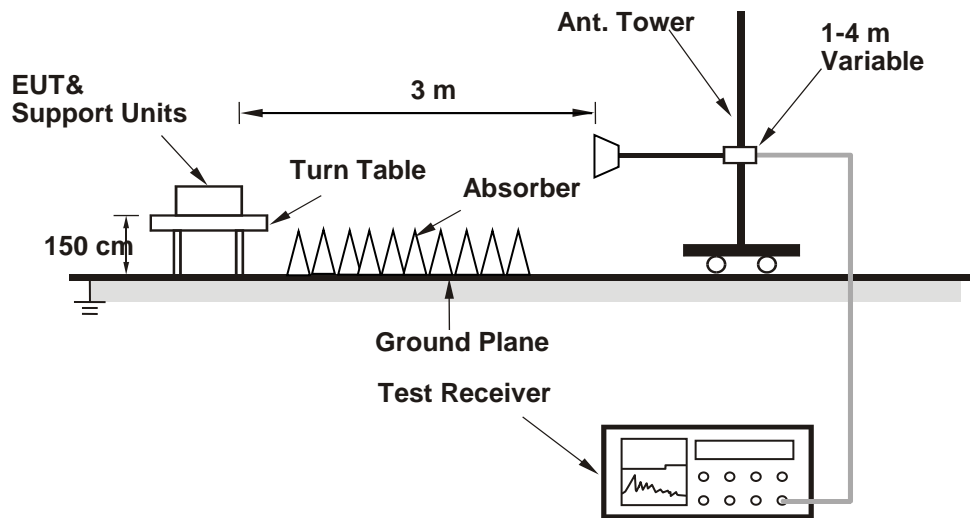

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :
802.11b

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	2.70 H	218	25.9	32.8
2	2390.00	50.0 AV	54.0	-4.0	2.70 H	218	17.2	32.8
3	*2412.00	114.8 PK			2.70 H	218	81.9	32.9
4	*2412.00	112.3 AV			2.70 H	218	79.4	32.9
5	4824.00	51.9 PK	74.0	-22.1	1.16 H	281	46.2	5.7
6	4824.00	47.0 AV	54.0	-7.0	1.16 H	281	41.3	5.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.16 V	162	24.6	32.8
2	2390.00	45.8 AV	54.0	-8.2	1.16 V	162	13.0	32.8
3	*2412.00	110.3 PK			1.16 V	162	77.4	32.9
4	*2412.00	107.9 AV			1.16 V	162	75.0	32.9
5	4824.00	52.0 PK	74.0	-22.0	2.42 V	293	46.3	5.7
6	4824.00	47.8 AV	54.0	-6.2	2.42 V	293	42.1	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.8 PK			2.39 H	234	82.0	32.8
2	*2437.00	112.4 AV			2.39 H	234	79.6	32.8
3	4874.00	53.8 PK	74.0	-20.2	2.20 H	310	48.2	5.6
4	4874.00	48.2 AV	54.0	-5.8	2.20 H	310	42.6	5.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.5 PK			1.19 V	181	80.7	32.8
2	*2437.00	111.5 AV			1.19 V	181	78.7	32.8
3	4874.00	54.9 PK	74.0	-19.1	1.65 V	123	49.3	5.6
4	4874.00	48.5 AV	54.0	-5.5	1.65 V	123	42.9	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.2 PK			2.59 H	233	81.4	32.8
2	*2462.00	112.1 AV			2.59 H	233	79.3	32.8
3	2487.50	58.9 PK	74.0	-15.1	2.59 H	233	26.0	32.9
4	2487.50	49.6 AV	54.0	-4.4	2.59 H	233	16.7	32.9
5	4924.00	49.4 PK	74.0	-24.6	3.65 H	223	44.0	5.4
6	4924.00	45.2 AV	54.0	-8.8	3.65 H	223	39.8	5.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.32 V	179	80.1	32.8
2	*2462.00	110.4 AV			1.32 V	179	77.6	32.8
3	2483.50	59.5 PK	74.0	-14.5	1.32 V	179	26.6	32.9
4	2483.50	49.9 AV	54.0	-4.1	1.32 V	179	17.0	32.9
5	4924.00	50.8 PK	74.0	-23.2	1.66 V	129	45.4	5.4
6	4924.00	47.0 AV	54.0	-7.0	1.66 V	129	41.6	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.45 H	213	35.4	32.8
2	2390.00	53.4 AV	54.0	-0.6	2.45 H	213	20.6	32.8
3	*2412.00	112.5 PK			2.45 H	213	79.6	32.9
4	*2412.00	102.6 AV			2.45 H	213	69.7	32.9
5	4824.00	47.0 PK	74.0	-27.0	1.14 H	279	41.3	5.7
6	4824.00	33.7 AV	54.0	-20.3	1.14 H	279	28.0	5.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.17 V	187	33.8	32.8
2	2390.00	52.3 AV	54.0	-1.7	1.17 V	187	19.5	32.8
3	*2412.00	112.3 PK			1.17 V	187	79.4	32.9
4	*2412.00	101.4 AV			1.17 V	187	68.5	32.9
5	4824.00	47.3 PK	74.0	-26.7	1.65 V	125	41.6	5.7
6	4824.00	34.1 AV	54.0	-19.9	1.65 V	125	28.4	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.0 PK			2.35 H	239	81.2	32.8
2	*2437.00	105.2 AV			2.35 H	239	72.4	32.8
3	4874.00	47.1 PK	74.0	-26.9	1.18 H	274	41.5	5.6
4	4874.00	33.8 AV	54.0	-20.2	1.18 H	274	28.2	5.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.6 PK			1.33 V	181	80.8	32.8
2	*2437.00	104.4 AV			1.33 V	181	71.6	32.8
3	4874.00	47.2 PK	74.0	-26.8	1.62 V	132	41.6	5.6
4	4874.00	34.0 AV	54.0	-20.0	1.62 V	132	28.4	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			2.56 H	233	80.7	32.8
2	*2462.00	104.1 AV			2.56 H	233	71.3	32.8
3	2483.50	69.6 PK	74.0	-4.4	2.56 H	233	36.7	32.9
4	2483.50	53.0 AV	54.0	-1.0	2.56 H	233	20.1	32.9
5	4924.00	46.9 PK	74.0	-27.1	1.15 H	277	41.5	5.4
6	4924.00	33.4 AV	54.0	-20.6	1.15 H	277	28.0	5.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			1.11 V	182	79.6	32.8
2	*2462.00	103.0 AV			1.11 V	182	70.2	32.8
3	2483.50	66.1 PK	74.0	-7.9	1.11 V	182	33.2	32.9
4	2483.50	52.9 AV	54.0	-1.1	1.11 V	182	20.0	32.9
5	4924.00	47.1 PK	74.0	-26.9	1.68 V	130	41.7	5.4
6	4924.00	33.7 AV	54.0	-20.3	1.68 V	130	28.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT20

RF Mode	TX VHT20	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	2.66 H	215	33.2	32.8
2	2390.00	53.2 AV	54.0	-0.8	2.66 H	215	20.4	32.8
3	*2412.00	109.7 PK			2.66 H	215	76.8	32.9
4	*2412.00	99.7 AV			2.66 H	215	66.8	32.9
5	4824.00	47.2 PK	74.0	-26.8	1.22 H	279	41.5	5.7
6	4824.00	34.0 AV	54.0	-20.0	1.22 H	279	28.3	5.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.16 V	185	33.7	32.8
2	2390.00	53.3 AV	54.0	-0.7	1.16 V	185	20.5	32.8
3	*2412.00	109.6 PK			1.16 V	185	76.7	32.9
4	*2412.00	99.4 AV			1.16 V	185	66.5	32.9
5	4824.00	47.5 PK	74.0	-26.5	1.63 V	125	41.8	5.7
6	4824.00	34.3 AV	54.0	-19.7	1.63 V	125	28.6	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX VHT20	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.4 PK			2.98 H	213	82.6	32.8
2	*2437.00	105.4 AV			2.98 H	213	72.6	32.8
3	4874.00	47.4 PK	74.0	-26.6	1.20 H	286	41.8	5.6
4	4874.00	34.1 AV	54.0	-19.9	1.20 H	286	28.5	5.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.6 PK			1.13 V	183	81.8	32.8
2	*2437.00	104.8 AV			1.13 V	183	72.0	32.8
3	4874.00	47.5 PK	74.0	-26.5	1.62 V	129	41.9	5.6
4	4874.00	34.2 AV	54.0	-19.8	1.62 V	129	28.6	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX VHT20	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.8 PK			2.87 H	212	78.0	32.8
2	*2462.00	101.1 AV			2.87 H	212	68.3	32.8
3	2483.50	64.2 PK	74.0	-9.8	2.87 H	212	31.3	32.9
4	2483.50	52.2 AV	54.0	-1.8	2.87 H	212	19.3	32.9
5	4924.00	46.8 PK	74.0	-27.2	1.18 H	274	41.4	5.4
6	4924.00	33.6 AV	54.0	-20.4	1.18 H	274	28.2	5.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.6 PK			1.08 V	184	77.8	32.8
2	*2462.00	100.8 AV			1.08 V	184	68.0	32.8
3	2483.50	61.0 PK	74.0	-13.0	1.08 V	184	28.1	32.9
4	2483.50	49.5 AV	54.0	-4.5	1.08 V	184	16.6	32.9
5	4824.00	47.3 PK	74.0	-26.7	1.70 V	131	41.6	5.7
6	4824.00	34.2 AV	54.0	-19.8	1.70 V	131	28.5	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT40

RF Mode	TX VHT40	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.97 H	209	28.7	32.8
2	2390.00	48.6 AV	54.0	-5.4	2.97 H	209	15.8	32.8
3	*2422.00	102.5 PK			2.97 H	209	69.6	32.9
4	*2422.00	93.1 AV			2.97 H	209	60.2	32.9
5	4844.00	47.2 PK	74.0	-26.8	1.19 H	282	41.5	5.7
6	4844.00	34.0 AV	54.0	-20.0	1.19 H	282	28.3	5.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	1.08 V	186	28.2	32.8
2	2390.00	46.6 AV	54.0	-7.4	1.08 V	186	13.8	32.8
3	*2422.00	102.3 PK			1.08 V	186	69.4	32.9
4	*2422.00	92.9 AV			1.08 V	186	60.0	32.9
5	4844.00	47.3 PK	74.0	-26.7	1.61 V	124	41.6	5.7
6	4844.00	34.4 AV	54.0	-19.6	1.61 V	124	28.7	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX VHT40	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.4 PK			2.92 H	211	75.6	32.8
2	*2437.00	100.6 AV			2.92 H	211	67.8	32.8
3	4874.00	47.1 PK	74.0	-26.9	1.12 H	268	41.5	5.6
4	4874.00	33.9 AV	54.0	-20.1	1.12 H	268	28.3	5.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.9 PK			1.32 V	185	75.1	32.8
2	*2437.00	99.8 AV			1.32 V	185	67.0	32.8
3	4874.00	47.2 PK	74.0	-26.8	1.66 V	130	41.6	5.6
4	4874.00	34.1 AV	54.0	-19.9	1.66 V	130	28.5	5.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX VHT40	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.2 PK			2.60 H	211	74.4	32.8
2	*2452.00	98.0 AV			2.60 H	211	65.2	32.8
3	2483.50	62.4 PK	74.0	-11.6	2.60 H	211	29.5	32.9
4	2483.50	50.9 AV	54.0	-3.1	2.60 H	211	18.0	32.9
5	4904.00	46.8 PK	74.0	-27.2	1.25 H	292	41.4	5.4
6	4904.00	33.6 AV	54.0	-20.4	1.25 H	292	28.2	5.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.1 PK			1.14 V	182	74.3	32.8
2	*2452.00	97.8 AV			1.14 V	182	65.0	32.8
3	2483.50	63.9 PK	74.0	-10.1	1.14 V	182	31.0	32.9
4	2483.50	53.1 AV	54.0	-0.9	1.14 V	182	20.2	32.9
5	4904.00	47.0 PK	74.0	-27.0	1.67 V	124	41.6	5.4
6	4904.00	33.8 AV	54.0	-20.2	1.67 V	124	28.4	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


802.11b

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	32.8 QP	40.0	-7.2	1.00 H	61	41.9	-9.1
2	100.81	33.7 QP	43.5	-9.8	1.25 H	13	47.1	-13.4
3	156.10	39.3 QP	43.5	-4.2	1.00 H	195	48.1	-8.8
4	169.68	38.3 QP	43.5	-5.2	1.00 H	195	47.4	-9.1
5	428.67	25.7 QP	46.0	-20.3	1.25 H	8	29.6	-3.9
6	931.13	34.5 QP	46.0	-11.5	1.50 H	11	28.4	6.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

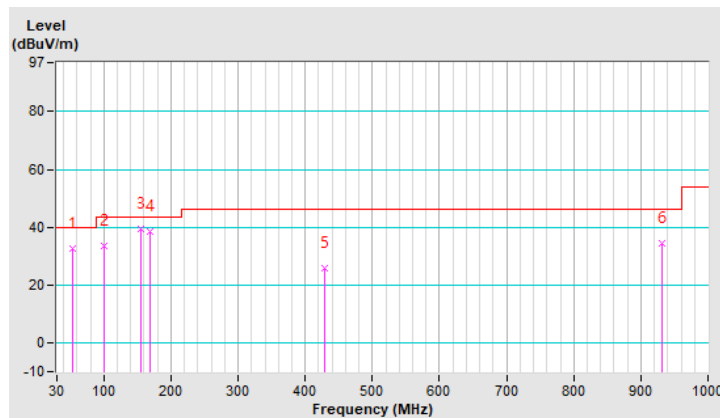


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	99.84	27.8 QP	43.5	-15.7	1.51 V	352	41.5	-13.7
2	159.01	27.2 QP	43.5	-16.3	2.00 V	179	35.9	-8.7
3	234.67	28.9 QP	46.0	-17.1	1.51 V	201	38.9	-10.0
4	458.74	26.5 QP	46.0	-19.5	1.25 V	248	29.7	-3.2
5	602.30	29.2 QP	46.0	-16.8	1.25 V	18	29.5	-0.3
6	964.11	35.2 QP	54.0	-18.8	1.25 V	6	28.7	6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

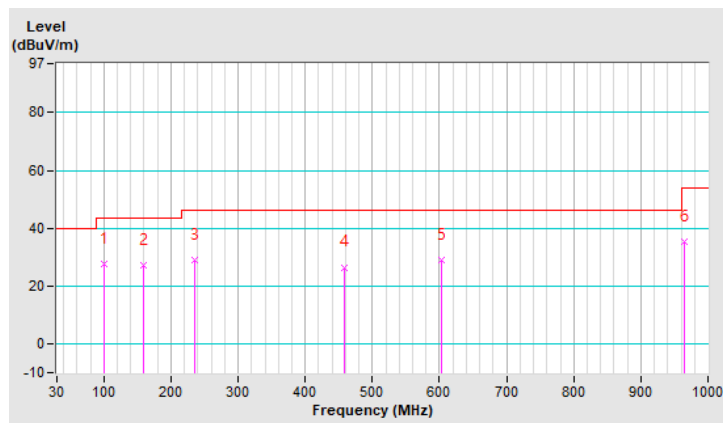

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 20, 2021	Dec. 19, 2022
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2021	Sep. 03, 2022
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 17, 2022	Feb. 16, 2023
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Sep. 17, 2021	Sep. 16, 2022
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2 (Conduction 2).
 3. The VCCI Site Registration No. is C-12047.
 4. Test Date: 2022/8/3

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

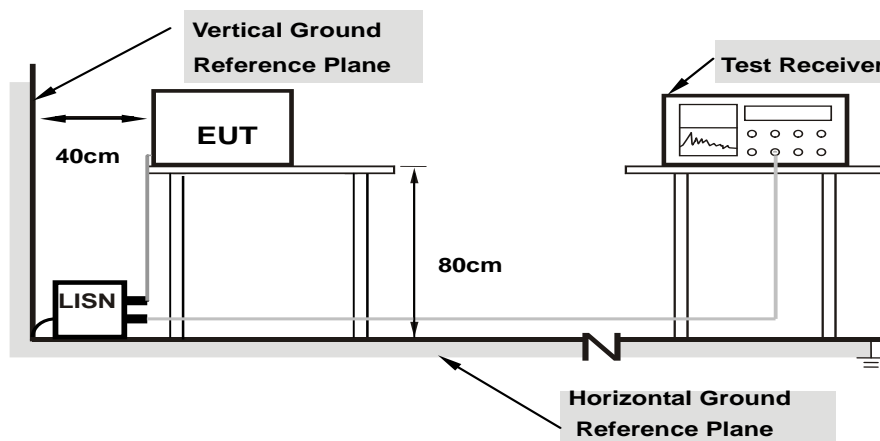

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18200	10.14	15.01	7.39	25.15	17.53	64.39	54.39	-39.24	-36.86
2	0.21800	10.14	7.93	0.22	18.07	10.36	62.89	52.89	-44.82	-42.53
3	0.28906	10.15	17.10	10.13	27.25	20.28	60.55	50.55	-33.30	-30.27
4	0.61800	10.17	18.49	11.80	28.66	21.97	56.00	46.00	-27.34	-24.03
5	1.23400	10.20	16.30	9.51	26.50	19.71	56.00	46.00	-29.50	-26.29
6	22.04200	10.33	14.06	3.33	24.39	13.66	60.00	50.00	-35.61	-36.34

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

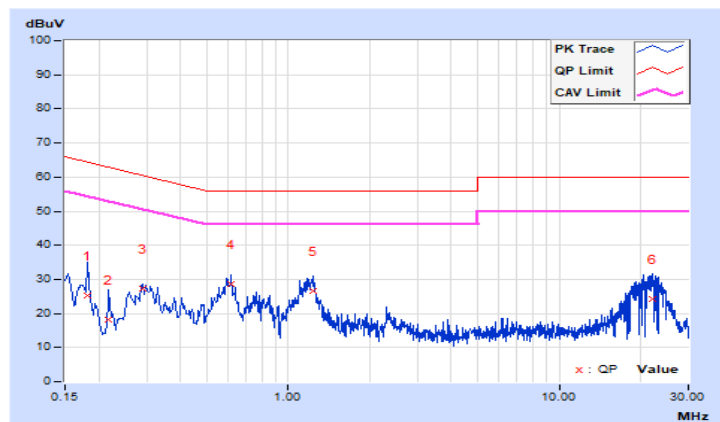


RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.14	21.68	16.05	31.82	26.19	65.78	55.78	-33.96	-29.59
2	0.29000	10.16	16.10	9.27	26.26	19.43	60.52	50.52	-34.26	-31.09
3	0.41000	10.17	16.17	4.54	26.34	14.71	57.65	47.65	-31.31	-32.94
4	0.61000	10.18	16.88	10.54	27.06	20.72	56.00	46.00	-28.94	-25.28
5	1.22200	10.21	16.16	9.23	26.37	19.44	56.00	46.00	-29.63	-26.56
6	21.42600	10.50	12.67	4.55	23.17	15.05	60.00	50.00	-36.83	-34.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

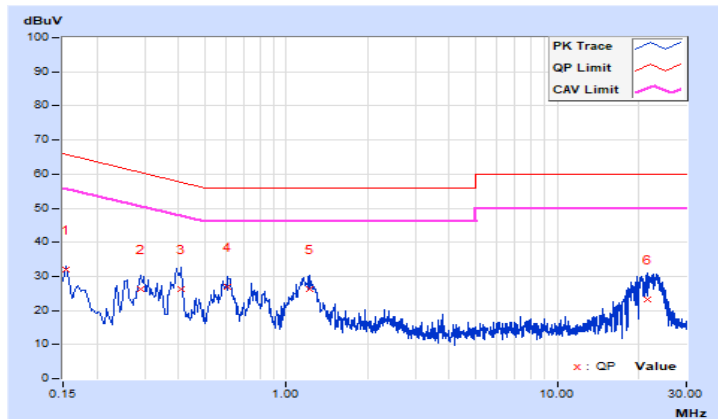

4.3 Conducted Output Power Measurement

4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = $5 \log(\text{NANT}/\text{NSS})$ dB or 3 dB, whichever is less for 20 MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.12	21.54	305.49	24.85	30	Pass
6	2437	23.45	22.99	420.377	26.24	30	Pass
11	2462	23.07	22.46	378.966	25.79	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	16.71	16.18	88.377	19.46	30	Pass
6	2437	22.41	21.90	329.062	25.17	30	Pass
11	2462	18.33	17.87	129.312	21.12	30	Pass

VHT20

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.48	14.15	54.056	17.33	30	Pass
6	2437	22.19	21.81	317.282	25.01	30	Pass
11	2462	17.32	16.91	103.042	20.13	30	Pass

VHT40

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	12.49	11.62	32.263	15.09	30	Pass
6	2437	17.59	17.09	108.58	20.36	30	Pass
9	2452	15.70	15.26	70.727	18.50	30	Pass

Beamforming Mode

VHT20

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.48	14.15	54.056	17.33	29.09	Pass
6	2437	22.19	21.81	317.282	25.01	29.09	Pass
11	2462	17.32	16.91	103.042	20.13	29.09	Pass

Note: Beamforming Directional gain = $3.9\text{dBi} + 10\log(2) = 6.91\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.91 - 6) = 29.09\text{dBm}$.

VHT40

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	12.49	11.62	32.263	15.09	29.09	Pass
6	2437	17.59	17.09	108.58	20.36	29.09	Pass
9	2452	15.70	15.26	70.727	18.50	29.09	Pass


Note: Beamforming Directional gain = $3.9\text{dBi} + 10\log(2) = 6.91\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.91 - 6) = 29.09\text{dBm}$.

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement


802.11b

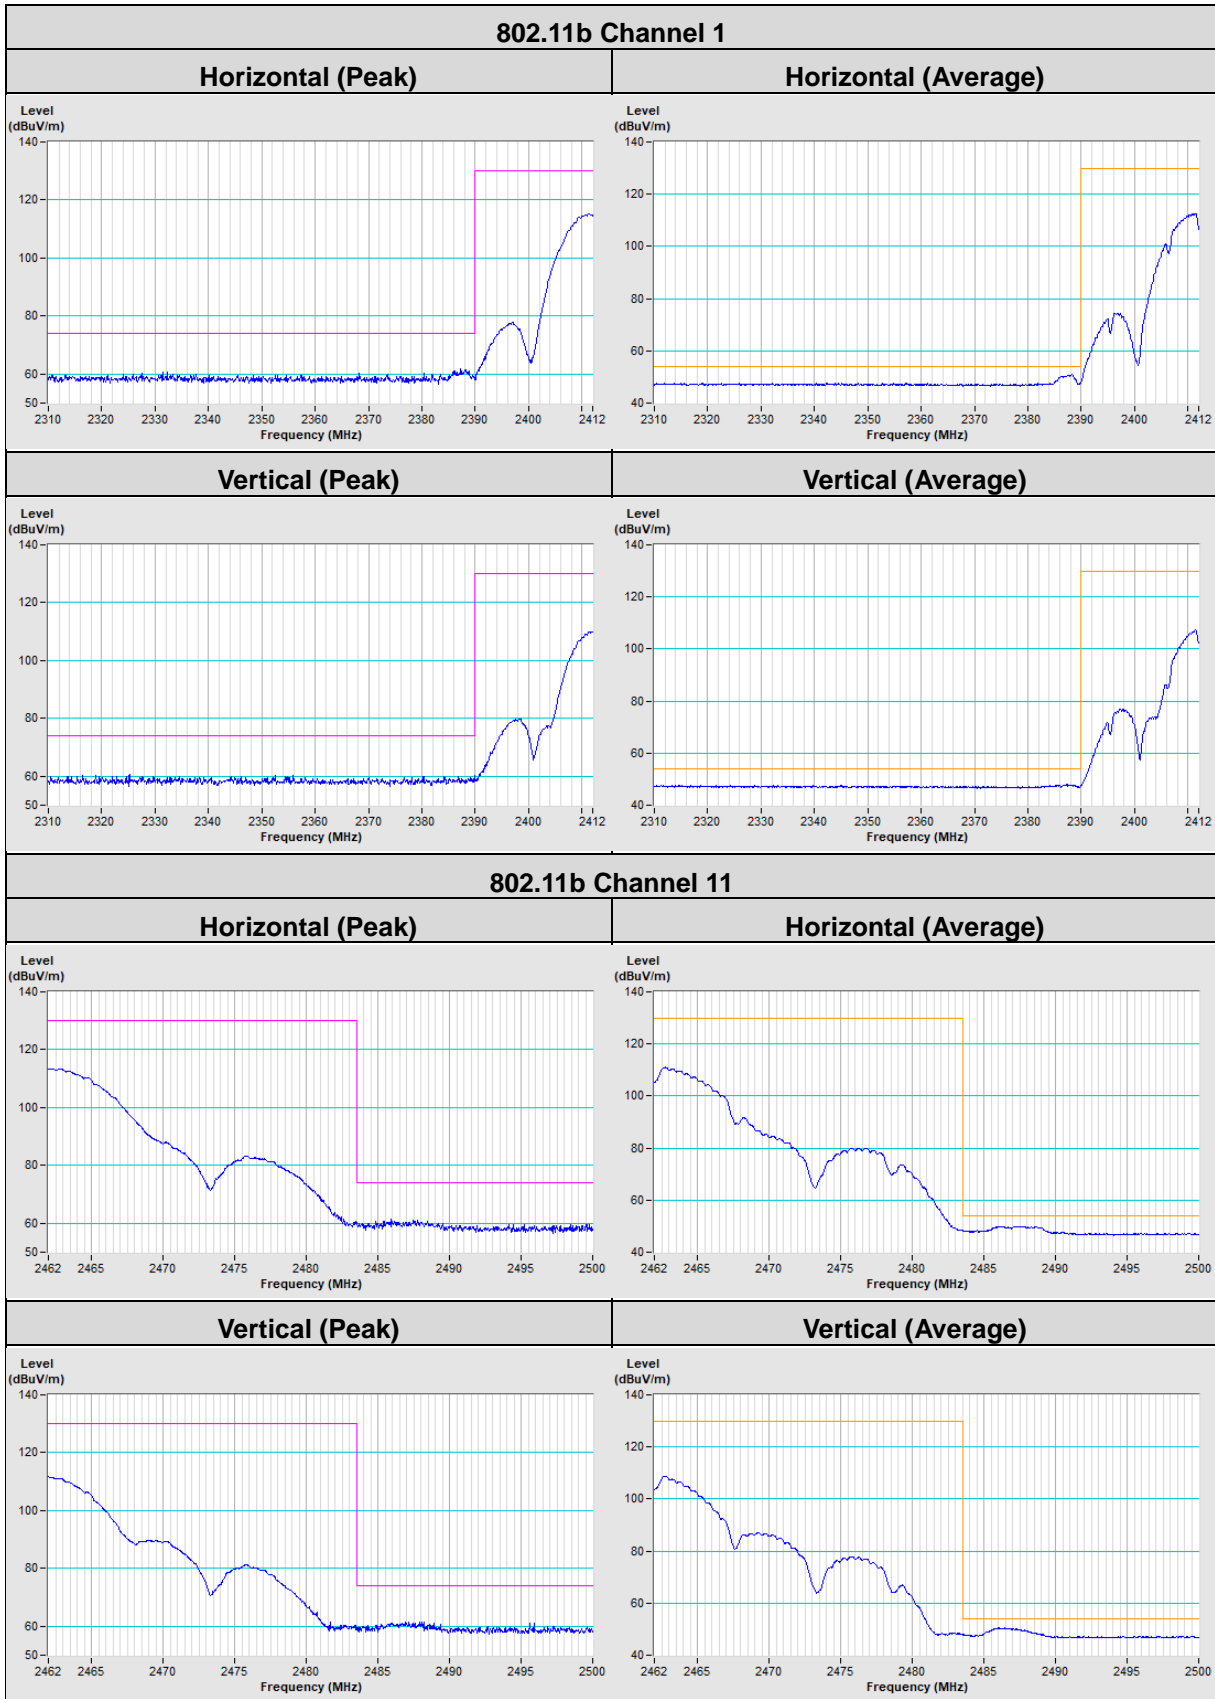


802.11g

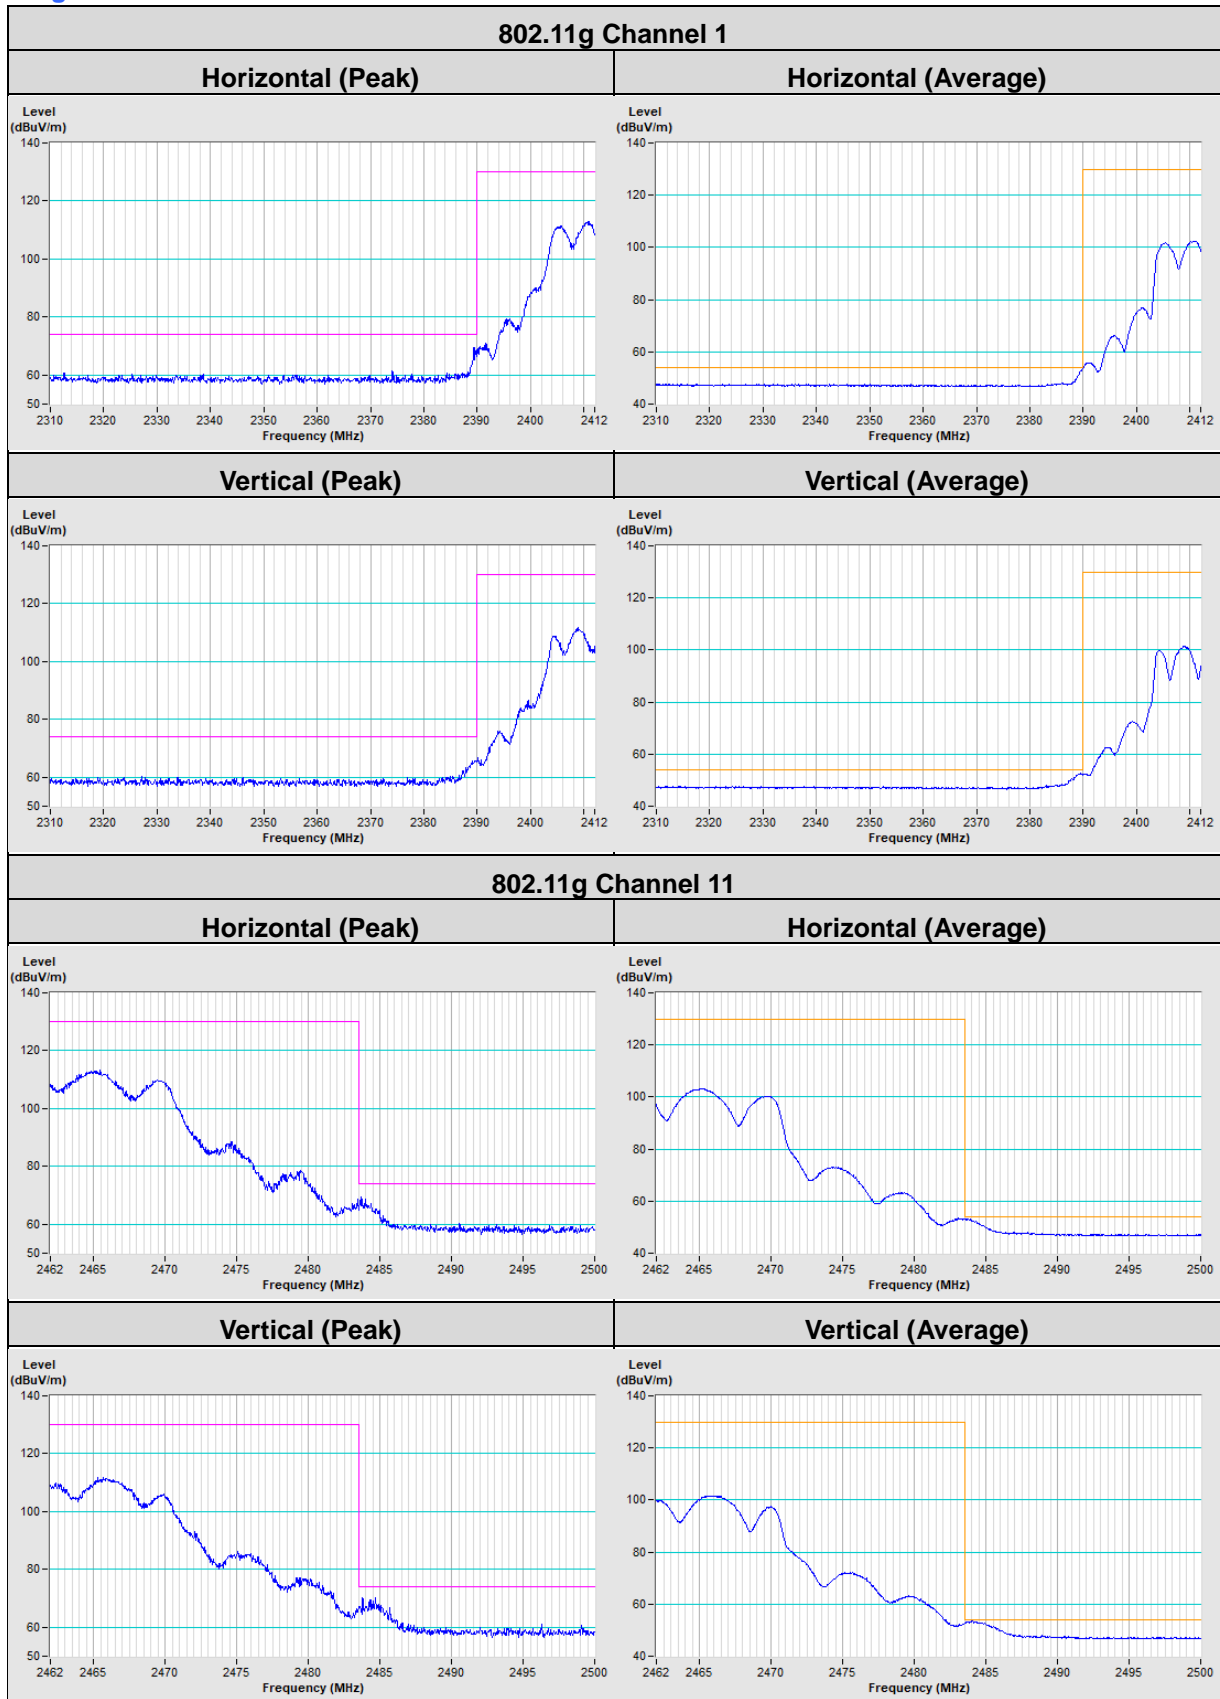

VHT20

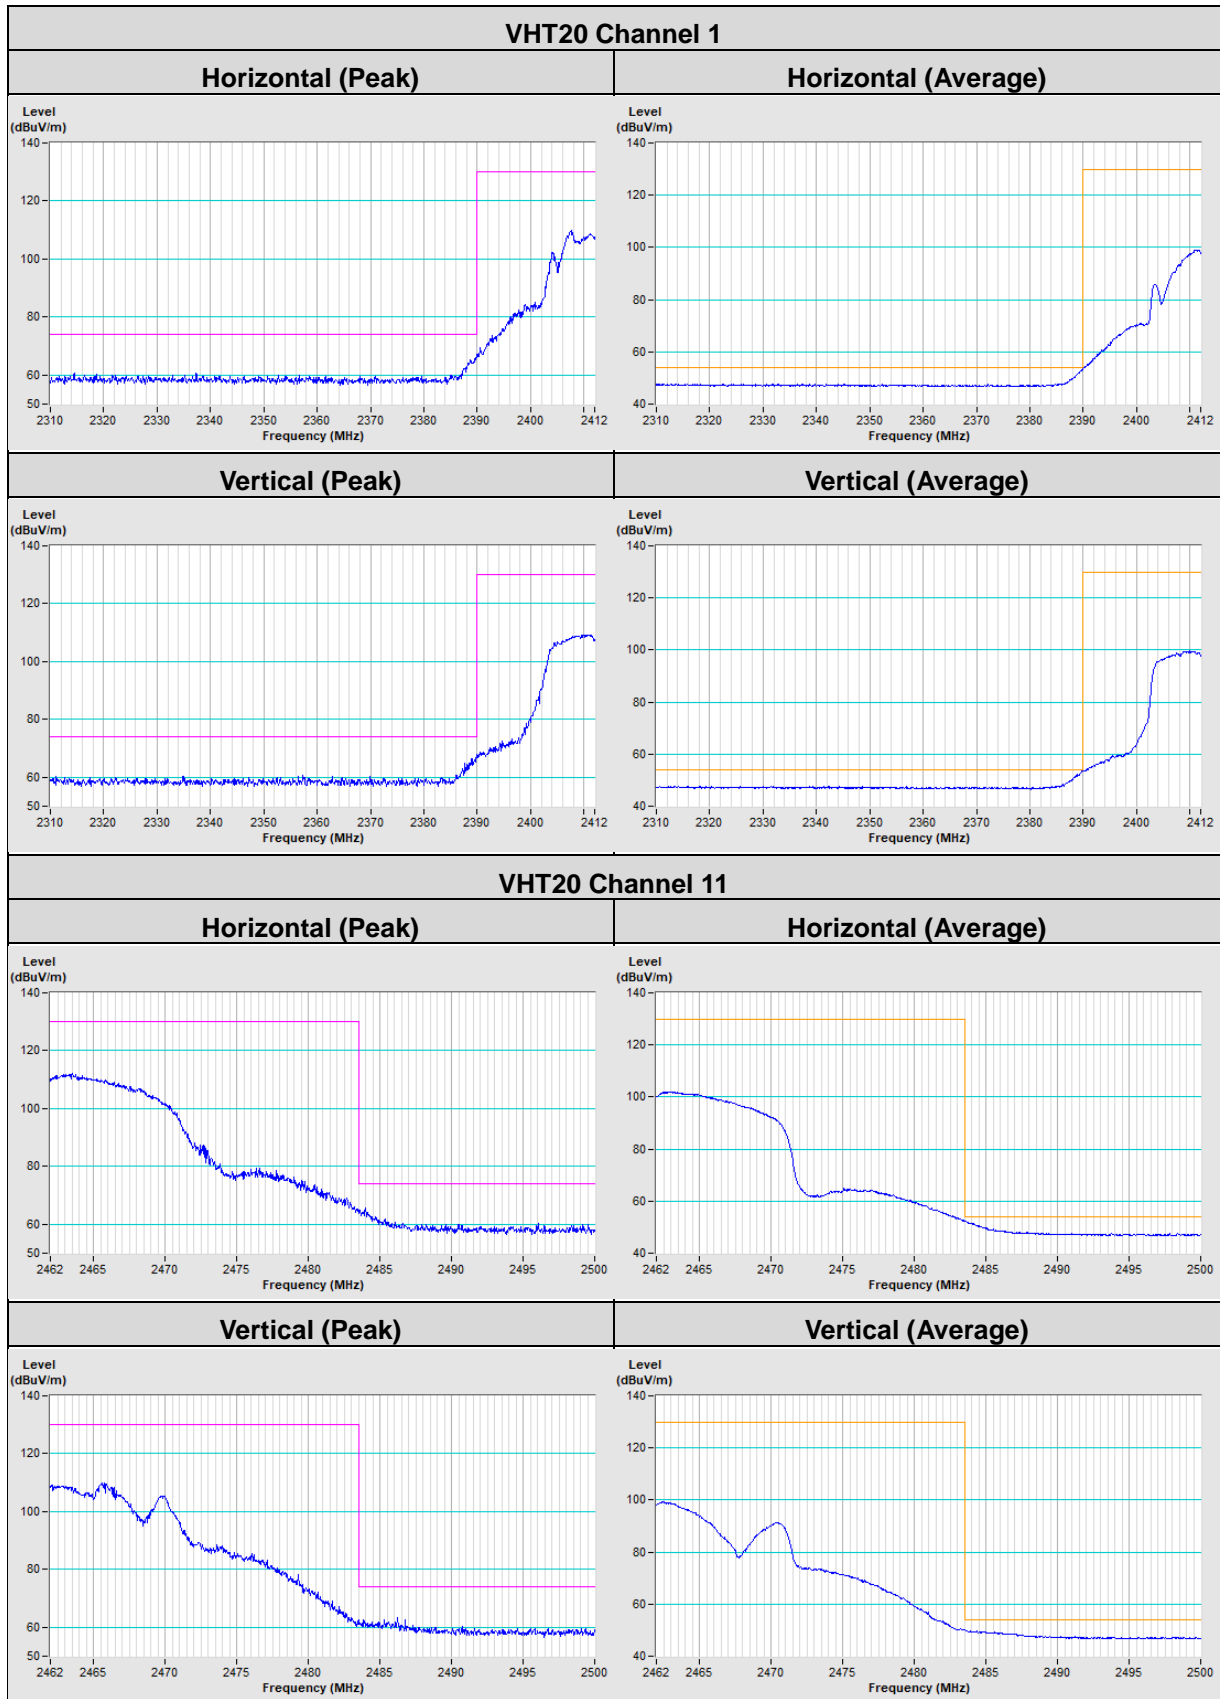

VHT40

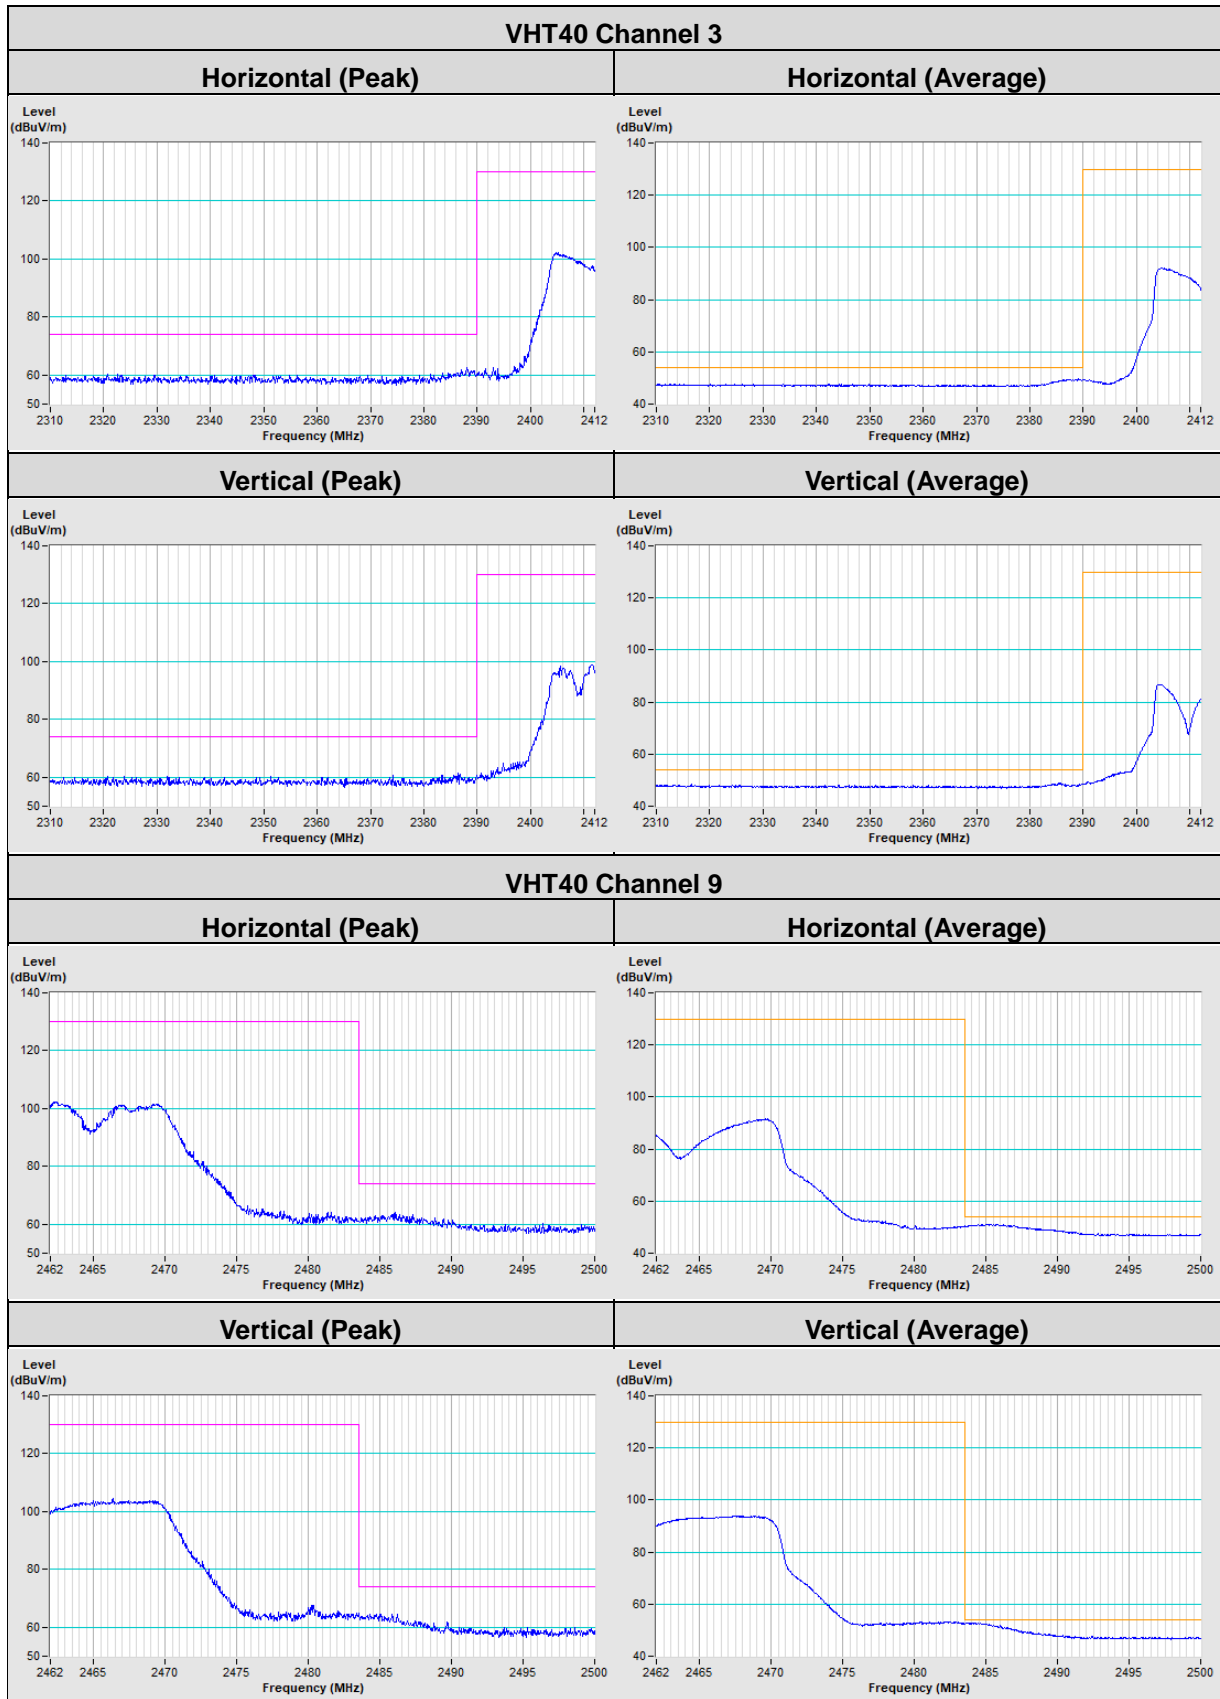

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---