

FCC Radio Test Report

FCC ID: R6H-HZJGSM6031

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1806C012
Equipment : FIXED WIRELESS PHONE
Model Name : CF 6031
Series Model : GW3600
Applicant : HUIZHOU QIAOXING FAMOUS SCIENCE&TECHNOLOGY CO.LTD
Address : QIAOXING SCIENCE INDUSTRIAL PARK,TANGQUAN,HUIZHOU CITY,GAUNGDONG P.R.C

Date of Receipt : Jun. 05, 2018
Date of Test : Jun. 05, 2018 ~ Jun. 11, 2018
Issued Date : Jun. 19, 2018
Tested by : BTL Inc.

Technical Engineer : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	10
3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . TEST RESULT	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMIT	12
4.1.2 TEST PROCEDURE	12
4.1.3 TESTSETUP LAYOUT	12
4.1.4 TEST DEVIATION	12
4.1.5 TEST RESULTS	12
4.2 OCCUPIED BANDWIDTH MEASUREMENT	13
4.2.1 TEST PROCEDURE	13
4.2.2 TEST SETUP LAYOUT	13
4.2.3 TEST DEVIATION	13
4.2.4 TEST RESULTS	13
4.3 CONDUCTED EMISSIONS MEASUREMENT	14
4.3.1 LIMIT	14
4.3.2 TEST PROCEDURES	14
4.3.3 TESTSETUP LAYOUT	14
4.3.4 TESTDEVIATION	14
4.3.5 TEST RESULTS	14
4.4 RADIATED EMISSIONS MEASUREMENT	15
4.4.1 LIMIT	15
4.4.2 TEST PROCEDURES	15
4.4.3 TESTSETUP LAYOUT	16
4.4.4 TESTDEVIATION	17
4.4.5 TEST RESULTS (9KHZ TO 30MHZ)	17
4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	17
4.4.7 TEST RESULTS (ABOVE 1000MHZ)	17
4.5 BAND EDGE MEASUREMENT	18

Table of Contents	Page
4.5.1 LIMIT	18
4.5.2 TEST PROCEDURES	18
4.5.3 TESTSETUP LAYOUT	18
4.5.4 TESTDEVIATION	18
4.5.5 TEST RESULTS	18
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	19
4.6.1 LIMIT	19
4.6.2 TEST PROCEDURES	19
4.6.3 TESTSETUP LAYOUT	19
4.6.4 TESTDEVIATION	19
4.6.5 TEST RESULTS	19
4.7 FREQUENCY STABILITY MEASUREMENT	20
4.7.1 LIMIT	20
4.7.2 TEST PROCEDURES	20
4.7.3 TESTSETUP LAYOUT	20
4.7.4 TESTDEVIATION	20
4.7.5 TEST RESULTS	20
5. LIST OF MEASUREMENT EQUIPMENTS	21
6. EUT TEST PHOTO	23
APPENDIX A - OUTPUT POWER	26
APPENDIX B - OCCUPIED BANDWIDTH	29
APPENDIX C - CONDUCTED EMISSIONS	34
APPENDIX D - RADIATED EMISSION (9KHZ TO 30MHZ)	38
APPENDIX E - RADIATED EMISSION (30MHZ TO 1GHZ)	43
APPENDIX F - RADIATED EMISSION (ABOVE 1GHZ)	52
APPENDIX G - BAND EDGE	61
APPENDIX H - PEAK TO AVERAGE RATIO	64
APPENDIX I - FREQUENCY STABILITY	67

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1806C012	Original Issue.	Jun. 19, 2018

1. CERTIFICATION

Equipment : FIXED WIRELESS PHONE
Brand Name : N/A
Model Name : CF 6031
Series Model : GW3600
Applicant : HUIZHOU QIAOXING FAMOUS SCIENCE&TECHNOLOGY CO.LTD
Manufacturer : HUIZHOU QIAOXING FAMOUS SCIENCE&TECHNOLOGY CO.LTD
Address : QIAOXING SCIENCE INDUSTRIAL PARK,TANGQUAN,HUIZHOU CITY,GAUNGDONG P.R.C
Factory : HUIZHOU QIAOXING FAMOUS SCIENCE&TECHNOLOGY CO.LTD
Address : QIAOXING SCIENCE INDUSTRIAL PARK,TANGQUAN,HUIZHOU CITY,GAUNGDONG P.R.C
Date of Test : Jun. 05, 2018 ~ Jun. 11, 2018
Test Sample : Engineering Sample NO.: D180604762
Standard(s) : 47 CFR FCC Part 24 Subpart E
47 CFR FCC Part 2
ANSI/TIA-603-D-2010
KDB 971168 D01 Power Meas License Digital Systems v03

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1806C012) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the PCS1900 and WCDMA Band 2 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 24 Subpart E & Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 24.232(c)	Radiated power	PASS	Paul Li
2.1046 24.232(c)	Conducted Output Power	PASS	Paul Li
2.1049 24.238(a)	Occupied Bandwidth	PASS	Paul Li
2.1051 24.238(a)	Conducted Spurious Emissions	PASS	Paul Li
2.1053 24.238(a)	Radiated Spurious Emissions	PASS	Paul Li
24.238(a)	Band Edge Measurements	PASS	Paul Li
24.232(d)	Peak To Average Ratio	PASS	Paul Li
2.1055 24.235	Frequency Stability	PASS	Paul Li

Note:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$.

The BTL measurement uncertainty as below table:

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	FIXED WIRELESS PHONE			
Brand Name	N/A			
Model Name	CF 6031			
Series Model	GW3600			
Model Difference	Only differ in model name.			
Modulation Type	GSM/GPRS	GMSK		
	EDGE	GMSK, 8PSK		
	WCDMA	UP: BPSK DL: QPSK		
	WCDMA(HSDPA)	16QAM		
Operation Frequency	GSM /EDGE/GPRS	1850.2 ~ 1909.8 MHz		
	WCDMA Band 2	1852.4 ~ 1907.6 MHz		
Max. EIRP Power	GSM/GPRS	GMSK	31.92	dBm
	EDGE	8PSK	28.37	dBm
	WCDMA	BPSK	24.81	dBm
	WCDMA_HSDPA	16QAM	23.59	dBm
Antenna Type	External Antenna			
Antenna Gain	3.45 dBi(WCDMA BAND 2), 3.45 dBi(PCS 1900)			
Hardware Version	GW3500-A-MB_V1.1			
Softwarre Version	COSUN_CF6031_CLARO_B2B5_0006			
IMEI No.	Radiated	352273017386340		
	Conducted	352273017386340		
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Supplied from battery.			
Power Rating	#1 AC 100–240V 50/60Hz 150mA #2 DC 3.7V/1000mAh			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. European adapter is used for the purpose of exporting to Chile.

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case was found when positioned on X-plane for EIRP and X-axis for radiated emission.
Following channel(s) was (were) selected for the final test as listed below:

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	512 to 810	512, 661, 810	GSM, EDGE
Conducted Output Power	512 to 810	512, 661, 810	GSM, EDGE
Occupied Bandwidth	512 to 810	512, 661, 810	GSM, EDGE
Condcudeted Emission	512 to 810	512	GSM, EDGE
Radiated Emission	512 to 810	512	GSM, EDGE
Band Edge	512 to 810	512, 810	GSM, EDGE
Peak to Average Ratio	512 to 810	512, 661, 810	GSM, EDGE
Frequency Stability	512 to 810	661	GSM

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in **512 CH**.


WCDMA MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Conducted Output Power	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Condcudeted Emission	9262 to 9538	9400	WCDMA, HSDPA
Radiated Emission	9262 to 9538	9400	WCDMA, HSDPA
Band Edge	9262 to 9538	9262, 9538	WCDMA, HSDPA
Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Frequency Stability	9262 to 9538	9262	WCDMA

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in **9400 CH**.

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
EIRP	25°C, 60%RH	AC 120V/60Hz
Conducted Output Power	25°C, 65%RH	AC 120V/60Hz
Occupied Bandwidth	25°C, 65%RH	AC 120V/60Hz
Conducted Emission	25°C, 65%RH	AC 120V/60Hz
Radiated Emission	25°C, 60%RH	AC 120V/60Hz
Band Edge	25°C, 65%RH	AC 120V/60Hz
Peak to Average Ratio	25°C, 65%RH	AC 120V/60Hz
Frequency Stability	25°C, 65%RH	AC 108V , AC 120V, AC 132V

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

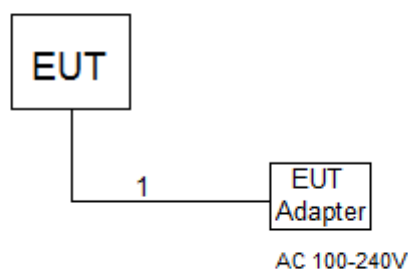

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC cable

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 TEST PROCEDURE

EIRP/ERP:


$EIRP = \text{Conducted Power} + \text{Antenna gain}$

Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Appendix A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

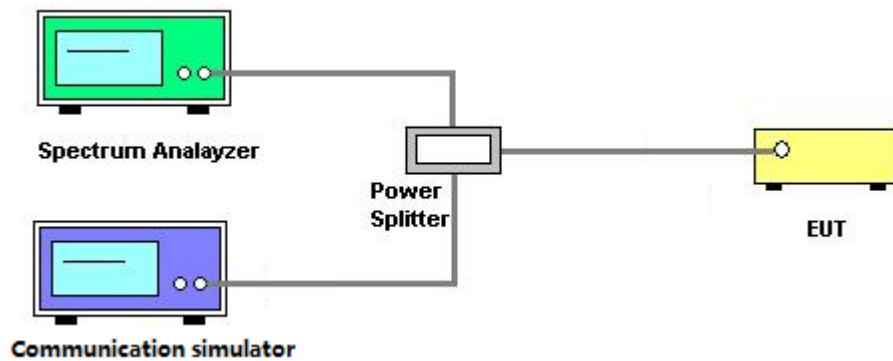

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Appendix B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)](dB)$
 $= [30 + 10 \log(P)](dBm) - [43 + 10 \log(P)](dB)$
 $= -13dBm$

4.3.3 TESTSETUP LAYOUT

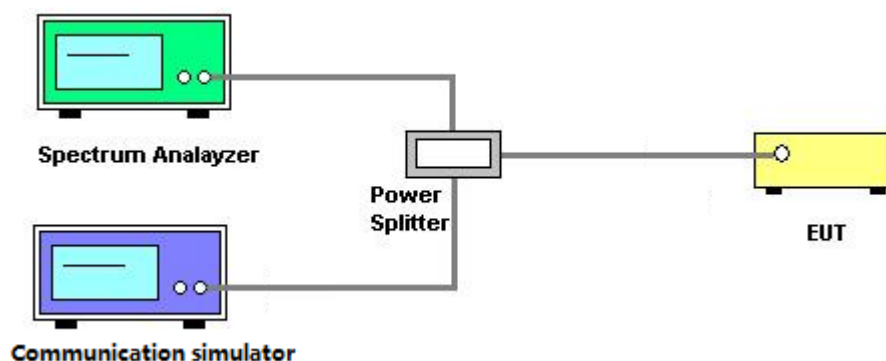

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Appendix C.

4.4 RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.4.2 TEST PROCEDURES


1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value. (below 1GHz)
2. For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table or support at a nominal height of 1.5 m above the ground plane. Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The height scan of the measurement antenna shall be varied from 1 m to 4 m in a search for the relative positioning that produces the maximum radiated signal level (i.e., field strength or received power). When using the direct field strength method and the EUT is manipulated through three different orientations, then the scan height range of the measurement antenna is limited to 2.5 m, or 0.5 m above the top of the EUT, whichever is higher. (above 1GHz)
3. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.3 TESTSETUP LAYOUT


Below 1G

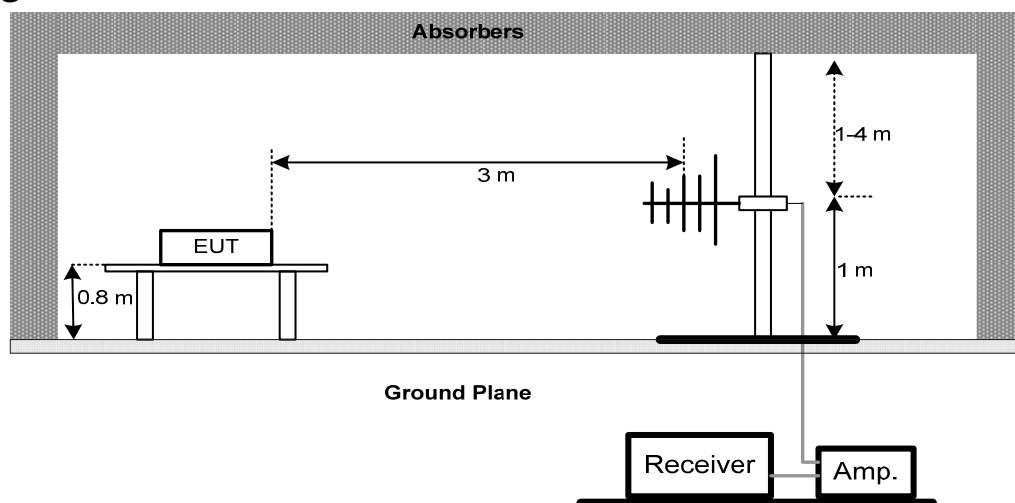

Above 1G

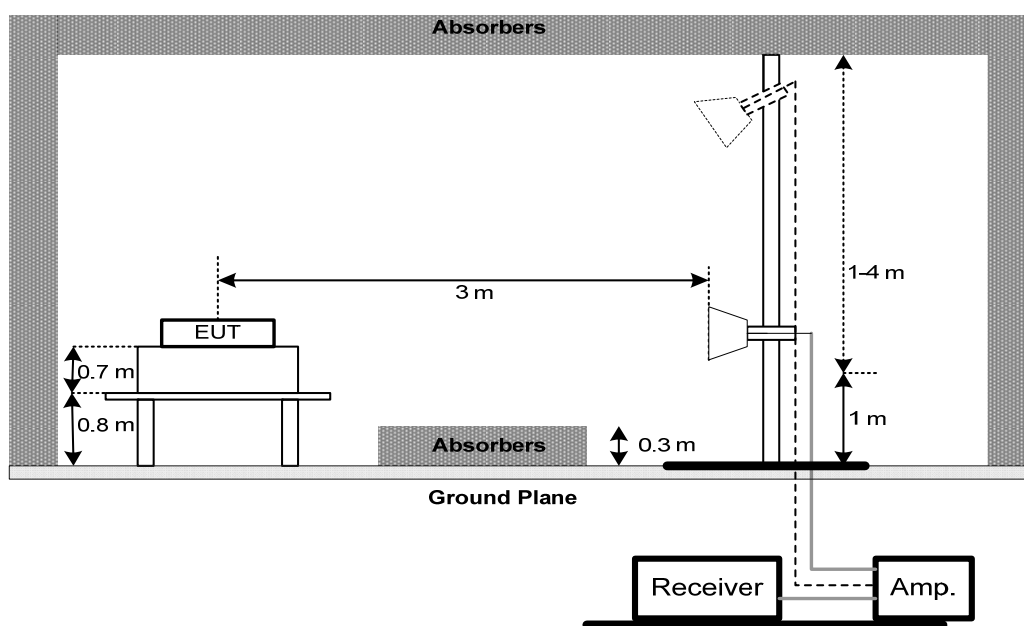

Below 30MHz

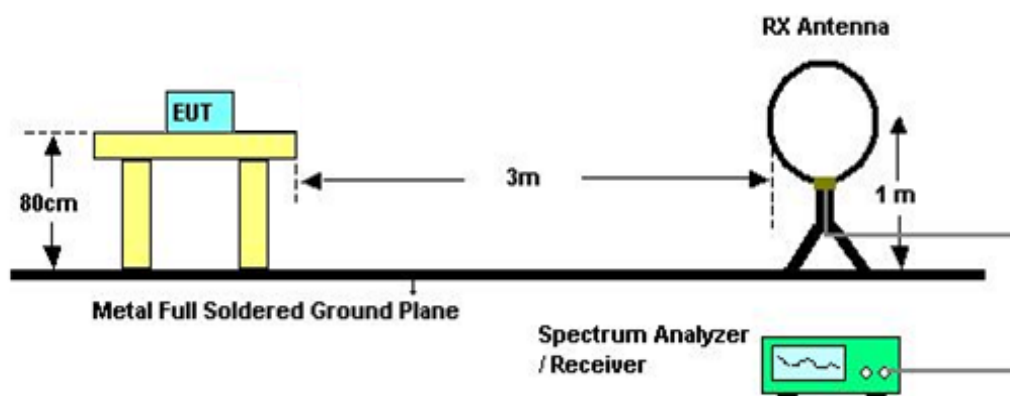

4.4.4 TESTDEVIATION

No deviation

4.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix D.

4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix E.

4.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix F.

4.5 BAND EDGE MEASUREMENT


4.5.1 LIMIT

A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
4. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

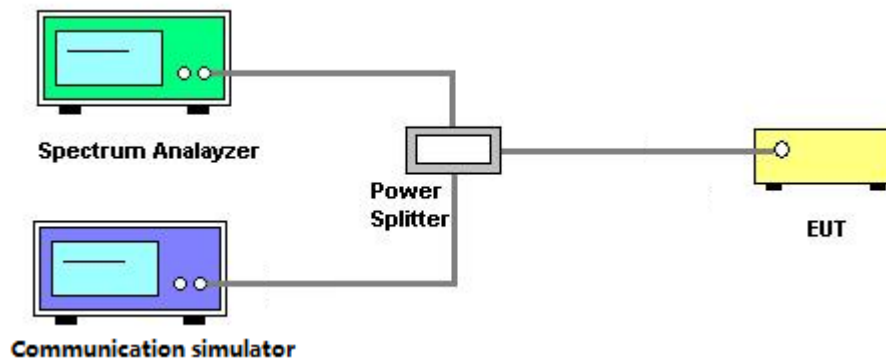

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Appendix G.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT


4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TESTSETUP LAYOUT

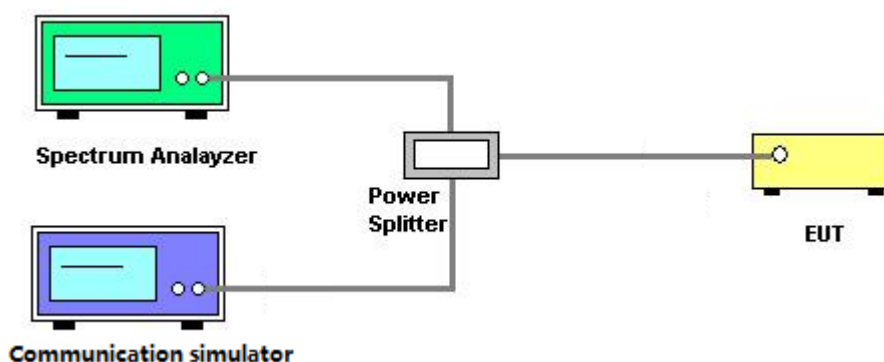

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Appendix H.

4.7 FREQUENCY STABILITY MEASUREMENT


4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

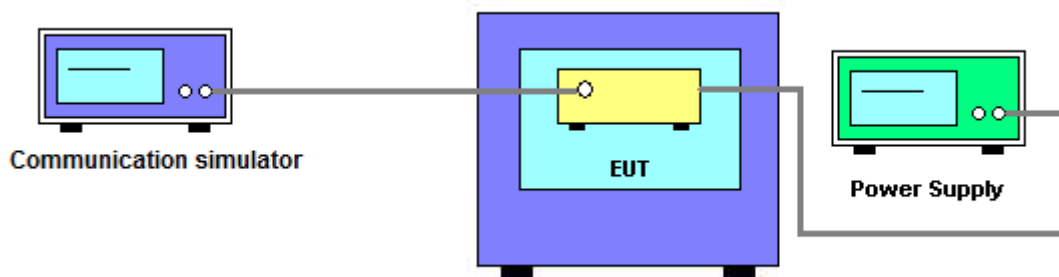

4.7.4 TESTDEVIATION

No deviation

4.7.5 TEST RESULTS

Please refer to the Appendix I.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission & ERP or EIRP Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
3	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
4	HighPass Filter	Wairwright Instruments Gmbh	WHK 1.5/15G-10ST	11	Mar. 11, 2019
5	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690/180 5-60/12SS	38	Mar. 11, 2019
6	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/863-60/ 9SS	7	Mar. 11, 2019
7	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/935-60/ 9SS	14	Mar. 11, 2019
8	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830/193 0-60/10SS	17	Mar. 11, 2019
9	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Mar. 11, 2019
10	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
12	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
13	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019
14	Cable	emci	LMR-400(30MHz-1G Hz)(8m+5m)	N/A	Jun. 26, 2018
15	Cable	emci	EMC104-SM-SM-12000(12m)	N/A	Jun. 26, 2018
16	Controller	ETS-Lindgren	2090	N/A	N/A
17	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 11, 2019
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 11, 2019
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 11, 2019
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 11, 2019
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 11, 2019
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

6. EUT TEST PHOTO


Radiated Measurement Photos

9KHz to 30MHz



Radiated Measurement Photos

30MHz to 1000MHz

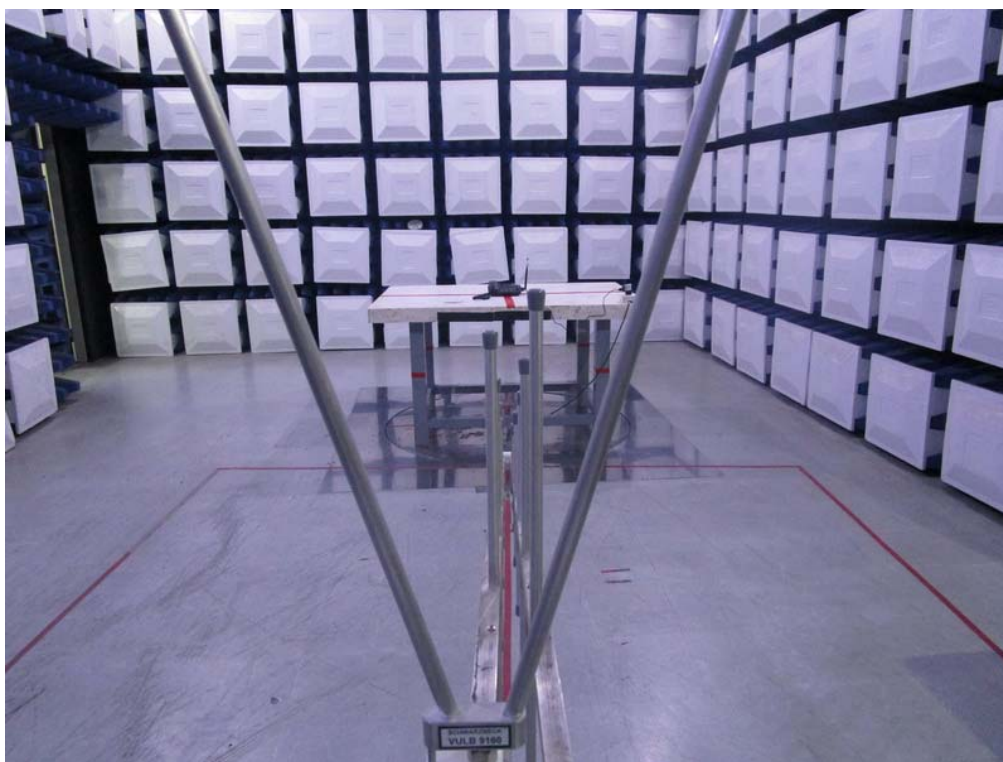

Radiated Measurement Photos

Above 1GHz



APPENDIX A - OUTPUT POWER

Conducted Power:

PCS1900	Burst Conducted Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GSM (CS)	28.47	28.28	28.39
GPRS/EDGE (GMSK)	28.46	28.26	28.38
	26.77	26.52	26.11
	25.31	24.98	24.55
	23.18	22.91	22.47
EDGE (8PSK)	24.13	24.92	24.44
	23.99	24.56	24.04
	22.05	22.72	22.04
	19.73	20.03	19.63

Modulation	Band	WCDMA Band II		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	21.32	21.36	21.11
	RMC 64K	21.31	21.27	21.08
	RMC 144K	21.34	21.23	21.17
	RMC 384K	21.34	21.27	21.11
16QAM	HSDPA Subtest-1	19.88	20.14	19.52
	HSDPA Subtest-2	19.91	20.00	19.52
	HSDPA Subtest-3	19.96	20.11	19.58
	HSDPA Subtest-4	19.89	20.13	19.53

EIRP Power

PCS1900	EIRP Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GSM (CS)	31.92	31.73	31.84
GPRS/EDGE (GMSK)	31.91	31.71	31.83
	30.22	29.97	29.56
	28.76	28.43	28.00
	26.63	26.36	25.92
EDGE (8PSK)	27.58	28.37	27.89
	27.44	28.01	27.49
	25.50	26.17	25.49
	23.18	23.48	23.08

Modulation	Band	WCDMA Band II		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	24.77	24.81	24.56
	RMC 64K	24.76	24.72	24.53
	RMC 144K	24.79	24.68	24.62
	RMC 384K	24.79	24.72	24.56
16QAM	HSDPA Subtest-1	23.33	23.59	22.97
	HSDPA Subtest-2	23.36	23.45	22.97
	HSDPA Subtest-3	23.41	23.56	23.03
	HSDPA Subtest-4	23.34	23.58	22.98

APPENDIX B - OCCUPIED BANDWIDTH


PCS1900					
GSM			EDGE		
CS			8PSK		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
512	1850.2	0.241	512	1850.2	0.244
661	1880	0.242	661	1880	0.242
810	1909.8	0.241	810	1909.8	0.243
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
512	1850.2	0.300	512	1850.2	0.316
661	1880	0.305	661	1880	0.307
810	1909.8	0.304	810	1909.8	0.312

Spectrum Plot


GSM-512



GSM-661

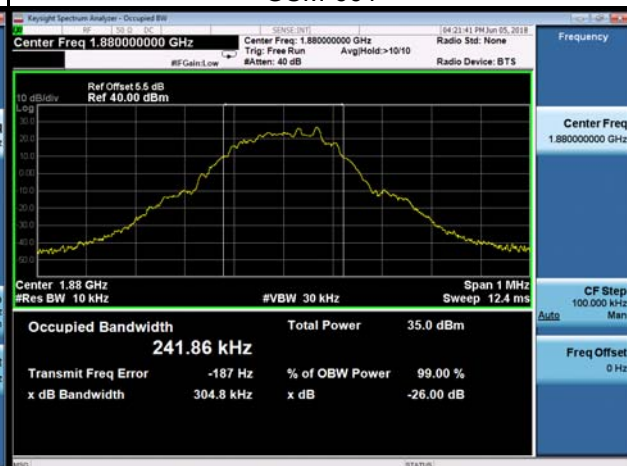

GSM-810

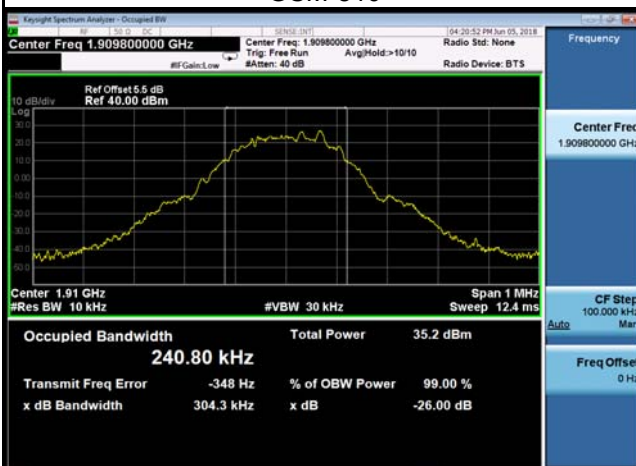

EDGE-512




EDGE-661




EDGE-810



WCDMA Band II					
BPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9662	1852	4.101	9662	1852	4.669
9800	1880	4.094	9800	1880	4.666
9938	1908	4.085	9938	1908	4.658

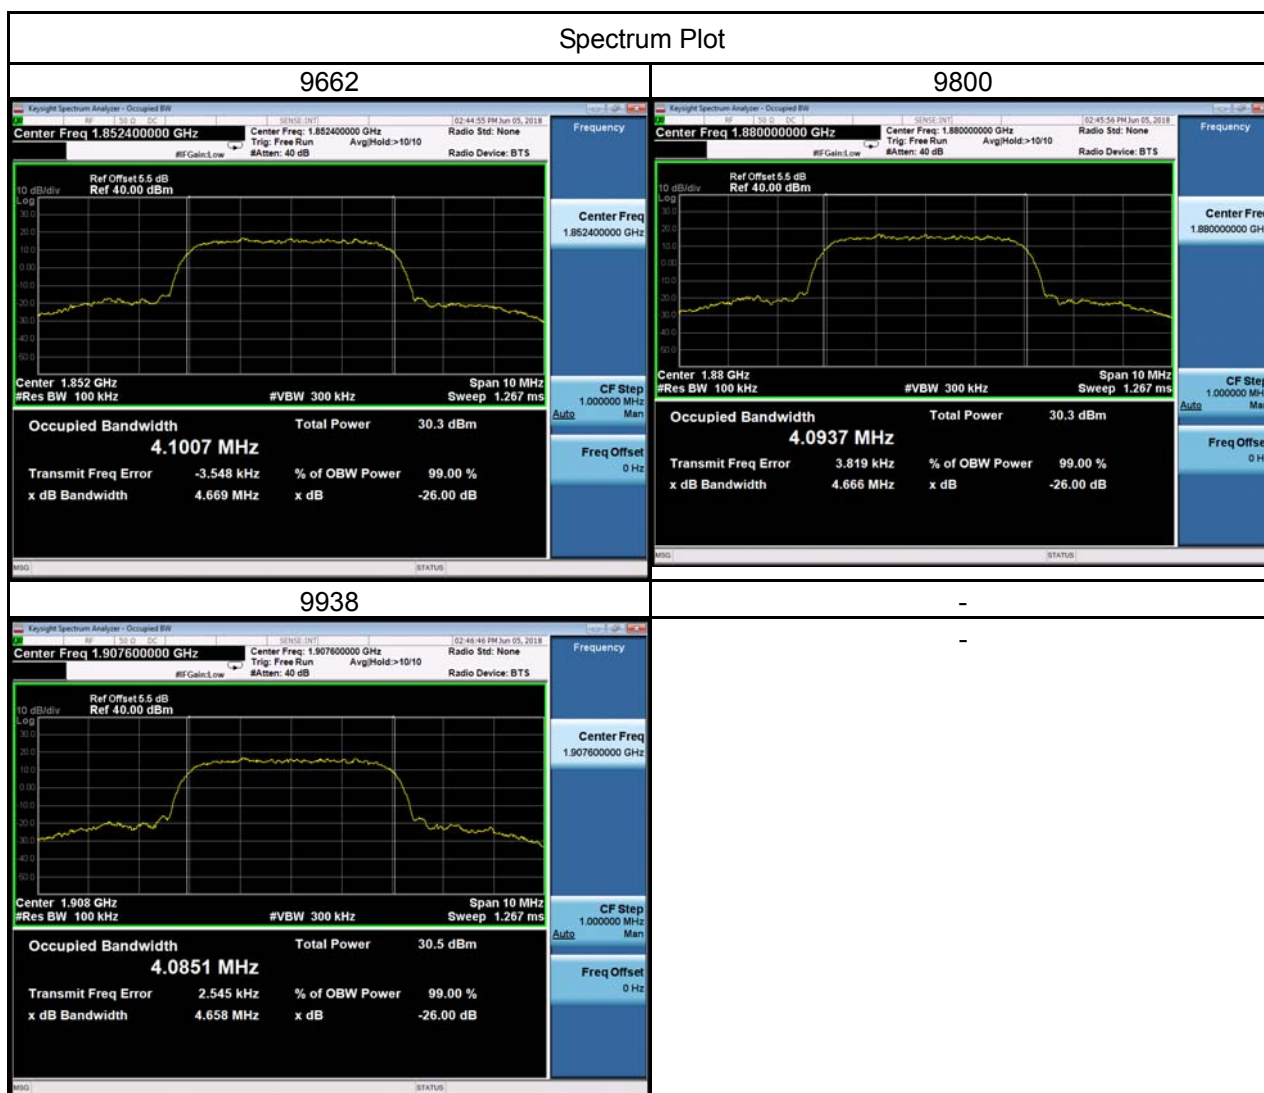


WCDMA_HSDPA Band II					
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9662	1852	4.109	9662	1852	4.692
9800	1880	4.102	9800	1880	4.683
9938	1908	4.093	9938	1908	4.675

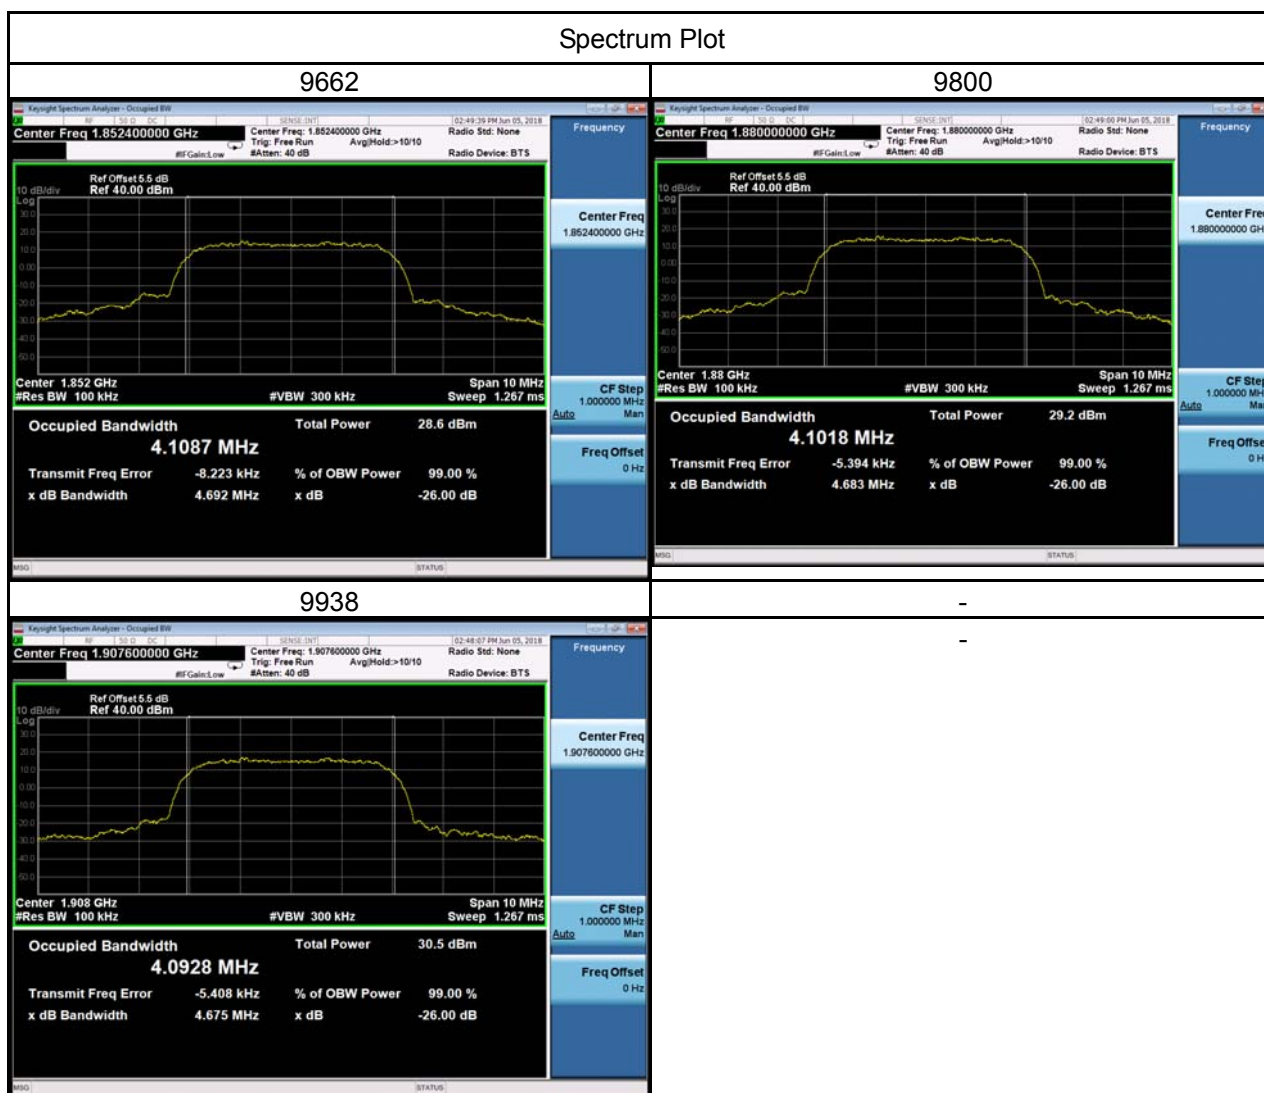

APPENDIX C - CONDUCTED EMISSIONS

PCS1900			
GSM		GSM	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
512	1850.2	512	1850.2
Date: 4.JUN.2018 21:14:13		Date: 4.JUN.2018 21:13:00	
GSM		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
512	1850.2	661	1880
Date: 4.JUN.2018 21:26:05		Date: 4.JUN.2018 21:13:58	
EDGE		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
661	1880	661	1880
Date: 4.JUN.2018 21:12:41		Date: 4.JUN.2018 21:29:43	


WCDMA Band II			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
9662	1852	9662	1852
Channel	Frequency(MHz)	-	-
9662	1852	-	-
		-	

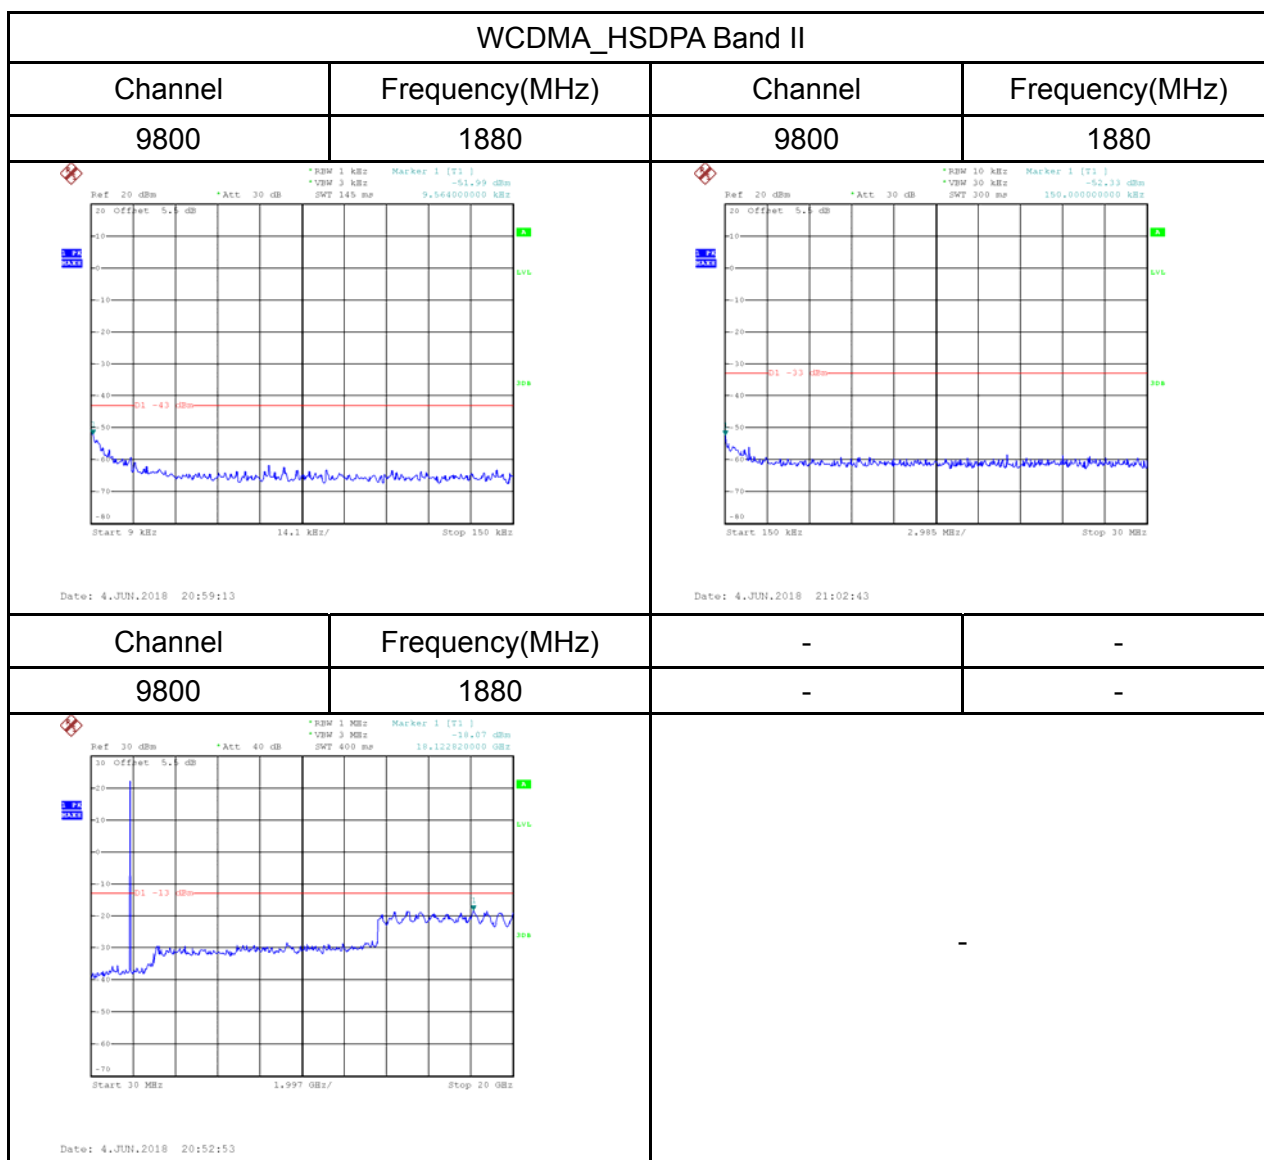

APPENDIX D - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode


Ant 0°

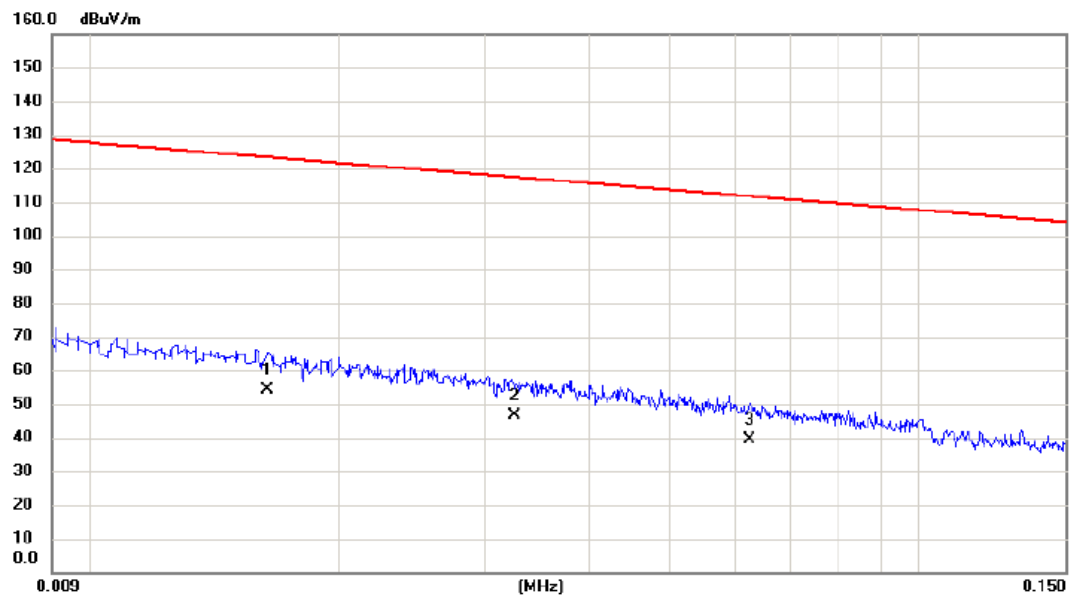

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0164	33.80	20.52	54.32	123.31	-68.99	AVG	
2		0.0325	26.70	19.81	46.51	117.37	-70.86	AVG	
3		0.0625	20.30	19.28	39.58	111.69	-72.11	AVG	

Test Mode: TX Mode


Ant 0°

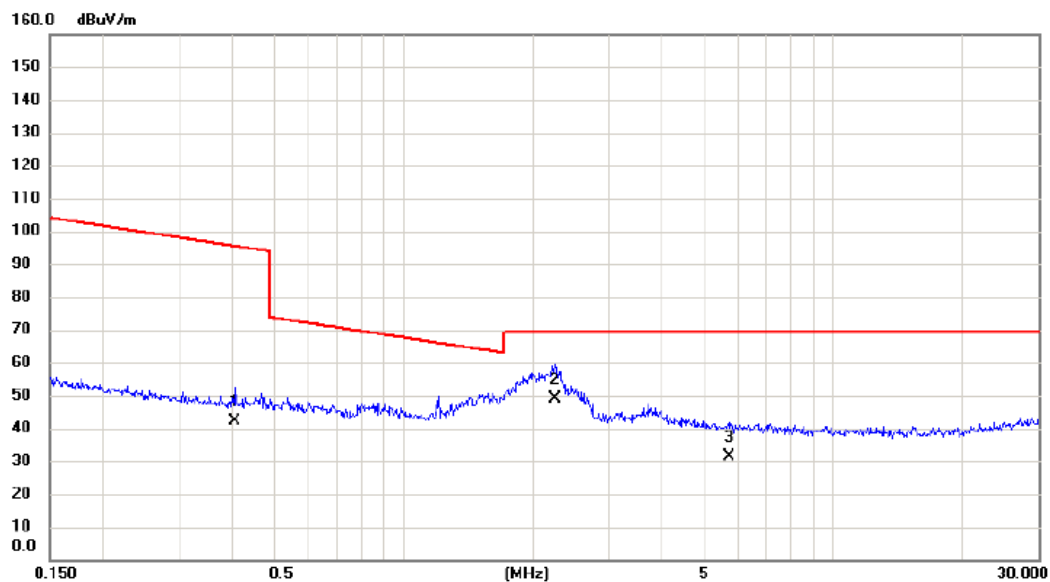

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4061	25.20	17.00	42.20	95.43	-53.23	AVG	
2	*	2.2486	32.10	16.96	49.06	69.54	-20.48	QP	
3		5.7135	16.20	15.05	31.25	69.54	-38.29	QP	

Test Mode: TX Mode


Ant 90°

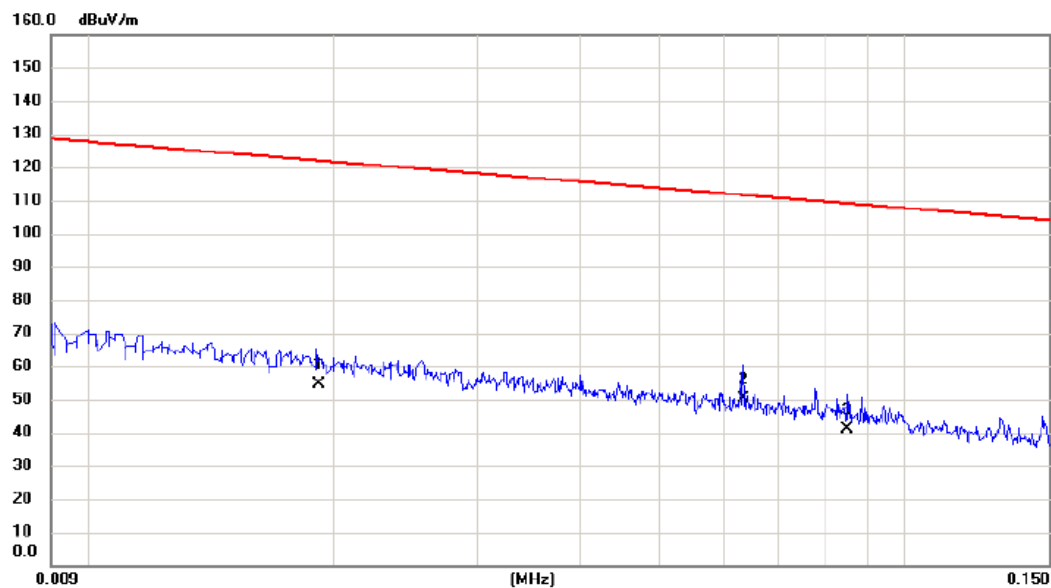

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0192	34.50	20.13	54.63	121.94	-67.31	AVG	
2	*	0.0634	31.10	19.26	50.36	111.56	-61.20	AVG	
3		0.0851	22.40	18.79	41.19	109.01	-67.82	AVG	

Test Mode: TX Mode

Ant 90°

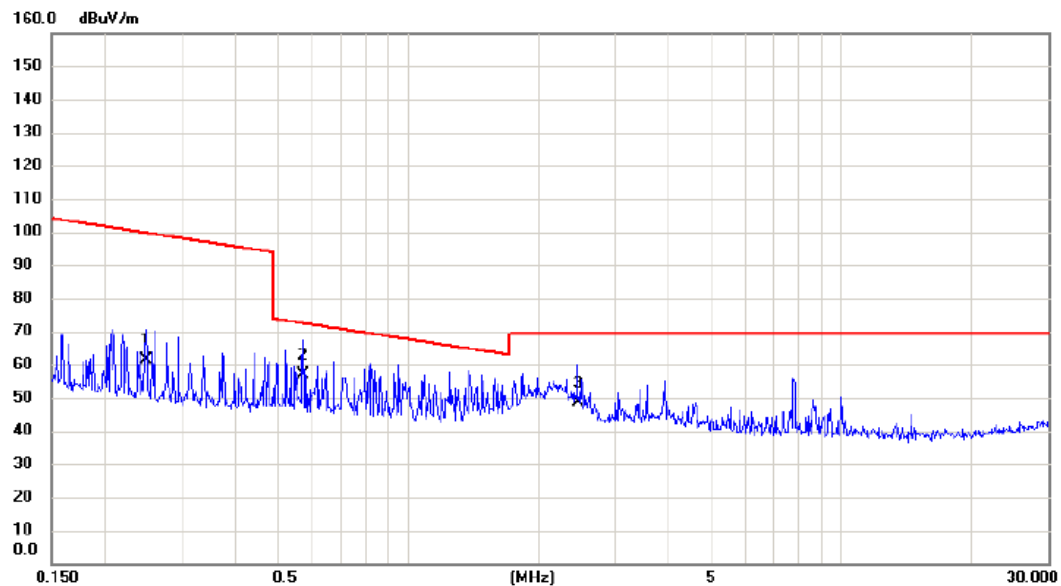


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2481	44.30	17.06	61.36	99.71	-38.35	AVG	
2	*	0.5701	40.00	16.94	56.94	72.48	-15.54	QP	
3		2.4606	31.70	16.84	48.54	69.54	-21.00	QP	

APPENDIX E - RADIATED EMISSION (30MHZ TO 1GHZ)


Test Mode:

PCS1900_TX CH512_GSM

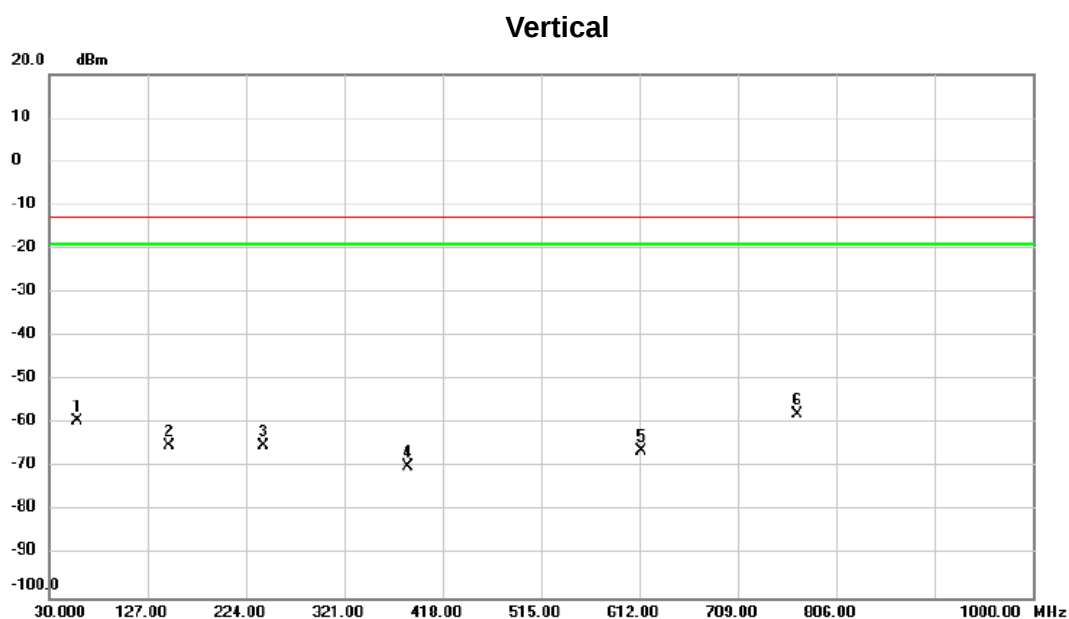

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		57.160	-61.23	1.74	-59.49	-13.00	-46.49	peak	
2		148.340	-67.97	2.98	-64.99	-13.00	-51.99	peak	
3		241.460	-65.23	0.23	-65.00	-13.00	-52.00	peak	
4		384.050	-73.67	3.89	-69.78	-13.00	-56.78	peak	
5		613.940	-75.49	9.10	-66.39	-13.00	-53.39	peak	
6	*	768.170	-70.01	12.26	-57.75	-13.00	-44.75	peak	


Test Mode: PCS1900_TX CH512_GSM

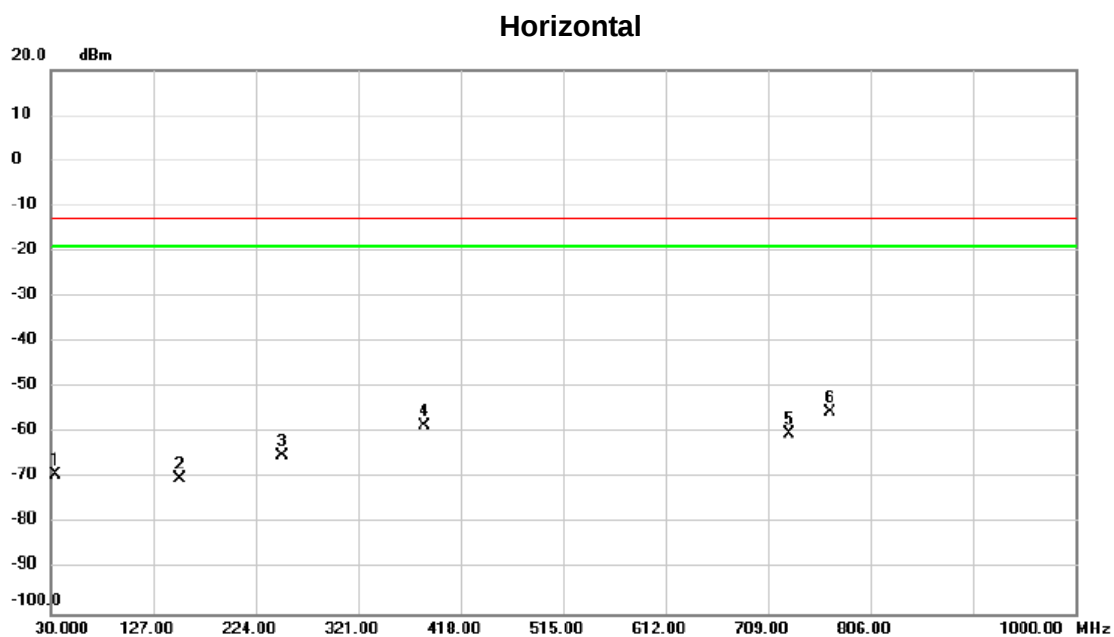

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		33.880	-69.88	0.65	-69.23	-13.00	-56.23	peak	
2		152.220	-73.93	3.91	-70.02	-13.00	-57.02	peak	
3		249.220	-67.03	1.91	-65.12	-13.00	-52.12	peak	
4		384.050	-64.42	6.06	-58.36	-13.00	-45.36	peak	
5		729.370	-73.59	13.27	-60.32	-13.00	-47.32	peak	
6	*	768.170	-67.99	12.50	-55.49	-13.00	-42.49	peak	


Test Mode:

PCS1900_TX CH661_EDGE

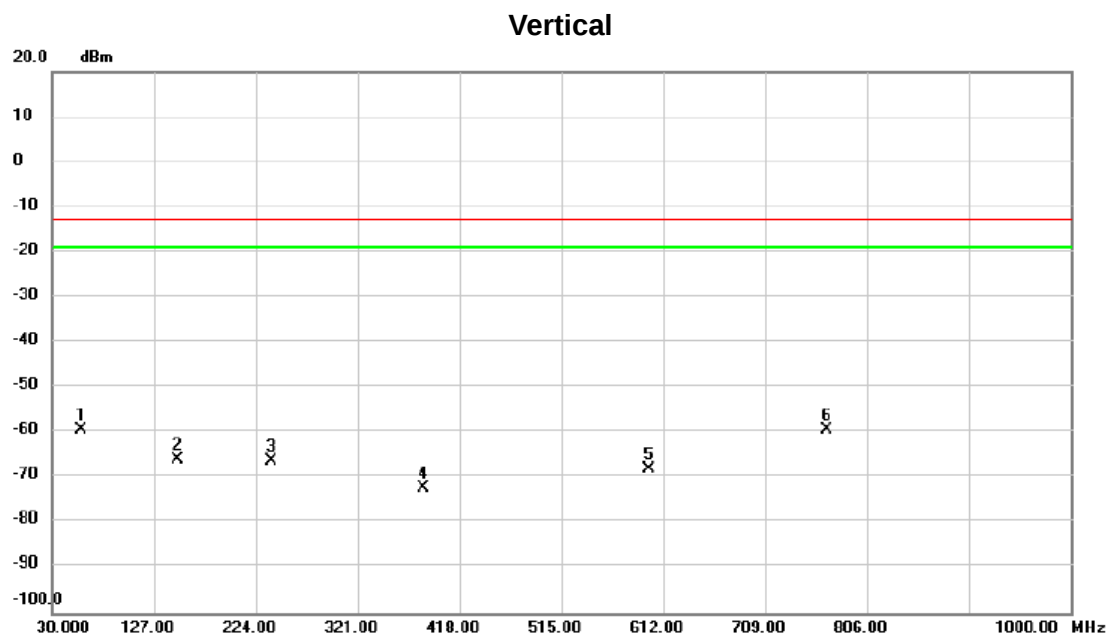

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		57.160	-61.05	1.74	-59.31	-13.00	-46.31	peak	
2		149.310	-69.16	3.08	-66.08	-13.00	-53.08	peak	
3		238.550	-66.50	0.27	-66.23	-13.00	-53.23	peak	
4		384.050	-76.03	3.89	-72.14	-13.00	-59.14	peak	
5		598.420	-76.76	8.66	-68.10	-13.00	-55.10	peak	
6	*	768.170	-71.50	12.26	-59.24	-13.00	-46.24	peak	


Test Mode: PCS1900_TX CH661_EDGE

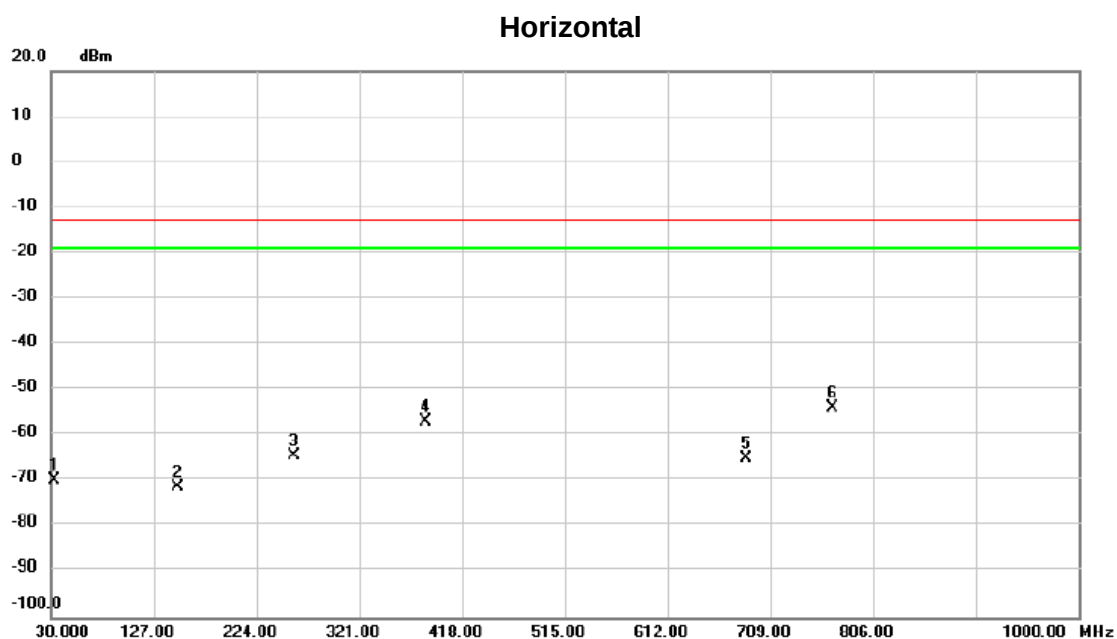

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		32.910	-70.74	0.96	-69.78	-13.00	-56.78	peak	
2		149.310	-75.47	4.16	-71.31	-13.00	-58.31	peak	
3		258.920	-66.51	1.92	-64.59	-13.00	-51.59	peak	
4		384.050	-62.95	6.06	-56.89	-13.00	-43.89	peak	
5		686.690	-78.20	13.07	-65.13	-13.00	-52.13	peak	
6	*	768.170	-66.55	12.50	-54.05	-13.00	-41.05	peak	

Test Mode: WCDMA Band II_TX CH9400


Vertical

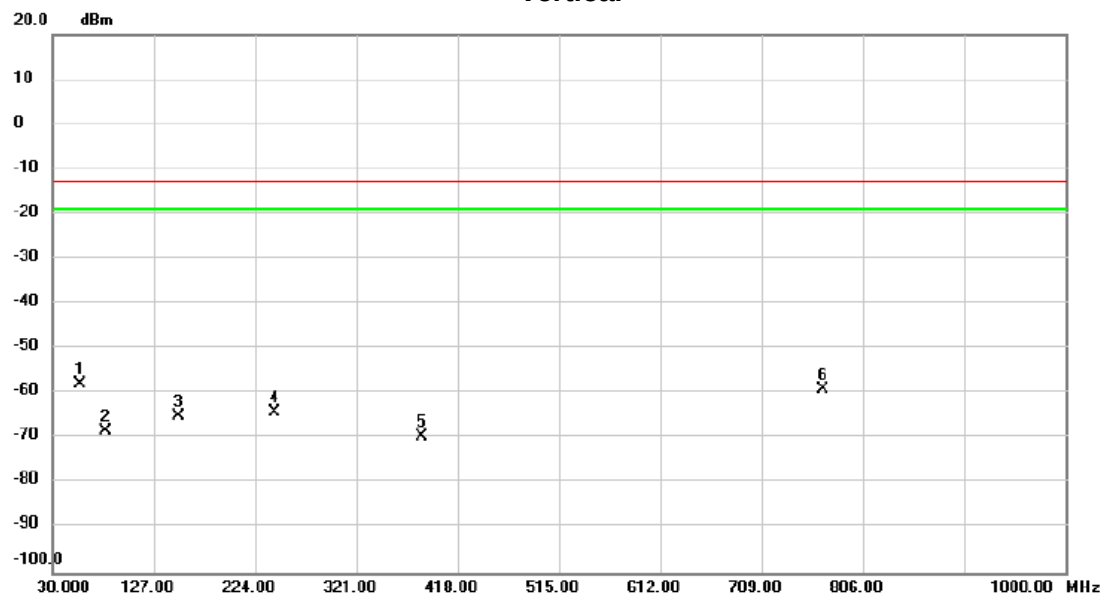

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	56.190	-60.11	2.18	-57.93	-13.00	-44.93	peak	
2		80.440	-62.53	-5.84	-68.37	-13.00	-55.37	peak	
3		150.280	-68.26	3.15	-65.11	-13.00	-52.11	peak	
4		242.430	-64.34	0.22	-64.12	-13.00	-51.12	peak	
5		384.050	-73.45	3.89	-69.56	-13.00	-56.56	peak	
6		768.170	-71.31	12.26	-59.05	-13.00	-46.05	peak	

Test Mode:

WCDMA Band II_TX CH9400

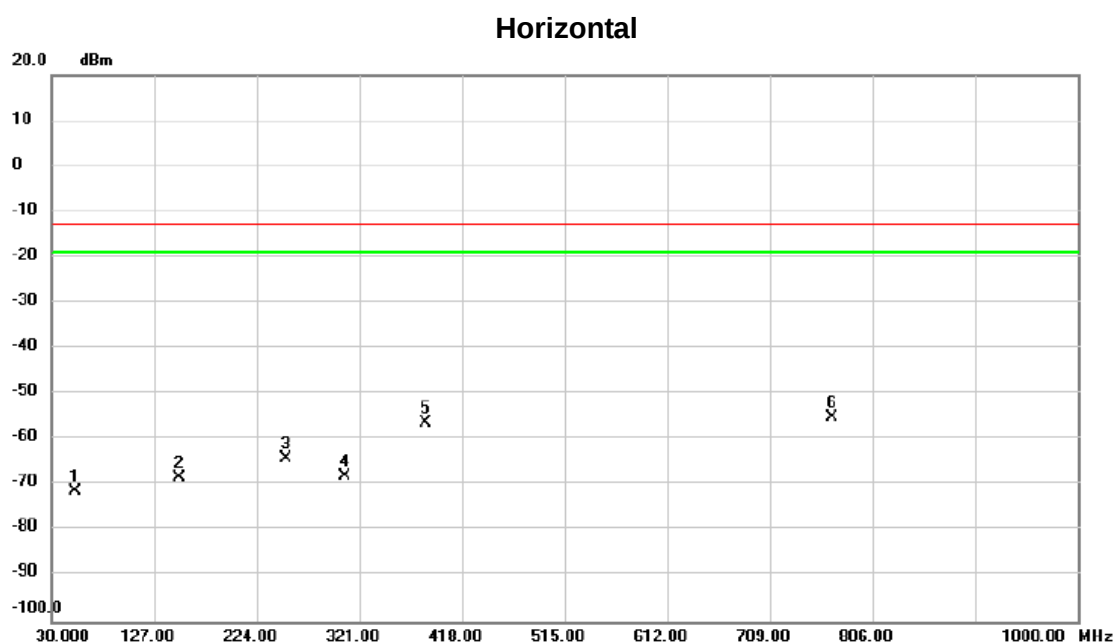


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		52.310	-73.33	1.92	-71.41	-13.00	-58.41	peak	
2		150.280	-72.68	4.20	-68.48	-13.00	-55.48	peak	
3		252.130	-66.03	1.88	-64.15	-13.00	-51.15	peak	
4		307.420	-69.11	1.18	-67.93	-13.00	-54.93	peak	
5		384.050	-62.33	6.06	-56.27	-13.00	-43.27	peak	
6	*	768.170	-67.77	12.50	-55.27	-13.00	-42.27	peak	

Test Mode:

WCDMA Band II_HSDPA_TX CH9400


Vertical

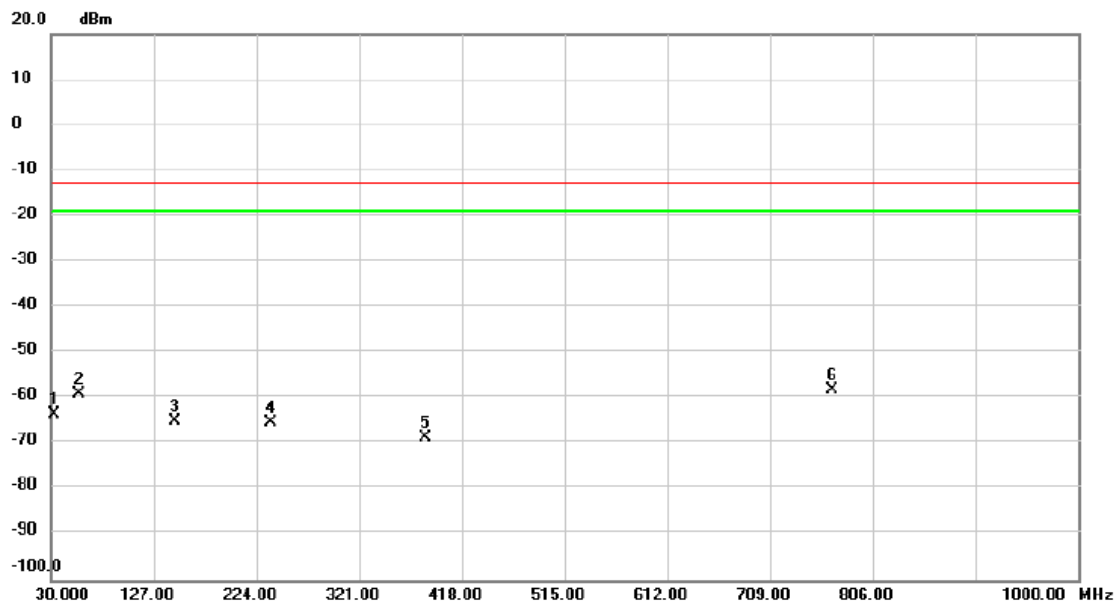

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		
1		32.910	-62.59	-0.96	-63.55	-13.00	-50.55	peak	
2		56.190	-61.08	2.18	-58.90	-13.00	-45.90	peak	
3		147.370	-67.81	2.89	-64.92	-13.00	-51.92	peak	
4		237.580	-65.68	0.30	-65.38	-13.00	-52.38	peak	
5		384.050	-72.43	3.89	-68.54	-13.00	-55.54	peak	
6	*	768.170	-70.33	12.26	-58.07	-13.00	-45.07	peak	

Test Mode: WCDMA Band II_HSDPA_TX CH9400


Horizontal

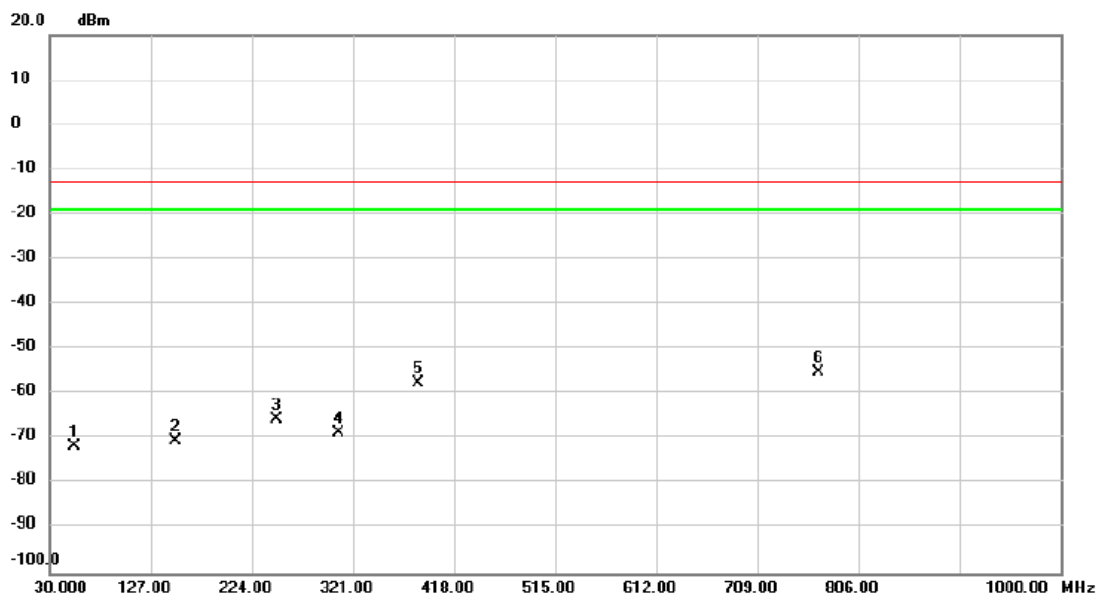

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		54.250	-74.02	2.47	-71.55	-13.00	-58.55	peak	
2		150.280	-74.73	4.20	-70.53	-13.00	-57.53	peak	
3		248.250	-67.50	1.96	-65.54	-13.00	-52.54	peak	
4		307.420	-69.87	1.18	-68.69	-13.00	-55.69	peak	
5		384.050	-63.56	6.06	-57.50	-13.00	-44.50	peak	
6	*	768.170	-67.74	12.50	-55.24	-13.00	-42.24	peak	

APPENDIX F - RADIATED EMISSION (ABOVE 1GHZ)


Test Mode:	PCS1900_TX CH512_GSM
------------	----------------------

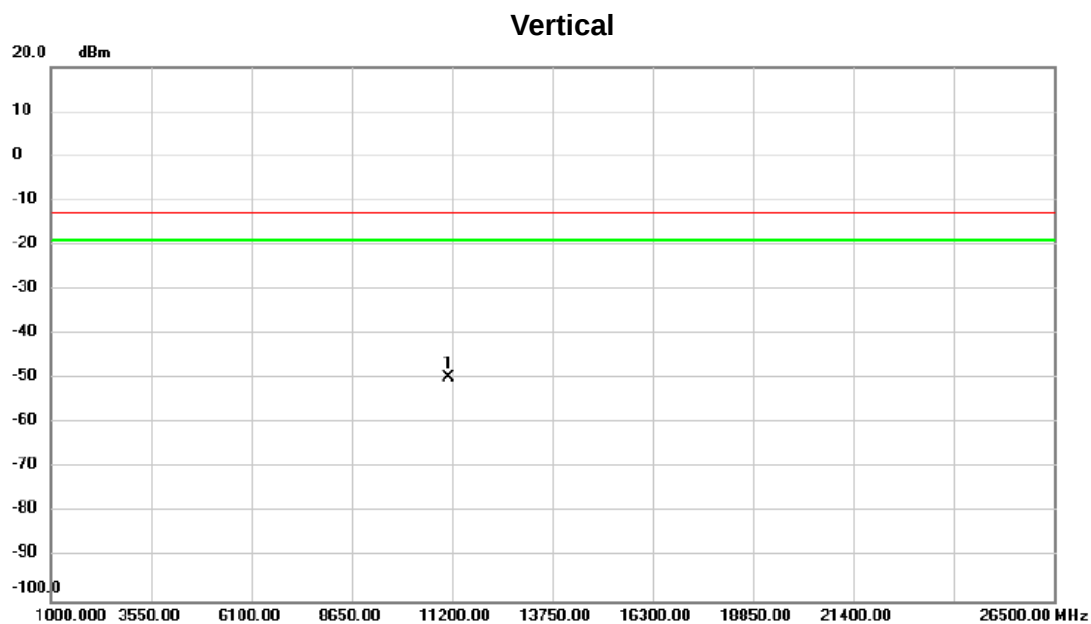

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	11098.000	-73.04	23.38	-49.66	-13.00	-36.66	peak	

Test Mode:


PCS1900_TX CH512_GSM

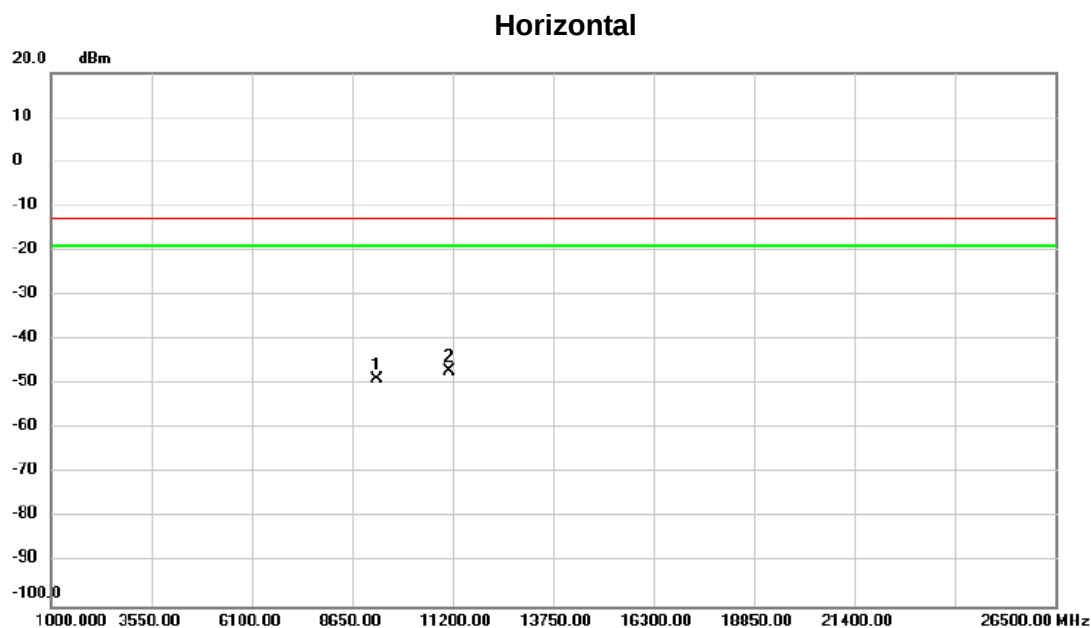

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBm	Factor	ment			Detector	Comment
				dB	dBm	dBm	dB		
1		9262.000	-68.12	19.20	-48.92	-13.00	-35.92	peak	
2	*	11098.000	-70.48	23.45	-47.03	-13.00	-34.03	peak	

Test Mode:


PCS1900_TX CH661_EDGE

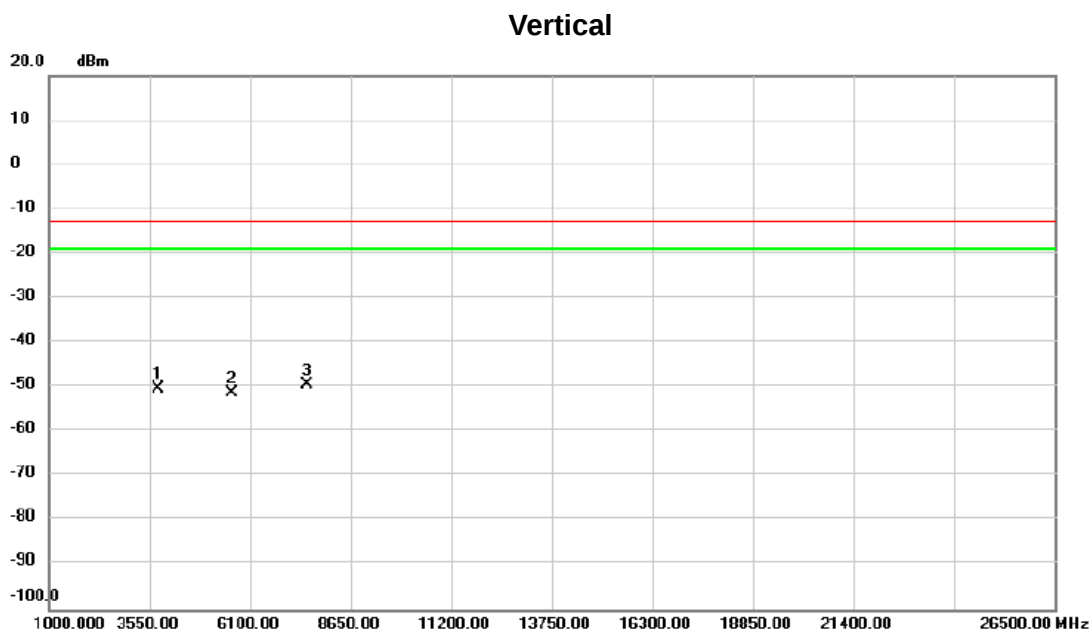

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		3754.000	-64.96	14.50	-50.46	-13.00	-37.46	peak	
2		5641.000	-67.55	16.31	-51.24	-13.00	-38.24	peak	
3	*	7528.000	-67.43	17.97	-49.46	-13.00	-36.46	peak	

Test Mode:


PCS1900_TX CH661_EDGE

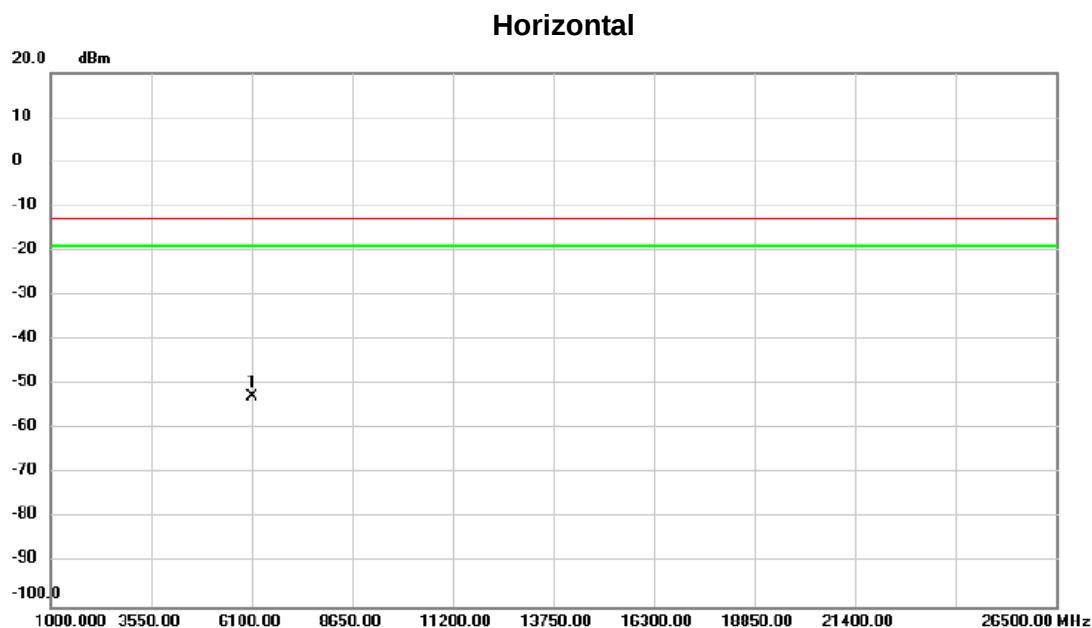

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	6100.000	-71.18	18.34	-52.84	-13.00	-39.84	peak	

Test Mode:	WCDMA Band II_TX CH9400
------------	-------------------------


Vertical

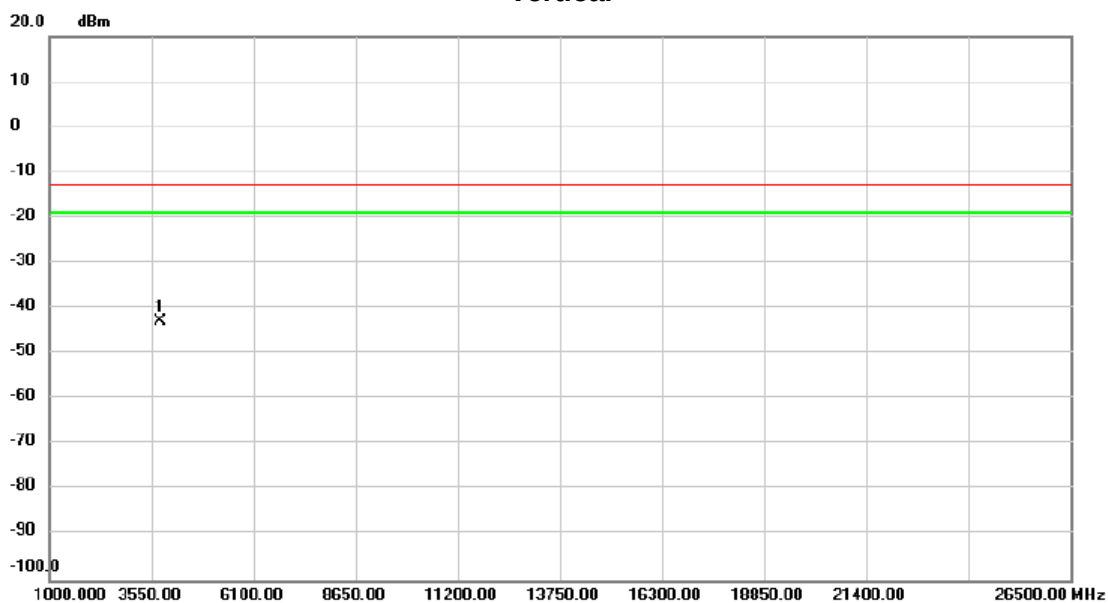

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3754.000	-57.33	14.50	-42.83	-13.00	-29.83	peak	

Test Mode: WCDMA Band II_TX CH9400


Horizontal

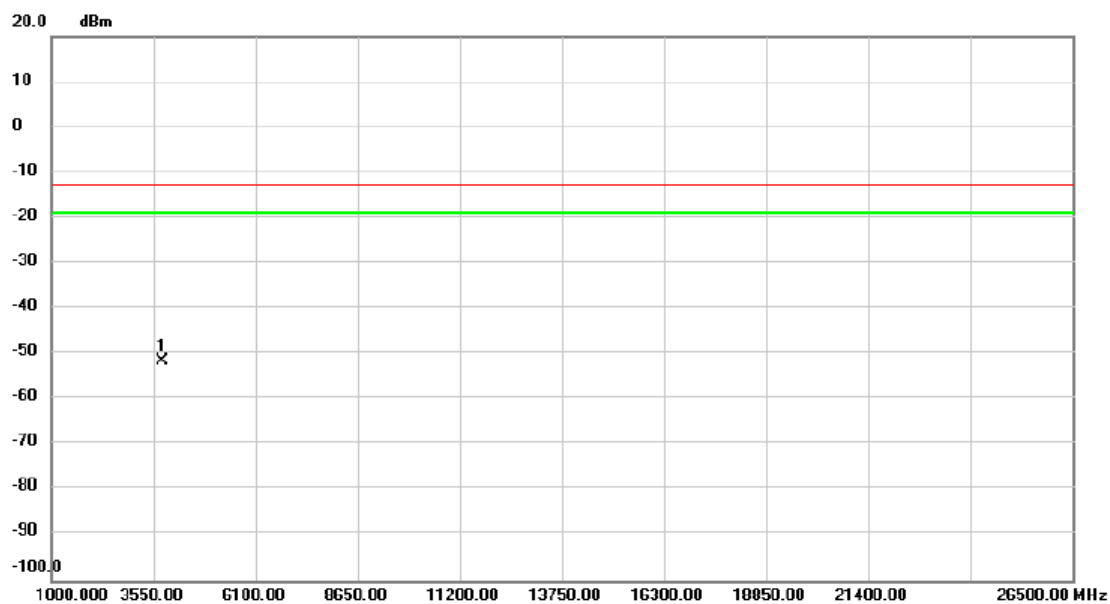

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3754.000	-62.74	11.33	-51.41	-13.00	-38.41	peak	

Test Mode:


WCDMA Band II_HSDPA_TX CH9400

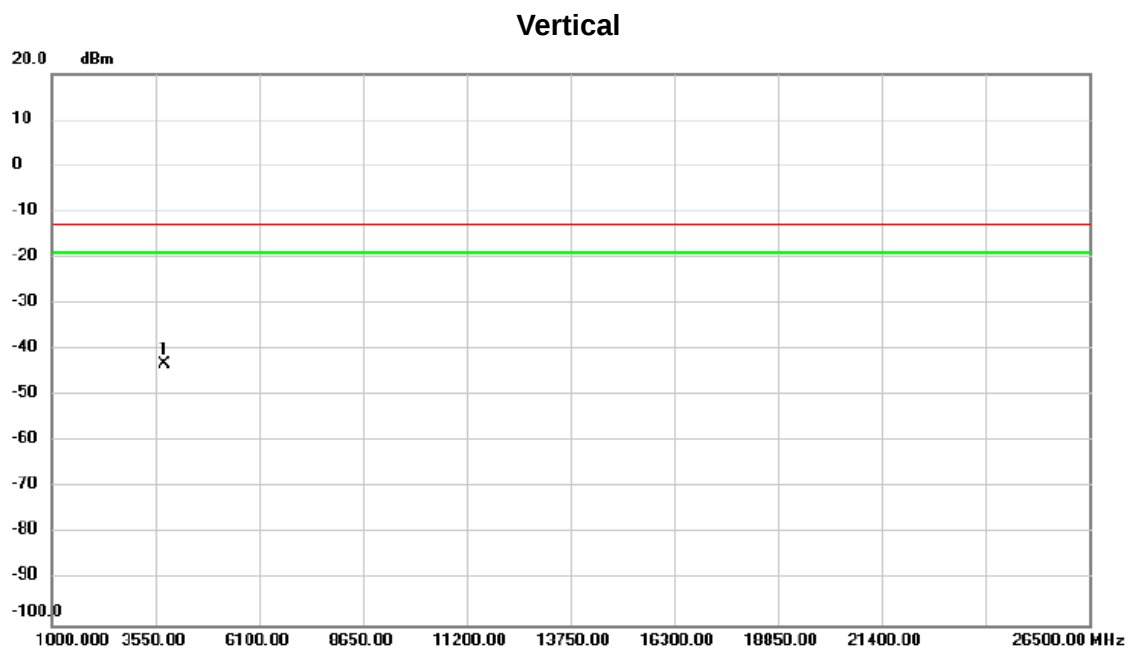

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		
1	*	3754.000	-57.59	14.50	-43.09	-13.00	-30.09	peak	


Test Mode:	WCDMA Band II_HSDPA_TX CH9400
------------	-------------------------------



Horizontal

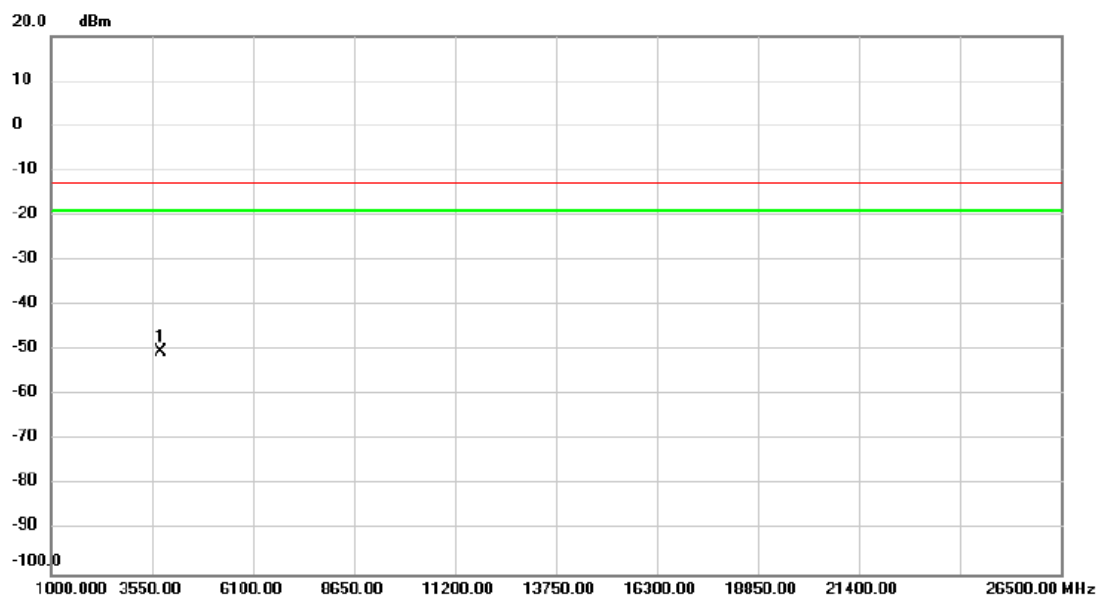

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3754.000	-61.71	11.33	-50.38	-13.00	-37.38	peak	


APPENDIX G - BAND EDGE

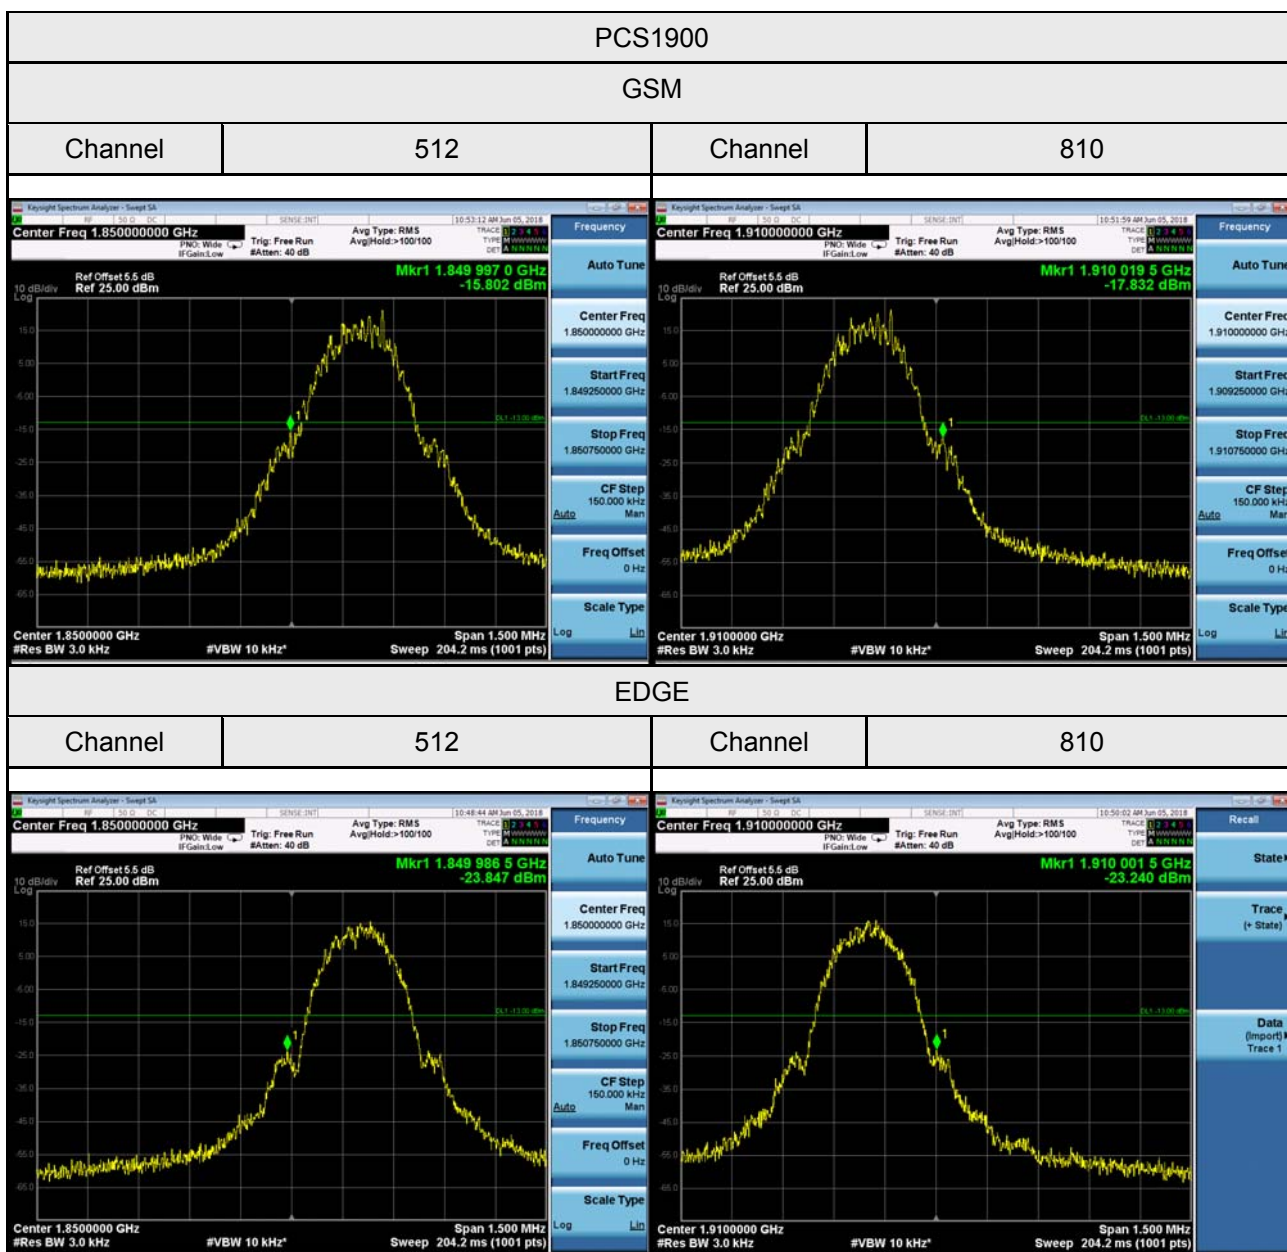

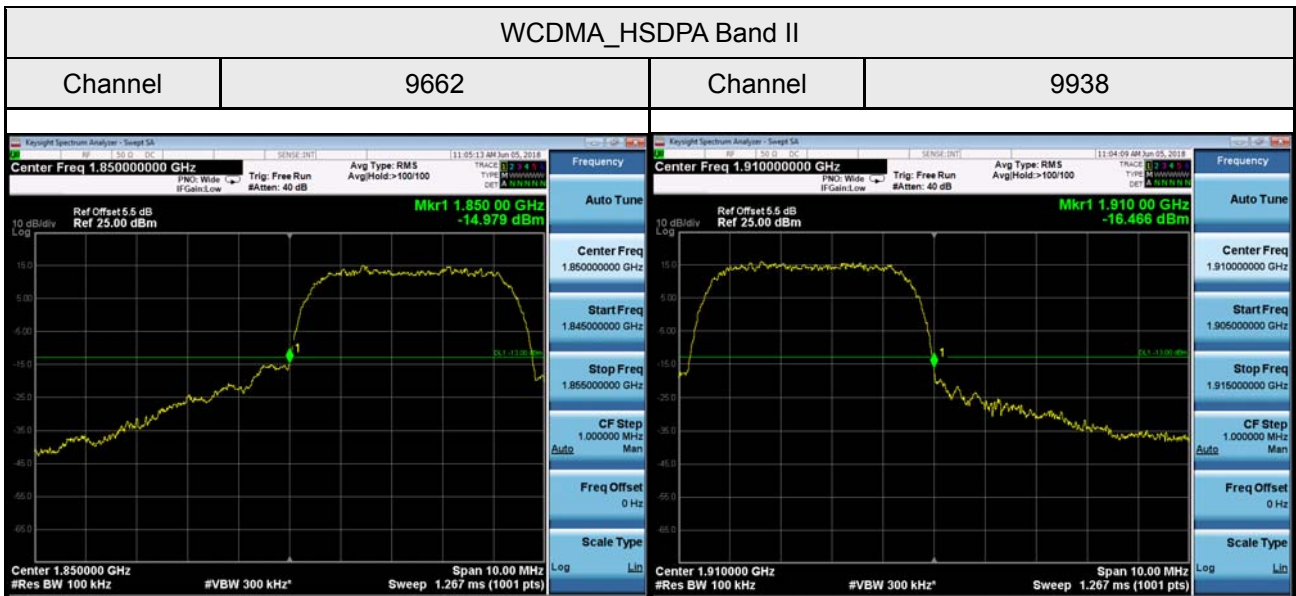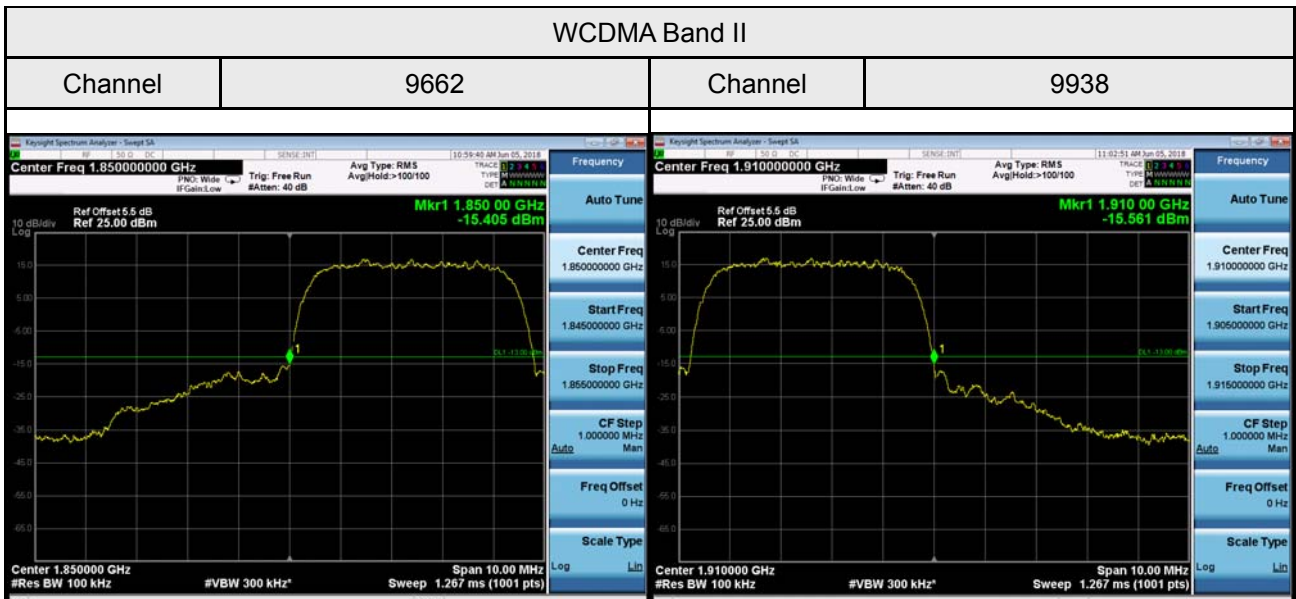


APPENDIX H - PEAK TO AVERAGE RATIO

PCS1900							
GSM				EDGE			
CS				8PSK			
Channel	Frequency (MHz)	PAPR (dB)	Limit (dB)	Channel	Frequency (MHz)	PAPR (dB)	Limit (dB)
512	1850.2	0.80	13	512	1850.2	3.82	13
661	1880	0.81	13	661	1880	3.62	13
810	1909.8	0.73	13	810	1909.8	3.60	13

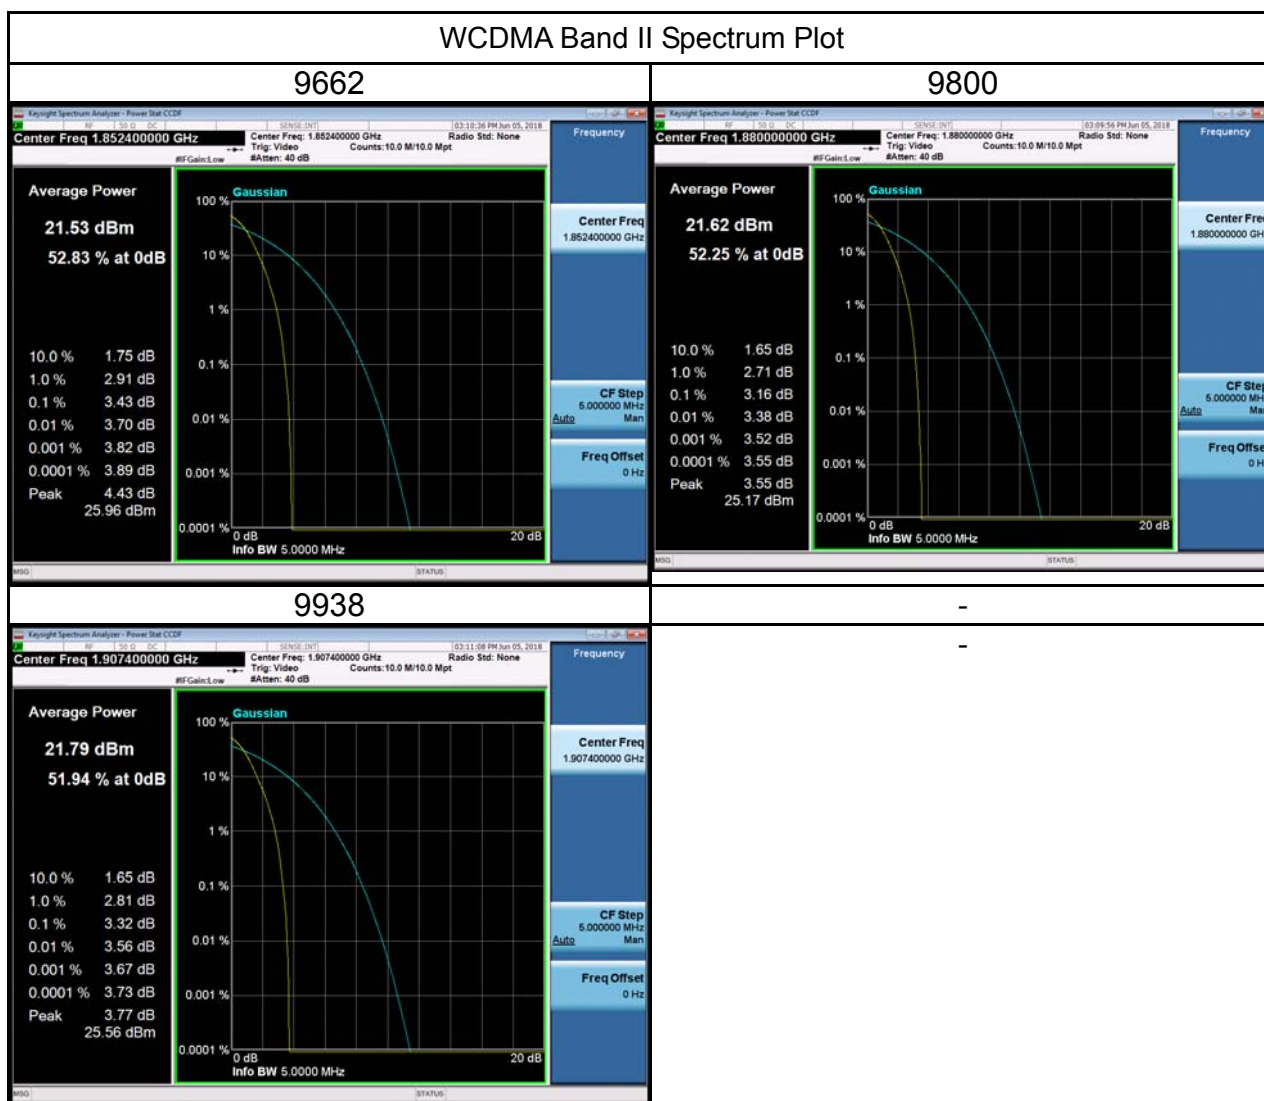

WCDMA Band 2			
BPSK			
Channel	Frequency (MHz)	0.1% PAPR (dB)	Limit (dB)
9262	1852.4	3.93	13
9400	1880	3.83	13
9538	1907.6	3.85	13

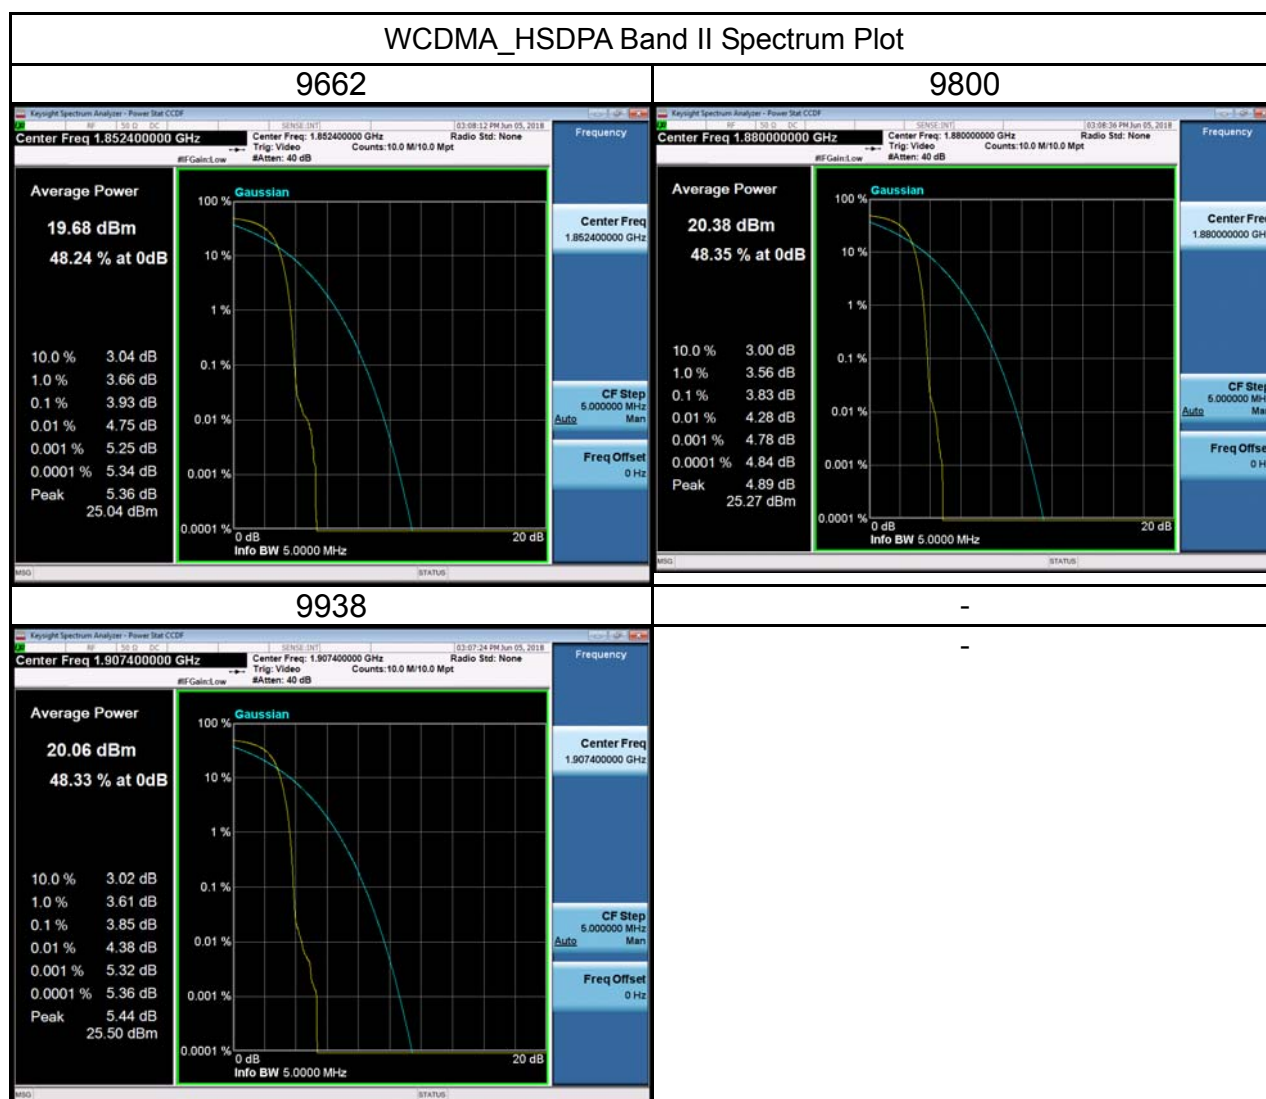

APPENDIX I - FREQUENCY STABILITY

Test Mode:	PCS1900_CH661
------------	---------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	4.5	0.002393617	±2.5
-20	7.44	0.003957447	
-10	6.35	0.00337766	
0	5.36	0.002851064	
10	7.33	0.003898936	
20	5.16	0.002744681	
30	5.85	0.003111702	
40	7.18	0.003819149	
50	3.67	0.001952128	
Max. Deviation (ppm)	7.44	0.003957447	

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
108	5.51	0.002930851	±2.5
120	4.04	0.002148936	
132	6.01	0.003196809	
Max. Deviation (ppm)	6.01	0.003196809	

Test Mode:	WCDMA Band II_CH9400
------------	----------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	4.66	0.002478723	±2.5
-20	6.63	0.003526596	
-10	2.55	0.001356383	
0	3.12	0.001659574	
10	2.95	0.001569149	
20	3.52	0.00187234	
30	7.20	0.003829787	
40	2.48	0.001319149	
50	3.63	0.001930851	
Max. Deviation (ppm)	7.2	0.003829787	

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
108	1.02	0.000542553	±2.5
120	2.57	0.001367021	
132	3.59	0.001909574	
Max. Deviation (ppm)	3.59	0.001909574	