



FCC Part 90 & RSS-119 TEST REPORT

For

Repeater (Base Station)

Model Name: TR-800V

Trade Name: HYT

FCC ID: R74TR-800V, IC: 5465A-TR800V

Report No.: SZAGC003080101E6

Date of Issue: Jan. 24, 2007

Prepared For

Shenzhen HYT Science & Technology Co., Ltd.

HYT Tower, Shenzhen Hi-Tech Industrial Park North, Beihuan Rd.,

Nanshan District, Shenzhen, P.R.C.

Tel: 86-755-2697 2999

Fax: 86-755-8613 7130

Prepared By

Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd

Suite B11/B12, 4F, Huafeng Mall, Chuangye 2nd Road,

25 District, Bao'an, Shenzhen

Tel: 86-755-2974 2358

Fax: 86-755-2600 8484

VERIFICATION OF COMPLIANCE

Applicant:	SHENZHEN HYT SCIENCE & TECHNOLOGY CO., LTD. HYT Tower, Shenzhen Hi-Tech Industrial Park North, Beihuan Rd., Nanshan District, Shenzhen, P.R.C.
Manufacturer:	SHENZHEN HYT SCIENCE & TECHNOLOGY CO., LTD. HYT Tower, Shenzhen Hi-Tech Industrial Park North, Beihuan Rd., Nanshan District, Shenzhen, P.R.C.
Product Description:	Repeater (Base Station)
Brand Name:	HYT
Model Number:	TR-800V
Serial Number:	N/A
File Number:	SZAGC003080101E6
Date of Test:	Jan.01 2008 ~ Jan.24, 2008

We hereby certify that:

The above equipment was tested by Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90.

The test results of this report relate only to the tested sample identified in this report.

Prepared By: Tony Tian
Tony Tian Jan.24, 2007

Checked By: Randy He
Randy He Jan.24, 2007

Authorized By: King Zhang
King Zhang Jan.24, 2007

CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 SPECIAL ACCESSORIES	5
1.6 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE	6
2.3 GENERAL TECHNICAL REQUIREMENTS	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES.....	8
5. CONDUCTED LIMITS.....	9
5.1 PROVISIONS APPLICABLE	9
5.2 MEASUREMENT PROCEDURE	9
5.3 TEST SETUP BLOCK DIAGRAM.....	10
5.4 TEST EQUIPMENT USED	10
5.5 TEST RESULT	11
6. FREQUENCY TOLERANCE.....	12
6.1 PROVISIONS APPLICABLE.....	12
6.2 MEASUREMENT PROCEDURE	12
6.3 TEST SETUP BLOCK DIAGRAM.....	13
6.4 TEST EQUIPMENT USED:	13
6.5 TEST RESULT	13
7. EMISSION BANDWIDTH.....	21
7.1 PROVISIONS APPLICABLE.....	21
7.2 MEASUREMENT PROCEDURE	21
7.3 TEST SETUP BLOCK DIAGRAM	21
7.4 MEASUREMENT EQUIPMENT USED:	21
7.5 MEASUREMENT RESULT:.....	22
8. UNWANTED RADIATION	26
8.1 PROVISIONS APPLICABLE.....	26
8.2 MEASUREMENT PROCEDURE	26
8.3 TEST SETUP BLOCK DIAGRAM	27

8.4 MEASUREMENT EQUIPMENT USED:	29
8.5 MEASUREMENT RESULTS:	29
8.6 EMISSION MASK PLOT	32
9. MODULATION CHARACTERISTICS	35
9.1 PROVISIONS APPLICABLE	35
9.2 MEASUREMENT METHOD	35
9.3 MEASUREMENT INSTRUMENTS	35
9.4 MEASUREMENT RESULT	36
10.1 PROVISIONS APPLICABLE	50
10.2 TEST PROCEDURE	50
10.3 TEST INSTRUMENTS	50
10.4 TEST RESULT	50
10.5 CONDUCT SPURIOUS PLOT	51
11. TRANSMITTER FREQUENCY BEHAVIOR	54
11.1 PROVISIONS APPLICABLE	54
11.2 TEST METHOD	54
11.3 TEST INSTRUMENTS	54
11.4 MEASURE RESULT	54
12.1 PROVISIONS APPLICABLE	59
12.2 TEST METHOD	59
12.3 TEST INSTRUMENTS	59
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)	59
13. RF EXPOSURE EVALUATION	60
APPENDIX I PHOTOGRAPHS OF SETUP	62
APPENDIX II EXTERNAL VIEW OF EUT	64

1. GENERAL INFORMATION

1.1 Product Description

The EUT is a single channel Repeater designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only	
Modulation	FM	
Emission Type	16K0F3E (2M+2D, M=3, D=5.0, NB=16KHz for 12.5 KHz separation) 11K0F3E (2M+2D, M=3, D=2.5, NB=11KHz for 25.0 KHz separation)	
Emission Bandwidth	10.50 KHz / 15.50 KHz (Limit:11.25 / 20.0KHz) for 12.5 / 25.0 KHz channel separation for Main Radio	
	10.75 KHz / 15.63 KHz (Limit:11.25 / 20.0KHz) for 12.5 / 25.0 KHz channel separation for Slave Radio	
Peak Frequency Deviation	1.82 KHz / 3.63 KHz for 12.5 / 25.0 KHz Channel Separation (Limit<±2.5 KHz / ±5 KHz) for Main Radio	
	1.82 KHz / 3.63 KHz for 12.5 / 25.0 KHz Channel Separation (Limit<±2.5 KHz / ±5 KHz) for Slave Radio	
Audio Frequency Response	2.8 KHz (Limit<3.125 KHz) for Main Radio	
	2.8 KHz (Limit<3.125 KHz) for Slave Radio	
Maximum Transmitter Power	47.97 W / 47.75 W for 12.5 KHz / 25.0 KHz Channel Separation for Main Radio	
	47.86 W / 47.53 W for 12.5 KHz / 25.0 KHz Channel Separation for Slave Radio	
Output power Modification	Fixed can't be changed	
Antenna Designation	Detachable	
Power Supply	AC 120V / 60 Hz	
Operation Frequency Range and Channel	Frequency Range: 136 MHz to 174 MHz Channel Separation: 12.5 KHz and 25.0 KHz	
	Top Channel: 173.875 MHz	Main Radio and Slave Radio
	Centre Channel: 157.875 MHz	
	Bottom Channel: 136.875 MHz	

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: R74TR-800V** and **IC: 5465A-TR800V** filing to comply with the FCC Part 90 requirements and RS-119 requirements.

1.3 Test Methodology

The radiated emission testing was performed according to the procedures of ANSI C63.4 : 2003;TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 Test Facility

The test site (Accurate Technology Co., Ltd.) used to collect the radio test data is located on the address of F1, Bldg.A, Changyuan New Material Port, Keyuan Rd., Science & Industry ParK, Nanshan District, Shenzhen 518057, China

The registration number is 253065. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

The open area test site Industry Canada number: 5077

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

2.3 General technical requirements

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Series No.	Note
1	Repeater	TR-800V	FCC ID: R74TR-800V IC:5465A-TC800V	N/A	EUT
--	--	--	--	--	--
--	--	--	--	--	--

3. SUMMARY OF TEST RESULTS

FCC Rules	RS-119	Description Of Test	Result
§15.207	RS-Gen	Conducted Emission	Compliant
§90.205	§5.4	Maximum Transmitter Power	Compliant
§90.207	§5.13	Modulation Characteristic	Compliant
§90.209	§5.5	Occupied Bandwidth	Compliant
§90.210	§5.8	Emission Mask	Compliant
§90.213	§5.3	Frequency Tolerance	Compliant
§90.214	§5.9	Transient Frequency Behavior	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under normal operating condition. Three channels (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation (12.5 KHz/ 25 KHz).

5. CONDUCTED LIMITS

5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

5.3 TEST SETUP BLOCK DIAGRAM

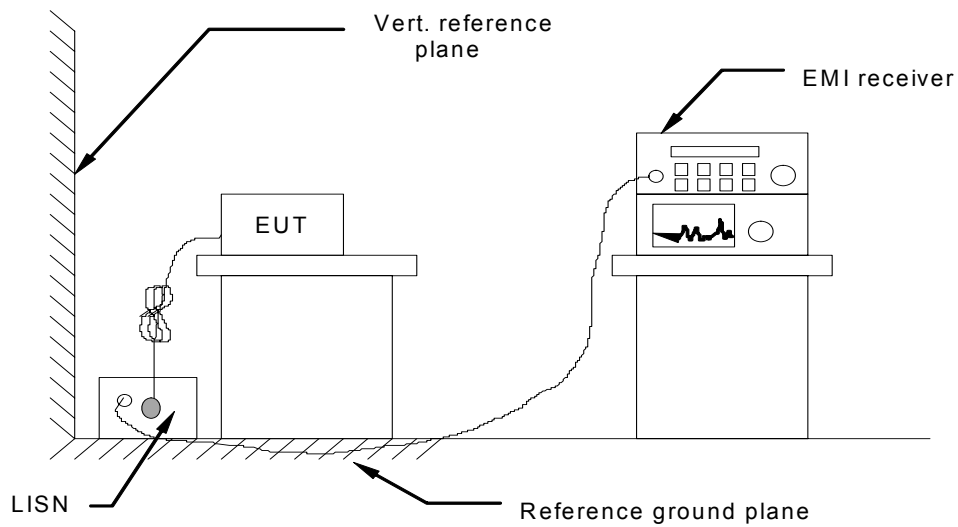

5.4 Test equipment used

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
EMI Test Receiver	R & S	ESPI3	100396	2007/07/13
LISN	R & S	ESH3-Z6	100132	2007/07/13

5.5 TEST RESULT**LINE CONDUCTED EMISSION TEST**

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.869	37.34	---	---	56.00	46.00	-18.66	-8.66	L
2.673	38.60	---	---	56.00	46.00	-17.40	-7.40	L
4.909	41.77	---	---	56.00	46.00	-14.23	-4.23	L
8.597	43.71	---	---	60.00	50.00	-16.29	-6.29	L
12.653	43.41	---	---	60.00	50.00	-16.59	-6.59	L
0.866	36.25	---	---	56.00	46.00	-19.75	-9.75	N
2.677	37.11	---	---	56.00	46.00	-18.89	-8.89	N
4.102	40.22	---	---	56.00	46.00	-15.78	-5.78	N
8.603	42.18	---	---	60.00	50.00	-17.82	-7.82	N
12.702	42.97	---	---	60.00	50.00	-17.03	-7.03	N

****NOTE:**

“---” denotes the peak emission level was or more than 2dB below the Average limit, so no re-check anymore.

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

6. FREQUENCY TOLERANCE

6.1 Provisions Applicable

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5KHz channel separation and 0.0005% for 25KHz channel separation.

6.2 Measurement Procedure


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by AC 120V/60Hz
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 Test Setup Block Diagram

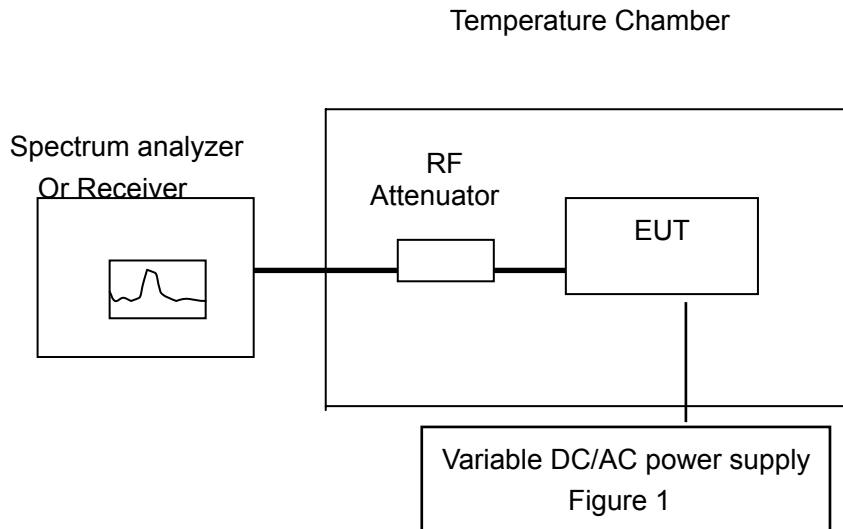

6.4 Test equipment used:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
EMI TEST RECEIVER	R & S	ESCS 30	100307	2007.07.13
Climate Chamber	ESPEC	EL-10KA	05107008	2007.07.13

6.5 Test result

(1) Frequency stability versus input voltage

Measurement Result for Channel Separation of 12.5 KHz for Main Radio

Channel		Reference Frequency (MHz)	Tested Frequency (MHz)	Frequency Deviation (ppm)	Limit (ppm)
Middle Channel	AC 138 V	157.875	157.874859	-0.89	2.5
	AC 120 V		157.874858	-0.90	
	AC 102 V		157.874854	-0.92	
Top Channel	AC 138 V	173.875	173.874834	-0.95	2.5
	AC 120 V		173.874834	-0.95	
	AC 102 V		173.874831	-0.97	
Bottom Channel	AC 138 V	136.875	136.874875	-0.91	2.5
	AC 120 V		136.874873	-0.93	
	AC 102 V		136.874871	-0.94	

Measurement Result for Channel Separation of 25KHz for Main Radio

Channel		Reference Frequency (MHz)	Tested Frequency (MHz)	Frequency Deviation (ppm)	Limit (ppm)
Middle Channel	AC 138 V	157.875	157.874860	-0.89	5.0
	AC 120 V		157.874859	-0.89	
	AC 102 V		157.874854	-0.92	
Top Channel	AC 138 V	173.875	173.874835	-0.95	5.0
	AC 120 V		173.874834	-0.95	
	AC 102 V		173.874830	-0.98	
Bottom Channel	AC 138 V	136.875	136.874874	-0.92	5.0
	AC 120 V		136.874873	-0.93	
	AC 102 V		136.874870	-0.95	

Measurement Result for Channel Separation of 12.5 KHz for Slave Radio

Channel		Reference Frequency (MHz)	Tested Frequency (MHz)	Frequency Deviation (ppm)	Limit (ppm)
Middle Channel	AC 138 V	157.875	157.874858	-0.89	2.5
	AC 120 V		157.874857	-0.90	
	AC 102 V		157.874851	-0.92	
Top Channel	AC 138 V	173.875	173.874832	-0.95	2.5
	AC 120 V		173.874830	-0.95	
	AC 102 V		173.874829	-0.97	
Bottom Channel	AC 138 V	136.875	136.874873	-0.91	2.5
	AC 120 V		136.874871	-0.93	
	AC 102 V		136.874868	-0.94	

Measurement Result for Channel Separation of 25KHz for Slave Radio

Channel		Reference Frequency (MHz)	Tested Frequency (MHz)	Frequency Deviation (ppm)	Limit (ppm)
Middle Channel	AC 138 V	157.875	157.874858	-0.89	5.0
	AC 120 V		157.874857	-0.89	
	AC 102 V		157.874855	-0.92	
Top Channel	AC 138 V	173.875	173.874834	-0.95	5.0
	AC 120 V		173.874832	-0.95	
	AC 102 V		173.874830	-0.98	
Bottom Channel	AC 138 V	136.875	136.874875	-0.92	5.0
	AC 120 V		136.874873	-0.93	
	AC 102 V		136.874871	-0.95	

(2)Frequency stability versus ambient temperature

Bottom Channel @ 12.5 KHz Channel Separations for Main Radio

Reference Frequency: 136.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	136.874781	-1.60
40	AC 120V	136.874813	-1.37
30	AC 120V	136.874842	-1.15
20	AC 120V	136.874873	-0.93
10	AC 120V	136.874902	-0.73
0	AC 120V	136.874931	-0.50
-10	AC 120V	136.874972	-0.20
-20	AC 120V	136.874998	-0.01
-30	AC 120V	136.875033	0.24

Middle Channel @ 12.5 KHz Channel Separations for Main Radio

Reference Frequency: 157.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	157.874763	-1.50
40	AC 120V	157.874792	-1.32
30	AC 120V	157.874827	-1.10
20	AC 120V	157.874859	-0.89
10	AC 120V	157.874881	-0.75
0	AC 120V	157.874918	-0.52
-10	AC 120V	157.874952	-0.30
-20	AC 120V	157.874987	-0.08
-30	AC 120V	157.875013	0.08

Top Channel @ 12.5KHz Channel Separation for Main Radio

Reference Frequency: 173.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	173.874741	-1.49
40	AC 120V	173.874772	-1.31
30	AC 120V	173.874807	-1.11
20	AC 120V	173.874834	-0.95
10	AC 120V	173.874871	-0.74
0	AC 120V	173.874897	-0.59
-10	AC 120V	173.874927	-0.42
-20	AC 120V	173.874961	-0.22
-30	AC 120V	173.874998	-0.01

Bottom Channel @ 25 KHz Channel Separation for Main Radio

Reference Frequency: 136.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	136.874762	-1.74
40	AC 120V	136.874797	-1.48
30	AC 120V	136.874837	-1.19
20	AC 120V	136.874873	-0.93
10	AC 120V	136.874906	-0.69
0	AC 120V	136.874944	-0.41
-10	AC 120V	136.874982	-0.13
-20	AC 120V	136.875012	0.09
-30	AC 120V	136.875041	0.30

Middle Channel @ 25 KHz Channel Separations for Main Radio

Reference Frequency: 157.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	157.874743	-1.63
40	AC 120V	157.874782	-1.38
30	AC 120V	157.874821	-1.13
20	AC 120V	157.874859	-0.89
10	AC 120V	157.874894	-0.67
0	AC 120V	157.874935	-0.41
-10	AC 120V	157.874972	-0.18
-20	AC 120V	157.875007	0.04
-30	AC 120V	157.875043	0.27

Top Channel @ 25 KHz Channel Separation for Main Radio

Reference Frequency: 173.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	173.874732	-1.54
40	AC 120V	173.874767	-1.34
30	AC 120V	173.874801	-1.14
20	AC 120V	173.874834	-0.95
10	AC 120V	173.874873	-0.73
0	AC 120V	173.874902	-0.56
-10	AC 120V	173.874935	-0.37
-20	AC 120V	173.874969	-0.18
-30	AC 120V	173.875011	0.06

Bottom Channel @ 12.5 KHz Channel Separations for Salve Radio

Reference Frequency: 136.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	136.874780	-1.61
40	AC 120V	136.874812	-1.37
30	AC 120V	136.874840	-1.17
20	AC 120V	136.874871	-0.94
10	AC 120V	136.874903	-0.71
0	AC 120V	136.874932	-0.50
-10	AC 120V	136.874974	-0.19
-20	AC 120V	136.874999	-0.01
-30	AC 120V	136.875034	0.25

Middle Channel @ 12.5 KHz Channel Separations for Slave Radio

Reference Frequency: 157.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	157.874762	-1.51
40	AC 120V	157.874791	-1.32
30	AC 120V	157.874826	-1.10
20	AC 120V	157.874857	-0.91
10	AC 120V	157.874878	-0.77
0	AC 120V	157.874915	-0.54
-10	AC 120V	157.874951	-0.31
-20	AC 120V	157.874986	-0.09
-30	AC 120V	157.875014	0.09

Top Channel @ 12.5KHz Channel Separation for Slave Radio

Reference Frequency: 173.875 MHz		Limit: ± 2.5 PPM	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	173.874740	-1.50
40	AC 120V	173.874771	-1.32
30	AC 120V	173.874805	-1.12
20	AC 120V	173.874830	-0.98
10	AC 120V	173.874870	-0.75
0	AC 120V	173.874894	-0.61
-10	AC 120V	173.874926	-0.43
-20	AC 120V	173.874959	-0.24
-30	AC 120V	173.874997	-0.02

Bottom Channel @ 25 KHz Channel Separation for Slave Radio

Reference Frequency: 136.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	136.874761	-1.75
40	AC 120V	136.874795	-1.50
30	AC 120V	136.874836	-1.20
20	AC 120V	136.874873	-0.93
10	AC 120V	136.874905	-0.69
0	AC 120V	136.874943	-0.42
-10	AC 120V	136.874981	-0.14
-20	AC 120V	136.875012	0.09
-30	AC 120V	136.875040	0.29

Middle Channel @ 25 KHz Channel Separations for Slave Radio

Reference Frequency: 157.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	157.874741	-1.64
40	AC 120V	157.874779	-1.40
30	AC 120V	157.874820	-1.14
20	AC 120V	157.874857	-0.91
10	AC 120V	157.874893	-0.68
0	AC 120V	157.874934	-0.42
-10	AC 120V	157.874971	-0.18
-20	AC 120V	157.875005	0.03
-30	AC 120V	157.875041	0.26

Top Channel @ 25 KHz Channel Separation for Slave Radio

Reference Frequency: 173.875 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	ppm
50	AC 120V	173.874731	-1.55
40	AC 120V	173.874764	-1.36
30	AC 120V	173.874800	-1.15
20	AC 120V	173.874832	-0.97
10	AC 120V	173.874873	-0.73
0	AC 120V	173.874901	-0.57
-10	AC 120V	173.874934	-0.38
-20	AC 120V	173.874968	-0.18
-30	AC 120V	173.875010	0.06

7. EMISSION BANDWIDTH


7.1 Provisions Applicable

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz and 20 KHz for 25 KHz

7.2 Measurement Procedure

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing)
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 Test Setup Block Diagram

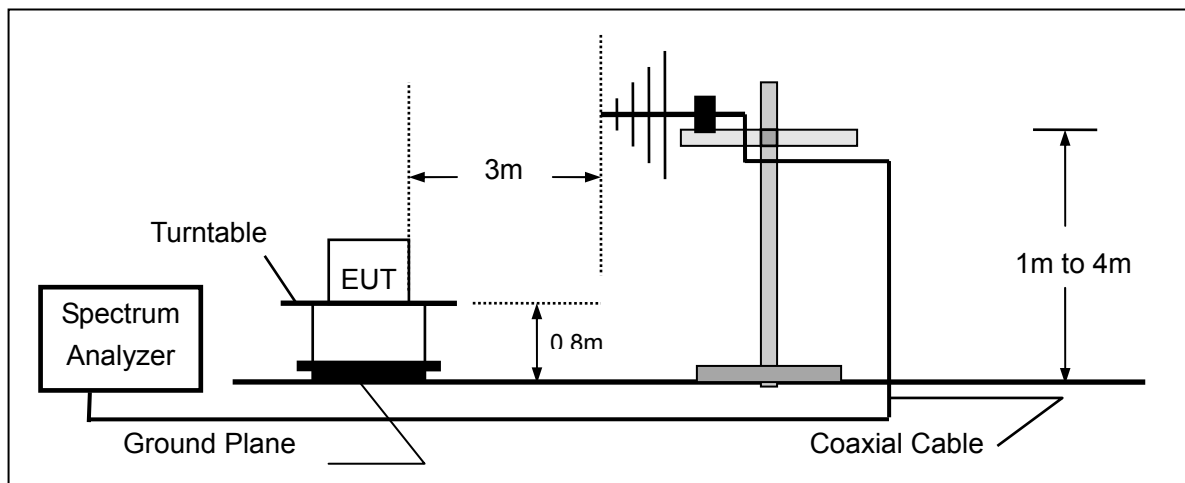


7.4 Measurement Equipment Used:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
EMI Test Receiver	R&S	ESPI	100396	04/16/2007
ANTENNA	Schwarzbeck	VULB9163	9163-194	2007/07/13
SPECTURM ANALYZER	AILENT	8593E	3523A01272	2007/07/13


7.5 MEASUREMENT RESULT:

26 dB Bandwidth Measurement Result For Main Radio						
Operating Frequency	12.5 KHz Channel Separation			25 KHz Channel Separation		
	Test Data	Limits	Result	Test Data	Limits	Result
Bottom Channel	10.44KHz	11.25 KHz	Pass	15.44 KHz	20.00 KHz	Pass
Middle Channel	10.50 KHz	11.25 KHz	Pass	15.50 KHz	20.00 KHz	Pass
Top Channel	10.46 KHz	11.25 KHz	Pass	15.45 KHz	20.00 KHz	Pass

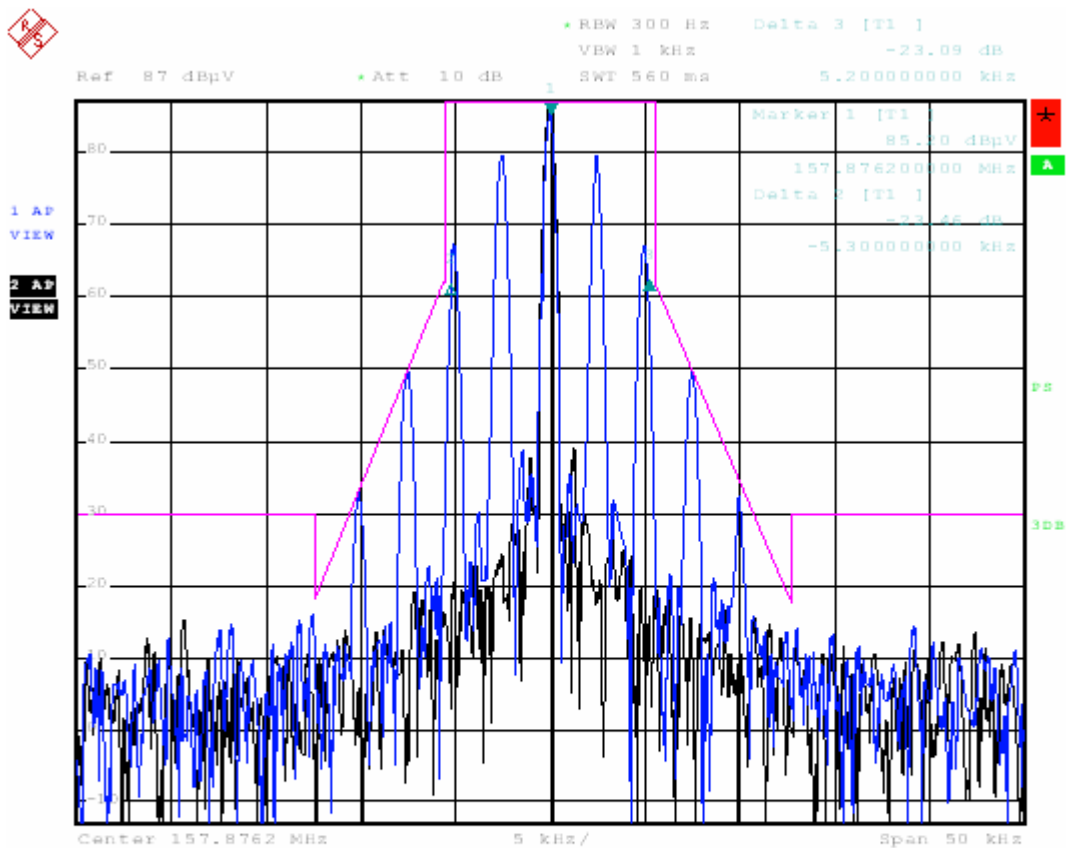Occupied bandwidth of Middle Channel @ 12.5KHz Channel Separation

BENS-19SA

Date: 9.JAN.2008 19:16:35

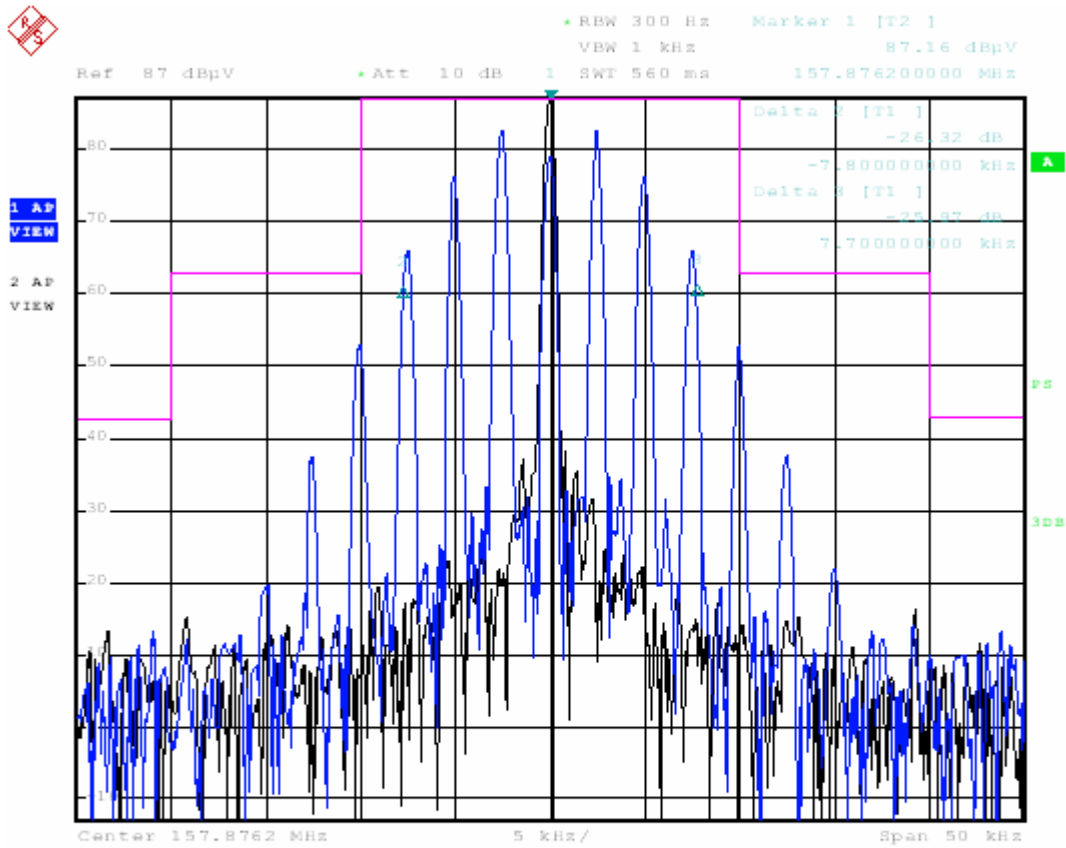
Occupied bandwidth of Middle Channel @ 25 KHz Channel Separation

BENS-19SA


Date: 9.JAN.2008 19:19:38

26 dB Bandwidth Measurement Result For Slave Radio						
Operating Frequency	12.5 KHz Channel Separation			25 KHz Channel Separation		
	Test Data	Limits	Result	Test Data	Limits	Result
Bottom Channel	10.72 KHz	11.25 KHz	Pass	15.57 KHz	20.00 KHz	Pass
Middle Channel	10.75 KHz	11.25 KHz	Pass	15.63 KHz	20.00 KHz	Pass
Top Channel	10.73 KHz	11.25 KHz	Pass	15.60 KHz	20.00 KHz	Pass

Occupied bandwidth of Middle Channel @ 12.5KHz Channel Separation

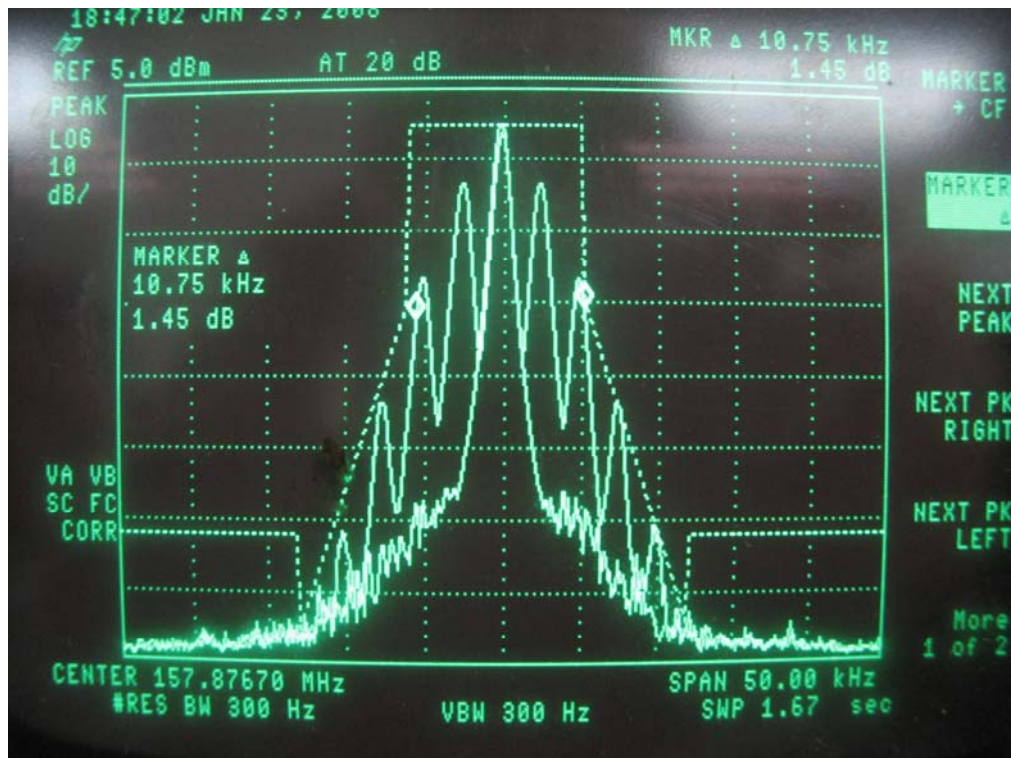

Occupied bandwidth of Middle Channel @ 25.0KHz Channel Separation

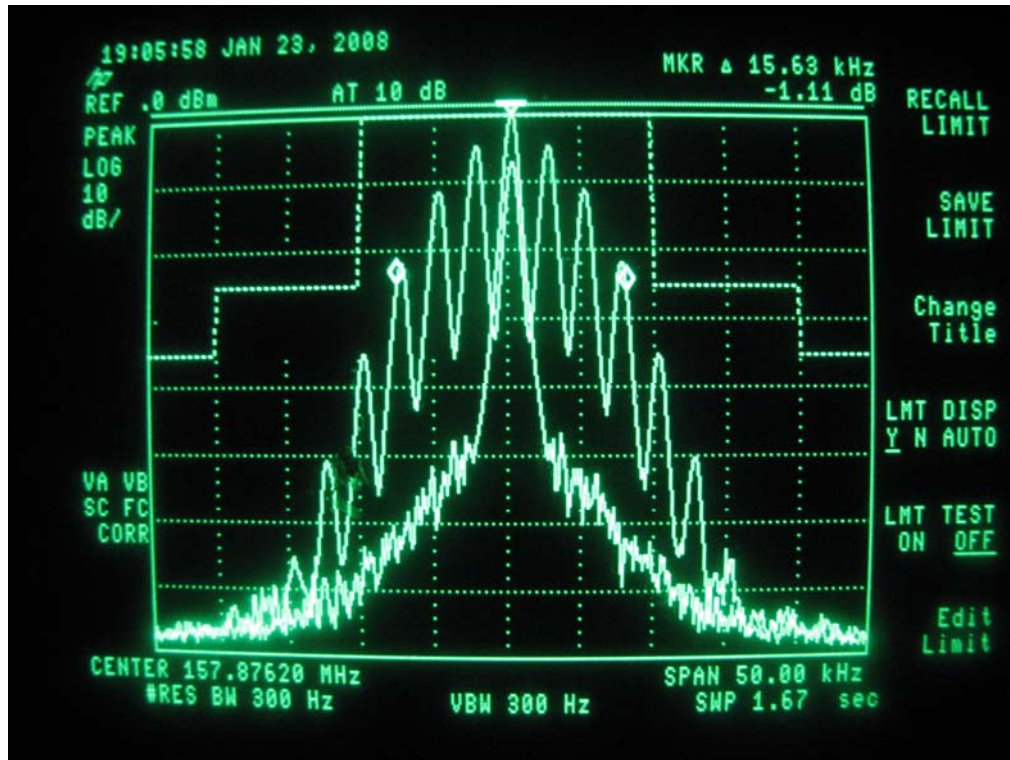

8. UNWANTED RADIATION

8.1 Provisions Applicable

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1). On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency $(f_d \text{ in KHz})f_0$ of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d - 2.88 \text{ KHz})$ dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency $(f_d \text{ in KHz})f_0$ of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

8.1.2 According to Section 90.210, Emission mask B. For transmitters designed to transmit with 25KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:


- (1), On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2), On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3), On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

8.2 Measurement Procedure

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.


- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 Test Setup Block Diagram

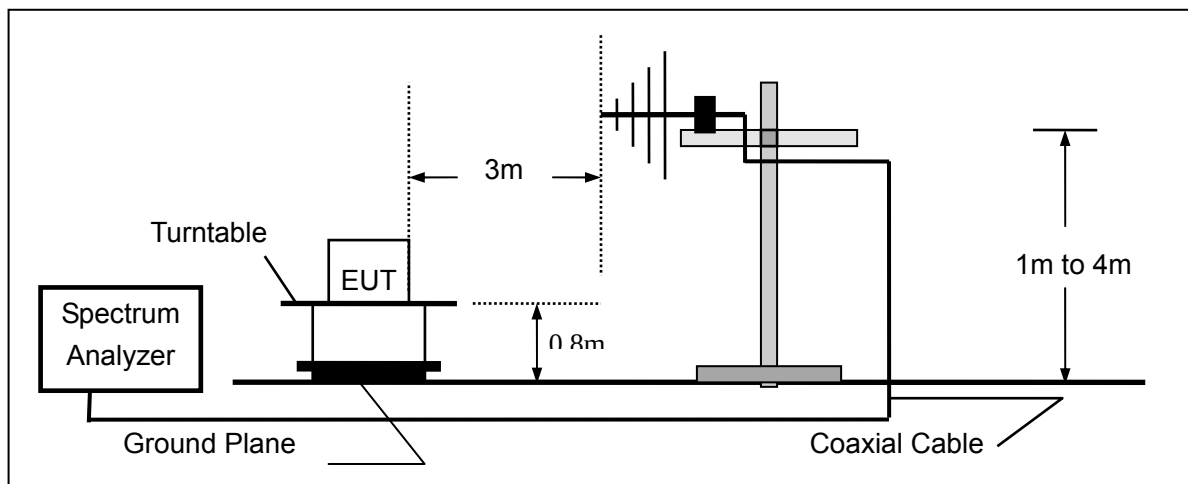


SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

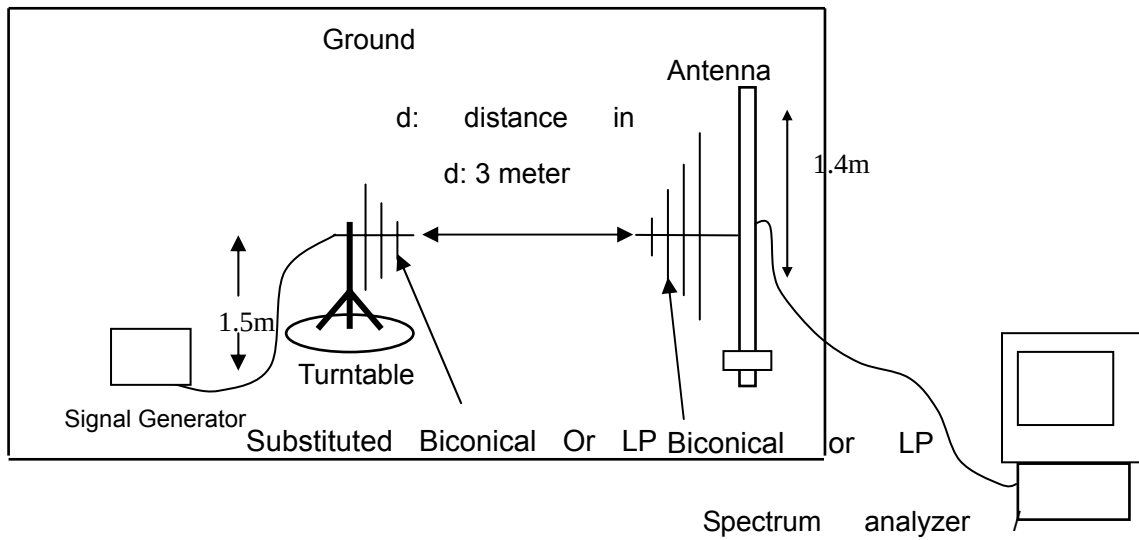

Radiated Above 1 GHz

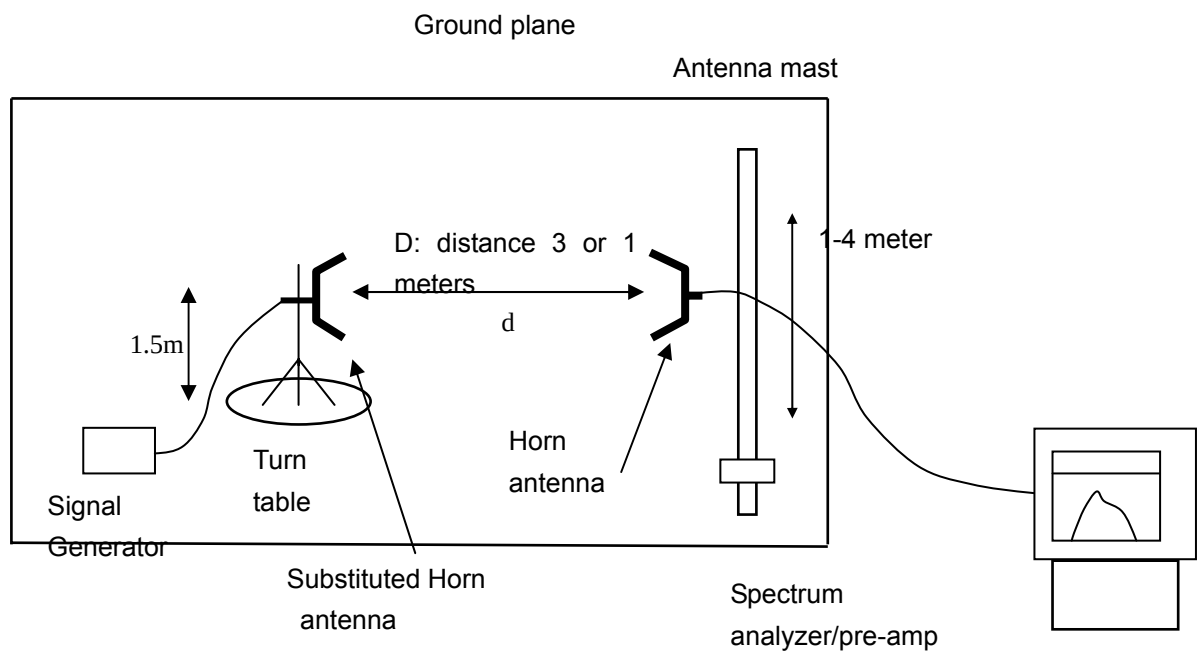

8.4 Measurement Equipment Used:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
EMI Test Receiver	R&S	ESCS30	100343	2007/07/13
AMPLIFIER	HP	HP8447E	2945A02715	2007/07/13
ANTENNA	Schwarzbeck	VULB9163	9163-194	2007/07/13
SPECTURM ANALYZER	AILENT	8593E	3523A01272	2007/07/13

8.5 MEASUREMENT RESULTS:**Measurement Result for 12.5 KHz Channel Separation**

Calculation: Limit (dBm) = $EL - 50 - 10 \log_{10}(TP)$

Notes:

EL is the emission level of the Output Power expressed in dBm,, in this application, the EL is $10 \log_{10}(P \cdot 1000)$ dBm.

Limit (dBm) = $10 \log_{10}(P \cdot 1000) - 50 - 10 \log_{10}(50) = -20$ dBm

Bottom Channel

Frequency	Reading level	Antenna	S.G.	Cable loss	Correction	Emission level	Limit	Margin
(MHz)	(dBuV)	Polarization	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
--	--	--	--	--	--	--	-20	--

Middle Channel

Frequency	Reading level	Antenna	S.G.	Cable loss	Correction	Emission level	Limit	Margin
(MHz)	(dBuV)	Polarization	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
--	--	--	--	--	--	--	-20	--

Top Channel

Frequency	Reading level	Antenna	S.G.	Cable loss	Correction	Emission level	Limit	Margin
(MHz)	(dBuV)	Polarization	(dBm)	(dB)	(dB)	(dBm)	(dBm)	(dB)
--	--	--	--	--	--	--	-20	--

Notes:

“—” means that the emission level is too low to be measured or at least 20 dB down than the limit.

Measurement Result For 25 KHz Channel Separation

Calculation: Limit (dBm)= EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm, in this application, the EL is 10log10(P) dBm.

Limit (dBm)=10log10(P) - 43-10log 10 (P) = -13 dBm

Bottom Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Middle Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Top Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Notes:


“—” means that the emission level is too low to be measured or at least 20 dB down than the limit.

8.6 Emission Mask Plot

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing)


The Worst Emission Mask for 12.5 KHz channel Separation For Main Radio

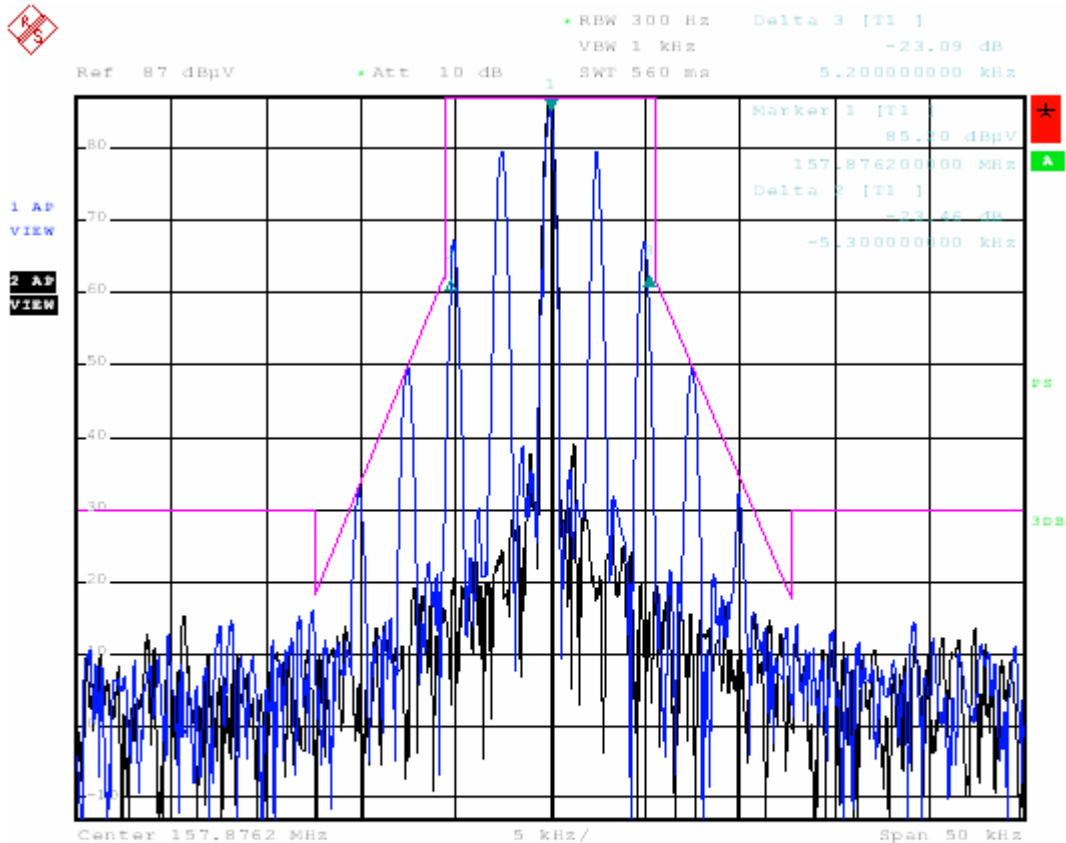

BENS-19SA

Date: 9.JAN.2008 19:16:35


The Worst Emission Mask for 25 KHz channel Separation For Main Radio

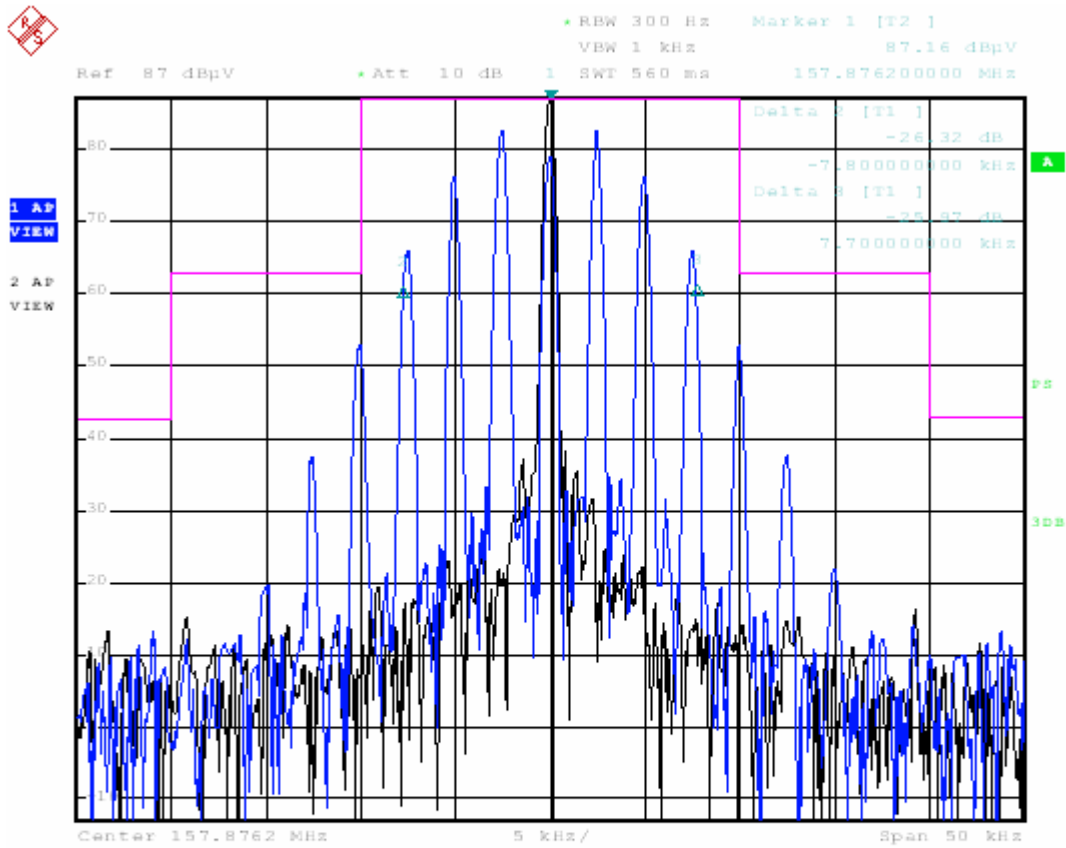


BENS-19SA

Date: 9.JAN.2008 19:19:38

The Worst Emission Mask for 12.5 KHz channel Separation For Slave Radio

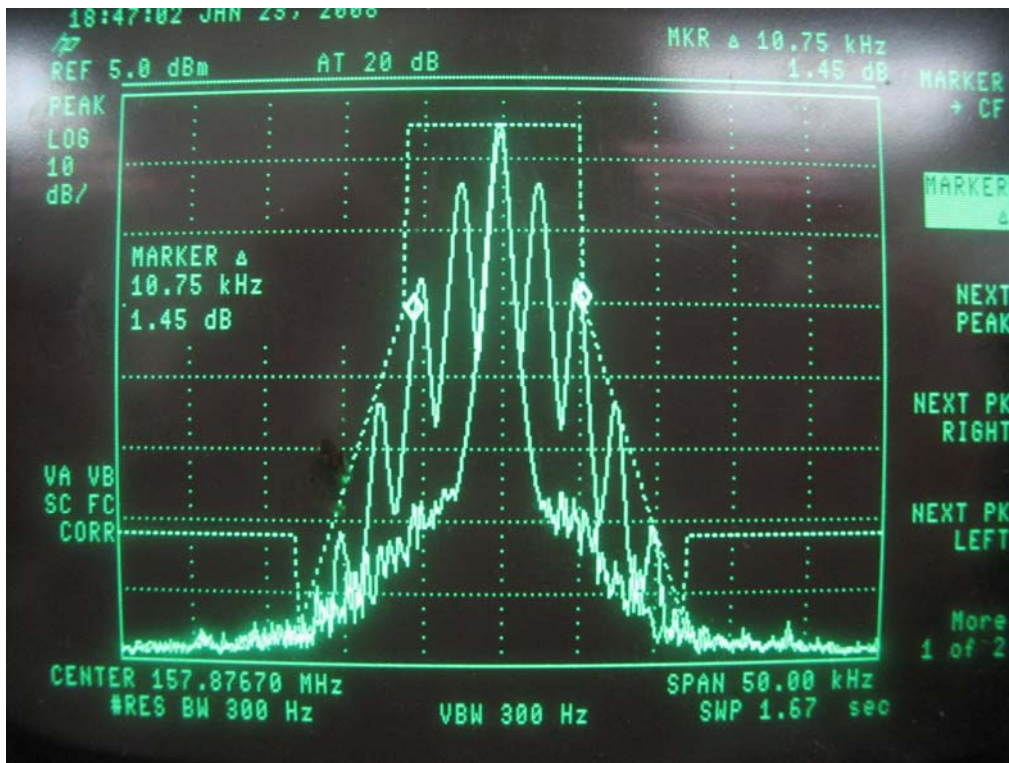

The Worst Emission Mask for 25.0 KHz channel Separation For Slave Radio

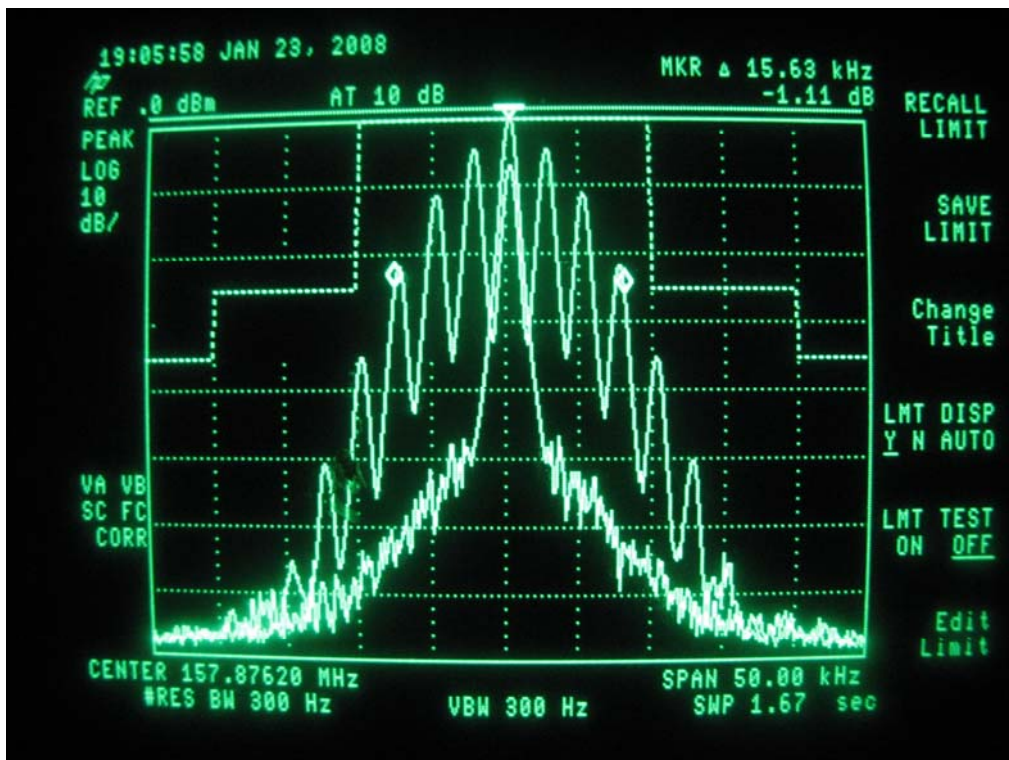

9. MODULATION CHARACTERISTICS

9.1 Provisions Applicable

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 Measurement Method

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1KHz reference})$.

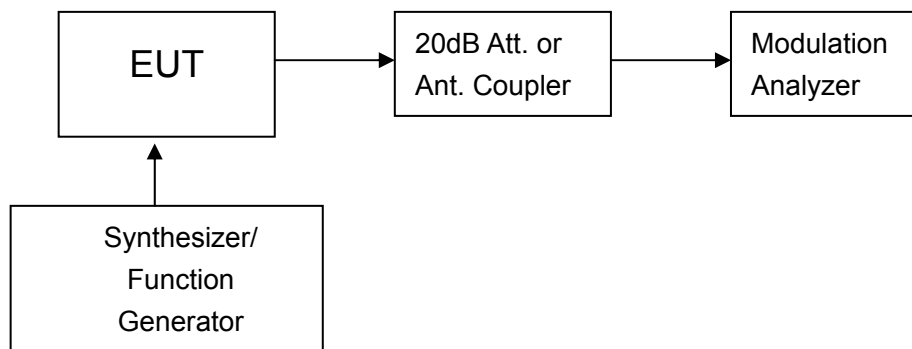


Figure 1: Modulation characteristic measurement configuration

9.3 Measurement Instruments


NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
RF COMMUNICATIONS TEST SET	HP	8920B	US35010161	2007-12-12

9.4 Measurement Result

(a). Modulation Limit:


Middle Channel @ 12.5 KHz Channel Separations For Main Radio

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.04	0.16	0.24	0.39
-15	0.07	0.28	0.43	0.69
-10	0.13	0.47	0.76	1.23
-5	0.23	0.87	1.35	1.57
0	0.40	1.52	1.76	1.64
+5	0.71	1.81	1.81	1.67
+10	1.21	1.81	1.82	1.67
+15	1.30	1.79	1.82	1.67
+20	1.29	1.78	1.82	1.67

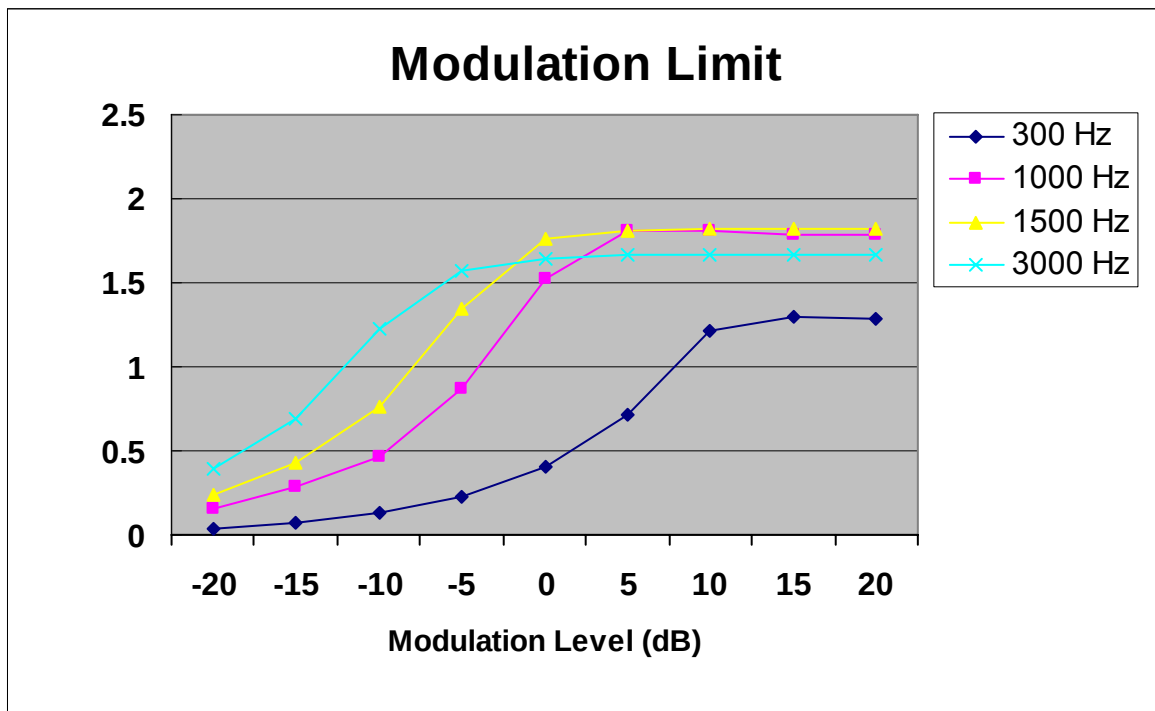


Middle Channel @ 25KHz Channel Separation For Main Radio

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.08	0.31	0.48	0.78
-15	0.15	0.55	0.85	1.38
-10	0.26	0.97	1.52	2.45
-5	0.46	1.73	2.69	3.14
0	0.81	3.04	3.51	3.28
+5	1.41	3.61	3.62	3.33
+10	2.40	3.62	3.63	3.34
+15	2.60	3.58	3.63	3.34
+20	2.57	3.55	3.63	3.35

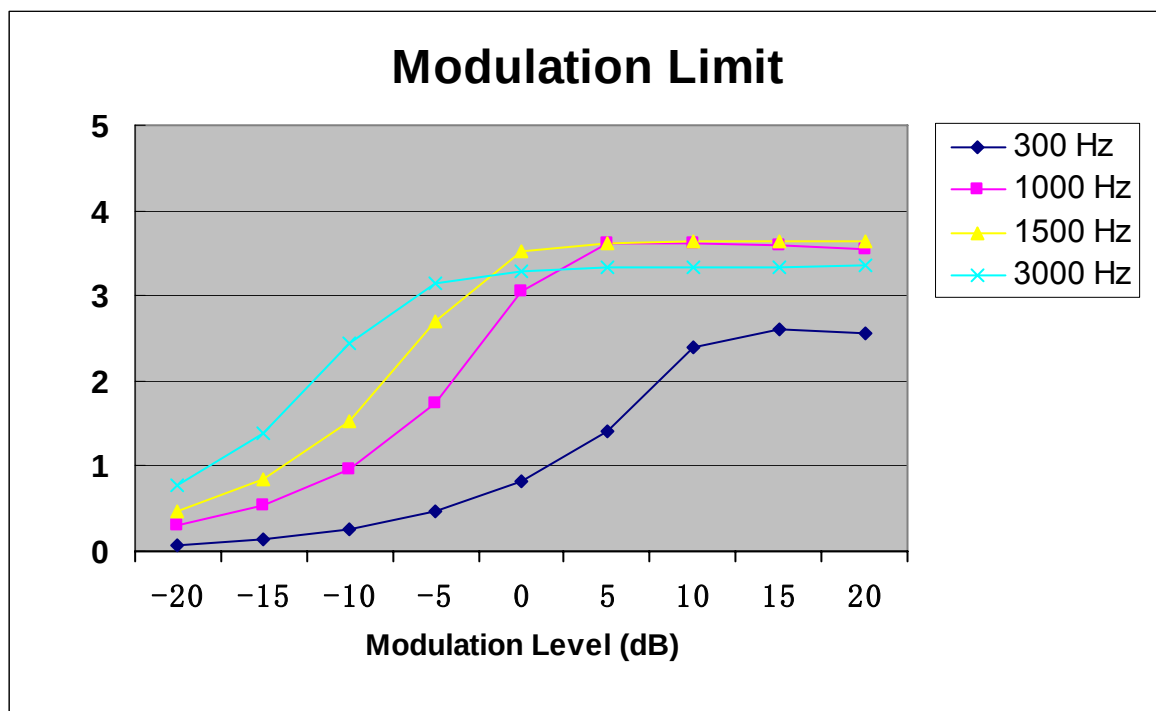


Middle Channel @ 12.5 KHz Channel Separations For Slave Radio

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.04	0.16	0.24	0.39
-15	0.07	0.28	0.43	0.69
-10	0.13	0.47	0.76	1.23
-5	0.24	0.87	1.35	1.57
0	0.40	1.52	1.76	1.64
+5	0.71	1.81	1.81	1.67
+10	1.21	1.81	1.82	1.67
+15	1.30	1.79	1.82	1.67
+20	1.29	1.78	1.82	1.67

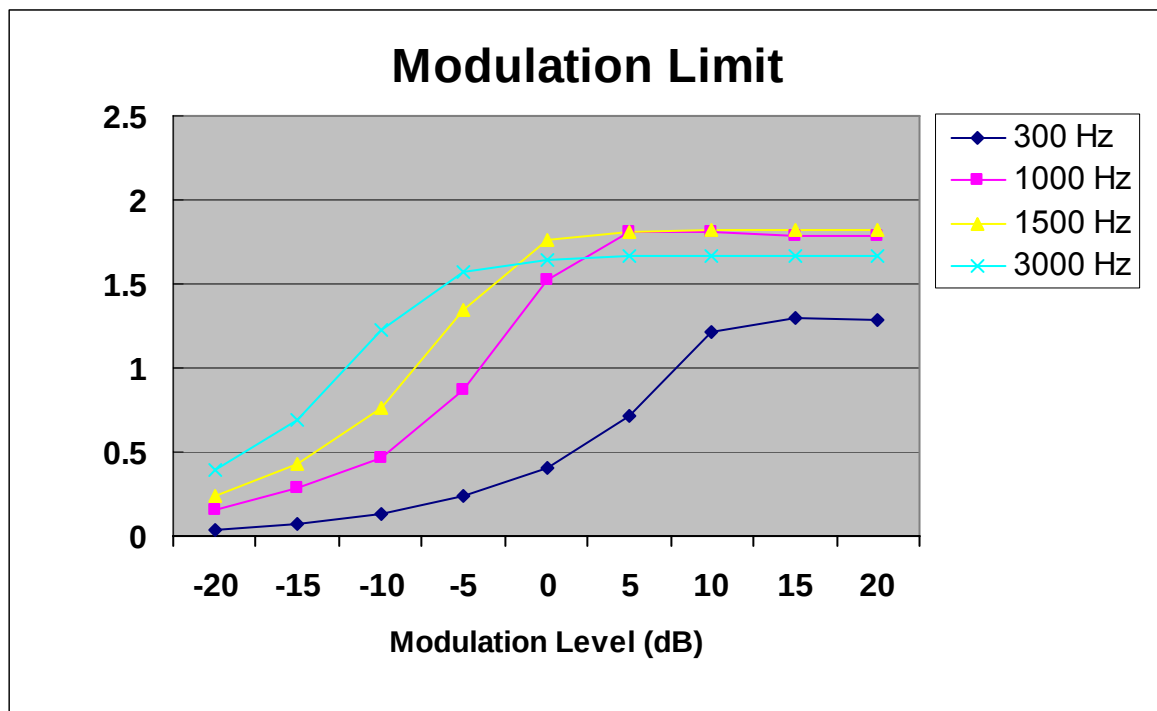


Middle Channel @ 25KHz Channel Separation For Slave Radio

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.08	0.31	0.48	0.78
-15	0.15	0.55	0.85	1.38
-10	0.26	0.97	1.52	2.45
-5	0.47	1.74	2.69	3.14
0	0.81	3.04	3.51	3.28
+5	1.41	3.61	3.62	3.33
+10	2.40	3.62	3.63	3.34
+15	2.60	3.58	3.63	3.34
+20	2.57	3.55	3.63	3.35

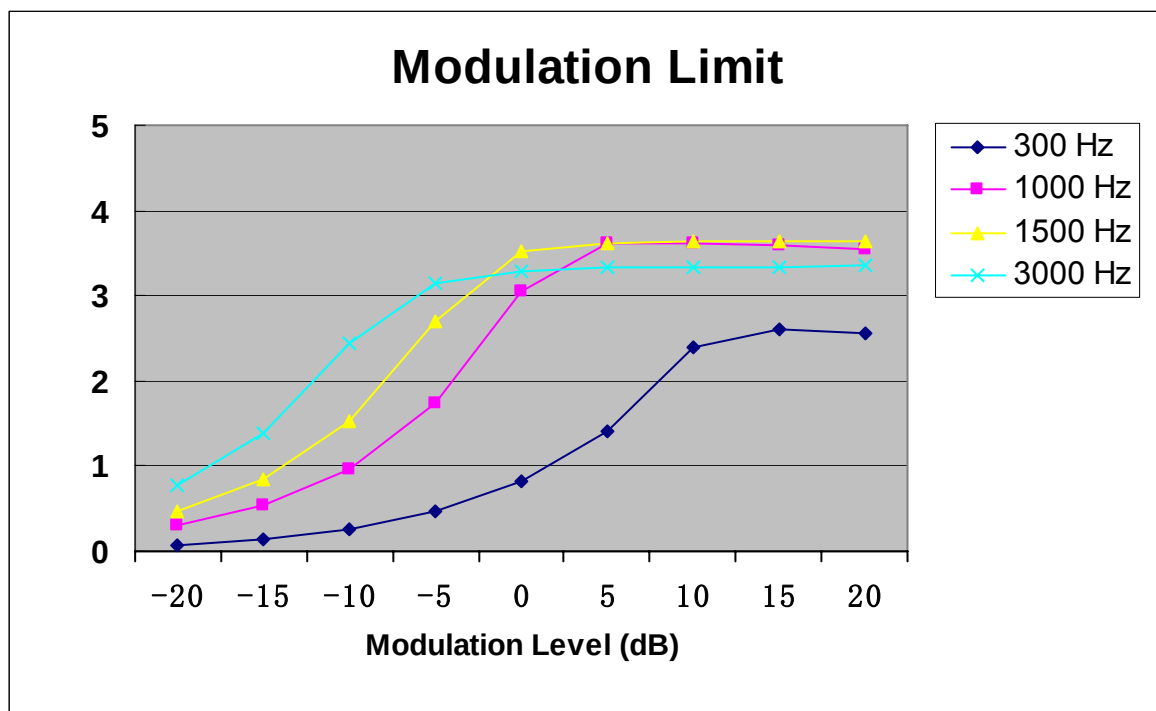


(b) Audio Low Pass Filter Response Test Plot:


Middle Channel @ 12.5 KHz Channel Separations For Main Radio

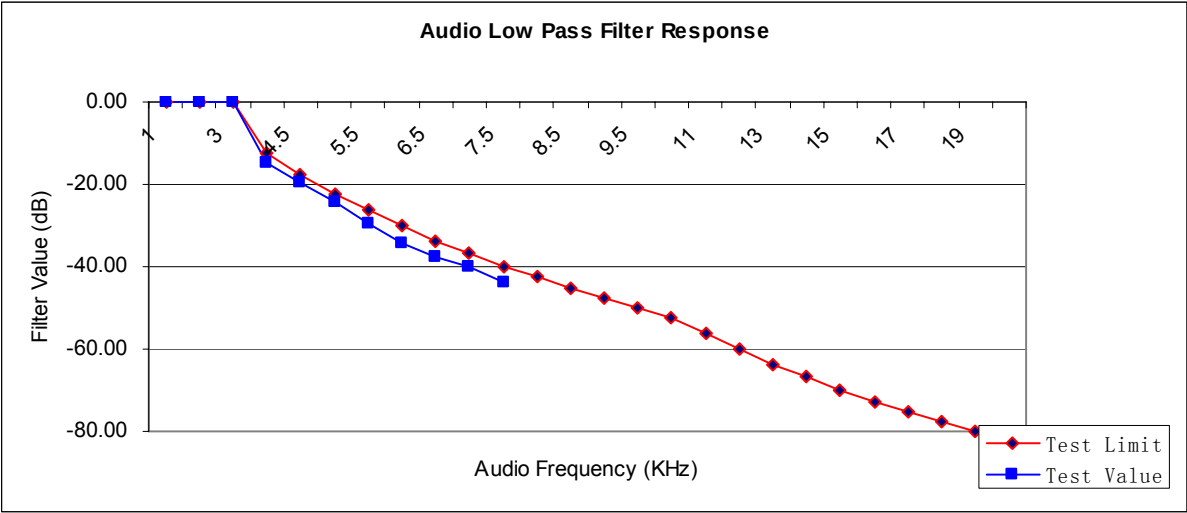


Middle Channel @ 25.0 KHz Channel Separations For Main Radio

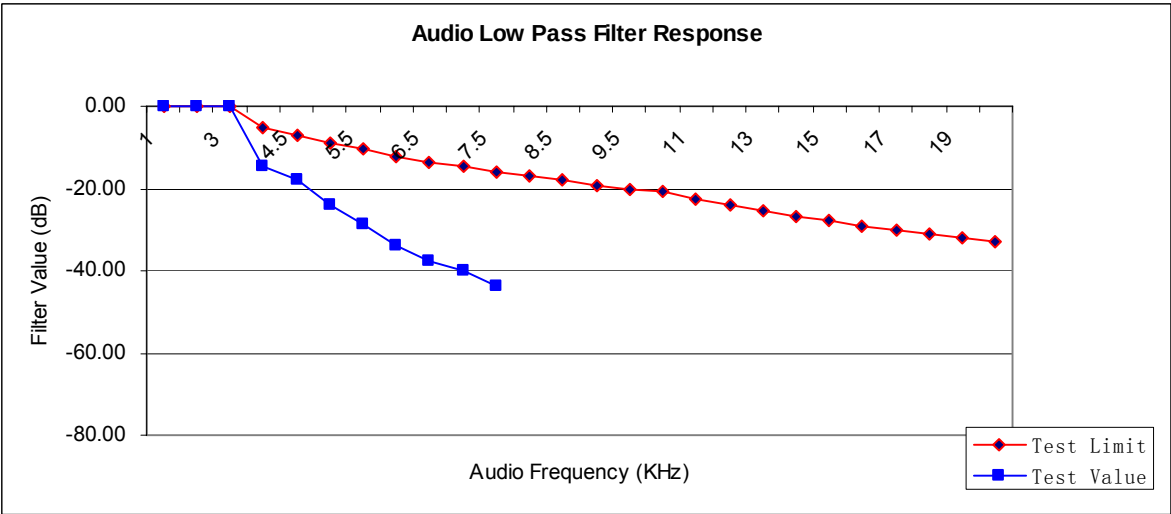

Middle Channel @ 12.5 KHz Channel Separations For Slave Radio

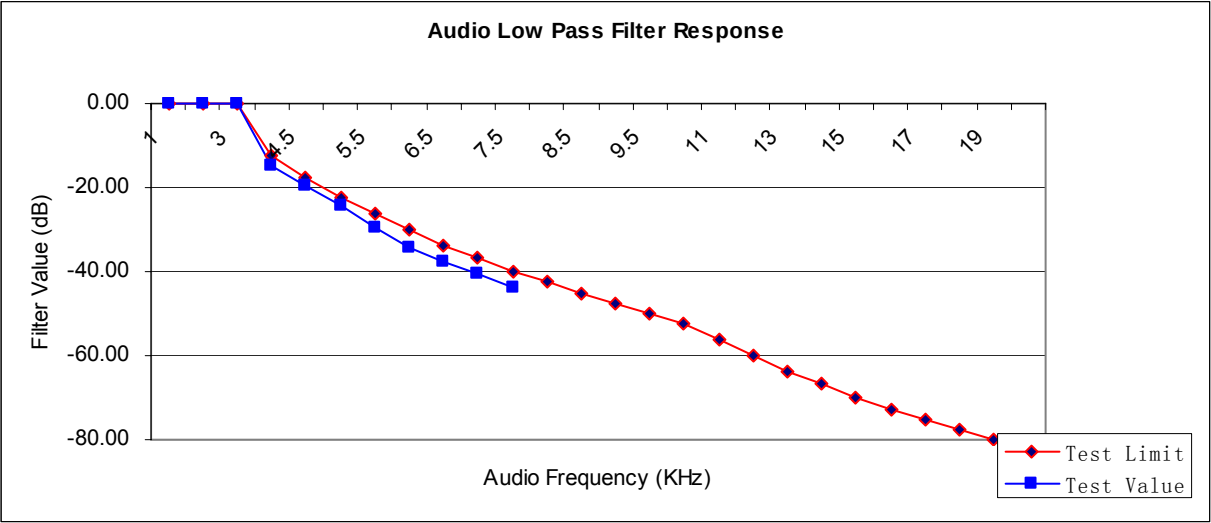


Middle Channel @ 25.0 KHz Channel Separations For Slave Radio

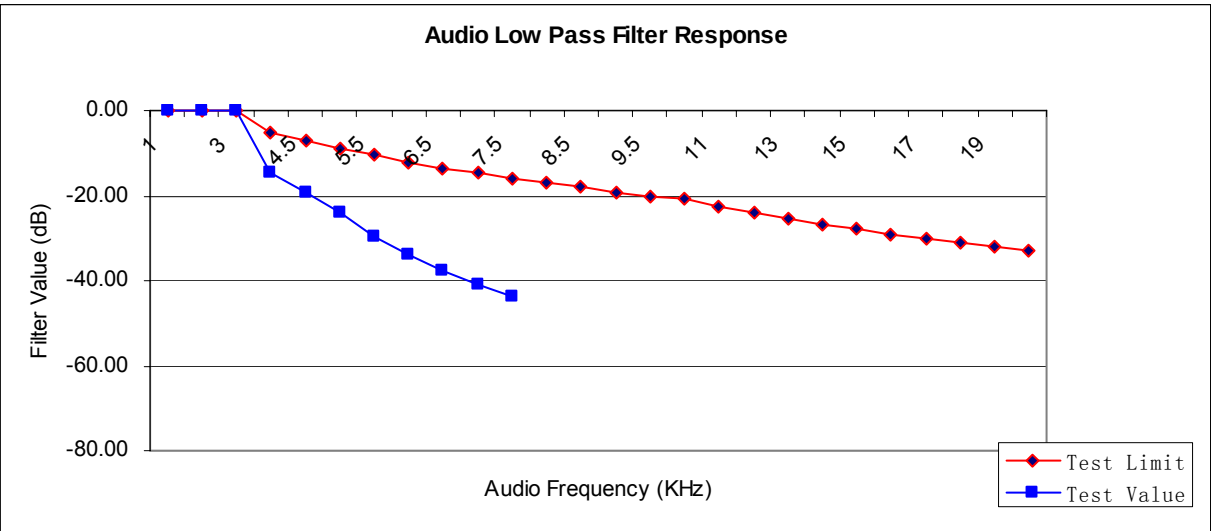

(b). Audio Frequency Response:**12.5 KHz Channel Separations For Main Radio**

Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.13
400	0.18
500	0.23
600	0.28
700	0.33
800	0.39
900	0.44
1000	0.51
1200	0.61
1400	0.73
1600	0.84
1800	0.95
2000	1.04
2200	1.14
2400	1.23
2600	1.28
2800	1.29
3000	1.26
3200	1.15
3400	1.01
3600	0.85
3800	0.69
4000	0.56
4500	0.32
5000	0.18
5500	0.11
6000	0.06
6500	0.03
7000	0.02
7500	--
8000	--
8500	--
9000	--
9500	--
10000	--


Frequency Response of Middle Channel For Main Radio

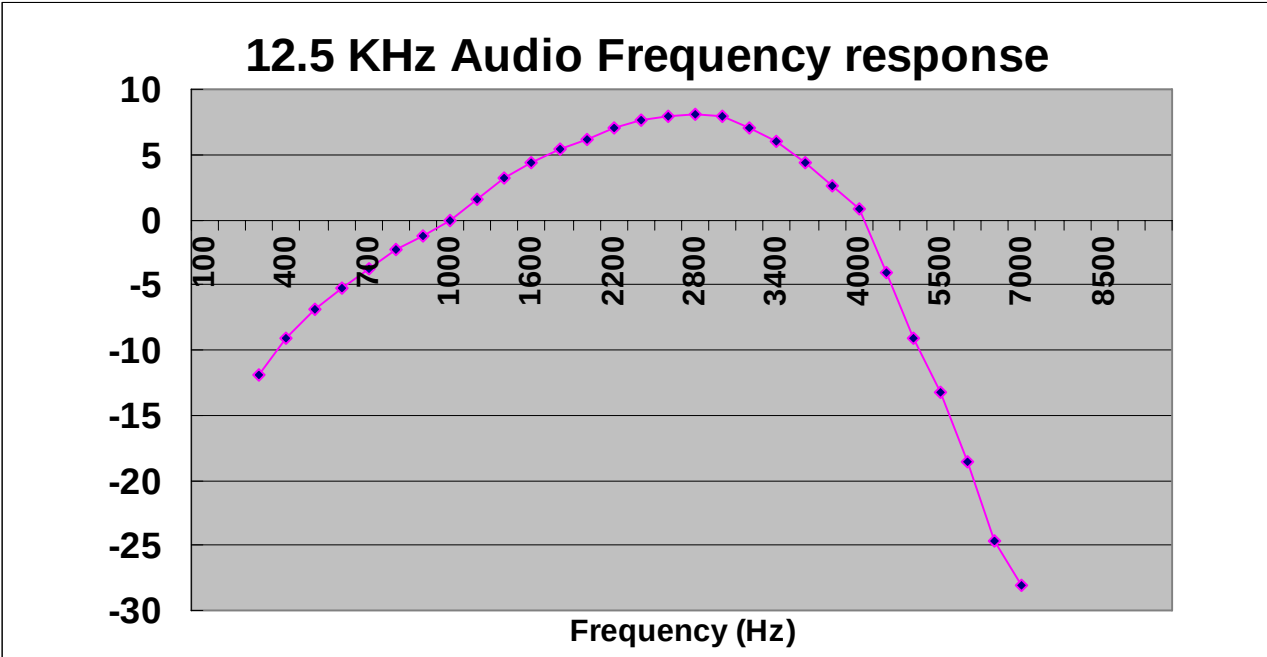

25 KHz Channel Separation For Main Radio


Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.27
400	0.36
500	0.45
600	0.56
700	0.67
800	0.78
900	0.89
1000	1.00
1200	1.23
1400	1.45
1600	1.67
1800	1.89
2000	2.09
2200	2.28
2400	2.45
2600	2.56
2800	2.59
3000	2.51
3200	2.31
3400	2.02
3600	1.70
3800	1.39
4000	1.12
4500	0.64
5000	0.37
5500	0.21
6000	0.12
6500	0.07
7000	0.05
7500	--
8000	--
8500	--
9000	--
9500	--
10000	--

Frequency Response of Middle Channel For Main Radio

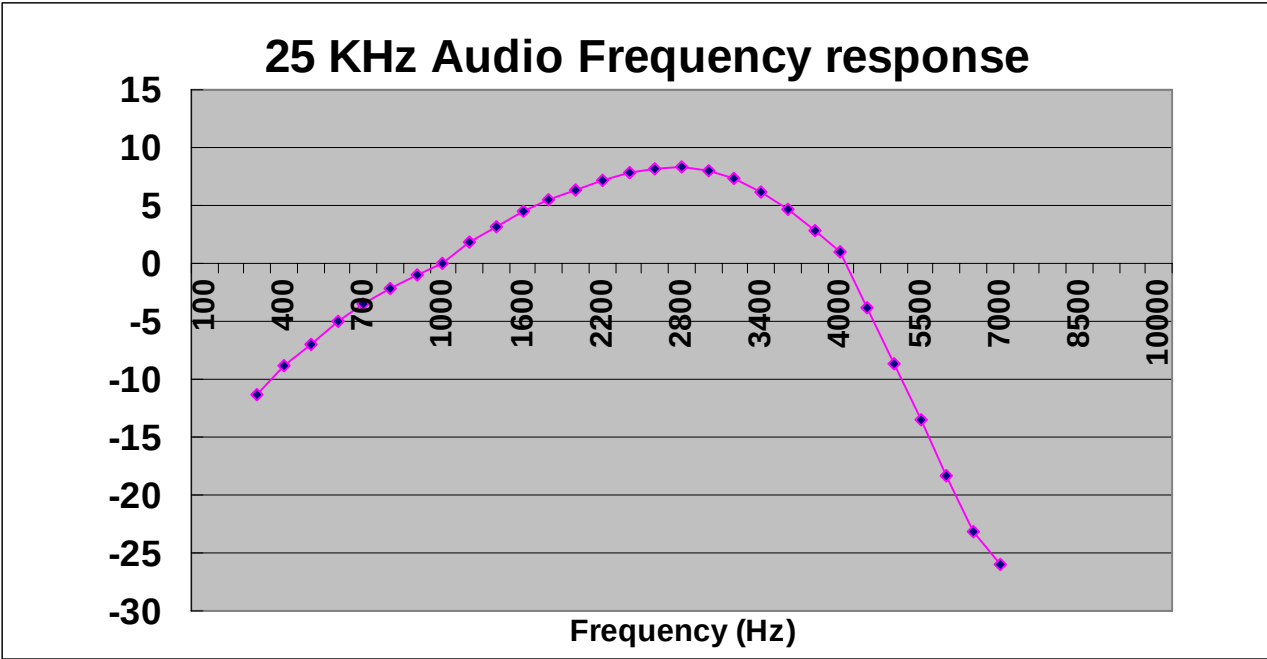

12.5 KHz Channel Separations For Salve Radio


Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.13
400	0.18
500	0.23
600	0.29
700	0.33
800	0.40
900	0.44
1000	0.52
1200	0.61
1400	0.74
1600	0.84
1800	0.96
2000	1.04
2200	1.14
2400	1.23
2600	1.27
2800	1.29
3000	1.25
3200	1.15
3400	1.01
3600	0.84
3800	0.69
4000	0.56
4500	0.31
5000	0.18
5500	0.12
6000	0.06
6500	0.03
7000	0.02
7500	--
8000	--
8500	--
9000	--
9500	--
10000	--

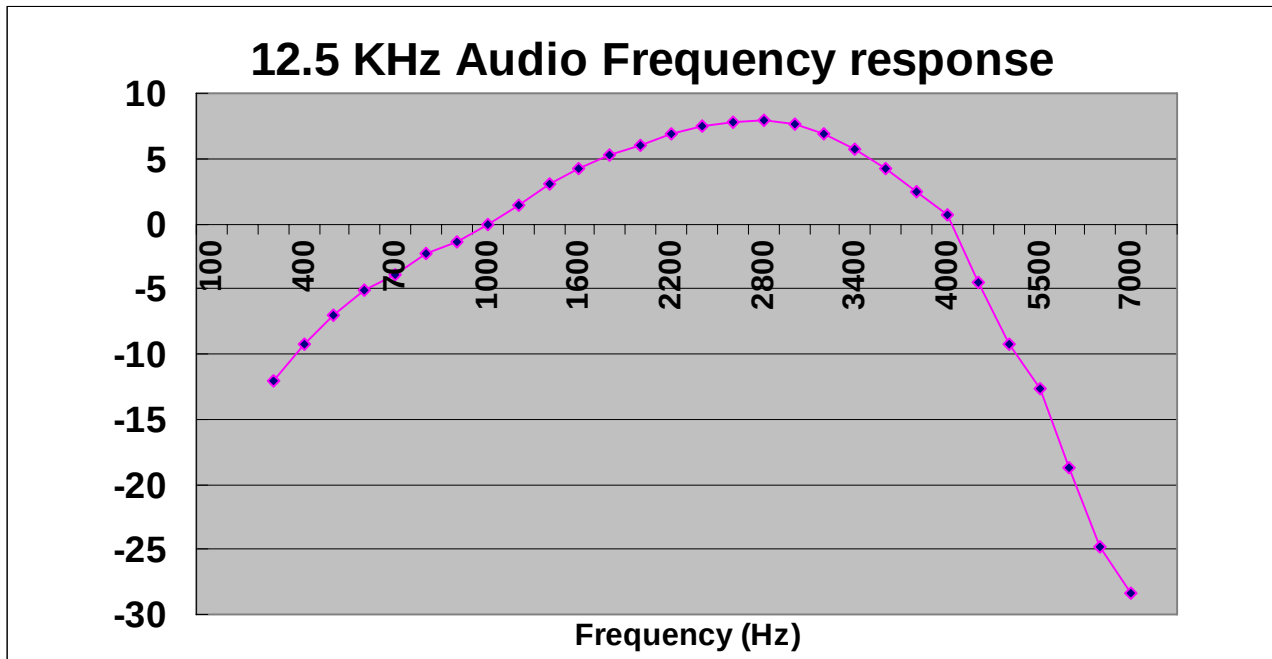Frequency Response of Middle Channel For Slave Radio

25 KHz Channel Separation For Slave Radio

Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.27
400	0.36
500	0.46
600	0.56
700	0.67
800	0.79
900	0.89
1000	1.00
1200	1.24
1400	1.45
1600	1.67
1800	1.90
2000	2.09
2200	2.28
2400	2.46
2600	2.56
2800	2.59
3000	2.52
3200	2.31
3400	2.02
3600	1.71
3800	1.39
4000	1.11
4500	0.64
5000	0.37
5500	0.21
6000	0.12
6500	0.07
7000	0.05
7500	--
8000	--
8500	--
9000	--
9500	--
10000	--

Frequency Response of Middle Channel For Slave Radio

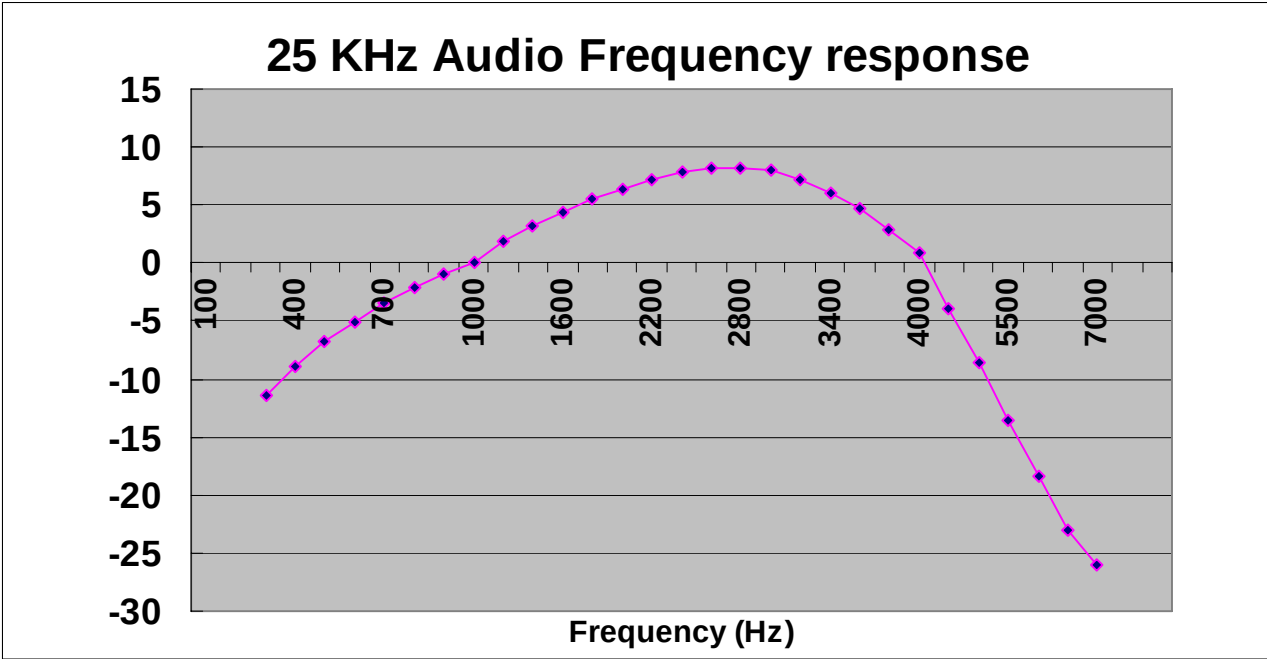

10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

10.1 Provisions Applicable

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 Test Procedure

The RF output of transceiver was conducted to a spectrum analyzer through an appropriate attenuator.

10.3 Test Instruments

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
EMI Test Receiver	R&S	ESCS30	100343	04/16/2007

10.4 Test Result

The maximum Conducted Power (CP) is

47.97 W / 47.75 W for 12.5 KHz / 25.0 KHz Channel Separation for Main Radio

47.97 W / 47.75 W for 12.5 KHz / 25.0 KHz Channel Separation for Main Radio

Calculation Formula: $CP = R + A + L$

* Note:


CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator


L : The loss of all connection cables

Conducted Power Measurement Results for Main Radio		
Channel Separation	Channel	Measurement Result
12.5 KHz	Bottom	46.79 dBm
	Middle	46.81 dBm
	Top	46.80 dBm
25 KHz	Bottom	46.77 dBm
	Middle	46.78 dBm
	Top	46.77 dBm
Conducted Power Measurement Results for Slave Radio		
Channel Separation	Channel	Measurement Result
12.5 KHz	Bottom	46.79 dBm
	Middle	46.80 dBm
	Top	46.80 dBm
25 KHz	Bottom	46.76 dBm
	Middle	46.77 dBm
	Top	46.76 dBm

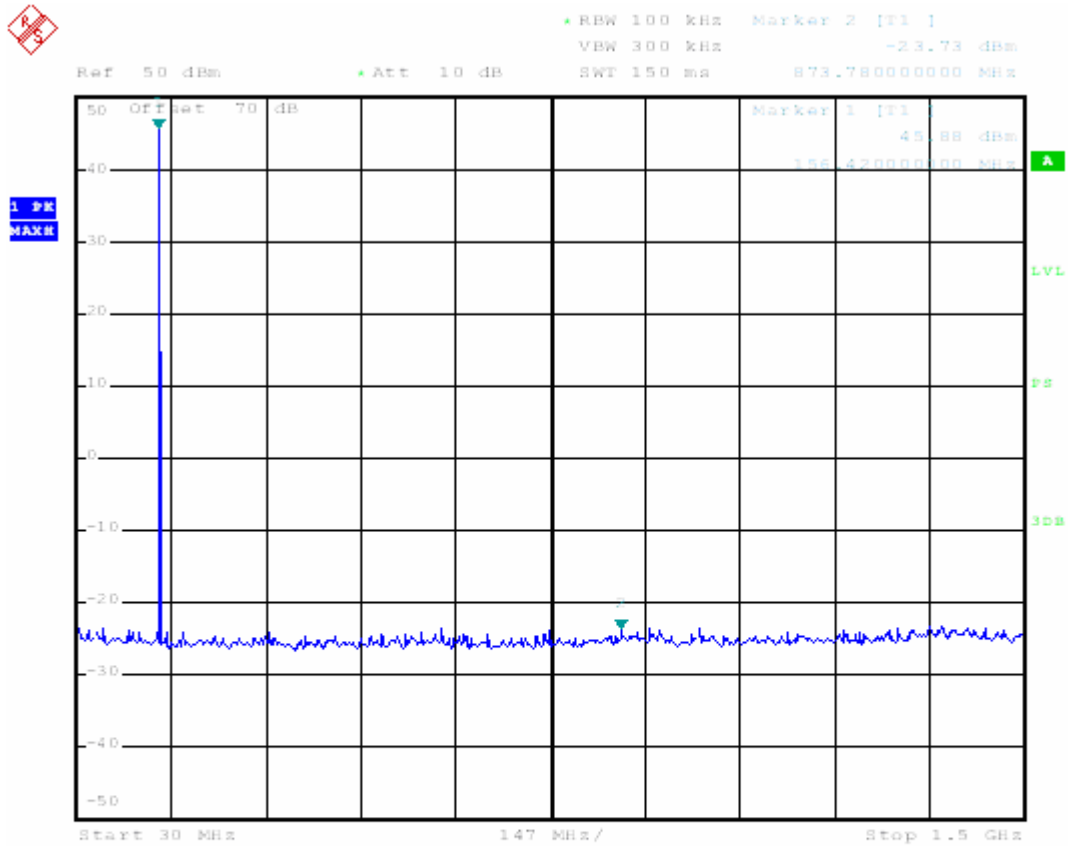Conduct spurious plot (For Main Radio)**The Worst Case of The Three Channels for Conduct Spurious Emission @ 12.5KHz**



BENS-19SA

Date: 9.JAN.2008 18:36:20

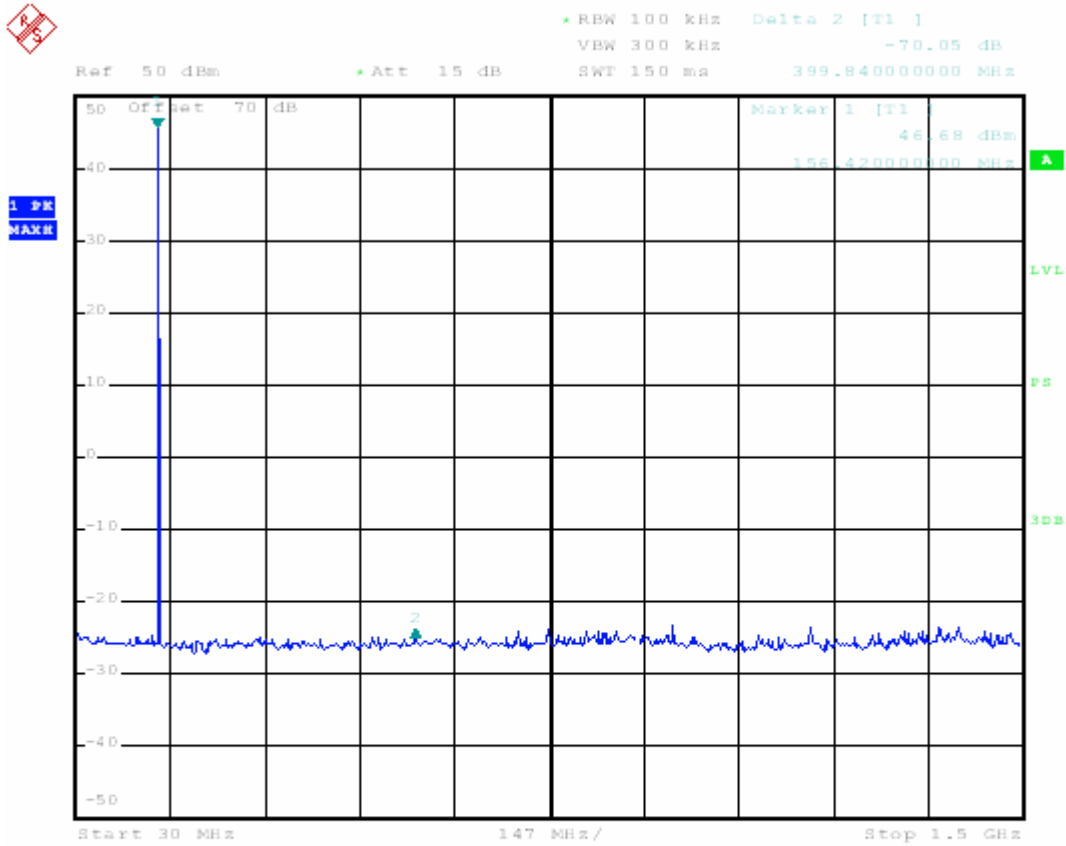The Worst Case of The Three Channels for Conduct Spurious Emission @ 25KHz

BENS-19SA

Date: 9.JAN.2008 18:39:20

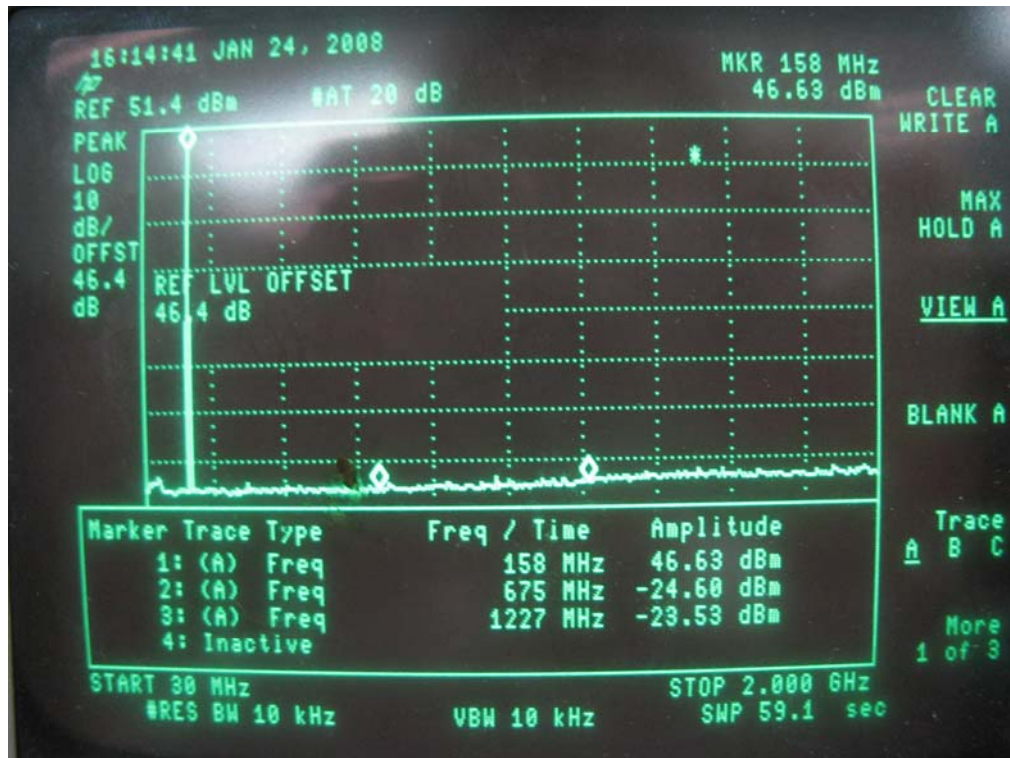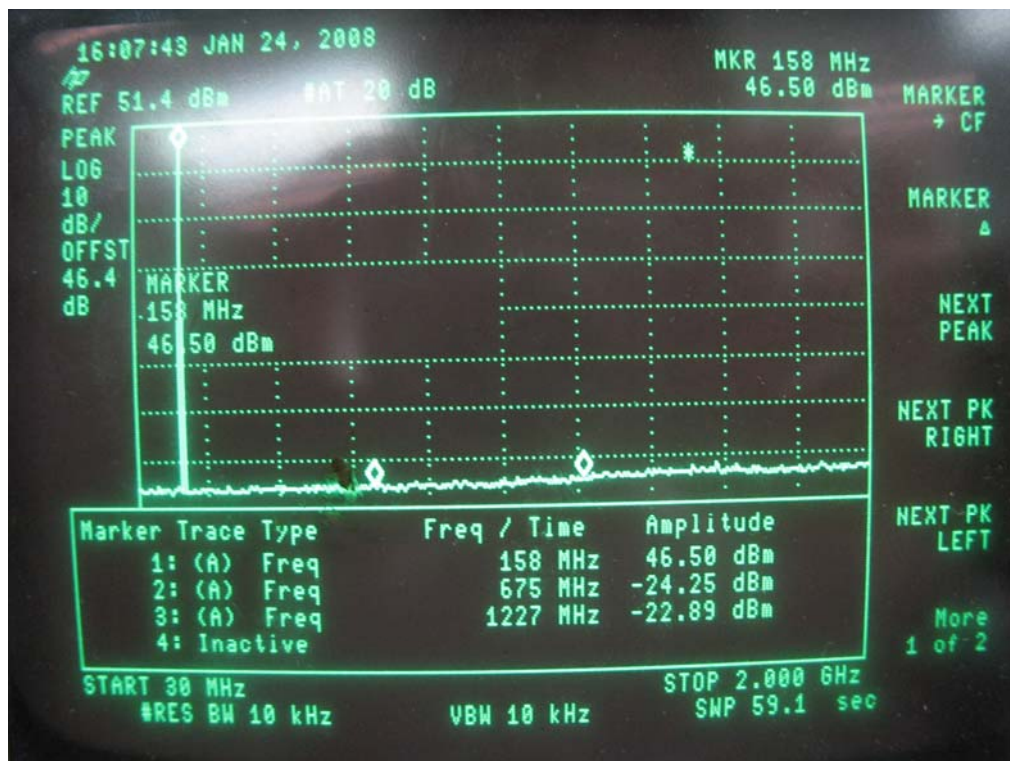Conduct spurious plot (For Slave Radio)**The Worst Case of The Three Channels for Conduct Spurious Emission @ 12.5KHz****The Worst Case of The Three Channels for Conduct Spurious Emission @ 25.0 KHz**

11 TRANSMITTER FREQUENCY BEHAVIOR

11.1 Provisions Applicable

Section 90.214

11.2 Test Method

TIA/EIA-603 2.2.19


11.3 Test Instruments

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
OSILLICOPE	TEKTRONIX	TDS3012B	B042290	2007/03/07
RF SIGNAL GENERATOR	R & S	SML01	101161	2007/07/13

11.4 Measure Result

Transmitter Frequency Behavior For Main Radio

Transmitter Frequency Behavior @ 25 KHz Channel Separation--Off to On

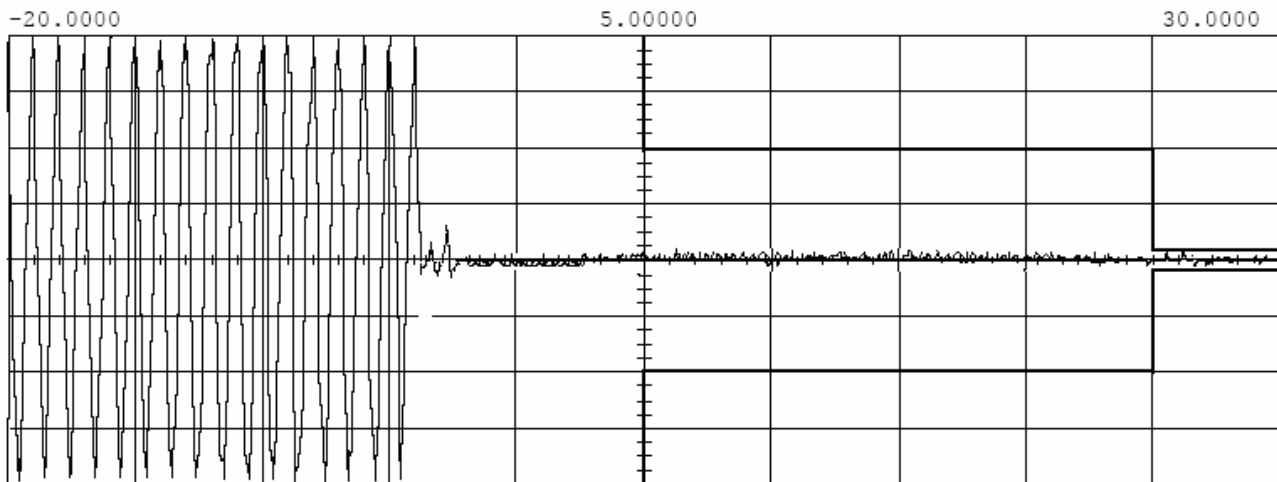


Main	Timebase	Delay/Pos	Left
	5.00 ms/div	-20.0000 ms	
Channel 1	Sensitivity	Offset	Probe
	122 mV/div	0.00000 V	1.000 :1

Measurements
V p-p (c1) = 30.971 mV
frequency (c1) = 1.00000 kHz

Trigger mode :
 On Negative Edge Of
 Trigger
 Chan2 = -970.000 mV (noise)
 Holdoff = -40.000

Transmitter Frequency Behaviour @ 25 KHz Channel Separation--On to Off

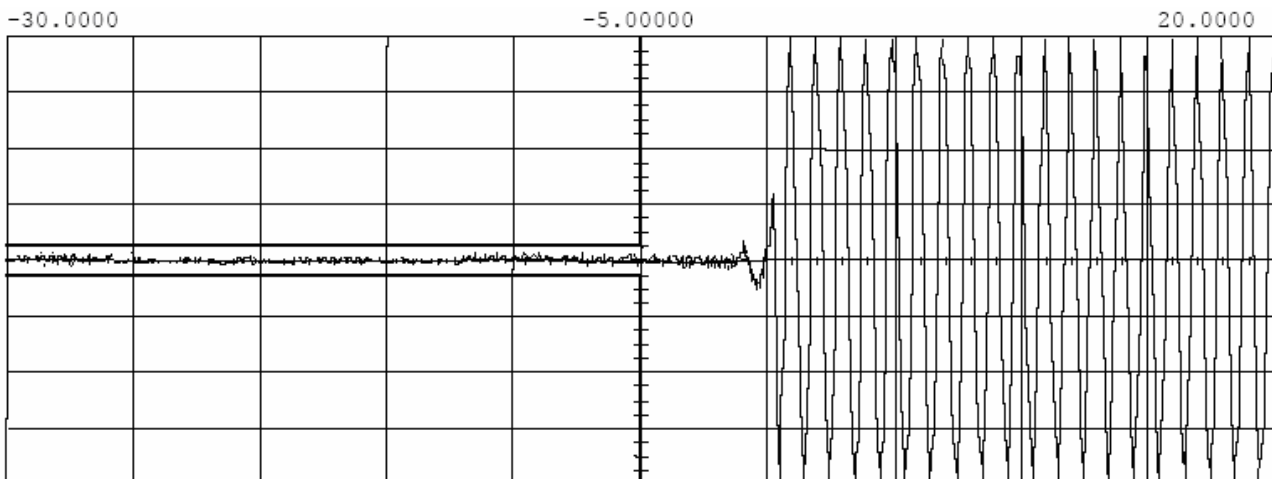


Main	Timebase	Delay/Pos	Right
	5.00 ms/div	20.0000 ms	
Channel 1	Sensitivity	Offset	Probe
	122 mV/div	0.00000 V	1.000 :1

Measurements
V p-p (c1) = 30.701 mV
frequency (c1) = 1.00000 kHz

Trigger mode :
 On Positive Edge Of
 Trigger
 Chan2 = -100.000 mV (noise)
 Holdoff = -40.000


Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

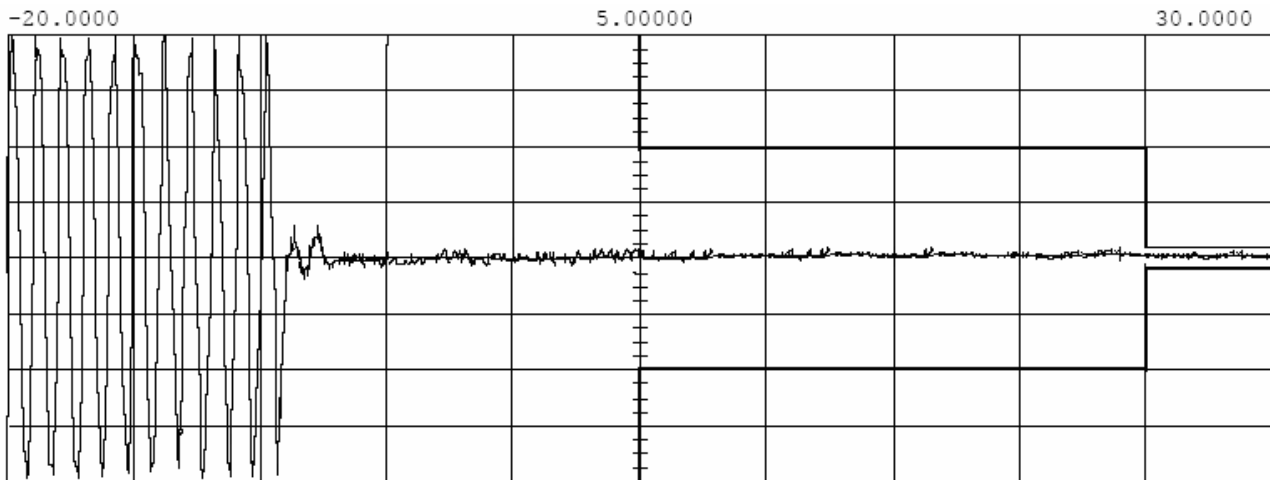

Main	Timebase 5.00 ms/div	Delay/Pos -20.0000 ms	Left	Measurements V p-p (c1) = 39.023 mV frequency (c1) = 1.00000 kHz
Channel 1	Sensitivity 66.0 mV/div	Offset 0.00000 V	Probe 1.000 :1	

Trigger mode :
On Negative Edge Of
Trigger
Chan2 = -440.000 mV (noise)
Holdoff = -40.000

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

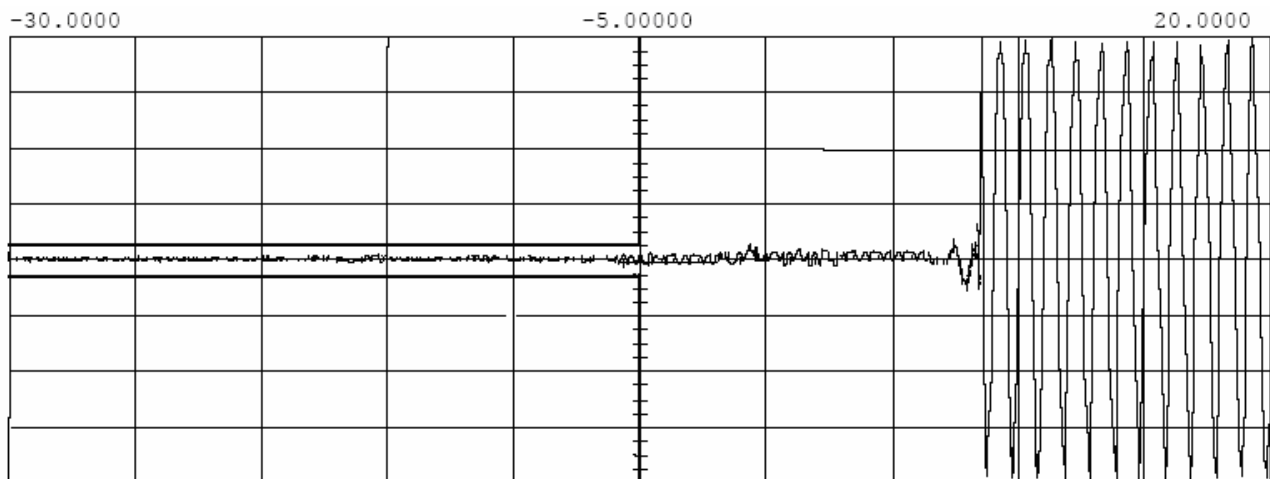


Main	Timebase 5.00 ms/div	Delay/Pos 20.0000 ms	Right	Measurements V p-p (c1) = 39.291 mV frequency (c1) = 1.00000 kHz
Channel 1	Sensitivity 66.0 mV/div	Offset 0.00000 V	Probe 1.000 :1	

Trigger mode :
On Positive Edge Of
Trigger
Chan2 = -100.000 mV (noise)
Holdoff = -40.000

Transmitter Frequency Behavior For Slave Radio

Transmitter Frequency Behavior @ 25 KHz Channel Separation--Off to On

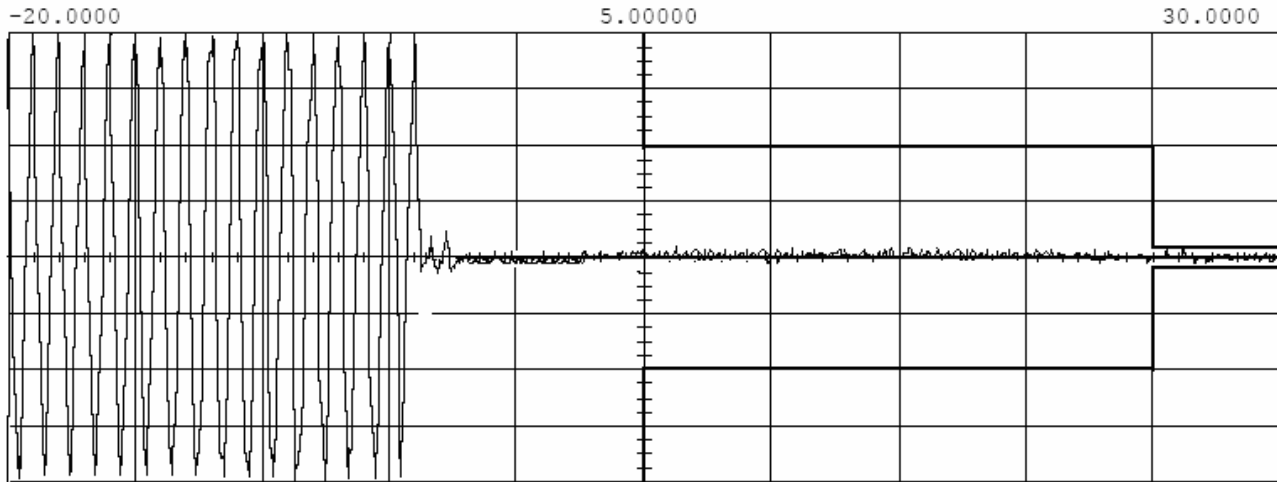


Main	Timebase 5.00 ms/div	Delay/Pos -20.0000 ms	Left
Channel 1	Sensitivity 122 mV/div	Offset 0.00000 V	Probe 1.000 :1

Measurements	
V p-p (c1) =	30.907 mV
frequency (c1) =	1.00000 kHz

Trigger mode :
 On Negative Edge Of
 Trigger
 Chan2 = -970.000 mV (noise)
 Holdoff = -40.000

Transmitter Frequency Behaviour @ 25 KHz Channel Separation--On to Off

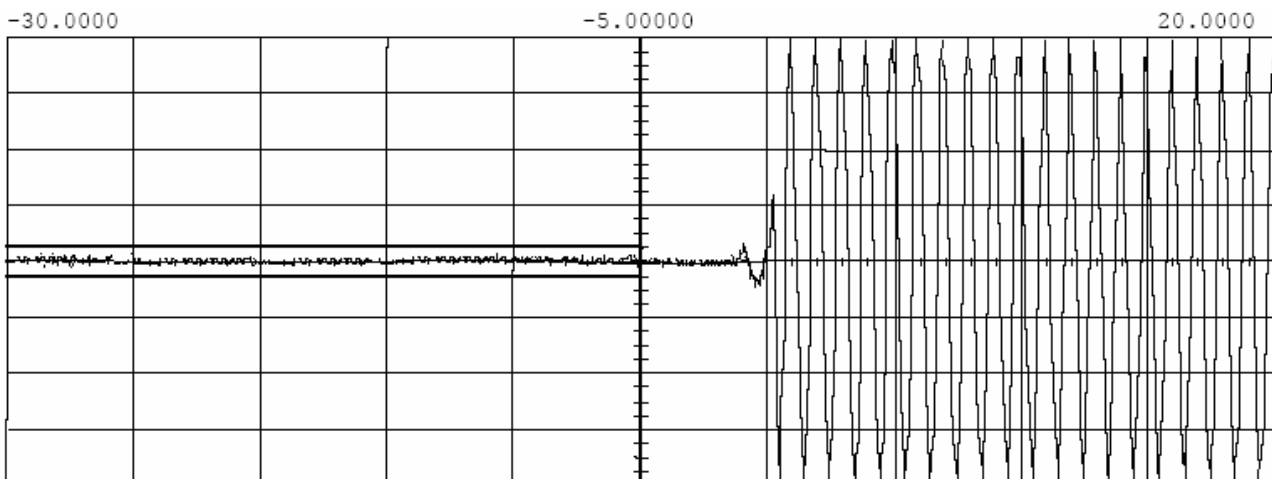


Main	Timebase 5.00 ms/div	Delay/Pos 20.0000 ms	Right
Channel 1	Sensitivity 122 mV/div	Offset 0.00000 V	Probe 1.000 :1

Measurements	
V p-p (c1) =	30.733 mV
frequency (c1) =	1.00000 kHz

Trigger mode :
 On Positive Edge Of
 Trigger
 Chan2 = -100.000 mV (noise)
 Holdoff = -40.000

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

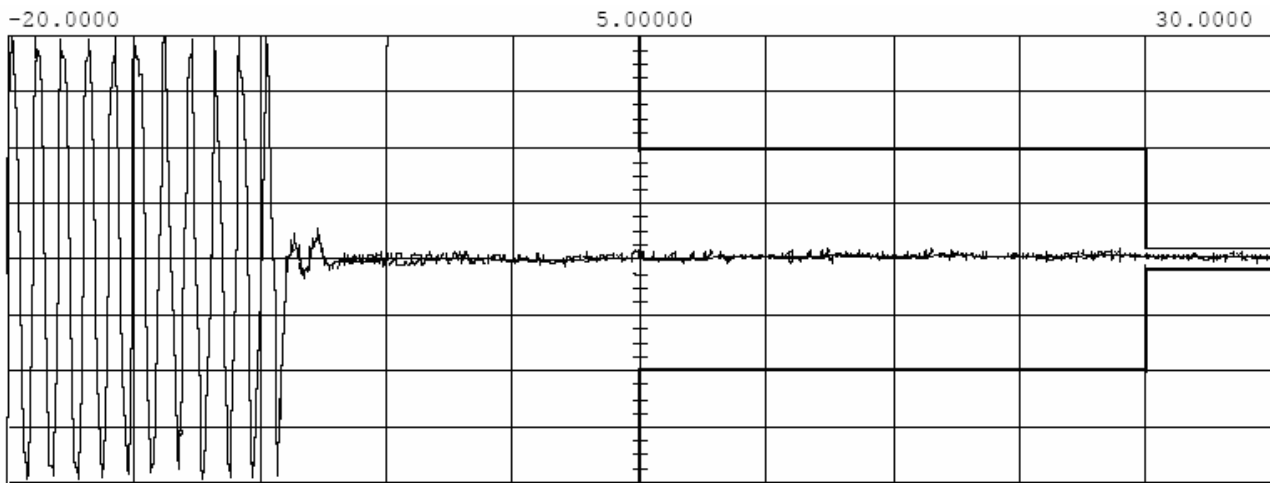


Main Timebase Delay/Pos Left Measurements
 5.00 ms/div -20.0000 ms V p-p (c1) = 39.109 mV
 frequency (c1) = 1.00000 kHz

Channel 1 Sensitivity Offset Probe
 66.0 mV/div 0.00000 V 1.000 :1

Trigger mode :
 On Negative Edge Of
 Trigger
 Chan2 = -440.000 mV (noise)
 Holdoff = -40.000

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

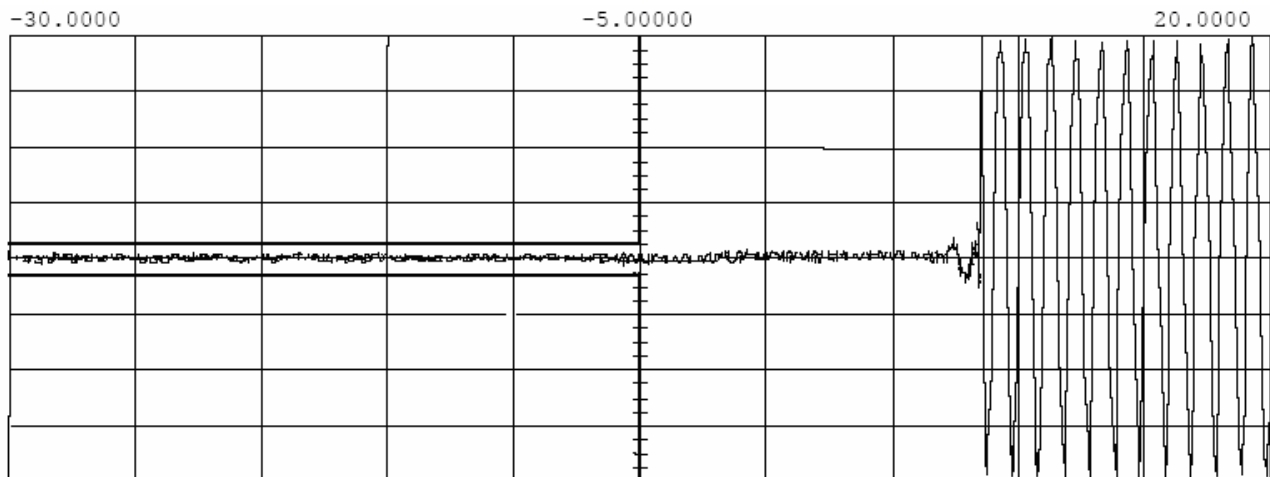

Main Timebase Delay/Pos Right Measurements
 5.00 ms/div 20.0000 ms V p-p (c1) = 38.202 mV
 frequency (c1) = 1.00000 kHz

Channel 1 Sensitivity Offset Probe
 66.0 mV/div 0.00000 V 1.000 :1

Trigger mode :
 On Positive Edge Of
 Trigger
 Chan2 = -100.000 mV (noise)
 Holdoff = -40.000

12. RADIATED EMISSION ON RECEIVING MODE

12.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

12.2 Test Method

ANSI C 63.4: 2003

12.3 Test Instruments

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
EMI Test Receiver	R&S	ESCS30	100343	2007/07/13
AMPLIFIER	HP	HP8447E	2945A02715	2007/07/13
ANTENNA	Schwarzbeck	VULB9163	9163-194	2007/07/13

12.4 Measure Result (Measured at 3m using FCC Part15 B Limits)

Radiated Emission Test Result									
Frequency	Leading Level (dBu)		Factor	Mission Level (dBuV/m)		Limit	Margin	Result	Remarks
(MHz)	Peak	Q.P.	dB	Peak	Q.P.	Q.P.	QP(dB)	(P/F)	(H/V)
157.70	32.24		-3.94	28.30		43.50	-15.20	P	H
167.44	34.88		-4.25	30.63		43.50	-12.87	P	H
177.17	40.43		-4.75	35.68		43.50	-7.82	P	H
226.95	32.78		-0.15	32.63		46.00	-13.37	P	H
246.43	33.32		-2.22	31.10		46.00	-14.90	P	H
363.13	34.68		-2.84	31.84		46.00	-14.16	P	H
39.19	41.77		-3.11	38.66		40.00	-1.34	P	V
48.93	40.05		-2.32	37.73		40.00	-2.27	P	V
60.30	40.60		-3.01	37.59		40.00	-2.41	P	V
68.95	41.05		-2.55	38.50		40.00	-1.50	P	V
177.17	36.38		-4.75	31.63		43.50	-11.87	P	V
372.95	33.82		-4.86	28.96		46.00	-17.04	P	V

13. RF EXPOSURE EVALUATION

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minute)
Limits for Occupational / Controlled Exposure				
0.3 – 3.0	614	1.63	(100)*	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100 000	/	/	5	6

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minute)
Limits for General population / Uncontrolled Exposure				
0.3 – 3.0	614	1.63	(100)*	30
3.0 – 30	842/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100 000	/	/	1.0	30

F = Frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where:

S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: **46.81(dBm)**

Maximum peak output power at antenna input terminal: **47.97(W)**

Prediction distance: **150 (cm)**

Predication frequency: **157.875(MHz)**

Antenna Gain (typical): **3.5 (dBi)**

Power density at predication frequency at **150 cm**: **0.190 (mW/cm²)**

MPE limit for controlled exposure at prediction frequency: **1.0 (mW/cm²)**

MPE limit for uncontrolled exposure at prediction frequency: **0.2 (mW/cm²)**

Test Result: Pass

APPENDIX I PHOTOGRAPHS OF SETUP

RADIATED EMISSION TEST SETUP



CONDUCTED EMISSION TEST SETUP



APPENDIX II EXTERNAL VIEW OF EUT

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE




TOP VIEW OF SAMPLE




BOTTOM VIEW OF SAMPLE




INTERNAL VIEW OF SAMPLE – 1

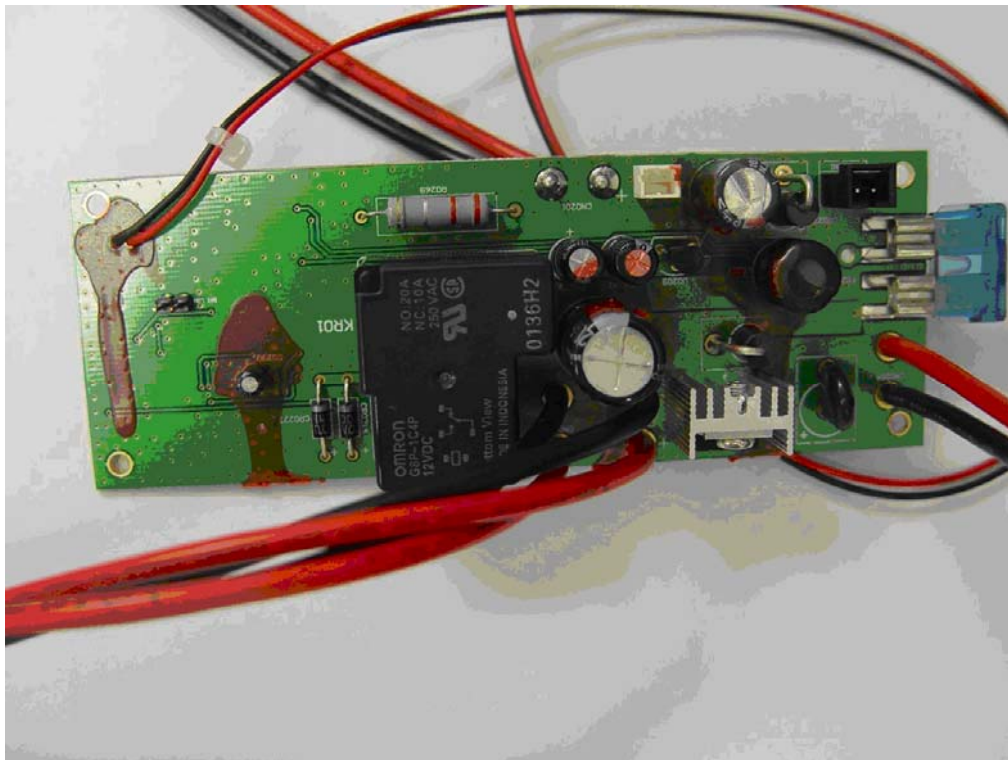


INTERNAL VIEW OF SAMPLE – 2

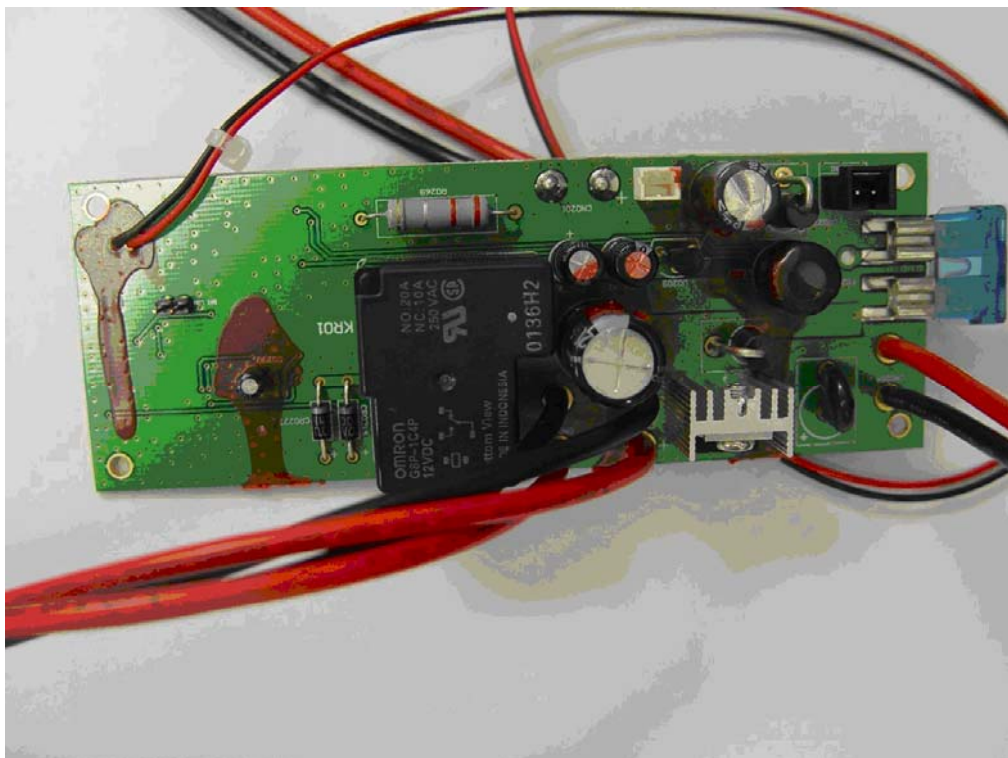


INTERNAL VIEW OF SAMPLE – 3

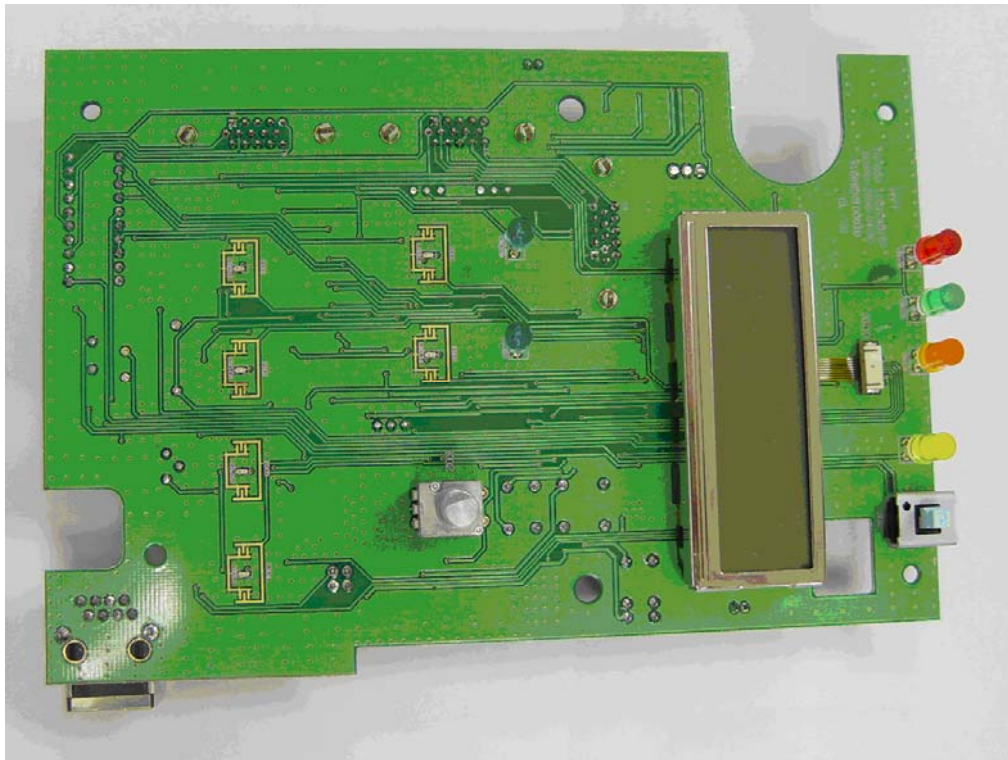


INTERNAL VIEW OF SAMPLE – 4

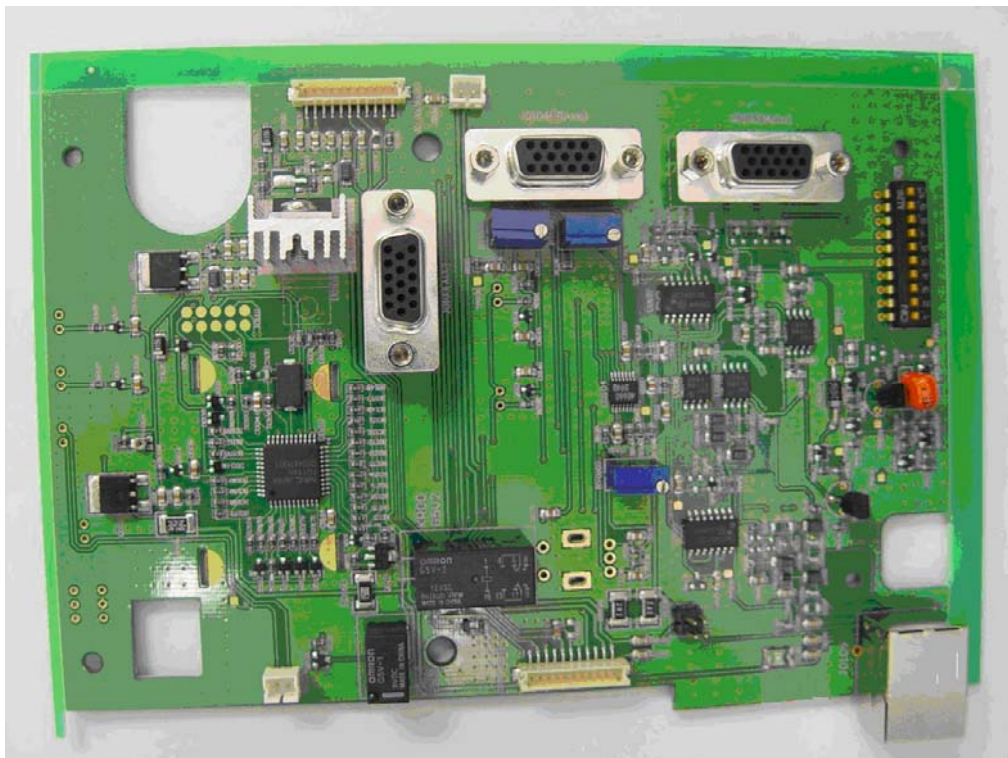

INTERNAL VIEW OF SAMPLE – 5

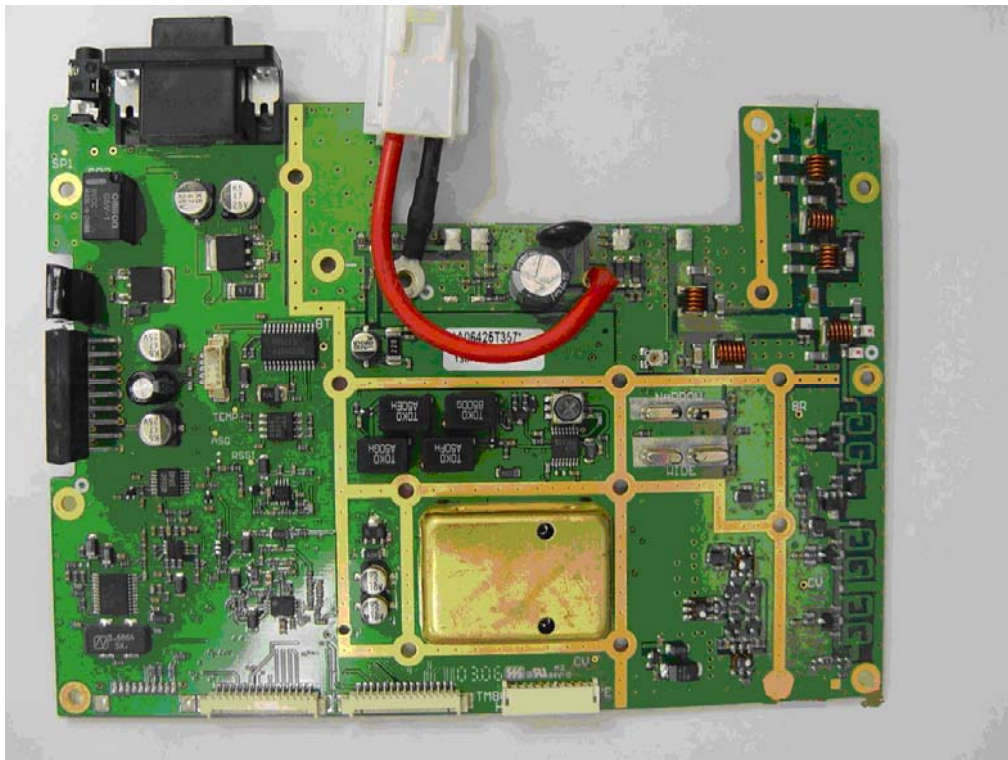

INTERNAL VIEW OF SAMPLE – 6

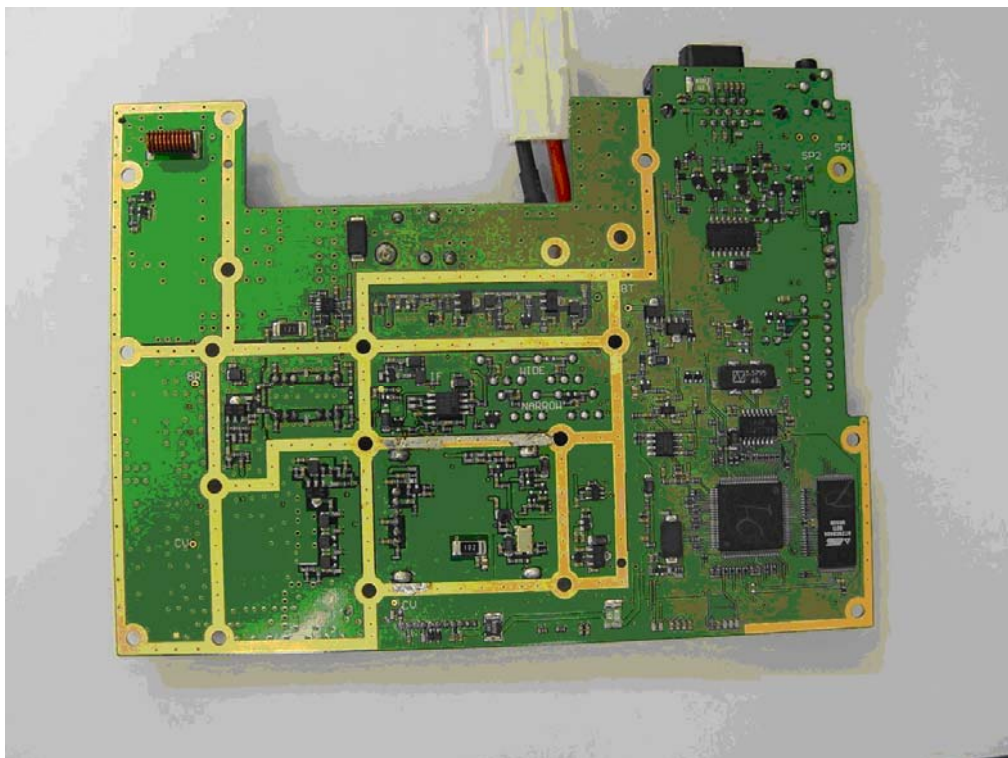

----END OF REPORT----