

Certification of Compliance

CFR 47 Part 15 Subpart B

Test Report File No. : 06-IST-0036

Date of Issue : January 26, 2006

FCC ID : R7DLD-42IU21

Model(s) : LD-42IU21 Basic Alternate

Kind of Product : LCD TV MONITOR

Applicant : IND TEK Co., Ltd.

Address : Bloc 11-1, Lot 35, Koogka 4 danji, Kumi-City, Kyoungbuk, Korea

Manufacturer : IND TEK Co., Ltd.

Address : Bloc 11-1, Lot 35, Koogka 4 danji, Kumi-City, Kyoungbuk, Korea

Test Result

Positive

Negative

Reviewed By



S.J.Cho / EMC Group Manager

Approved By



J.H.Lee / Chief

Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 23 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2003.



TABLE OF CONTENTS

| | |
|----------------------------------------------------------------------------------------------------------------|--------------------------------|
| Table of contents | 2 |
| Information of test laboratory, Environmental conditions, Power supply system used, Product information | 3 |
| Descriptions of test | |
| Conducted Emission | 4 |
| Radiated Emission | 5 |
| Measurement Uncertainty Calculations | 6 |
| Equipment Under Test | 7 |
| Test Set-Up (Figure) | 8 |
| Summary | 9 |
| ■ Test Conditions and Data - Emissions | |
| ◆ Conducted Emissions | 0.15MHz- 30MHz Applicable |
| Test Conditions / Data and Plots | 10-12 |
| ◆ Radiated Emissions | 30MHz - 1GHz Applicable |
| Test Conditions / Data and Plots | 13-19 |
| Appendix A. The Photos of Test Setup | 20-21 |
| B. The Photos of Equipment Under Test | 22-23 |

Note:

INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)
San 21-8, Goan-Ri, Baekam-Myun, Yongin-City
Kyonggi-Do, 449-860, Korea
TEL : +82 31 333 4093 FAX : +82 31 333 4094

ENVIRONMENTAL CONDITIONS

| | |
|----------------------|-----------|
| Temperature | 17.5 °C |
| Humidity | 34 % |
| Atmospheric pressure | 1014 mbar |

POWER SUPPLY SYSTEM USED

Power supply system AC 120V, 60Hz
(Refer to the product information)

PRODUCT INFORMATION

Type: 42Inch Flat Panel LCD
Resolution (Max): 1600 x 1200, @60Hz
Power: AC100~240, 50/60Hz, 240W

- EMC suppression device is not used during the test.
- Please refer to user's manual.



DESCRIPTIONS OF TEST

Conducted Emissions:

The measurement were performed over the frequency range of 0.15MHz to 30MHz using a $50\Omega/50\mu\text{H}$ LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

-Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S 3725/2 and Hyup-Rip KNW-407 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the LISN. The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

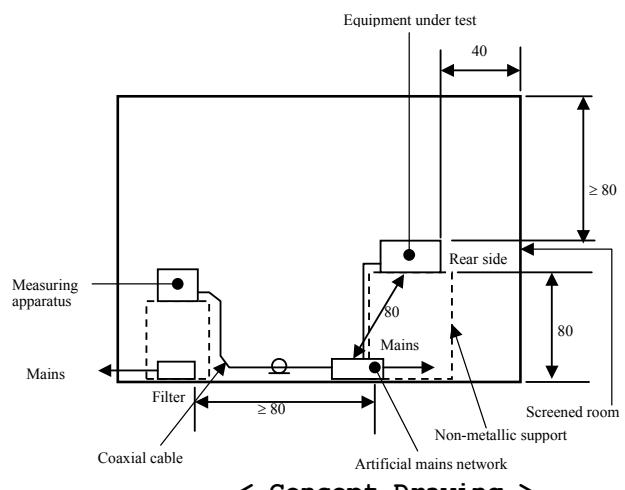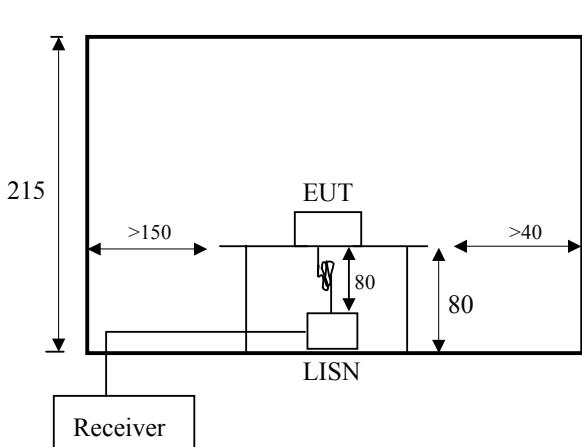


DESCRIPTION OF TEST

Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

-Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1000MHz using S/B LogBicon antenna VL9160. Under 30MHz, magnetic loop antenna were used. Final measurements were made at open site with 3-meters test distance using the same antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

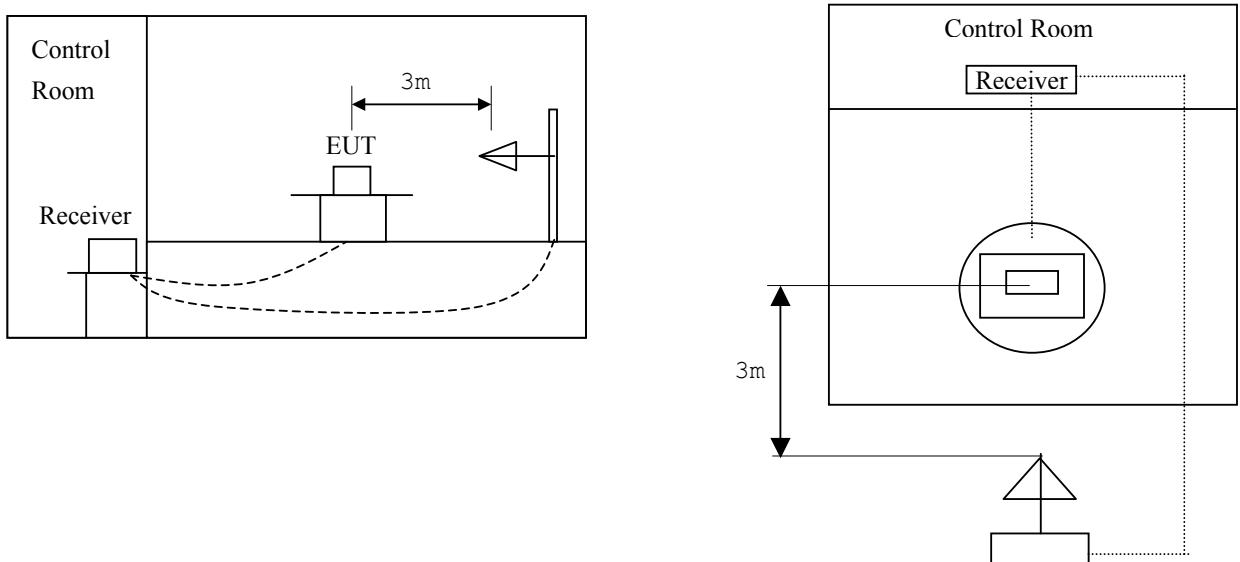

Measurement Uncertainty Calculations

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

| Contribution (Conducted Emissions) | Probability Distribution | Uncertainty (\pm dB) |
|----------------------------------------|-----------------------------|-------------------------|
| | | 0.15-30MHz |
| Receiver Specification | Rectangular | 1.5 |
| LISN Coupling Specification | Rectangular | 1.5 |
| Cable and Input Attenuator Calibration | Normal (k=2) | 0.5 |
| Mismatch to Receiver | U-Shaped | -0.8 / +0.7 |
| System Repeatability | Normal (k=1) | 0.2 |
| Combined Standard Uncertainty | Normal (k=2) | -1.85 / +1.71 |
| Expanded Uncertainty U | Normal (k=2) | -3.7 / +3.42 |

$U_{c,minus} = -1.85$, $U_{c,plus} = 1.71$

$U = -3.70 / +3.42$ (k=2, 95.45% confidence level)

| Contribution (Radiated Emissions) | Probability Distribution | Uncertainties (\pm dB) |
|-----------------------------------------------------------------------------------------|-----------------------------|---------------------------|
| | | 3 m |
| Antenna Factor | Normal (k=2) | 0.9968 |
| Frequency Interpolation | Rectangular | 0.1039 |
| Height Variation | Rectangular | -2.6 / +1.5 |
| Directivity Difference | Rectangular | -1.0 / +0 |
| Phase Center Location | Rectangular | 1.0 |
| Cable Loss | Normal (k=2) | 0.5 |
| Receiver | | |
| Voltage Accuracy | Normal (k=2) | 2.0 |
| Pulse Response | Rectangular | 1.5 |
| Absolute Repetition Rate | Rectangular | 1.5 |
| Mismatch to Receiver $\Gamma_{antenna}$ = 0.33 $\Gamma_{receiver}$ = 0.33 | U-Shaped | -1.0 / +0.9 |
| System Repeatability | Std Deviation | 0.5 |
| Combined Standard Uncertainty | Normal | -2.6048 / 2.2775 |
| Expanded Uncertainty U | Normal (k=2) | -5.21 / +4.55 |

$U_{c,minus} = -2.6048$, $U_{c,plus} = 2.2775$

$U = -5.21 / +4.55$ (k=2, 95.45% confidence level)

Equipment Under Test

EUT Type :

- Table-Top.
- Floor-Standing.
- Table-Top and Floor-Standing(Combination).

Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby Mode
- Operational Condition : Display scrollong 'H' pattern on the windows

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :


| Equipment | Type | Brand | Serial No. | FCC Compliance Info. |
|----------------|-----------------|------------------|-------------|----------------------|
| PC | Vectra VL420 MT | HP | SG21208253 | DOC |
| Keyboard(PS/2) | SK-2502C | HP | M020321534 | DOC |
| Mouse(PS/2) | M-S48a | HP | LZC20660272 | JNZ201213 |
| Mouse(Serial) | M-M28 | Logitech | N/A | DZL210365 |
| Printer | A0302380 | Northern Telecom | 2516S60951 | BS46XU225C-L |

Connecting Interface Cables :


- Unshielded AC power cable : 1.8 m
- Shielded monitor signal(D-sub) cable (with two ferrite core) : 1.6 m
- Unshielded keyboard(PS/2) signal cable (without ferrite core) : 1.8 m
- Unshielded mouse(PS/2) signal cable (without ferrite core) : 1.8 m
- Unshielded mouse(Serial) signal cable (without ferrite core) : 1.6 m
- Unshielded printer(Parallel) signal cable (without ferrite core) : 1.8 m
- Unshielded stereo sound signal cable (with two ferrite core) : 1.8 m

Note :

Test Set-Up

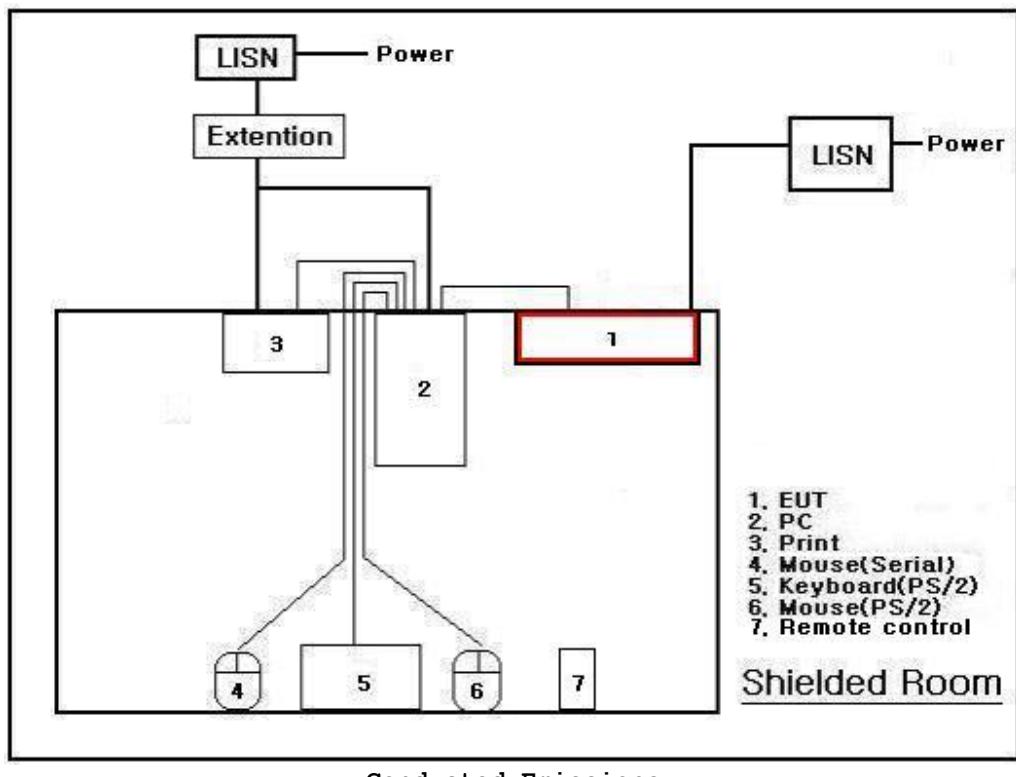

Conducted Emissions

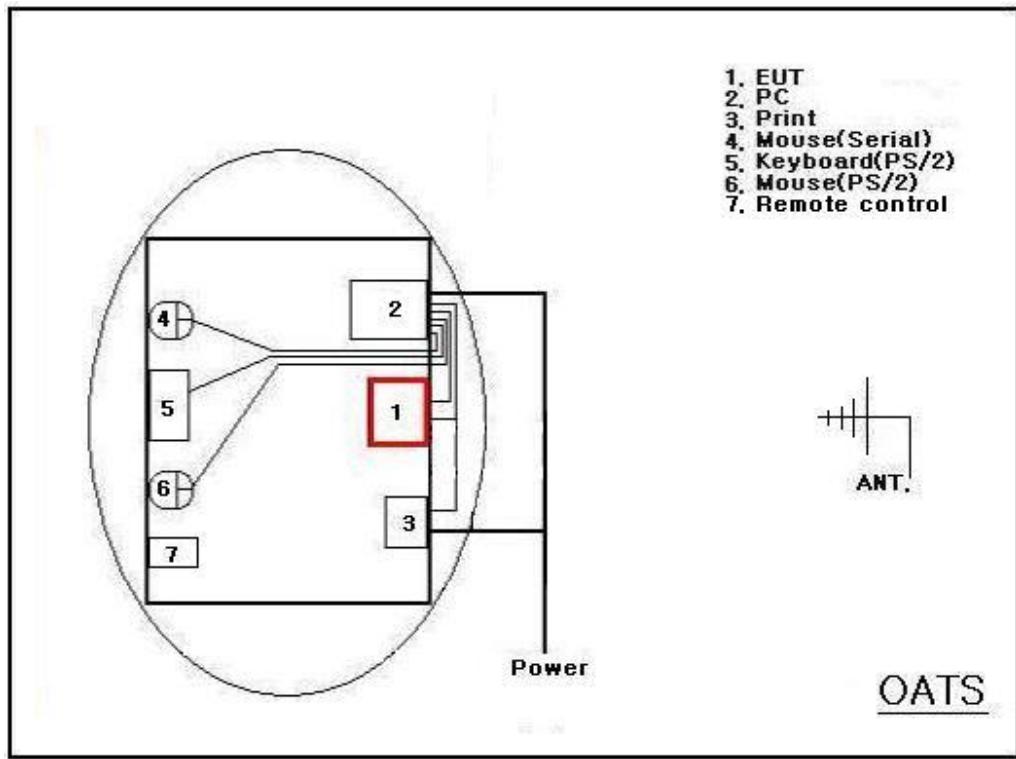

Radiated Emissions

SUMMARY

Emissions

■ Conducted Emission

Test Rule Part 15.107(c)

The requirements are

MET

Not MET

Minimum limit margin

3.72dB at 0.292MHz

Maximum limit exceeding

Remarks : Limits are kept with more 3dB margin.

Find the test data in following pages 11 to 12.

■ Radiated Emission

Test Rule Part 15.109(a)(e)

The requirements are

MET

Not MET

Minimum limit margin

3.41dB at 113.19MHz

Maximum limit exceeding

Remarks : Limits are kept with more 3dB margin.

Find the test data in following page 14 to 19.

test Date

Begin of testing : Jan. 18, 2006

End of testing : Jan. 25, 2006

Prepared By

Note :

- ■ means the test is applicable,
- □ is not applicable.



S.J.OH / EMC Engineer

TEST CONDITIONS AND DATA

Conducted Emissions

[Applicable]

◆ Test Equipment Used

| Model Name | Description | Manufacture | Calibration Date | Serial Number |
|------------|---------------|-----------------|------------------|---------------|
| ESH 3 | Test Receiver | Rohde & Schwarz | Jul. 12, 2005 | 892108/018 |
| 3725/2 | LISN | Rohde & Schwarz | Jul. 12, 2005 | 9101-2068 |
| KNW-407 | LISN | Hyup-Rip | Jul. 12, 2005 | 9101-2068 |
| ESH 3-ZZ | Pulse limiter | Rohde & Schwarz | Jul. 12, 2005 | 357.8810.52 |

◆ Test Accessories Used

| Type | Manufacturer |
|-------------------|--------------|
| Aneroid Barometer | Sato |
| Hygrometer | Sato |


◆ Test Program See the operation in page 7.

◆ Test Date Jan. 18, 2006

◆ Test Area Shielded Room (for Conducted Emission test)

Note : The equipment used is calibrated in regular for every year.

Conducted Emissions

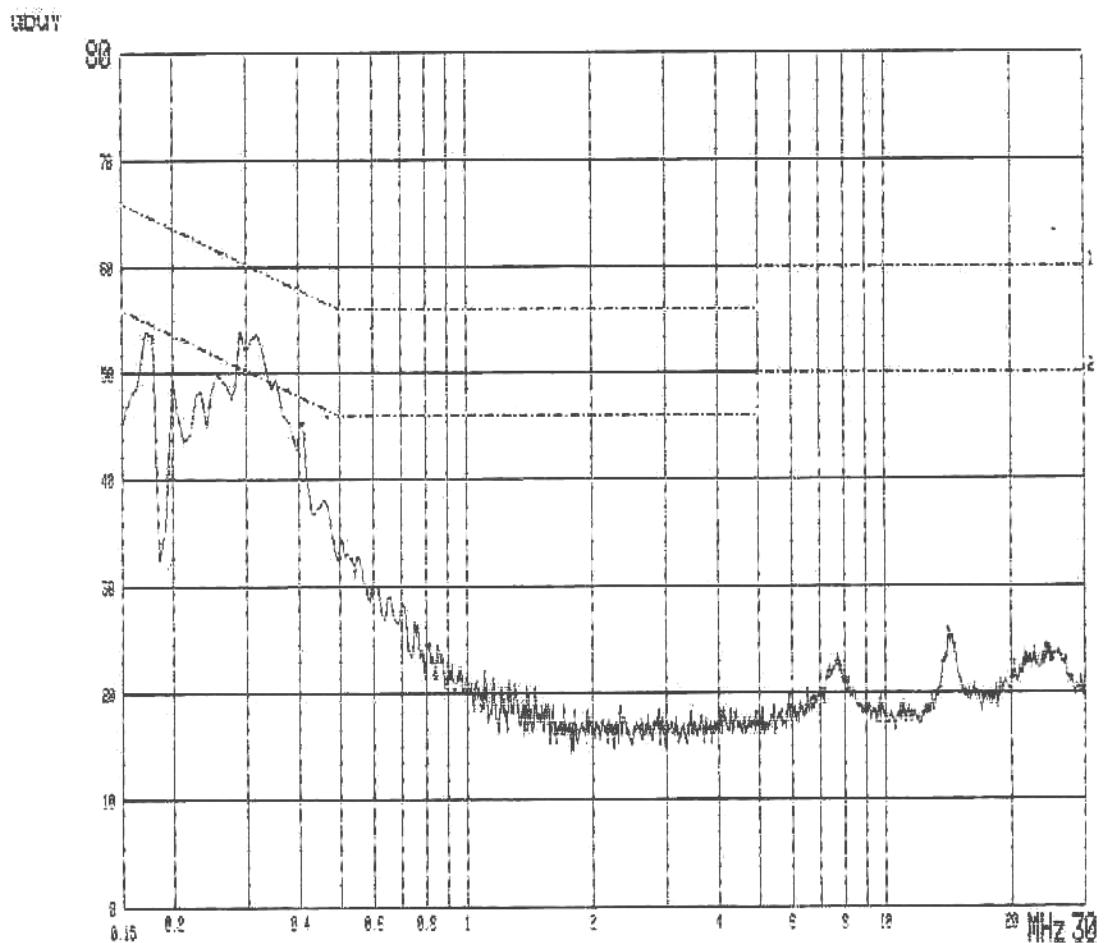


MODEL NAME : LD-42IU21
120Vac 60Hz PHASE : LIVE

| Freq. [MHz] | Measurement [dB μ V] | | Limit [dB μ V] | | Insertion Loss [dB] | Cable Loss [dB μ V] | Result [dB μ V] | | Margin [dB] | |
|----------------|-----------------------------|---------|-----------------------|---------|---------------------------|-------------------------------|------------------------|---------|----------------|---------|
| | Q-peak | Average | Q-peak | Average | | | Q-peak | Average | Q-peak | Average |
| 0.175 | 51.50 | 49.30 | 64.72 | 54.72 | 0.34 | 0.20 | 52.04 | 49.84 | 12.68 | 4.88 |
| 0.292 | 49.80 | 46.10 | 60.47 | 50.47 | 0.26 | 0.39 | 50.45 | 46.75 | 10.02 | 3.72 |
| 0.315 | 50.10 | 20.40 | 59.84 | 49.84 | 0.25 | 0.40 | 50.75 | 21.05 | 9.09 | 28.79 |

Note :

Conducted Emissions

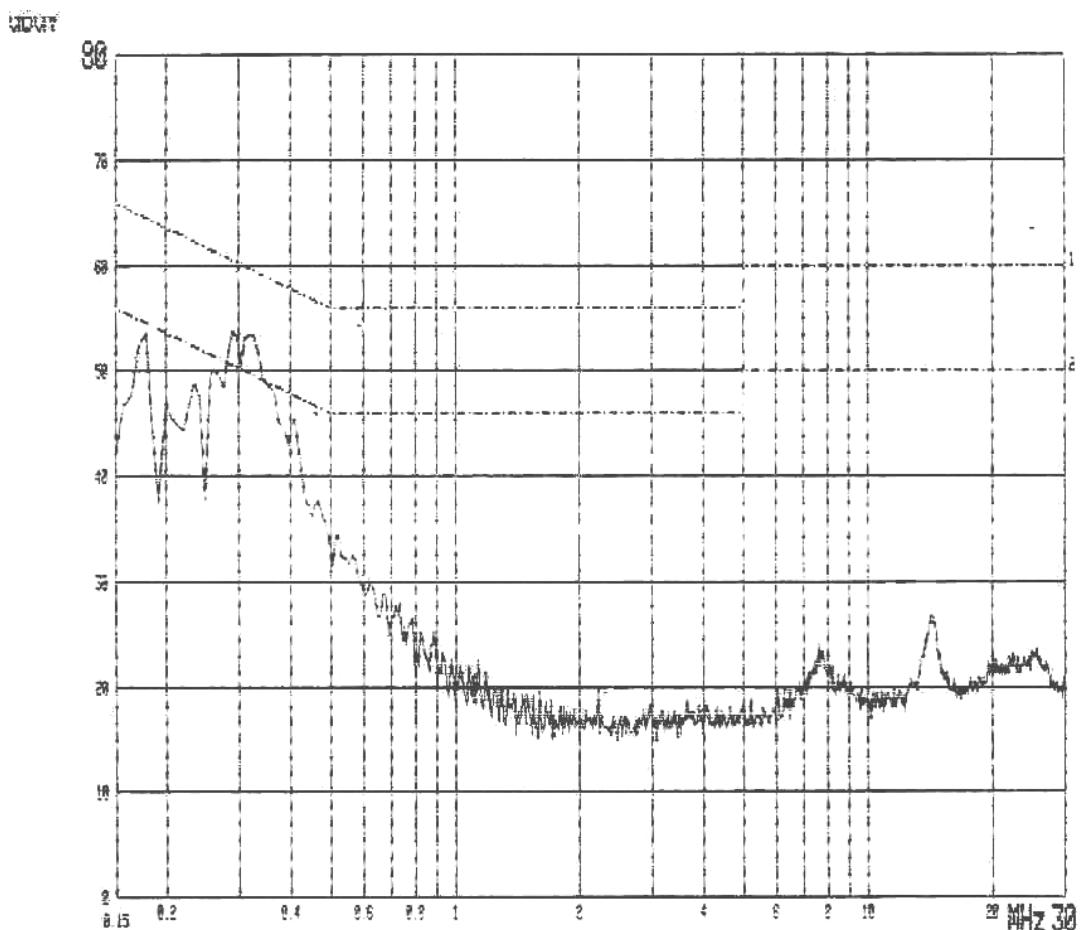

MODEL NAME : LD-42IU21
 120Vac 60Hz PHASE : NEUTRAL

| Freq. [MHz] | Measurement [dB μ V] | | Limit [dB μ V] | | Insertion Loss [dB] | Cable Loss [dB μ V] | Result [dB μ V] | | Margin [dB] | |
|----------------|-----------------------------|---------|-----------------------|---------|---------------------------|-------------------------------|------------------------|---------|----------------|---------|
| | Q-peak | Average | Q-peak | Average | | | Q-peak | Average | Q-peak | Average |
| 0.175 | 50.90 | 49.20 | 64.72 | 54.72 | 0.34 | 0.20 | 51.44 | 49.74 | 13.28 | 4.98 |
| 0.292 | 49.10 | 46.00 | 60.47 | 50.47 | 0.26 | 0.39 | 49.75 | 46.65 | 10.72 | 3.82 |
| 0.324 | 48.90 | 15.80 | 59.60 | 49.60 | 0.25 | 0.40 | 49.55 | 16.45 | 10.05 | 33.15 |

Note :

TEST CONDITIONS AND DATA

Radiated Emission

[Applicable]

◆ Test Equipment Used

| Name | Type | Manufacturer | Calibration Date | Serial Number |
|-----------|---------------|-----------------|------------------|---------------|
| ESVS10 | Test Receiver | Rohde & Schwarz | Aug. 16, 2005 | 839049/004 |
| VULB 9160 | LogBicon Ant. | Schwarzbeck | Aug. 23, 2005 | 3048 |

◆ Test Accessories Used

| Type | Manufacturer |
|-------------------|--------------|
| Aneroid Barometer | Sato |
| Hygrometer | Sato |

◆ Test Program See the operation in page 7.

◆ Test Date Jan. 25, 2006

◆ Test Area Open Area Test Site No.2


Note : The equipment used is calibrated in regular for every year.

Radiated Emissions

| Freq. [MHz] | Reading [dBuV] | Antenna Factor [dB/m] | Cable Loss [dB] | Polar. [H/V] | Limit [dBuV/m] | Result [dBuV/m] | Margin [dB] |
|----------------|-------------------|-----------------------------|-----------------------|-----------------|-------------------|--------------------|----------------|
| 50.18 | 15.60 | 11.38 | 1.30 | V | 40.0 | 28.28 | 11.72 |
| 61.10 | 17.80 | 11.95 | 1.42 | V | 40.0 | 31.17 | 8.83 |
| 74.82 | 19.70 | 8.46 | 1.64 | H | 40.0 | 29.80 | 10.20 |
| 113.25 | 24.80 | 11.11 | 2.39 | H | 43.5 | 38.30 | 5.20 |
| 161.97 | 16.10 | 13.14 | 3.12 | H | 43.5 | 32.36 | 11.14 |
| 249.97 | 17.00 | 11.04 | 4.29 | H | 46.0 | 32.33 | 13.67 |
| 400.50 | 21.30 | 14.83 | 5.50 | H | 46.0 | 41.63 | 4.37 |
| 552.20 | 4.50 | 18.16 | 6.24 | H | 46.0 | 28.90 | 17.10 |

Note : 800 x 600, 85Hz mode

MEASUREMENT OF DISTURBANCE RADIATION

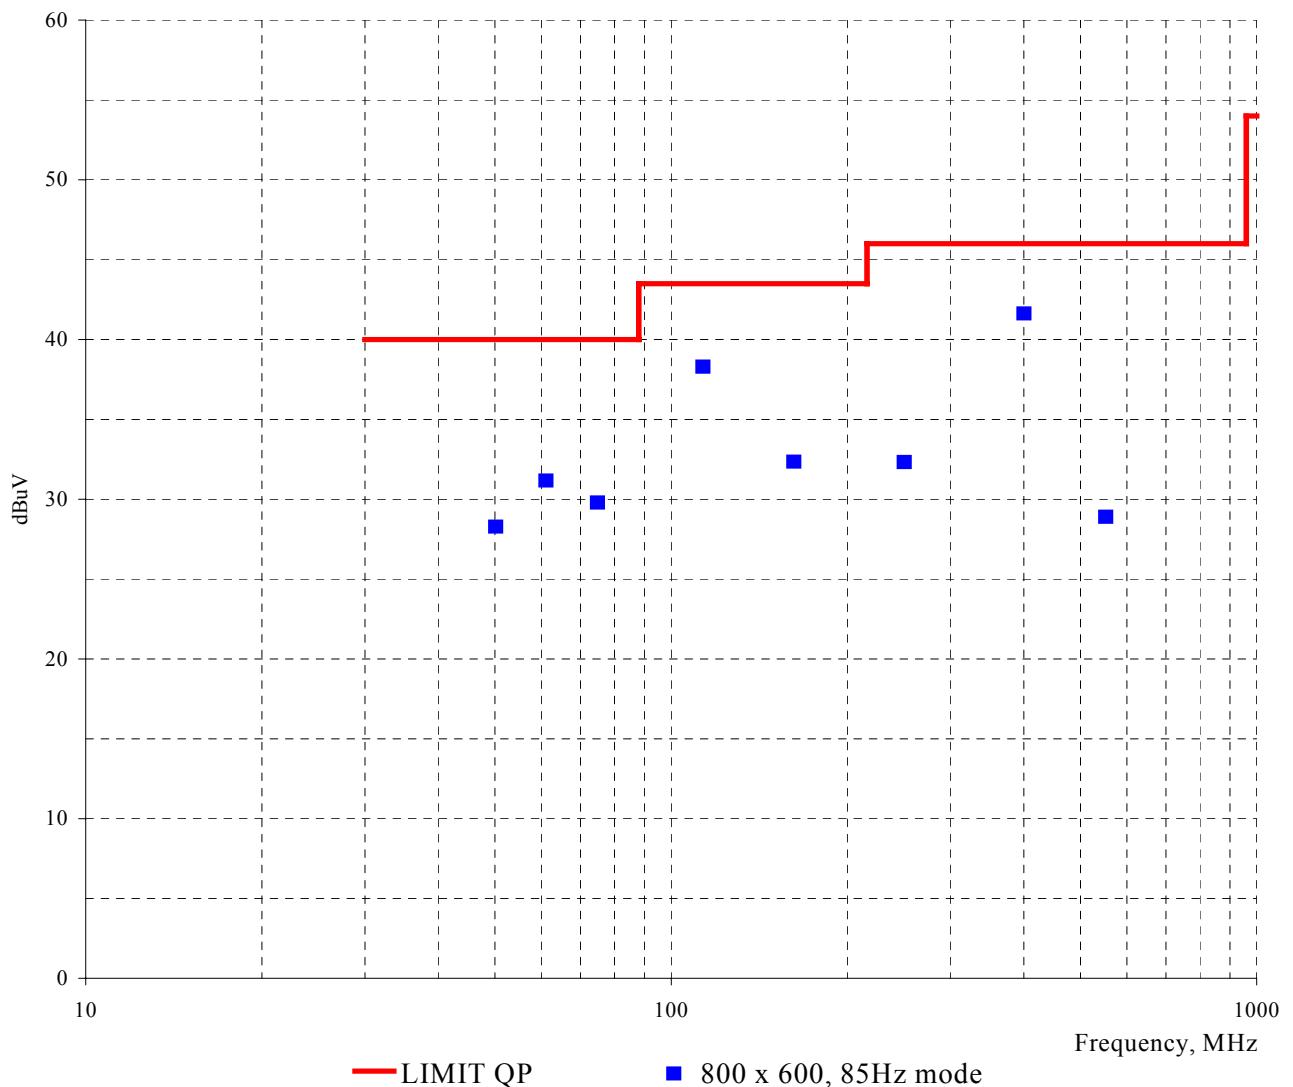


Radiated Emissions

| Freq. [MHz] | Reading [dBuV] | Antenna Factor [dB/m] | Cable Loss [dB] | Polar. [H/V] | Limit [dBuV/m] | Result [dBuV/m] | Margin [dB] |
|----------------|-------------------|-----------------------------|-----------------------|-----------------|-------------------|--------------------|----------------|
| 50.20 | 15.10 | 11.38 | 1.30 | V | 40.0 | 27.78 | 12.22 |
| 61.10 | 16.50 | 11.95 | 1.42 | V | 40.0 | 29.87 | 10.13 |
| 74.42 | 21.20 | 8.51 | 1.64 | H | 40.0 | 31.35 | 8.65 |
| 113.20 | 25.90 | 11.11 | 2.39 | V | 43.5 | 39.40 | 4.10 |
| 161.97 | 16.20 | 13.14 | 3.12 | H | 43.5 | 32.46 | 11.04 |
| 250.00 | 15.20 | 11.05 | 4.30 | H | 46.0 | 30.55 | 15.45 |
| 401.00 | 21.80 | 14.85 | 5.51 | H | 46.0 | 42.16 | 3.84 |
| 552.16 | 4.10 | 18.16 | 6.24 | V | 46.0 | 28.50 | 17.50 |

Note : 1280 x 1024, 85Hz mode

MEASUREMENT OF DISTURBANCE RADIATION

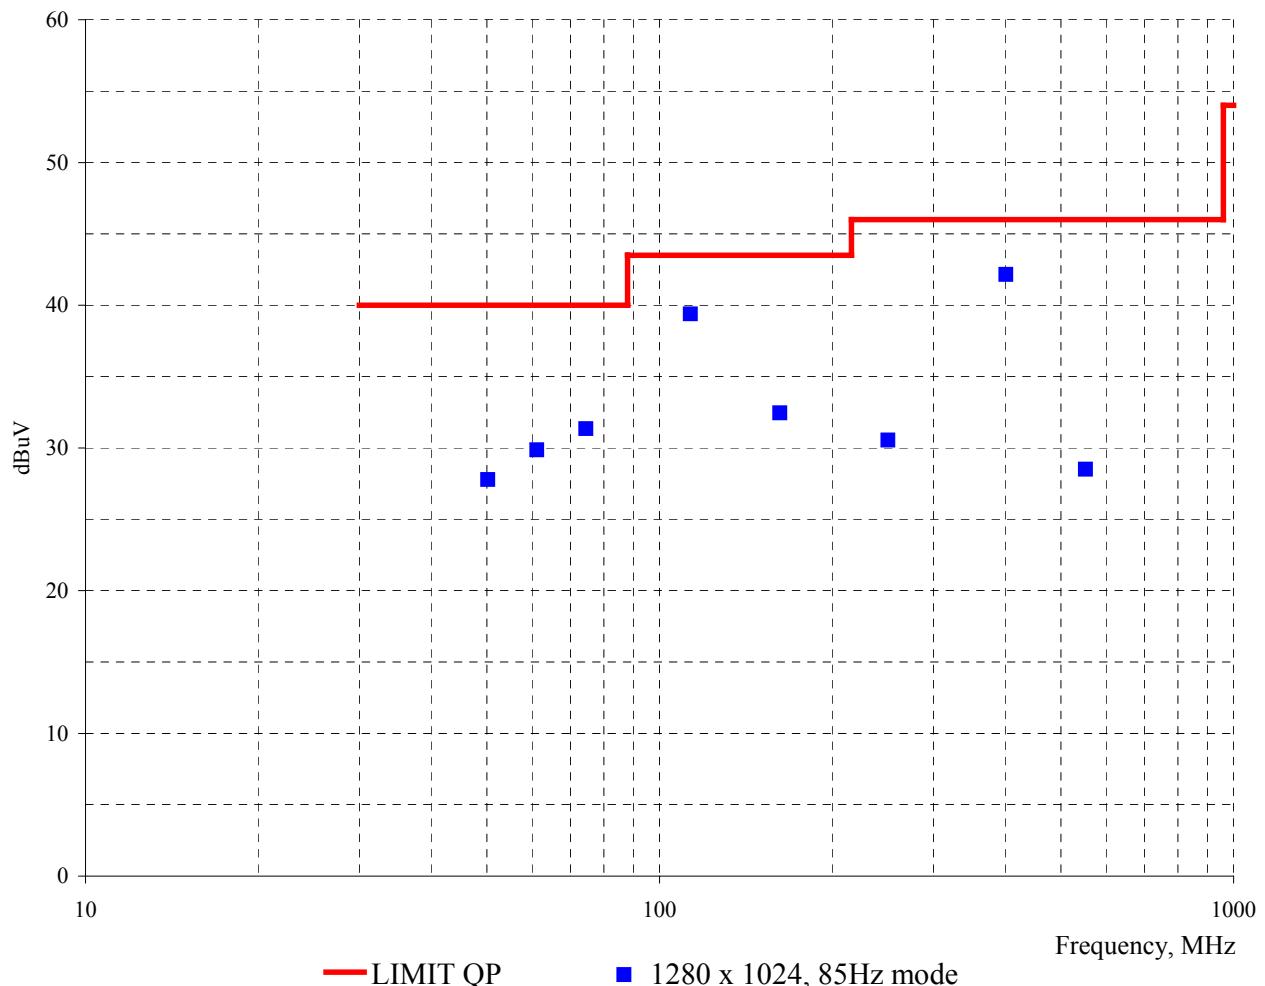


Radiated Emissions

| Freq. [MHz] | Reading [dBuV] | Antenna Factor [dB/m] | Cable Loss [dB] | Polar. [H/V] | Limit [dBuV/m] | Result [dBuV/m] | Margin [dB] |
|----------------|-------------------|-----------------------------|-----------------------|-----------------|-------------------|--------------------|----------------|
| 50.16 | 15.30 | 11.38 | 1.30 | V | 40.0 | 27.98 | 12.02 |
| 61.09 | 16.00 | 11.95 | 1.42 | V | 40.0 | 29.37 | 10.63 |
| 74.42 | 20.50 | 8.51 | 1.64 | H | 40.0 | 30.65 | 9.35 |
| 113.19 | 26.60 | 11.10 | 2.39 | H | 43.5 | 40.09 | 3.41 |
| 161.97 | 15.00 | 13.14 | 3.12 | H | 43.5 | 31.26 | 12.24 |
| 249.75 | 16.10 | 11.03 | 4.29 | H | 46.0 | 31.42 | 14.58 |
| 400.32 | 22.10 | 14.83 | 5.50 | H | 46.0 | 42.43 | 3.57 |
| 552.16 | 3.00 | 18.16 | 6.24 | V | 46.0 | 27.40 | 18.60 |

Note : 1600 x 1200, 60Hz mode

End of Data

MEASUREMENT OF DISTURBANCE RADIATION

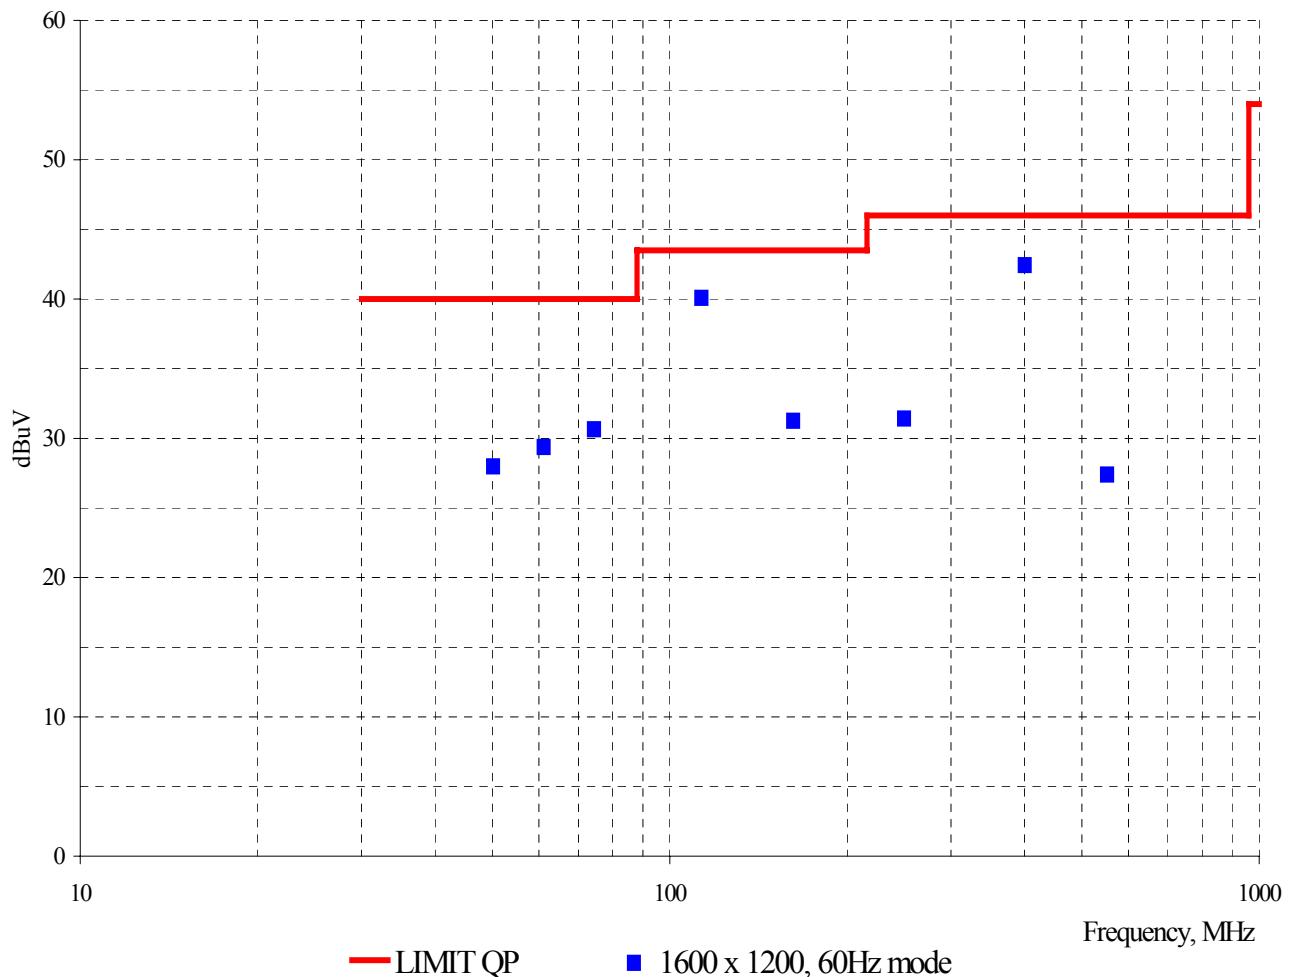

Appendix A. The Photos of Test Setup



Conducted Emissions-Front View




Conducted Emissions-Rear View

Appendix A. The Photos of Test Setup



Radiated Emissions (30MHz-1GHz) -Front View

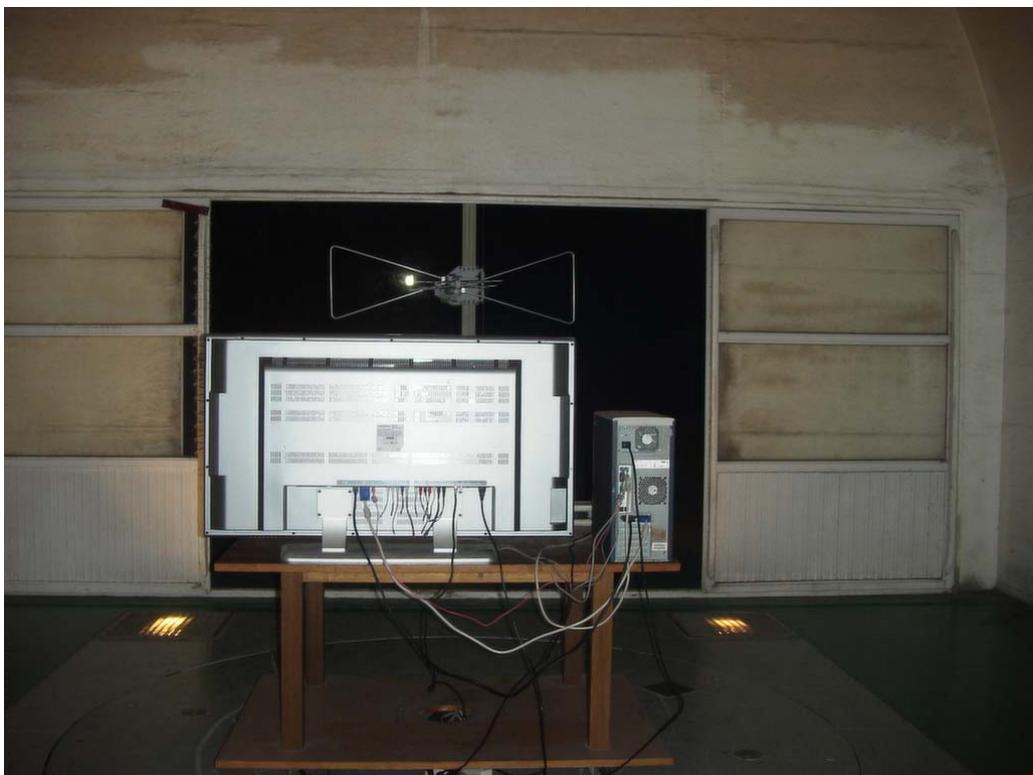

Radiated Emissions (30MHz-1GHz) -Rear View

Appendix B. The Photos of EUT



Front View



Rear View

Appendix B. The Photos of EUT



Remote control