

FCC TEST REPORT
for
Hame Technology Co., Limited

Wireless Router
Model No.:A1, A1+, A1B, A1S, A1W, A2, A2B, A2S, A2W

Prepared for : Hame Technology Co., Limited
Address : 4F, Plant 1st, Huahan Industrial Park, Jinniu West Rd., Pingshan
New District, Shenzhen, China.

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201211673F
Date of Test : Nov. 05 to 21, 2012
Date of Report : Nov. 21, 2012


TABLE OF CONTENT

Description	Page
Test Report	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Auxiliary Equipment Used during Test.....	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty.....	6
2. ANTENNA REQUIREMENT	7
3. TEST METHODOLOGY	8
3.1. Summary of Test Results.....	8
3.2. Description of Test Modes.....	8
3.3. List of channels:.....	9
4. CONDUCTED EMISSION TEST.....	10
4.1. Block Diagram of Test Setup	10
4.2. Power Line Conducted Emission Measurement Limits (15.207).....	10
4.3. Configuration of EUT on Measurement	10
4.4. Operating Condition of EUT	10
4.5. Test Procedure	11
4.6. Test equipment	11
4.7. Power Line Conducted Emission Measurement Results	11
5. FCC PART 15.247 REQUIREMENTS FOR DSSS & OFDM MODULATION.....	14
5.1 Test Setup	14
5.2 6dB Bandwidth	14
5.3 Maximum Peak output power test	22
5.4 Band Edges Measurement	30
5.5 Peak Power Spectral Density.....	36
5.6 Spurious Emission Test	44
5.7 Radiated Emissions.....	49
6. PHOTOGRAPH.....	64
6.1. Photo of Conducted Emission Measurement.....	64
6.2. Photo of Radiation Emission Test	64

Appendix I External Photos (3 Pages)

Appendix II Internal Photos (3 Pages)

TEST REPORT

Applicant : Hame Technology Co., Limited
 Manufacturer : Hame Technology Co., Limited
 EUT : Wireless Router
 Model No. : A1, A1+, A1B, A1S, A1W, A2, A2B, A2S, A2W
 Serial No. : N/A
 Rating : DC 5V From PC and DC 3.7V From Battery
 Trade Mark : 

Measurement Procedure Used:
 FCC Part15 Subpart C, Paragraph 15.247: 2010

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test : Nov. 05 to 21, 2012

Rock zeng

Prepared by : (Tested Engineer / Rock Zeng)

Andy chen

Reviewer : (Project Manager / Andy Chen)

Tom. Chen

Approved & Authorized Signer : (Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Wireless Router
Model Number	: A1, A1+, A1B, A1S, A1W, A2, A2B, A2S, A2W (Note: All the samples are the same except the model number & Shape of appliances, so we prepare “A1” for EMC test only.)
Test Power Supply	: DC 5V From PC and DC 3.7V From Battery
RF Transmission Frequency	: 2412MHz~2462MHz (802.11b/802.11g/802.11n (HT20)) 2422MHz~2452MHz (802.11n (HT40))
Channels	: 11 For (802.11b/802.11g/802.11n (HT20)) 7 For (802.11n (HT40))
Antenna Type	: Internal
Antenna Gain	: 0 dBi
Applicant Address	: Hame Technology Co., Limited 4F, Plant 1st, Huahan Industrial Park, Jinniu West Rd., Pingshan New District, Shenzhen, China.
Manufacturer Address	: Hame Technology Co., Limited 4F, Plant 1st, Huahan Industrial Park, Jinniu West Rd., Pingshan New District, Shenzhen, China.
Date of receiver	: Nov. 05, 2012
Date of Test	: Nov. 05 to 21, 2012

1.2.Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer:Brother M/N: MFC-3360C S/N: N/A CE, FCC:DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
Network Cable	: Non-Shielded, 1.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, August 30, 2010.

Test Location

All Emissions tests were performed at
Anbotek Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park,
No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

2. ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT have a antenna, is a internal antenna for WIFI, The gain is 0dBi, Which in accordance to section 15.203, please refer to the internal photos.

Result: Compliance

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247

3.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107, 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15, Paragraph 15.247(b)(1)	Peak Output Power	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(2)	6dB Bandwidth	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	-	N/A
FCC Part 15, Paragraph 15.247(c)	Peak Power Density	PASS	Complies

* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

3.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 11Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 54Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

3.3. List of channels:

√ - available


X - tested

Number	Frequency(MHz)		802.11 b/g/n (HT20)	802.11 n (HT40)
1	2412	√	X	
2	2417	√		
3	2422	√		X
4	2427	√		
5	2432	√		
6	2437	√	X	X
7	2442	√		
8	2447	√		
9	2452	√		X
10	2457	√		
11	2462	√	X	

4. Conducted Emission Test

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators

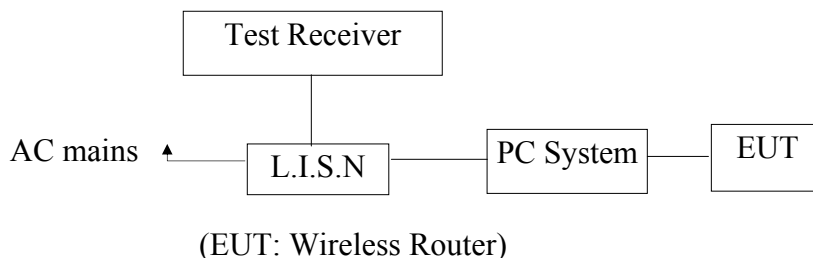

4.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

- Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Wireless Router
 Model Number : A1
 Applicant : Hame Technology Co., Limited

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode (ON) and measure it.

4.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 4.6.

4.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May. 12, 2012	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2012	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A

Conduction Uncertainty : U_c = 3.4dB

4.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Wireless Router M/N:A1
 Operating Condition: Charging with PC
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: DC 5V From PC
 Comment: Live Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

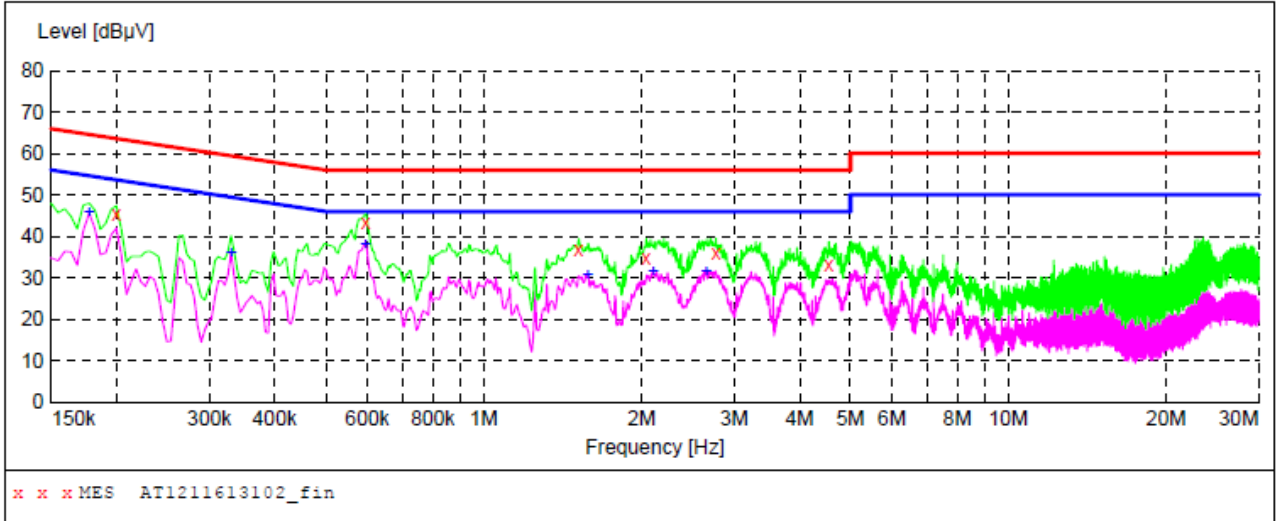

MEASUREMENT RESULT: "AT1211613102_fin"

11/8/2012 10:01AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	45.40	20.1	64	18.2	QP	L1	GND
0.595500	43.40	20.1	56	12.6	QP	L1	GND
1.517500	36.70	20.3	56	19.3	QP	L1	GND
2.039500	34.70	20.3	56	21.3	QP	L1	GND
2.773000	36.10	20.4	56	19.9	QP	L1	GND
4.546000	33.30	20.5	56	22.7	QP	L1	GND

MEASUREMENT RESULT: "AT1211613102_fin2"

11/8/2012 10:01AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	45.70	20.1	55	8.9	AV	L1	GND
0.330000	36.10	20.1	50	13.4	AV	L1	GND
0.595500	38.00	20.1	46	8.0	AV	L1	GND
1.580500	30.70	20.3	46	15.3	AV	L1	GND
2.102500	31.60	20.3	46	14.4	AV	L1	GND
2.656000	31.60	20.4	46	14.4	AV	L1	GND

FCC ID: R7FA1

CONDUCTED EMISSION TEST DATA

EUT: Wireless Router M/N:A1
 Operating Condition: Charging with PC
 Test Site: 1# Shielded Room
 Operator: Andy Chen
 Test Specification: DC 5V From PC
 Comment: Neutral Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"
 Short Description: 150K-30M Disturbance Voltages

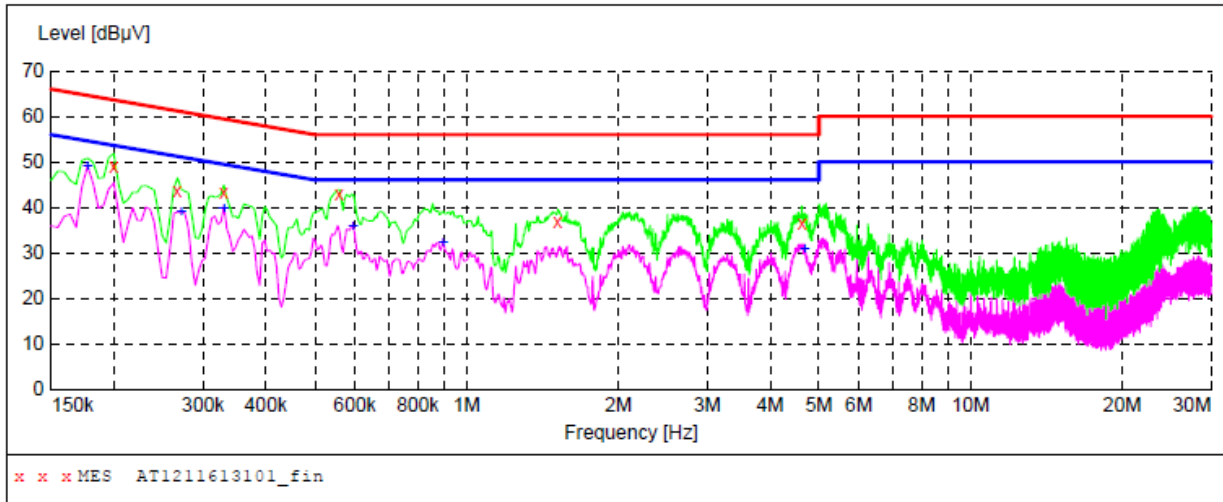

MEASUREMENT RESULT: "AT1211613101_fin"

11/8/2012 9:57AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	48.90	20.1	64	14.7	QP	N	GND
0.267000	43.60	20.1	61	17.6	QP	N	GND
0.330000	43.40	20.1	60	16.1	QP	N	GND
0.559500	43.10	20.1	56	12.9	QP	N	GND
1.517500	36.80	20.3	56	19.2	QP	N	GND
4.622500	36.40	20.5	56	19.6	QP	N	GND


MEASUREMENT RESULT: "AT1211613101_fin2"

11/8/2012 9:57AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	49.10	20.1	55	5.5	AV	N	GND
0.271500	39.00	20.1	51	12.1	AV	N	GND
0.330000	39.80	20.1	50	9.7	AV	N	GND
0.595500	35.80	20.1	46	10.2	AV	N	GND
0.897000	32.20	20.1	46	13.8	AV	N	GND
4.676500	30.70	20.5	46	15.3	AV	N	GND

5. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

5.1 Test Setup



5.2 6dB Bandwidth

a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

b. Test Procedure

This test was according the KDB558074 DTS D01 meas guidance v02.

One of the following procedures can be used to determine the modulated DTS channel bandwidth:

7.1. Option 1:

Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.

Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

c. Test Setup See 5.1

d. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 25, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC01183 0	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass

FCC ID: R7FA1

f. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	8.12		Pass
Mid	2437	8.08	>500	Pass
High	2462	8.08		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.72		Pass
Mid	2437	16.56	>500	Pass
High	2462	16.60		Pass

Test mode: IEEE 802.11n (HT20)


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	17.92		Pass
Mid	2437	17.84	>500	Pass
High	2462	17.84		Pass

Test mode: IEEE 802.11n (HT40)


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	36.72		Pass
Mid	2437	36.88	>500	Pass
High	2452	37.36		Pass

Test Plots See the following page.


Test Mode: 802.11b---Low

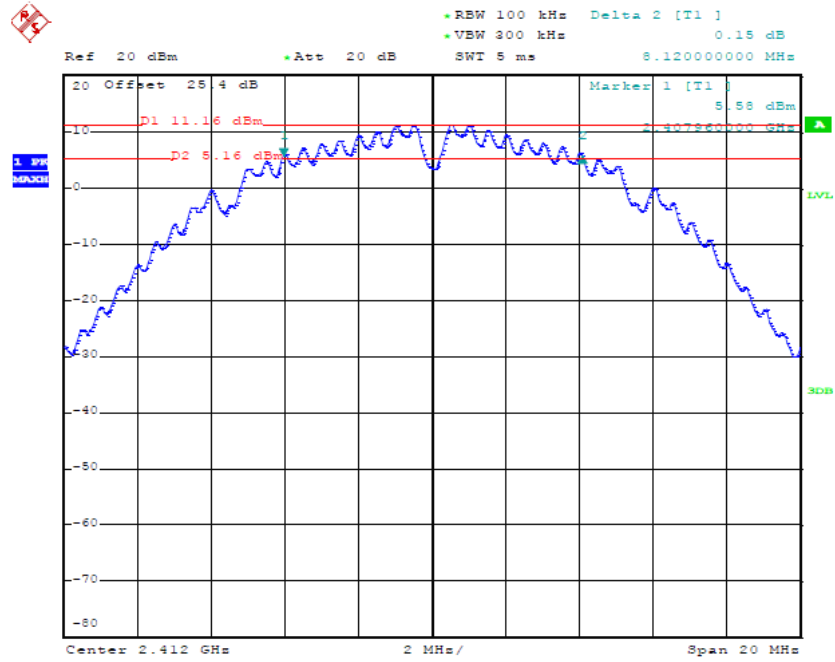


Test Mode: 802.11b---Mid

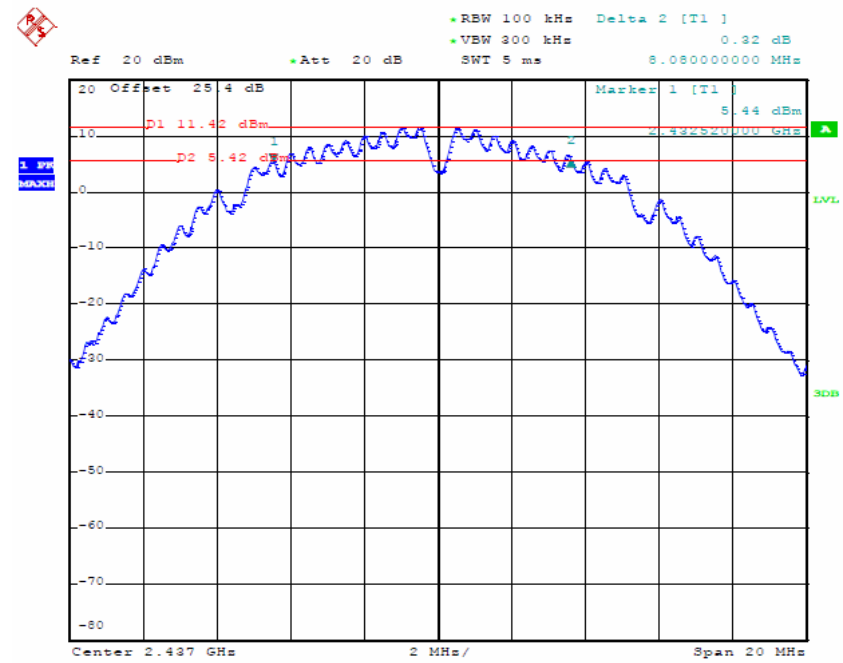


Test Mode: 802.11b---High

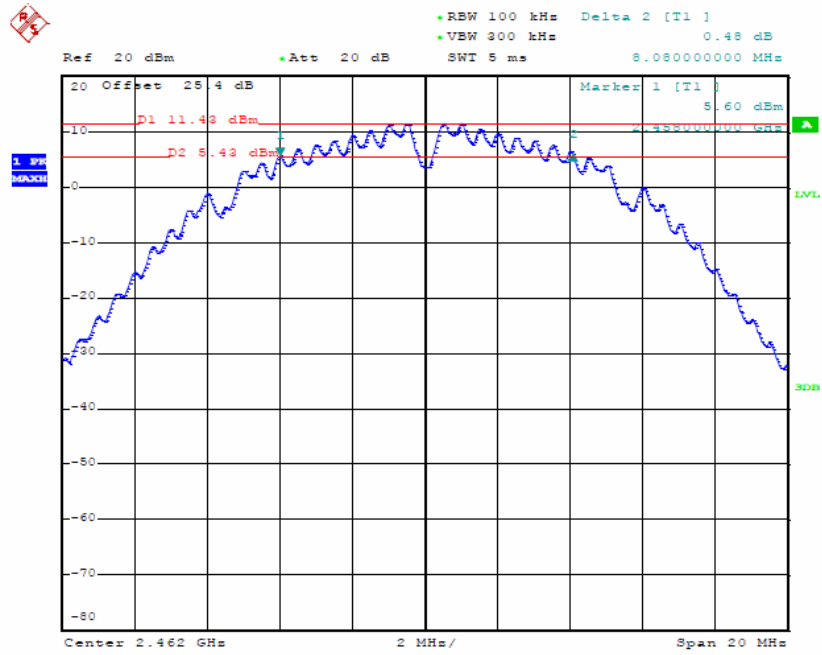


Test Mode: 802.11g---Low

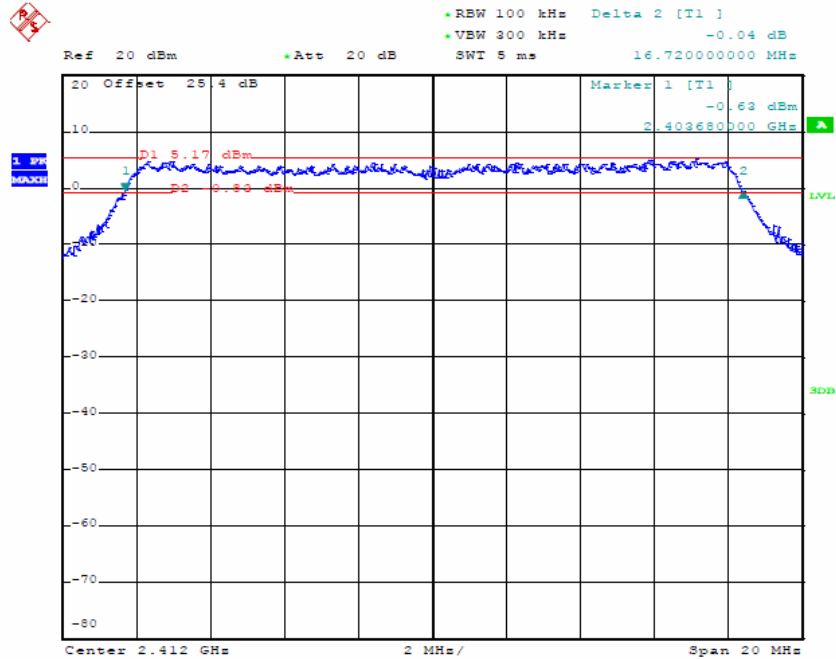


Test Mode: 802.11g---Mid

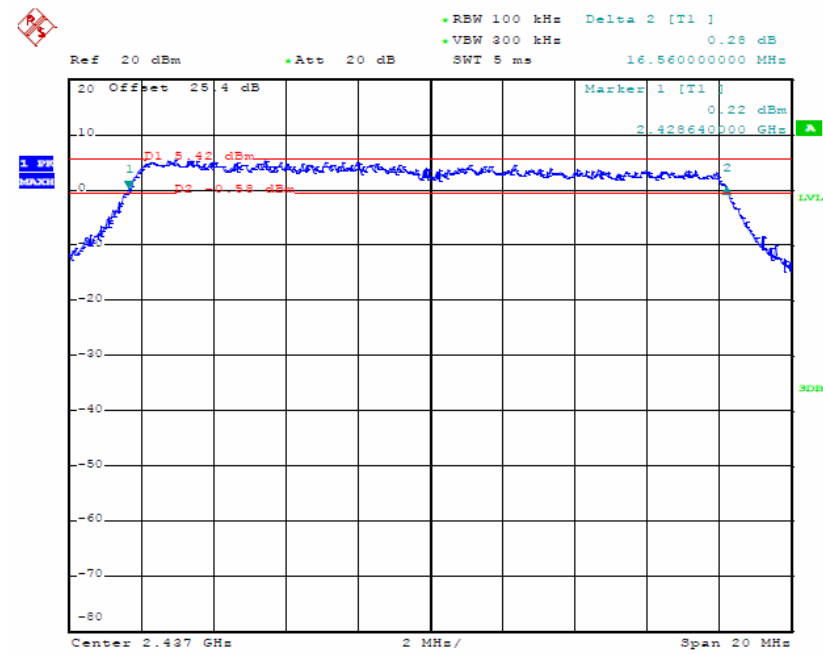


Test Mode: 802.11g---High

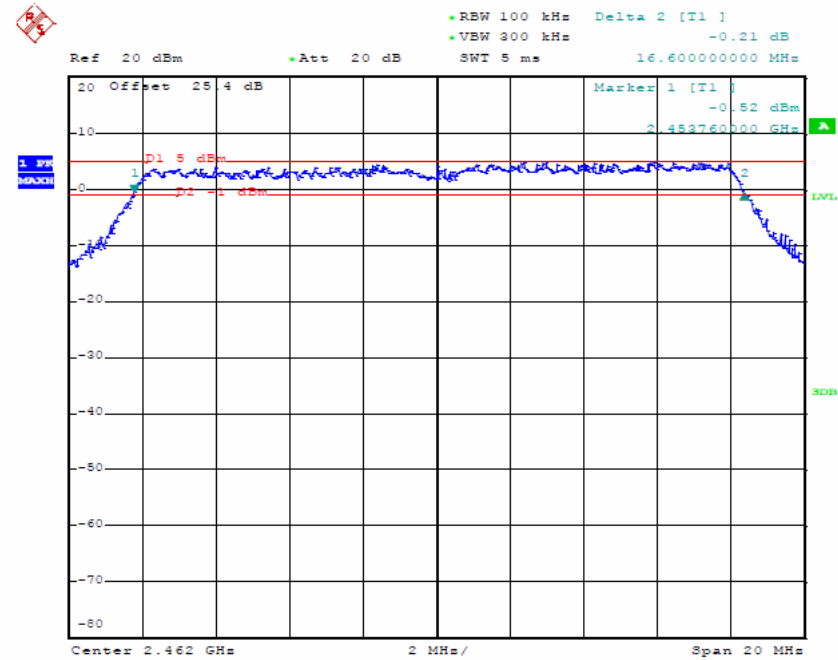


Test Mode: 802.11n (HT20) ---Low

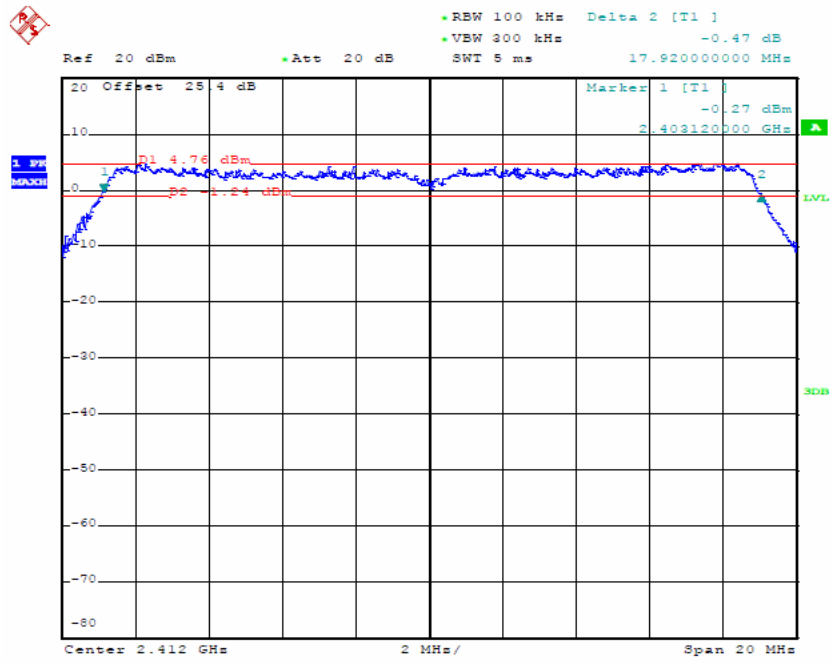


Test Mode: 802.11n (HT20) ---Mid

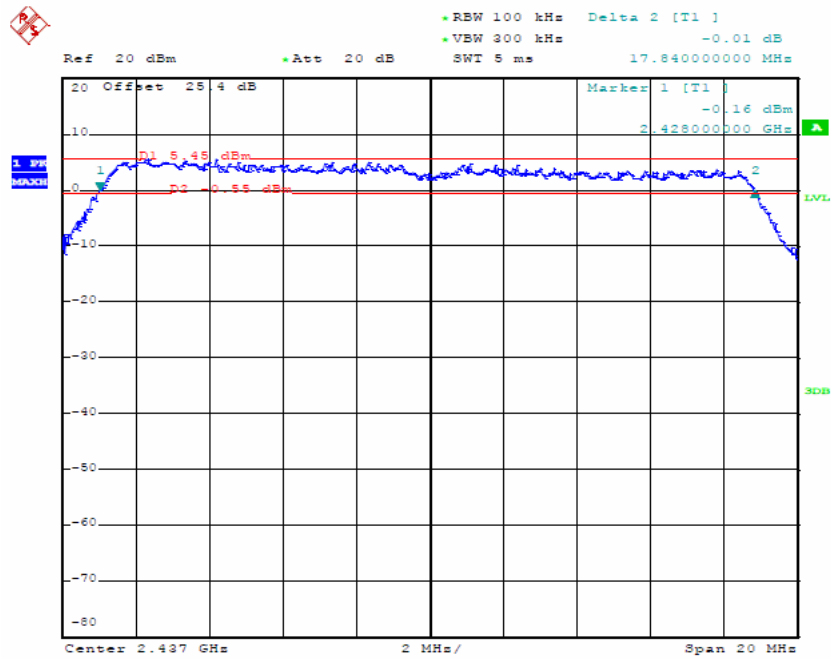


Test Mode: 802.11n (HT20) ---High

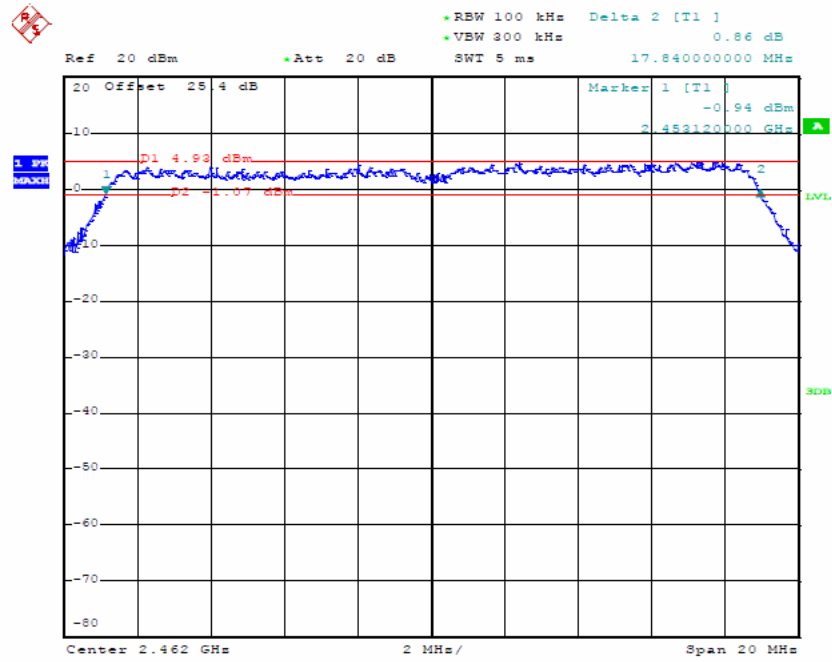


Test Mode: 802.11n (HT40) ---Low

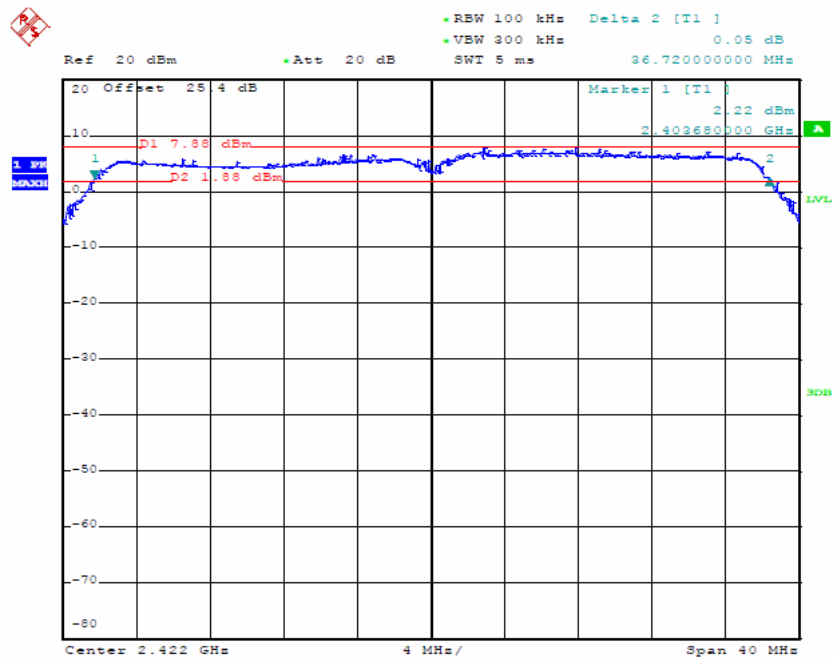

Test Mode: 802.11n (HT40) ---Mid

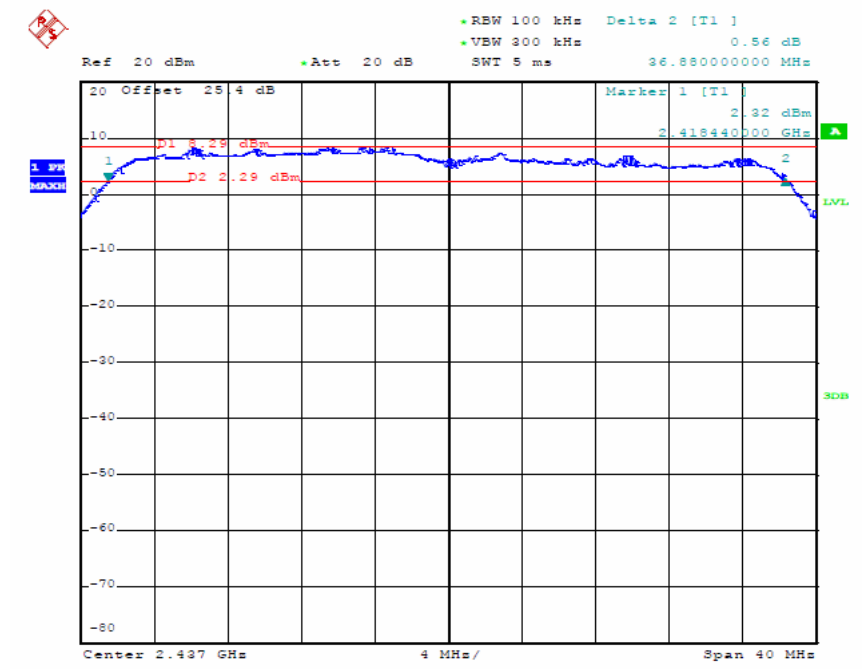

Test Mode: 802.11n (HT40) ---High

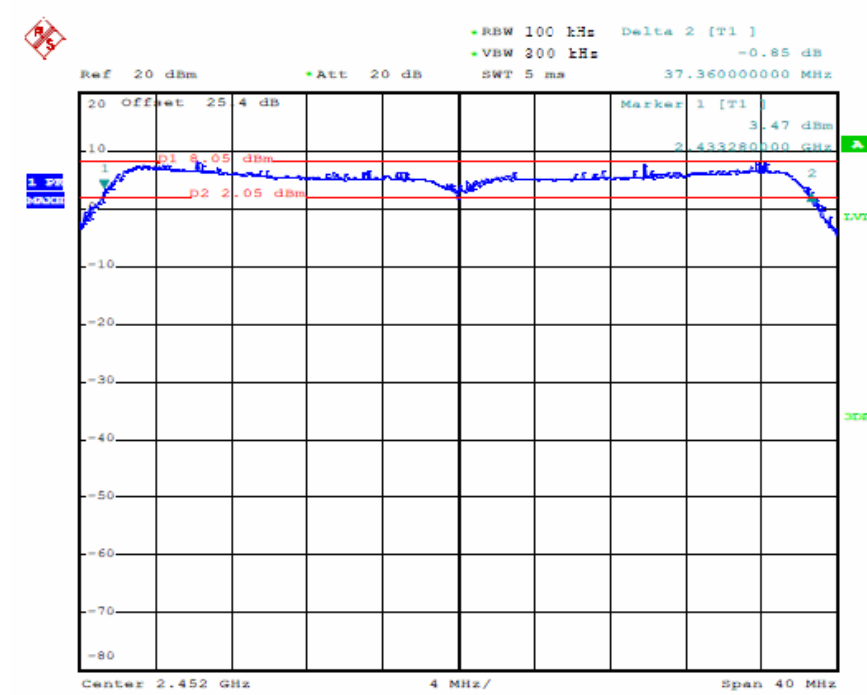


5.3 Maximum Peak output power test

a. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

b. Configuration of Measurement



c. Data Rates

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 11Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 54Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 7Mbps data rate (the worst case) are chosen for the final testing.

d. Test Procedure

This test was according the KDB558074 DTS D01 meas guidance v02.

7.2.1.2 Option 2 (integrated band power method)

This procedure provides an integrated measurement alternative for use with a spectrum analyzer where the maximum available RBW < the DTS bandwidth.

1. Set the RBW = 1 MHz.
2. Set the VBW = 3 MHz.
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the DTS bandwidth.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 25, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass

f. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	14.67	30	1	Pass
Mid	2437	14.57			Pass
High	2462	14.09			Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	13.28	30	1	Pass
Mid	2437	13.18			Pass
High	2462	13.36			Pass


Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	12.99	30	1	Pass
Mid	2437	12.74			Pass
High	2462	12.55			Pass


Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2422	12.28	30	1	Pass
Mid	2437	12.37			Pass
High	2452	12.25			Pass


Test Mode: 802.11b ---Low

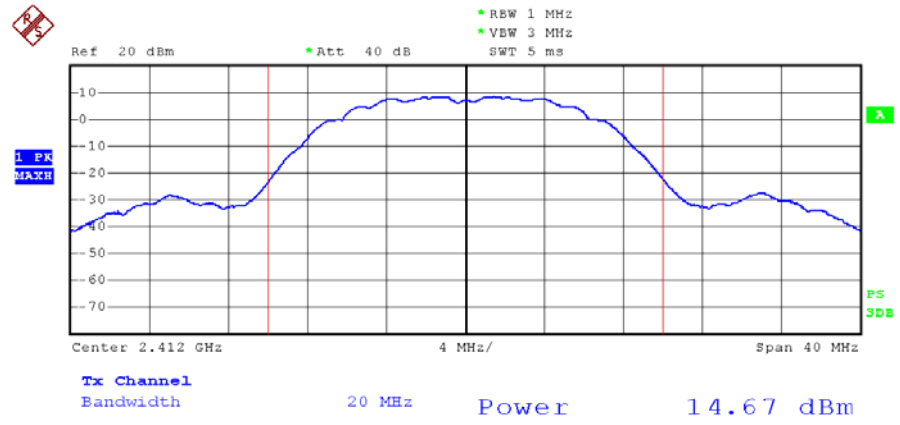


Test Mode: 802.11b---Mid

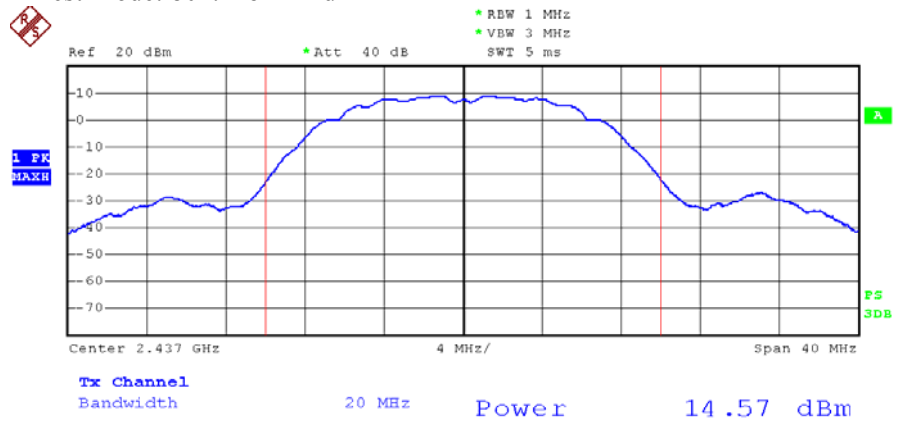


Test Mode: 802.11b---High

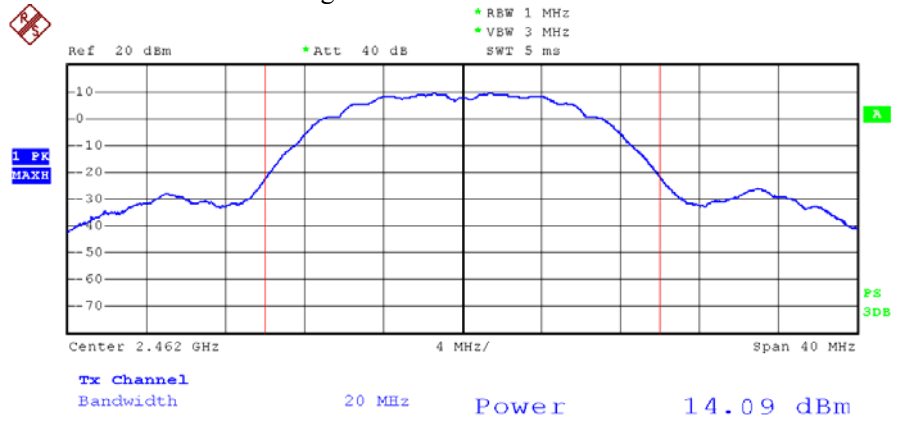


Test Mode: 802.11g ---Low

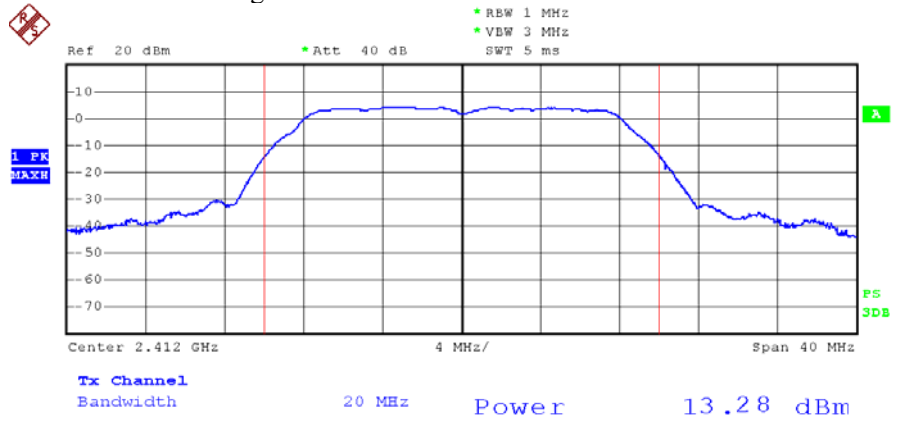


Test Mode: 802.11g---Mid

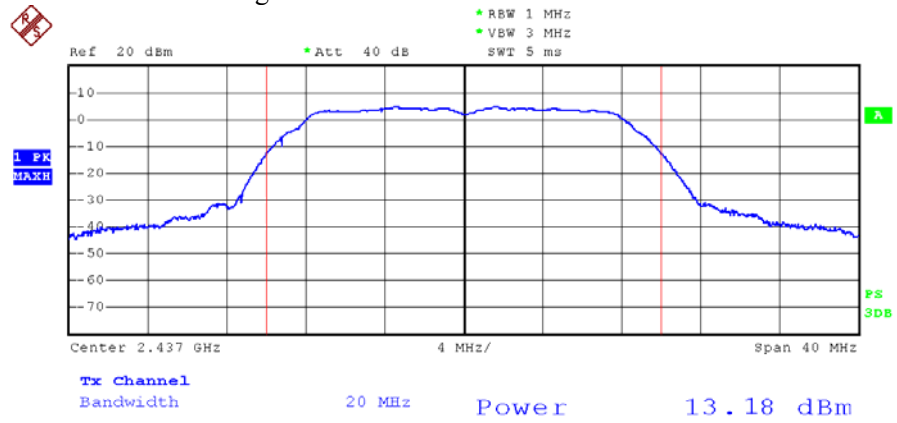


Test Mode: 802.11g---High

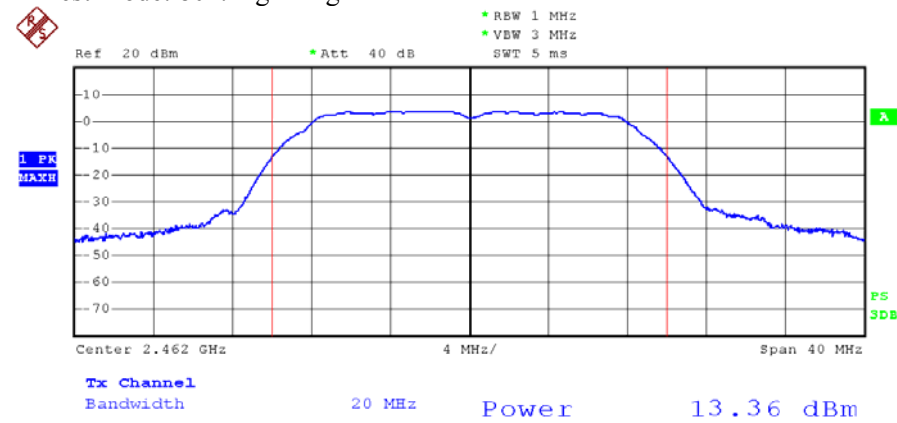


Test Mode: 802.11n (HT20) ---Low

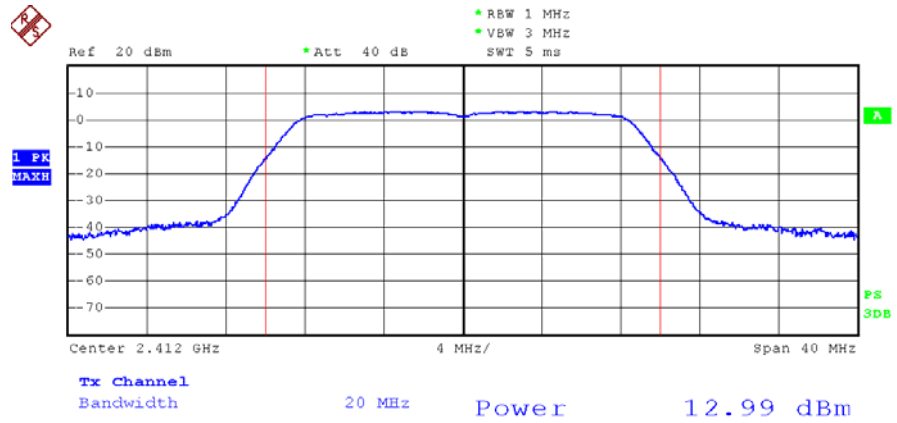


Test Mode: 802.11n (HT20) ---Mid

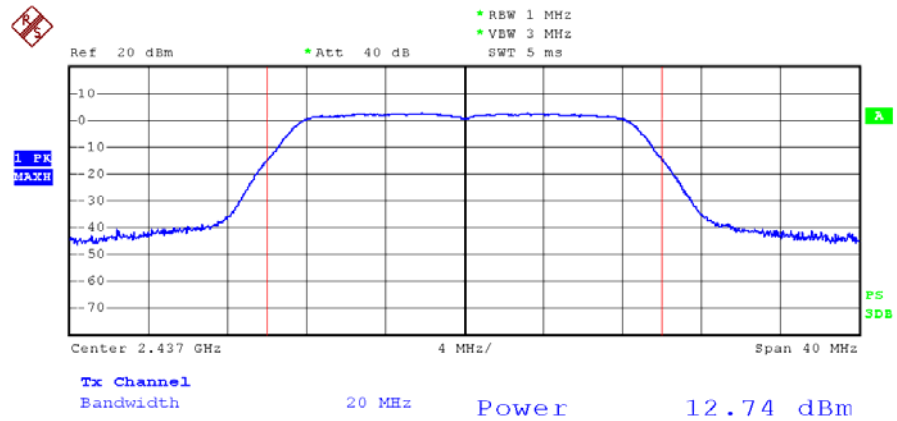


Test Mode: 802.11n (HT20) ---High

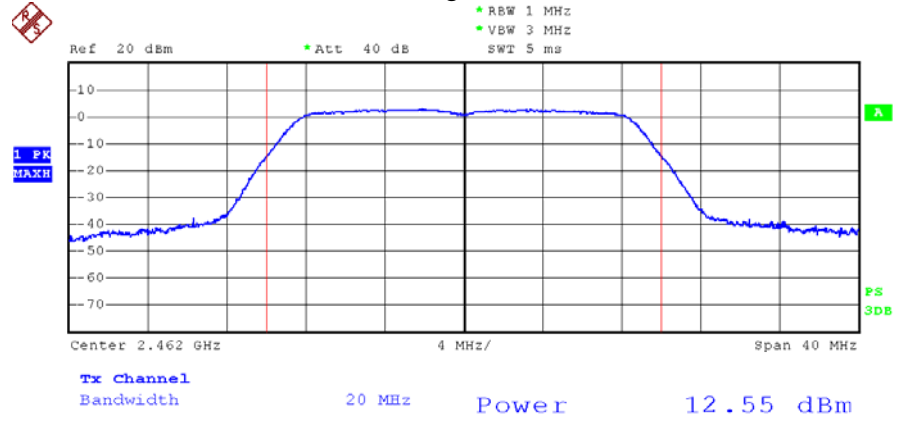


Test Mode: 802.11n (HT40) ---Low

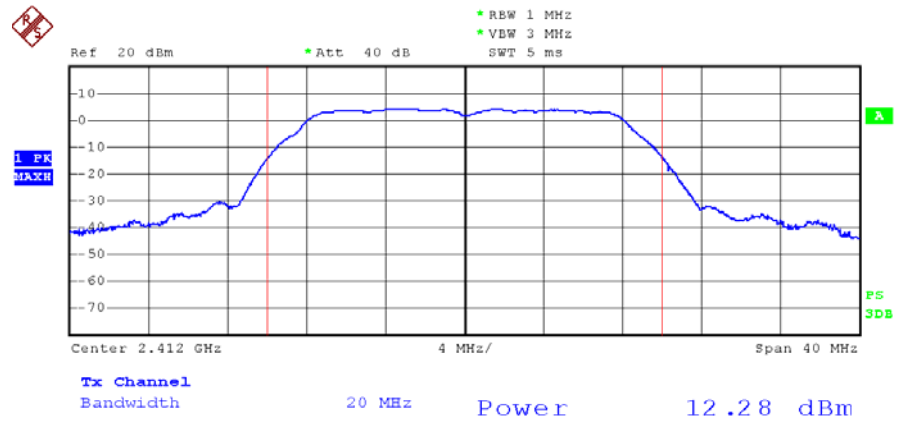

Test Mode: 802.11n (HT40) --- Mid

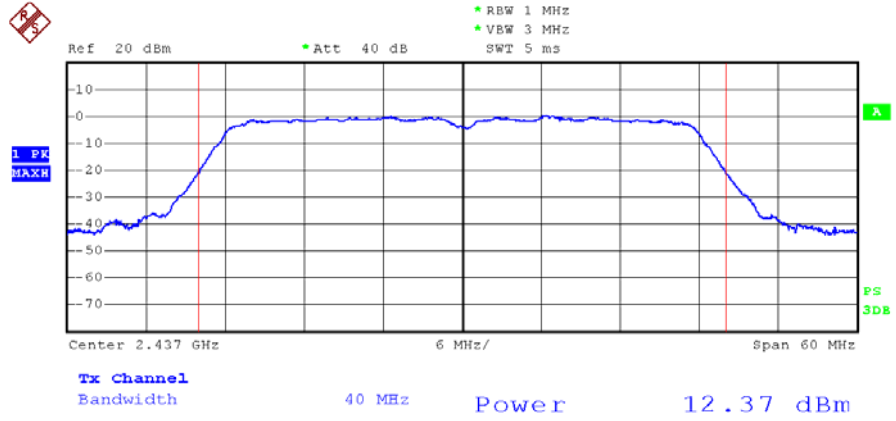

Test Mode: 802.11n (HT40) ---High

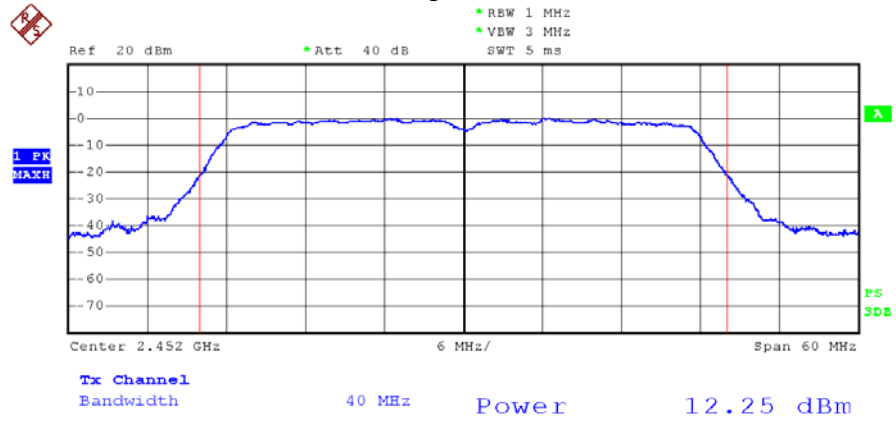

5.4 Band Edges Measurement

a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).


b. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Peak detector: RBW=100KHz, VBW=100KHz, SWT=AUTO
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO
The EUT is tested in 9*6*6 Chamber.
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 25, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

c. Test Setup

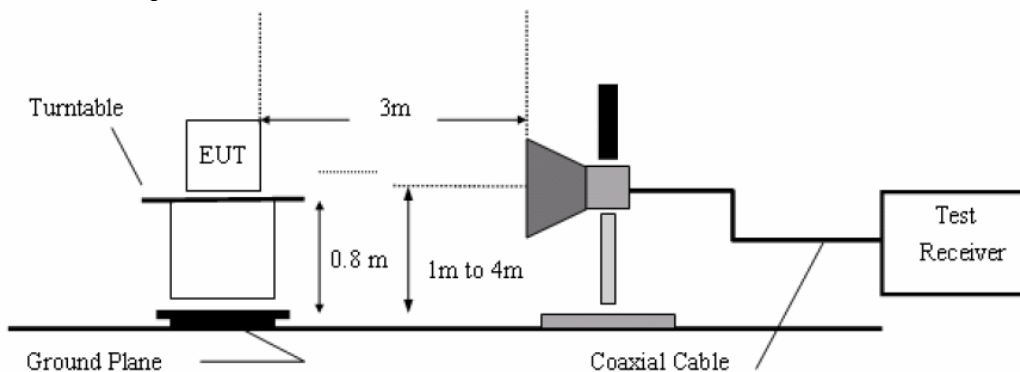

d. Test Results


Pass

e. Test Plots

See the following page.


(1) The Conducted Bandedge Emission Test

Test Mode: 802.11b ---Low

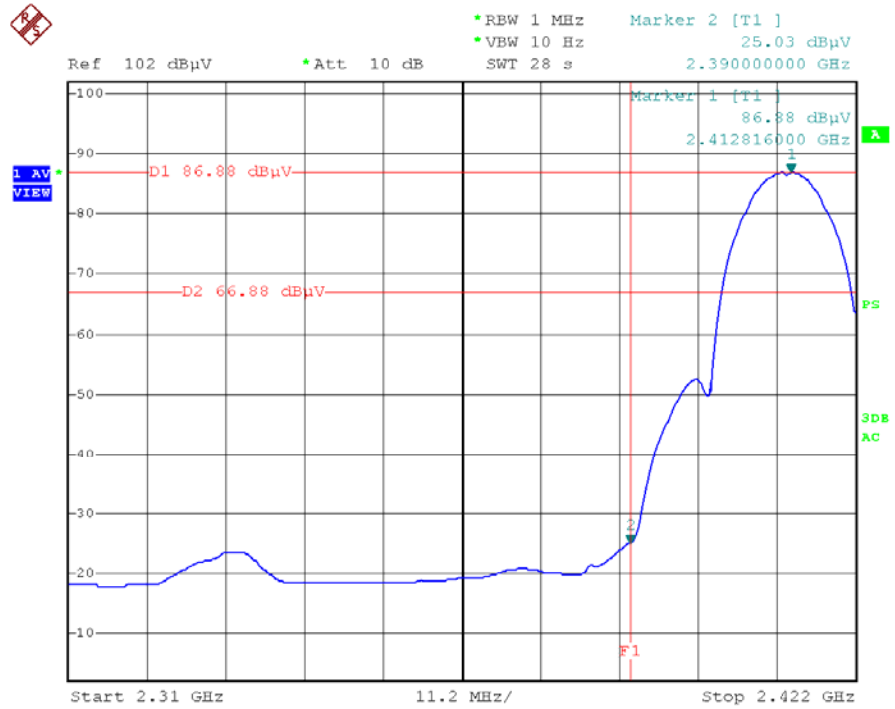


BE-L-b-AV

Test Mode: 802.11b ---High

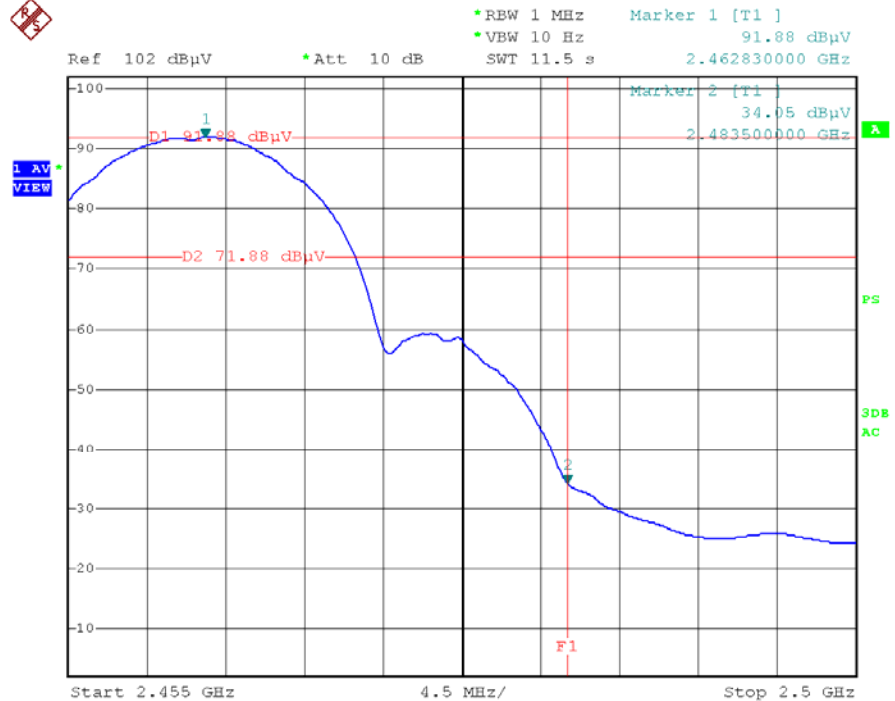


BE-H-b-AV

Test Mode: 802.11g ---Low

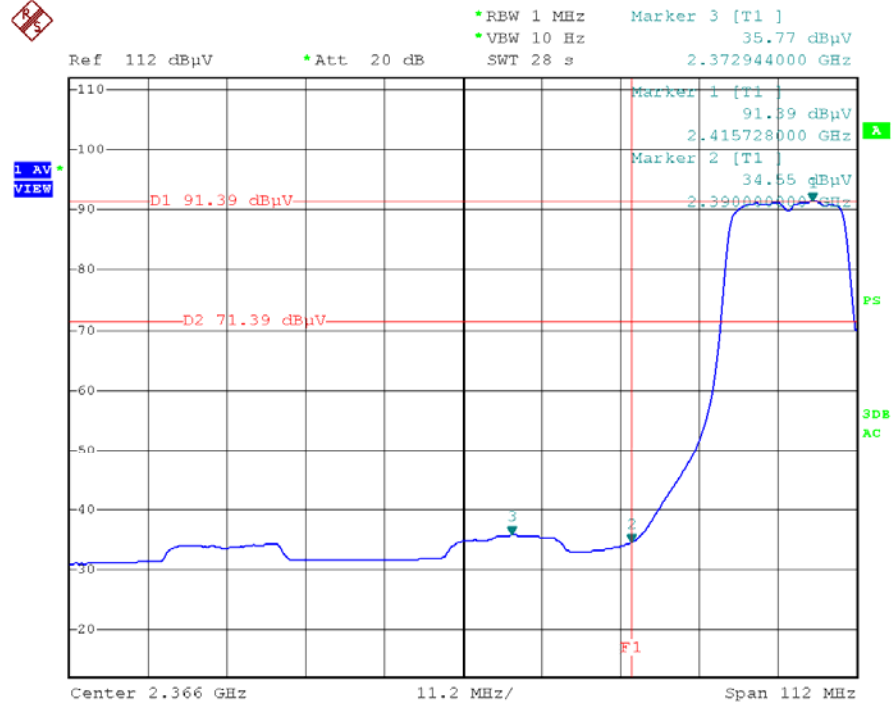


Bandedges-L-AV

Test Mode: 802.11g ---High

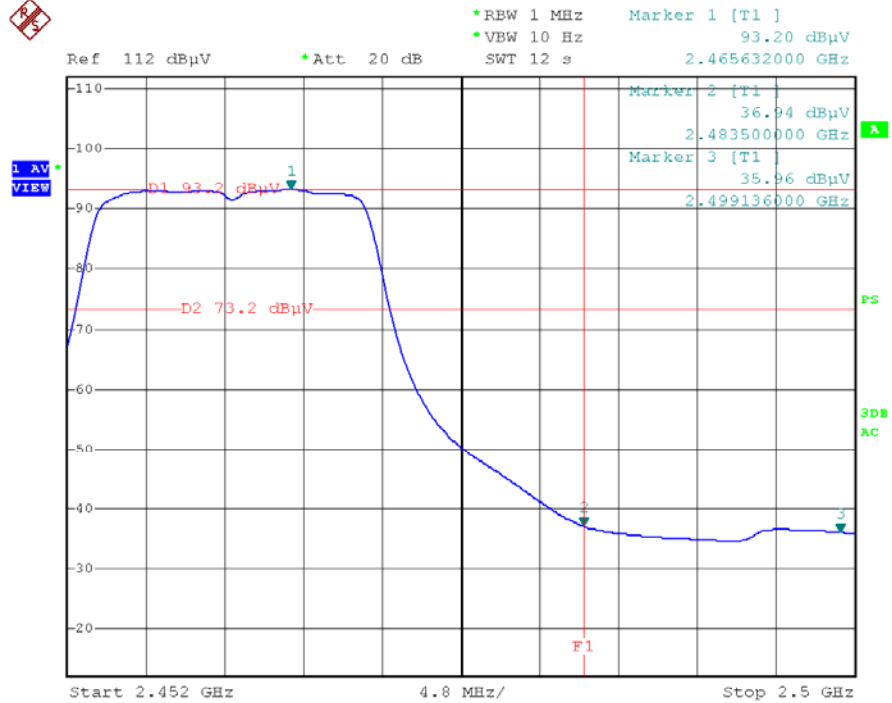


Bandedges-H-AV

Test Mode: 802.11n (HT20) ---Low

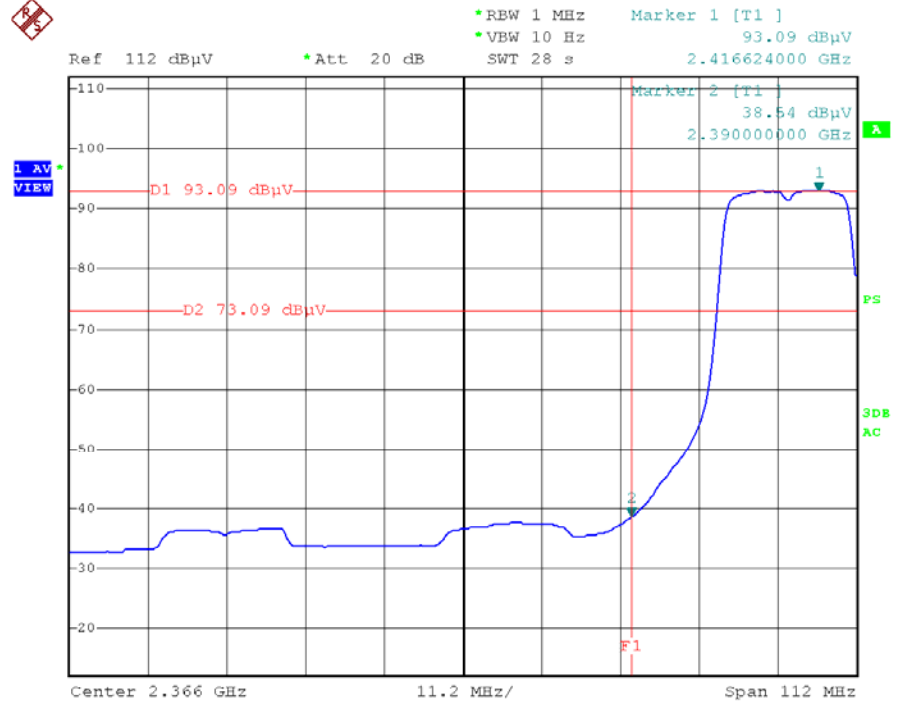


Bandedges-L-AV

Test Mode: 802.11n (HT20) ---High

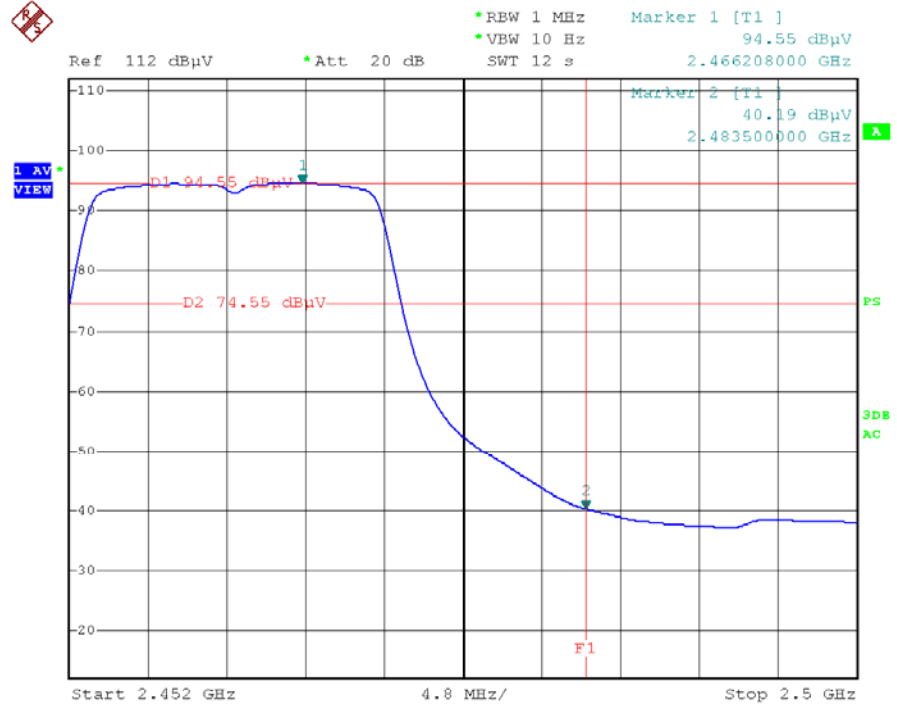


Bandedges-H-AV

Test Mode: 802.11n (HT40) ---Low

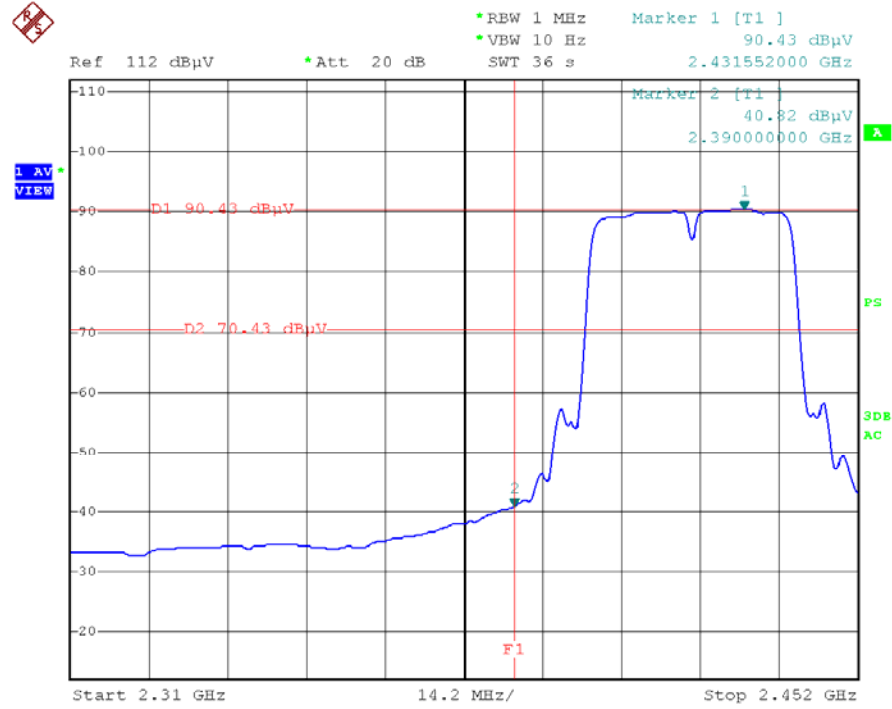

Bandedges-L-AV

Test Mode: 802.11n (HT40) ---High

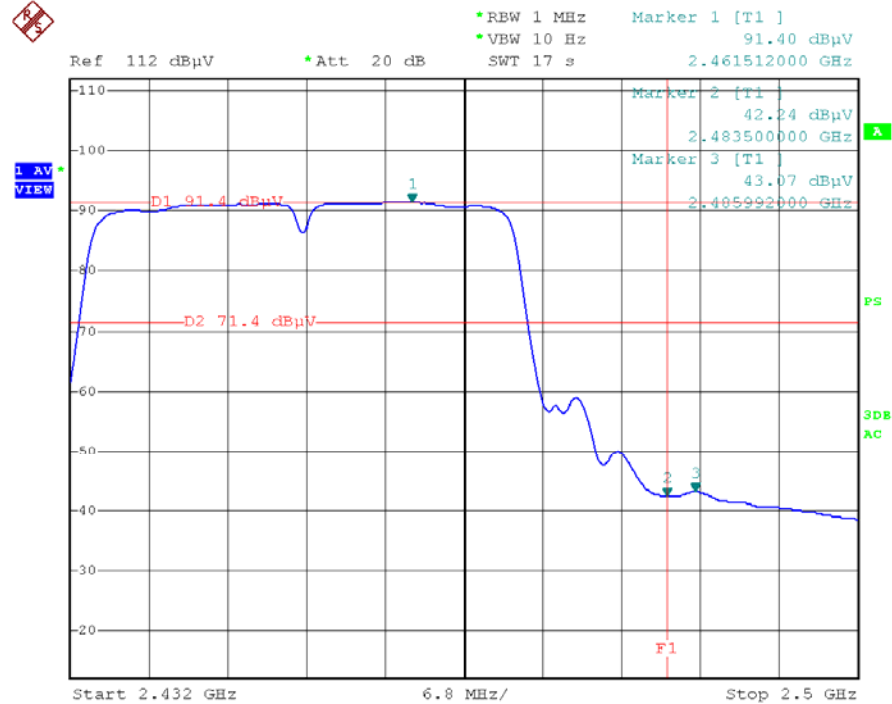

Bandedges-H-AV

(2) The Radiated Bandedge Emission Test

802.11b

Frequency (MHz)	Antenna Polarization (H/V)	Emission (dBuV/m)		Bandage Limit (dBuV/m)	
		Peak	AV	Peak	AV
<2400	H	57.70	42.32	74	54
<2400	H	52.32	40.12	74	54
>2483.5	V	54.01	39.54	74	54
>2483.5	V	58.23	44.10	74	54

802.11g

Frequency (MHz)	Antenna Polarization (H/V)	Emission (dBuV/m)		Bandage Limit (dBuV/m)	
		Peak	AV	Peak	AV
<2400	H	55.74	41.32	74	54
<2400	H	51.30	38.12	74	54
>2483.5	V	50.01	39.52	74	54
>2483.5	V	54.23	39.10	74	54

802.11n(20)

Frequency (MHz)	Antenna Polarization (H/V)	Emission (dBuV/m)		Bandage Limit (dBuV/m)	
		Peak	AV	Peak	AV
<2400	H	54.37	41.32	74	54
<2400	H	50.32	37.12	74	54
>2483.5	V	51.35	39.51	74	54
>2483.5	V	56.46	38.13	74	54

802.11n(40)

Frequency (MHz)	Antenna Polarization (H/V)	Emission (dBuV/m)		Bandage Limit (dBuV/m)	
		Peak	AV	Peak	AV
<2400	H	50.70	38.32	74	54
<2400	H	49.31	37.11	74	54
>2483.5	V	48.21	36.54	74	54
>2483.5	V	45.27	35.10	74	54

5.5 Peak Power Spectral Density

a. Limit

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

b. Test Procedure

This test was according the KDB558074 DTS D01 meas guidance v02.

9.1 Option 1

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS channel bandwidth.

Set the RBW \geq 3 kHz.

Set the VBW \geq 3 x RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

c. **Test Setup** See 5.1

d. **Test Results** Pass

e. **Test Data**

FCC ID: R7FA1

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	-4.25		Pass
Mid	2437	-4.69	8.00	Pass
High	2462	-4.69		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm/100KHZ)	Limit (dBm)	Result
Low	2412	1.64		Pass
Mid	2437	1.64	8.00	Pass
High	2462	1.44		Pass

Test mode: IEEE 802.11n (HT20)


Channel	Frequency (MHz)	PPSD (dBm/100KHz)	Limit (dBm)	Result
Low	2412	1.64		Pass
Mid	2437	1.91	8.00	Pass
High	2462	1.44		Pass

Test mode: IEEE 802.11n (HT40)


Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2422	-1.99		Pass
Mid	2437	-1.52	8.00	Pass
High	2452	-1.40		Pass

Test Plot See the following pages


f. 802.11 b CH--Low

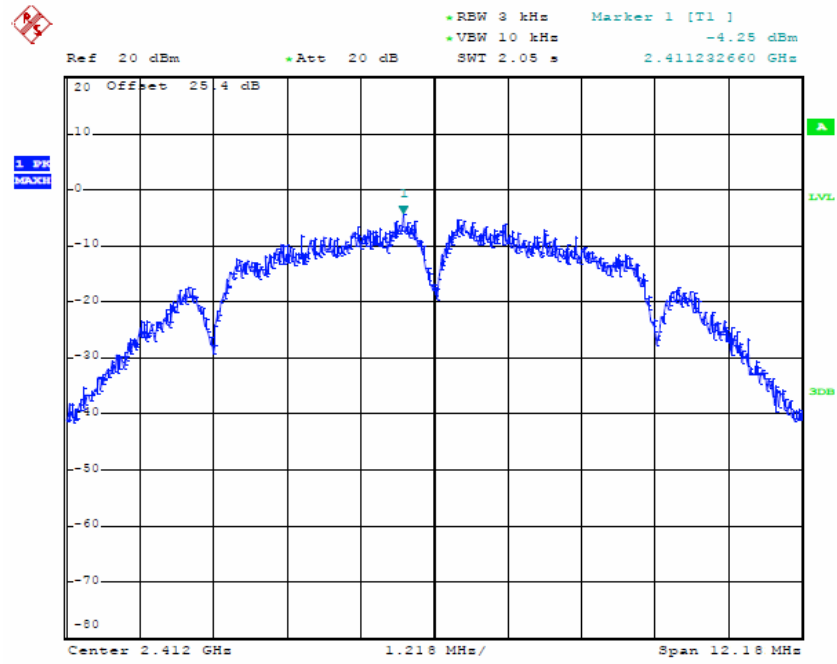


CH--Mid

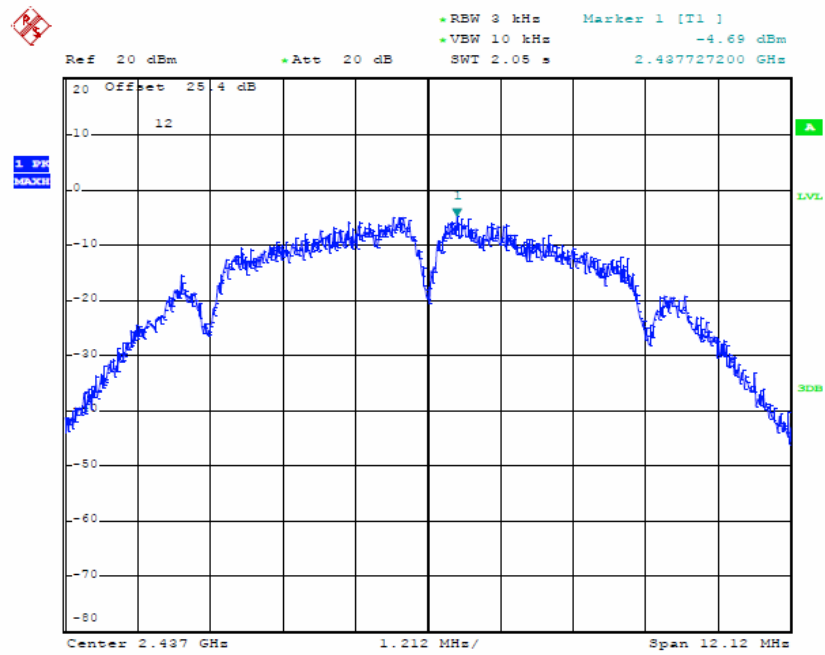


CH--High

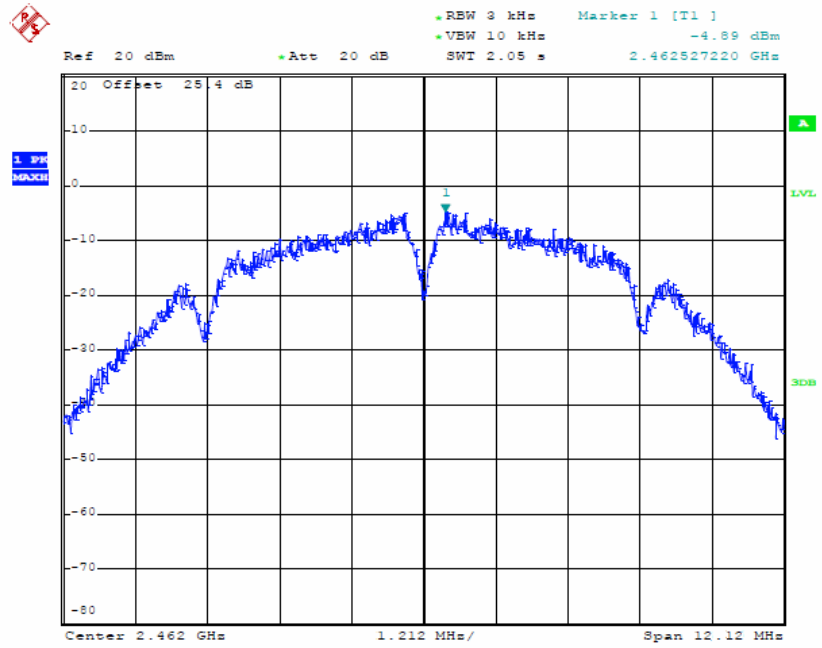


802.11g CH--Low

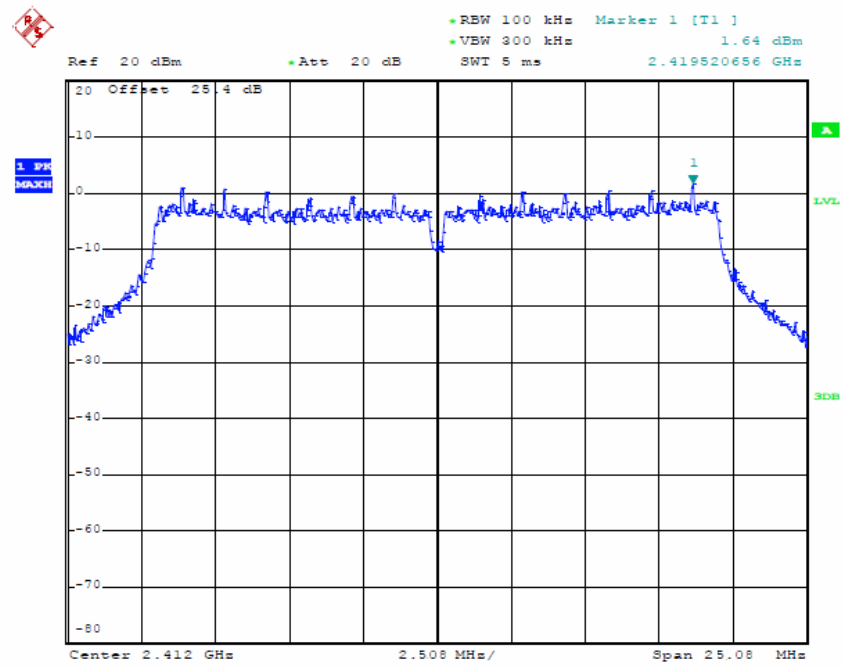


CH--Mid

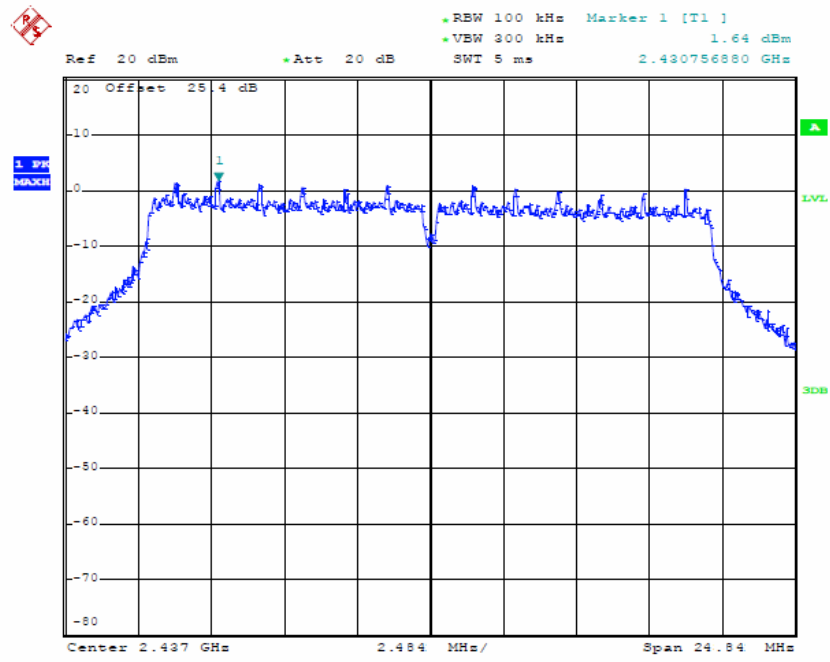


CH--High

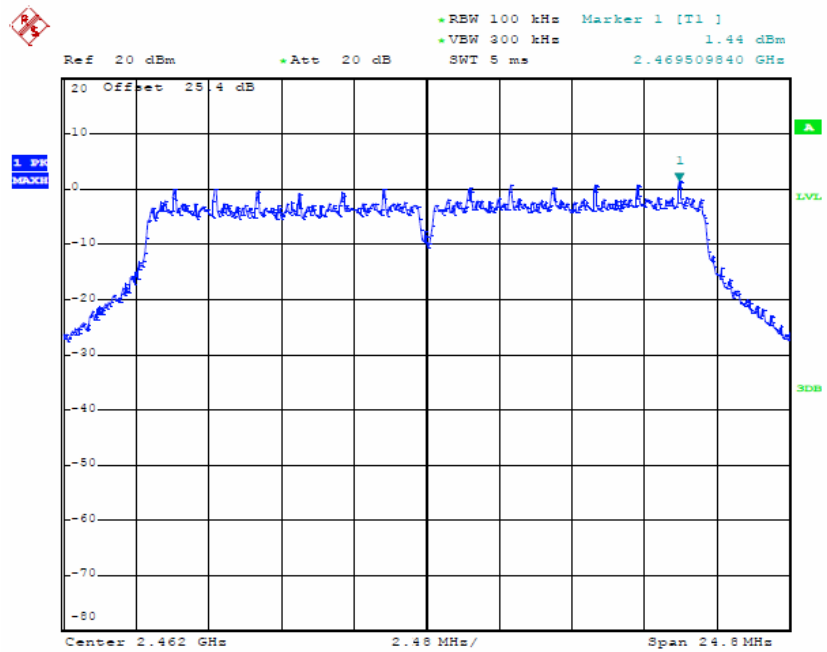


802.11n (HT20) CH—Low

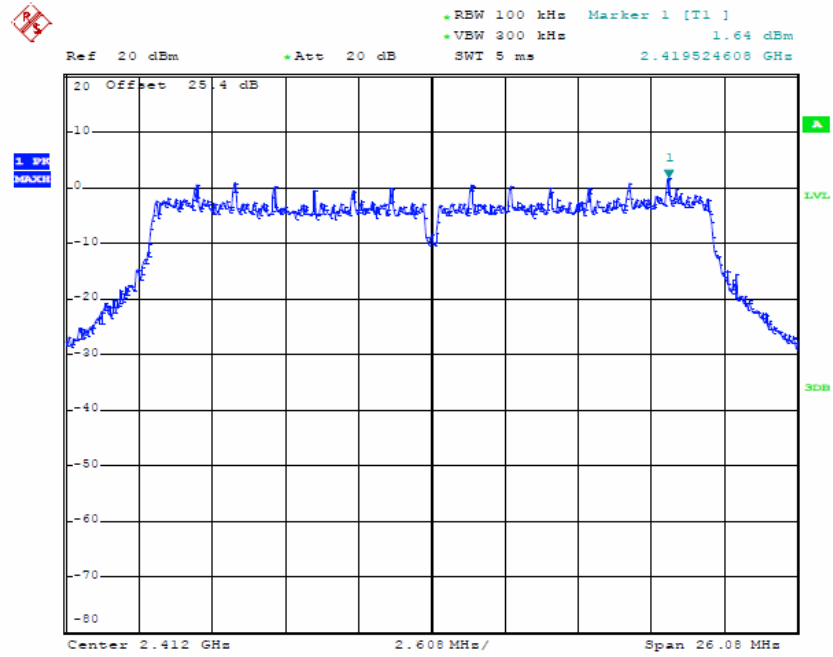


CH—Mid

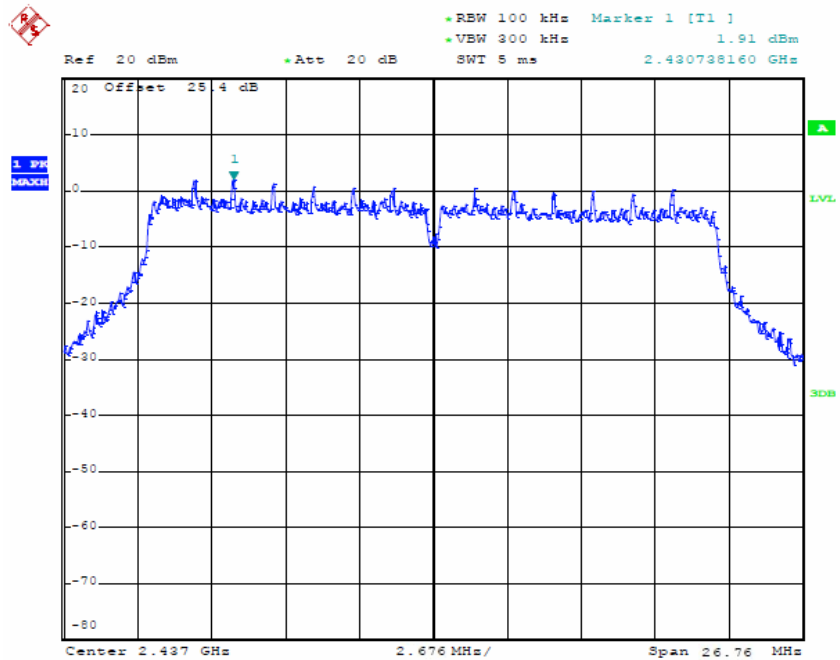


CH—High

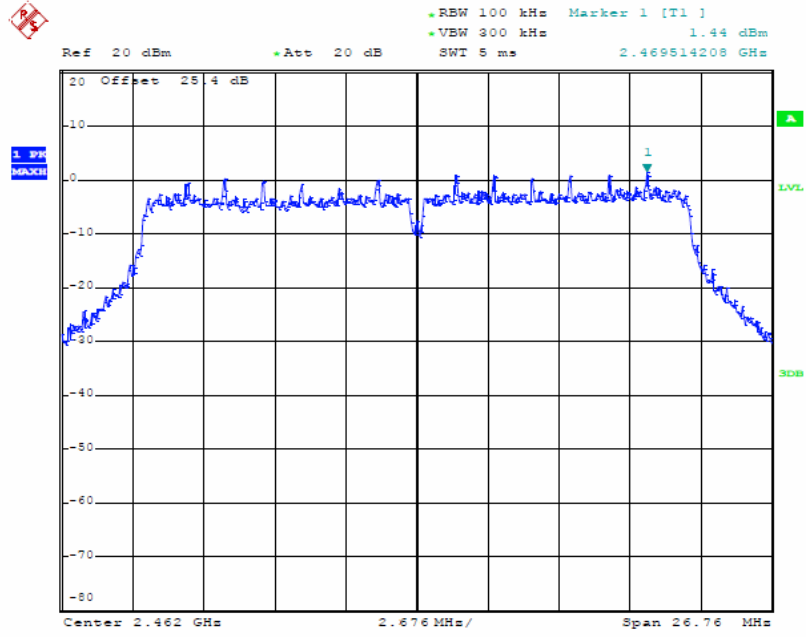


802.11n (HT40) CH—Low

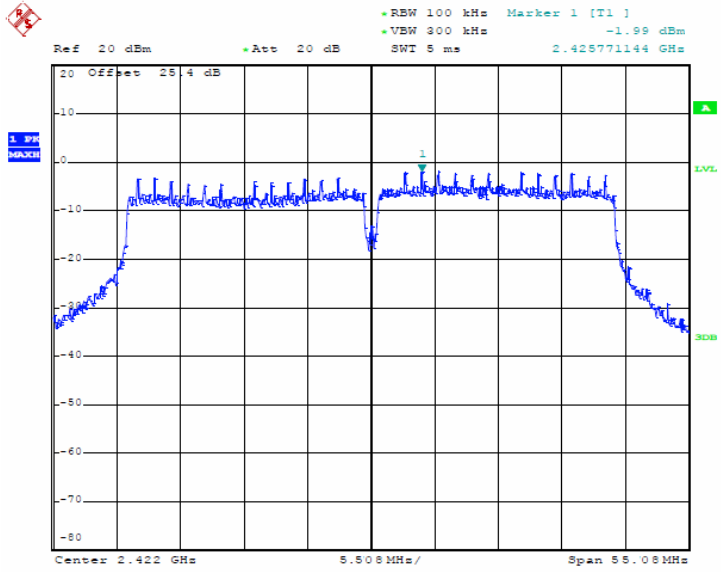

CH—Mid

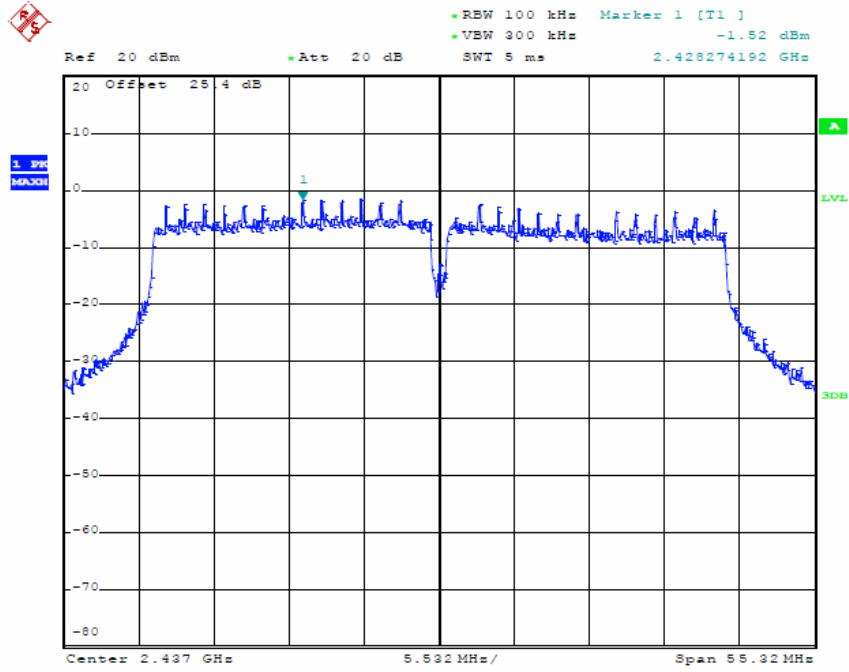

CH—High

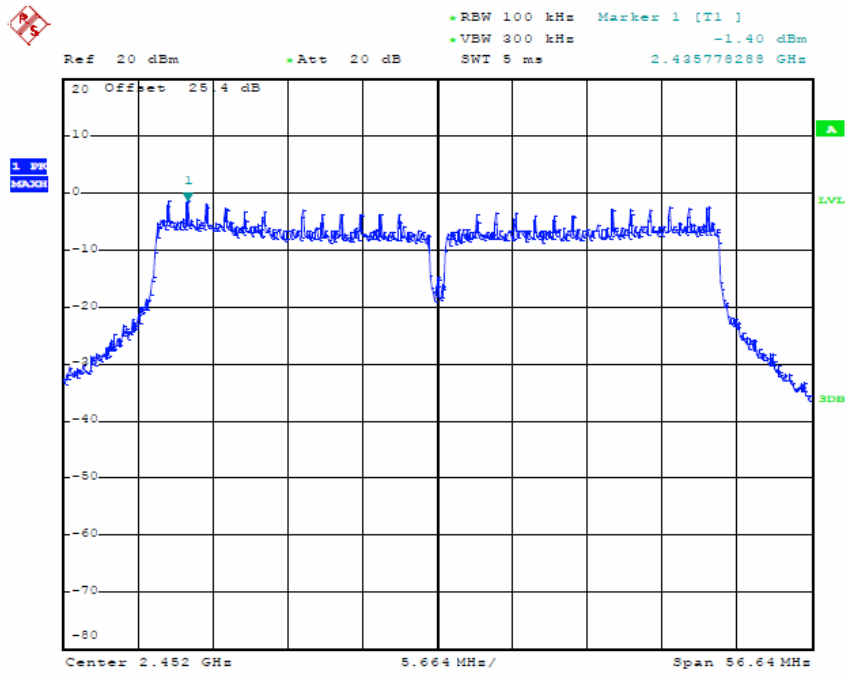

5.6 Spurious Emission Test


5.6.1 Test Requirement: FCC Part15 Section 15.247(d)

5.6.2 Test method: ANSI C63.4: 2009 and KDB558074 DTS D01 meas guidance v02.

5.6.3 limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.6.4 Test Setup:

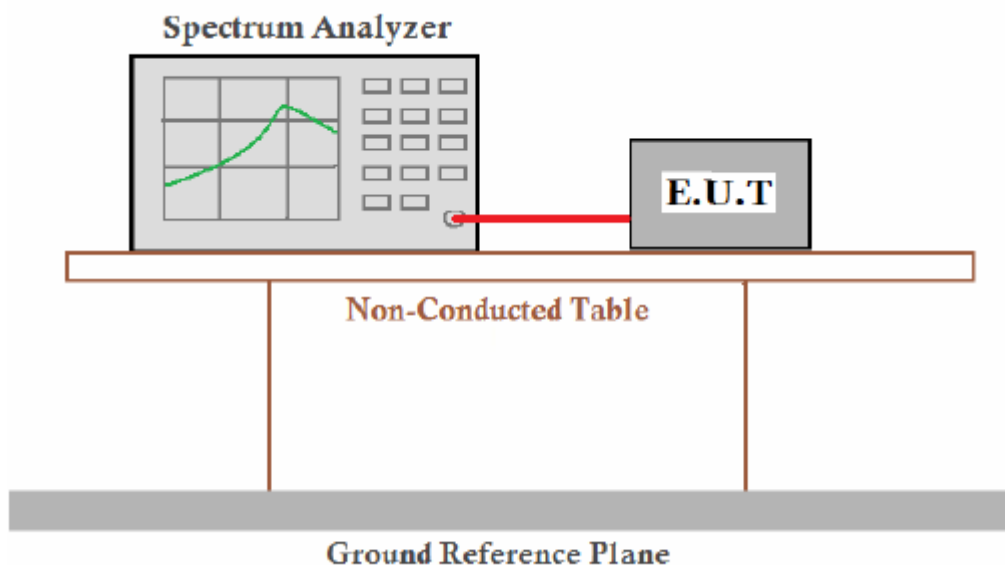

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.6.5 Test Plot as follows:

(The spurious emission of the three mode are nearly the same ,and the 3G Dongle playing mode is better than the iphone and ADSL mode, so we give only the worstest date.)


FCC ID: R7FA1

802.11b

Low Channel




30M-10G

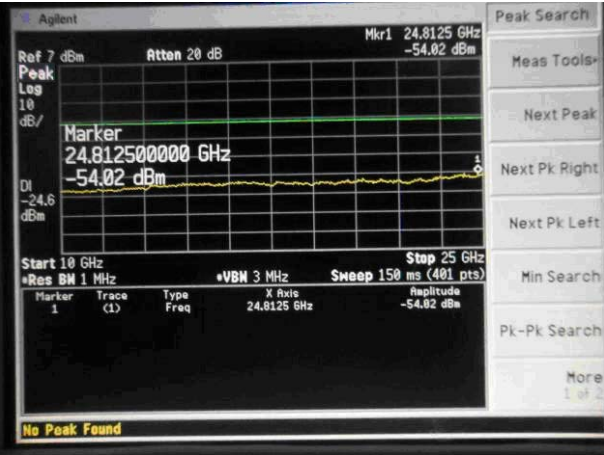


10G-25G

Middle Channel

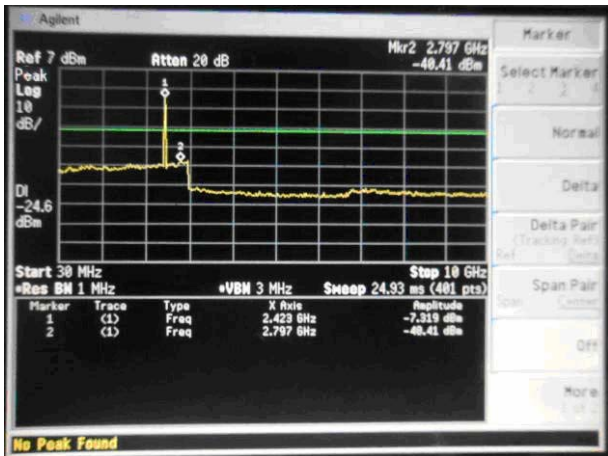


30M-10G

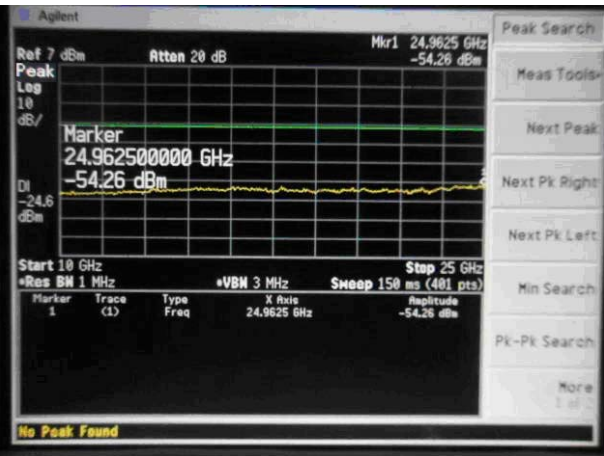


10G-25G

High Channel

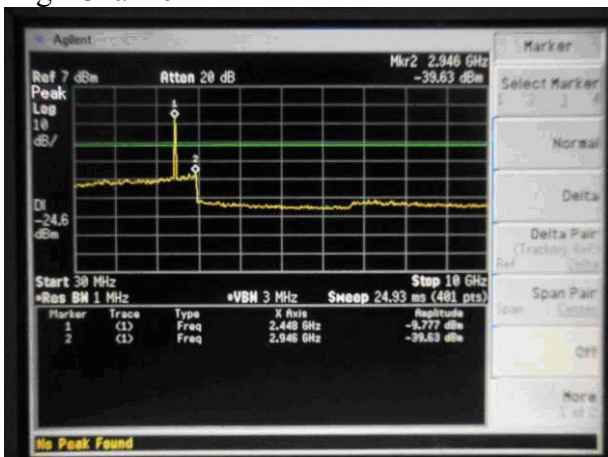

30M-10G

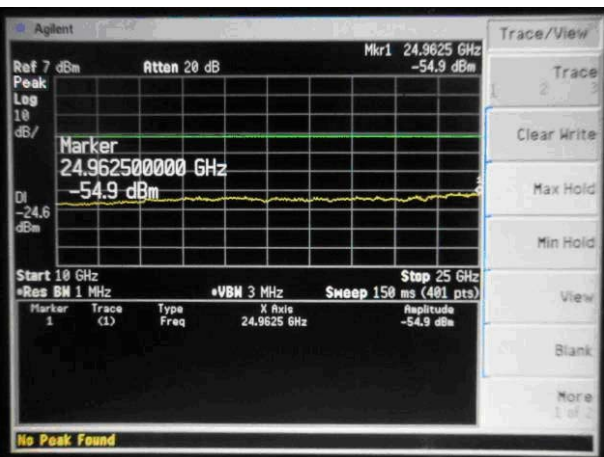


10G-25G


FCC ID: R7FA1

802.11g

Low Channel

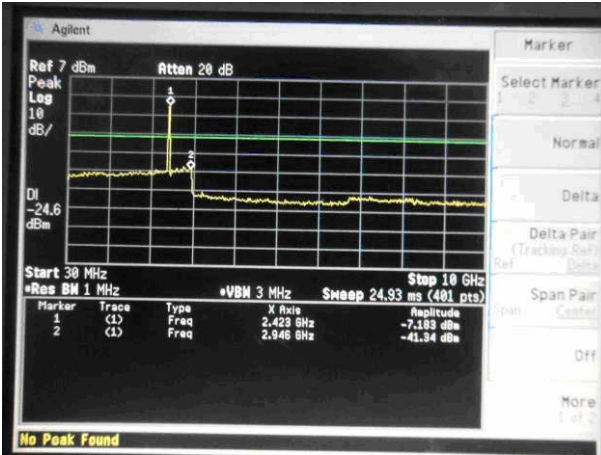


30M-10G

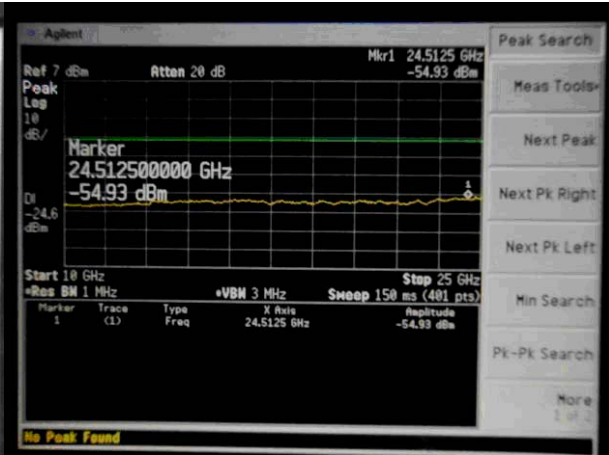


10G-25G

Middle Channel

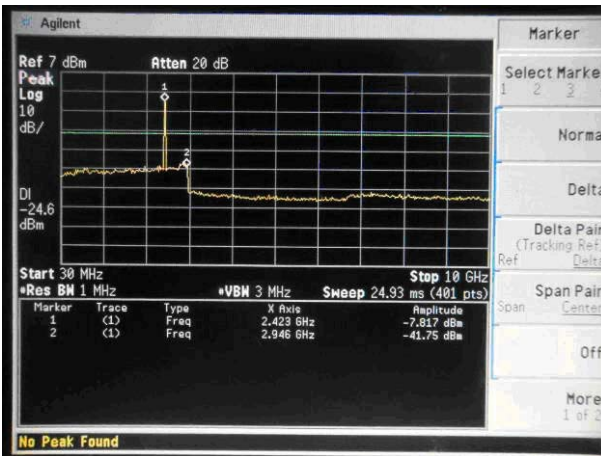


30M-10G

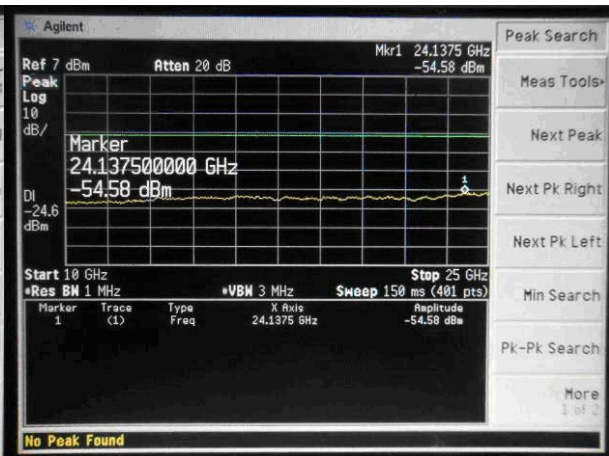


10G-25G

High Channel

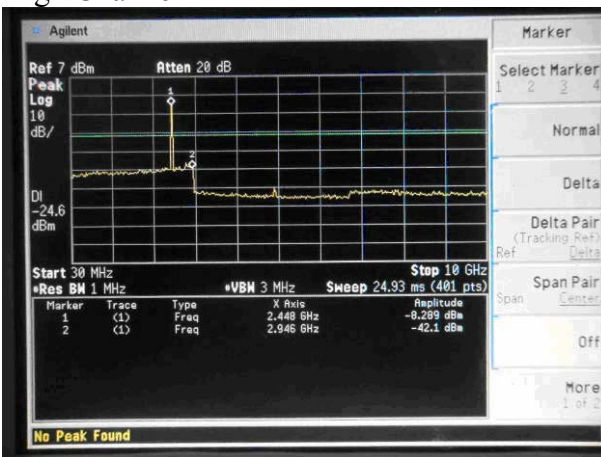

30M-10G

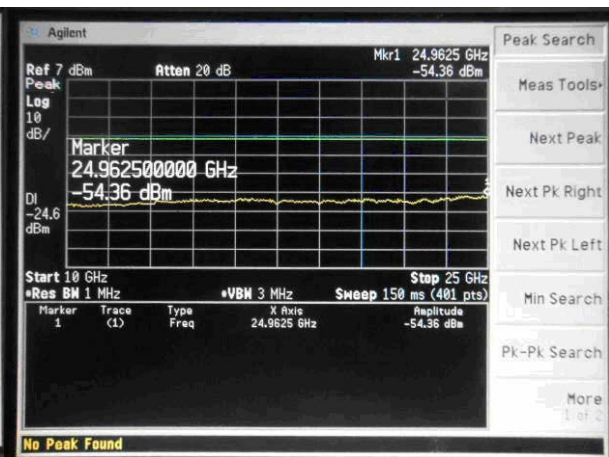


10G-25G


FCC ID: R7FA1

802.11n (HT20)

Low Channel

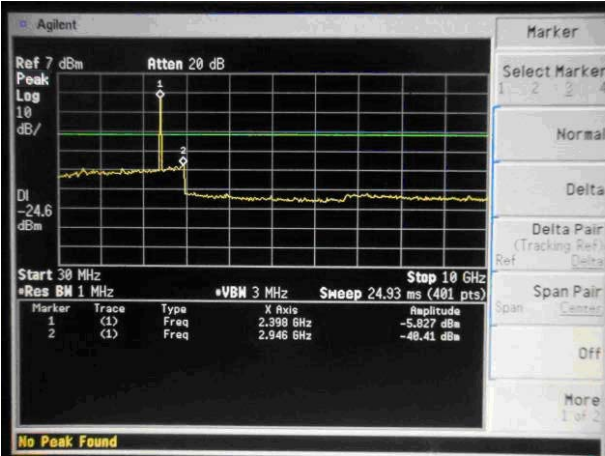


30M-10G

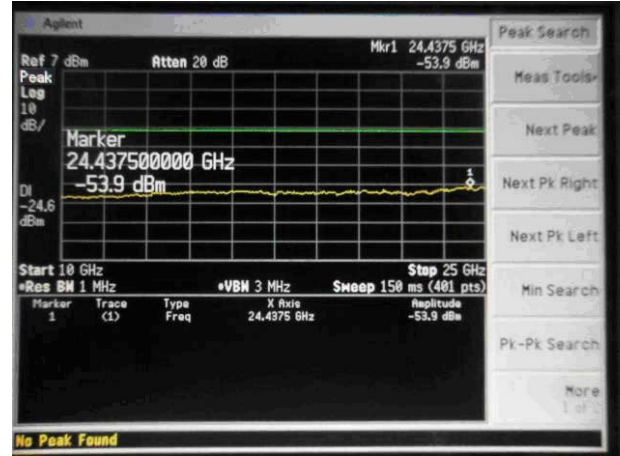


10G-25G

Middle Channel

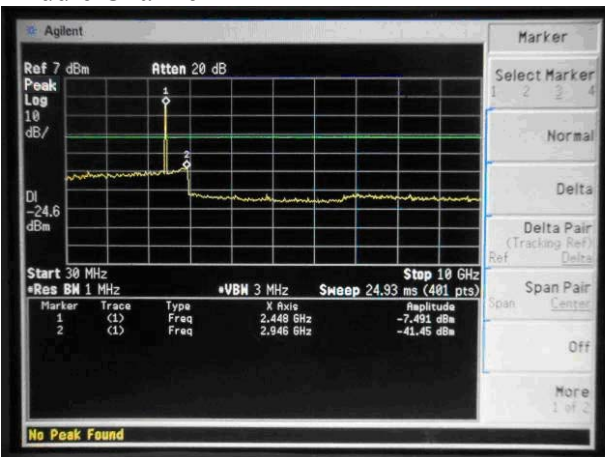


30M-10G

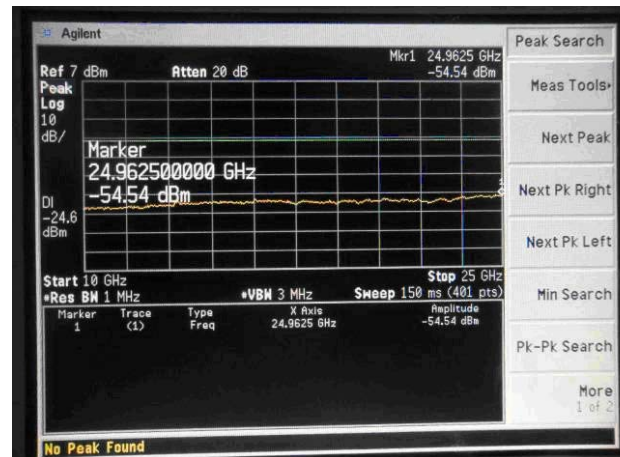


10G-25G

High Channel

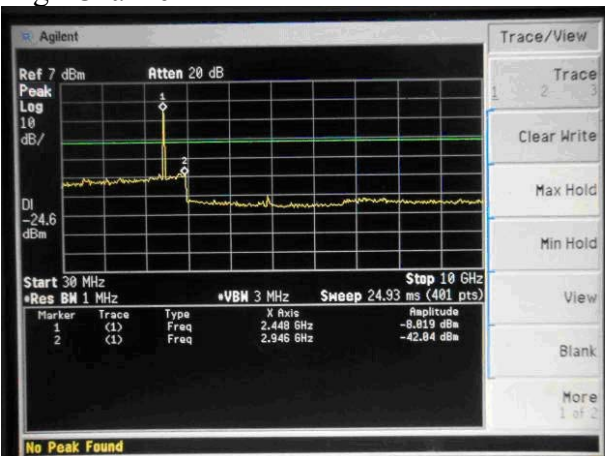

30M-10G

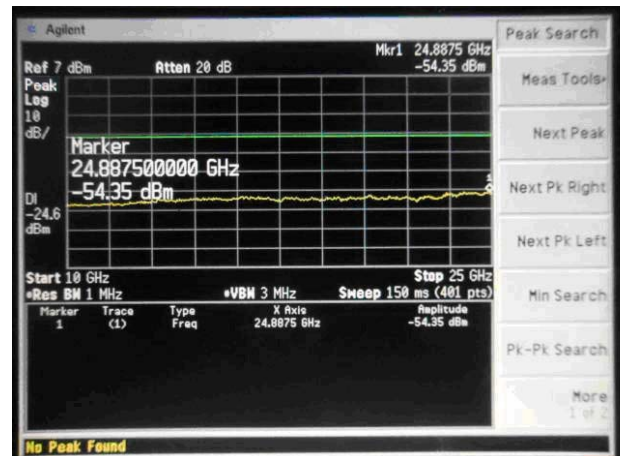


10G-25G

FCC ID: R7FA1

802.11n (HT40)

Low Channel

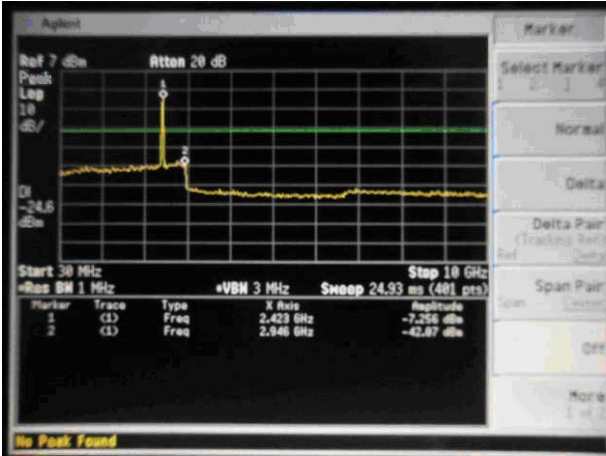


30M-10G




10G-25G

Middle Channel

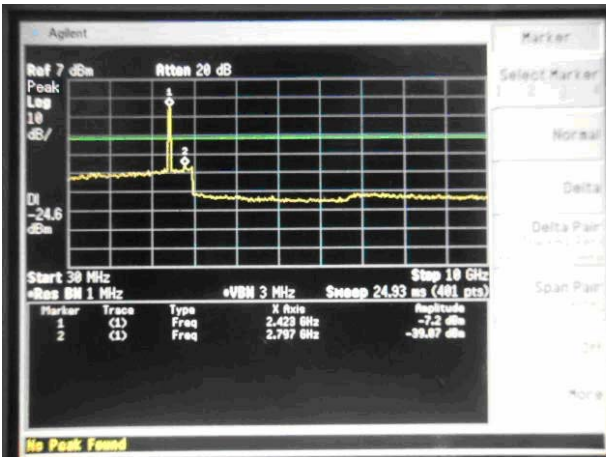


30M-10G

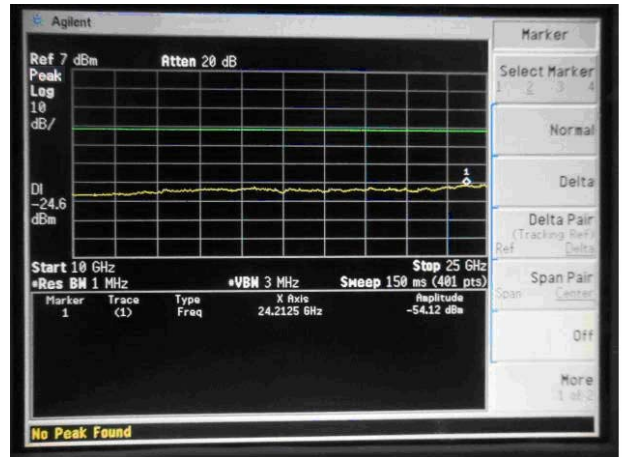


10G-25G

High Channel

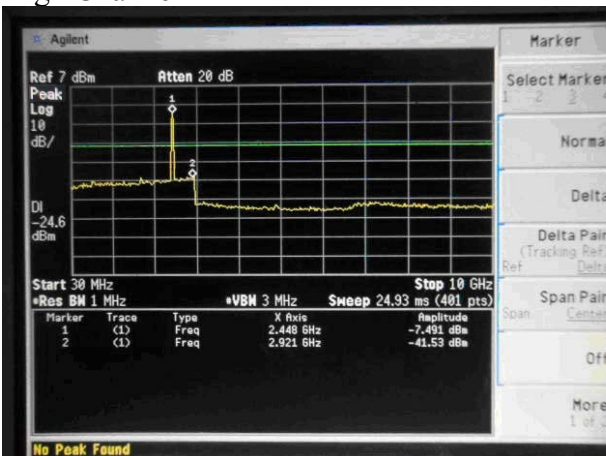

30M-10G

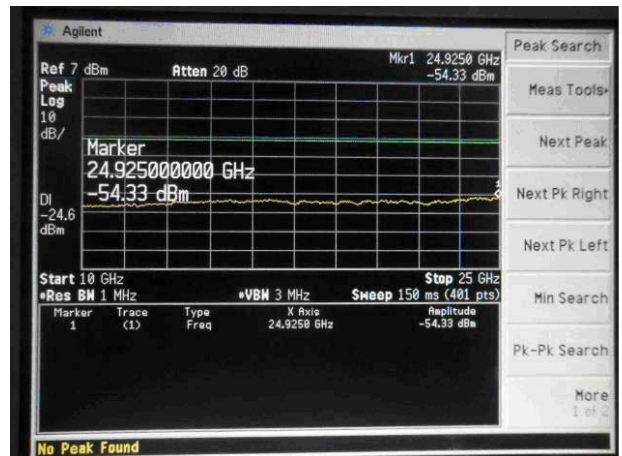

10G-25G

5.7 Radiated Emissions

5.7.1.1. Test Limits (< 30 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

5.7.1.2. Test Limits (\geq 30 MHz)

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209	
902-928 MHz		30 - 88 MHz	40 dBuV/m @3M
2.4-2.4835 GHz		88 - 216 MHz	43.5
94 dB μ V/m @3m		216 - 960 MHz	46
	54 dB μ V/m @3m	ABOVE 960 MHz	54dBuV/m


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.7.2. Test Configuration:


5.7.2.1. 9k to 30MHz emissions:

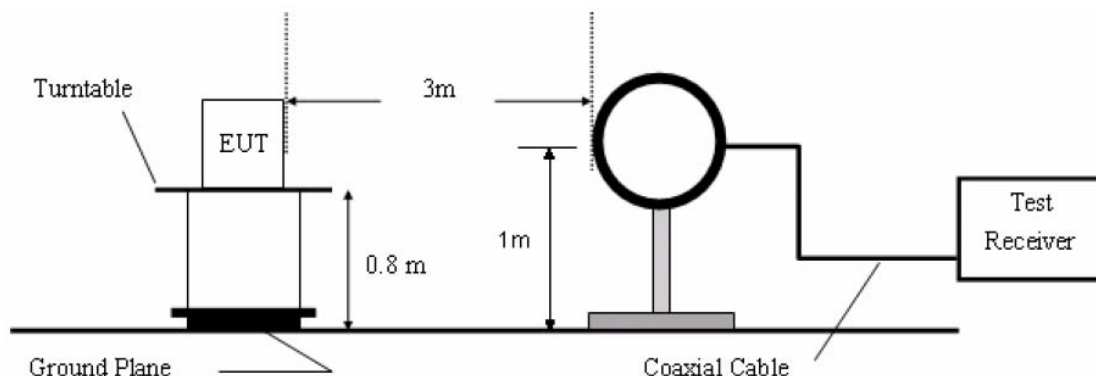

5.7.2.2. 30M to 1G emissions:

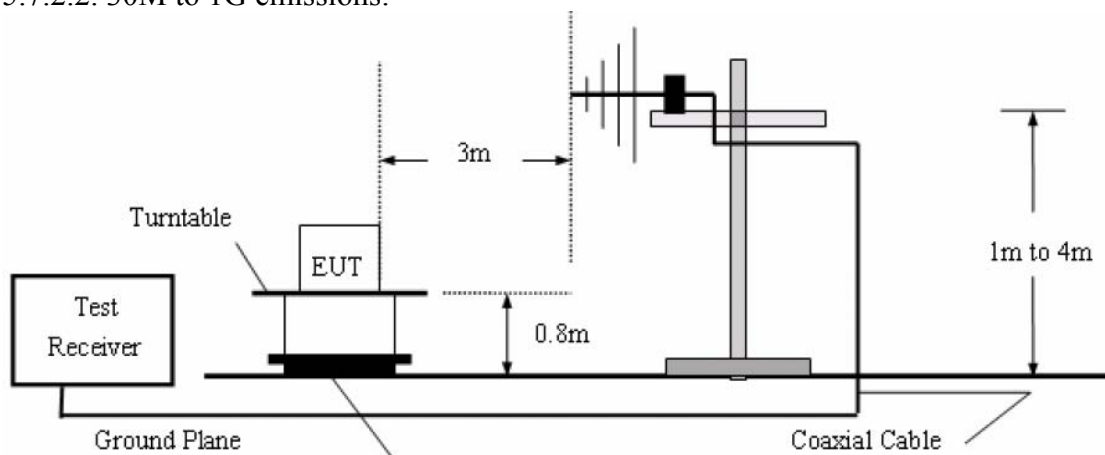

5.7.2.3. 1G to 40G emissions:

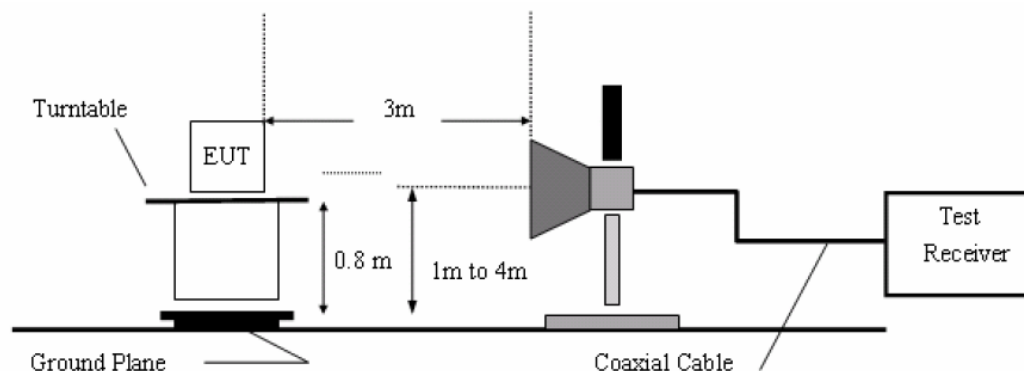

5.7.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz.

All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 5.6.4.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

5.7.4. Test Results

FCC ID: R7FA1

Below 30MHz

There is no emissions were detected below 30MHz

From 30MHz to 1 GHz

Operation Mode: Normal link

Temperature: 25°C

Humidity: 70 % RH

Test Date:Nov.07 2012

Tested by: Andy Chen

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Detector Mode (PK/QP)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
60.0690	V	Peak	61.00	-25.23	35.77	40.00	-4.23
125.0066	V	Peak	64.63	-25.20	39.43	43.50	-4.07
159.7844	V	Peak	64.33	-26.49	37.84	43.50	-5.66
250.3011	V	Peak	63.83	-22.54	41.29	46.00	-4.71
480.5276	V	Peak	58.56	-19.63	38.89	46.00	-7.11
801.7862	V	Peak	53.24	-12.59	40.65	46.00	-5.35
125.0066	H	Peak	64.81	-30.00	34.81	43.50	-8.69
159.7844	H	Peak	71.35	-31.49	39.86	43.50	-3.64
250.3011	H	Peak	69.22	-26.27	42.95	46.00	-3.05
375.9384	H	Peak	60.96	-21.90	39.06	46.00	-6.94
480.5276	H	Peak	62.34	-19.90	42.44	46.00	-3.56
801.7862	H	Peak	55.41	-13.58	41.83	46.00	-4.17

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz and the IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Above 1 GHz(lowest=2412MHz, Middle=2437MHz, High=2462MHz)■ **Above 1GHz**

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.01	31.79	8.61	24.17	45.24	74.00	-28.76	Vertical
7236.00	29.39	36.19	11.68	26.52	50.74	74.00	-23.26	Vertical
9648.00	29.94	38.07	14.16	25.44	56.73	74.00	-17.27	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	26.93	31.81	8.62	24.17	43.19	74.00	-30.81	Horizontal
7236.00	27.98	36.19	11.68	26.52	49.33	74.00	-24.67	Horizontal
9648.00	28.29	38.07	14.16	25.44	55.08	74.00	-18.92	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	19.24	31.79	8.61	24.17	35.47	54.00	-18.53	Vertical
7236.00	20.15	36.19	11.68	26.52	41.50	54.00	-12.50	Vertical
9648.00	21.48	38.07	14.16	25.44	48.27	54.00	-5.73	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	21.43	31.81	8.62	24.17	37.69	54.00	-16.31	Horizontal
7236.00	21.78	36.19	11.68	26.52	43.13	54.00	-10.87	Horizontal
9648.00	17.19	38.07	14.16	25.44	43.98	54.00	-10.02	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.63	31.85	8.66	24.12	46.02	74.00	-27.98	Vertical
7311.00	29.22	36.37	11.71	26.71	50.59	74.00	-23.41	Vertical
9748.00	30.93	38.27	14.25	25.38	58.07	74.00	-15.93	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	27.26	31.85	8.66	24.10	43.67	74.00	-30.33	Horizontal
7311.00	28.15	36.37	11.71	26.71	49.52	74.00	-24.48	Horizontal
9748.00	27.73	38.27	14.25	25.38	54.87	74.00	-19.13	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	20.13	31.85	8.66	24.12	36.52	54.00	-17.48	Vertical
7311.00	20.16	36.37	11.71	26.71	41.53	54.00	-12.47	Vertical
9748.00	21.35	38.27	14.25	25.38	48.49	54.00	-5.51	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	22.06	31.85	8.66	24.10	38.47	54.00	-15.53	Horizontal
7311.00	21.75	36.37	11.71	26.71	43.12	54.00	-10.88	Horizontal
9748.00	16.33	38.27	14.25	25.38	43.47	54.00	-10.53	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.99	31.89	8.70	24.05	45.53	74.00	-28.47	Vertical
7386.00	29.36	36.49	11.76	26.90	50.71	74.00	-23.29	Vertical
9848.00	27.95	38.62	14.31	25.30	55.58	74.00	-18.42	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	27.70	31.89	8.70	24.05	44.24	74.00	-29.76	Horizontal
7386.00	28.07	36.49	11.76	26.90	49.42	74.00	-24.58	Horizontal
9848.00	27.41	38.62	14.31	25.30	55.04	74.00	-18.96	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	19.54	31.89	8.70	24.05	36.08	54.00	-17.92	Vertical
7386.00	20.34	36.49	11.76	26.90	41.69	54.00	-12.31	Vertical
9848.00	18.67	38.62	14.31	25.30	46.30	54.00	-7.70	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	22.10	31.89	8.70	24.05	38.64	54.00	-15.36	Horizontal
7386.00	21.27	36.49	11.76	26.90	42.62	54.00	-11.38	Horizontal
9848.00	15.11	38.62	14.31	25.30	42.74	54.00	-11.26	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remarks:

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.82	31.79	8.81	24.17	45.05	74.00	-28.95	Vertical
7236.00	28.47	36.19	11.88	26.52	49.82	74.00	-24.18	Vertical
9648.00	30.98	38.07	14.16	25.44	57.75	74.00	-16.25	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	28.23	31.81	8.82	24.17	44.49	74.00	-29.51	Horizontal
7236.00	29.50	36.19	11.88	26.52	50.85	74.00	-23.15	Horizontal
9648.00	28.17	38.07	14.16	25.44	54.96	74.00	-19.04	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	24.22	31.79	8.81	24.17	40.45	54.00	-13.55	Vertical
7236.00	22.07	36.19	11.88	26.52	43.42	54.00	-10.58	Vertical
9648.00	16.46	38.07	14.16	25.44	43.25	54.00	-10.75	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	24.03	31.81	8.82	24.17	40.29	54.00	-13.71	Horizontal
7236.00	22.80	36.19	11.88	26.52	44.15	54.00	-9.85	Horizontal
9648.00	16.97	38.07	14.16	25.44	43.76	54.00	-10.24	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.35	31.79	8.61	24.17	45.58	74.00	-28.42	Vertical
7311.00	27.71	36.37	11.71	26.71	49.08	74.00	-24.92	Vertical
9748.00	28.16	38.27	14.25	25.38	55.30	74.00	-18.70	Vertical
12185.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4874.00	30.35	31.85	8.66	24.10	46.76	74.00	-27.24	Horizontal
7311.00	28.39	36.37	11.71	26.71	49.76	74.00	-24.24	Horizontal
9748.00	27.75	38.27	14.25	25.38	54.89	74.00	-19.11	Horizontal
12185.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	24.65	31.79	8.61	24.17	40.88	54.00	-13.12	Vertical
7311.00	21.21	36.37	11.71	26.71	42.58	54.00	-11.42	Vertical
9748.00	14.76	38.27	14.25	25.38	41.90	54.00	-12.10	Vertical
12185.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4874.00	26.25	31.85	8.66	24.10	42.66	54.00	-11.34	Horizontal
7311.00	19.99	36.37	11.71	26.71	41.36	54.00	-12.64	Horizontal
9748.00	15.65	38.27	14.25	25.38	42.79	54.00	-11.21	Horizontal
12185.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.07	31.85	8.66	24.12	44.46	74.00	-29.54	Vertical
7386.00	27.76	36.49	11.76	26.90	49.11	74.00	-24.89	Vertical
9848.00	27.00	38.62	14.31	25.30	54.63	74.00	-19.37	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	29.07	31.89	8.70	24.05	45.61	74.00	-28.39	Horizontal
7386.00	29.62	36.49	11.76	26.90	50.97	74.00	-23.03	Horizontal
9848.00	28.47	38.62	14.31	25.30	56.10	74.00	-17.90	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	23.57	31.85	8.66	24.12	39.96	54.00	-14.04	Vertical
7386.00	21.06	36.49	11.76	26.90	42.41	54.00	-11.59	Vertical
9848.00	15.10	38.62	14.31	25.30	42.73	54.00	-11.27	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	24.57	31.89	8.70	24.05	41.11	54.00	-12.89	Horizontal
7386.00	20.72	36.49	11.76	26.90	42.07	54.00	-11.93	Horizontal
9848.00	15.07	38.62	14.31	25.30	42.70	54.00	-11.30	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.17	31.81	8.62	24.17	45.43	74.00	-28.57	Vertical
7236.00	28.92	36.19	11.68	26.52	50.27	74.00	-23.73	Vertical
9648.00	29.08	38.07	14.16	25.44	55.87	74.00	-18.13	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	26.83	31.81	8.62	24.17	43.09	74.00	-30.91	Horizontal
7236.00	27.33	36.19	11.68	26.52	48.68	74.00	-25.32	Horizontal
9648.00	27.18	38.07	14.16	25.44	53.97	74.00	-20.03	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	25.07	31.81	8.62	24.17	41.33	54.00	-12.67	Vertical
7236.00	21.02	36.19	11.68	26.52	42.37	54.00	-11.63	Vertical
9648.00	16.68	38.07	14.16	25.44	43.47	54.00	-10.53	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	26.83	31.81	8.62	24.17	43.09	54.00	-10.91	Horizontal
7236.00	21.10	36.19	11.68	26.52	42.45	54.00	-11.55	Horizontal
9648.00	17.48	38.07	14.16	25.44	44.27	54.00	-9.73	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.30	31.85	8.66	24.10	46.71	74.00	-27.29	Vertical
7311.00	28.54	36.37	11.71	26.71	49.91	74.00	-24.09	Vertical
9748.00	28.67	38.27	14.25	25.38	55.81	74.00	-18.19	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	28.63	31.85	8.66	24.10	45.04	74.00	-28.96	Horizontal
7311.00	27.79	36.37	11.71	26.71	49.16	74.00	-24.84	Horizontal
9748.00	28.46	38.27	14.25	25.38	55.60	74.00	-18.40	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	26.30	31.85	8.66	24.10	42.71	54.00	-11.29	Vertical
7311.00	21.74	36.37	11.71	26.71	43.11	54.00	-10.89	Vertical
9748.00	15.27	38.27	14.25	25.38	42.41	54.00	-11.59	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	26.14	31.85	8.66	24.10	42.55	54.00	-11.45	Horizontal
7311.00	20.36	36.37	11.71	26.71	41.73	54.00	-12.27	Horizontal
9748.00	17.68	38.27	14.25	25.38	44.82	54.00	-9.18	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	28.96	31.89	8.70	24.05	45.50	74.00	-28.50	Vertical
7386.00	28.20	36.49	11.76	26.90	49.55	74.00	-24.45	Vertical
9848.00	28.03	38.62	14.31	25.30	55.66	74.00	-18.34	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	28.29	31.89	8.70	24.05	44.83	74.00	-29.17	Horizontal
7386.00	28.08	36.49	11.76	26.90	49.43	74.00	-24.57	Horizontal
9848.00	27.79	38.62	14.31	25.30	55.42	74.00	-18.58	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	25.56	31.89	8.70	24.05	42.10	54.00	-11.90	Vertical
7386.00	21.50	36.49	11.76	26.90	42.85	54.00	-11.15	Vertical
9848.00	14.63	38.62	14.31	25.30	42.26	54.00	-11.74	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	25.47	31.89	8.70	24.05	42.01	54.00	-11.99	Horizontal
7386.00	22.54	36.49	11.76	26.90	43.89	54.00	-10.11	Horizontal
9848.00	16.87	38.62	14.31	25.30	44.50	54.00	-9.50	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	28.91	31.82	8.63	24.15	45.21	74.00	-28.79	Vertical
7266.00	29.98	36.28	11.69	26.58	51.37	74.00	-22.63	Vertical
9688.00	29.97	38.13	14.21	25.41	56.90	74.00	-17.10	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	28.95	31.82	8.63	24.15	45.25	74.00	-28.75	Horizontal
7266.00	29.79	36.28	11.69	26.58	51.18	74.00	-22.82	Horizontal
9688.00	30.11	38.13	14.21	25.41	57.04	74.00	-16.96	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	24.41	31.82	8.63	24.15	40.71	54.00	-13.29	Vertical
7266.00	20.28	36.28	11.69	26.58	41.67	54.00	-12.33	Vertical
9688.00	16.57	38.13	14.21	25.41	43.50	54.00	-10.50	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	24.45	31.82	8.63	24.15	40.75	54.00	-13.25	Horizontal
7266.00	20.89	36.28	11.69	26.58	42.28	54.00	-11.72	Horizontal
9688.00	16.21	38.13	14.21	25.41	43.14	54.00	-10.86	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.30	31.85	8.66	24.10	46.71	74.00	-27.29	Vertical
7311.00	28.54	36.37	11.71	26.71	49.91	74.00	-24.09	Vertical
9748.00	28.67	38.27	14.25	25.38	55.81	74.00	-18.19	Vertical
12185.00	*					74.00		Vertical
14682.00	*					74.00		Vertical
17179.00	*					74.00		Vertical
4874.00	30.46	31.85	8.66	24.10	46.87	74.00	-27.13	Horizontal
7311.00	29.56	36.37	11.71	26.71	50.93	74.00	-23.07	Horizontal
9748.00	29.26	38.27	14.25	25.38	56.40	74.00	-17.60	Horizontal
12185.00	*					74.00		Horizontal
14682.00	*					74.00		Horizontal
17179.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	26.10	31.85	8.66	24.10	42.51	54.00	-11.49	Vertical
7311.00	21.84	36.37	11.71	26.71	43.21	54.00	-10.79	Vertical
9748.00	16.97	38.27	14.25	25.38	44.11	54.00	-9.89	Vertical
12185.00	*					54.00		Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	25.06	31.85	8.66	24.10	41.47	54.00	-12.53	Horizontal
7311.00	21.16	36.37	11.71	26.71	42.53	54.00	-11.47	Horizontal
9748.00	15.06	38.27	14.25	25.38	42.20	54.00	-11.80	Horizontal
12185.00	*					54.00		Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Test mode:	802.11n(HT40)			Test channel:	Highest			
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	28.15	31.88	8.68	24.08	44.63	74.00	-29.37	Vertical
7356.00	28.56	36.45	11.74	26.84	49.91	74.00	-24.09	Vertical
9808.00	28.80	38.52	14.29	25.33	56.28	74.00	-17.72	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	29.10	31.88	8.68	24.08	45.58	74.00	-28.42	Horizontal
7356.00	28.66	36.45	11.74	26.84	50.01	74.00	-23.99	Horizontal
9808.00	29.16	38.52	14.29	25.33	56.64	74.00	-17.36	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal
Average value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	24.55	31.88	8.68	24.08	41.03	54.00	-12.97	Vertical
7356.00	22.06	36.45	11.74	26.84	43.41	54.00	-10.59	Vertical
9808.00	15.60	38.52	14.29	25.33	43.08	54.00	-10.92	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	24.80	31.88	8.68	24.08	41.28	54.00	-12.72	Horizontal
7356.00	19.56	36.45	11.74	26.84	40.91	54.00	-13.09	Horizontal
9808.00	16.86	38.52	14.29	25.33	44.34	54.00	-9.66	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal