

Certification Test Report

FCC ID: R7PEG1R1S2

FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210

ACS Report Number: 10-0207.W06.22.A

Manufacturer: Cellnet Technology Inc.
Model: Gridstream RF Enhanced Integrated Focus AX

Test Begin Date: June 22, 2010
Test End Date: June 23, 2010

Report Issue Date: April 25, 2011



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:

A handwritten signature in black ink, appearing to read 'Kirby Munroe', is written over a horizontal line.

Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 24 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES	7
4	LIST OF TEST EQUIPMENT	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS	10
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207 IC: RSS-GEN 7.2.4.....	10
7.2.1	<i>Measurement Procedure</i>	10
7.2.2	<i>Measurement Results</i>	10
7.3	RADIATED EMISSIONS – FCC: SECTION 15.109 (UNINTENTIONAL RADIATION) IC: RSS-GEN 6.1	13
7.3.1	<i>Measurement Procedure</i>	13
7.3.2	<i>Measurement Results</i>	13
7.4	6dB / 99% BANDWIDTH – FCC: SECTION 15.247(A)(2) IC: RSS-210 A8.2(A)	14
7.4.1	<i>Measurement Procedure</i>	14
7.4.2	<i>Measurement Results</i>	14
7.5	PEAK OUTPUT POWER REQUIREMENT - FCC SECTION 15.247(B)(3) IC: RSS-210 A8.4(4)	16
7.5.1	<i>Measurement Procedure</i>	16
7.5.2	<i>Measurement Results</i>	16
7.6	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS-FCC 15.247D IC:RSS-210 2.6, A8.5	17
7.6.1	<i>Band-Edge Compliance of RF Conducted Emissions</i>	17
7.6.1.1	<i>Measurement Procedure</i>	17
7.6.1.2	<i>Measurement Results</i>	17
7.6.2	<i>RF Conducted Spurious Emissions</i>	18
7.6.2.1	<i>Measurement Procedure</i>	18
7.6.2.2	<i>Measurement Results</i>	18
7.6.3	<i>Radiated Spurious Emissions (Restricted Bands) - FCC Sec. 15.205 IC: RSS-210 2.6</i>	20
7.6.3.1	<i>Measurement Procedure</i>	20
7.6.3.2	<i>Duty Cycle Correction</i>	20
7.6.3.3	<i>Measurement Results</i>	21
7.6.3.4	<i>Sample Calculation:</i>	21
7.7	PEAK POWER SPECTRAL DENSITY- FCC SECTION 15.247(E) IC: RSS-210 A8.2(B).....	22
7.7.1	<i>Measurement Procedure</i>	22
7.7.2	<i>Measurement Results</i>	22
8	CONCLUSION	24

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210.

1.2 Product description

Gridstream RF Enhanced Integrated Focus AX meter is an Active Energy kWh/kW/TOU Meter with field-proven Digital Multiplication Measurement Technique to ensure a highly accurate load performance and dependability during the entire life of the product. It is an integrated solution with FOCUS AX advanced metering electronics the Gridstream RF communication electronics combined together on a single PCB. It also offers a Service Disconnect option and ZigBee connectivity for HAN applications.

Technical Details:

Band of operation:	2405 – 2475 MHz
Number of hopping channels:	15
Channel spacing	5 MHz
Modulation format:	O-QPSK
Antenna Type/Gain:	Printed Inverted F, 5dBi
Operating Voltage:	120/240VAC

Manufacturer Information:

Cellnet Technology, Inc.
30000 Mill Creek Ave., Suite 100
Alpharetta, GA 30022

Test Sample Serial Number(s): 102324554

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

The Gridstream RF Enhanced Integrated Focus AX contains both 900 MHz and 2.4GHz radios. The 900 MHz LAN radio and the 2.4 GHz Zigbee radio operate under CFR 47 Part 15.247 and IC RSS-210. This report addresses the 2.4 GHz Zigbee radio only. A separate report, 10-0207.W06.12.A, will be issued to address the 900 MHz LAN radio.

Both the 900 MHz LAN radio and the 2.4 GHz Zigbee radio can transmit simultaneously therefore radiated inter-modulation products were evaluated and found to be in compliance.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 894540

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

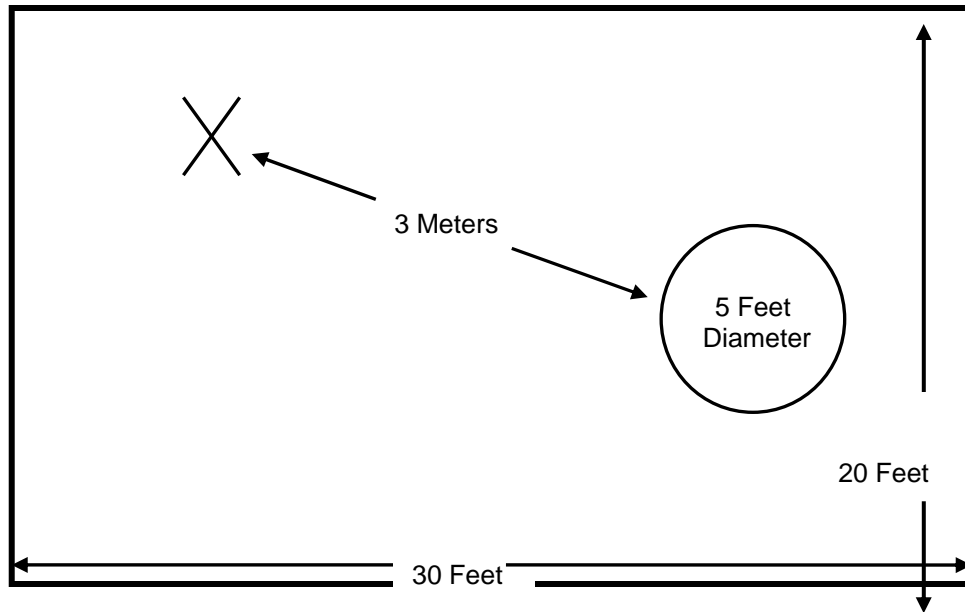


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

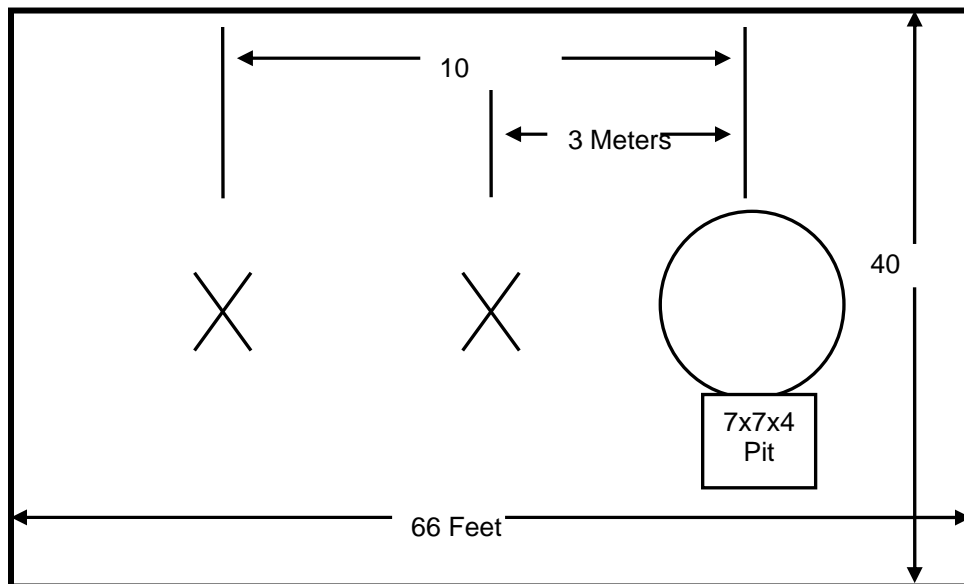


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

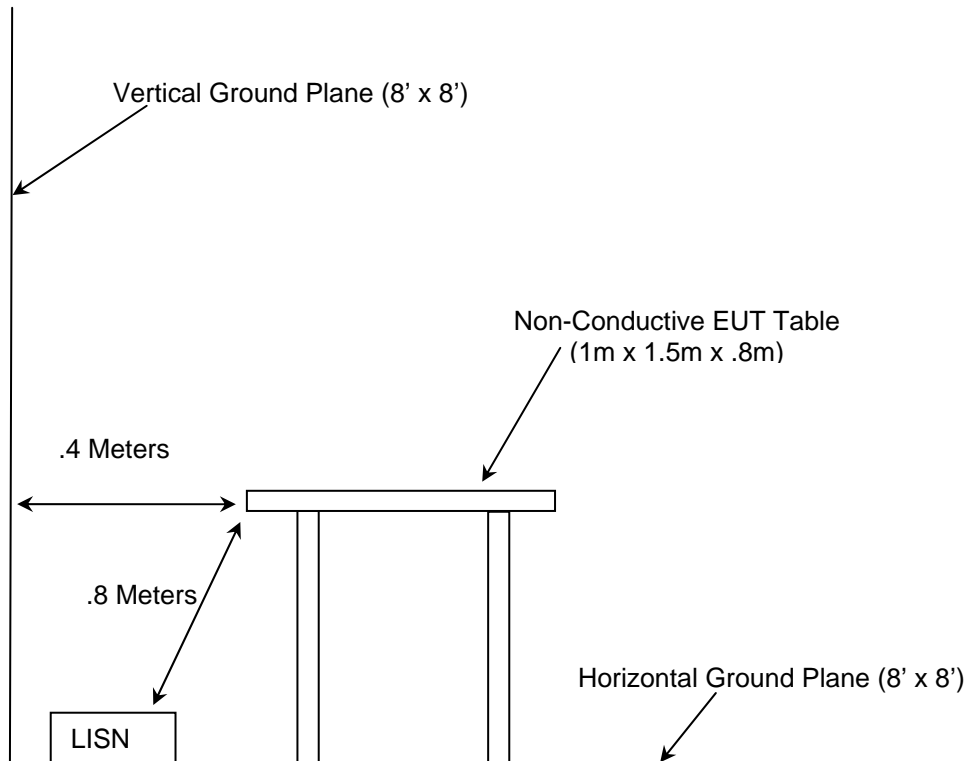


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2010
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2010
- ❖ FCC KDB Publication No. 558074 - Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247), March 2005
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8 December 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN - General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

Equipment Calibration Information					
ACS#	Mfg.	Eq. type	Model	S/N	Cal. Due
1	Rohde & Schwarz	Spectrum Analyzers	ESMI - Display	833771/007	09-21-2010
2	Rohde & Schwarz	Spectrum Analyzers	ESMI - Receiver	839587/003	09-21-2010
3	Rohde & Schwarz	Spectrum Analyzers	ESMI - Display	839379/011	02-02-2011
4	Rohde & Schwarz	Spectrum Analyzers	ESMI - Receiver	833827/003	02-02-2011
22	Agilent	Amplifiers	8449B	3008A00526	09-21-2010
25	Chase	Antennas	CBL6111	1043	09-02-2010 (See Note1)
30	Spectrum Technologies	Antennas	DRH-0118	970102	05-08-2011 (See Note1)
73	Agilent	Amplifier	8447D	2727A05624	05-26-2011
153	EMCO	LISN	Feb-25	9411-2268	01-11-2011
167	ACS	Cable Set	Chamber EMI Cable Set	167	01-25-2011
168	Hewlett Packard	Attenuators	11947A	44829	02-04-2011
193	ACS	Cable Set	OATS cable Set	193	01-05-2011
283	Rohde & Schwarz	Spectrum Analyzers	FSP40	1000033	09-21-2010
324	ACS	Cables	Belden	8214	07-15-2010
329	A.H. Systems	Antennas	SAS-571	721	08-04-2011 (See Note1)
338	Hewlett Packard	Amplifiers	8449B	3008A01111	10-16-2010
340	Aeroflex/Weinschel	Attenuators	AS-20	7136	10-16-2010
343	Florida RF Cables	Cables	SMRE-200W- 12.0-SMRE	N/A	04-27-2011
430	RF Cables	Cables	SMS-290AW- 480-SMS	N/A	04-27-2011
432	Microwave Circuits	Filters	H3G020G4	264066	07-17-2010

Note1: Items calibrated on a 2 year cycle.

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
The EUT was tested standalone with no support equipment utilized.				

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

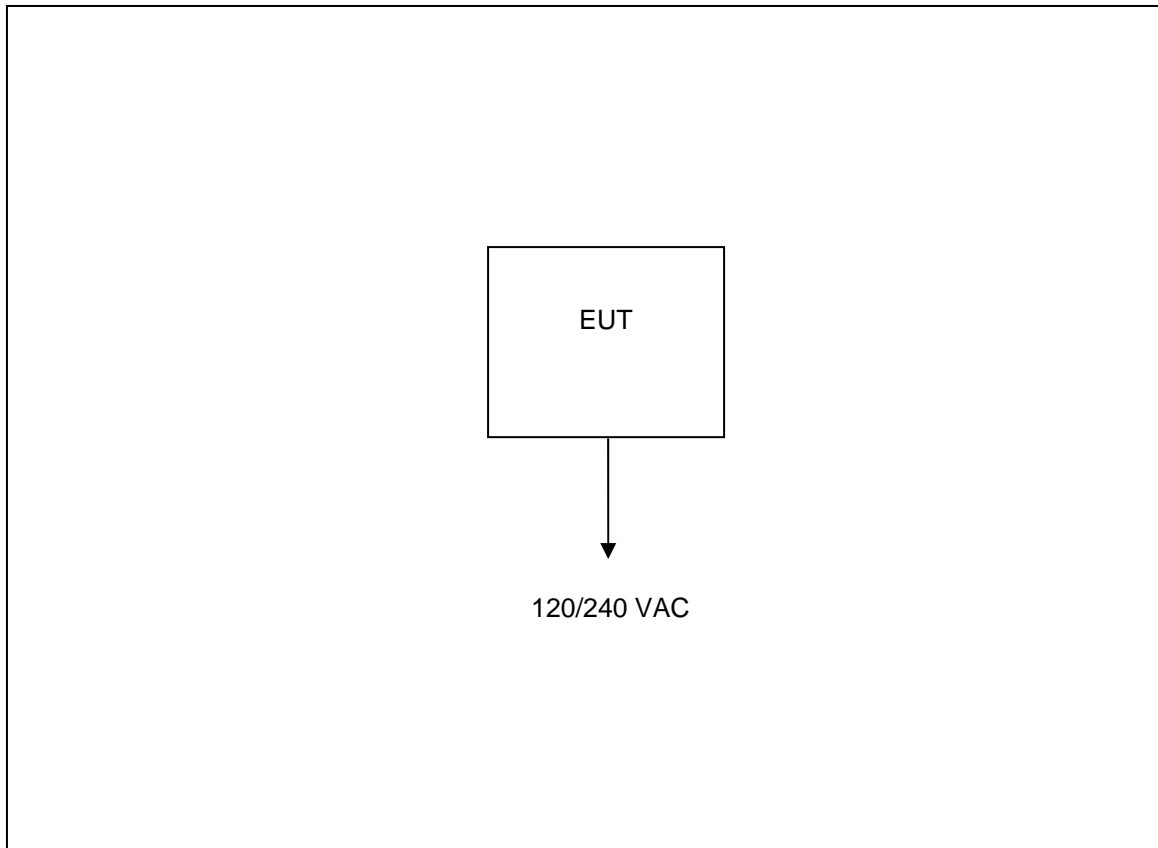


Figure 6-1: EUT Test Setup

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses an inverted F PCB antenna with a maximum gain of +5 dBi. The antenna is integral to the PCB and cannot be removed or modified.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss
Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Results of the test are shown below in and Tables 7.2.2-1 to 7.2.2-4.

Table 7.2.2-1: Line 1 Conducted EMI Results – 120 VAC

Frequency (MHz)	Level (dBuV)	Transducer (dB)	Limit (dBuV)	Margin (dB)	Line	PE	Detector
0.228	54.00	9.9	63	8.5	L1	GND	QP
0.276	51.80	10.0	61	9.1	L1	GND	QP
0.564	42.60	10.0	56	13.4	L1	GND	QP
0.738	43.00	10.1	56	13.0	L1	GND	QP
0.912	33.10	10.0	56	22.9	L1	GND	QP
3.708	32.20	9.9	56	23.8	L1	GND	QP
4.062	38.10	9.9	56	17.9	L1	GND	QP
4.296	38.80	9.9	56	17.2	L1	GND	QP
4.698	36.00	10.0	56	20.0	L1	GND	QP
4.812	35.60	10.0	56	20.4	L1	GND	QP
0.228	38.30	9.9	53	14.2	L1	GND	AVG
0.348	31.50	10.0	49	17.5	L1	GND	AVG
0.570	32.80	10.0	46	13.2	L1	GND	AVG
0.720	22.00	10.1	46	24.0	L1	GND	AVG
0.978	21.80	10.0	46	24.2	L1	GND	AVG
3.654	28.10	9.9	46	17.9	L1	GND	AVG
4.092	33.70	9.9	46	12.3	L1	GND	AVG
4.302	33.00	9.9	46	13.0	L1	GND	AVG
4.698	30.30	10.0	46	15.7	L1	GND	AVG
4.842	30.70	10.0	46	15.3	L1	GND	AVG

Table 7.2.2-2: Line 2 Conducted EMI Results – 120 VAC

Frequency (MHz)	Level (dBuV)	Transducer (dB)	Limit (dBuV)	Margin (dB)	Line	PE	Detector
0.228	54.50	9.9	63	8.0	L2	GND	QP
0.258	54.70	10.0	62	6.8	L2	GND	QP
0.528	43.80	10.0	56	12.2	L2	GND	QP
0.894	35.60	10.0	56	20.4	L2	GND	QP
4.128	41.60	9.9	56	14.4	L2	GND	QP
4.422	41.30	10.0	56	14.7	L2	GND	QP
4.488	40.80	10.0	56	15.2	L2	GND	QP
4.674	38.50	10.0	56	17.5	L2	GND	QP
4.746	38.20	10.0	56	17.8	L2	GND	QP
4.914	36.80	10.0	56	19.2	L2	GND	QP
0.264	37.20	10.0	51	14.1	L2	GND	AVG
0.330	33.90	10.0	50	15.6	L2	GND	AVG
0.516	30.90	10.0	46	15.1	L2	GND	AVG
0.954	24.80	10.0	46	21.3	L2	GND	AVG
4.122	35.30	9.9	46	10.7	L2	GND	AVG
4.422	37.30	10.0	46	8.7	L2	GND	AVG
4.5.00	34.20	10.0	46	11.8	L2	GND	AVG
4.674	32.20	10.0	46	13.8	L2	GND	AVG
4.698	32.70	10.0	46	13.3	L2	GND	AVG
4.968	28.80	10.0	46	17.2	L2	GND	AVG

Table 7.2.2-3: Line 1 Conducted EMI Results – 240 VAC

Frequency (MHz)	Level (dBuV)	Transducer (dB)	Limit (dBuV)	Margin (dB)	Line	PE	Detector
0.228	51.60	9.9	63	11.0	L1	GND	QP
0.294	51.00	10.0	60	9.4	L1	GND	QP
0.354	49.50	10.0	59	9.4	L1	GND	QP
0.438	46.80	10.0	57	10.3	L1	GND	QP
0.702	38.20	10.1	56	17.8	L1	GND	QP
3.468	33.30	9.9	56	22.7	L1	GND	QP
3.534	35.60	9.9	56	20.4	L1	GND	QP
3.816	40.40	9.9	56	15.6	L1	GND	QP
3.924	36.90	9.9	56	19.1	L1	GND	QP
4.386	45.20	10.0	56	10.8	L1	GND	QP
0.228	34.20	9.9	53	18.4	L1	GND	AVG
0.294	34.20	10.0	50	16.2	L1	GND	AVG
0.354	33.80	10.0	49	15.1	L1	GND	AVG
0.510	31.30	10.0	46	14.7	L1	GND	AVG
0.786	17.40	10.1	46	28.6	L1	GND	AVG
3.480	29.10	9.9	46	16.9	L1	GND	AVG
3.534	30.80	9.9	46	15.2	L1	GND	AVG
3.828	33.90	9.9	46	12.1	L1	GND	AVG
3.930	31.30	9.9	46	14.7	L1	GND	AVG
4.368	40.10	10.0	46	5.9	L1	GND	AVG

Table 7.2.2-4: Line 2 Conducted EMI Results – 240 VAC

Frequency (MHz)	Level (dBuV)	Transducer (dB)	Limit (dBuV)	Margin (dB)	Line	PE	Detector
0.294	51.40	10.0	60	9.0	L2	GND	QP
0.330	50.90	10.0	60	8.6	L2	GND	QP
0.402	49.20	10.1	58	8.6	L2	GND	QP
0.408	49.00	10.1	58	8.6	L2	GND	QP
0.504	46.40	10.0	56	9.6	L2	GND	QP
0.738	37.50	10.1	56	18.5	L2	GND	QP
3.630	41.10	9.9	56	14.9	L2	GND	QP
3.804	42.20	9.9	56	13.8	L2	GND	QP
4.404	48.10	10.0	56	7.9	L2	GND	QP
4.998	37.70	10.0	56	18.3	L2	GND	QP
0.294	35.90	10.0	50	14.5	L2	GND	AVG
0.330	35.30	10.0	50	14.1	L2	GND	AVG
0.450	34.00	10.0	47	12.9	L2	GND	AVG
0.492	32.10	10.0	46	14.1	L2	GND	AVG
0.558	34.90	10.0	46	11.1	L2	GND	AVG
0.750	22.10	10.1	46	23.9	L2	GND	AVG
3.600	35.70	9.9	46	10.4	L2	GND	AVG
3.834	36.70	9.9	46	9.3	L2	GND	AVG
4.392	43.20	10.0	46	2.8	L2	GND	AVG
4.998	32.70	10.0	46	13.3	L2	GND	AVG

7.3 Radiated Emissions – FCC: Section 15.109 (Unintentional Radiation) IC: RSS-Gen 6.1

7.3.1 Measurement Procedure

Radiated emissions tests were performed over the frequency range of 30MHz to 12.5GHz. Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. Radiated measurements above 30MHz and below 1GHz were made with the Spectrum Analyzer’s resolution bandwidth set to 120 KHz using a Quasi-peak detector. Above 1GHz, peak and average measurements are taken with the RBW and VBW were set to 1MHz and 3MHz respectively.

7.3.2 Measurement Results

Results of the test are given in Tables 7.3.2-1 below:

Table 7.3.2-1: Radiated Emissions Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
30	-----	17.22	V	-6.70	-----	10.52	-----	40.0	-----	29.5
171.2	-----	38.15	V	-14.95	-----	23.20	-----	43.5	-----	20.3
173.3	-----	37.44	V	-15.03	-----	22.41	-----	43.5	-----	21.1
319.2	-----	37.33	H	-10.72	-----	26.61	-----	46.0	-----	19.4
329.046	-----	39.01	H	-10.34	-----	28.67	-----	46.0	-----	17.3
702.5	-----	19.36	H	-1.25	-----	18.11	-----	46.0	-----	27.9
957.9	-----	19.25	H	3.57	-----	22.82	-----	46.0	-----	23.2

* Note: All emissions above 957.9 MHz were attenuated below the permissible limit.

7.4 6dB / 99% Bandwidth – FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a)

7.4.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB Publication No. 558074 “Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)”. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the entire emissions and >> RBW.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission and approximately 20 dB below the peak level. The RBW was to 1% - 3% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The occupied bandwidth measurement function of the analyzer was used for the 99% bandwidth.

7.4.2 Measurement Results

Results are shown below in table 7.4.2-1 and figure 7.4.2-1 to 7.4.2-6:

Table 7.4.2-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2405	1.60	2.40
2440	1.59	2.39
2475	1.59	2.39

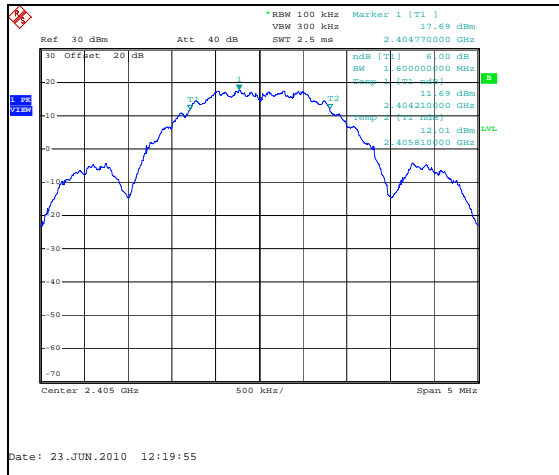


Figure 7.4.2-1: 6dB Bandwidth Plot – Low Channel





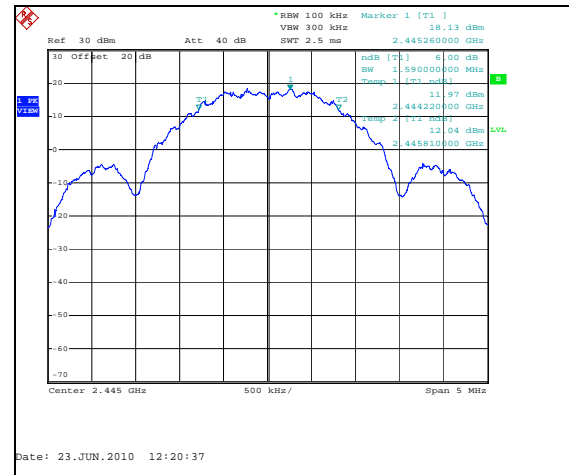


Figure 7.4.2-2: 6dB Bandwidth Plot – Mid Channel

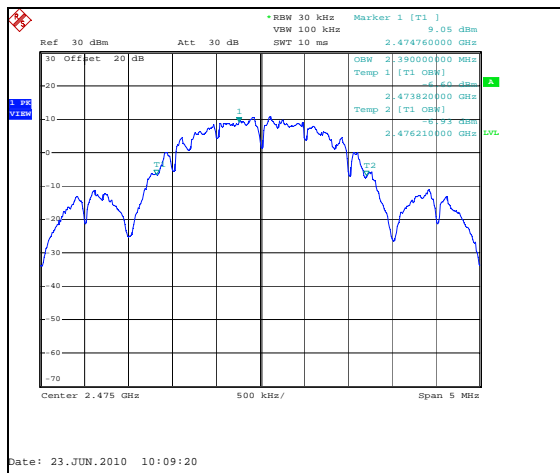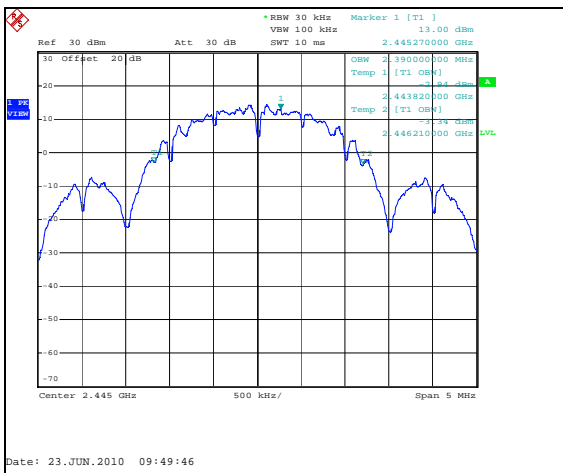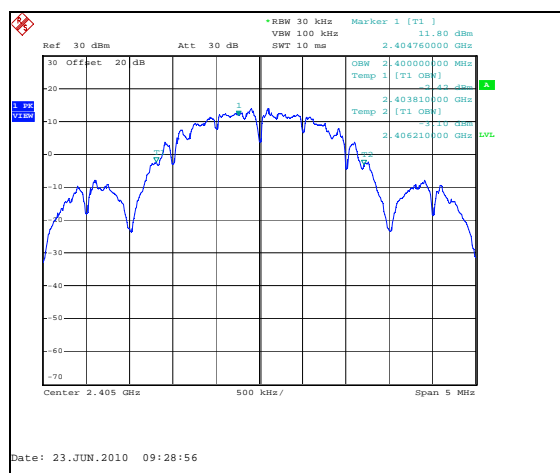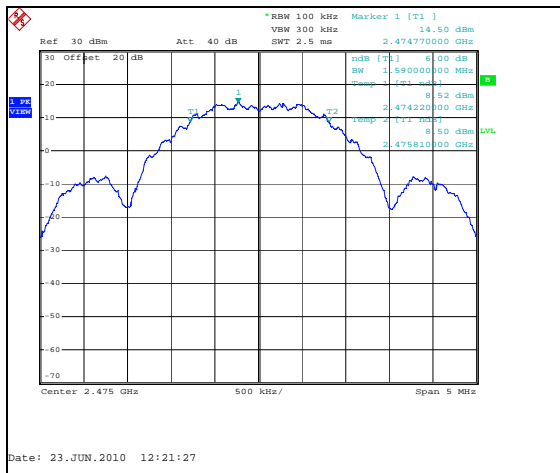

7.5 Peak Output Power Requirement - FCC Section 15.247(b)(3) IC: RSS-210 A8.4(4)

7.5.1 Measurement Procedure

The Peak Output Power was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)" Power Option 1. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer and the RBW was set >> than the emission BW. The insertion loss for all cables and attenuators was included as an offset value. The EUT was operating at maximum power.

7.5.2 Measurement Results

Results are shown below in Table 7.5.2-1 and Figures 7.5.2-1 to 7.5.2-3 below.

Table 7.5.2-1: Peak Output Power

Frequency (MHz)	Output Power (dBm)
2405	21.20
2440	21.68
2475	18.11

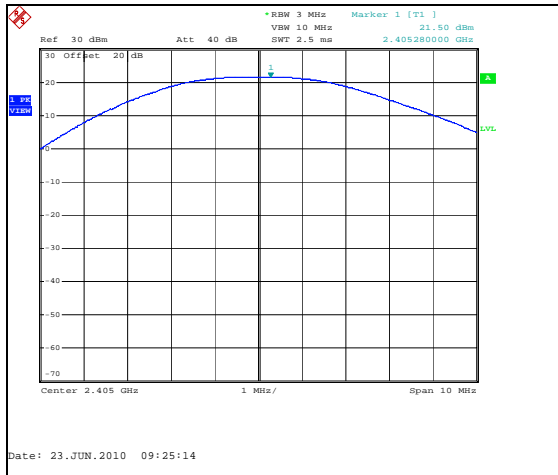


Figure 7.5.2-1: Peak Power Output – Low Channel

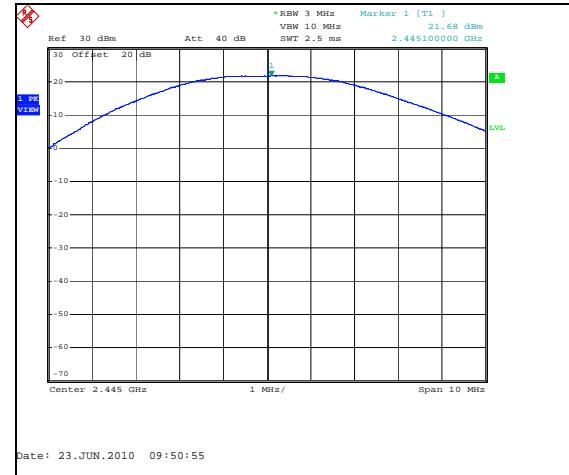


Figure 7.5.2-2: Peak Power Output – Mid Channel

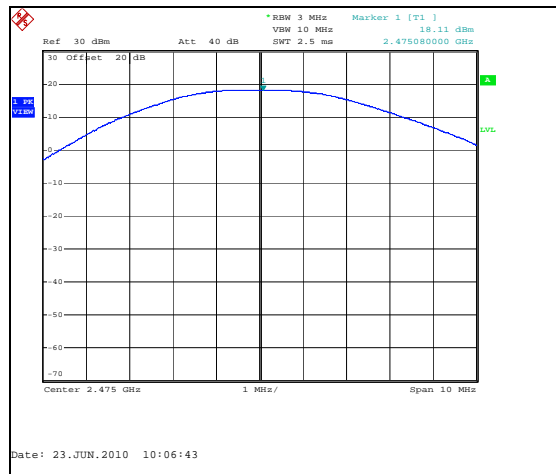


Figure 7.5.2-3: Peak Power Output – High Channel

7.6 Band-Edge Compliance and Spurious Emissions-FCC 15.247d IC:RSS-210 2.6, A8.5

7.6.1 Band-Edge Compliance of RF Conducted Emissions

7.6.1.1 Measurement Procedure

The EUT was investigated at the low and high channels of operation to determine band-edge compliance. Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using an absolute measurement of the radiated field strength. Data for the upper band edge is presented in the tables of Section 7.6.3

The lower band-edge compliance was determined using the marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.6.1.2 Measurement Results

Lower band-edge data is displayed in Figure 7.6.1.2-1.

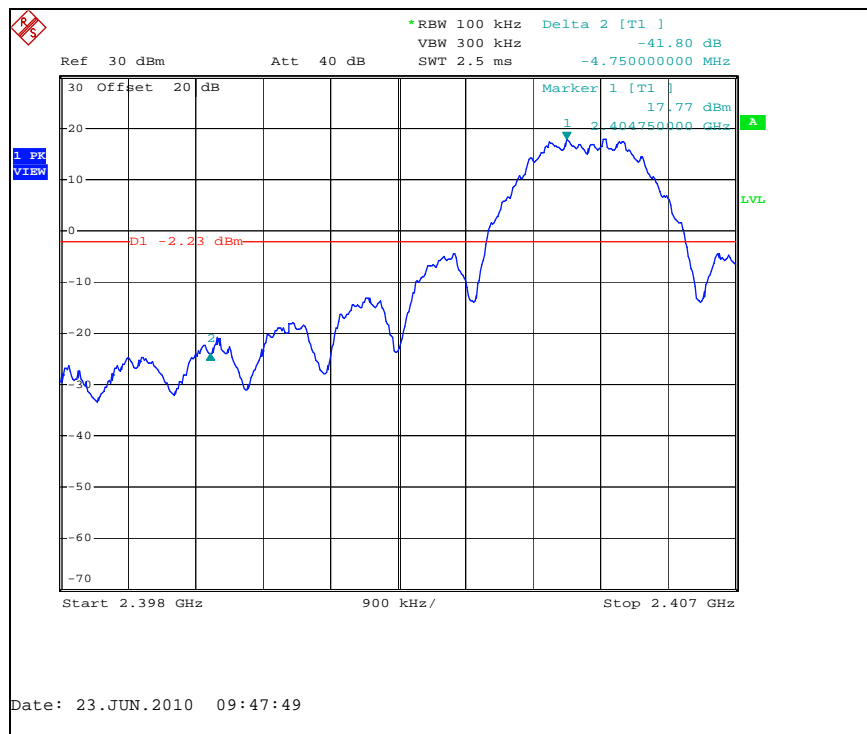


Figure 7.6.1.2-7: Lower Band-edge (Conducted)

7.6.2 RF Conducted Spurious Emissions

7.6.2.1 Measurement Procedure

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)". The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak detector and Max Hold function of the analyzer were utilized.

7.6.2.2 Measurement Results

In a 100 kHz bandwidth, the radio frequency power that was produced by the EUT emissions is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. RF Conducted Emissions are displayed in Figures 7.6.2.2-1 through 7.6.2.2-9.

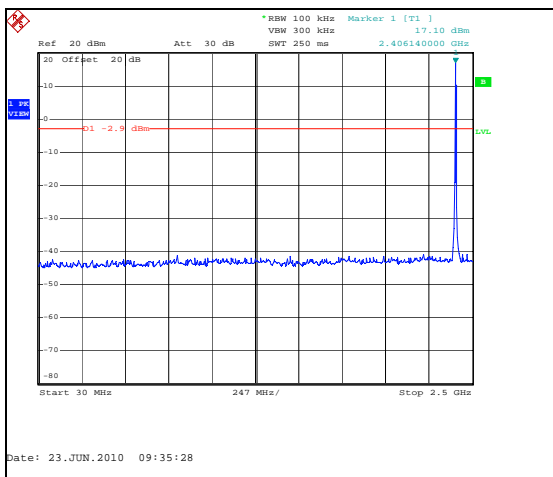


Figure 7.6.2.2-1: 30 MHz – 2.5 GHz – Low Channel

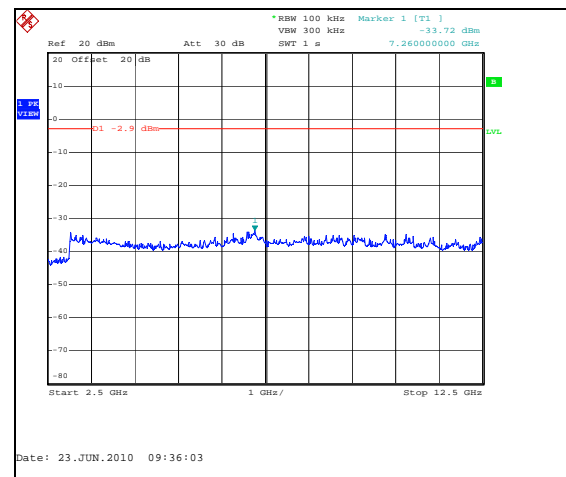


Figure 7.6.2.2-2: 2.5 GHz – 12.5 GHz – Low Channel

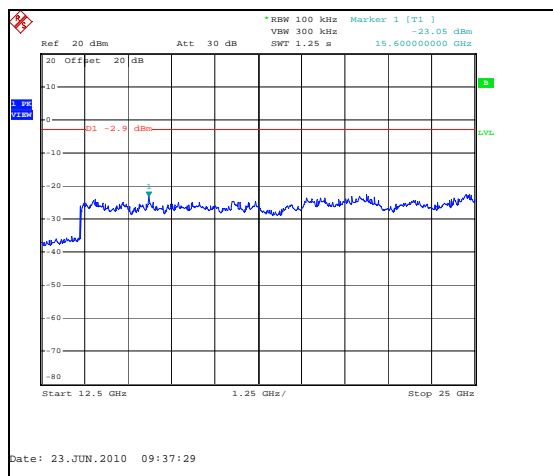


Figure 7.6.2.2-3: 12.5 GHz – 25 GHz – Low Channel

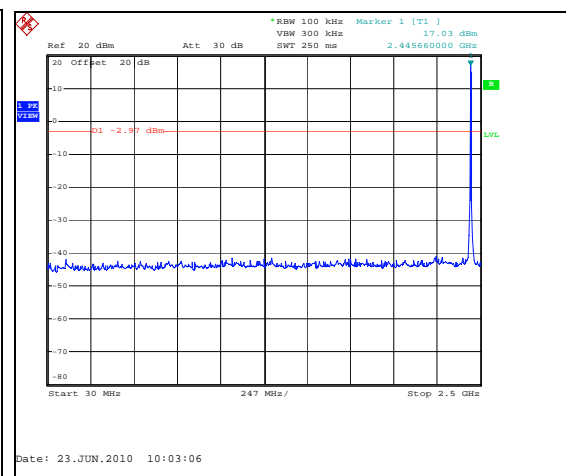


Figure 7.6.2.2-4: 30 MHz – 2.5 GHz – Mid Channel

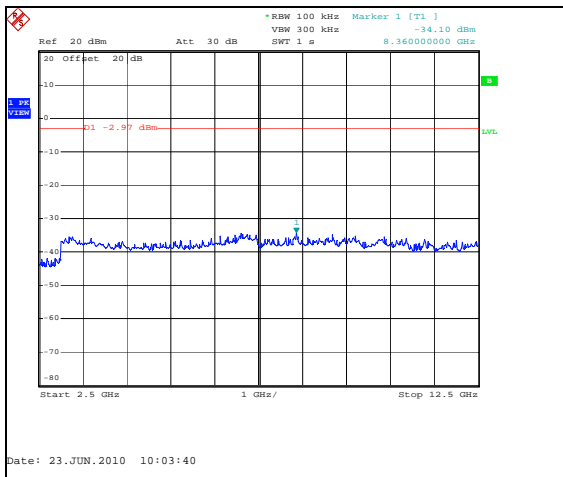


Figure 7.6.2.2-5: 2.5 GHz – 12.5 GHz – Mid Channel

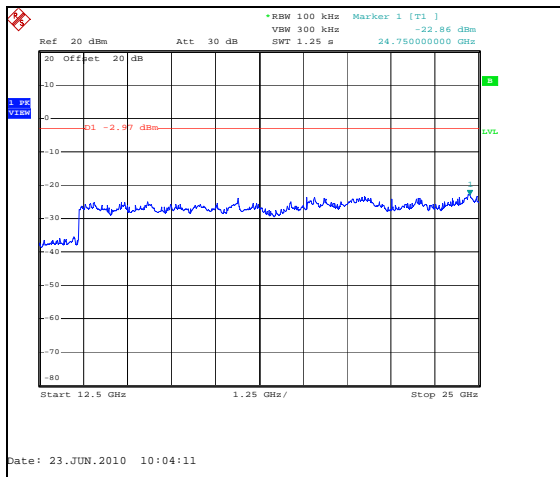


Figure 7.6.2.2-6: 12.5 GHz – 25 GHz – Mid Channel

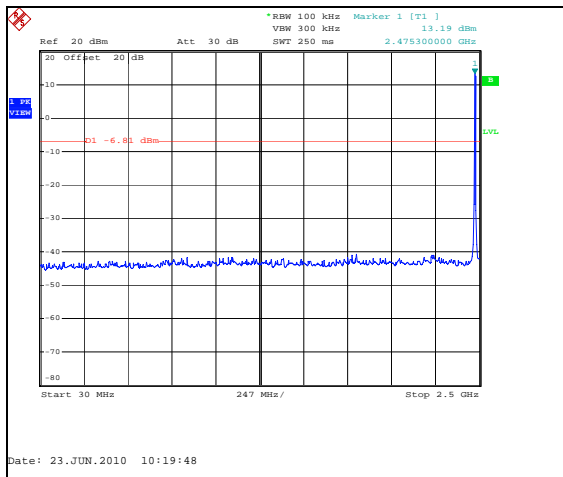


Figure 7.6.2.2-7: 30 MHz – 2.5 GHz – High Channel

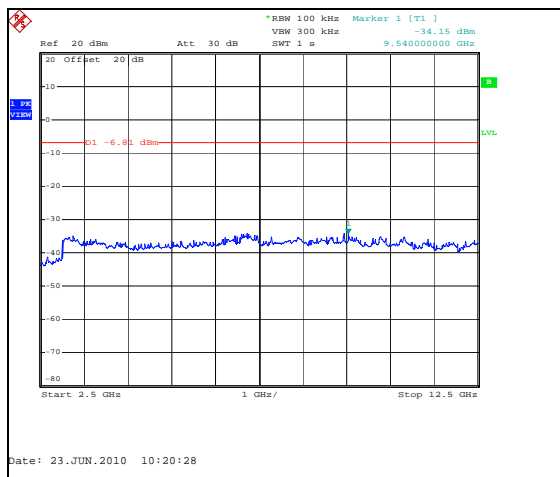


Figure 7.6.2.2-8: 2.5 GHz – 12.5 GHz – High Channel

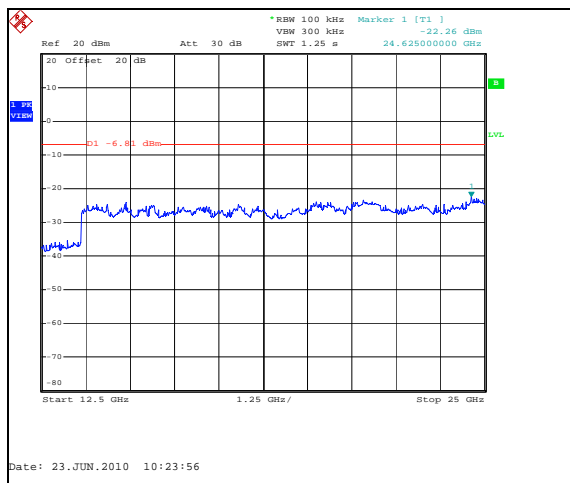


Figure 7.6.2.2-9: 12.5 GHz – 25 GHz – High Channel

7.6.3 Radiated Spurious Emissions (Restricted Bands) - FCC Sec. 15.205 IC: RSS-210 2.6**7.6.3.1 Measurement Procedure**

Radiated emissions tests were made over the frequency range of 30MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively. The average emissions were further corrected by applying the duty cycle correction of the EUT for comparison to the average limit.

Each emission found to be in a restricted band as defined by section 15.205 was compared to the radiated emission limits as defined in section 15.209.

7.6.3.2 Duty Cycle Correction

The device operates with a 42% duty cycle, therefore for average radiated measurements the measured level was reduced by a factor 7.53dB. The duty cycle correction factor is determined using the formula: $20\log(42/100) = -7.53\text{dB}$.

A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying this report.

7.6.3.3 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in the table 7.6.3.3-1.

Table 7.6.3.3-1: Radiated Spurious Emissions

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4810	52.56	44.61	H	1.74	54.30	38.81	74.0	54.0	19.7	15.2
4810	51.28	42.14	V	1.74	53.02	36.34	74.0	54.0	21.0	17.7
Middle Channel										
4890	51.53	43.99	H	2.13	53.66	38.58	74.0	54.0	20.3	15.4
4890	53.36	45.88	V	2.13	55.49	40.47	74.0	54.0	18.5	13.5
High Channel										
2483.5	74.71	65	H	-4.75	69.96	52.72	74.0	54.0	4.0	1.3
2483.5	75.14	65.76	V	-4.75	70.39	53.48	74.0	54.0	3.6	0.5
4950	50.93	43.26	H	2.42	53.35	38.15	74.0	54.0	20.6	15.9
4950	51.76	43.12	V	2.42	54.18	38.01	74.0	54.0	19.8	16.0
7425	51.65	41.90	H	6.40	58.05	40.76	74.0	54.0	16.0	13.2
7425	50.63	41.56	V	6.40	57.03	40.42	74.0	54.0	17.0	13.6

7.6.3.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- R_U = Uncorrected Reading
- R_C = Corrected Level
- AF = Antenna Factor
- CA = Cable Attenuation
- AG = Amplifier Gain
- DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: 52.56 + 1.74 = 54.30dBuV/m

Margin: 74dBuV/m – 54.30dBuV/m = 19.7dB

Example Calculation: Average

Corrected Level: 44.61 + 1.74 – 7.53 = 38.81dBuV

Margin: 54dBuV – 38.81dBuV = 15.2dB

7.7 Peak Power Spectral Density- FCC Section 15.247(e) IC: RSS-210 A8.2(b)

7.7.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)". The emission peaks within the pass band were located and zoomed in on. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 500 kHz and the sweep time was calculated to be 170s (~Span/3 kHz).

7.7.2 Measurement Results

Results are shown below in table 7.7.2-1 and figure 7.7.2-1 to 7.7.2-3.

Table 7.7.2-1: Peak Power Spectral Density

Frequency (MHz)	PSD Level (dBm)
2405	5.39
2440	7.23
2475	3.62

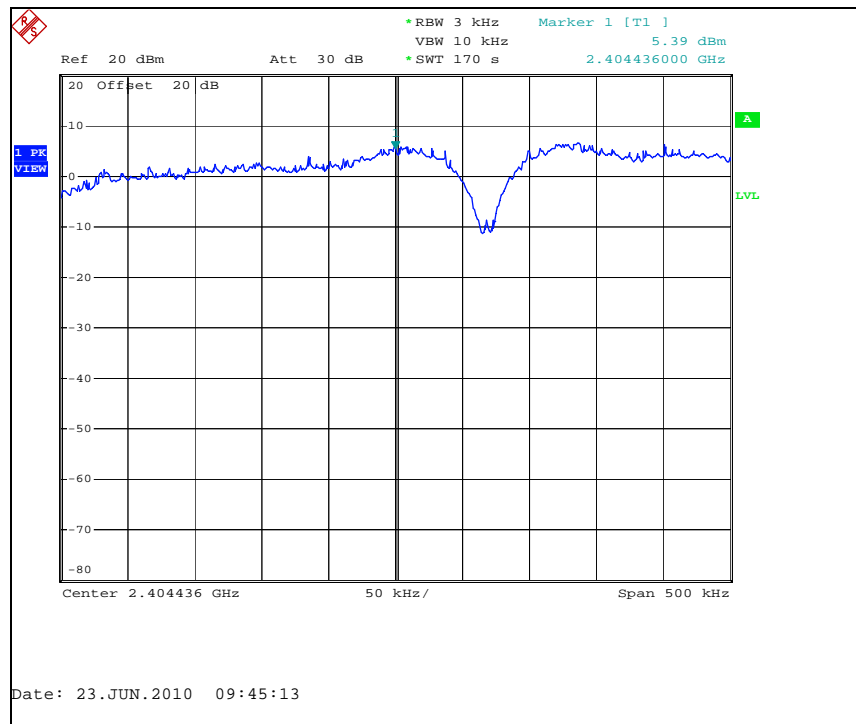


Figure 7.7.2-1: PSD – Low Channel

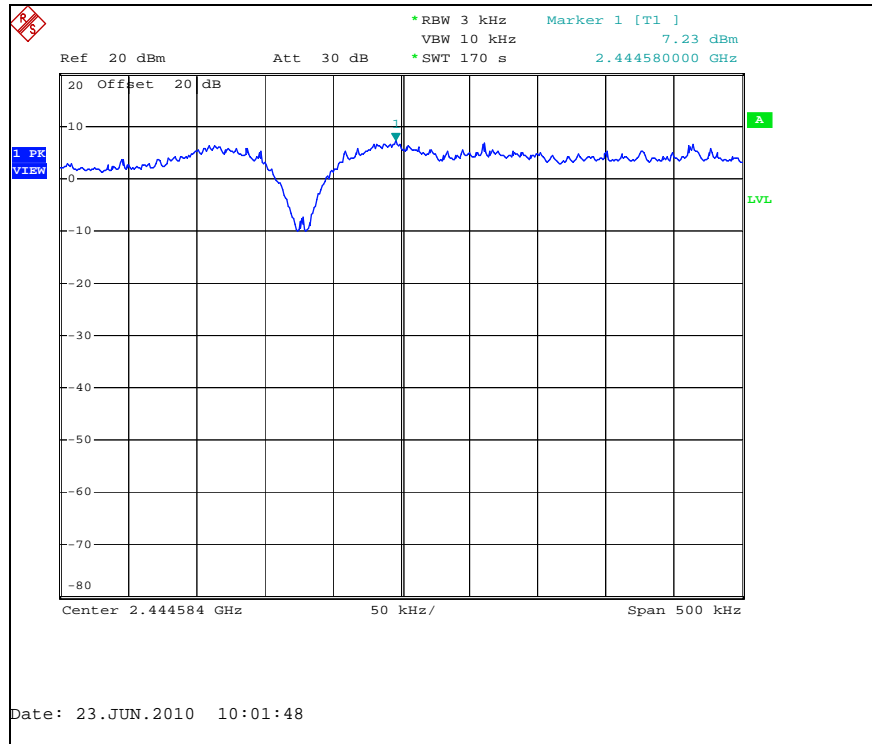


Figure 7.7.2-2: PSD – Mid Channel

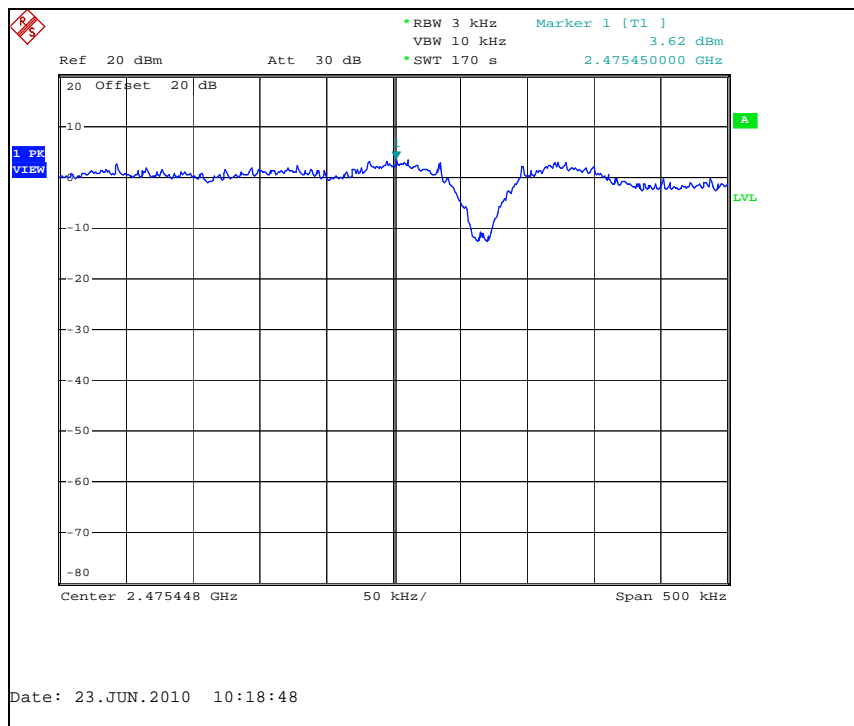


Figure 7.7.2-3: PSD – High Channel

8 CONCLUSION

In the opinion of ACS, Inc. the Gridstream RF Enhanced Integrated Focus AX, manufactured by Cellnet Technology Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT