



TEST REPORT

Test report no.: 1-5727/18-04-03



BNetzA-CAB-02/21-102

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-04 and D-PL-12076-01-05

Applicant

Würth Elektronik eiSos GmbH & Co KG

Max-Eyth-Str. 1
74638 Waldenburg / GERMANY
Phone: +49 7942 945 0
Contact: Gudrun Eckhardt
e-mail: gudrun.eckhardt@we-online.de
Phone: +49 (0) 651 9935562

Manufacturer

Würth Elektronik eiSos GmbH & Co KG

Max-Eyth-Str. 1
74638 Waldenburg / GERMANY

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5 Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: WLAN module 2.4GHz
Model name: Calypso: 2610011025000
FCC ID: R7T1001102
IC: 5136A-1001102
Frequency: DTS band 2400 MHz to 2483.5 MHz
Technology tested: WLAN
Antenna: On-module antenna or external antenna
Power supply: 3.3 V DC by external power supply
Temperature range: -40°C to +85°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:

Andreas Luckenbill
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s and references	4
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	5
6	Description of the test setup	6
6.1	Shielded semi anechoic chamber	7
6.2	Shielded fully anechoic chamber	8
6.3	Radiated measurements > 18 GHz	9
6.4	AC conducted	10
6.5	Conducted measurements with peak power meter & spectrum analyzer	11
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	14
7.4	Sequence of testing radiated spurious above 18 GHz	15
8	Measurement uncertainty	16
9	Summary of measurement results	17
10	Additional comments	18
11	Additional EUT parameter	19
12	Measurement results	20
12.1	Antenna gain	20
12.2	Identify worst case data rate	21
12.3	Maximum output power	22
12.4	Duty cycle	23
12.5	Peak power spectral density	30
12.6	6 dB DTS bandwidth	37
12.7	Occupied bandwidth – 99% emission bandwidth	44
12.8	Occupied bandwidth – 20 dB bandwidth	51
12.9	Band edge compliance conducted	58
12.10	Spurious emissions conducted	63
12.11	Spurious emissions radiated below 30 MHz	76
12.12	Spurious emissions radiated 30 MHz to 1 GHz	85
12.13	Spurious emissions radiated above 1 GHz	100
12.14	Spurious emissions conducted below 30 MHz (AC conducted)	117
13	Observations	121
Annex A	Glossary	122
Annex B	Document history	123
Annex C	Accreditation Certificate – D-PL-12076-01-04	123
Annex D	Accreditation Certificate – D-PL-12076-01-05	124

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2018-09-07
Date of receipt of test item:	2018-09-21
Start of test:	2018-09-28
End of test:	2019-03-26
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

Test standard	Date	Description
FCC - Title 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5	April 2018	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	v05r01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Measurement distance: tri-log antenna 10 meter
EMC32 software version: 10.30.0

FS = UR + CL + AF
(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	-/-	300000551	ne	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	12.12.2018	11.12.2019
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	371	300003854	vKII	24.11.2017	23.11.2020
8	A	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	-/-	-/-

6.2 Shielded fully anechoic chamber

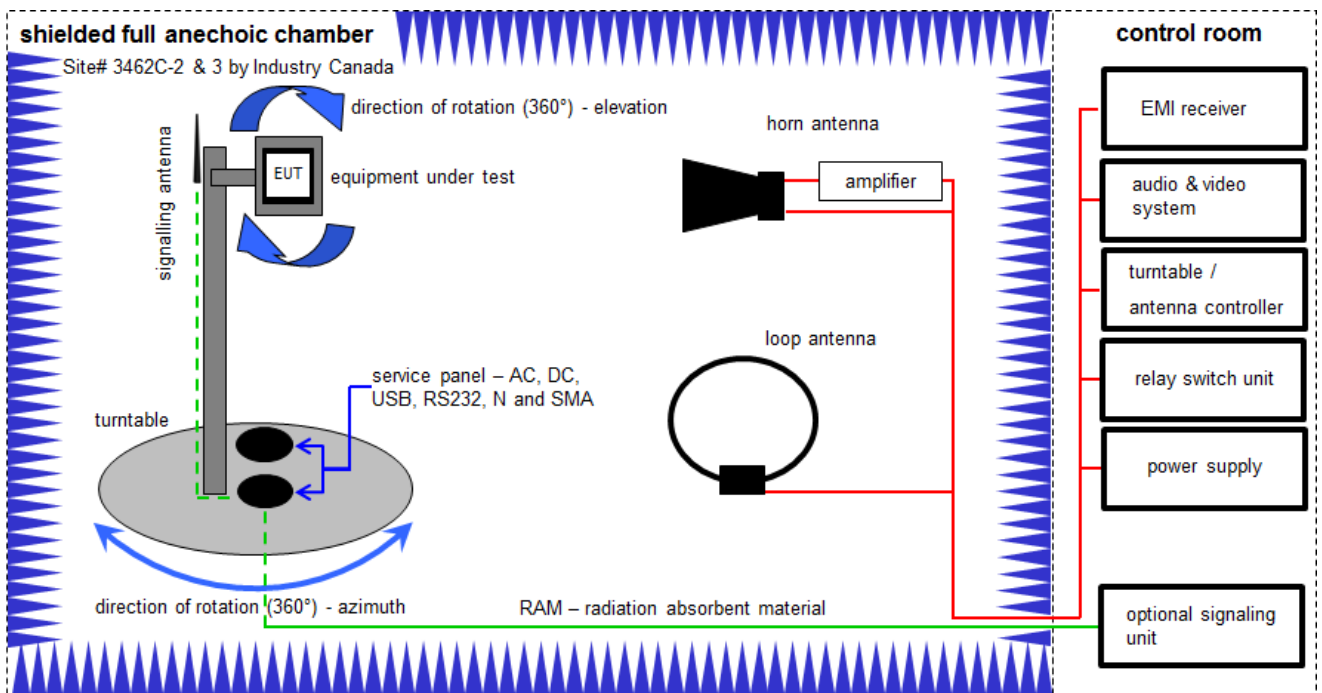

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	B	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vKII	14.02.2017	13.02.2019
4	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	A	Band Reject filter	WRCG2400/2483- 2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
6	A, B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	14.09.2018	13.12.2019
7	A	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
8	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
9	A	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
10	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
11	A, B, C	NEXIO EMV- Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
12	A, B, C	PC	ExOne	F+W	-/-	300004703	ne	-/-	-/-
13	A, B, C	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2818A03450	300001040	vKII	12.12.2017	11.12.2020

6.3 Radiated measurements > 18 GHz

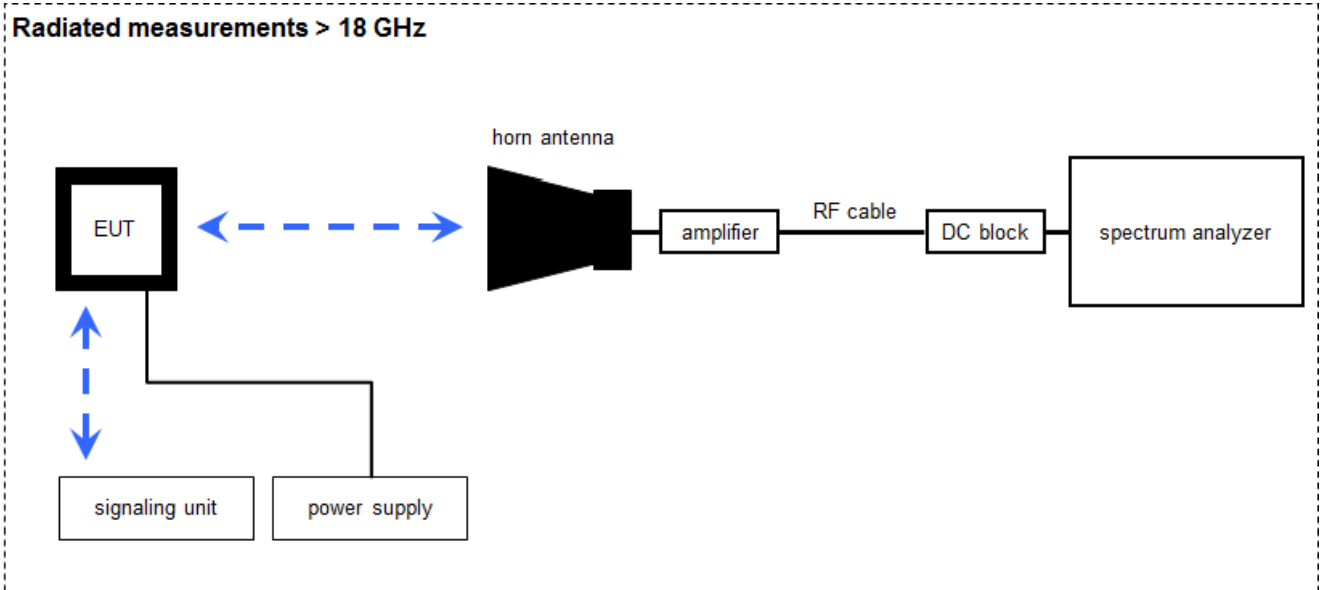

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	-/-	300000486	vIKI!	13.12.2017	12.12.2019
3	A	Signal Analyzer 40 GHz	FSV40	R&S	101353	300004819	vIKI!	12.12.2017	11.12.2019
4	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
6	A	DC Power Supply	HMP2020	Rohde & Schwarz	102850	300005517	vIKI!	14.12.2017	13.12.2019

6.4 AC conducted

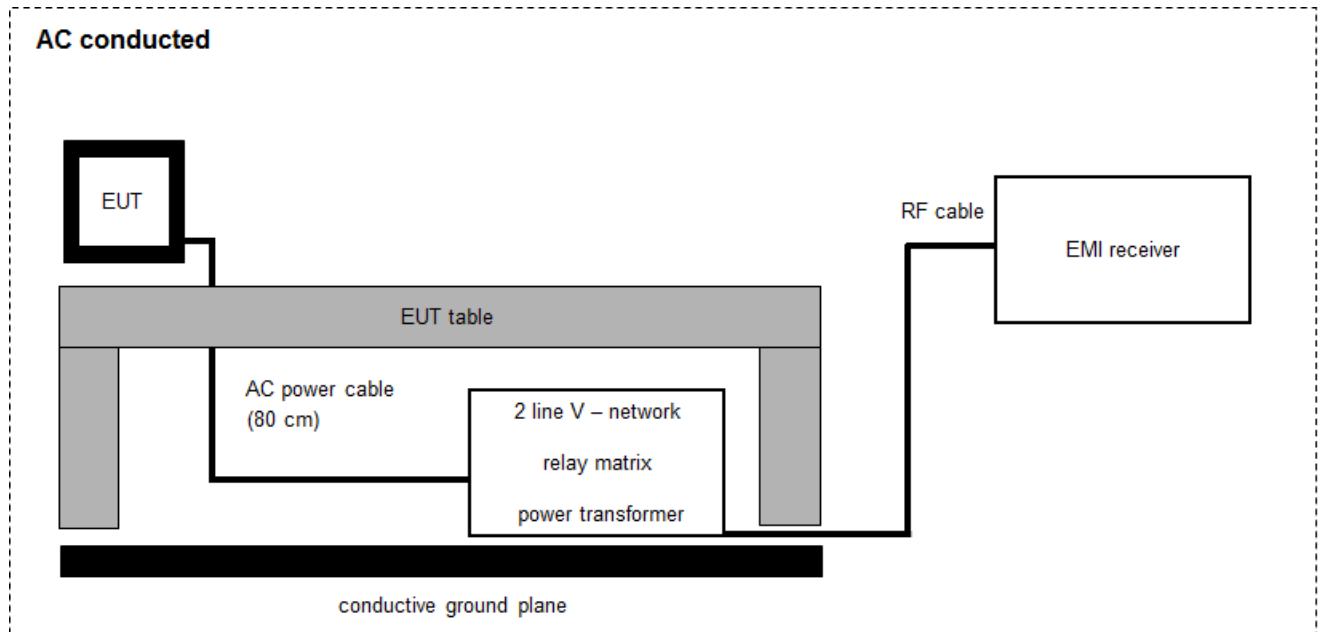

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)


Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	892475/017	300002209	vIKI!	13.12.2017	12.12.2019
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
4	A	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	12.12.2018	11.12.2019
5	A	DC Power Supply	HMP2020	Rohde & Schwarz	102850	300005517	vIKI!	14.12.2017	13.12.2019

6.5 Conducted measurements with peak power meter & spectrum analyzer

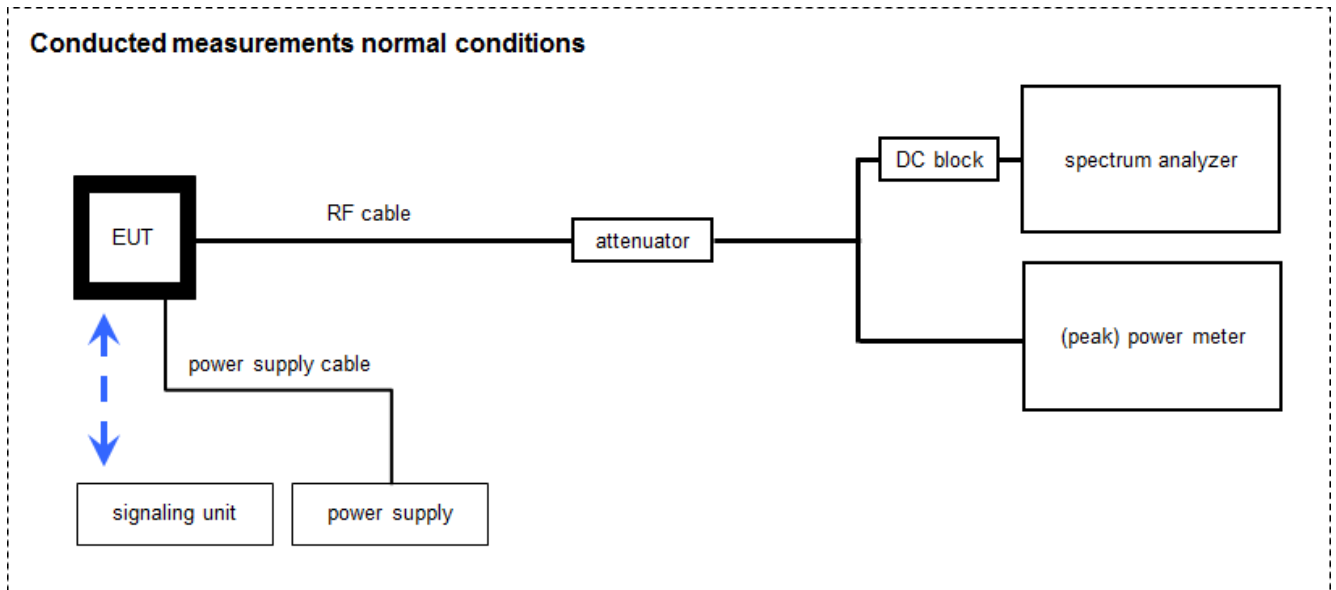

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	17.12.2018	16.12.2019
2	A, B	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000108	ev	11.05.2018	10.05.2020
3	A, B	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A45 23	300004589	ne	-/-	-/-
4	A, B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	-/-	300004590	ne	-/-	-/-
5	B	Power Sensor	NRP-Z81	R&S	100010	300003780	vIKI!	11.12.2018	10.12.2019
6	A, B	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
7	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-
8	A, B	DC Power Supply	HMP2020	Rohde & Schwarz	102850	300005517	vIKI!	14.12.2017	13.12.2019

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.15 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.15 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.15 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.15 dB
	> 7 GHz	± 1.15 dB
	> 18 GHz	± 1.89 dB
	≥ 40 GHz	± 3.12 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2019-04-04	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Nominal	DSSS		-/-			-/-
§15.35	Duty cycle	-/-	Nominal	Nominal	DSSS OFDM		-/-			-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. & rad.	KDB 558074 DTS clause: 13.3.2 and clause 12.2.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

10 Additional comments

Reference documents: Certification_information

Special test descriptions: None

Configuration descriptions: None

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Note: The channels used for the tests are marked in bold in the list.

11 Additional EUT parameter

- Test mode:
- No test mode available
Iperf was used to ping another device with the largest support packet size
 - Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself
- Modulation types:
- Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
 - Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- Operating mode 1 (single antenna)
 - *Equipment with 1 antenna,*
 - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
 - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
 - Operating mode 2 (multiple antennas, no beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
 - Operating mode 3 (multiple antennas, with beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

12 Measurement results

12.1 Antenna gain

Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz / 10 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 A (conducted) See chapter 6.2 C (radiated)
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
6 dBi / > 6 dBi output power and power density reduction required	

Results: on-module antenna

T _{nom}	V _{nom}	Lowest channel	Middle channel	Highest channel
Conducted power [dBm] Measured, DSSS modulation		10.6	10.6	10.9
Radiated power [dBm] Measured, DSSS modulation		11.6	11.7	11.8
Gain [dBi] Calculated		1.0	1.1	0.9

Results: external antenna

Antenna type 2600130021	Lowest channel	Middle channel	Highest channel
Declared antenna gain by manufacturer [dBi]	2.8		

12.2 Identify worst case data rate

Description:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 B
Measurement uncertainty	See chapter 8

Results:

Modulation scheme / bandwidth	
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0

12.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Peak power meter	
Test setup	See chapter 6.5 B
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

Results:

	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	15.0	15.3	14.4
Output power conducted OFDM / g – mode	16.1	17.2	16.3
Output power conducted OFDM / n HT20 – mode	16.9	17.3	17.2

12.4 Duty cycle

Description:

Measurement of the timing behavior.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
No limitation!	

Results:


T_{nom}	V_{nom}	lowest channel	middle channel	highest channel
DSSS / b – mode		83.7 % / 0.8 dB	83.5 % / 0.8 dB	84.2 % / 0.8 dB
OFDM / g – mode		69.9 % / 1.6 dB	69.8 % / 1.6 dB	70.0 % / 1.6 dB
OFDM / n HT20 – mode		77.6 % / 1.1 dB	72.1 % / 1.4 dB	44.5 % / 3.5 dB

Plots: DSSS / b – mode


Plot 1: channel 1

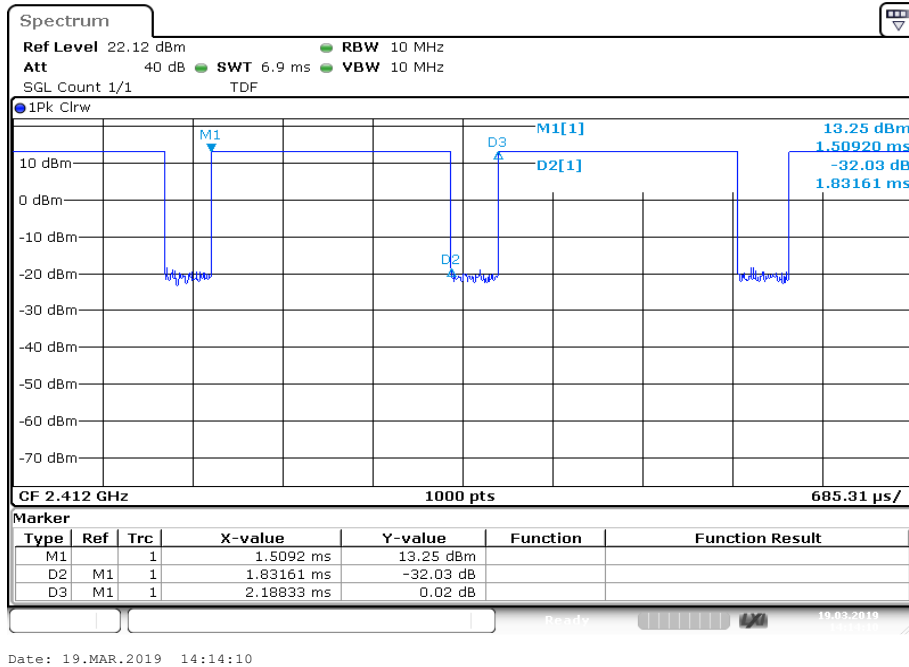

Plot 2: channel 6

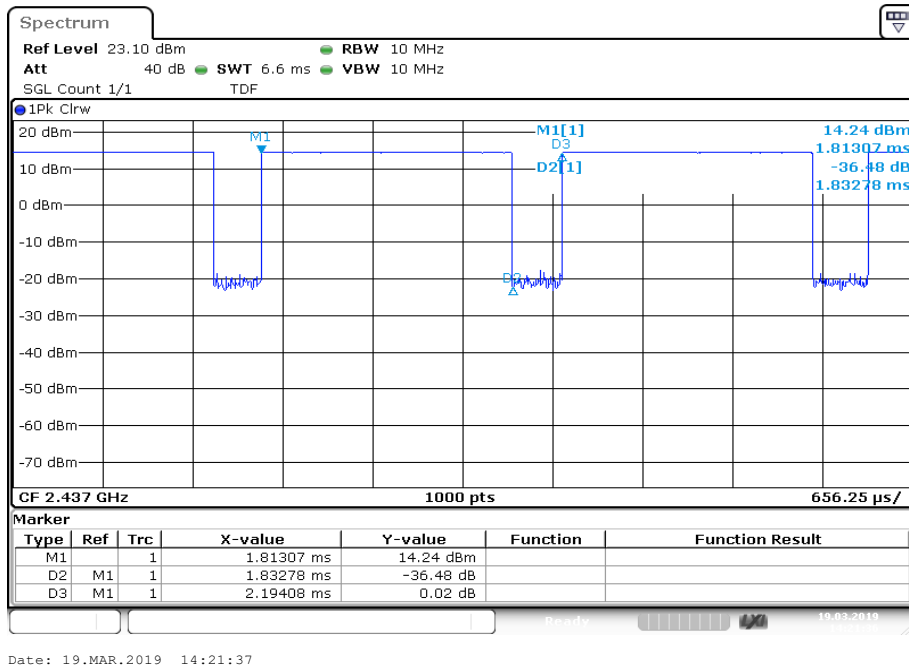


Plot 3: channel 11

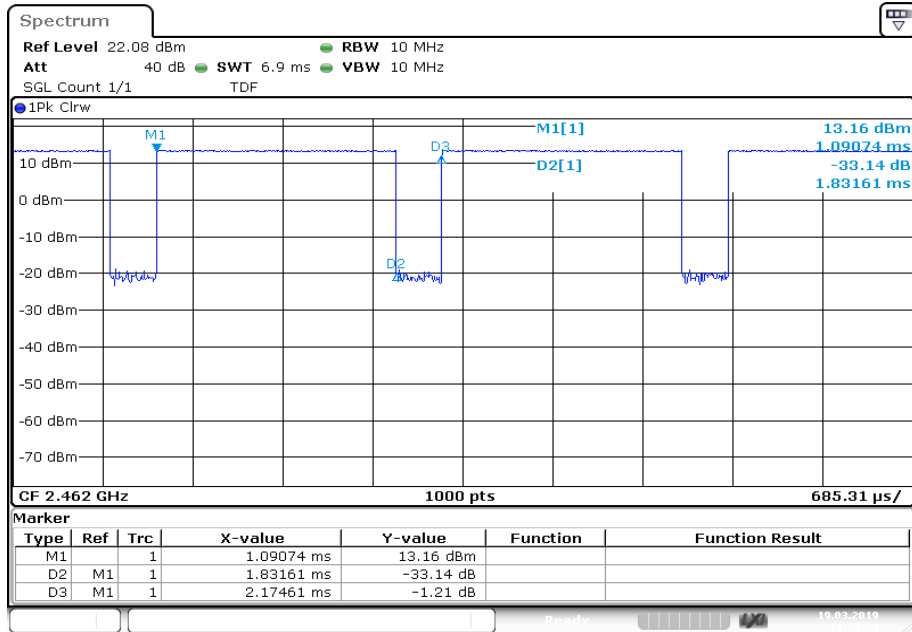


Plots: OFDM / g – mode


Plot 1: channel 1

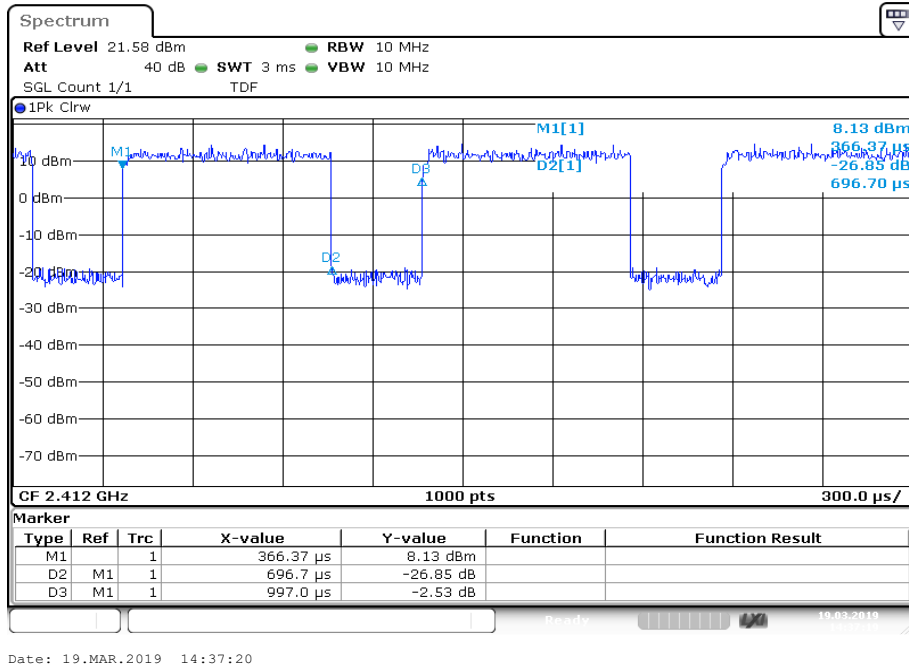

Plot 2: channel 6

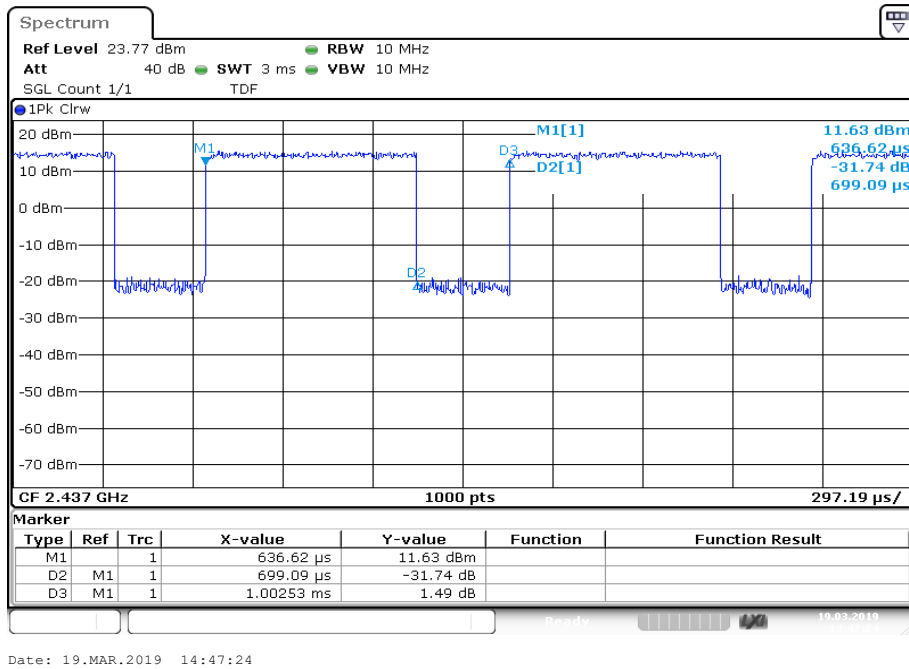


Plot 3: channel 11

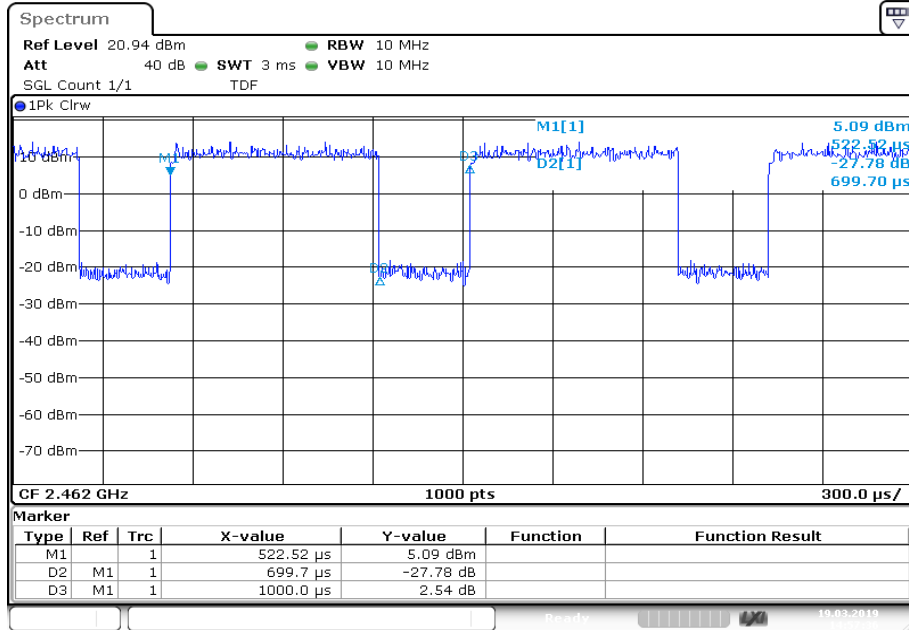


Date: 19.MAR.2019 14:57:36

Plots: OFDM / n HT20 – mode


Plot 1: channel 1

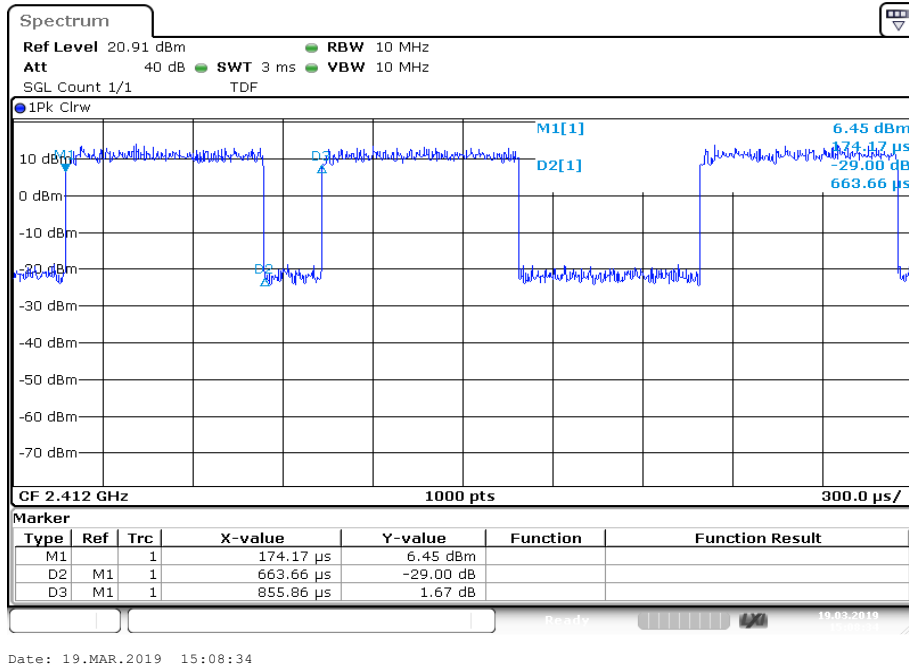

Plot 2: channel 6

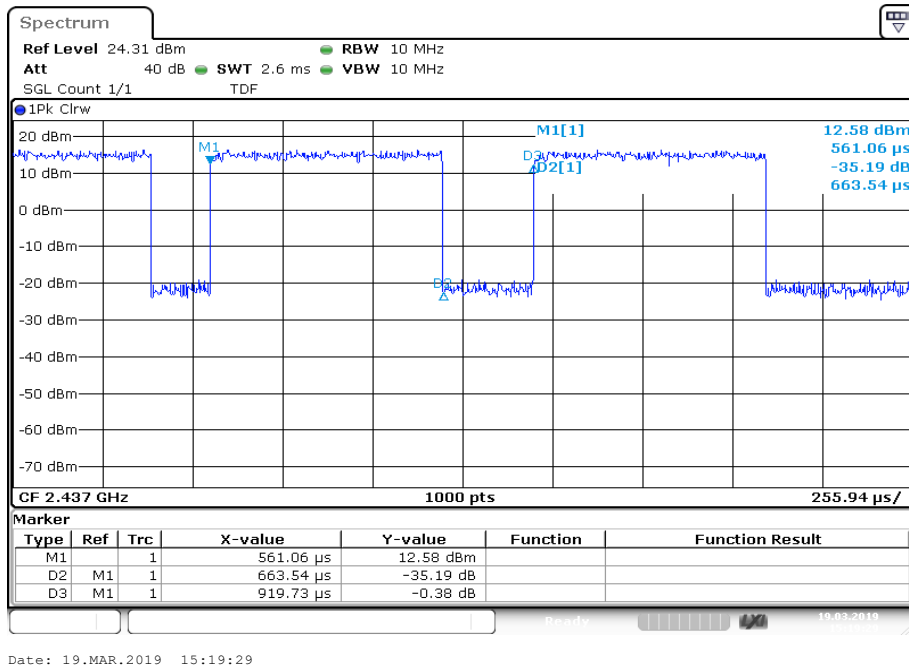

Plot 3: channel 11

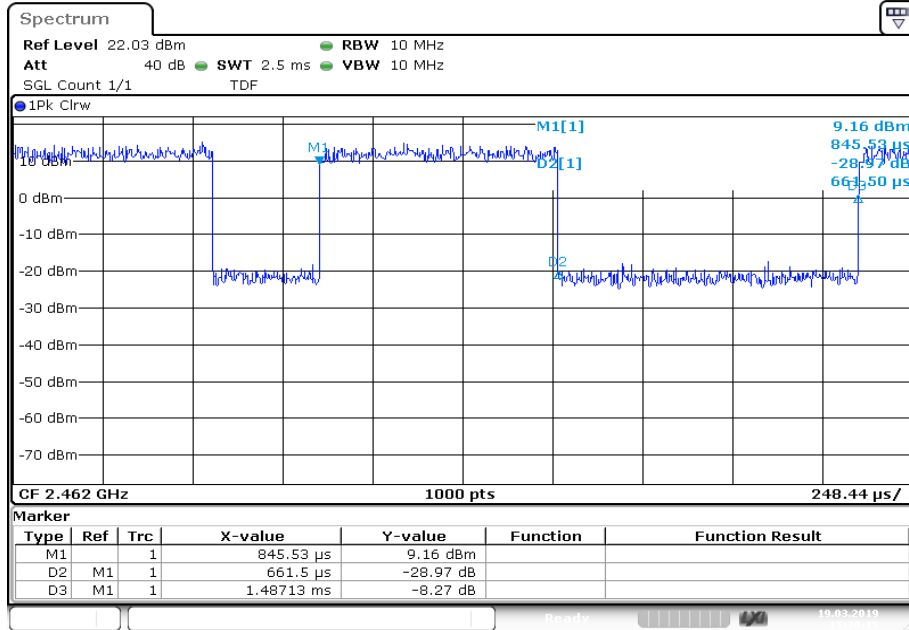

Date: 19.MAR.2019 15:30:15

12.5 Peak power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 10.2	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
8 dBm / 3 kHz (conducted)	
8 dBm / 100 kHz (conducted)	

Results:

measured	peak power spectral density / dBm @ 100 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-3.0	-2.8	-3.8
OFDM / g – mode	-9.5	-4.2	-9.3
OFDM / n HT20 – mode	-8.1	-4.3	-7.8


Plots: DSSS / b – mode

Plot 1: Channel 1

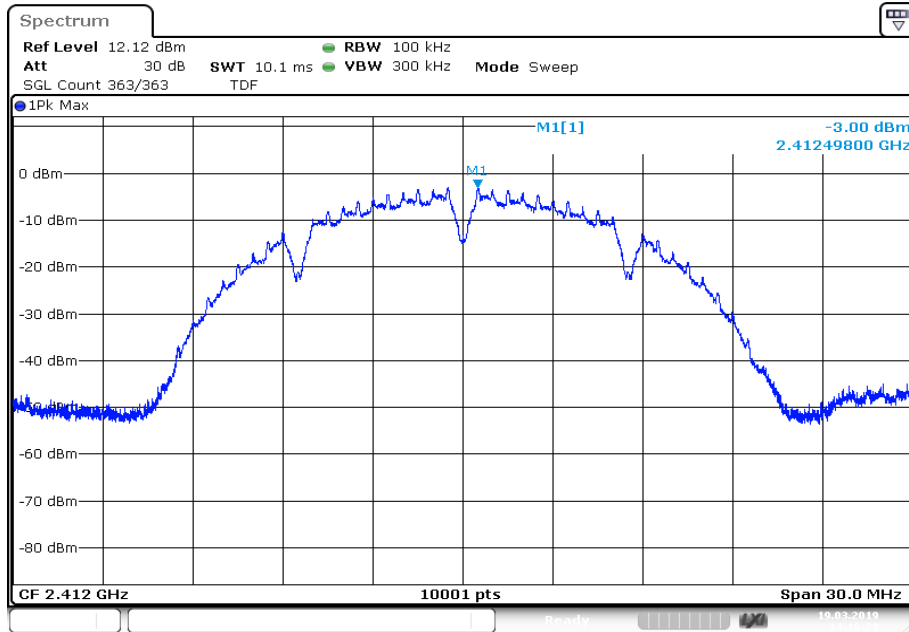


Date: 19.MAR.2019 14:16:29

Plot 2: Channel 6

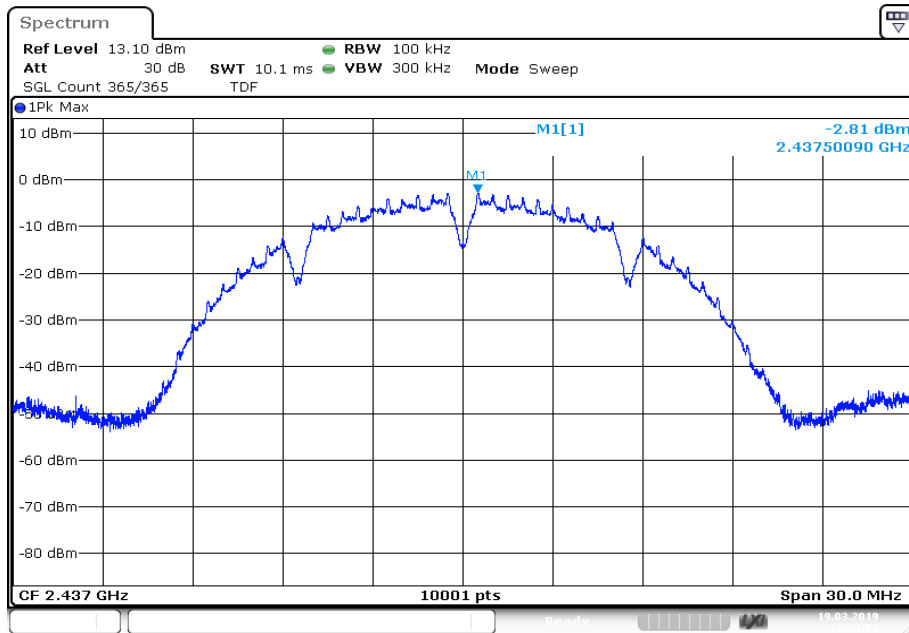

Date: 19.MAR.2019 14:24:02


Plot 3: Channel 11

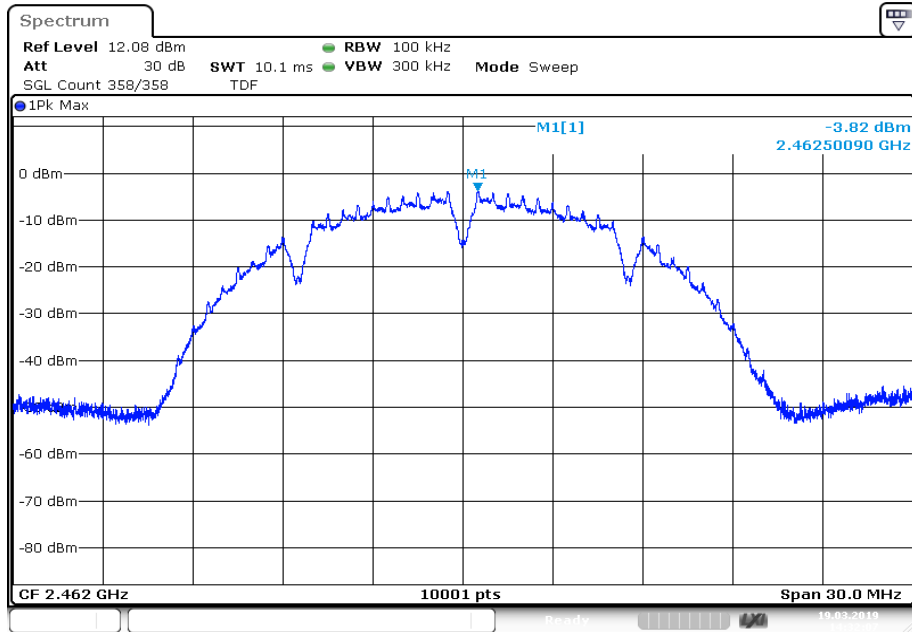

Date: 19.MAR.2019 14:32:07


Plots: OFDM / g – mode

Plot 1: Channel 1

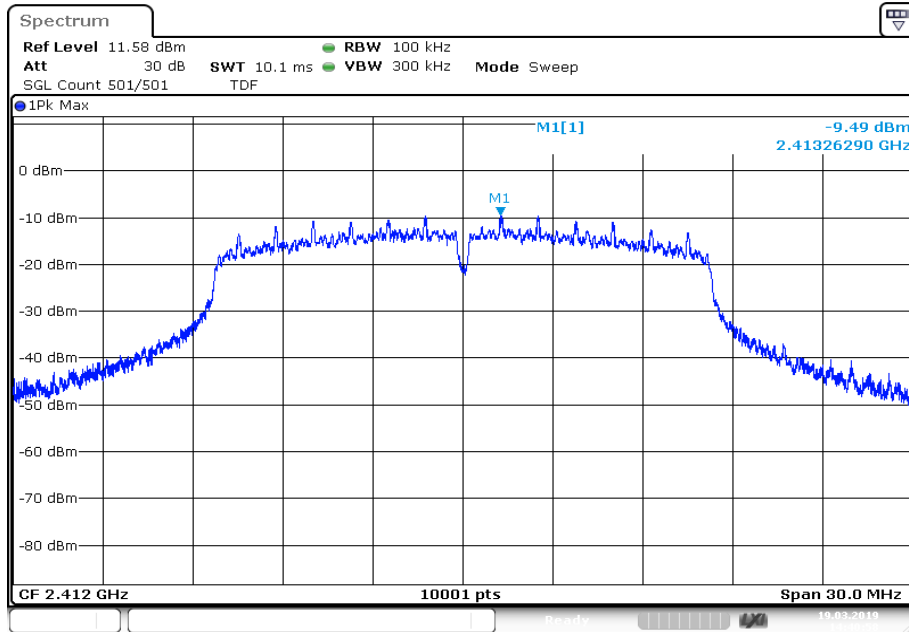


Date: 19.MAR.2019 14:40:58

Plot 2: Channel 6

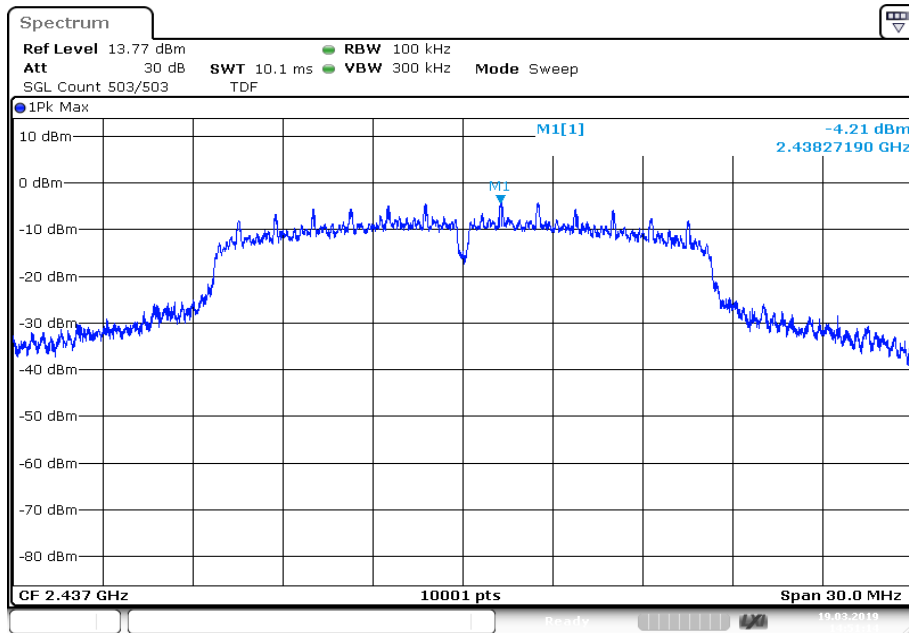

Date: 19.MAR.2019 14:51:14


Plot 3: Channel 11

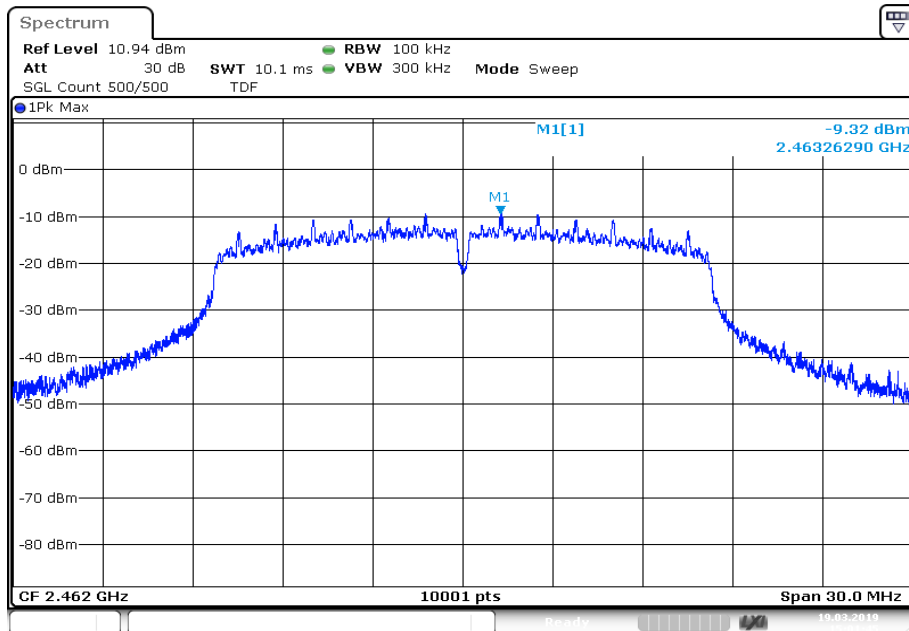

Date: 19.MAR.2019 15:01:45


Plots: OFDM / n HT20 – mode

Plot 1: Channel 1

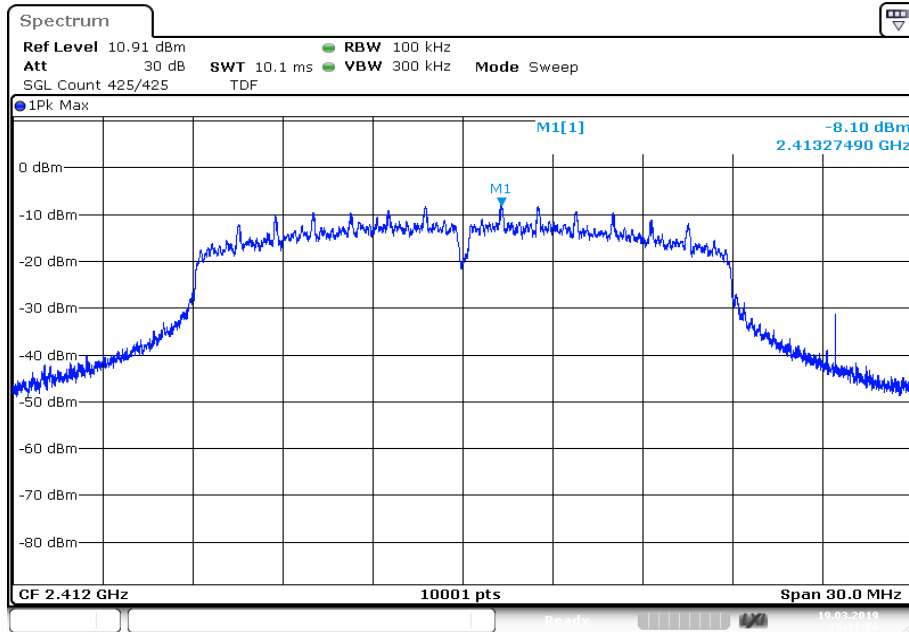


Date: 19.MAR.2019 15:11:26

Plot 2: Channel 6

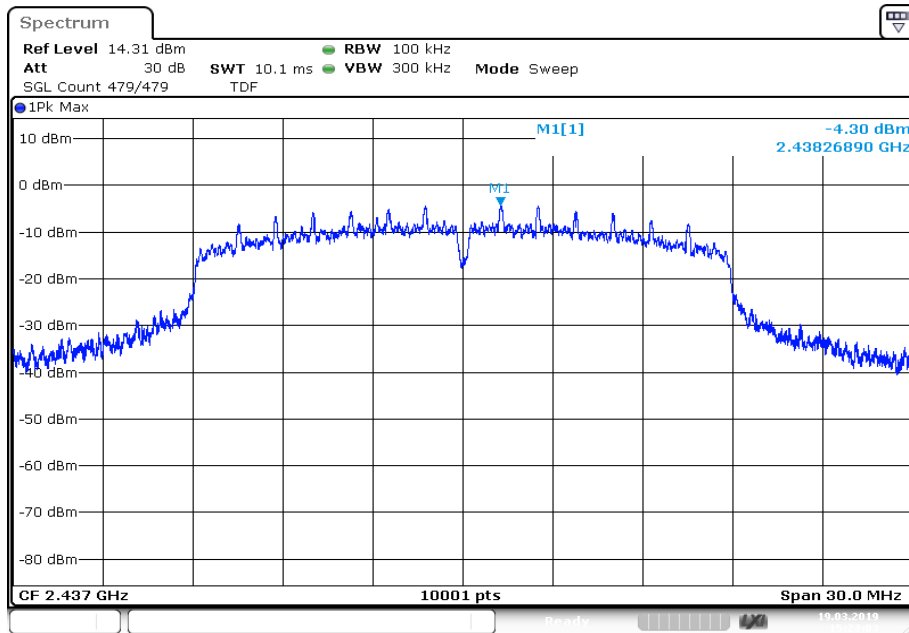

Date: 19.MAR.2019 15:23:03

Plot 3: Channel 11

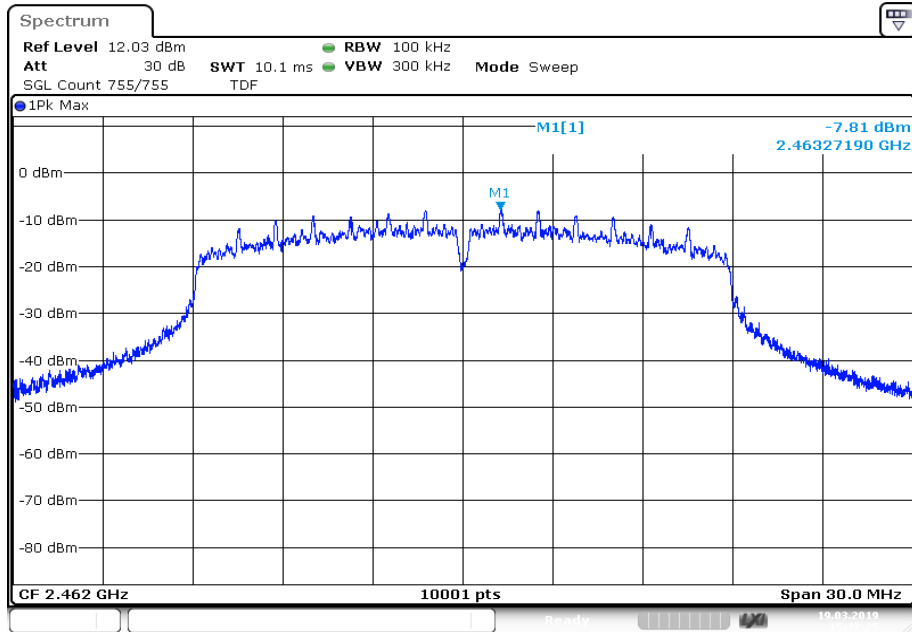

Date: 19.MAR.2019 15:37:25

12.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.1	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:


	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	9092	9095	9095
OFDM / g – mode	15103	15110	15109
OFDM / n HT20 – mode	15116	15107	15107

Plots: DSSS / b – mode


Plot 1: Channel 1

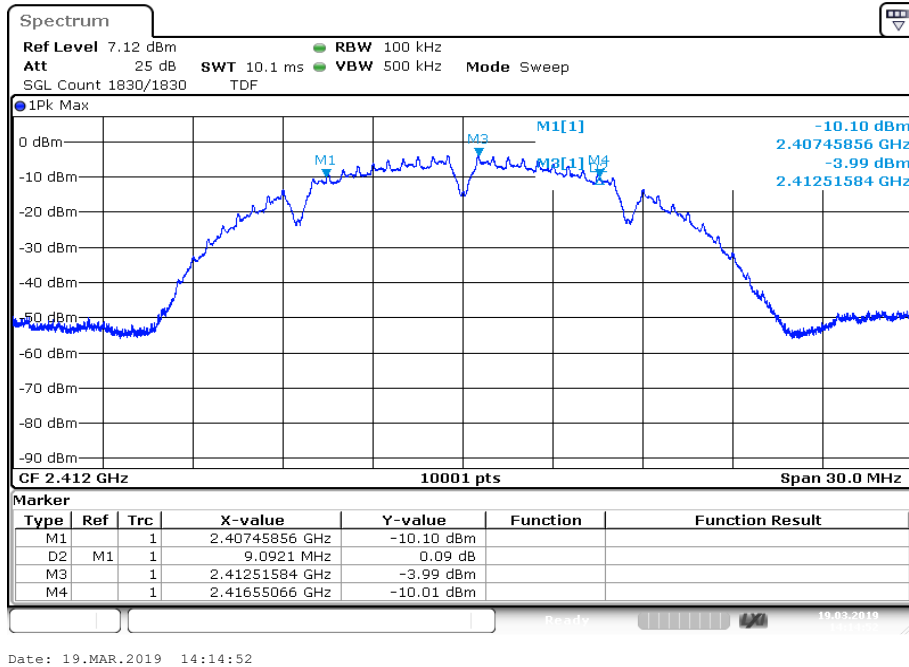

Plot 2: Channel 6

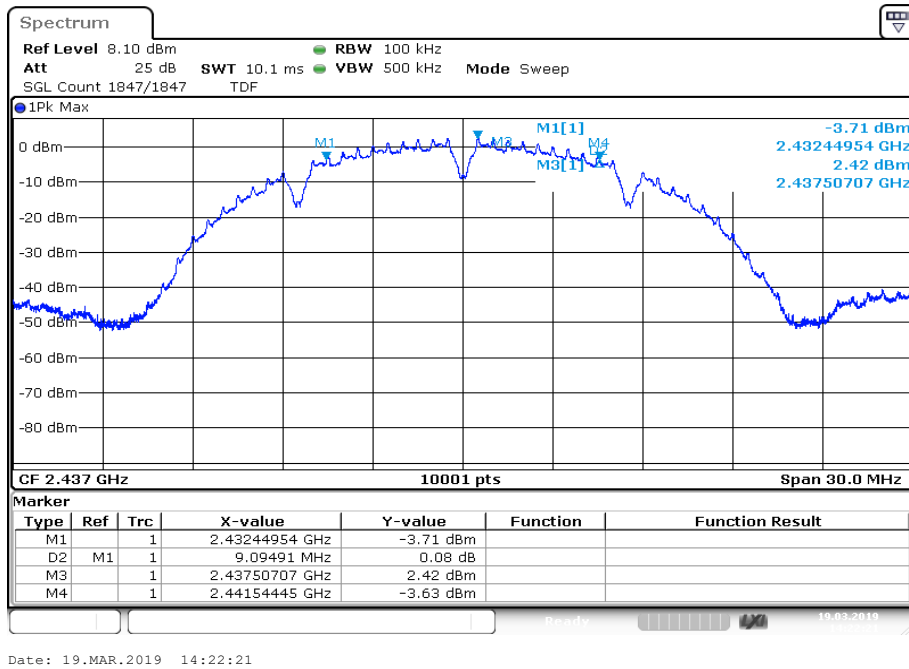


Plot 3: Channel 11

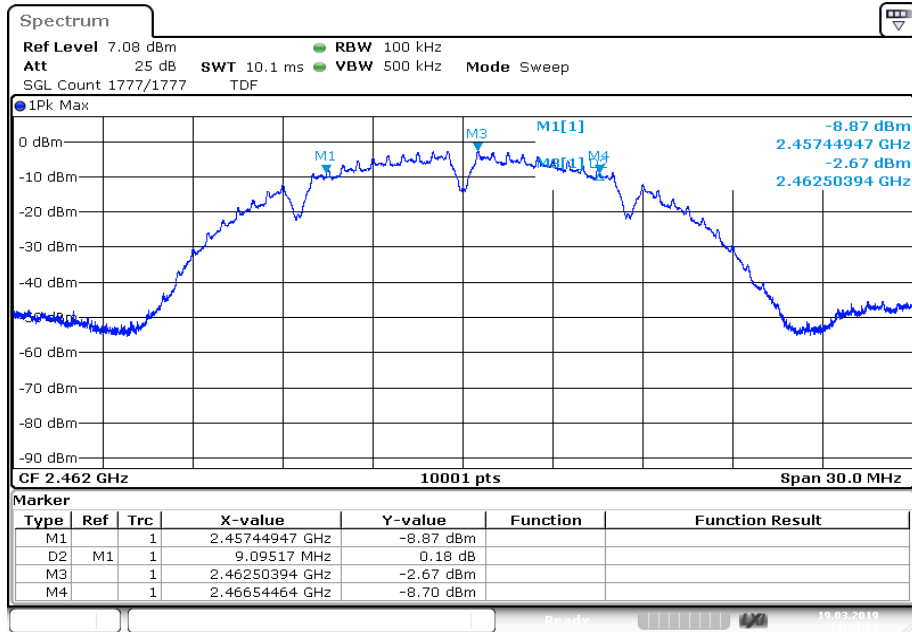


Date: 19.MAR.2019 14:30:23

Plots: OFDM / g – mode


Plot 1: Channel 1

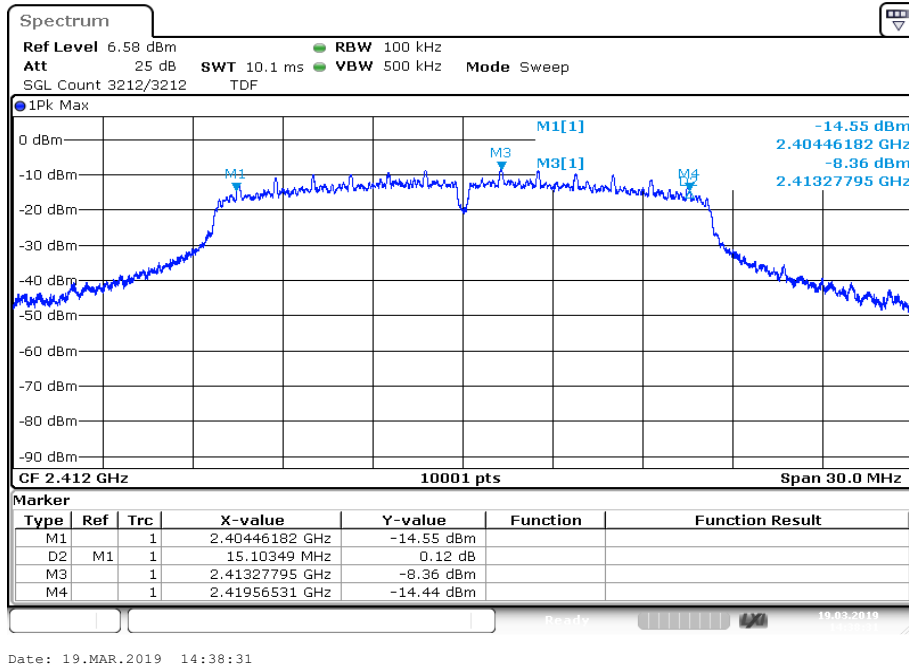

Plot 2: Channel 6

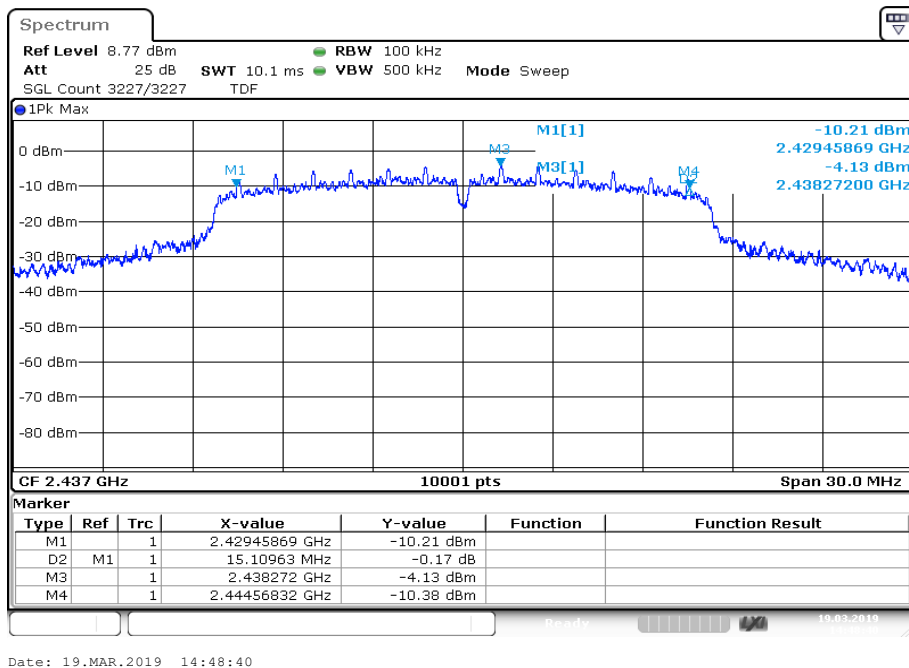


Plot 3: Channel 11

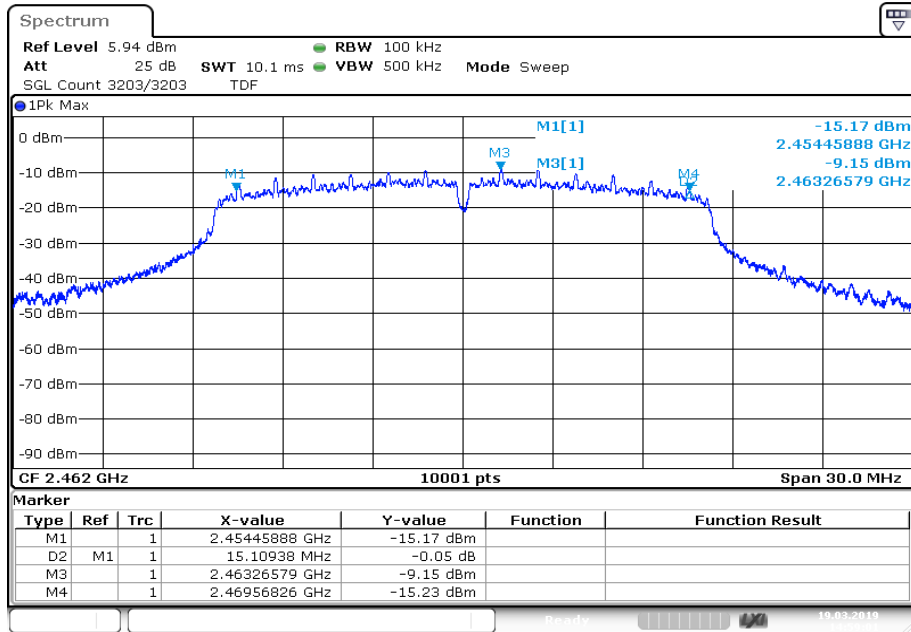


Date: 19.MAR.2019 14:59:01

Plots: OFDM / n HT20 – mode


Plot 1: Channel 1

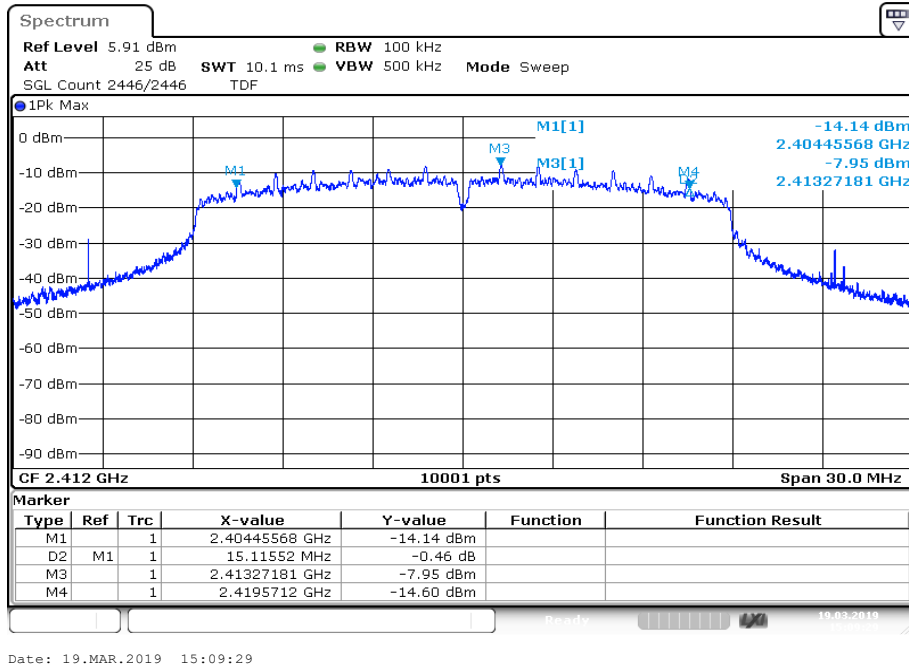

Plot 2: Channel 6

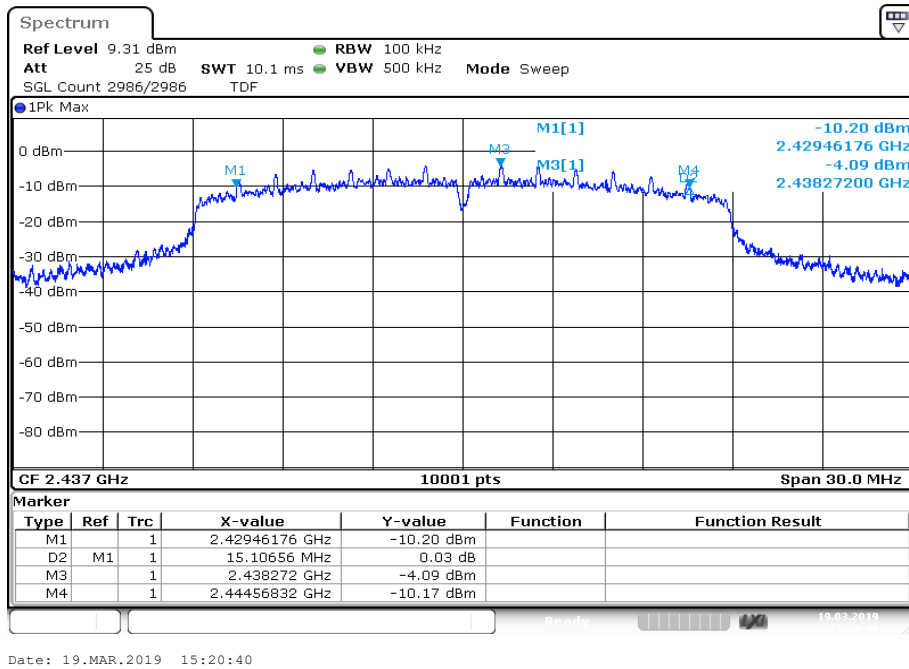

Plot 3: Channel 11

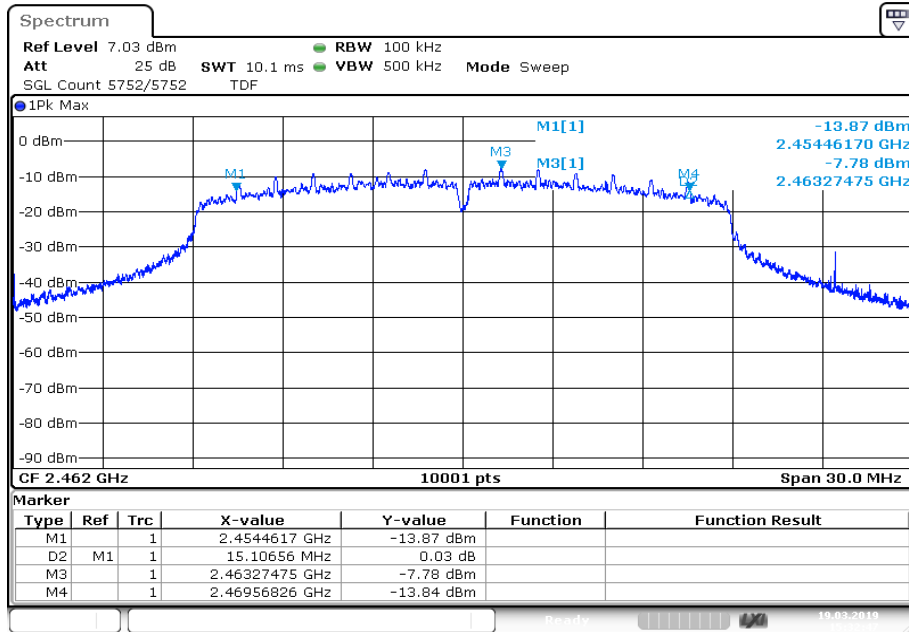

Date: 19.MAR.2019 15:32:47

12.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Usage:


-/-	IC
OBW is necessary for Emission Designator	

Results:


	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	13970	13982	13994
OFDM / g – mode	16645	17072	16639
OFDM / n HT20 – mode	17611	17869	17653

Plots: DSSS / b – mode


Plot 1: Channel 1

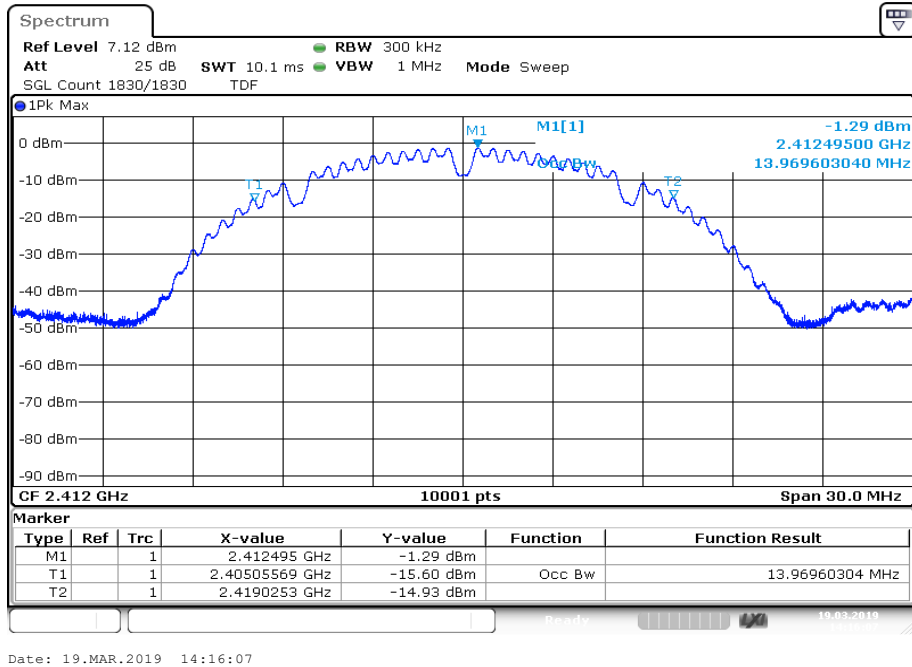

Plot 2: Channel 6

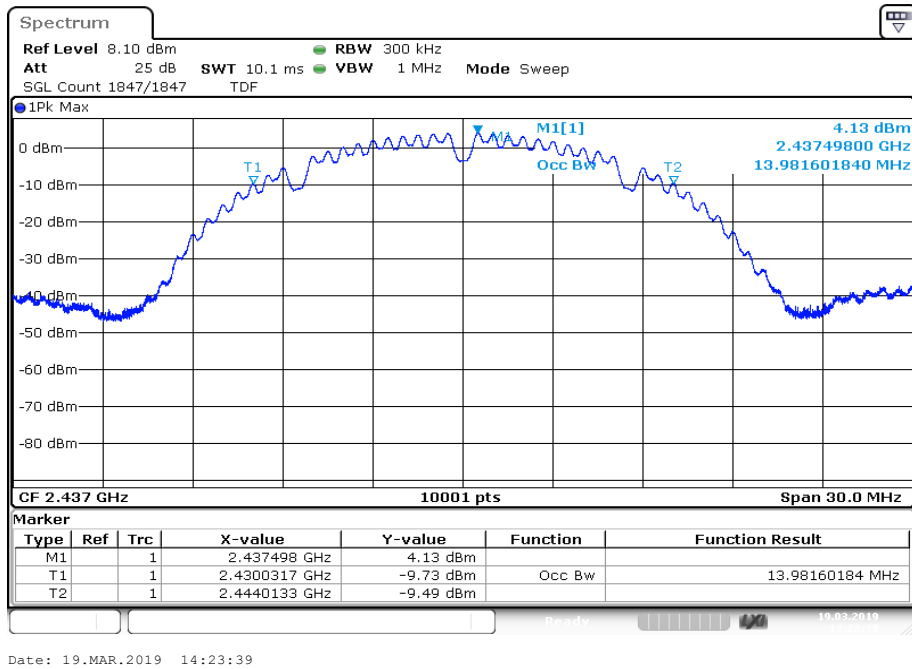


Plot 3: Channel 11

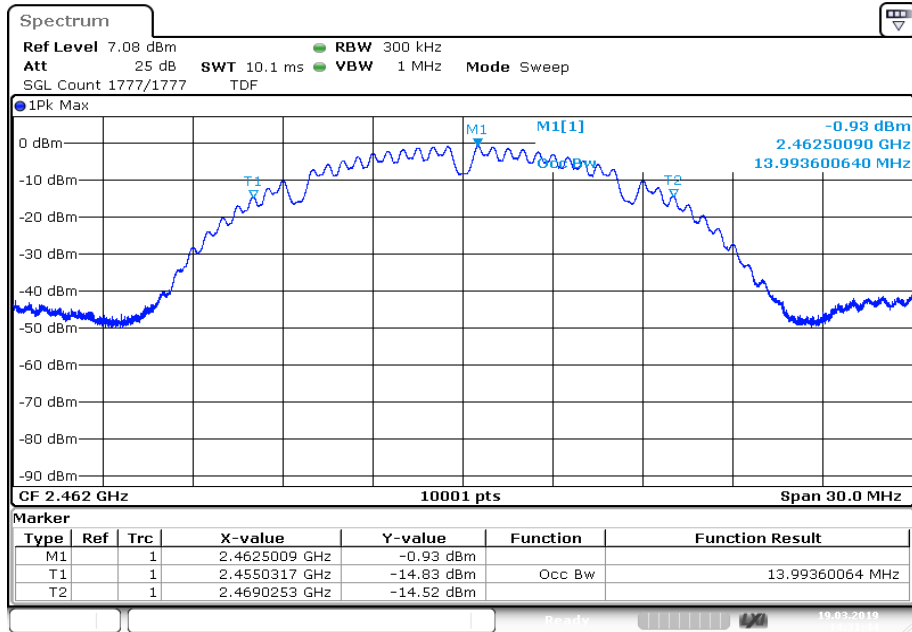


Date: 19.MAR.2019 14:31:44

Plots: OFDM / g – mode


Plot 1: Channel 1

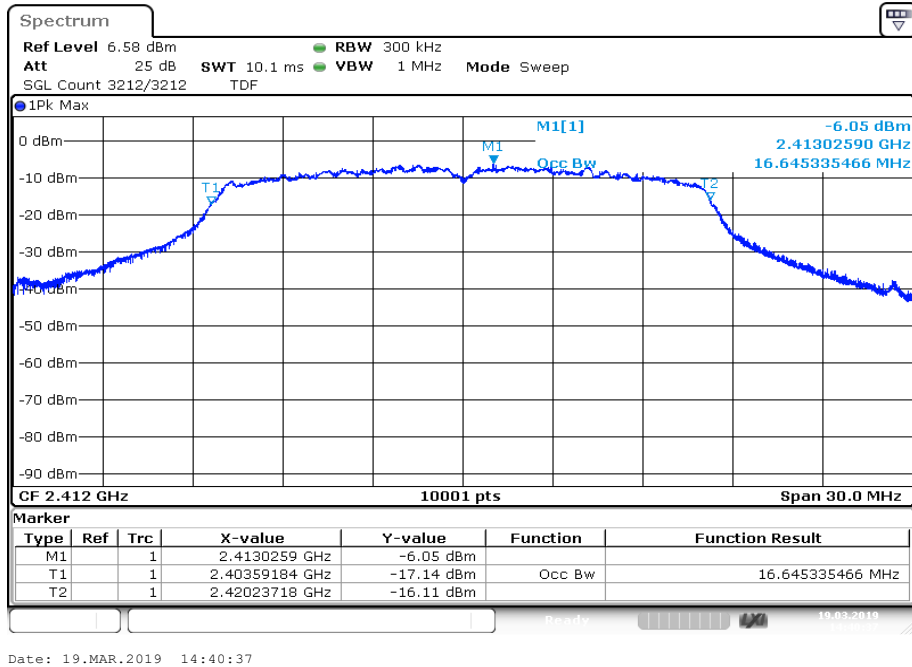

Plot 2: Channel 6

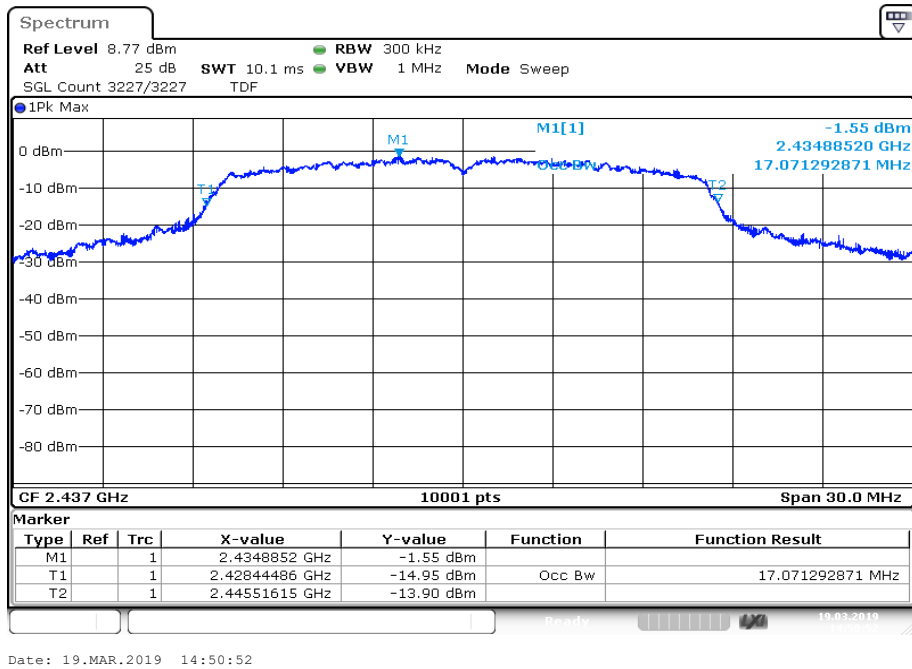


Plot 3: Channel 11

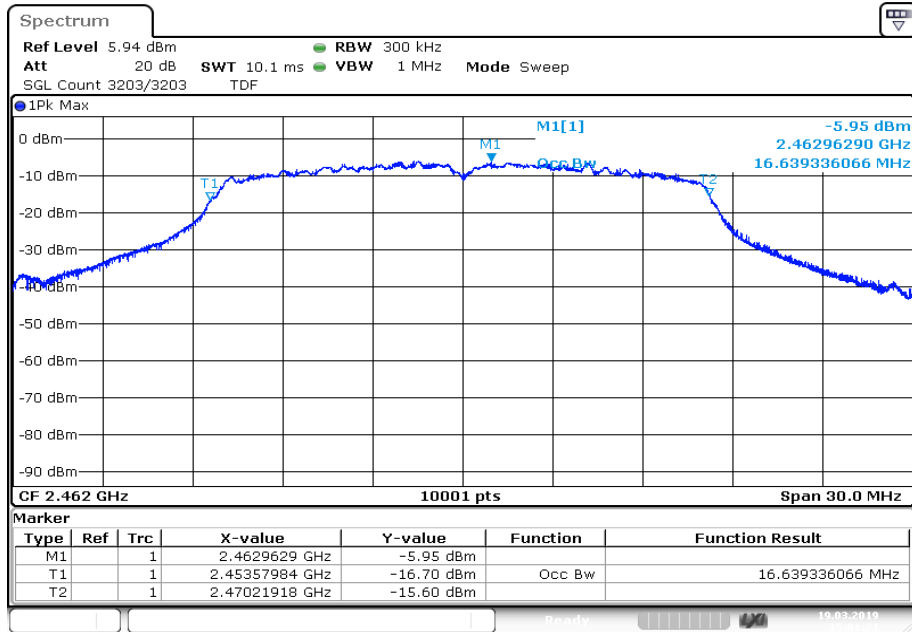


Date: 19.MAR.2019 15:01:21

Plots: OFDM / n HT20 – mode


Plot 1: Channel 1

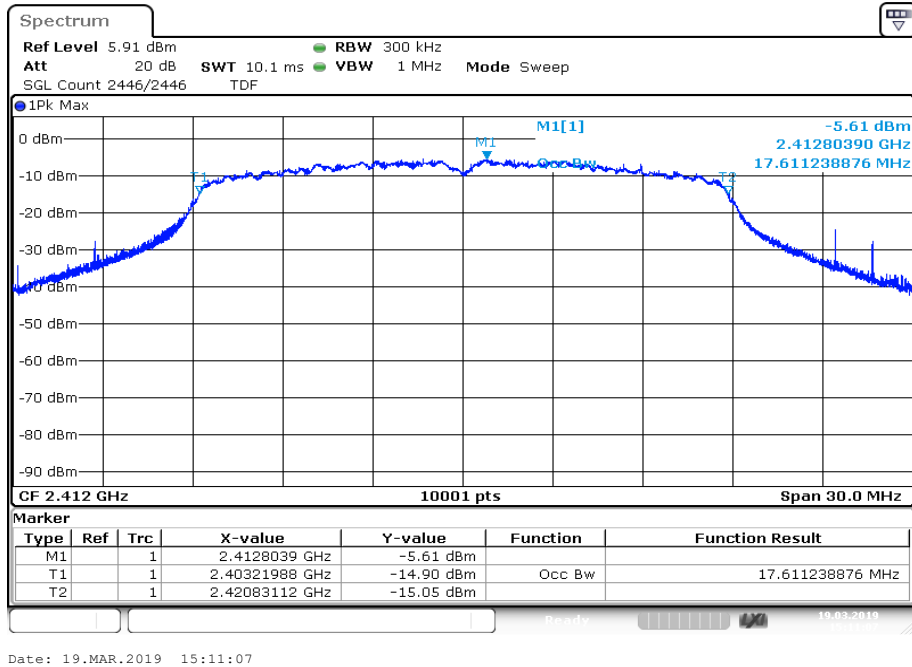

Plot 2: Channel 6

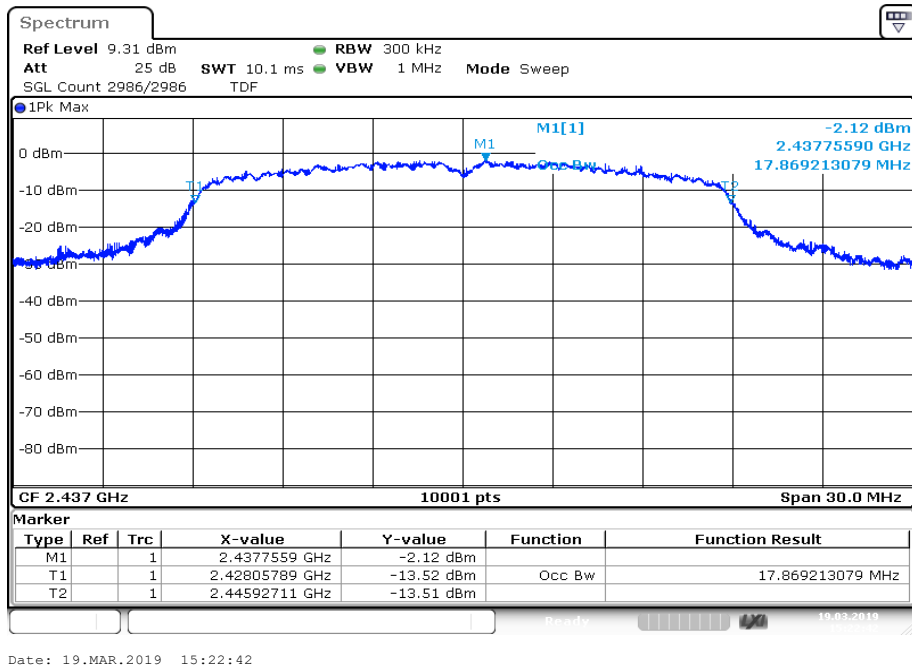

Plot 3: Channel 11

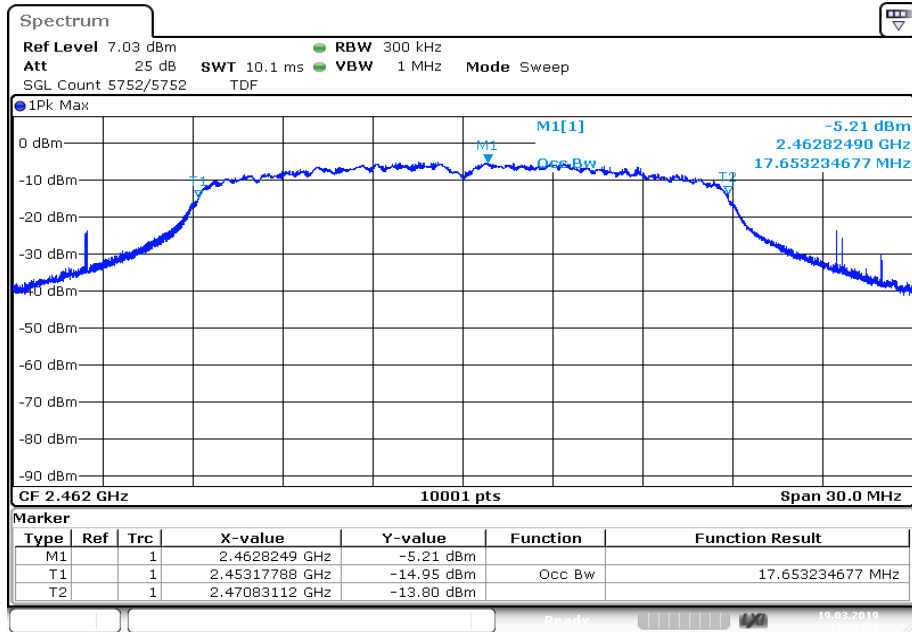

Date: 19.MAR.2019 15:36:54

12.8 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz
Trace mode	Single count with min. 200 counts
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Usage:


-/-	IC
Within the used band	

Results:


	20 dB bandwidth / MHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	16.063	16.075	16.057
OFDM / g – mode	17.125	18.028	17.128
OFDM / n HT20 – mode	18.319	18.361	18.337

Plots: DSSS / b – mode


Plot 1: Channel 1

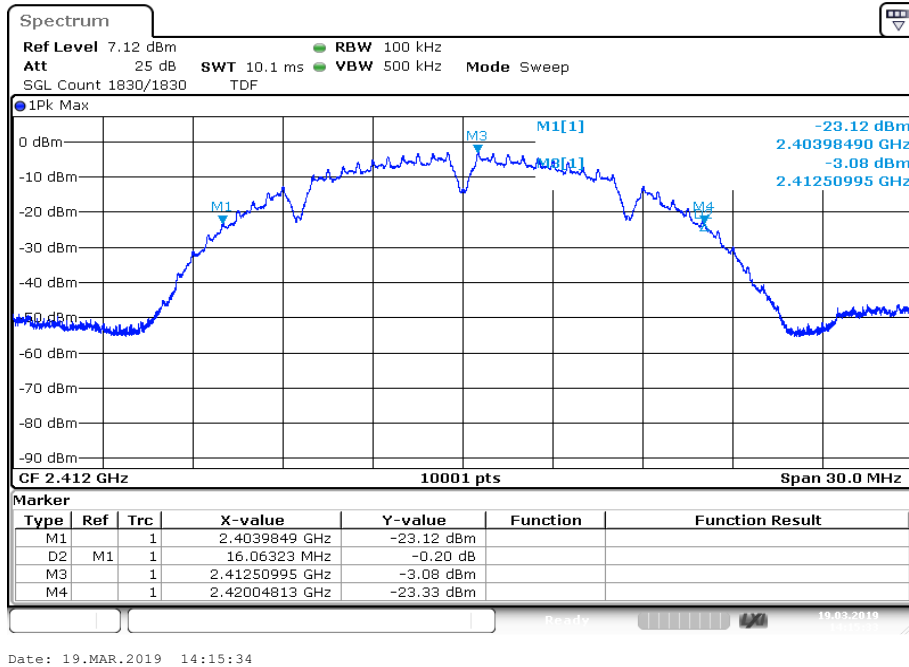

Plot 2: Channel 6

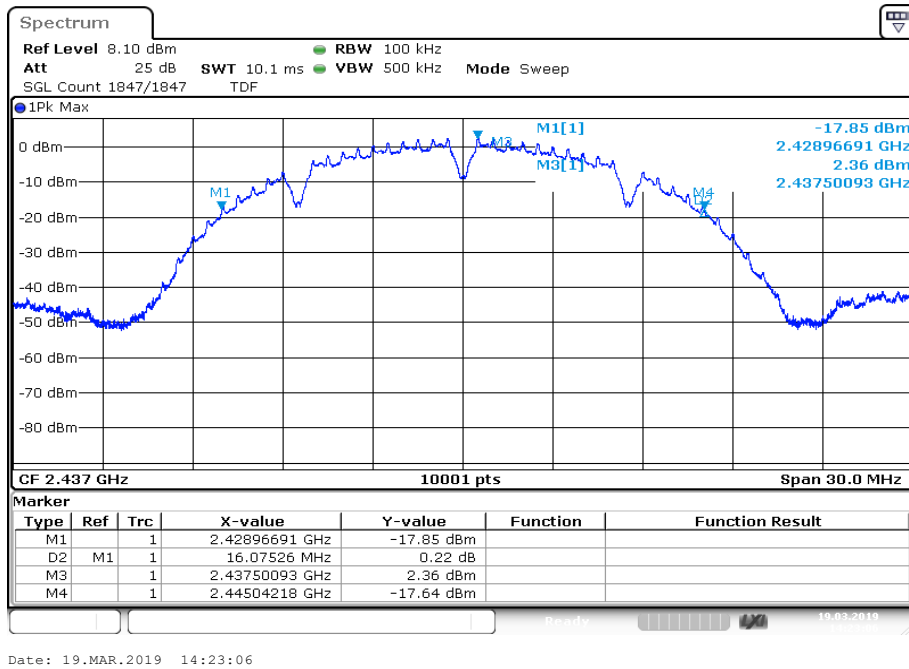


Plot 3: Channel 11

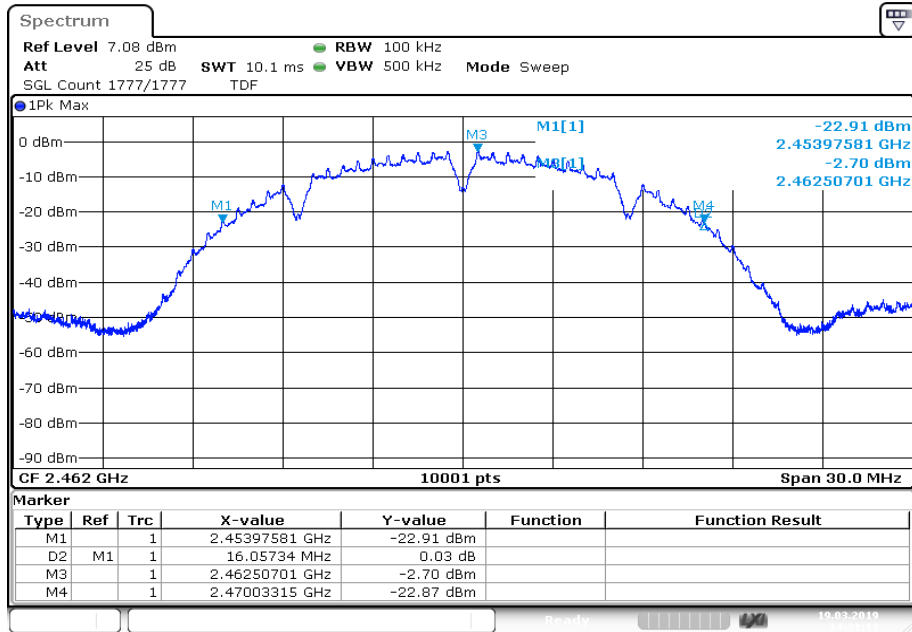


Date: 19.MAR.2019 14:31:11

Plots: OFDM / g – mode


Plot 1: Channel 1

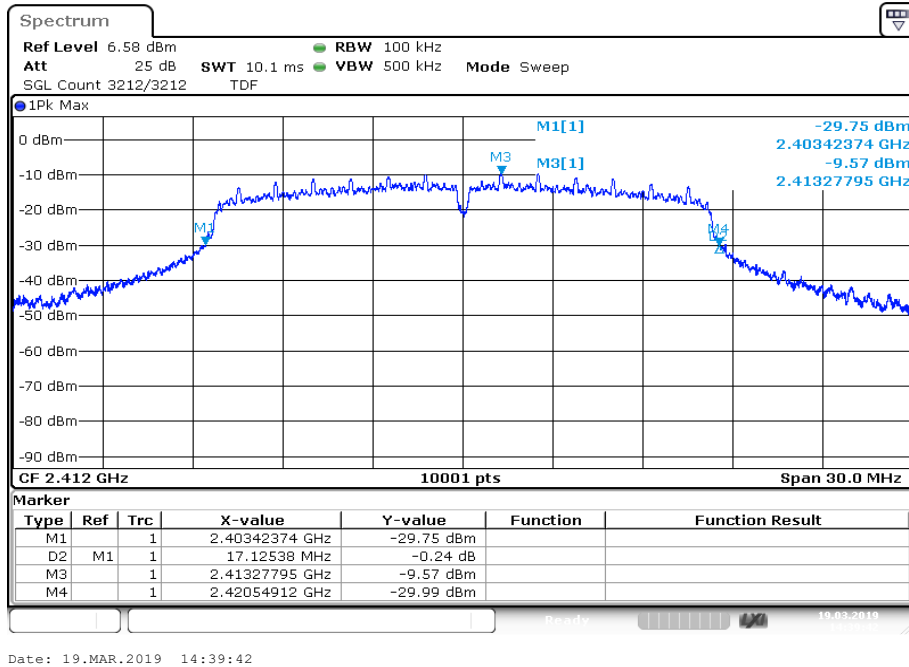

Plot 2: Channel 6

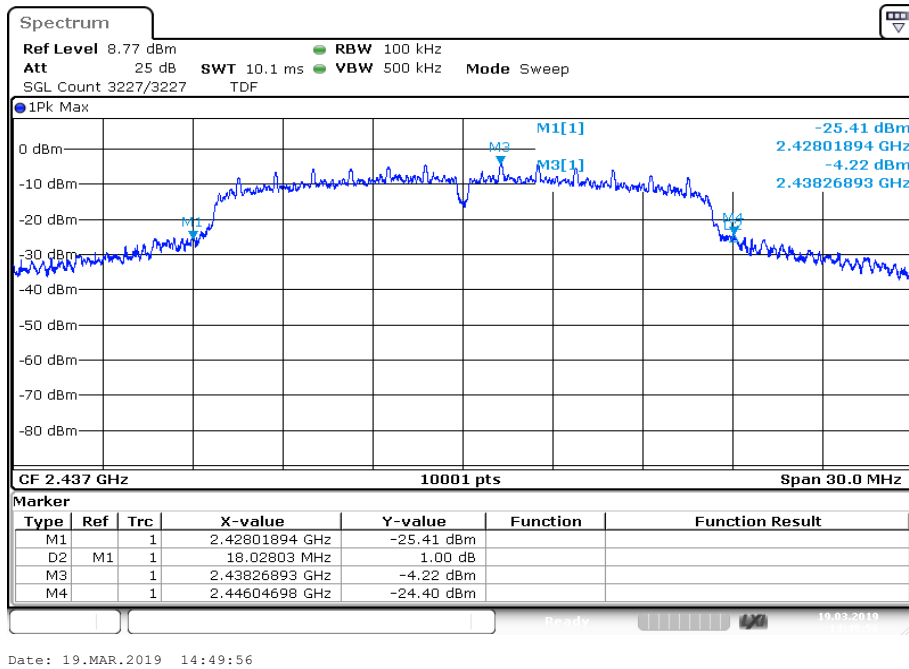


Plot 3: Channel 11

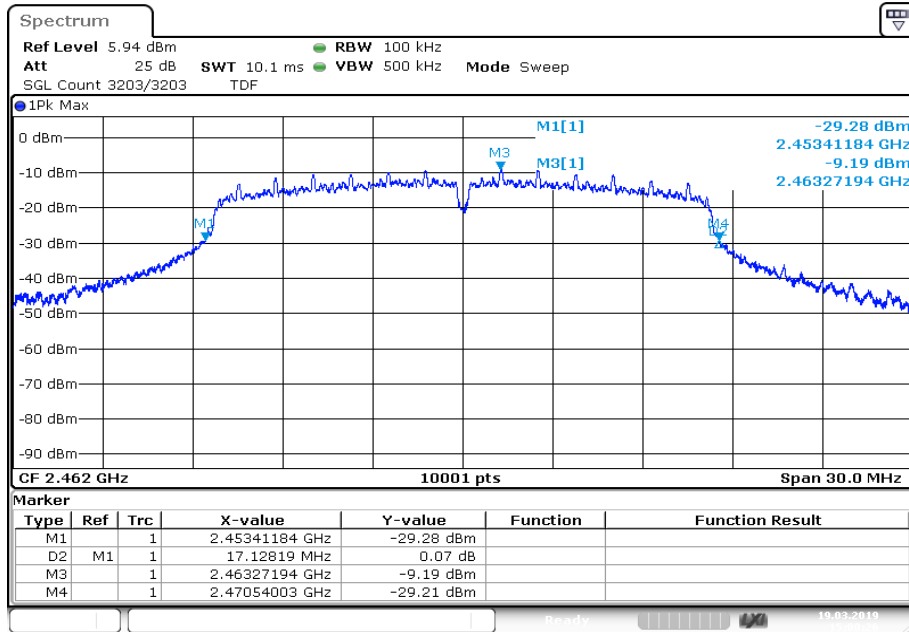


Date: 19.MAR.2019 15:00:26

Plots: OFDM / n HT20 – mode


Plot 1: Channel 1

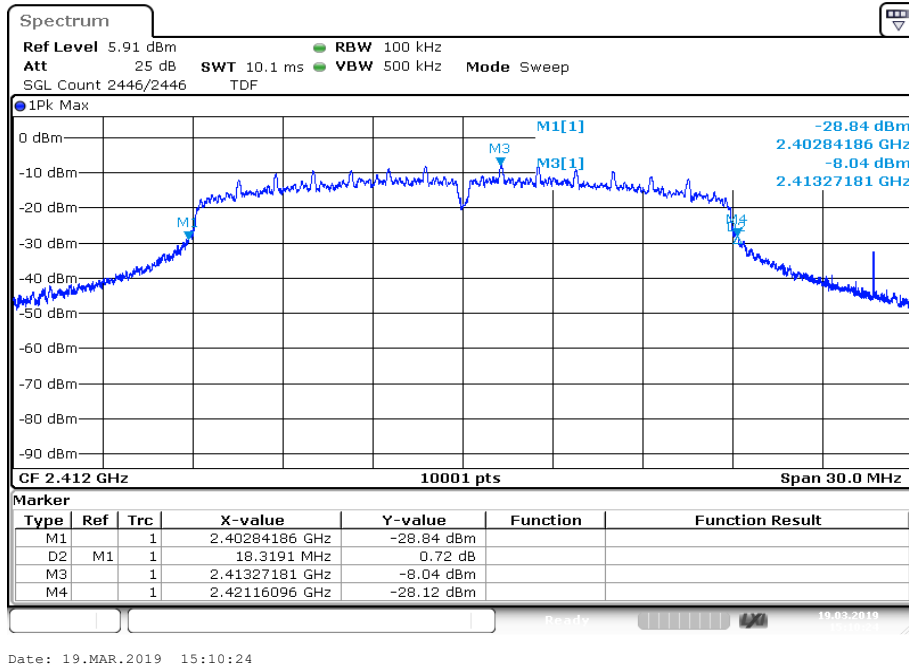

Plot 2: Channel 6

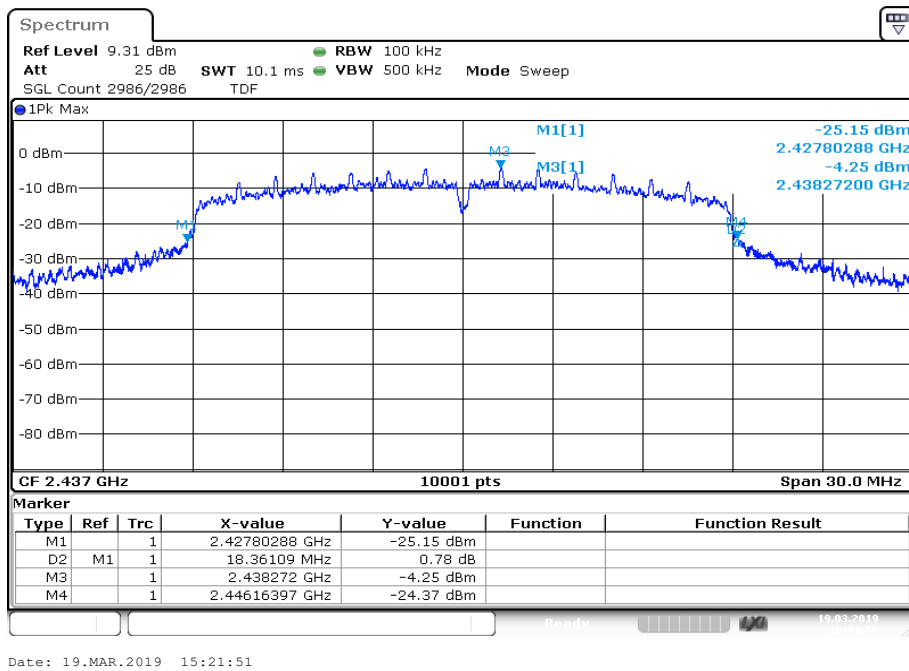

Plot 3: Channel 11

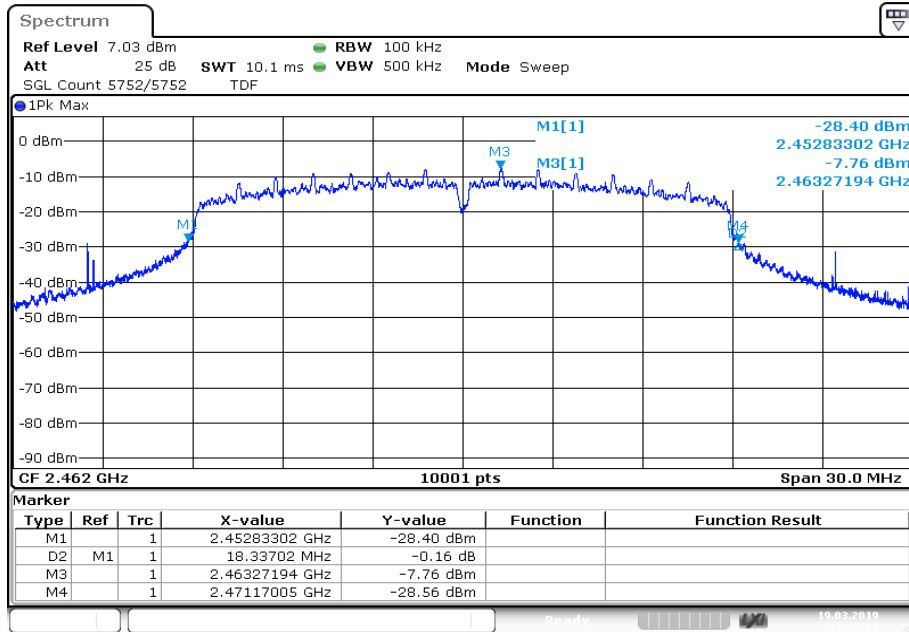

Date: 19.MAR.2019 15:35:19

12.9 Band edge compliance conducted

Description:

Measurement of the radiated band edge compliance with a conducted test setup.

Measurement:

Measurement parameter for measurements				
According to DTS clause: 13.3.2 and clause 12.2.2				
Detector	RMS			
Sweep time	Auto			
Resolution bandwidth	100 kHz			
Video bandwidth	300 kHz			
Span	2 MHz			
	lower band edge	2388 MHz	to	2390 MHz
	upper band edge	2483.5 MHz	to	2485.5 MHz
Trace mode	Trace average with 200 counts			
Test setup	See chapter 6.5 A			
Measurement uncertainty	See chapter 8			

Limits:

FCC	IC
-41.26 dBm	

Results: on-module antenna


	band edge compliance / dBm (gain calculation)		
Modulation:	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode
Max. lower band edge power conducted	-60.0	-60.2	-59.1
Antenna gain / dBi	1.0		
Max. lower band edge power radiated	-59.0	-59.2	-58.1
Max. upper band edge power conducted	-59.5	-59.5	-55.7
Antenna gain / dBi	0.9		
Max. upper band edge power radiated	-58.6	-58.6	-54.8

Results: external antenna


	band edge compliance / dBm (gain calculation)		
Modulation:	DSSS / b – mode	OFDM / g – mode	OFDM / n HT20 – mode
Max. lower band edge power conducted	-60.0	-60.2	-59.1
Antenna gain / dBi	2.8		
Max. lower band edge power radiated	-57.2	-57.4	-56.3
Max. upper band edge power conducted	-59.5	-59.5	-55.7
Antenna gain / dBi	2.8		
Max. upper band edge power radiated	-56.7	-56.7	-52.9

Plots: DSSS / b – mode

Plot 1: Lower band edge, channel 1

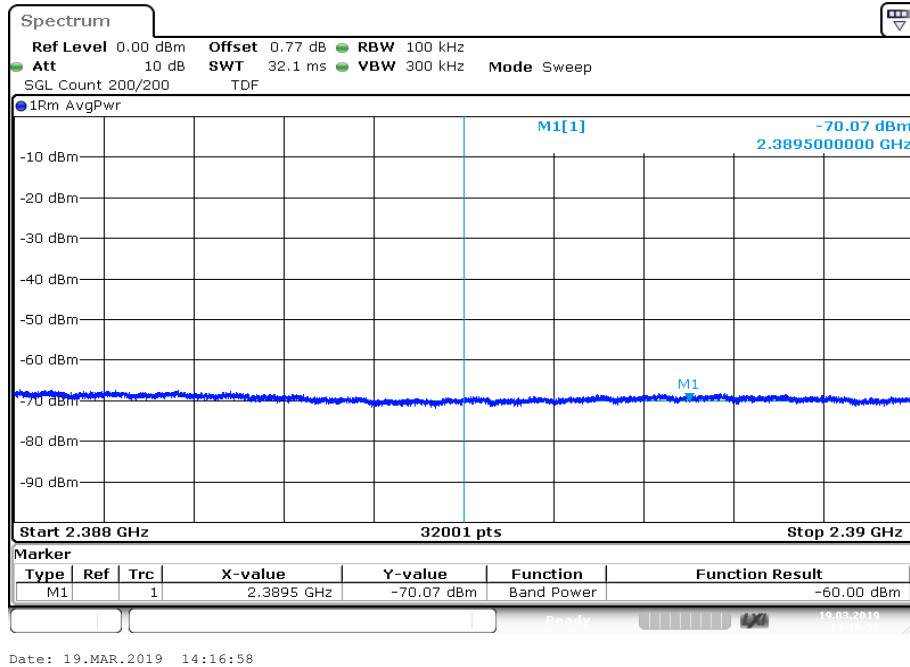


Plot 2: Upper band edge, channel 11

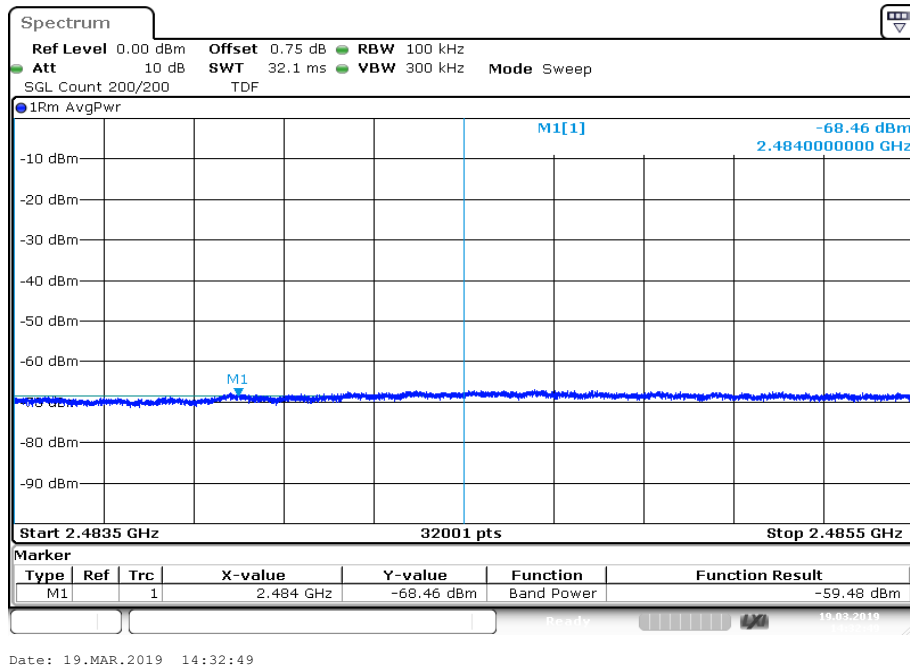


Plots: OFDM / g – mode

Plot 1: Lower band edge, channel 1

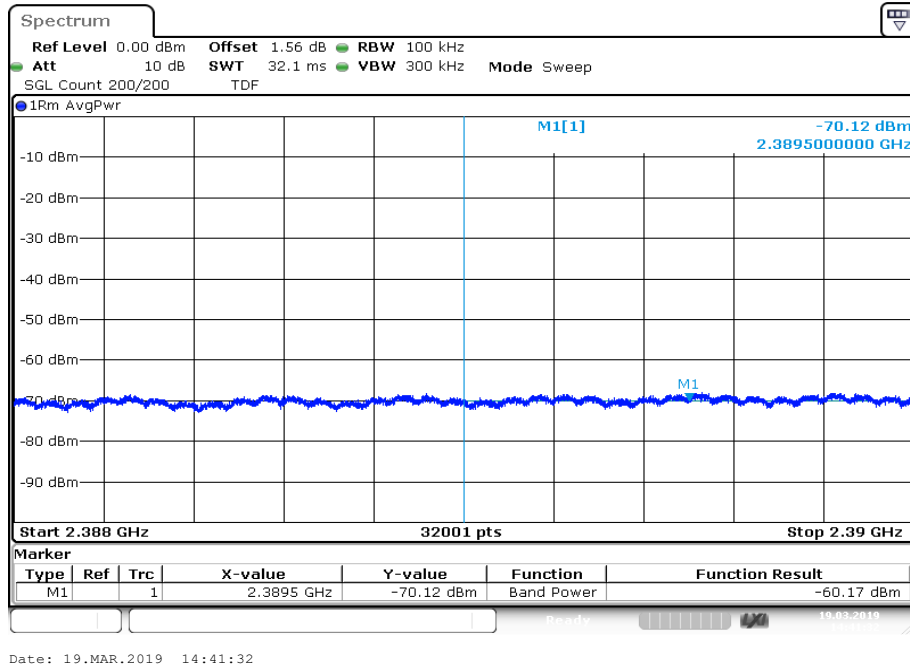


Plot 2: Upper band edge, channel 11

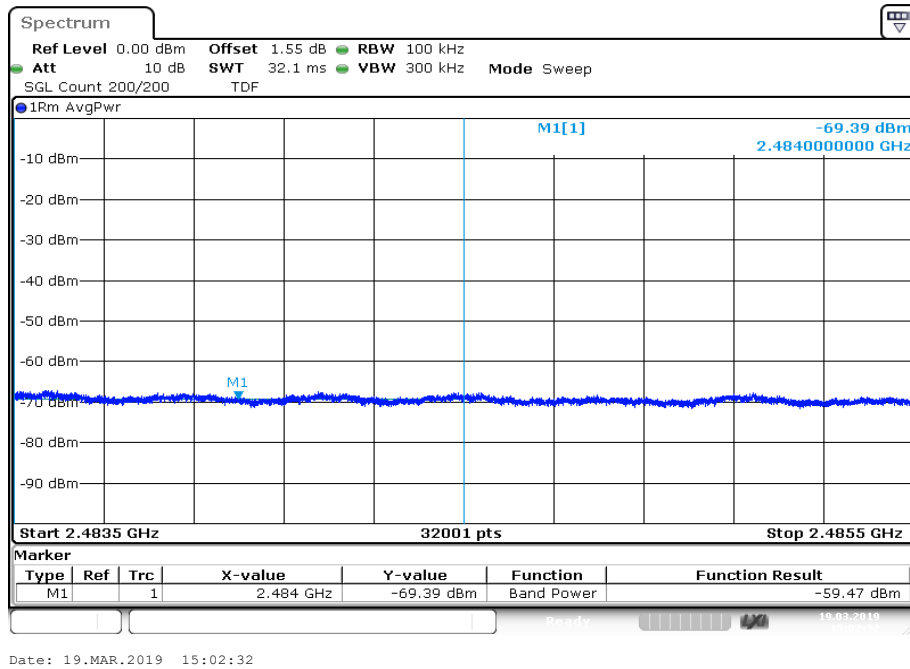


Plots: OFDM / n HT20 – mode

Plot 1: Lower band edge, channel 1

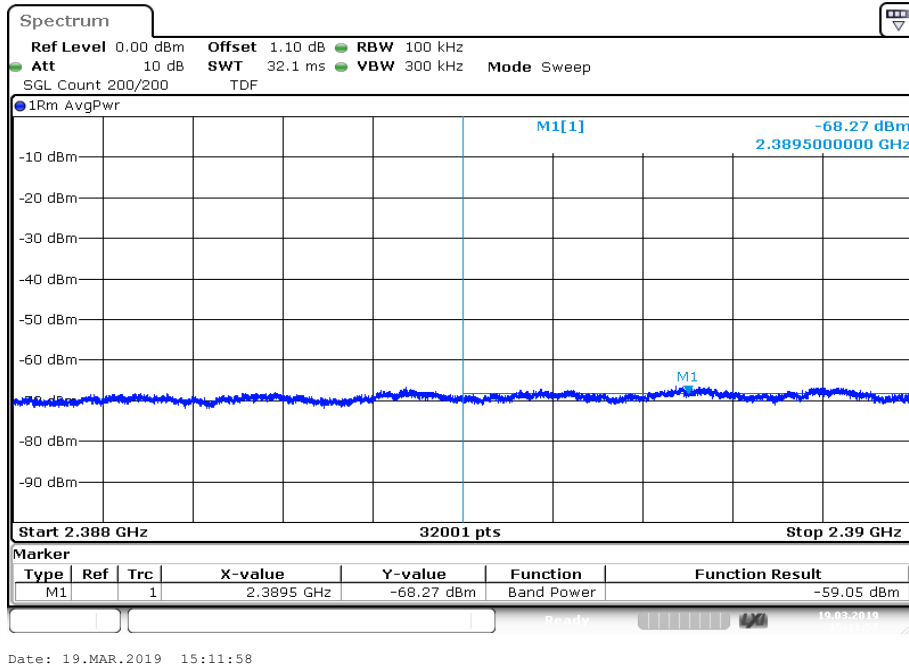

Plot 2: Upper band edge, channel 11

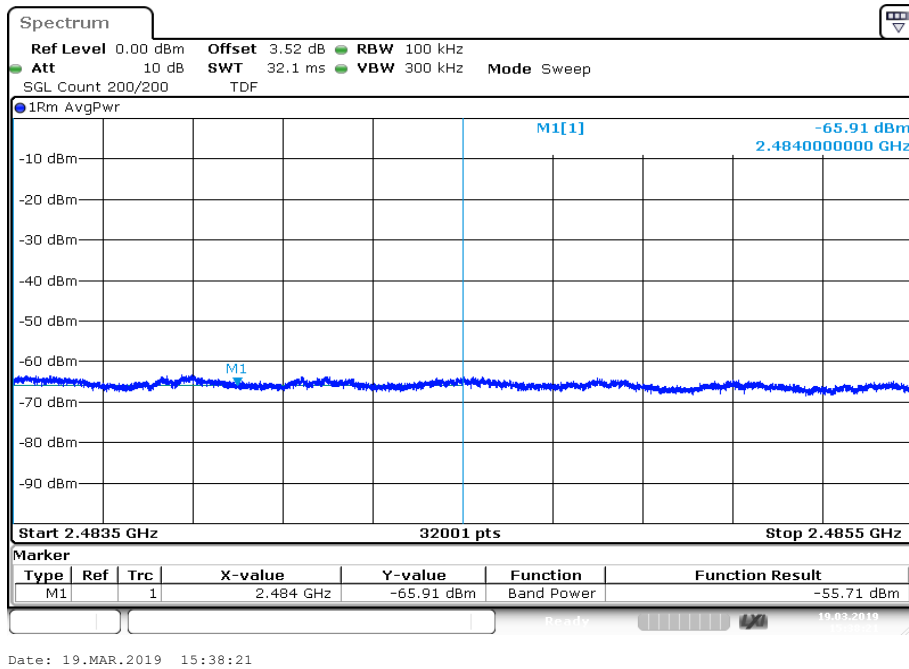

12.10 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
Test setup	See chapter 6.5 A
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: DSSS / b – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		0.9	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-2.9	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-3.9	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / g – mode


TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-9.5	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-4.0	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-9.5	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / n HT20 – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-9.0	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		-4.2	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-8.2	30 dBm		Operating frequency
All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant


Plots: DSSS / b – mode

Plot 1: Channel 1, up to 25 GHz

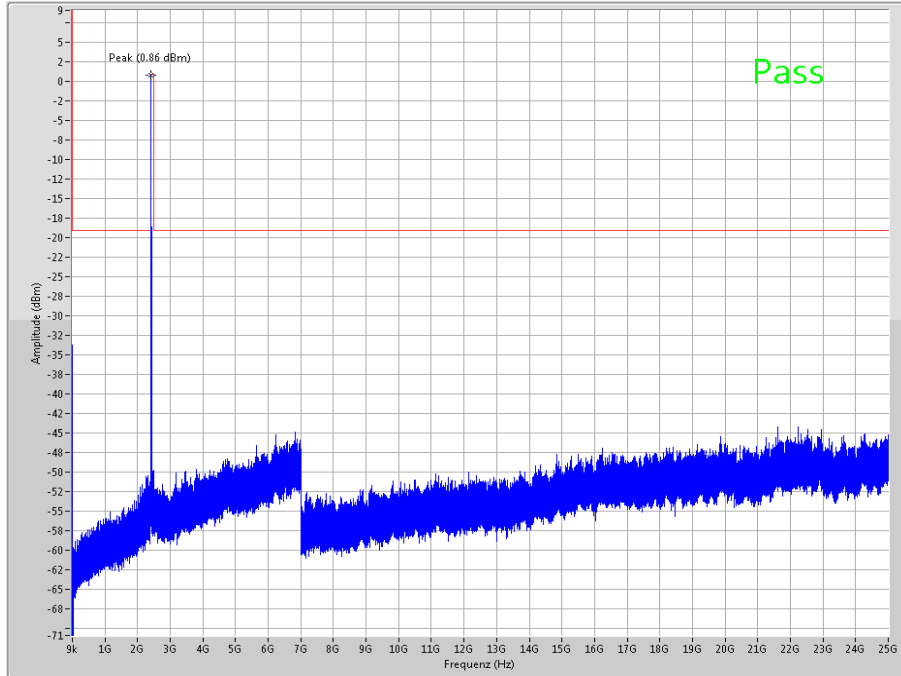


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Channel 1, zoomed carrier

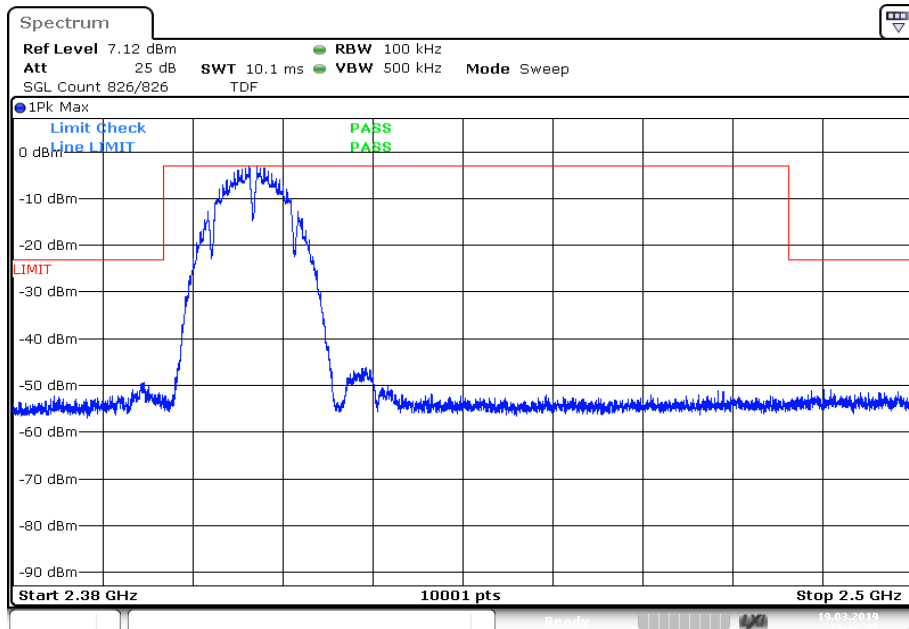


Date: 19.MAR.2019 14:16:45

Plot 3: Channel 6, up to 25 GHz

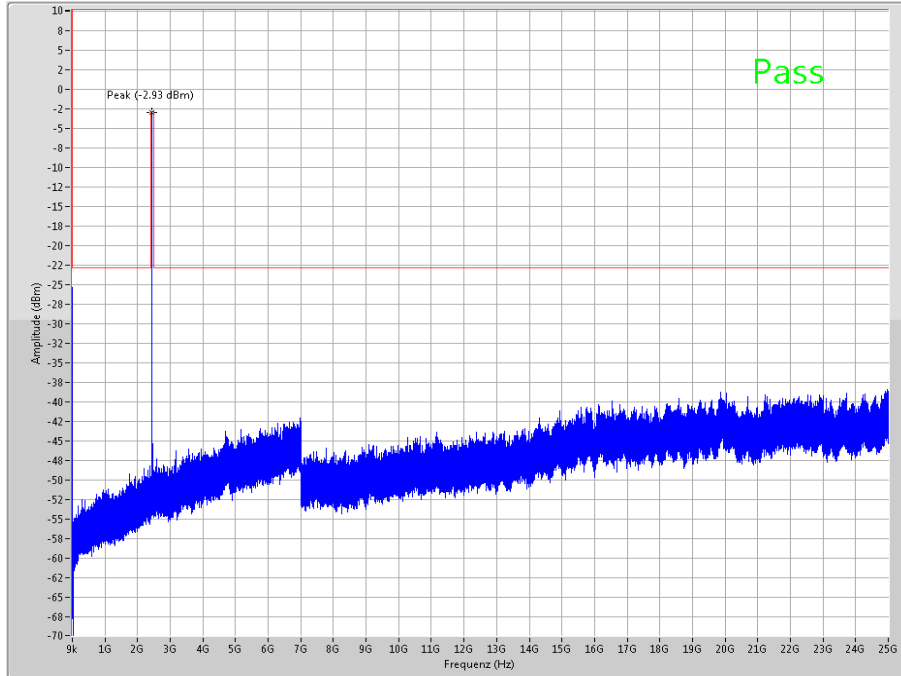


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Channel 6, zoomed carrier

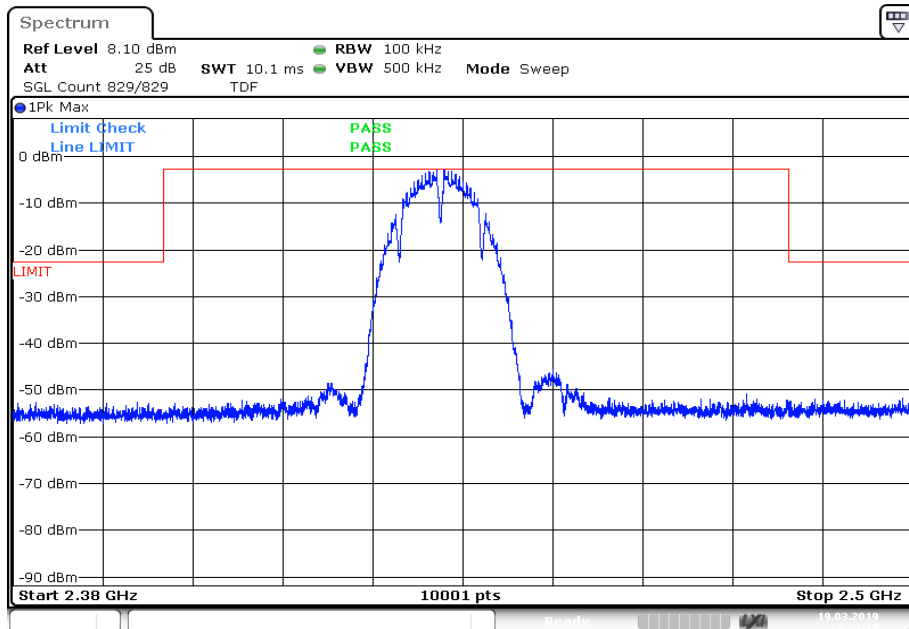


Plot 5: Channel 11, up to 25 GHz

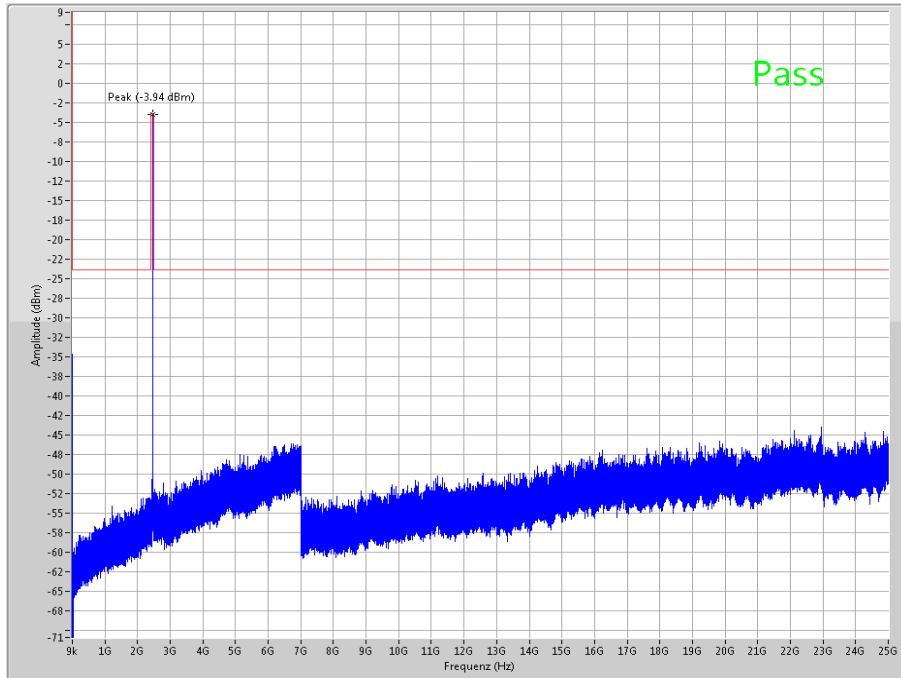

The peak at the beginning of the plot is the LO from the SA.


Plot 6: Channel 11, zoomed carrier

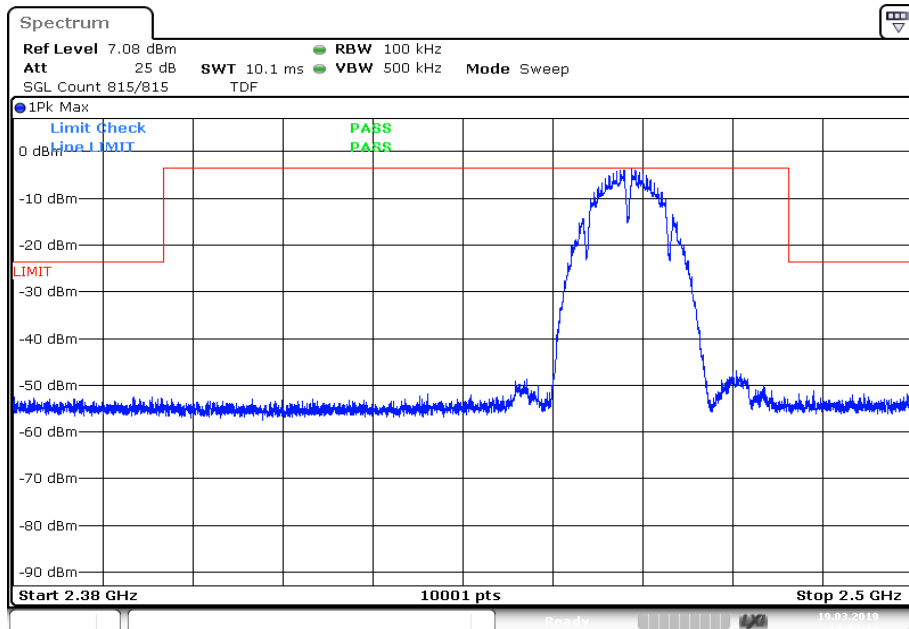

Date: 19.MAR.2019 14:32:22


Plots: OFDM / g – mode

Plot 1: Channel 1, up to 25 GHz

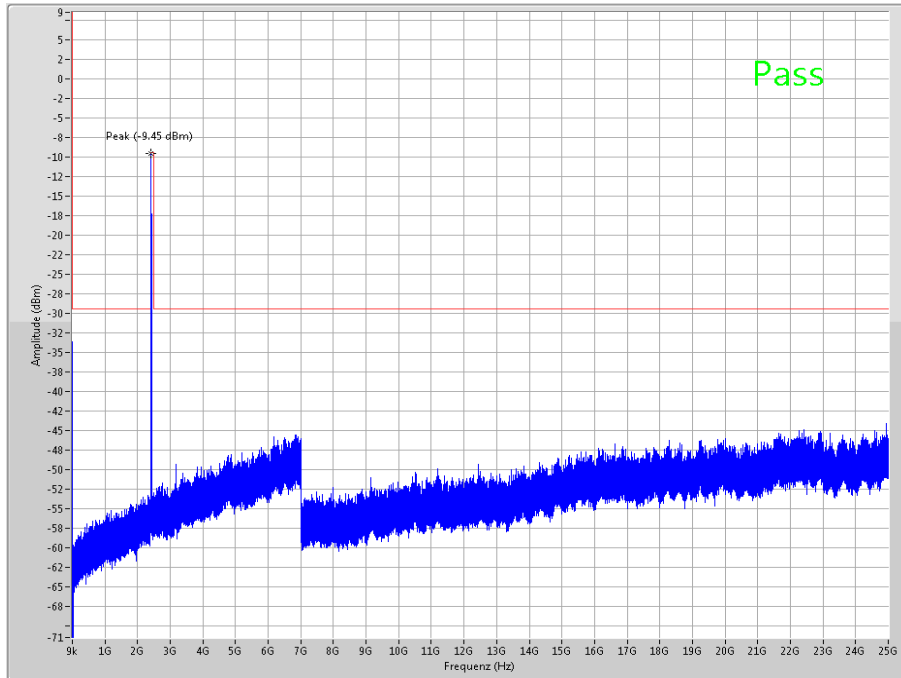


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Channel 1, zoomed carrier

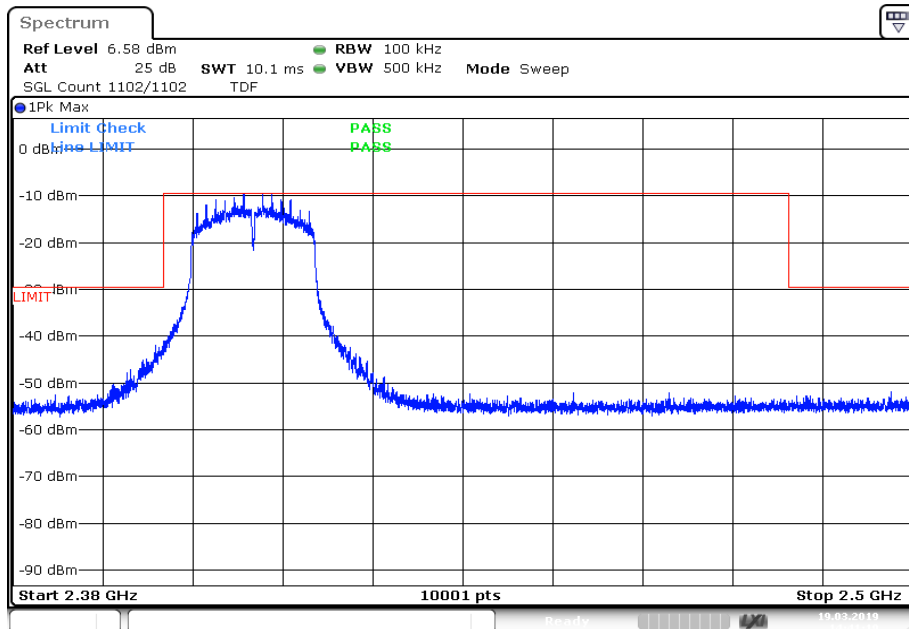


Date: 19.MAR.2019 14:41:19

Plot 3: Channel 6, up to 25 GHz

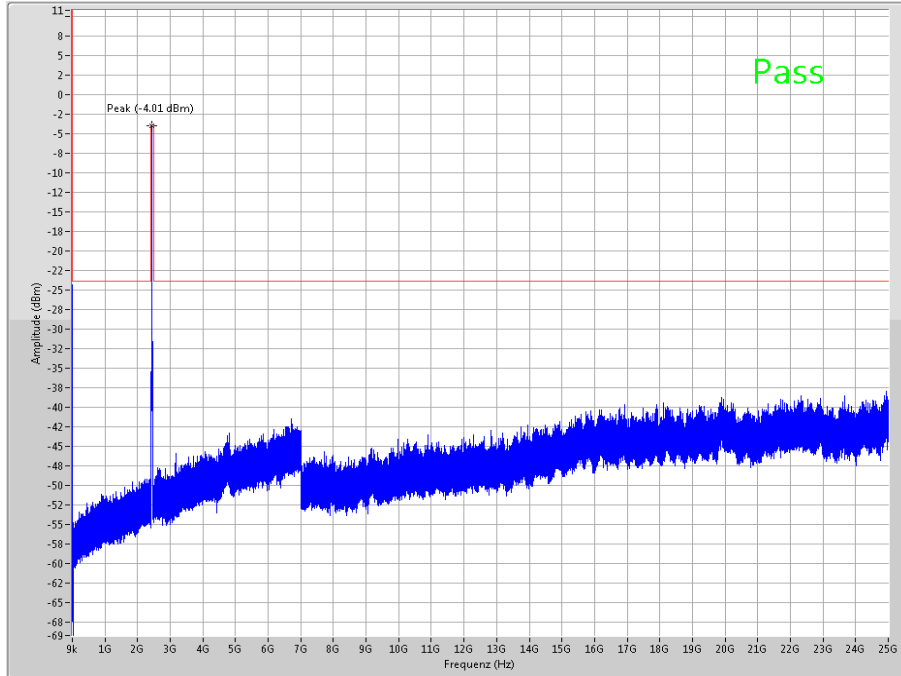


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Channel 6, zoomed carrier

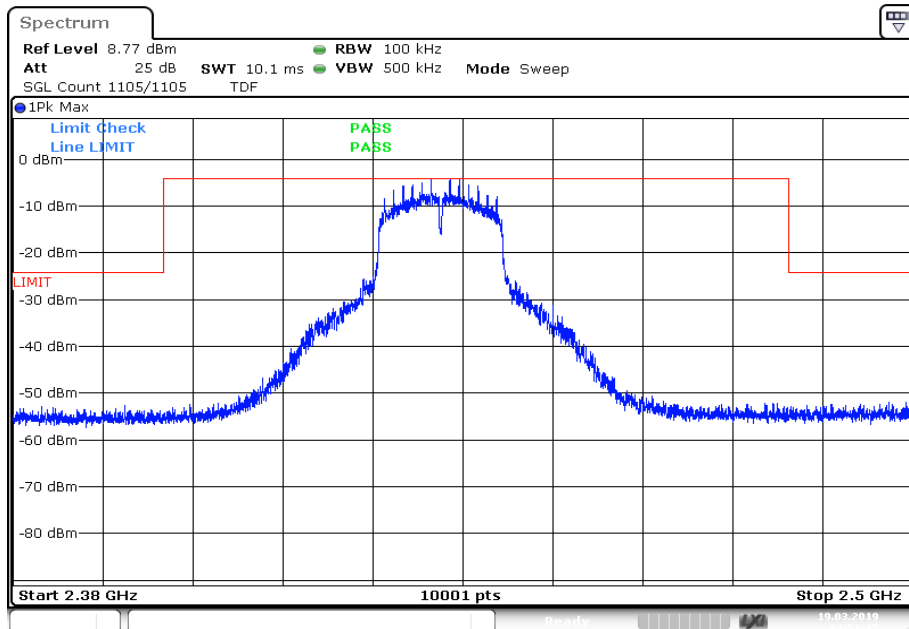


Date: 19.MAR.2019 14:51:35

Plot 5: Channel 11, up to 25 GHz

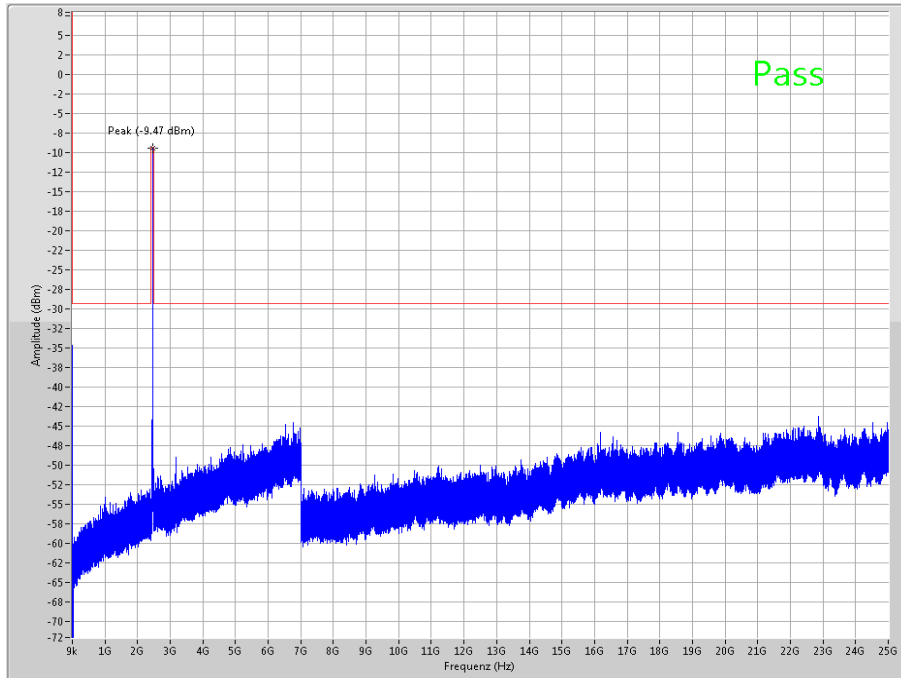

The peak at the beginning of the plot is the LO from the SA.


Plot 6: Channel 11, zoomed carrier

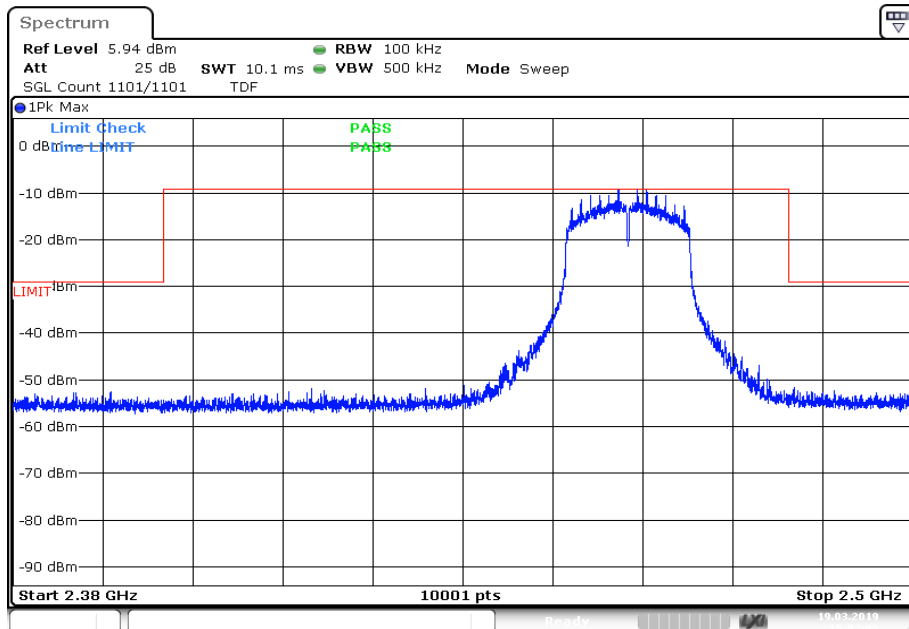

Date: 19.MAR.2019 15:02:06


Plots: OFDM / n HT 20 – mode

Plot 1: Channel 1, up to 25 GHz

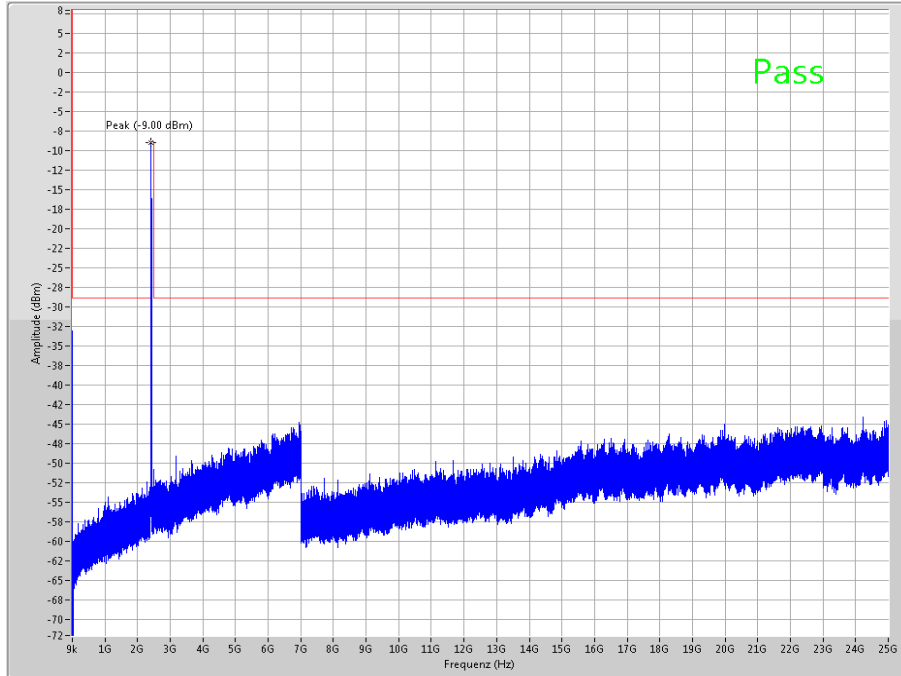


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Channel 1, zoomed carrier

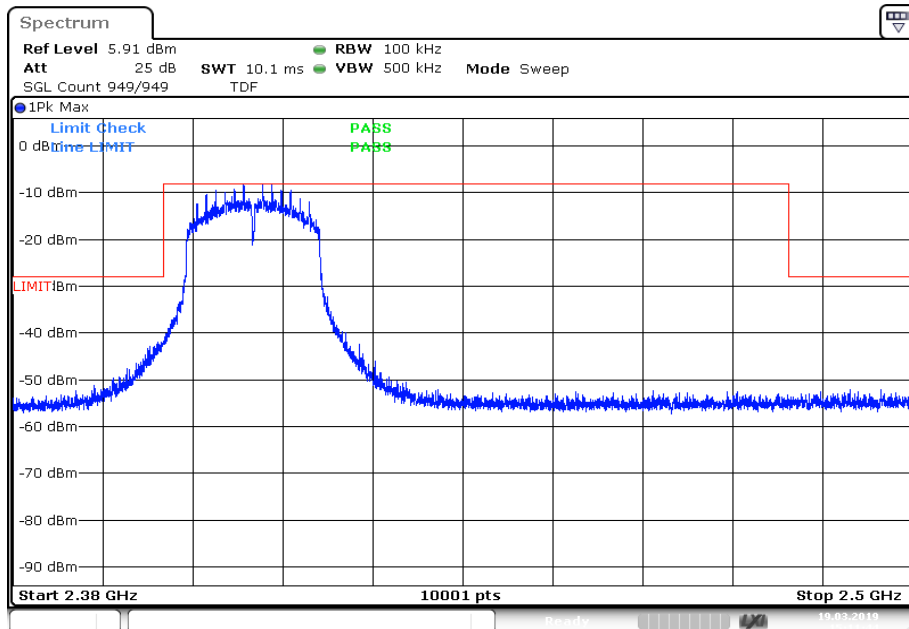


Date: 19.MAR.2019 15:11:44

Plot 3: Channel 6, up to 25 GHz

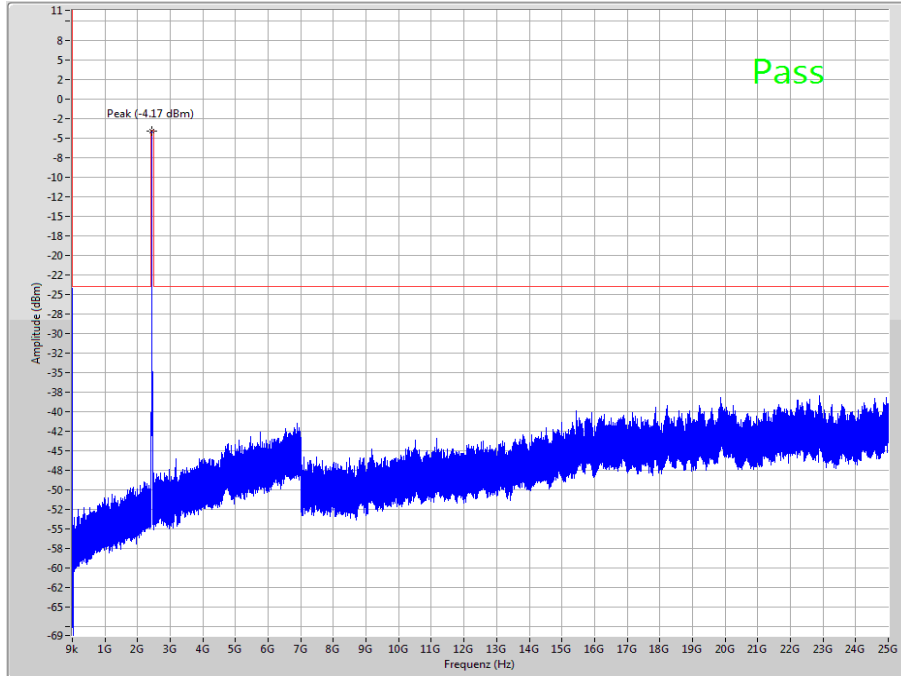


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Channel 6, zoomed carrier

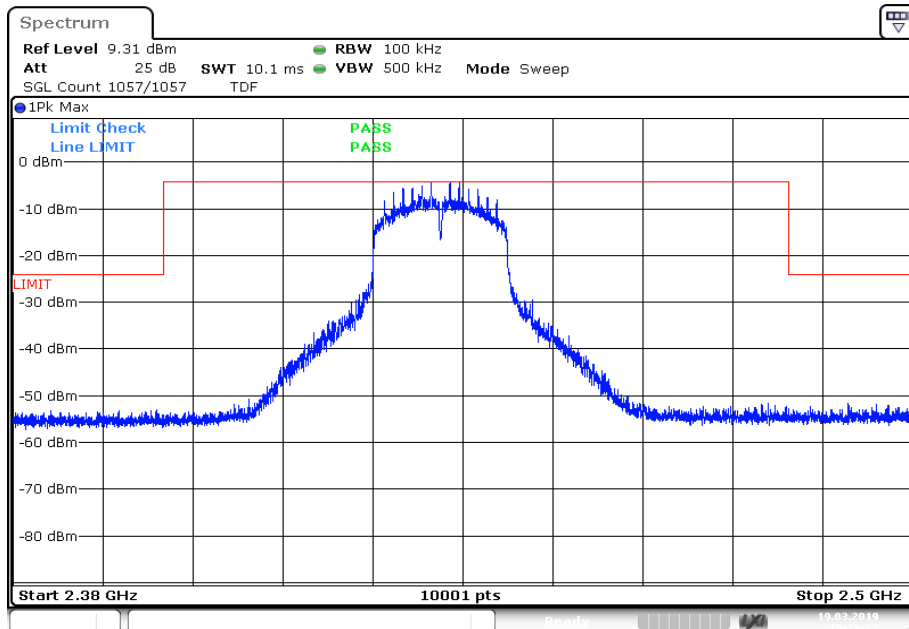


Date: 19.MAR.2019 15:23:23

Plot 5: Channel 11, up to 25 GHz

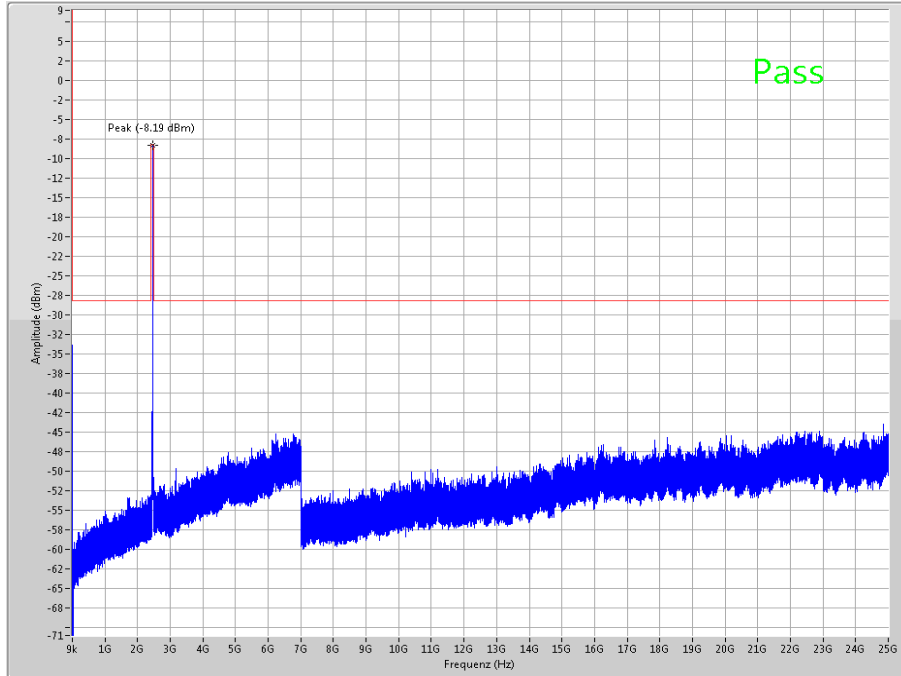

The peak at the beginning of the plot is the LO from the SA.

Plot 6: Channel 11, zoomed carrier

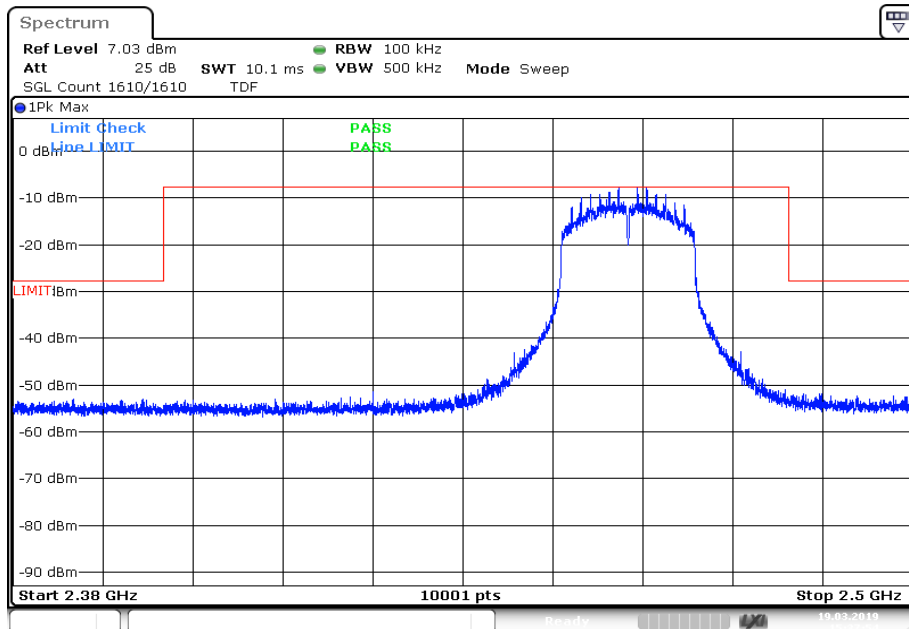

Date: 19.MAR.2019 15:37:54

12.11 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n HT20 – mode <input type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 6.2 B
Measurement uncertainty	See chapter 8

Limits:


FCC		IC
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


TX spurious emissions radiated < 30 MHz / (dBµV / m) @ 3 m		
Frequency / MHz	Detector	Level / (dBµV / m)
All detected peaks are more than 20 dB below the limit.		

Plots: DSSS, on-board antenna


Plot 1: 9 kHz to 30 MHz, lowest channel

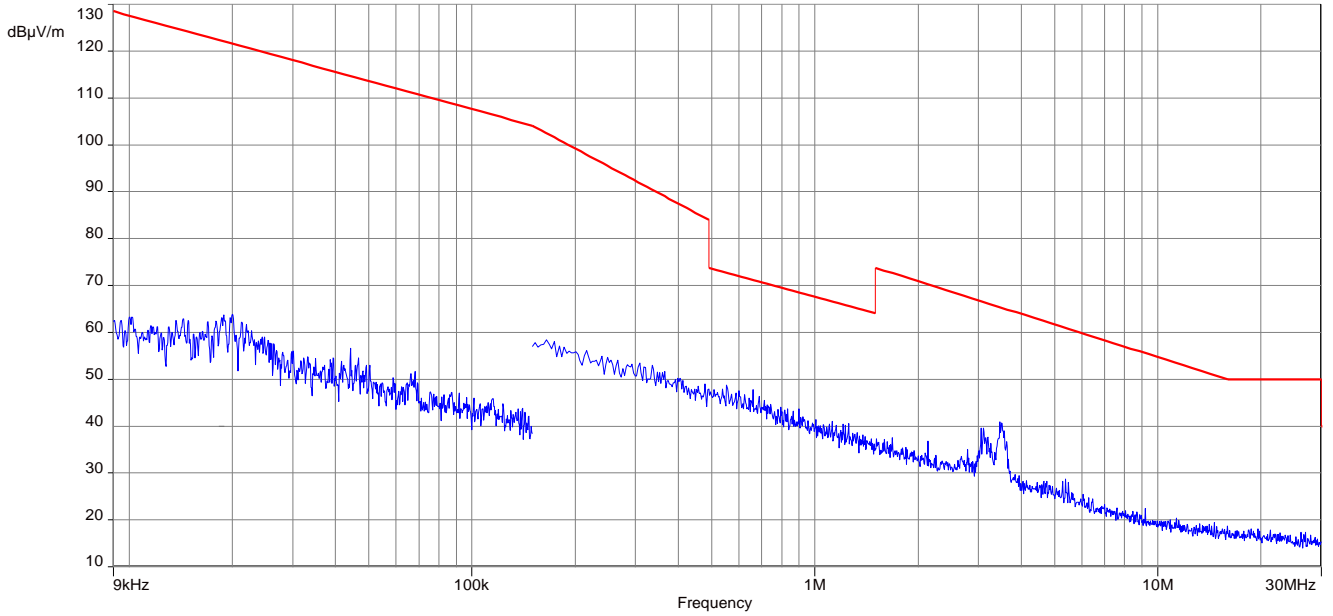

Plot 2: 9 kHz to 30 MHz, middle channel

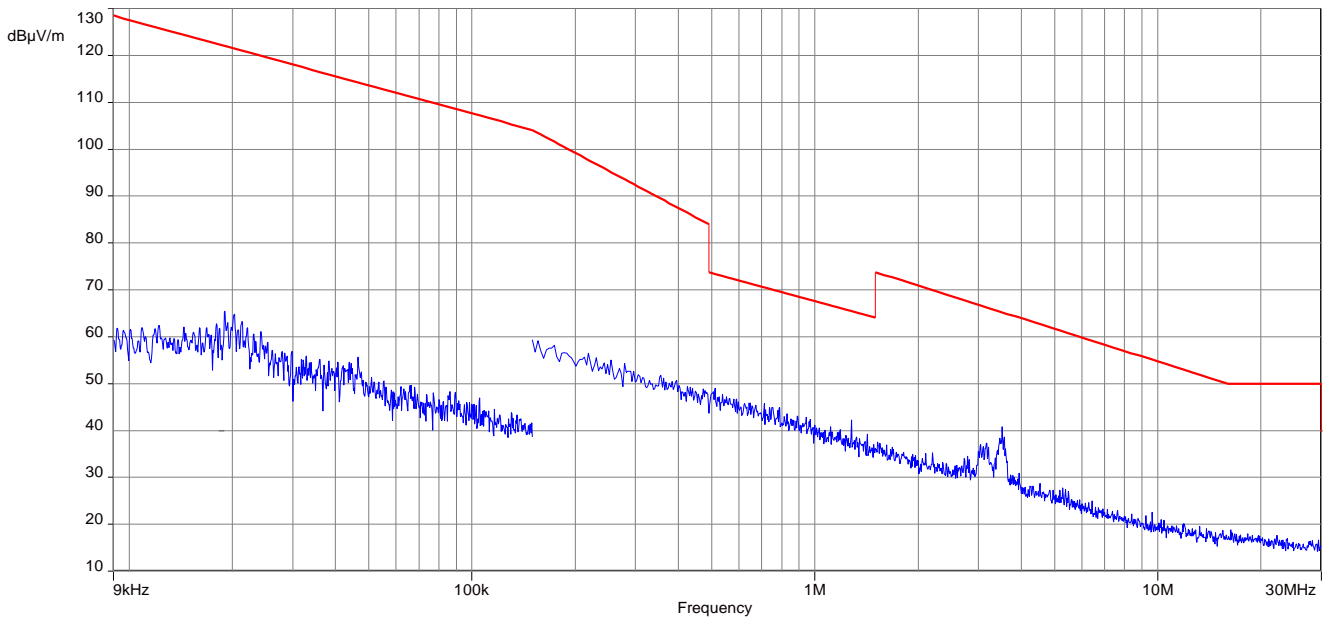


Plot 3: 9 kHz to 30 MHz, highest channel

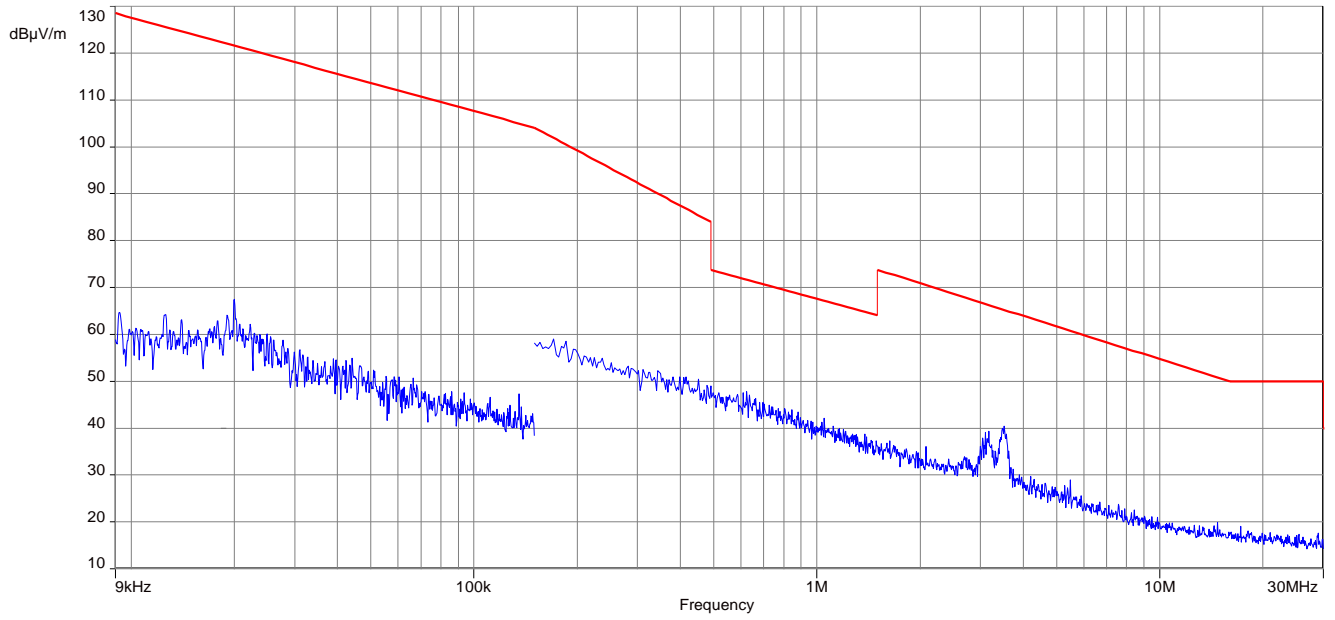


Plots: OFDM (20 MHz nominal channel bandwidth), on-board antenna


Plot 1: 9 kHz to 30 MHz, lowest channel

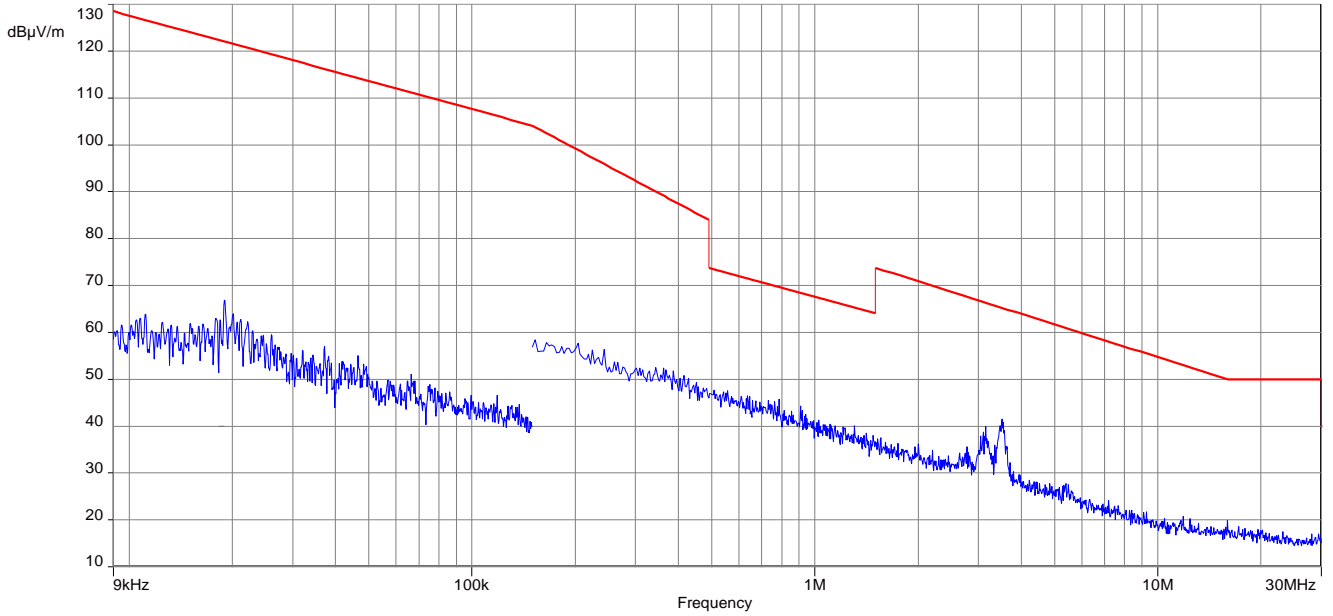

Plot 2: 9 kHz to 30 MHz, middle channel

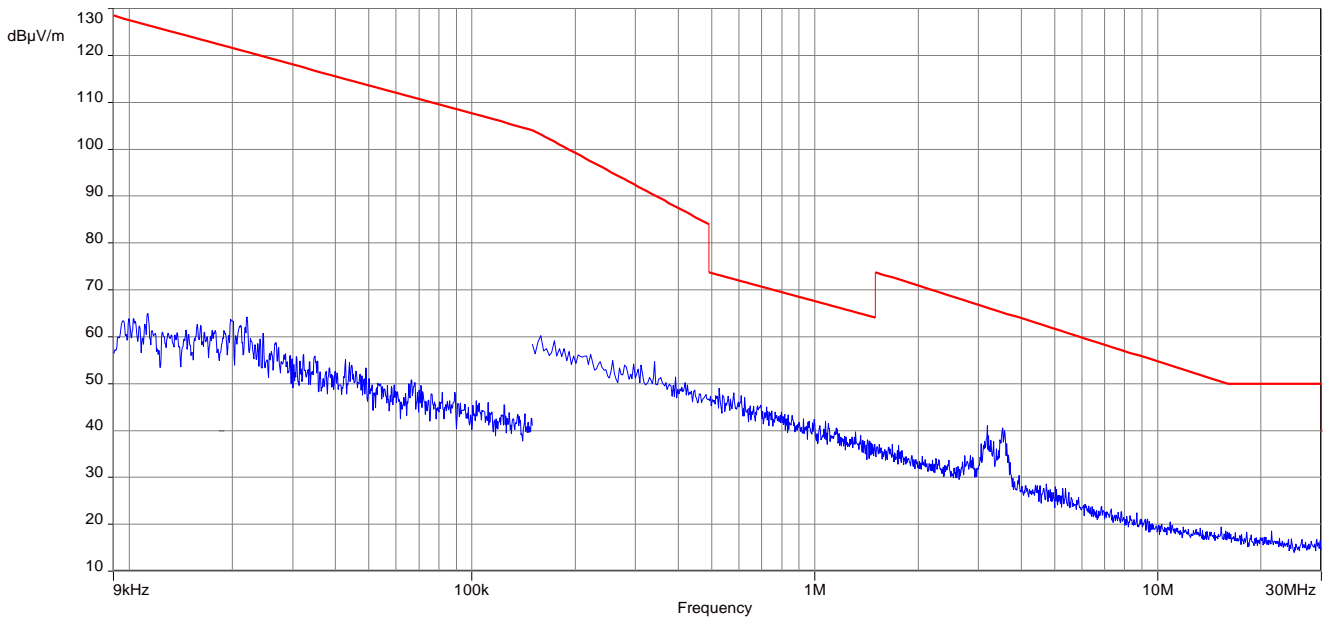


Plot 3: 9 kHz to 30 MHz, highest channel

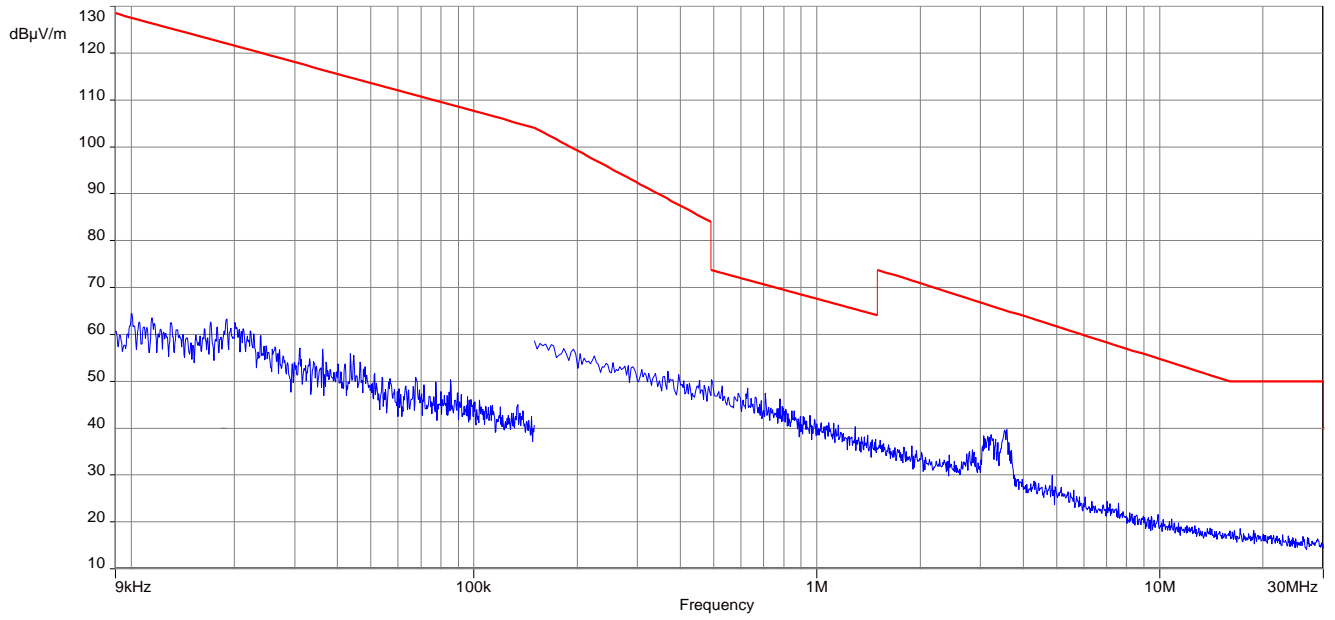


Plots: DSSS, external antenna


Plot 1: 9 kHz to 30 MHz, lowest channel

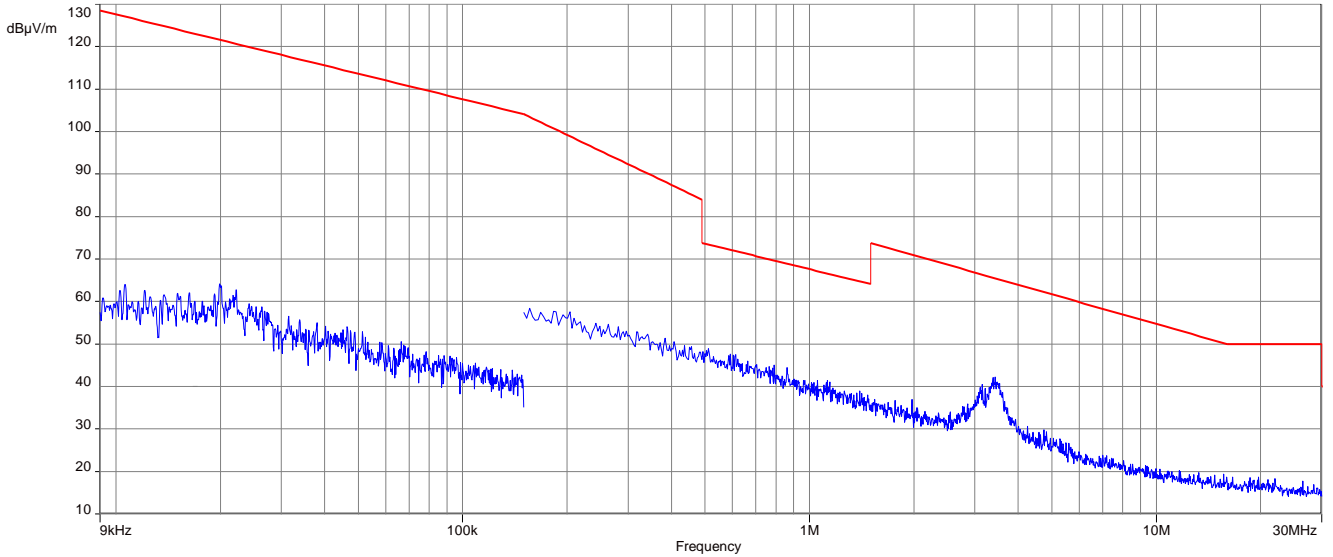

Plot 2: 9 kHz to 30 MHz, middle channel

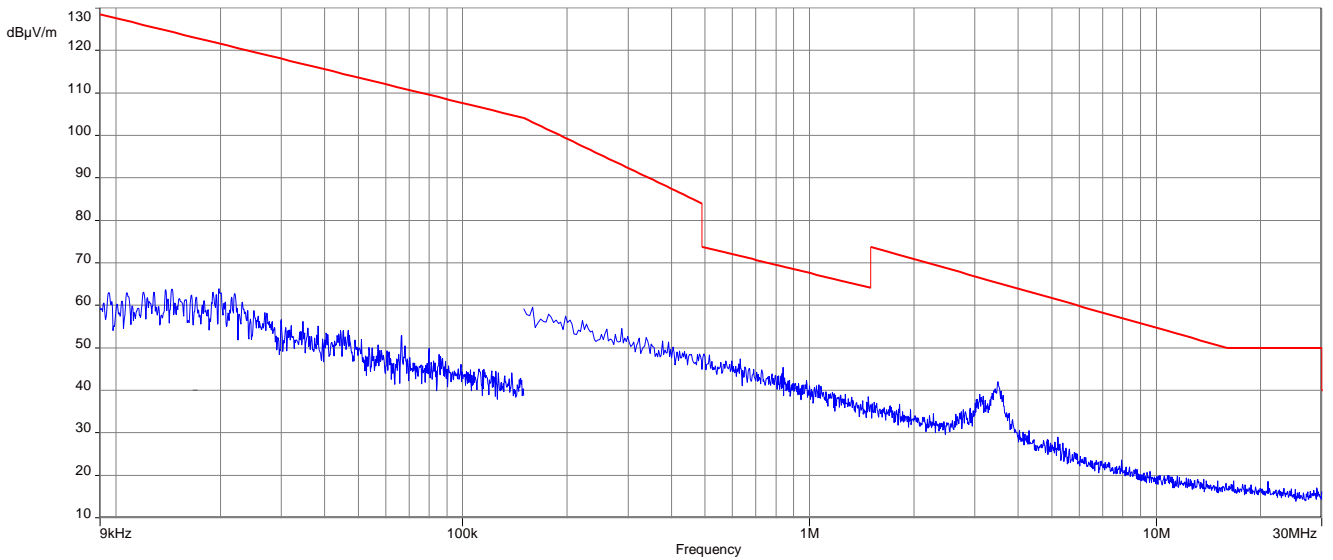


Plot 3: 9 kHz to 30 MHz, highest channel

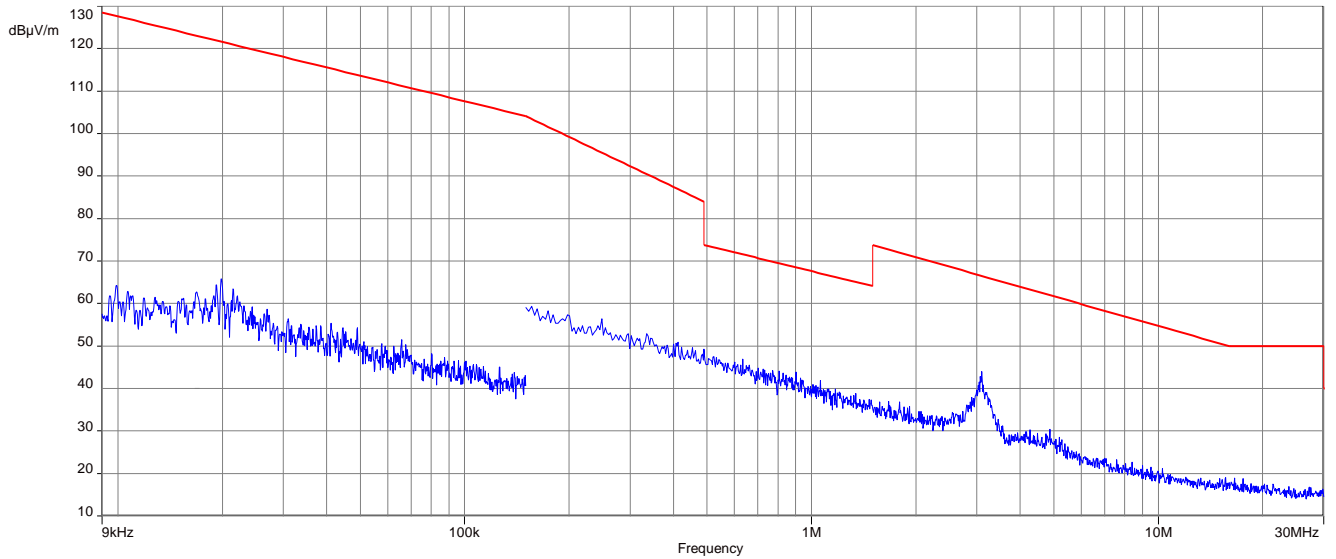


Plots: OFDM (20 MHz nominal channel bandwidth), external antenna


Plot 1: 9 kHz to 30 MHz, lowest channel

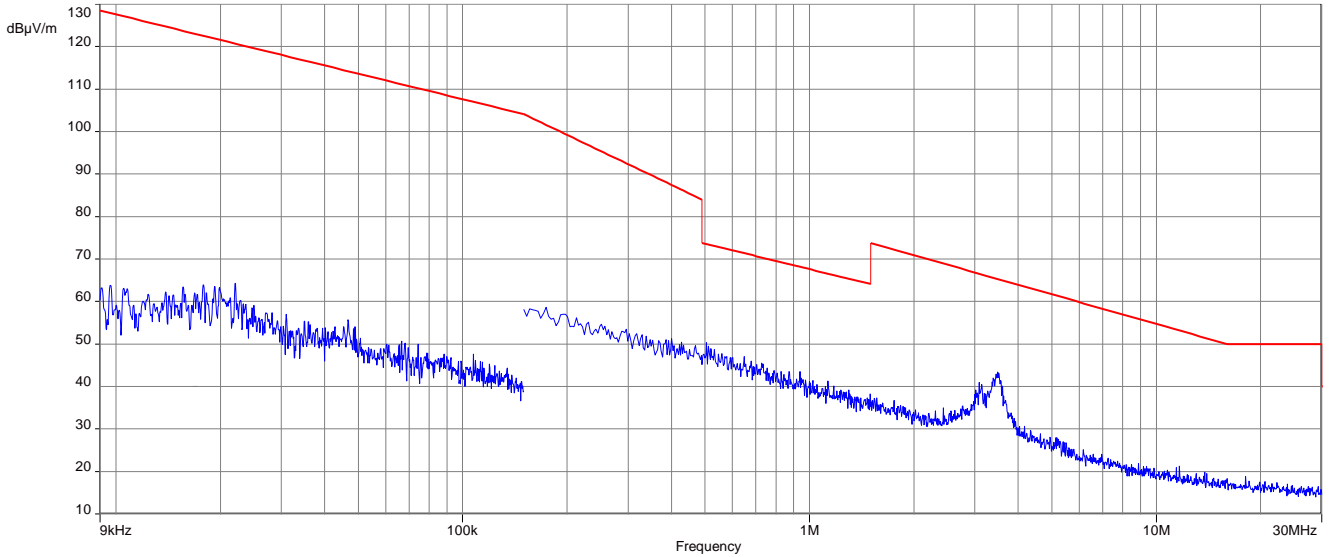

Plot 2: 9 kHz to 30 MHz, middle channel

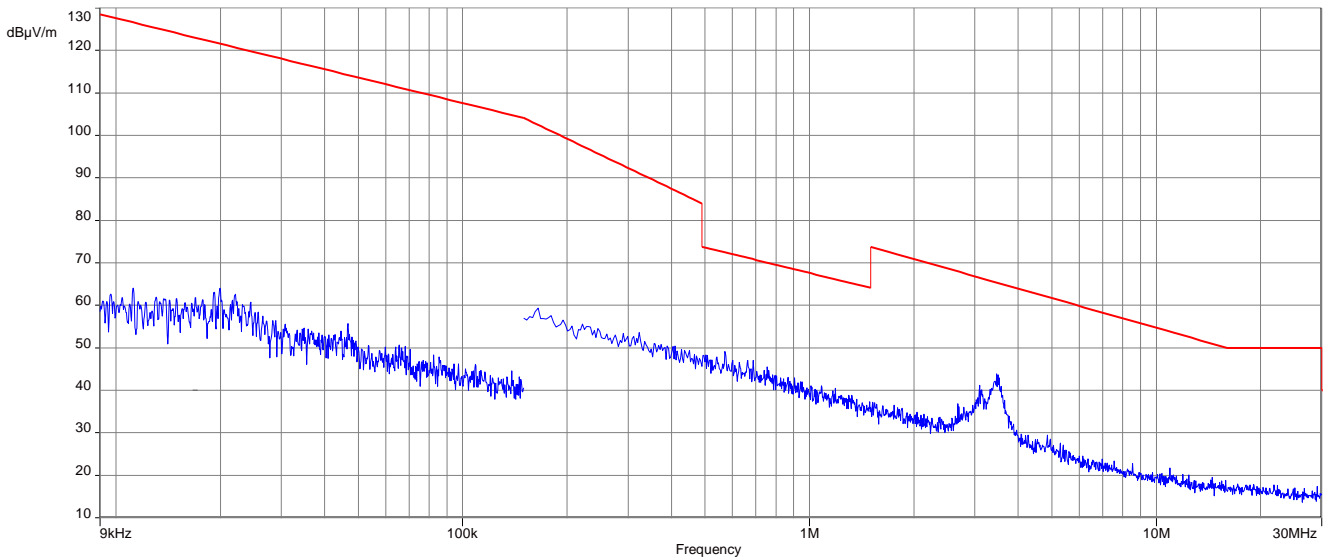

Plot 3: 9 kHz to 30 MHz, highest channel

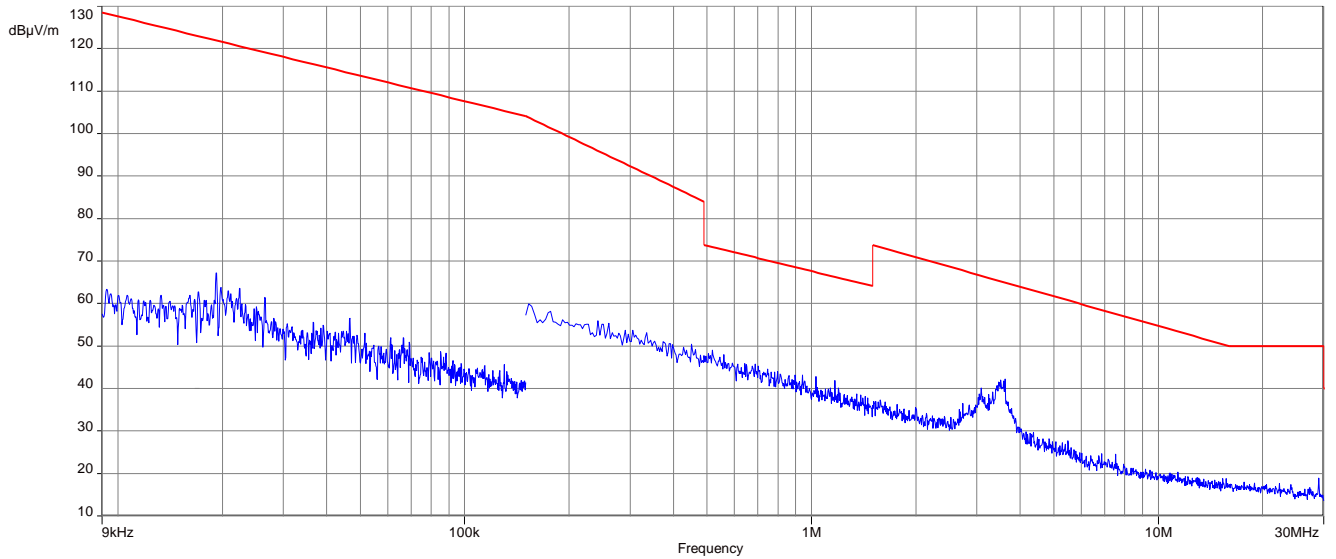

12.12 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:


Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.1 A
Measurement uncertainty	See chapter 8

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

Plot: DSSS, on-board antenna


Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

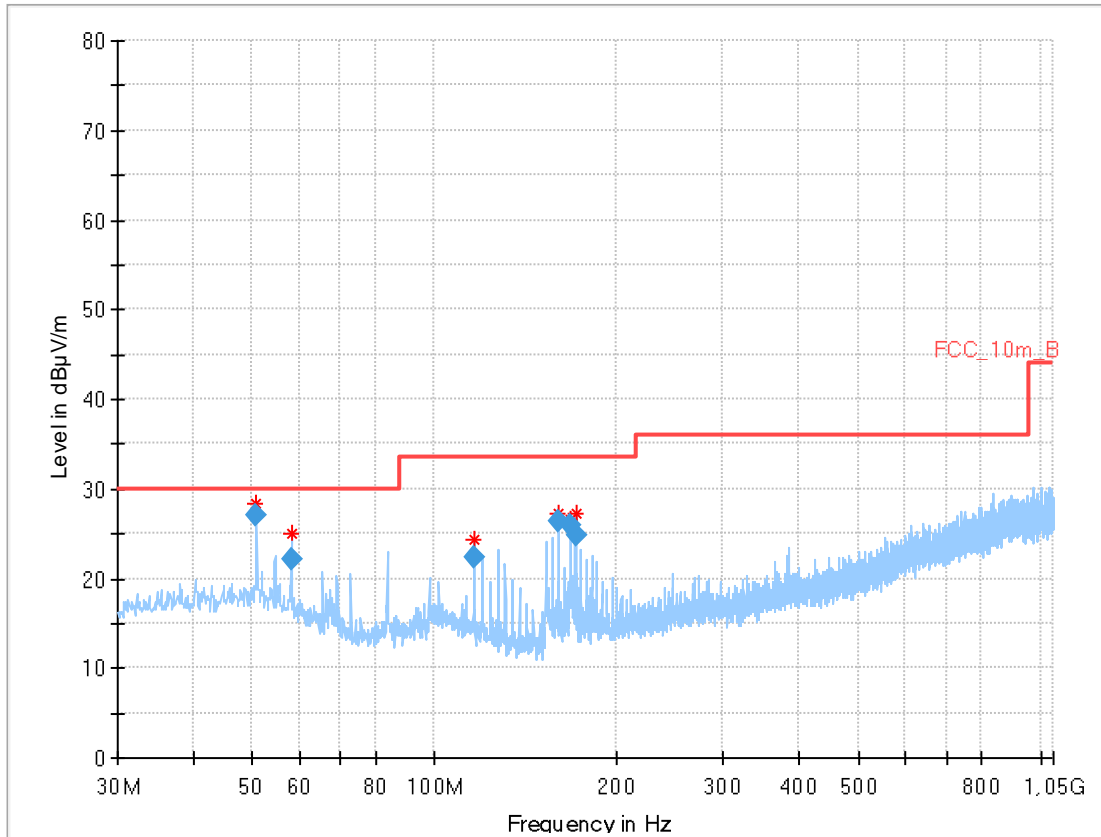

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.903	26.99	30.0	3.01	1000	120	98.0	V	90.0
58.172	22.12	30.0	7.88	1000	120	98.0	V	180.0
116.359	22.34	33.5	11.16	1000	120	170.0	V	90.0
160.016	26.42	33.5	7.08	1000	120	101.0	V	180.0
167.253	25.85	33.5	7.65	1000	120	98.0	V	270.0
170.929	24.79	33.5	8.71	1000	120	98.0	V	0.0


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

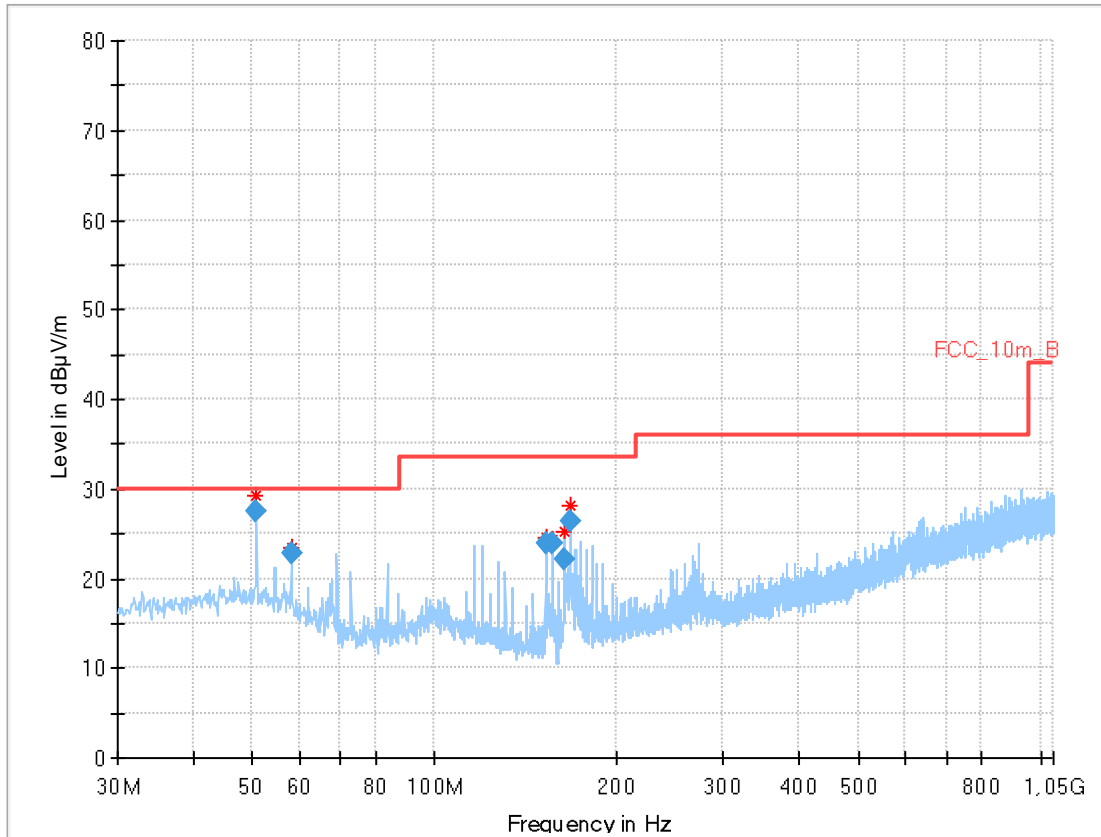

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.917	27.53	30.0	2.47	1000	120	98.0	V	0.0
58.165	22.80	30.0	7.20	1000	120	98.0	V	90.0
152.739	23.98	33.5	9.52	1000	120	98.0	V	180.0
156.364	23.81	33.5	9.69	1000	120	98.0	V	0.0
163.650	22.15	33.5	11.35	1000	120	98.0	V	180.0
167.237	26.36	33.5	7.14	1000	120	98.0	V	0.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

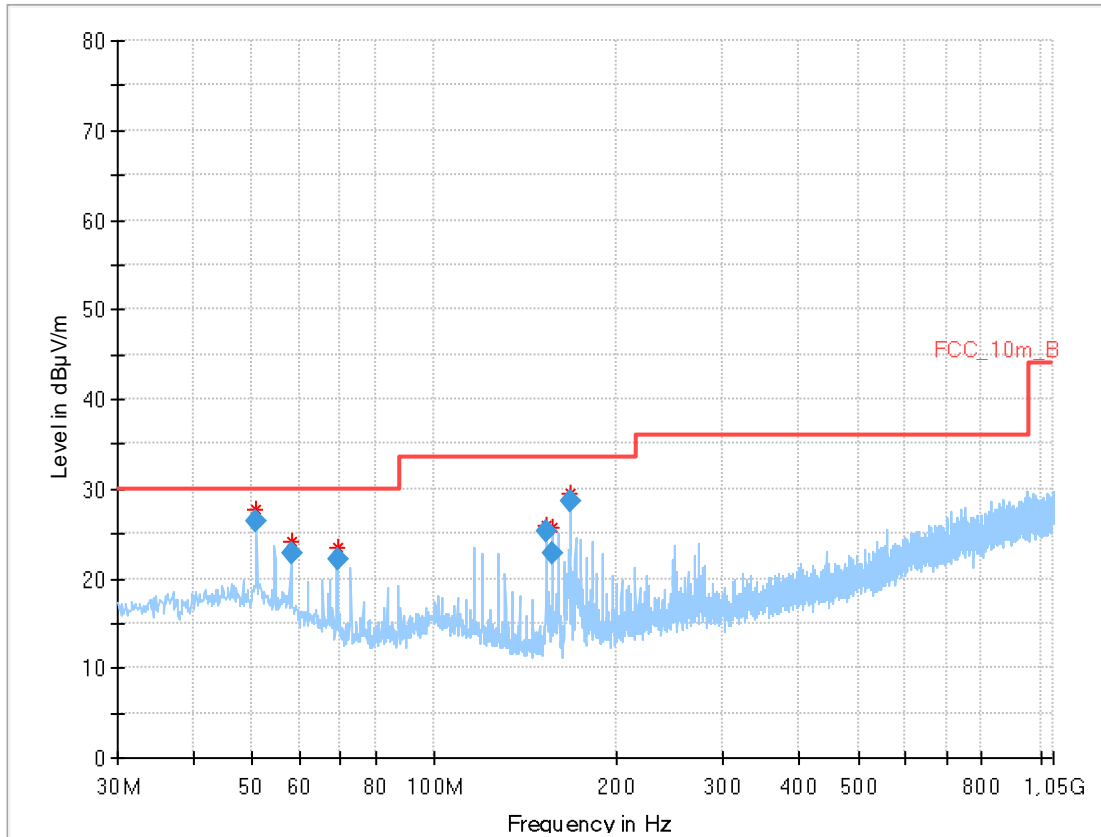


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.887	26.40	30.0	3.60	1000	120	98.0	V	270.0
58.180	22.89	30.0	7.11	1000	120	101.0	V	90.0
69.075	22.10	30.0	7.90	1000	120	170.0	V	90.0
152.720	25.26	33.5	8.24	1000	120	98.0	V	0.0
156.377	22.82	33.5	10.68	1000	120	98.0	V	0.0
167.265	28.52	33.5	4.98	1000	120	98.0	V	0.0

Plot: OFDM (20 MHz nominal channel bandwidth), on-board antenna


Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

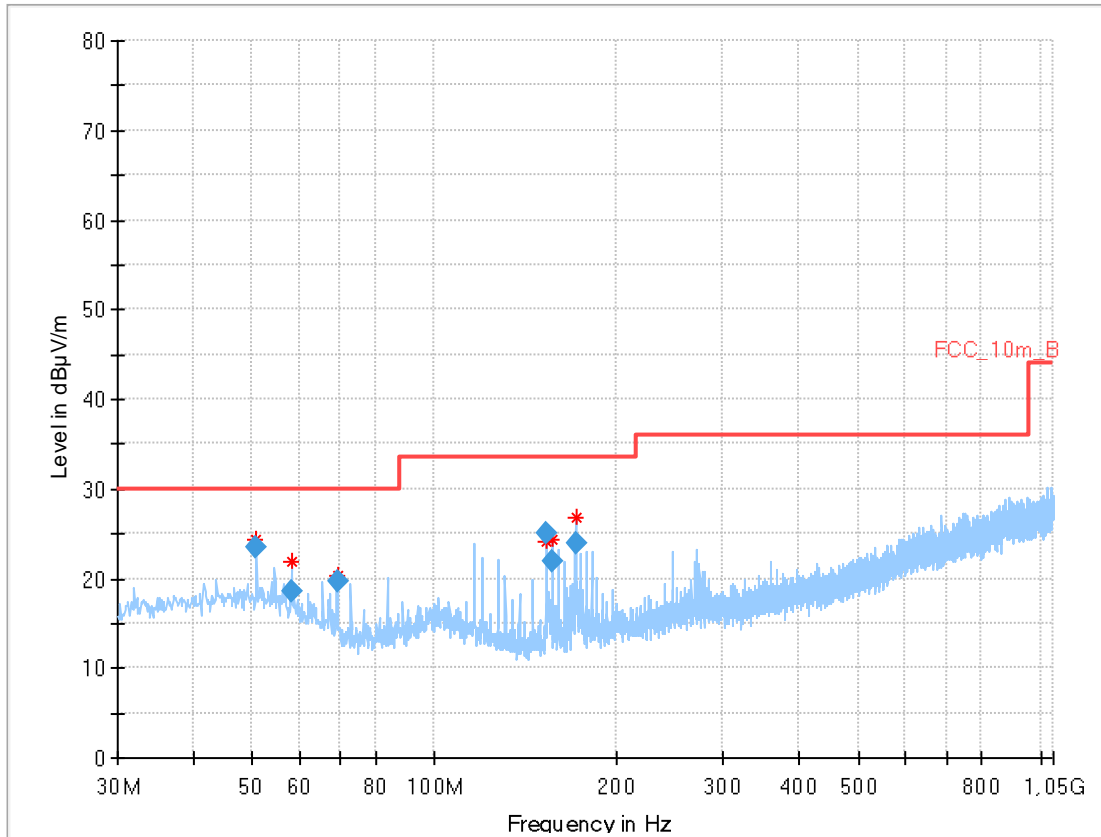

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.893	23.50	30.0	6.50	1000	120	98.0	V	90.0
58.096	18.48	30.0	11.52	1000	120	98.0	V	180.0
69.082	19.77	30.0	10.23	1000	120	170.0	V	90.0
152.732	24.99	33.5	8.51	1000	120	98.0	V	0.0
156.371	21.80	33.5	11.70	1000	120	101.0	V	270.0
170.950	23.91	33.5	9.59	1000	120	98.0	V	270.0


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

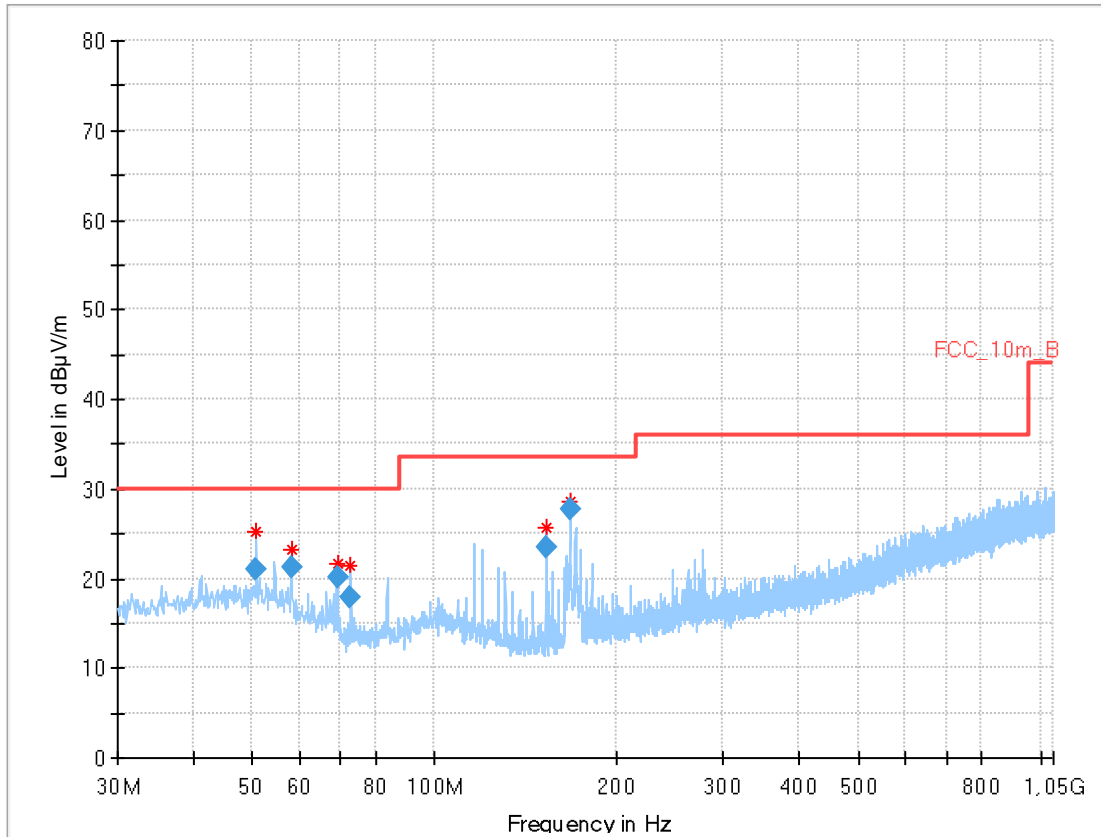

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.854	21.00	30.0	9.00	1000	120	98.0	V	270.0
58.178	21.29	30.0	8.71	1000	120	98.0	V	180.0
69.101	20.08	30.0	9.92	1000	120	170.0	V	90.0
72.702	17.98	30.0	12.02	1000	120	170.0	V	0.0
152.745	23.47	33.5	10.03	1000	120	98.0	V	180.0
167.251	27.72	33.5	5.78	1000	120	98.0	V	0.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

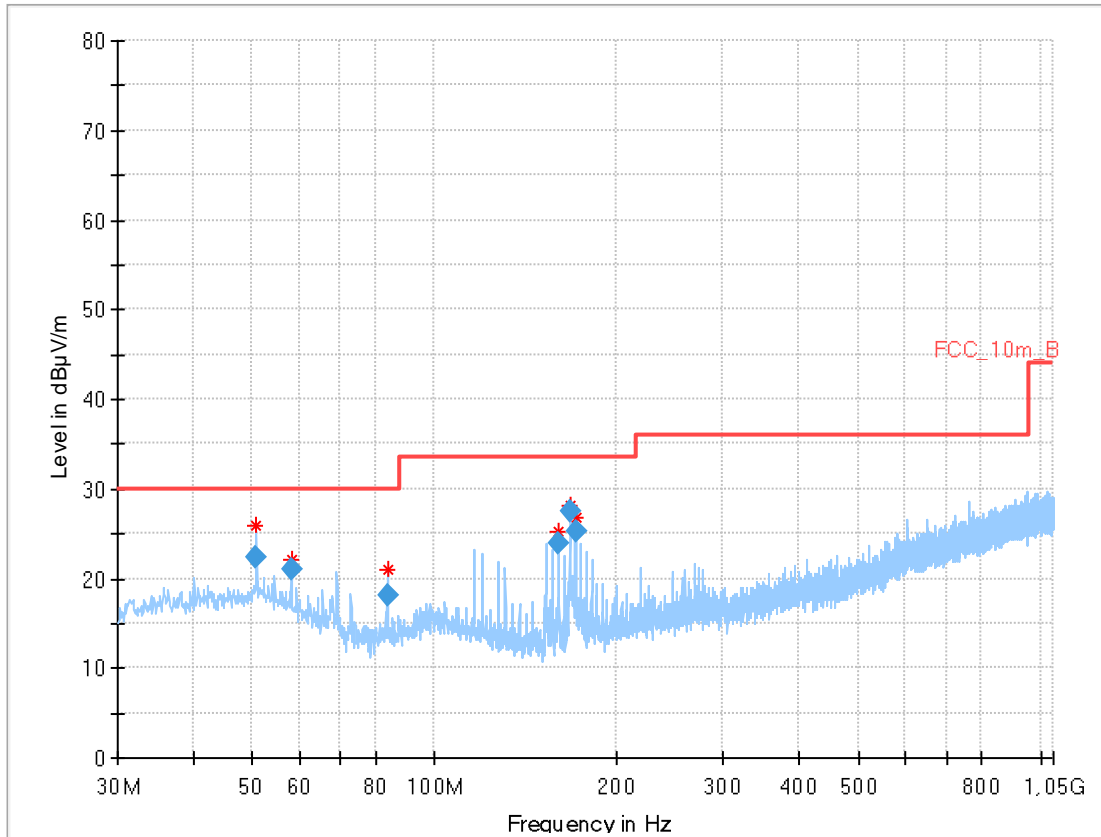


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.871	22.42	30.0	7.58	1000	120	98.0	V	0.0
58.180	21.05	30.0	8.95	1000	120	170.0	V	180.0
83.643	18.17	30.0	11.83	1000	120	170.0	V	180.0
159.999	23.94	33.5	9.56	1000	120	101.0	V	180.0
167.293	27.45	33.5	6.05	1000	120	101.0	V	0.0
170.936	25.19	33.5	8.31	1000	120	98.0	V	0.0

Plot: RX / Idle mode, on-board antenna

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

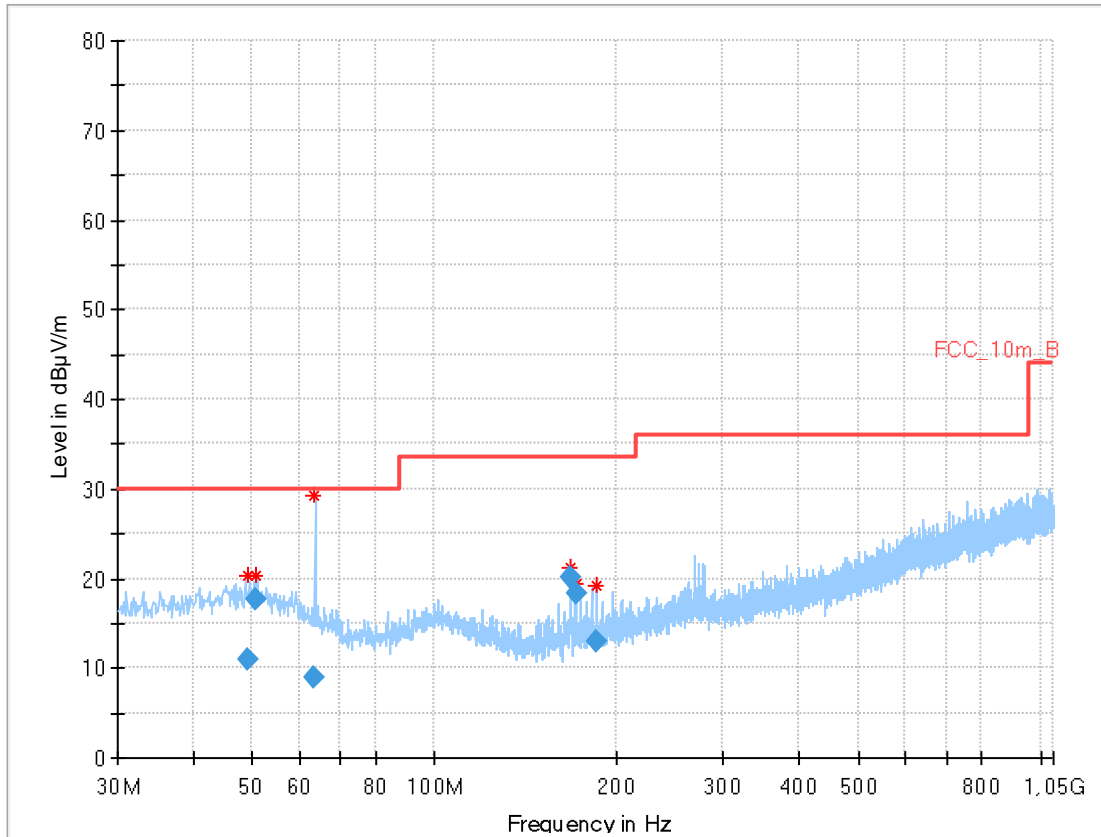


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
49.250	10.88	30.0	19.12	1000	120	101.0	V	270.0
50.897	17.63	30.0	12.37	1000	120	101.0	V	90.0
63.249	8.98	30.0	21.02	1000	120	170.0	V	270.0
167.267	20.16	33.5	13.34	1000	120	98.0	V	0.0
170.903	18.35	33.5	15.15	1000	120	98.0	V	270.0
185.506	12.94	33.5	20.56	1000	120	98.0	V	0.0

Plot: DSSS


Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

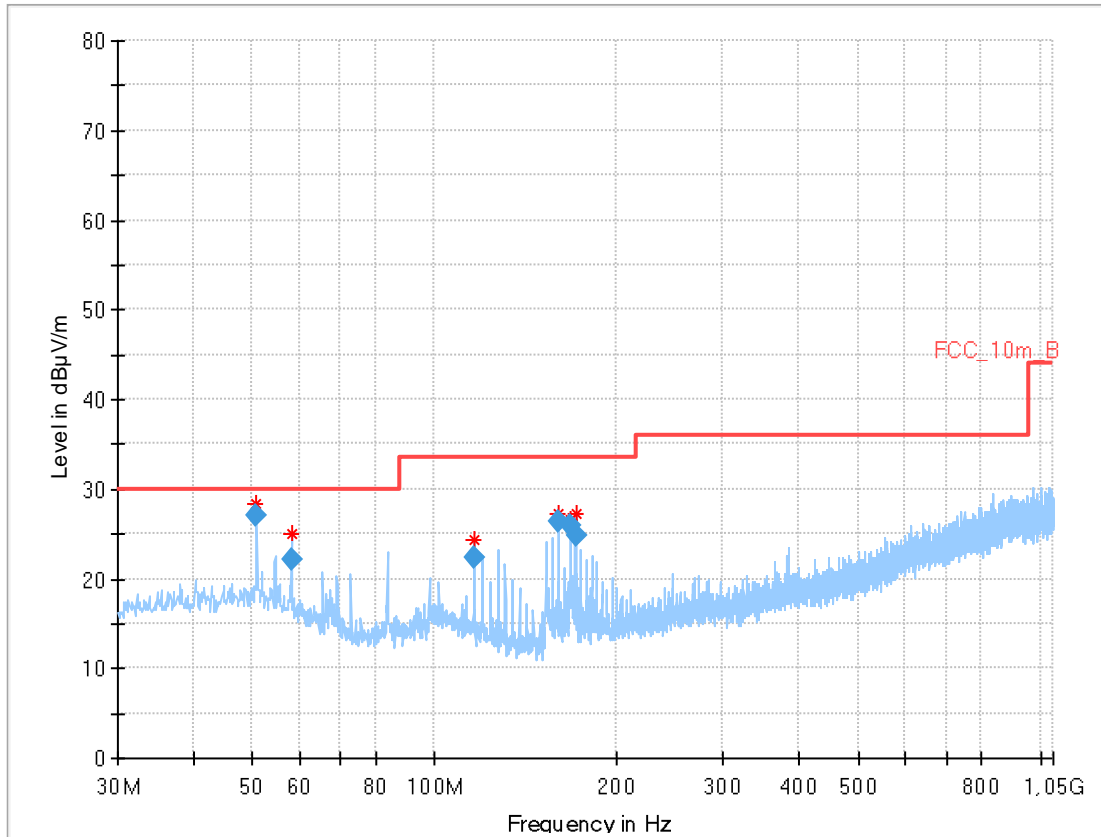

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.903	26.99	30.0	3.01	1000	120	98.0	V	90.0
58.172	22.12	30.0	7.88	1000	120	98.0	V	180.0
116.359	22.34	33.5	11.16	1000	120	170.0	V	90.0
160.016	26.42	33.5	7.08	1000	120	101.0	V	180.0
167.253	25.85	33.5	7.65	1000	120	98.0	V	270.0
170.929	24.79	33.5	8.71	1000	120	98.0	V	0.0


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

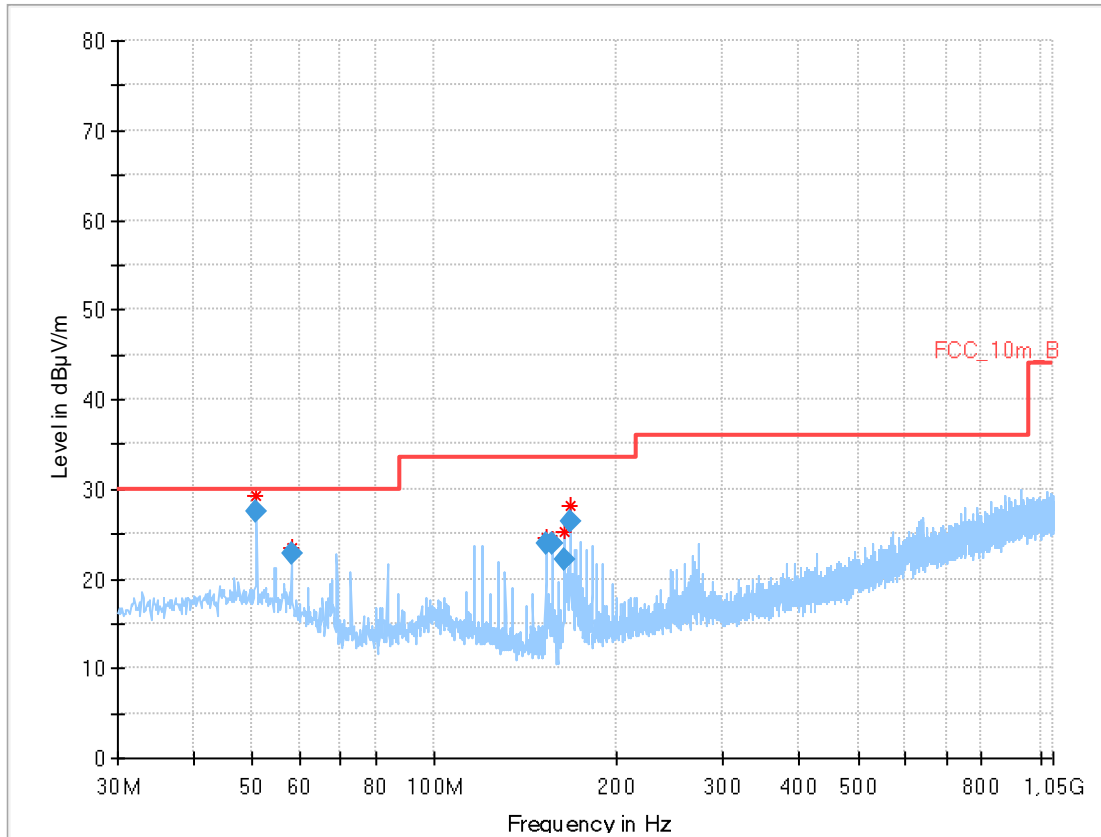

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.917	27.53	30.0	2.47	1000	120	98.0	V	0.0
58.165	22.80	30.0	7.20	1000	120	98.0	V	90.0
152.739	23.98	33.5	9.52	1000	120	98.0	V	180.0
156.364	23.81	33.5	9.69	1000	120	98.0	V	0.0
163.650	22.15	33.5	11.35	1000	120	98.0	V	180.0
167.237	26.36	33.5	7.14	1000	120	98.0	V	0.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

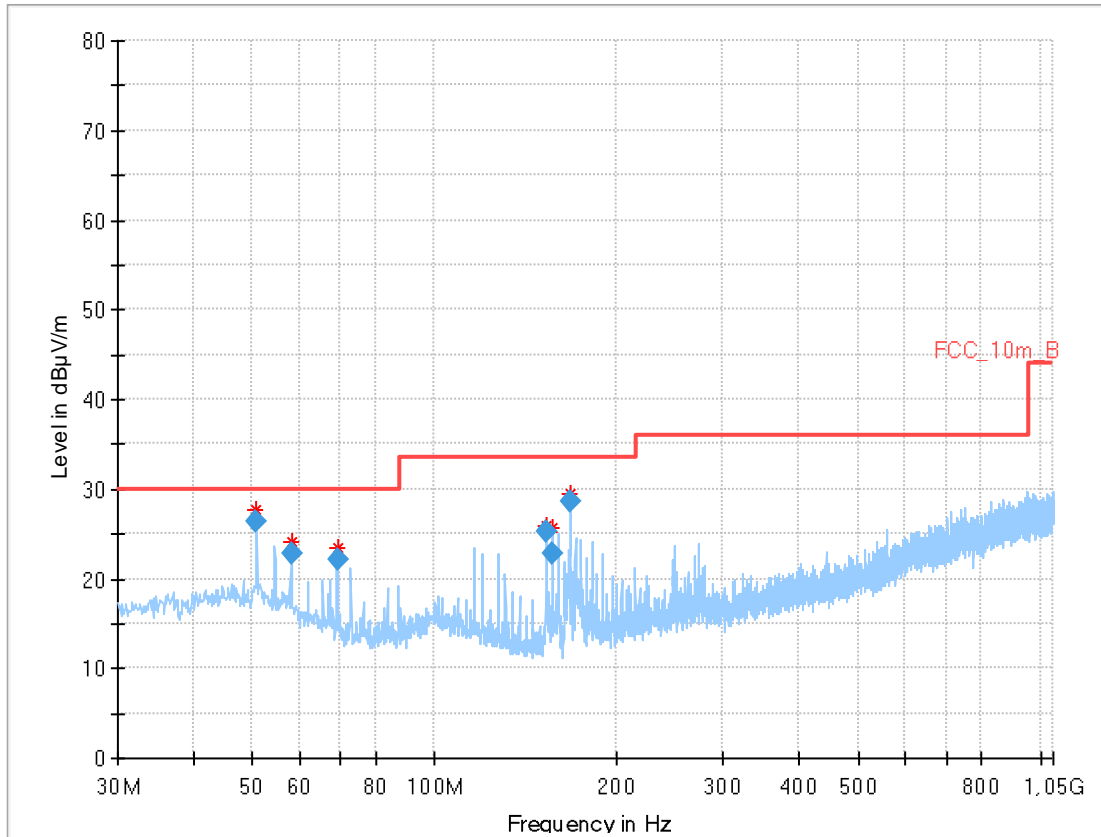


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.887	26.40	30.0	3.60	1000	120	98.0	V	270.0
58.180	22.89	30.0	7.11	1000	120	101.0	V	90.0
69.075	22.10	30.0	7.90	1000	120	170.0	V	90.0
152.720	25.26	33.5	8.24	1000	120	98.0	V	0.0
156.377	22.82	33.5	10.68	1000	120	98.0	V	0.0
167.265	28.52	33.5	4.98	1000	120	98.0	V	0.0

Plot: OFDM (20 MHz nominal channel bandwidth)


Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

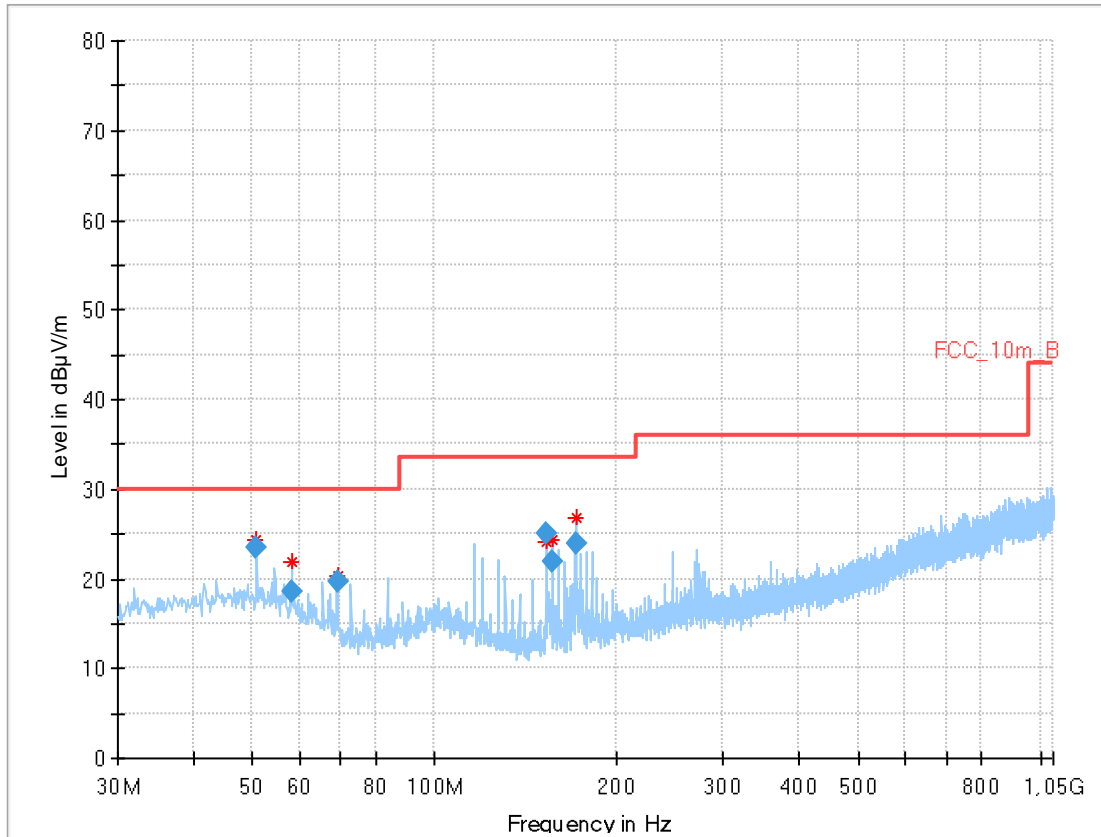

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.893	23.50	30.0	6.50	1000	120	98.0	V	90.0
58.096	18.48	30.0	11.52	1000	120	98.0	V	180.0
69.082	19.77	30.0	10.23	1000	120	170.0	V	90.0
152.732	24.99	33.5	8.51	1000	120	98.0	V	0.0
156.371	21.80	33.5	11.70	1000	120	101.0	V	270.0
170.950	23.91	33.5	9.59	1000	120	98.0	V	270.0


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

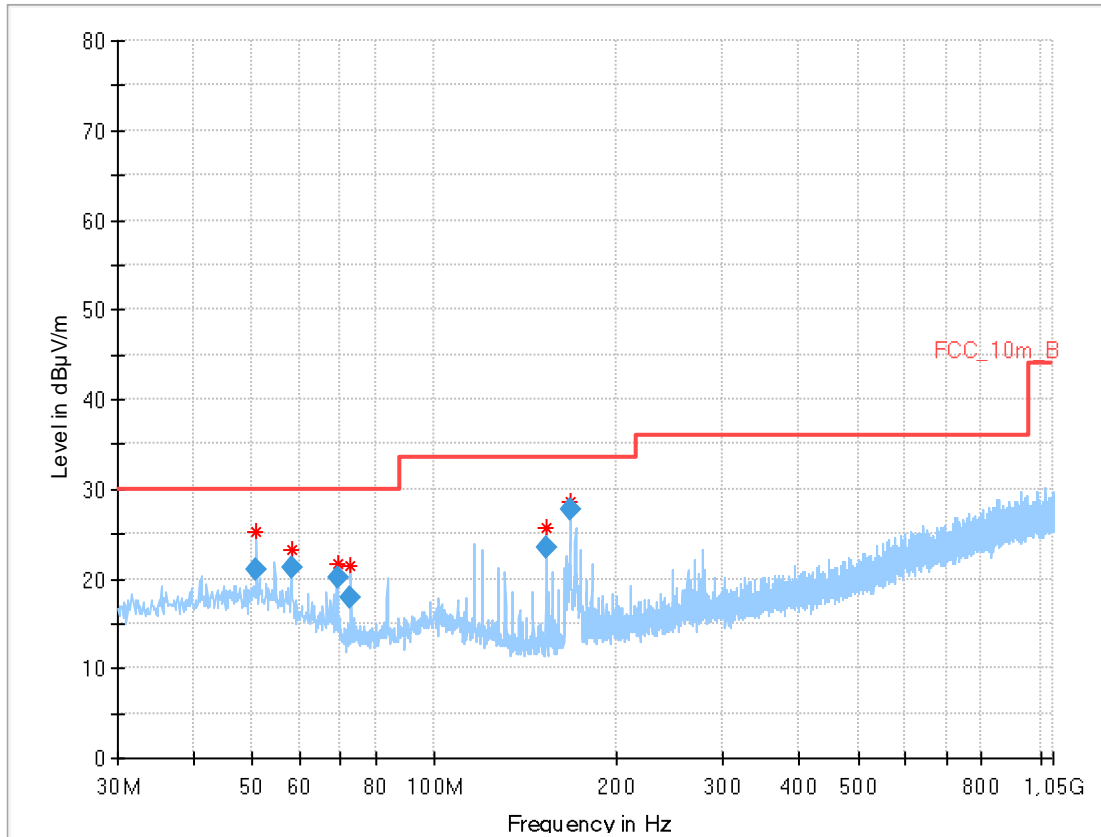

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.854	21.00	30.0	9.00	1000	120	98.0	V	270.0
58.178	21.29	30.0	8.71	1000	120	98.0	V	180.0
69.101	20.08	30.0	9.92	1000	120	170.0	V	90.0
72.702	17.98	30.0	12.02	1000	120	170.0	V	0.0
152.745	23.47	33.5	10.03	1000	120	98.0	V	180.0
167.251	27.72	33.5	5.78	1000	120	98.0	V	0.0

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

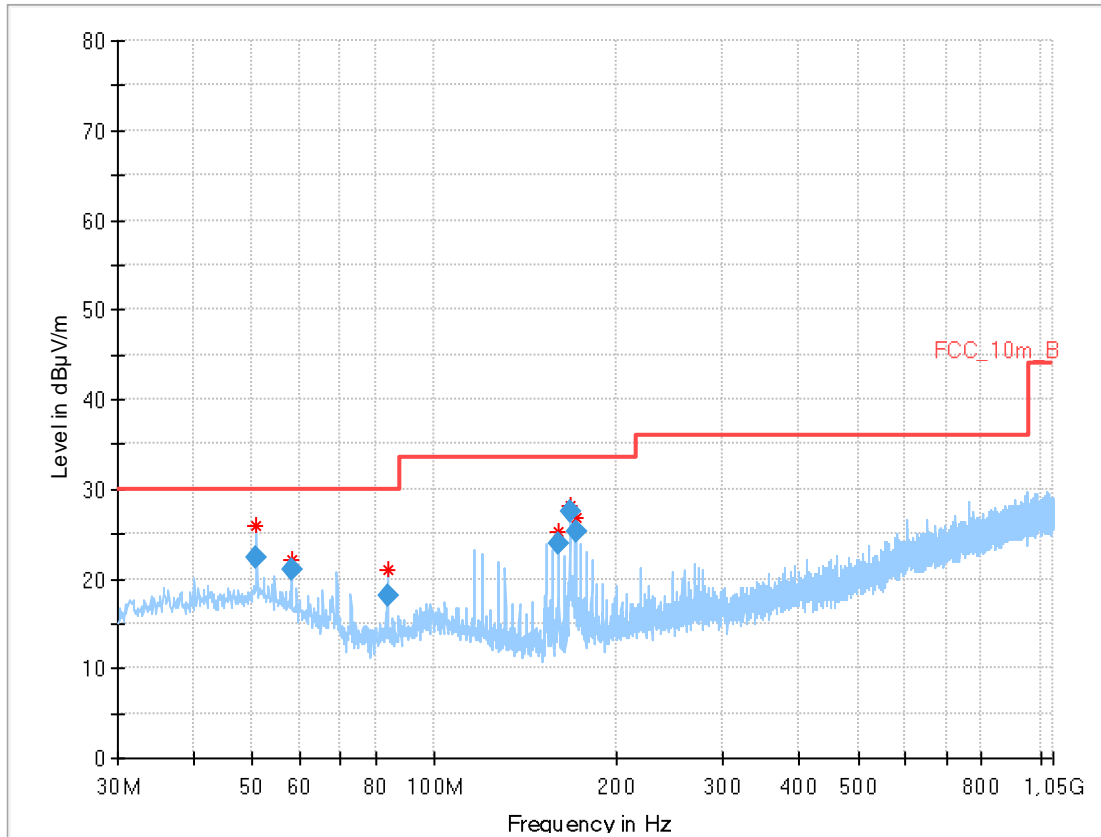


Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
50.871	22.42	30.0	7.58	1000	120	98.0	V	0.0
58.180	21.05	30.0	8.95	1000	120	170.0	V	180.0
83.643	18.17	30.0	11.83	1000	120	170.0	V	180.0
159.999	23.94	33.5	9.56	1000	120	101.0	V	180.0
167.293	27.45	33.5	6.05	1000	120	101.0	V	0.0
170.936	25.19	33.5	8.31	1000	120	98.0	V	0.0

Plot: RX / Idle mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

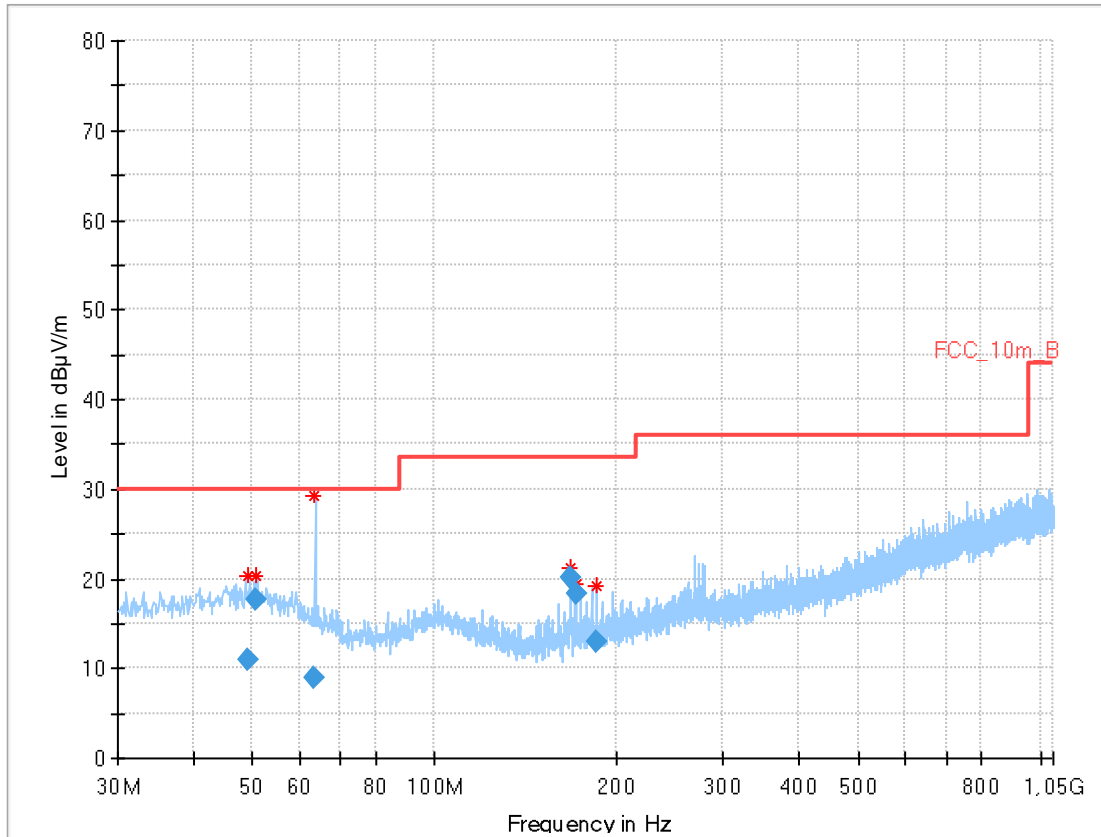

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
49.250	10.88	30.0	19.12	1000	120	101.0	V	270.0
50.897	17.63	30.0	12.37	1000	120	101.0	V	90.0
63.249	8.98	30.0	21.02	1000	120	170.0	V	270.0
167.267	20.16	33.5	13.34	1000	120	98.0	V	0.0
170.903	18.35	33.5	15.15	1000	120	98.0	V	270.0
185.506	12.94	33.5	20.56	1000	120	98.0	V	0.0

12.13 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup	See chapter 6.2 A (1 GHz to 18 GHz) See chapter 6.3 A (18 GHz to 26 GHz)
Measurement uncertainty	See chapter 8

Limits:

FCC		IC	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).			
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m	
Above 960	54.0 (AVG)	3	
	74.0 (peak)		

Results: DSSS; on-module antenna

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
4824	Peak	49.8	4874	Peak	52.2	4103	Peak	51.0
	AVG	41.3		AVG	44.7		AVG	41.3
-/-	Peak	-/-	7310	Peak	52.0	4924	Peak	53.9
	AVG	-/-		AVG	44.1		AVG	48.1

Results: OFDM (20 MHz nominal channel bandwidth), on-module antenna

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
-/-	Peak	-/-	7310	Peak	57.0	-/-	Peak	-/-
	AVG	-/-		AVG	43.4		AVG	-/-
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

Results: DSSS; external antenna


TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
1608	Peak	46.5	4874	Peak	53.0	4924	Peak	53.9
	RMS	42.7		RMS	47.0		RMS	48.3
4828	Peak	55.3	12997	Peak	57.6	-/-	Peak	-/-
	RMS	47.5		no in restricted band			RMS	-/-

Results: OFDM (20 MHz nominal channel bandwidth), external antenna

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected emissions are more than 20 dB below the limit.			1623	Peak	48.6	All detected emissions are more than 20 dB below the limit.		
				RMS	35.8			
-/-	Peak	-/-	4874	Peak	58.3	-/-	Peak	-/-
	RMS	-/-		RMS	45.8		RMS	-/-


Plots: DSSS, on-board antenna

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

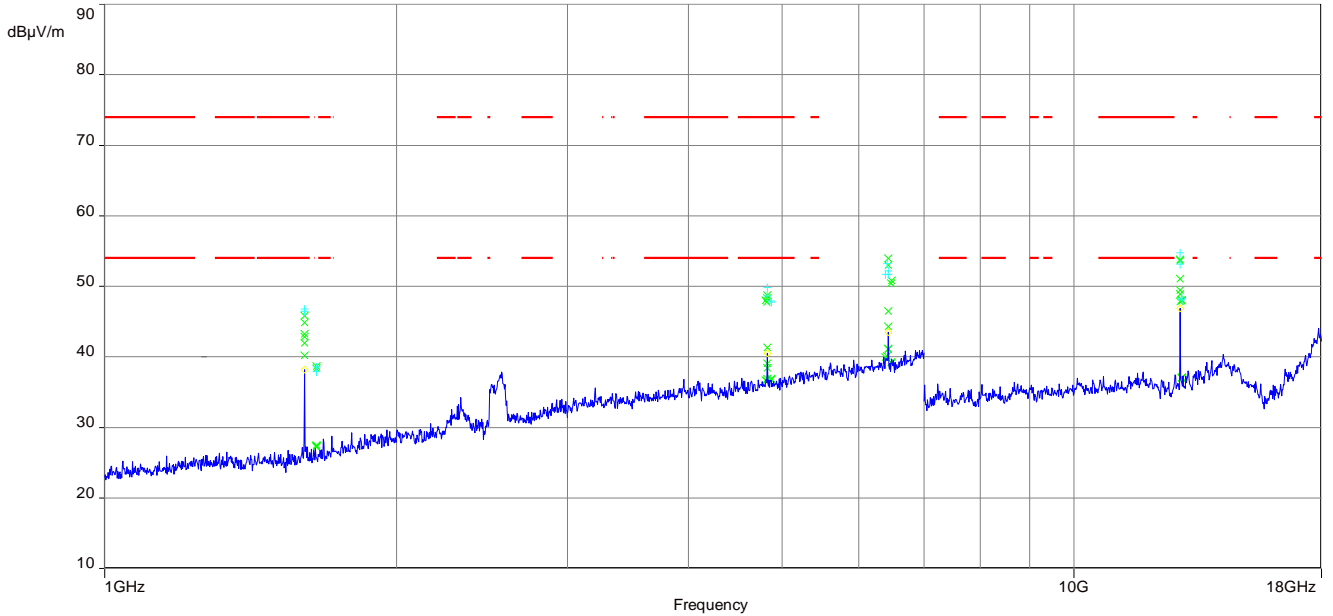


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

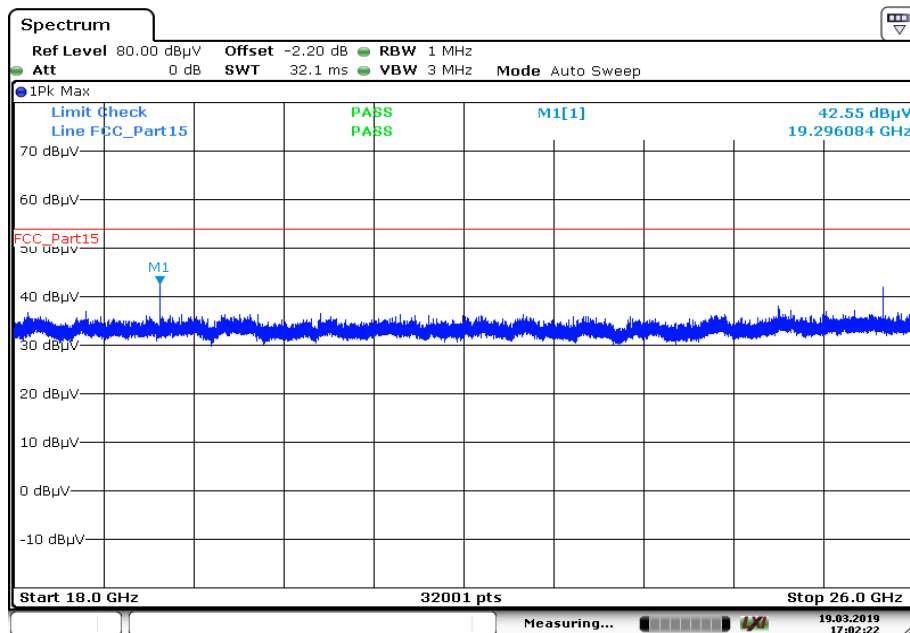


Date: 19.MAR.2019 17:02:22

Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

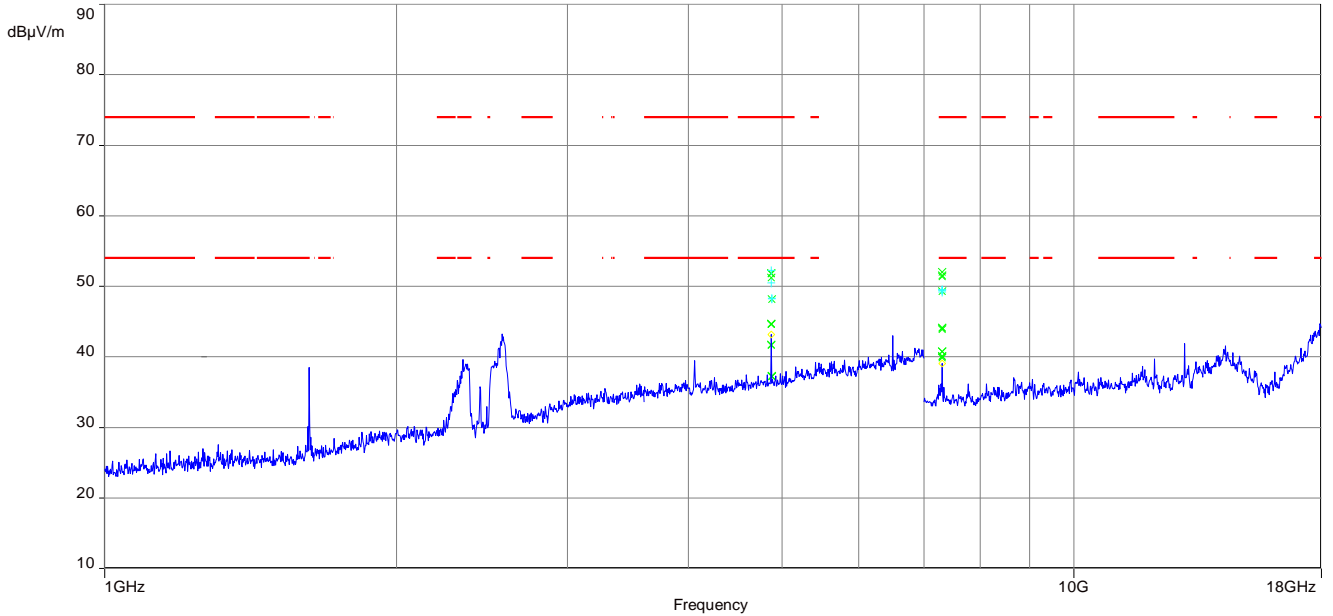


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

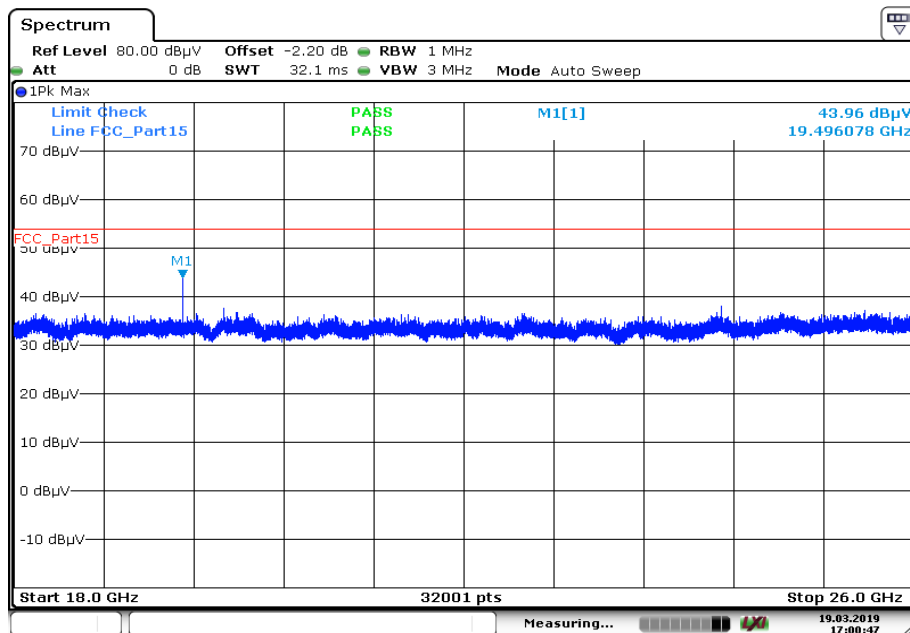


Date: 19.MAR.2019 17:00:47

Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

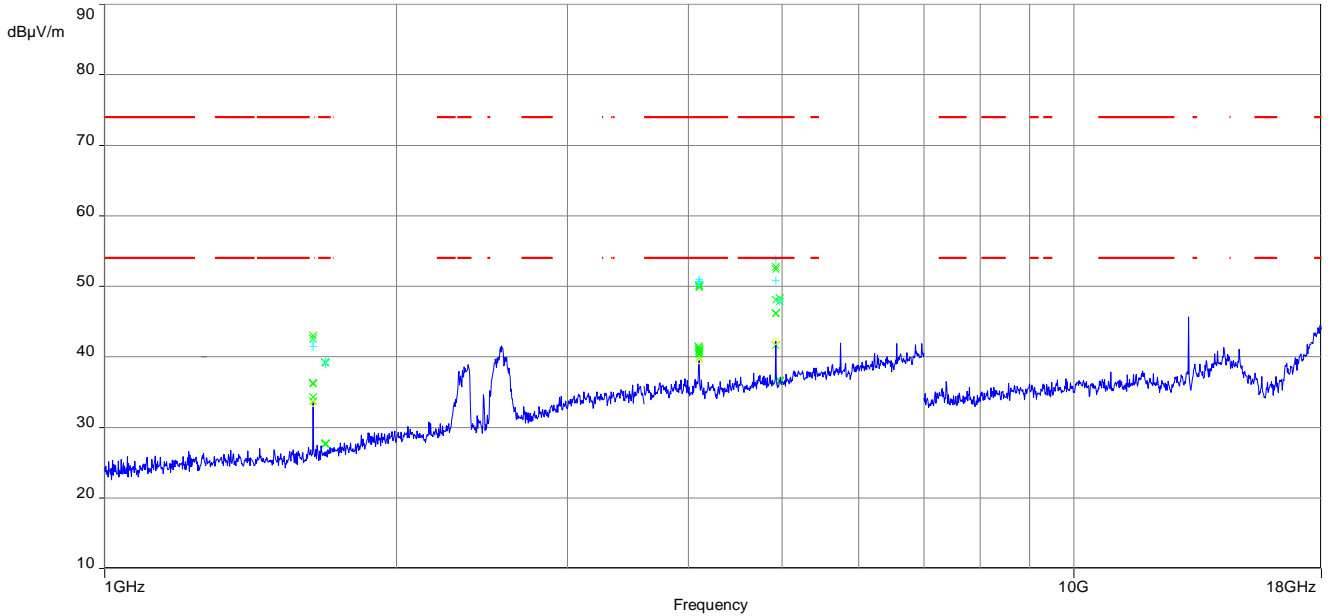

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

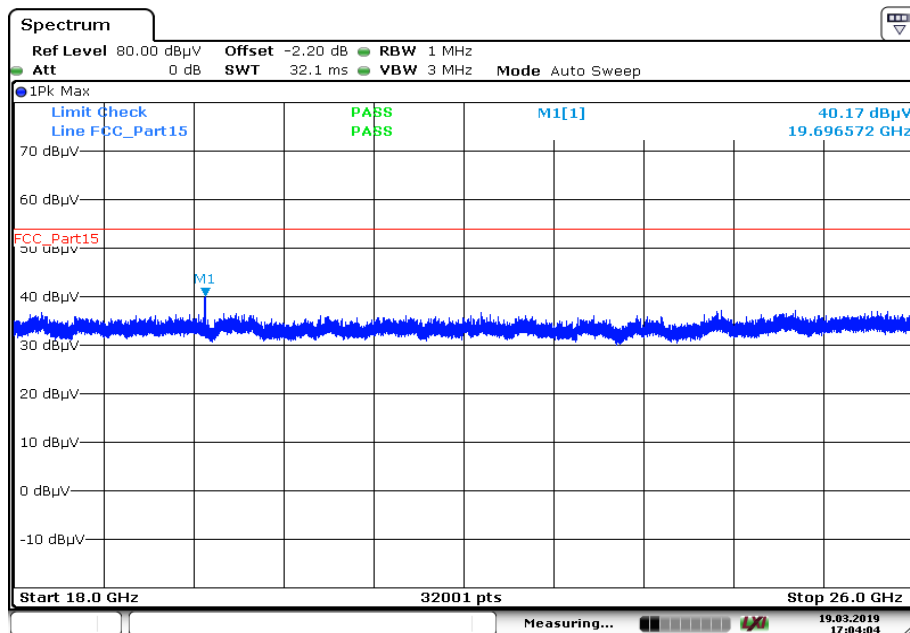

Date: 19.MAR.2019 17:04:04


Plots: OFDM (20 MHz bandwidth), on-board antenna

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

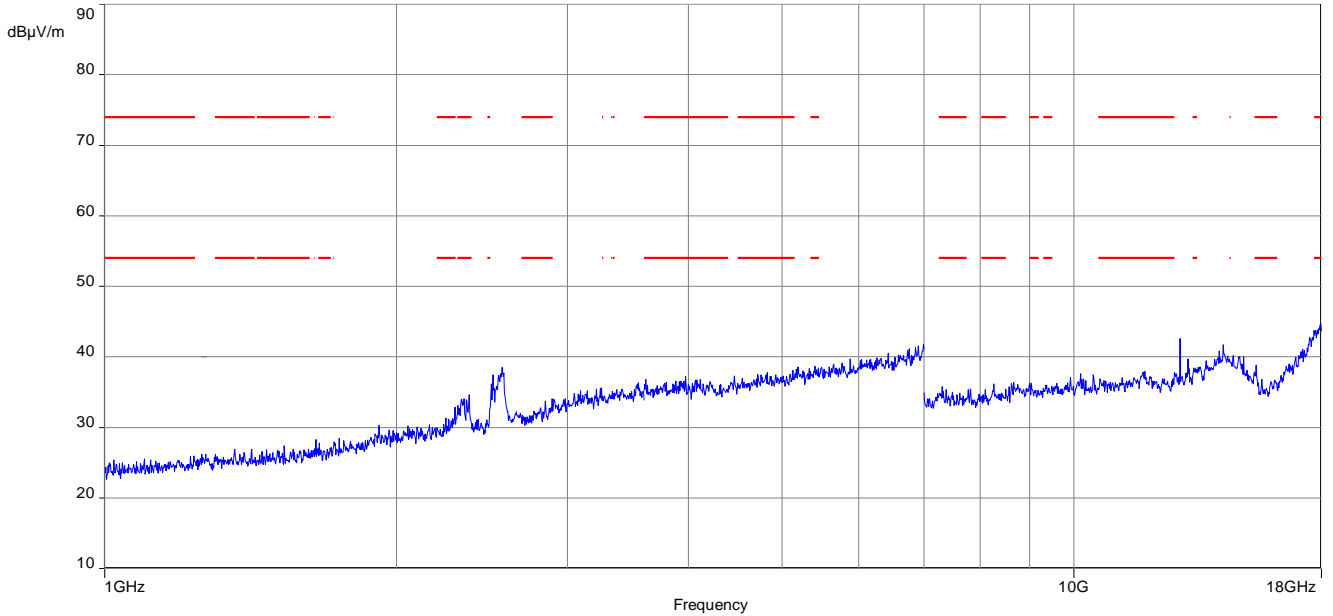


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

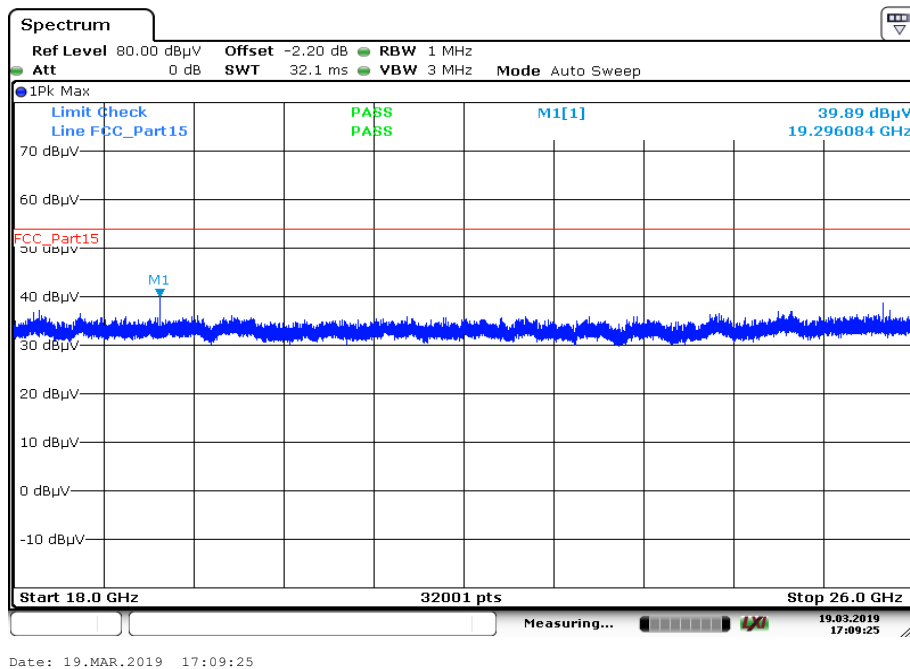


Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

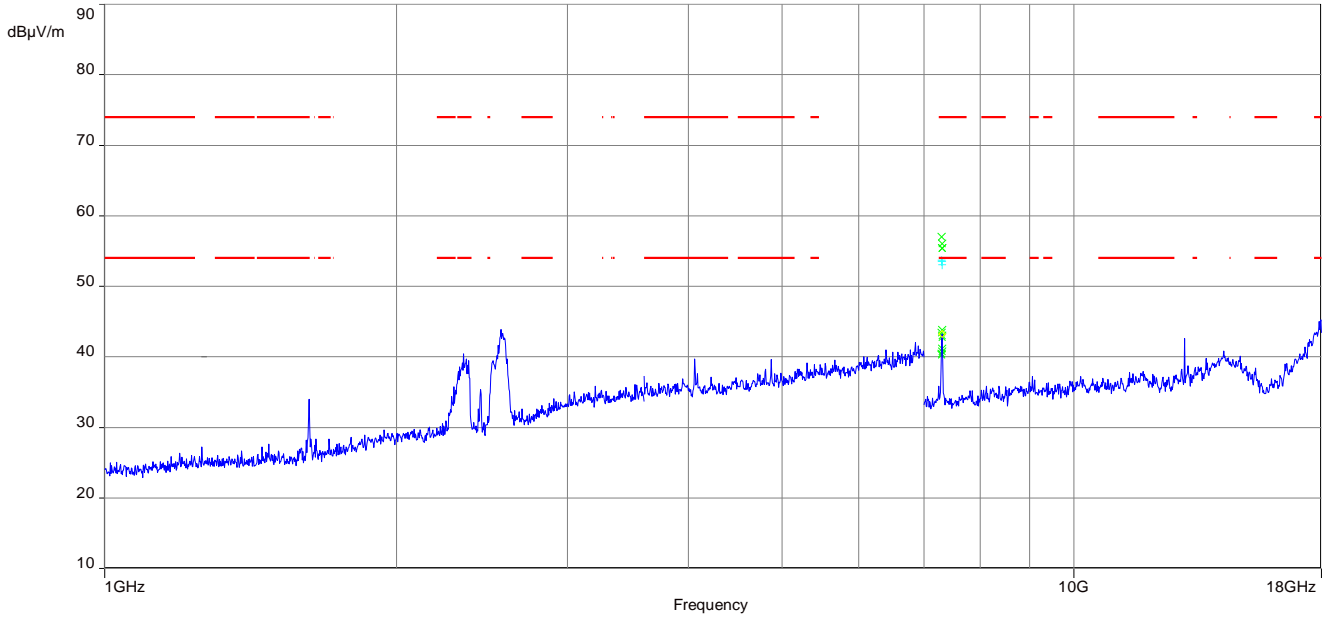


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

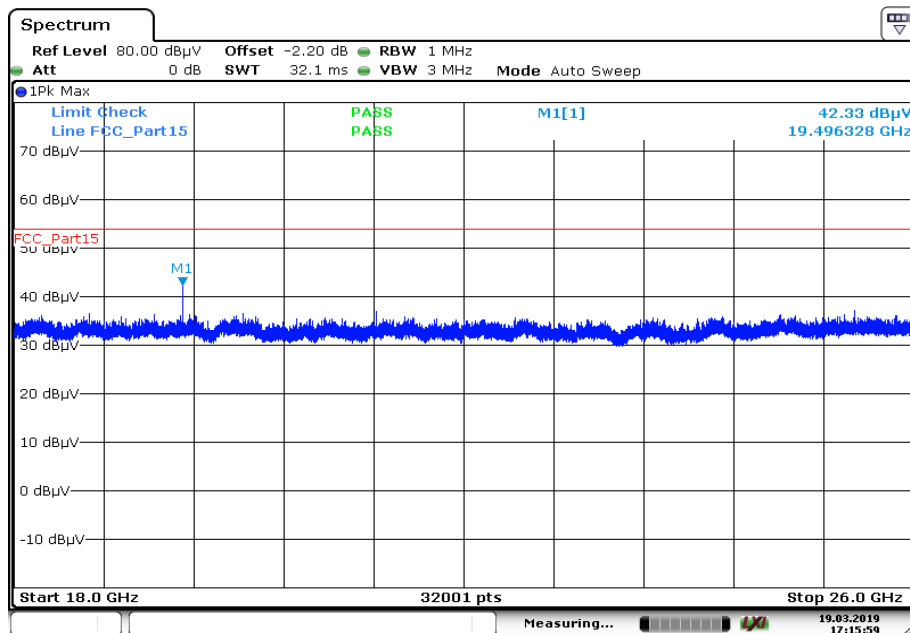


Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

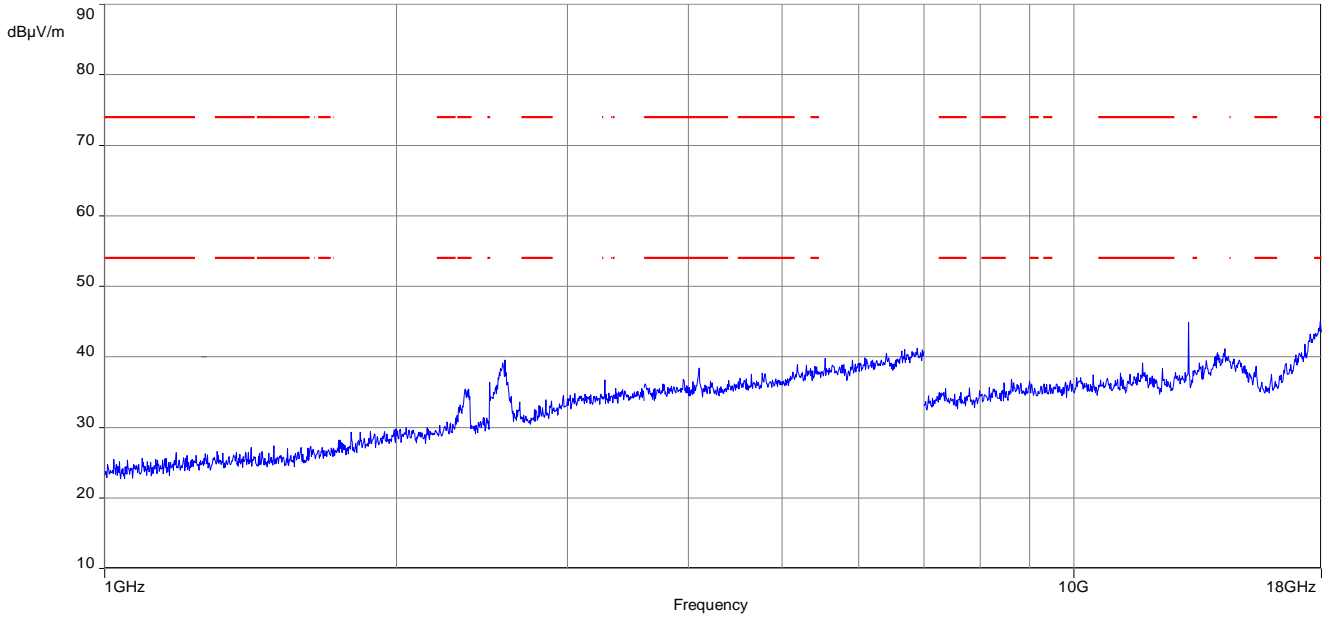

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

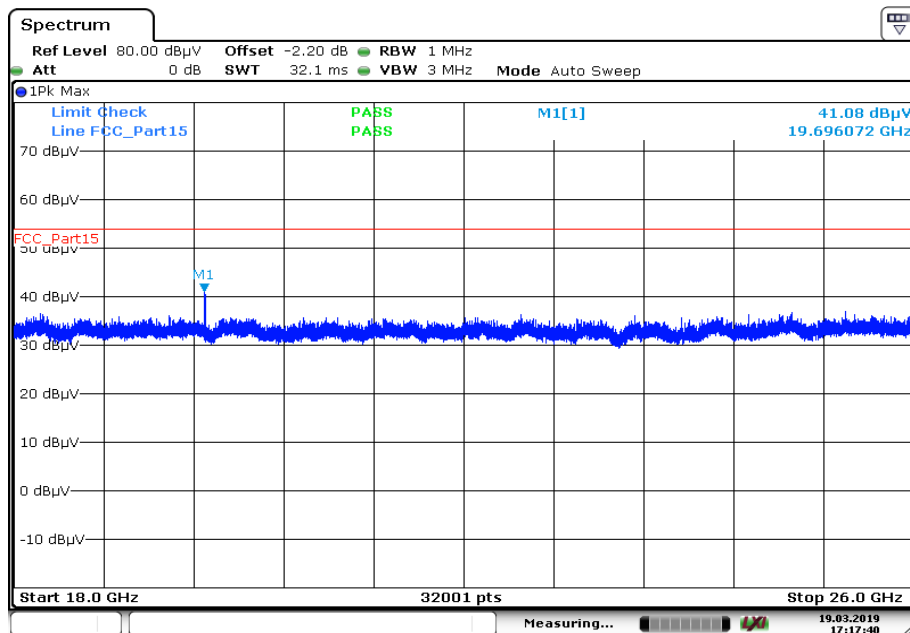


Date: 19.MAR.2019 17:17:40

Plots: RX / idle mode

Plot 1: 1 GHz to 18 GHz, vertical & horizontal polarization

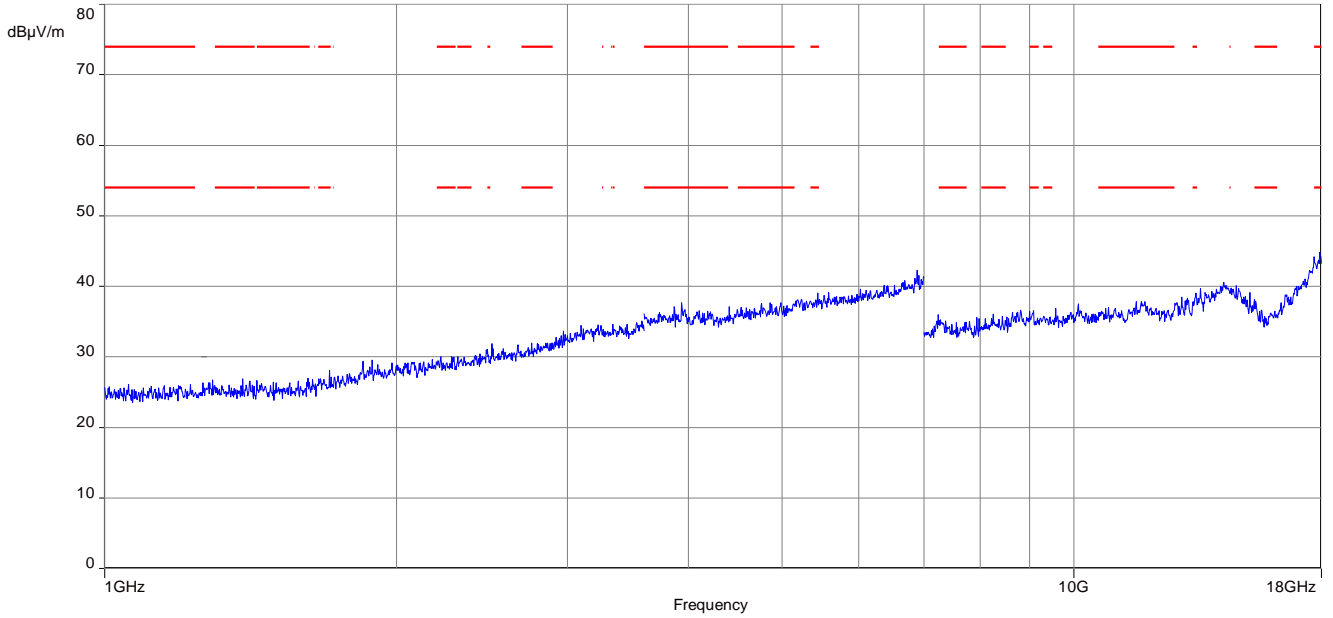


Plot 2: 18 GHz to 26 GHz, vertical & horizontal polarization

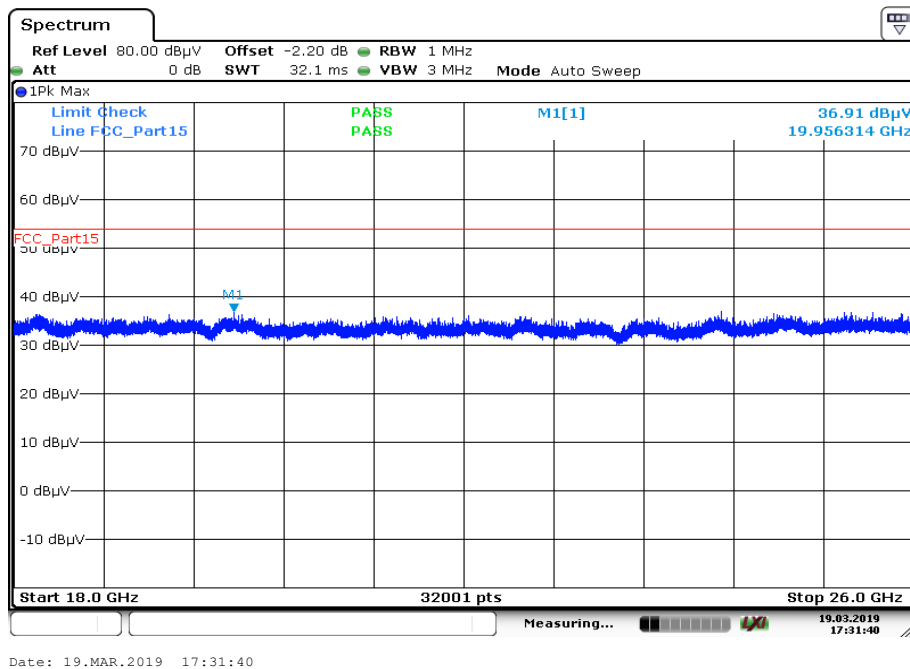


Plots: DSSS, external antenna

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

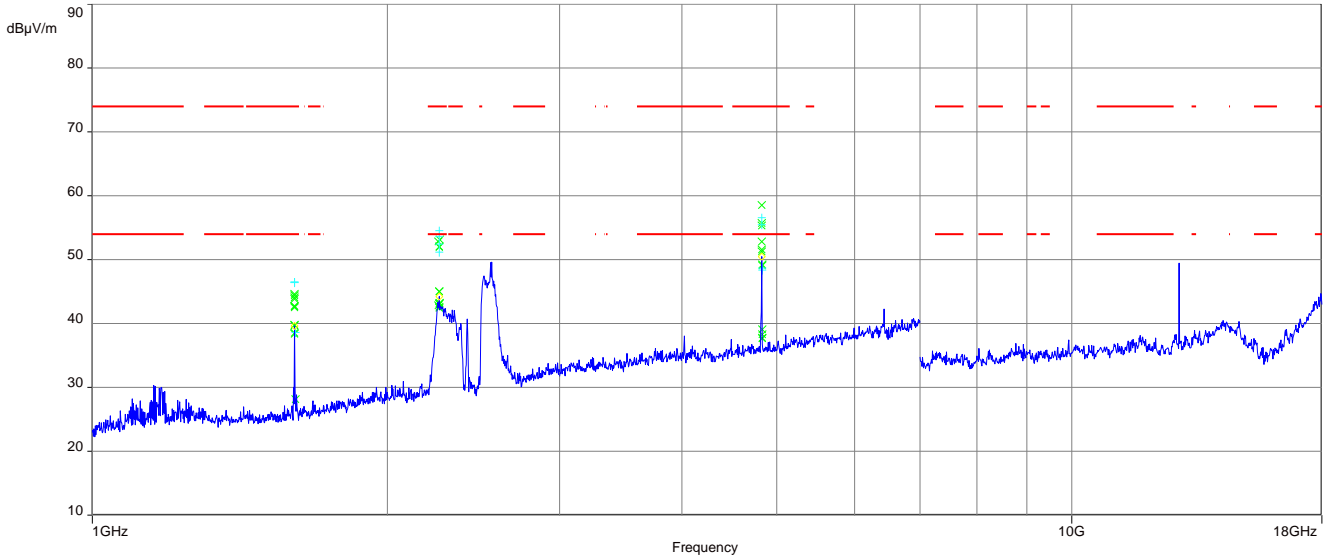


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

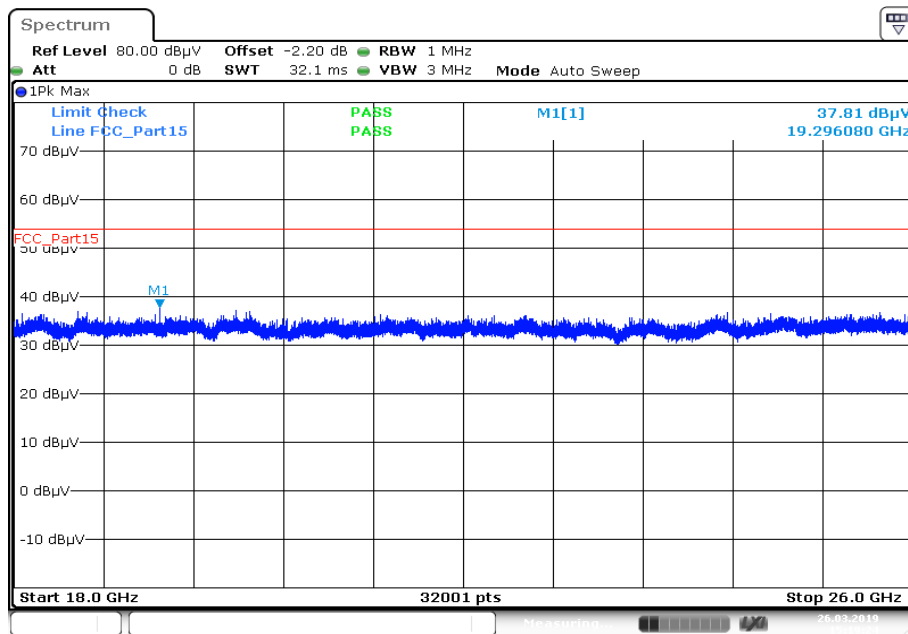


Date: 26.MAR.2019 15:19:24

Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

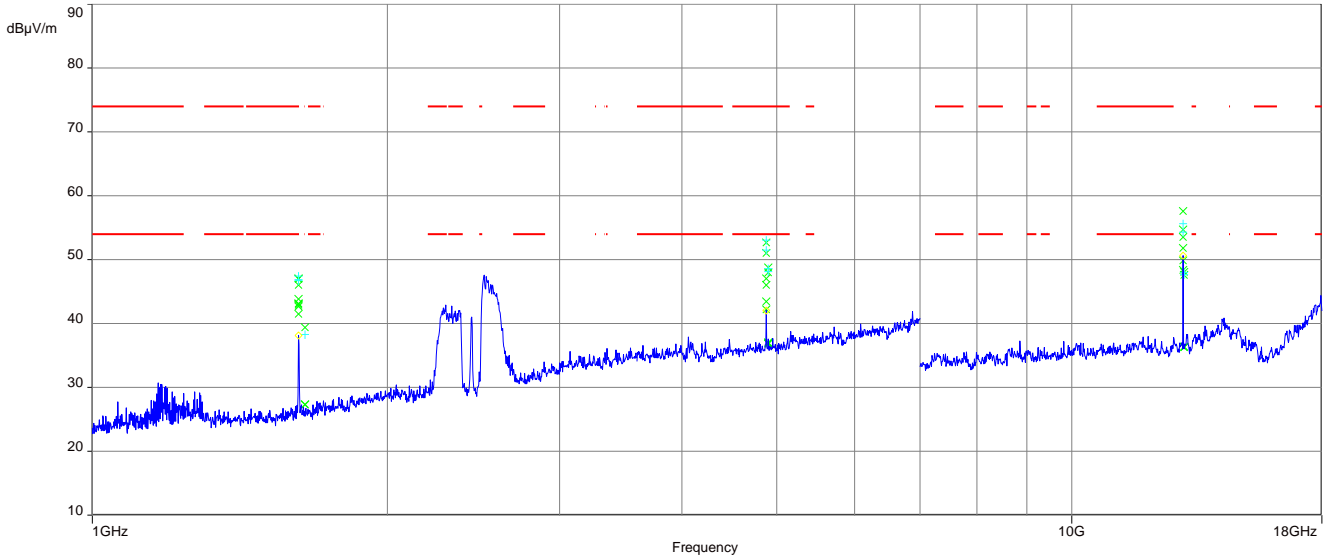


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

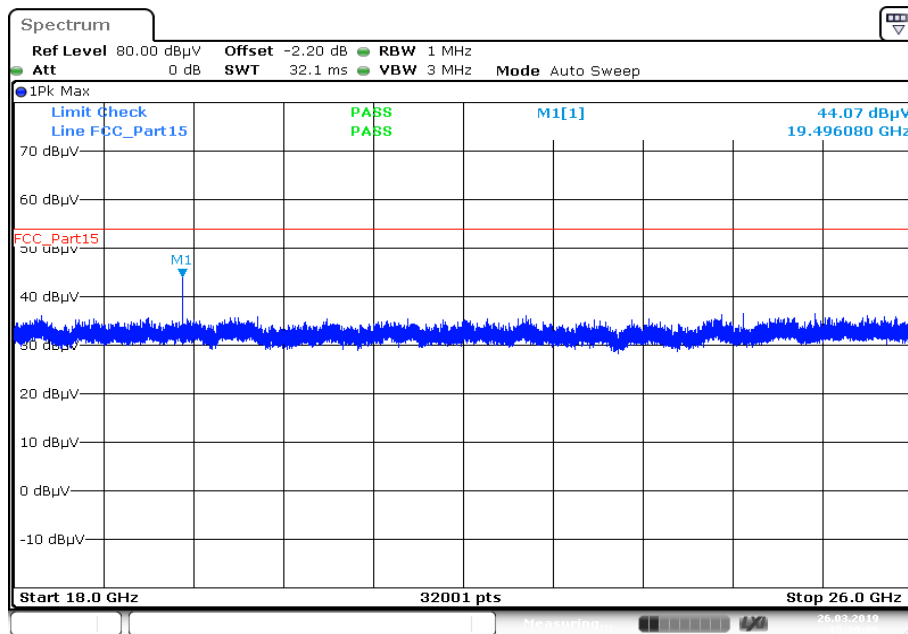


Date: 26.MAR.2019 15:20:09

Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

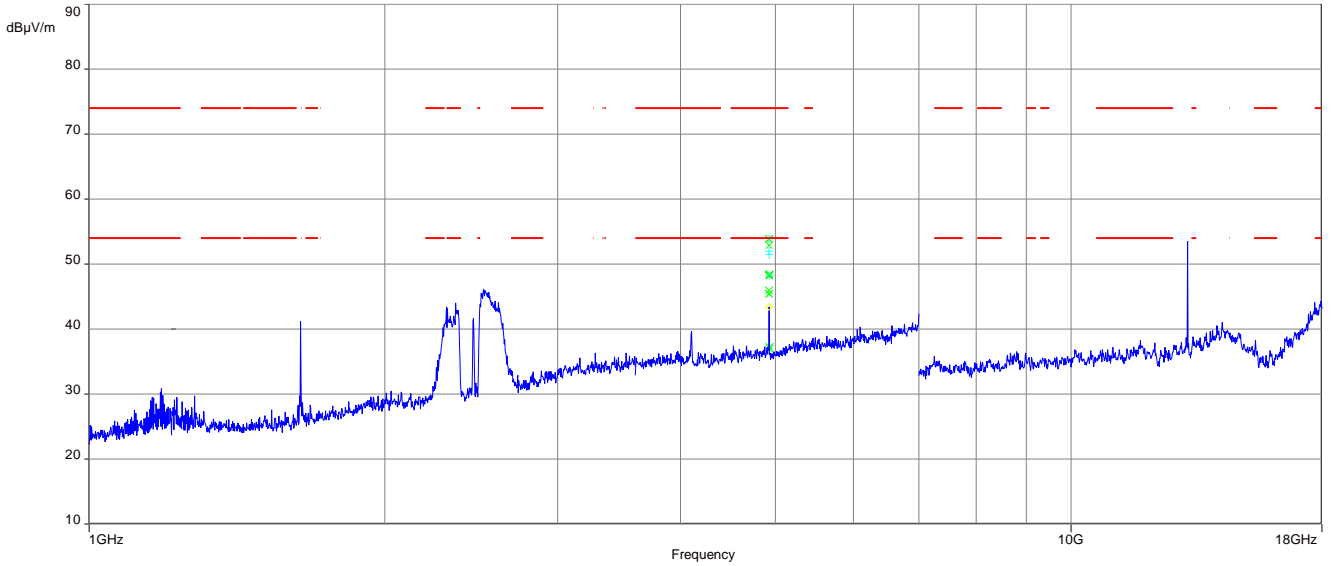

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

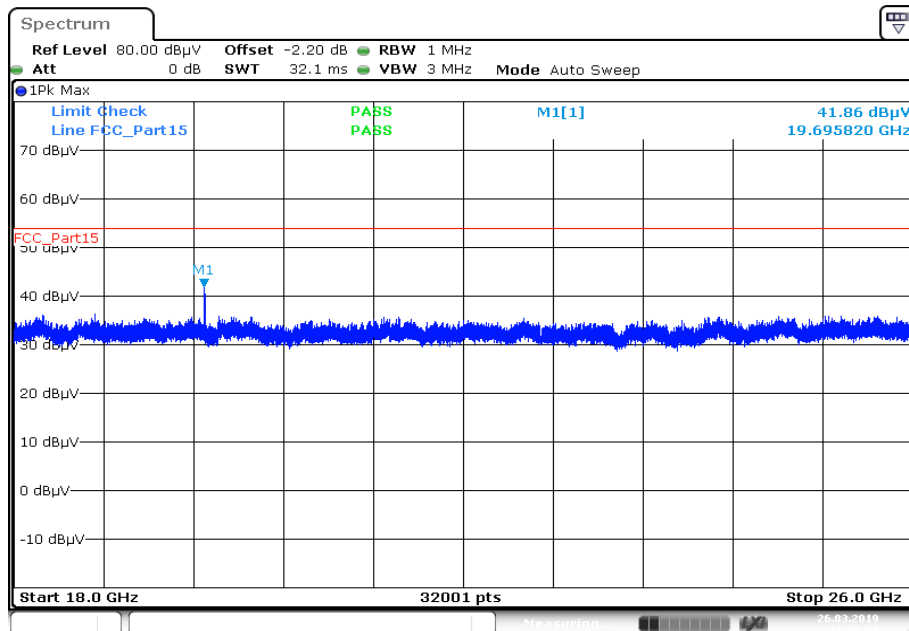

Date: 26.MAR.2019 15:20:51


Plots: OFDM (20 MHz bandwidth), external antenna

Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

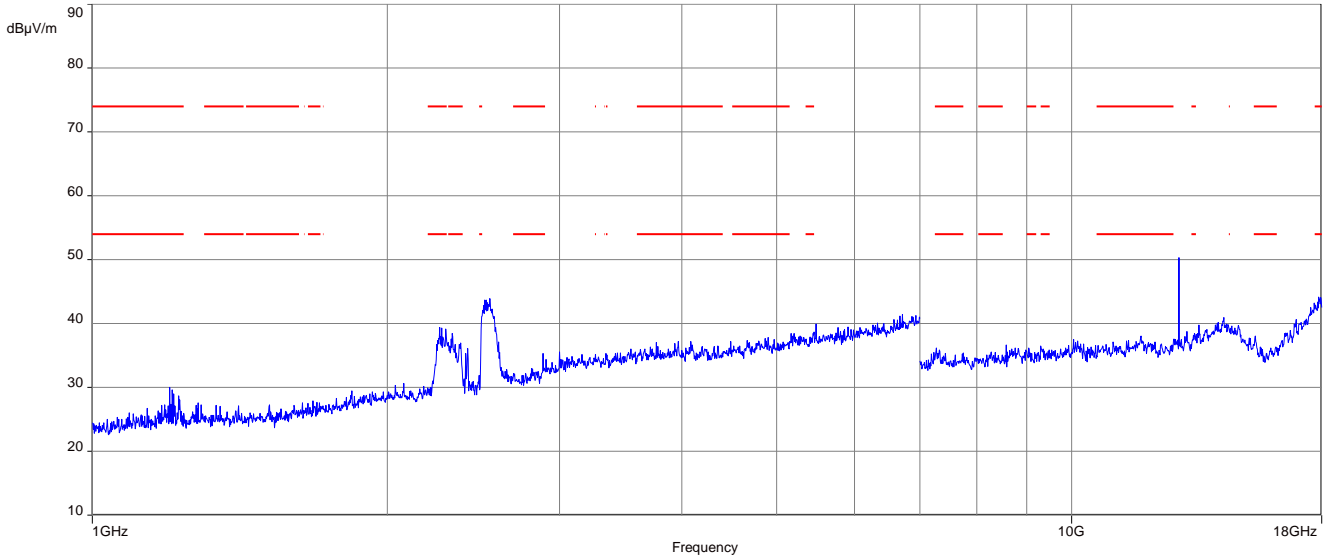


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

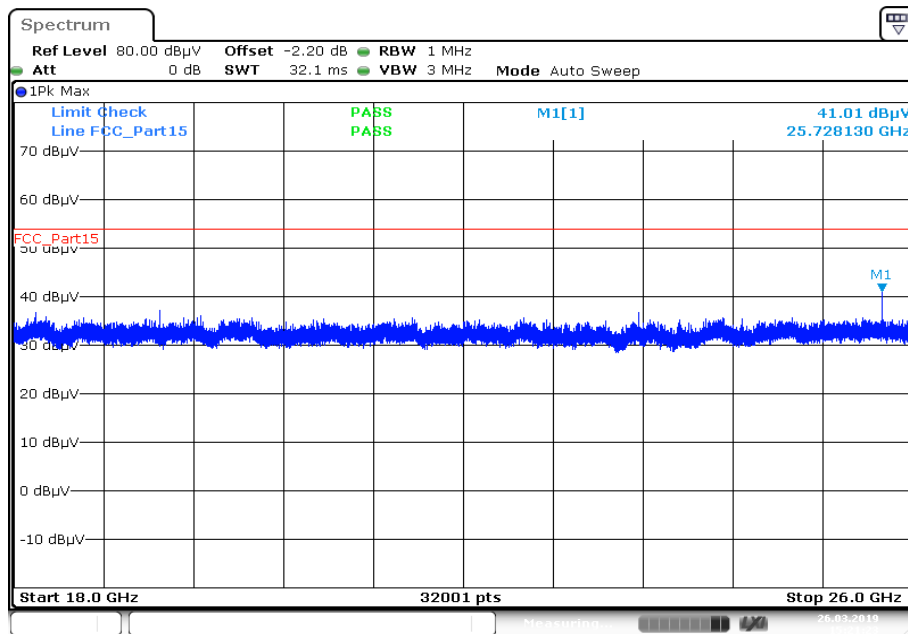


Plot 3: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

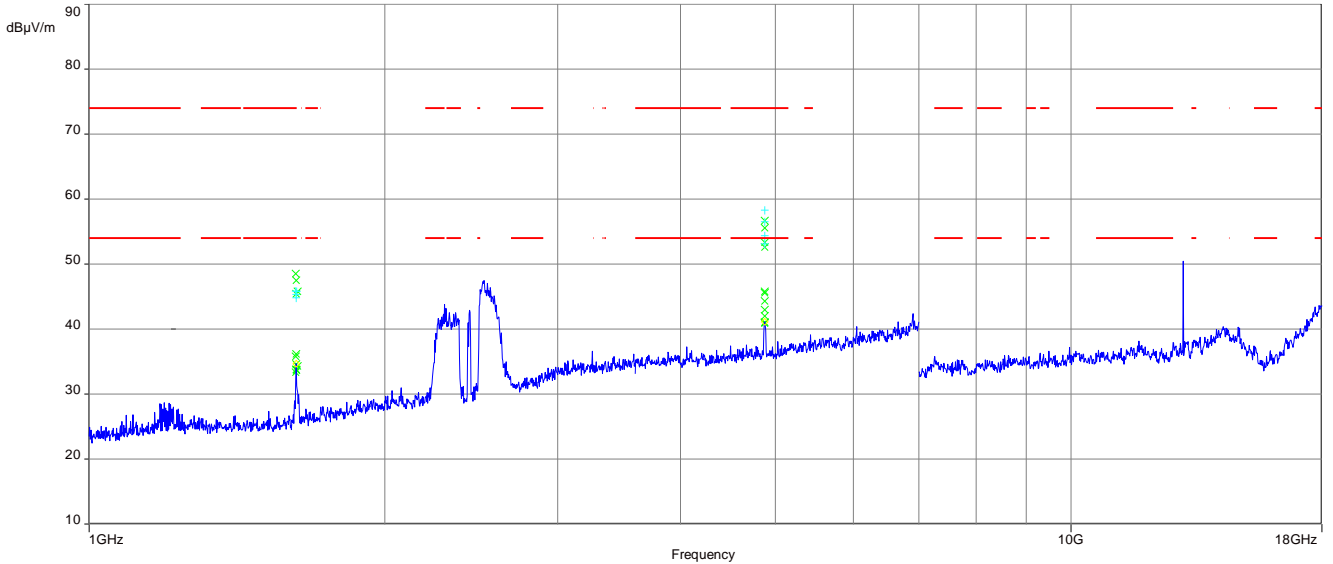


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

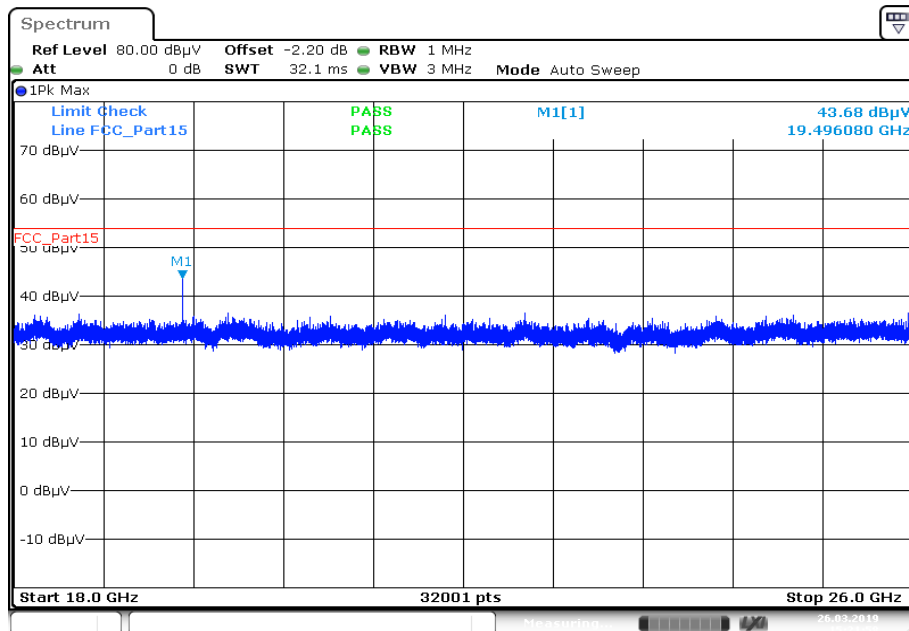


Plot 5: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

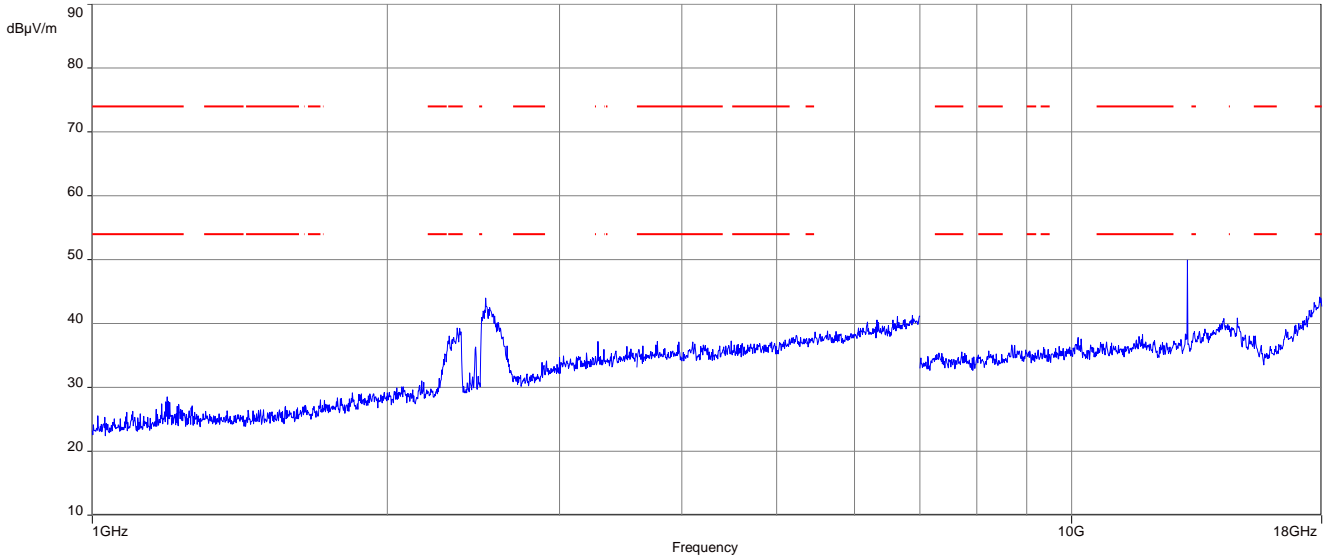

The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

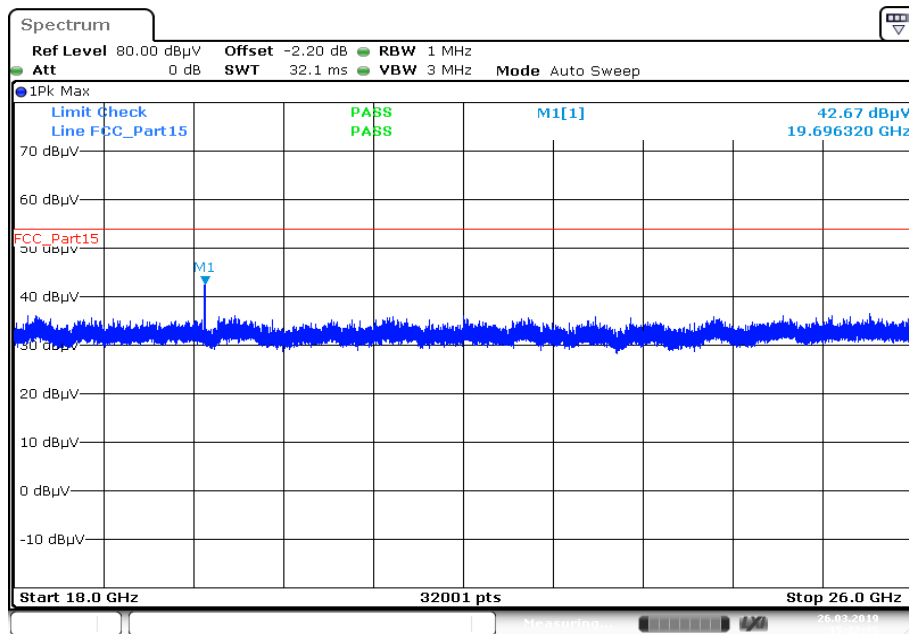


Date: 26.MAR.2019 15:22:35

Plots: RX / idle mode

Plot 1: 1 GHz to 18 GHz, vertical & horizontal polarization

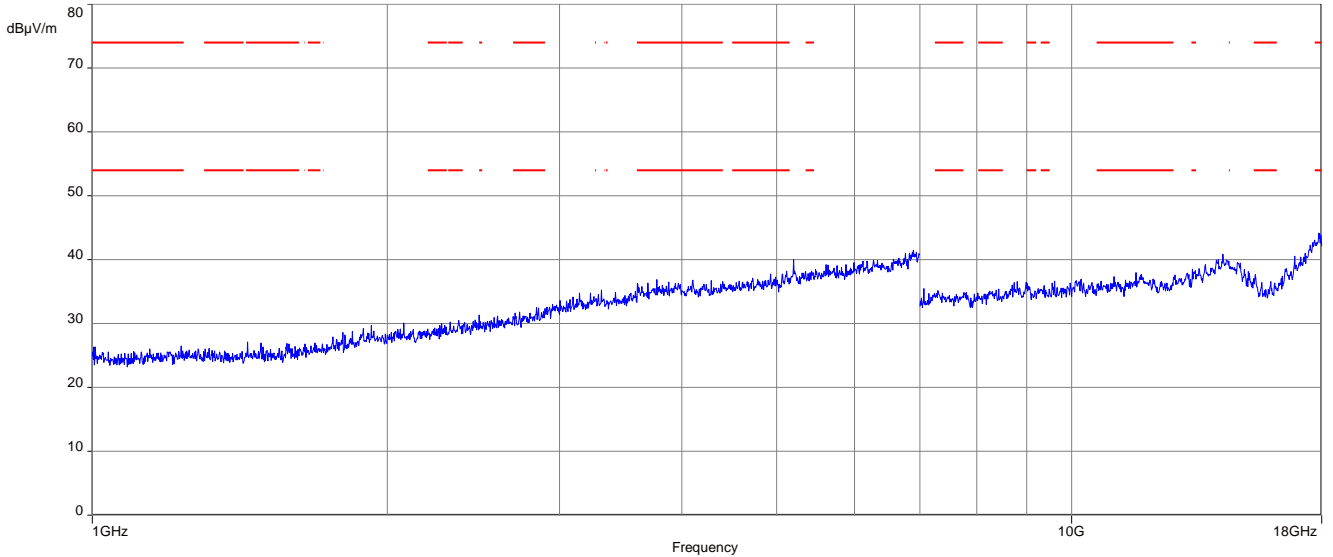

Plot 2: 18 GHz to 26 GHz, vertical & horizontal polarization

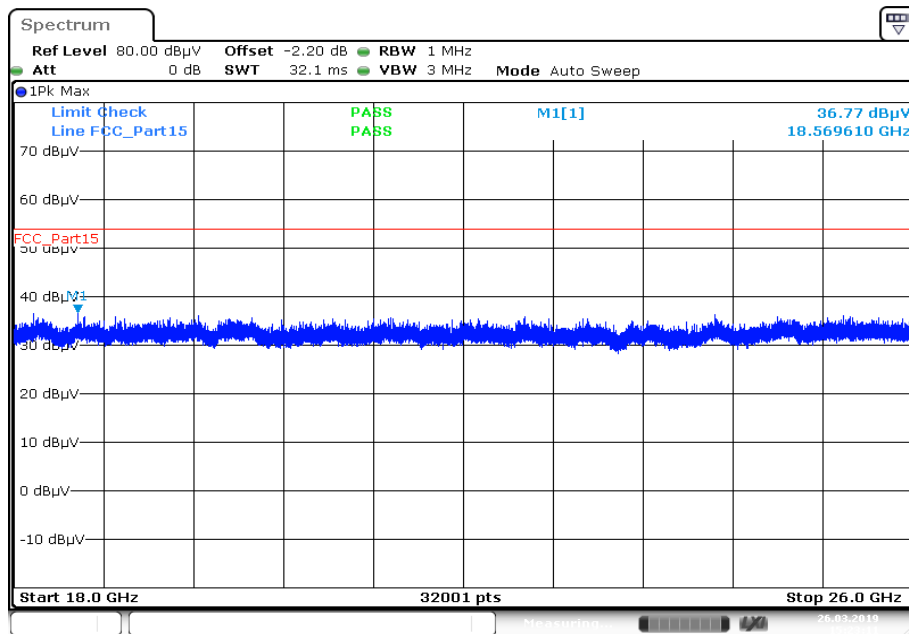

Date: 26.MAR.2019 15:23:12

12.14 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 6.4 A
Measurement uncertainty	See chapter 8

Limits:

FCC		IC
Frequency / MHz	Quasi-Peak / (dB μ V / m)	Average / (dB μ V / m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Results:

TX spurious emissions conducted < 30 MHz / (dB μ V / m) @ 3m		
f / MHz	Detector	Level / dB μ V/m
All detected peaks are more than 20 dB below the limit.		

Plots: on-board antenna

Plot 1: 150 kHz to 30 MHz, phase line

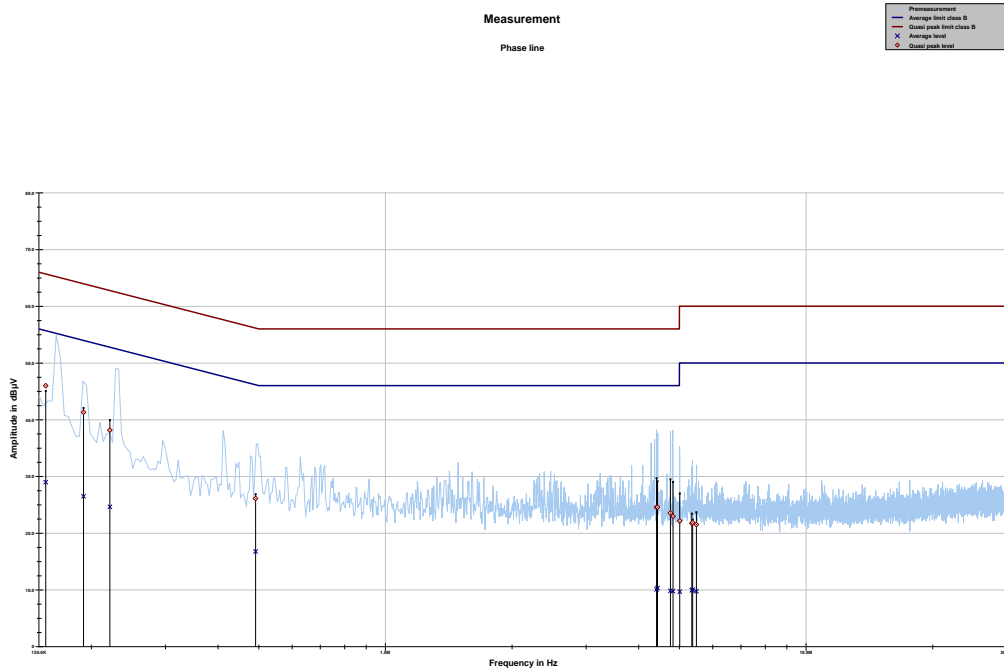


Project ID: 1-5727/18-04-03

Final results:

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.155771	45.98	19.70	65.686	28.98	26.86	55.835
0.191604	41.31	22.66	63.967	26.49	28.32	54.811
0.221368	38.17	24.60	62.767	24.64	29.32	53.961
0.491524	26.10	30.04	56.142	16.77	29.47	46.242
4.411786	24.58	31.42	56.000	10.08	35.92	46.000
4.434739	24.58	31.42	56.000	10.34	35.66	46.000
4.759203	23.55	32.45	56.000	9.84	36.16	46.000
4.828393	22.97	33.03	56.000	9.78	36.22	46.000
5.009095	22.17	37.83	60.000	9.67	40.33	50.000
5.351354	21.73	38.27	60.000	9.92	40.08	50.000
5.375562	21.86	38.14	60.000	10.03	39.97	50.000
5.487860	21.52	38.48	60.000	9.76	40.24	50.000

Plot 2: 150 kHz to 30 MHz, neutral line

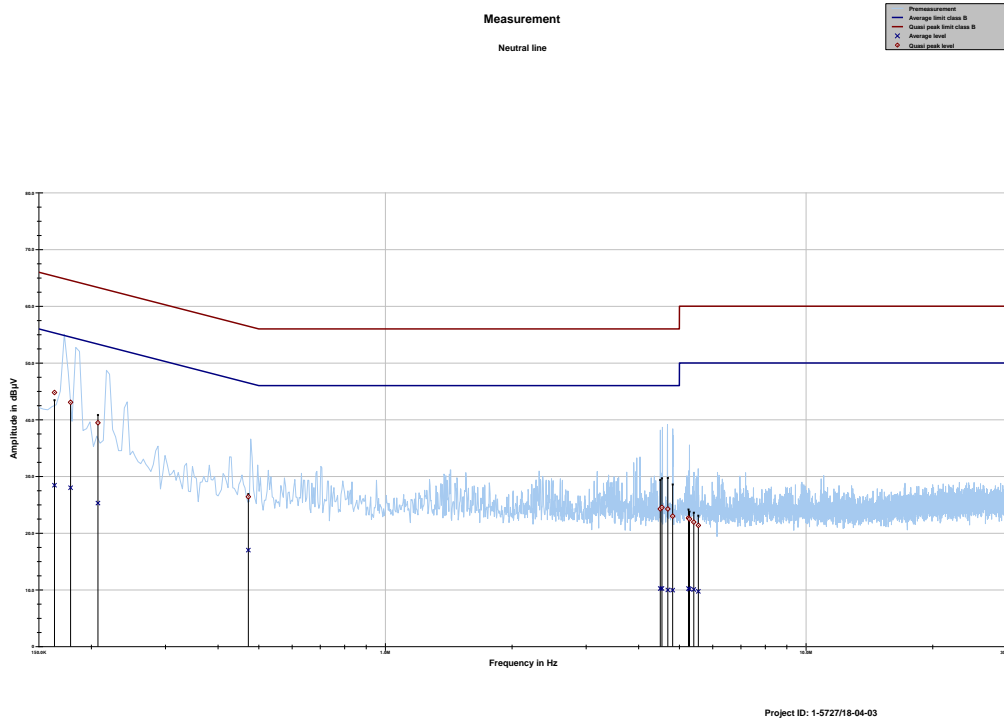


Final results:

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.163444	44.79	20.50	65.287	28.45	27.17	55.616
0.178545	43.06	21.49	64.553	28.01	27.18	55.184
0.207363	39.46	23.85	63.310	25.30	29.06	54.361
0.472410	26.41	30.06	56.471	17.01	29.78	46.788
4.503176	24.27	31.73	56.000	10.24	35.76	46.000
4.544735	24.53	31.47	56.000	10.24	35.76	46.000
4.692619	24.27	31.73	56.000	9.98	36.02	46.000
4.819812	23.01	32.99	56.000	9.96	36.04	46.000
5.255081	22.67	37.33	60.000	10.23	39.77	50.000
5.283104	22.48	37.52	60.000	10.14	39.86	50.000
5.410634	21.95	38.05	60.000	10.06	39.94	50.000
5.546086	21.37	38.63	60.000	9.75	40.25	50.000

Plots: external antenna


Plot 1: 150 kHz to 30 MHz, phase line

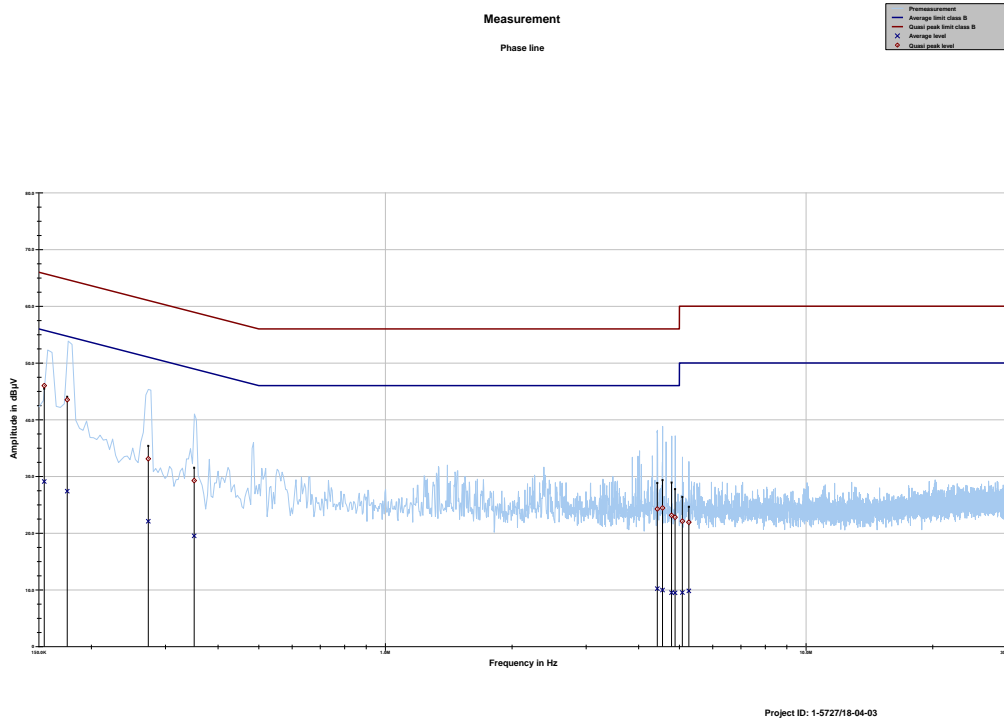

Final results:

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.154532	46.00	19.75	65.753	29.10	26.77	55.870
0.175266	43.51	21.19	64.707	27.39	27.88	55.278
0.273149	33.11	27.91	61.022	22.10	30.38	52.481
0.351096	29.26	29.67	58.937	19.52	30.74	50.254
4.431053	24.27	31.73	56.000	10.22	35.78	46.000
4.558891	24.44	31.56	56.000	9.98	36.02	46.000
4.790366	23.14	32.86	56.000	9.51	36.49	46.000
4.882453	22.80	33.20	56.000	9.48	36.52	46.000
5.081971	22.11	37.89	60.000	9.53	40.47	50.000
5.265004	21.92	38.08	60.000	9.81	40.19	50.000
0.154532	46.00	19.75	65.753	29.10	26.77	55.870
0.175266	43.51	21.19	64.707	27.39	27.88	55.278

Plot 2: 150 kHz to 30 MHz, neutral line

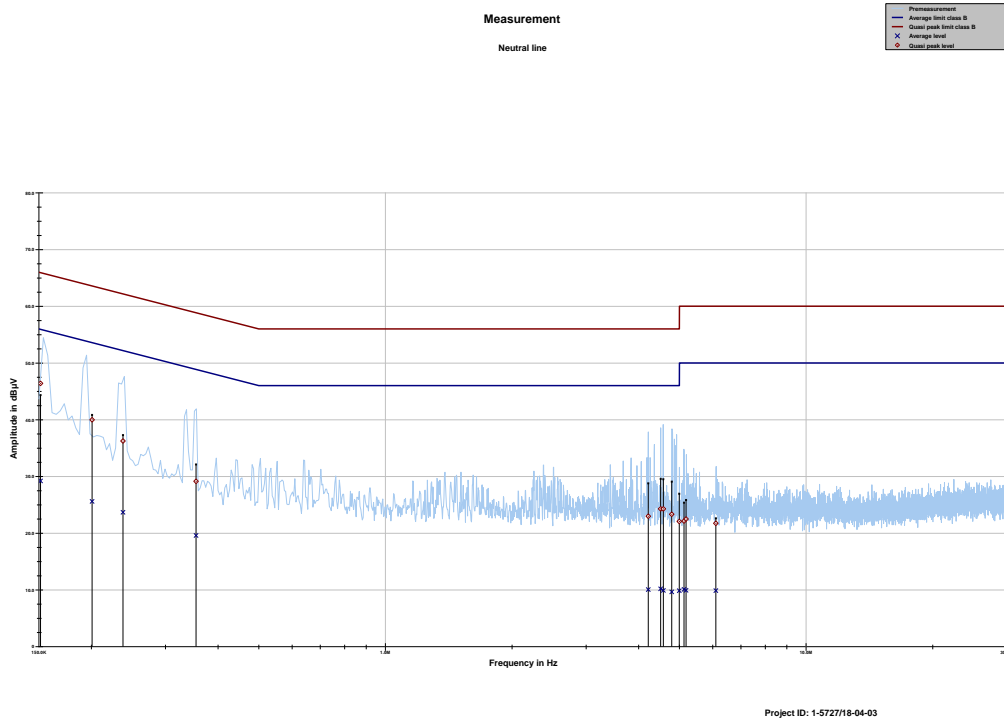

Final results:

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.151388	46.40	19.53	65.923	29.21	26.76	55.960
0.200834	39.99	23.59	63.576	25.59	28.96	54.548
0.237741	36.23	25.94	62.175	23.67	29.83	53.493
0.354652	29.13	29.72	58.853	19.58	30.58	50.153
4.216805	22.99	33.01	56.000	10.05	35.95	46.000
4.512415	24.27	31.73	56.000	10.18	35.82	46.000
4.578964	24.28	31.72	56.000	9.91	36.09	46.000
4.795416	23.32	32.68	56.000	9.65	36.35	46.000
4.996714	22.07	33.93	56.000	9.85	36.15	46.000
5.127751	22.13	37.87	60.000	10.08	39.92	50.000
5.186241	22.50	37.50	60.000	9.91	40.09	50.000
6.105168	21.74	38.26	60.000	9.86	40.14	50.000

13 Observations

No observations except those reported with the single test cases have been made.

Annex A Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

Annex B Document history

Version	Applied changes	Date of release
-/-	Initial release	2019-04-04

Annex C Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory</p> <p>CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 11.01.2019 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 7 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 11.01.2019  Dipl.-Biol. Uwe Zimmermann Head of Division</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 200 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.eu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04.pdf>

Annex D Accreditation Certificate – D-PL-12076-01-05

first page	last page			
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 11.01.2019 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 5 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05</p> <p>Frankfurt am Main, 11.01.2019  Uwe Zimmermann Head of Division</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <table border="0"> <tr> <td>Office Berlin Spittelmarkt 10 10117 Berlin</td> <td>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</td> <td>Office Braunschweig Bundesallee 100 38116 Braunschweig</td> </tr> </table> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>	Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig
Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig		

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf>

END OF TEST REPORT