


AM OOK 433.92 code sending

TX-4M10HA
TX-4M10HA/V



434 Mhz AM (OOK) transmitters with helical antenna

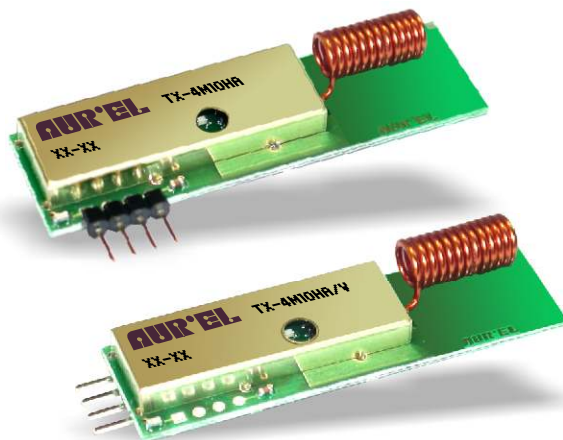


Description

SAW transmitter module with helical antenna ideal for applications where it is required maximum irradiated power and minimal space occupation.

In compliance with European Normative.

Descrizione

Modulo trasmettitore SAW con antenna elicoidale, ideale per applicazioni ove sia richiesta la massima potenza irradiabile e il minimo ingombro in termini di spazio occupato. Conforme alle Normative Europee.

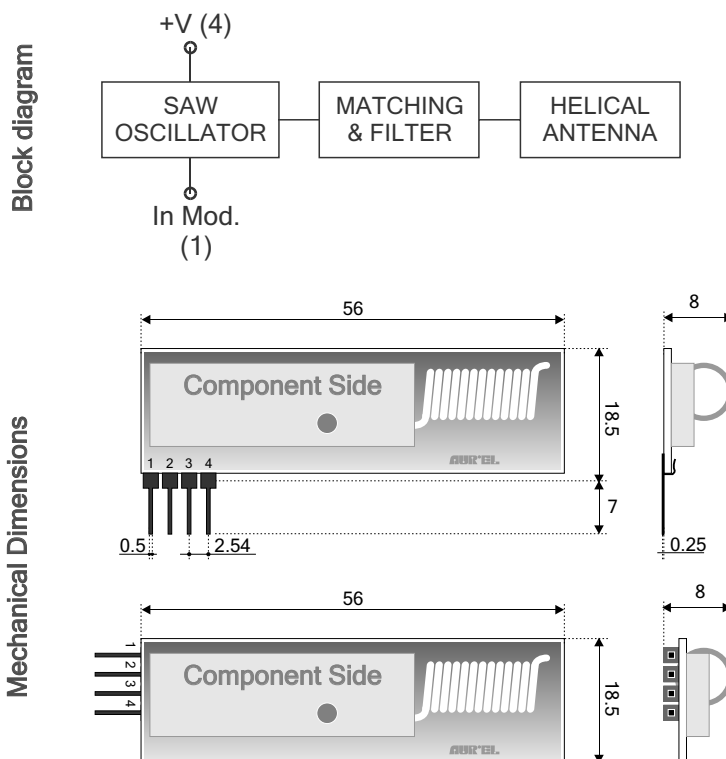

Pin-out

- 1) Input mod.
- 2) Ground
- 3) Ground
- 4) +V

434 Mhz OOK Transmitter with helical antenna

Technical Specification

Ta = 25 °C

Characteristics	Min	Typ	Max	Unit
V _s Supply Voltage	2.5	3	3.3	Vdc
I _s Supply Current (*)		25 (*)		mA
F _c Carrier frequency	433.82	433.92	434.02	MHz
P _o RF Output power (E.R.P.)			10	mW
E _s RF spurious emission		-50		dBm
F _m Square wave modulation			5	KHz
L _H High logic level	2.7		3.3	V
L _L Low logic level	0		0.2	V
T _{OP} Operating temperature range	-20		+80	°C

(*) Duty Cycle 50%

Specifiche Tecniche

Ta = 25 °C

Caratteristiche	Min	Tip	Max	Unit
V _s Alimentazione	2.5	3	3.3	Vdc
I _s Corrente assorbita (*)		25 (*)		mA
F _c Frequenza portante	433.82	433.92	434.02	MHz
P _o Potenza di uscita (E.R.P.)			10	mW
E _s Emissioni RF spurie		-50		dBm
F _m Frequenza di modulazione			5	KHz
L _H Livello logico alto (@Vs=3V)	2.7		3.3	V
L _L Livello logico basso (@Vs=3V)	0		0.2	V
T _{OP} Temperatura di lavoro	-20		+80	°C

(*) Duty Cycle 50%

Part Number / Model

P.N. 650200819 mod. TX-4M10HA
P.N. 650200834 mod. TX-4M10HA/V