




Component Side

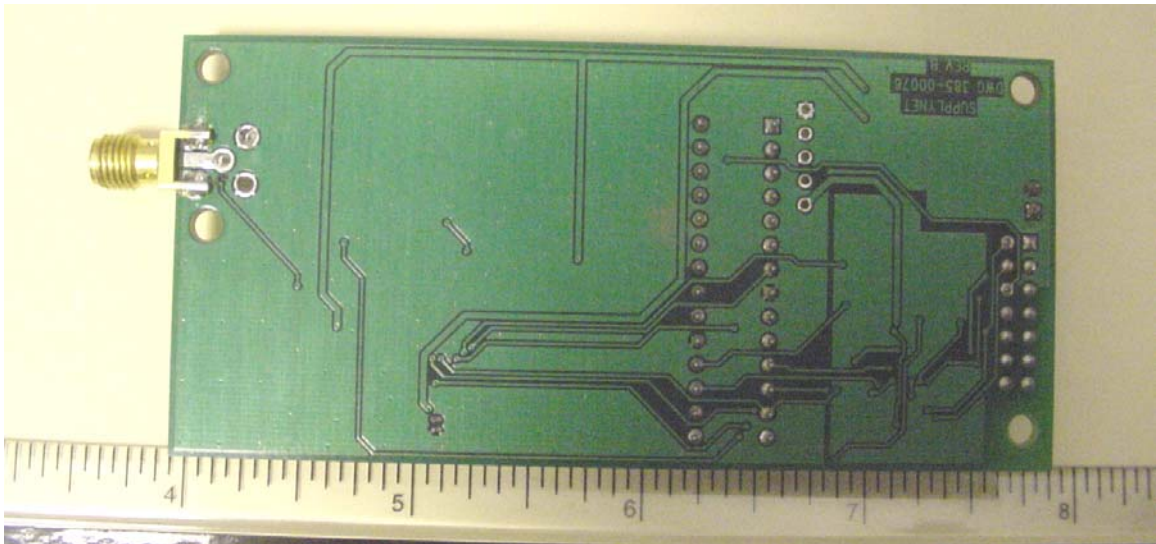


Solder Side

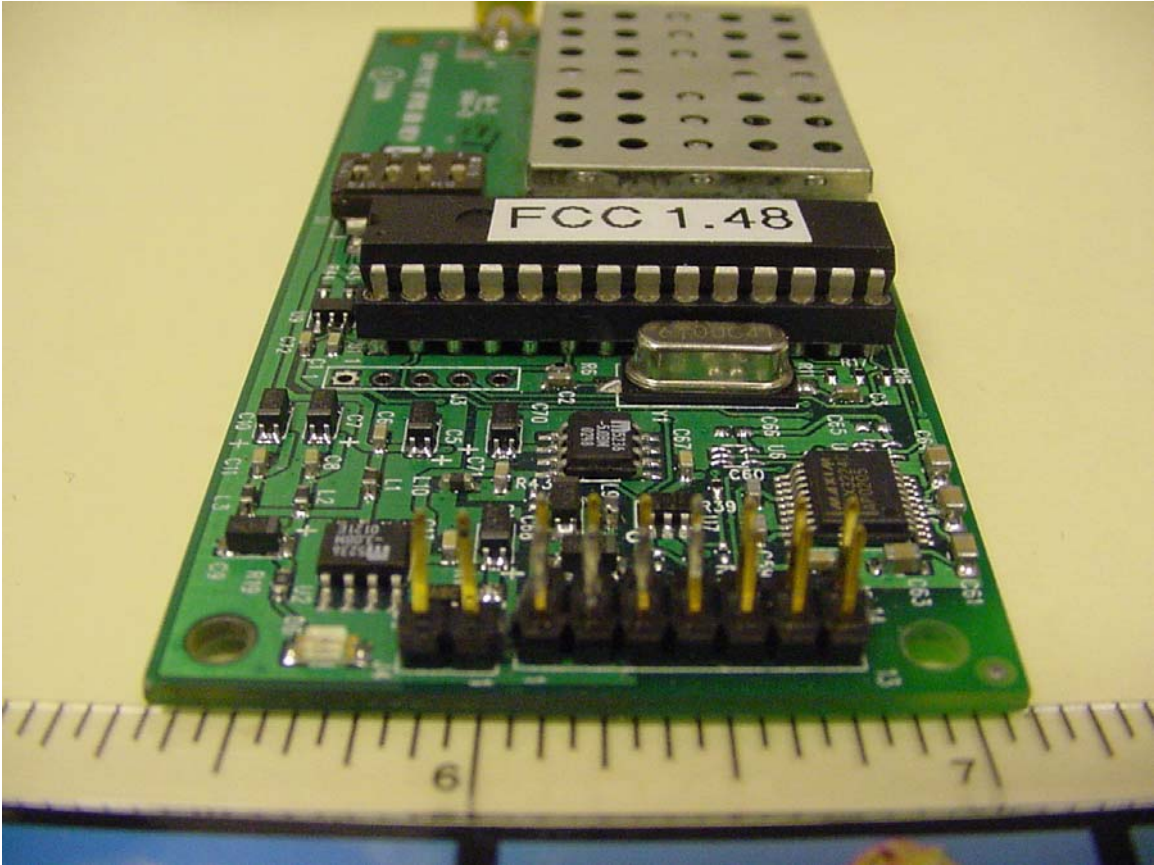

Side view showing data/power interface connector

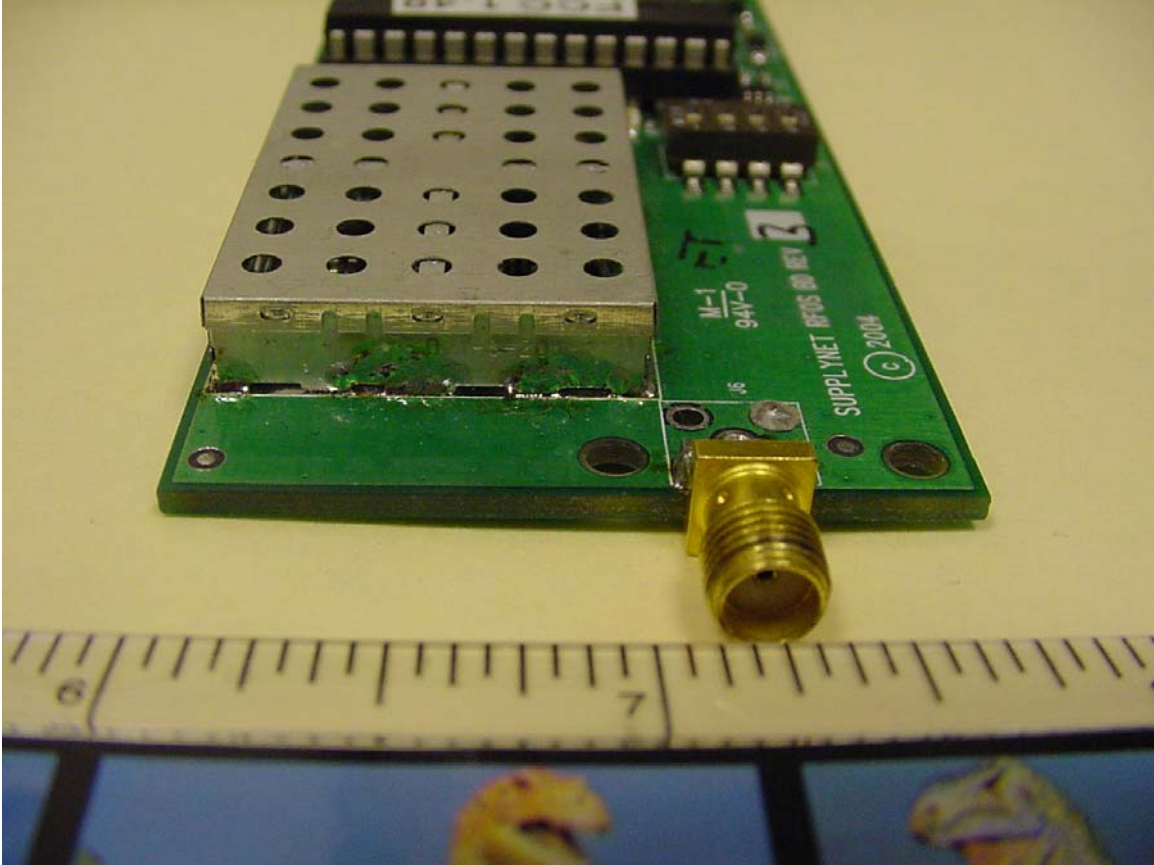

Side view of EUT showing SMA RF antenna connector

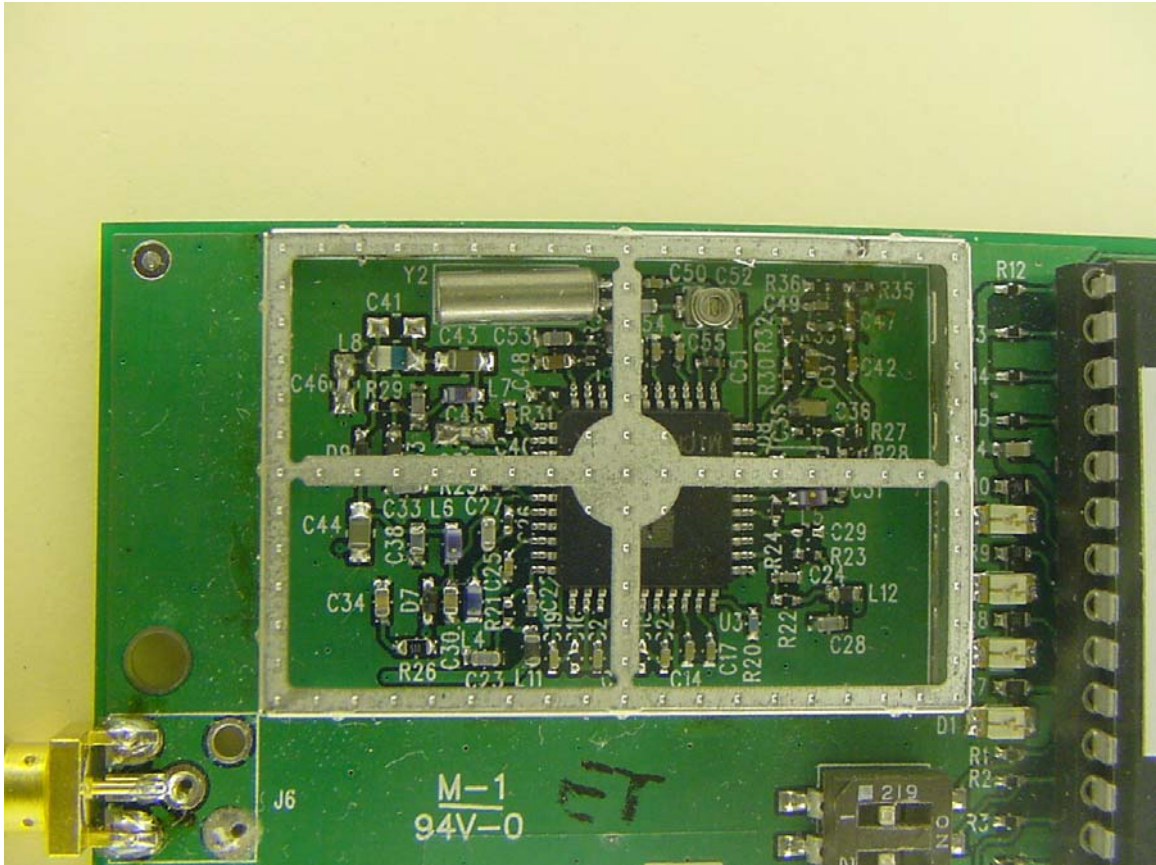

RF section with top shield removed.



Wiring harness used in testing, allows the use of a 9V battery or power supply. The uncut ribbon cable section is 7cm in length, typical of normal installation in supplynet systems.