




802.11n-HT20 Low Channel

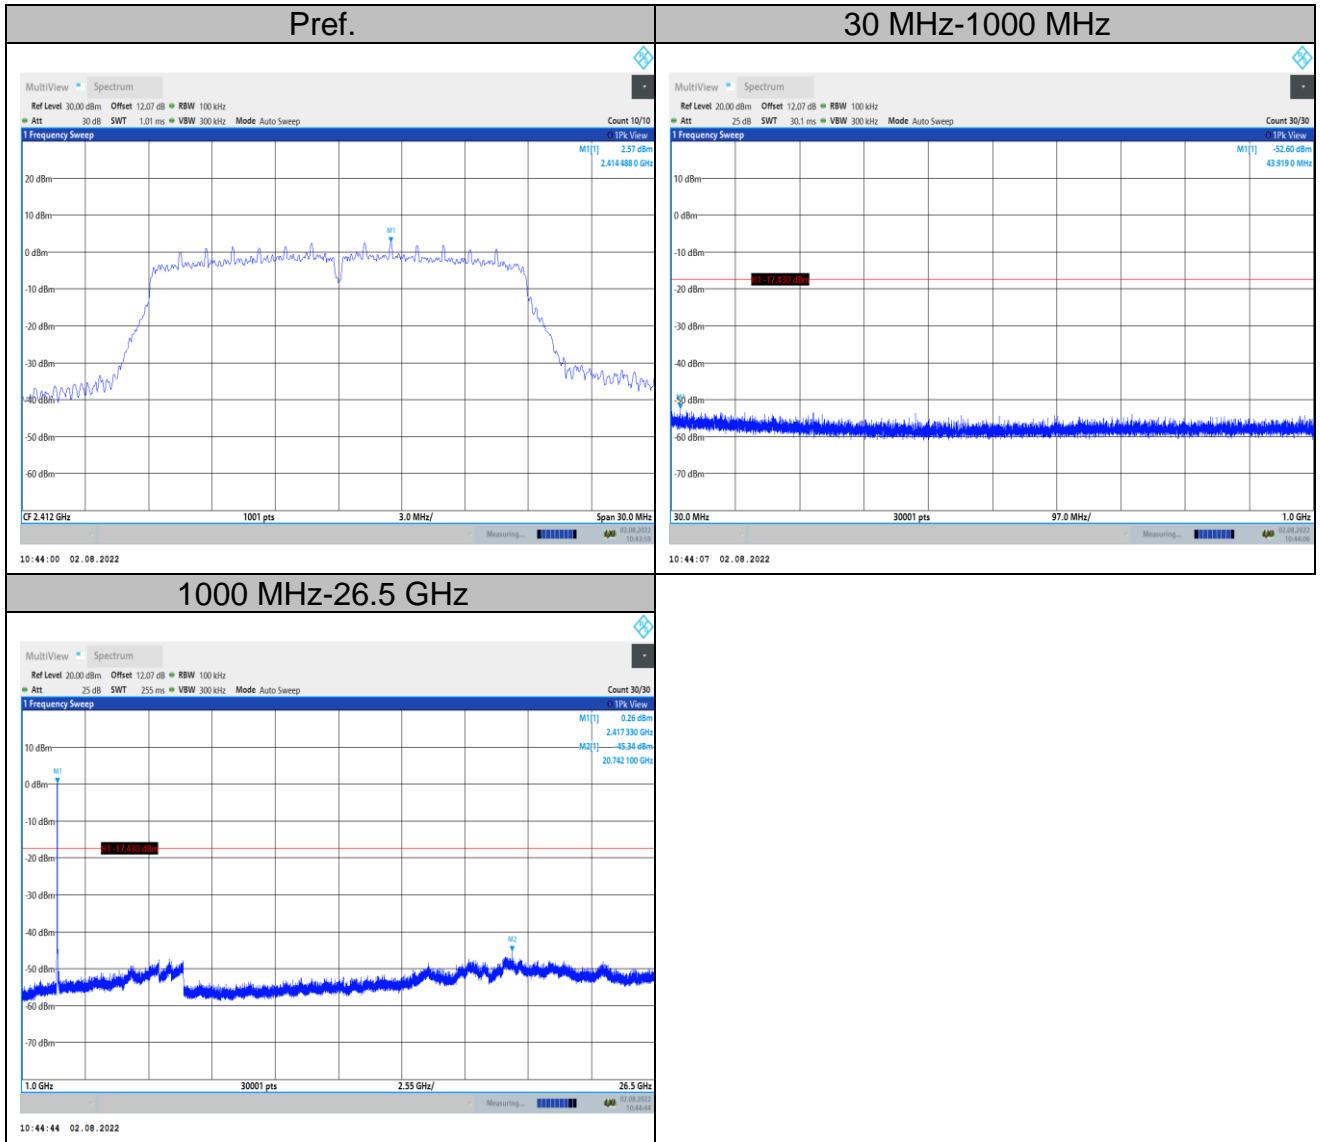


802.11n-HT20 Mid Channel

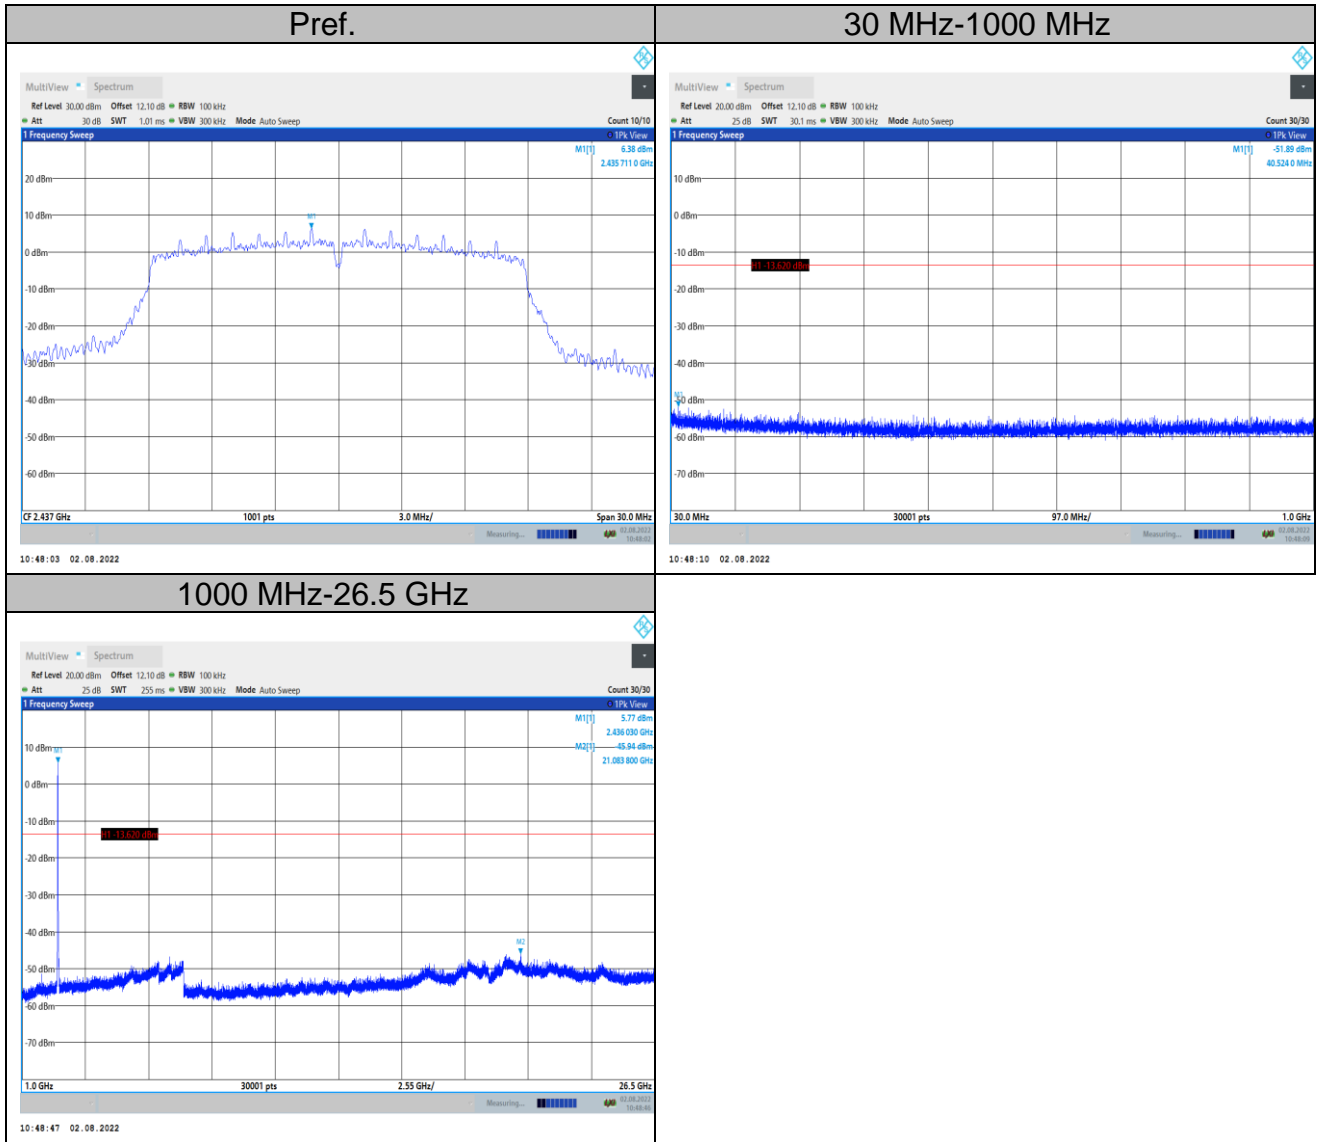


802.11n-HT20 High Channel

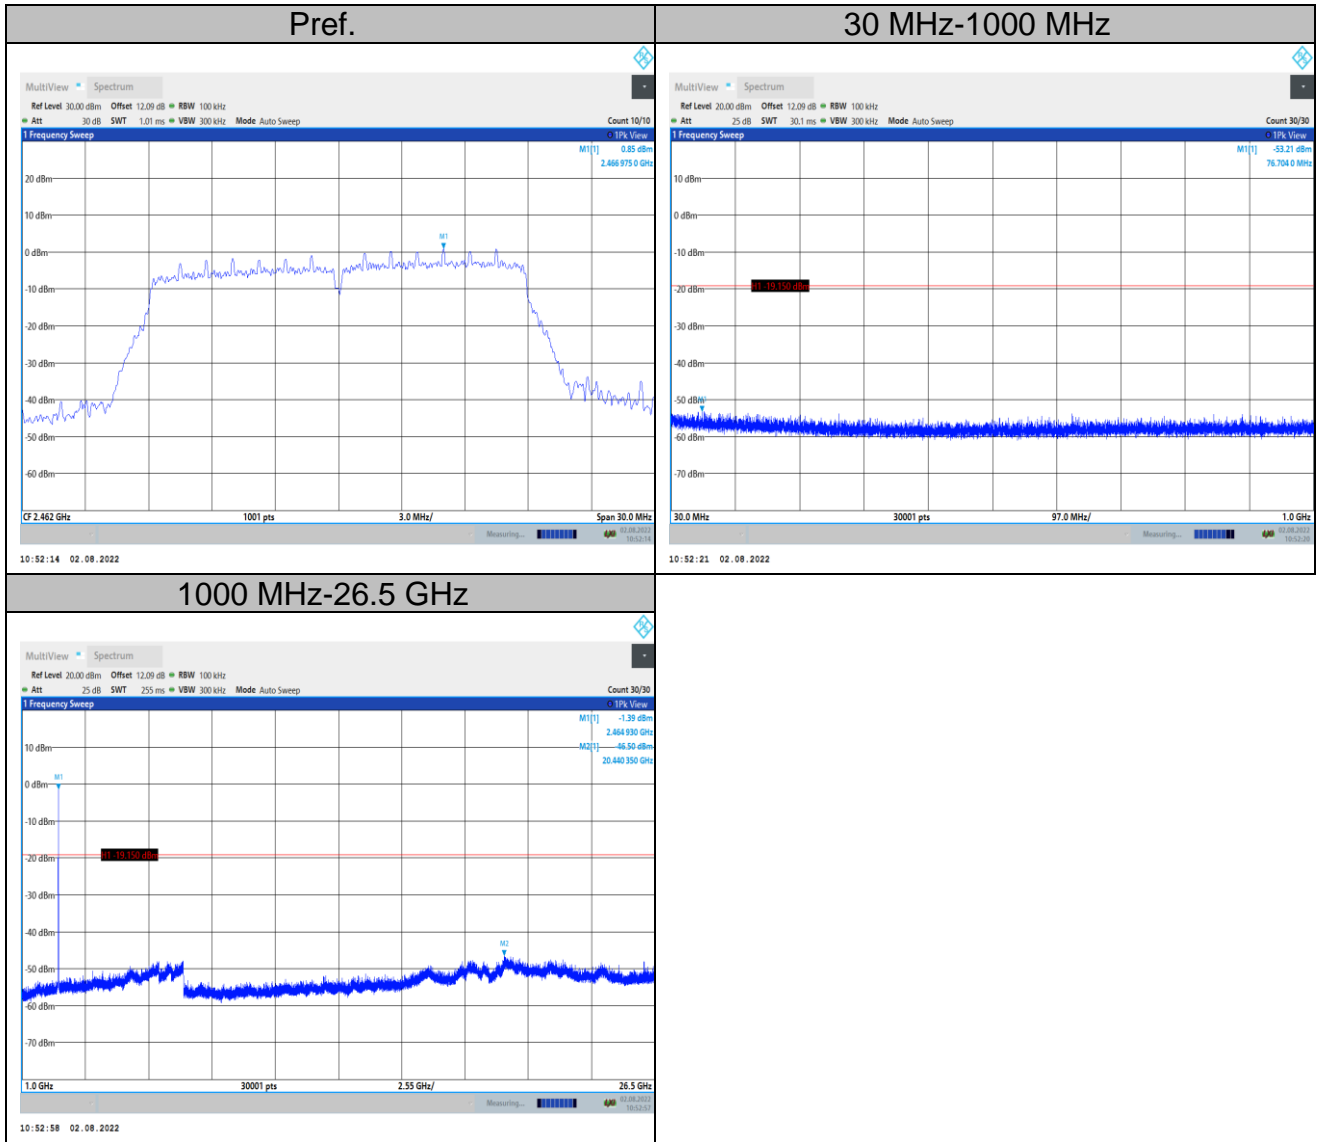


802.11n-HT40 Low Channel

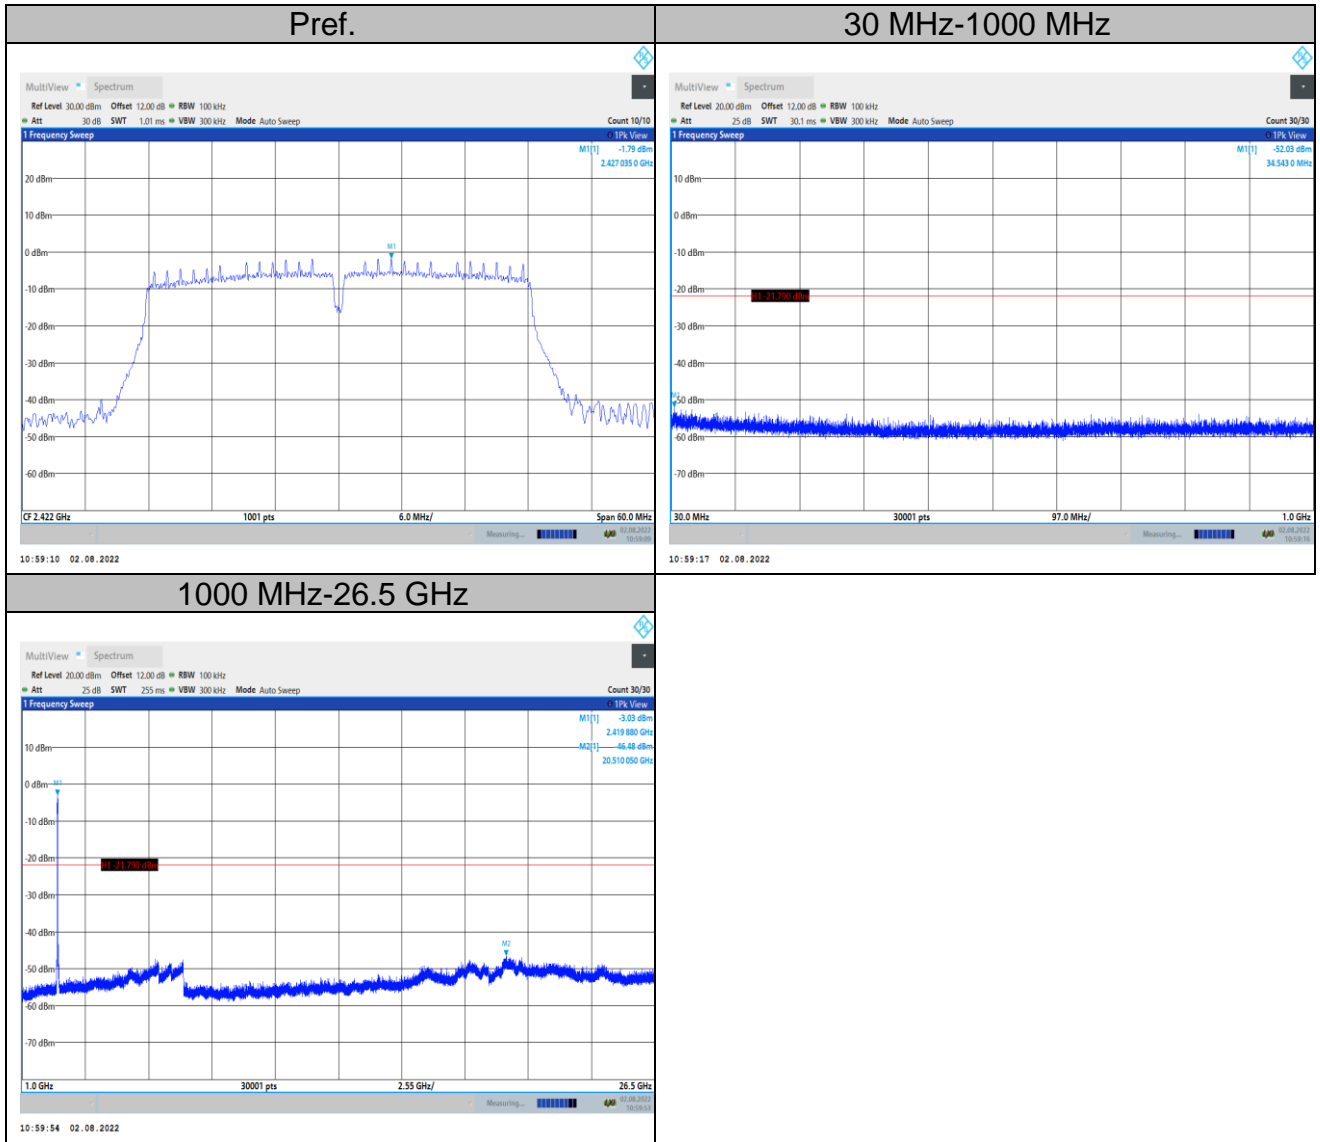

802.11n-HT40 Mid Channel

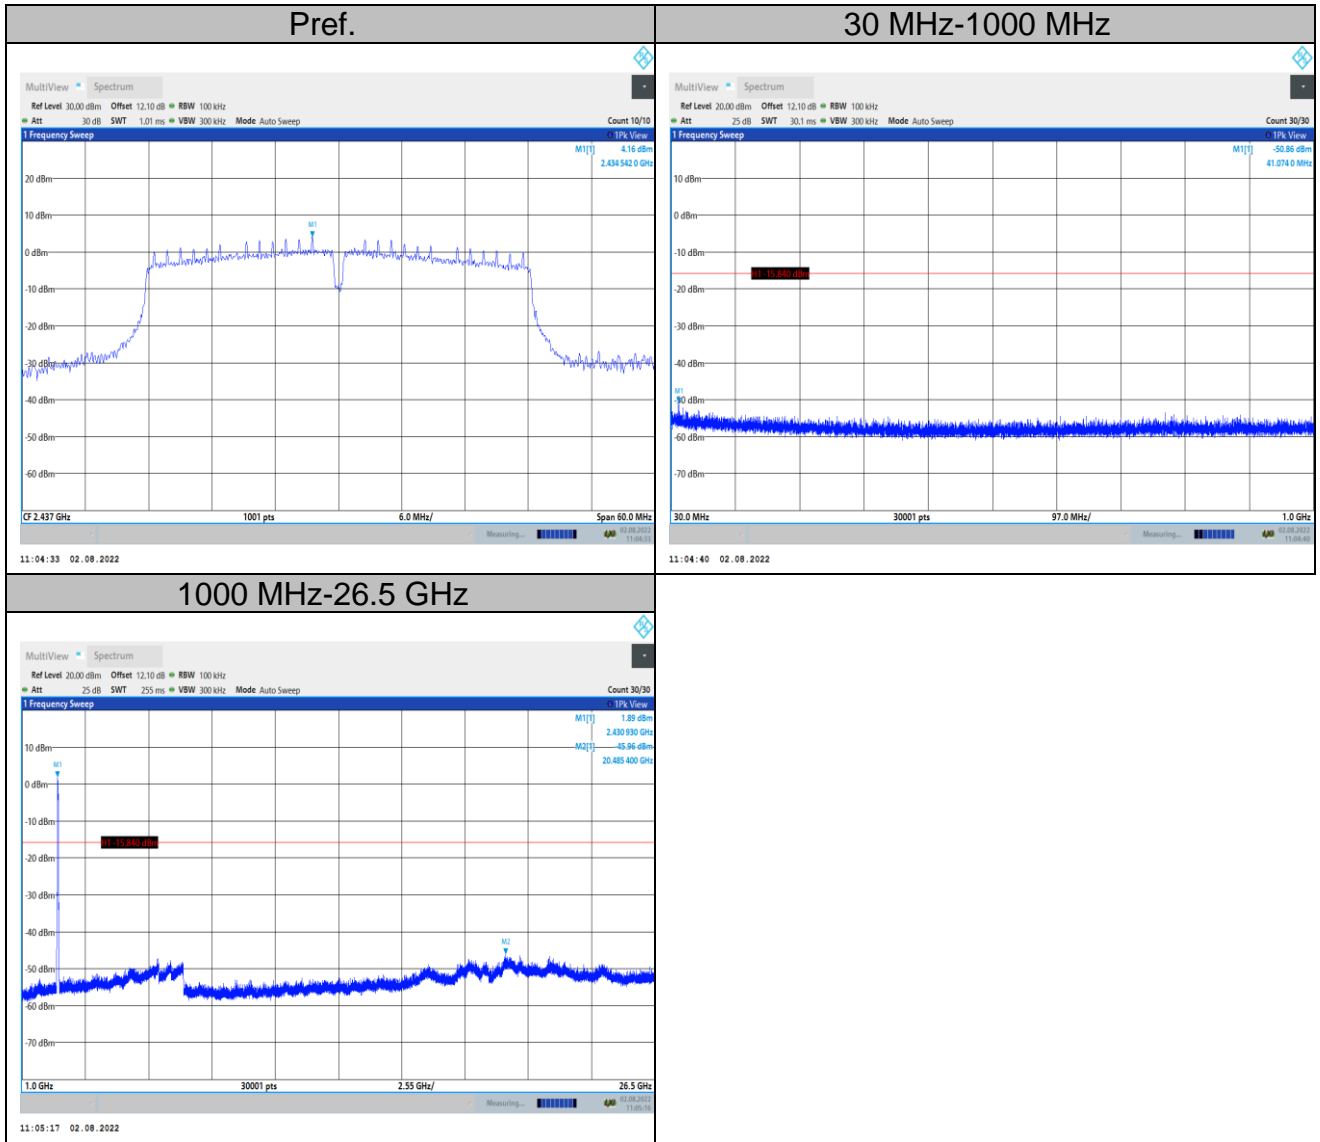


802.11n-HT40 High Channel

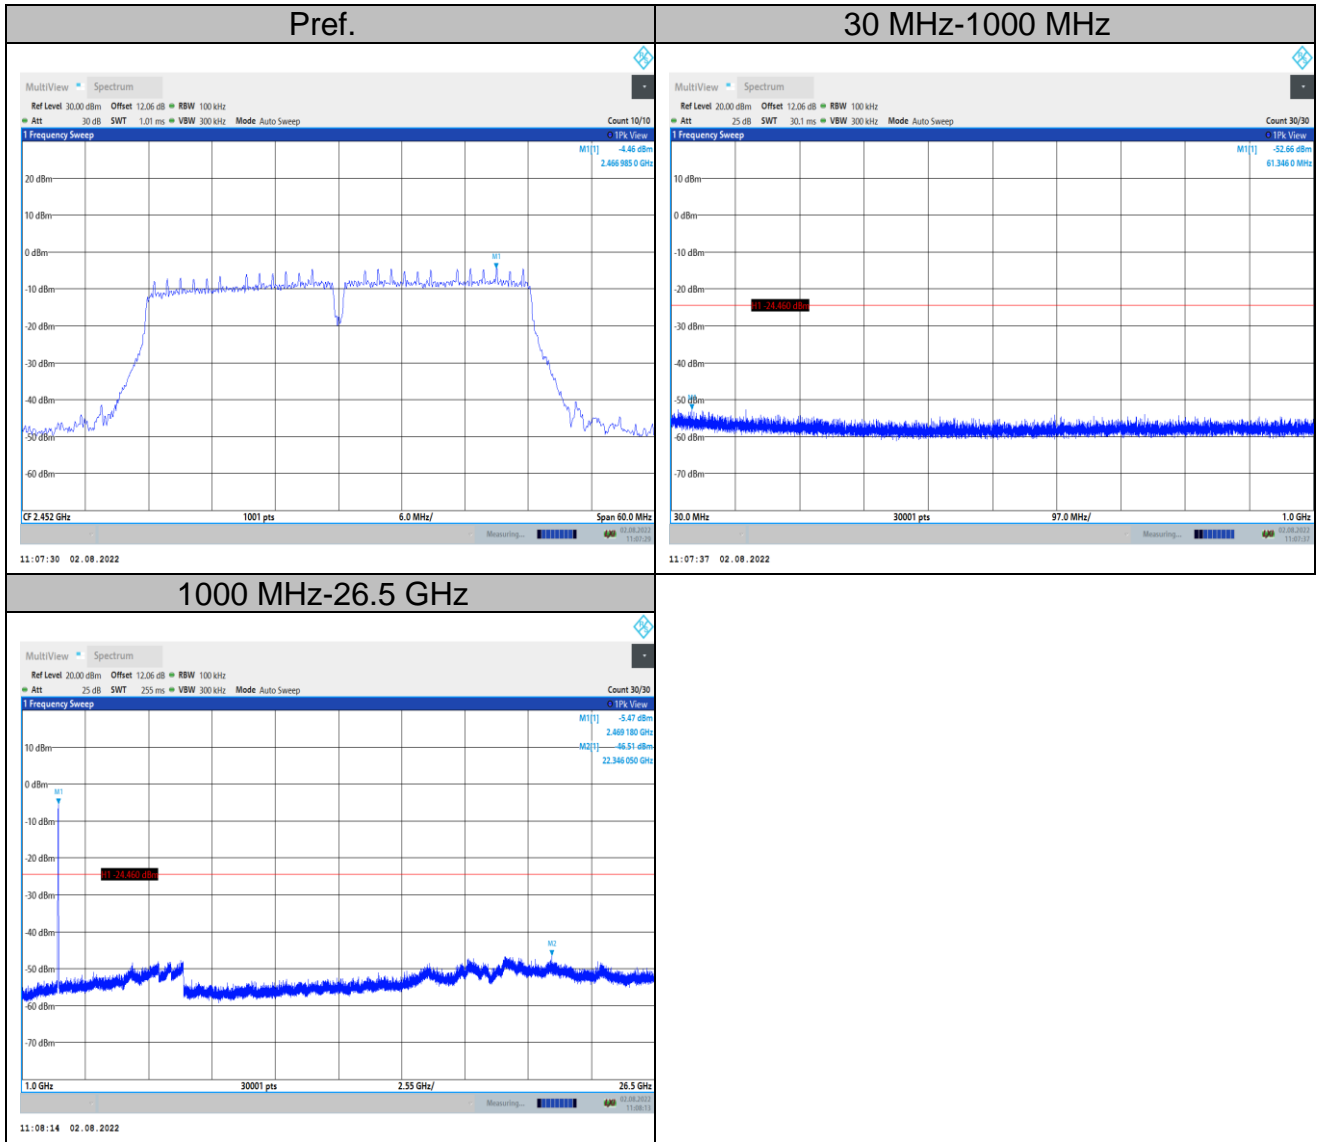


Band Edge

11B_Ant1_Low_2412

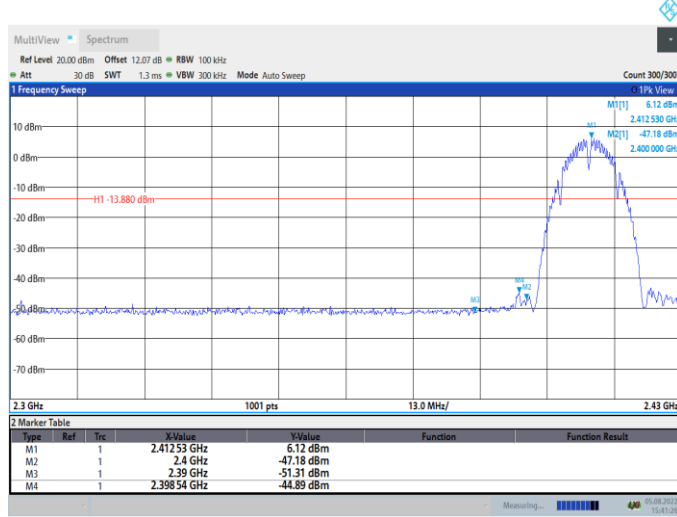

15:41:27 05.08.2022

11B_Ant1_High_2462

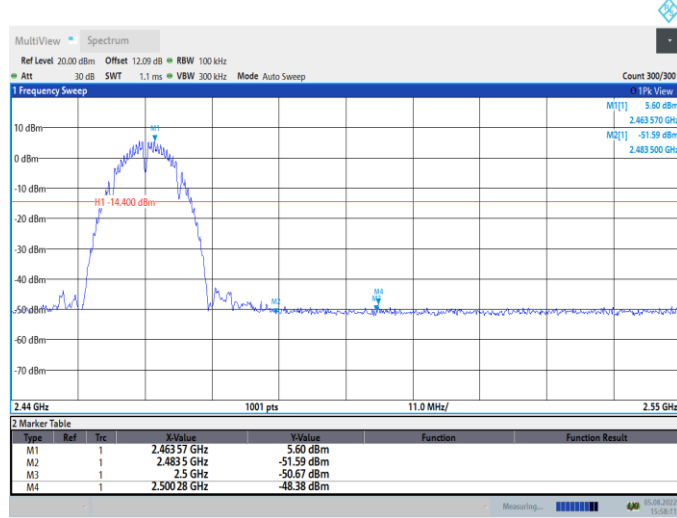


15:58:11 05.08.2022

11G_Ant1_Low_2412



10:22:21 02.08.2022

11G_Ant1_High_2462

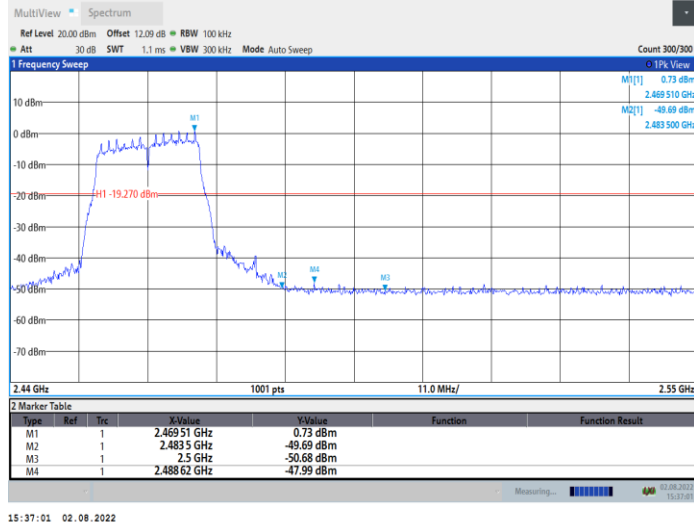

11N20SISO_Ant1_Low_2412




11N20SISO_Ant1_High_2462



11N40SISO_Ant1_Low_2422



11N40SISO_Ant1_High_2452

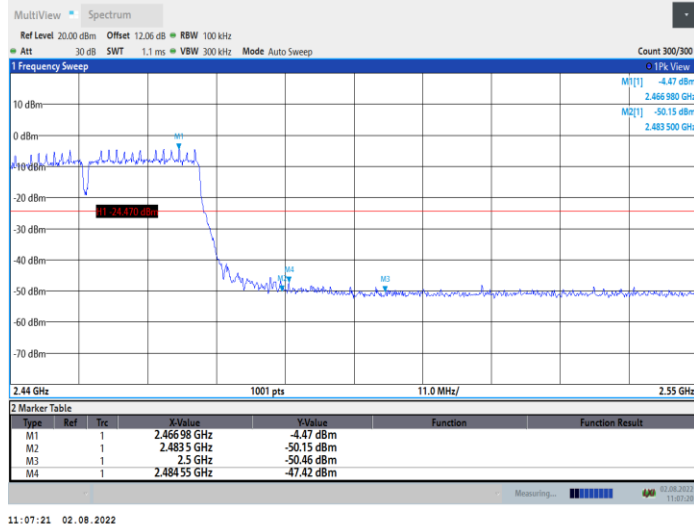

11AC20SISO_Ant1_Low_2412



11AC20SISO_Ant1_High_2462




14:25:18 02.08.2022

11AC40SISO_Ant1_Low_2422



14:30:06 02.08.2022

11AC40SISO_Ant1_High_2452

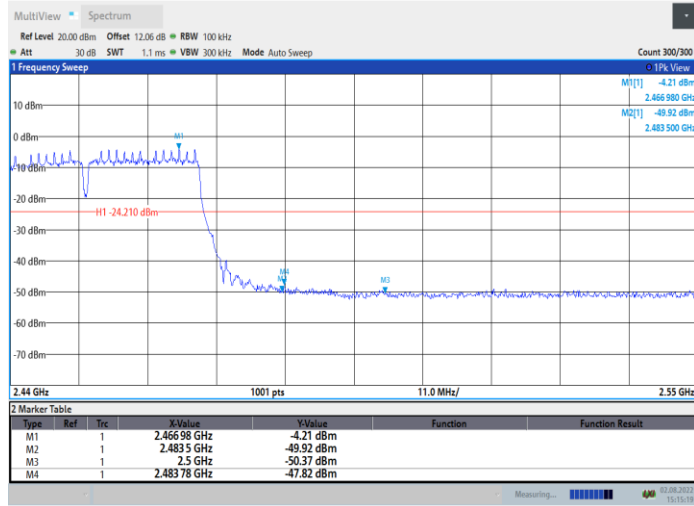

15:15:20 02.08.2022

10. RADIATED BANDEDGE AND SPURIOUS MEASUREMENT

10.1. LIMITS OF Radiated Bandedge and Spurious Measurement

Table 11 Radiation Emission Test Limit for FCC (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 12 Radiation Emission Test Limit for FCC (Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

10.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.12

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. For measurement below 1GHz, the EUT was placed on a turntable with 0.8 meter, above ground. For measurement above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;

(3) Set RBW = 1 MHz, VBW= 3MHz for f > 1 GHz for peak measurement.
 Set RBW = 1 MHz, and 1/T (on time) for average measurement.

10.3.TEST DATA

9 kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 13 Radiated Emission Test Data 9k Hz-30MHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dBµV/m)	Level (dBµV/m)	Polarity (H/V)	Limit (dBµV/m)	Margin (dB)	Note
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.


Table 14 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dBµV/m)	Level (dBµV/m)	Polarity (Horizontal/Vertical)	Limit (dBµV/m)	Margin (dB)	Note
30.000	0.6	12.3	11.2	24.1	Vertical	40	15.9	QP
38.439	0.7	12.3	10.8	23.8	Vertical	40	16.2	QP
54.347	0.8	13.3	10.5	24.6	Vertical	40	15.4	QP
65.502	0.9	10.7	11.5	23.1	Vertical	40	16.9	QP
175.985	1.5	9.0	25.2	35.7	Vertical	43.5	7.8	QP
188.013	1.5	9.7	22.2	33.4	Vertical	43.5	10.1	QP
55.511	0.9	13.0	1.4	15.3	Horizontal	40	24.7	QP
152.317	1.4	8.3	6.8	16.5	Horizontal	43.5	27.0	QP
175.500	1.5	9.0	20.3	30.8	Horizontal	43.5	12.7	QP
186.849	1.5	9.7	18.9	30.1	Horizontal	43.5	13.4	QP
193.833	1.7	10.6	15.6	27.9	Horizontal	43.5	15.6	QP
280.745	1.9	12.7	14.7	29.3	Horizontal	46	16.7	QP


Remark: Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz

Horizontal

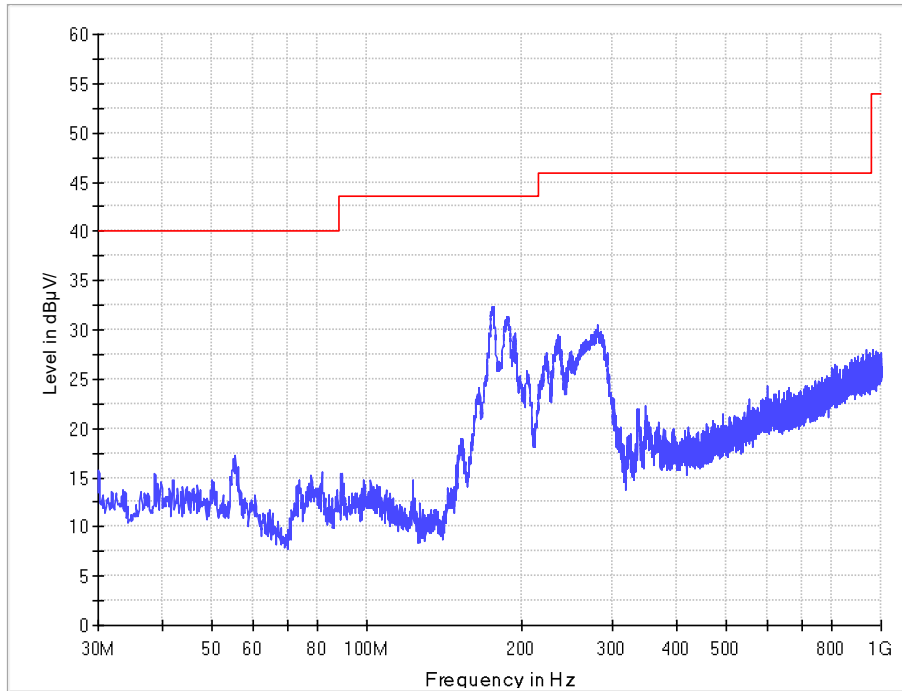


Vertical

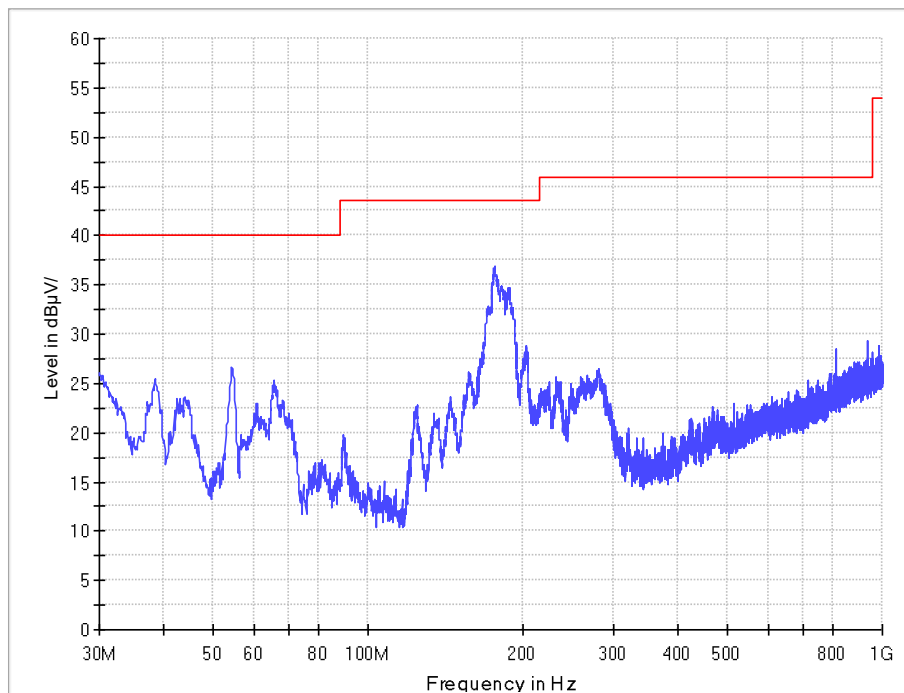


1-18G

802.11b CH1

Horizontal

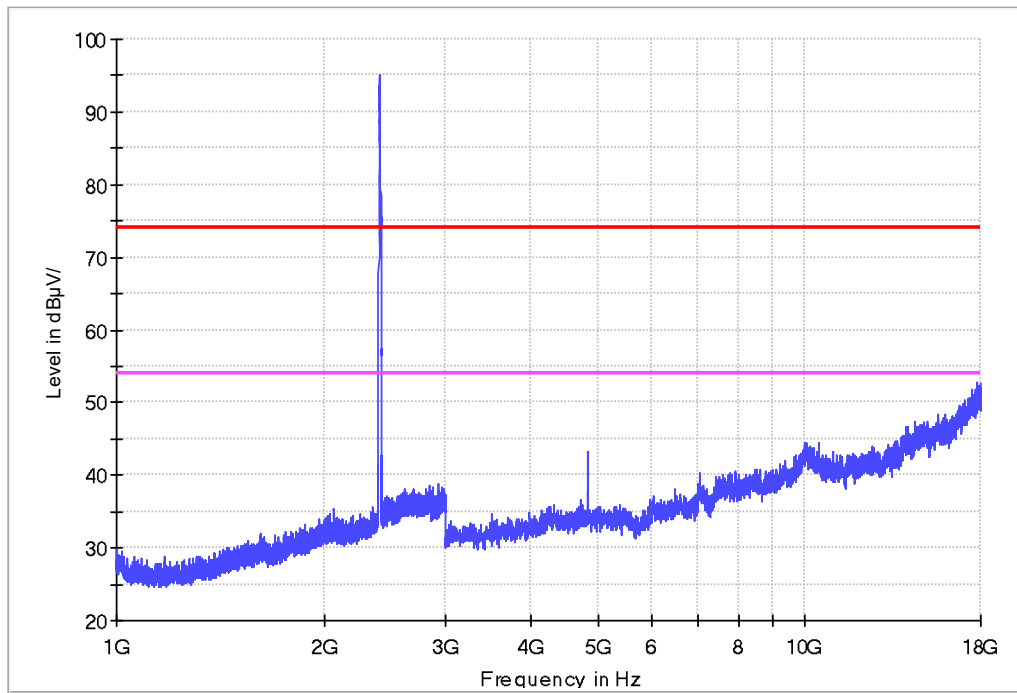


Vertical

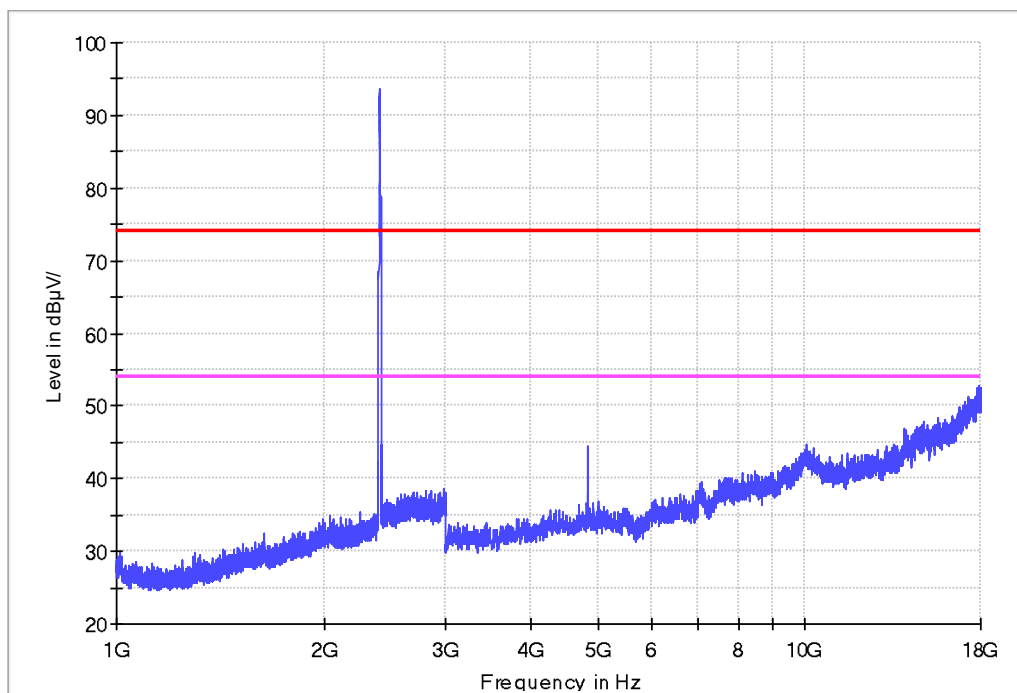


1-18G

802.11b CH6

Horizontal

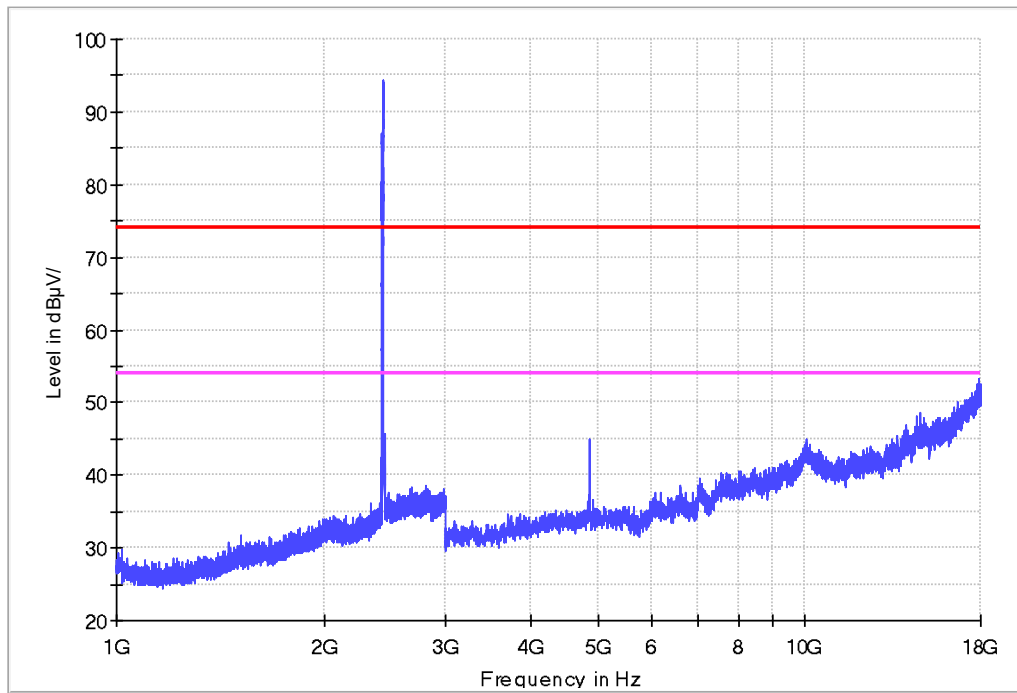


Vertical

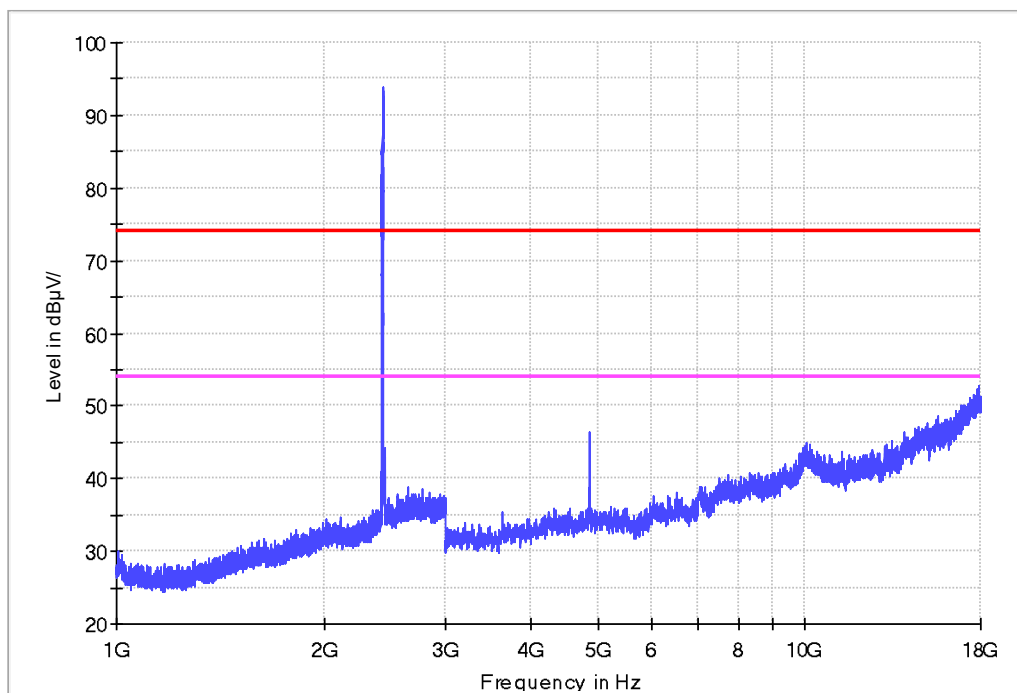


1-18G

802.11b CH11

Horizontal

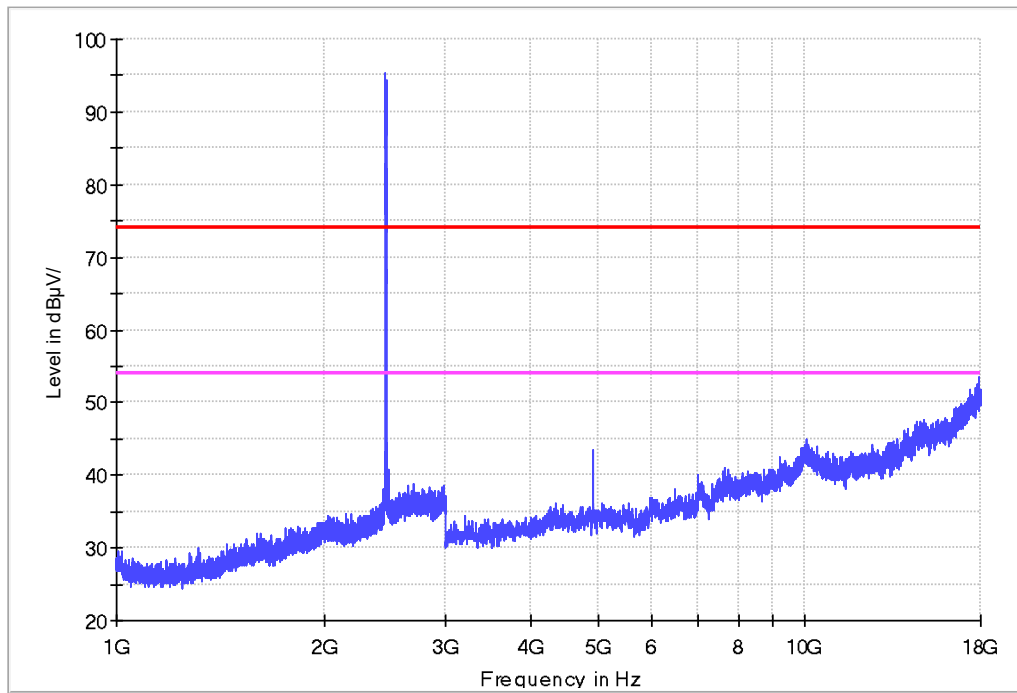


Vertical

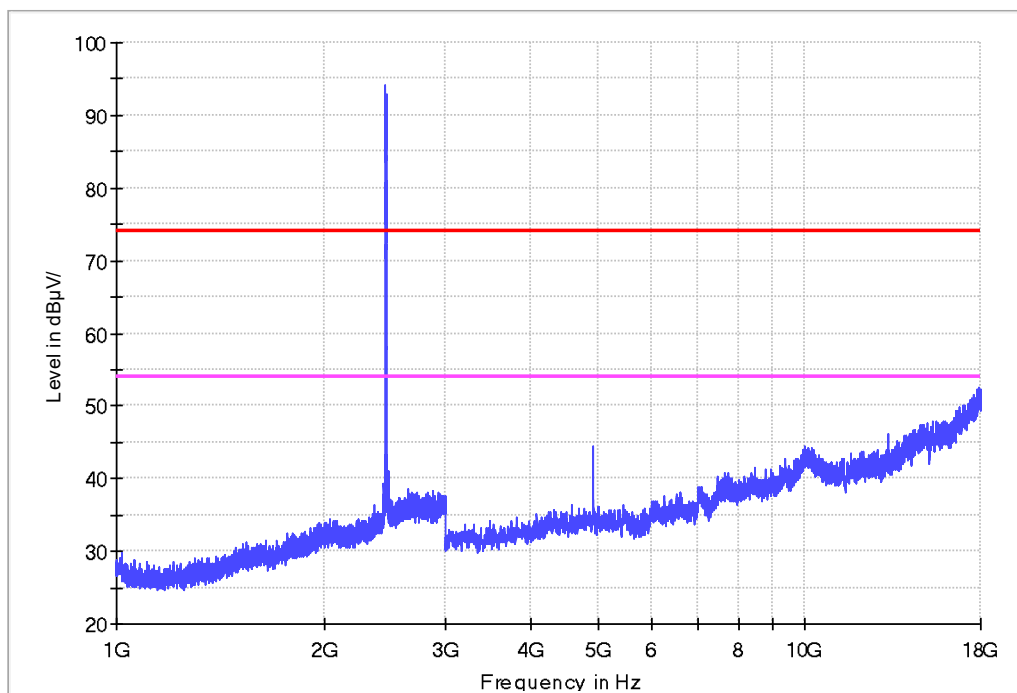


1-18G

802.11g CH1

Horizontal

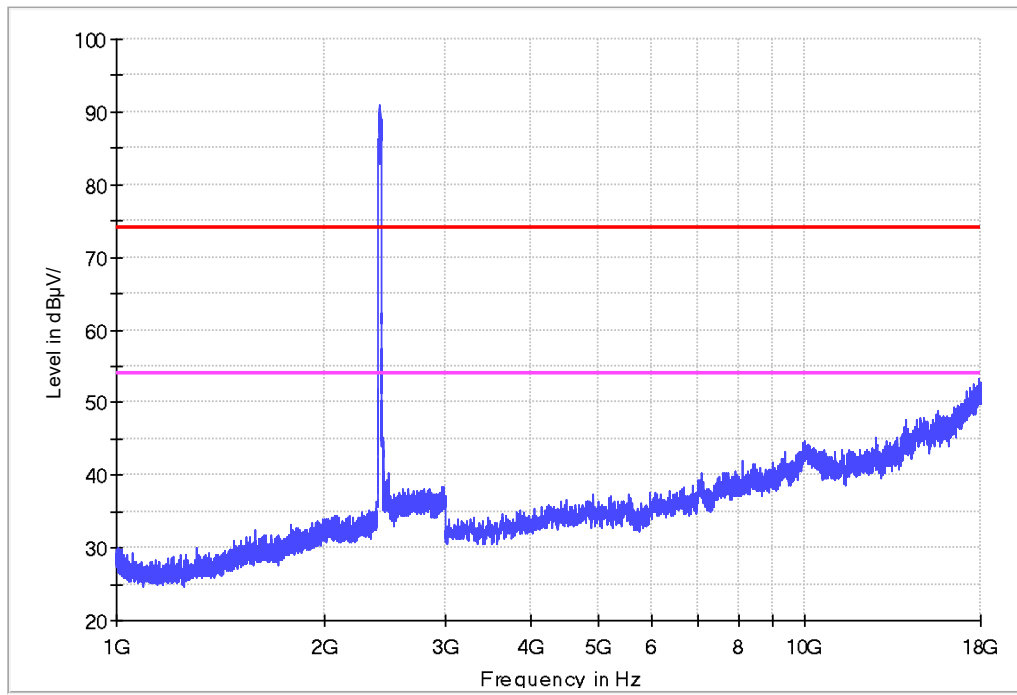


Vertical

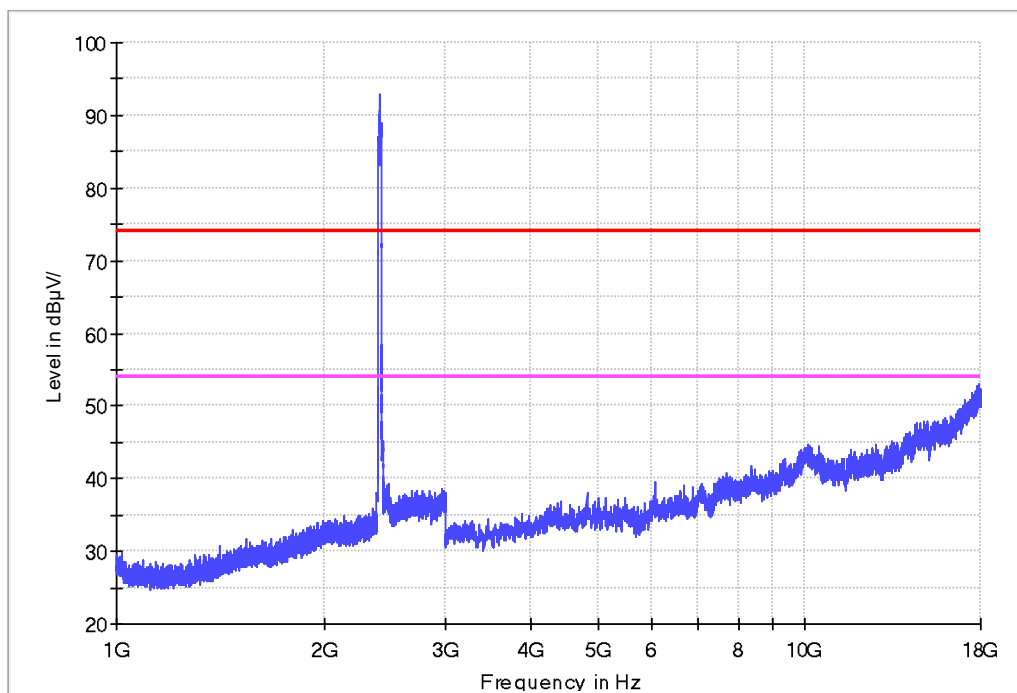


1-18G

802.11g CH6

Horizontal

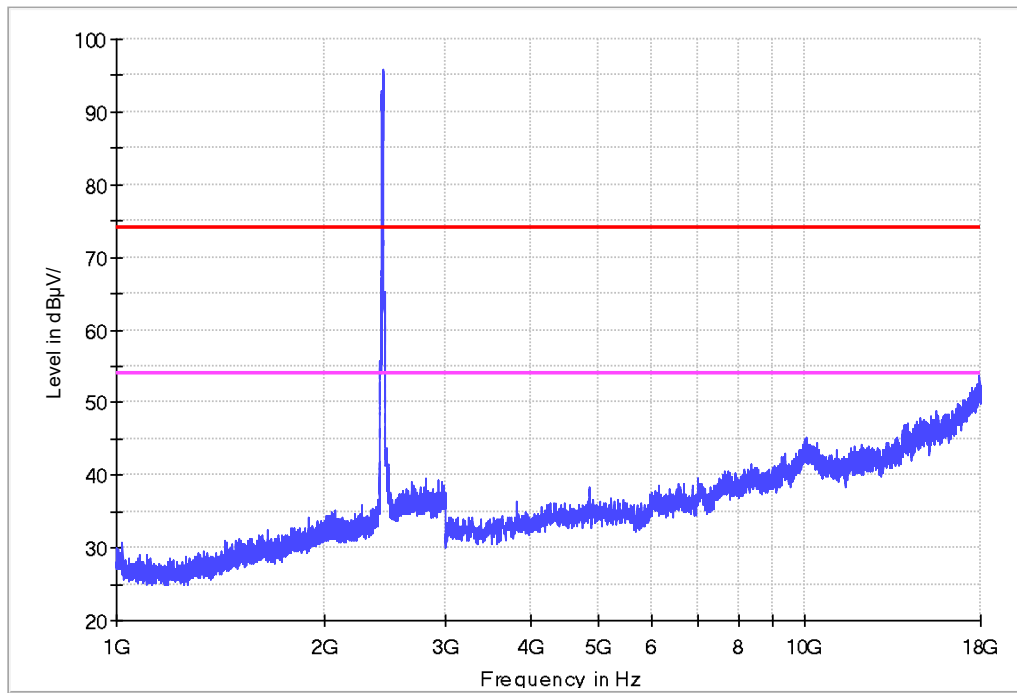


Vertical

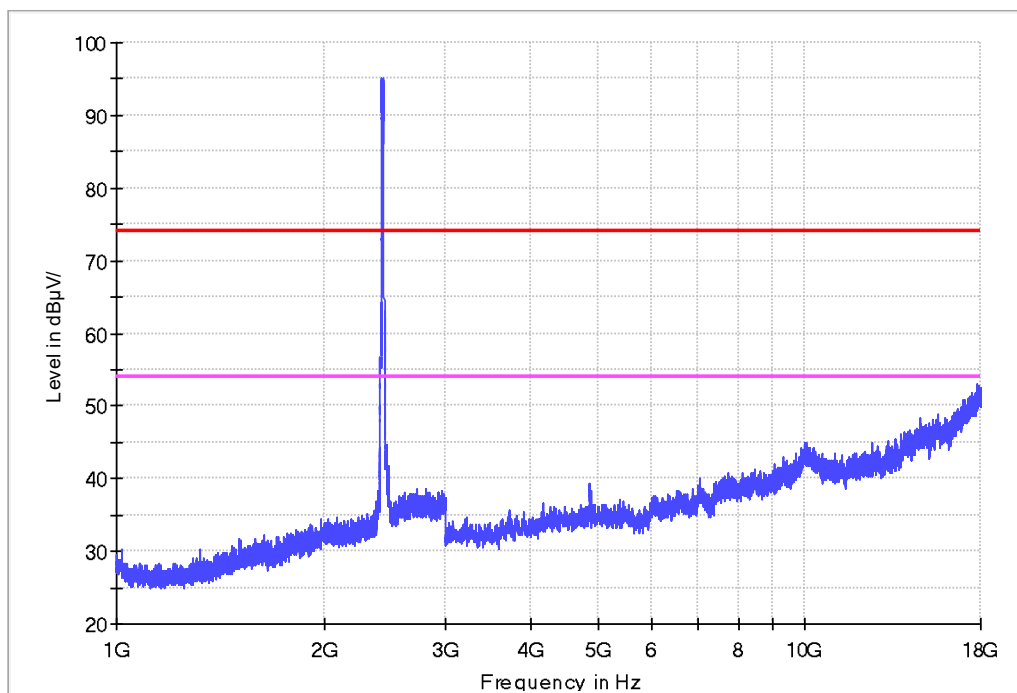


1-18G

802.11g CH11

Horizontal

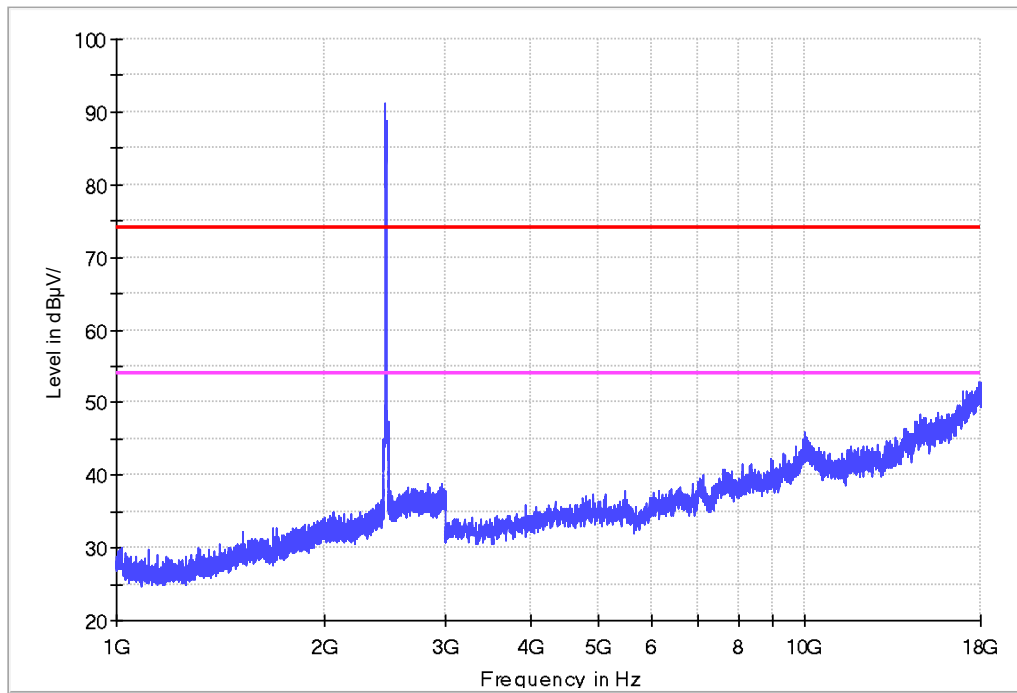


Vertical

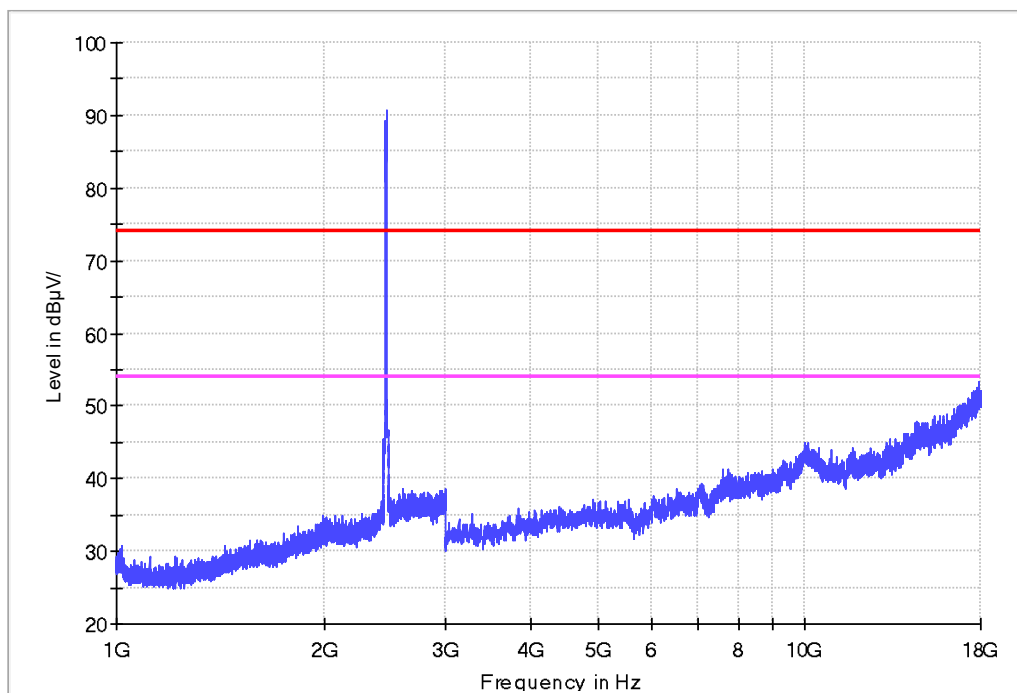


1-18G

802.11n-HT20 CH1

Horizontal

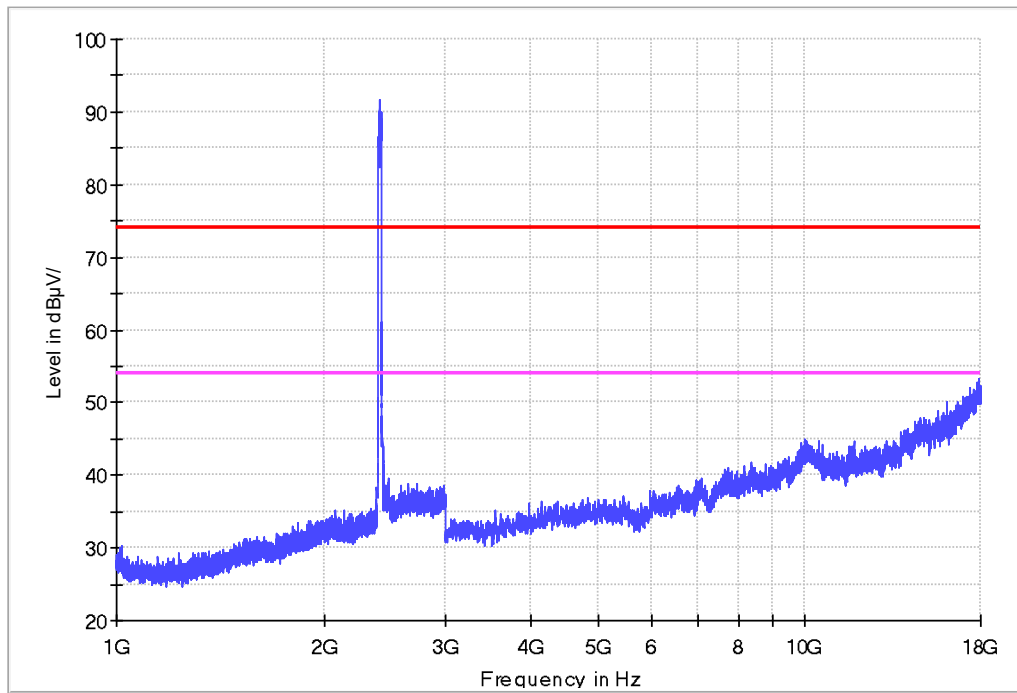


Vertical

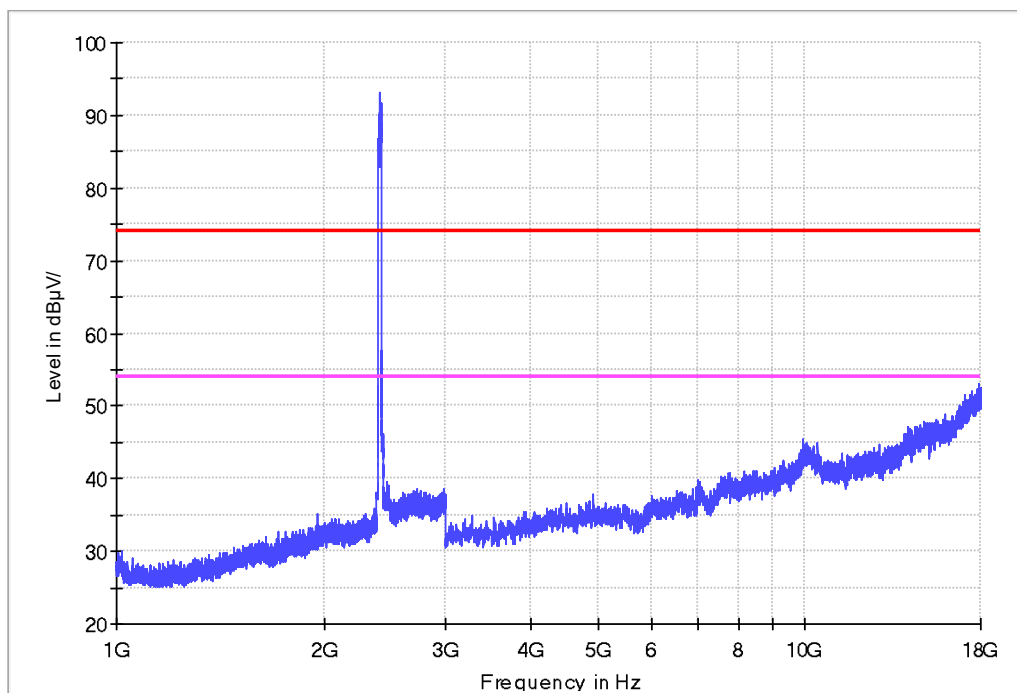


1-18G

802.11n-HT20 CH6

Horizontal

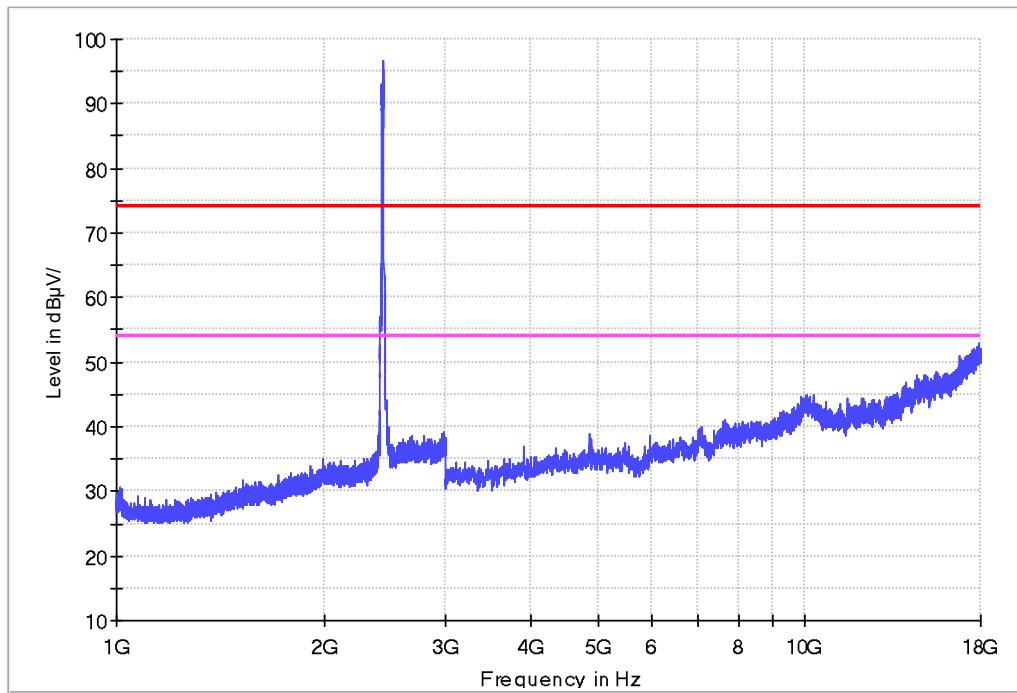


Vertical

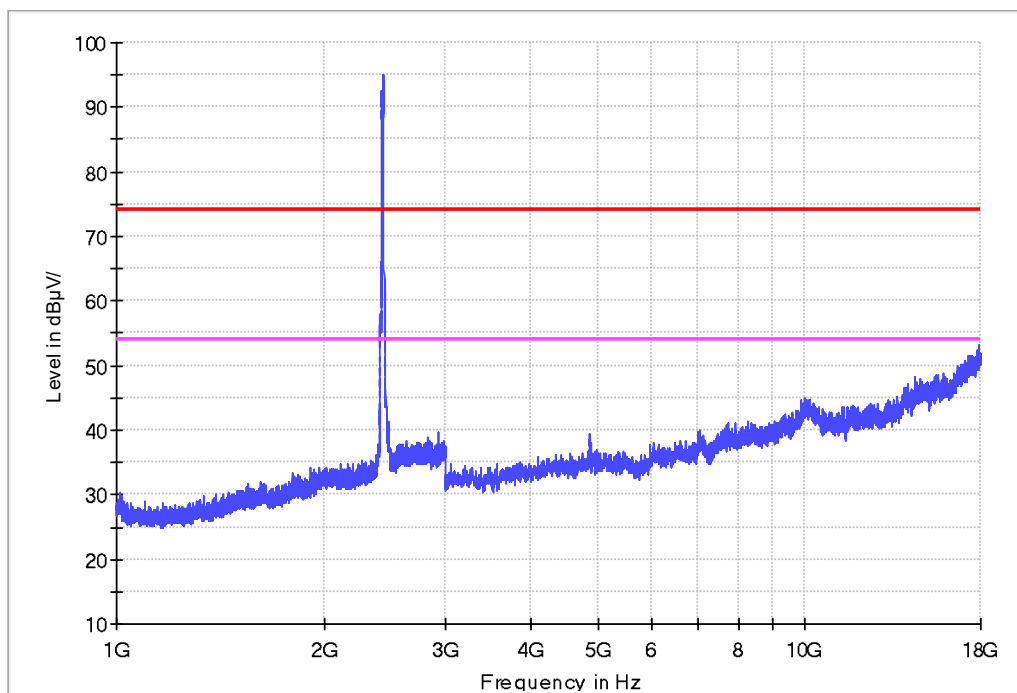


1-18G

802.11n-HT20 CH11

Horizontal

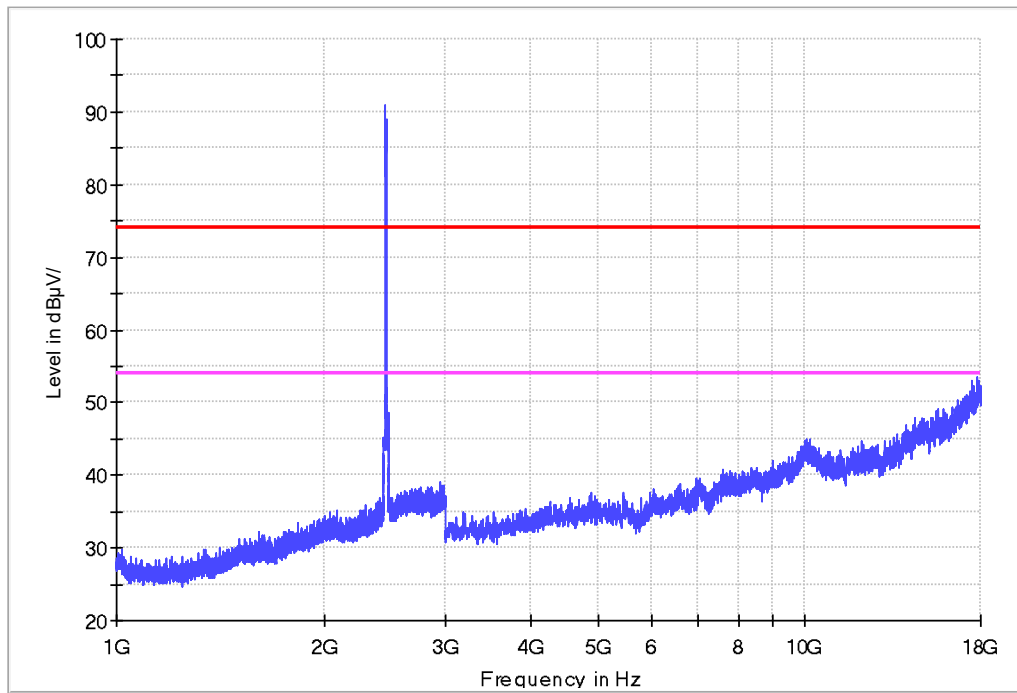


Vertical

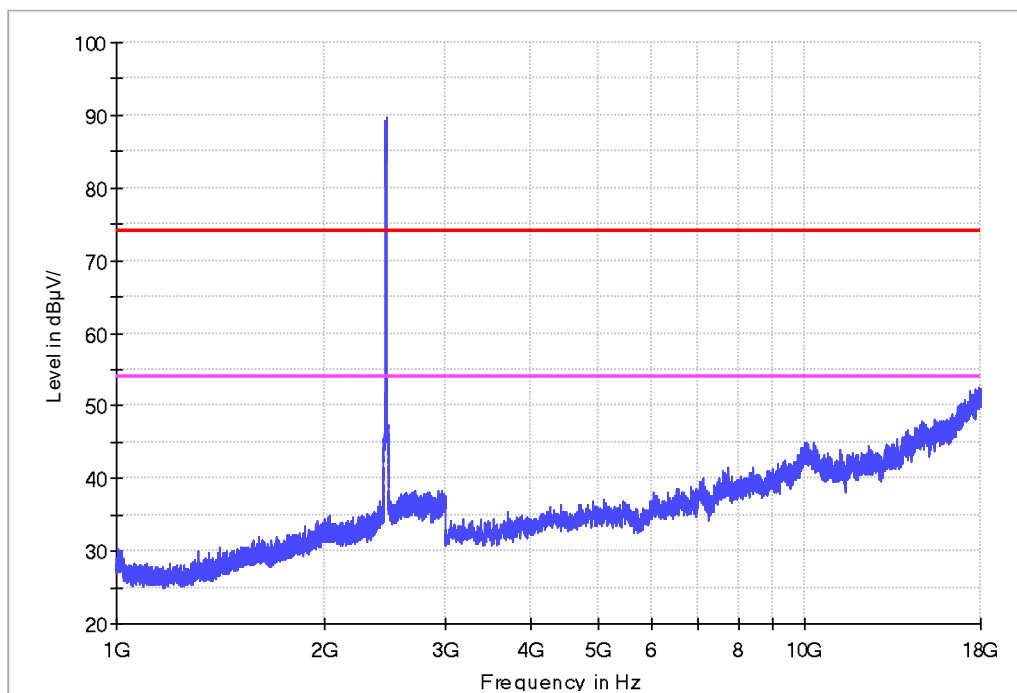


1-18G

802.11n-HT40 CH3

Horizontal

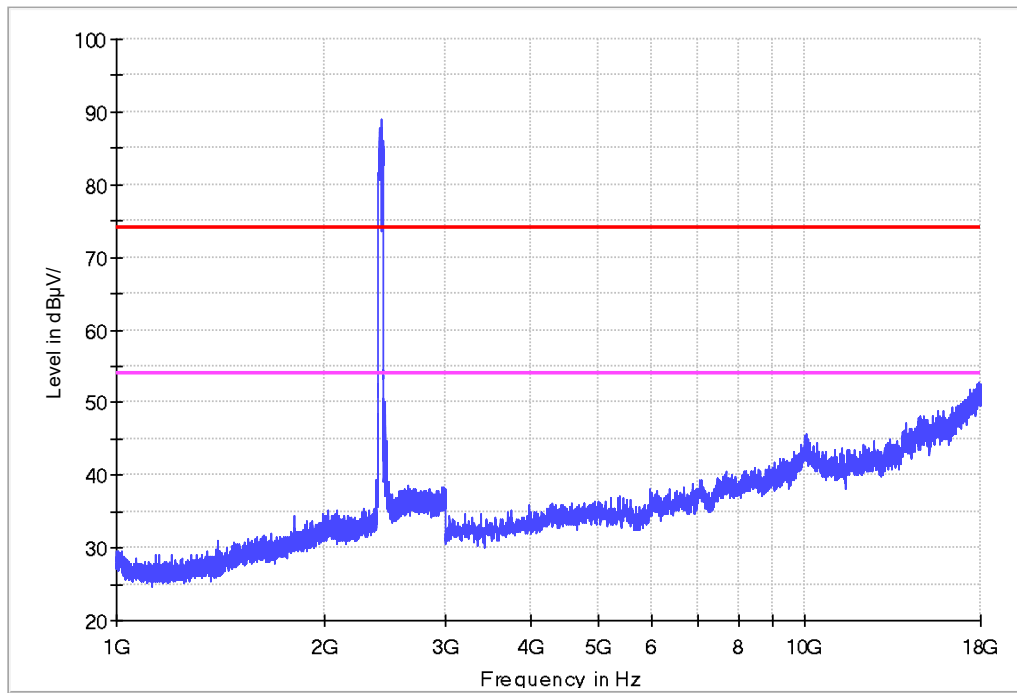


Vertical

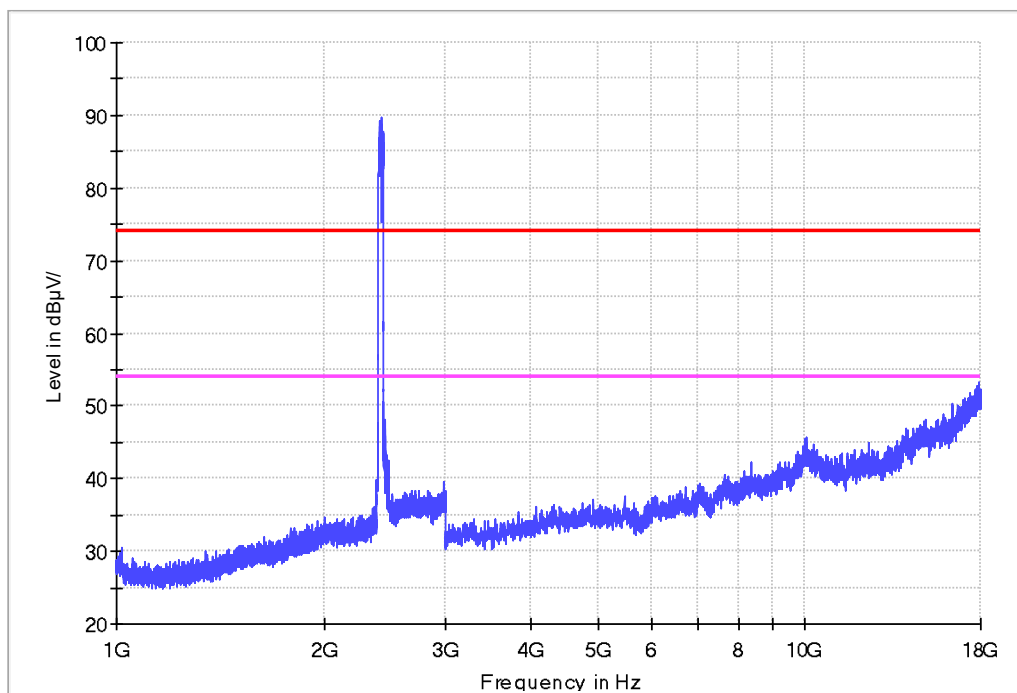


1-18G

802.11n-HT40 CH6

Horizontal

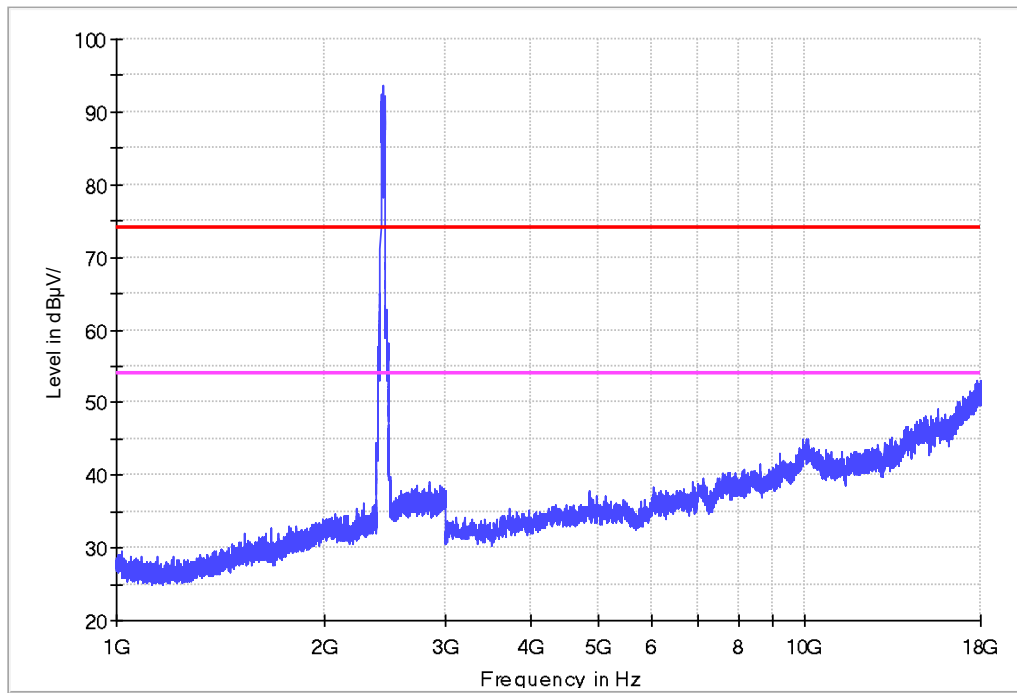


Vertical

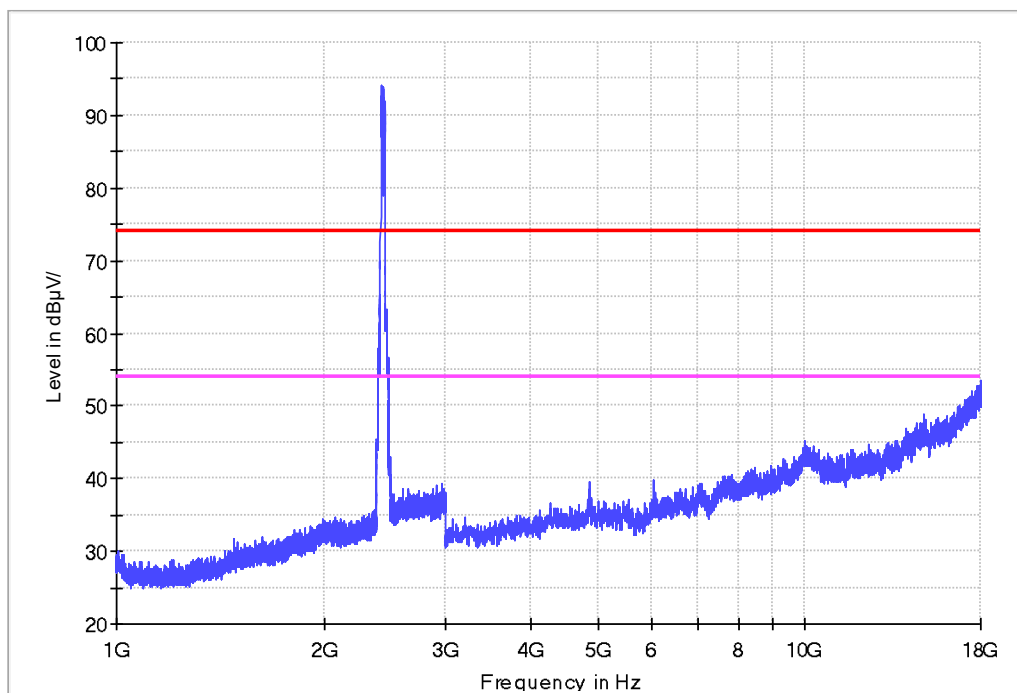


1-18G

802.11n-HT40 CH9

Horizontal

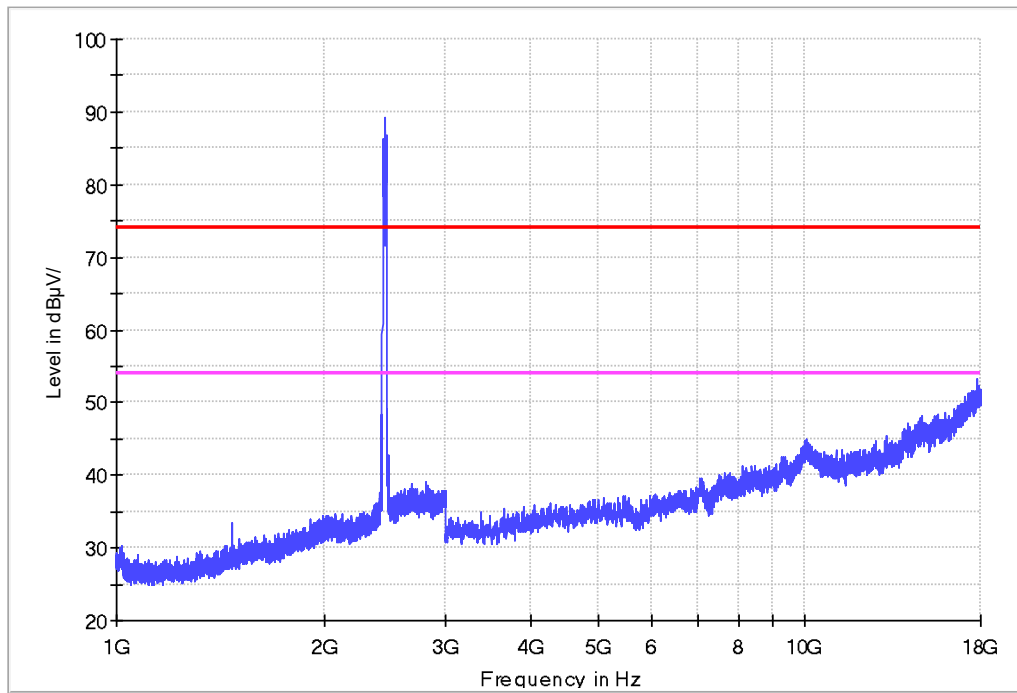


Vertical

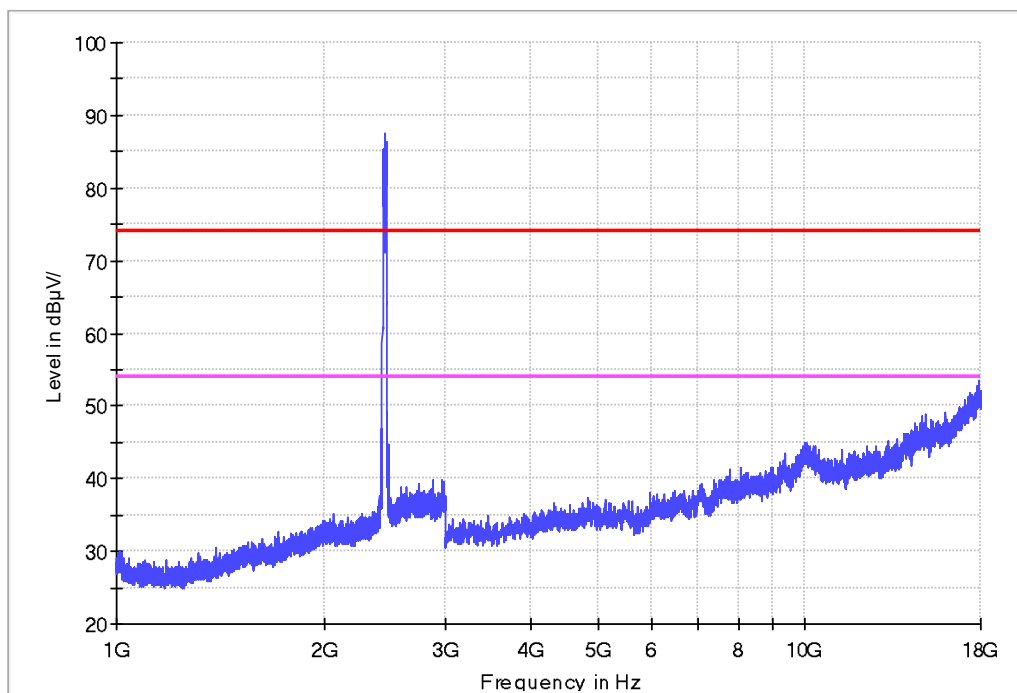


1-18G

802.11ac-VHT20 CH1

Horizontal

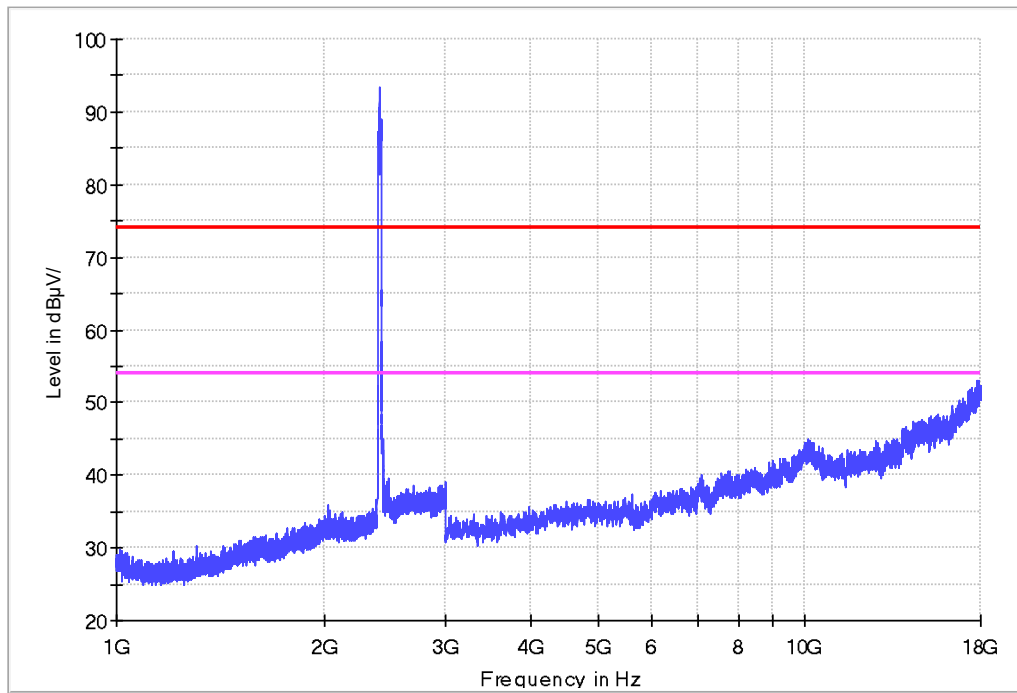


Vertical

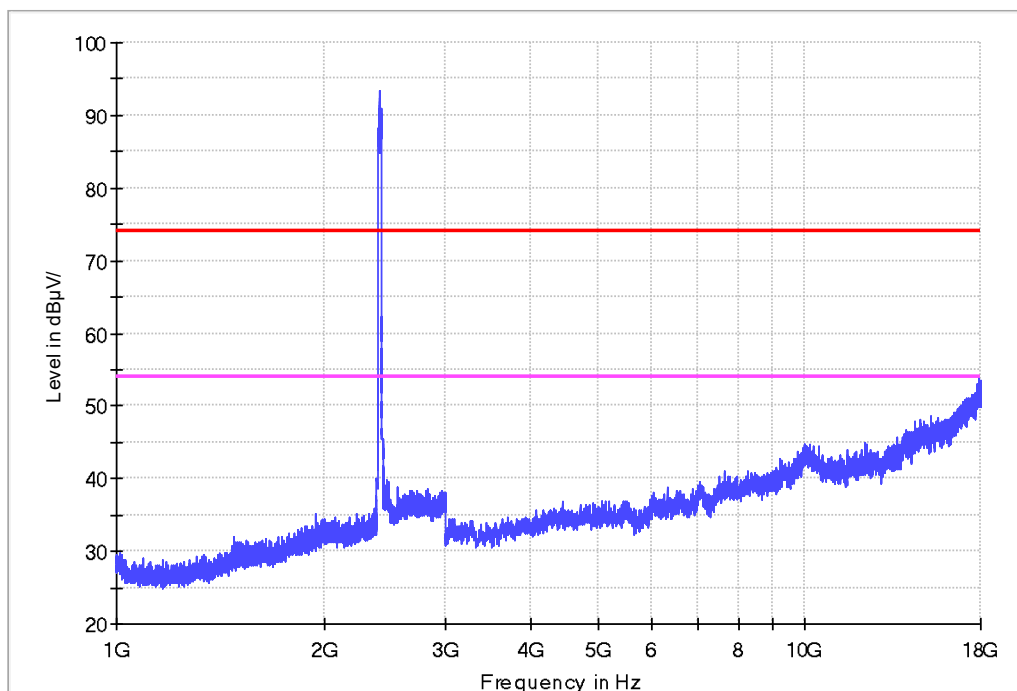


1-18G

802.11ac-VHT20 CH6

Horizontal

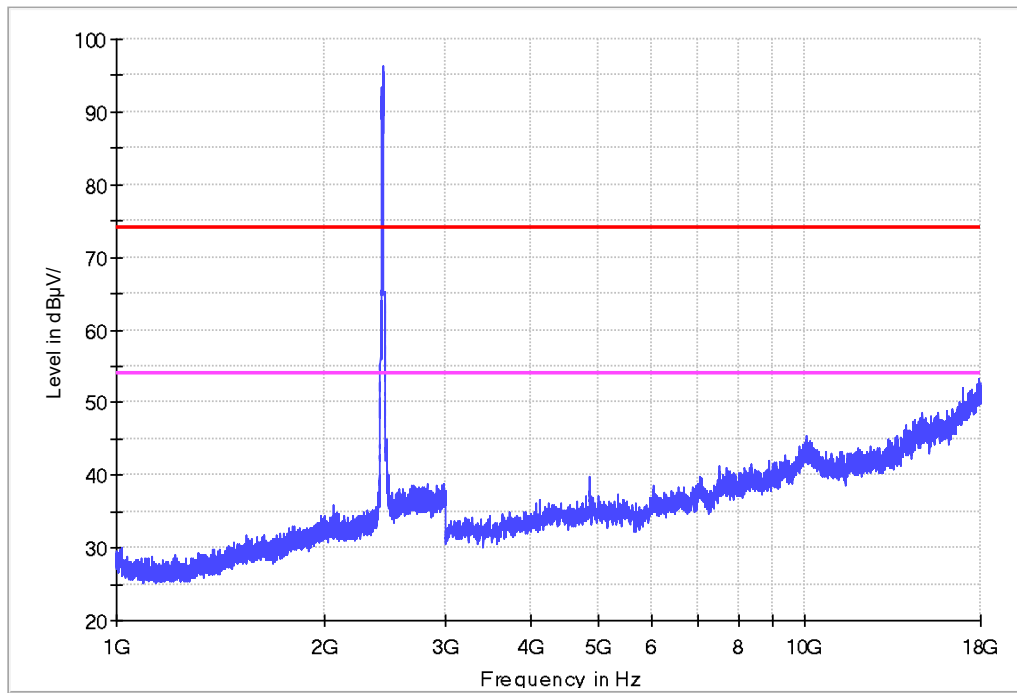


Vertical

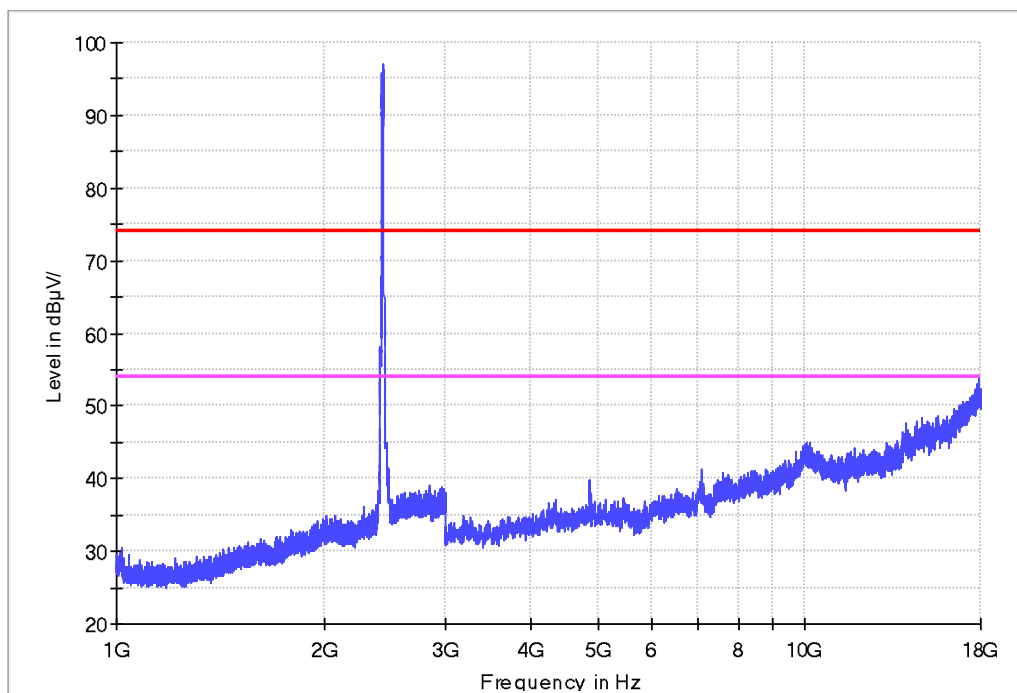


1-18G

802.11ac-VHT20 CH11

Horizontal

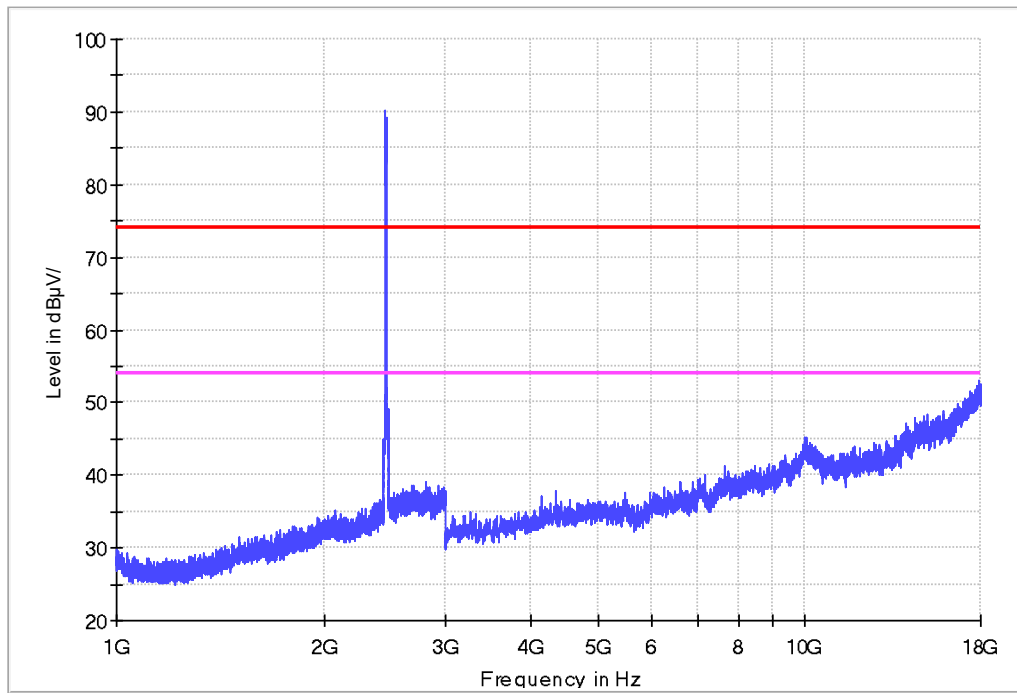


Vertical

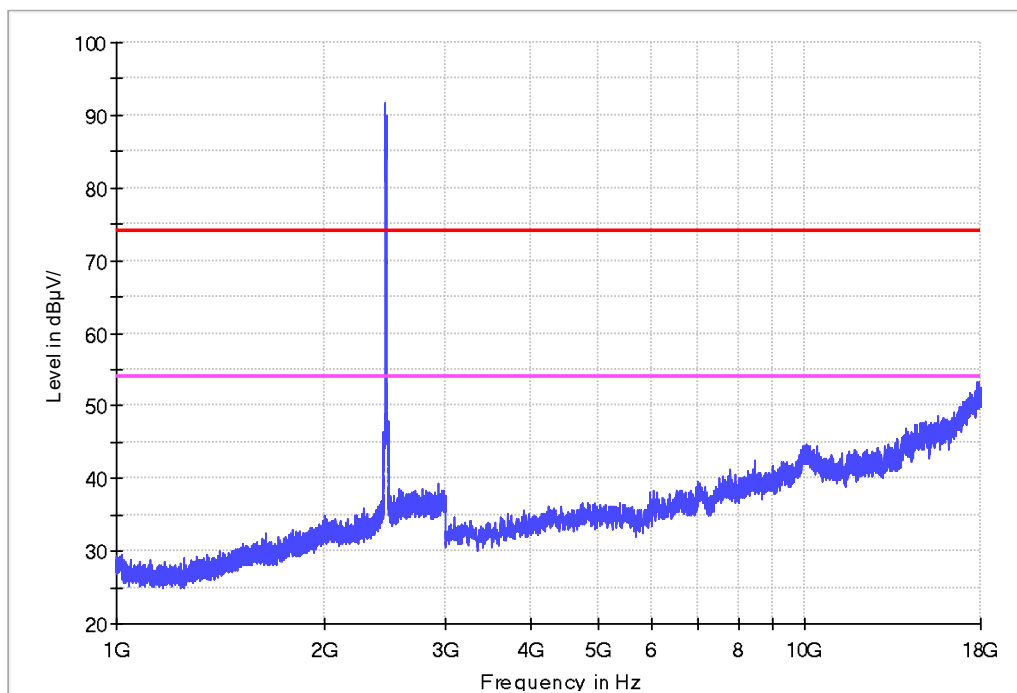


1-18G

802.11ac-VHT40 CH3

Horizontal

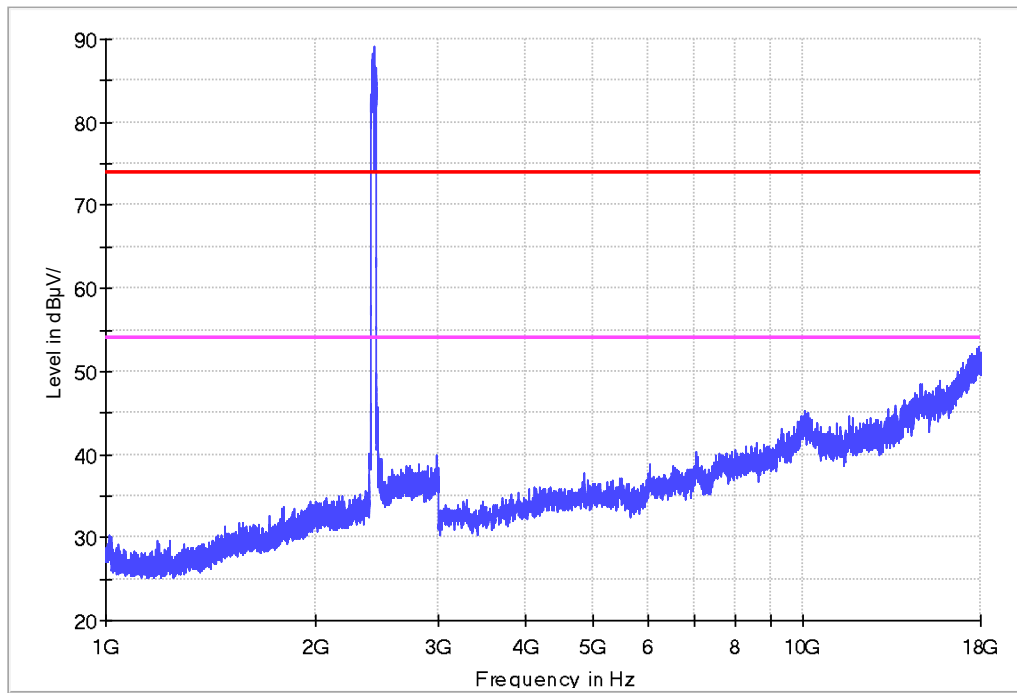


Vertical

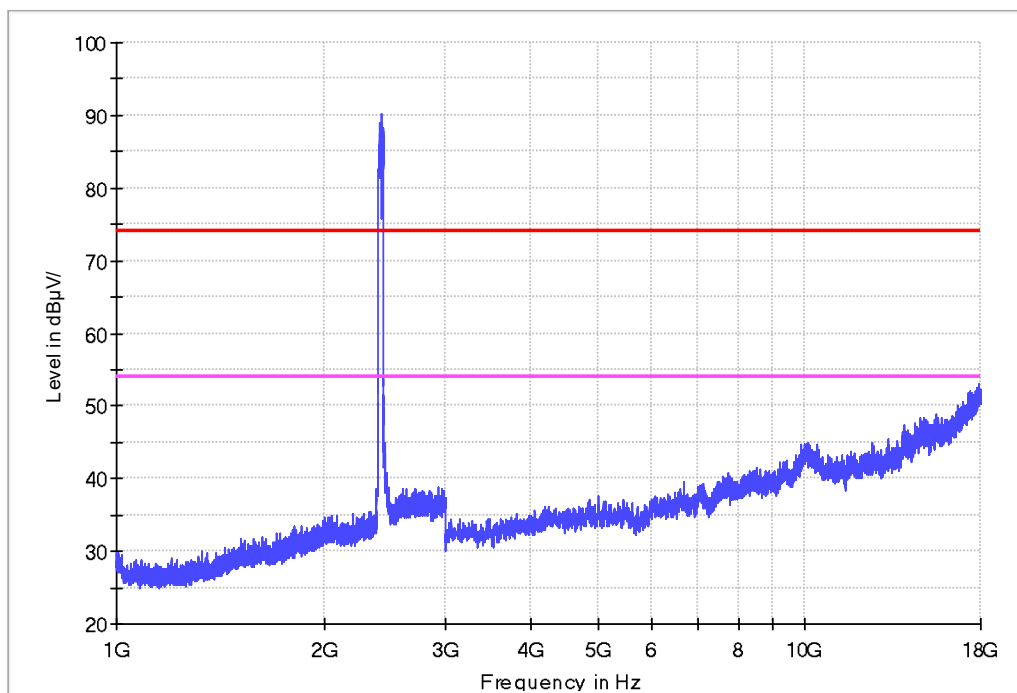


1-18G

802.11ac-VHT40 CH6

Horizontal

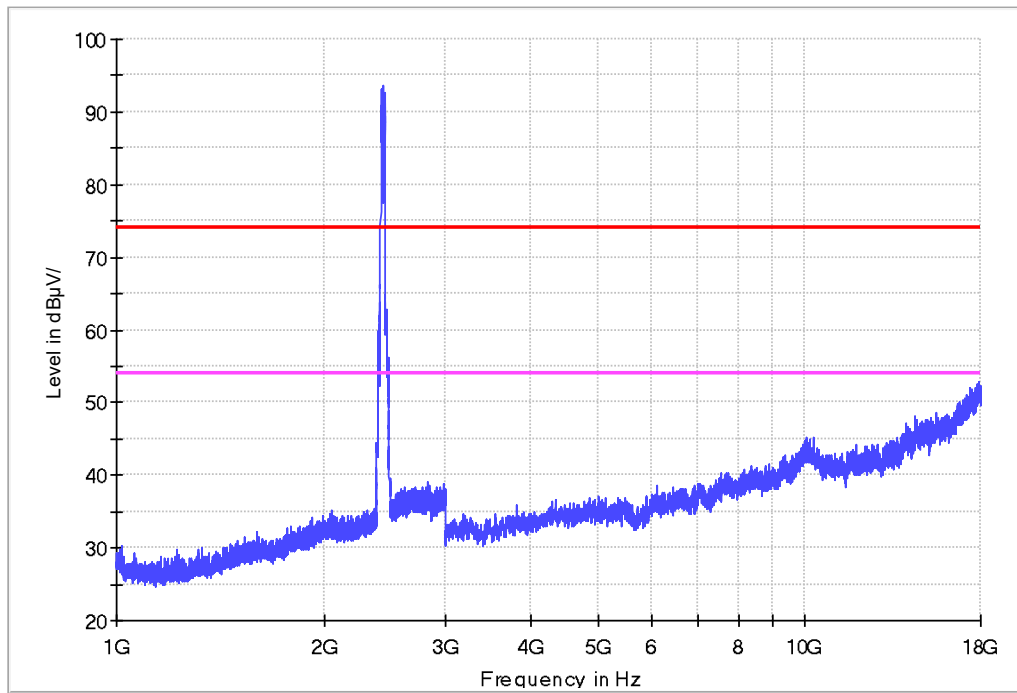


Vertical

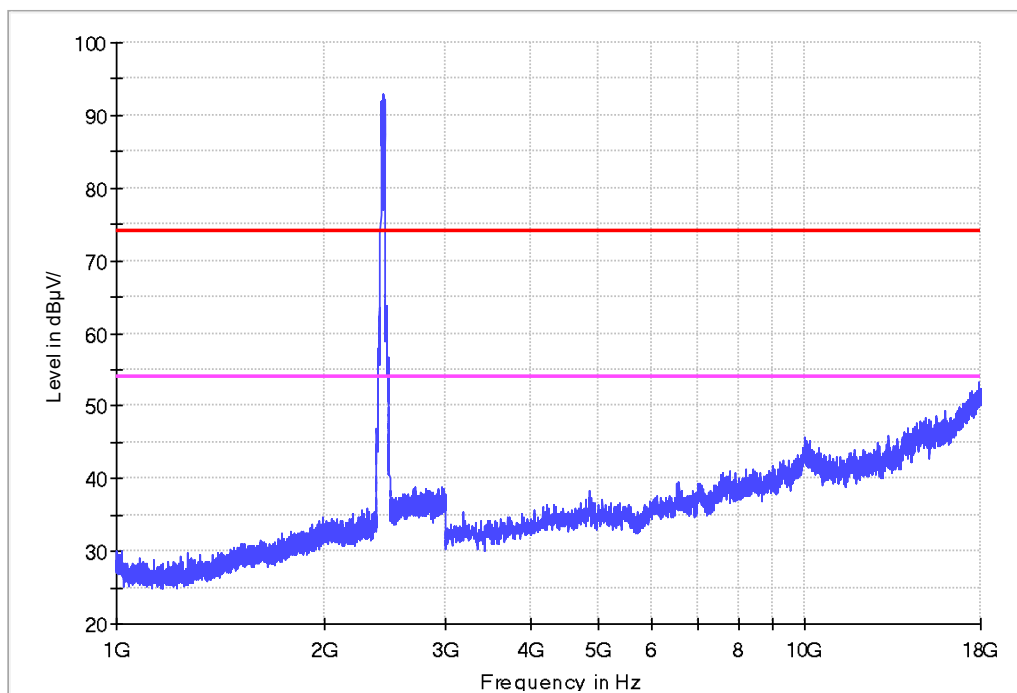


1-18G

802.11ac-VHT40 CH9

Horizontal

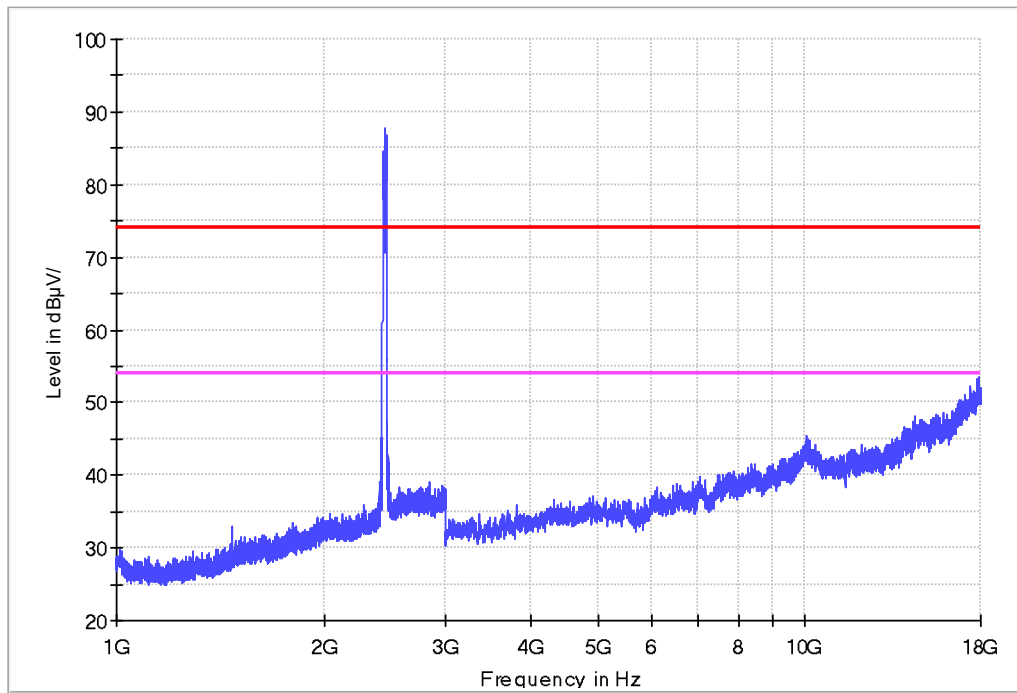


Vertical

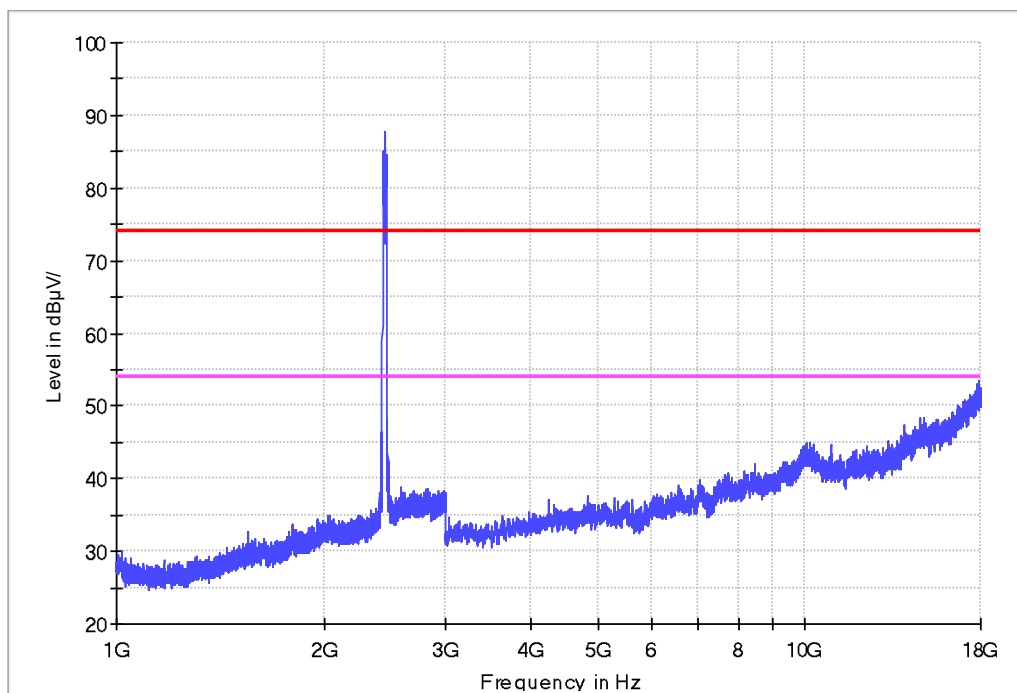


18-26.5G

(Worst Case)
Horizontal

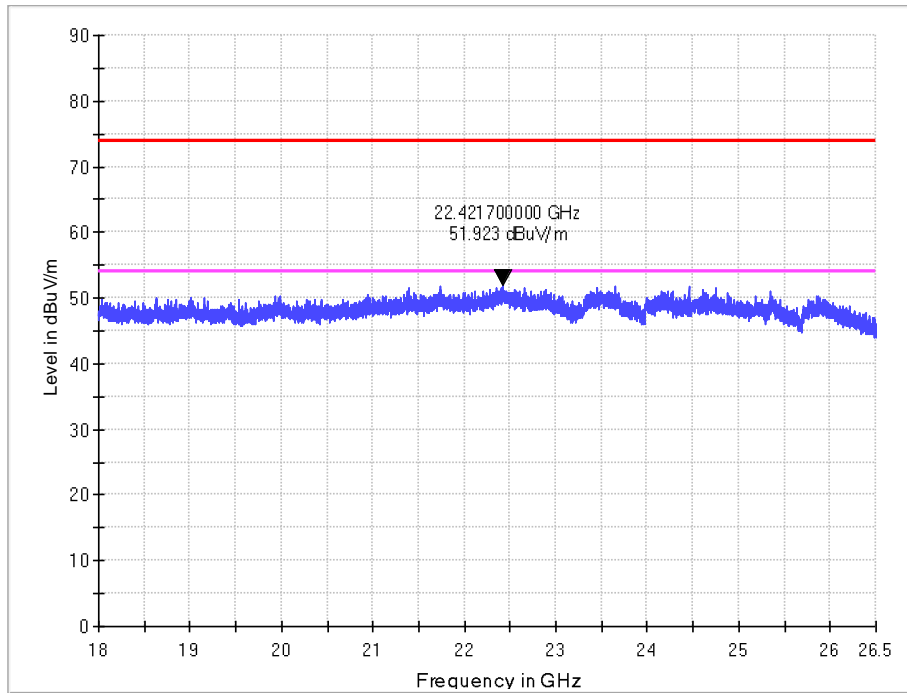


Vertical

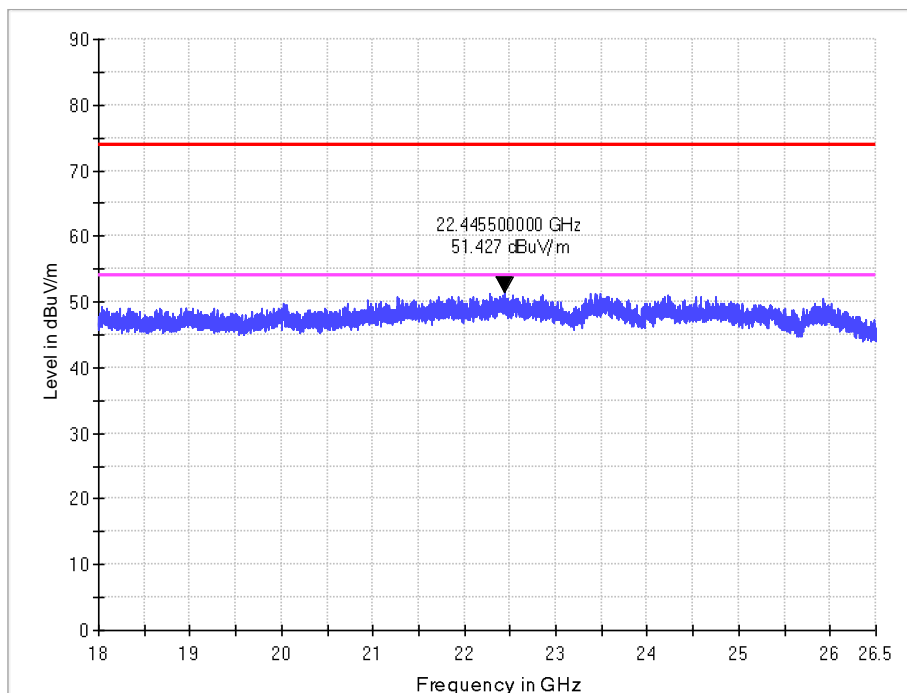


Band edge


11b
CH1
PK
Horizontal

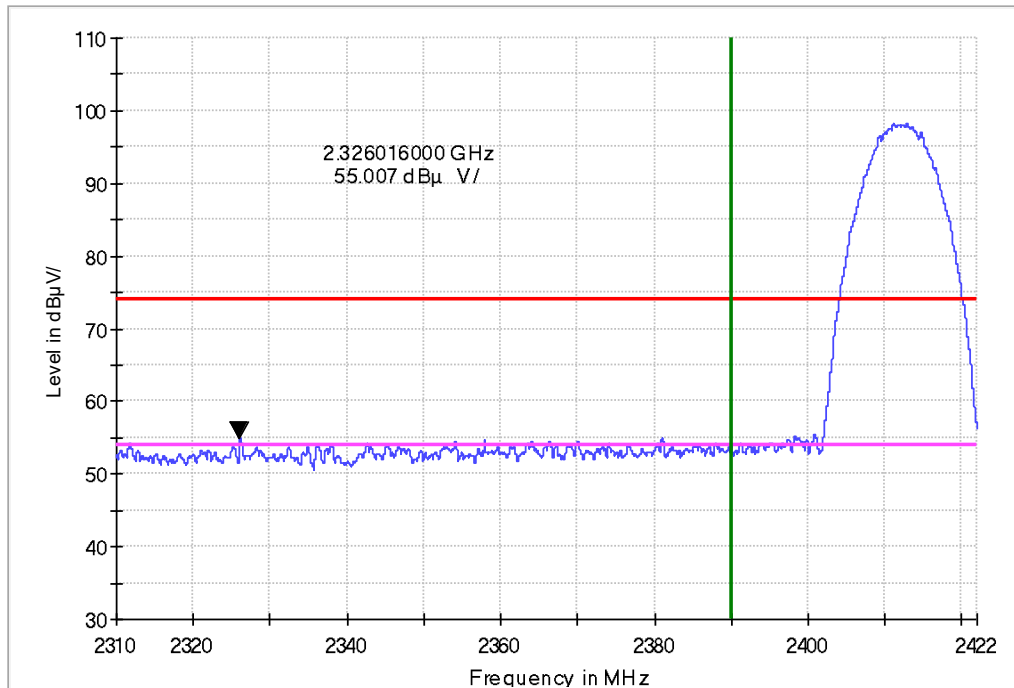


Vertical

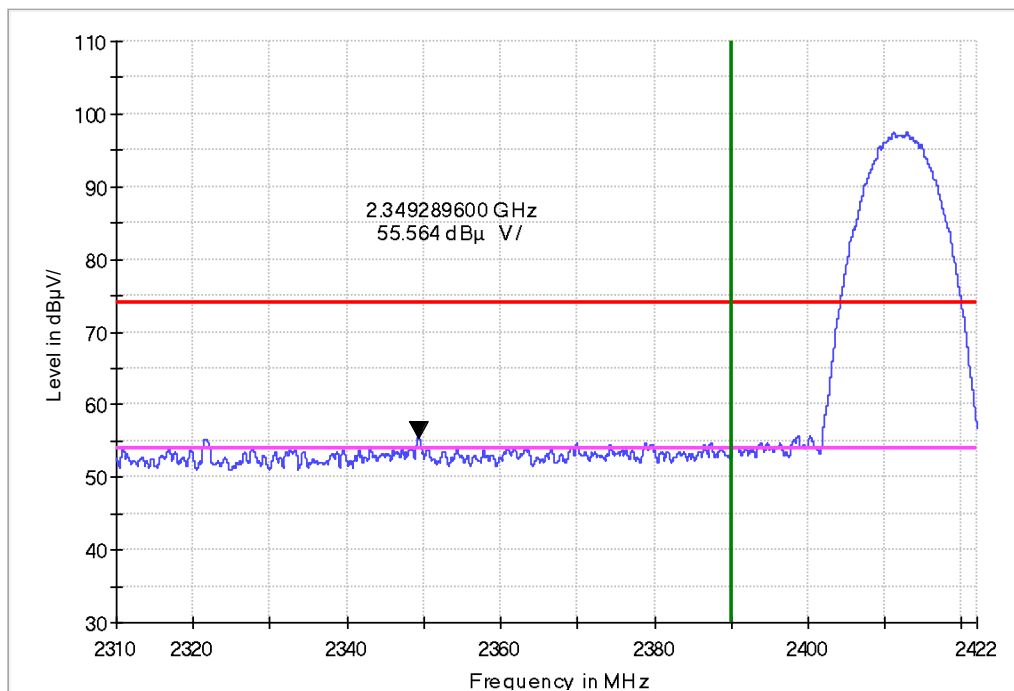

AV
Horizontal

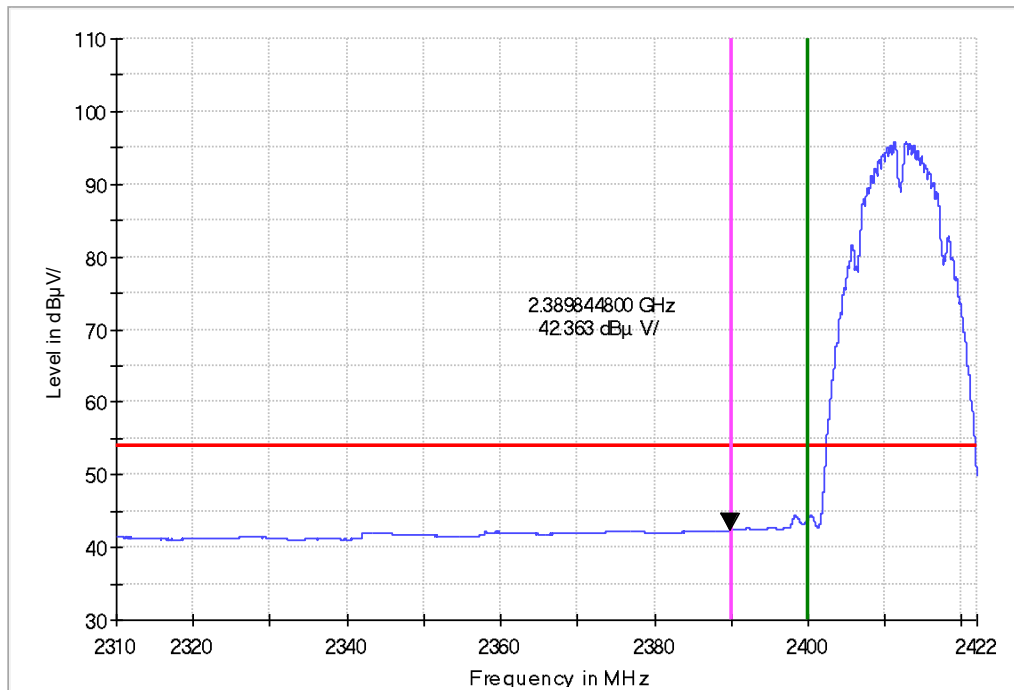


Vertical

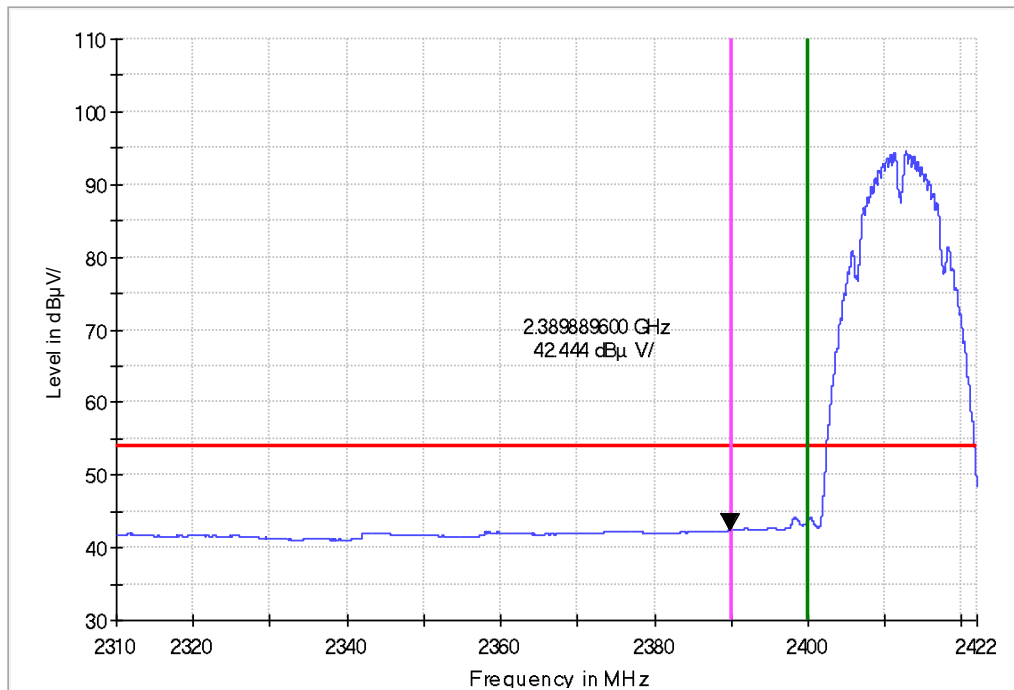


Band edge


11b
CH11
PK
Horizontal

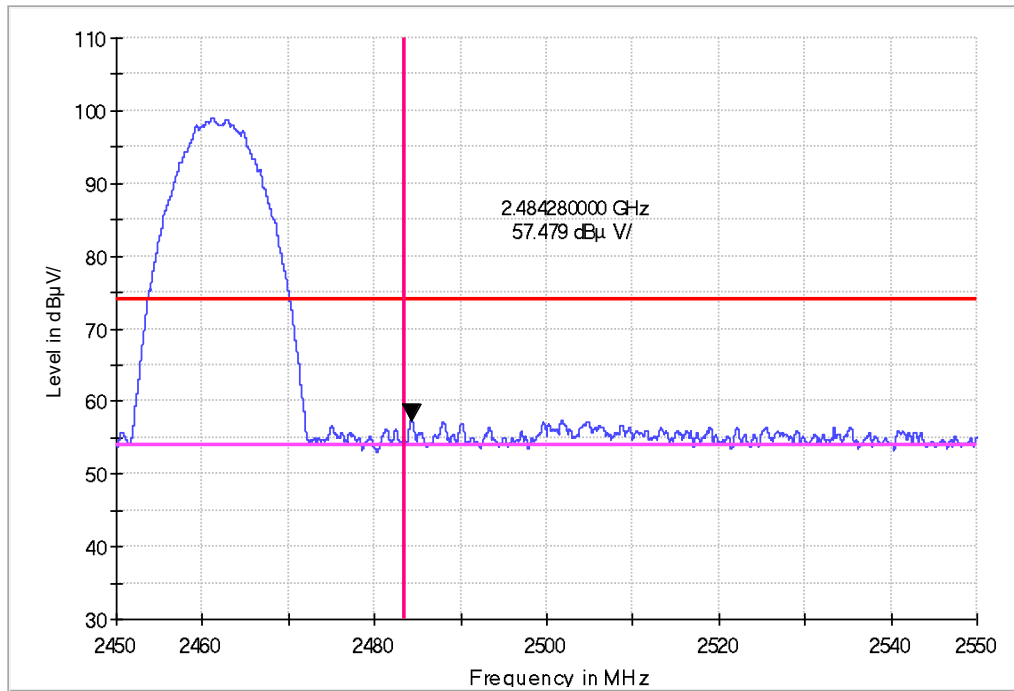


Vertical

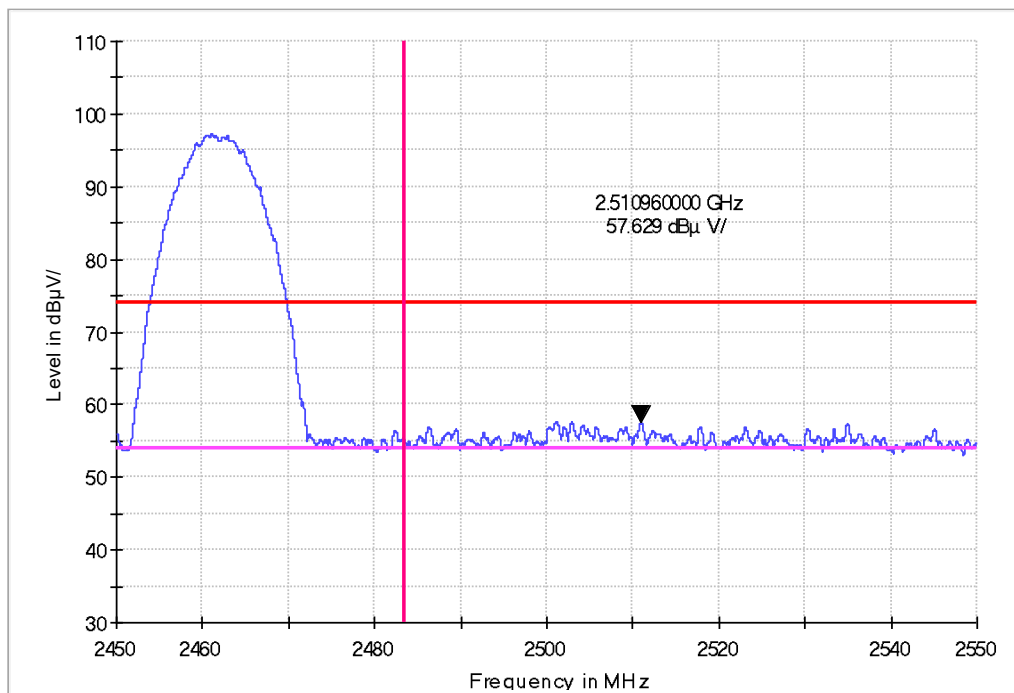

AV
Horizontal

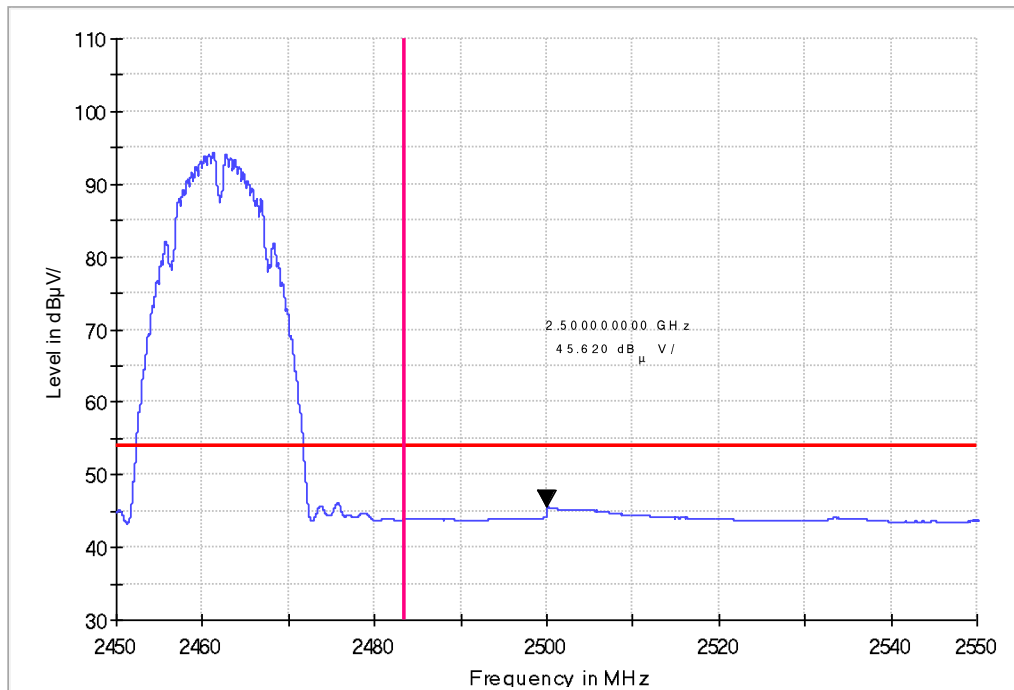


Vertical

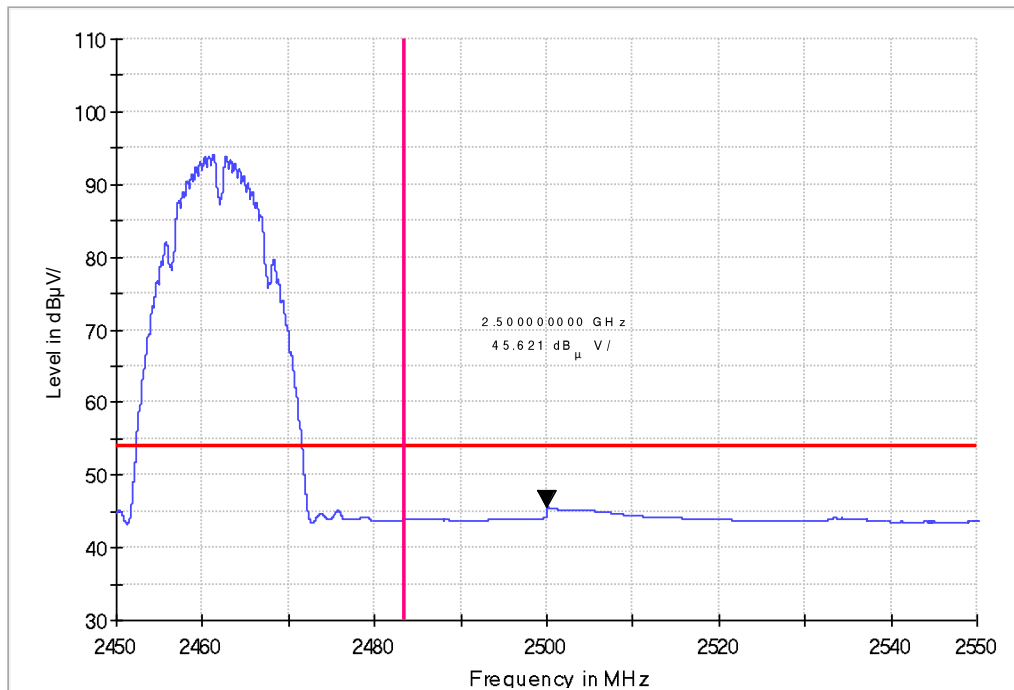


Band edge


11g
CH1
PK
Horizontal

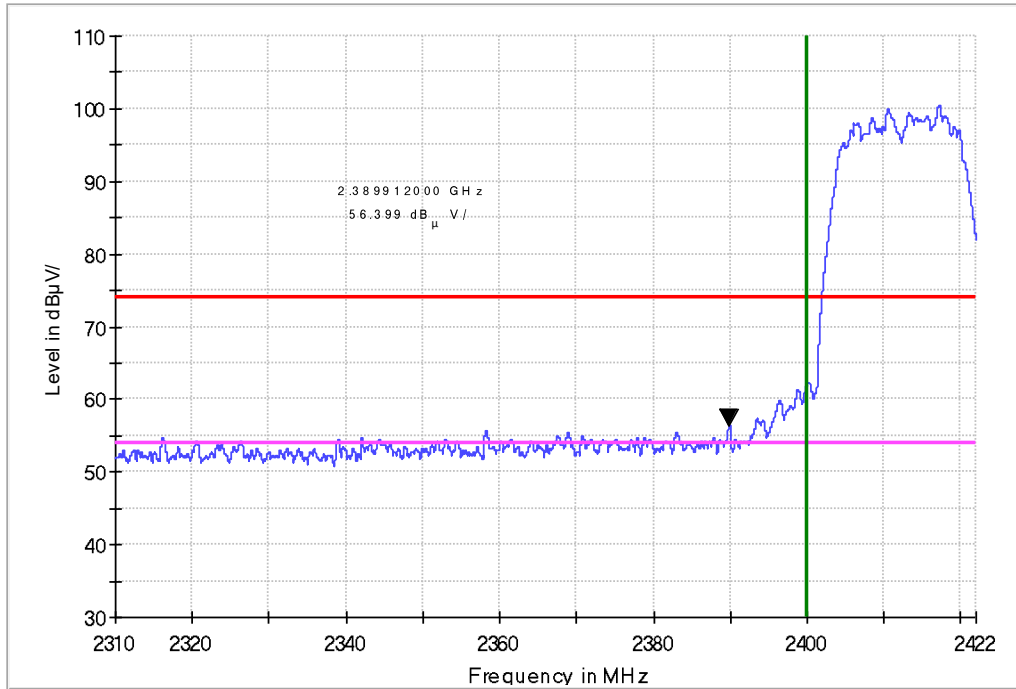


Vertical

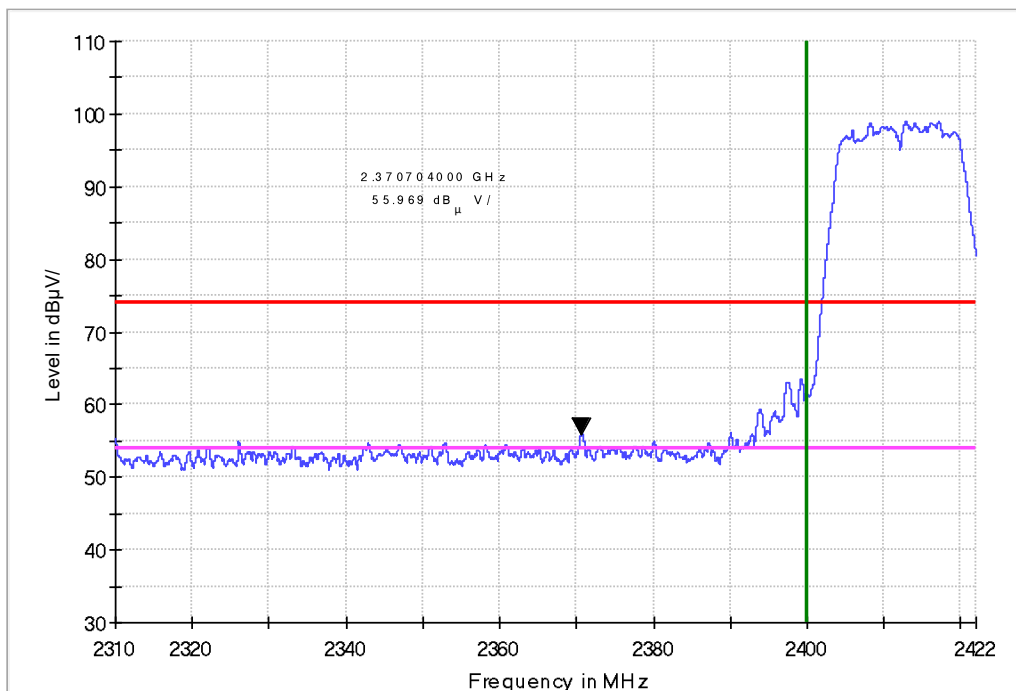

AV
Horizontal

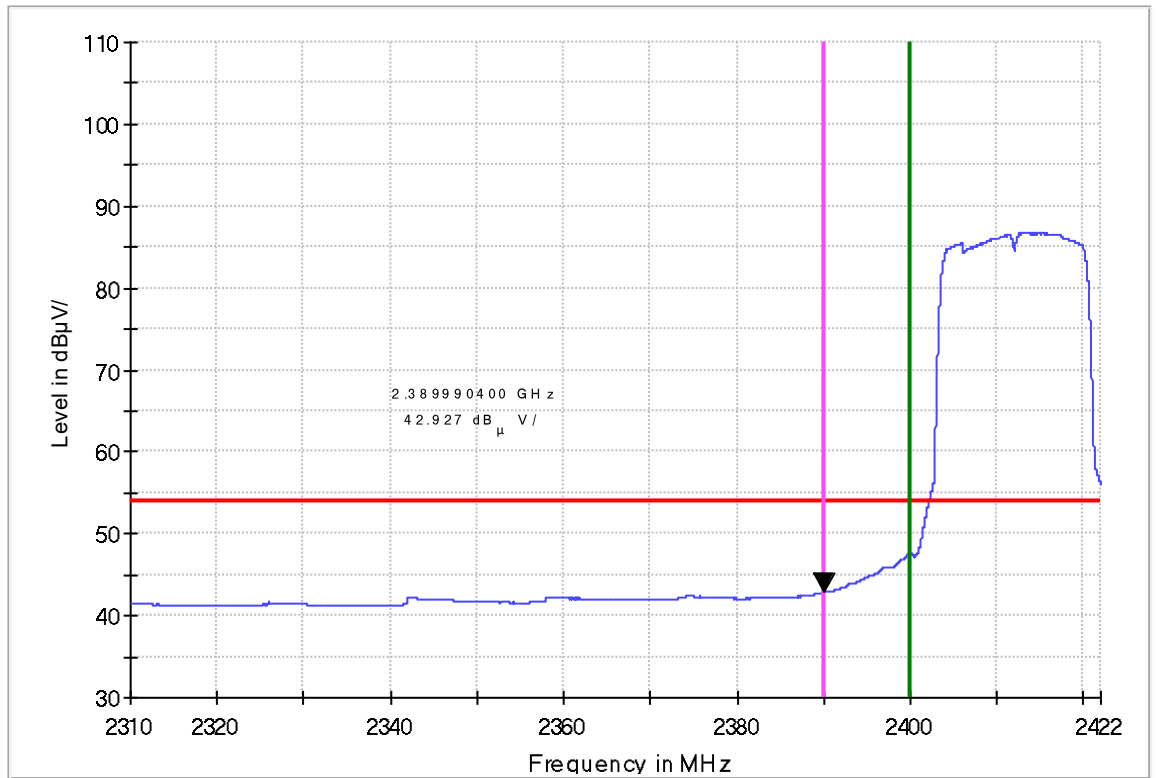


Vertical

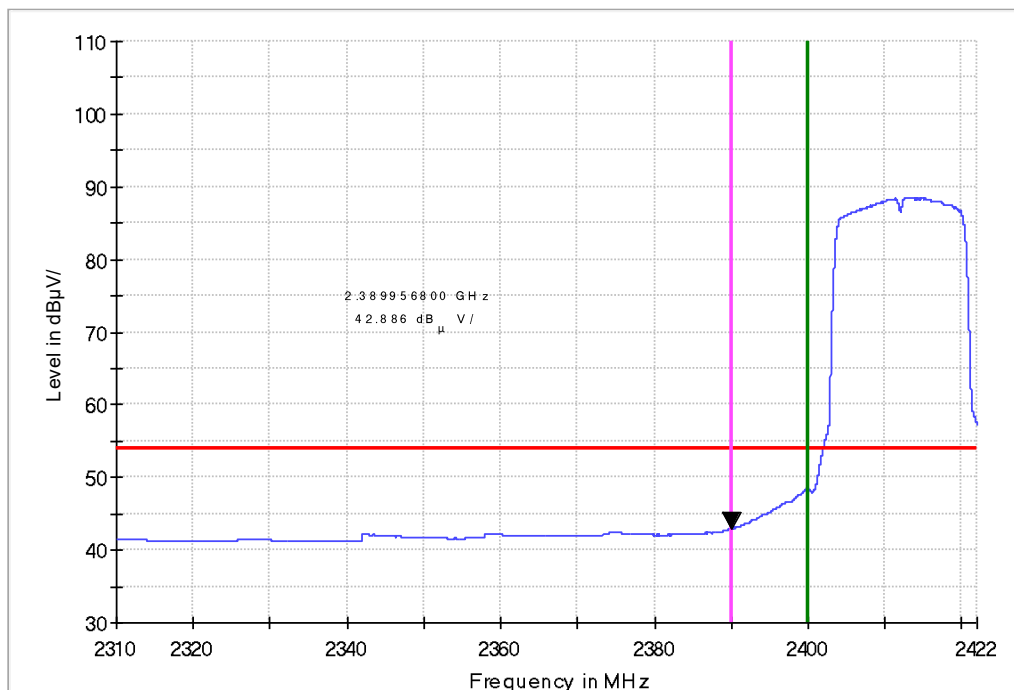


Band edge


11g
CH11
PK
Horizontal

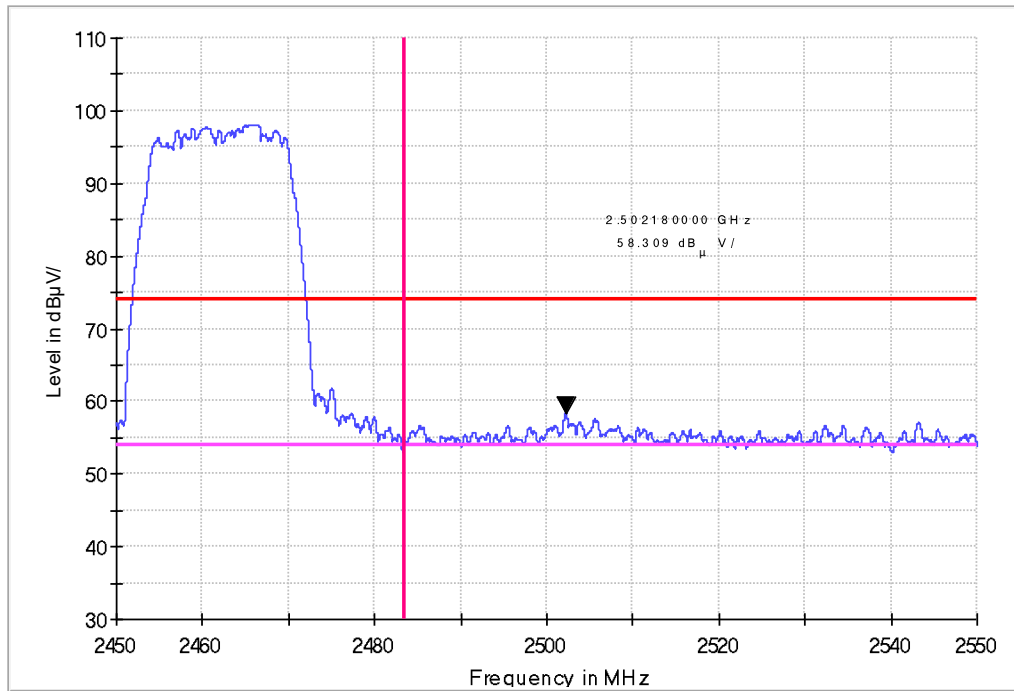


Vertical

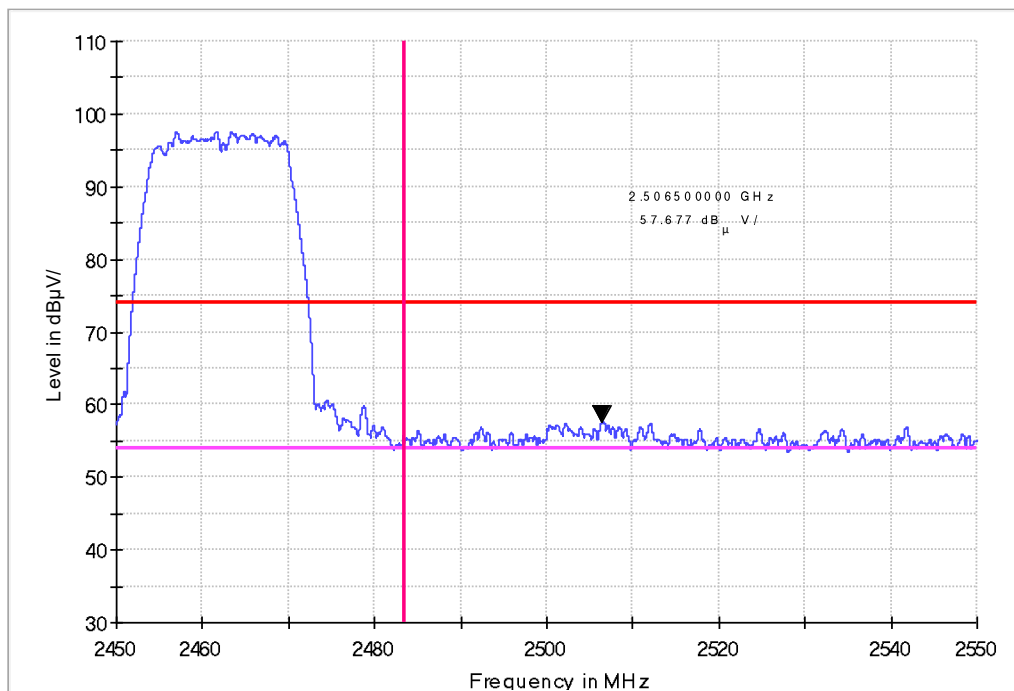

AV
Horizontal

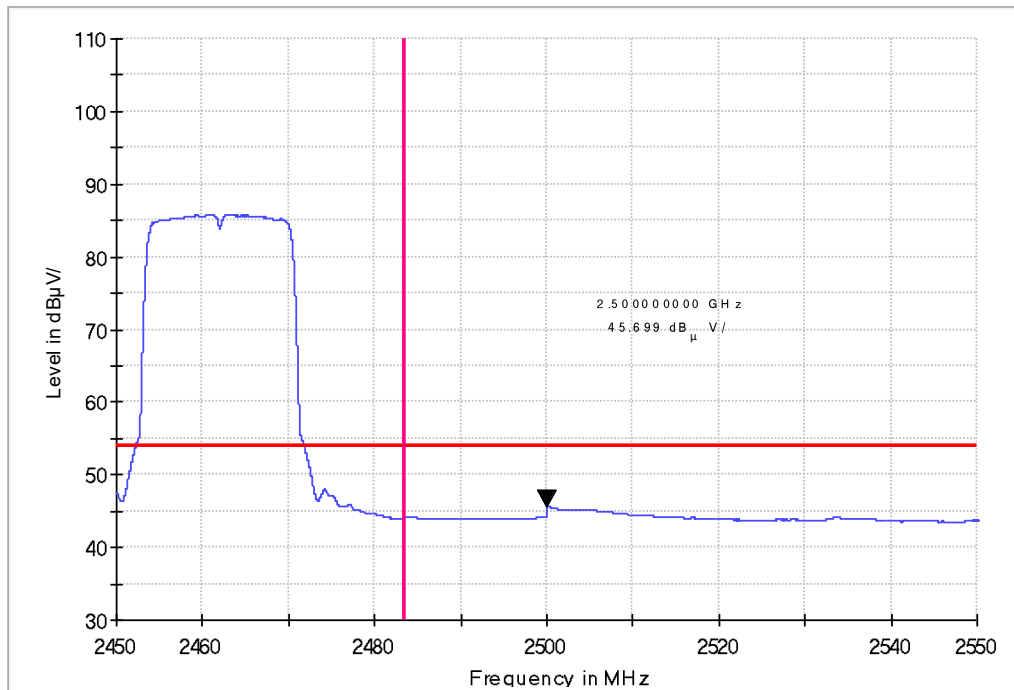


Vertical

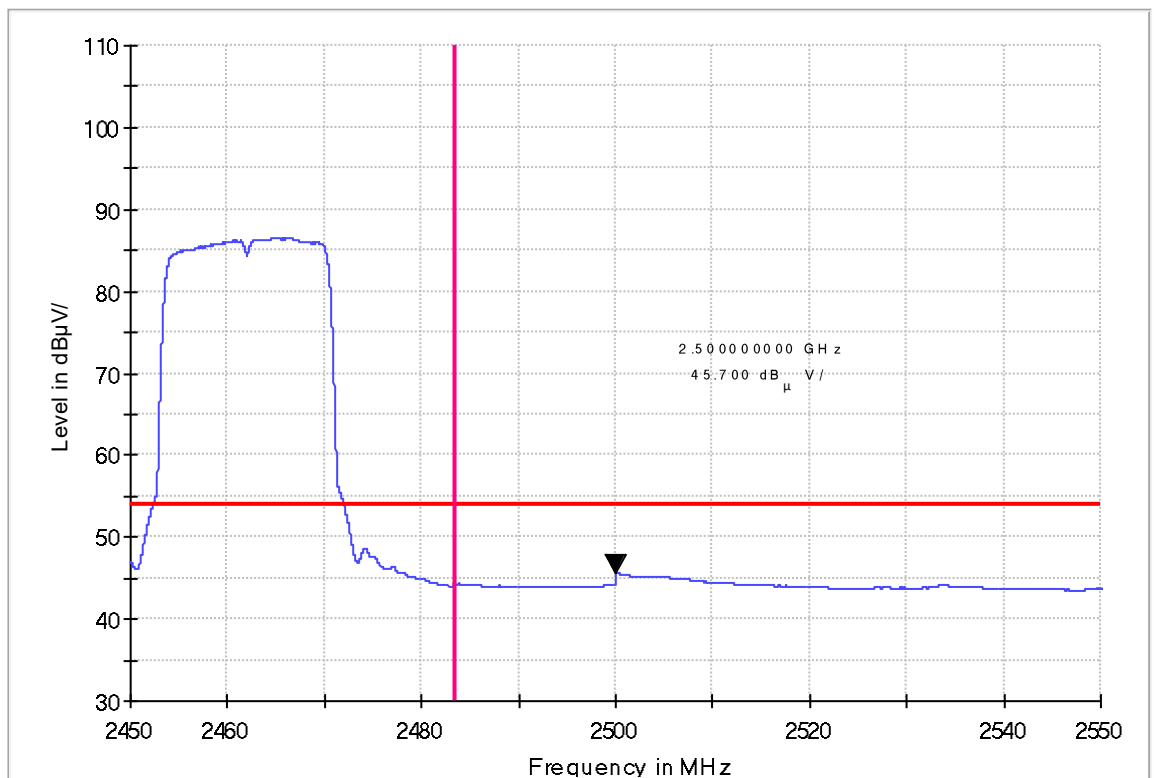


Band edge


11n-HT20
CH1
PK
Horizontal

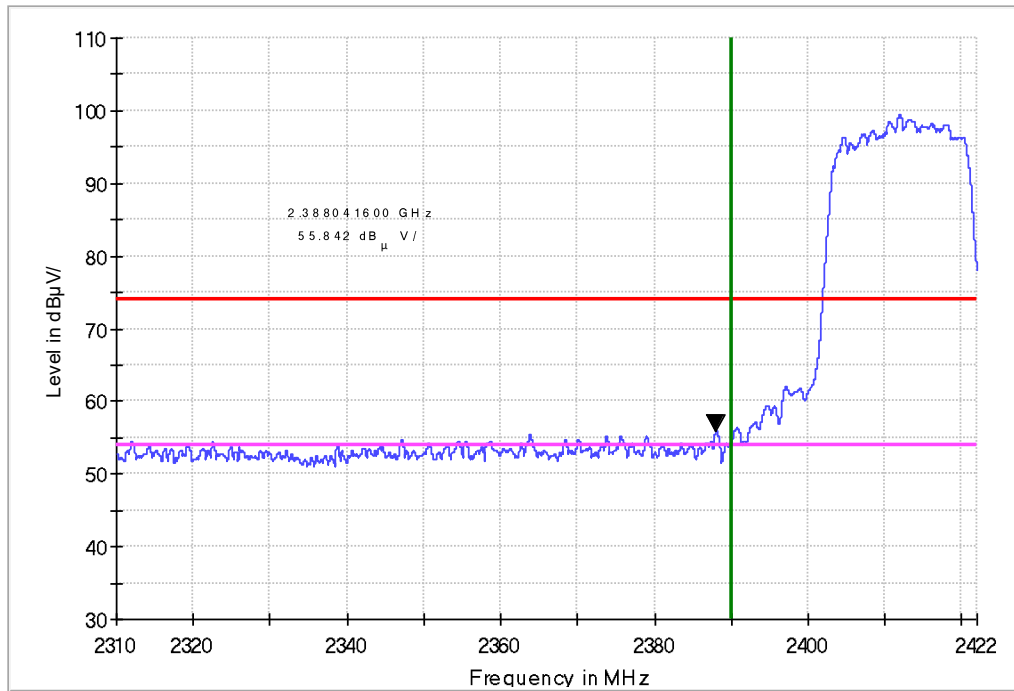


Vertical

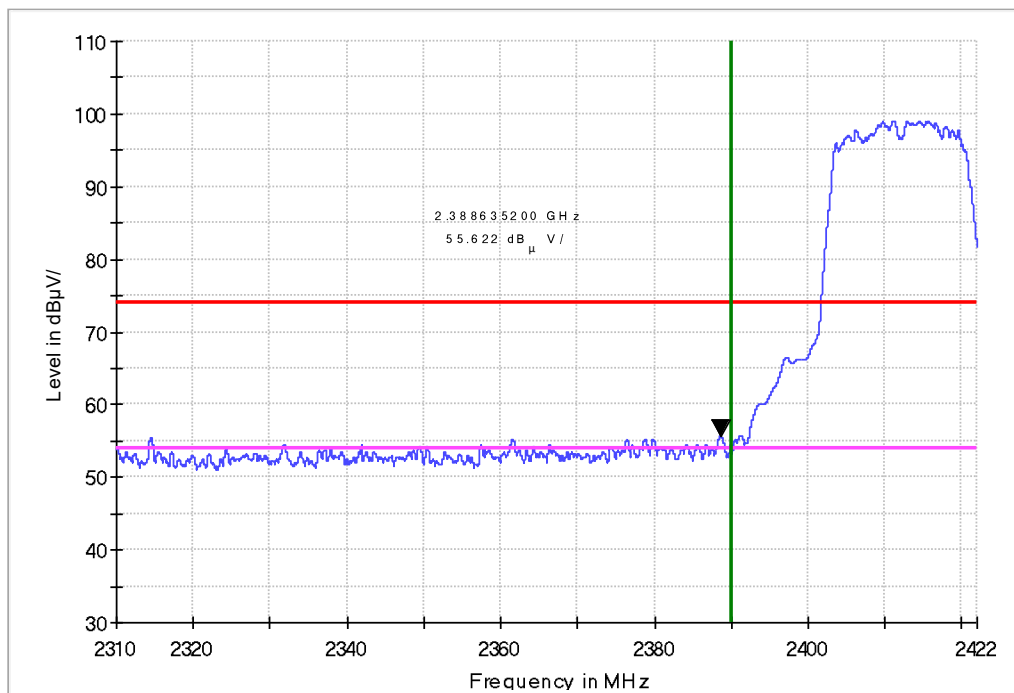

AV
Horizontal

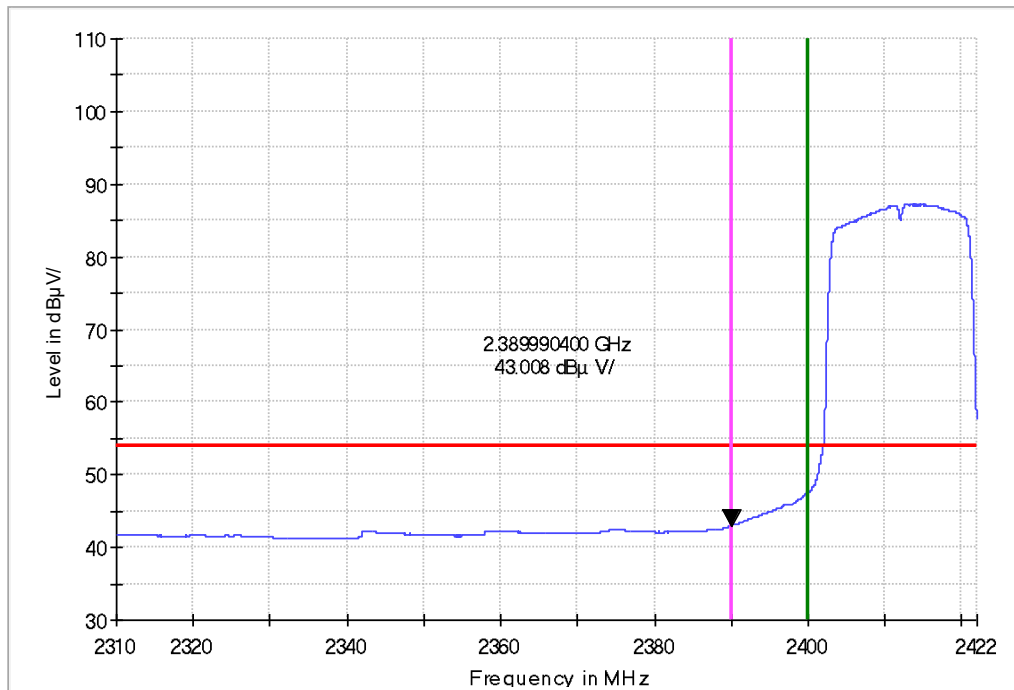


Vertical

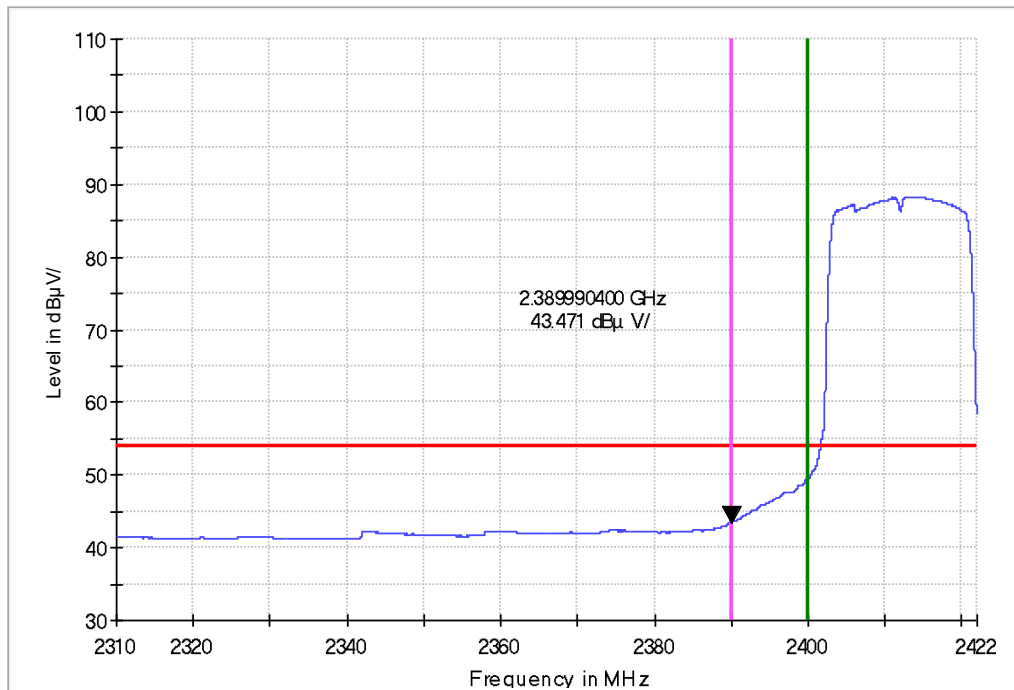


Band edge


11n-HT20
CH11
PK
Horizontal

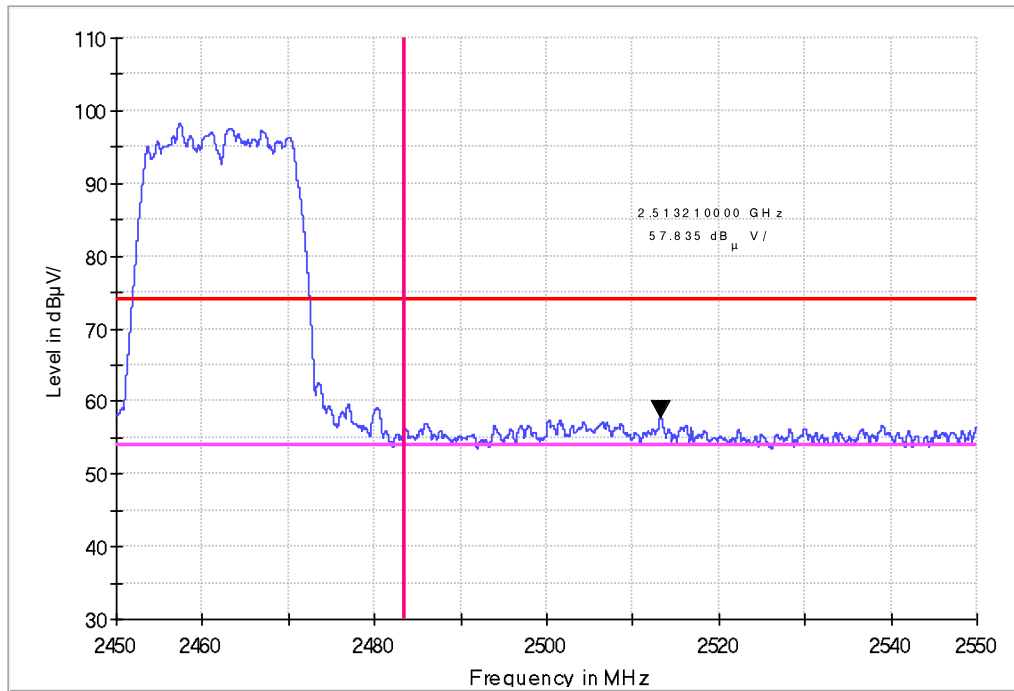


Vertical

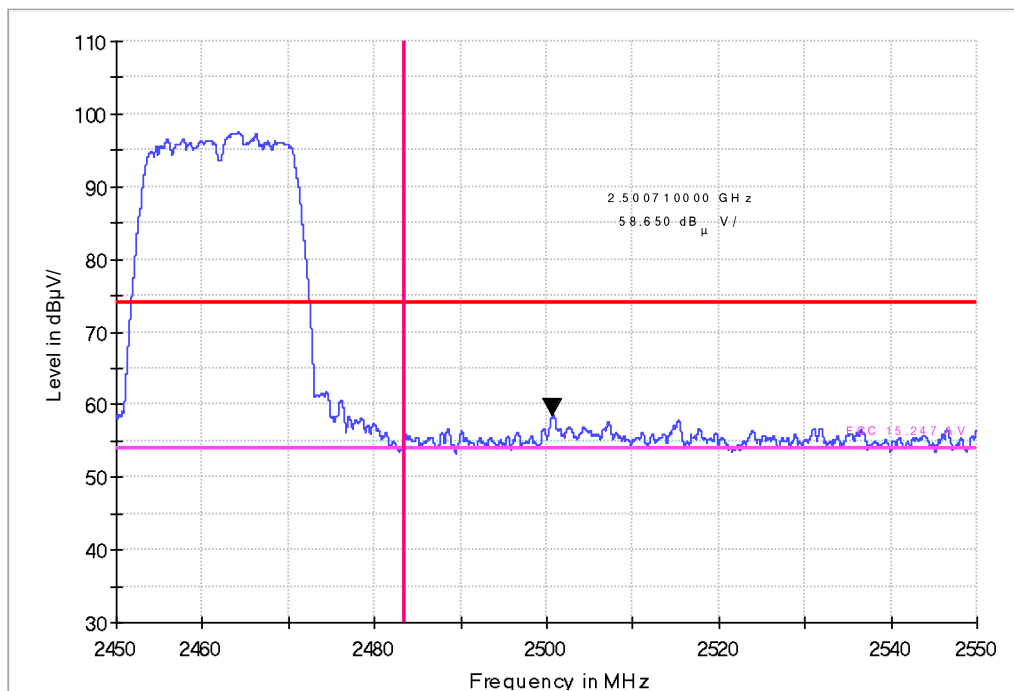

AV
Horizontal

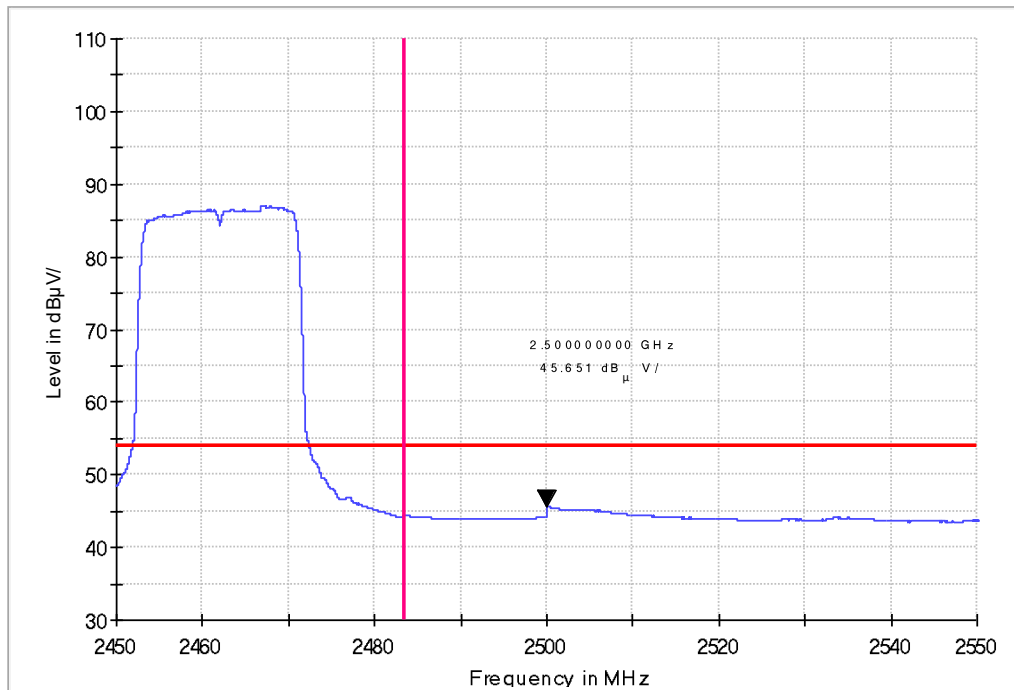


Vertical

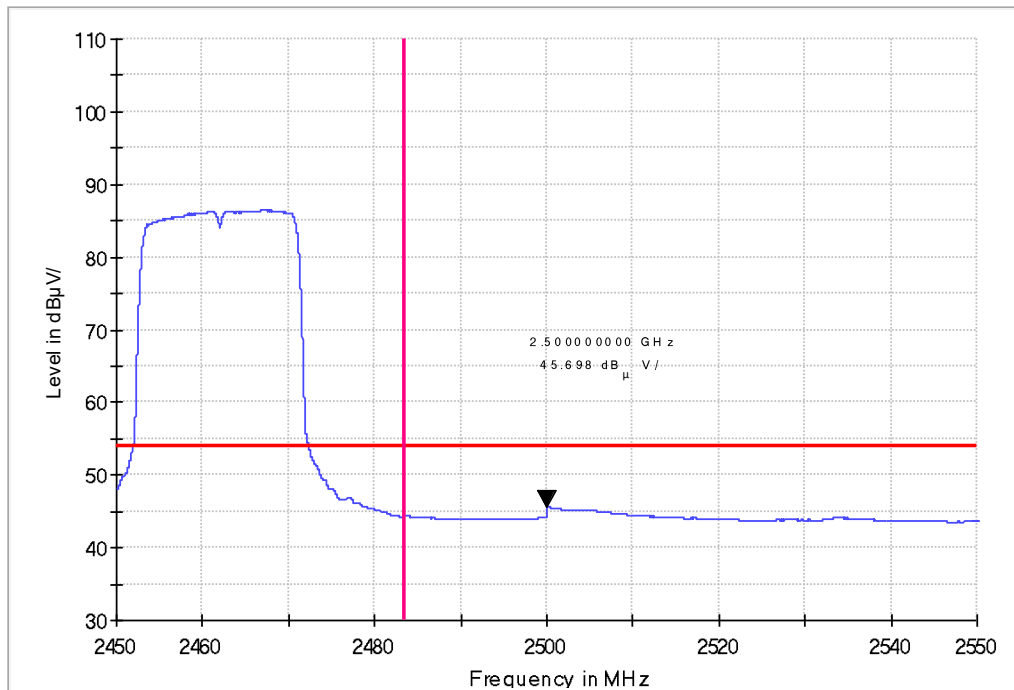


Band edge


11n-HT40
CH3
PK
Horizontal

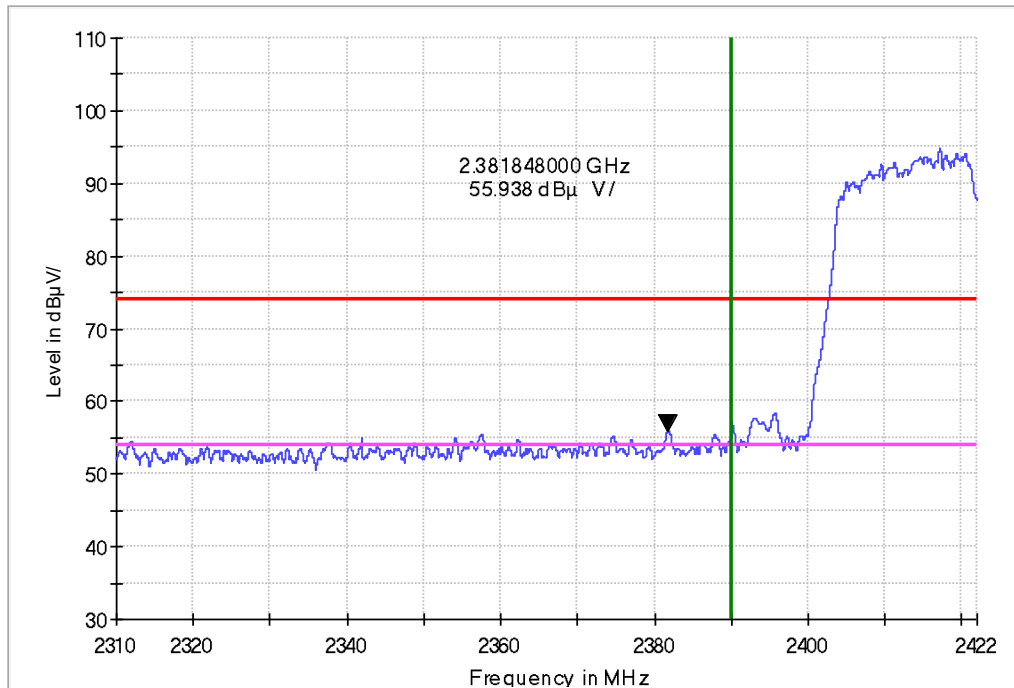


Vertical

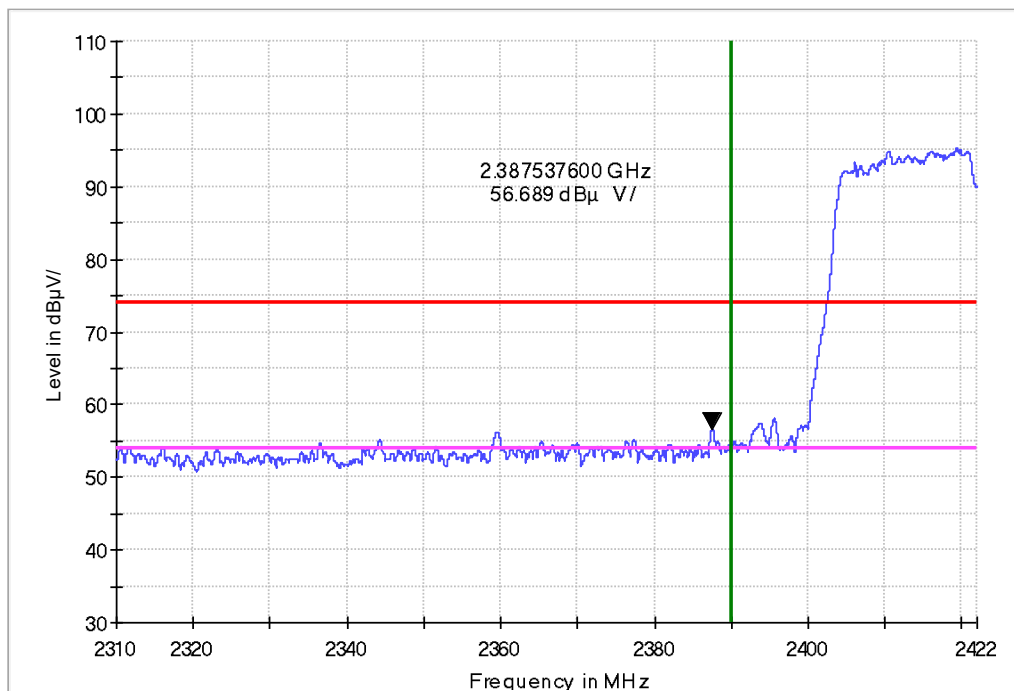

AV
Horizontal

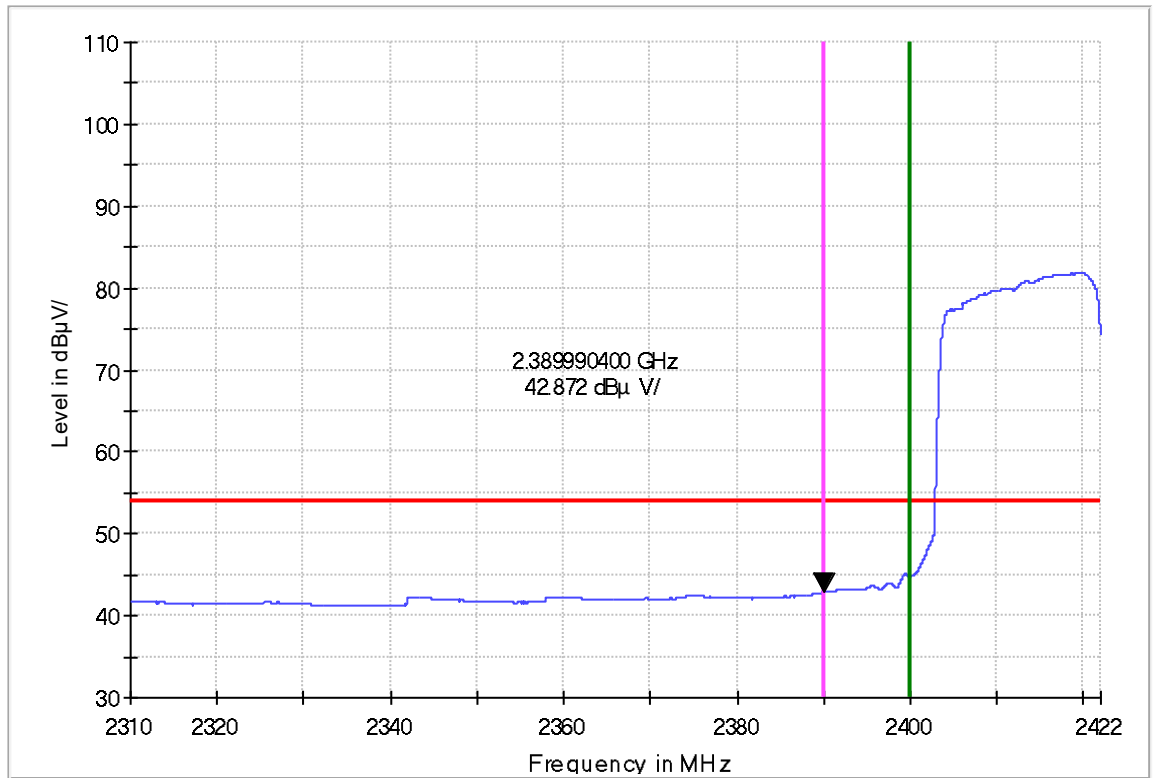


Vertical

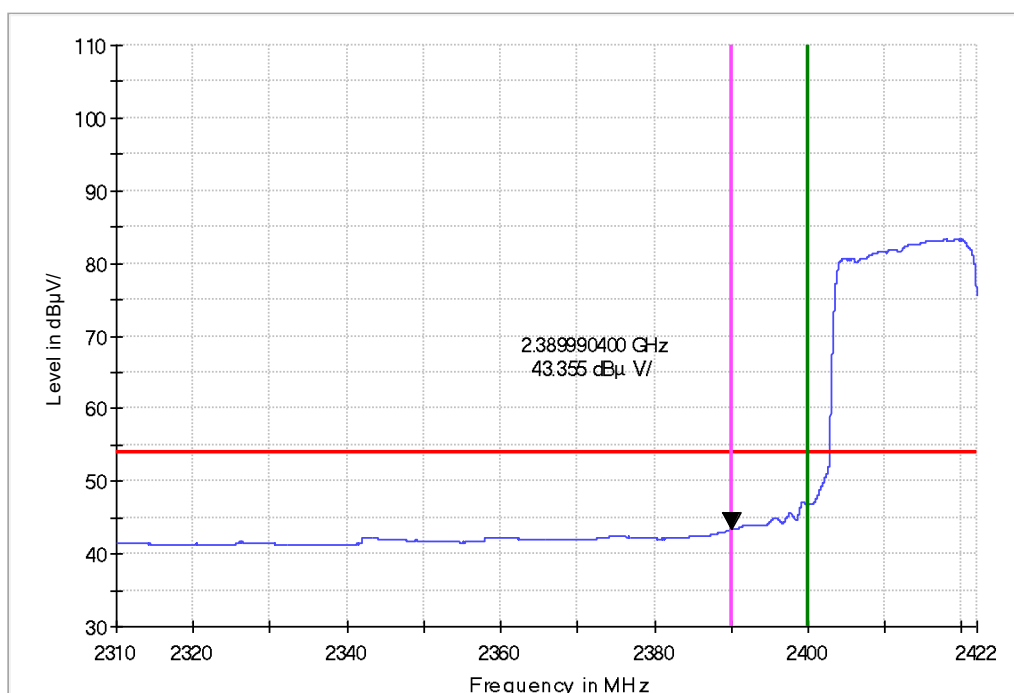


Band edge


11n-HT40
CH9
PK
Horizontal

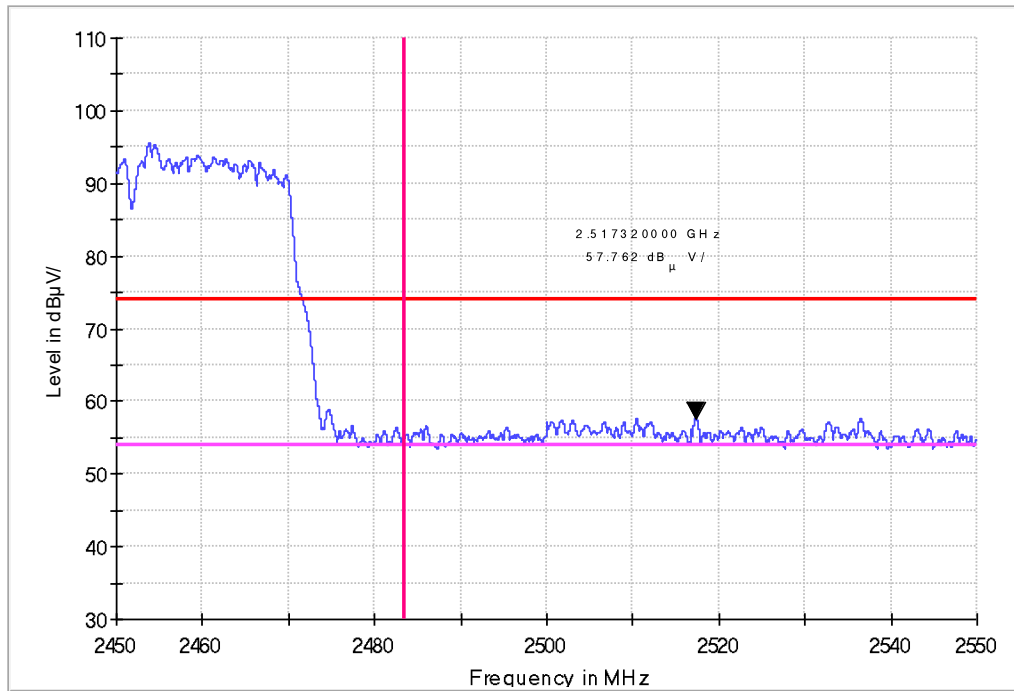


Vertical

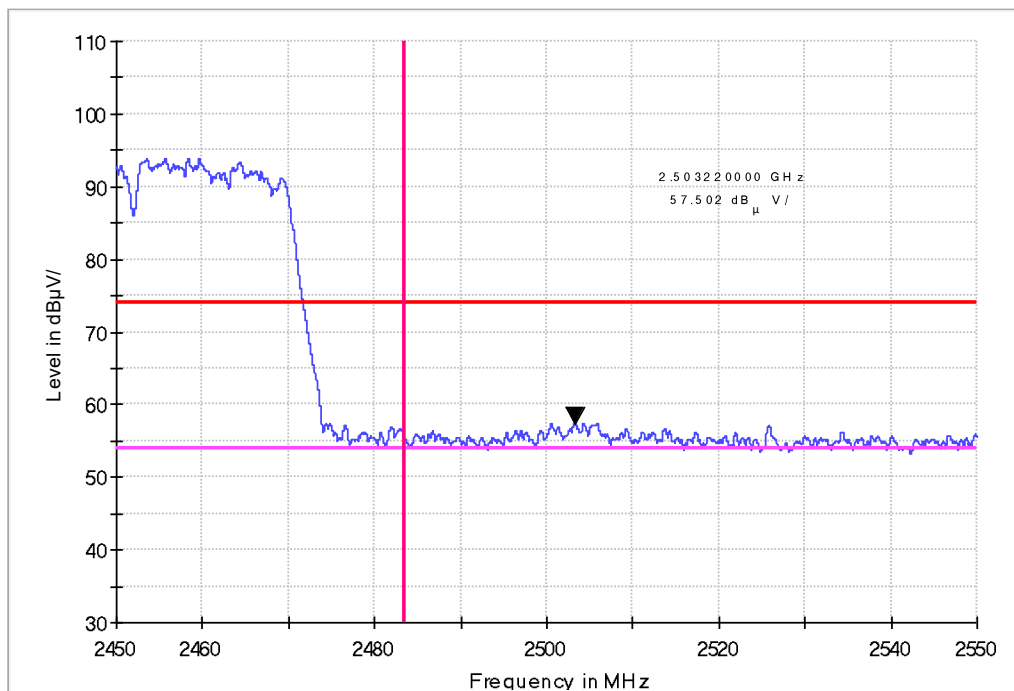

AV
Horizontal

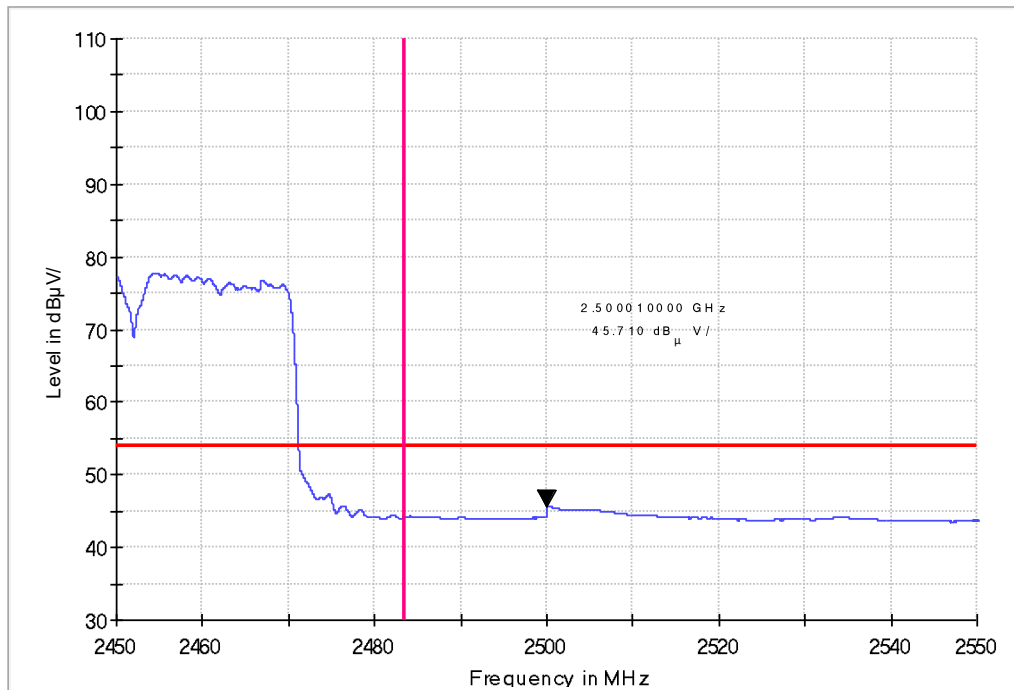


Vertical

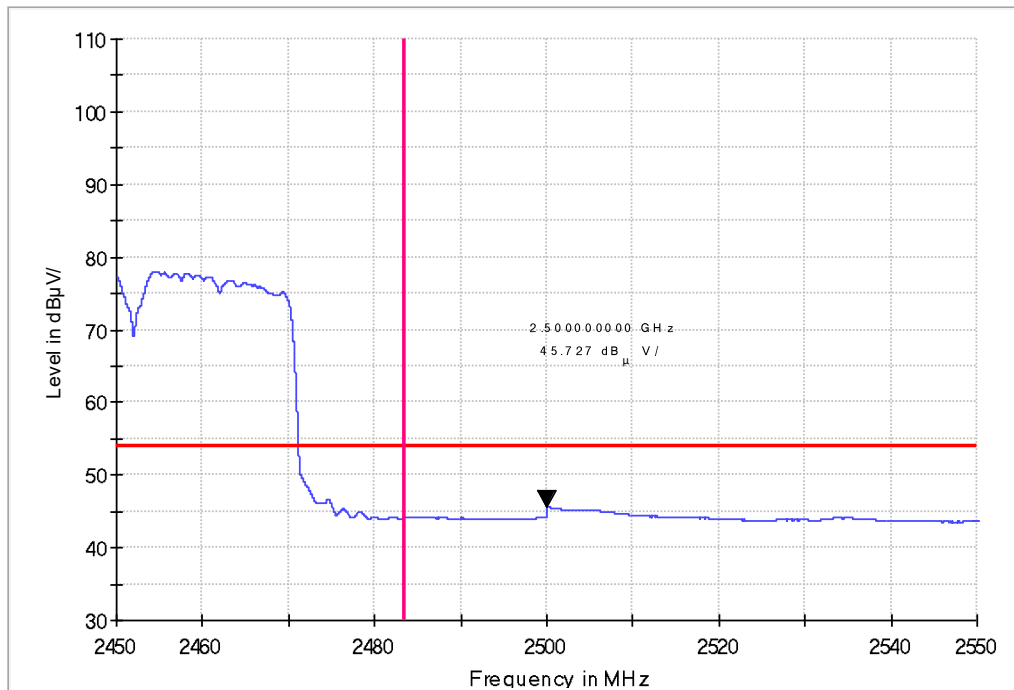


Band edge


11ac-VHT20
CH1
PK
Horizontal

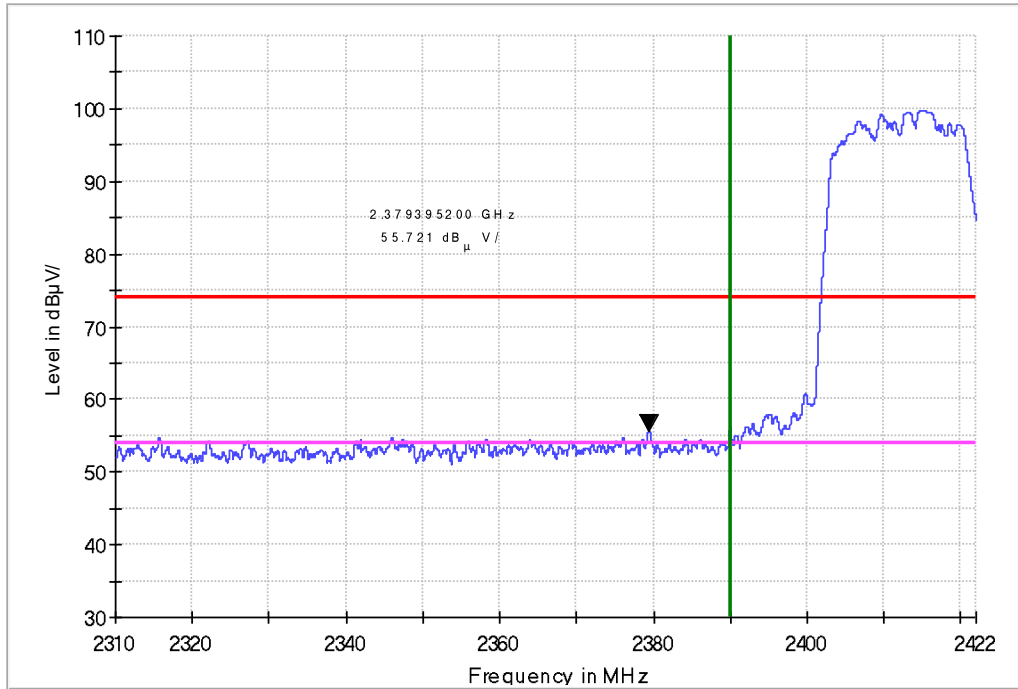


Vertical

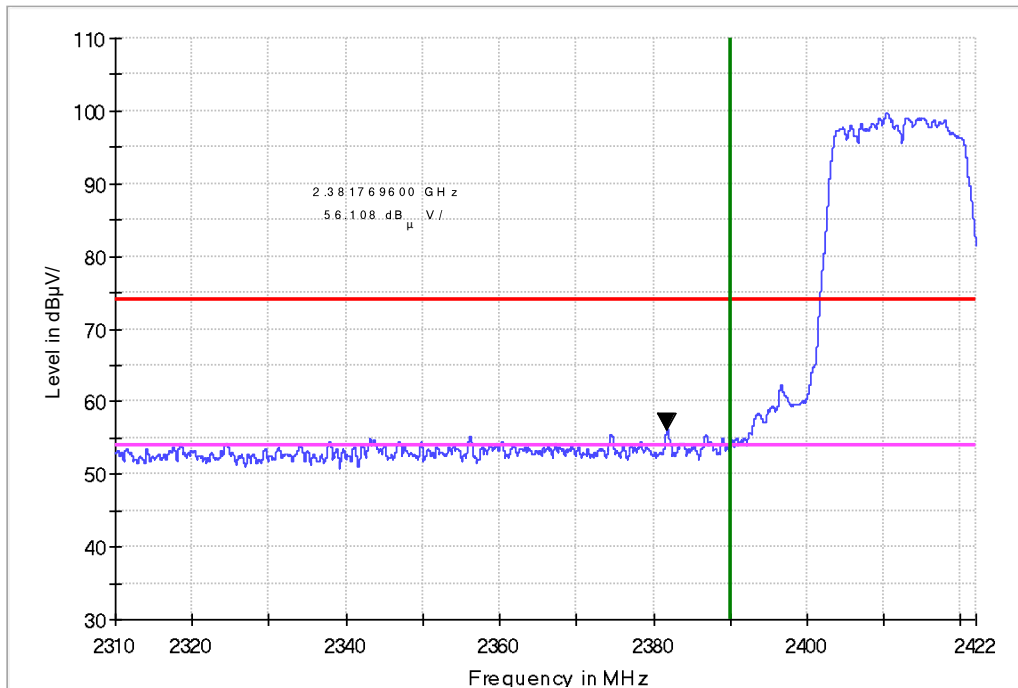

AV
Horizontal

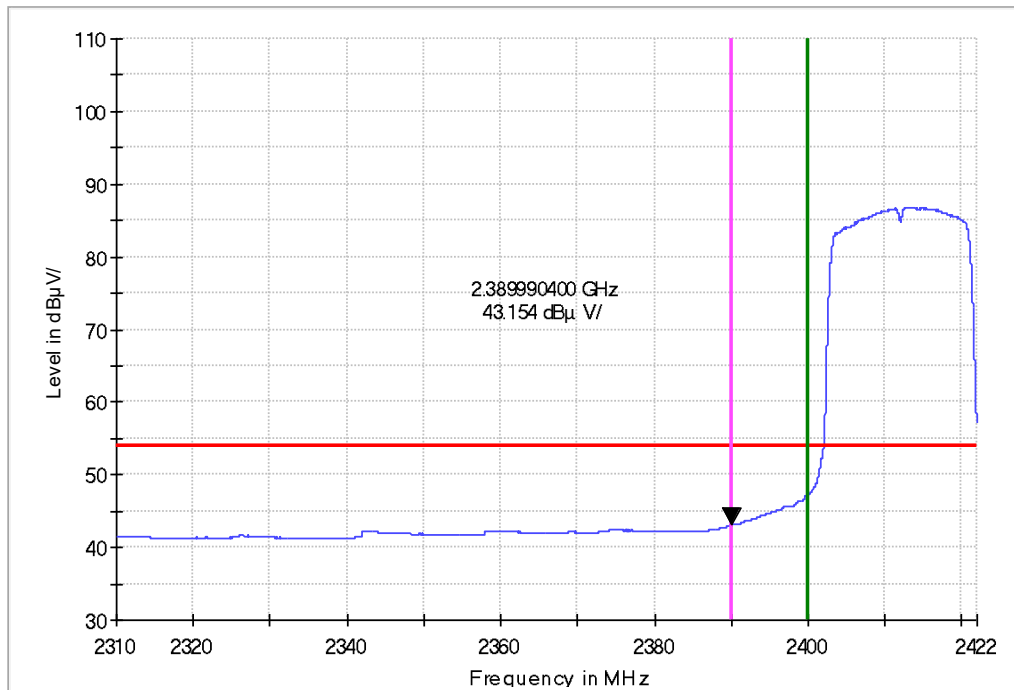

Vertical

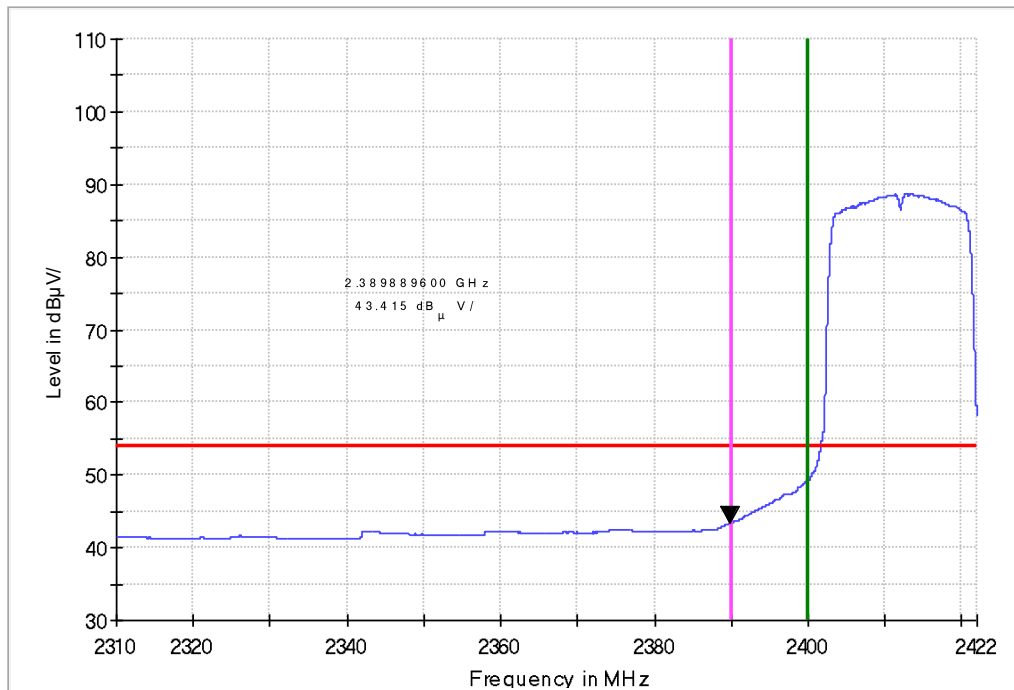


Band edge

11ac-VHT20


CH11

PK


Horizontal

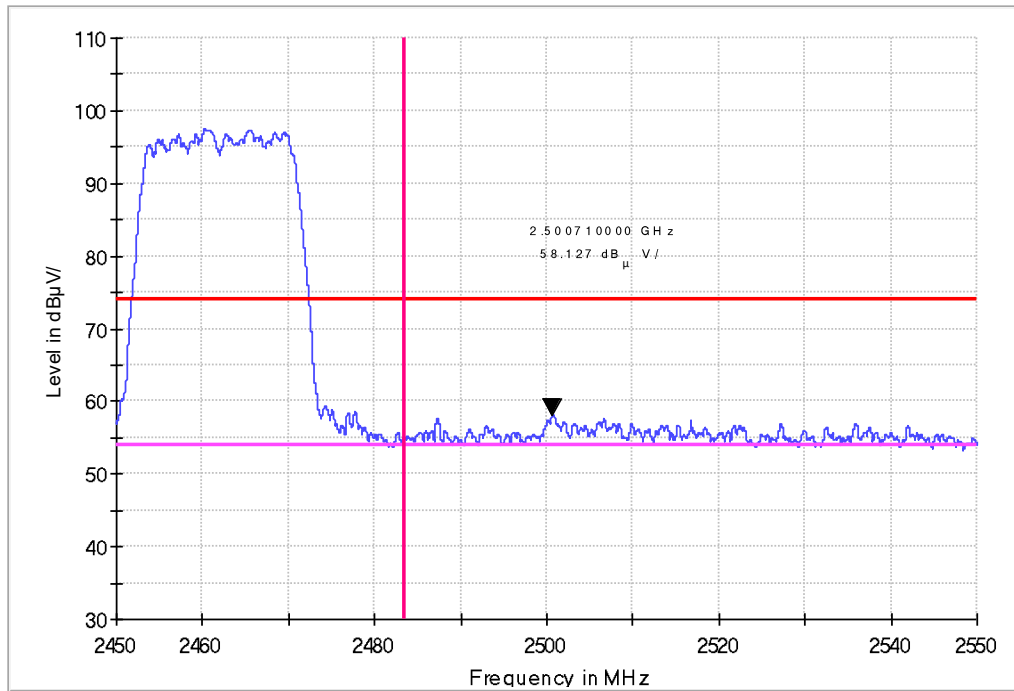


Vertical

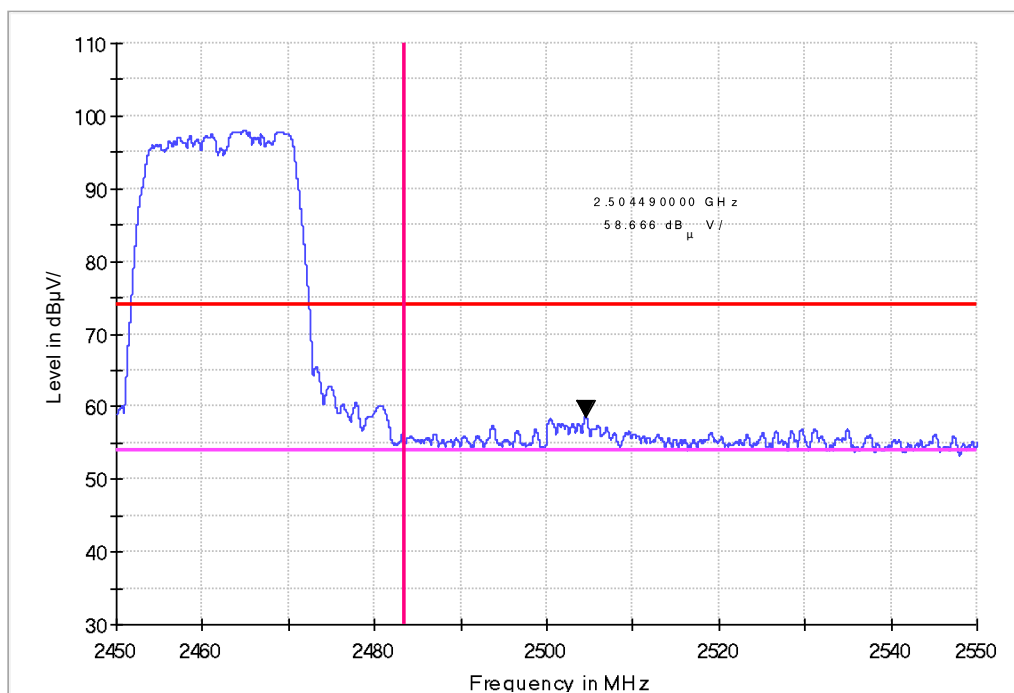

AV
Horizontal

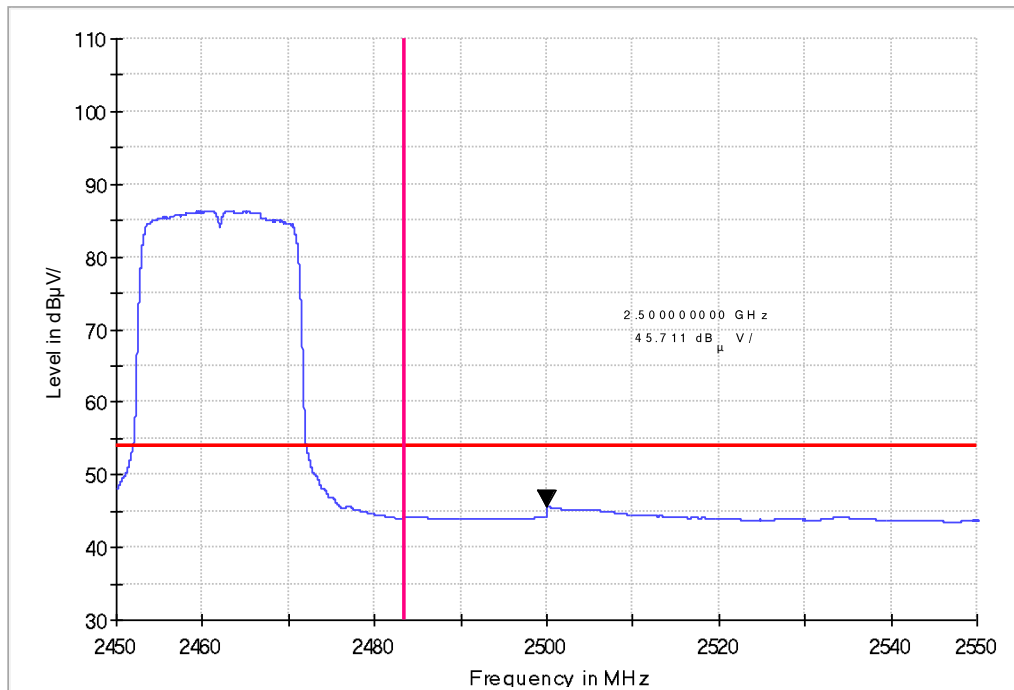


Vertical

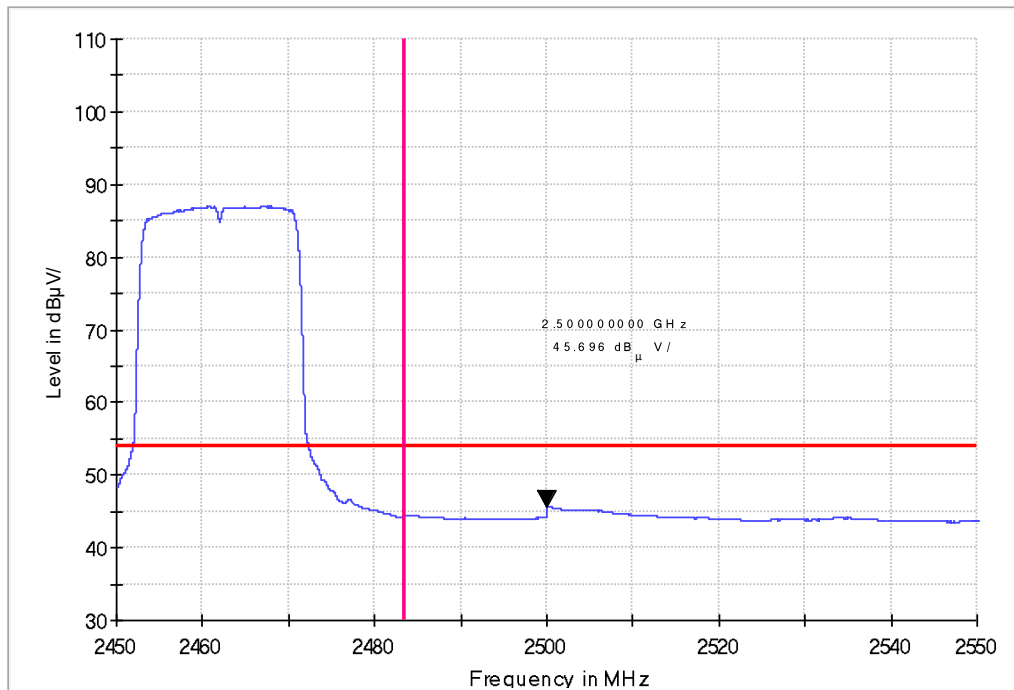


Band edge


11ac-VHT40
CH3
PK
Horizontal

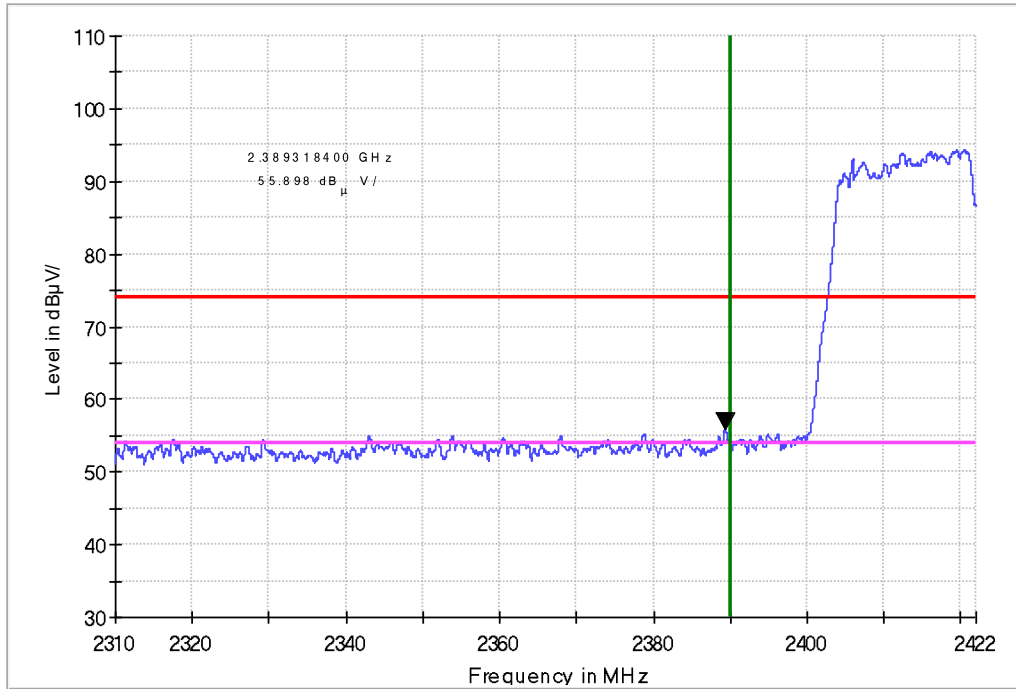


Vertical

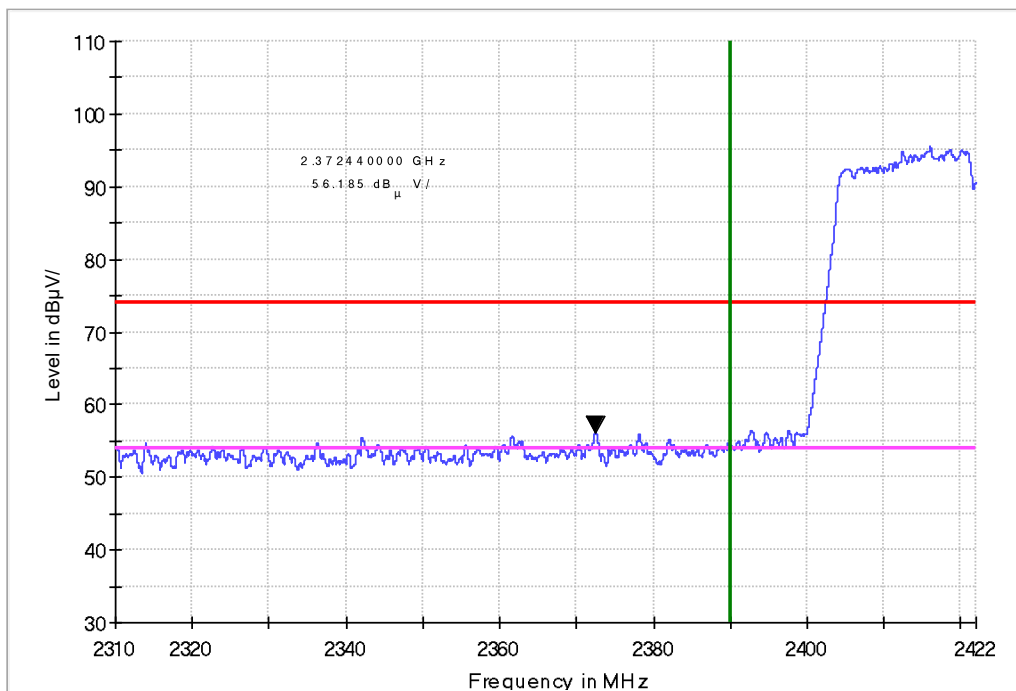

AV
Horizontal

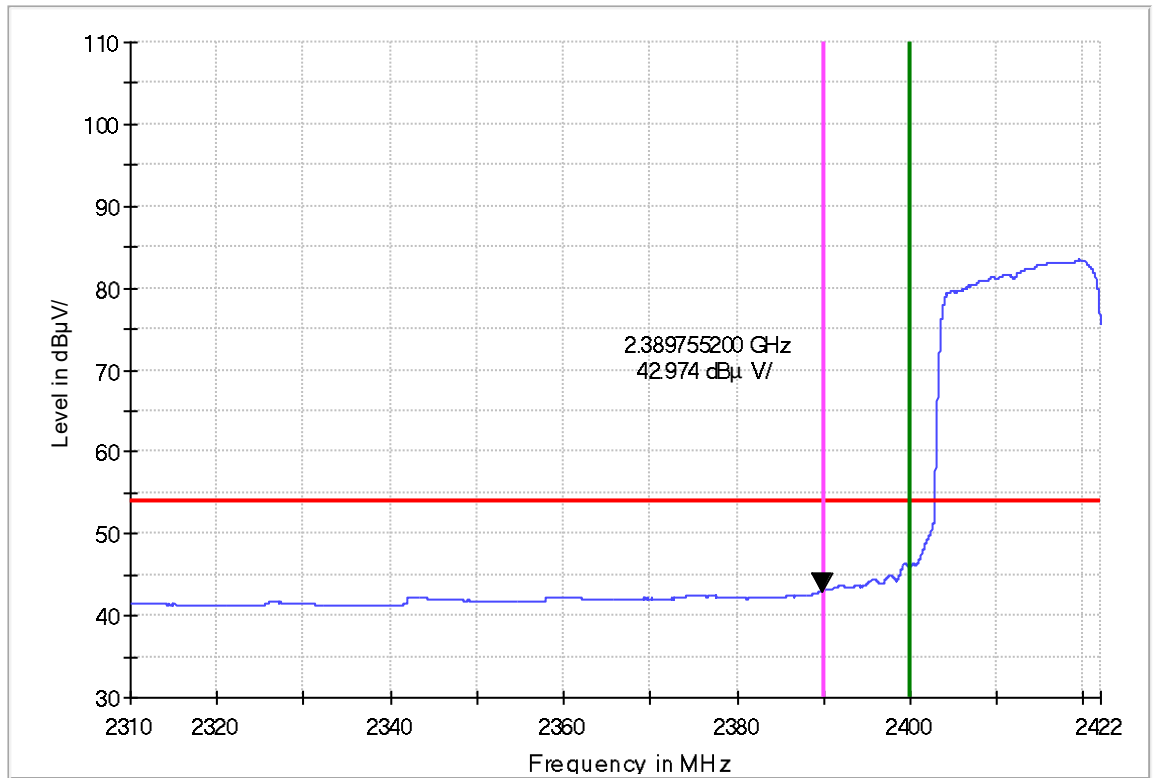


Vertical

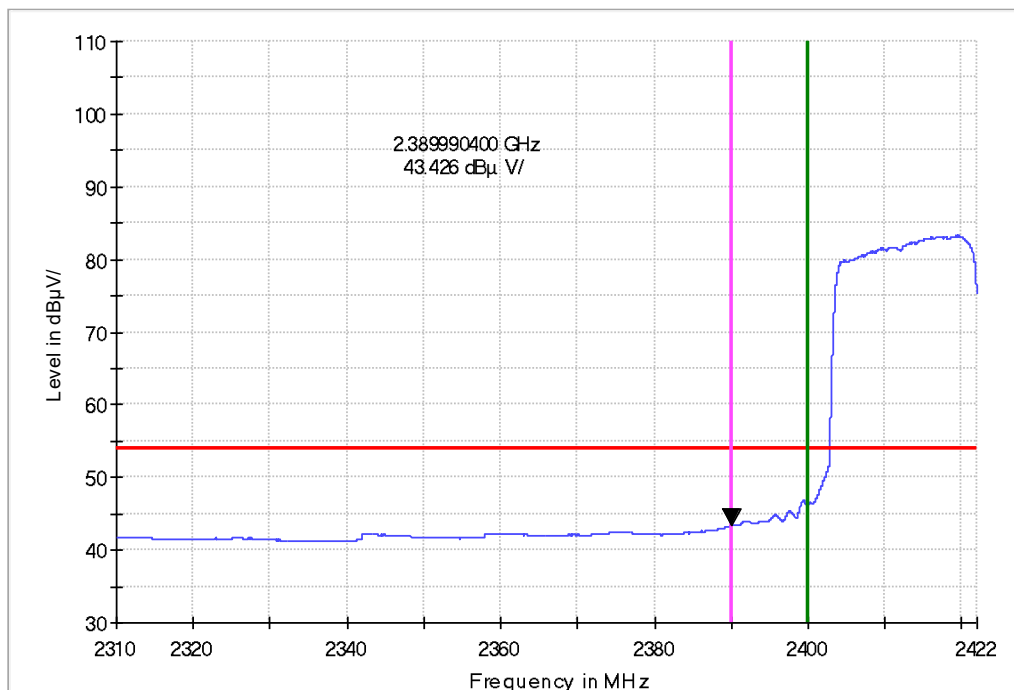


Band edge


11ac-VHT40
CH9
PK
Horizontal

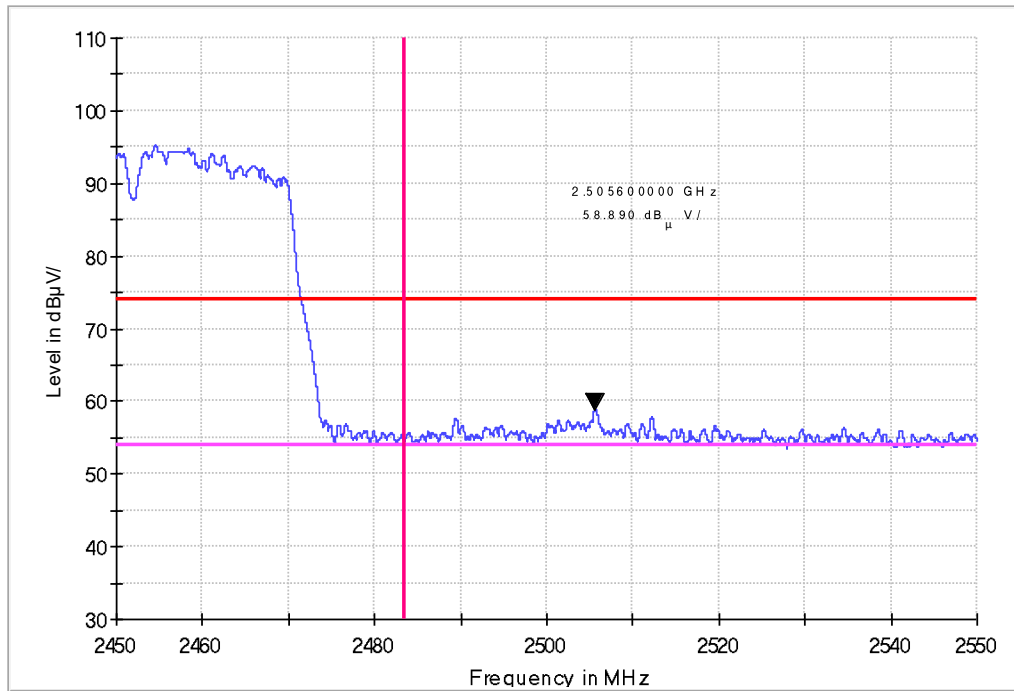


Vertical

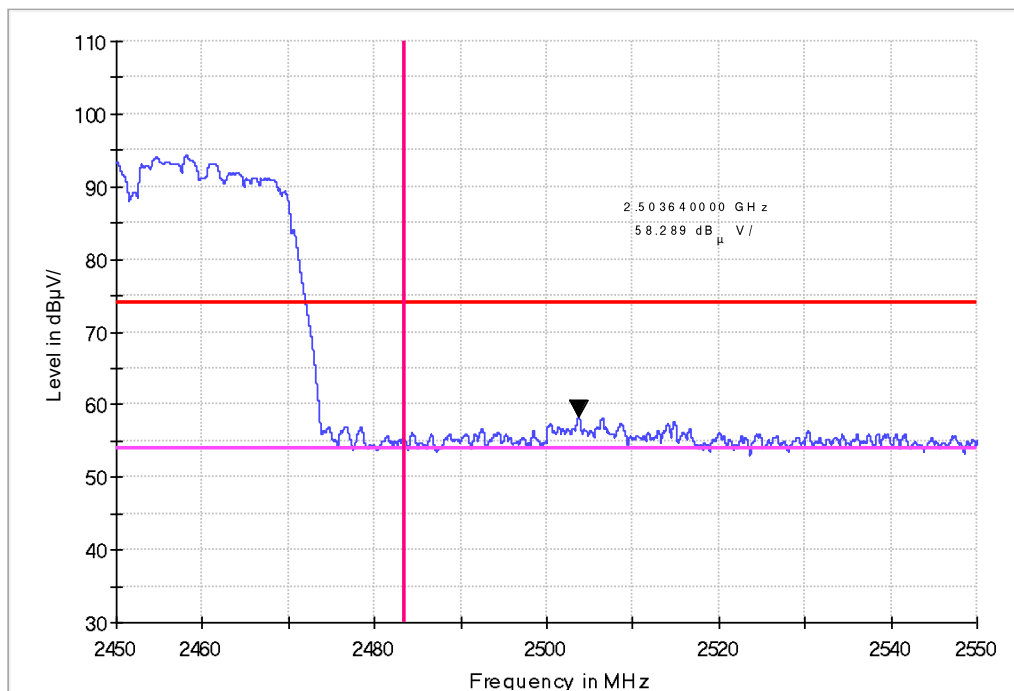

AV
Horizontal

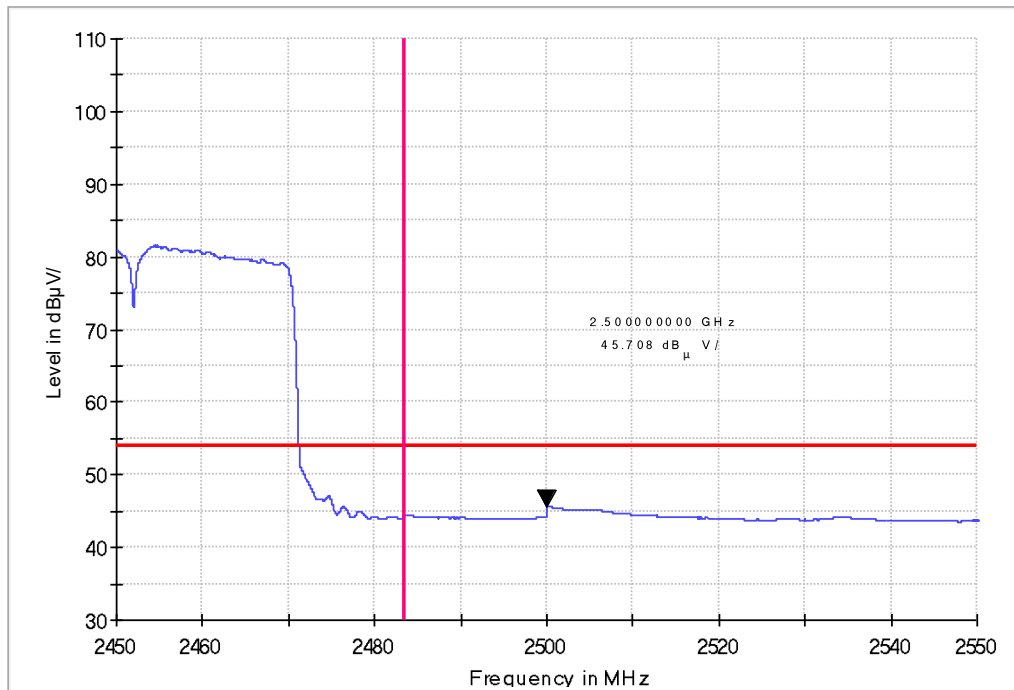

Vertical

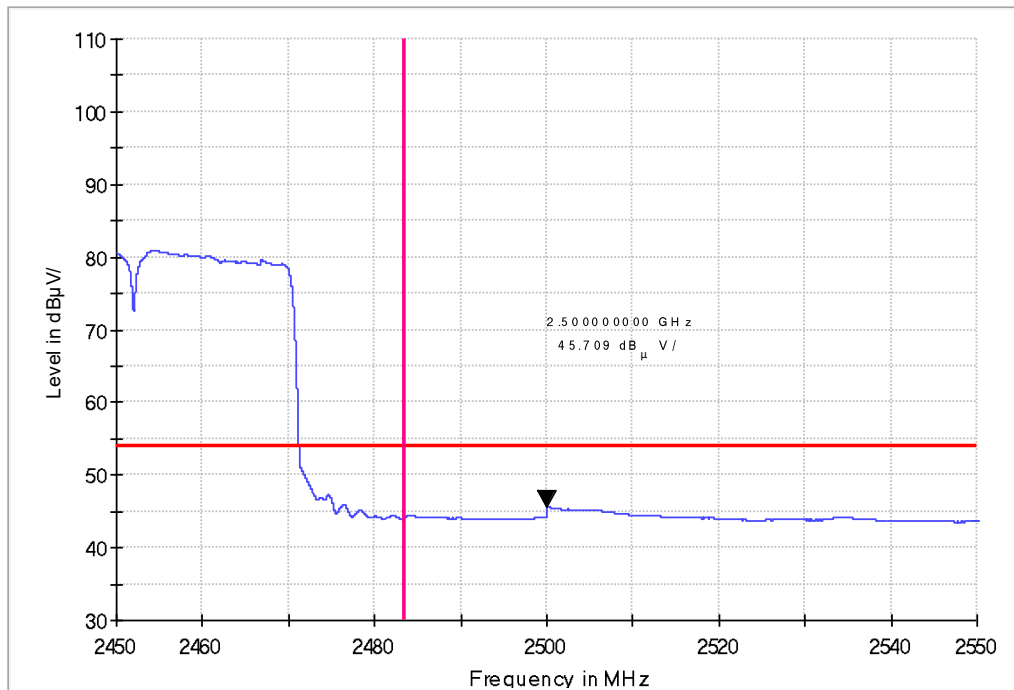

11. CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT

11.1. Test Standard and Limit

11.1.1. Test Standard

FCC Part 15 15.207

11.1.2. Test Limit

Table 15 Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

11.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. According to the requirements of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

11.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

11.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 16 Conducted Emission Test Data


Test mode: Charging and Transmitting								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)
Line	0.154	9.7	38.4	48.1	65.8	18.1	27.8	55.8
	0.186	9.7	30.4	40.1	64.2	10.2	19.9	54.2
	0.339	9.7	25.5	35.2	59.2	8.5	18.2	49.2
	0.523	9.8	26.0	35.8	56	13.7	23.5	46
	0.807	9.8	17.3	27.1	56	6.0	15.8	46
	22.884	10.2	22.0	32.2	60	15.9	26.1	50
Neutral	0.154	9.7	34.8	44.5	65.8	14.5	24.2	55.8
	0.190	9.7	28.9	38.6	64.0	9.1	18.8	54.0
	0.379	9.7	21.4	31.1	58.3	6.9	16.6	48.3
	0.501	9.8	20.5	30.3	56	8.4	18.2	46
	11.319	9.9	15.2	25.1	60	8.3	18.2	50
	22.983	10.2	21.0	31.2	60	15.4	25.6	50

REMARKS: 1. Emission level (dB μ V) = Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) = LISN Factor (dB) + Cable Factor (dB) + Limiter Factor (dB)
 3. The other emission levels were very low against the limit.

Line

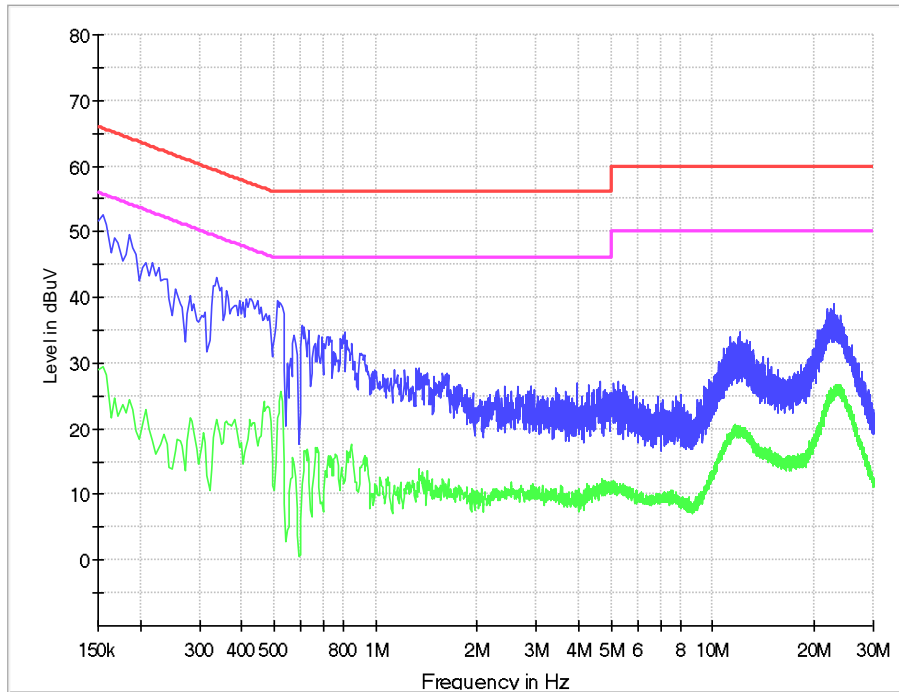

Neutral

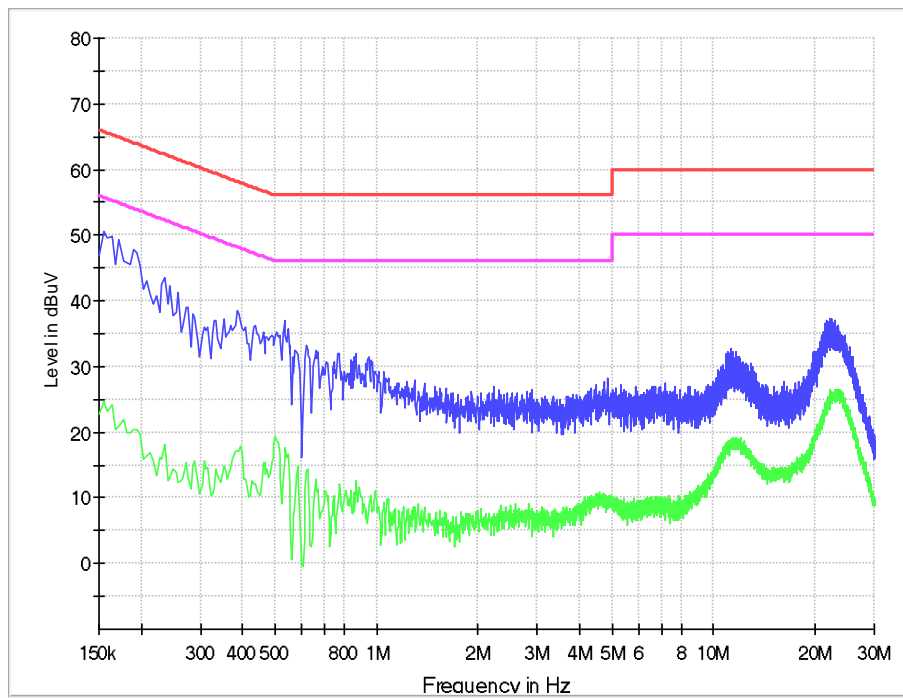

12. ANTENNA REQUIREMENTS

15.203 requirements:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirements:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

12.1. Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

12.2. Antenna Gain

The antenna gain of EUT is less than 6 dBi.

13. APPENDIX I PRODUCT EQUALITY DECLARATION

Product Equality Declaration

We, GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD. declare on our sole responsibility for the product of CPH2477 as below:

The major feature difference between CPH2477 (Latin-america Version,FCC ID:R9C-CPH2477) and CPH2477 (Full-band Version,FCC ID:R9C-22263) are:

1. The Full-band Version does not support the B2,B4,B6 and B19 frequency bands of WCDMA. And these four frequency bands are blank-posted on the motherboard.
2. The Full-band Version does not support the B2,B4,B12,B13,B17,B18,B19,B26 and B66 frequency bands of LTE FDD. And these nine frequency bands are blank-posted on the motherboard.
3. The Full-band Version LTE B28 has two duplexers, split into LET B28A and LTE B28B, and the Latin American version uses a full-band diplexer.
4. The Full-band Version supports LTE B20.

5. Note:

Full-band Version LTE Bands: B41(2496-2690MHz).

Latin-america Version LTE Bands: B41(2535-2655MHz).

Except listings above, the others are all the same.

-----End of Report-----