



TEST REPORT

No. I21N02292-BT

for

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: A102OP

with

Hardware Version: 11

Software Version: ColorOS V11

FCC ID: R9C-A102OP

Issued Date: 2021-08-26

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



CONTENTS

CONTENTS	2
1. SUMMARY OF TEST REPORT.....	3
1.1. TEST ITEMS.....	3
1.2. TEST STANDARDS	3
1.3. TEST RESULT	3
1.4. TESTING LOCATION	3
1.5. PROJECT DATA	3
1.6. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION.....	6
4. REFERENCE DOCUMENTS.....	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT	7
4.2. REFERENCE DOCUMENTS FOR TESTING	7
5. TEST RESULTS	8
5.1. TESTING ENVIRONMENT.....	8
5.2. TEST RESULTS	8
5.3. STATEMENTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. LABORATORY ENVIRONMENT.....	10
8. MEASUREMENT UNCERTAINTY	11
ANNEX A: DETAILED TEST RESULTS.....	12
TEST CONFIGURATION.....	12
A.0 ANTENNA REQUIREMENT	14
A.1 MAXIMUM PEAK OUTPUT POWER	15
A.2 BAND EDGES COMPLIANCE	16
A.3 CONDUCTED EMISSION	23
A.4 RADIATED EMISSION.....	38
A.5 20dB BANDWIDTH.....	50
A.6 TIME OF OCCUPANCY (DWELL TIME)	55
A.7 NUMBER OF HOPPING CHANNELS.....	59
A.8 CARRIER FREQUENCY SEPARATION	62
A.9 AC POWER LINE CONDUCTED EMISSION	64



1. Summary of Test Report

1.1. Test Items

Product Name	Mobile Phone
Model Name	A102OP
Applicant's name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.

1.2. Test Standards

FCC Part15-2019; ANSI C63.10-2013

1.3. Test Result

Pass

Please refer to "5.2.Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project data

Testing Start Date:	2021-07-25
Testing End Date:	2021-08-25

1.6. Signature

Lin Zechuang
(Prepared this test report)

Tang Weisheng
(Reviewed this test report)

Zhang Bojun
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,
Guangdong, China
Contact Person Mei XiLi
E-Mail meixili@oppo.com
Telephone: (86)76986076999
Fax: /

2.2. Manufacturer Information

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,
Guangdong, China
Contact Person Mei XiLi
E-Mail meixili@oppo.com
Telephone: (86)76986076999
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Mobile Phone
Model Name	A102OP
Frequency Band	2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated
Antenna Gain	-3.0dBi
Power Supply	3.85V DC by Battery
FCC ID	R9C-A102OP
Condition of EUT as received	No abnormality in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Receive Date
UT03aa	868994050054571	11	ColorOS V11	2021-07-23
	868994050054563			
UT02aa	868994050055578	11	ColorOS V11	2021-07-23
	868994050055560			

*EUT ID: is used to identify the test sample in the lab internally.

UT03aa is used for conduction test, UT02aa is used for radiation test and AC Power line Conducted Emission test.

3.3. Internal Identification of AE used during the test

AE ID*	Description	AE ID*
AE1	Battery	/
AE2	Charger	/
AE3	USB Cable	/
AE4	Headset	/

AE1

Model	BLP779
Manufacturer	TWS TECHNOLOGY (GUANGZHOU) LIMITED
Capacity	3890mAh
Nominal Voltage	3.85V

AE2

Model	OP92KAJH
Manufacturer	Shenzhen Kunxing Technology Co.,Ltd.
Specification	Japan Standard Charger



AE3

Model	DL143
Manufacturer	Dongguan Fuqiang Electronics Co., Ltd

AE4

Model	MH156
Manufacturer	JiangXi Risound Electronics CO.,LTD

*AE ID: is used to identify the test sample in the lab internally. AE2: just for testing.

3.4. General Description

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and battery.

It consists of normal options: Lithium Battery, Charger, USB Cable and Headset.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2019
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013



5. Test Results

5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

5.2. Test Results

No	Test cases	Sub-clause of Part 15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Band Edges Compliance	15.247 (d)	P
3	Conducted Spurious Emission	15.247 (d)	P
4	Radiated Spurious Emission	15.247,15.205,15.209	P
5	Occupied 20dB bandwidth	15.247(a)	/
6	Time of Occupancy(Dwell Time)	15.247(a)	P
7	Number of Hopping Channel	15.247(a)	P
8	Carrier Frequency Separation	15.247(a)	P
9	AC Power line Conducted Emission	15.107,15.207	P

See **ANNEX A** for details.

5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

6. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2021-12-30	1 year
2	RF Control Unit	JS0806-2	21C8060398	Tonscend	2022-05-09	1 year
3	Wireless Connective Tester	CMW270	100540	Rohde & Schwarz	2022-03-14	1 year
4	Test Receiver	ESCI	100702	Rohde & Schwarz	2022-01-13	100702
5	LISN	ENV216	102067	Rohde & Schwarz	2022-07-15	1 year

Radiated test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Loop Antenna	HLA6120	35779	TESEQ	2022-04-25	3 years
2	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024-05-27	3 years
3	Horn Antenna	3117	00066577	ETS-Lindgren	2022-04-02	3 years
4	Horn Antenna	QSH-SL-18 -26-S-20	17013	Q-par	2023-01-06	3 years
5	Test Receiver	ESR7	101676	Rohde & Schwarz	2021-11-25	1 year
6	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2022-01-13	1 year
7	Chamber	FACT3-2.0	1285	ETS-Lindgren	2023-05-29	2 years

Test software

No.	Equipment	Manufacturer	Version
1	RF Test System	Tonscend	JS1120-3
2	EMC32	Rohde & Schwarz	10.50.40

EUT is engineering software provided by the customer to control the transmitting signal.

The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Laboratory Environment

Semi-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

Shielded room

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

8. Measurement Uncertainty

Test Name	Uncertainty ($k=2$)	
1. Maximum Peak Output Power	1.32dB	
2. Band Edges Compliance	1.92dB	
3. Transmitter Spurious Emission - Conducted	30MHz \leq f<1GHz	1.41dB
	1GHz \leq f<7GHz	1.92dB
	7GHz \leq f<13GHz	2.31dB
	13GHz \leq f \leq 26GHz	2.61dB
4.. Transmitter Spurious Emission - Radiated	9kHz \leq f<30MHz	1.74dB
	30MHz \leq f<1GHz	4.84dB
	1GHz \leq f<18GHz	4.68dB
	18GHz \leq f \leq 40GHz	3.76dB
5. 20dB Bandwidth	66Hz	
6. Time of Occupancy (Dwell Time) & Number of Hopping Channels	0.58ms	
7. Carrier Frequency Separation	66Hz	
8. AC Power line Conducted Emission	150kHz \leq f \leq 30MHz	3.00dB


ANNEX A: Detailed Test Results

Test Configuration

The measurement is made according to ANSI C63.10.


1) Conducted Measurements

1. Connect the EUT to the test system correctly.
2. Set the EUT to the required work mode.
3. Set the EUT to the required channel.
4. Set the EUT hopping mode (hopping on or hopping off).
5. Set the spectrum analyzer to start measurement.
6. Record the values.

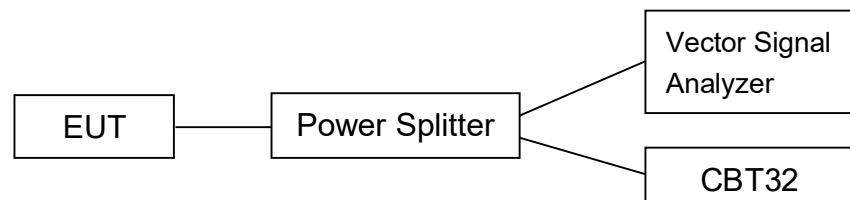


2) Radiated Measurements

Test setup: EUT was placed on a 1.5 meter high non-conductive table at a 3 meter test distance from the receive antenna. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT and adjusting the receiving antenna polarization.

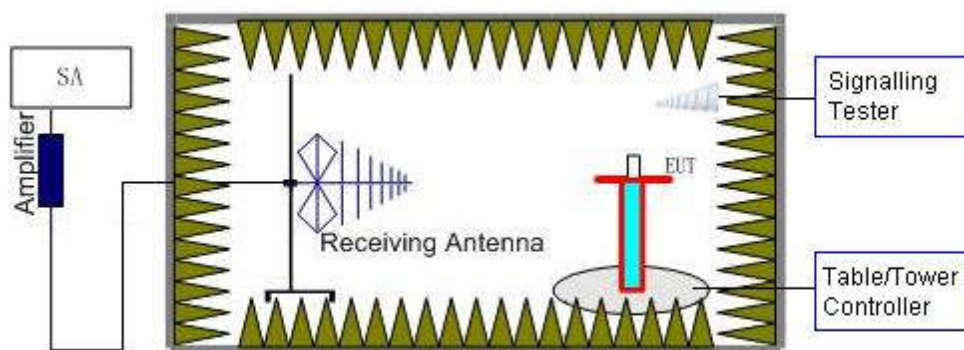

3) AC Power line Conducted Emission Measurement

The EUT is working as Bluetooth terminal. A communication link of Bluetooth is set up with a System Simulator (SS). The EUT is commanded to operate at maximum transmitting power.

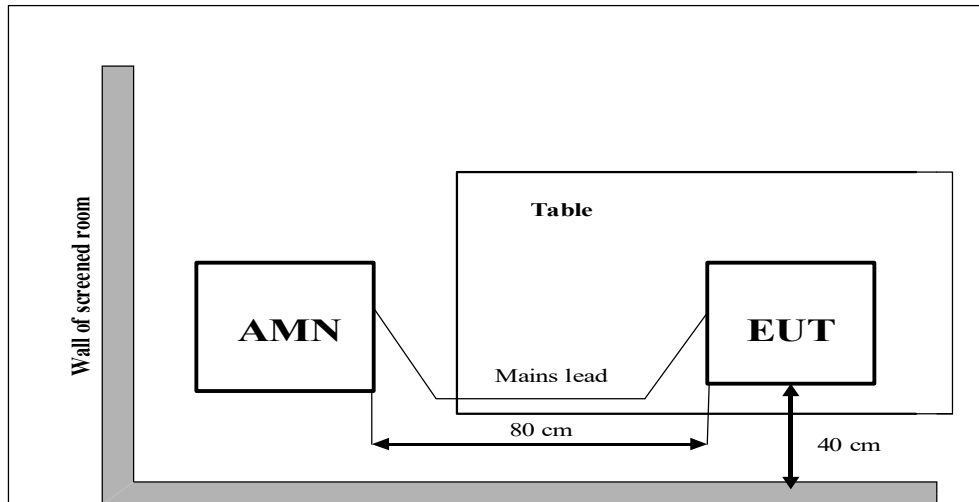



A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is -3.0dBi.
The RF transmitter uses an integrate antenna without connector.**



A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 7.8.5.

A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

Measurement Results:

Mode	RF output power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	11.96	12.26	12.18
$\pi/4$ DQPSK	11.50	11.37	11.32
8DPSK	11.34	11.85	11.46

Conclusion: Pass



A.2 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.1	P
	78	ON	Fig.2	P
$\pi/4$ DQPSK	0	ON	Fig.3	P
	78	ON	Fig.4	P
8DPSK	0	ON	Fig.5	P
	78	ON	Fig.6	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.7	P
	78	OFF	Fig.8	P
$\pi/4$ DQPSK	0	OFF	Fig.9	P
	78	OFF	Fig.10	P
8DPSK	0	OFF	Fig.11	P
	78	OFF	Fig.12	P

See below for test graphs.

Conclusion: Pass

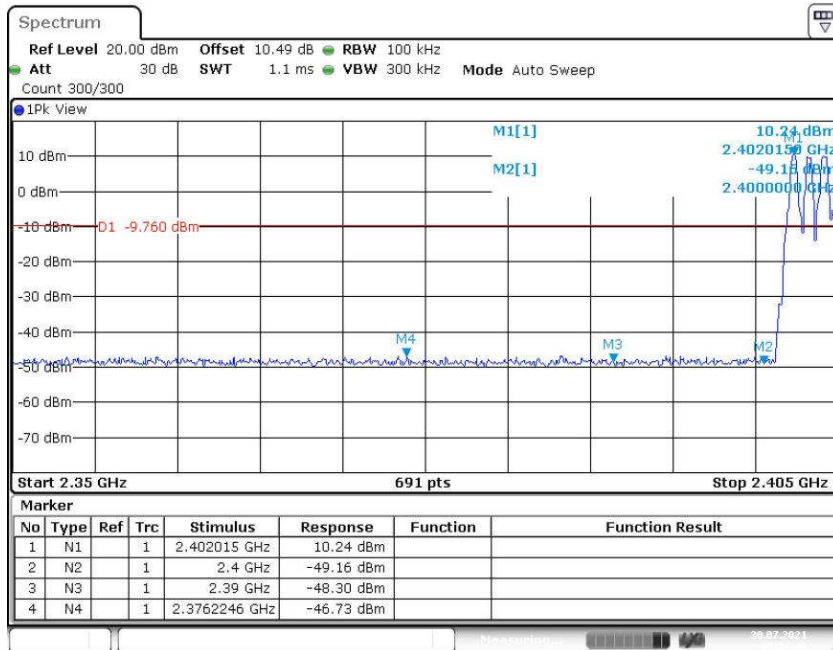


Fig. 1 Band Edges (GFSK, CH0, Hopping ON)

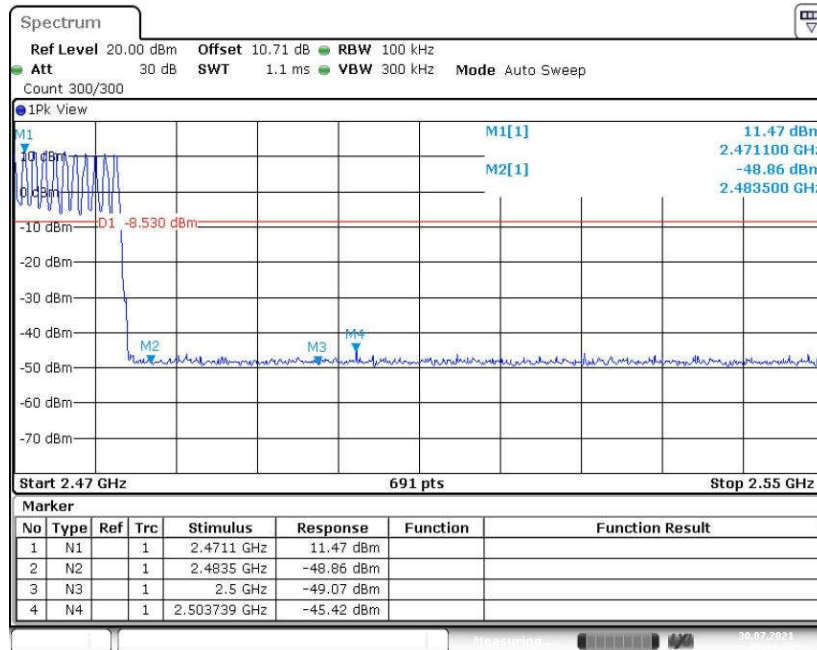


Fig. 2 Band Edges (GFSK, CH78, Hopping ON)

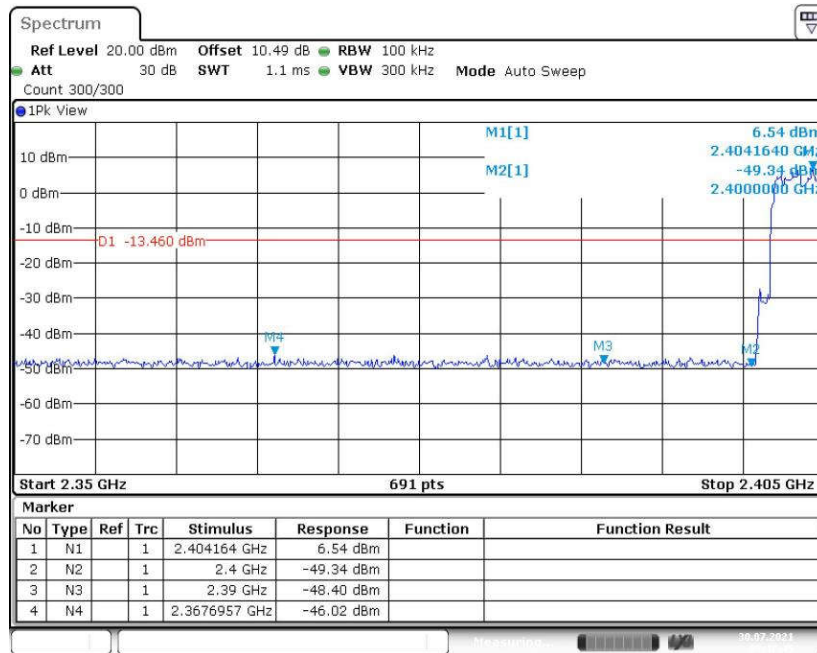


Fig. 3 Band Edges ($\pi/4$ DQPSK, CH0, Hopping ON)

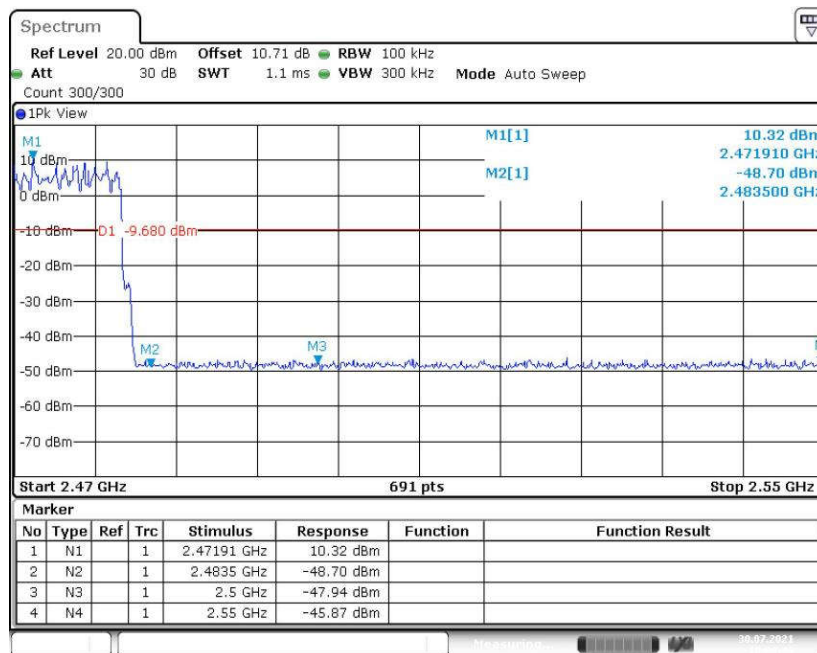


Fig. 4 Band Edges ($\pi/4$ DQPSK, CH78, Hopping ON)

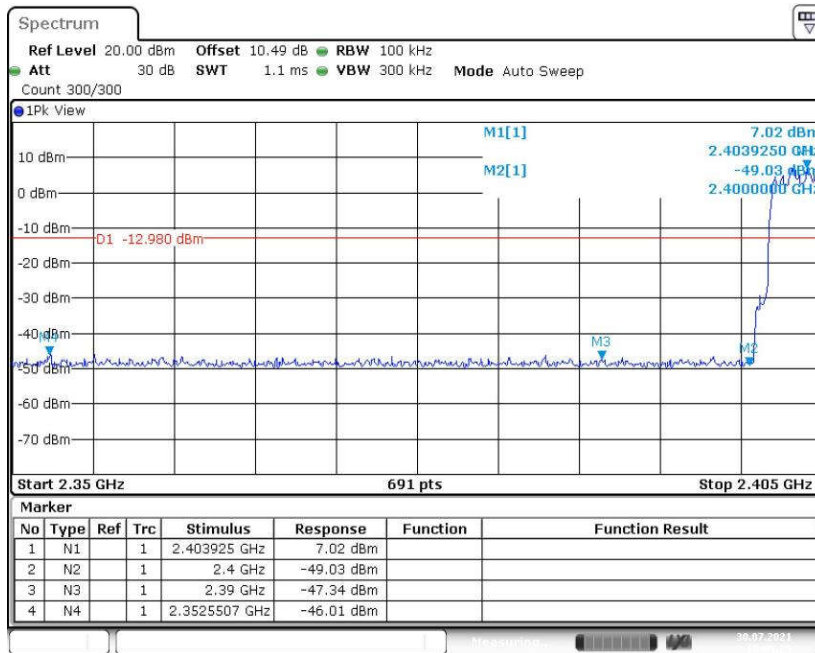


Fig. 5 Band Edges (8DPSK, CH0, Hopping ON)

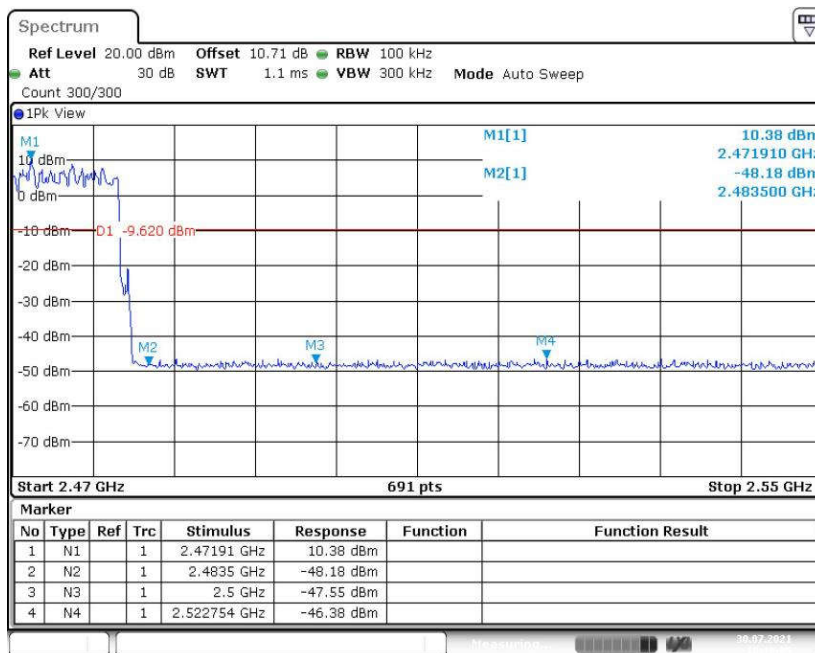


Fig. 6 Band Edges (8DPSK, CH78, Hopping ON)

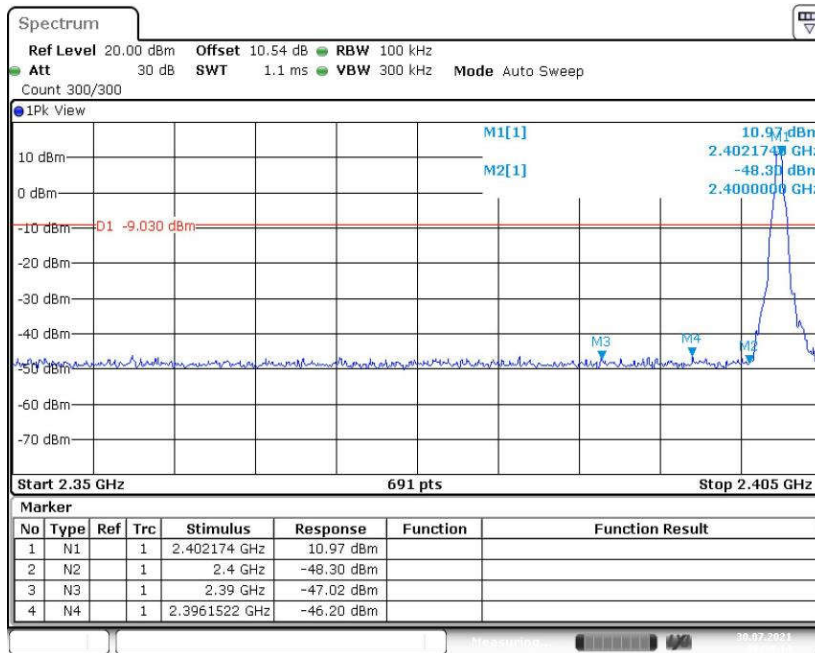


Fig. 7 Band Edges (GFSK, CH0, Hopping OFF)

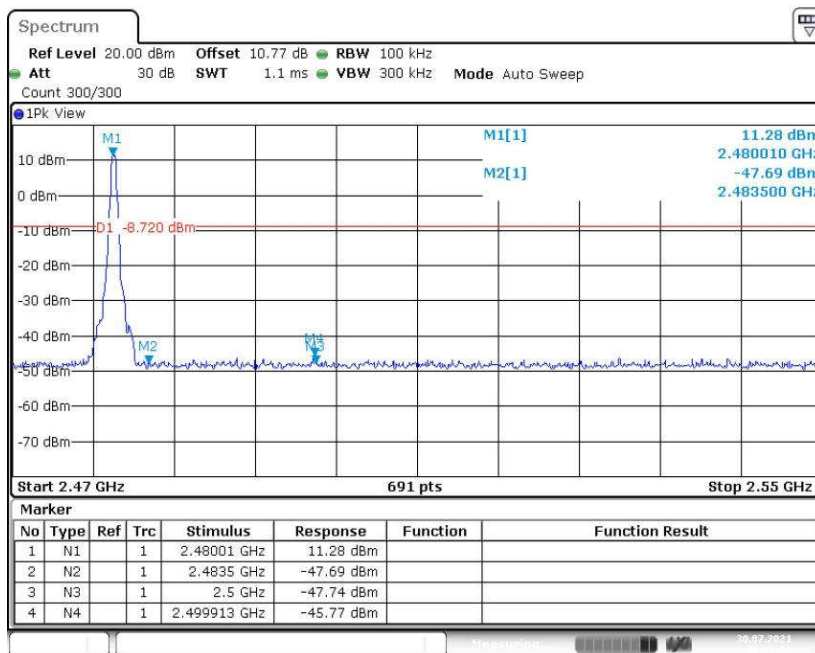


Fig. 8 Band Edges (GFSK, CH78, Hopping OFF)

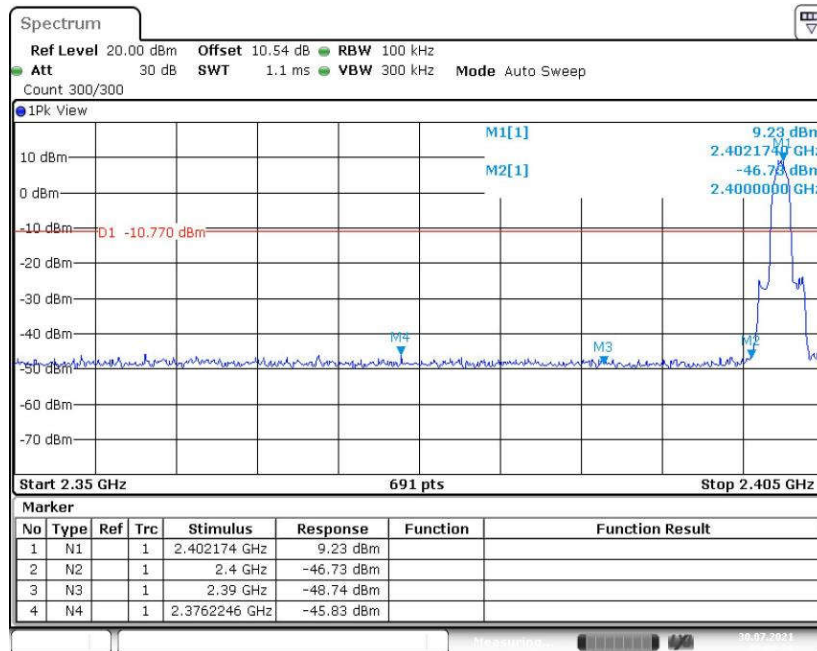


Fig. 9 Band Edges ($\pi/4$ DQPSK, CH0, Hopping OFF)

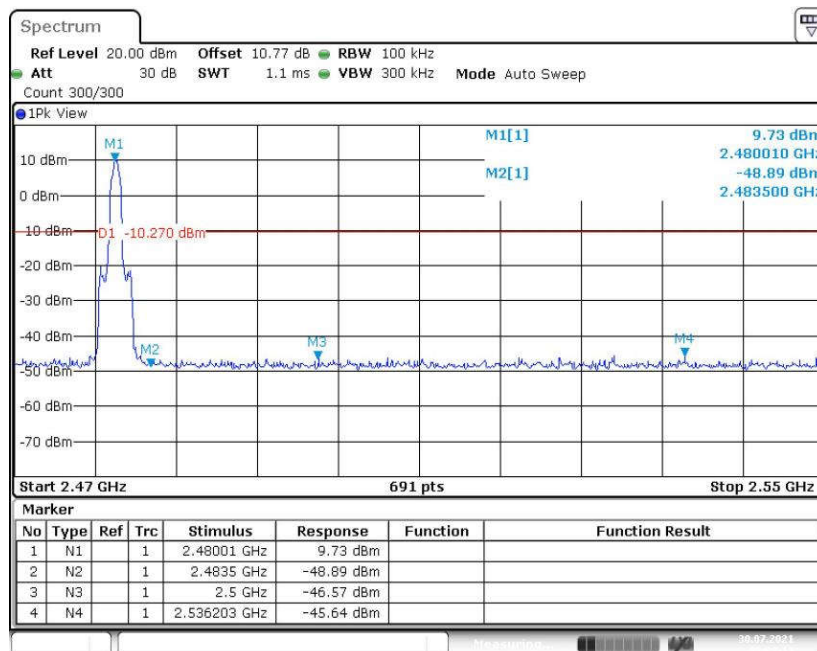


Fig. 10 Band Edges ($\pi/4$ DQPSK, CH78, Hopping OFF)

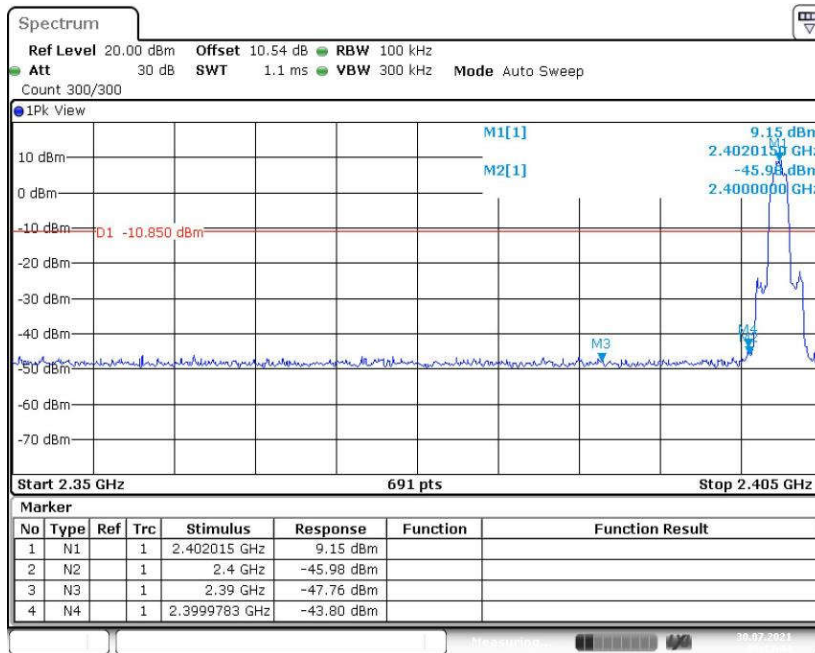


Fig. 11 Band Edges (8DPSK, CH0, Hopping OFF)

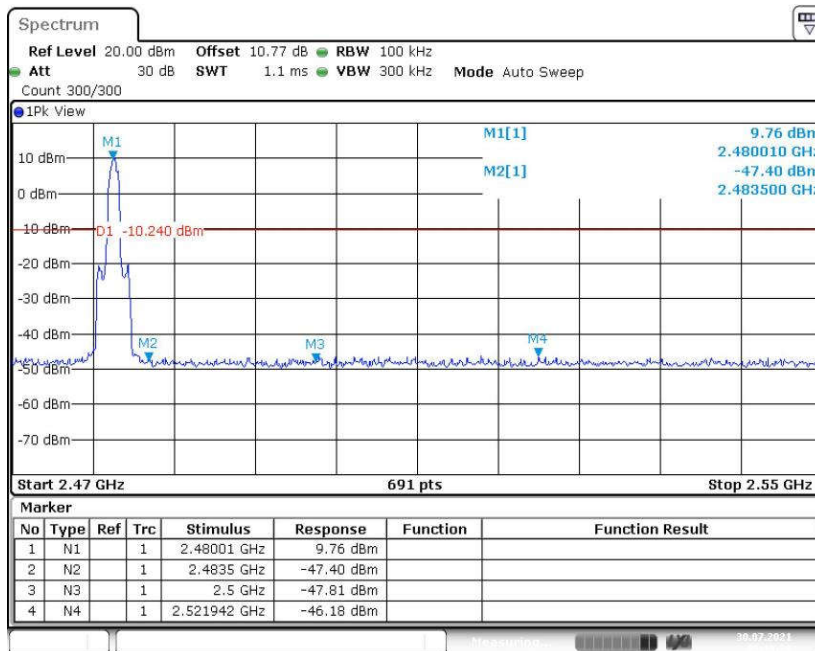


Fig. 12 Band Edges (8DPSK, CH78, Hopping OFF)



A.3 Conducted Emission

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247 (d)	20dBm below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.402 GHz	Fig.13	P
		30MHz -1GHz	Fig.14	P
		1GHz-26.5GHz	Fig.15	P
	39	2.441 GHz	Fig.16	P
		30MHz -1GHz	Fig.17	P
		1GHz-26.5GHz	Fig.18	P
	78	2.480 GHz	Fig.19	P
		30MHz -1GHz	Fig.20	P
		1GHz-26.5GHz	Fig.21	P
$\pi/4$ DQPSK	0	2.402 GHz	Fig.22	P
		30MHz -1GHz	Fig.23	P
		1GHz-26.5GHz	Fig.24	P
	39	2.441 GHz	Fig.25	P
		30MHz -1GHz	Fig.26	P
		1GHz-26.5GHz	Fig.27	P
	78	2.480 GHz	Fig.28	P
		30MHz -1GHz	Fig.29	P
		1GHz-26.5GHz	Fig.30	P
8DPSK	0	2.402 GHz	Fig.31	P
		30MHz -1GHz	Fig.32	P
		1GHz-26.5GHz	Fig.33	P
	39	2.441 GHz	Fig.34	P
		30MHz -1GHz	Fig.35	P
		1GHz-26.5GHz	Fig.36	P
	78	2.480 GHz	Fig.37	P
		30MHz -1GHz	Fig.38	P
		1GHz-26.5GHz	Fig.39	P

See below for test graphs.

Conclusion: Pass

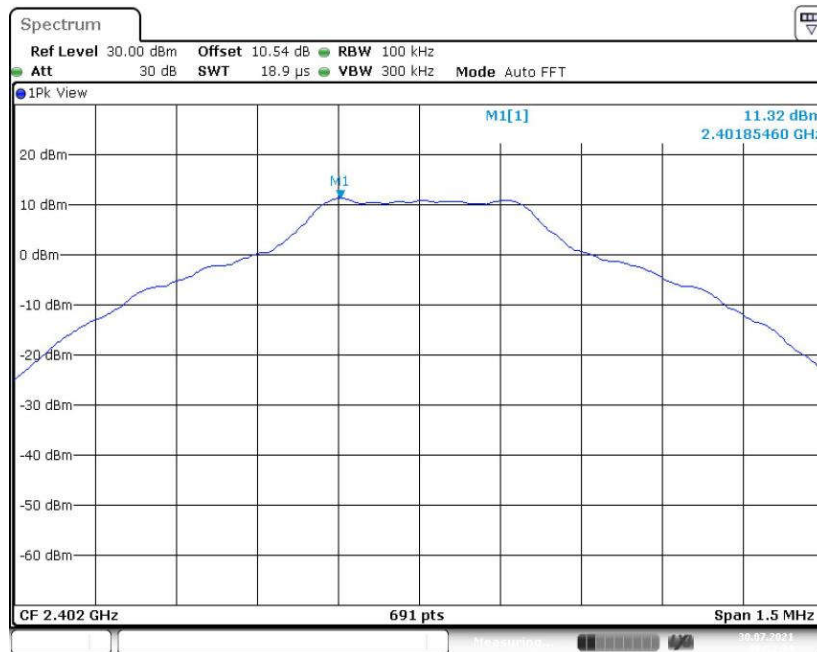


Fig. 13 Conducted Spurious Emission (GFSK, CH0, 2.402GHz)

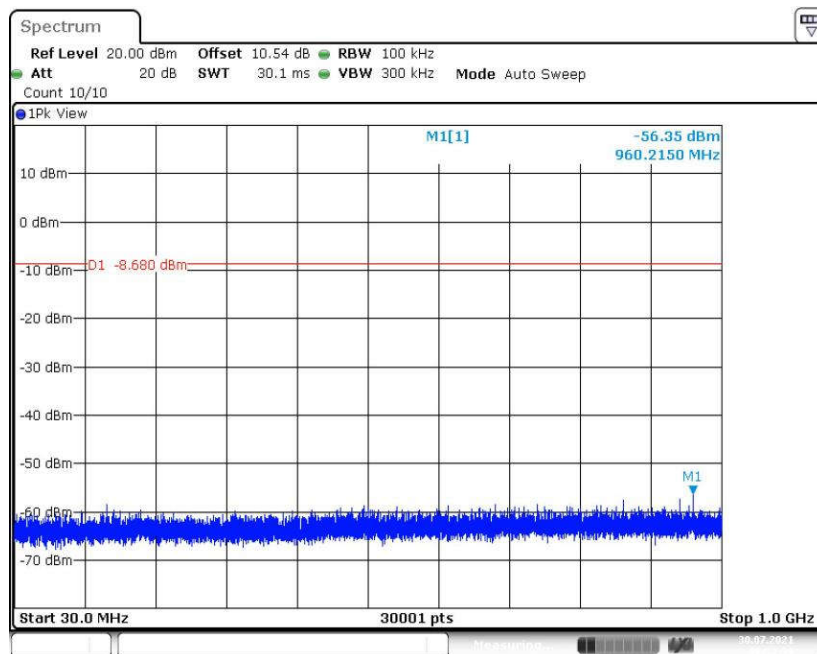


Fig. 14 Conducted Spurious Emission (GFSK, CH0, 30MHz -1GHz)

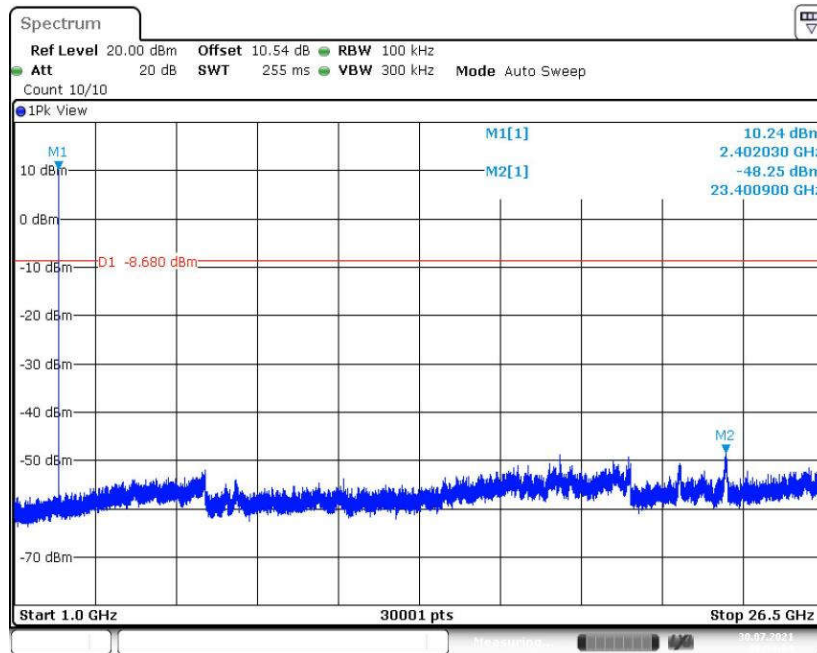


Fig. 15 Conducted Spurious Emission (GFSK, CH0, 1GHz-26.5GHz)

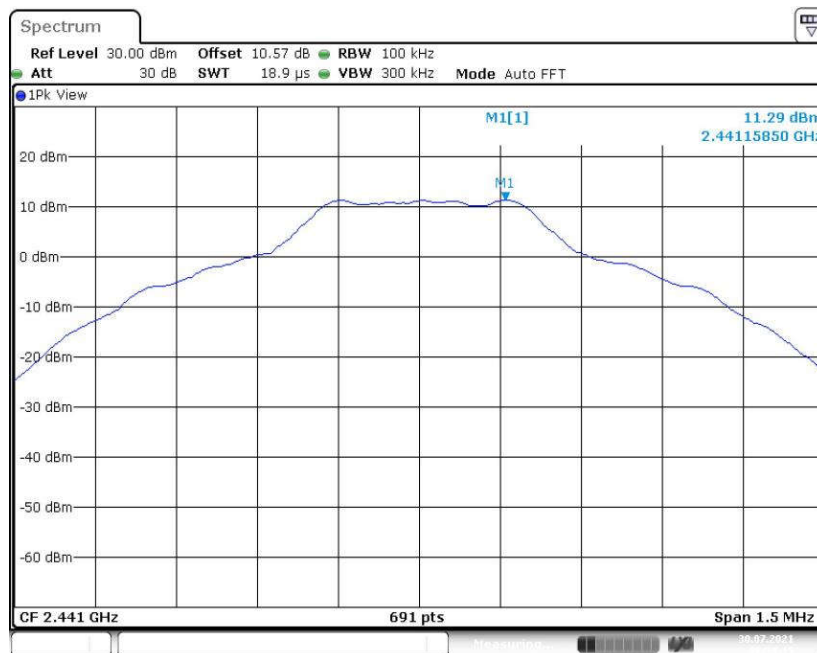


Fig. 16 Conducted Spurious Emission (GFSK, CH39, 2.441GHz)

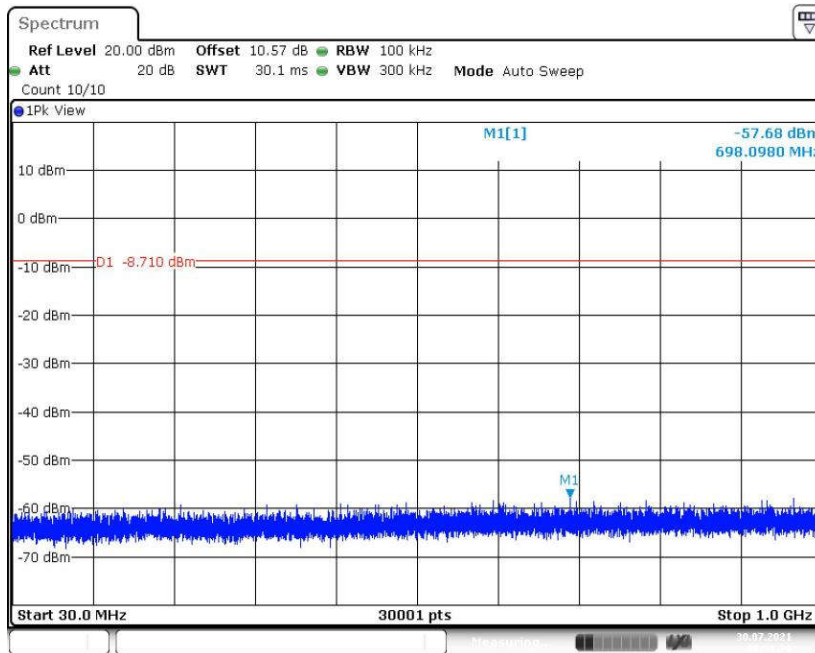


Fig. 17 Conducted Spurious Emission (GFSK, CH39, 30MHz -1GHz)

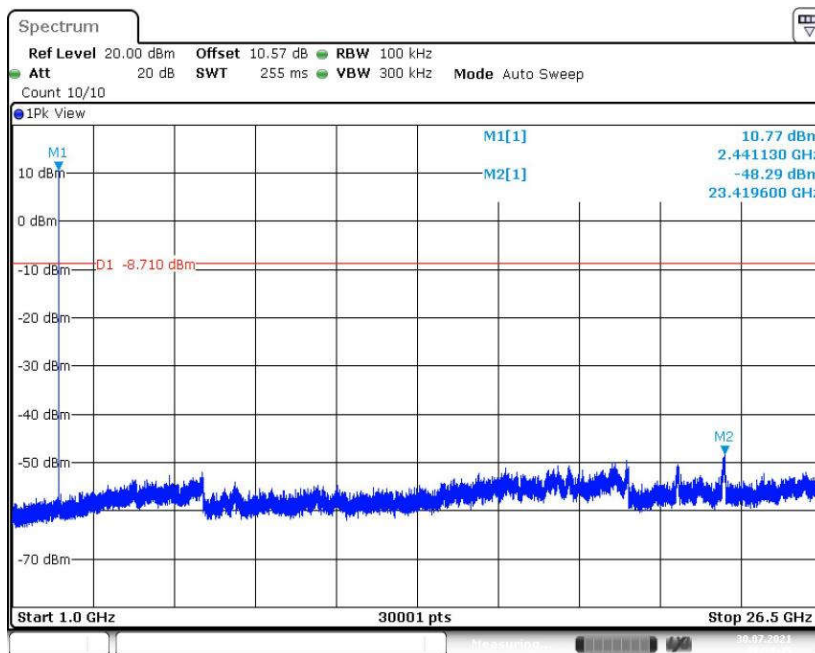


Fig. 18 Conducted Spurious Emission (GFSK, CH39, 1GHz-26.5GHz)

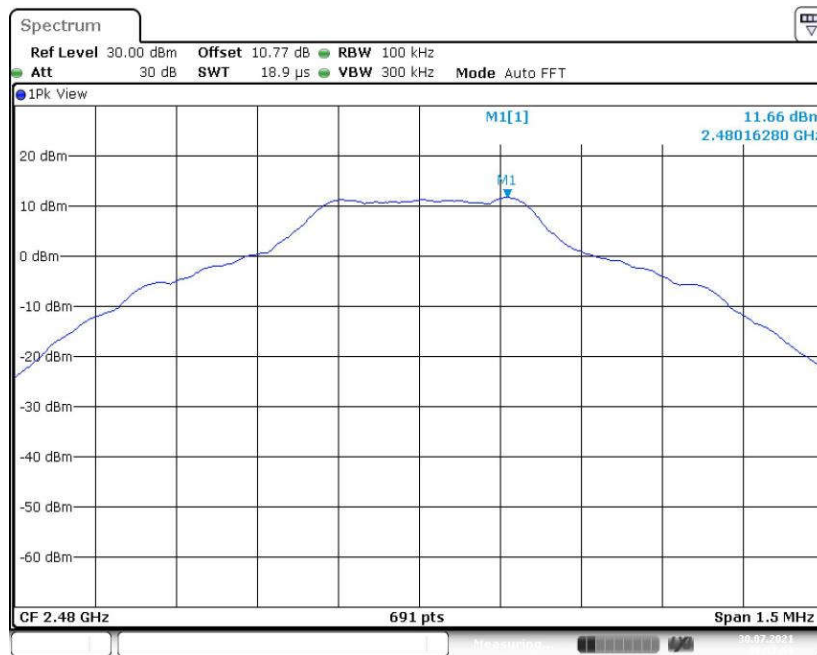


Fig. 19 Conducted Spurious Emission (GFSK, CH78, 2.480GHz)

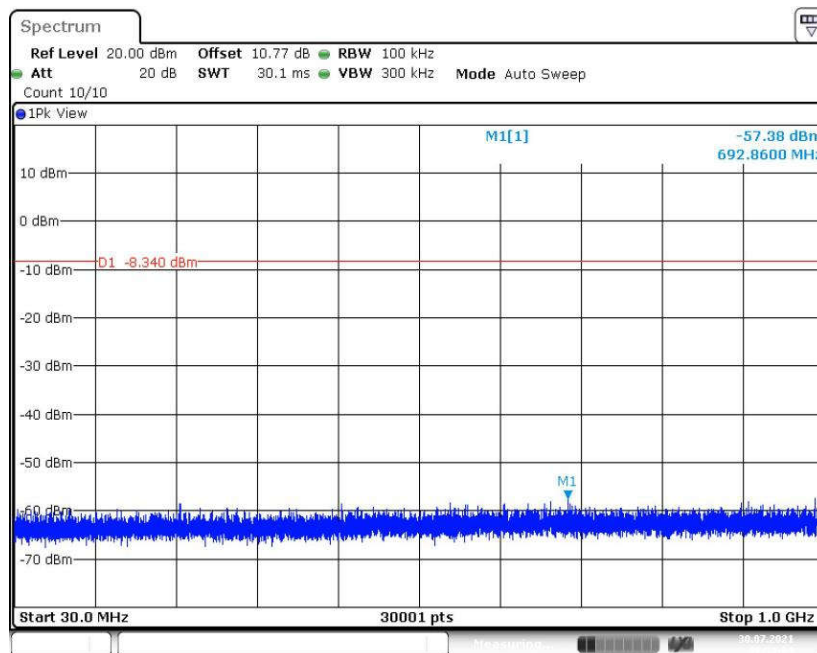


Fig. 20 Conducted Spurious Emission (GFSK, CH78, 30MHz -1GHz)

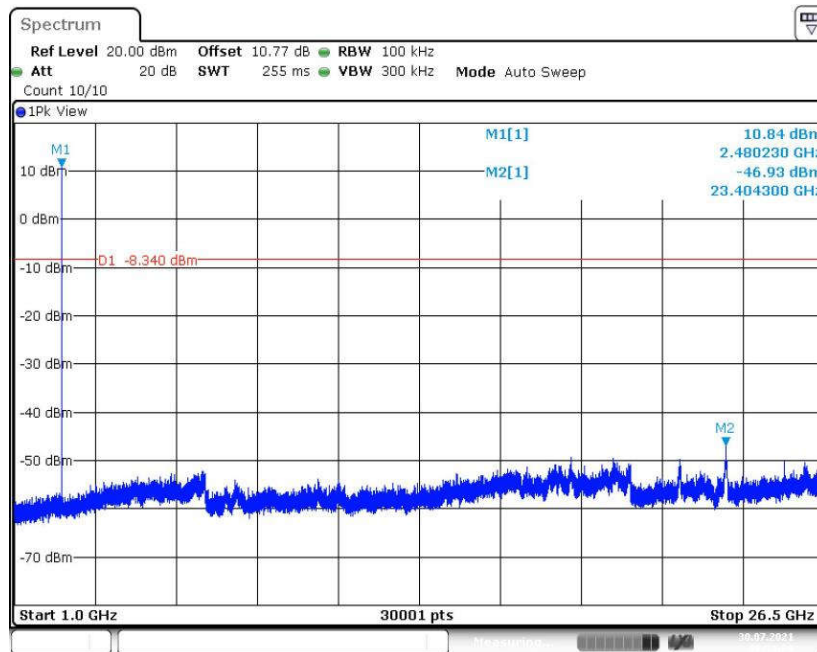


Fig. 21 Conducted Spurious Emission (GFSK, CH78, 1GHz-26.5GHz)

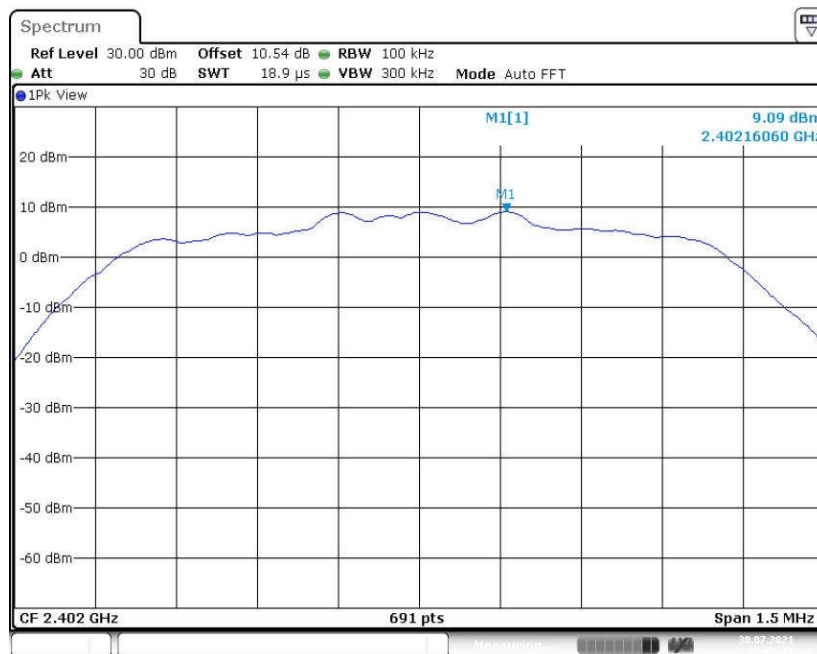


Fig. 22 Conducted Spurious Emission ($\pi/4$ DQPSK, CH0, 2.402GHz)

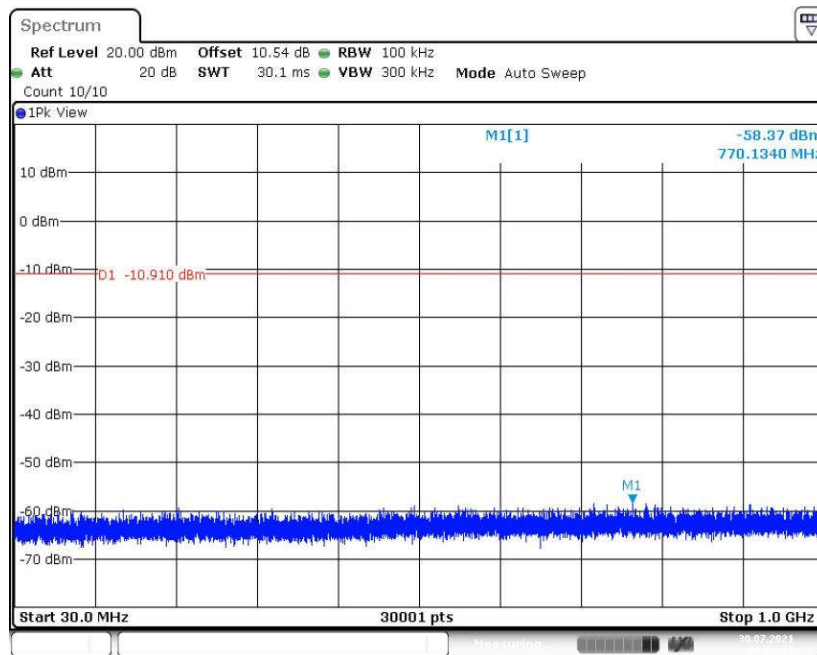


Fig. 23 Conducted Spurious Emission ($\pi/4$ DQPSK, CH0, 30MHz -1GHz)

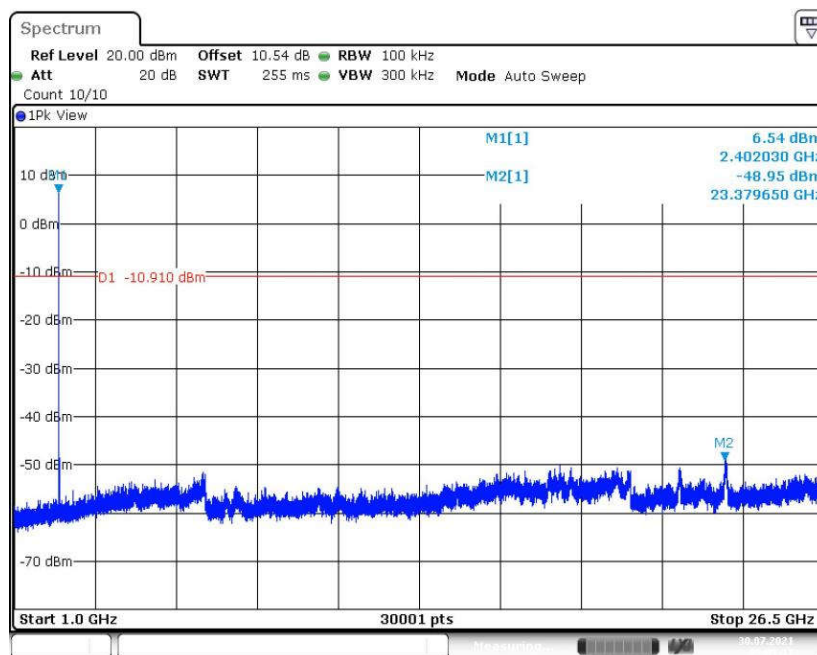


Fig. 24 Conducted Spurious Emission ($\pi/4$ DQPSK, CH0, 1GHz-26.5GHz)

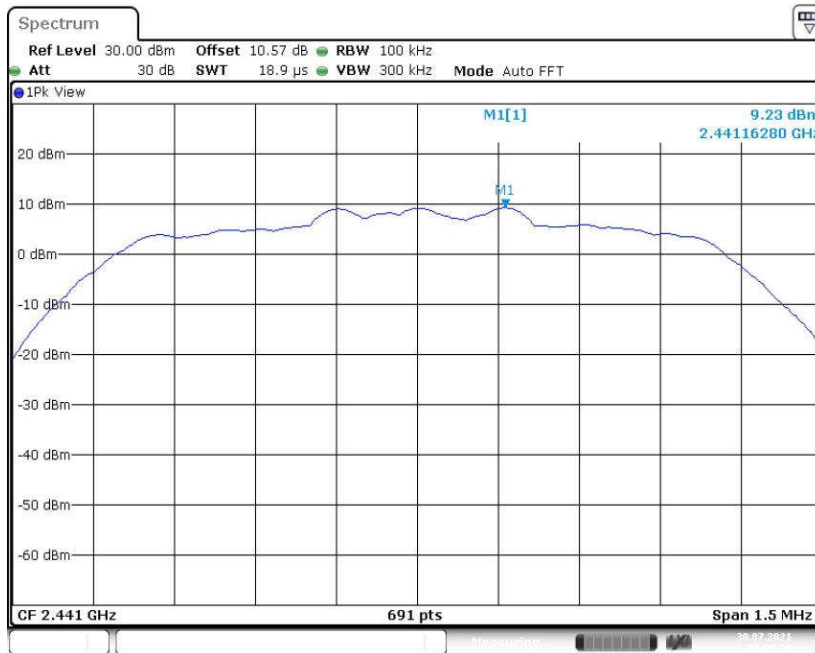


Fig. 25 Conducted Spurious Emission ($\pi/4$ DQPSK, CH39, 2.441GHz)

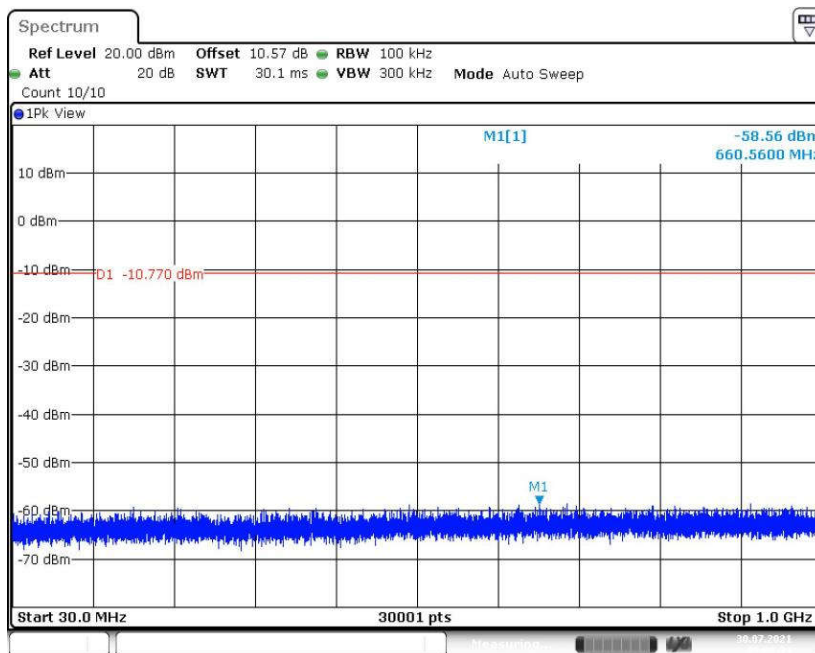


Fig. 26 Conducted Spurious Emission ($\pi/4$ DQPSK, CH39, 30MHz -1GHz)

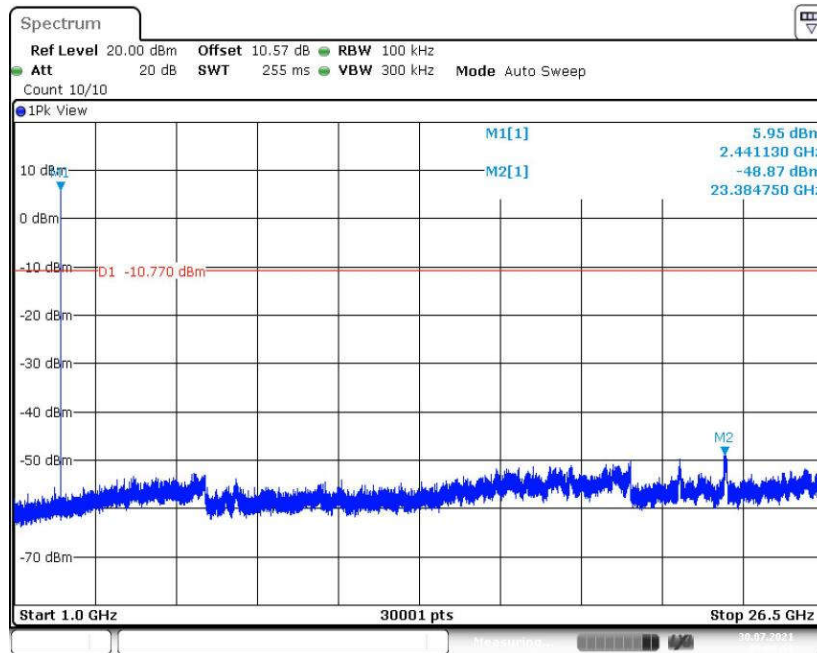


Fig. 27 Conducted Spurious Emission ($\pi/4$ DQPSK, CH39, 1GHz-26.5GHz)

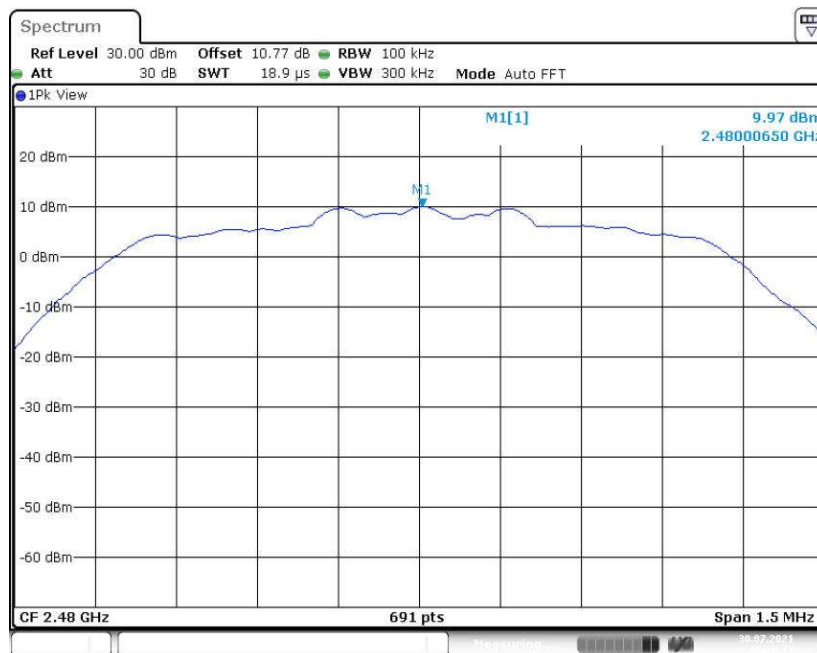


Fig. 28 Conducted Spurious Emission ($\pi/4$ DQPSK, CH78, 2.480GHz)

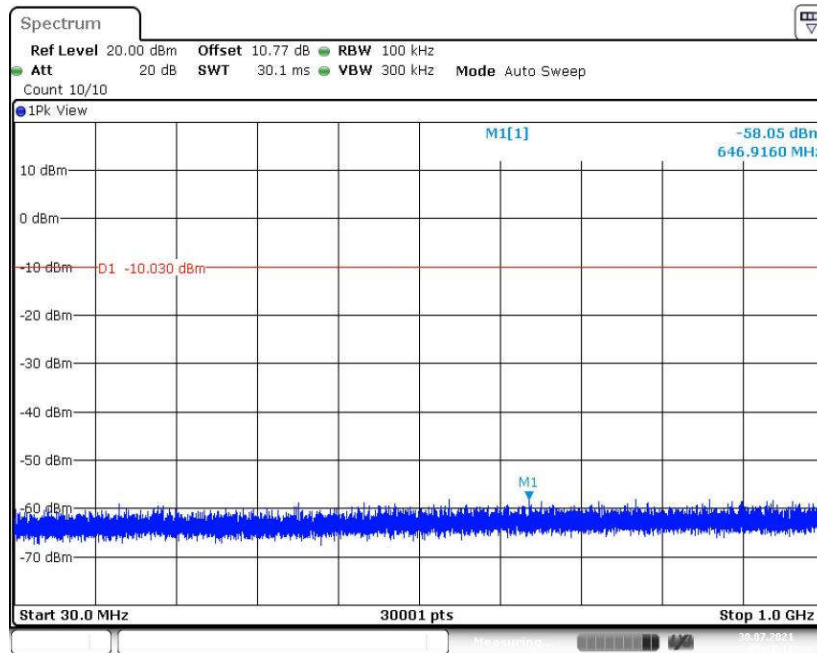


Fig. 29 Conducted Spurious Emission ($\pi/4$ DQPSK, CH78, 30MHz -1GHz)

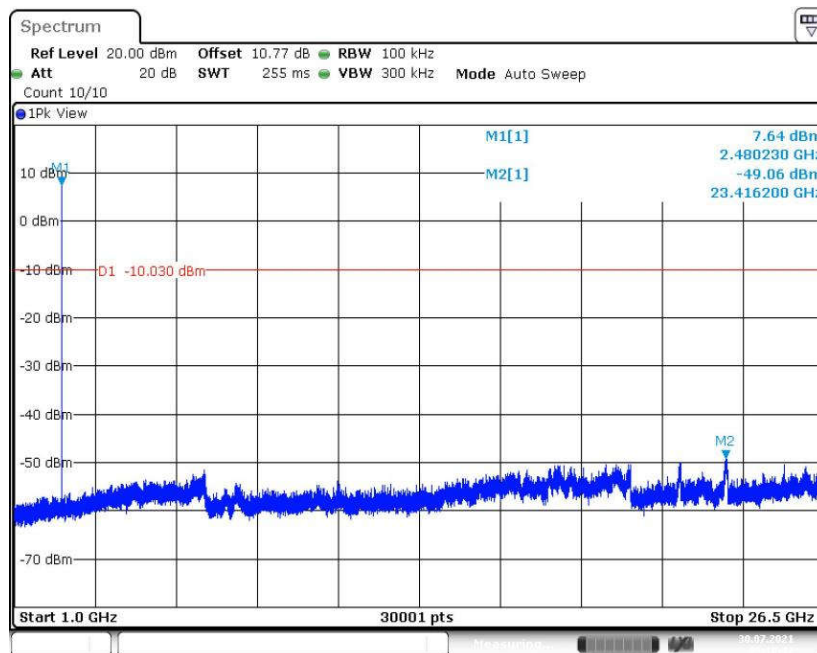


Fig. 30 Conducted Spurious Emission ($\pi/4$ DQPSK, CH78, 1GHz-26.5GHz)

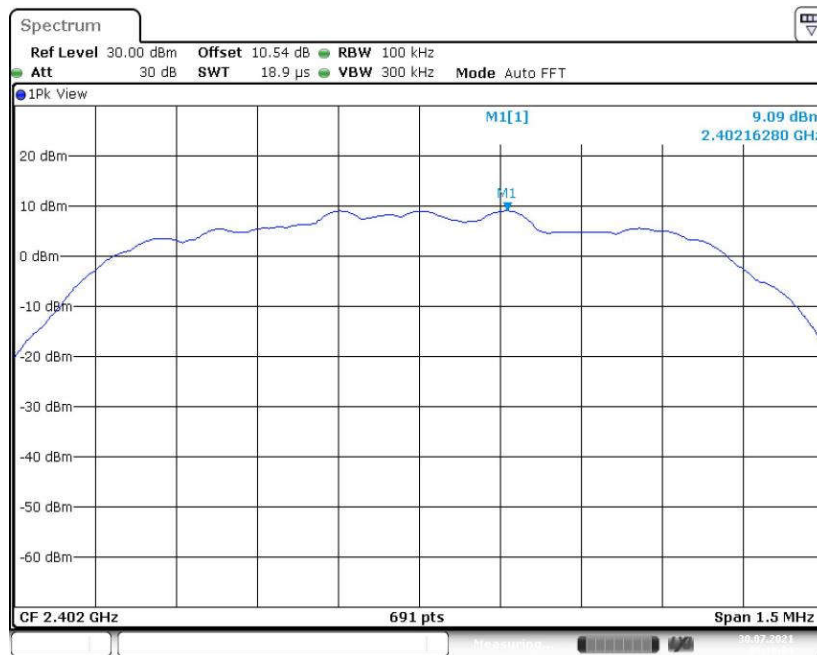


Fig. 31 Conducted Spurious Emission (8DPSK, CH0, 2.402GHz)

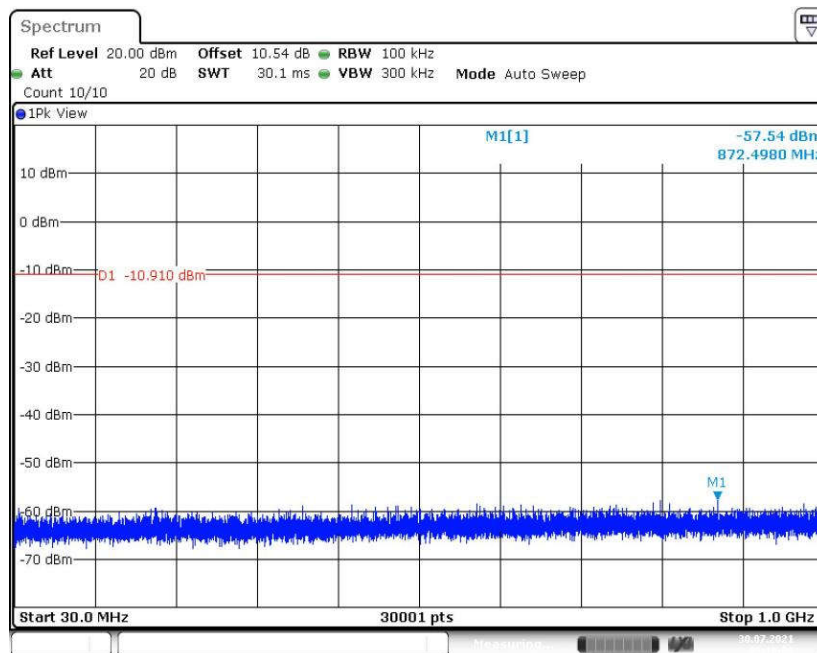


Fig. 32 Conducted Spurious Emission (8DPSK, CH0, 30MHz -1GHz)

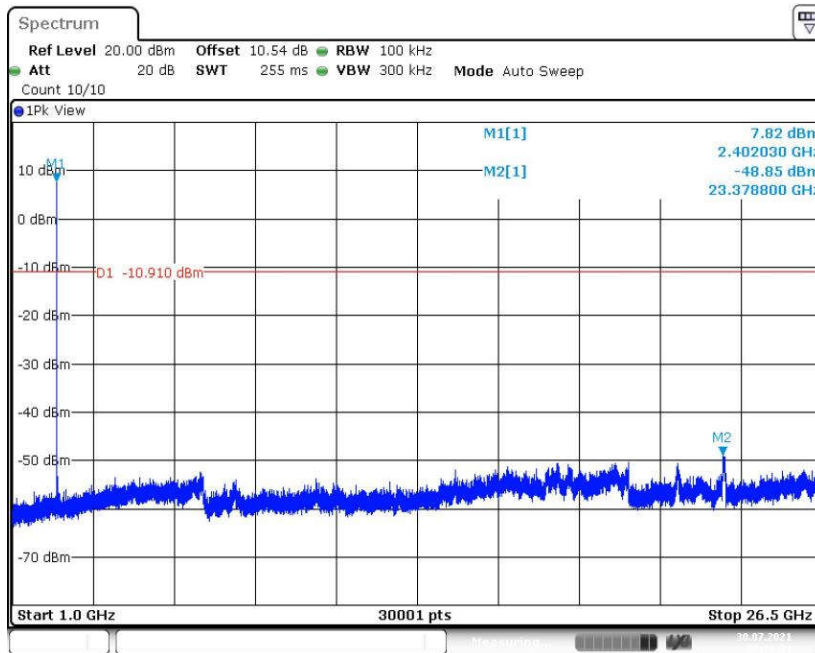


Fig. 33 Conducted Spurious Emission (8DPSK, CH0, 1GHz-26.5GHz)

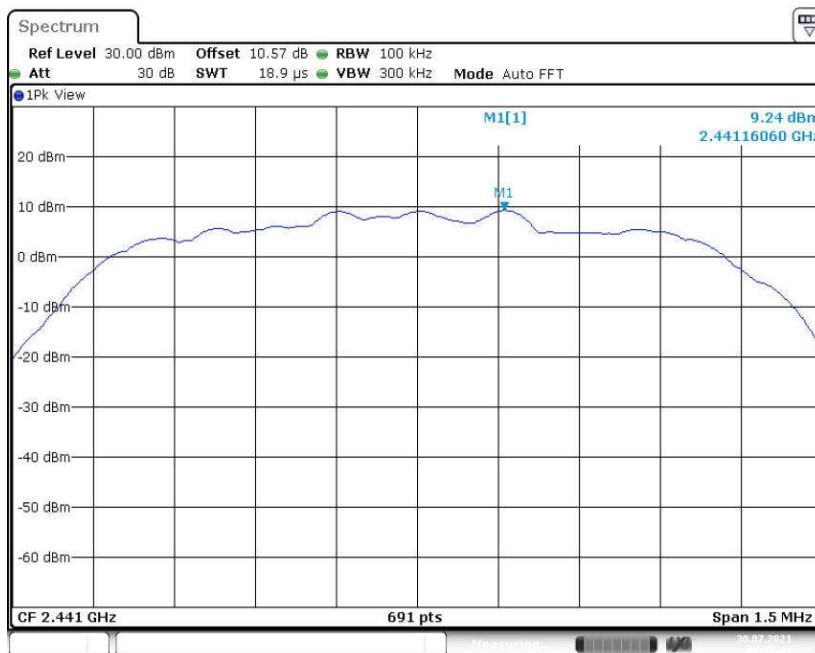


Fig. 34 Conducted Spurious Emission (8DPSK, CH39, 2.441GHz)

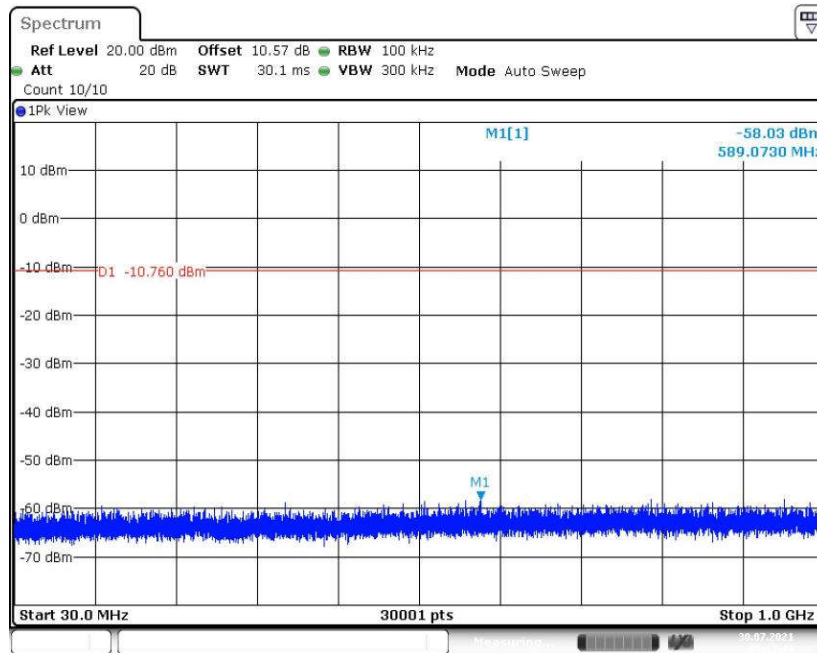


Fig. 35 Conducted Spurious Emission (8DPSK, CH39, 30MHz -1GHz)

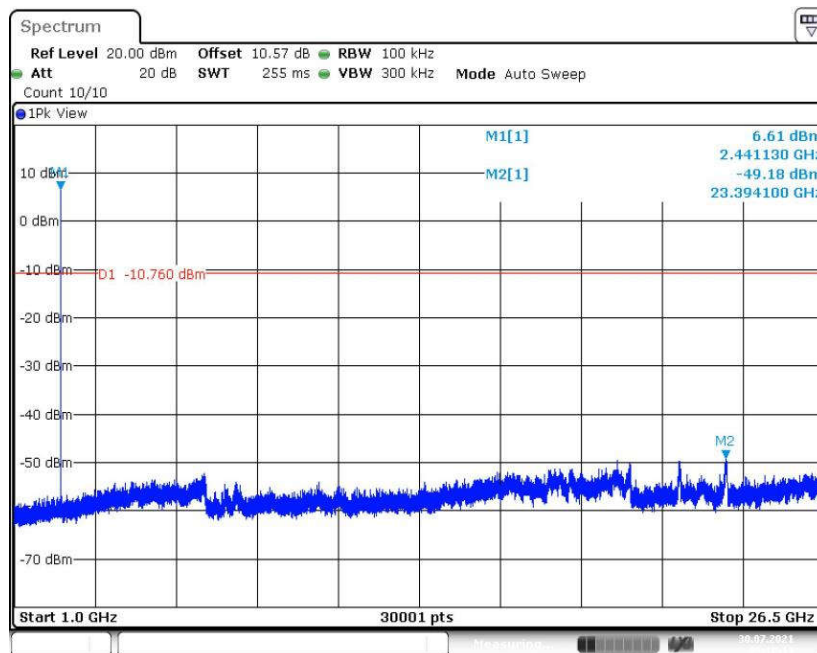


Fig. 36 Conducted Spurious Emission (8DPSK, CH39, 1GHz-26.5GHz)

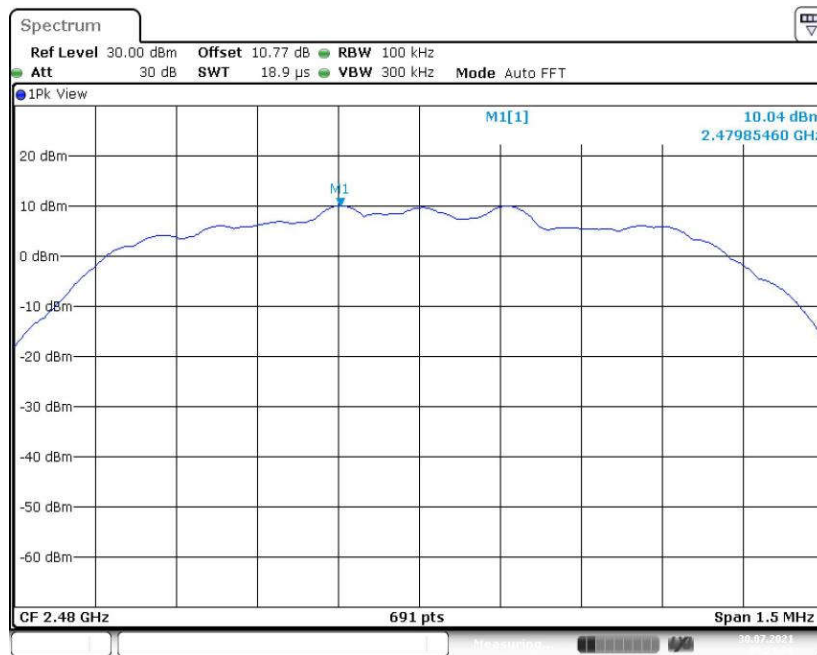


Fig. 37 Conducted Spurious Emission (8DPSK, CH78, 2.480GHz)

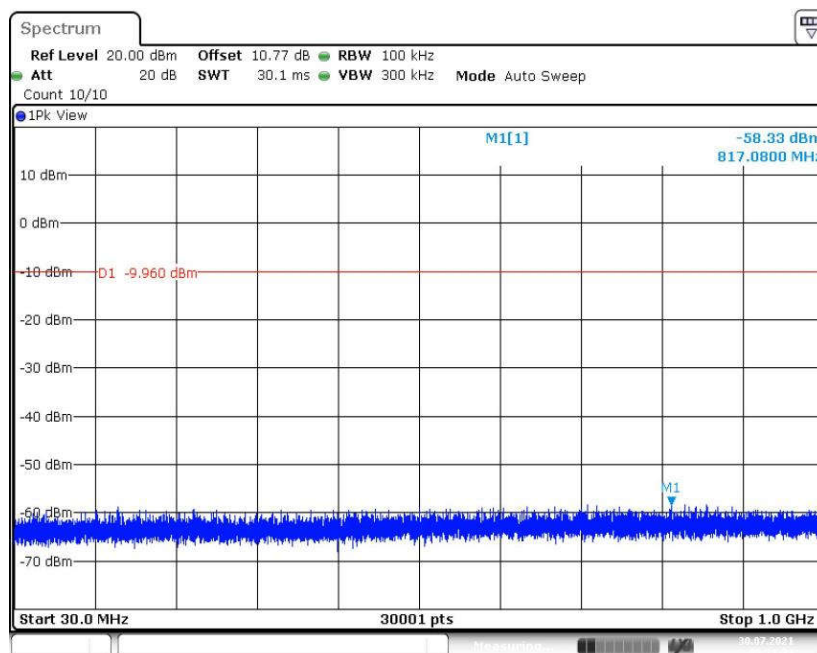


Fig. 38 Conducted Spurious Emission (8DPSK, CH78, 30MHz -1GHz)

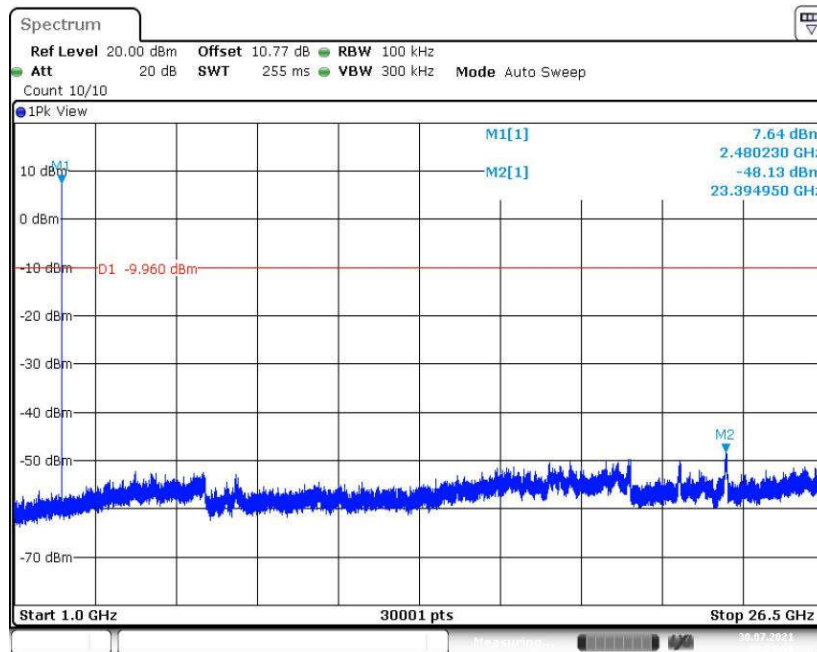


Fig. 39 Conducted Spurious Emission (8DPSK, CH78, 1GHz-26.5GHz)



A.4 Radiated Emission

Measurement Limit:

Standard	Limit (dBm)
FCC 47 CFR Part 15.247, 15.205, 15.209	20dBm below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	1 GHz ~18 GHz	Fig.40	P
	39	1 GHz ~18 GHz	Fig.41	P
	78	1 GHz ~18 GHz	Fig.42	P
	Restricted Band(CH0)	2.38 GHz ~ 2.45 GHz	Fig.43	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.44	P
$\pi/4$ DQPSK	0	1 GHz ~18 GHz	Fig.45	P
	39	1 GHz ~18 GHz	Fig.46	P
	78	1 GHz ~18 GHz	Fig.47	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.48	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.49	P
8DPSK	0	1 GHz ~18 GHz	Fig.50	P
	39	1 GHz ~18 GHz	Fig.51	P
	78	1 GHz ~18 GHz	Fig.52	P
	Restricted Band (CH0)	2.38 GHz ~ 2.45 GHz	Fig.53	P
	Restricted Band (CH78)	2.45 GHz ~ 2.5 GHz	Fig.54	P
/	All channels	9 kHz ~30 MHz	Fig.55	P
		30 MHz ~1 GHz	Fig.56	P
		18 GHz ~26.5 GHz	Fig.57	P

Worst Case Result
GFSK CH39 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
7323.428572	46.92	74.00	27.08	V	5.2
10415.142857	47.55	74.00	26.45	V	9.1
12814.285714	49.05	74.00	24.95	V	11.1
14775.857143	51.44	74.00	22.56	V	12.7
16849.714286	54.40	74.00	19.60	V	17.9
17939.571429	55.18	74.00	18.82	V	19.0

Frequency (MHz)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
7323.428572	35.90	54.00	18.10	V	5.2
10415.142857	35.62	54.00	18.38	V	9.1
12814.285714	37.03	54.00	16.97	V	11.1
14775.857143	38.33	54.00	15.67	V	12.7
16849.714286	42.22	54.00	11.78	V	17.9
17939.571429	43.00	54.00	11.00	V	19.0



π/4 DQPSK CH39 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7627.714286	45.87	74.00	28.13	V	5.7
10438.285714	48.37	74.00	25.63	V	9.0
12781.285714	49.30	74.00	24.70	V	11.1
14844.428572	50.87	74.00	23.13	V	13.0
17117.142857	55.96	74.00	18.04	V	18.4
17911.285714	55.42	74.00	18.58	V	18.9

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7627.714286	33.61	54.00	20.39	V	5.7
10438.285714	35.75	54.00	18.25	V	9.0
12781.285714	36.75	54.00	17.26	V	11.1
14844.428572	39.24	54.00	14.76	V	13.0
17117.142857	43.53	54.00	10.47	V	18.4
17911.285714	43.14	54.00	10.86	V	18.9

8DPSK CH39 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7463.571429	45.87	74.00	28.13	H	5.7
10438.285714	48.72	74.00	25.28	V	9.0
12450.000000	49.28	74.00	24.72	V	11.4
14830.285714	51.38	74.00	22.62	H	12.9
16906.285714	55.04	74.00	18.96	H	18.1
17895.428571	56.09	74.00	17.91	H	18.8

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
7463.571429	33.23	54.00	20.77	H	5.7
10438.285714	35.70	54.00	18.30	V	9.0
12450.000000	37.20	54.00	16.80	V	11.4
14830.285714	38.90	54.00	15.10	H	12.9
16906.285714	42.37	54.00	11.63	H	18.1
17895.428571	42.76	54.00	11.24	H	18.8

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument. The measurement results are obtained as described below:

Result= P_{Mea} +Cable Loss +Antenna Factor-Gain of the preamplifier.

See below for test graphs.

Conclusion: Pass

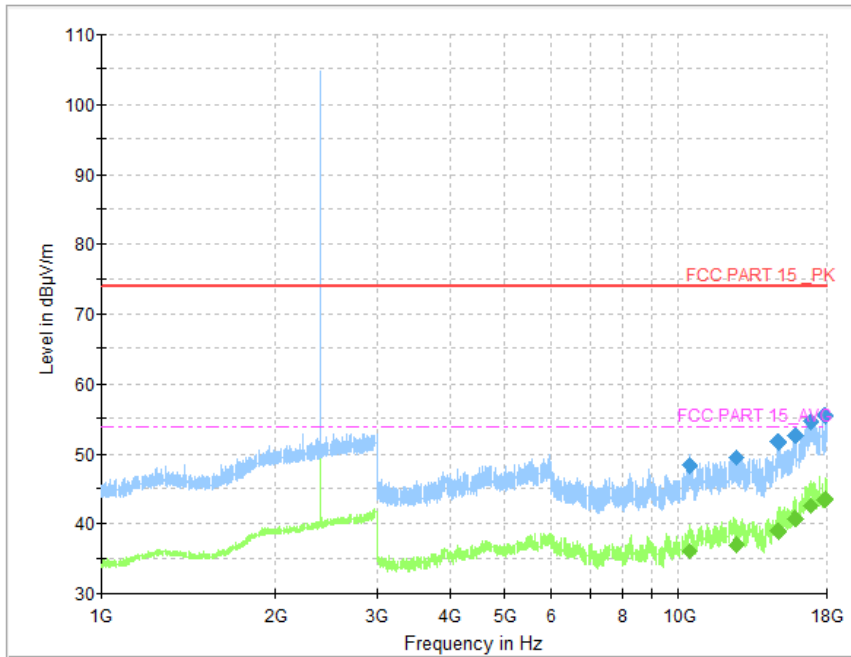


Fig. 40 Radiated Spurious Emission (GFSK, CH0, 1 GHz ~18 GHz)

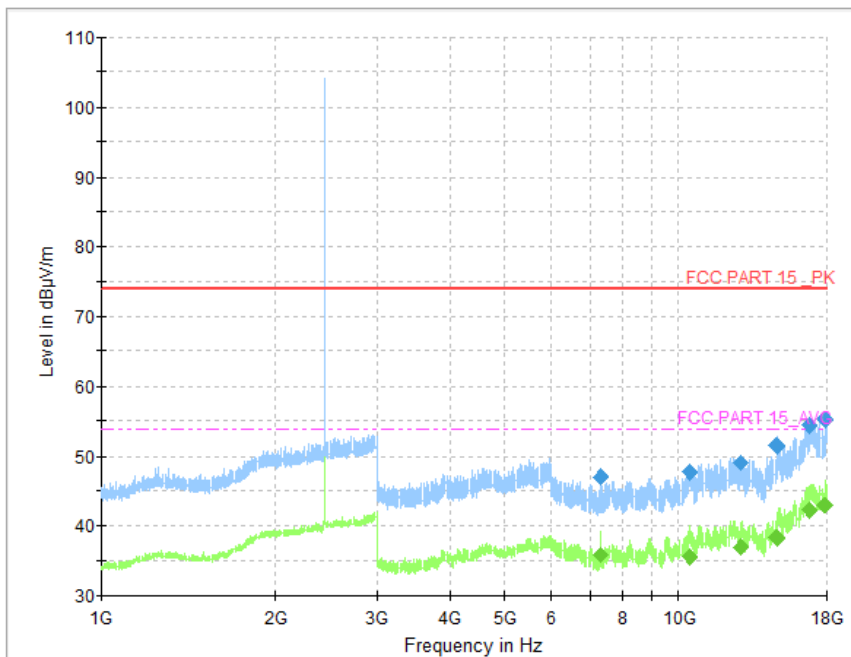


Fig. 41 Radiated Spurious Emission (GFSK, CH39, 1 GHz ~18 GHz)

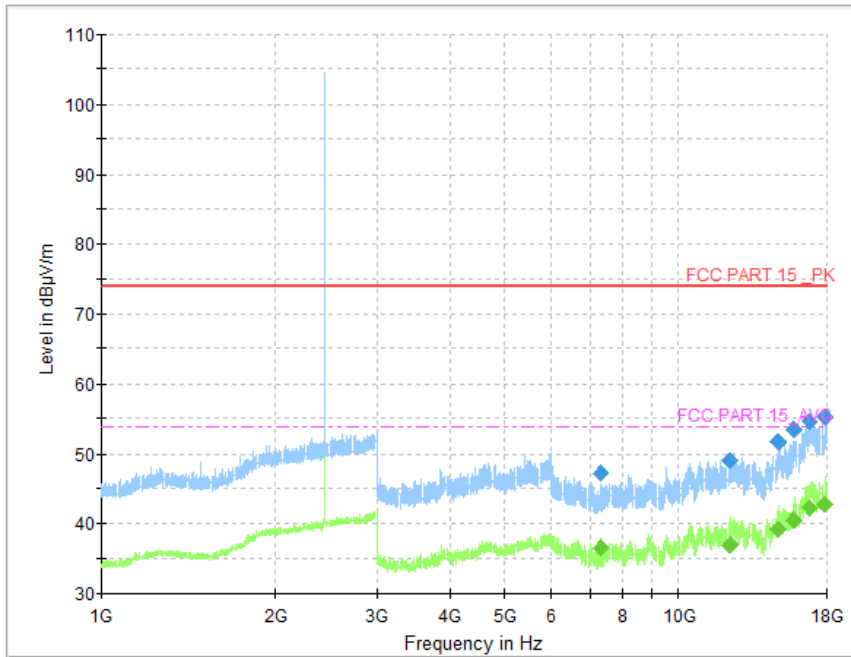


Fig. 42 Radiated Spurious Emission (GFSK, CH78, 1 GHz ~18 GHz)

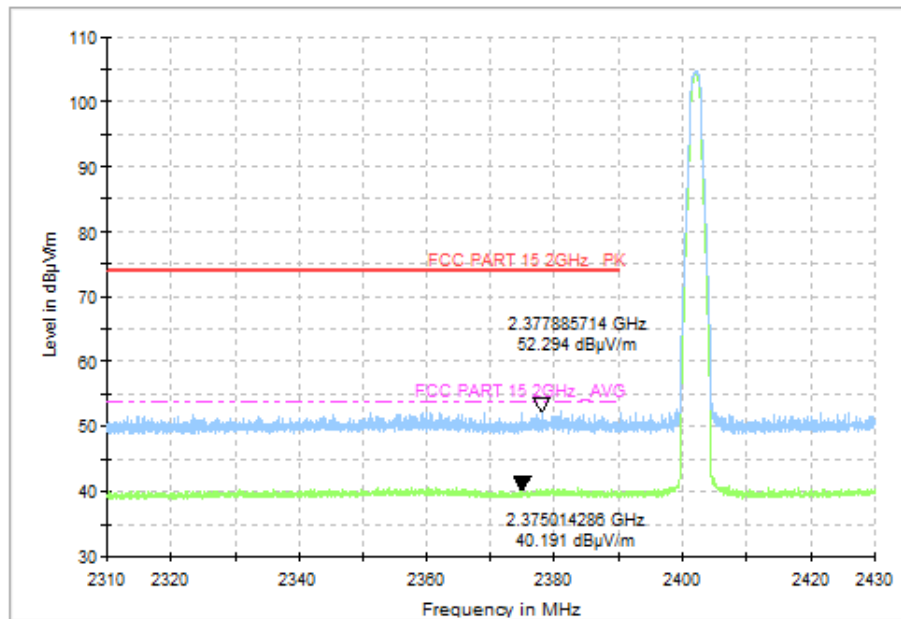


Fig. 43 Radiated Band Edges (GFSK, CH0, 2380GHz~2450GHz)

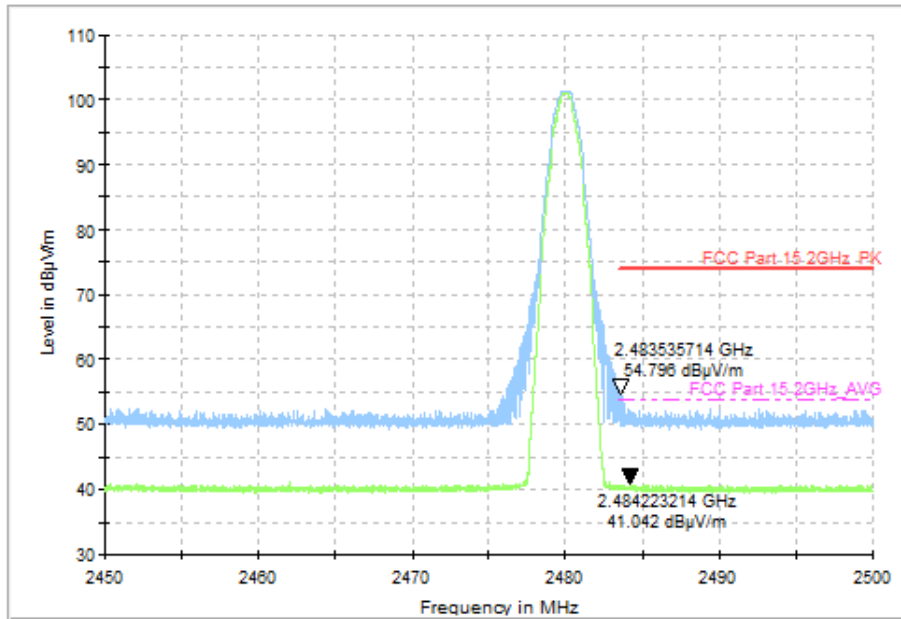


Fig. 44 Radiated Band Edges (GFSK, CH78, 2450GHz~2500GHz)

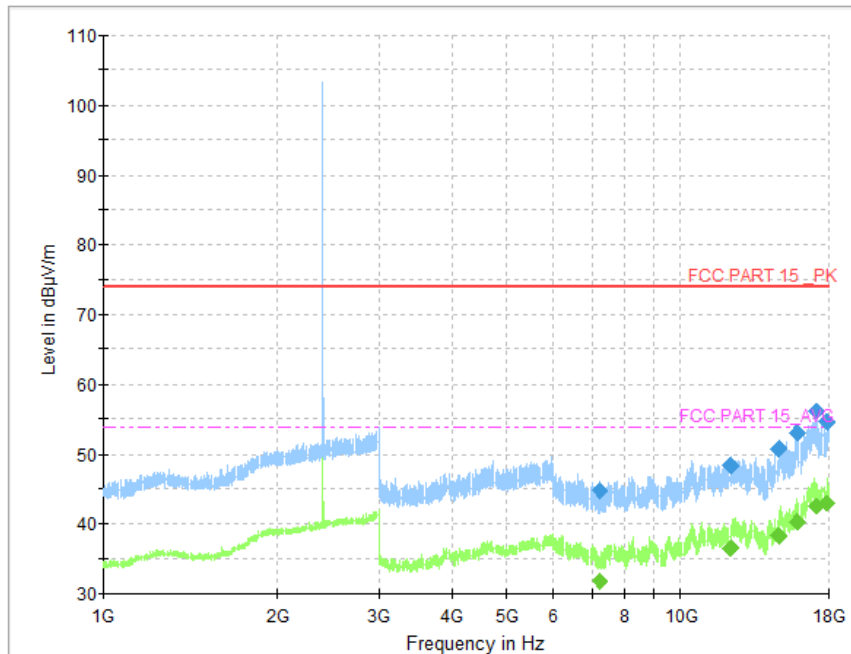


Fig. 45 Radiated Spurious Emission ($\pi/4$ DQPSK, CH0, 1 GHz ~18 GHz)

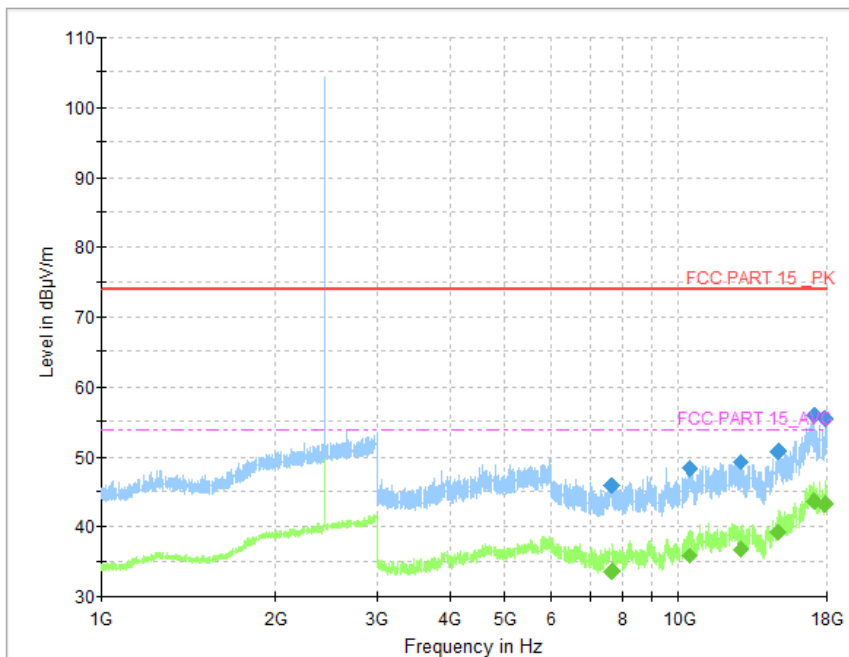


Fig. 46 Radiated Spurious Emission ($\pi/4$ DQPSK, CH39, 1 GHz ~18 GHz)

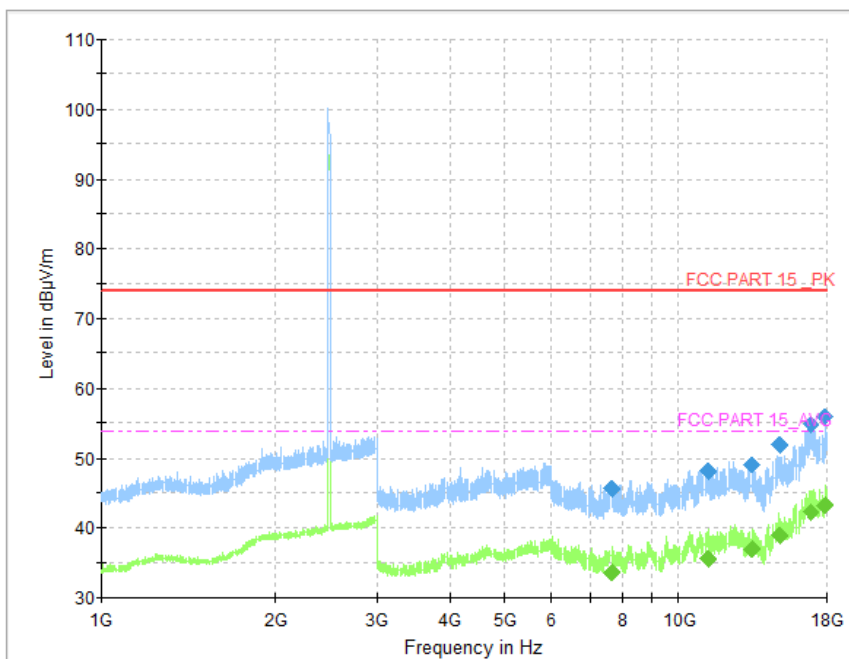


Fig. 47 Radiated Spurious Emission ($\pi/4$ DQPSK, CH78, 1 GHz ~18 GHz)

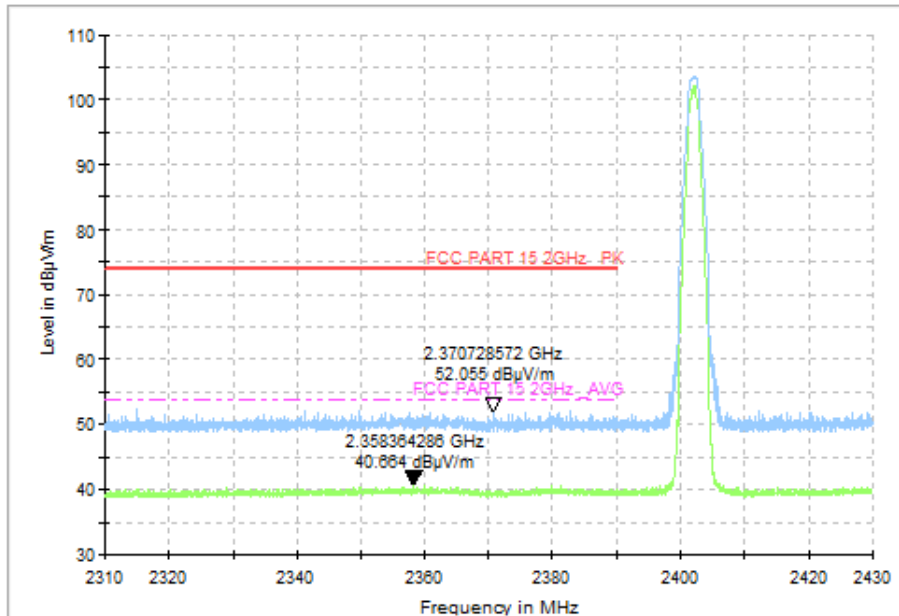


Fig. 48 Radiated Band Edges ($\pi/4$ DQPSK, CH0, 2380GHz~2450GHz)

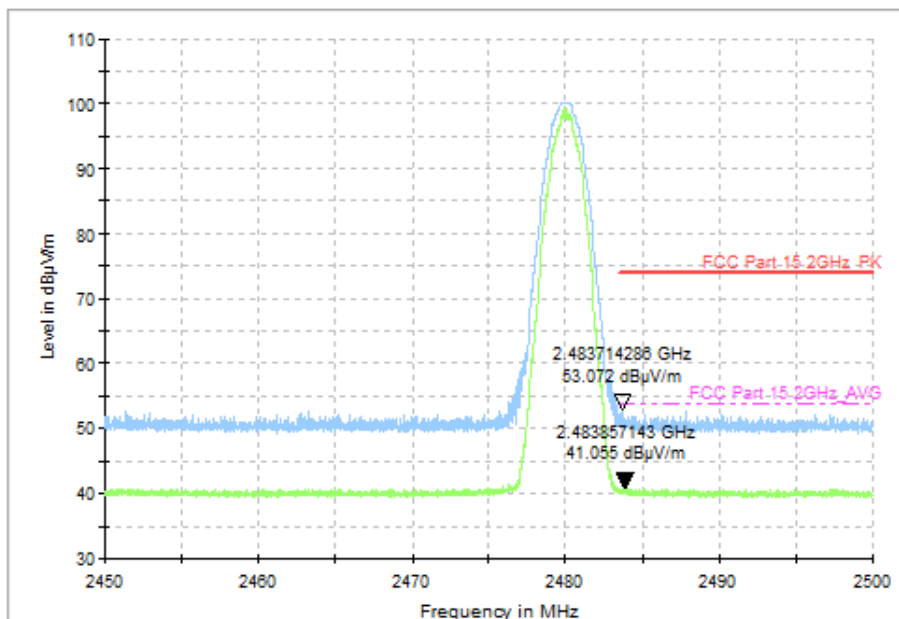


Fig. 49 Radiated Band Edges ($\pi/4$ DQPSK, CH78, 2450GHz~2500GHz)

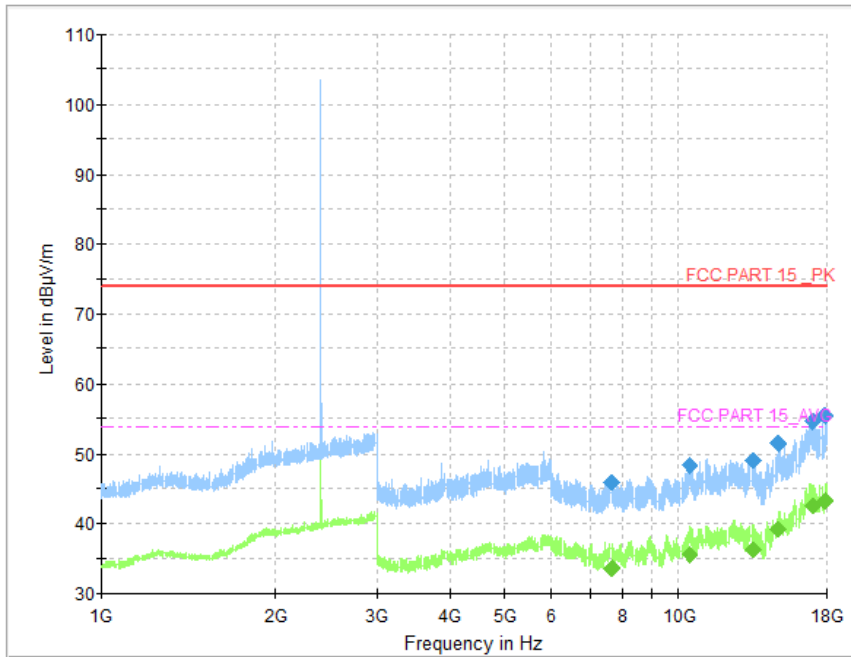


Fig. 50 Radiated Spurious Emission (8DPSK, CH0, 1 GHz ~18 GHz)

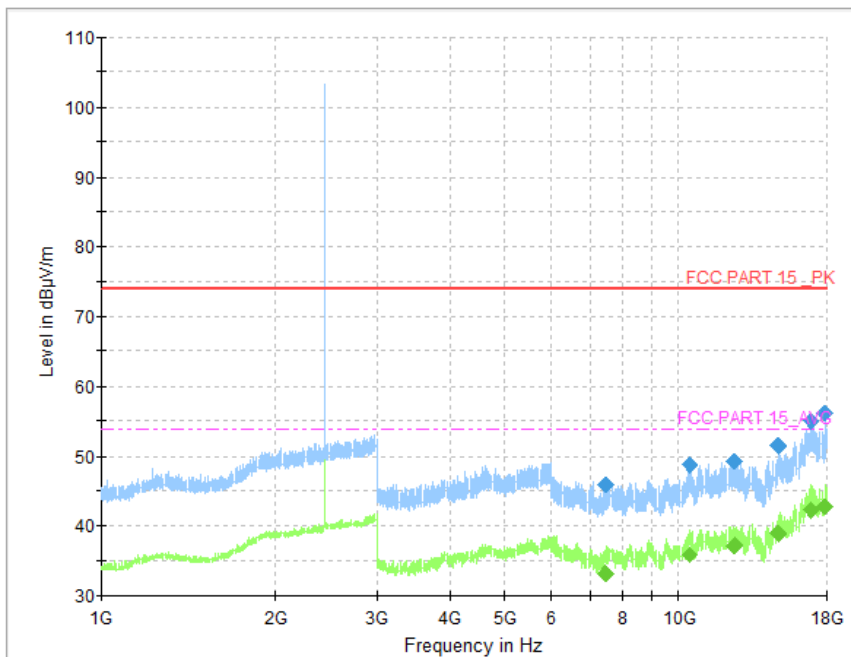


Fig. 51 Radiated Spurious Emission (8DPSK, CH39, 1 GHz ~18 GHz)

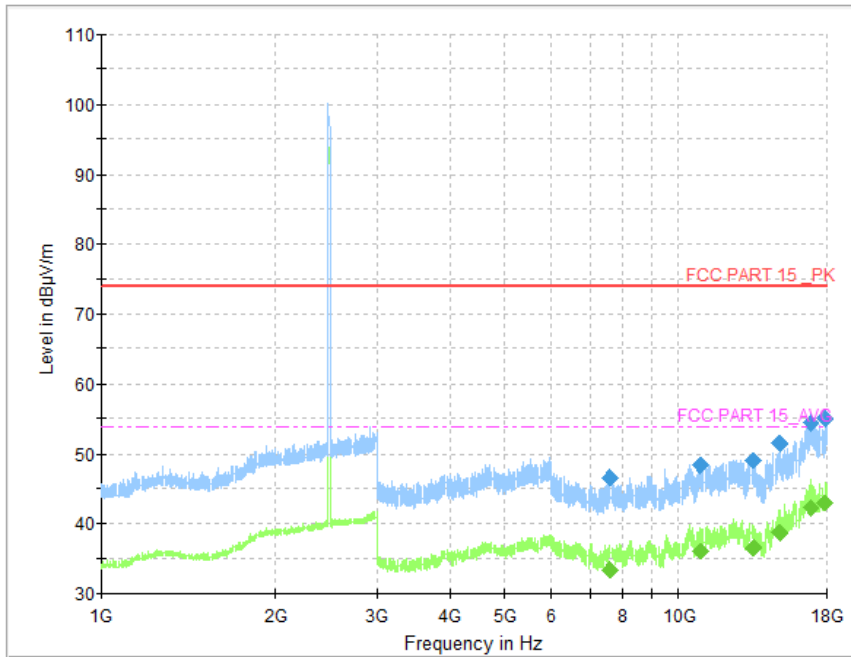


Fig. 52 Radiated Spurious Emission (8DPSK, CH78, 1 GHz ~18 GHz)

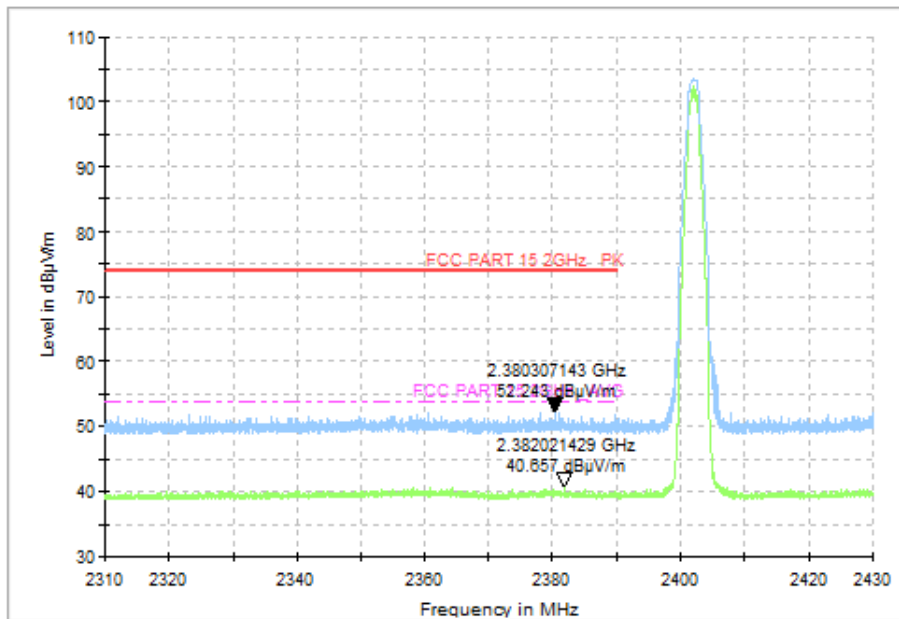


Fig. 53 Radiated Band Edges (8DPSK, CH0, 2380GHz~2450GHz)

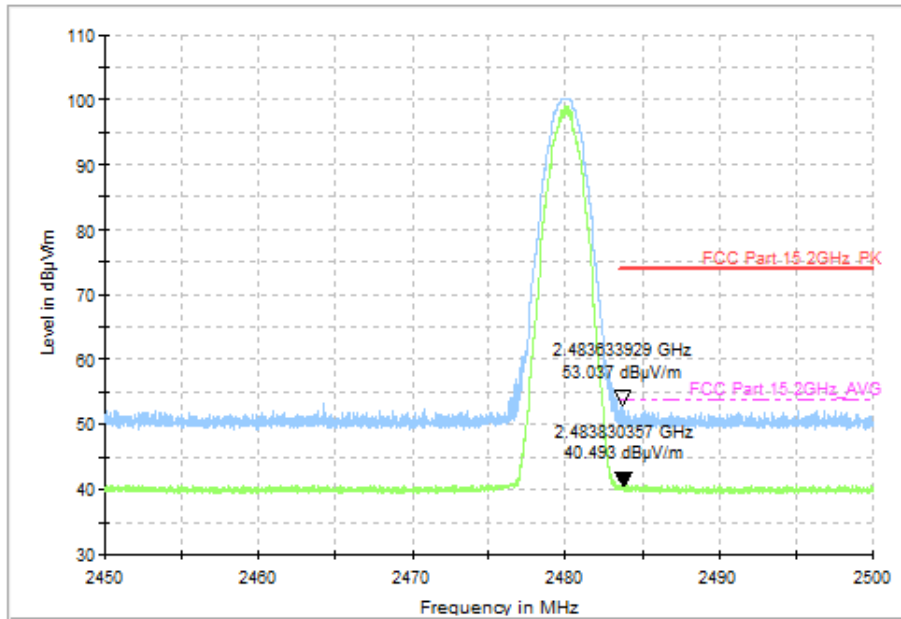


Fig. 54 Radiated Band Edges (8DPSK, CH78, 2450GHz~2500GHz)

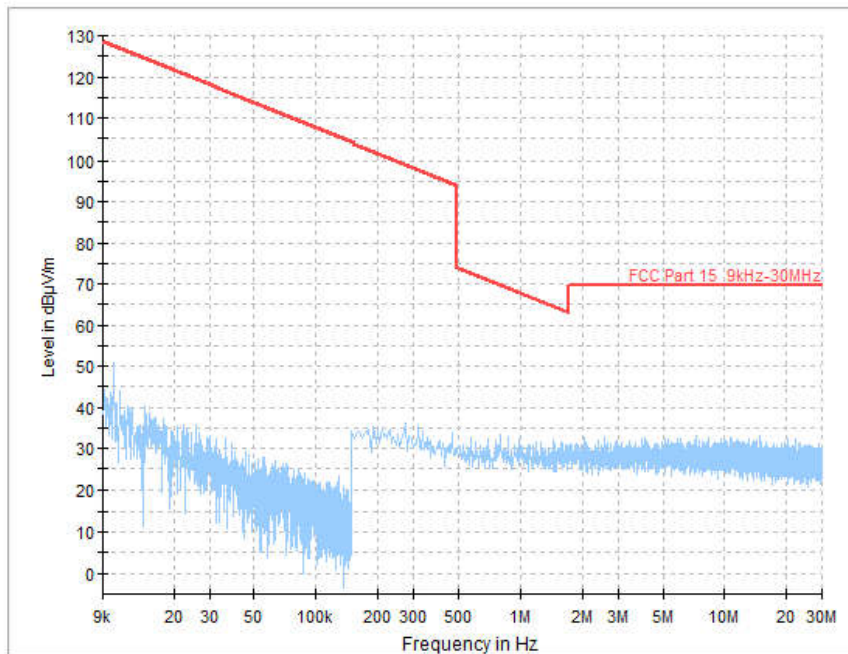


Fig. 55 Radiated Spurious Emission (All Channels, 9 kHz ~30 MHz)

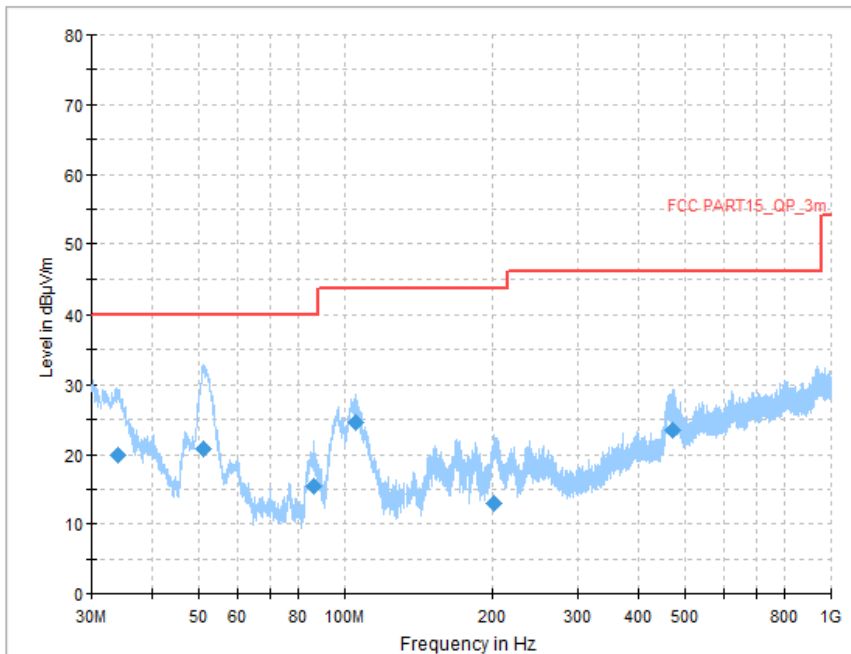


Fig. 56 Radiated Spurious Emission (All Channels, 30 MHz ~1 GHz)

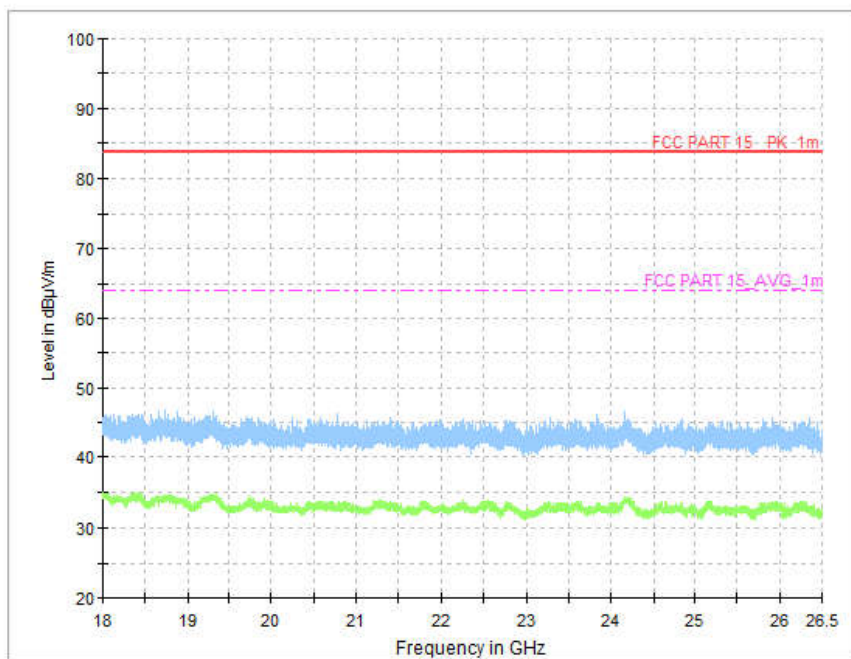


Fig. 57 Radiated Spurious Emission (All Channels, 18 GHz ~26.5 GHz)

A.5 20dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

Measurement Result:

Mode	Channel	20dB Bandwidth (kHz)		Conclusion
		Fig.	Value	
GFSK	0	Fig.58	900.00	/
	39	Fig.59	915.00	
	78	Fig.60	933.00	
$\pi/4$ DQPSK	0	Fig.61	1287.00	/
	39	Fig.62	1287.00	
	78	Fig.63	1287.00	
8DPSK	0	Fig.64	1260.00	/
	39	Fig.65	1260.00	
	78	Fig.66	1269.00	

See below for test graphs.

Conclusion: PASS

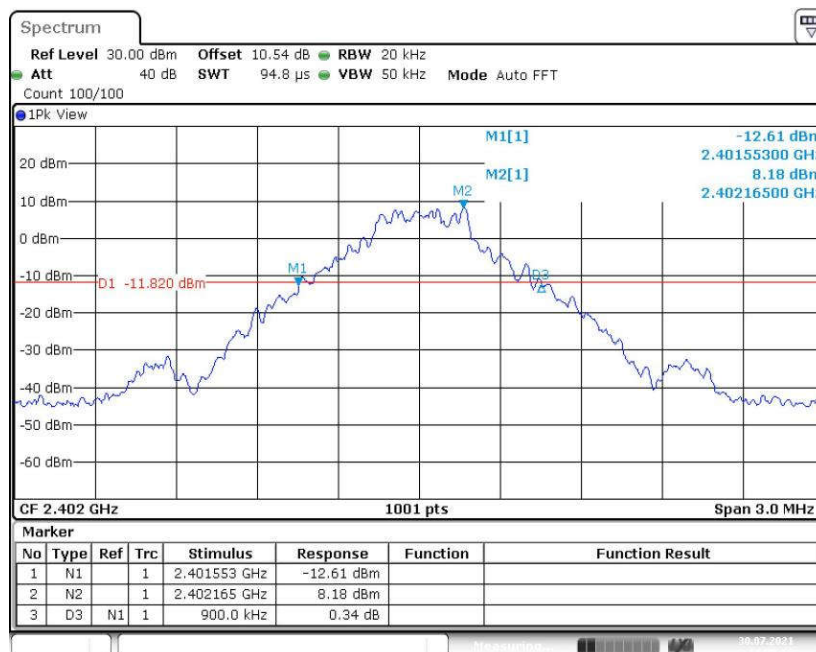


Fig. 58 20dB Bandwidth (GFSK, CH0)

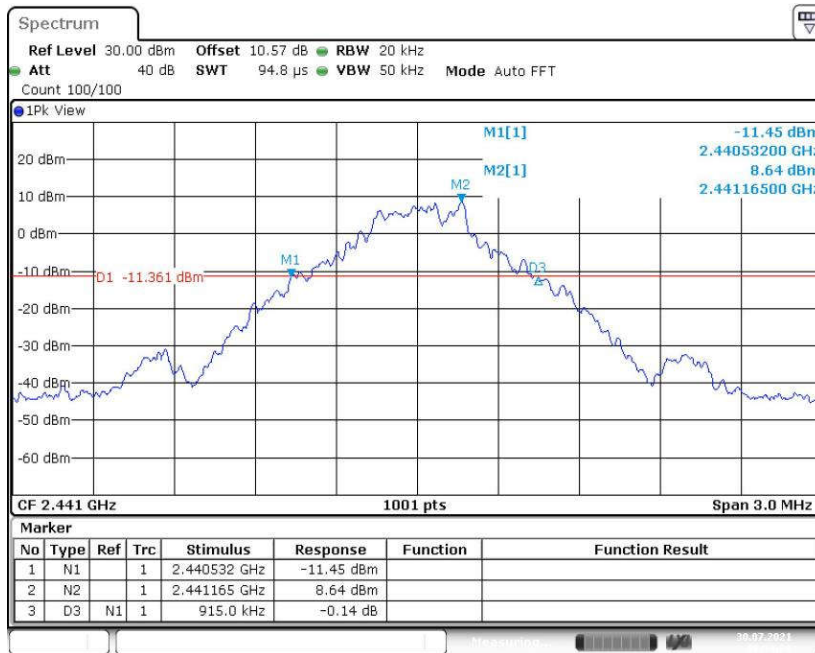


Fig. 59 20dB Bandwidth (GFSK, CH39)

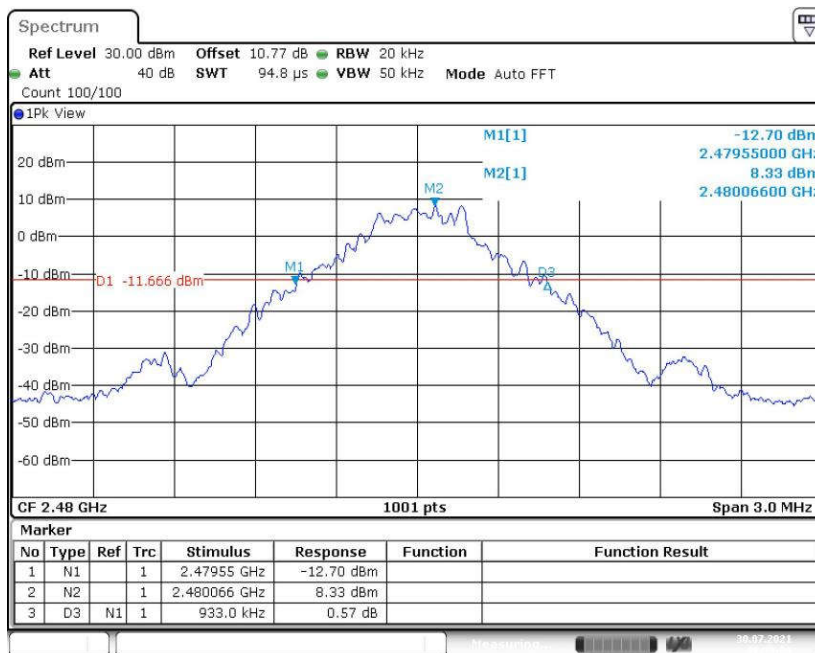


Fig. 60 20dB Bandwidth (GFSK, CH78)

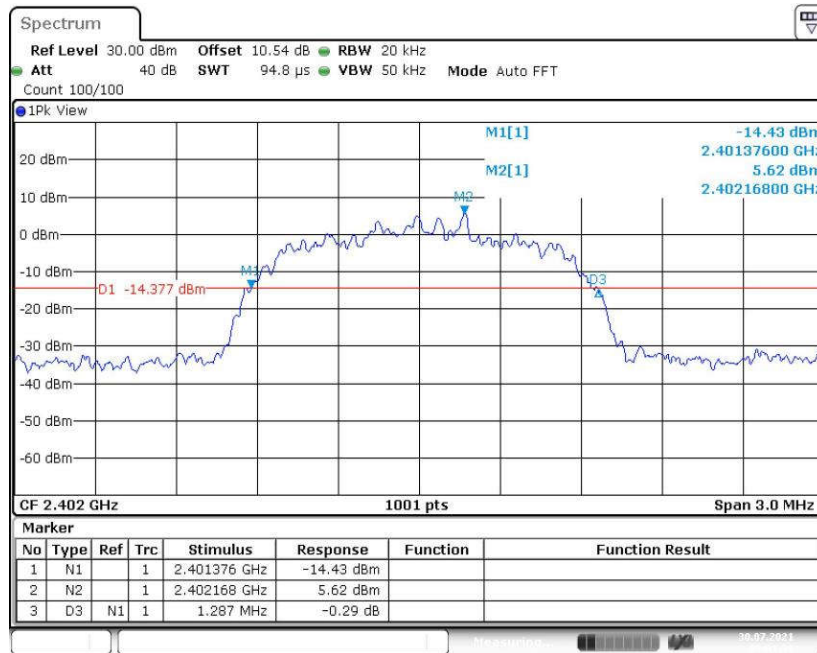


Fig. 61 20dB Bandwidth ($\pi/4$ DQPSK, CH0)

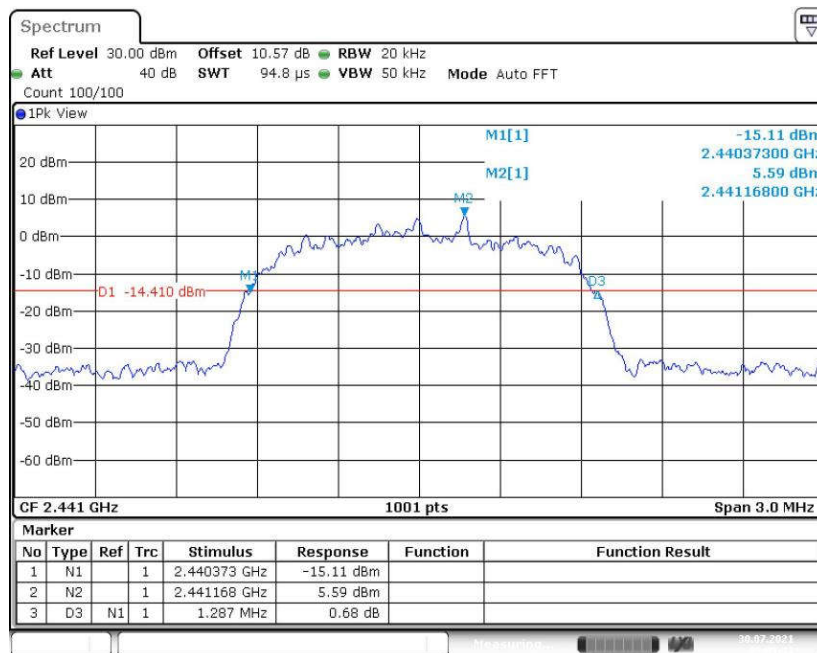


Fig. 62 20dB Bandwidth ($\pi/4$ DQPSK, CH39)

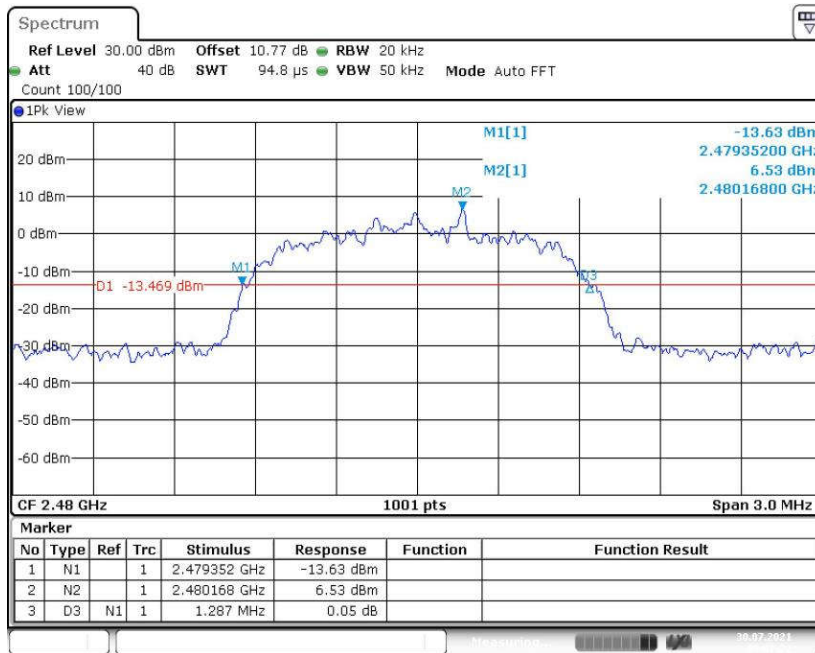


Fig. 63 20dB Bandwidth ($\pi/4$ DQPSK, CH78)

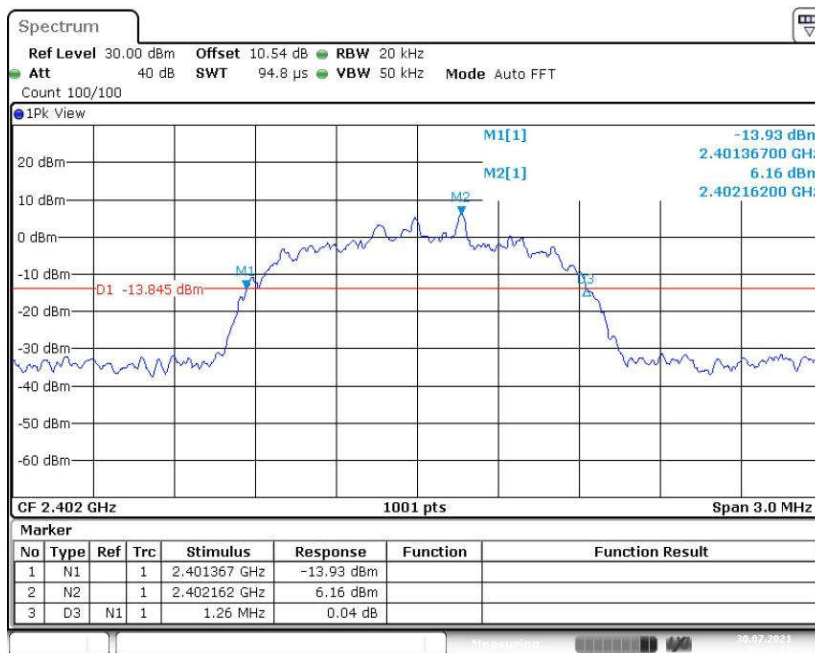


Fig. 64 20dB Bandwidth (8DPSK, CH0)

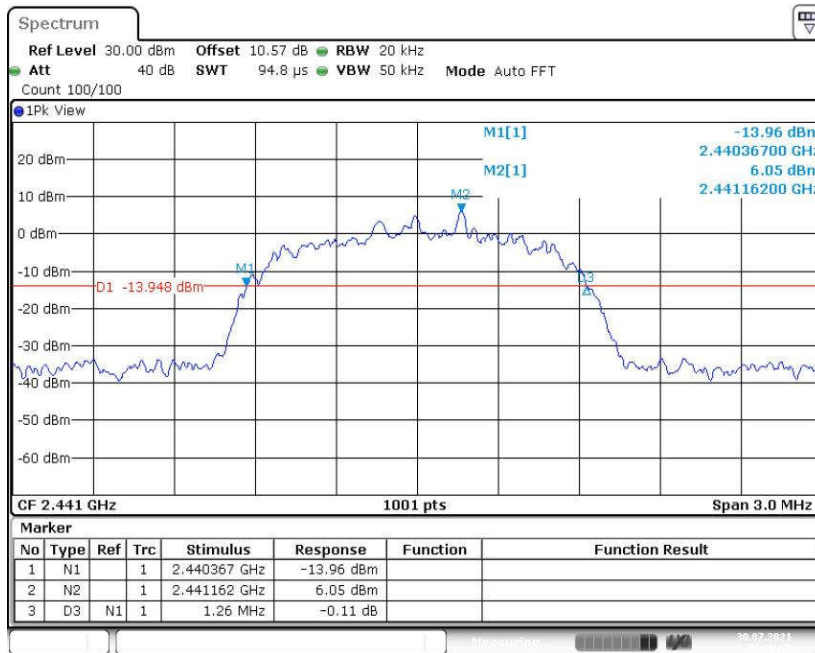


Fig. 65 20dB Bandwidth (8DPSK, CH39)

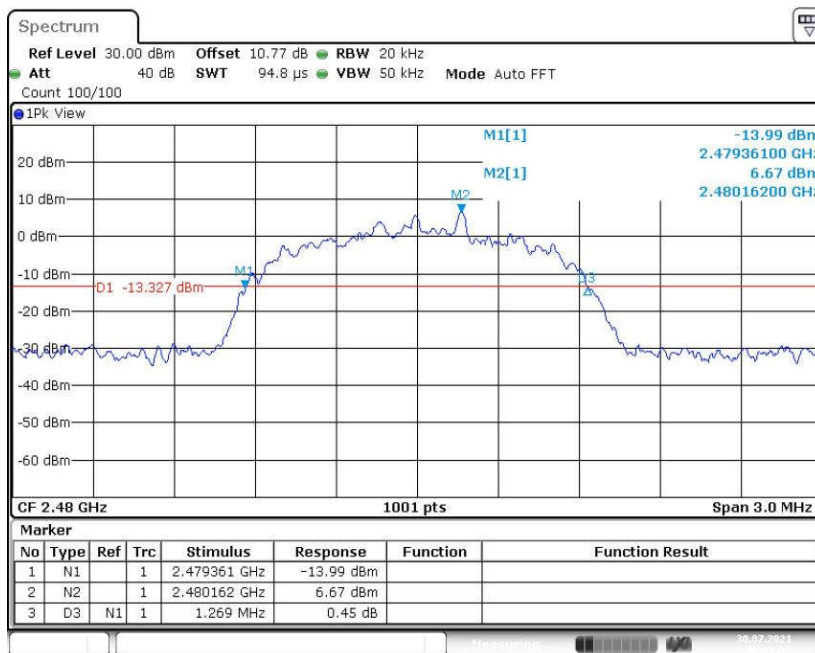


Fig. 66 20dB Bandwidth (8DPSK, CH78)



A.6 Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a)	< 400

Measurement Results:

Mode	Channel	Packet	BurstWidth (ms)		TotalHops (Num)		Result (ms)	Conclusion
			Fig.	ms	Fig.	Num		
GFSK	39	DH5	Fig.67	2.87	Fig.68	60	172.00	P
$\pi/4$ DQPSK	39	2-DH5	Fig.69	2.87	Fig.70	60	172.00	P
8DPSK	39	3-DH5	Fig.71	2.87	Fig.72	70	201.00	P

See below for test graphs.

Conclusion: Pass

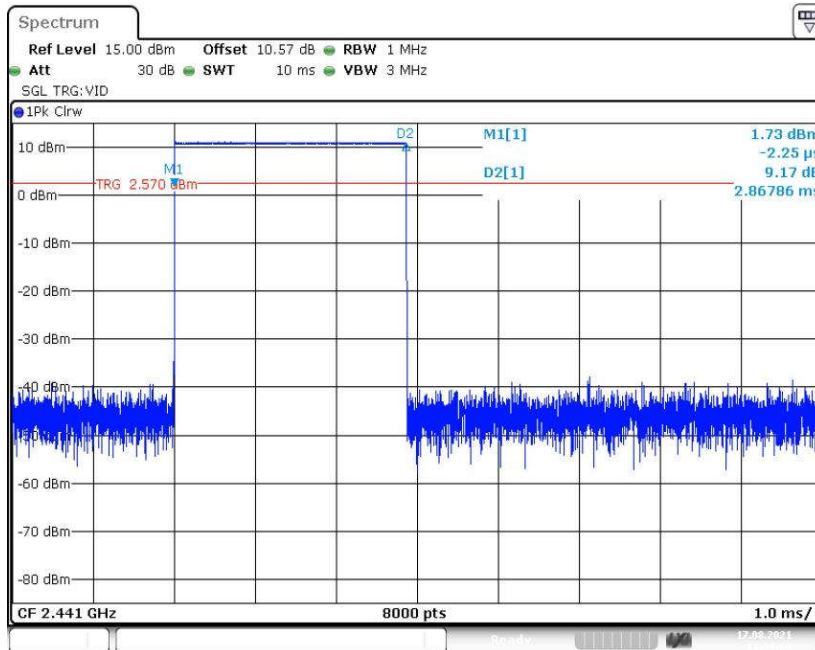


Fig. 67 BurstWidth (Dwell Time) (GFSK, CH39)

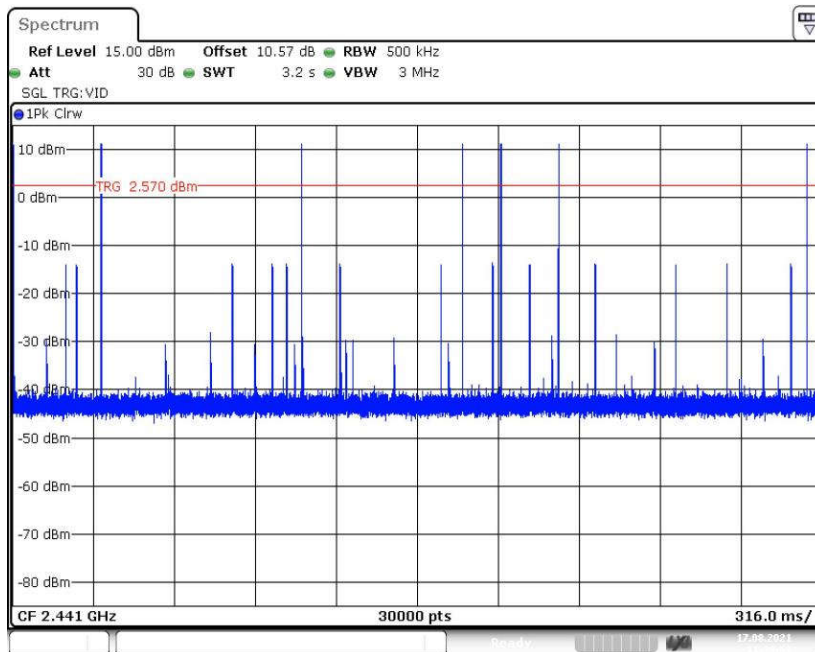


Fig. 68 Number of Burst in Observation Period (Dwell Time) (GFSK, CH39)

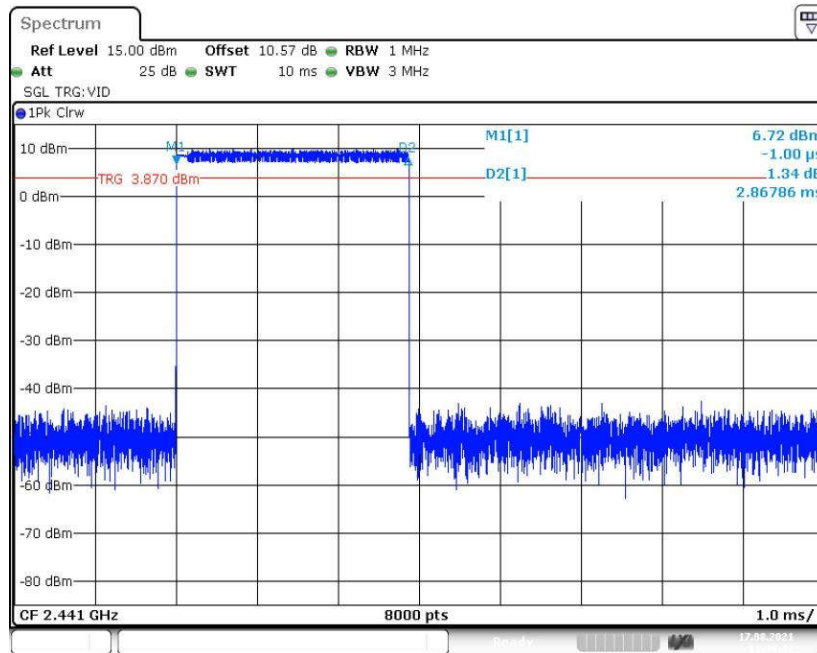


Fig. 69 BurstWidth (Dwell Time) ($\pi/4$ DQPSK, CH39)

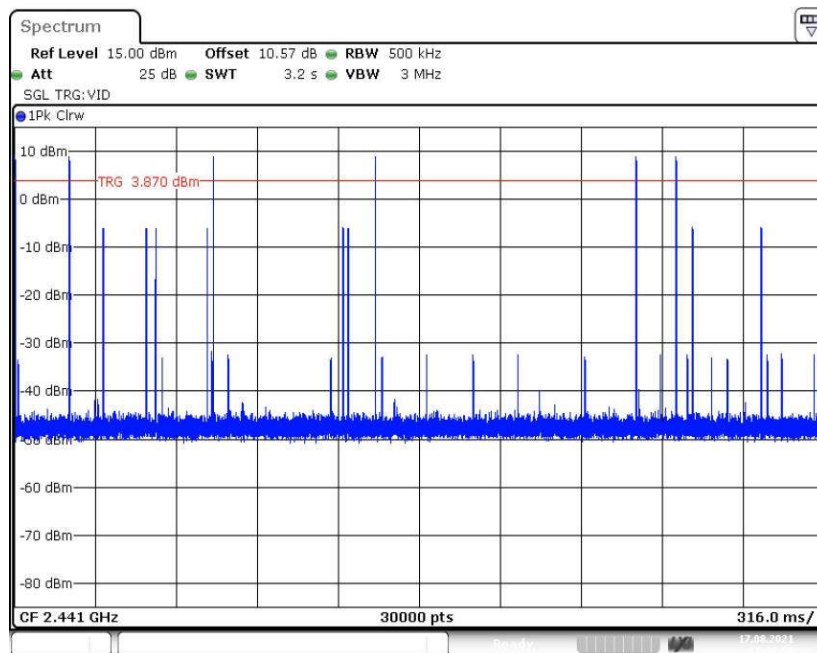


Fig. 70 Number of Burst in Observation Period (Dwell Time) ($\pi/4$ DQPSK, CH39)

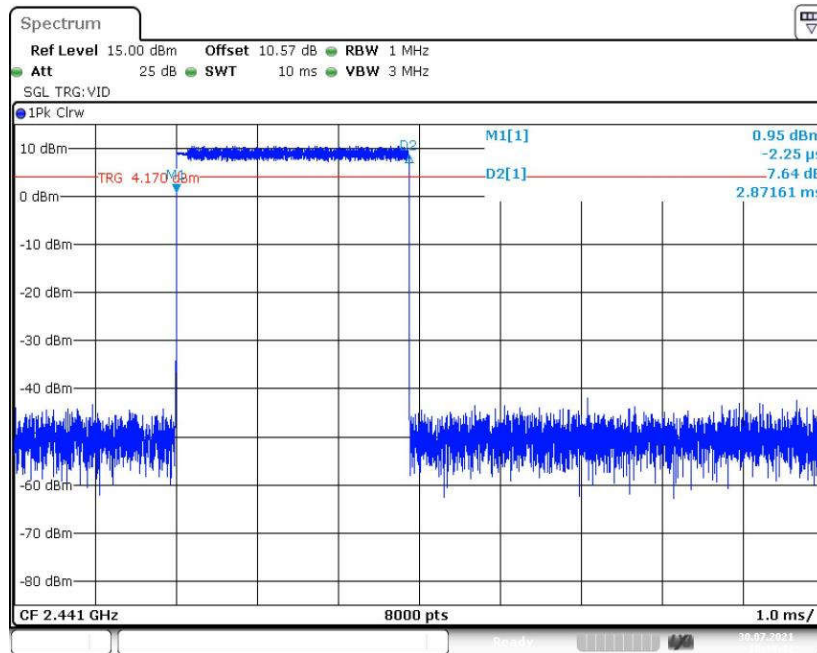


Fig. 71 BurstWidth (Dwell Time) (8DPSK, CH39)

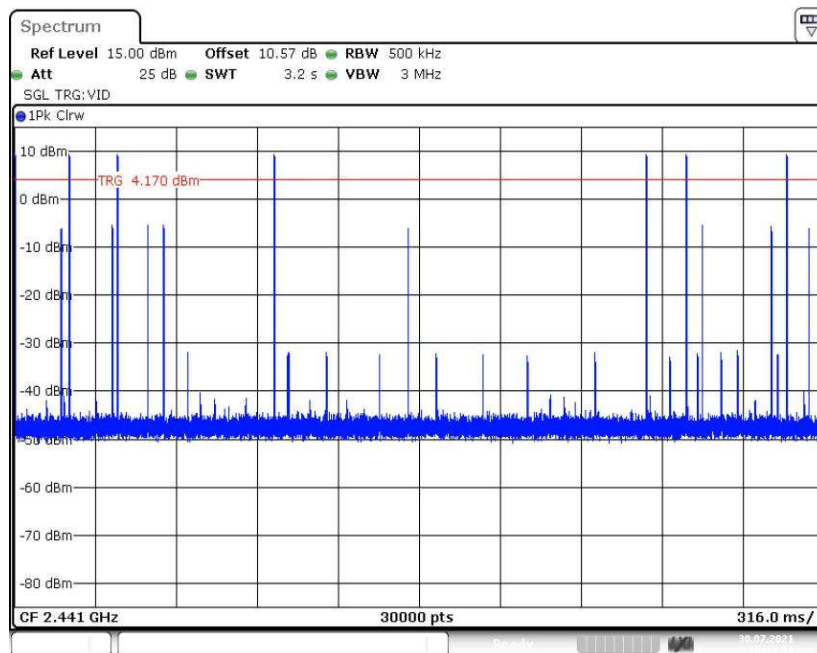


Fig. 72 Number of Burst in Observation Period (Dwell Time) (8DPSK, CH39)



A.7 Number of Hopping Channels

Measurement Limit:

Standard	Limit (Num)
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

Measurement Results:

Mode	Packet	Number of Hopping Channels	Test results (Num)	Conclusion
GFSK	DH5	Fig.73	79	P
$\pi/4$ DQPSK	2-DH5	Fig.74	79	P
8DPSK	3-DH5	Fig.75	79	P

See below for test graphs.

Conclusion: Pass

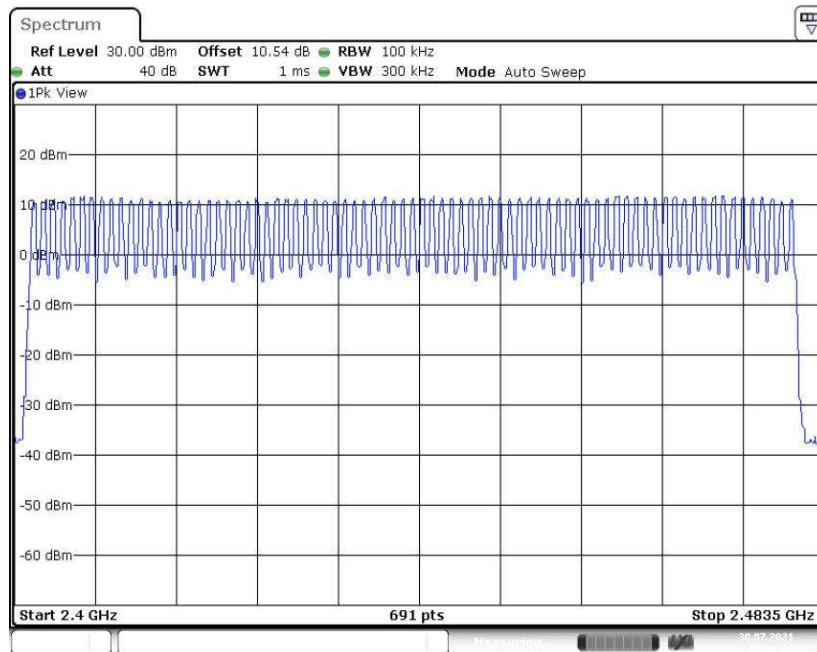


Fig. 73 Number of Hopping Channels (GFSK, CH39)

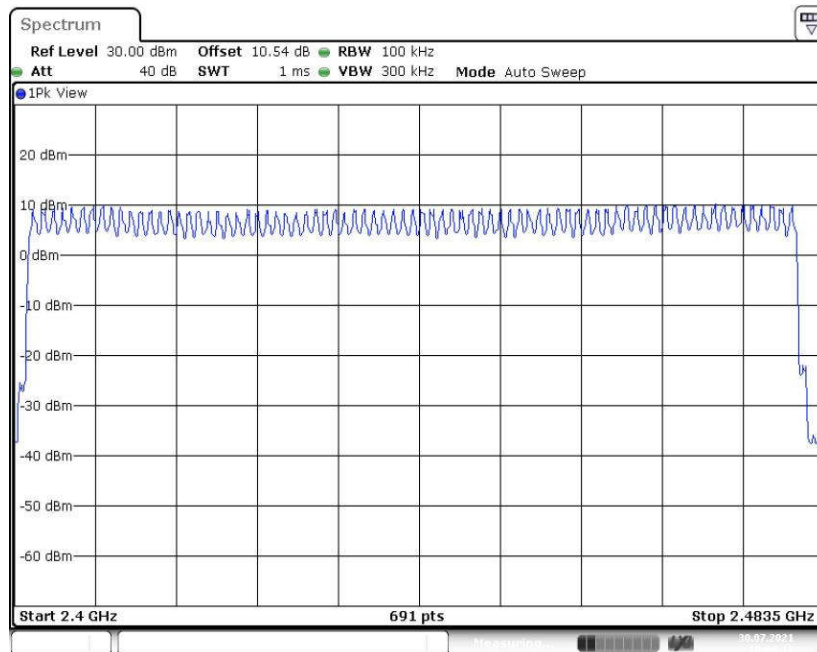


Fig. 74 Number of Hopping Channels ($\pi/4$ DQPSK, CH39)

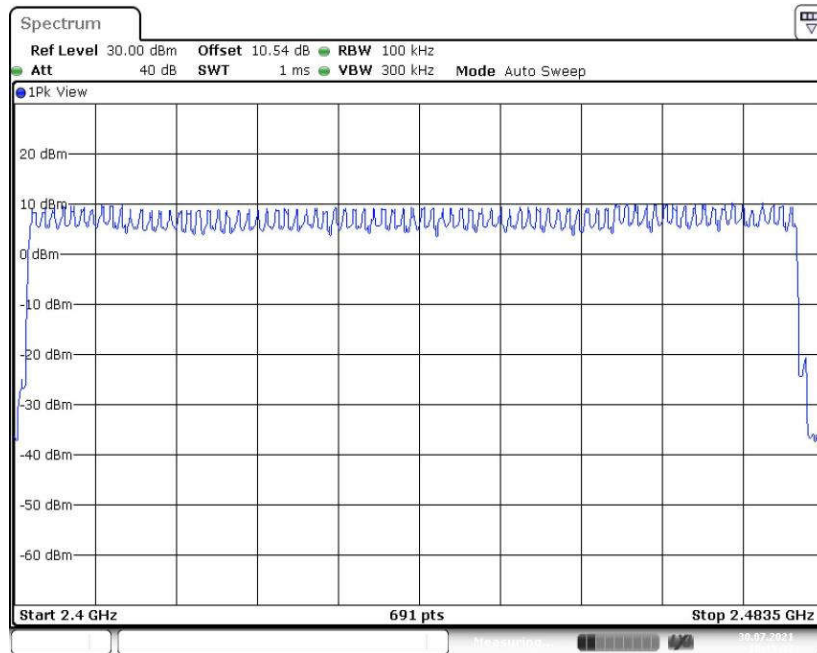


Fig. 75 Number of Hopping Channels (8DPSK, CH39)

A.8 Carrier Frequency Separation

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (kHz)	Conclusion
GFSK	39	DH5	Fig.76	1000.00	P
$\pi/4$ DQPSK	39	2-DH5	Fig.77	1000.00	P
8DPSK	39	3-DH5	Fig.78	1003.00	P

See below for test graphs.

Conclusion: Pass

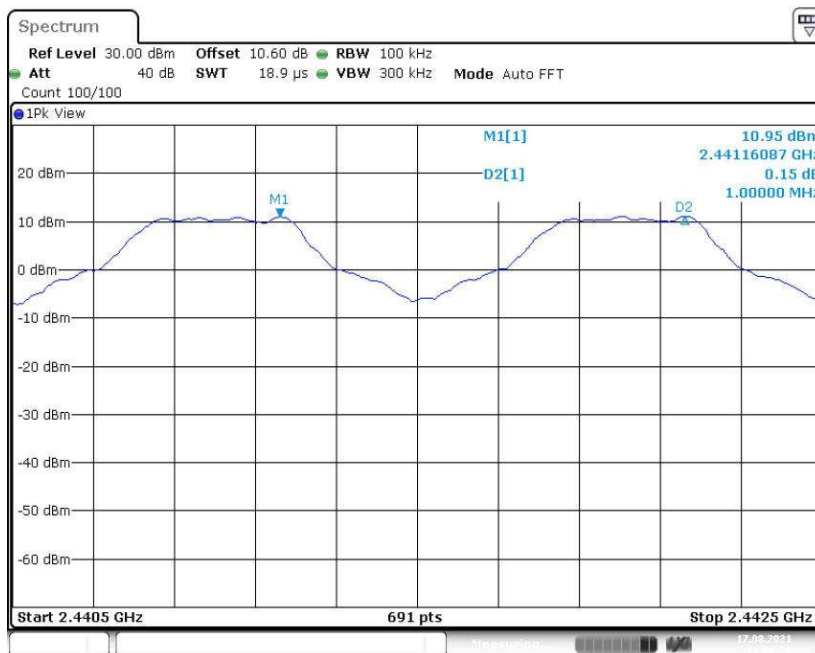


Fig. 76 Carrier Frequency Separation (GFSK, CH39)

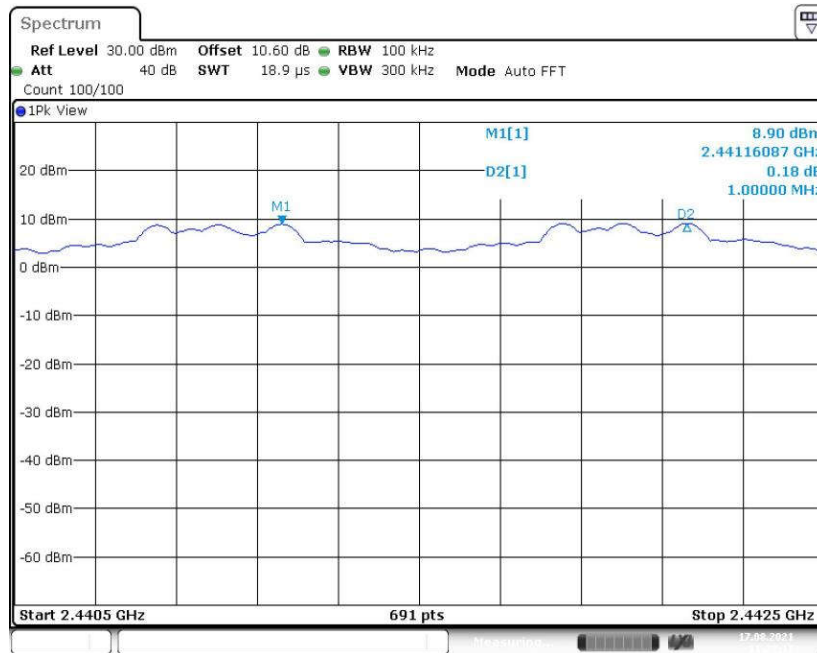


Fig. 77 Carrier Frequency Separation ($\pi/4$ DQPSK, CH39)

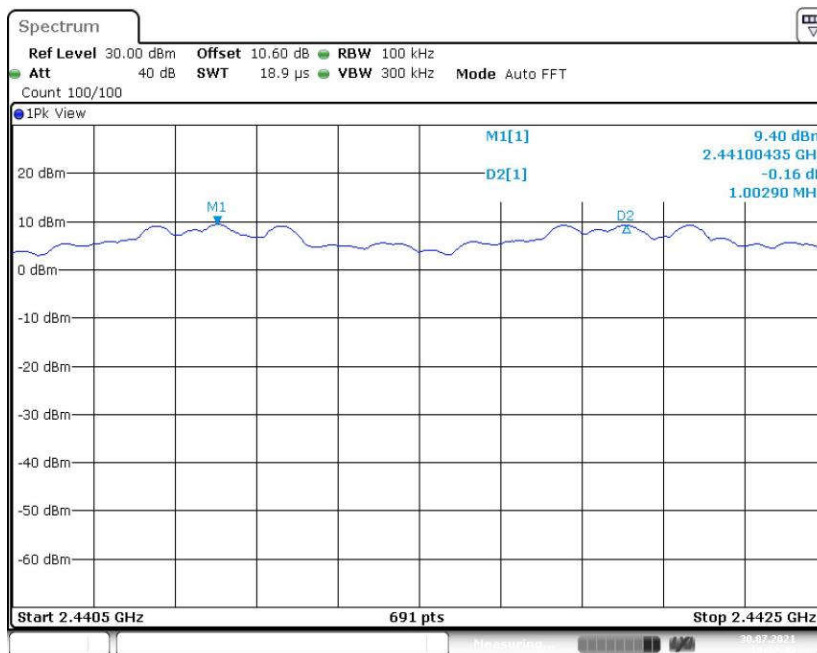


Fig. 78 Carrier Frequency Separation (8DPSK, CH39)



A.9 AC Power line Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

BT-AE2, AE3, AE4

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
			Traffic	Idle	
0.15 to 0.5	66 to 56	56 to 46	Fig.79	Fig.80	P
0.5 to 5	56	46			
5 to 30	60	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results include the L1 and N measurements.

See below for test graphs.

Conclusion: Pass

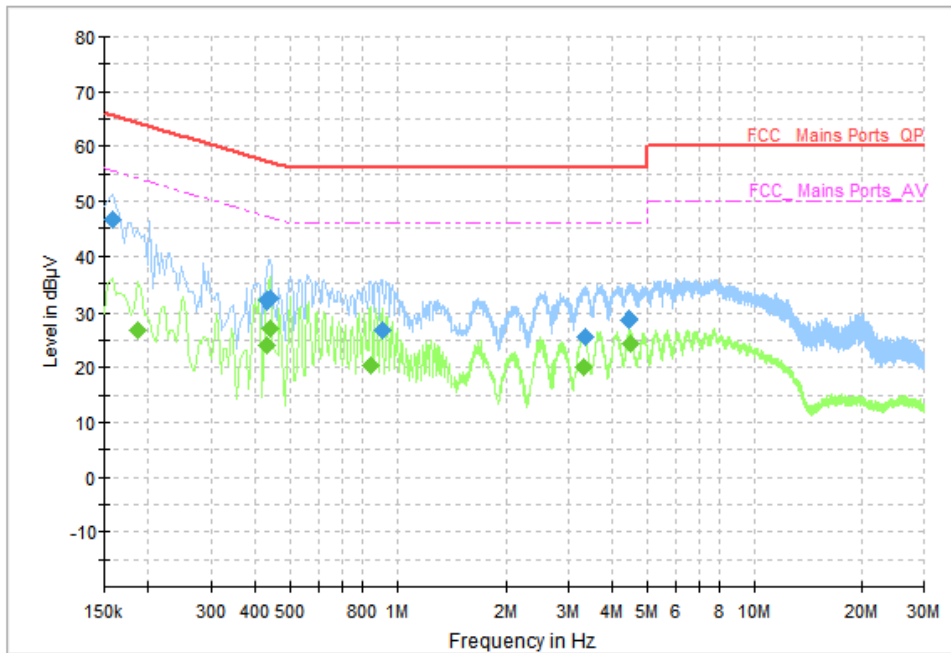


Fig. 79 AC Power line Conducted Emission (Traffic)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	46.64	65.57	18.93	N	ON	10
0.430000	32.12	57.25	25.13	L1	ON	10
0.438000	32.24	57.10	24.86	L1	ON	10
0.906000	26.85	56.00	29.15	L1	ON	10
3.346000	25.57	56.00	30.43	L1	ON	10
4.458000	28.58	56.00	27.42	L1	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186000	26.76	54.21	27.46	L1	ON	10
0.430000	23.98	47.25	23.27	N	ON	10
0.438000	27.23	47.10	19.87	L1	ON	10
0.842000	20.50	46.00	25.50	L1	ON	10
3.298000	19.97	46.00	26.03	L1	ON	10
4.482000	24.47	46.00	21.53	L1	ON	10

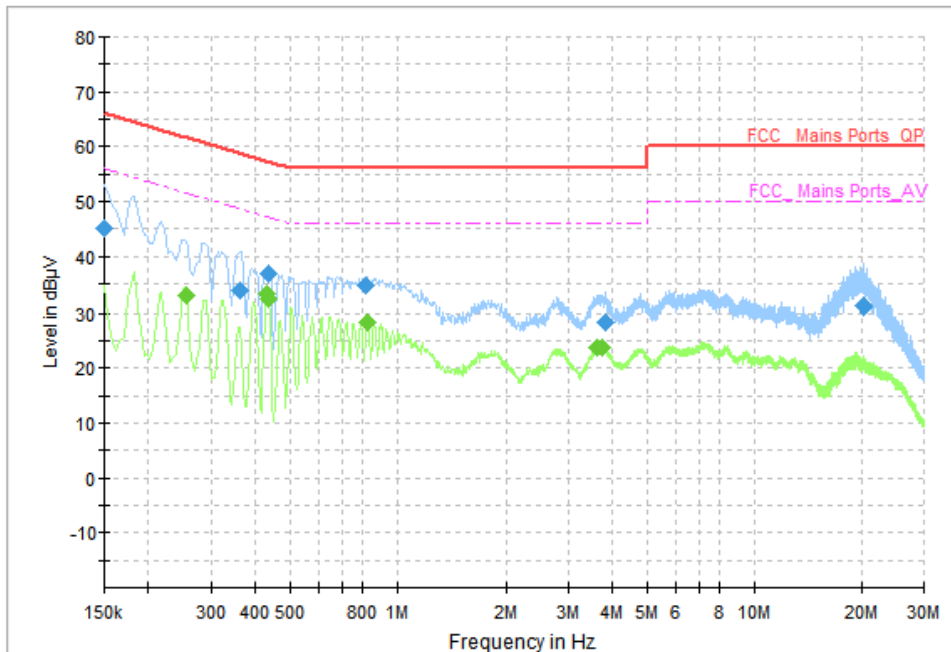


Fig. 80 AC Power line Conducted Emission (Idle)

Measurement Results: Quasi Peak

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	45.25	66.00	20.75	N	ON	10
0.362000	33.88	58.68	24.80	N	ON	10
0.434000	36.90	57.18	20.27	L1	ON	10
0.818000	34.70	56.00	21.30	L1	ON	10
3.798000	28.28	56.00	27.72	L1	ON	10
20.326000	30.97	60.00	29.03	N	ON	10

Measurement Results: Average

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.254000	33.02	51.63	18.60	L1	ON	10
0.430000	33.21	47.25	14.05	L1	ON	10
0.434000	32.40	47.18	14.78	L1	ON	10
0.822000	28.46	46.00	17.54	L1	ON	10
3.594000	23.64	46.00	22.36	L1	ON	10
3.722000	23.75	46.00	22.25	L1	ON	10

END OF REPORT