

## Antenna Gain test report

Equipment: Mobile Phone

Brand Name: OPPO

Model Name: CPH2557

Manufacturer:

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan

City, Guangdong, China

Issue Date: Sept 1st, 2023

Project Engineer: chungui Xu




Date: 2023/9/1

Checked by: changhong Tang

Date: 2023/9/1

Approved by: tianping Liang

Date: 2023/9/1



Antenna Location&dimension:

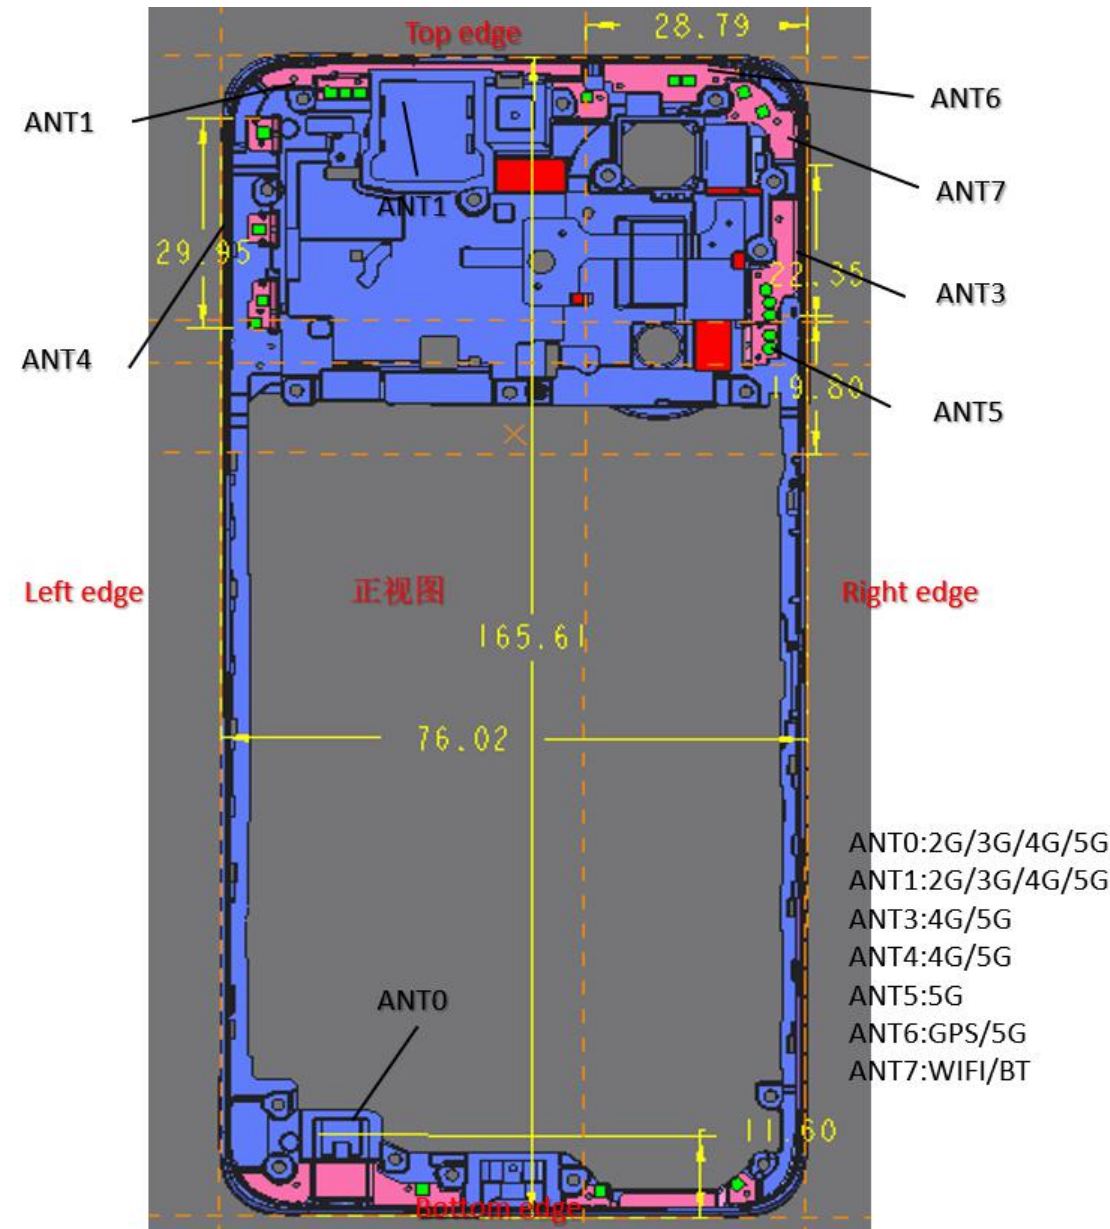


Fig 1 Antenna location&dimension

Antenna Gain and Antenna Type specification:

Antenna Gain (dBi)	Ant 7	Antenna Type	Antenna model	Manufacturer
2.4G WiFi	0.1	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd

5G Wifi	5150~5250 MHz	0.9	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd
	5250~5350 MHz	1.6	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd
	5470~5725 MHz	1.6	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd
	5725~5850 MHz	1.6	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd
BT	2400~2483.5MHz	0.1	IFA(Inverted F Antenna)	AC105-T OP-COVER	Shenzhen Sunway Communication Co., Ltd/Pursi Wireless Communication Products Co., Ltd
NFC	13.56MHz	/	FPC(Flexible Printed Circuit)	AC105-SX A1XX	Shenzhen Sunway Communication Co., Ltd/Pursi



					Wireless Communicatio n Products Co., Ltd
--	--	--	--	--	--




Table1 Antenna Gain and Antenna Type specification

Note: Antenna gain was measured in the anechoic chamber, 3D scan was exercised, and the highest numbers are reported in this document.

Accoring toTest standard: IEEE Std 149-2021,we measure antenna gain .


**Antenna Radiation Pattern:**

	<b>ANT7</b>
<b>WIFI2.4G/BT</b>	
<b>WIFI5G B1 (5150~5250 MHz)</b>	

<p><b>WIFI5G B2</b> (5250~5350 MHz)</p>	
<p><b>WIFI5G B3</b> (5470~5725 MHz)</p>	
<p><b>WIFI5G B4</b> (5725~5850 MHz)</p>	

**NFC passive impedance on phone**

Zload@13.62MHz		BW(-3dB)
9Ω-2.2613Ω		

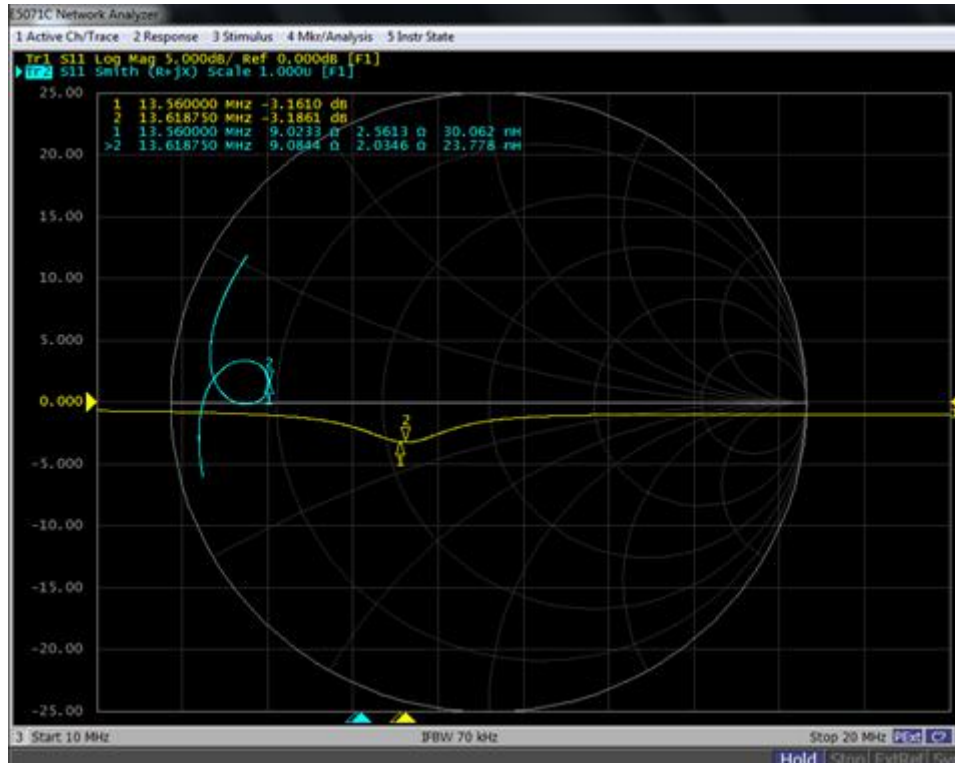

### List of Test and Measurement Instruments

#### TEST EQUIPMENT

NO.	Equipment	Manufacturer	Model No.
1	AMS-8923	ETS-Lingen	SN1702
2	Network Analyzer E5071C	Kesight	MY4690575

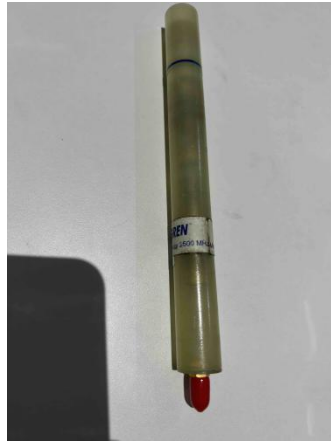


Fig 2 dipole model 3126-2500 frequency 2500 MHz



Fig 3 model 3126-5500 frequency 5500 MHz

## I. Measurement Setup:

### A. Reflection Coefficient Measurement:

**Instrument:** Network Analyzer (Kesight E5071C).

**Setup:**

1. Calibrate the Network Analyzer by one port calibration using Kesight 85093C Electronic calibration module .
2. Connect the antenna under test to the Network Analyzer.
3. Measure the S11(reflection coefficient),Return Loss....

### B. Pattern Measurement:

A Fully Anechoic Chamber is used to simulate free-space conditions.

A Fully Anechoic Chamber is a shielded room lined with RF/microwave absorber on all walls, ceiling, and floor.



RF/microwave absorber reduces reflections from the inner walls of the shield. Absorber performance depends on the depth and design of the absorber and the angle of incidence of the field.

Normal incidence is best, shallower angles are worse.

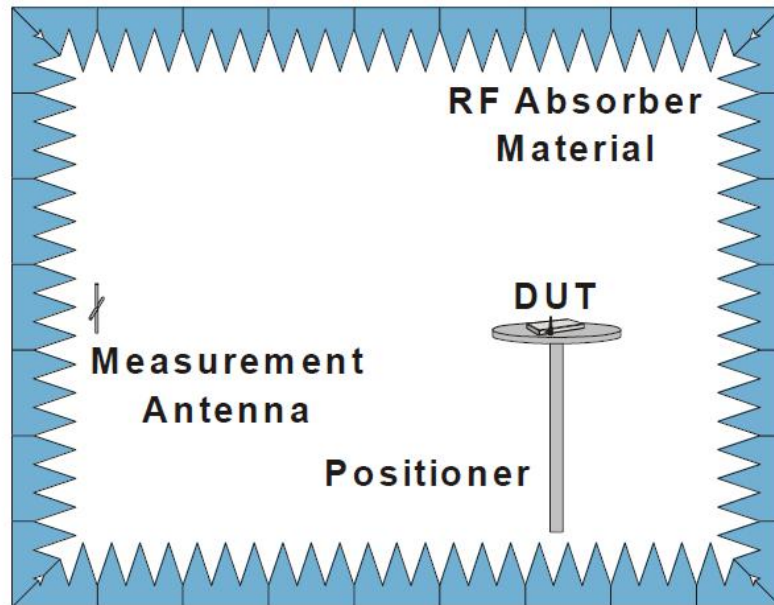


Fig. 4. The fully anechoic chamber

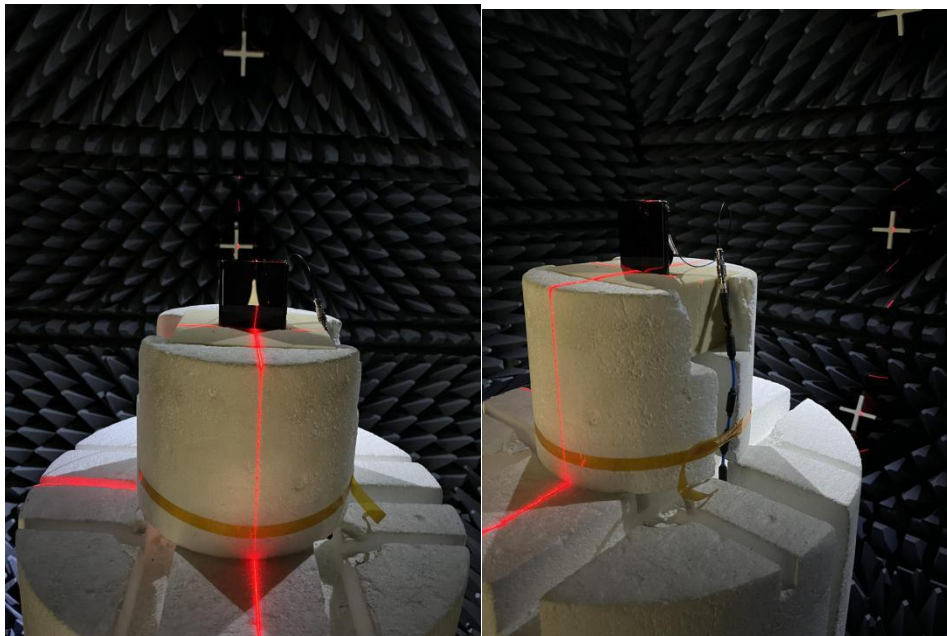


Fig.5. The DUT in the fully anechoic chamber