

# FCC Radio Test Report

## FCC ID: R9C-CPH2015

This report concerns: Original Grant

**Project No.** : 1911C066  
**Equipment** : Mobile Phone  
**Brand Name** : OPPO  
**Test Model** : CPH2015  
**Series Model** : N/A  
**Applicant** : GuangDong Oppo Mobile Telecommunications Corp., Ltd.  
**Address** : NO. 18 HaiBin Road, WuSha village, Chang An Town, DongGuan City,Guangdong,China.  
**Manufacturer** : GuangDong Oppo Mobile Telecommunications Corp., Ltd.  
**Address** : NO. 18 HaiBin Road, WuSha village, Chang An Town, DongGuan City,Guangdong,China.  
**Factory** : GuangDong Oppo Mobile Telecommunications Corp., Ltd.  
**Address** : NO. 18 HaiBin Road, WuSha village, Chang An Town, DongGuan City,Guangdong,China.  
**Date of Receipt** : Nov. 12, 2019  
**Date of Test** : Nov. 12, 2019 ~ Dec. 18, 2019  
**Issued Date** : Dec. 24, 2019  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG2019112566 for conducted, DG2019112565 for radiated.  
**Standard(s)** : 47 CFR FCC Part 22 Subpart H  
47 CFR FCC Part 2  
ANSI/TIA/EIA-603-E-2016  
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

*Trey Chen*

Prepared by : Trey Chen

*Steven Lu*

Approved by : Steven Lu



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and is not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
<b>2 . GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED	13
3.4 DESCRIPTION OF SUPPORT UNITS	13
<b>3 . TEST RESULT</b>	<b>14</b>
3.1 OUTPUT POWER MEASUREMENT	14
3.1.1 LIMIT	14
3.1.2 TEST PROCEDURE	14
3.1.3 TEST SETUP LAYOUT	14
3.1.4 TEST DEVIATION	14
3.1.5 TEST RESULTS	14
3.2 OCCUPIED BANDWIDTH MEASUREMENT	15
3.2.1 TEST PROCEDURE	15
3.2.2 TEST SETUP LAYOUT	15
3.2.3 TEST DEVIATION	15
3.2.4 TEST RESULTS	15
3.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	16
3.3.1 LIMIT	16
3.3.2 TEST PROCEDURES	16
3.3.3 TEST SETUP LAYOUT	16
3.3.4 TEST DEVIATION	16
3.3.5 TEST RESULTS	16
3.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT	17
3.4.1 LIMIT	17
3.4.2 TEST PROCEDURES	17
3.4.3 TEST SETUP LAYOUT	18
3.4.4 TEST DEVIATION	19
3.4.5 TEST RESULTS (9KHZ TO 30MHZ)	19
3.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	19
3.4.7 TEST RESULTS (ABOVE 1000MHZ)	19
3.5 BAND EDGE MEASUREMENT	20
3.5.1 LIMIT	20

<b>Table of Contents</b>	<b>Page</b>
3.5.2 TEST PROCEDURES	20
3.5.3 TEST SETUP LAYOUT	20
3.5.4 TEST DEVIATION	20
3.5.5 TEST RESULTS	20
3.6 PEAK TO AVERAGE RATIO MEASUREMENT	21
3.6.1 LIMIT	21
3.6.2 TEST PROCEDURES	21
3.6.3 TEST SETUP LAYOUT	21
3.6.4 TEST DEVIATION	21
3.6.5 TEST RESULTS	21
3.7 FREQUENCY STABILITY MEASUREMENT	22
3.7.1 LIMIT	22
3.7.2 TEST PROCEDURES	22
3.7.3 TEST SETUP LAYOUT	22
3.7.4 TEST DEVIATION	22
3.7.5 TEST RESULTS	22
4. LIST OF MEASUREMENT EQUIPMENTS	23
APPENDIX A - OUTPUT POWER	25
APPENDIX B - OCCUPIED BANDWIDTH	32
APPENDIX C - CONDUCTED SPURIOUS EMISSIONS	50
APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)	56
APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)	61
APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)	86
APPENDIX G - BAND EDGE	111
APPENDIX H - PEAK TO AVERAGE RATIO	118
APPENDIX I - FREQUENCY STABILITY	131

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	Dec. 24, 2019

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
2.1046 22.913(a)(5)	Effective Radiated Power	PASS	-----
2.1049	Occupied Bandwidth	PASS	-----
2.1051 22.917(a)	Conducted Spurious Emissions	PASS	-----
2.1053 22.917(a)	Radiated Spurious Emissions	PASS	-----
22.917(a)	Band Edge Measurements	PASS	-----
-	Peak To Average Ratio	PASS	Record Only
2.1055 22.355	Frequency Stability	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

#### A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.58
		6GHz ~ 18GHz	5.18

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Output Power & ERP	22.6°C	50.5%	DC 3.85V	Vegeta Li
Occupied Bandwidth	22.6°C	50.5%	DC 3.85V	Vegeta Li
Conducted Spurious Emissions	22.6°C	50.5%	DC 3.85V	Vegeta Li
Radiated Spurious Emissions	24°C	68%	AC 120V/60Hz	Berton Luo
Band Edge	22.6°C	50.5%	DC 3.85V	Vegeta Li
Peak to Average Ratio	22.6°C	50.5%	DC 3.85V	Vegeta Li
Frequency Stability	Normal and Extreme			Vegeta Li

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone					
Brand Name	OPPO					
Test Model	CPH2015					
Series Model	N/A					
Model Difference(s)	N/A					
Hardware Version	11					
Software Version	ColorOS V6.1.2					
Power Source	1. DC Voltage supplied from AC/DC adapter. 1# Model: OP52KAUH 2# Model: OP52JAUH 3# Model: OP52JBUH 4# Model: OP52YAUH 2. Supplied from Li-ion Polymer battery. 1# Factory / Model: Scud / BLP673 2# Factory / Model: Desay / BLP673 3. Supplied from USB port.					
Power Rating	1. I/P: 100-240V~ 50/60Hz 0.4A    O/P: 5V --- 2A 2. 3.85Vdc, 4100mAh/15.78Wh 3. DC 5V					
IEMI No.	Radiated	867898040019951				
	Conducted	867898040019977				
Modulation Type	GSM/GPRS		GMSK			
	EDGE		GMSK, 8PSK			
	WCDMA/HSDPA/HSUPA		UL: QPSK DL: QPSK, 16QAM			
	LTE		UL: QPSK, 16QAM, 64QAM DL: QPSK, 16QAM, 64QAM			
Max. ERP	GSM 850 / GPRS 850		GMSK	27.90	dBm	
	EDGE 850		8PSK	22.74	dBm	
	WCDMA Band V		QPSK	17.45	dBm	
	HSDPA Band V		QPSK	16.94	dBm	
	HSUPA Band V		QPSK	16.41	dBm	
	LTE	Channel Bandwidth (MHz)	QPSK	16QAM	64QAM	
			(dBm)	(dBm)	(dBm)	
	Band 5		1.4	17.39	16.44	15.45
			3	16.49	15.92	14.81
			5	16.45	15.92	14.79
10			16.60	15.92	14.80	



**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

**2. Channel List:**

GSM 850				
Test Frequency ID	UARFCN	Frequency of Uplink (MHz)	UARFCN	Frequency of Downlink (MHz)
Low Range	128	824.2	137	869.2
Mid Range	190	836.6	199	881.6
High Range	251	848.8	260	893.8

WCDMA Band V				
Test Frequency ID	UARFCN	Frequency of Uplink (MHz)	UARFCN	Frequency of Downlink (MHz)
Low Range	4132	826.4	4357	871.4
Mid Range	4182	836.4	4407	881.4
High Range	4233	846.6	4458	891.6

LTE Band 5					
Test Frequency ID	Bandwidth (MHz)	N <sub>UL</sub>	Frequency of Uplink (MHz)	N <sub>DL</sub>	Frequency of Downlink (MHz)
Low Range	1.4	20407	824.7	2407	869.7
	3	20415	825.5	2415	870.5
	5	20425	826.5	2425	871.5
	10	20450	829	2450	874
Mid Range	1.4/3/5/10	20525	836.5	2525	881.5
High Range	1.4	20643	848.3	2643	893.3
	3	20635	847.5	2635	892.5
	5	20625	846.5	2625	891.5
	10	20600	844	2600	889

## 3. Table for Filed Antenna:

## Main Antenna

Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
N/A	N/A	Internal	N/A	-2.9	GSM 850
N/A	N/A	Internal	N/A	-3.4	WCDMA Band V
N/A	N/A	Internal	N/A	-3.4	LTE Band 5

## Second Antenna

Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
N/A	N/A	Internal	N/A	-2.9	GSM 850
N/A	N/A	Internal	N/A	-3.4	WCDMA Band V
N/A	N/A	Internal	N/A	-3.4	LTE Band 5

## 2.2 DESCRIPTION OF TEST MODES


Following mode(s) is (were) found to be the worst case(s) and selected for the final test.

<b>GSM MODE</b>			
Test Item	Available Channel	Tested Channel	Mode
Output Power & ERP	128 to 251	128, 190, 251	GSM, GPRS, EDGE
Occupied Bandwidth	128 to 251	128, 190, 251	GSM, EDGE
Conducted Spurious Emissions	128 to 251	190	GSM, EDGE
Radiated Spurious Emissions	128 to 251	190	GSM, EDGE
Band Edge	128 to 251	128, 251	GSM, EDGE
Peak to Average Ratio	128 to 251	128, 190, 251	GSM, EDGE
Frequency Stability	128 to 251	190	GSM

<b>WCDMA BAND V MODE</b>			
Test Item	Available Channel	Tested Channel	Mode
Output Power & ERP	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
Conducted Spurious Emissions	4132 to 4233	4182	WCDMA
Radiated Spurious Emissions	4132 to 4233	4182	WCDMA
Band Edge	4132 to 4233	4132, 4233	WCDMA, HSDPA, HSUPA
Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
Frequency Stability	4132 to 4233	4182	WCDMA

LTE BAND 5 MODE					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power & ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1RB/3RB/6RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1RB/8RB/15RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1RB/12RB/25RB
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1RB/25RB/50RB
Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	6RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	15RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	25RB
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	50RB
Conducted Spurious Emissions	20407 to 20643	20525	1.4MHz	QPSK	1RB
	20425 to 20625	20525	5MHz	QPSK	1RB
	20450 to 20600	20525	10MHz	QPSK	1RB
Radiated Spurious Emissions	20407 to 20643	20525	1.4MHz	QPSK	1RB
	20425 to 20625	20525	5MHz	QPSK	1RB
	20450 to 20600	20525	10MHz	QPSK	1RB
Band Edge	20407 to 20643	20407, 20643	1.4MHz	QPSK	1RB/6RB
	20415 to 20635	20415, 20635	3MHz	QPSK	1RB/15RB
	20425 to 20625	20425, 20625	5MHz	QPSK	1RB/25RB
	20450 to 20600	20450, 20600	10MHz	QPSK	1RB/50RB
Peak To Average Ratio	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM, 64QAM	1RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM, 64QAM	1RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM, 64QAM	1RB
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM, 64QAM	1RB
Frequency Stability	20407 to 20643	20525	1.4MHz	QPSK	1RB
	20415 to 20635	20525	3MHz	QPSK	1RB
	20425 to 20625	20525	5MHz	QPSK	1RB
	20450 to 20600	20525	10MHz	QPSK	1RB

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED

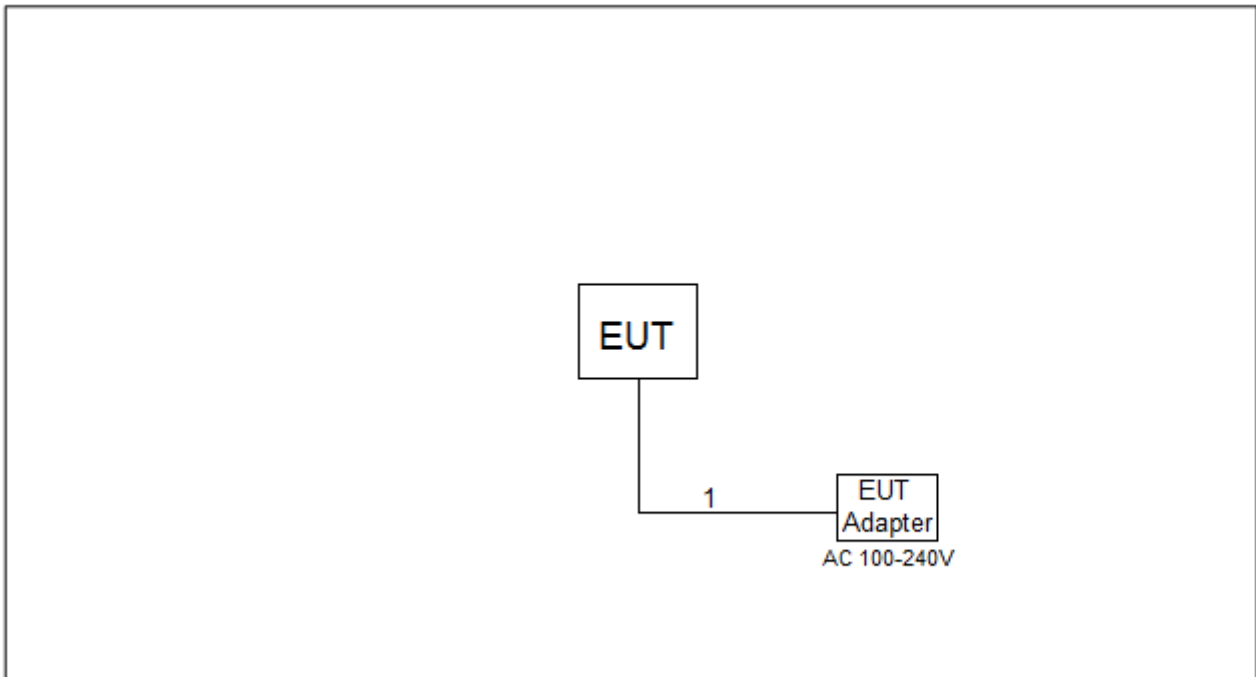

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	YES	NO	1m

### 3. TEST RESULT

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMIT

Mobile / Portable station are limited to 7 watts e.r.p.

##### 3.1.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.

##### EIRP / ERP:

$EIRP = \text{Output Power} + \text{Antenan gain}$


$ERP = EIPR - 2.15\text{dBi}$

##### Output Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

##### 3.1.3 TEST SETUP LAYOUT

###### Output Power Measurement



##### 3.1.4 TEST DEVIATION

No deviation

##### 3.1.5 TEST RESULTS

Please refer to the APPENDIX A.


## 3.2 OCCUPIED BANDWIDTH MEASUREMENT

### 3.2.1 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 4.

1. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3.  $RBW=(1\% \sim 5\%)*EBW$   
 $VBW \geq 3*RBW$
4. Set spectrum analyzer with Peak detector.

### 3.2.2 TEST SETUP LAYOUT

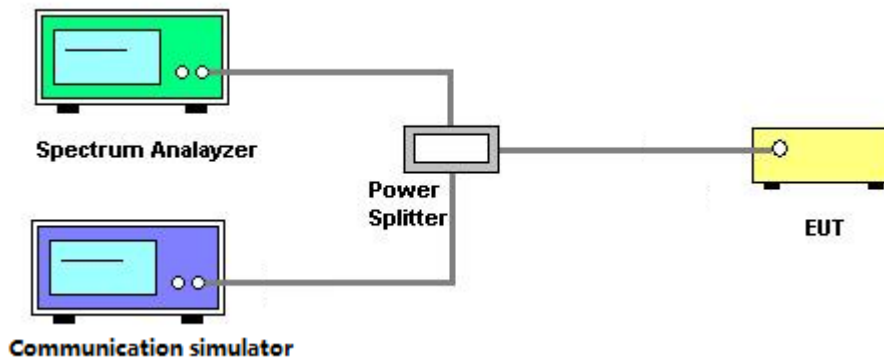

### 3.2.3 TEST DEVIATION

No deviation

### 3.2.4 TEST RESULTS

Please refer to the APPENDIX B.

### 3.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

#### 3.3.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

#### 3.3.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with Peak detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.3.3 TEST SETUP LAYOUT

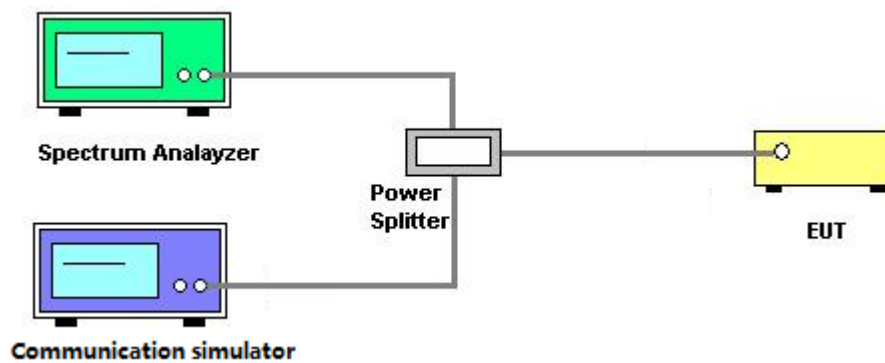

#### 3.3.4 TEST DEVIATION

No deviation

#### 3.3.5 TEST RESULTS

Please refer to the APPENDIX C.



### **3.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT**



#### **3.4.1 LIMIT**


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

#### **3.4.2 TEST PROCEDURES**

The testing follows FCC KDB 971168 v03r01 Section 6.2.

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
4. ERP can be calculated form EIRP by subtracting the gain of dipole,  $ERP = EIPR - 2.15\text{dBi.}$
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

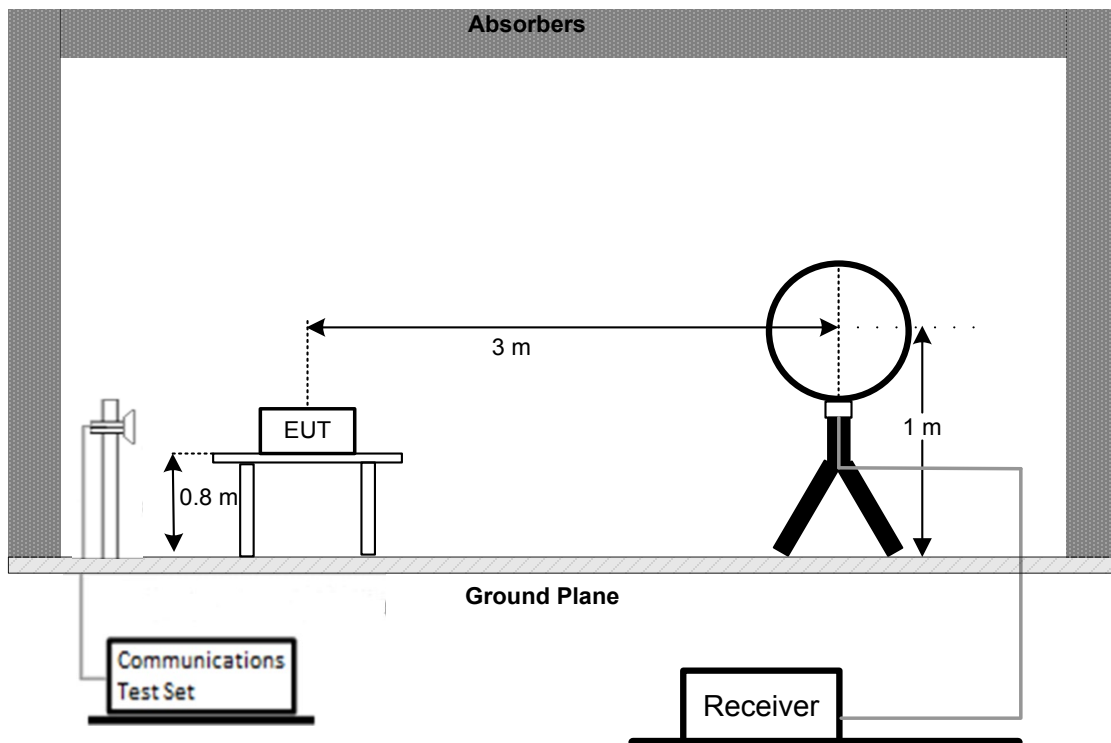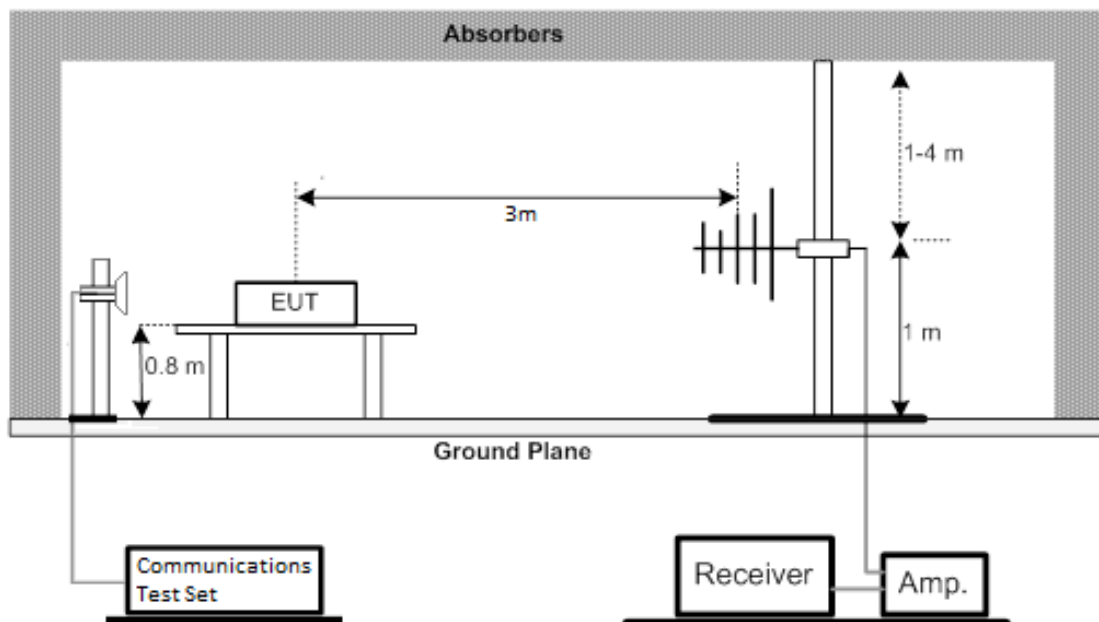**3.4.3 TEST SETUP LAYOUT****Below 30MHz****30MHz to 1000MHz**

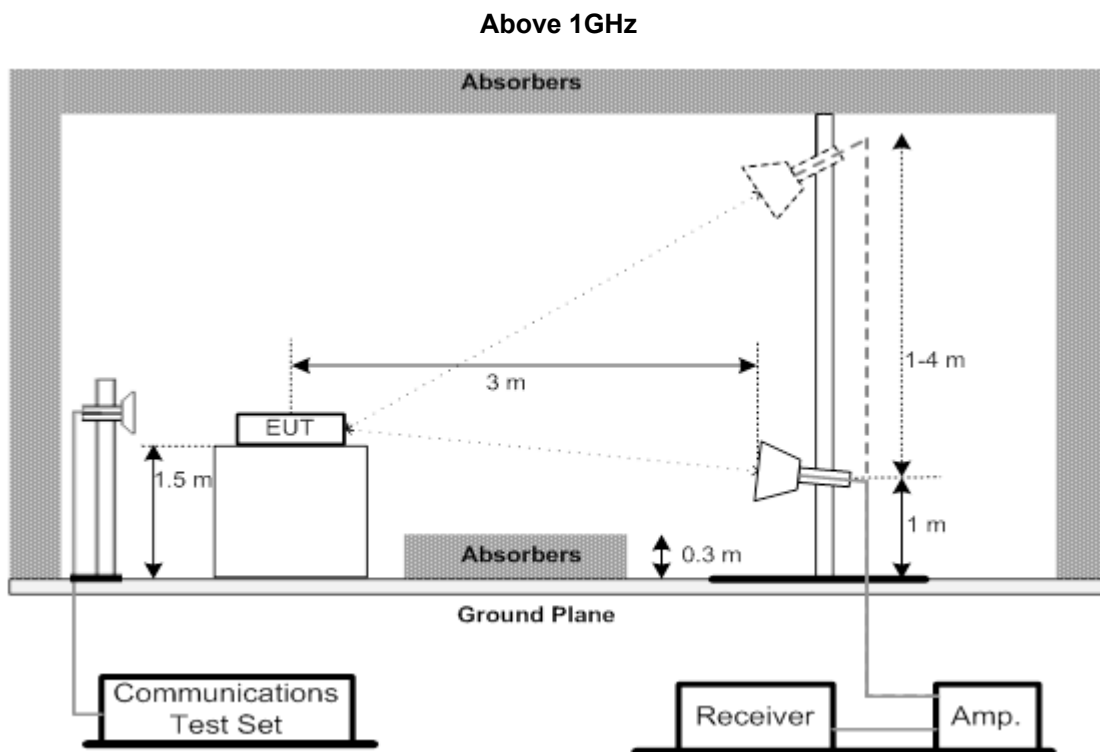

### 3.4.4 TEST DEVIATION

No deviation

### 3.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the APPENDIX D.

### 3.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the APPENDIX E.

### 3.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the APPENDIX F.

### 3.5 BAND EDGE MEASUREMENT

#### 3.5.1 LIMIT


A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 3.5.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.

1. All measurements were done at low and high operational frequency range.
2. Record the max trace plot into the test report.

#### 3.5.3 TEST SETUP LAYOUT

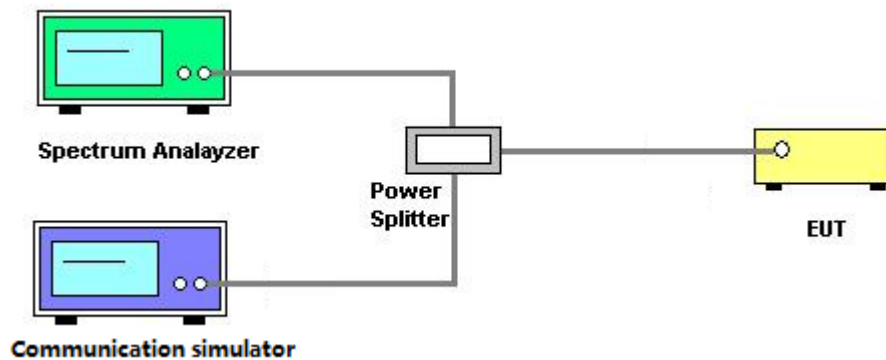

#### 3.5.4 TEST DEVIATION

No deviation

#### 3.5.5 TEST RESULTS

Please refer to the APPENDIX G.

### 3.6 PEAK TO AVERAGE RATIO MEASUREMENT

#### 3.6.1 LIMIT


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### 3.6.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 5.7.

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 3.6.3 TEST SETUP LAYOUT

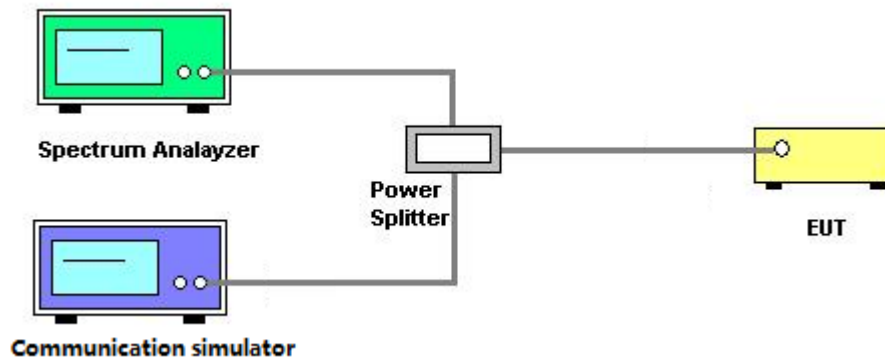

#### 3.6.4 TEST DEVIATION

No deviation

#### 3.6.5 TEST RESULTS

Please refer to the APPENDIX H.

### 3.7 FREQUENCY STABILITY MEASUREMENT

#### 3.7.1 LIMIT


$\pm 1.5$  ppm is for base and fixed station.  $\pm 2.5$  ppm is for mobile station.

#### 3.7.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 9.

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^\circ\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

#### 3.7.3 TEST SETUP LAYOUT

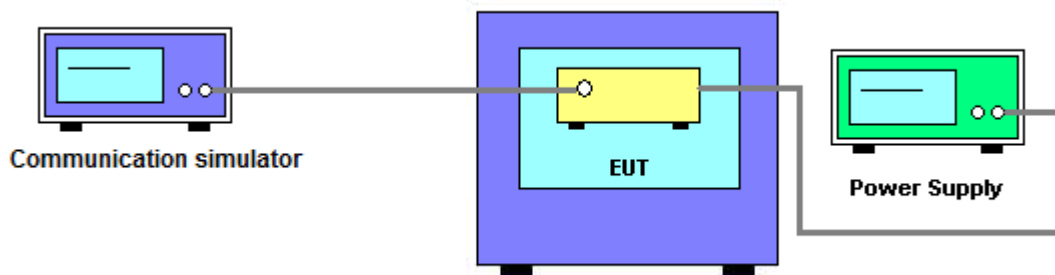

#### 3.7.4 TEST DEVIATION

No deviation

#### 3.7.5 TEST RESULTS

Please refer to the APPENDIX I.

#### 4. LIST OF MEASUREMENT EQUIPMENTS

Radiated Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2020
2	Amplifier	Agilent	8449B	3008A02274	Mar. 10, 2020
3	HighPass Filter	Wairwright Instruments Gmbh	WHK 1.5/15G-10ST	11	Mar. 10, 2020
4	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-1690/1805-60/12SS	38	Mar. 10, 2020
5	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/863-60/9SS	7	Mar. 10, 2020
6	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/935-60/9SS	14	Mar. 10, 2020
7	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-1830/1930-60/10SS	17	Mar. 10, 2020
8	HighPass Filter	Wairwright Instruments Gmbh	WHK3.1/18G-10SS	24	Mar. 10, 2020
9	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 10, 2020
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 10, 2020
11	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
12	wideband radio communication tester	R&S	CMW500	152372	Mar. 10, 2020
13	High pass filter	KANGMAIWEI	ZHPF-M3-12.75G-3869	B2015073763	Feb. 12, 2020
14	High pass filter	KANGMAIWEI	ZHPF-M1000-4000-1	B2015073762	Feb. 12, 2020
15	High pass filter	KANGMAIWEI	ZHPF-M6-186-1727	B2015073764	Feb. 12, 2020
16	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	May 24, 2020
17	Cable	mitron	B10-01-01-12M	18072744	Jun. 29, 2020
18	Controller	ETS-Lindgren	2090	N/A	N/A
19	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
20	Loop Antenna	EM	EM-6876-1	230	Jan. 15, 2020
21	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 09, 2020
22	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 23, 2020

Conducted Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 10, 2020
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 10, 2020
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 10, 2020
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 10, 2020

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 10, 2020
2	Multi-output DC Power Supply	GW Instek	GPC-3030DN	EK880675	Sep. 26, 2020
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 10, 2020
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 10, 2020
5	Const Temp, & Humidity Chamber	Bell	BTH-50C	20170306001	Mar. 10, 2020

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



## APPENDIX A - OUTPUT POWER

**Output Power (dBm):**

GSM850		128CH	190CH	251CH
		824.2MHz	836.6MHz	848.8MHz
GSM (CS)		32.86	32.95	32.90
GPRS/EDGE (GMSK)	1 Tx Slot	32.87	32.94	32.89
	2 Tx Slot	30.54	30.66	30.62
	3 Tx Slot	28.98	29.10	29.05
	4 Tx Slot	27.97	28.11	28.03
EDGE (8PSK)	1 Tx Slot	27.57	27.79	27.74
	2 Tx Slot	25.5	25.43	25.66
	3 Tx Slot	24.36	24.37	24.71
	4 Tx Slot	23.66	23.80	23.95

Modulation	Band	WCDMA Band V		
	Tx Channel	4132CH	4182CH	4233CH
	Frequency	826.4MHz	836.4MHz	846.6MHz
QPSK	RMC 12.2K	22.91	22.93	22.95
	RMC 64K	22.94	22.97	23
	RMC 144K	22.92	22.95	22.97
	RMC 384K	22.93	22.96	22.94
	HSDPA Subtest-1	22.42	22.44	22.49
	HSDPA Subtest-2	22.38	22.46	22.45
	HSDPA Subtest-3	21.9	21.94	21.97
	HSDPA Subtest-4	21.89	21.96	21.95
	HSUPA Subtest-1	20.9	20.94	20.99
	HSUPA Subtest-2	20.91	20.95	21.01
	HSUPA Subtest-3	21.89	21.94	21.96
	HSUPA Subtest-4	20.45	20.45	20.49
	HSUPA Subtest-5	21.84	21.89	21.92

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20407CH	20525CH	20643CH
				824.7MHz	836.5MHz	848.3MHz
5 / 1.4M	QPSK	1	0	21.78	21.81	21.79
		1	2	21.86	21.89	21.92
		1	5	21.76	21.78	21.80
		3	0	22.87	22.89	22.88
		3	1	22.88	22.91	22.94
		3	2	22.83	22.90	22.88
	16QAM	6	0	21.82	21.78	21.83
		1	0	20.91	21.04	21.18
		1	2	20.96	21.10	21.29
		1	5	20.85	21.02	21.20
		3	0	21.83	21.99	21.87
		3	1	21.85	21.83	21.90
	64QAM	3	2	21.80	21.74	21.88
		6	0	20.84	20.85	20.80
		1	0	19.99	20.09	20.24
		1	2	20.13	20.15	20.41
		1	5	19.93	20.11	20.30
		3	0	20.99	20.87	20.97
		3	1	21.00	20.92	20.96
		3	2	20.96	20.90	20.99
		6	0	19.97	19.82	19.92

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20415CH	20525CH	20635CH
				825.5MHz	836.5MHz	847.5MHz
5 / 3M	QPSK	1	0	21.84	21.90	21.88
		1	7	21.96	22.04	21.98
		1	14	21.87	21.94	21.85
		8	0	21.85	21.83	21.86
		8	4	21.91	21.87	21.91
		8	7	21.85	21.84	21.82
		15	0	21.87	21.87	21.87
	16QAM	1	0	20.88	21.28	20.96
		1	7	20.98	21.47	21.08
		1	14	20.85	21.38	20.95
		8	0	20.99	20.99	20.91
		8	4	20.90	20.94	20.98
		8	7	20.96	20.90	20.90
		15	0	20.90	20.94	20.84
	64QAM	1	0	20.25	20.03	20.12
		1	7	20.36	20.25	20.25
		1	14	20.22	20.18	20.09
		8	0	19.91	19.96	19.89
		8	4	19.92	19.94	19.93
		8	7	19.94	19.91	19.86
		15	0	19.88	19.96	19.92

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20425CH	20525CH	20625CH
				826.5MHz	836.5MHz	846.5MHz
5 / 5M	QPSK	1	0	21.89	21.81	21.90
		1	13	22.00	21.91	21.98
		1	24	21.86	21.81	21.83
		12	0	21.83	21.93	21.94
		12	6	21.91	21.96	21.96
		12	11	21.93	21.97	21.90
		25	0	21.88	21.98	21.88
	16QAM	1	0	21.06	21.34	21.01
		1	13	21.16	21.47	21.06
		1	24	20.98	21.39	20.97
		12	0	20.87	20.87	20.93
		12	6	20.96	20.90	20.99
		12	11	20.96	20.94	20.93
		25	0	20.86	20.83	20.82
	64QAM	1	0	19.83	20.19	20.14
		1	13	19.92	20.34	20.18
		1	24	19.76	20.24	20.10
		12	0	19.88	19.92	19.96
		12	6	19.94	19.94	19.82
		12	11	19.93	19.97	19.94
		25	0	19.85	19.96	19.89

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20450CH	20525CH	20600CH
				829.0MHz	836.5MHz	844.0MHz
5 / 10M	QPSK	1	0	21.86	21.95	21.90
		1	25	22.12	22.15	22.13
		1	49	21.85	21.96	21.83
		25	0	21.89	21.87	21.91
		25	13	21.95	21.78	21.98
		25	25	21.86	21.85	21.89
		50	0	21.90	21.90	21.91
	16QAM	1	0	20.89	21.28	20.98
		1	25	21.00	21.47	21.09
		1	49	20.82	21.35	20.91
		25	0	20.86	20.93	20.98
		25	13	20.90	20.85	20.85
		25	25	20.83	20.89	20.97
		50	0	20.83	20.91	20.91
	64QAM	1	0	20.24	20.10	20.17
		1	25	20.35	20.28	20.29
		1	49	20.21	20.14	20.12
		25	0	19.92	19.99	19.98
		25	13	19.94	19.91	19.88
		25	25	19.84	19.97	19.97
		50	0	19.87	19.95	19.90

**ERP (dBm):**

GSM850		128CH	190CH	251CH
		824.2MHz	836.6MHz	848.8MHz
GSM (CS)		27.81	27.90	27.85
GPRS/EDGE (GMSK)	1 Tx Slot	27.82	27.89	27.84
	2 Tx Slot	25.49	25.61	25.57
	3 Tx Slot	23.93	24.05	24.00
	4 Tx Slot	22.92	23.06	22.98
EDGE (8PSK)	1 Tx Slot	22.52	22.74	22.69
	2 Tx Slot	20.45	20.38	20.61
	3 Tx Slot	19.31	19.32	19.66
	4 Tx Slot	18.61	18.75	18.90

Modulation	Band	WCDMA Band V		
	Tx Channel	4132CH	4182CH	4233CH
	Frequency	826.4MHz	836.4MHz	846.6MHz
QPSK	RMC 12.2K	17.36	17.38	17.40
	RMC 64K	17.39	17.42	17.45
	RMC 144K	17.37	17.40	17.42
	RMC 384K	17.38	17.41	17.39
	HSDPA Subtest-1	16.87	16.89	16.94
	HSDPA Subtest-2	16.83	16.91	16.90
	HSDPA Subtest-3	16.35	16.39	16.42
	HSDPA Subtest-4	16.34	16.41	16.40
	HSUPA Subtest-1	15.35	15.39	15.44
	HSUPA Subtest-2	15.36	15.40	15.46
	HSUPA Subtest-3	16.34	16.39	16.41
	HSUPA Subtest-4	14.90	14.90	14.94
	HSUPA Subtest-5	16.29	16.34	16.37

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20407CH	20525CH	20643CH
				824.7MHz	836.5MHz	848.3MHz
5 / 1.4M	QPSK	1	0	16.23	16.26	16.24
		1	2	16.31	16.34	16.37
		1	5	16.21	16.23	16.25
		3	0	17.32	17.34	17.33
		3	1	17.33	17.36	17.39
		3	2	17.28	17.35	17.33
	16QAM	6	0	16.27	16.23	16.28
		1	0	15.36	15.49	15.63
		1	2	15.41	15.55	15.74
		1	5	15.30	15.47	15.65
		3	0	16.28	16.44	16.32
		3	1	16.30	16.28	16.35
	64QAM	3	2	16.25	16.19	16.33
		6	0	15.29	15.30	15.25
		1	0	14.44	14.54	14.69
		1	2	14.58	14.60	14.86
		1	5	14.38	14.56	14.75
		3	0	15.44	15.32	15.42
		3	1	15.45	15.37	15.41
		3	2	15.41	15.35	15.44
		6	0	14.42	14.27	14.37

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20415CH	20525CH	20635CH
				825.5MHz	836.5MHz	847.5MHz
5 / 3M	QPSK	1	0	16.29	16.35	16.33
		1	7	16.41	16.49	16.43
		1	14	16.32	16.39	16.30
		8	0	16.30	16.28	16.31
		8	4	16.36	16.32	16.36
		8	7	16.30	16.29	16.27
	16QAM	15	0	16.32	16.32	16.32
		1	0	15.33	15.73	15.41
		1	7	15.43	15.92	15.53
		1	14	15.30	15.83	15.40
		8	0	15.44	15.44	15.36
		8	4	15.35	15.39	15.43
	64QAM	8	7	15.41	15.35	15.35
		15	0	15.35	15.39	15.29
		1	0	14.70	14.48	14.57
		1	7	14.81	14.70	14.70
		1	14	14.67	14.63	14.54
		8	0	14.36	14.41	14.34
		8	4	14.37	14.39	14.38
		8	7	14.39	14.36	14.31
		15	0	14.33	14.41	14.37

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20425CH	20525CH	20625CH
				826.5MHz	836.5MHz	846.5MHz
5 / 5M	QPSK	1	0	16.34	16.26	16.35
		1	13	16.45	16.36	16.43
		1	24	16.31	16.26	16.28
		12	0	16.28	16.38	16.39
		12	6	16.36	16.41	16.41
		12	11	16.38	16.42	16.35
		25	0	16.33	16.43	16.33
	16QAM	1	0	15.51	15.79	15.46
		1	13	15.61	15.92	15.51
		1	24	15.43	15.84	15.42
		12	0	15.32	15.32	15.38
		12	6	15.41	15.35	15.44
		12	11	15.41	15.39	15.38
		25	0	15.31	15.28	15.27
	64QAM	1	0	14.28	14.64	14.59
		1	13	14.37	14.79	14.63
		1	24	14.21	14.69	14.55
		12	0	14.33	14.37	14.41
		12	6	14.39	14.39	14.27
		12	11	14.38	14.42	14.39
		25	0	14.30	14.41	14.34


LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20450CH	20525CH	20600CH
				829.0MHz	836.5MHz	844.0MHz
5 / 10M	QPSK	1	0	16.31	16.40	16.35
		1	25	16.57	16.60	16.58
		1	49	16.30	16.41	16.28
		25	0	16.34	16.32	16.36
		25	13	16.40	16.23	16.43
		25	25	16.31	16.30	16.34
		50	0	16.35	16.35	16.36
	16QAM	1	0	15.34	15.73	15.43
		1	25	15.45	15.92	15.54
		1	49	15.27	15.80	15.36
		25	0	15.31	15.38	15.43
		25	13	15.35	15.30	15.30
		25	25	15.28	15.34	15.42
		50	0	15.28	15.36	15.36
	64QAM	1	0	14.69	14.55	14.62
		1	25	14.80	14.73	14.74
		1	49	14.66	14.59	14.57
		25	0	14.37	14.44	14.43
		25	13	14.39	14.36	14.33
		25	25	14.29	14.42	14.42
		50	0	14.32	14.40	14.35

## **APPENDIX B - OCCUPIED BANDWIDTH**



GSM850					
GSM			EDGE		
CS			8PSK		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
128	824.2	0.2459	128	824.2	0.2486
190	836.6	0.2450	190	836.6	0.2451
251	848.8	0.2448	251	848.8	0.2475
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
128	824.2	0.3223	128	824.2	0.3113
190	836.6	0.3194	190	836.6	0.3166
251	848.8	0.3212	251	848.8	0.3110


## Spectrum Plot

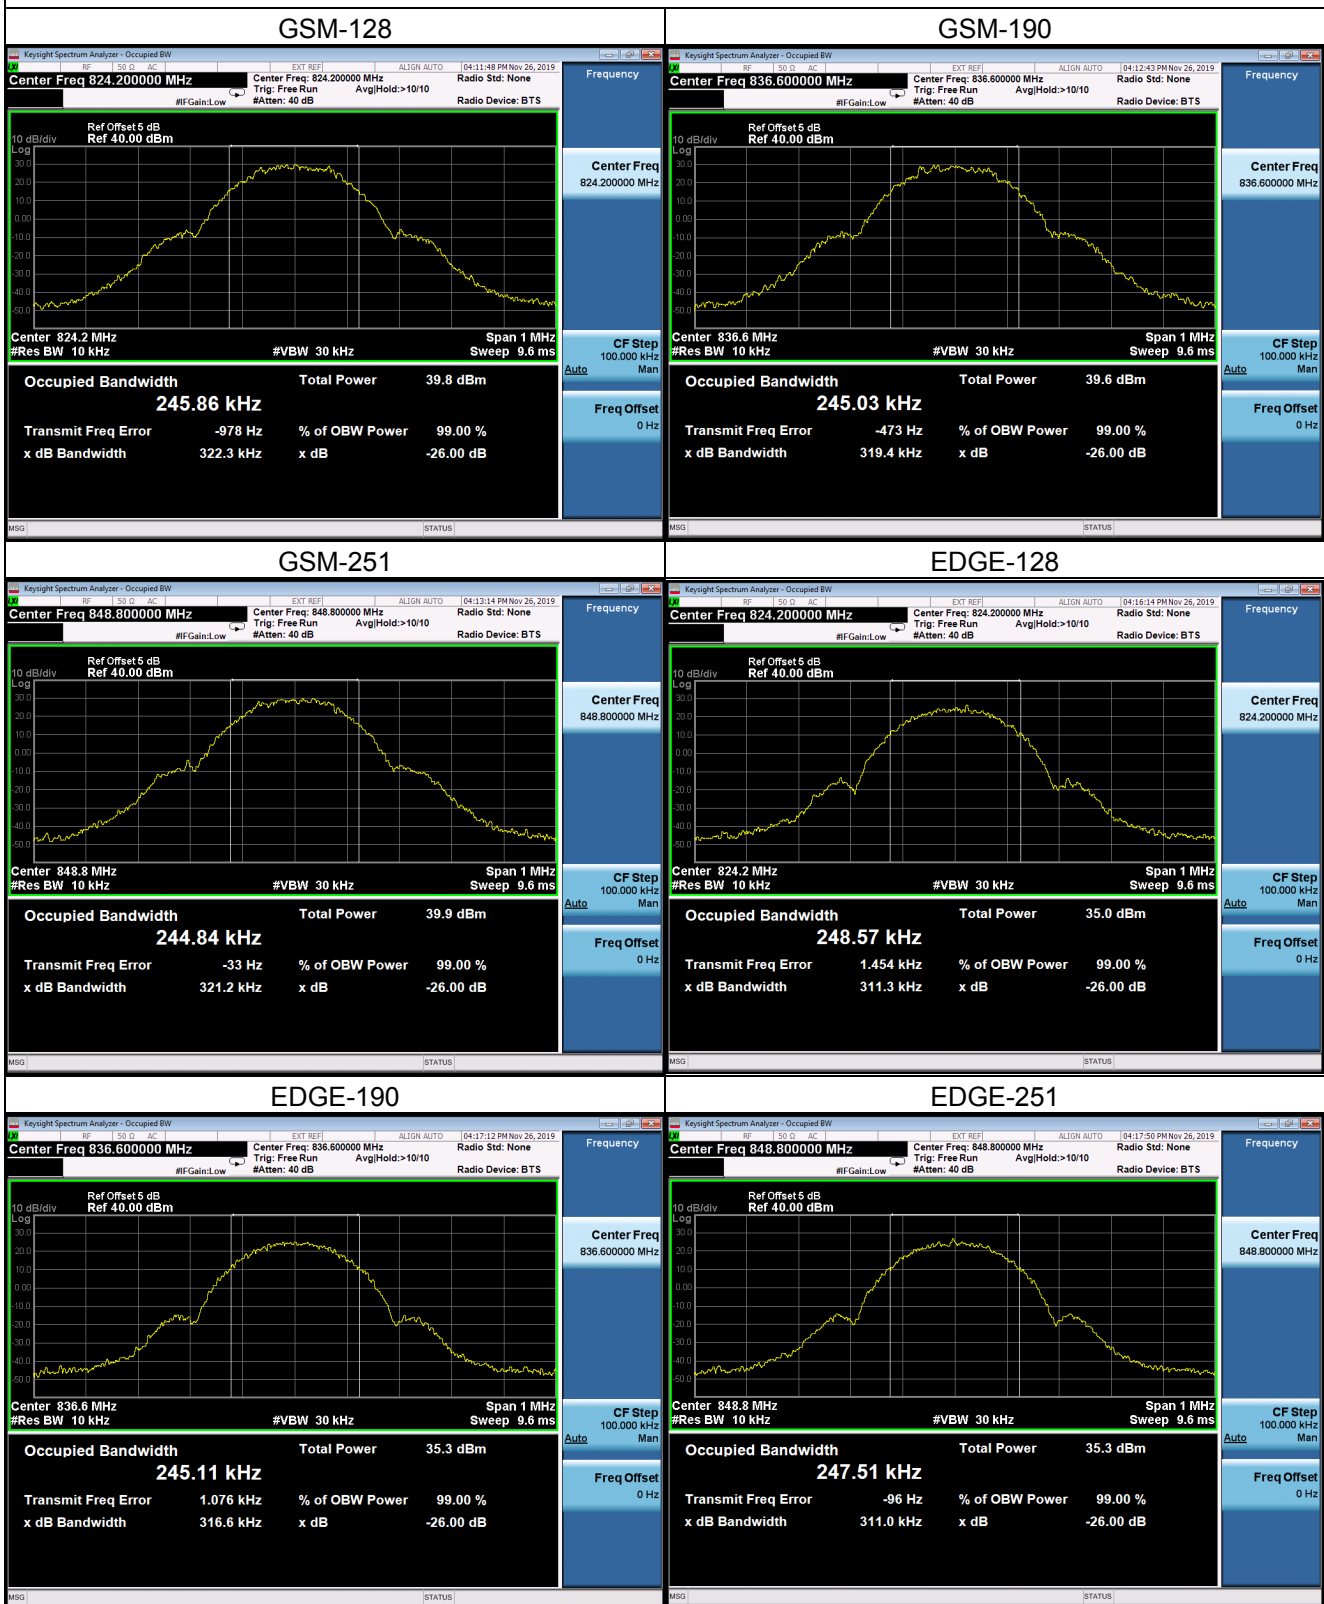

WCDMA Band V_WCDMA					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
4132	826.4	4.1608	4132	826.4	4.709
4182	836.4	4.1699	4182	836.4	4.714
4233	846.6	4.1528	4233	846.6	4.697



WCDMA Band V_HSDPA					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
4132	826.4	4.1614	4132	826.4	4.703
4182	836.4	4.1763	4182	836.4	4.716
4233	846.6	4.1685	4233	846.6	4.706

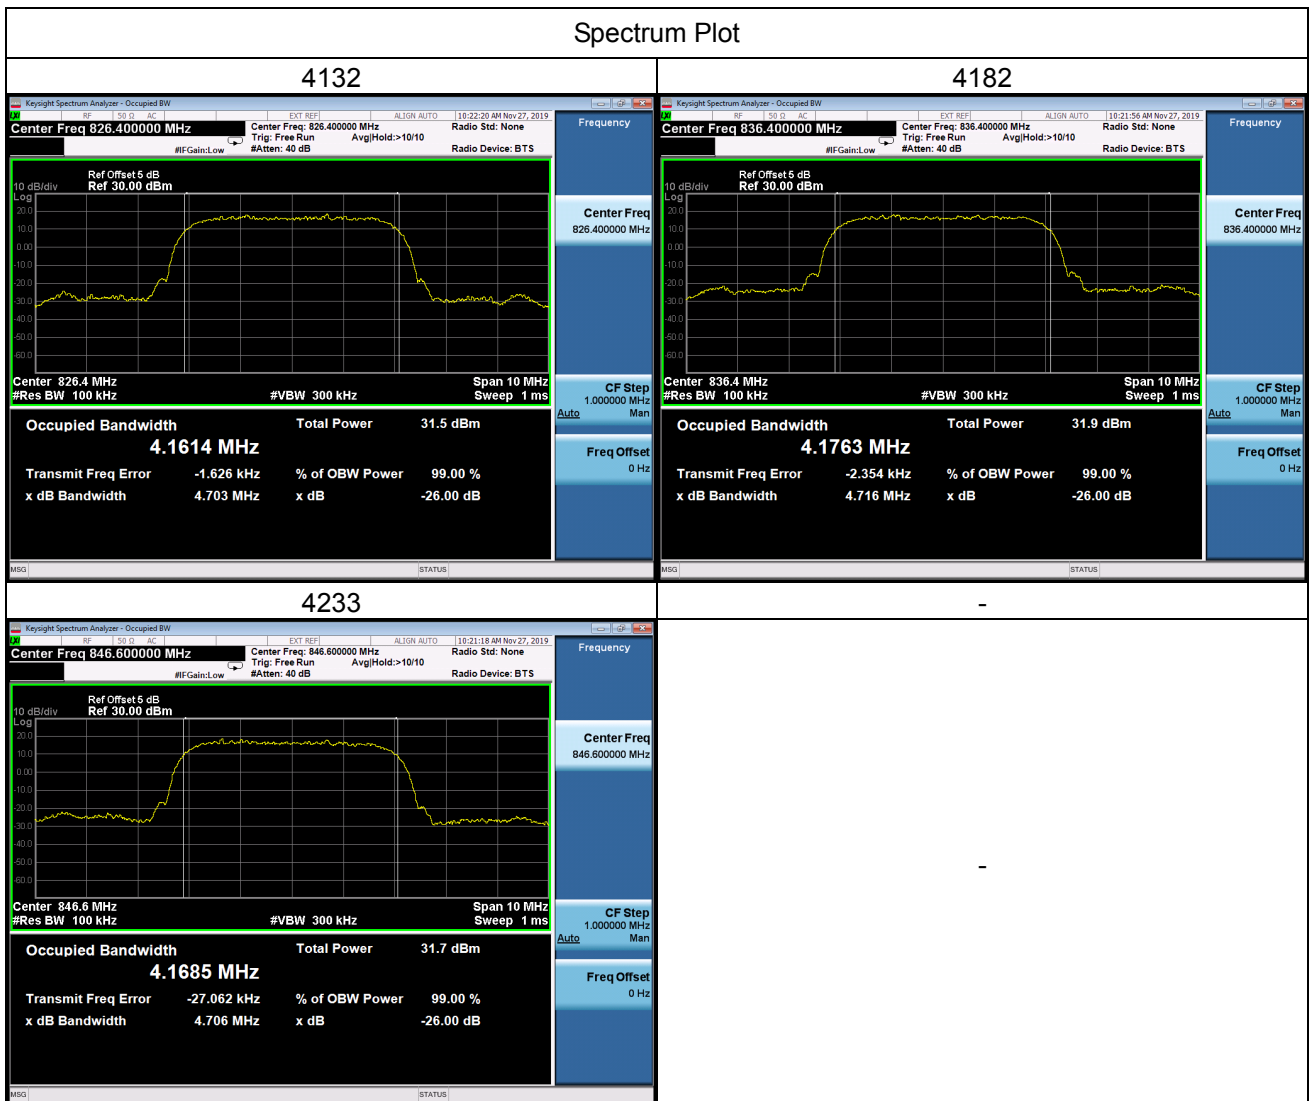


WCDMA Band V_HSUPA					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
4132	826.4	4.1852	4132	826.4	4.740
4182	836.4	4.2043	4182	836.4	4.728
4233	846.6	4.1875	4233	846.6	4.710




LTE Band 5_1.4M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20407	824.7	1.0963	20407	824.7	1.292
20525	836.5	1.0865	20525	836.5	1.277
20643	848.3	1.0900	20643	848.3	1.288
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20407	824.7	1.0903	20407	824.7	1.293
20525	836.5	1.0946	20525	836.5	1.288
20643	848.3	1.0860	20643	848.3	1.272
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20407	824.7	1.0816	20407	824.7	1.264
20525	836.5	1.0887	20525	836.5	1.285
20643	848.3	1.0842	20643	848.3	1.274

## Spectrum Plot


### QPSK-20407

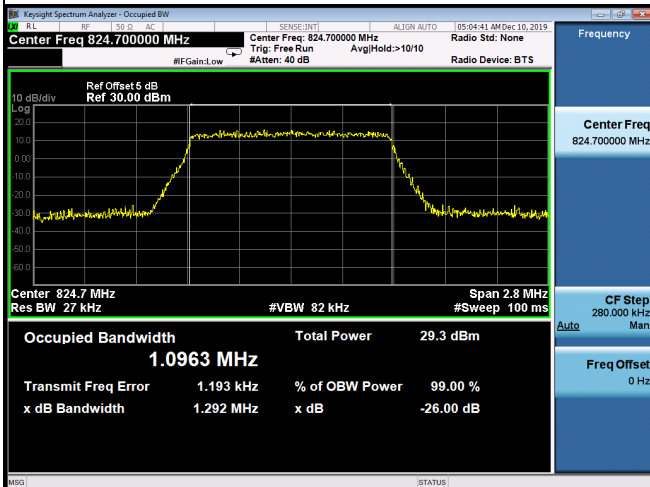


### QPSK-20525

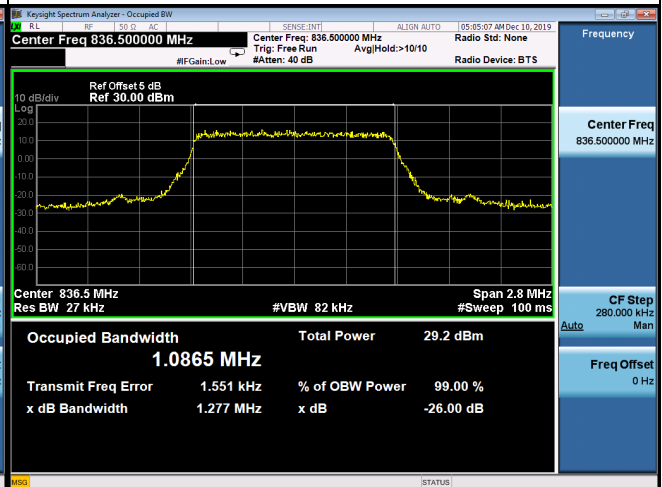


### QPSK-20643

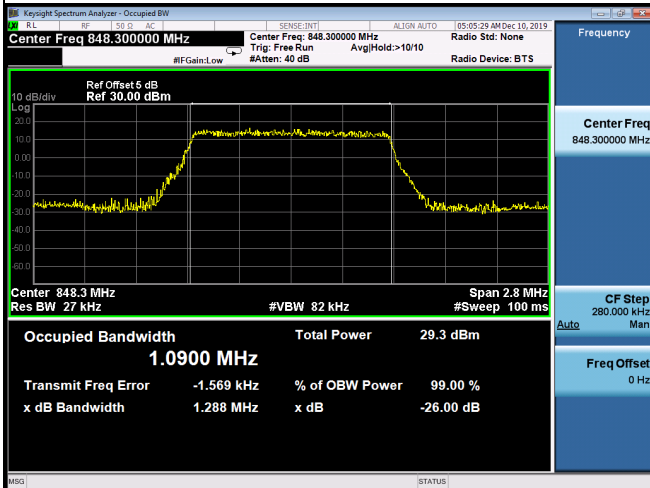


### 16QAM-20407

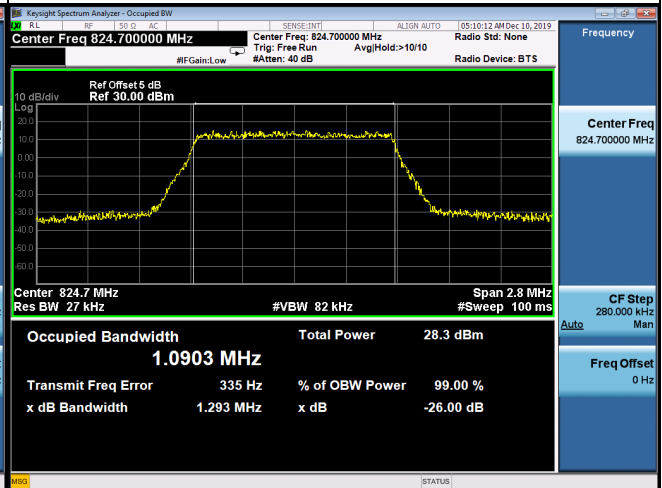

### 16QAM-20525

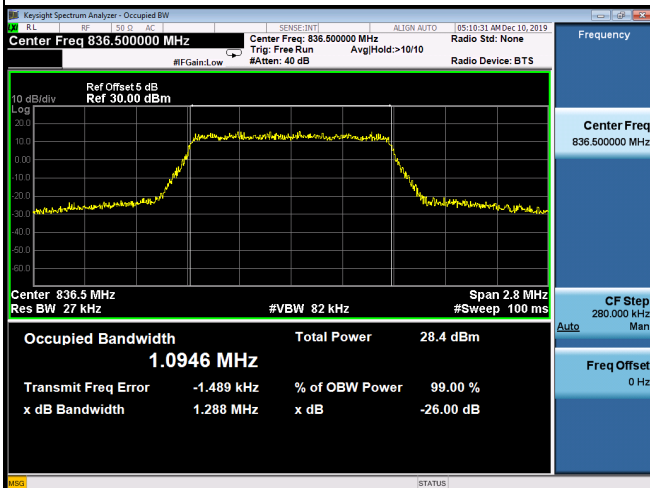


### 16QAM-20643

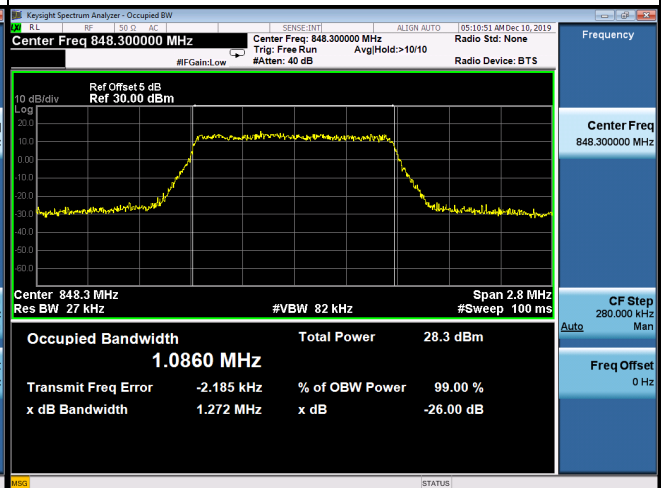


## Spectrum Plot


### 64QAM-20407

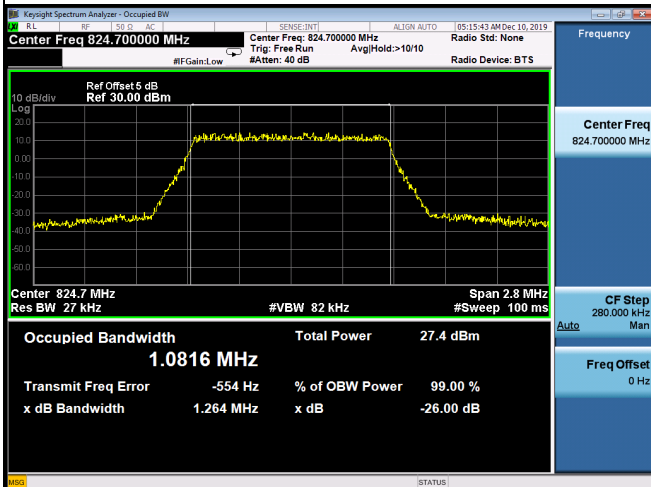

### 64QAM-20525

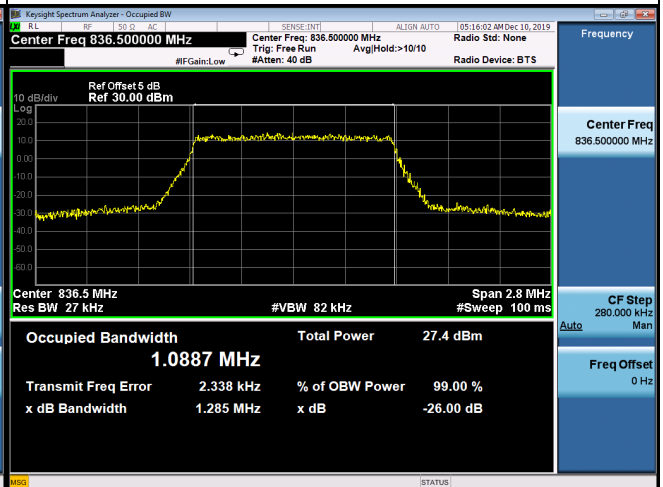

### 64QAM-20643

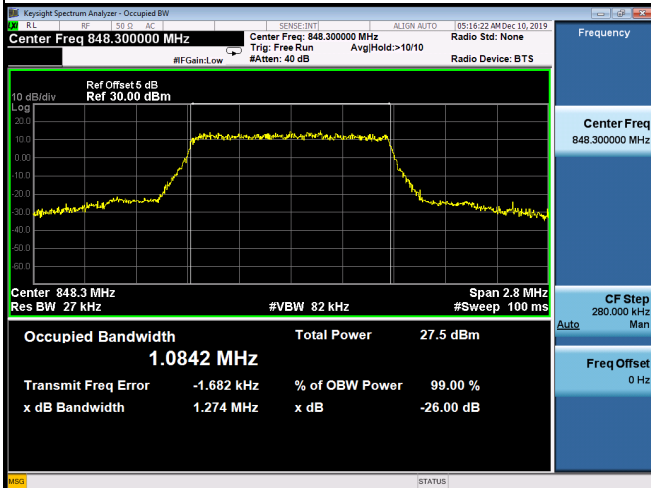





LTE Band 5_3M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20415	825.5	2.6903	20415	825.5	2.901
20525	836.5	2.6962	20525	836.5	2.906
20635	847.5	2.6890	20635	847.5	2.914
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20415	825.5	2.6879	20415	825.5	2.905
20525	836.5	2.6866	20525	836.5	2.927
20635	847.5	2.6882	20635	847.5	2.926
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20415	825.5	2.6907	20415	825.5	2.919
20525	836.5	2.6896	20525	836.5	2.903
20635	847.5	2.6830	20635	847.5	2.906

## Spectrum Plot


### QPSK-20415

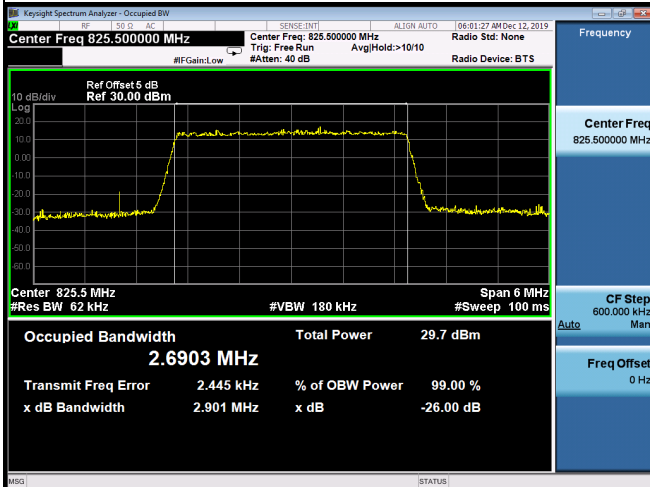


### QPSK-20525

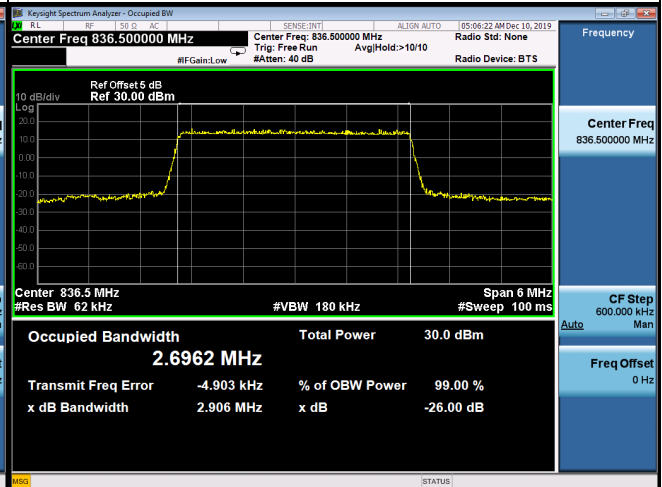


### QPSK-20635

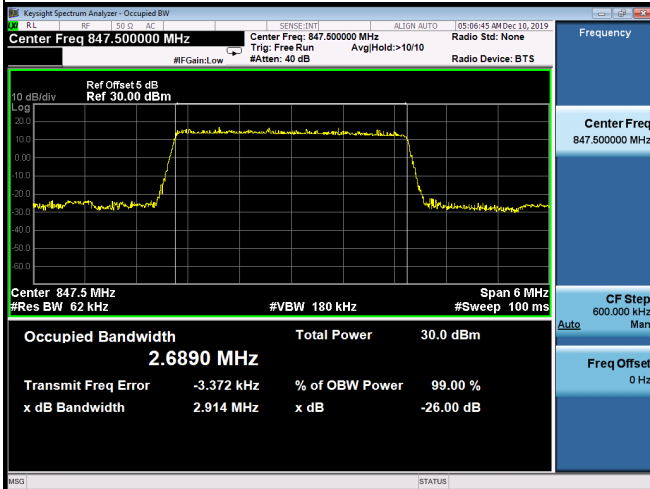


### 16QAM-20415

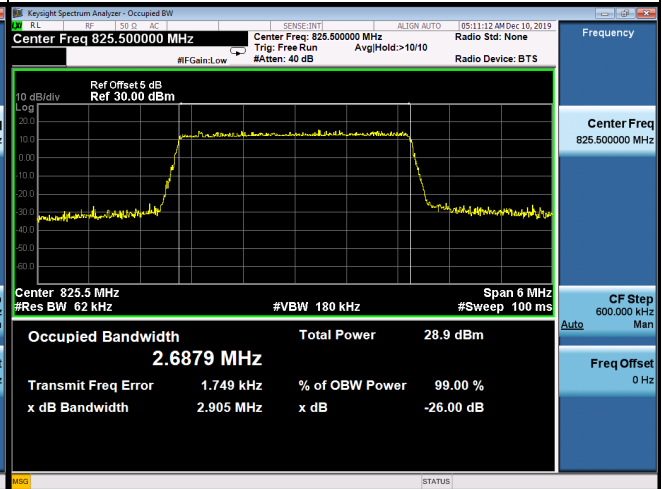

### 16QAM-20525

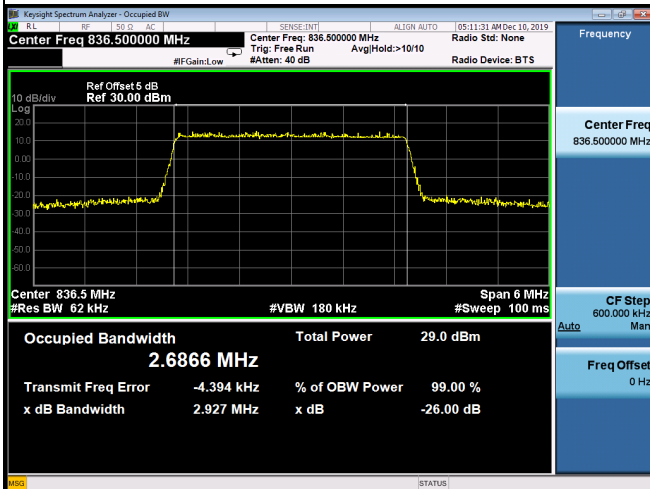


### 16QAM-20635

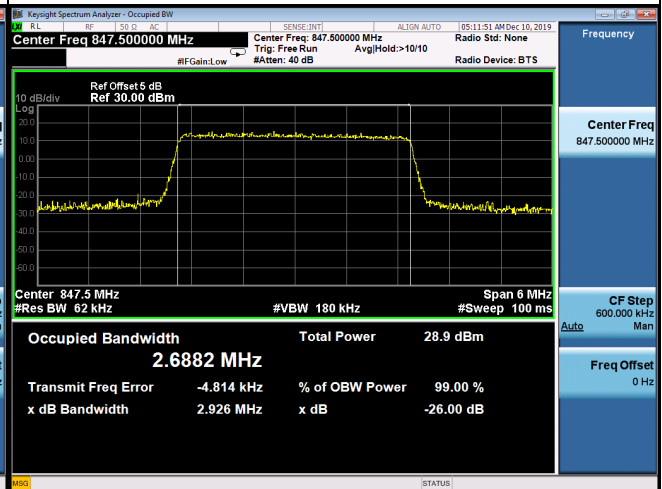


## Spectrum Plot


### 64QAM-20415

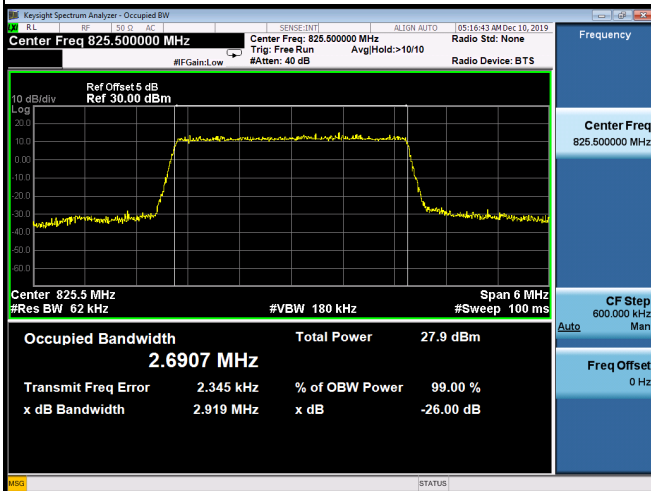

### 64QAM-20525

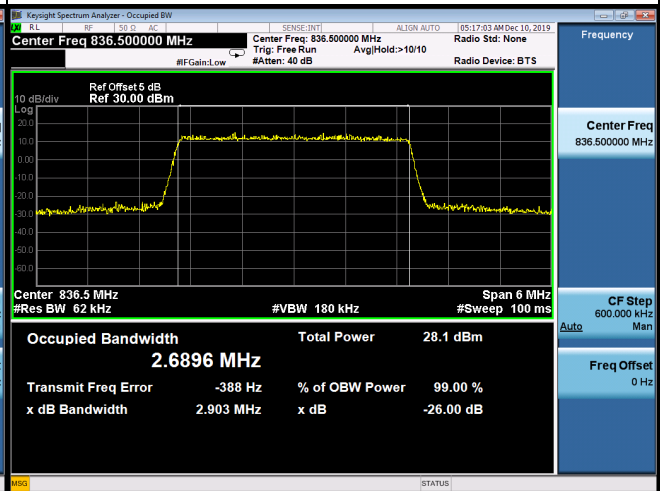

### 64QAM-20635

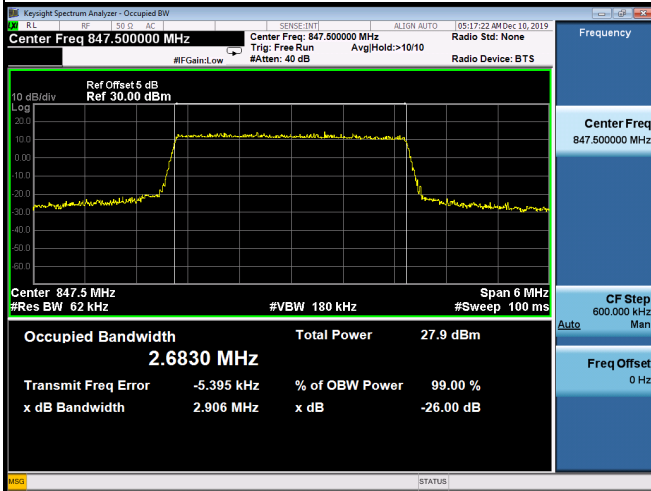


LTE Band 5_5M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20425	826.5	4.4969	20425	826.5	4.905
20525	836.5	4.5026	20525	836.5	4.885
20625	846.5	4.4923	20625	846.5	4.890
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20425	826.5	4.4864	20425	826.5	4.936
20525	836.5	4.4947	20525	836.5	4.938
20625	846.5	4.4773	20625	846.5	4.885
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20425	826.5	4.4856	20425	826.5	4.896
20525	836.5	4.4977	20525	836.5	4.888
20625	846.5	4.4853	20625	846.5	4.900

## Spectrum Plot


### QPSK-20425




### QPSK-20525

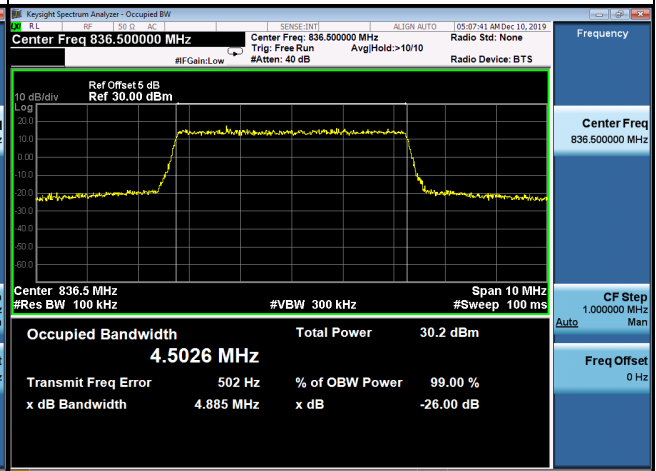


### QPSK-20625

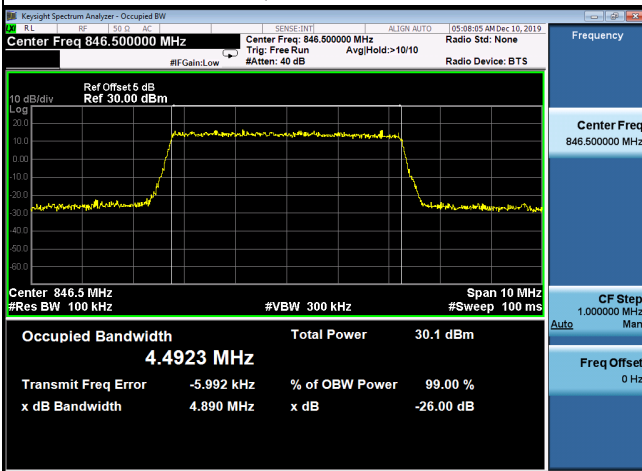


### 16QAM-20425

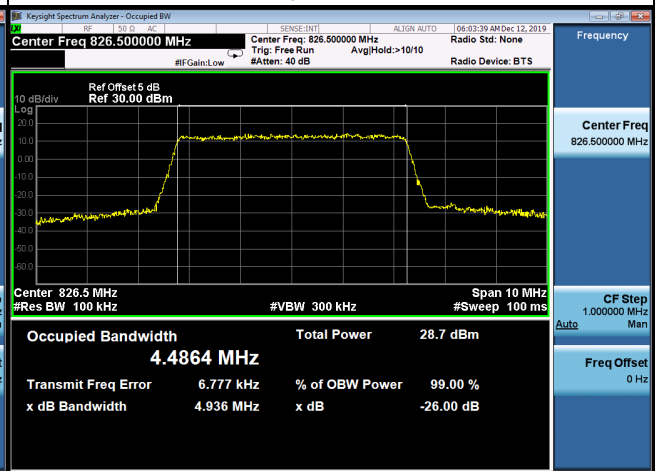

### 16QAM-20525

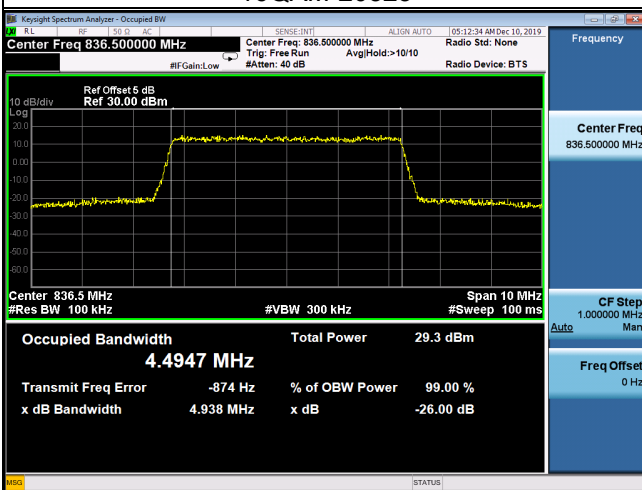


### 16QAM-20625

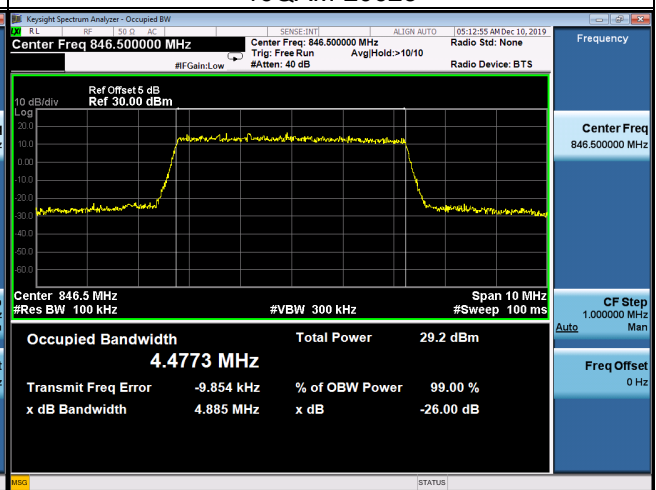


## Spectrum Plot


### 64QAM-20425

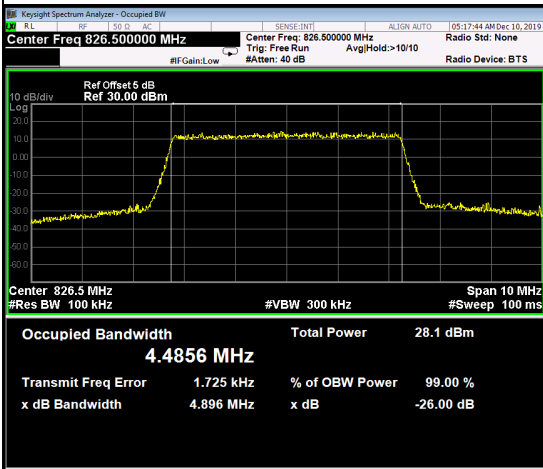

### 64QAM-20525

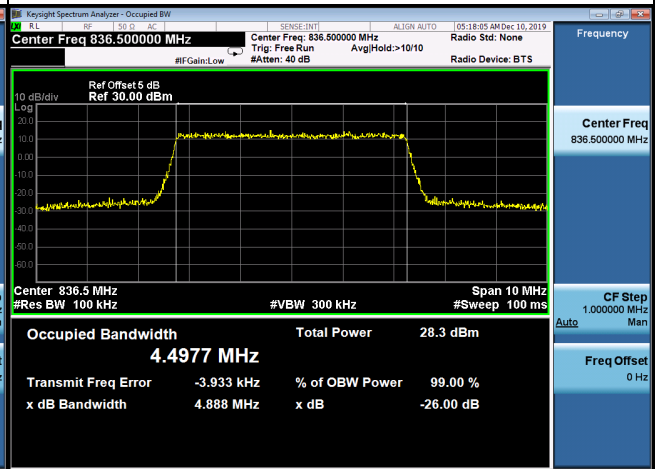


### 64QAM-20625

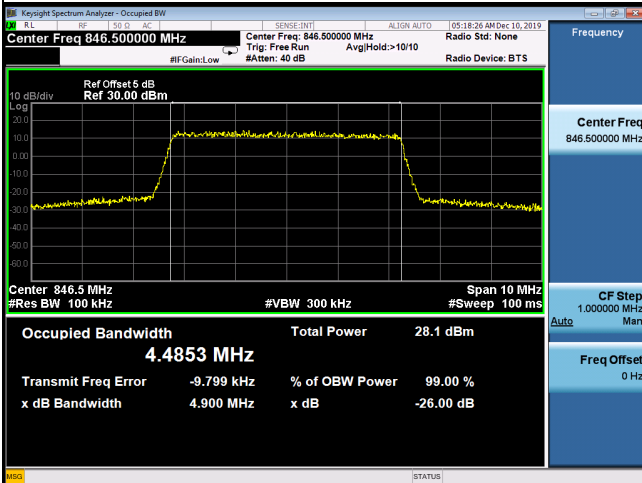


LTE Band 5_10M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20450	829.0	8.9461	20450	829.0	9.781
20525	836.5	8.9951	20525	836.5	9.828
20600	844.0	8.9447	20600	844.0	9.790
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20450	829.0	8.9755	20450	829.0	9.739
20525	836.5	8.9951	20525	836.5	9.790
20600	844.0	8.9496	20600	844.0	9.696
64QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20450	829.0	8.9537	20450	829.0	9.768
20525	836.5	9.0017	20525	836.5	9.772
20600	844.0	8.9432	20600	844.0	9.660

## Spectrum Plot


### QPSK-20450

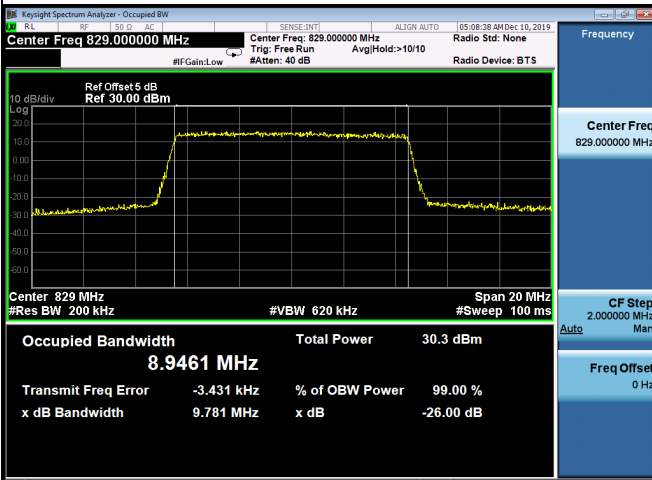


### QPSK-20525

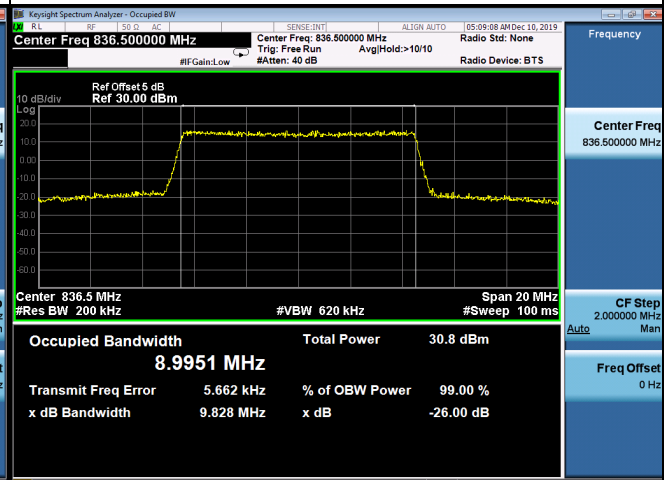


### QPSK-20600

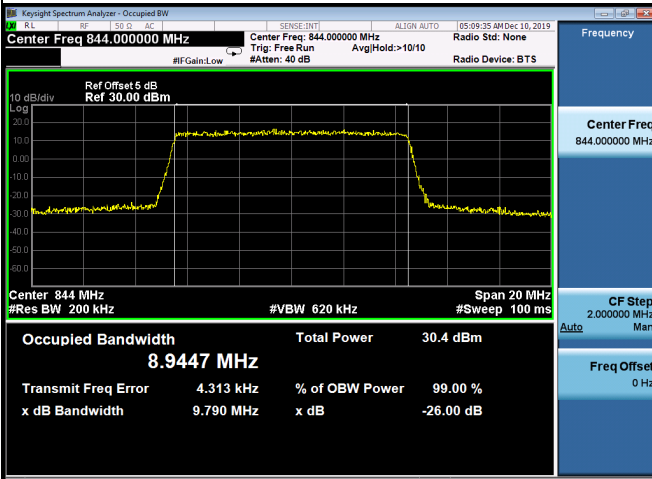

### 16QAM-20450

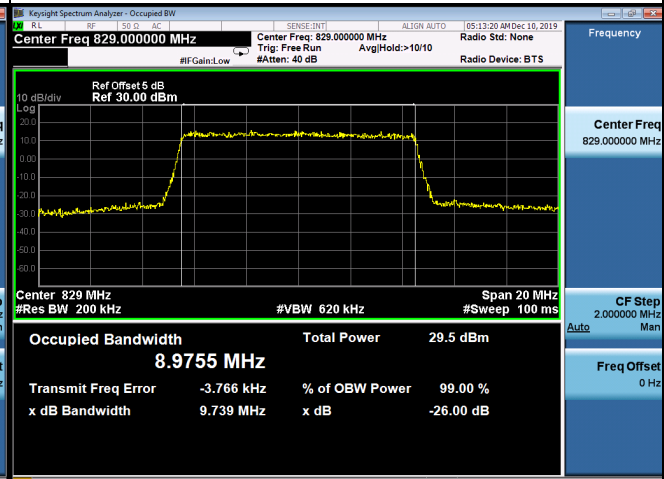

### 16QAM-20525

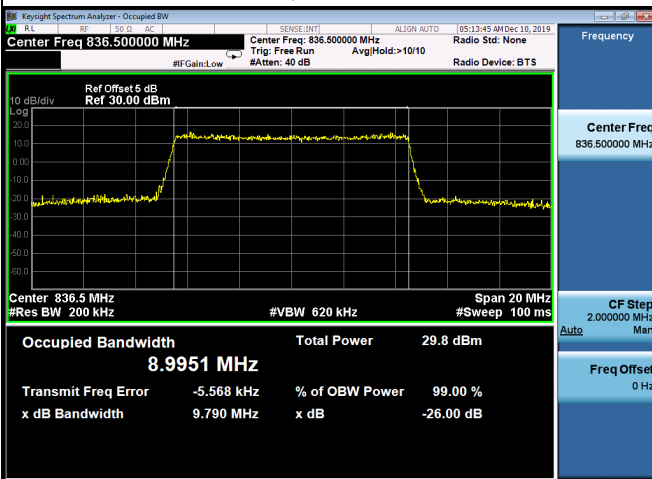


### 16QAM-20600






## Spectrum Plot


### 64QAM-20450

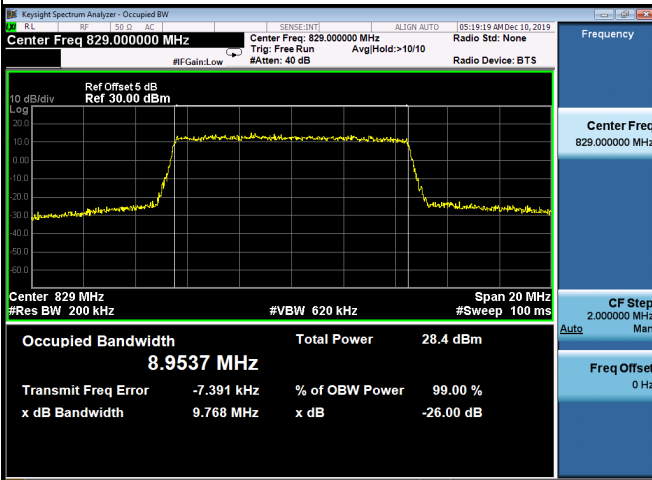


### 64QAM-20525

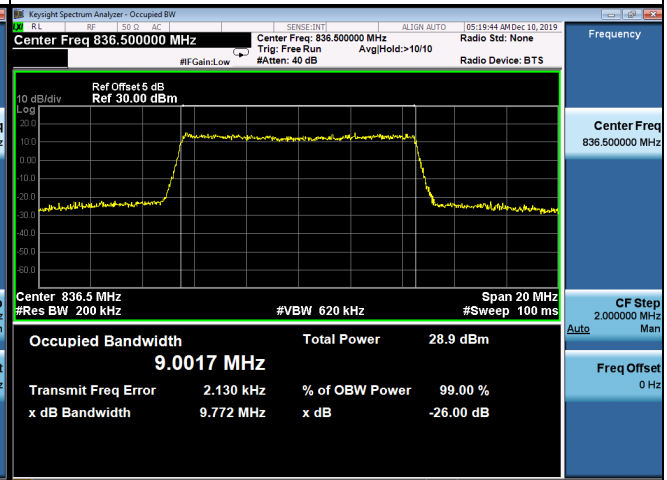

### 64QAM-20600

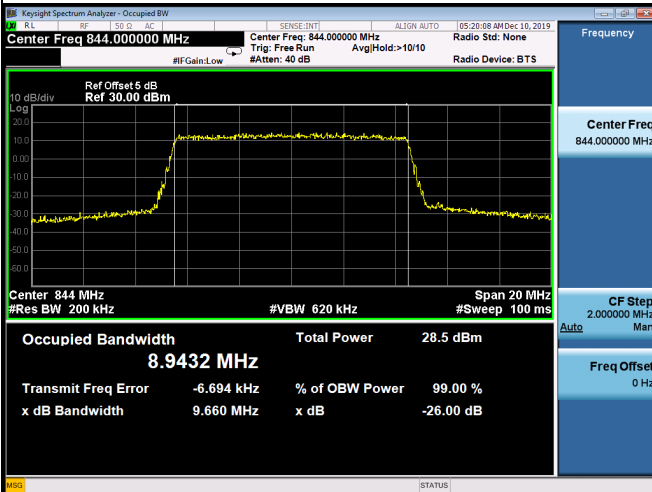

## **APPENDIX C - CONDUCTED SPURIOUS EMISSIONS**

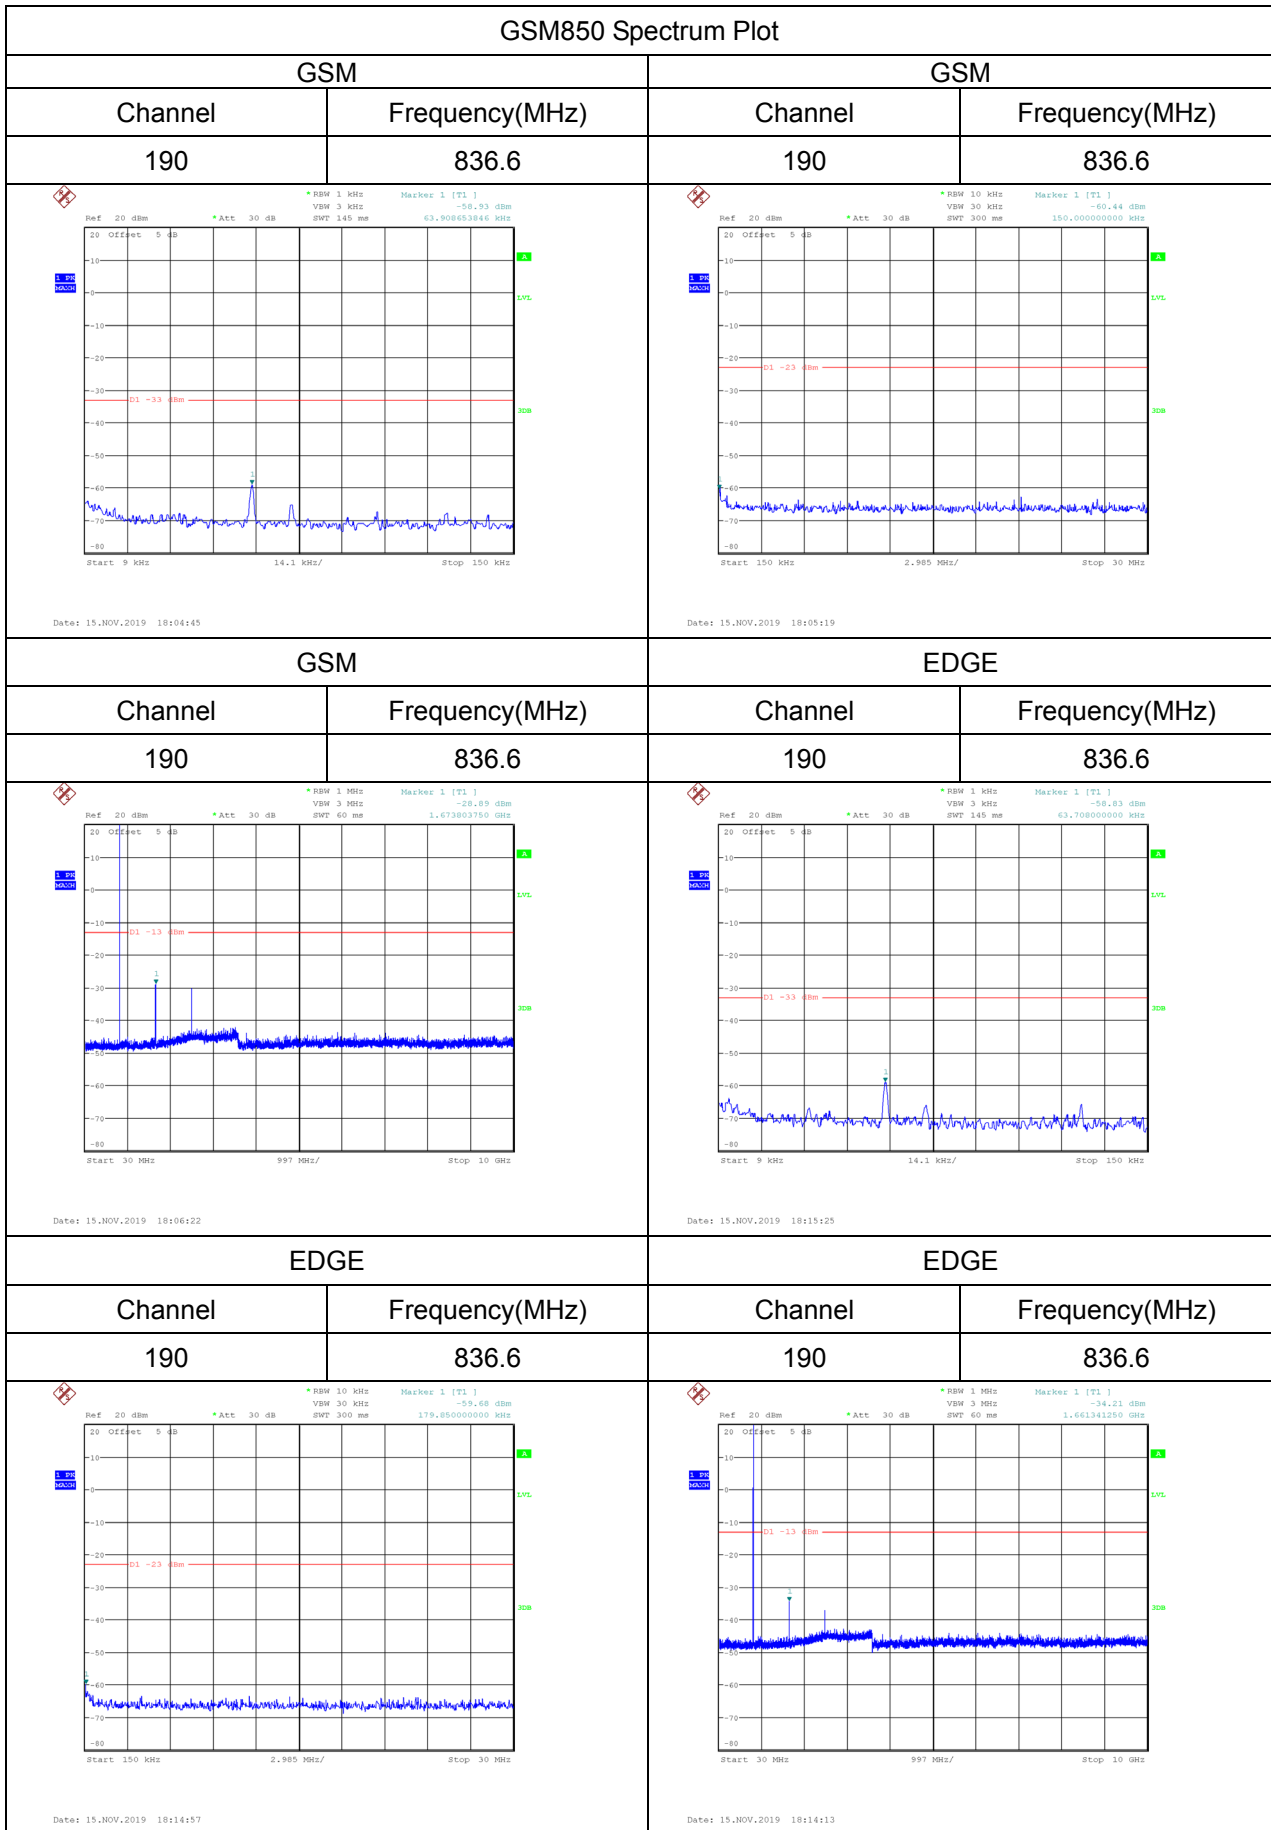

WCDMA Band V_WCDMA Spectrum Plot			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
4182	836.4	4182	836.4
<p>Date: 15.NOV.2019 18:24:15</p>		<p>Date: 15.NOV.2019 18:24:44</p>	
Channel	Frequency(MHz)	-	-
4182	836.4	-	-
<p>Date: 15.NOV.2019 18:25:38</p>			

## LTE Band 5\_1.4M Spectrum Plot

Channel	Frequency(MHz)	Channel	Frequency(MHz)
20525	836.5	20525	836.5
<p>Ref: 20 dBm, Att: 30 dB, RBW: 1 kHz, VBW: 3 kHz, SWT: 145 ms, Marker 1 (T1): -60.14 dBm @ 63.90853845 MHz</p> <p>Date: 15.NOV.2019 11:33:35</p>		<p>Ref: 20 dBm, Att: 30 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 300 ms, Marker 1 (T1): -58.93 dBm @ 150.00000000 MHz</p> <p>Date: 15.NOV.2019 11:29:07</p>	
Channel	Frequency(MHz)	-	-
20525	836.5	-	-
<p>Ref: 30 dBm, Att: 40 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 60 ms, Marker 1 (T1): -32.54 dBm @ 4.189012500 GHz</p> <p>Date: 15.NOV.2019 11:34:31</p>			

## LTE Band 5\_5M Spectrum Plot

Channel	Frequency(MHz)	Channel	Frequency(MHz)
20525	836.5	20525	836.5
<p>Date: 15.NOV.2019 11:33:20</p>		<p>Date: 15.NOV.2019 11:31:14</p>	
Channel	Frequency(MHz)	-	-
20525	836.5	-	-
<p>Date: 15.NOV.2019 11:34:51</p>			

## LTE Band 5\_10M Spectrum Plot


Channel	Frequency(MHz)	Channel	Frequency(MHz)
20525	836.5	20525	836.5
<p>Ref: 20 dBm, Offset: 5 dB, Att: 30 dB, RBW: 1 kHz, VBW: 3 kHz, SWT: 145 ms, Marker 1 [T1]: -59.24 dBm @ 836.53846 kHz</p> <p>Date: 15.NOV.2019 11:32:58</p>		<p>Ref: 20 dBm, Offset: 5 dB, Att: 30 dB, RBW: 10 kHz, VBW: 30 kHz, SWT: 300 ms, Marker 1 [T1]: -60.75 dBm @ 150.000000000 kHz</p> <p>Date: 15.NOV.2019 11:31:53</p>	
Channel	Frequency(MHz)	-	-
20525	836.5	-	-
<p>Ref: 30 dBm, Offset: 5 dB, Att: 40 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 60 ms, Marker 1 [T1]: -32.72 dBm @ 2.516249750 GHz</p> <p>Date: 15.NOV.2019 11:35:10</p>			

## **APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)**



Test Mode TX Mode


Ant 0°

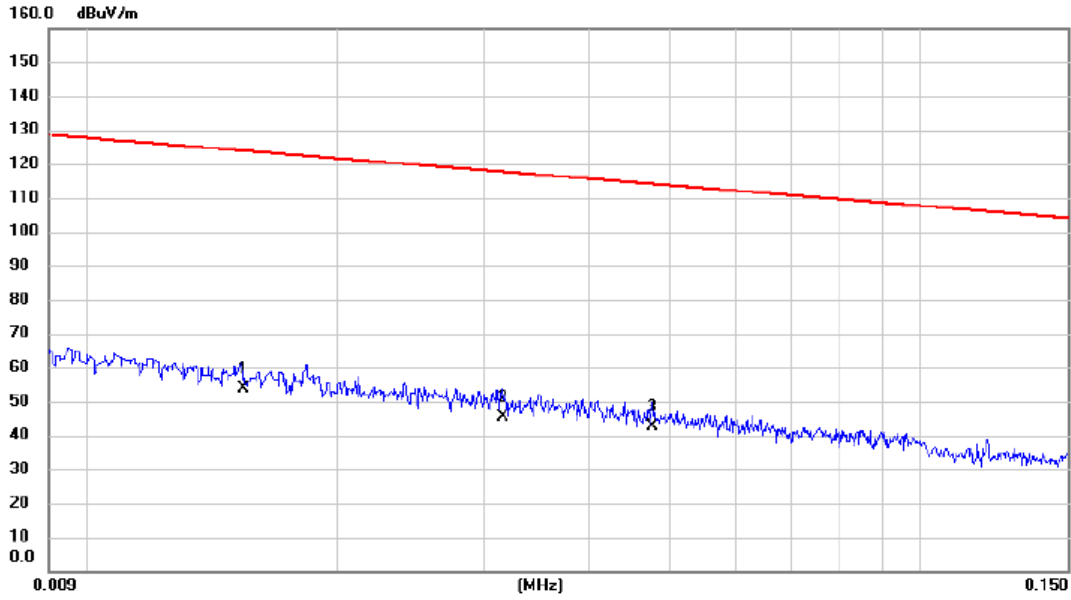

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0154	38.45	15.20	53.65	123.85	-70.20	AVG	
2		0.0316	31.58	13.86	45.44	117.61	-72.17	AVG	
3		0.0477	28.73	13.92	42.65	114.03	-71.38	AVG	

Test Mode TX Mode


Ant 0°

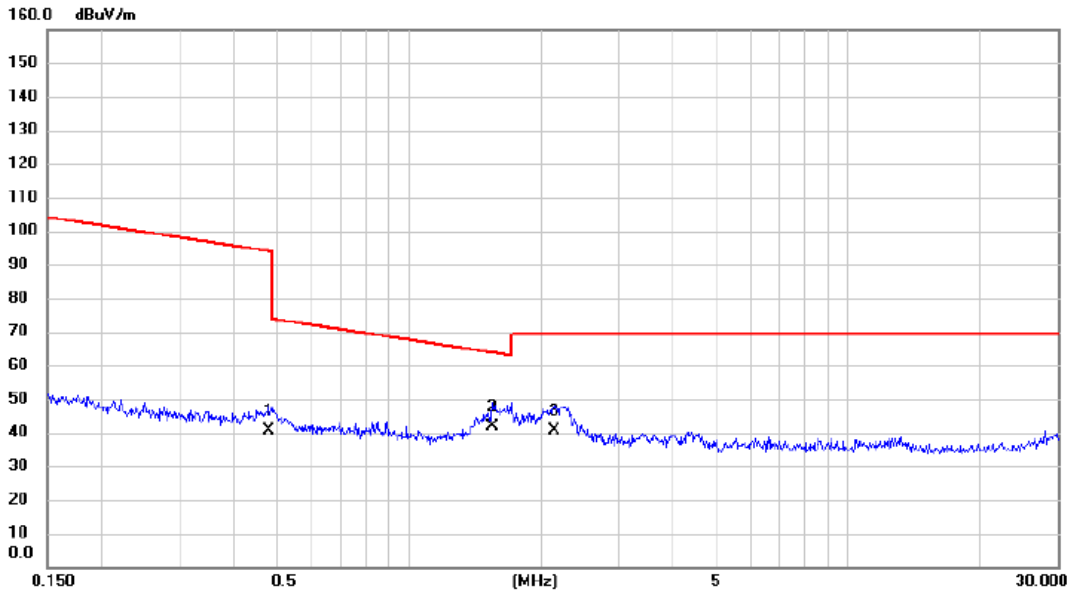

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.4786	27.65	13.11	40.76	94.00	-53.24	AVG	
2	*	1.5518	29.87	12.12	41.99	63.79	-21.80	QP	
3		2.1440	28.74	11.73	40.47	69.54	-29.07	QP	

Test Mode TX Mode


Ant 90°

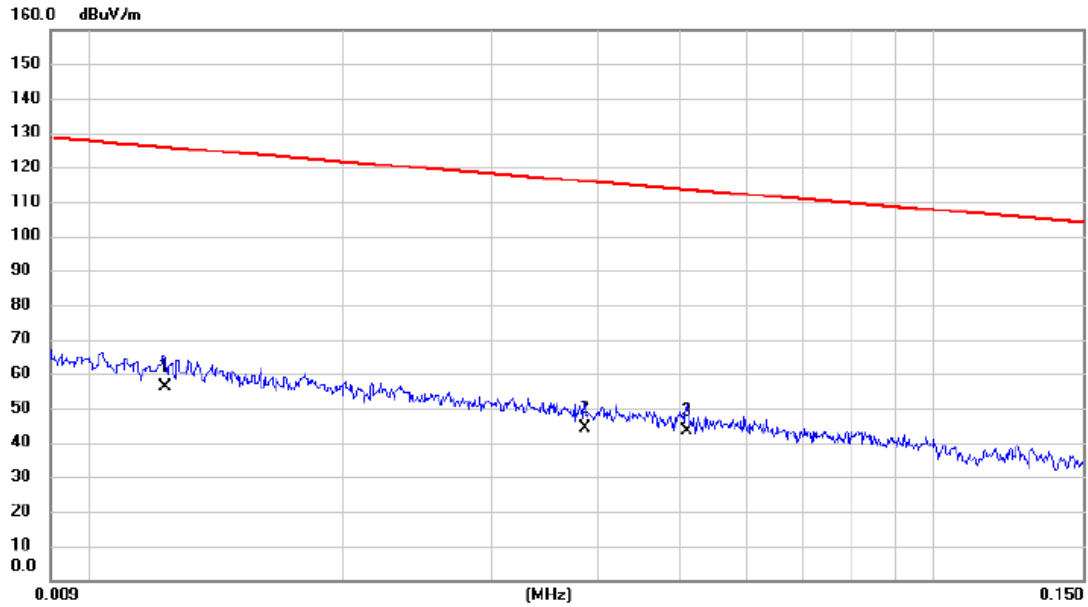

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0123	40.25	16.13	56.38	125.81	-69.43	AVG	
2		0.0387	30.14	13.89	44.03	115.85	-71.82	AVG	
3		0.0510	29.66	13.91	43.57	113.45	-69.88	AVG	

Test Mode TX Mode

Ant 90°

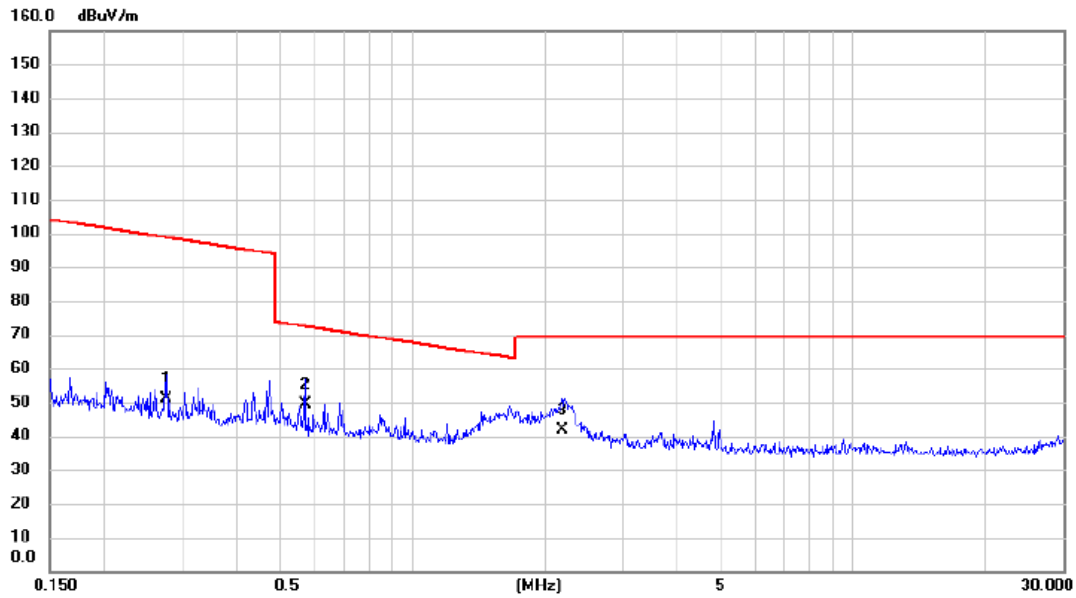


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.2760	37.45	13.60	51.05	98.79	-47.74	AVG	
2 *	0.5701	36.48	12.93	49.41	72.48	-23.07	QP	
3	2.1898	30.15	11.71	41.86	69.54	-27.68	QP	

## **APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)**

Test Mode GSM850\_TX CH190\_GSM\_Main Antenna


### Vertical

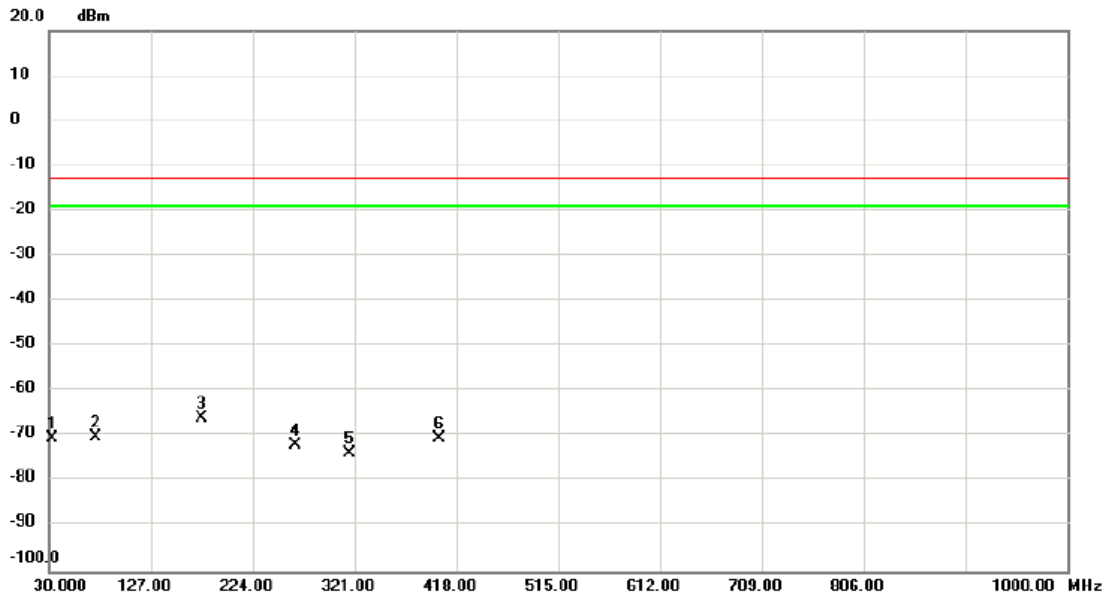

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-55.49	-14.96	-70.45	-13.00	-57.45	peak	
2		74.620	-52.97	-17.11	-70.08	-13.00	-57.08	peak	
3	*	175.500	-53.16	-12.88	-66.04	-13.00	-53.04	peak	
4		264.740	-59.14	-12.93	-72.07	-13.00	-59.07	peak	
5		316.150	-62.49	-11.29	-73.78	-13.00	-60.78	peak	
6		401.510	-60.84	-9.49	-70.33	-13.00	-57.33	peak	

Test Mode GSM850\_TX CH190\_GSM\_Main Antenna


### Horizontal

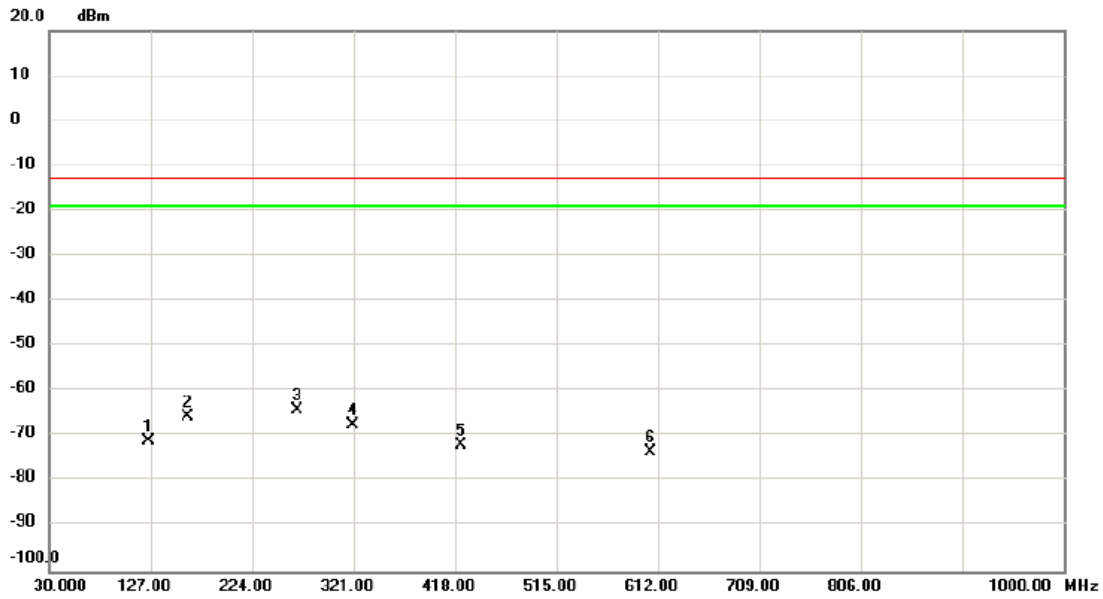

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		125.060	-57.95	-13.10	-71.05	-13.00	-58.05	peak	
2		162.890	-54.04	-11.48	-65.52	-13.00	-52.52	peak	
3	*	266.680	-51.01	-13.01	-64.02	-13.00	-51.02	peak	
4		320.030	-56.35	-11.22	-67.57	-13.00	-54.57	peak	
5		423.820	-63.14	-8.87	-72.01	-13.00	-59.01	peak	
6		605.210	-67.87	-5.69	-73.56	-13.00	-60.56	peak	

Test Mode GSM850\_TX CH190\_EDGE\_Main Antenna

### Vertical

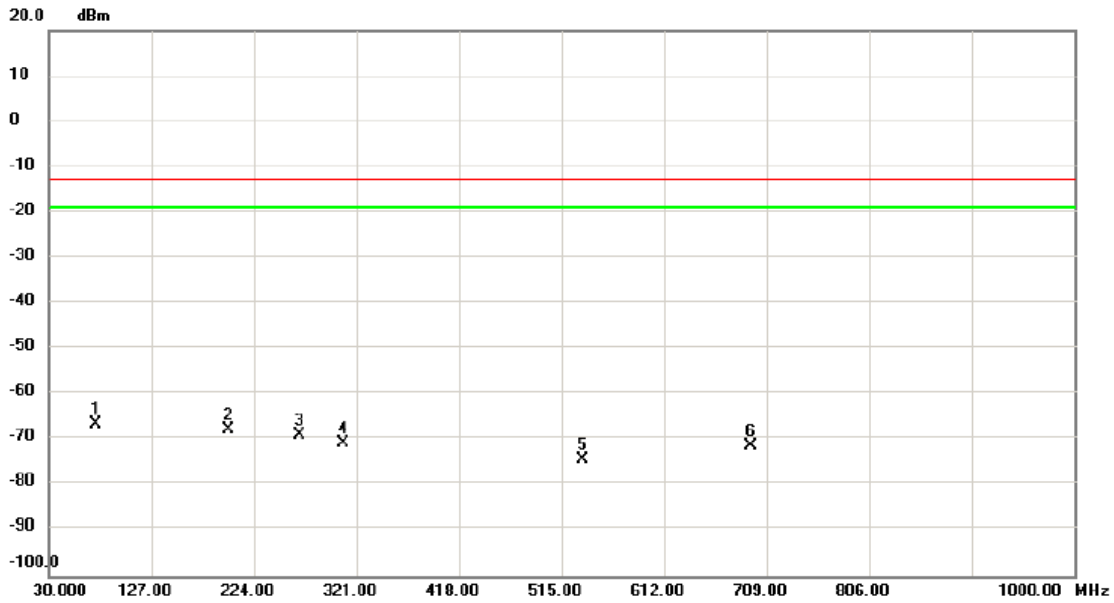


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	74.620	-49.47	-17.11	-66.58	-13.00	-53.58	peak	
2		199.750	-52.62	-15.22	-67.84	-13.00	-54.84	peak	
3		267.650	-55.80	-13.05	-68.85	-13.00	-55.85	peak	
4		308.390	-59.40	-11.42	-70.82	-13.00	-57.82	peak	
5		535.370	-66.89	-7.42	-74.31	-13.00	-61.31	peak	
6		693.480	-67.15	-4.13	-71.28	-13.00	-58.28	peak	



Test Mode GSM850\_TX CH190\_EDGE\_Main Antenna


### Horizontal

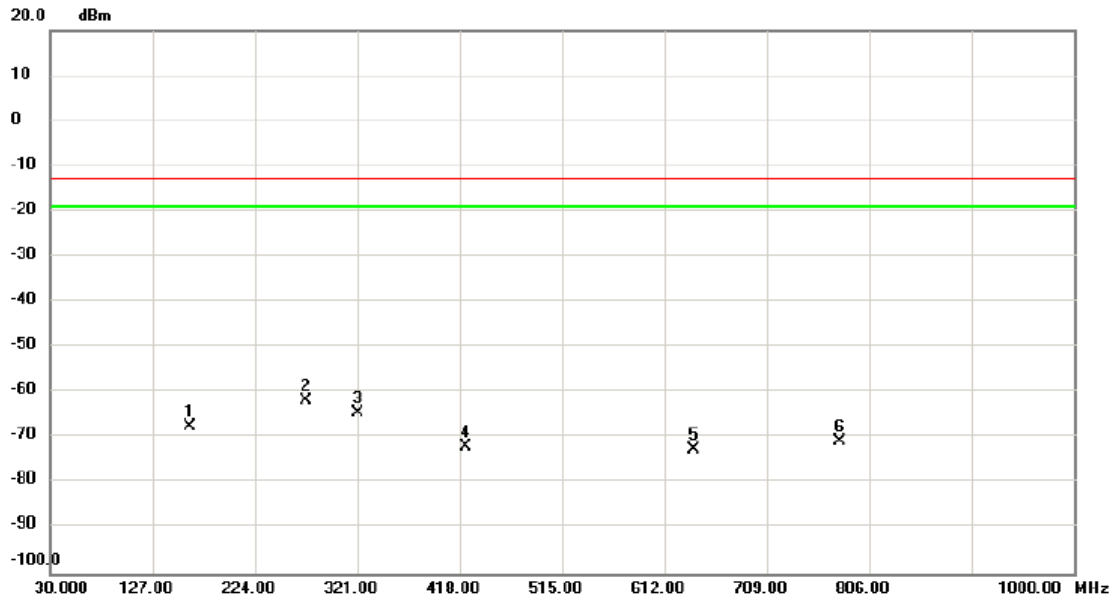

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		162.890	-56.04	-11.48	-67.52	-13.00	-54.52	peak	
2	*	272.500	-48.70	-13.04	-61.74	-13.00	-48.74	peak	
3		321.970	-53.34	-11.19	-64.53	-13.00	-51.53	peak	
4		423.820	-63.14	-8.87	-72.01	-13.00	-59.01	peak	
5		640.130	-67.55	-4.93	-72.48	-13.00	-59.48	peak	
6		777.870	-67.35	-3.30	-70.65	-13.00	-57.65	peak	

Test Mode GSM850\_TX CH190\_GSM\_Second Antenna


### Vertical

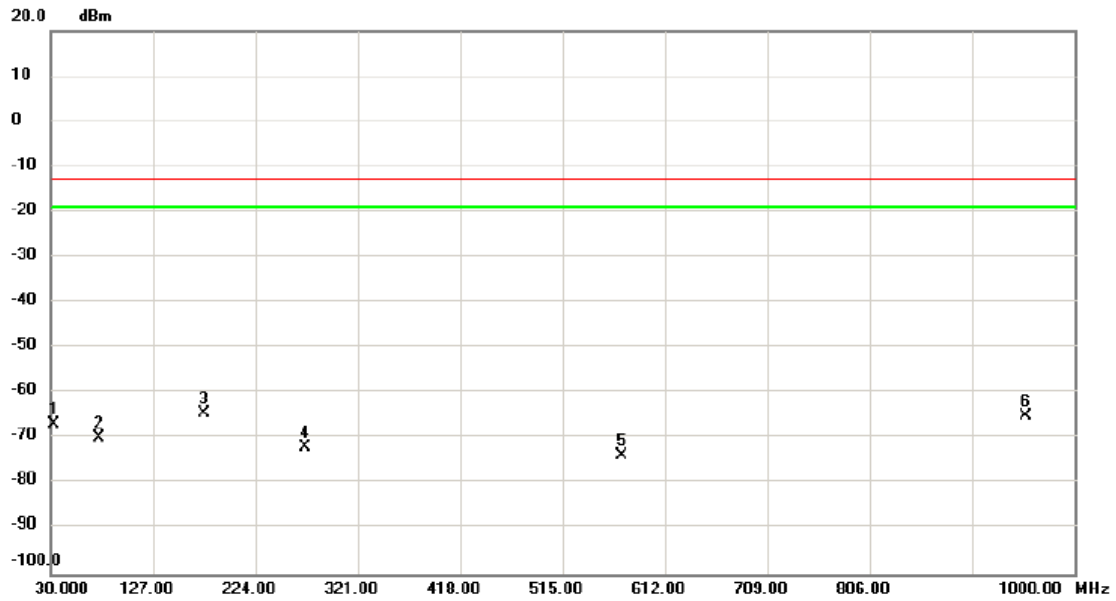

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-51.84	-14.96	-66.80	-13.00	-53.80	peak	
2		75.590	-52.56	-17.30	-69.86	-13.00	-56.86	peak	
3	*	175.500	-51.51	-12.88	-64.39	-13.00	-51.39	peak	
4		270.560	-58.87	-13.13	-72.00	-13.00	-59.00	peak	
5		571.260	-67.07	-6.65	-73.72	-13.00	-60.72	peak	
6		953.440	-64.47	-0.65	-65.12	-13.00	-52.12	peak	

Test Mode	GSM850_TX CH190_GSM_Second Antenna
-----------	------------------------------------


### Horizontal

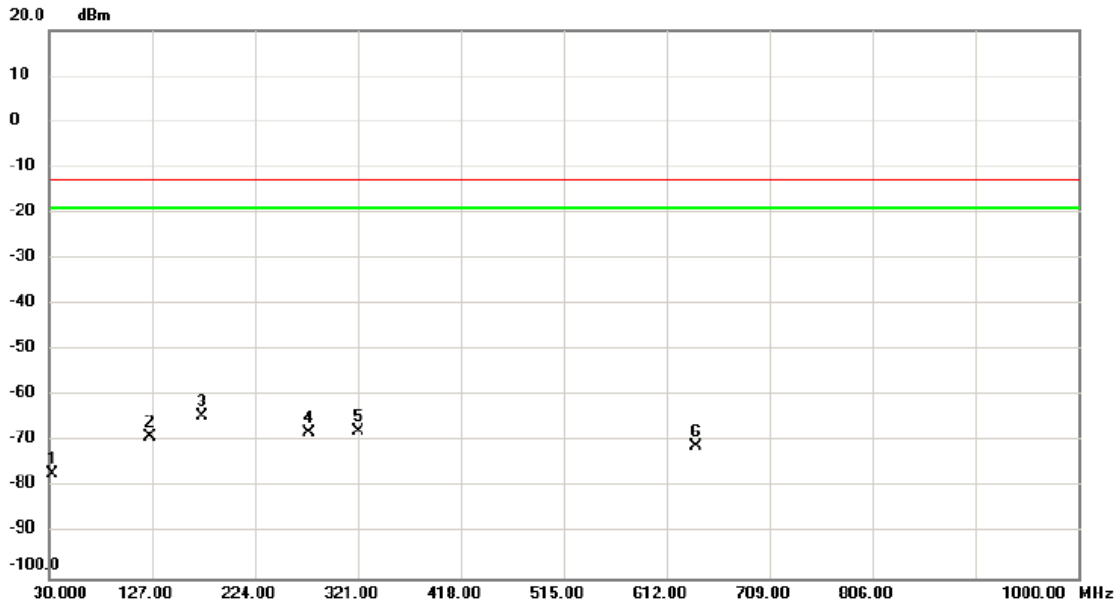

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	32.910	-62.19	-14.96	-77.15	-13.00	-64.15	peak	
2	125.060	-55.91	-13.10	-69.01	-13.00	-56.01	peak	
3 *	174.530	-51.56	-12.81	-64.37	-13.00	-51.37	peak	
4	275.410	-55.23	-12.90	-68.13	-13.00	-55.13	peak	
5	321.970	-56.69	-11.19	-67.88	-13.00	-54.88	peak	
6	640.130	-66.05	-4.93	-70.98	-13.00	-57.98	peak	

Test Mode GSM850\_TX CH190\_EDGE\_Second Antenna


### Vertical

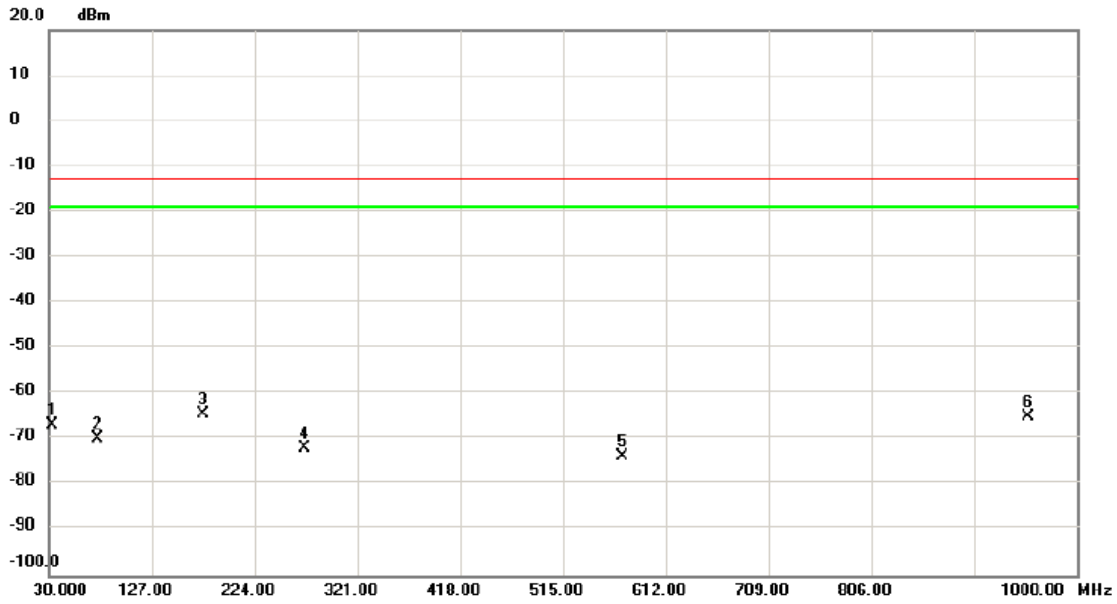

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-51.84	-14.96	-66.80	-13.00	-53.80	peak	
2		75.590	-52.56	-17.30	-69.86	-13.00	-56.86	peak	
3	*	175.500	-51.51	-12.88	-64.39	-13.00	-51.39	peak	
4		270.560	-58.87	-13.13	-72.00	-13.00	-59.00	peak	
5		571.260	-67.07	-6.65	-73.72	-13.00	-60.72	peak	
6		953.440	-64.47	-0.65	-65.12	-13.00	-52.12	peak	

Test Mode GSM850\_TX CH190\_EDGE\_Second Antenna


### Horizontal

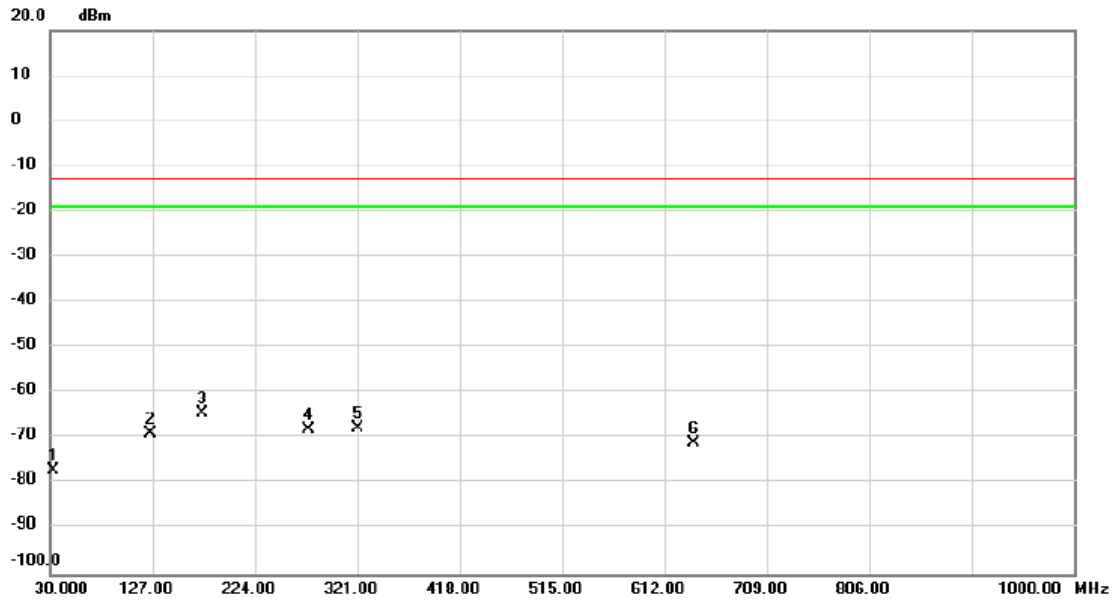

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-62.19	-14.96	-77.15	-13.00	-64.15	peak	
2		125.060	-55.91	-13.10	-69.01	-13.00	-56.01	peak	
3	*	174.530	-51.56	-12.81	-64.37	-13.00	-51.37	peak	
4		275.410	-55.23	-12.90	-68.13	-13.00	-55.13	peak	
5		321.970	-56.69	-11.19	-67.88	-13.00	-54.88	peak	
6		640.130	-66.05	-4.93	-70.98	-13.00	-57.98	peak	

Test Mode	WCDMA Band V_TX CH4182_Main Antenna
-----------	-------------------------------------


### Vertical

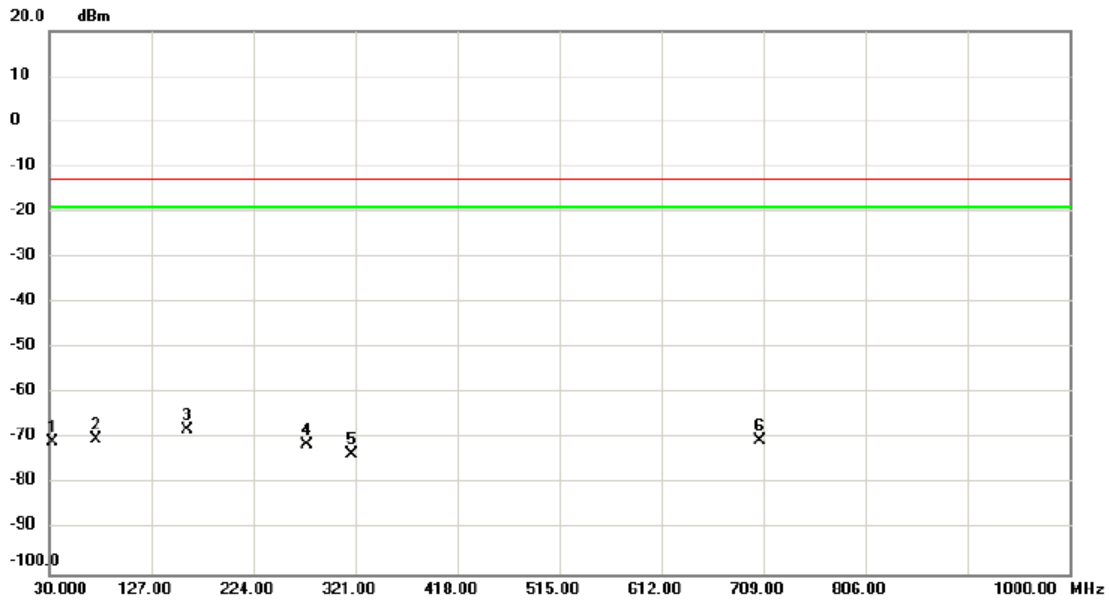

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-55.82	-14.96	-70.78	-13.00	-57.78	peak	
2		74.620	-53.00	-17.11	-70.11	-13.00	-57.11	peak	
3	*	160.950	-56.79	-11.20	-67.99	-13.00	-54.99	peak	
4		275.410	-58.35	-12.90	-71.25	-13.00	-58.25	peak	
5		318.090	-62.28	-11.25	-73.53	-13.00	-60.53	peak	
6		705.120	-66.46	-3.99	-70.45	-13.00	-57.45	peak	


Test Mode	WCDMA Band V_TX CH4182_Main Antenna
-----------	-------------------------------------

### Horizontal

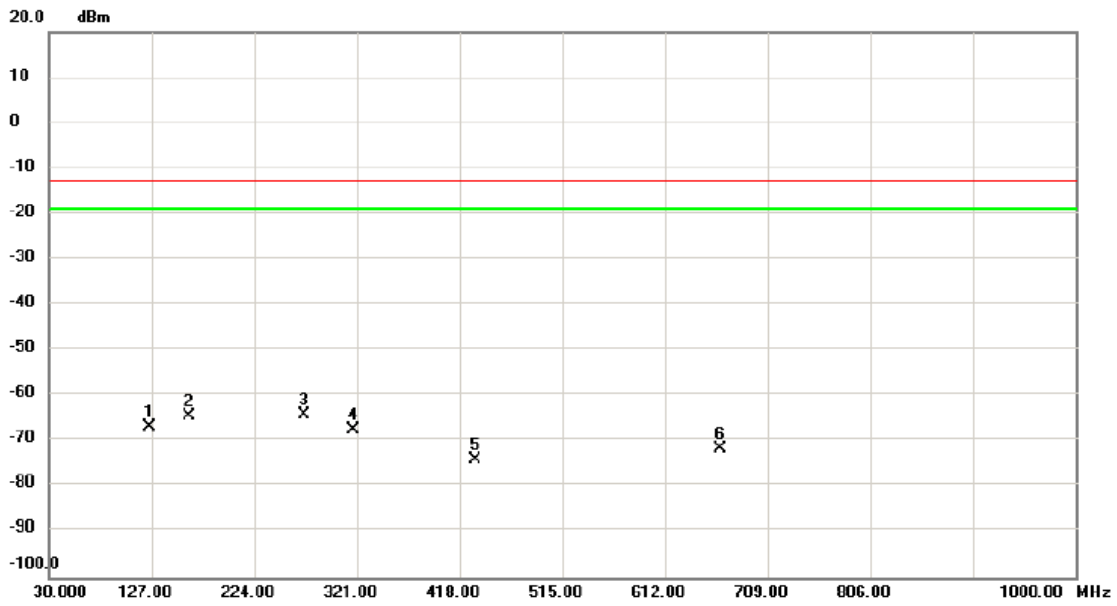

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		125.060	-53.77	-13.10	-66.87	-13.00	-53.87	peak	
2		162.890	-53.07	-11.48	-64.55	-13.00	-51.55	peak	
3	*	270.560	-51.16	-13.13	-64.29	-13.00	-51.29	peak	
4		318.090	-56.15	-11.25	-67.40	-13.00	-54.40	peak	
5		432.550	-65.34	-8.63	-73.97	-13.00	-60.97	peak	
6		664.380	-67.25	-4.52	-71.77	-13.00	-58.77	peak	

Test Mode	WCDMA Band V_TX CH4182_Second Antenna
-----------	---------------------------------------

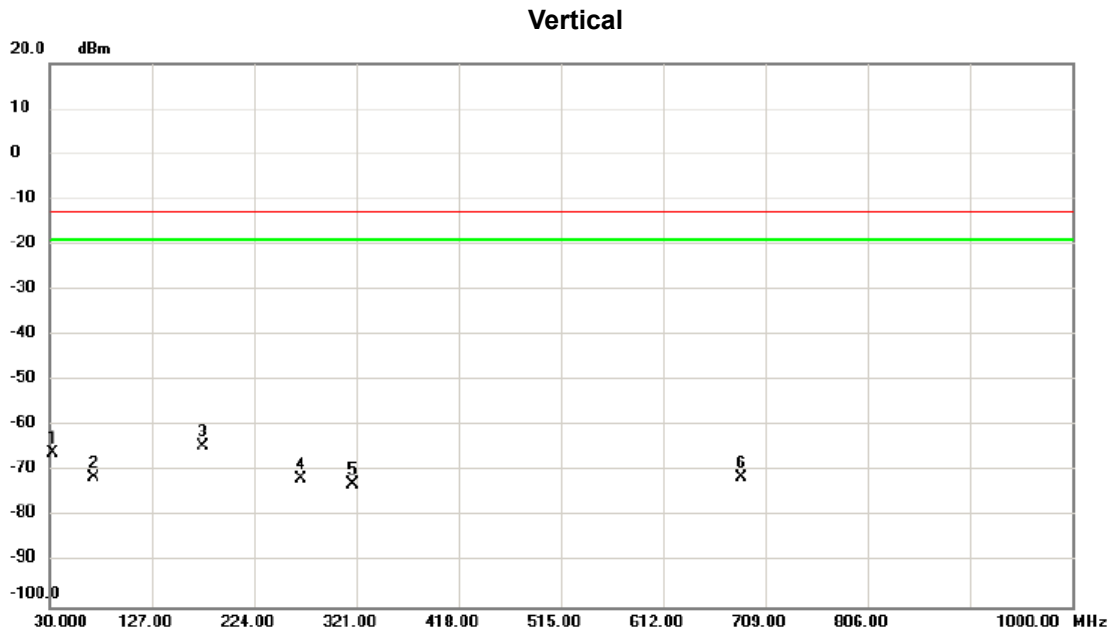


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-51.14	-14.96	-66.10	-13.00	-53.10	peak	
2		71.710	-54.83	-16.56	-71.39	-13.00	-58.39	peak	
3	*	175.500	-51.60	-12.88	-64.48	-13.00	-51.48	peak	
4		268.620	-58.41	-13.10	-71.51	-13.00	-58.51	peak	
5		318.090	-61.72	-11.25	-72.97	-13.00	-59.97	peak	
6		686.690	-67.24	-4.21	-71.45	-13.00	-58.45	peak	



Test Mode | WCDMA Band V\_TX CH4182\_Second Antenna


### Horizontal

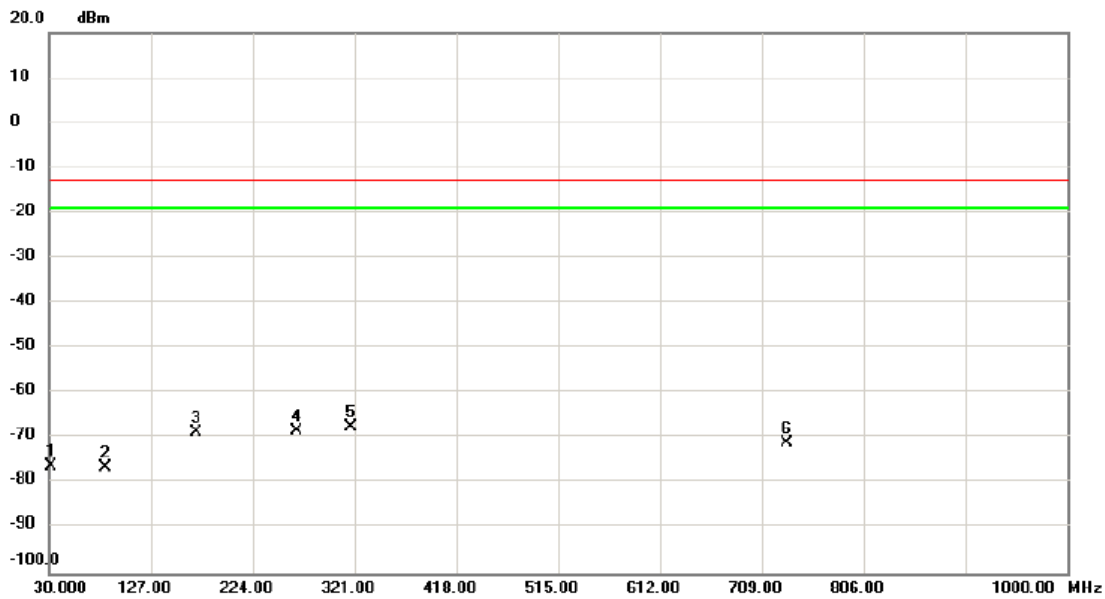

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	31.940	-61.36	-14.81	-76.17	-13.00	-63.17	peak	
2	83.350	-59.17	-17.42	-76.59	-13.00	-63.59	peak	
3	169.680	-56.13	-12.44	-68.57	-13.00	-55.57	peak	
4	265.710	-55.39	-12.98	-68.37	-13.00	-55.37	peak	
5 *	318.090	-56.29	-11.25	-67.54	-13.00	-54.54	peak	
6	732.280	-67.28	-3.80	-71.08	-13.00	-58.08	peak	

Test Mode | LTE Band 5\_TX CH20525\_1.4M\_Main Antenna


### Vertical

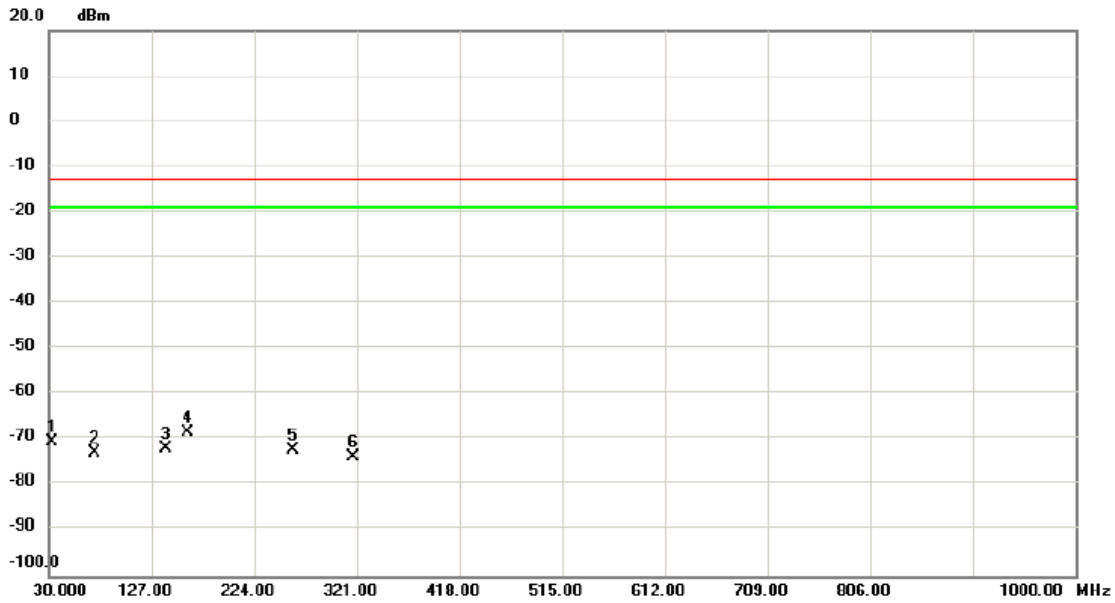

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-55.52	-14.96	-70.48	-13.00	-57.48	peak	
2		72.680	-56.06	-16.75	-72.81	-13.00	-59.81	peak	
3		140.580	-59.03	-12.90	-71.93	-13.00	-58.93	peak	
4	*	160.950	-57.00	-11.20	-68.20	-13.00	-55.20	peak	
5		260.860	-59.51	-12.76	-72.27	-13.00	-59.27	peak	
6		318.090	-62.50	-11.25	-73.75	-13.00	-60.75	peak	

Test Mode | LTE Band 5\_TX CH20525\_1.4M\_Main Antenna


### Horizontal

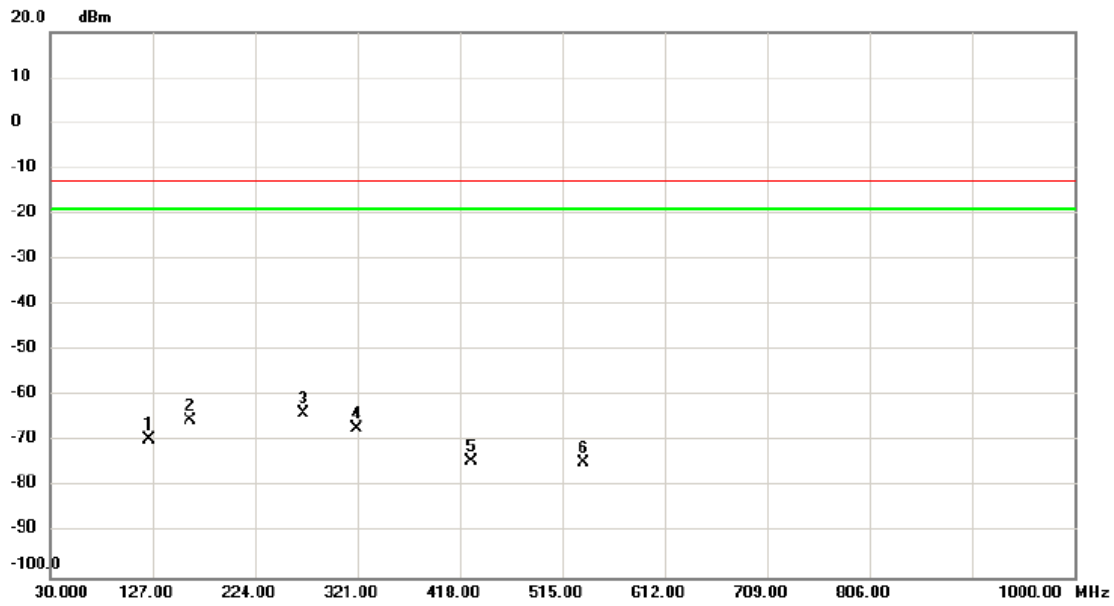

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		124.090	-56.57	-13.10	-69.67	-13.00	-56.67	peak	
2		161.920	-54.14	-11.35	-65.49	-13.00	-52.49	peak	
3	*	269.590	-50.84	-13.14	-63.98	-13.00	-50.98	peak	
4		320.030	-55.80	-11.22	-67.02	-13.00	-54.02	peak	
5		428.670	-65.51	-8.74	-74.25	-13.00	-61.25	peak	
6		534.400	-67.20	-7.43	-74.63	-13.00	-61.63	peak	

Test Mode | LTE Band 5\_TX CH20525\_5M\_Main Antenna


### Vertical

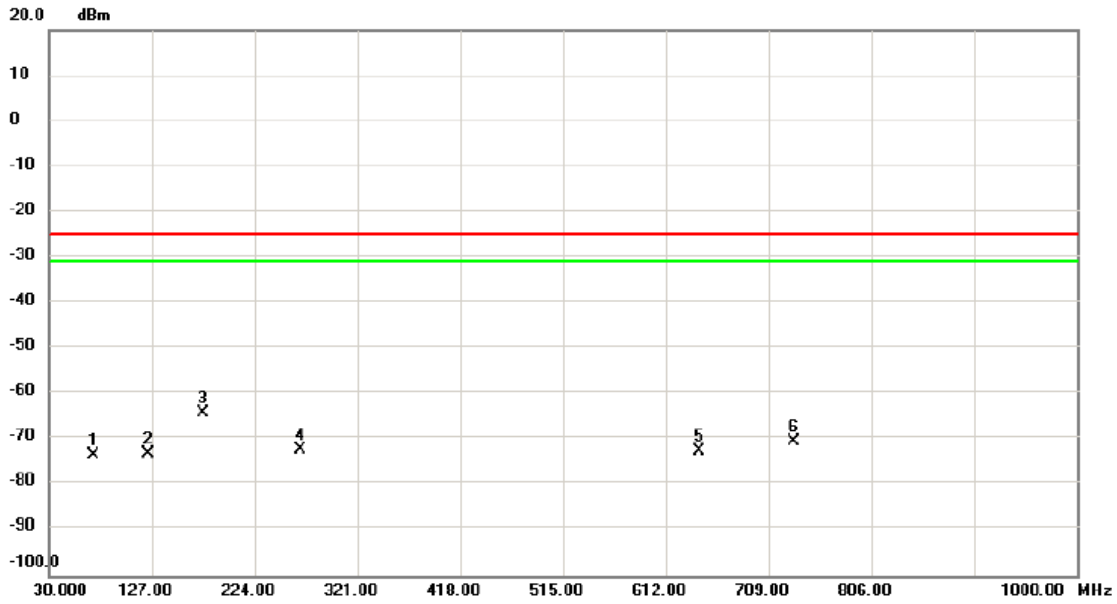

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		71.710	-57.02	-16.56	-73.58	-25.00	-48.58	peak	
2		124.090	-59.99	-13.10	-73.09	-25.00	-48.09	peak	
3	*	175.500	-51.18	-12.88	-64.06	-25.00	-39.06	peak	
4		267.650	-59.22	-13.05	-72.27	-25.00	-47.27	peak	
5		644.010	-67.67	-4.85	-72.52	-25.00	-47.52	peak	
6		732.280	-66.75	-3.80	-70.55	-25.00	-45.55	peak	

Test Mode LTE Band 5\_TX CH20525\_5M\_Main Antenna


### Horizontal

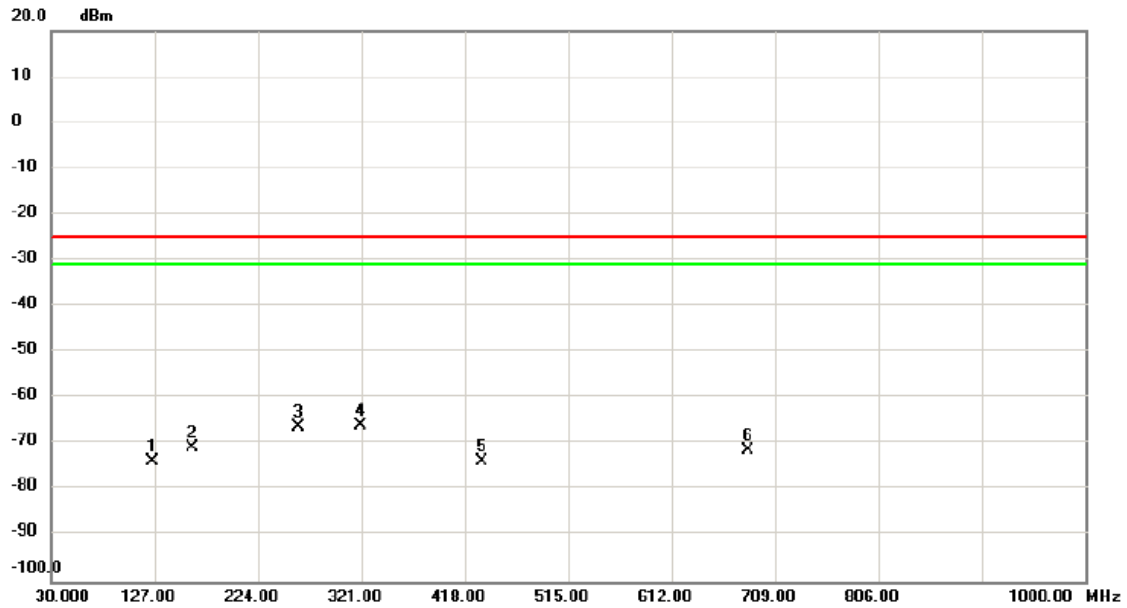

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		125.060	-60.65	-13.10	-73.75	-25.00	-48.75	peak	
2		162.890	-59.27	-11.48	-70.75	-25.00	-45.75	peak	
3		261.830	-53.58	-12.81	-66.39	-25.00	-41.39	peak	
4	*	320.030	-54.59	-11.22	-65.81	-25.00	-40.81	peak	
5		433.520	-65.07	-8.60	-73.67	-25.00	-48.67	peak	
6		683.780	-66.98	-4.25	-71.23	-25.00	-46.23	peak	

Test Mode | LTE Band 5\_TX CH20525\_10M\_Main Antenna


### Vertical

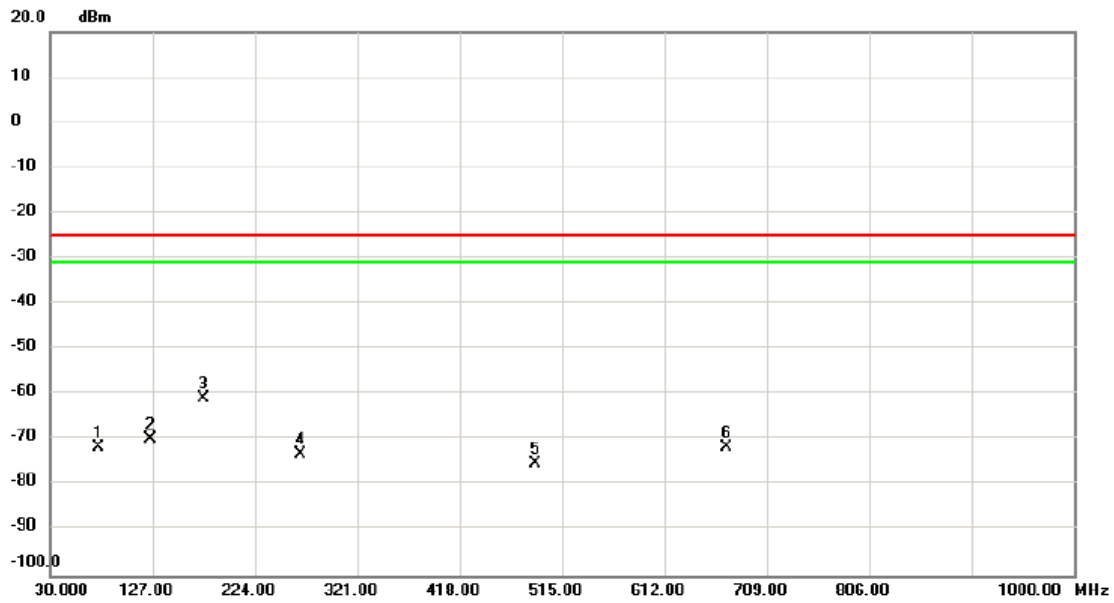

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	75.590	-54.46	-17.30	-71.76	-25.00	-46.76	peak	
2	125.060	-56.82	-13.10	-69.92	-25.00	-44.92	peak	
3 *	175.500	-48.06	-12.88	-60.94	-25.00	-35.94	peak	
4	266.680	-60.01	-13.01	-73.02	-25.00	-48.02	peak	
5	489.780	-67.36	-7.84	-75.20	-25.00	-50.20	peak	
6	671.170	-67.20	-4.43	-71.63	-25.00	-46.63	peak	

Test Mode | LTE Band 5\_TX CH20525\_10M\_Main Antenna


### Horizontal

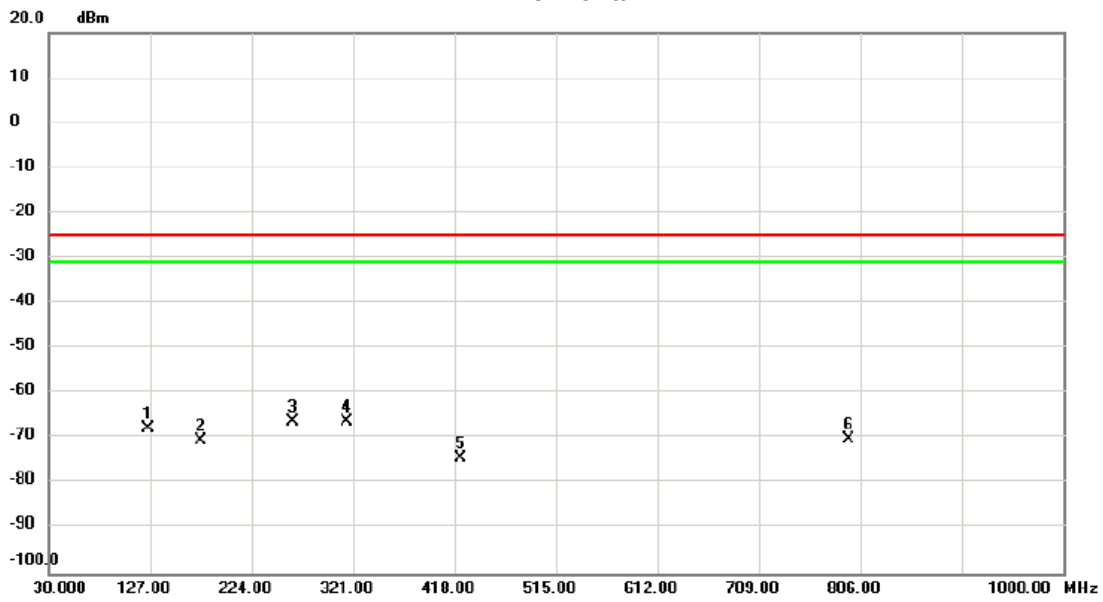

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	125.060	-54.60	-13.10	-67.70	-25.00	-42.70	peak	
2	175.500	-57.68	-12.88	-70.56	-25.00	-45.56	peak	
3 *	262.800	-53.32	-12.85	-66.17	-25.00	-41.17	peak	
4	315.180	-55.01	-11.31	-66.32	-25.00	-41.32	peak	
5	423.820	-65.50	-8.87	-74.37	-25.00	-49.37	peak	
6	795.330	-66.95	-3.08	-70.03	-25.00	-45.03	peak	

Test Mode LTE Band 5\_TX CH20525\_1.4M\_Second Antenna

### Vertical

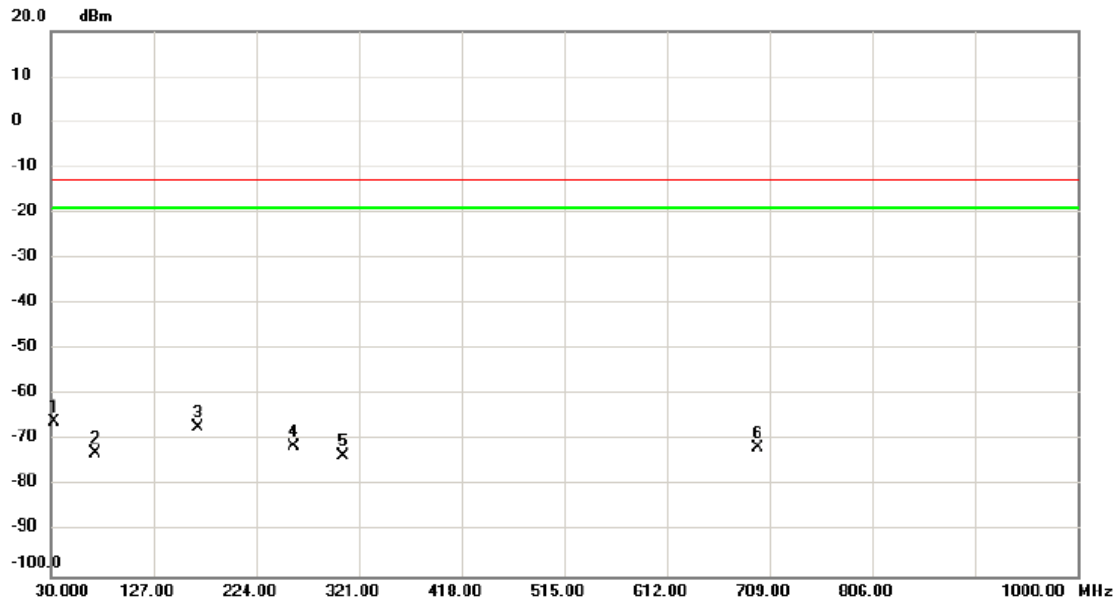


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	32.910	-50.95	-14.96	-65.91	-13.00	-52.91	peak	
2	71.710	-56.16	-16.56	-72.72	-13.00	-59.72	peak	
3	168.710	-54.95	-12.31	-67.26	-13.00	-54.26	peak	
4	258.920	-58.63	-12.84	-71.47	-13.00	-58.47	peak	
5	306.450	-62.11	-11.45	-73.56	-13.00	-60.56	peak	
6	697.360	-67.72	-4.07	-71.79	-13.00	-58.79	peak	



Test Mode | LTE Band 5\_TX CH20525\_1.4M\_Second Antenna


### Horizontal

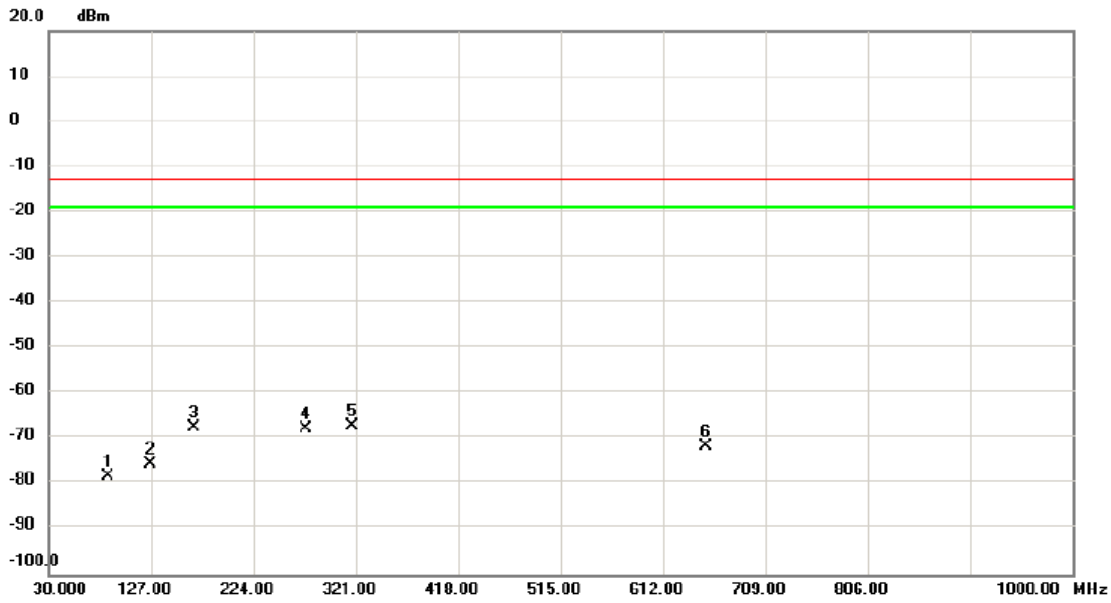

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		86.260	-61.41	-16.85	-78.26	-13.00	-65.26	peak	
2		126.030	-62.55	-13.11	-75.66	-13.00	-62.66	peak	
3		167.740	-55.27	-12.17	-67.44	-13.00	-54.44	peak	
4		273.470	-54.89	-12.99	-67.88	-13.00	-54.88	peak	
5	*	318.090	-55.83	-11.25	-67.08	-13.00	-54.08	peak	
6		652.740	-67.10	-4.68	-71.78	-13.00	-58.78	peak	

Test Mode | LTE Band 5\_TX CH20525\_5M\_Second Antenna


### Vertical

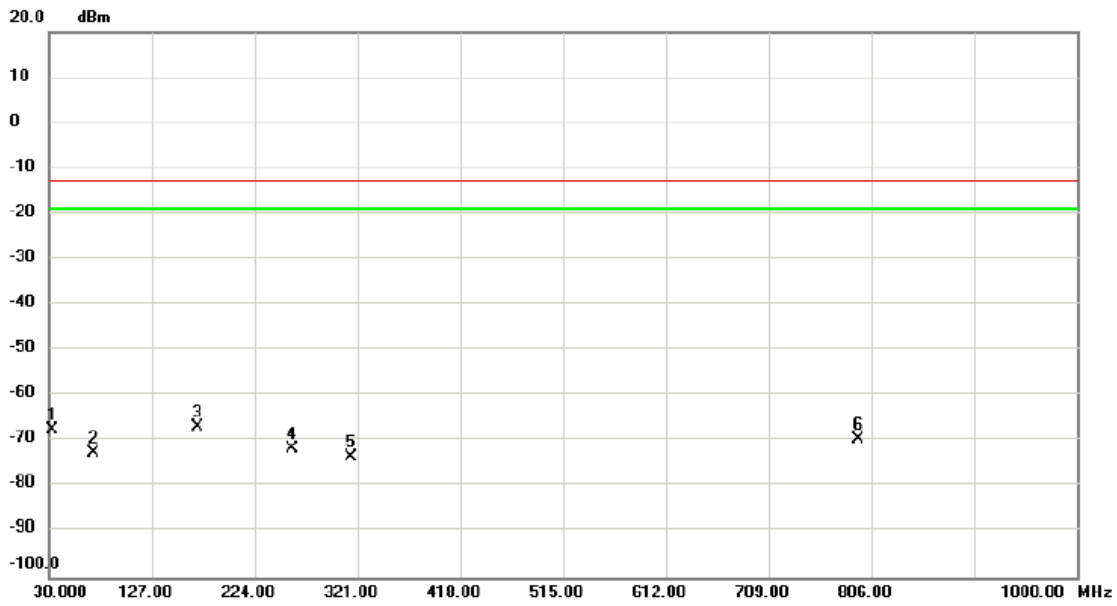

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		32.910	-52.49	-14.96	-67.45	-13.00	-54.45	peak	
2		71.710	-56.13	-16.56	-72.69	-13.00	-59.69	peak	
3	*	169.680	-54.51	-12.44	-66.95	-13.00	-53.95	peak	
4		259.890	-58.86	-12.74	-71.60	-13.00	-58.60	peak	
5		315.180	-62.17	-11.31	-73.48	-13.00	-60.48	peak	
6		793.390	-66.54	-3.10	-69.64	-13.00	-56.64	peak	

Test Mode LTE Band 5\_TX CH20525\_5M\_Second Antenna


### Horizontal

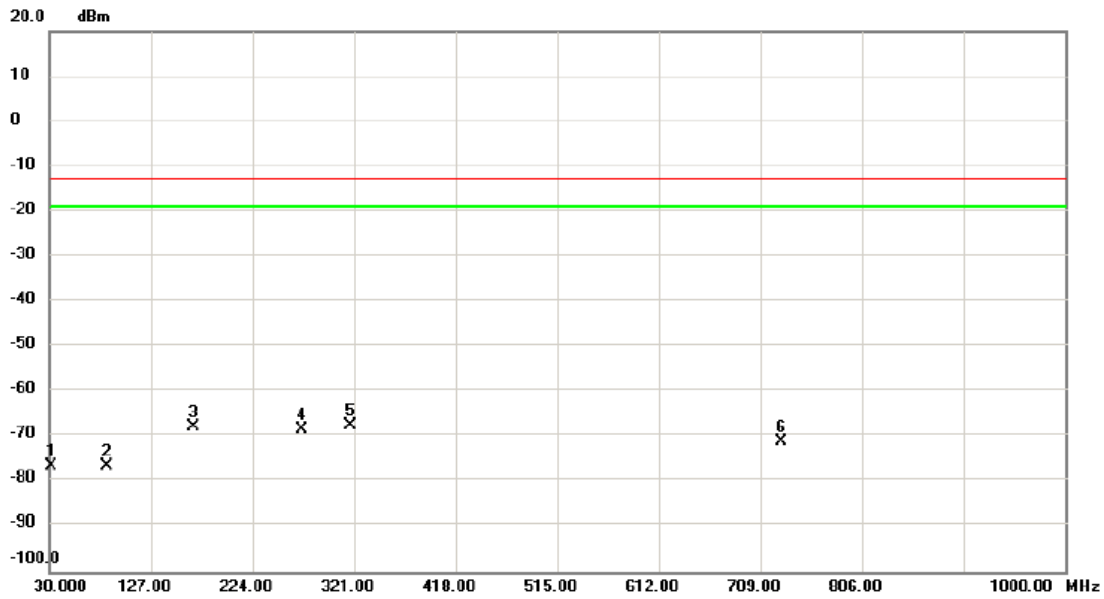

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	31.940	-61.77	-14.81	-76.58	-13.00	-63.58	peak	
2	85.290	-59.39	-17.05	-76.44	-13.00	-63.44	peak	
3	167.740	-55.72	-12.17	-67.89	-13.00	-54.89	peak	
4	271.530	-55.38	-13.08	-68.46	-13.00	-55.46	peak	
5 *	317.120	-56.17	-11.28	-67.45	-13.00	-54.45	peak	
6	728.400	-67.23	-3.82	-71.05	-13.00	-58.05	peak	

Test Mode LTE Band 5\_TX CH20525\_10M\_Second Antenna


### Vertical

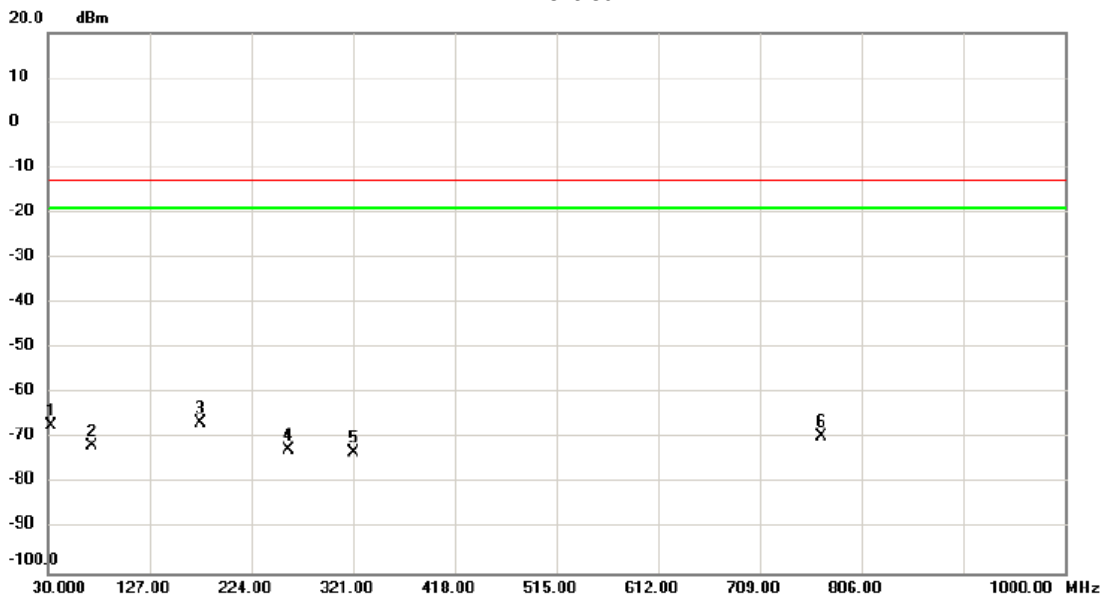

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	32.910	-52.10	-14.96	-67.06	-13.00	-54.06	peak	
2	71.710	-55.06	-16.56	-71.62	-13.00	-58.62	peak	
3 *	175.500	-53.71	-12.88	-66.59	-13.00	-53.59	peak	
4	259.890	-59.79	-12.74	-72.53	-13.00	-59.53	peak	
5	321.000	-61.96	-11.21	-73.17	-13.00	-60.17	peak	
6	767.200	-66.19	-3.44	-69.63	-13.00	-56.63	peak	

Test Mode LTE Band 5\_TX CH20525\_10M\_Second Antenna

### Horizontal

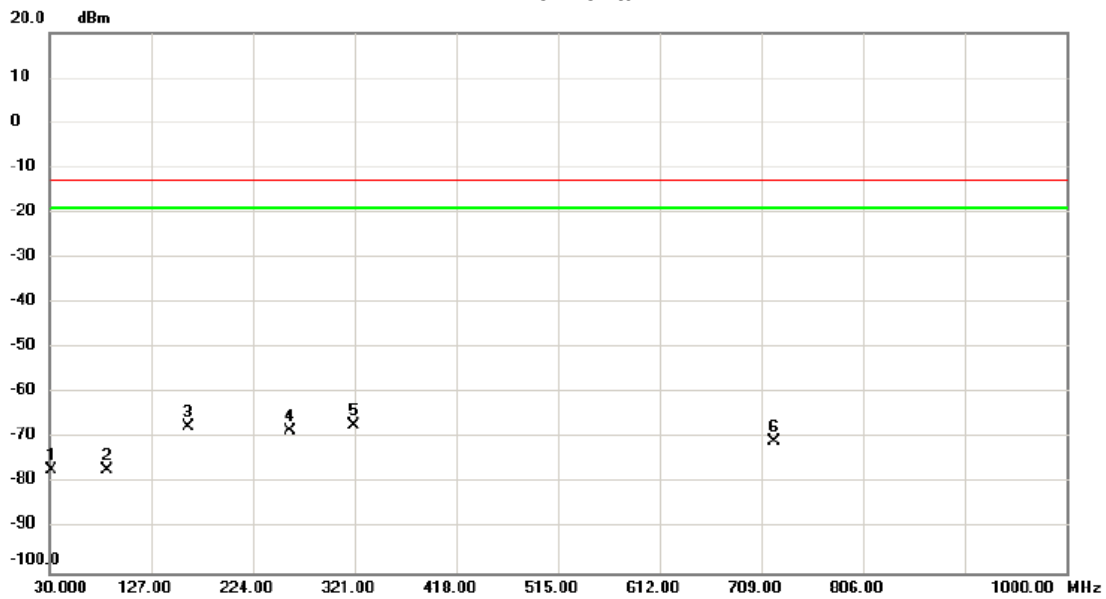


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	31.940	-62.09	-14.81	-76.90	-13.00	-63.90	peak	
2	85.290	-59.89	-17.05	-76.94	-13.00	-63.94	peak	
3	161.920	-55.98	-11.35	-67.33	-13.00	-54.33	peak	
4	259.890	-55.51	-12.74	-68.25	-13.00	-55.25	peak	
5 *	320.030	-55.89	-11.22	-67.11	-13.00	-54.11	peak	
6	721.610	-66.97	-3.87	-70.84	-13.00	-57.84	peak	

## **APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)**

Test Mode	GSM850_TX CH190_GSM_Main Antenna
-----------	----------------------------------


### Vertical

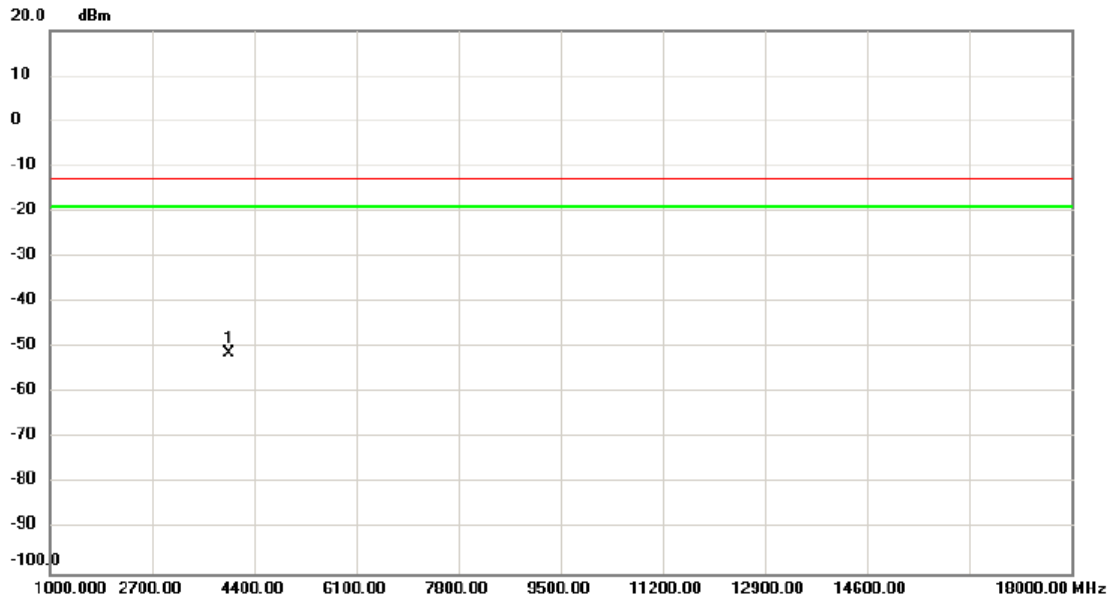

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3975.000	-69.30	18.06	-51.24	-13.00	-38.24	peak	

Test Mode GSM850\_TX CH190\_GSM\_Main Antenna


### Horizontal

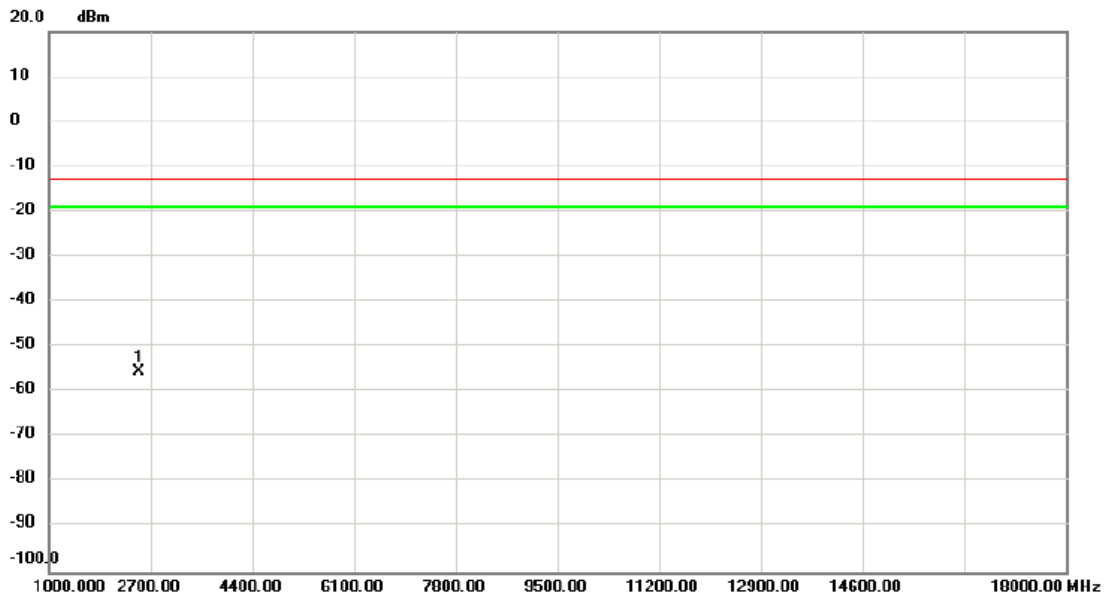

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	2513.000	-66.25	10.82	-55.43	-13.00	-42.43	peak	




Test Mode	GSM850_TX CH190_EDGE_Main Antenna
-----------	-----------------------------------

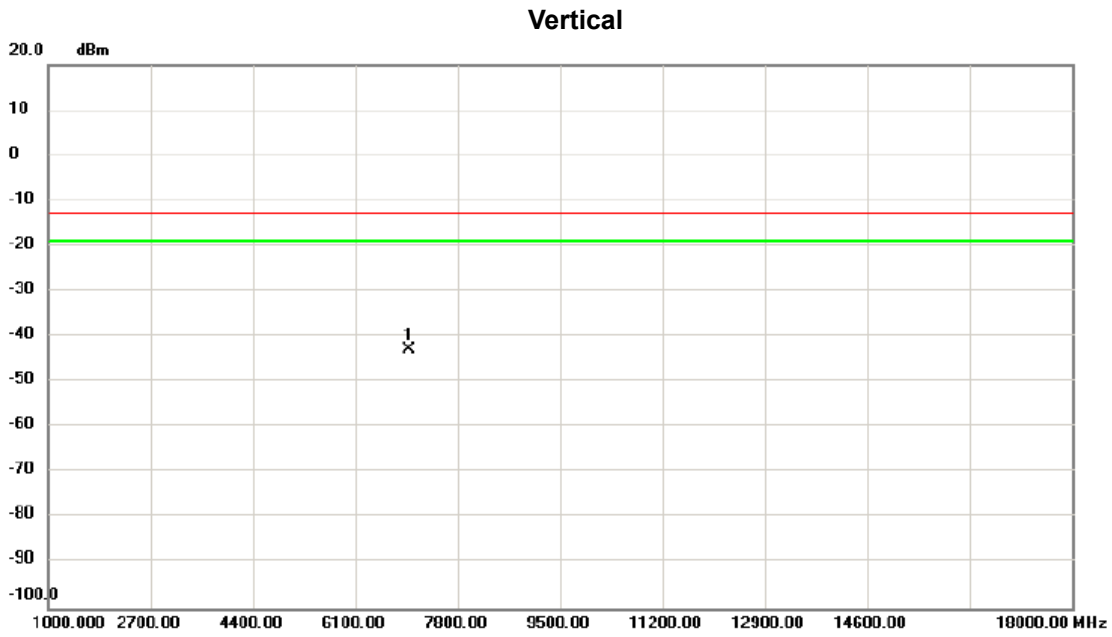


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7001.000	-71.20	28.25	-42.95	-13.00	-29.95	peak	

Test Mode GSM850\_TX CH190\_EDGE\_Main Antenna

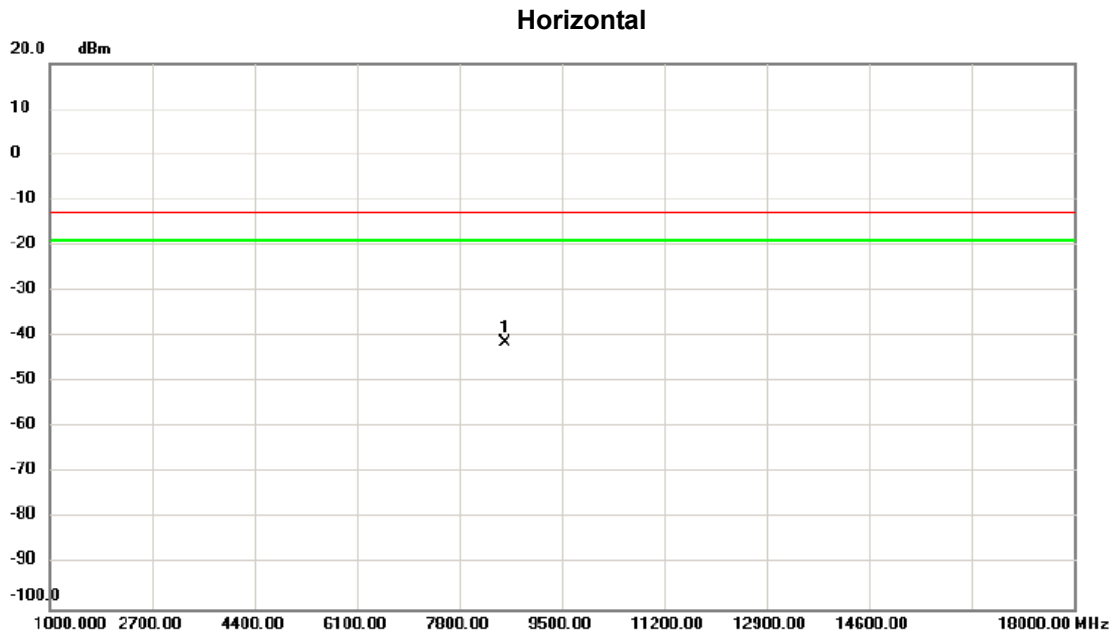

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	8548.000	-71.55	30.35	-41.20	-13.00	-28.20	peak	


Test Mode GSM850\_TX CH190\_GSM\_Second Antenna

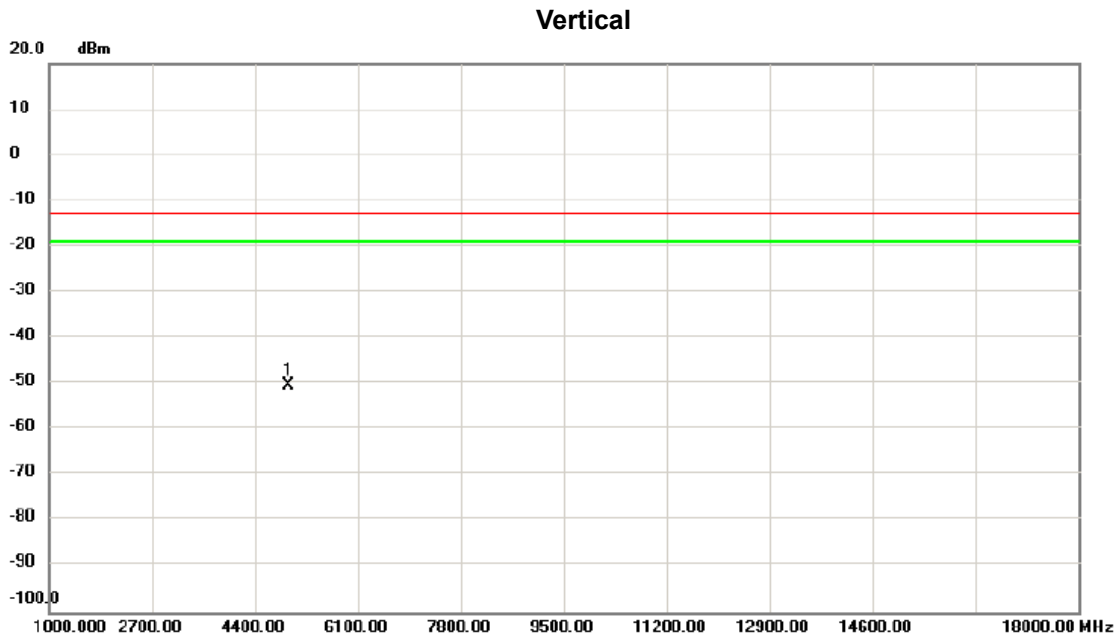

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	4961.000	-58.70	8.50	-50.20	-13.00	-37.20	peak	


Test Mode GSM850\_TX CH190\_GSM\_Second Antenna

### Horizontal

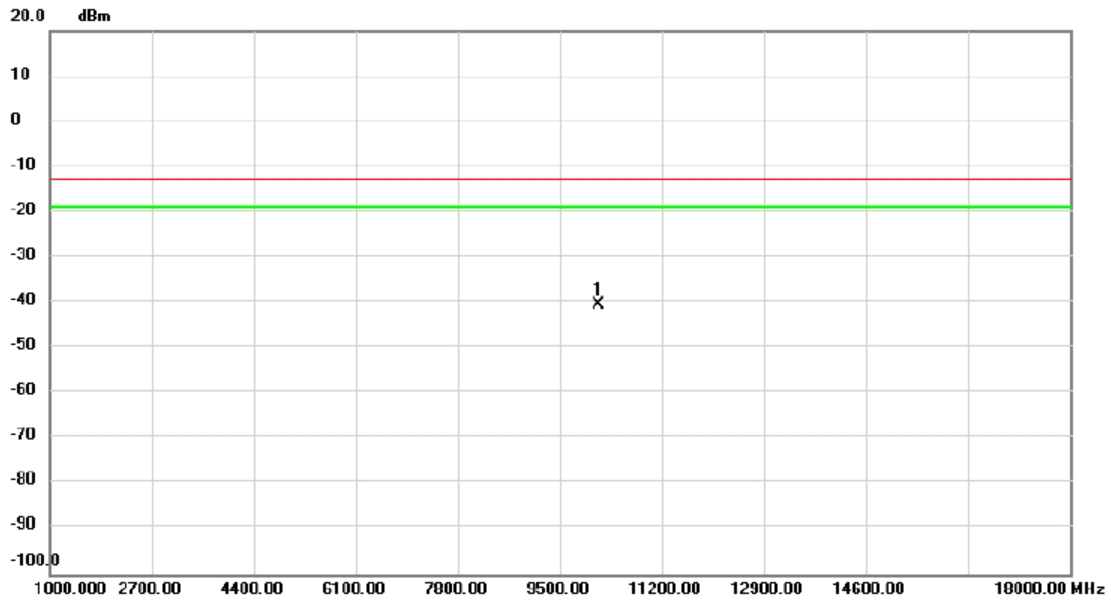

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	10146.000	-59.72	19.33	-40.39	-13.00	-27.39	peak	


Test Mode GSM850\_TX CH190\_EDGE\_Second Antenna

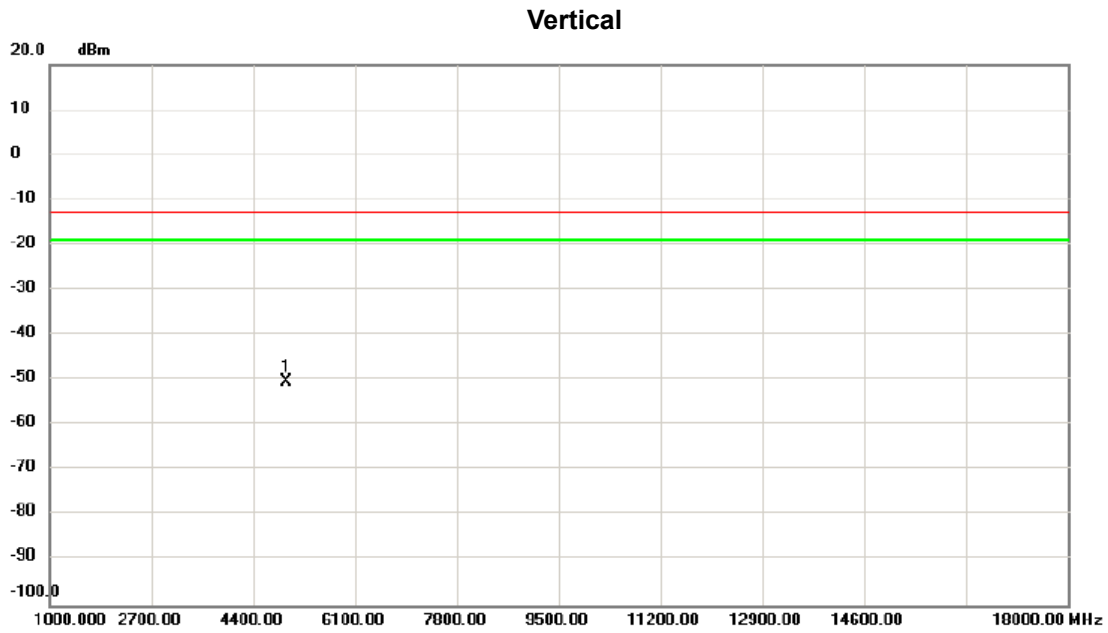

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	4961.000	-58.70	8.50	-50.20	-13.00	-37.20	peak	

Test Mode GSM850\_TX CH190\_EDGE\_Second Antenna


### Horizontal

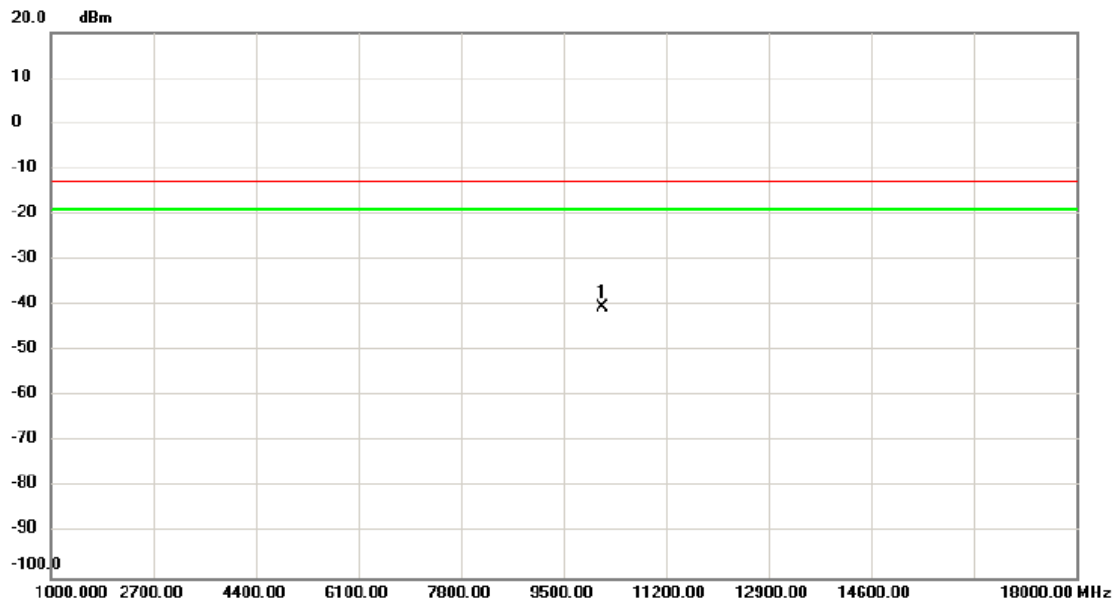

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	10146.000	-59.72	19.33	-40.39	-13.00	-27.39	peak	

Test Mode	WCDMA Band V_TX CH4182_Main Antenna
-----------	-------------------------------------


### Vertical

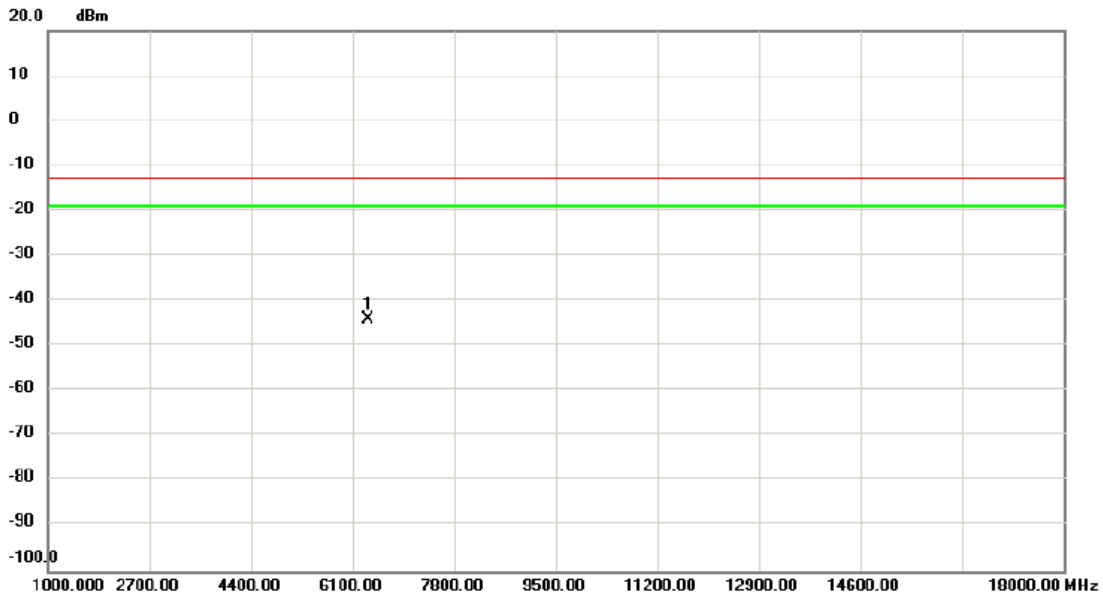

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	6355.000	-58.71	14.75	-43.96	-13.00	-30.96	peak	

Test Mode	WCDMA Band V_TX CH4182_Main Antenna
-----------	-------------------------------------


### Horizontal

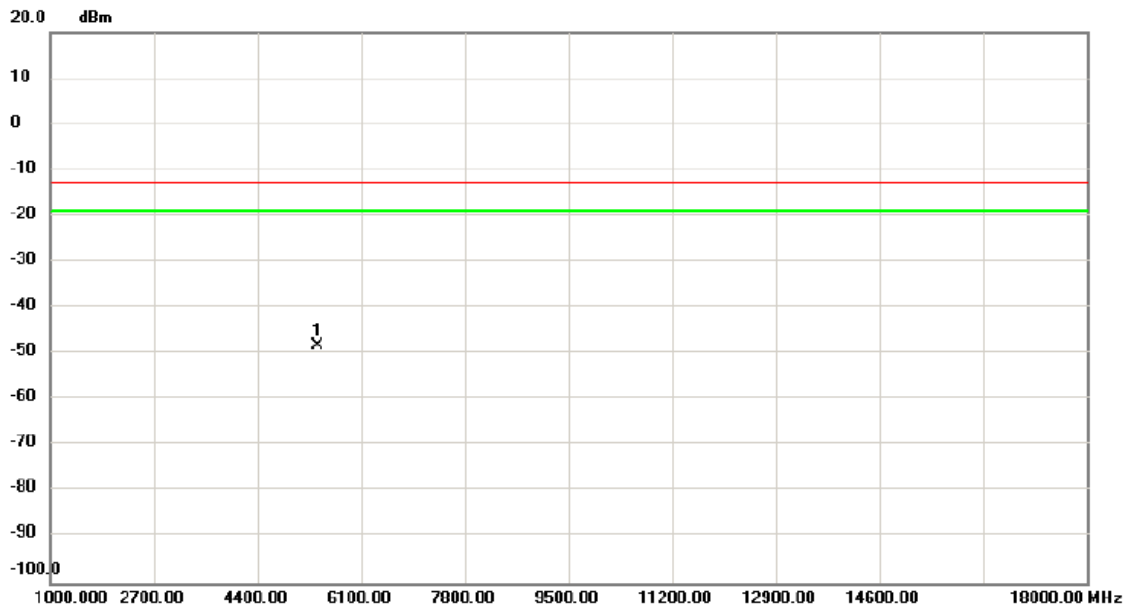

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	5386.000	-58.24	10.03	-48.21	-13.00	-35.21	peak	




Test Mode	WCDMA Band V_TX CH4182_Second Antenna
-----------	---------------------------------------

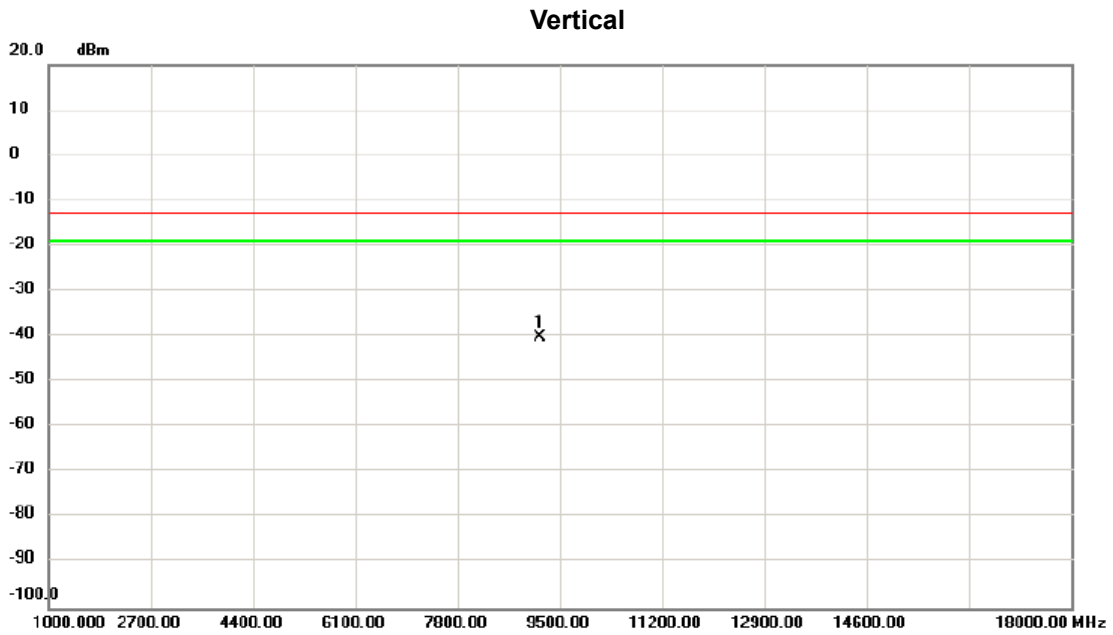

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	9177.000	-58.96	18.69	-40.27	-13.00	-27.27	peak	

Test Mode	WCDMA Band V_TX CH4182_Second Antenna
-----------	---------------------------------------


### Horizontal

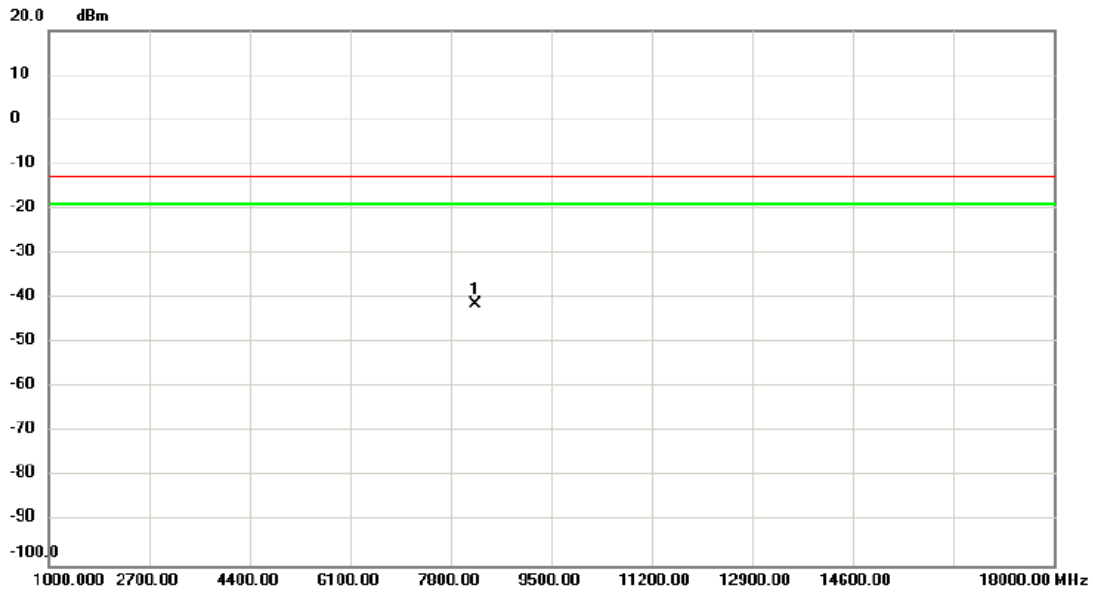

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	8225.000	-59.10	17.80	-41.30	-13.00	-28.30	peak	

Test Mode | LTE Band 5\_TX CH20525\_1.4M\_Main Antenna

### Vertical

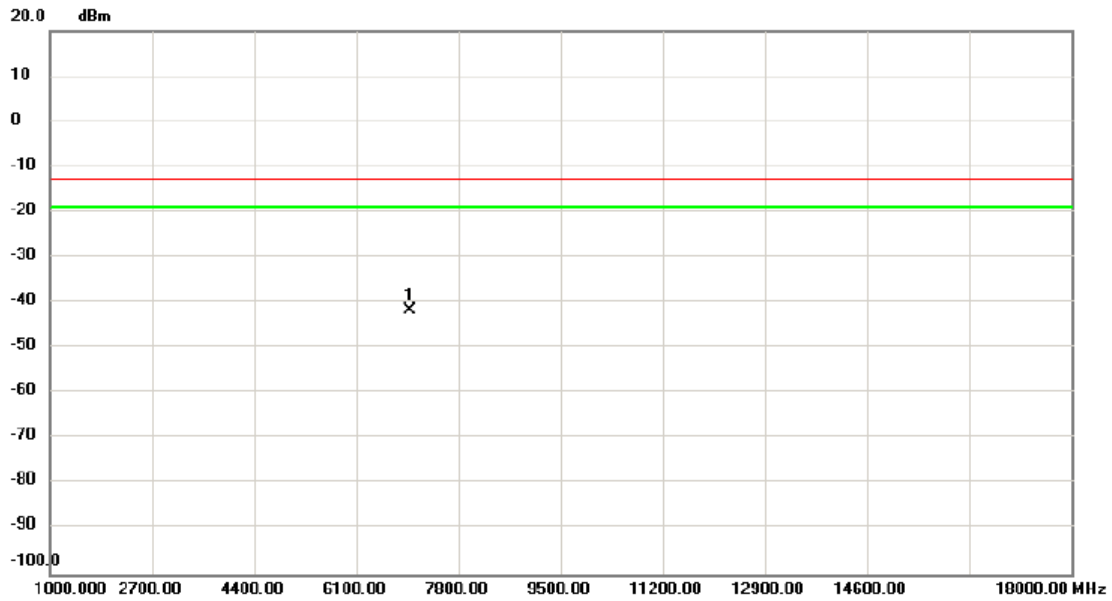

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	6984.000	-58.05	16.48	-41.57	-13.00	-28.57	peak	