





<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

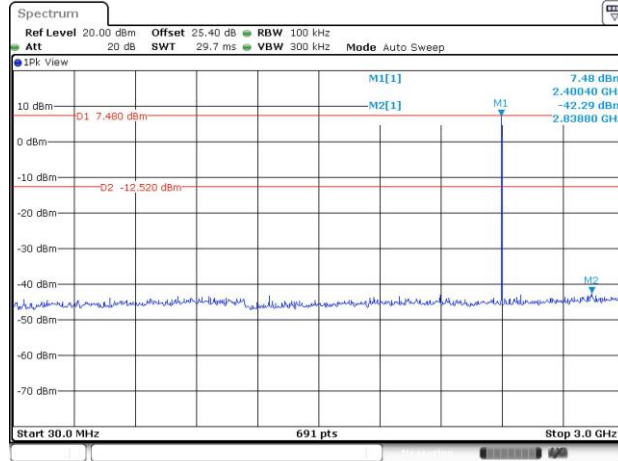


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

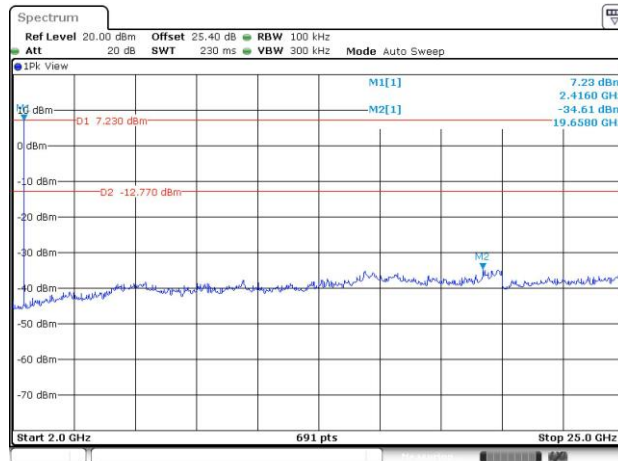




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

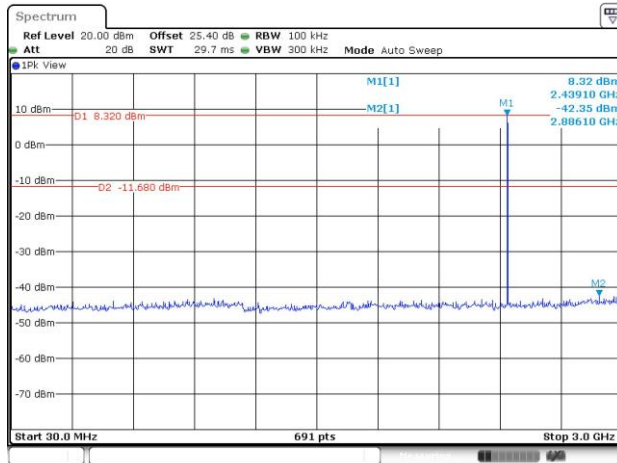

Date: 17.MAR.2020 17:29:07


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

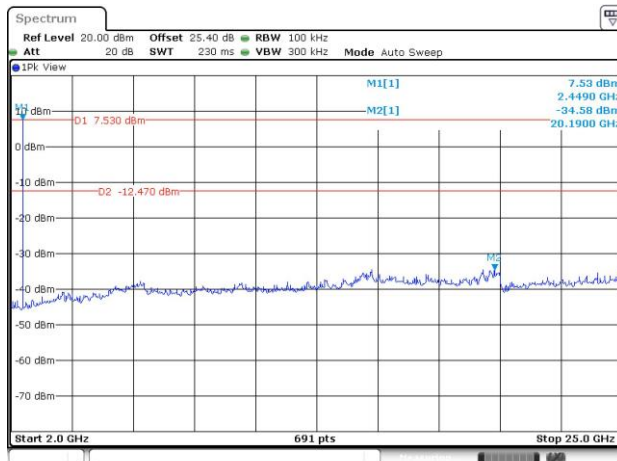


Date: 17.MAR.2020 17:29:41



CSE Plot on Ch 78 between 30MHz ~ 3 GHz

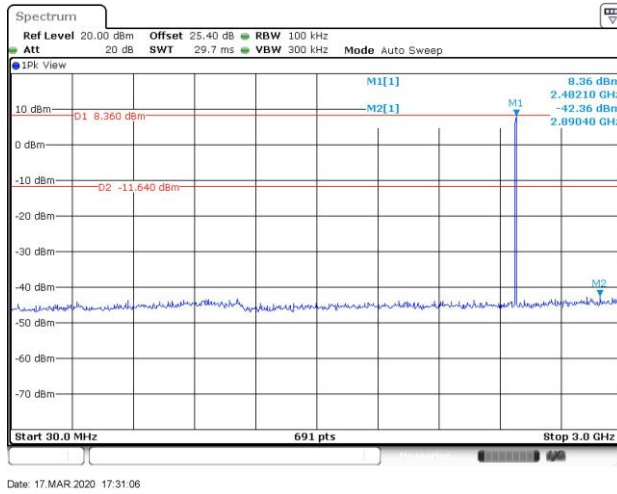


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

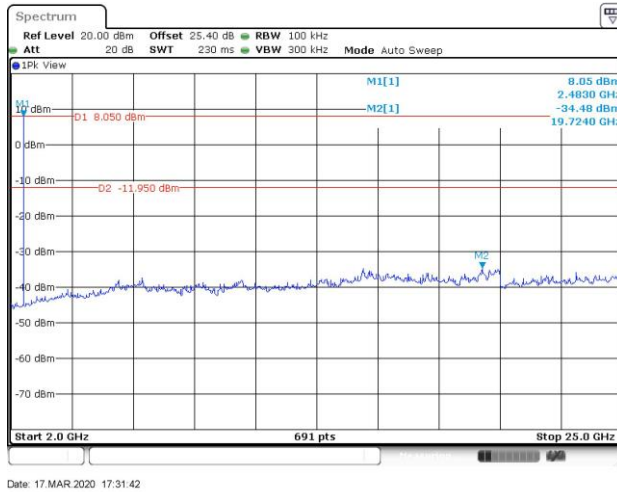




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

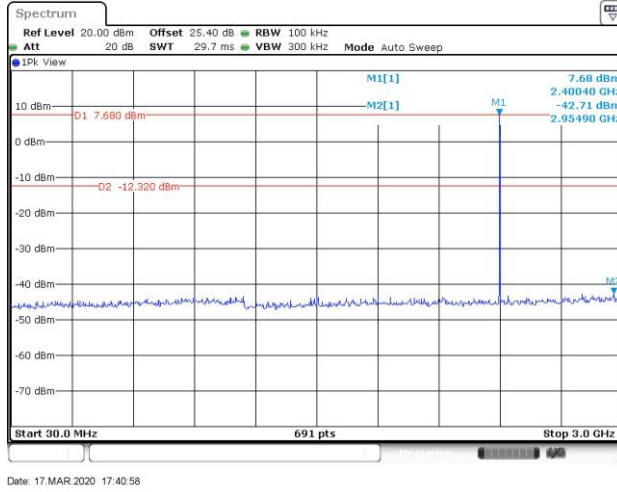


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

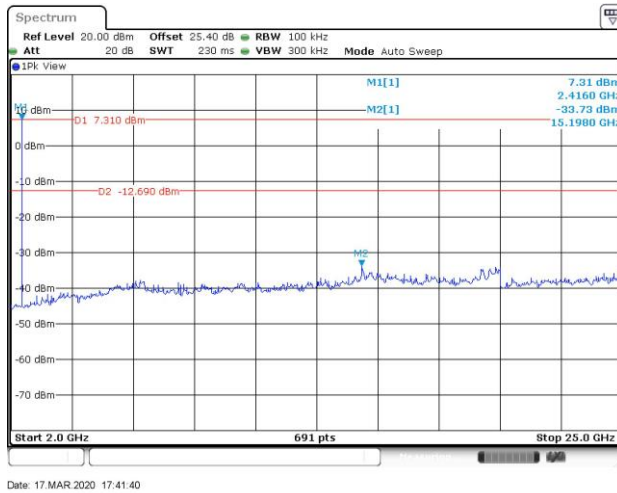




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

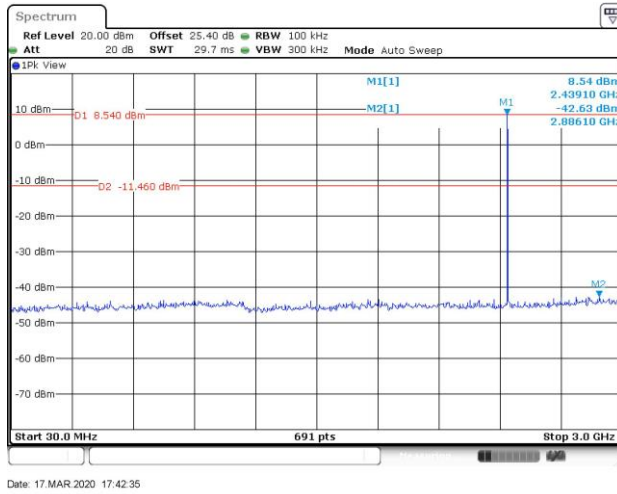


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

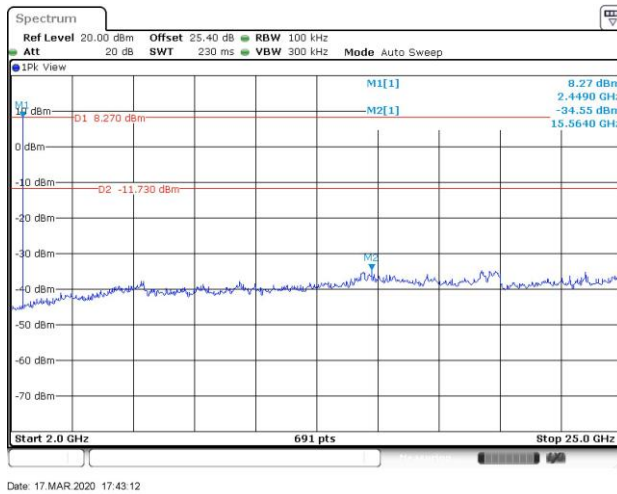




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

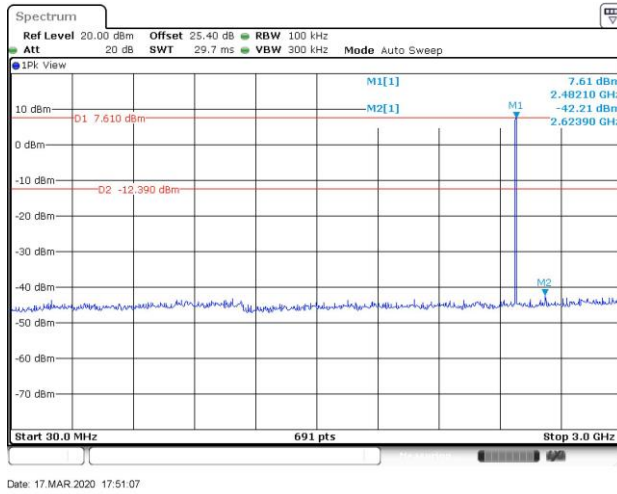

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

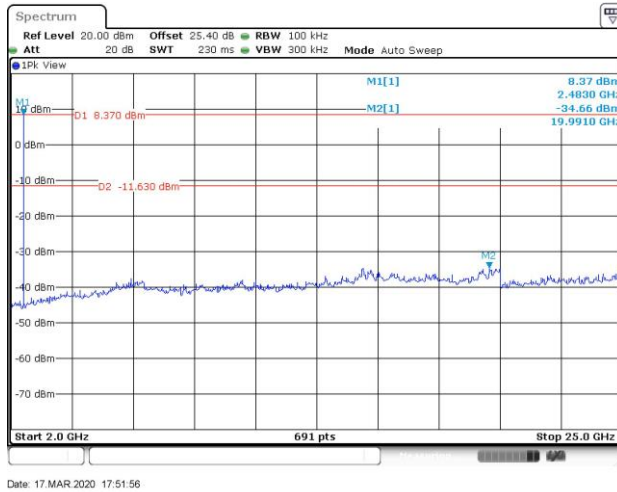



### 3.8 Radiated Band Edges and Spurious Emission Measurement

#### 3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.8.2 Measuring Instruments

See list of measuring equipment of this test report.

**3.8.3 Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
On time =  $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$   
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.




### 3.8.4 Test Setup


For radiated emissions below 30MHz

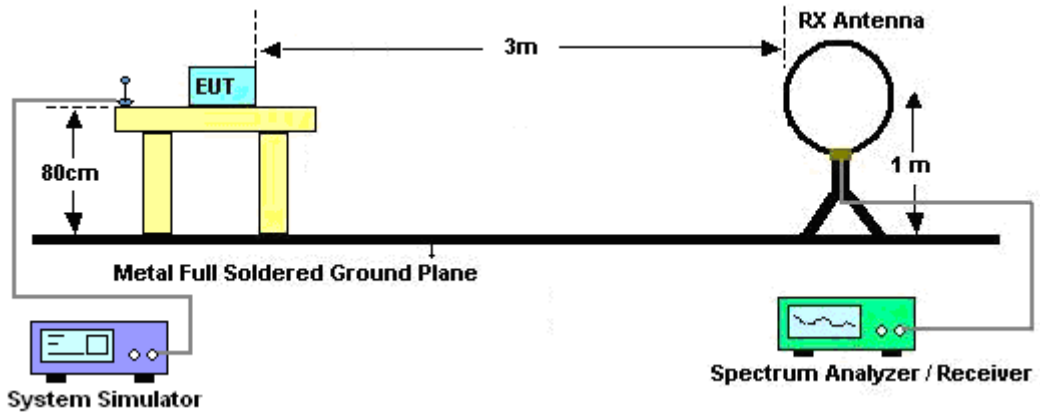

For radiated emissions from 30MHz to 1GHz

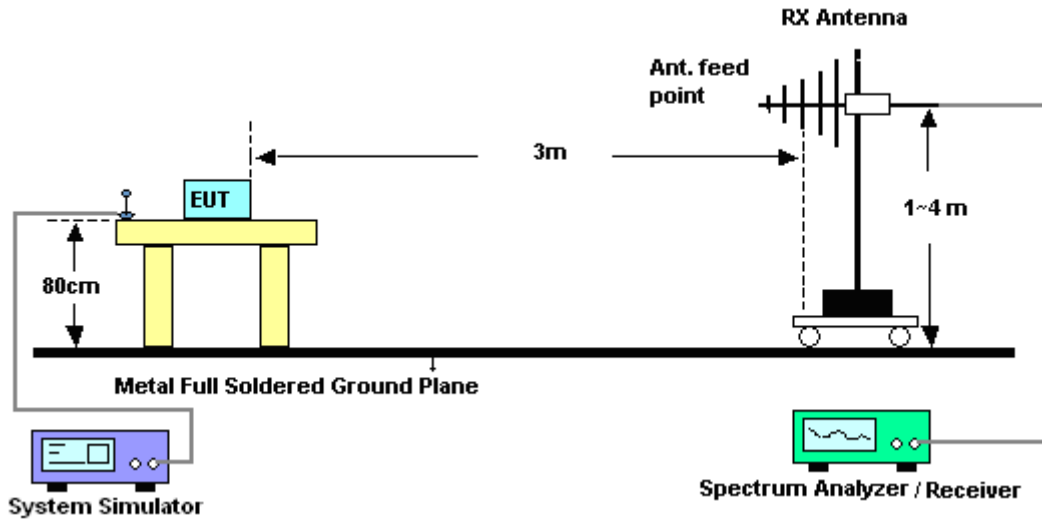

For radiated emissions above 1GHz

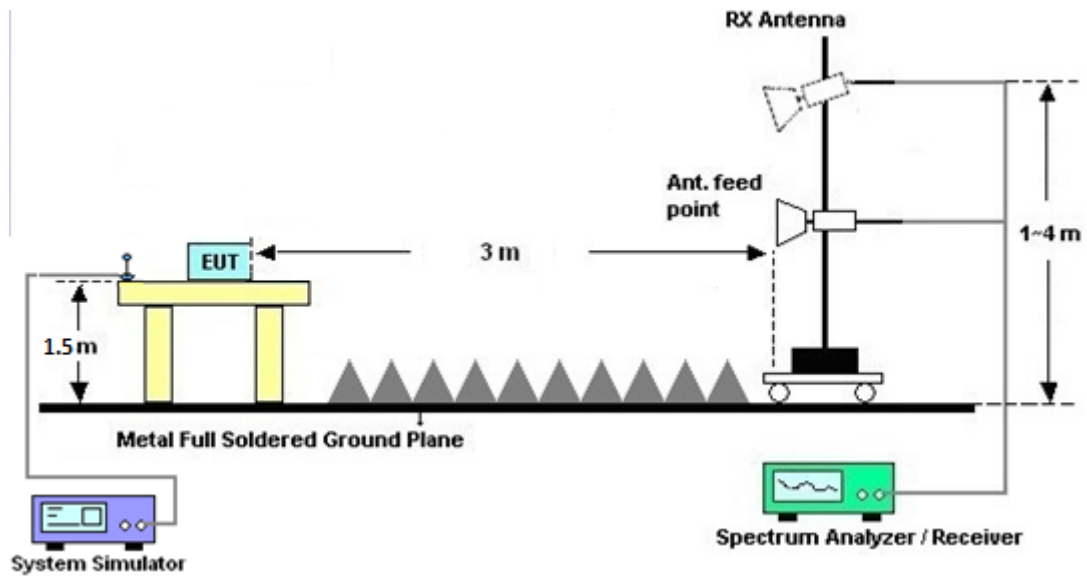

### 3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.8.7 Duty Cycle

Please refer to Appendix E.

### 3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix C and D.

### 3.9 AC Conducted Emission Measurement

#### 3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.9.4 Test Setup

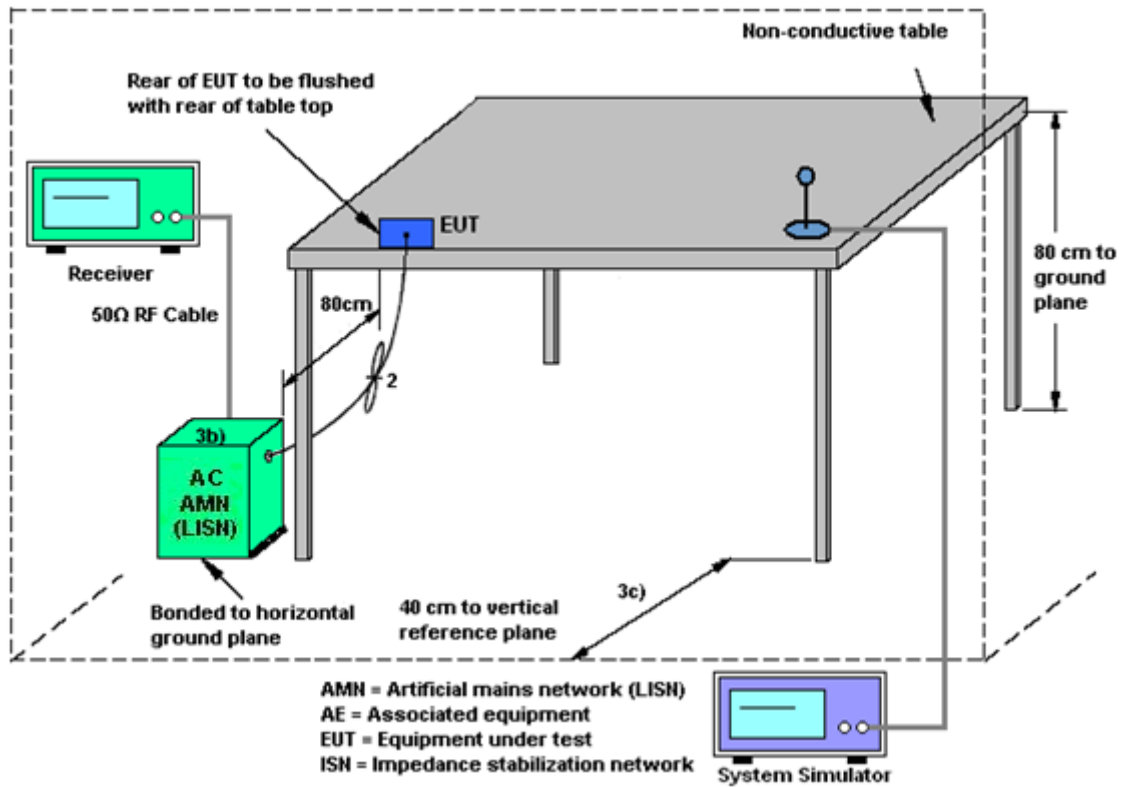

### 3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.10.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Jun. 17, 2019	Feb. 06, 2020~ Mar. 17, 2020	Jun. 16, 2020	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB4129234 4	N/A	Dec. 27, 2019	Feb. 06, 2020~ Mar. 17, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 27, 2019	Feb. 06, 2020~ Mar. 17, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Jul. 15, 2019	Feb. 06, 2020~ Mar. 17, 2020	Jul. 14, 2020	Conducted (TH05-HY)
BT Base Station	Rohde & Schwarz	CBT	101136	BT 3.0	Oct. 27, 2019	Feb. 06, 2020~ Mar. 17, 2020	Oct. 26, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1208382	N/A	Mar. 27, 2019	Feb. 06, 2020~ Mar. 17, 2020	Mar. 26, 2020	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 10, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Feb. 10, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Mar. 19, 2019	Feb. 10, 2020	Mar. 18, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Feb. 10, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 10, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Feb. 10, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Feb. 10, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Preamplifier	EMCE	EMC184045B	980192	18GHz ~ 40GHz	Aug. 01, 2019	Feb. 12, 2020~ Mar. 17, 2020	Jul. 31, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Feb. 12, 2020~ Mar. 17, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Feb. 12, 2020~ Mar. 17, 2020	Oct. 13, 2020	Radiation (03CH11-HY)
Horn Antenna	SCHWARZ ZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 04, 2019	Feb. 12, 2020~ Mar. 17, 2020	Nov. 03, 2020	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Feb. 12, 2020~ Mar. 17, 2020	Jan. 08, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 13, 2019	Feb. 12, 2020~ Mar. 17, 2020	Nov. 12, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHz	Oct. 28, 2019	Feb. 12, 2020~ Mar. 17, 2020	Oct. 27, 2020	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 12, 2020~ Mar. 17, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 12, 2020~ Mar. 17, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 12, 2020~ Mar. 17, 2020	N/A	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55 303K	1710001800 054002	1GHz~18GHz	Feb. 07, 2020	Feb. 12, 2020~ Mar. 17, 2020	Feb. 06, 2021	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JAP00101800- 30-10P	1601185500 04	1GHz~18GHz	Sep. 17, 2019	Feb. 12, 2020~ Mar. 17, 2020	Sep. 16, 2020	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz- 40GHz	May 14, 2019	Feb. 12, 2020~Mar. 17, 2020	May 13, 2020	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Nov. 01, 2019	Feb. 12, 2020~Mar. 17, 2020	Oct. 31, 2020	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 12, 2020~Mar. 17, 2020	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 13, 2019	Feb. 12, 2020~Mar. 11, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 12, 2020	Mar. 13, 2020~Mar. 17, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 13, 2019	Feb. 12, 2020~Mar. 11, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	Mar. 13, 2020~Mar. 17, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 13, 2019	Feb. 12, 2020~Mar. 11, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 12, 2020	Mar. 13, 2020~Mar. 17, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 13, 2019	Feb. 12, 2020~Mar. 11, 2020	Mar. 12, 2020	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	Mar. 13, 2020~Mar. 17, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53G Low Pass	Sep. 15, 2019	Feb. 12, 2020~Mar. 17, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 15, 2019	Feb. 12, 2020~Mar. 17, 2020	Sep. 14, 2020	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 16, 2019	Feb. 12, 2020~Mar. 17, 2020	Sep. 15, 2020	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 07, 2019	Feb. 12, 2020~Mar. 17, 2020	Nov. 06, 2020	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.00
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.20
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.12
---	------



## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2020/2/6~2020/03/17	Relative Humidity:	51~54	%

&lt;Ant.1&gt;

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.892	0.828	0.999	0.5943	Pass
DH	1Mbps	1	39	2441	0.892	0.828	1.003	0.5943	Pass
DH	1Mbps	1	78	2480	0.889	0.828	0.999	0.5924	Pass
2DH	2Mbps	1	0	2402	1.259	1.166	0.994	0.8393	Pass
2DH	2Mbps	1	39	2441	1.259	1.164	1.177	0.8393	Pass
2DH	2Mbps	1	78	2480	1.255	1.164	1.085	0.8365	Pass
3DH	3Mbps	1	0	2402	1.229	1.152	1.168	0.8191	Pass
3DH	3Mbps	1	39	2441	1.229	1.149	0.999	0.8191	Pass
3DH	3Mbps	1	78	2480	1.224	1.152	1.003	0.8162	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	13.57	30.00	Pass
	39	1	13.96	30.00	Pass
	78	1	13.80	30.00	Pass
2DH1	0	1	11.28	20.97	Pass
	39	1	11.40	20.97	Pass
	78	1	11.45	20.97	Pass
3DH1	0	1	11.68	20.97	Pass
	39	1	11.79	20.97	Pass
	78	1	11.85	20.97	Pass

<b>TEST RESULTS DATA</b>				
<b>Average Power Table</b>				
<b>(Reporting Only)</b>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	13.33	5.22
	39	1	13.62	5.22
	78	1	13.52	5.22
2DH1	0	1	8.78	5.15
	39	1	8.85	5.15
	78	1	8.89	5.15
3DH1	0	1	8.80	5.14
	39	1	8.86	5.14
	78	1	8.91	5.14

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

&lt;Ant. 2&gt;

<b>TEST RESULTS DATA</b>									
<b>20dB and 99% Occupied Bandwidth and Hopping Channel Separation</b>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.892	0.831	1.003	0.5943	Pass
DH	1Mbps	1	39	2441	0.892	0.834	1.003	0.5943	Pass
DH	1Mbps	1	78	2480	0.892	0.831	1.003	0.5943	Pass
2DH	2Mbps	1	0	2402	1.289	1.166	1.007	0.8596	Pass
2DH	2Mbps	1	39	2441	1.285	1.164	1.016	0.8567	Pass
2DH	2Mbps	1	78	2480	1.276	1.164	1.155	0.8509	Pass
3DH	3Mbps	1	0	2402	1.233	1.152	1.003	0.8220	Pass
3DH	3Mbps	1	39	2441	1.233	1.149	1.003	0.8220	Pass
3DH	3Mbps	1	78	2480	1.229	1.149	1.146	0.8191	Pass

<b>TEST RESULTS DATA</b>						
<b>Dwell Time</b>						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

<b>TEST RESULTS DATA</b>					
<b>Peak Power Table</b>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	12.83	30.00	Pass
	39	1	13.73	30.00	Pass
	78	1	13.60	30.00	Pass
2DH1	0	1	10.51	20.97	Pass
	39	1	11.22	20.97	Pass
	78	1	11.24	20.97	Pass
3DH1	0	1	11.04	20.97	Pass
	39	1	11.70	20.97	Pass
	78	1	11.73	20.97	Pass

<b>TEST RESULTS DATA</b>				
<b>Average Power Table</b>				
<b>(Reporting Only)</b>				
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	12.55	5.22
	39	1	13.33	5.22
	78	1	13.22	5.22
2DH1	0	1	8.02	5.14
	39	1	8.64	5.14
	78	1	8.70	5.14
3DH1	0	1	8.04	5.14
	39	1	8.66	5.14
	78	1	8.74	5.14

<b>TEST RESULTS DATA</b>			
<b>Number of Hopping Frequency</b>			
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Howard Huang	Temperature :	21~25°C
		Relative Humidity :	42~48%

## EUT Information

Report NO : 012210  
 Test Mode : Mode 1  
 Test Voltage : 110Vac/60Hz  
 Phase : Line

Full Spectrum

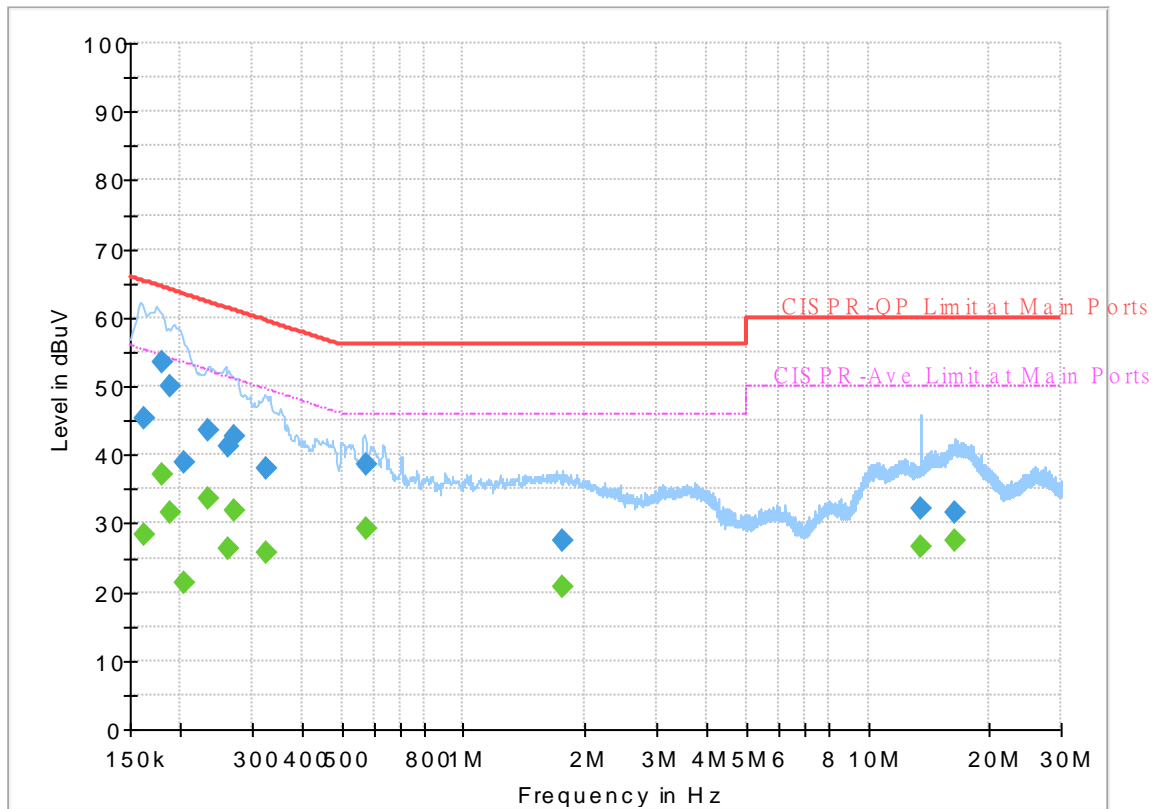

## Final\_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162870	---	28.47	55.32	26.85	L1	OFF	19.6
0.162870	45.46	---	65.32	19.86	L1	OFF	19.6
0.179250	---	37.05	54.52	17.47	L1	OFF	19.6
0.179250	53.52	---	64.52	11.00	L1	OFF	19.6
0.188250	---	31.54	54.11	22.57	L1	OFF	19.6
0.188250	50.03	---	64.11	14.08	L1	OFF	19.6
0.204000	---	21.30	53.45	32.15	L1	OFF	19.6
0.204000	39.01	---	63.45	24.44	L1	OFF	19.6
0.233700	---	33.49	52.32	18.83	L1	OFF	19.6
0.233700	43.56	---	62.32	18.76	L1	OFF	19.6
0.262500	---	26.41	51.35	24.94	L1	OFF	19.6
0.262500	41.11	---	61.35	20.24	L1	OFF	19.6
0.271500	---	31.84	51.07	19.23	L1	OFF	19.6
0.271500	42.73	---	61.07	18.34	L1	OFF	19.6
0.325500	---	25.72	49.57	23.85	L1	OFF	19.6
0.325500	38.00	---	59.57	21.57	L1	OFF	19.6
0.573000	---	29.11	46.00	16.89	L1	OFF	19.6
0.573000	38.54	---	56.00	17.46	L1	OFF	19.6
1.758840	---	20.78	46.00	25.22	L1	OFF	19.7
1.758840	27.60	---	56.00	28.40	L1	OFF	19.7
13.560000	---	26.66	50.00	23.34	L1	OFF	20.0

13.560000	32.22	---	60.00	27.78	L1	OFF	20.0
16.437750	---	27.47	50.00	22.53	L1	OFF	20.1
16.437750	31.49	---	60.00	28.51	L1	OFF	20.1

# EUT Information

Report NO : 012210  
 Test Mode : Mode 1  
 Test Voltage : 110Vac/60Hz  
 Phase : Neutral

Full Spectrum

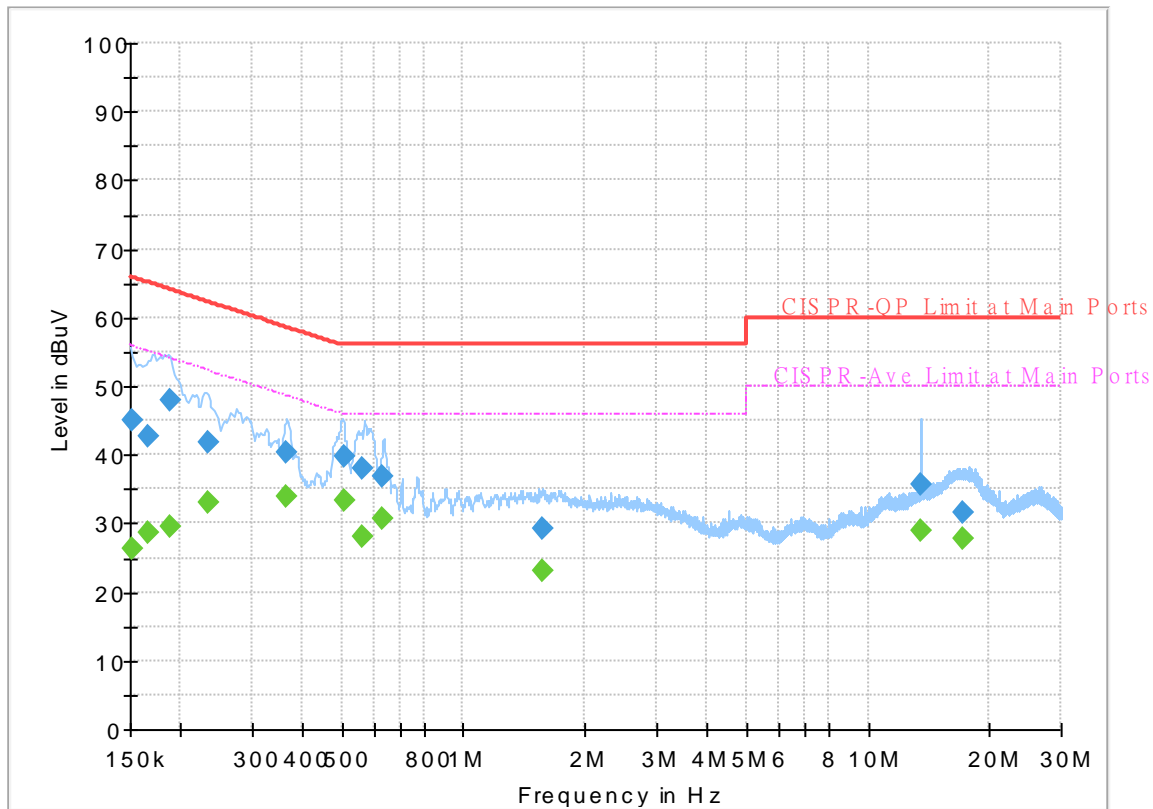

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152093	---	26.35	55.89	29.54	N	OFF	19.6
0.152093	44.95	---	65.89	20.94	N	OFF	19.6
0.165750	---	28.75	55.17	26.42	N	OFF	19.6
0.165750	42.83	---	65.17	22.34	N	OFF	19.6
0.188790	---	29.56	54.09	24.53	N	OFF	19.6
0.188790	47.82	---	64.09	16.27	N	OFF	19.6
0.234690	---	33.13	52.28	19.15	N	OFF	19.6
0.234690	41.88	---	62.28	20.40	N	OFF	19.6
0.364380	---	34.03	48.63	14.60	N	OFF	19.6
0.364380	40.35	---	58.63	18.28	N	OFF	19.6
0.505500	---	33.34	46.00	12.66	N	OFF	19.6
0.505500	39.77	---	56.00	16.23	N	OFF	19.6
0.561750	---	27.93	46.00	18.07	N	OFF	19.6
0.561750	38.01	---	56.00	17.99	N	OFF	19.6
0.631500	---	30.73	46.00	15.27	N	OFF	19.6
0.631500	36.86	---	56.00	19.14	N	OFF	19.6
1.563000	---	23.21	46.00	22.79	N	OFF	19.6
1.563000	29.36	---	56.00	26.64	N	OFF	19.6
13.560000	---	28.94	50.00	21.06	N	OFF	20.1
13.560000	35.82	---	60.00	24.18	N	OFF	20.1
17.156400	---	27.65	50.00	22.35	N	OFF	20.1

17.156400	31.60	---	60.00	28.40	N	OFF	20.1
-----------	-------	-----	-------	-------	---	-----	------



### Appendix C. Radiated Spurious Emission

Test Engineer :	Cookie Ku, Fu Chen, Troye Hsieh and Quentin Liu	Temperature :	17.1~26.7°C
		Relative Humidity :	39.9~74.5%

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BT CH00 2402MHz		2373.525	43.51	-30.49	74	42.51	27.55	6.69	33.24	100	310	P	H	
		2373.525	18.72	-35.28	54	-	-	-	-	-	-	A	H	
	*	2402	108.52	-	-	107.53	27.5	6.72	33.23	100	310	P	H	
	*	2402	83.73	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2360.4	43.45	-30.55	74	42.44	27.58	6.67	33.24	314	61	P	V
			2360.4	18.66	-35.34	54	-	-	-	-	-	-	A	V
	*		2402	105.72	-	-	104.73	27.5	6.72	33.23	314	61	P	V
	*		2402	80.93	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2346.96	43.89	-30.11	74	42.86	27.61	6.66	33.24	100	306	P	H	
		2346.96	19.1	-34.9	54	-	-	-	-	-	-	A	H	
	*	2441	109.28	-	-	108.32	27.42	6.76	33.22	100	306	P	H	
	*	2441	84.49	-	-	-	-	-	-	-	-	A	H	
			2483.97	42.33	-31.67	74	41.47	27.26	6.81	33.21	100	306	P	H
			2483.97	17.54	-36.46	54	-	-	-	-	-	-	A	H
			2389.66	43.04	-30.96	74	42.04	27.52	6.71	33.23	346	58	P	V
			2389.66	18.25	-35.75	54	-	-	-	-	-	-	A	V
	*		2441	105.65	-	-	104.69	27.42	6.76	33.22	346	58	P	V
	*		2441	80.86	-	-	-	-	-	-	-	-	A	V
			2489.92	42.44	-31.56	74	41.6	27.24	6.81	33.21	346	58	P	V
			2489.92	17.65	-36.35	54	-	-	-	-	-	-	A	V





<b>BT CH 78 2480MHz</b>	*	2480	109.81	-	-	108.94	27.28	6.8	33.21	108	308	P	H
	*	2480	85.02	-	-	-	-	-	-	-	-	A	H
		2483.8	51.19	-22.81	74	50.33	27.26	6.81	33.21	108	308	P	H
		2483.8	26.4	-27.6	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	105.76	-	-	104.89	27.28	6.8	33.21	335	46	P	V
	*	2480	80.97	-	-	-	-	-	-	-	-	A	V
		2484.08	47.56	-26.44	74	46.7	27.26	6.81	33.21	335	46	P	V
		2484.08	22.77	-31.23	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	40.97	-33.03	74	61.46	31	11.07	62.56	100	0	P	H	
		4804	16.18	-37.82	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	37.55	-36.45	74	58.04	31	11.07	62.56	100	0	P	V	
		4804	12.76	-41.24	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	39.98	-34.02	74	60.43	31	11.13	62.58	100	0	P	H	
		4882	15.19	-38.81	54	-	-	-	-	-	-	A	H	
		7323	43.38	-30.62	74	56.78	36.5	13.66	63.56	100	0	P	H	
		7323	18.59	-35.41	54	-	-	-	-	-	-	A	H	
		4882	38.68	-35.32	74	59.13	31	11.13	62.58	100	0	P	V	
		4882	13.89	-40.11	54	-	-	-	-	-	-	-	A	V
		7323	41.27	-32.73	74	54.67	36.5	13.66	63.56	100	0	P	V	
		7323	16.48	-37.52	54	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	38.83	-35.17	74	59.09	31.14	11.19	62.59	100	0	P	H	
		4960	14.04	-39.96	54	-	-	-	-	-	-	A	H	
		7440	42.31	-31.69	74	55.91	36.38	13.61	63.59	100	0	P	H	
		7440	17.52	-36.48	54	-	-	-	-	-	-	A	H	
		4960	39.46	-34.54	74	59.72	31.14	11.19	62.59	100	0	P	V	
		4960	14.67	-39.33	54	-	-	-	-	-	-	A	V	
		7440	42.33	-31.67	74	55.93	36.38	13.61	63.59	100	0	P	V	
		7440	17.54	-36.46	54	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BT LF		95.96	33.98	-9.52	43.5	49.8	15.22	1.35	32.39	100	0	P	H	
		142.52	28.82	-14.68	43.5	42.69	16.98	1.62	32.47			P	H	
		201.69	33.69	-9.81	43.5	49.59	14.71	1.97	32.58			P	H	
		874.87	31.26	-14.74	46	29.88	29.06	4.16	31.84			P	H	
		933.07	32.27	-13.73	46	30	29.26	4.3	31.29			P	H	
		955.38	33.44	-12.56	46	29.71	30.38	4.35	31			P	H	
														H
														H
														H
														H
														H
														H
														H
														H
														H
			48.43	33.94	-6.06	40	50.86	14.67	0.94	32.53	100	0	P	V
			63.95	31.42	-8.58	40	51.23	11.59	1.1	32.5			P	V
			94.02	33.27	-10.23	43.5	49.2	15.13	1.34	32.4			P	V
			764.29	30.29	-15.71	46	30.66	27.81	3.88	32.06			P	V
			867.11	31.34	-14.66	46	30.03	29.04	4.14	31.87			P	V
		950.53	32.66	-13.34	46	29.29	30.09	4.34	31.06			P	V	
													V	
													V	
													V	
													V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.													



2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
BT CH00 2402MHz		2389.275	44.32	-29.68	74	43.32	27.52	6.71	33.23	253	0	P	H	
		2389.275	19.53	-34.47	54	-	-	-	-	-	-	A	H	
	*	2402	102.32	-	-	101.33	27.5	6.72	33.23	253	0	P	H	
	*	2402	77.53	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2340.135	44.63	-29.37	74	43.61	27.62	6.65	33.25	267	0	P	V
			2340.135	19.84	-34.16	54	-	-	-	-	-	-	A	V
	*		2402	94.48	-	-	93.49	27.5	6.72	33.23	267	0	P	V
	*		2402	69.69	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2325.68	44.12	-29.88	74	43.09	27.65	6.63	33.25	215	0	P	H	
		2325.68	19.33	-34.67	54	-	-	-	-	-	-	A	H	
	*	2441	104	-	-	103.04	27.42	6.76	33.22	215	0	P	H	
	*	2441	79.21	-	-	-	-	-	-	-	-	A	H	
			2497.06	43.5	-30.5	74	42.68	27.21	6.82	33.21	215	0	P	H
			2497.06	18.71	-35.29	54	-	-	-	-	-	-	A	H
			2389.8	44.94	-29.06	74	43.94	27.52	6.71	33.23	180	16	P	V
			2389.8	20.15	-33.85	54	-	-	-	-	-	-	A	V
	*		2441	96.85	-	-	95.89	27.42	6.76	33.22	180	16	P	V
	*		2441	72.06	-	-	-	-	-	-	-	-	A	V
			2492.23	43.53	-30.47	74	42.69	27.23	6.82	33.21	180	16	P	V
			2492.23	18.74	-35.26	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	106.18	-	-	105.31	27.28	6.8	33.21	166	0	P	H
	*	2480	81.39	-	-	-	-	-	-	-	-	A	H
		2483.64	47.6	-26.4	74	46.73	27.27	6.81	33.21	166	0	P	H
		2483.64	22.81	-31.19	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	97.95	-	-	97.08	27.28	6.8	33.21	299	127	P	V
	*	2480	73.16	-	-	-	-	-	-	-	-	A	V
		2484	45.15	-28.85	74	44.29	27.26	6.81	33.21	299	127	P	V
		2484	20.36	-33.64	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BT (Harmonic @ 3m)

BT Ant. 2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BT CH 00 2402MHz		4804	41.51	-32.49	74	62	31	11.07	62.56	100	0	P	H	
		4804	16.72	-37.28	54	-	-	-	-	-	-	A	H	
													H	
													H	
			4804	41.66	-32.34	74	62.15	31	11.07	62.56	100	0	P	V
			4804	16.87	-37.13	54	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	43.85	-30.15	74	64.3	31	11.13	62.58	100	0	P	H	
		4882	19.06	-34.94	54	-	-	-	-	-	-	A	H	
		7323	48.26	-25.74	74	61.66	36.5	13.66	63.56	100	0	P	H	
		7323	23.47	-30.53	54	-	-	-	-	-	-	A	H	
		4882	42.44	-31.56	74	62.89	31	11.13	62.58	100	0	P	V	
		4882	17.65	-36.35	54	-	-	-	-	-	-	A	V	
		7323	48.14	-25.86	74	61.54	36.5	13.66	63.56	100	0	P	V	
		7323	23.35	-30.65	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	45.66	-28.34	74	65.92	31.14	11.19	62.59	100	0	P	H	
		4960	20.87	-33.13	54	-	-	-	-	-	-	A	H	
		7440	46.36	-27.64	74	59.96	36.38	13.61	63.59	100	0	P	H	
		7440	21.57	-32.43	54	-	-	-	-	-	-	A	H	
		4960	43.67	-30.33	74	63.93	31.14	11.19	62.59	100	0	P	V	
		4960	18.88	-35.12	54	-	-	-	-	-	-	A	V	
		7440	48.67	-25.33	74	62.27	36.38	13.61	63.59	100	0	P	V	
		7440	23.88	-30.12	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Cookie Ku, Fu Chen, Troye Hsieh and Quentin Liu	Temperature :	17.1~26.7°C
		Relative Humidity :	39.9~74.5%

Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03G-H11-1F Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>	<p>Site : 03G-H11-1F Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>

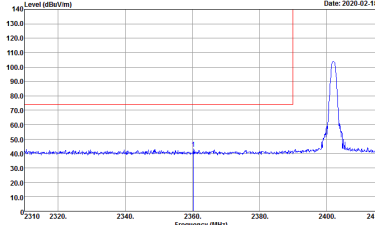
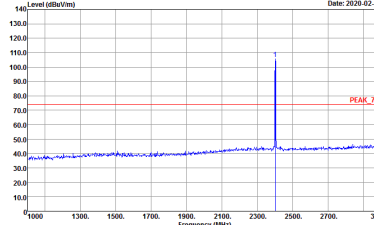



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2020-02-18</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	 <p>Date: 2020-02-18</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	Left blank

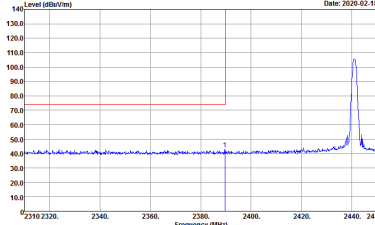
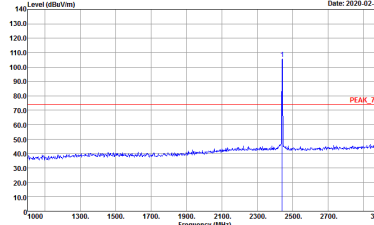


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 012210</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 012210</p>
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 012210</p>	Left blank

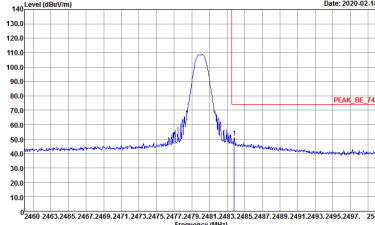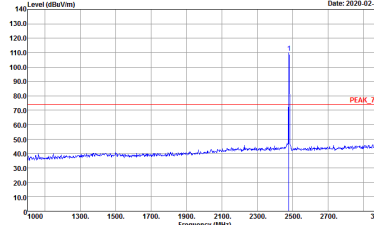

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>

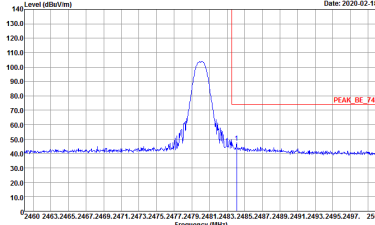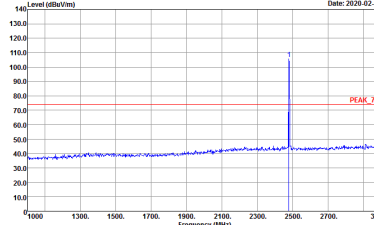

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2020-02-18</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	 <p>Date: 2020-02-18</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH11-1FY Condition : PEAK_74 3m HORN 91200-1HF HORIZONTAL Detector : Peak Project : 012210</p>	<p>Site : 03CH11-1FY Condition : PEAK_74 3m HORN 91200-1HF VERTICAL Detector : Peak Project : 012210</p>



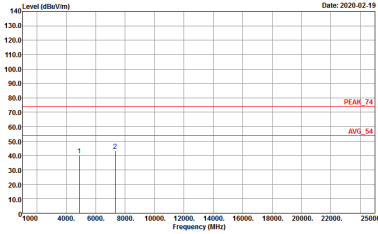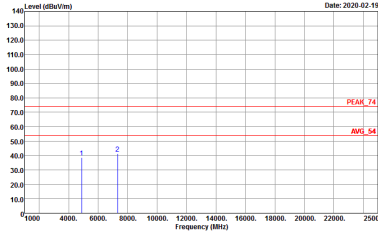

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH39 2441MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 012210</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 012210</p>

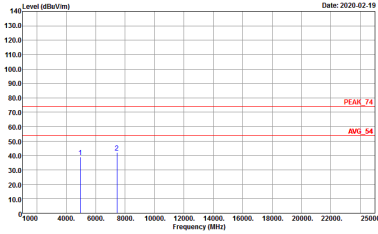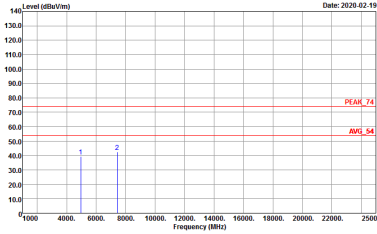

<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH78 2480MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          Detector : Peak          Project : 012210</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          Detector : Peak          Project : 012210</p>



Emission below 1GHz

2.4GHz BT (LF)

BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 012210</p>	<p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 012210</p>





2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-1F Condition : PEAK_BE_74 3m HORN 9120D-4F HORIZONTAL Detector : Peak Project : 012210</p>	<p>Site : 03CH11-1F Condition : PEAK_74 3m HORN 9120D-4F HORIZONTAL Detector : Peak Project : 012210</p>

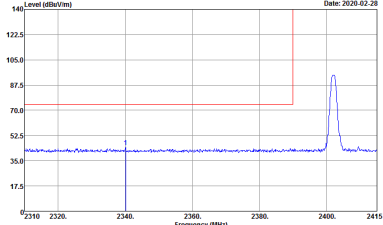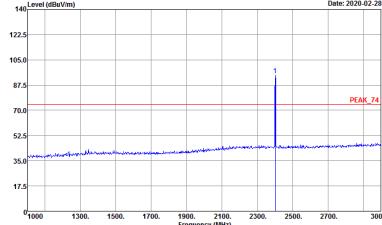

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY          Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 012210</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF VERTICAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 012210</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>	Left blank





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 012210</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 012210</p>
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 012210</p>	Left blank

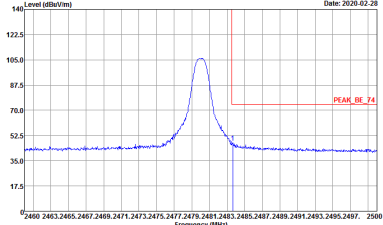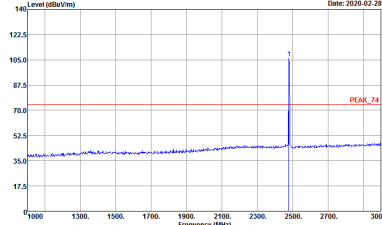

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY          Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 012210</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL          RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 012210</p>



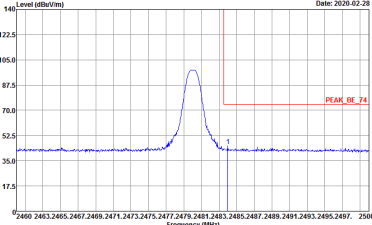
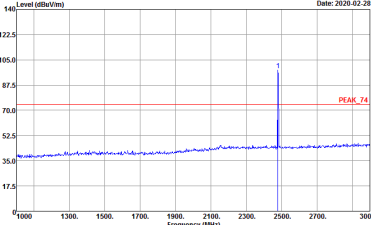


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 012210</p>



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

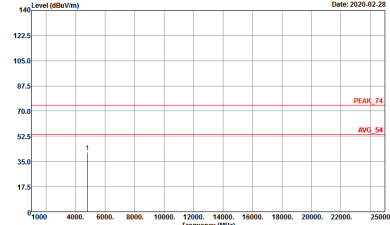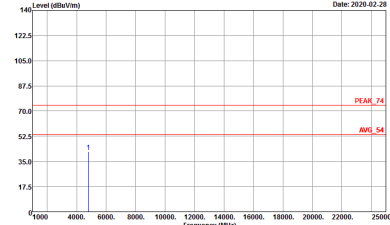BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-1FY          Condition : PEAK_74 3m HORN 91200-1HF HORIZONTAL          Detector : Peak          Project : 012210</p>	 <p>Site : 03CH11-1FY          Condition : PEAK_74 3m HORN 91200-1HF VERTICAL          Detector : Peak          Project : 012210</p>



<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH39 2441MHz</b>	
<b>2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 012210</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 012210</p>




<b>BT</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>BT CH78 2480MHz</b>	
<b>2</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 012210</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 012210</p>


## Appendix E. Duty Cycle Plots

<Ant. 1>

DH5 on time (One Pulse) Plot on Channel 39

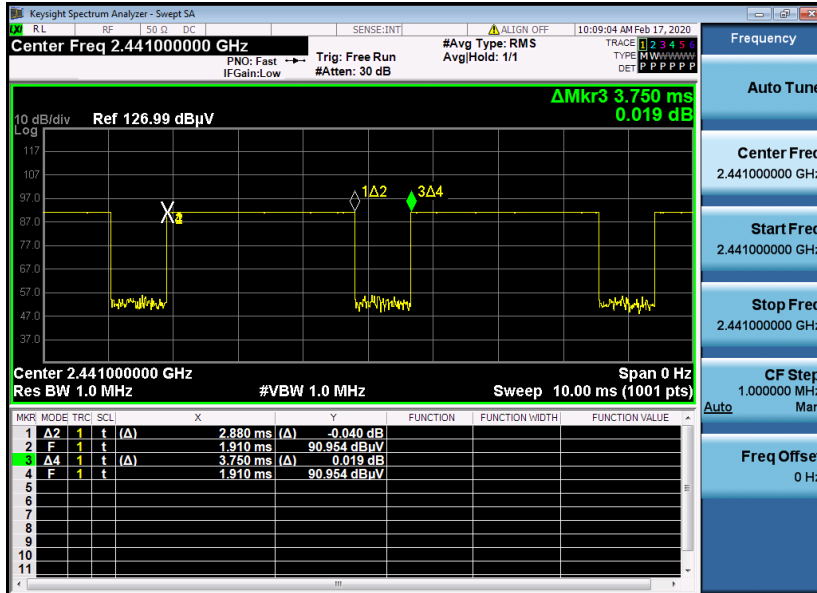

on time (Count Pulses) Plot on Channel 39

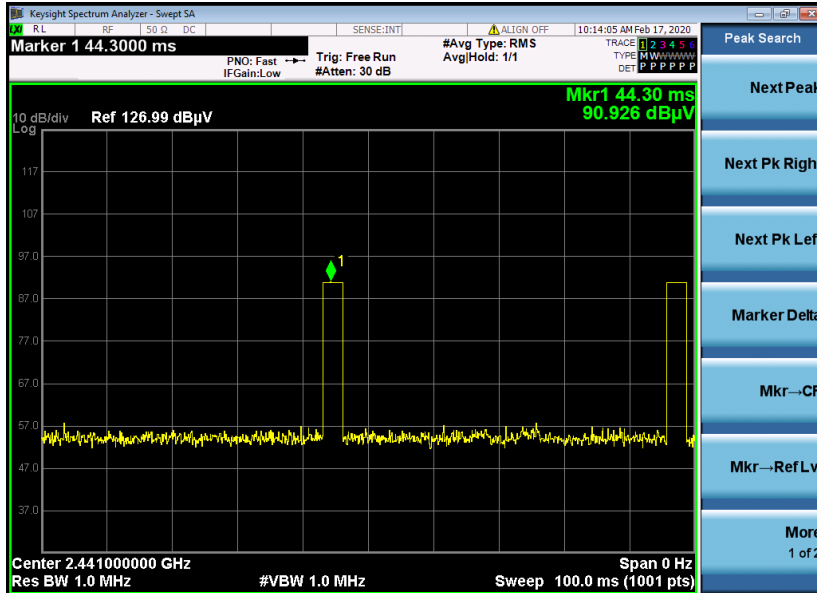


**Note:**

1. Worst case Duty cycle = on time/100 milliseconds = 2 \* 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20\*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.




<Ant. 2>

DH5 on time (One Pulse) Plot on Channel 39

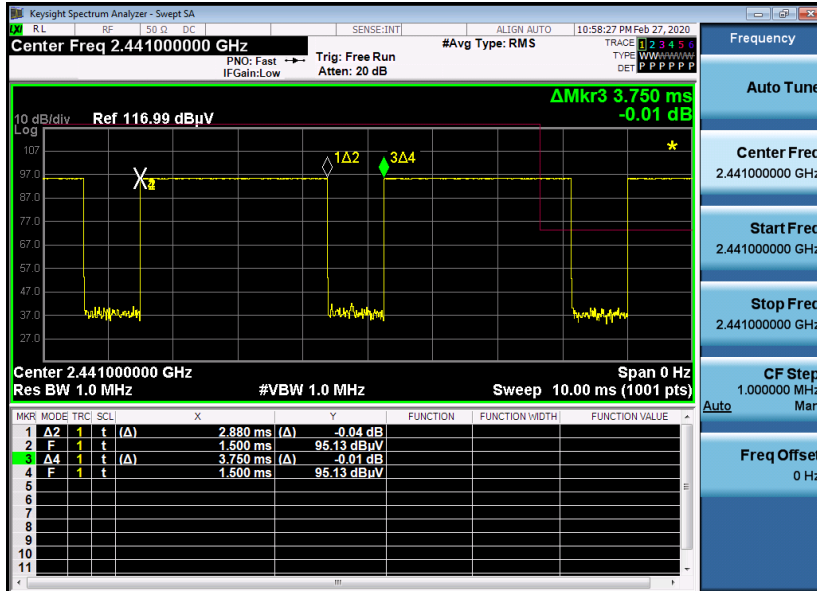

on time (Count Pulses) Plot on Channel 39

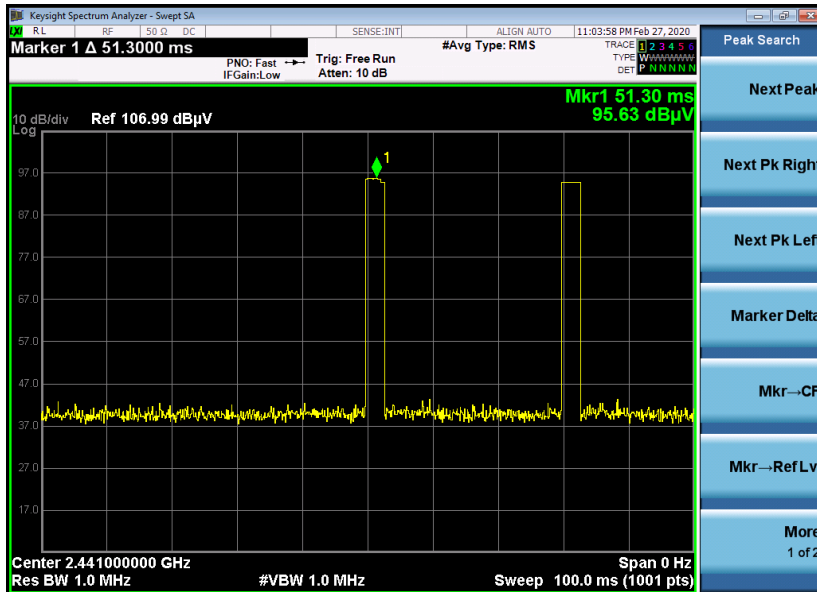

Note:

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ Db}$
3. DH5 has the highest duty cycle worst case and is reported.



**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2$  hops

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$