



# TEST REPORT

No. I21N01157-RF-UMTS

for

**Guangdong OPPO Mobile Telecommunications Corp., Ltd.**

**Mobile Phone**

**Model Name: CPH2269**

**FCC ID: R9C-CPH2269**

with

**Hardware Version: 11**

**Software Version: ColorOS V11.1**

**Issued Date: 2021-05-17**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



No. I21N01157-RF-UMTS

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21N01157-RF-UMTS	Rev.0	1st edition	2021-05-17



## **CONTENTS**

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>4</b>
<b>1.1. TEST ITEMS.....</b>	<b>4</b>
<b>1.2. TEST STANDARDS .....</b>	<b>4</b>
<b>1.3. TEST RESULT .....</b>	<b>4</b>
<b>1.4. TESTING LOCATION .....</b>	<b>4</b>
<b>1.5. PROJECT DATA .....</b>	<b>4</b>
<b>1.6. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>7. STATEMENT .....</b>	<b>12</b>
<b>8. TEST EQUIPMENTS UTILIZED.....</b>	<b>13</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>14</b>
<b>A.1 OUTPUT POWER.....</b>	<b>14</b>
<b>A.2 FIELD STRENGTH OF SPURIOUS RADIATION.....</b>	<b>22</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>38</b>
<b>A.4 OCCUPIED BANDWIDTH.....</b>	<b>42</b>
<b>A.5 EMISSION BANDWIDTH .....</b>	<b>55</b>
<b>A.6 BAND EDGE COMPLIANCE.....</b>	<b>67</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>71</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>96</b>

## 1. SUMMARY OF TEST REPORT

### 1.1. Test Items

Description	Mobile Phone
Model Name	CPH2269
Applicant's name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Guangdong OPPO Mobile Telecommunications Corp., Ltd.

### 1.2. Test Standards

FCC Part 2/22/24/27	10-1-19
	Edition
ANSI C63.26	2015
KDB971168 D01	v03r01

### 1.3. Test Result

All test items are pass. Please refer to "6 Summary of Test Results" for detail.

### 1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000

### 1.5. Project Data

Testing Start Date: 2021-04-13


Testing End Date: 2020-05-15

### 1.6. Signature




---

Lai Minghua  
(Prepared this test report)



---

Huang Qiuqin  
(Reviewed this test report)



---

Zhang Hao  
(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
Address /Post: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,  
Guangdong, China  
Contact Person: Mei XiLi  
Contact Email: meixili@oppo.com  
Telephone: (86)76986076999  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
Address /Post: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City,  
Guangdong, China  
Contact Person: Mei XiLi  
Contact Email: meixili@oppo.com  
Telephone: (86)76986076999  
Fax: /

**3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT****(AE)****3.1. About EUT**

Description	Mobile Phone
Model Name	CPH2269
FCC ID	R9C-CPH2269
Frequency Bands	WCDMA Band 2,4,5
Antenna	Integrated
Extreme vol. Limits	3.60V to 4.45V (nominal: 3.87V)
Extreme temp. Tolerance	0°C to +35°C
Condition of EUT as received	No abnormality in appearance

**3.2. Internal Identification of EUT used during the test**

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
UT02aa	864849050019772	11	ColorOS V11.1	2021-04-13
	864849050019764			
UT04aa	866223050027672	11	ColorOS V11.1	2021-04-13
	866223050027664			

\*EUT ID: is used to identify the test sample in the lab internally.

UT04aa is used for conduction test, UT02aa is used for radiation test.

**3.3. Internal Identification of AE used during the test**

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	USB Cable
AE4	Headset

**AE1**

Model	BLP805
Manufacturer	Sunwoda Electronic Co., Ltd.
Capacity	4980mAh
Nominal Voltage	3.87V

**AE2**

Model	OP52JAUH
Manufacturer	HUIZHOU GOLDEN LAKE INDUSTRIAL CO., LTD
Specification	American Standard Charger

**AE3**

Model	DL143
Manufacturer	Freeport Resources Enterprises (Jiangxi) CO.,LTD

**AE4**

Model	MH156
Manufacturer	GuangDong Allwin Technology Co.,Ltd

\*AE ID: is used to identify the test sample in the lab internally.



### **3.4. General Description**

The Equipment Under Test (EUT) is a model Mobile Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.



#### **4. REFERENCE DOCUMENTS**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-19 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-19 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio Service	2015
KDB971168 D01	Power Meas License Digital Systems	v03r01



## 5. LABORATORY ENVIRONMENT

**Shielded room** did not exceed following limits along the RF testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz>60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 4 Ω

**Fully-anechoic chamber** did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/24.232	A.1	P
2	Field Strength of Spurious Radiation	2.1053/24.238	A.2	P
3	Frequency Stability	2.1055/24.235	A.3	P
4	Occupied Bandwidth	2.1049/24.238	A.4	P
5	Emission Bandwidth	2.1049/24.238	A.5	P
6	Band Edge Compliance	2.1051/24.238	A.6	P
7	Conducted Spurious Emission	2.1051/24.238	A.7	P
8	Peak-to-Average Power Ratio	24.232/KDB971168 D01	A.8	P

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046/22.913	A.1	P
2	Field Strength of Spurious Radiation	2.1053/22.917	A.2	P
3	Frequency Stability	2.1055/22.355	A.3	P
4	Occupied Bandwidth	2.1049/22.917	A.4	P
5	Emission Bandwidth	2.1049/22.917	A.5	P
6	Band Edge Compliance	2.1051/22.917	A.6	P
7	Conducted Spurious Emission	2.1051/22.917	A.7	P
8	Peak-to-Average Power Ratio	KDB971168 D01	A.8	P



**WCDMA Band IV**

<b>Items</b>	<b>Test Name</b>	<b>Clause in FCC rules</b>	<b>Section in this report</b>	<b>Verdict</b>
1	Output Power	2.1046/27.50(d)	A.1	P
2	Field Strength of Spurious Radiation	2.1053/27.53(h)	A.2	P
3	Frequency Stability	2.1055/27.54	A.3	P
4	Occupied Bandwidth	2.1049/27.53(g)	A.4	P
5	Emission Bandwidth	2.1049/27.53(g)	A.5	P
6	Band Edge Compliance	2.1051/27.53(h)	A.6	P
7	Conducted Spurious Emission	2.1051/27.53(h)	A.7	P
8	Peak-to-Average Power Ratio	27.50(d) /KDB971168 D01	A.8	P



## **7. STATEMENT**

Since the information of samples in this report is provided by the client, the laboratory is not responsible for the authenticity of sample information.

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

**8. TEST EQUIPMENTS UTILIZED**

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101676	2021-11-25
2	BiLog Antenna	3142E	ETS-Lindgren	0224831	2021-05-17
3	Horn Antenna	3117	ETS-Lindgren	00066577	2022-04-02
4	Horn Antenna	QSH-SL-18 -26-S-20	Q-par	17013	2023-01-06
5	Antenna	BBHA 9120D	Schwarzbeck	1593	2022-12-05
6	Antenna	VUBA 9117	Schwarzbeck	207	2023-07-15
7	Antenna	QWH-SL-18 -40-K-SG	Q-par	15979	2023-01-06
8	preamplifier	83017A	Agilent	MY39501110	/
9	Signal Generator	SMB100A	R&S	179725	2021-11-25
10	Fully Anechoic Chamber	FACT3-2.0	ETS-Lindgren	1285	2021-07-19
11	Spectrum Analyzer	FSV40	R&S	101192	2022-01-13
12	Universal Radio Communication Tester	CMU200	R&S	114545	2022-01-13
13	Universal Radio Communication Tester	CMU200	R&S	123210	2021-12-13
14	Spectrum Analyzer	FSU	R&S	101506	2021-12-13
15	Temperature Chamber	SH-241	ESPEC	92007516	2021-10-15
16	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2021-11-13

**Test software**

Item	Name	Vesion
Radiated	EMC32	V10.50.40



## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **Reference**

FCC: CFR Part 2.1046, 22.913, 24.232, 27.50(d)

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200 or CMW500) to ensure max power transmission and proper modulation.

This result contains max output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies, 1852.4 MHz, 1880.0MHz and 1907.6MHz for WCDMA Band II;826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V and 1712.4MHz, 1740.0MHz and 1752.6MHz for WCDMA Band IV (bottom, middle and top of operational frequency range).

#### **Limit**

According to FCC Part 2.1046

#### **WCDMA Band II**

##### **A.1.2.2 Measurement result**

#### **QPSK**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	23.22
	9400	1880.0	23.03
	9538	1907.6	23.20

#### **16QAM**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band II)	9262	1852.4	22.34
	9400	1880.0	22.16
	9538	1907.6	22.28

**WCDMA Band V****Measurement result****QPSK**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	23.41
	4183	836.6	23.43
	4233	846.6	23.49

**16QAM**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band V)	4132	826.4	22.58
	4183	836.6	22.61
	4233	846.6	22.66

**WCDMA Band IV****Measurement result****QPSK**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band IV)	1312	1712.4	23.43
	1450	1740.0	23.38
	1513	1752.6	23.27

**16QAM**

	CH	Frequency(MHz)	output power(dBm)
WCDMA (Band IV)	1312	1712.4	22.56
	1450	1740.0	22.51
	1513	1752.6	22.45

Note: Expanded measurement uncertainty is  $U = 0.49\text{dB}$ ,  $k = 1.96$

### A.1.3 Radiated


#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

#### A.1.3.2 Method of Measurement

- For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

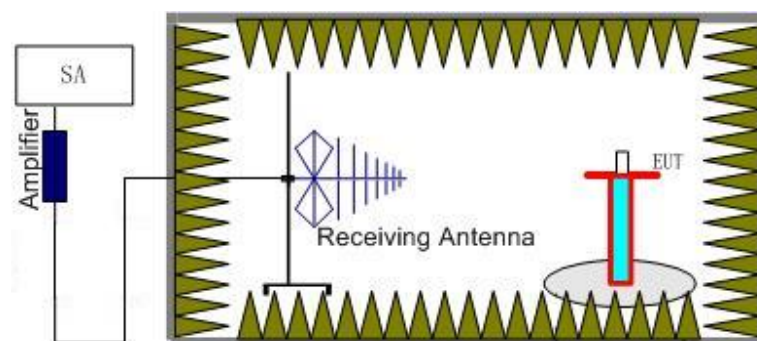

- The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
- The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

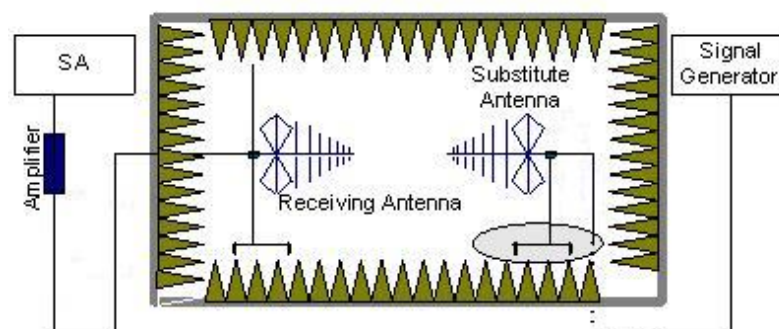

In the chamber, an substitution antenna for the frequency band of interest is placed at the





reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain(dBi) ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .



**Upper antenna**

**WCDMA Band II-EIRP**

**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
<b>1852.40</b>	<b>-17.23</b>	<b>-29.30</b>	<b>8.10</b>	<b>20.17</b>	<b>33.00</b>	<b>H</b>
1880.00	-17.48	-29.40	8.10	20.02	33.00	H
1907.60	-17.26	-29.30	8.10	20.14	33.00	H

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.40	-18.94	-29.30	8.10	18.46	33.00	H
1880.00	-19.16	-29.40	8.10	18.34	33.00	H
1907.60	-18.75	-29.30	8.10	18.65	33.00	H

Frequency: 1852.40MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-17.23dBm)-(P<sub>ci</sub>+P<sub>Ag</sub>)(-29.30dB)+Ga (8.10dB) =20.17dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

**WCDMA Band V-ERP**

**Limits**

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction(dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-10.44	-33.60	-0.84	2.15	20.17	38.45	V
836.60	-10.54	-33.50	-0.74	2.15	20.07	38.45	V
<b>846.60</b>	<b>-10.35</b>	<b>-33.50</b>	<b>-0.73</b>	<b>2.15</b>	<b>20.27</b>	<b>38.45</b>	<b>V</b>

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-11.91	-33.60	-0.84	2.15	18.70	38.45	V
836.60	-12.01	-33.50	-0.74	2.15	18.60	38.45	V
846.60	-11.81	-33.50	-0.73	2.15	18.80	38.45	V

Frequency: 846.60MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-10.35dBm)-(P<sub>ci</sub>+P<sub>Ag</sub>)(-33.50dB)+Ga (-0.73dB)-2.15dB=20.27dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**



**WCDMA Band IV-EIRP**

**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30.00dBm

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
<b>1712.40</b>	<b>-17.20</b>	<b>-29.60</b>	<b>8.10</b>	<b>20.50</b>	<b>30.00</b>	<b>H</b>
1740.00	-17.19	-29.50	8.10	20.41	30.00	H
1752.60	-17.31	-29.50	8.10	20.29	30.00	H

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.40	-17.67	-29.60	8.10	20.03	30.00	H
1740.00	-17.66	-29.50	8.10	19.94	30.00	H
1752.60	-17.78	-29.50	8.10	19.82	30.00	H

Frequency: 1712.40MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-17.20dBm)-(P<sub>cl</sub>+P<sub>Ag</sub>)(-29.60dB)+Ga (8.10dB)=20.50dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

**Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.**



**Lower antenna**

**WCDMA Band II-EIRP**

**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm (2W)

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
<b>1852.40</b>	<b>-17.43</b>	<b>-29.30</b>	<b>8.10</b>	<b>19.97</b>	<b>33.00</b>	<b>H</b>
1880.00	-17.86	-29.40	8.10	19.64	33.00	H
1907.60	-17.62	-29.30	8.10	19.78	33.00	H

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1852.40	-18.94	-29.30	8.10	18.46	33.00	H
1880.00	-19.12	-29.40	8.10	18.38	33.00	H
1907.60	-18.66	-29.30	8.10	18.74	33.00	H

Frequency: 1852.40MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-17.43dBm)-(P<sub>ci</sub>+P<sub>Ag</sub>)(-29.30dB)+Ga (8.10dB) =19.97dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

**WCDMA Band V-ERP**

**Limits**

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction(dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-10.94	-33.60	-0.84	2.15	19.67	38.45	V
836.60	-10.52	-33.50	-0.74	2.15	20.09	38.45	V
<b>846.60</b>	<b>-10.41</b>	<b>-33.50</b>	<b>-0.73</b>	<b>2.15</b>	<b>20.21</b>	<b>38.45</b>	<b>V</b>

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>ci</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.40	-12.25	-33.60	-0.84	2.15	18.36	38.45	V
836.60	-11.76	-33.50	-0.74	2.15	18.86	38.45	V
846.60	-11.64	-33.50	-0.73	2.15	18.98	38.45	V

Frequency: 846.60MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-10.41dBm)-(P<sub>ci</sub>+P<sub>Ag</sub>)(-33.50dB)+Ga (-0.73dB)-2.15dB=20.21dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**



**WCDMA Band IV-EIRP**

**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30.00dBm

**Measurement result**

**QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.40	-18.12	-29.60	8.10	19.58	30.00	H
1740.00	-17.88	-29.50	8.10	19.72	30.00	H
<b>1752.60</b>	<b>-17.23</b>	<b>-29.50</b>	<b>8.10</b>	<b>20.37</b>	<b>30.00</b>	<b>H</b>

**16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)+ P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Polarization
1712.40	-18.35	-29.60	8.10	19.35	30.00	H
1740.00	-18.11	-29.50	8.10	19.49	30.00	H
1752.60	-17.46	-29.50	8.10	20.14	30.00	H

Frequency: 1752.60MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-17.23dBm)-(P<sub>cl</sub>+P<sub>Ag</sub>)(-29.50dB)+Ga (8.10dB)=20.37dBm

**ANALYZER SETTINGS: RBW = VBW = 5MHz**

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

**Note: Both of Vertical and Horizontal polarizations are evaluated, but only the worst case is recorded in this report.**

## **A.2 FIELD STRENGTH OF SPURIOUS RADIATION**

### **Reference**


FCC: CFR 2.1053, 22.917, 24.238, 27.53(h).

### **A.2.1 Measurement Method**


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238, Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

### **The procedure of radiated spurious emissions is as follows:**

1. For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, EUT was placed on a 80 cm high non-conductive stand at a 3 meter test distance from the receive antenna. For radiated measurements performed at frequencies above 1 GHz, EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Receiving antenna was placed on the antenna mast 3 meters from the EUT. For emission measurements. The receiving antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

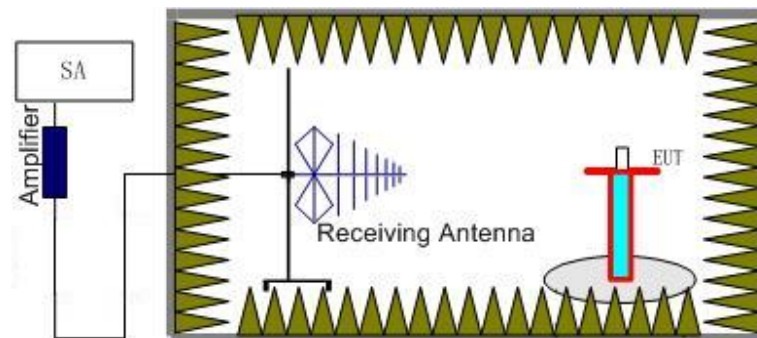

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

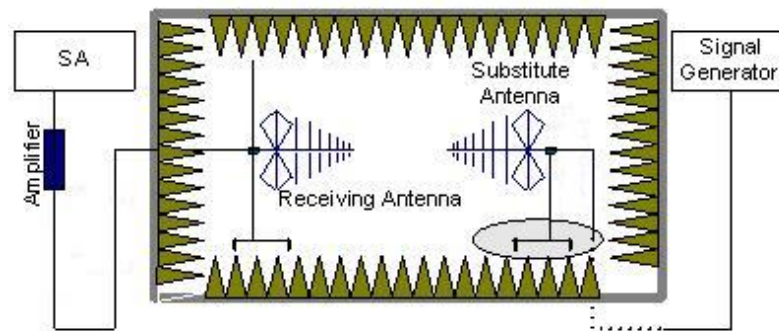

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain(dBi) ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .



### **A.2.2 Measurement Limit**

Part 24.238 , Part 22.917 and Part 27.50 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV (1712.4MHz, 1740.0MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.





**A.2.4 Measurement Results Table**

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

**A.2.5 Sweep Table**

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	
WCDMA Band IV	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	3	



**Upper antenna**

**WCDMA BAND II Mode Channel 9662/1932.4MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2176.17	-50.44	0.90	9.80	-41.54	-13.00	V
2934.00	-53.04	1.00	10.70	-43.34	-13.00	V
4582.68	-54.76	1.30	12.50	-43.56	-13.00	V
6158.76	-51.65	1.60	13.10	-40.15	-13.00	V
13696.31	-55.84	2.50	12.40	-45.94	-13.00	V
16931.95	-55.63	2.90	16.50	-42.03	-13.00	H

**WCDMA BAND II Mode Channel 9800/1960MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2961.50	-52.11	1.00	10.70	-42.41	-13.00	V
3788.70	-55.69	1.10	12.20	-44.59	-13.00	H
4651.32	-55.01	1.30	12.50	-43.81	-13.00	V
6196.38	-51.78	1.60	13.10	-40.28	-13.00	V
11839.34	-56.11	2.50	11.00	-47.61	-13.00	V
16950.33	-55.93	2.90	16.50	-42.33	-13.00	H

**WCDMA BAND II Mode Channel 9938/1987.6MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2949.00	-52.15	1.00	10.70	-42.45	-13.00	V
3872.52	-56.01	1.20	12.20	-45.01	-13.00	H
4855.26	-54.74	1.30	12.50	-43.54	-13.00	H
6208.59	-51.15	1.60	13.10	-39.65	-13.00	H
12742.34	-57.34	2.60	13.80	-46.14	-13.00	V
17447.11	-53.30	2.90	14.50	-41.70	-13.00	V



**WCDMA BAND II Mode Channel 9662/1932.4MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2956.50	-52.00	1.00	10.70	-42.30	-13.00	V
3805.20	-55.45	1.20	12.20	-44.45	-13.00	H
4901.13	-54.00	1.40	12.50	-42.90	-13.00	H
6145.89	-50.78	1.60	13.10	-39.28	-13.00	V
13113.23	-56.30	2.30	13.30	-45.30	-13.00	H
17003.81	-52.87	2.90	14.50	-41.27	-13.00	V

**WCDMA BAND II Mode Channel 9800/1960MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2927.00	-52.54	1.00	10.70	-42.84	-13.00	V
3847.77	-54.95	1.20	12.20	-43.95	-13.00	V
4900.14	-54.03	1.40	12.50	-42.93	-13.00	V
6136.32	-51.25	1.60	13.10	-39.75	-13.00	V
10552.57	-56.27	2.30	10.80	-47.77	-13.00	V
17046.47	-54.05	2.90	14.50	-42.45	-13.00	H

**WCDMA BAND II Mode Channel 9938/1987.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2995.00	-53.07	1.00	10.70	-43.37	-13.00	V
4407.12	-55.14	1.30	12.40	-44.04	-13.00	V
5192.52	-53.60	1.60	12.50	-42.70	-13.00	H
6174.27	-51.72	1.60	13.10	-40.22	-13.00	V
13738.31	-55.02	2.50	12.40	-45.12	-13.00	H
16925.39	-55.62	2.90	16.50	-42.02	-13.00	V



**WCDMA BAND V Mode Channel 4357/871.4 MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1114.21	-52.42	0.60	6.00	-49.17	-13.00	H
2124.83	-50.27	0.90	9.80	-43.52	-13.00	H
2965.50	-53.61	1.00	10.70	-46.06	-13.00	V
4377.75	-55.30	1.30	12.40	-46.35	-13.00	V
6136.65	-52.61	1.60	13.10	-43.26	-13.00	H
7777.69	-59.49	1.80	11.30	-52.14	-13.00	V

**WCDMA BAND V Mode Channel 4408/881.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1115.58	-52.27	0.60	6.00	-49.02	-13.00	H
2163.79	-49.58	0.90	9.80	-42.83	-13.00	H
2970.00	-51.58	1.00	10.70	-44.03	-13.00	V
4440.78	-55.66	1.30	12.40	-46.71	-13.00	H
6165.36	-51.51	1.60	13.10	-42.16	-13.00	V
8747.55	-58.78	2.00	12.00	-50.93	-13.00	V

**WCDMA BAND V Mode Channel 4458/891.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1105.04	-52.68	0.60	6.00	-49.43	-13.00	H
2091.83	-49.62	0.90	9.80	-42.87	-13.00	V
2987.00	-52.21	1.00	10.70	-44.66	-13.00	H
4478.07	-54.46	1.20	12.40	-45.41	-13.00	H
6186.48	-52.15	1.60	13.10	-42.80	-13.00	H
9540.04	-58.65	2.10	11.20	-51.70	-13.00	H

**WCDMA BAND V Mode Channel 4357/871.4 MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1992.83	-48.55	0.80	8.10	-43.40	-13.00	V
2068.46	-50.31	0.80	9.80	-43.46	-13.00	H
2517.50	-52.06	0.90	10.70	-44.41	-13.00	H
2966.50	-53.13	1.00	10.70	-45.58	-13.00	H
3567.60	-55.98	1.20	12.20	-47.13	-13.00	V
6069.99	-52.29	1.60	13.10	-42.94	-13.00	V

**WCDMA BAND V Mode Channel 4408/881.6MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1103.67	-51.43	0.60	6.00	-48.18	-13.00	H
2108.33	-49.83	0.90	9.80	-43.08	-13.00	V
2939.50	-53.15	1.00	10.70	-45.60	-13.00	V
4446.06	-55.31	1.30	12.40	-46.36	-13.00	V
6187.47	-52.48	1.60	13.10	-43.13	-13.00	H
9796.04	-57.53	2.30	11.20	-50.78	-13.00	H

**WCDMA BAND V Mode Channel 4458/891.6MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1111.92	-52.72	0.60	6.00	-49.47	-13.00	H
2111.54	-50.12	0.90	9.80	-43.37	-13.00	V
2985.00	-53.26	1.00	10.70	-45.71	-13.00	H
4833.15	-54.87	1.30	12.50	-45.82	-13.00	H
6170.64	-52.23	1.60	13.10	-42.88	-13.00	H
7817.93	-59.53	1.80	11.30	-52.18	-13.00	H



**WCDMA BAND IV Mode Channel 1537/1753.4MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3779.79	-66.99	1.10	12.20	-55.89	-13.00	V
4859.22	-66.69	1.30	12.50	-55.49	-13.00	H
5526.48	-66.45	1.40	13.10	-54.75	-13.00	V
6191.10	-63.20	1.60	13.10	-51.70	-13.00	V
13735.69	-65.96	2.50	12.40	-56.06	-13.00	H
16954.92	-66.12	2.90	16.50	-52.52	-13.00	H

**WCDMA BAND IV Mode Channel 1638/1777.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3117.48	-66.96	1.10	11.50	-56.56	-13.00	H
3812.79	-66.84	1.20	12.20	-55.84	-13.00	H
4882.65	-66.46	1.40	12.50	-55.36	-13.00	H
6198.36	-63.49	1.60	13.10	-51.99	-13.00	H
13745.53	-65.85	2.50	12.40	-55.95	-13.00	V
17000.20	-64.03	2.90	14.50	-52.43	-13.00	H

**WCDMA BAND IV Mode Channel 1738/1797.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3190.08	-66.83	1.10	11.50	-56.43	-13.00	V
3793.65	-67.08	1.10	12.20	-55.98	-13.00	H
4882.65	-66.40	1.40	12.50	-55.30	-13.00	V
6151.17	-63.77	1.60	13.10	-52.27	-13.00	H
13815.09	-65.77	2.50	12.40	-55.87	-13.00	H
17465.48	-63.85	2.90	14.50	-52.25	-13.00	H

**WCDMA BAND IV Mode Channel 1537/1753.4MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3144.21	-67.17	1.00	11.50	-56.67	-13.00	H
3805.20	-66.93	1.20	12.20	-55.93	-13.00	H
4858.89	-66.24	1.30	12.50	-55.04	-13.00	V
6195.72	-63.25	1.60	13.10	-51.75	-13.00	H
13758.66	-65.96	2.50	12.40	-56.06	-13.00	H
17461.55	-64.04	2.90	14.50	-52.44	-13.00	H

**WCDMA BAND IV Mode Channel 1638/1777.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3179.52	-66.66	1.10	11.50	-56.26	-13.00	H
3789.36	-67.44	1.10	12.20	-56.34	-13.00	H
4851.63	-66.04	1.30	12.50	-54.84	-13.00	H
6139.62	-63.21	1.60	13.10	-51.71	-13.00	V
13762.59	-65.99	2.50	12.40	-56.09	-13.00	H
17008.41	-63.82	2.90	14.50	-52.22	-13.00	V

**WCDMA BAND IV Mode Channel 1738/1797.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
3189.42	-66.94	1.10	11.50	-56.54	-13.00	V
4418.67	-66.70	1.30	12.40	-55.60	-13.00	H
5174.70	-65.93	1.60	12.50	-55.03	-13.00	H
6203.97	-63.49	1.60	13.10	-51.99	-13.00	V
16098.84	-69.15	2.60	17.40	-54.35	-13.00	H
17008.73	-63.97	2.90	14.50	-52.37	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2



**Lower antenna**

**WCDMA BAND II Mode Channel 9662/1932.4MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2987.50	-53.81	1.00	10.70	-44.11	-13.00	H
3842.16	-55.65	1.20	12.20	-44.65	-13.00	H
5464.77	-53.73	1.30	12.50	-42.53	-13.00	H
6099.36	-51.68	1.60	13.10	-40.18	-13.00	V
13412.81	-56.11	2.30	13.30	-45.11	-13.00	H
16855.83	-54.73	2.90	16.50	-41.13	-13.00	H

**WCDMA BAND II Mode Channel 9800/1960MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2095.96	-48.02	0.90	9.80	-39.12	-13.00	V
2986.50	-53.79	1.00	10.70	-44.09	-13.00	H
4398.54	-54.00	1.30	12.40	-42.90	-13.00	H
6201.66	-51.72	1.60	13.10	-40.22	-13.00	H
14024.44	-54.28	2.50	11.90	-44.88	-13.00	V
16977.89	-55.37	2.90	16.50	-41.77	-13.00	V

**WCDMA BAND II Mode Channel 9938/1987.6MHz (QPSK)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2998.00	-53.79	1.00	10.70	-44.09	-13.00	V
4126.62	-55.39	1.20	12.40	-44.19	-13.00	V
5628.78	-53.68	1.30	13.10	-41.88	-13.00	H
6191.43	-51.34	1.60	13.10	-39.84	-13.00	H
13619.53	-55.02	2.40	12.40	-45.02	-13.00	H
16889.30	-54.75	2.90	16.50	-41.15	-13.00	H





**WCDMA BAND II Mode Channel 9662/1932.4MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2172.04	-47.93	0.90	9.80	-39.03	-13.00	V
2947.50	-53.19	1.00	10.70	-43.49	-13.00	H
4882.65	-53.81	1.40	12.50	-42.71	-13.00	V
6211.56	-51.82	1.60	13.10	-40.32	-13.00	V
13479.75	-55.64	2.50	13.30	-44.84	-13.00	H
17009.39	-52.09	2.90	14.50	-40.49	-13.00	H

**WCDMA BAND II Mode Channel 9800/1960MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2190.83	-48.92	0.90	9.80	-40.02	-13.00	H
2975.00	-53.72	1.00	10.70	-44.02	-13.00	H
4380.39	-54.86	1.30	12.40	-43.76	-13.00	V
6232.02	-51.75	1.60	13.10	-40.25	-13.00	H
14603.58	-52.68	2.60	11.20	-44.08	-13.00	V
16832.53	-55.41	2.90	16.50	-41.81	-13.00	V

**WCDMA BAND II Mode Channel 9938/1987.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2997.00	-52.80	1.00	10.70	-43.10	-13.00	H
4308.12	-53.83	1.20	12.40	-42.63	-13.00	H
5372.37	-53.49	1.30	12.50	-42.29	-13.00	V
6201.33	-51.68	1.60	13.10	-40.18	-13.00	V
13182.14	-55.84	2.40	13.30	-44.94	-13.00	H
16967.72	-55.46	2.90	16.50	-41.86	-13.00	V



**WCDMA BAND V Mode Channel 4357/871.4 MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1122.00	-51.30	0.60	6.00	-48.05	-13.00	V
1980.46	-47.18	0.80	8.10	-42.03	-13.00	V
2970.50	-50.93	1.00	10.70	-43.38	-13.00	V
4859.88	-53.98	1.30	12.50	-44.93	-13.00	H
6202.32	-50.84	1.60	13.10	-41.49	-13.00	V
8708.01	-58.51	2.00	12.00	-50.66	-13.00	H

**WCDMA BAND V Mode Channel 4408/881.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1989.17	-47.05	0.80	8.10	-41.90	-13.00	H
2097.79	-48.62	0.90	9.80	-41.87	-13.00	V
2950.50	-50.99	1.00	10.70	-43.44	-13.00	H
3884.40	-55.25	1.20	12.20	-46.40	-13.00	H
4420.65	-54.00	1.30	12.40	-45.05	-13.00	H
6198.36	-50.86	1.60	13.10	-41.51	-13.00	H

**WCDMA BAND V Mode Channel 4458/891.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1217.33	-50.87	0.70	6.00	-47.72	-13.00	H
1641.75	-50.45	0.80	8.10	-45.30	-13.00	H
2969.00	-51.60	1.00	10.70	-44.05	-13.00	V
3830.94	-55.62	1.20	12.20	-46.77	-13.00	H
6191.43	-50.54	1.60	13.10	-41.19	-13.00	V
9204.27	-58.46	2.10	11.60	-51.11	-13.00	H

**WCDMA BAND V Mode Channel 4357/871.4 MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1975.42	-48.68	0.80	8.10	-43.53	-13.00	H
2146.83	-49.83	0.90	9.80	-43.08	-13.00	V
2959.00	-51.36	1.00	10.70	-43.81	-13.00	V
3841.83	-54.81	1.20	12.20	-45.96	-13.00	H
4636.14	-53.95	1.30	12.50	-44.90	-13.00	V
6155.79	-51.52	1.60	13.10	-42.17	-13.00	V

**WCDMA BAND V Mode Channel 4408/881.6MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1985.04	-46.77	0.80	8.10	-41.62	-13.00	H
2184.42	-47.64	0.90	9.80	-40.89	-13.00	H
2888.00	-51.19	1.00	10.70	-43.64	-13.00	V
3796.95	-55.10	1.20	12.20	-46.25	-13.00	H
4842.39	-53.88	1.30	12.50	-44.83	-13.00	V
6144.90	-51.43	1.60	13.10	-42.08	-13.00	V

**WCDMA BAND V Mode Channel 4458/891.6MHz (16QAM)**

Frequency(MHz)	PMea(dBm)	Path loss	Antenna Gain(dBi)	Peak ERP(dBm)	Limit(dBm)	Polarization
1823.25	-46.03	0.80	8.10	-40.88	-13.00	V
2127.58	-42.97	0.90	9.80	-36.22	-13.00	V
2996.00	-51.51	1.00	10.70	-43.96	-13.00	H
3889.02	-55.36	1.20	12.20	-46.51	-13.00	H
4844.04	-54.14	1.30	12.50	-45.09	-13.00	V
6194.40	-50.47	1.60	13.10	-41.12	-13.00	H



**WCDMA BAND IV Mode Channel 1537/1753.4MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2912.50	-53.75	1.00	10.70	-44.05	-13.00	H
3732.93	-55.66	1.10	12.20	-44.56	-13.00	H
4628.55	-54.56	1.30	12.50	-43.36	-13.00	H
6203.97	-51.48	1.60	13.10	-39.98	-13.00	V
13617.23	-54.93	2.40	12.40	-44.93	-13.00	H
16833.19	-55.02	2.90	16.50	-41.42	-13.00	H

**WCDMA BAND IV Mode Channel 1638/1777.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2712.08	-49.37	1.00	10.70	-39.67	-13.00	H
3531.00	-53.03	1.10	12.20	-41.93	-13.00	H
3801.57	-55.35	1.20	12.20	-44.35	-13.00	H
6247.53	-51.91	1.60	13.10	-40.41	-13.00	H
13608.70	-54.39	2.40	12.40	-44.39	-13.00	V
16981.17	-54.15	2.90	16.50	-40.55	-13.00	V

**WCDMA BAND IV Mode Channel 1738/1797.6MHz (QPSK)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2983.00	-54.17	1.00	10.70	-44.47	-13.00	H
3542.85	-55.99	1.20	12.20	-44.99	-13.00	H
4433.52	-54.61	1.30	12.40	-43.51	-13.00	H
6198.69	-51.41	1.60	13.10	-39.91	-13.00	H
15860.63	-55.27	2.40	15.60	-42.07	-13.00	V
16993.64	-54.75	2.90	16.50	-41.15	-13.00	H

**WCDMA BAND IV Mode Channel 1537/1753.4MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2183.50	-48.70	0.90	9.80	-39.80	-13.00	H
2910.00	-53.76	1.00	10.70	-44.06	-13.00	V
3809.16	-55.49	1.20	12.20	-44.49	-13.00	H
6138.63	-51.10	1.60	13.10	-39.60	-13.00	H
13829.20	-54.43	2.50	12.40	-44.53	-13.00	V
16951.64	-55.31	2.90	16.50	-41.71	-13.00	V

**WCDMA BAND IV Mode Channel 1638/1777.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2387.79	-48.84	0.90	9.80	-39.94	-13.00	V
2992.50	-53.07	1.00	10.70	-43.37	-13.00	H
4443.75	-54.90	1.30	12.40	-43.80	-13.00	V
6165.03	-51.58	1.60	13.10	-40.08	-13.00	V
13238.58	-56.14	2.40	13.30	-45.24	-13.00	V
16990.69	-55.11	2.90	16.50	-41.51	-13.00	V

**WCDMA BAND IV Mode Channel 1738/1797.6MHz (16QAM)**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path loss	Antenna Gain(dBi)	Peak EIRP(dBm)	Limit(dBm)	Polarization
2923.00	-53.30	1.00	10.70	-43.60	-13.00	V
3840.51	-55.14	1.20	12.20	-44.14	-13.00	H
4403.82	-54.87	1.30	12.40	-43.77	-13.00	V
6204.30	-51.33	1.60	13.10	-39.83	-13.00	V
14247.89	-54.35	2.50	11.90	-44.95	-13.00	V
16873.88	-55.11	2.90	16.50	-41.51	-13.00	V

Note: The maximum value of expanded measurement uncertainty for this test item is U = 2.72dB(30MHz-3GHz)/3.60dB(3GHz-18GHz)/3.58dB(18GHz-40GHz), k = 2

### **A.3 FREQUENCY STABILITY**

#### **Reference**

FCC: CFR Part 2.1055, 22.355, 24.235, 27.54

#### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at 0°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II, WCDMA Band V and WCDMA Band IV, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 5°C increments from 0°C to +35°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +35°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 5°C increments from +35°C to 0°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **A.3.2 Measurement Limit**

##### **A.3.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.60V and 4.45V, with a nominal voltage of 3.87V. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

##### **A.3.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec.



24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**A.3.3 Measurement results**

**WCDMA Band II**

**Frequency Error vs Voltage-QPSK**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-20	0.011
3.87	-9	0.005
4.45	-12	0.007

**Frequency Error vs Temperature-QPSK**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-13	0.007
5	-16	0.008
10	-16	0.008
15	-17	0.009
20	-12	0.006
25	-15	0.008
30	-17	0.009
35	-14	0.007

**Frequency Error vs Voltage-16QAM**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-17	0.009
3.87	-15	0.008
4.45	-11	0.006

**Frequency Error vs Temperature-16QAM**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-18	0.010
5	-12	0.006
10	-11	0.006
15	-11	0.006
20	-9	0.005
25	-16	0.009
30	-18	0.010
35	-18	0.010

**WCDMA Band V****Frequency Error vs Voltage-QPSK**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-9	0.011
3.87	-7	0.008
4.45	-15	0.018

**Frequency Error vs Temperature-QPSK**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-13	0.015
5	-8	0.010
10	-12	0.015
15	-12	0.014
20	-13	0.015
25	-9	0.011
30	-14	0.017
35	-9	0.010

**Frequency Error vs Voltage-16QAM**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-11	0.013
3.87	-7	0.008
4.45	-14	0.017

**Frequency Error vs Temperature-16QAM**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-15	0.018
5	-3	0.004
10	-15	0.017
15	-13	0.015
20	-15	0.018
25	-9	0.011
30	-10	0.012
35	-13	0.016



**WCDMA Band IV****Frequency Error vs Voltage-QPSK**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-16	0.009
3.87	-10	0.006
4.45	-12	0.007

**Frequency Error vs Temperature-QPSK**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-16	0.009
5	-18	0.011
10	-15	0.009
15	-13	0.007
20	-14	0.008
25	-14	0.008
30	-16	0.009
35	-13	0.007

**Frequency Error vs Voltage-16QAM**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.60	-20	0.011
3.87	-17	0.010
4.45	-14	0.008

**Frequency Error vs Temperature-16QAM**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
0	-10	0.006
5	-12	0.007
10	-8	0.005
15	-19	0.011
20	-12	0.007
25	-14	0.008
30	-22	0.013
35	-14	0.008

Expanded measurement uncertainty is 10Hz, k = 2



## **A.4 OCCUPIED BANDWIDTH**

### **Reference**

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53(g).

### **A.4.1 Occupied Bandwidth Results**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- e) Set the detection mode to peak, and the trace mode to max hold.
- d) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.




**WCDMA Band II (99% BW)-QPSK**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.18
1880.0	4.18
1907.6	4.20


**WCDMA Band II**

**Channel 9262-Occupied Bandwidth (99% BW)-QPSK**

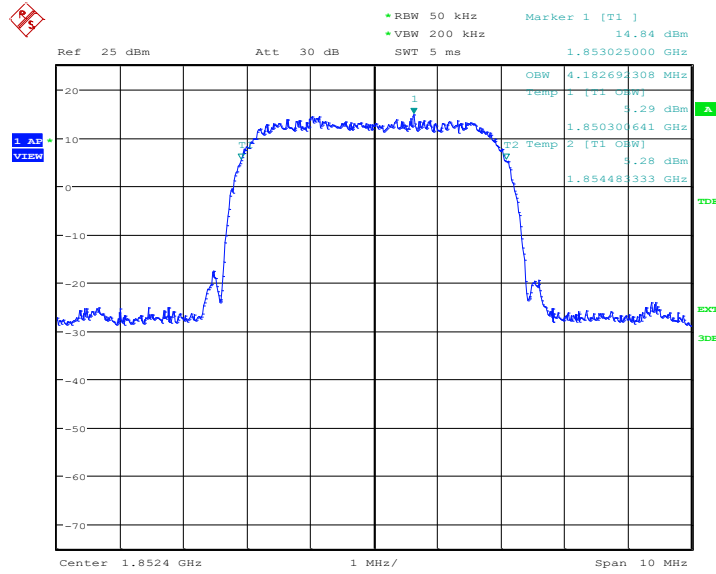

Date: 15.APR.2021 16:37:21


**Channel 9400-Occupied Bandwidth (99% BW)-QPSK**

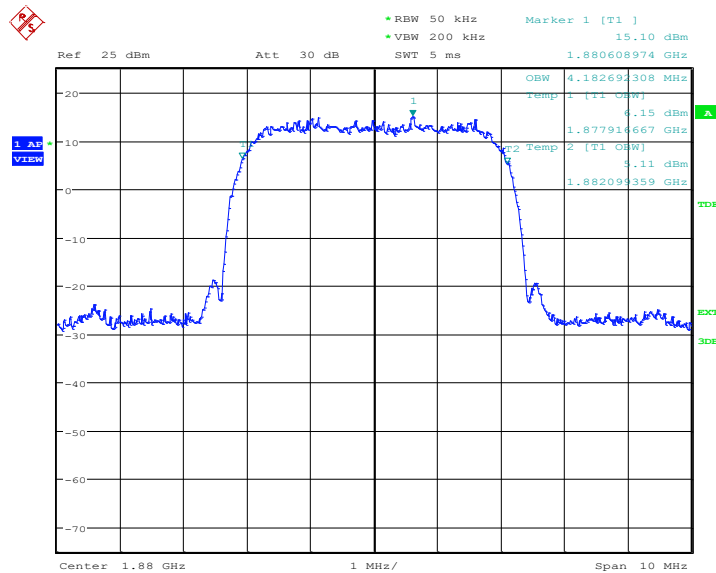

Date: 15.APR.2021 16:37:54



Channel 9538-Occupied Bandwidth (99% BW)-QPSK

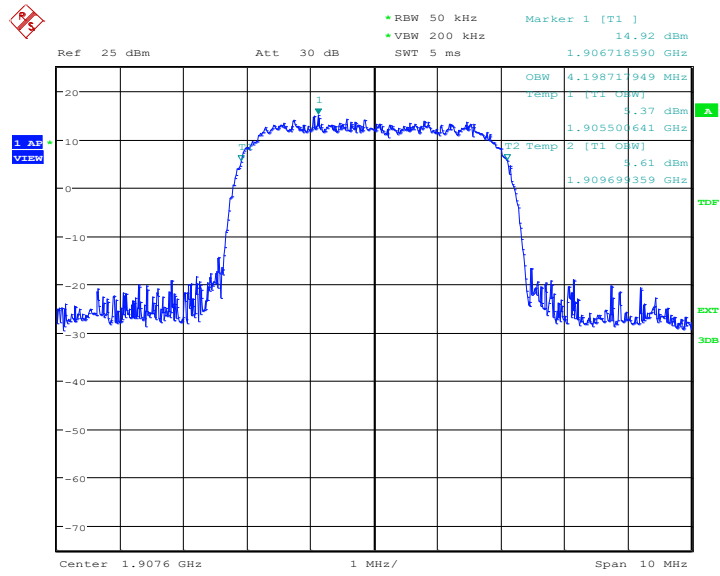

Date: 15.APR.2021 16:38:28




**WCDMA Band II (99% BW)-16QAM**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1852.4	4.20
1880.0	4.17
1907.6	4.18


**WCDMA Band II**

**Channel 9262-Occupied Bandwidth (99% BW)-16QAM**

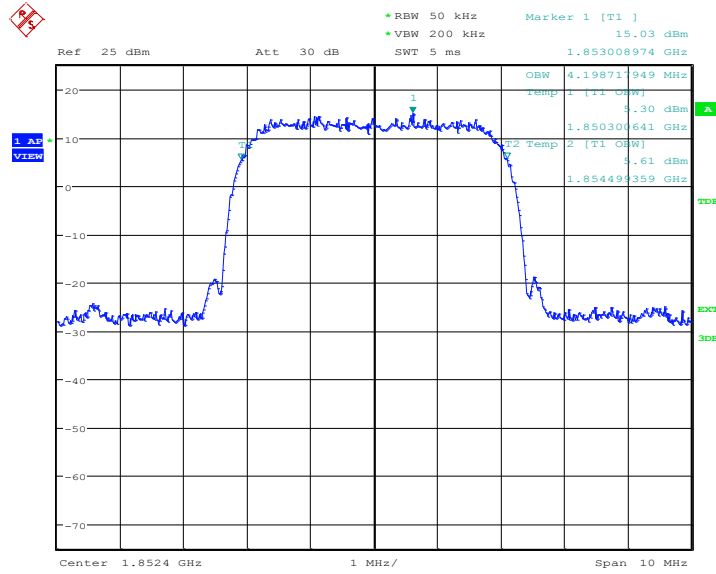

Date: 15.APR.2021 17:44:15


**Channel 9400-Occupied Bandwidth (99% BW)-16QAM**

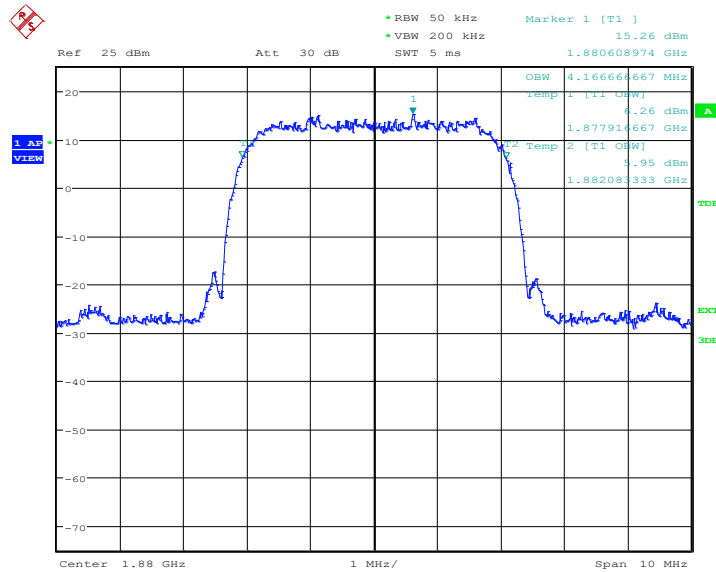

Date: 15.APR.2021 17:44:48



Channel 9538-Occupied Bandwidth (99% BW)-16QAM

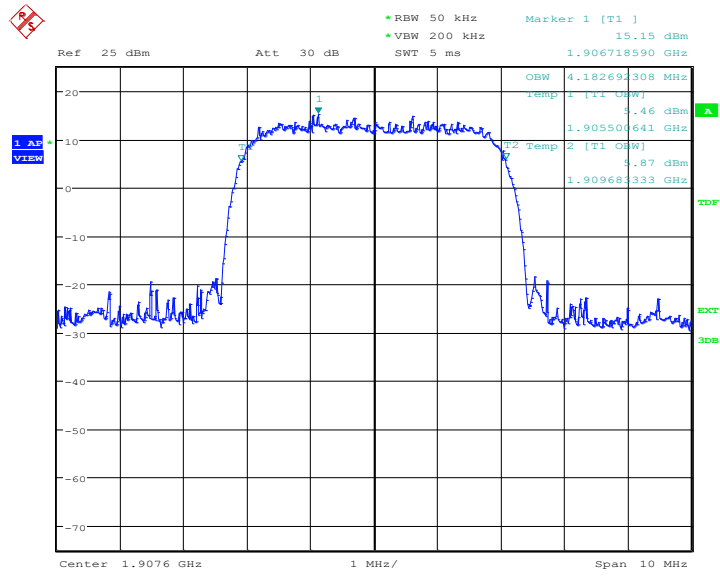

Date: 15.APR.2021 17:45:22




**WCDMA Band V(99% BW)-QPSK**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
826.4	4.17
836.6	4.17
846.6	4.18


**WCDMA Band V**

**Channel 4132-Occupied Bandwidth (99% BW)-QPSK**

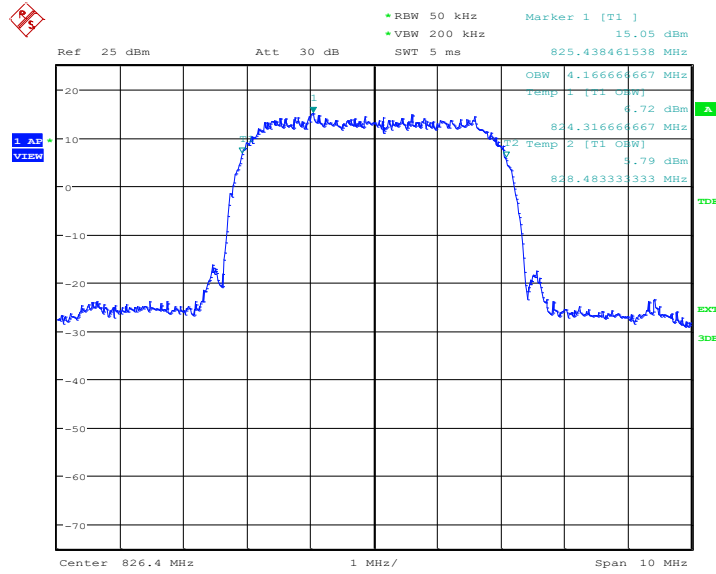

Date: 15.APR.2021 17:22:01


**Channel 4183-Occupied Bandwidth (99% BW)-QPSK**

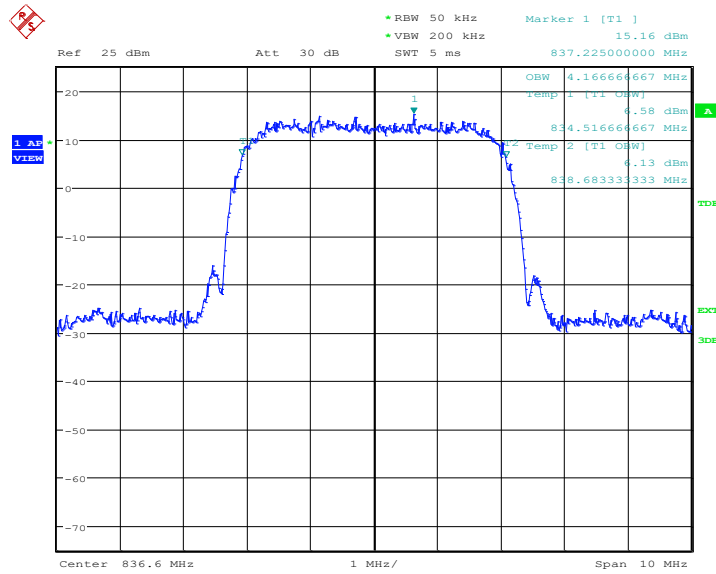

Date: 15.APR.2021 17:22:35



Channel 4233-Occupied Bandwidth (99% BW)-QPSK

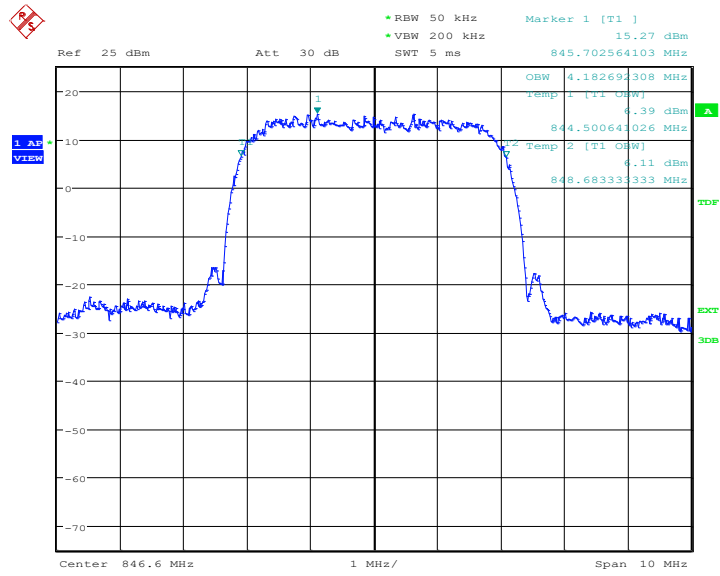

Date: 15.APR.2021 17:23:09






**WCDMA Band V(99% BW)-16QAM**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
826.4	4.17
836.6	4.17
846.6	4.18


**WCDMA Band V**

**Channel 4132-Occupied Bandwidth (99% BW)-16QAM**

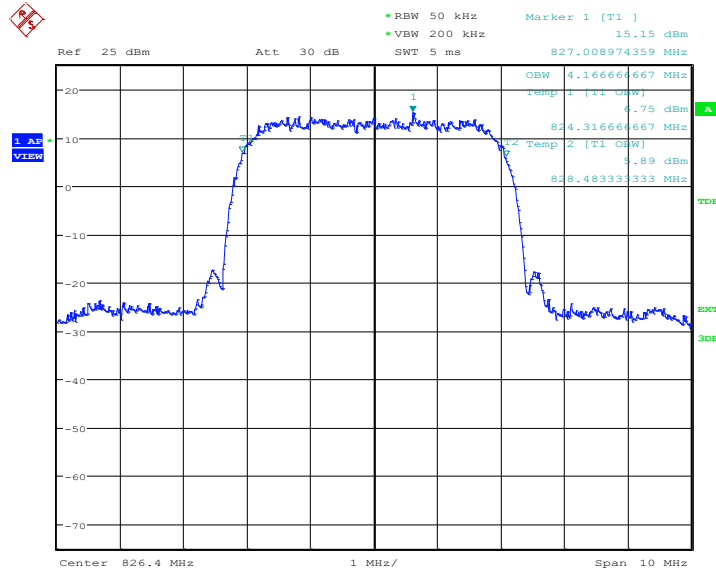

Date: 15.APR.2021 18:03:41


**Channel 4183-Occupied Bandwidth (99% BW)-16QAM**

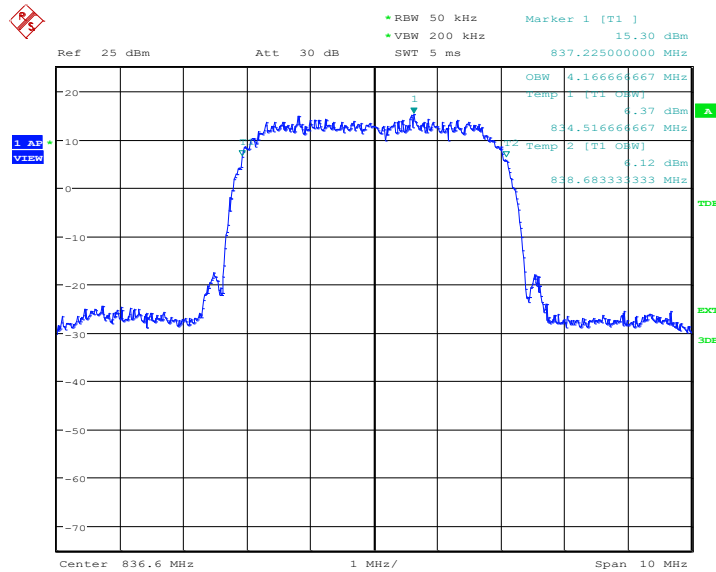

Date: 15.APR.2021 18:04:15



Channel 4233-Occupied Bandwidth (99% BW)-16QAM

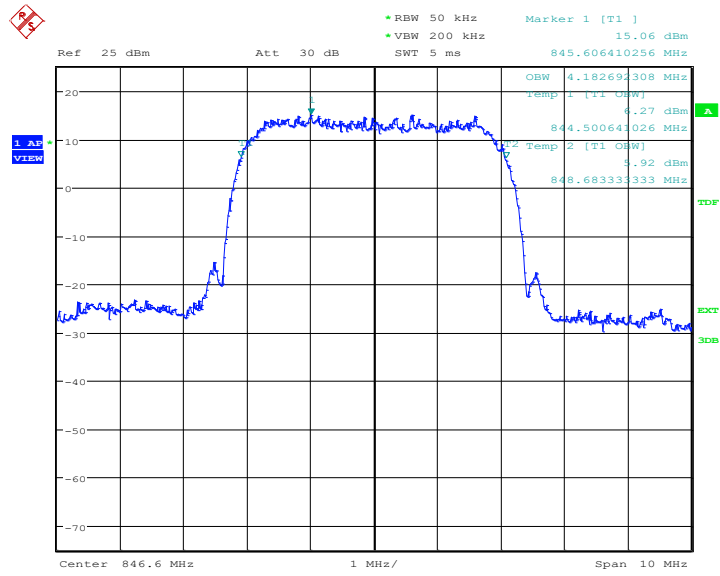

Date: 15.APR.2021 18:04:48




**WCDMA Band IV(99% BW)-QPSK**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1712.4	4.18
1740.0	4.18
1752.6	4.18


**WCDMA Band IV**

**Channel 1312-Occupied Bandwidth (99% BW)-QPSK**

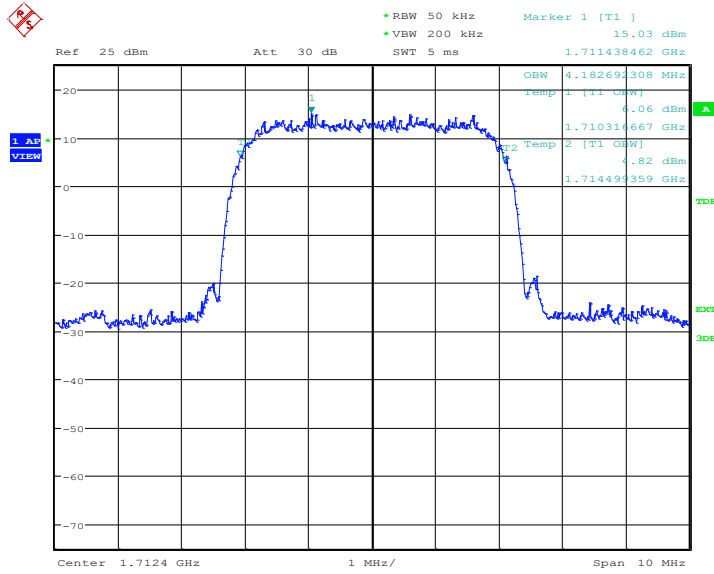

Date: 15.APR.2021 16:55:50


**Channel 1450-Occupied Bandwidth (99% BW)-QPSK**

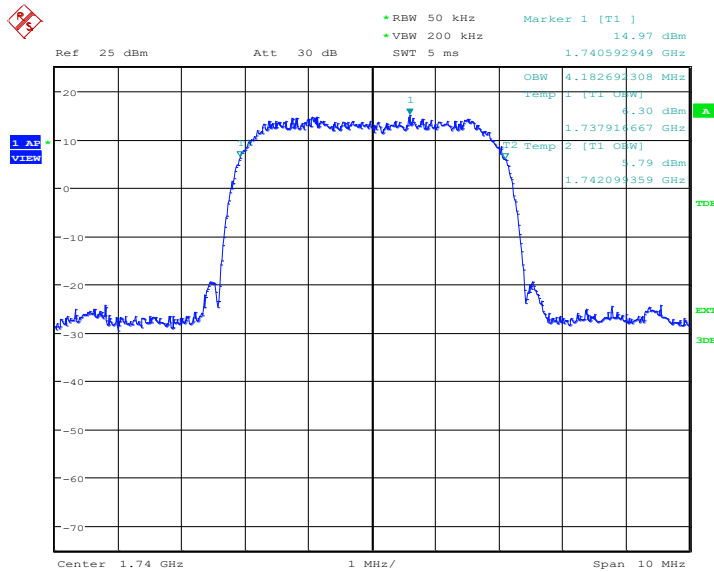

Date: 15.APR.2021 16:56:23



Channel 1513-Occupied Bandwidth (99% BW)-QPSK

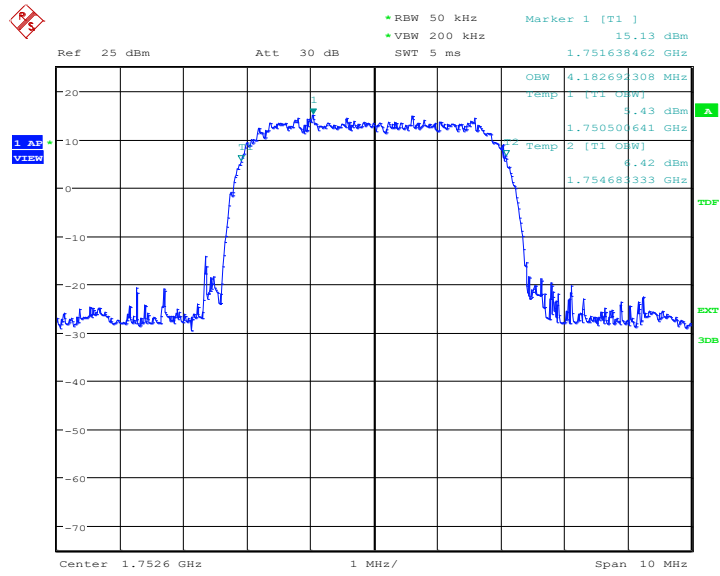

Date: 15.APR.2021 16:56:57




**WCDMA Band IV(99% BW)-16QAM**

Frequency(MHz)	Occupied Bandwidth (99% BW)(MHz)
1712.4	4.17
1740.0	4.17
1752.6	4.20


**WCDMA Band IV**

**Channel 1312-Occupied Bandwidth (99% BW)-16QAM**

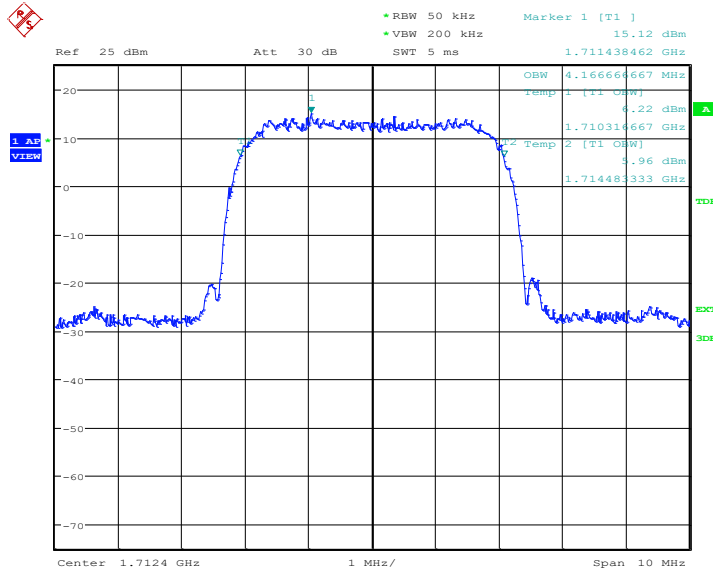

Date: 15.APR.2021 17:55:44


**Channel 1450-Occupied Bandwidth (99% BW)-16QAM**

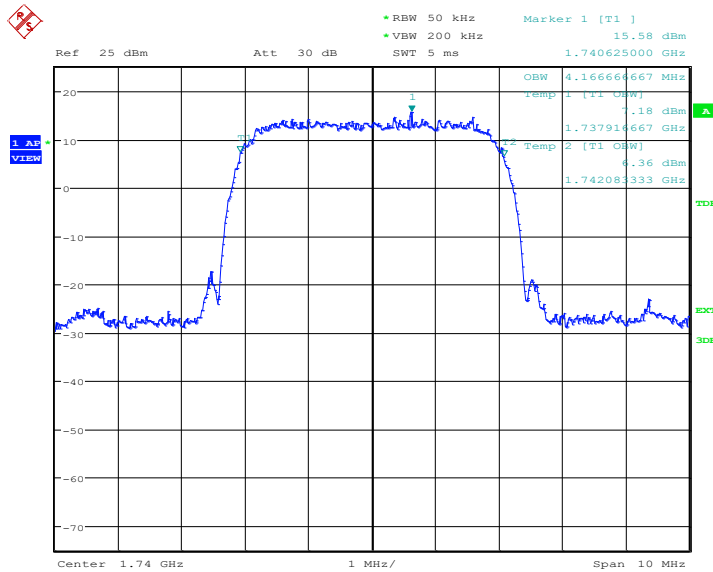

Date: 15.APR.2021 17:56:18



Channel 1513-Occupied Bandwidth (99% BW)-16QAM

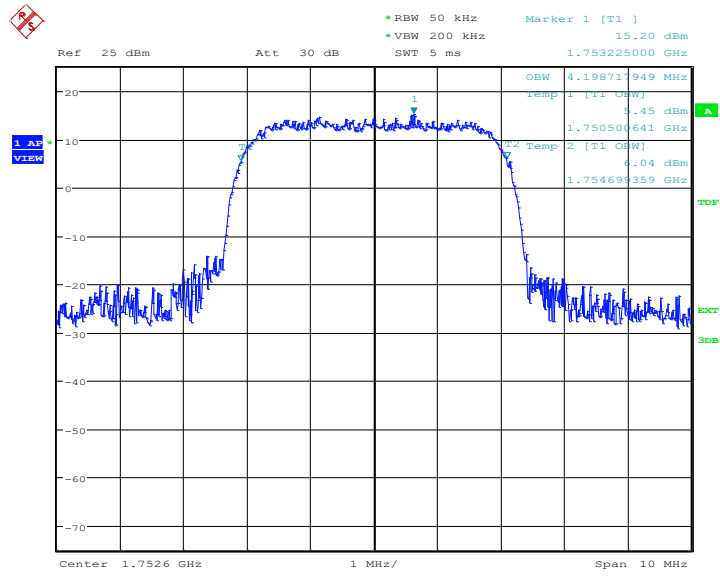

Date: 15.APR.2021 17:56:51

Note: Expanded measurement uncertainty is  $U = 3428\text{Hz}$ ,  $k = 2$



### A.5 EMISSION BANDWIDTH

#### Reference

FCC: CFR Part 2.1049, 22.917, 24.238, 27.53(g).

#### A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### WCDMA Band II (-26dBc BW)-QPSK

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
1852.4	4.74
1880.0	4.73
1907.6	4.74

#### WCDMA Band II


#### Channel 9262-Emission Bandwidth (-26dBc BW)-QPSK

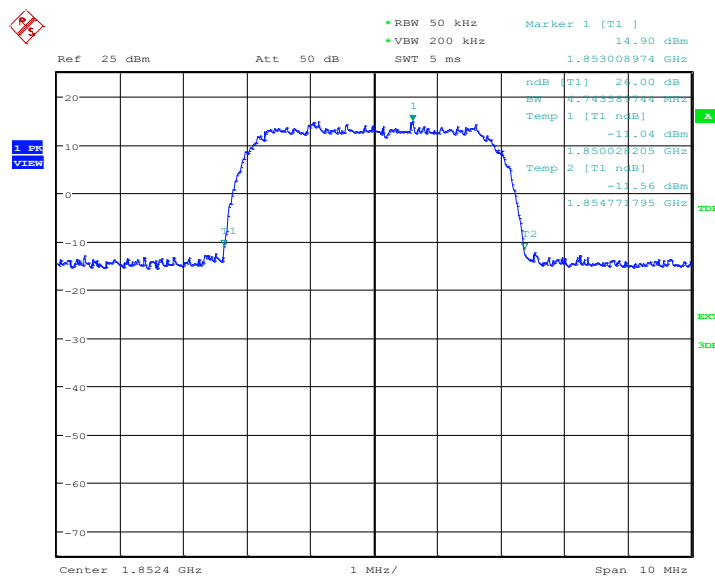

Date: 15.APR.2021 16:39:38




### Channel 9400-Emission Bandwidth (-26dBc BW)-QPSK

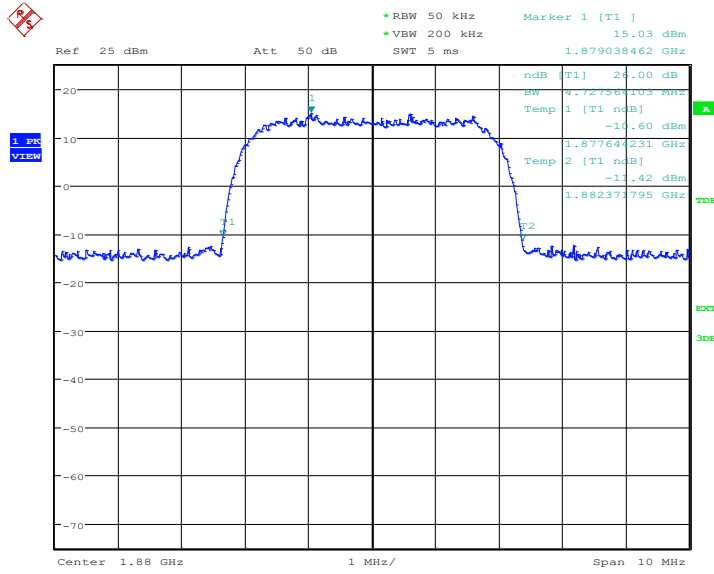

Date: 15.APR.2021 16:40:47

### Channel 9538-Emission Bandwidth (-26dBc BW)-QPSK

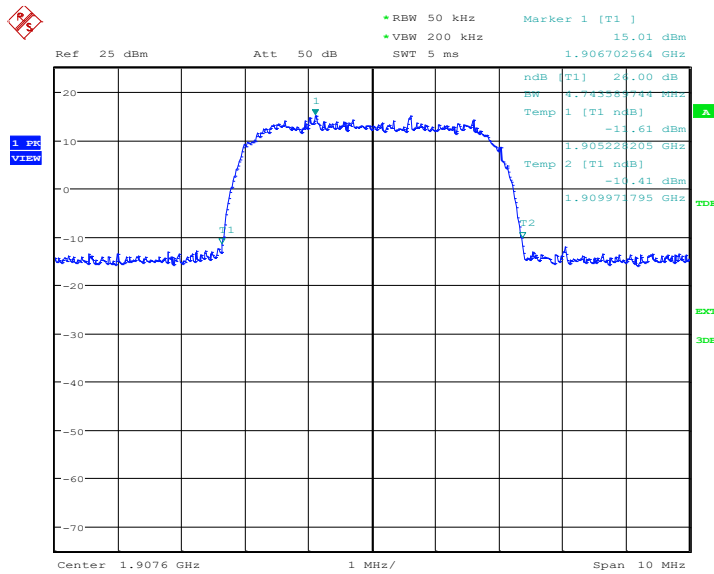

Date: 15.APR.2021 16:41:56






**WCDMA Band II (-26dBc BW)-16QAM**

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
1852.4	4.74
1880.0	4.73
1907.6	4.73


**WCDMA Band II**

**Channel 9262-Emission Bandwidth (-26dBc BW)-16QAM**

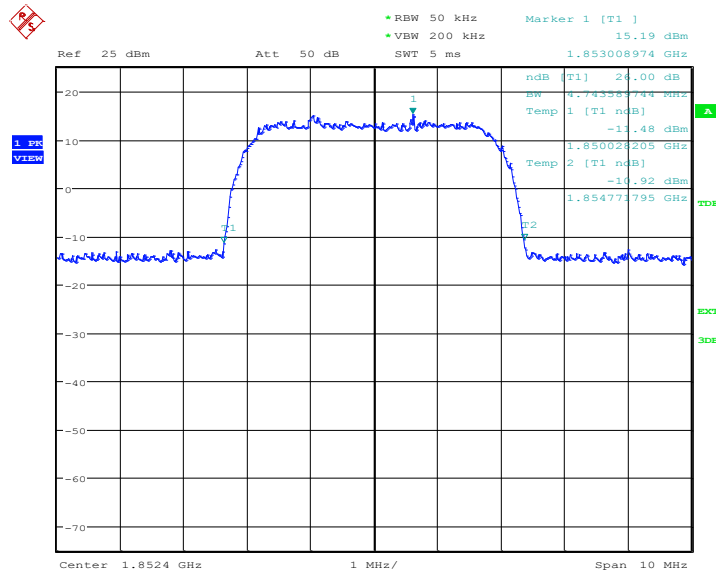

Date: 15.APR.2021 17:46:32


**Channel 9400-Emission Bandwidth (-26dBc BW)-16QAM**

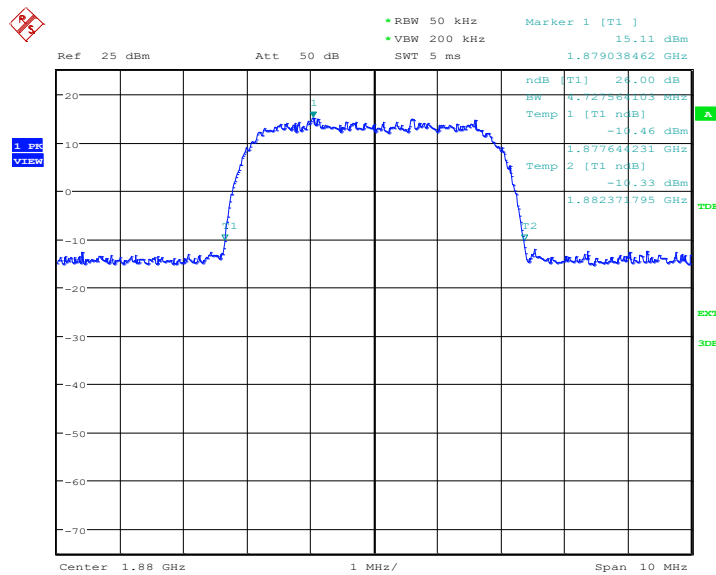

Date: 15.APR.2021 17:47:41



Channel 9538-Emission Bandwidth (-26dBc BW)-16QAM

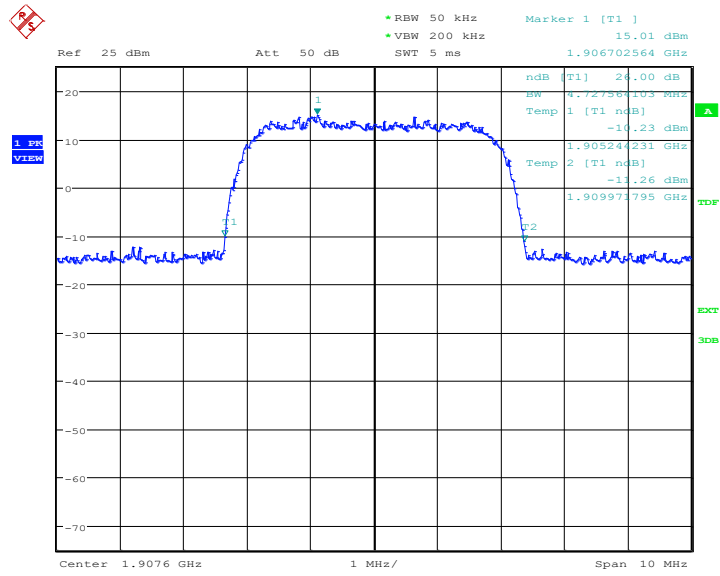

Date: 15.APR.2021 17:48:50




**WCDMA Band V(-26dBc BW)-QPSK**

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
826.40	4.71
836.60	4.71
846.60	4.70


**WCDMA Band V**

**Channel 4132-Emission Bandwidth (-26dBc BW)-QPSK**

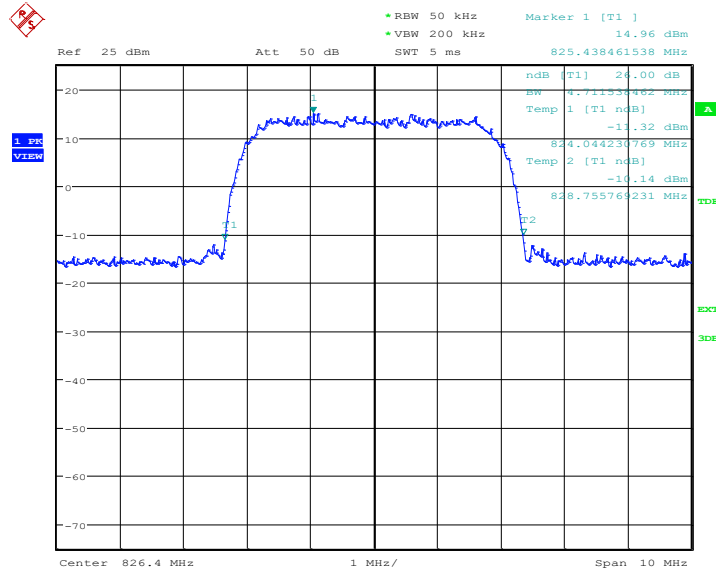

Date: 15.APR.2021 17:24:19


**Channel 4183-Emission Bandwidth (-26dBc BW)-QPSK**

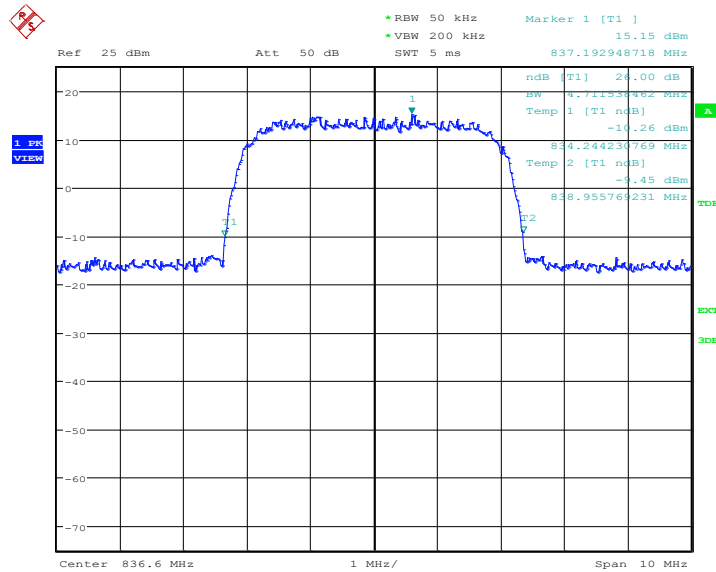

Date: 15.APR.2021 17:25:28



Channel 4233-Emission Bandwidth (-26dBc BW)-QPSK

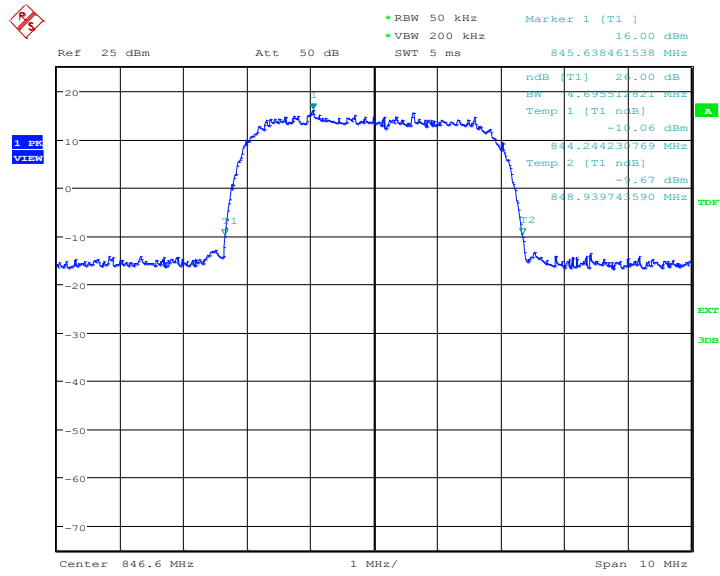

Date: 15.APR.2021 17:26:37




**WCDMA Band V(-26dBc BW)-16QAM**

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
826.40	4.71
836.60	4.71
846.60	4.71


**WCDMA Band V**

**Channel 4132-Emission Bandwidth (-26dBc BW)-16QAM**

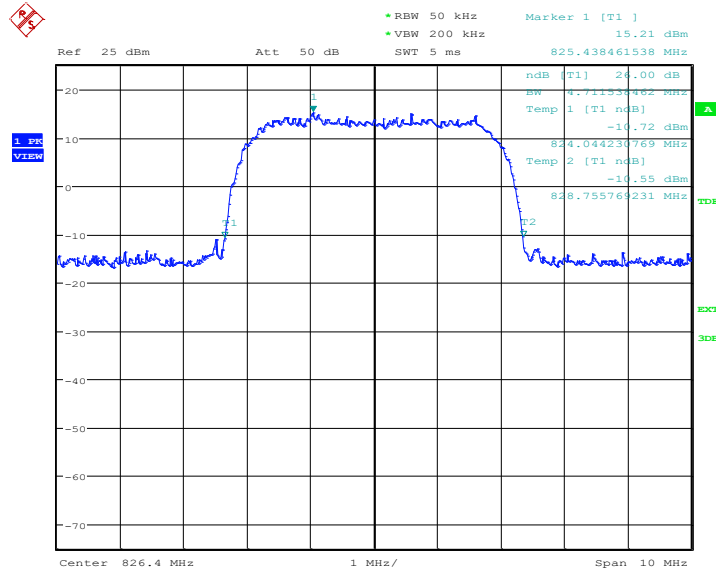

Date: 15.APR.2021 18:05:58


**Channel 4183-Emission Bandwidth (-26dBc BW)-16QAM**

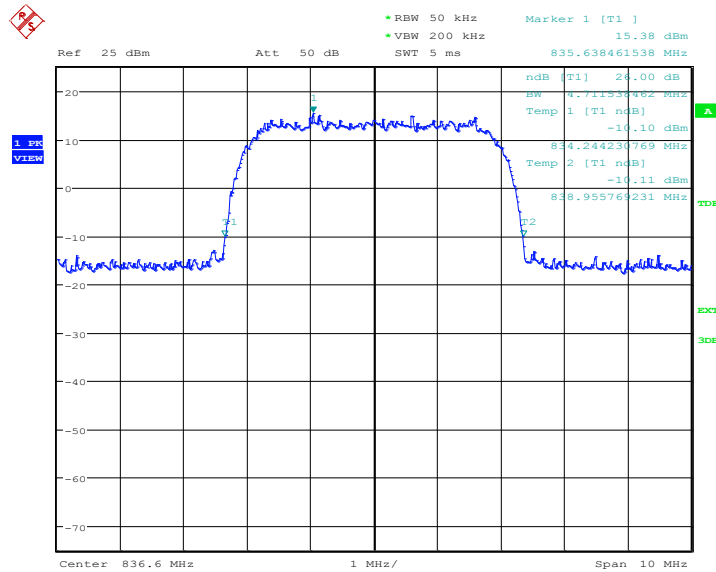

Date: 15.APR.2021 18:07:07



Channel 4233-Emission Bandwidth (-26dBc BW)-16QAM

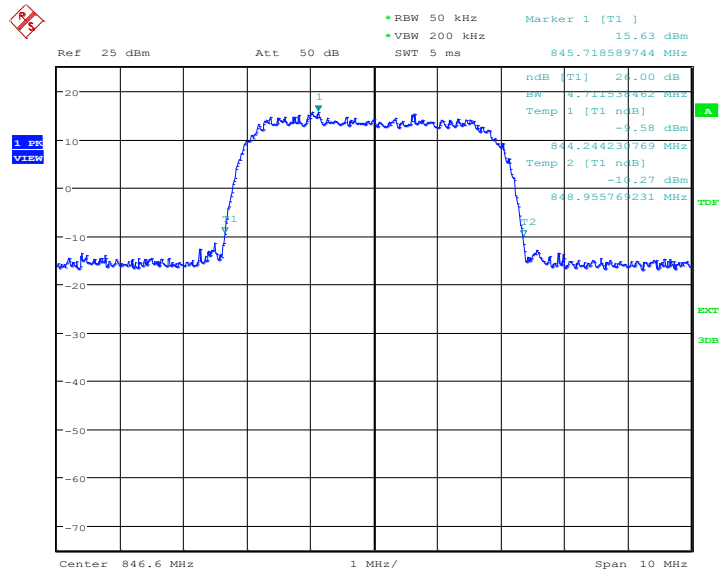

Date: 15.APR.2021 18:08:16




**WCDMA Band IV(-26dBc BW)-QPSK**

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
1712.4	4.73
1740.0	4.73
1752.6	4.74


**WCDMA Band IV**

**Channel 1312-Emission Bandwidth (-26dBc BW)-QPSK**

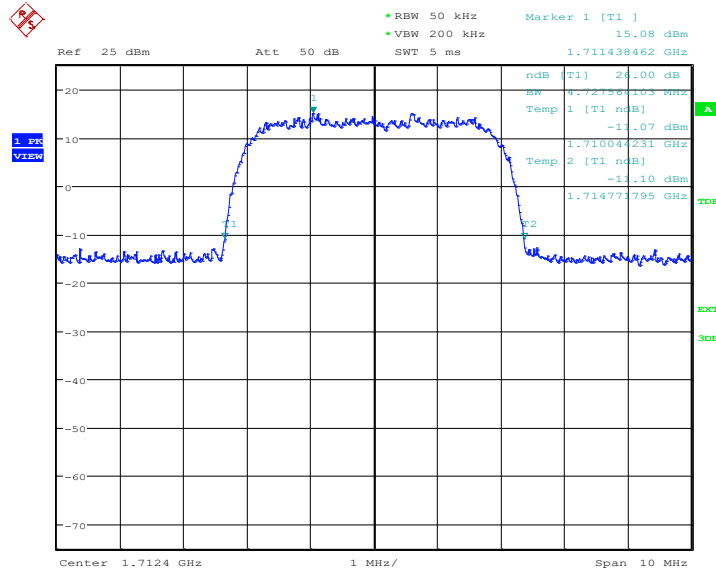

Date: 15.APR.2021 16:58:07


**Channel 1450-Emission Bandwidth (-26dBc BW)-QPSK**

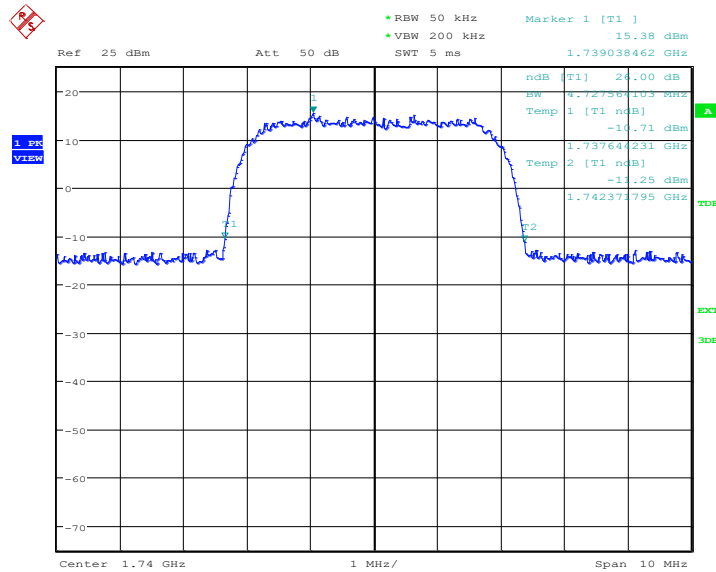

Date: 15.APR.2021 16:59:16



### Channel 1513-Emission Bandwidth (-26dBc BW)-QPSK

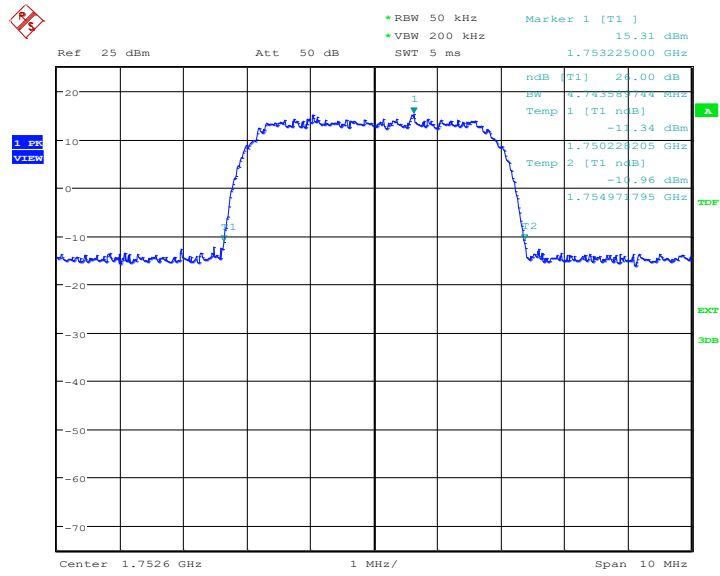

Date: 15.APR.2021 17:00:25






**WCDMA Band IV(-26dBc BW)-16QAM**

Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)
1712.4	4.71
1740.0	4.73
1752.6	4.73


**WCDMA Band IV**

**Channel 1312-Emission Bandwidth (-26dBc BW)-16QAM**

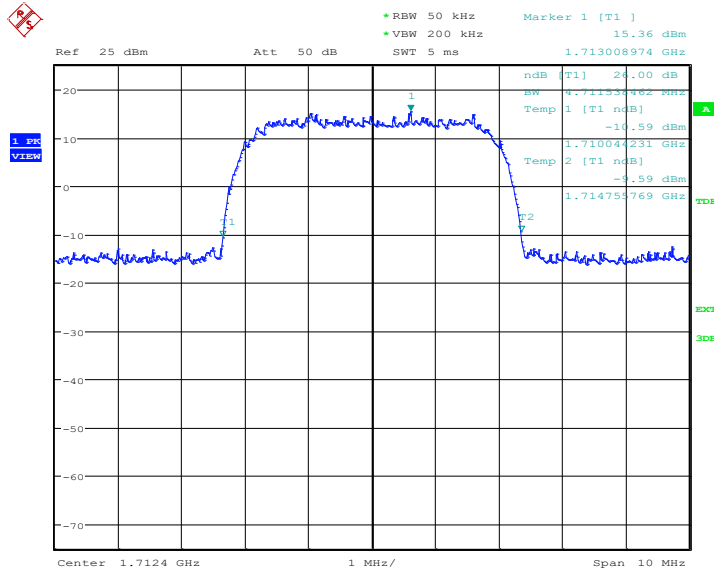

Date: 15.APR.2021 17:58:01


**Channel 1450-Emission Bandwidth (-26dBc BW)-16QAM**

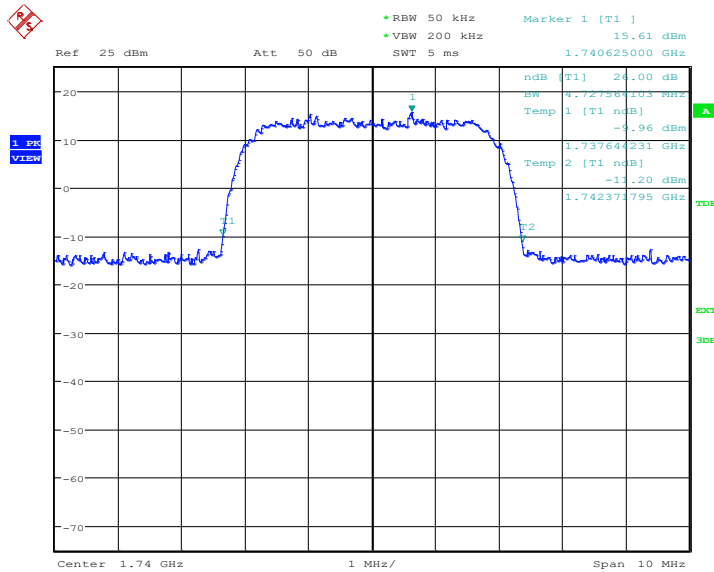

Date: 15.APR.2021 17:59:10



Channel 1513-Emission Bandwidth (-26dBc BW)-16QAM

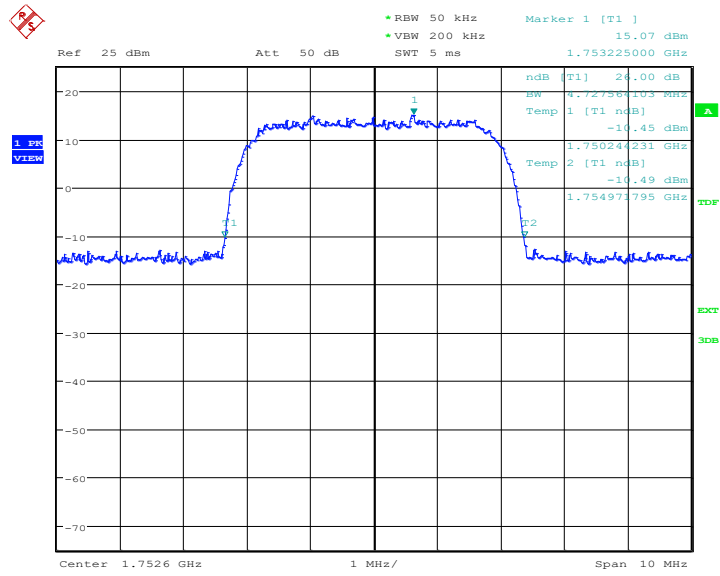

Date: 15.APR.2021 18:00:19

Note: Expanded measurement uncertainty is  $U = 3428\text{Hz}$ ,  $k = 2$



## **A.6 BAND EDGE COMPLIANCE**

### **Reference**

FCC: CFR Part 2.1051, 22.917, 24.238, 27.53(h).

### **A.6.1 Measurement limit**


On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. A relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

### **A.6.2 Measurement result**

**Only worst case result is given below**

#### **WCDMA BandII**


#### **LOW BAND EDGE BLOCK-A-Channel 9262**

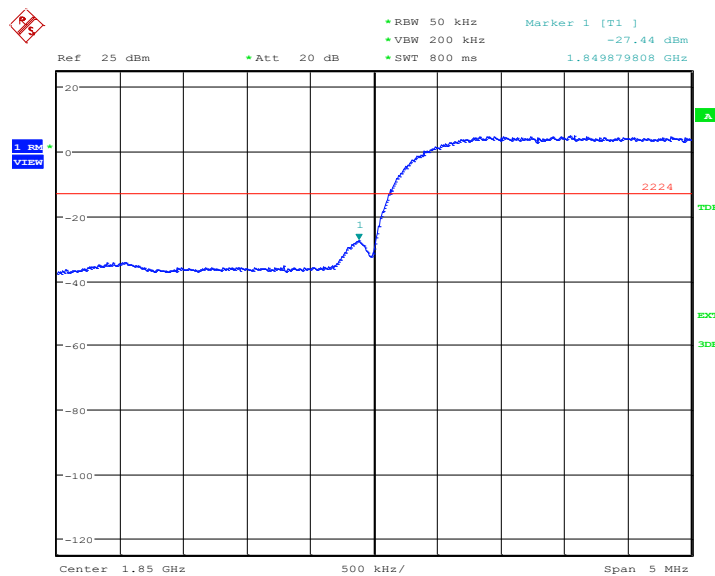

Date: 15.APR.2021 16:42:06




HIGH BAND EDGE BLOCK-C-Channel 9538

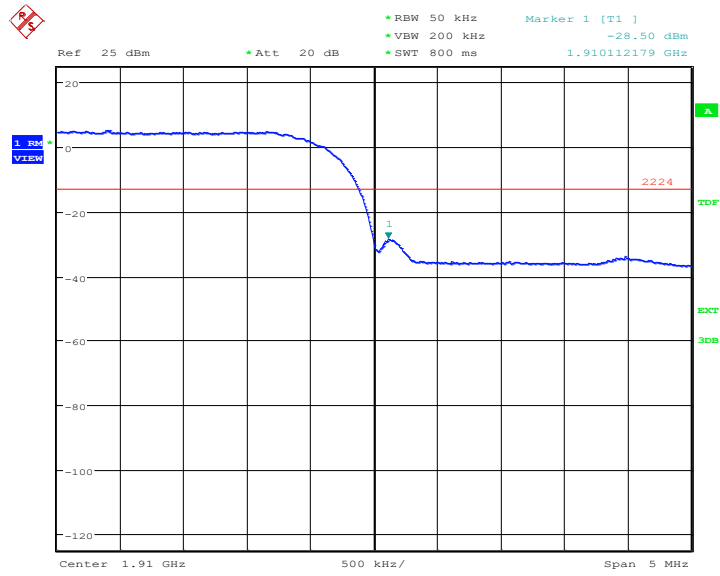

Date: 15.APR.2021 16:44:10




### WCDMA Band V LOW BAND EDGE BLOCK-A-Channel 4132

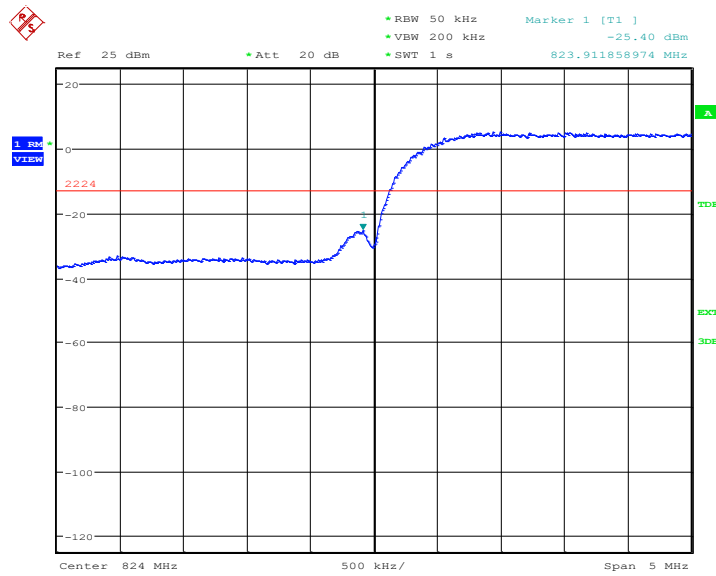

Date: 15.APR.2021 17:26:46


### HIGH BAND EDGE BLOCK-C (WCDMA Band V) –Channel 4233

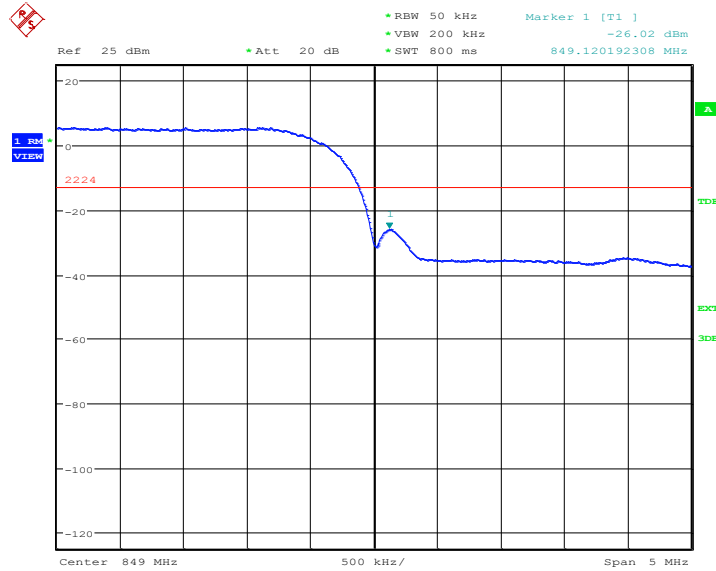

Date: 15.APR.2021 17:28:51




### WCDMA Band IV LOW BAND EDGE BLOCK-A -Channel 1312

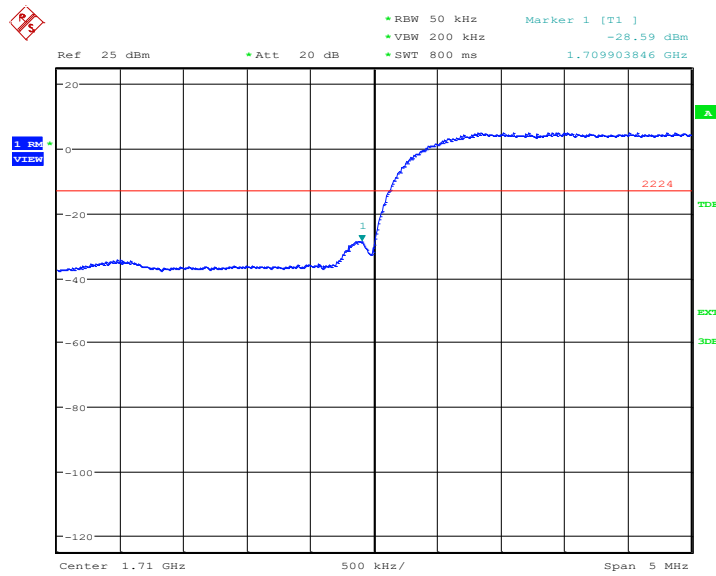

Date: 15.APR.2021 17:00:35

### HIGH BAND EDGE BLOCK-C-Channel 1513

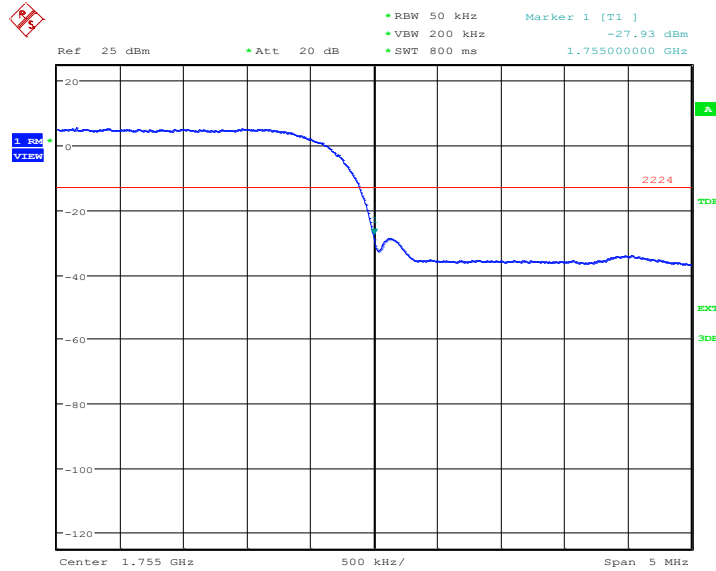

Date: 15.APR.2021 17:02:39

Note: Expanded measurement uncertainty is  $U = 0.49 \text{ dB}(100\text{KHz}-2\text{GHz})/1.21 \text{ dB} (2\text{GHz}-26.5\text{GHz}), k = 1.96$

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **Reference**

FCC: CFR Part 2.1051, 22.917, 24.238, 27.53(h).

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1051 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **WCDMA Band II Transmitter**

Channel	Frequency (MHz)
9262	1852.4
9400	1880.0
9538	1907.6

#### **WCDMA Band V Transmitter**

Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

#### **WCDMA Band IV Transmitter**

Channel	Frequency (MHz)
1312	1712.4
1450	1740.0
1513	1752.6

### **A.7.2 Measurement Limit**

Part 24.238, Part 22.917 and Part 27.53(h) specify that the power of any emission outside of the authorized

operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


**A.7.3 Measurement result**

Only worst case result is given below

**WCDMA Band II**

**Channel 9262: 30MHz –1GHz**

Spurious emission limit –13dBm.

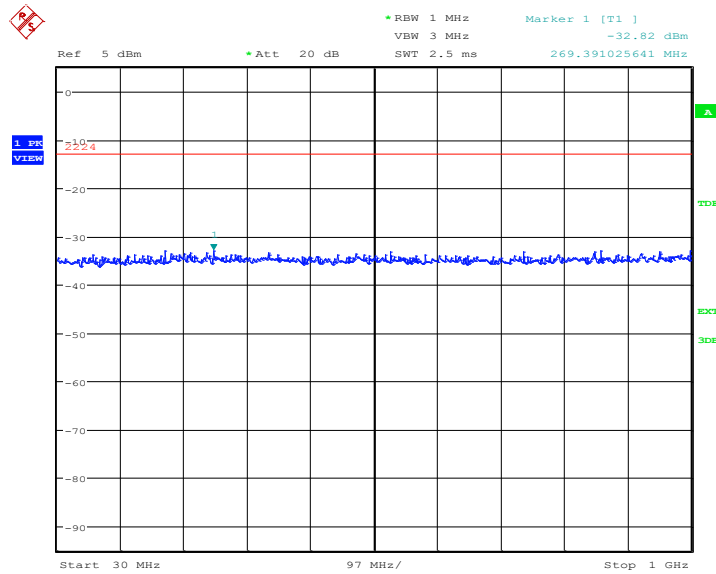


Date: 15.APR.2021 16:45:02

**Channel 9262: 1GHz –2.5GHz**

Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

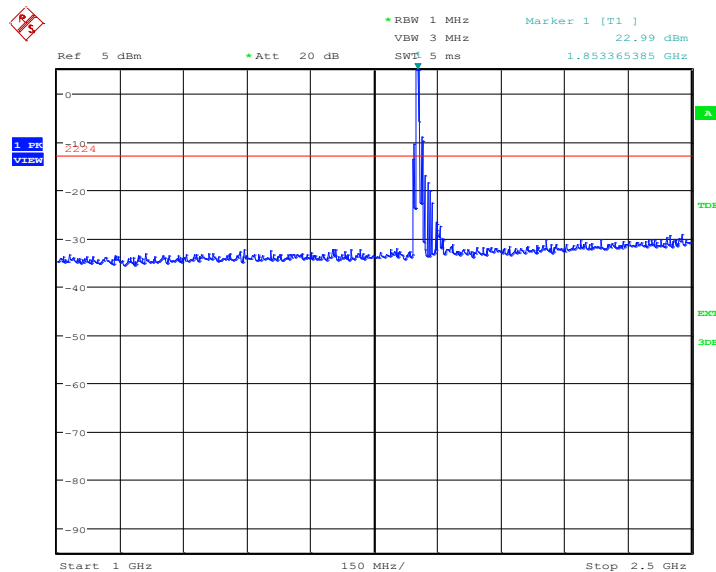


Date: 15.APR.2021 16:45:28






**Channel 9262: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

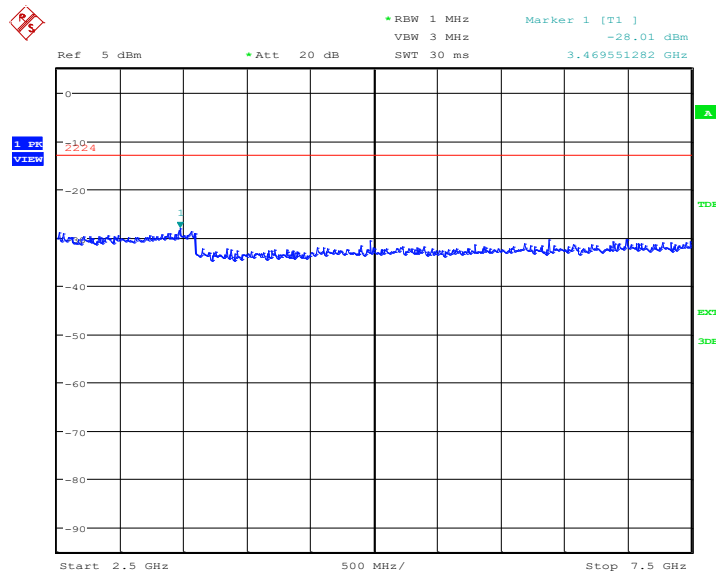

Date: 15.APR.2021 16:45:55


**Channel 9262: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

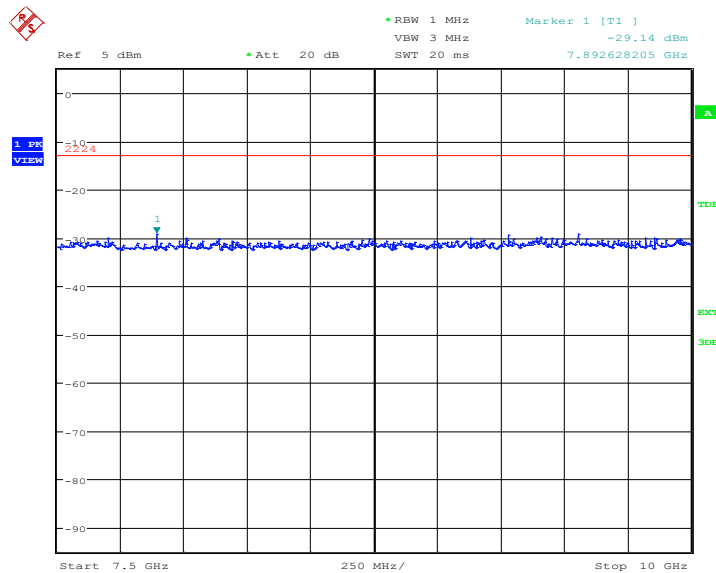

Date: 15.APR.2021 16:46:22




**Channel 9262: 10GHz –15GHz**  
Spurious emission limit –13dBm.

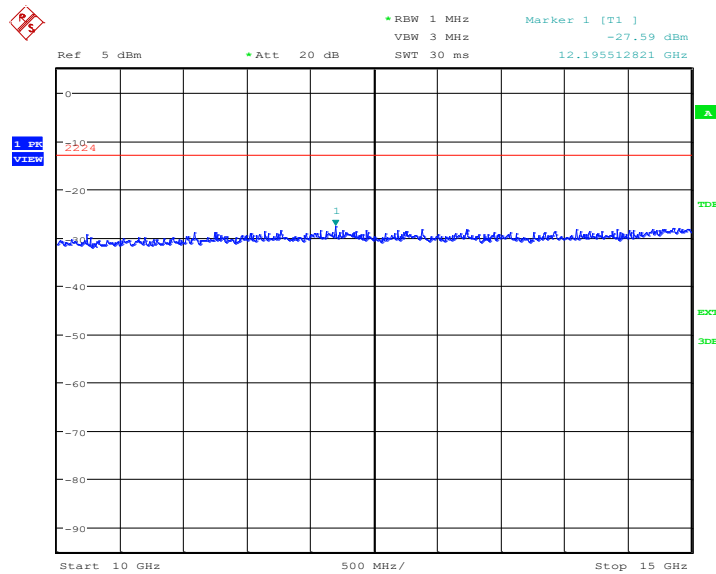

Date: 15.APR.2021 16:46:49


**Channel 9262: 15GHz –20GHz**  
Spurious emission limit –13dBm.

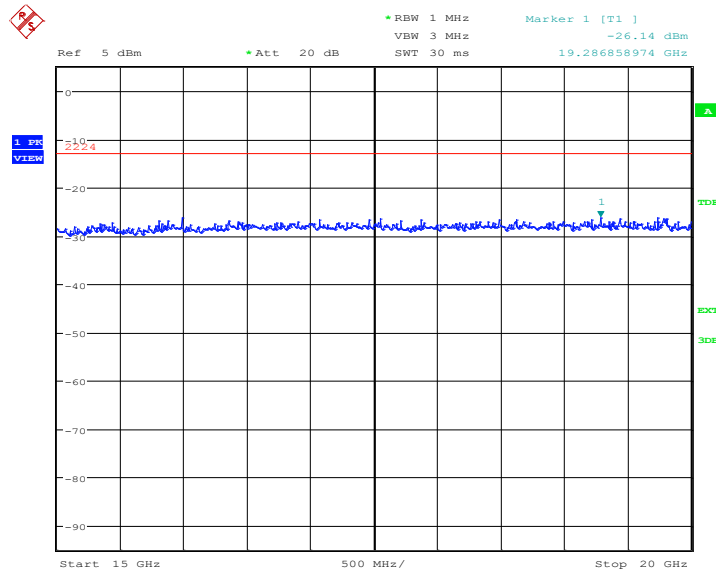

Date: 15.APR.2021 16:47:16




**Channel 9400: 30MHz –1GHz**  
Spurious emission limit –13dBm.

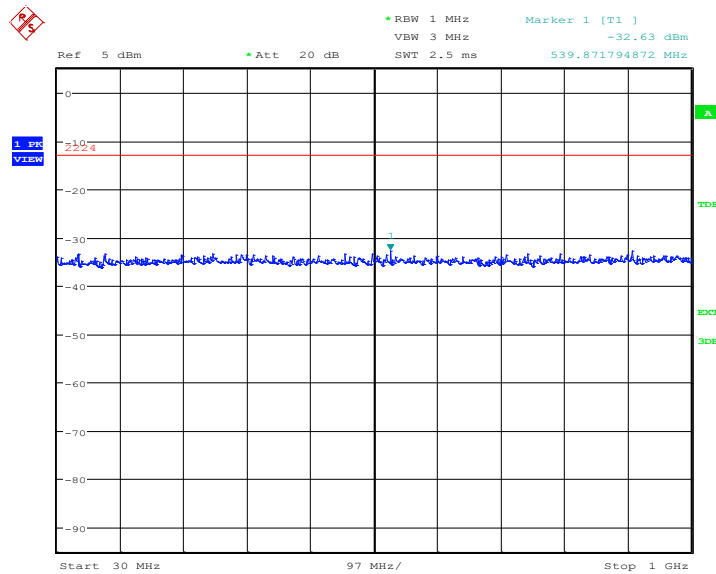

Date: 15.APR.2021 16:47:45

**Channel 9400: 1GHz –2.5GHz**  
Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

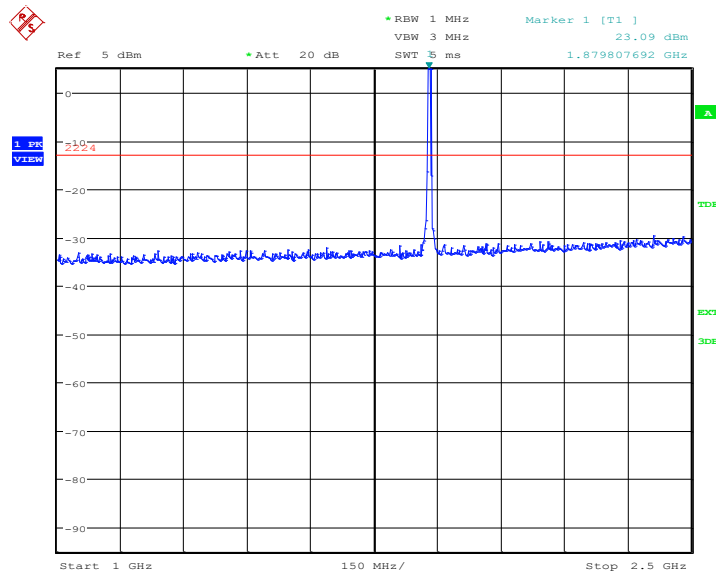

Date: 15.APR.2021 16:48:12




**Channel 9400: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

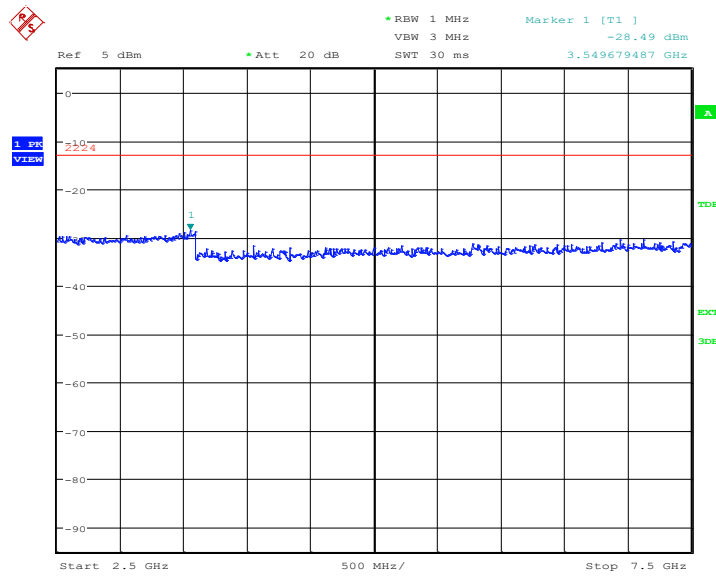

Date: 15.APR.2021 16:48:39


**Channel 9400: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

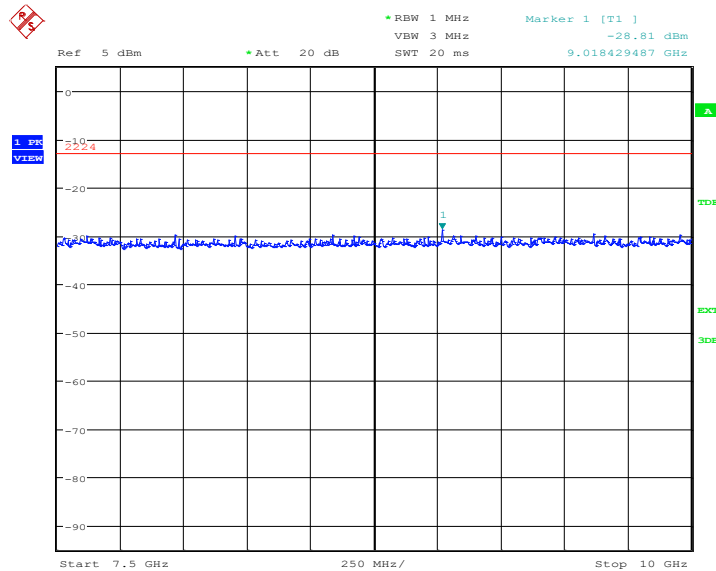

Date: 15.APR.2021 16:49:06




**Channel 9400: 10GHz –15GHz**  
Spurious emission limit –13dBm.

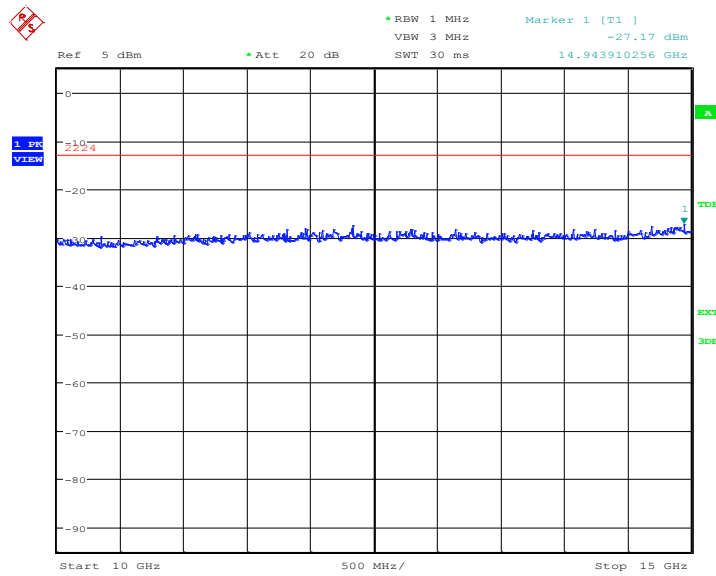

Date: 15.APR.2021 16:49:33


**Channel 9400: 15GHz –20GHz**  
Spurious emission limit –13dBm.

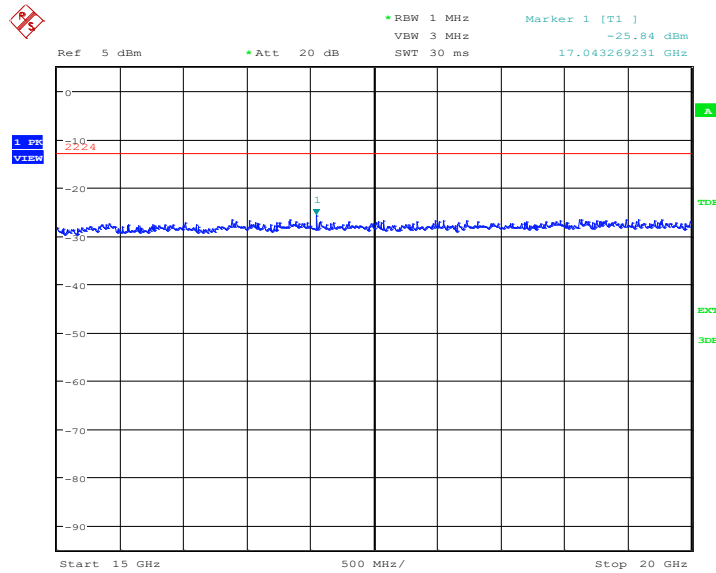

Date: 15.APR.2021 16:50:00




**Channel 9538: 30MHz –1GHz**  
Spurious emission limit –13dBm.

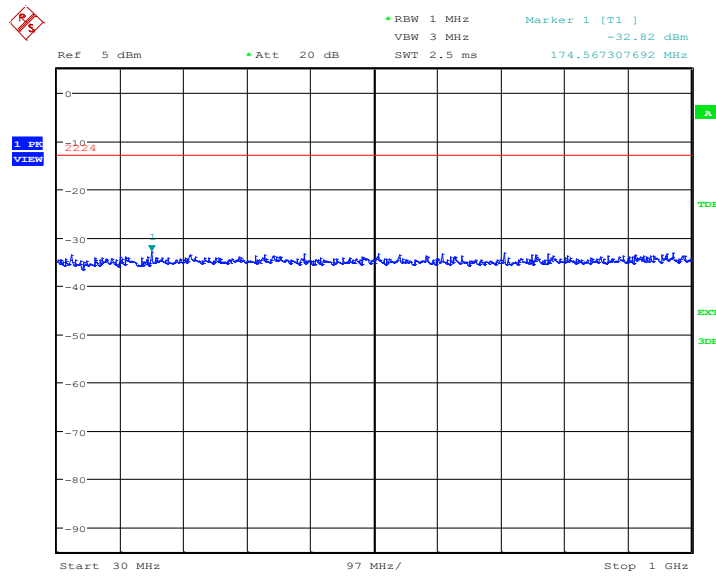

Date: 15.APR.2021 16:50:29

**Channel 9538: 1GHz –2.5GHz**  
Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

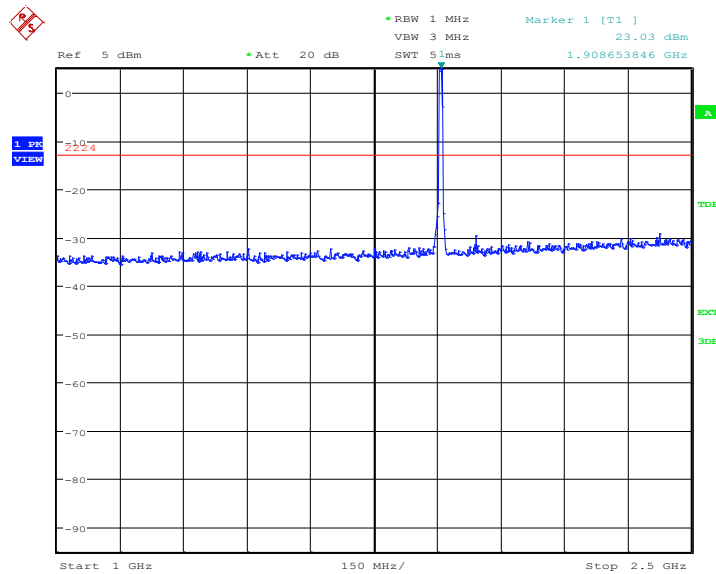

Date: 15.APR.2021 16:50:56




**Channel 9538: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

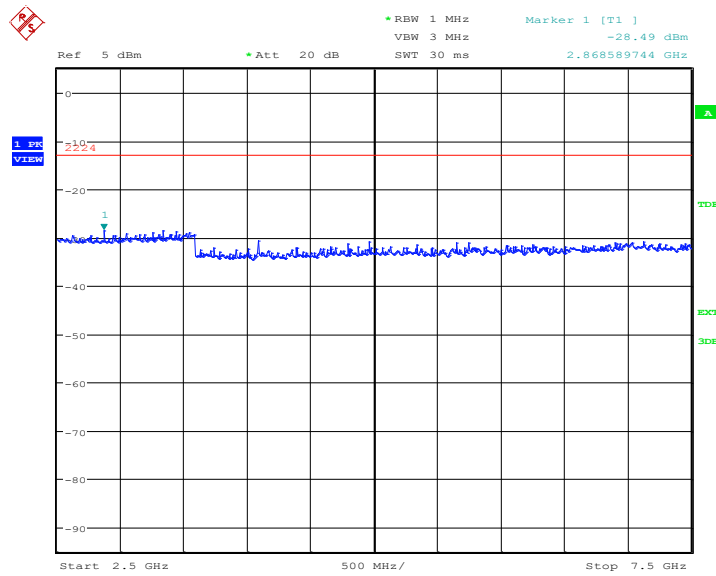

Date: 15.APR.2021 16:51:23


**Channel 9538: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

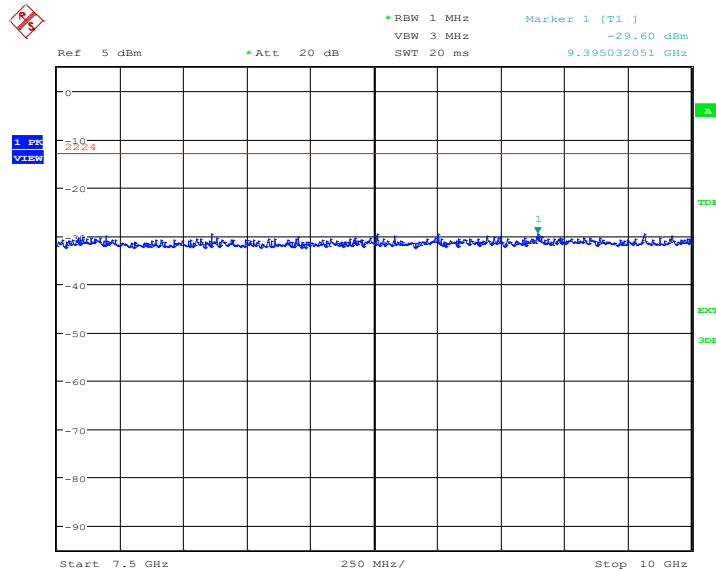

Date: 15.APR.2021 16:51:49




**Channel 9538: 10GHz –15GHz**  
Spurious emission limit –13dBm.

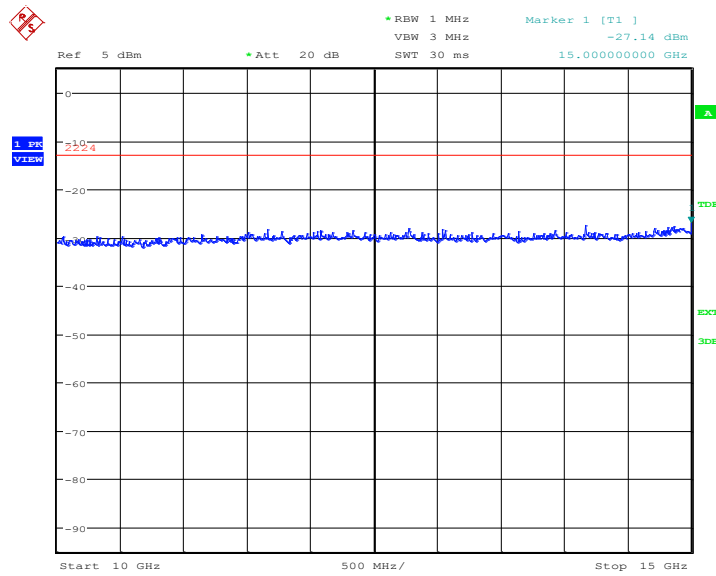

Date: 15.APR.2021 16:52:16

**Channel 9538: 15GHz –20GHz**  
Spurious emission limit –13dBm.

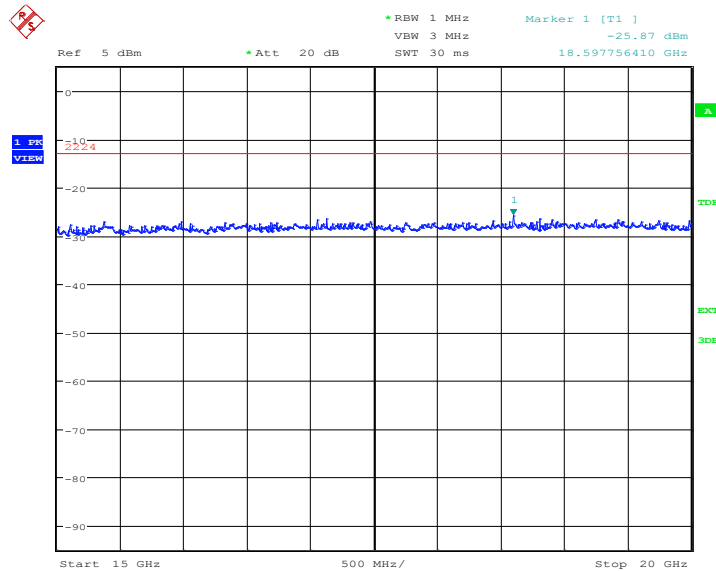

Date: 15.APR.2021 16:52:43






**WCDMA Band V**

**Channel 4132: 30MHz –1GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

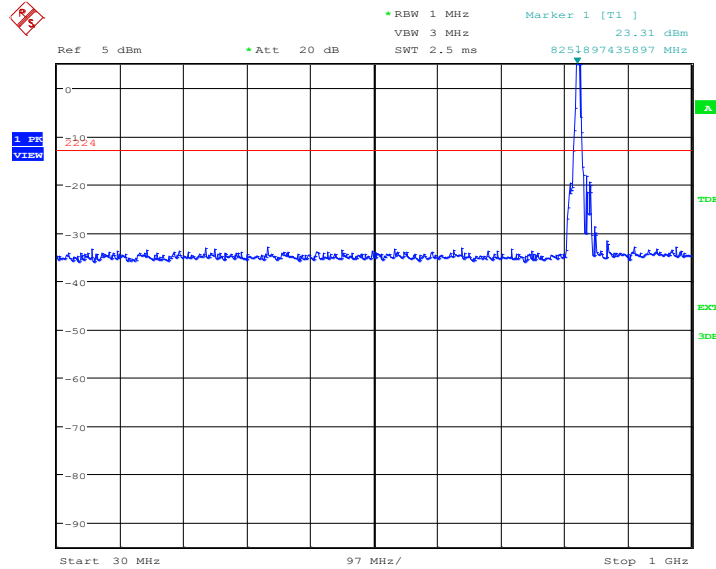

Date: 15.APR.2021 17:29:43

**Channel 4132: 1GHz – 2.5GHz**


Spurious emission limit –13dBm.

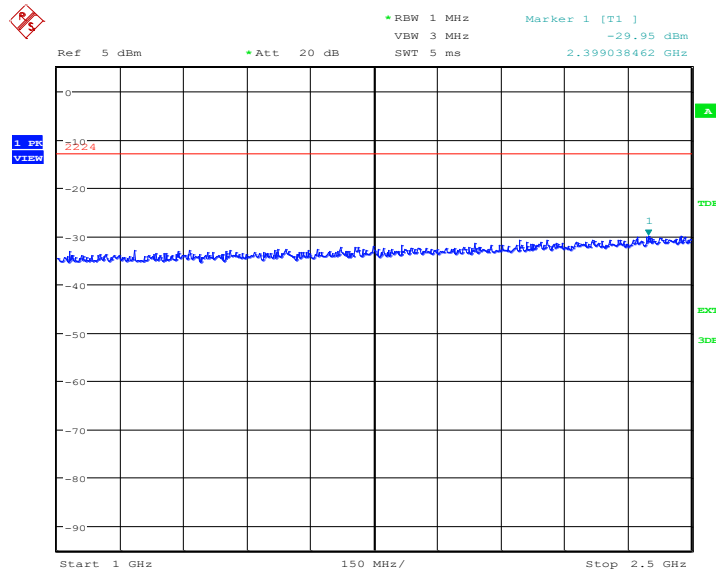

Date: 15.APR.2021 17:30:10




**Channel 4132: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

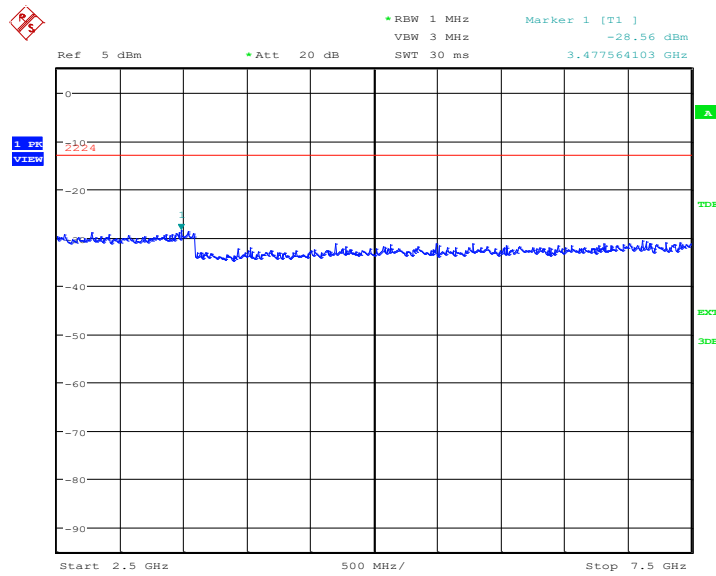

Date: 15.APR.2021 17:30:37

**Channel 4132: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

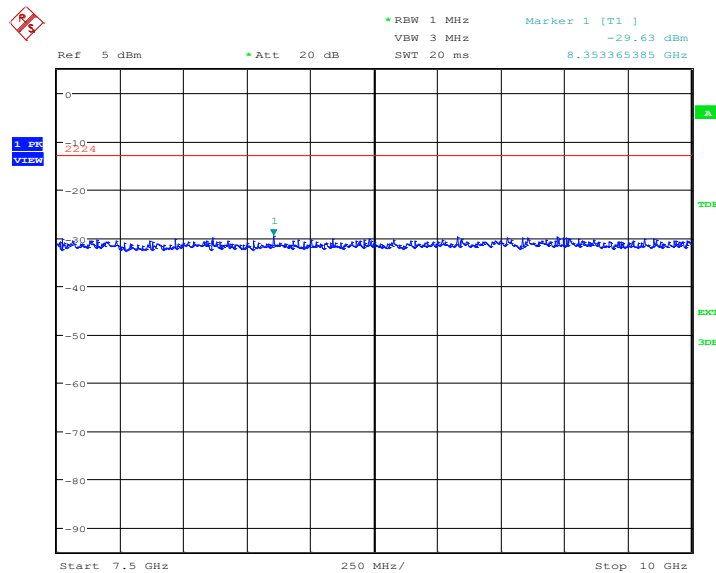


Date: 15.APR.2021 17:31:03



**Channel 4183: 30MHz –1GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

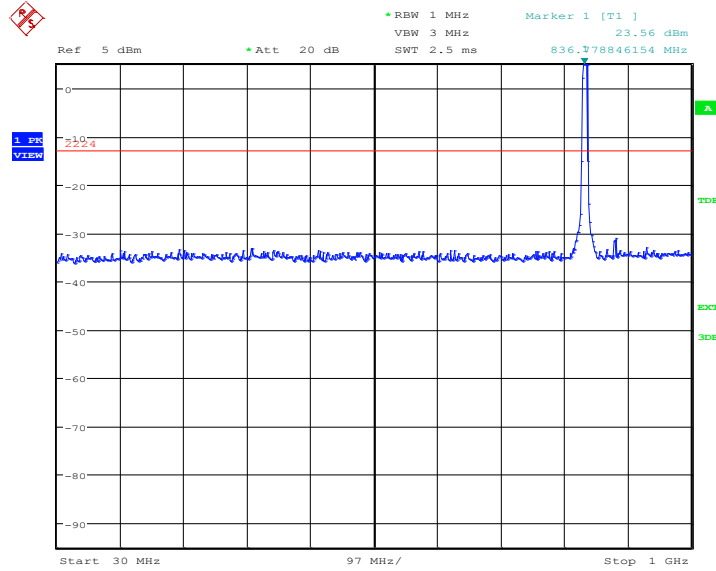

Date: 15.APR.2021 17:31:33

**Channel 4183: 1GHz – 2.5GHz**


Spurious emission limit –13dBm.

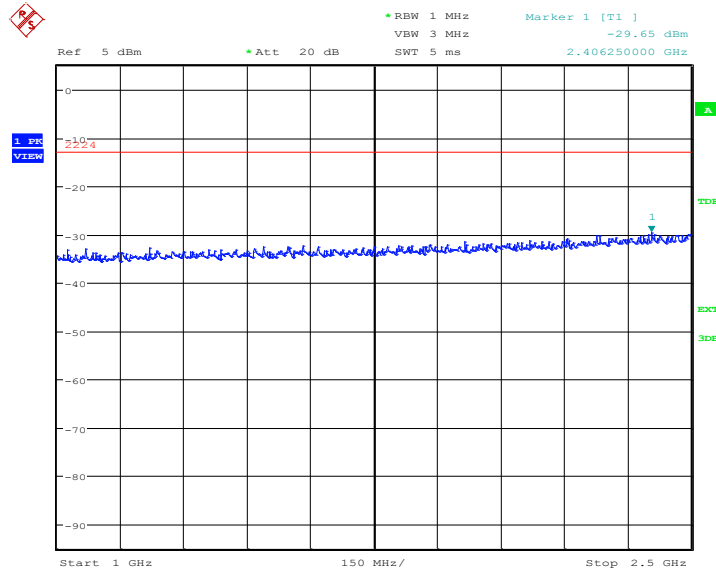

Date: 15.APR.2021 17:32:00




**Channel 4183: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

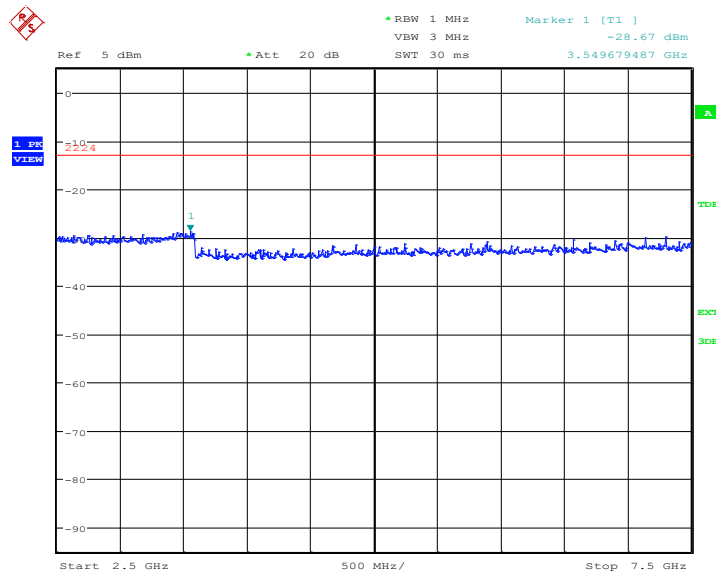

Date: 15.APR.2021 17:32:27

**Channel 4183: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

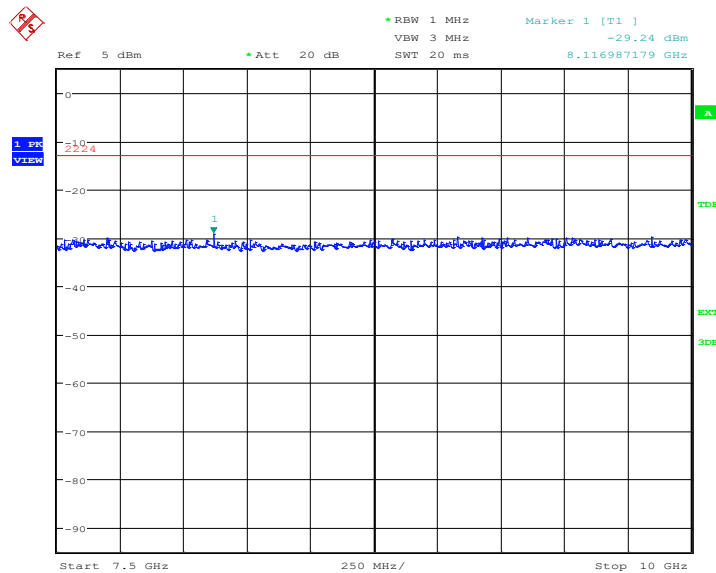


Date: 15.APR.2021 17:32:53



**Channel 4233: 30MHz –1GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

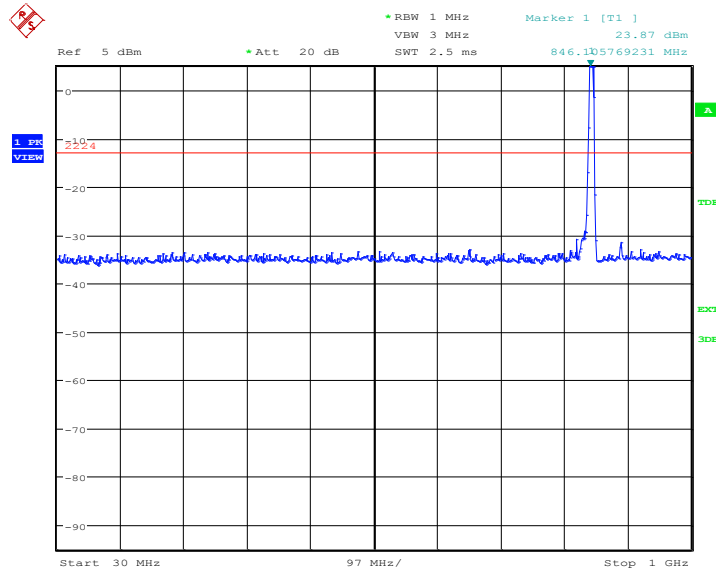

Date: 15.APR.2021 17:33:23

**Channel 4233: 1GHz – 2.5GHz**


Spurious emission limit –13dBm.

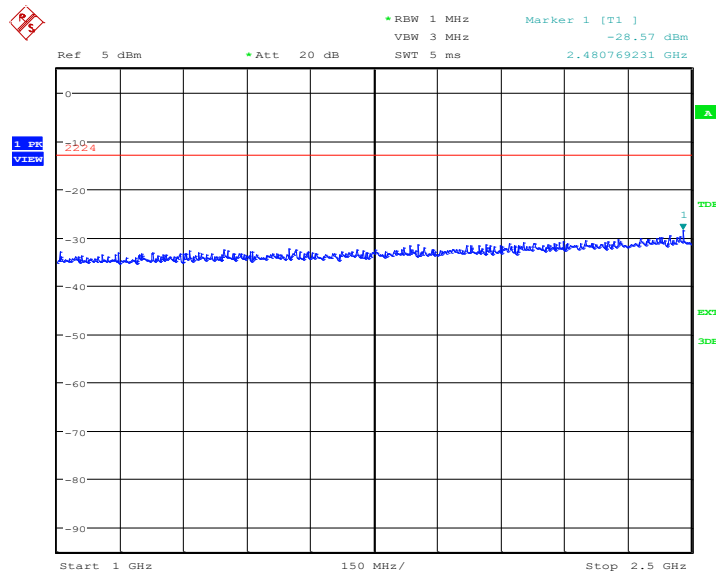

Date: 15.APR.2021 17:33:50




**Channel 4233: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

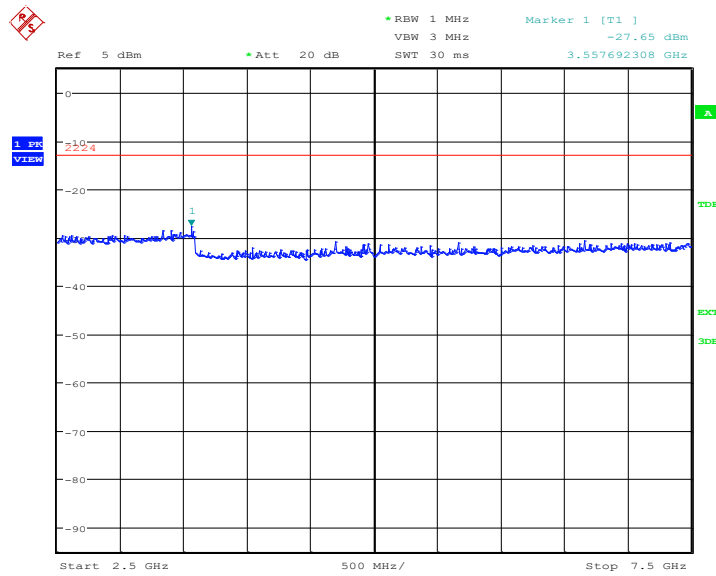

Date: 15.APR.2021 17:34:17

**Channel 4233: 7.5GHz – 10GHz**  
Spurious emission limit –13dBm.

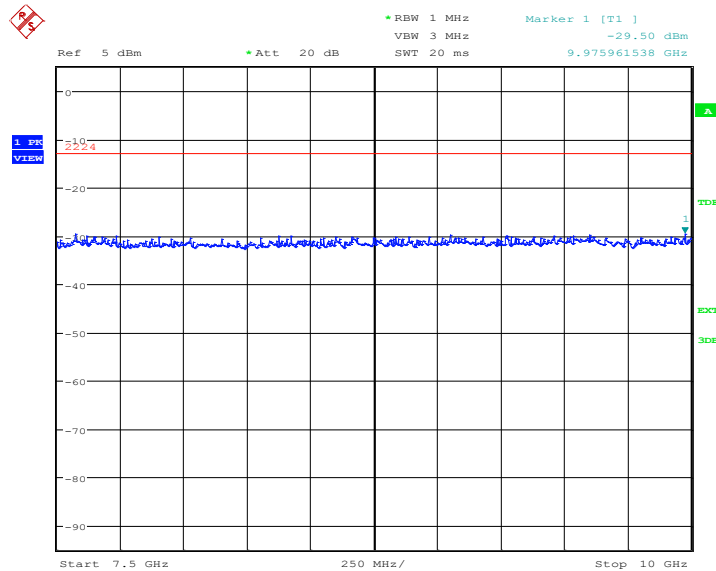


Date: 15.APR.2021 17:34:43



**WCDMA Band IV**

**Channel 1312: 30MHz –1GHz**

Spurious emission limit –13dBm.

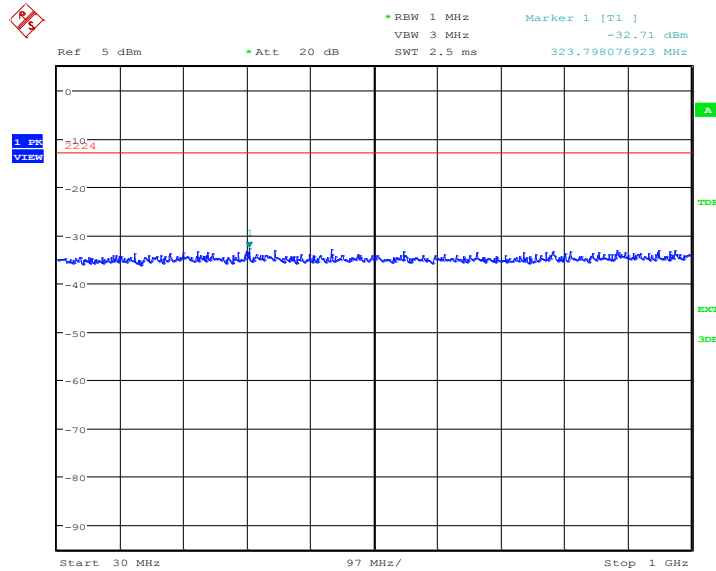


Date: 15.APR.2021 17:03:31

**Channel 1312: 1GHz –2.5GHz**

Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

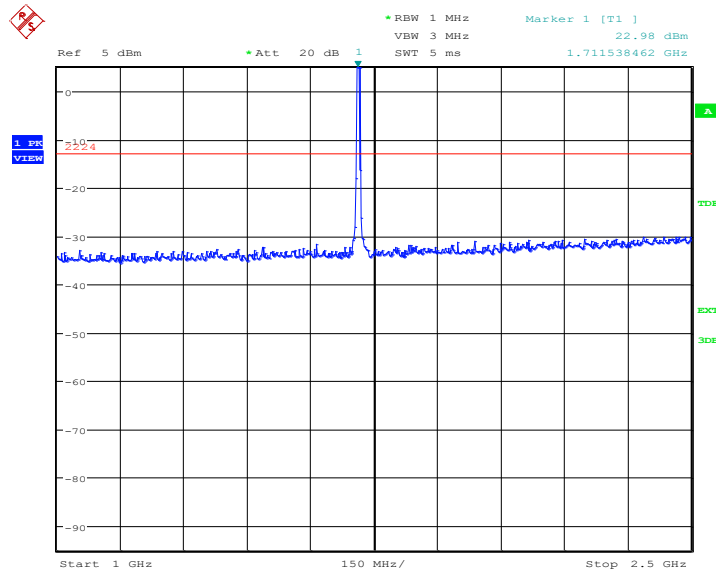

Date: 15.APR.2021 17:03:58




**Channel 1312: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

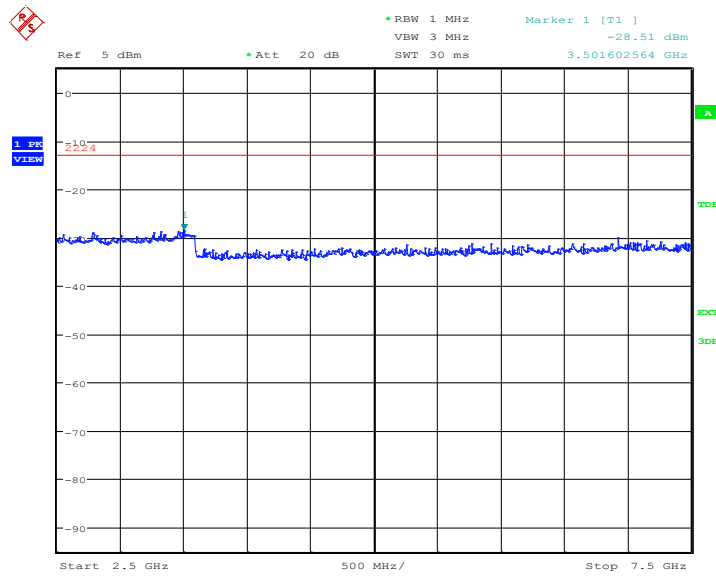

Date: 15.APR.2021 17:04:24

**Channel 1312: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

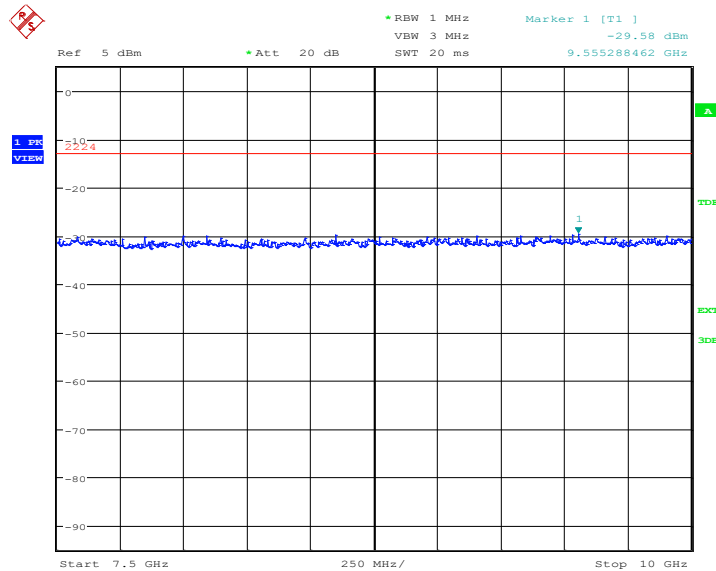


Date: 15.APR.2021 17:04:51






**Channel 1312: 10GHz –15GHz**  
Spurious emission limit –13dBm.

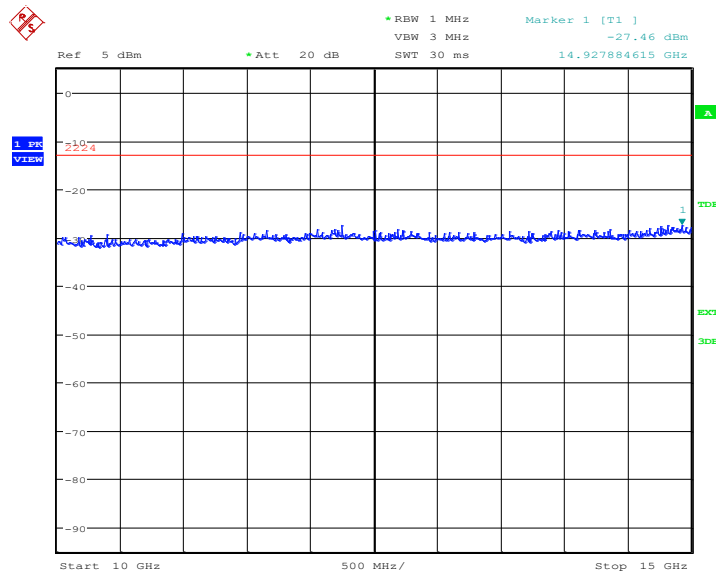

Date: 15.APR.2021 17:05:18


**Channel 1312: 15GHz –20GHz**  
Spurious emission limit –13dBm.

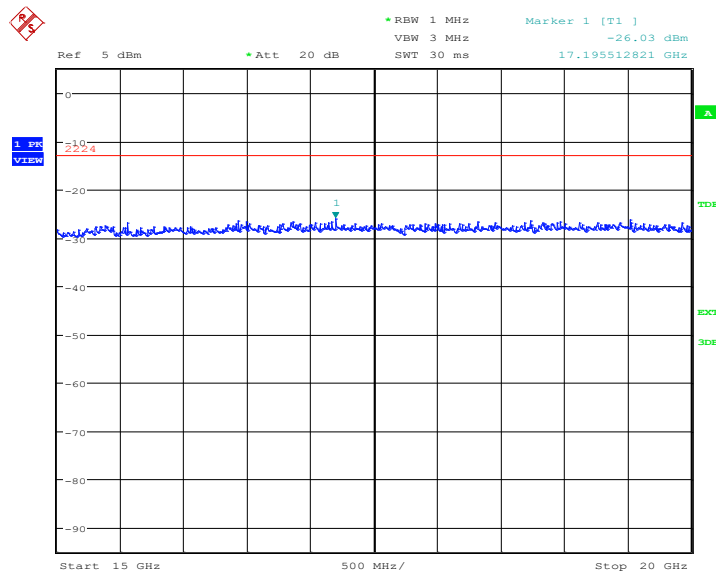

Date: 15.APR.2021 17:05:45




**Channel 1450: 30MHz –1GHz**  
Spurious emission limit –13dBm.

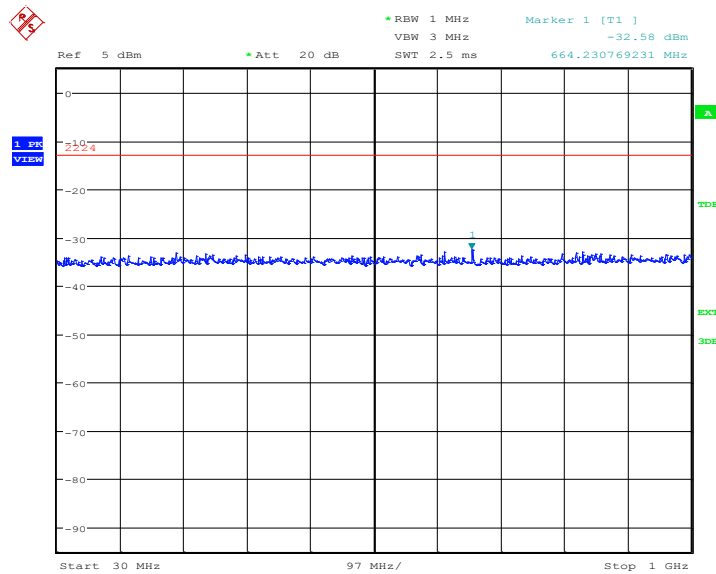

Date: 15.APR.2021 17:06:14

**Channel 1450: 1GHz –2.5GHz**  
Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

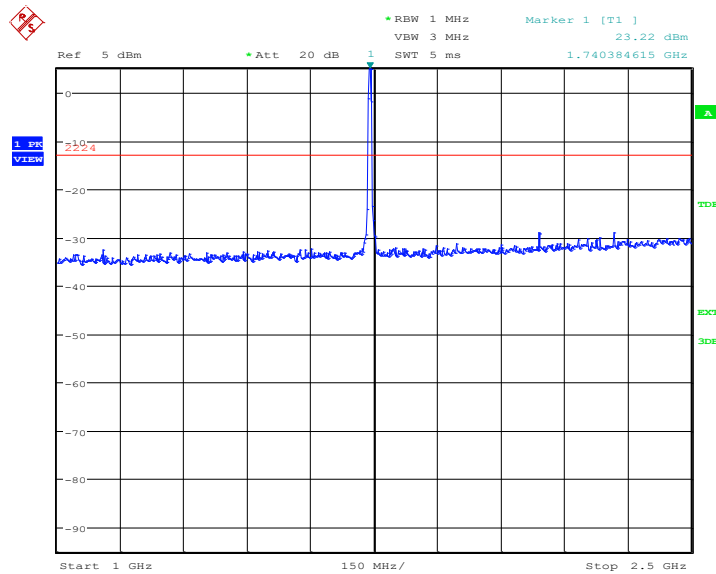

Date: 15.APR.2021 17:06:41




**Channel 1450: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

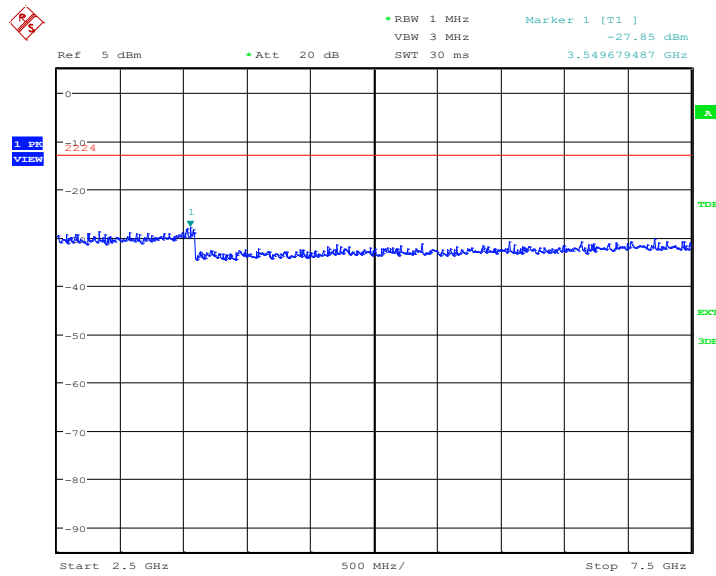

Date: 15.APR.2021 17:07:08


**Channel 1450: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

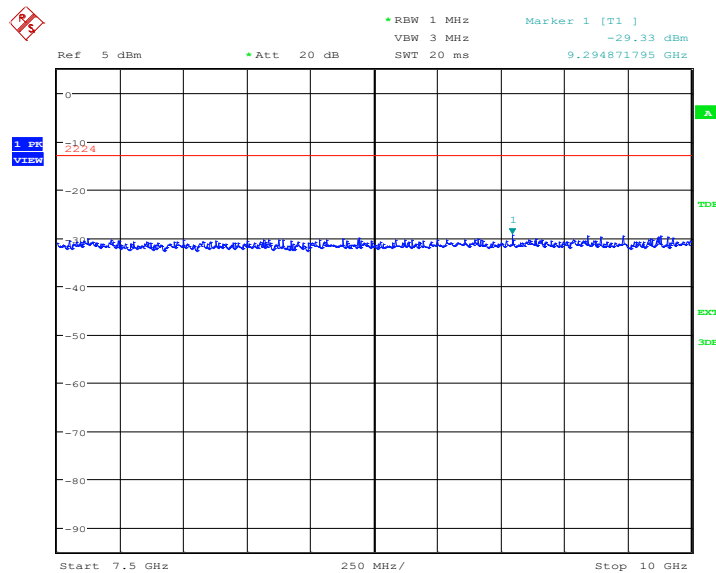

Date: 15.APR.2021 17:07:35




**Channel 1450: 10GHz –15GHz**  
Spurious emission limit –13dBm.

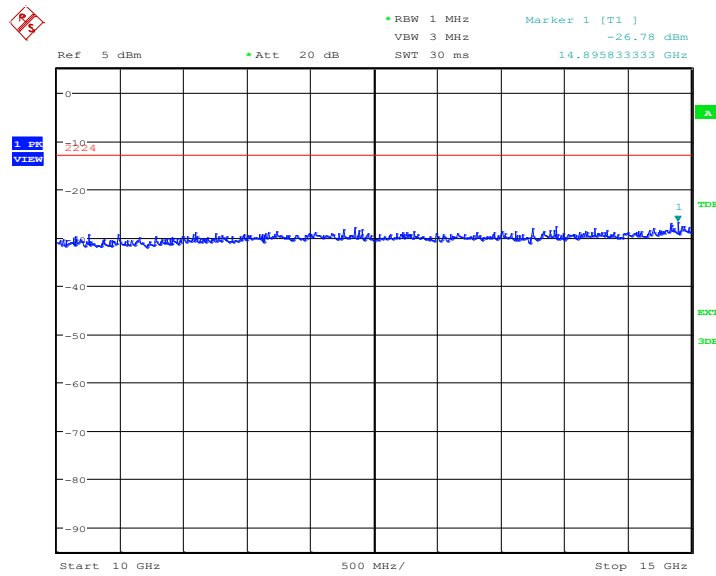

Date: 15.APR.2021 17:08:02


**Channel 1450: 15GHz –20GHz**  
Spurious emission limit –13dBm.

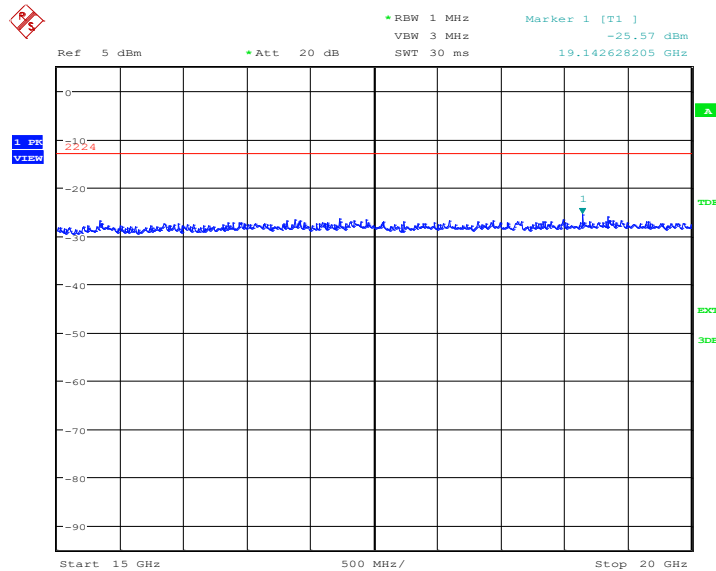

Date: 15.APR.2021 17:08:29




**Channel 1513: 30MHz –1GHz**  
Spurious emission limit –13dBm.

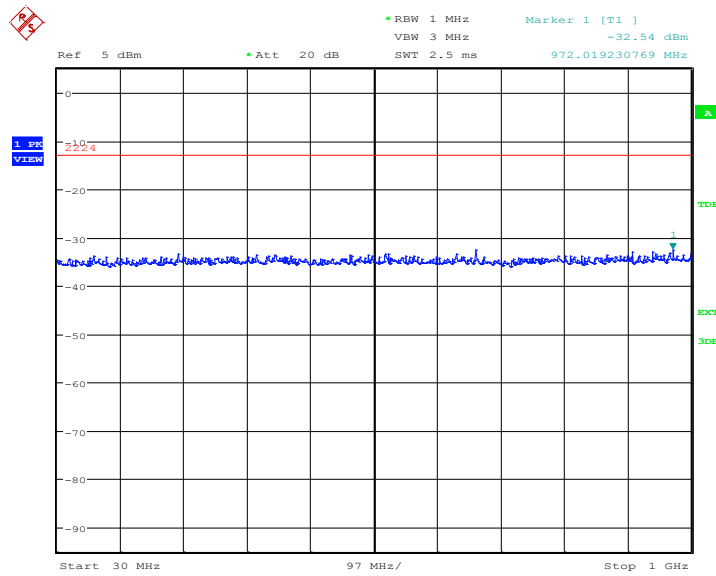

Date: 15.APR.2021 17:08:58

**Channel 1513: 1GHz –2.5GHz**  
Spurious emission limit –13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

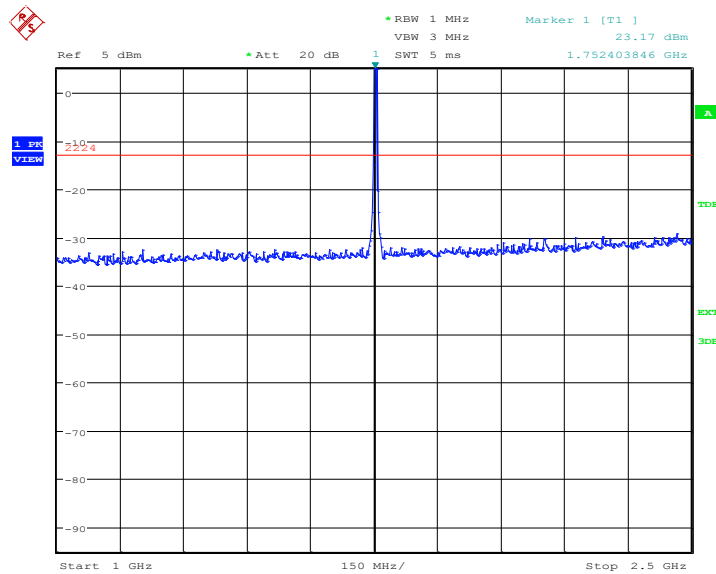

Date: 15.APR.2021 17:09:25




**Channel 1513: 2.5GHz –7.5GHz**  
Spurious emission limit –13dBm.

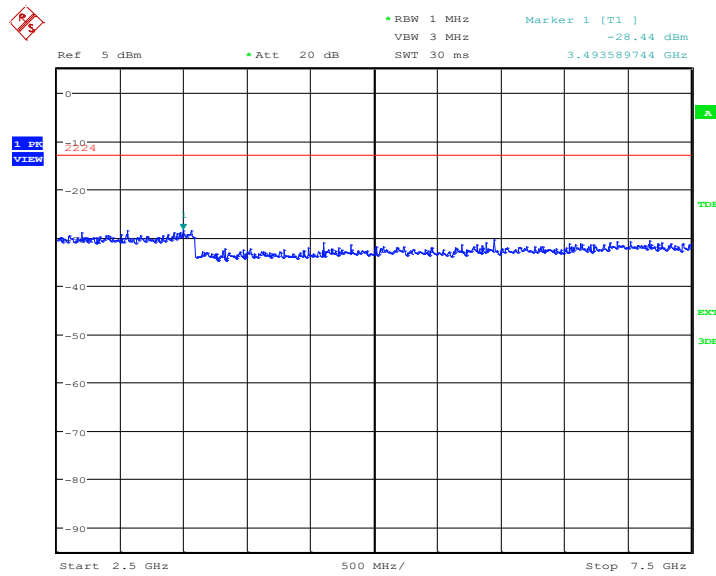

Date: 15.APR.2021 17:09:52


**Channel 1513: 7.5GHz –10GHz**  
Spurious emission limit –13dBm.

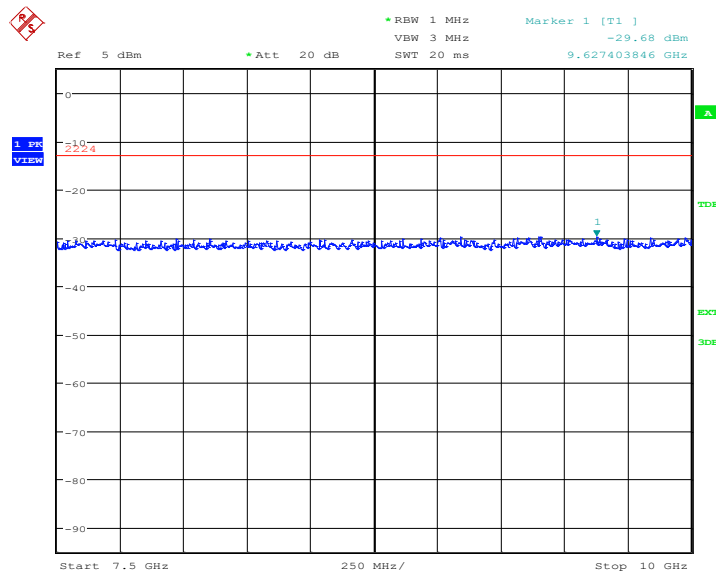

Date: 15.APR.2021 17:10:19




**Channel 1513: 10GHz –15GHz**  
Spurious emission limit –13dBm.

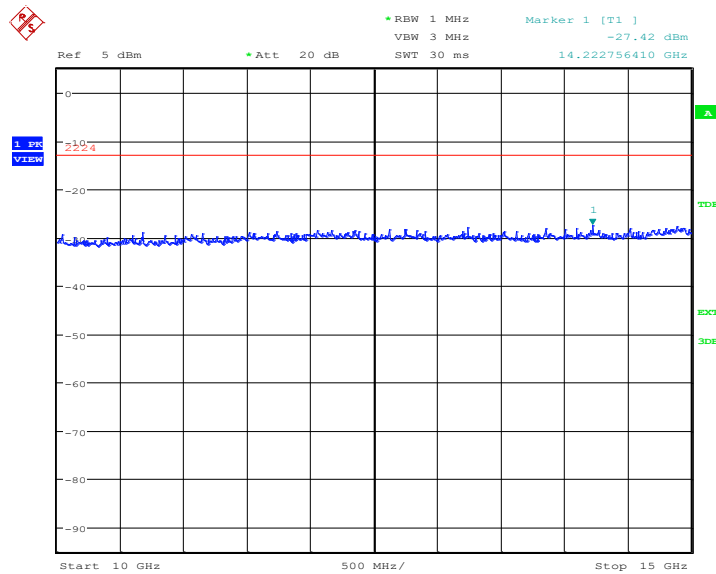

Date: 15.APR.2021 17:10:46

**Channel 1513: 15GHz –20GHz**  
Spurious emission limit –13dBm.

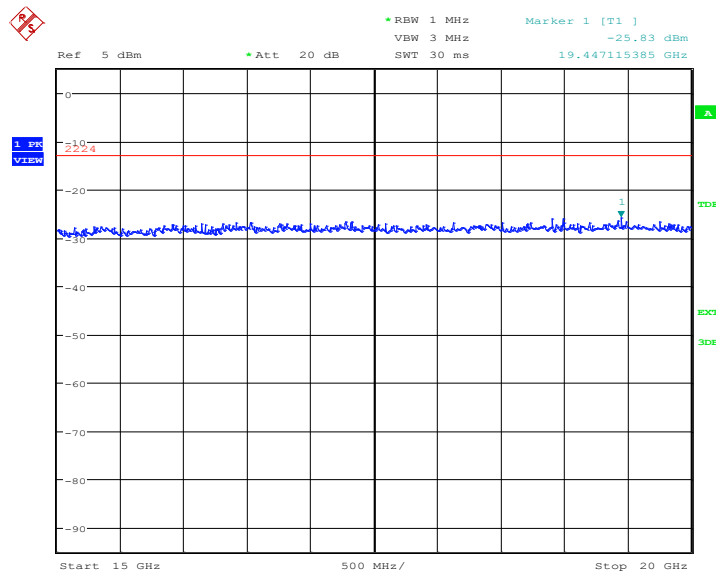

Date: 15.APR.2021 17:11:12

Note: Expanded measurement uncertainty is  $U = 0.49 \text{ dB}(100\text{kHz}-2\text{GHz})/1.21 \text{ dB} (2\text{GHz}-26.5\text{GHz}), k = 1.96$



**A.8 PEAK-TO-AVERAGE POWER RATIO**

**Reference**

FCC: CFR Part 24.232, 27.50(d), KDB971168 D01.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

**A.8.1 Measurement limit**

not exceed 13 dB

**A.8.2 Measurement results**


Only worst case result is given below

**WCDMA Band II (PAPR)-QPSK**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	4.42
1880.0	4.33
1907.6	4.36

**WCDMA Band II**

**Channel 9262-Peak-To-Average Power Ratio(PAPR)-QPSK**

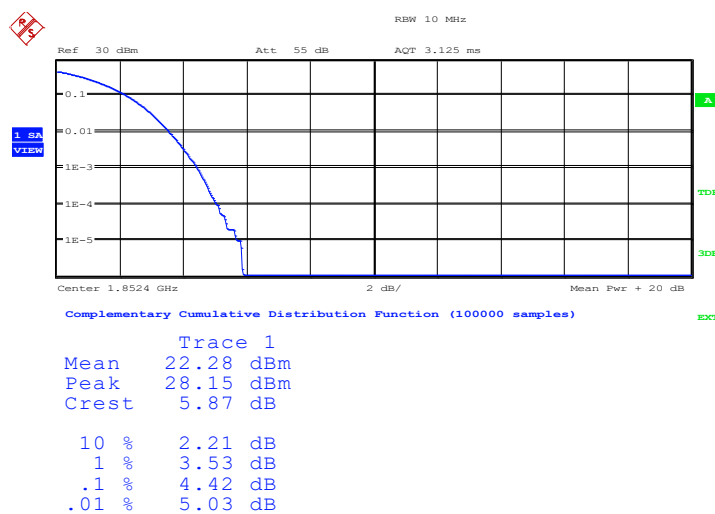


Date: 15.APR.2021 16:44:17






### Channel 9400- Peak-To-Average Power Ratio(PAPR)-QPSK

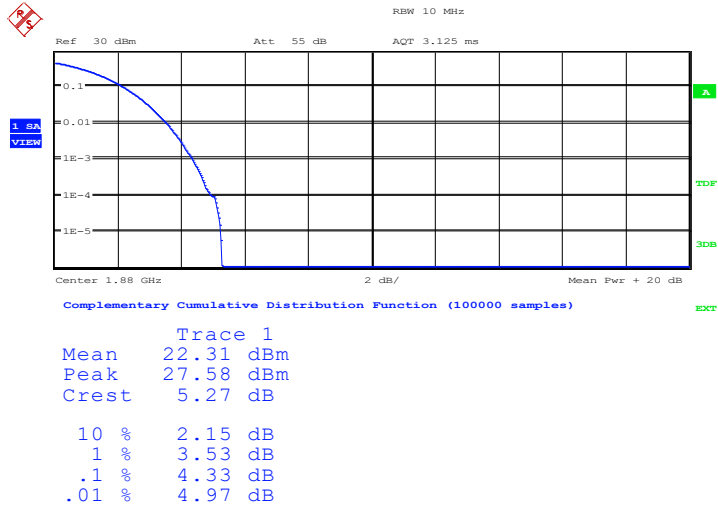

Date: 15.APR.2021 16:44:25

### Channel 9538- Peak-To-Average Power Ratio(PAPR)-QPSK

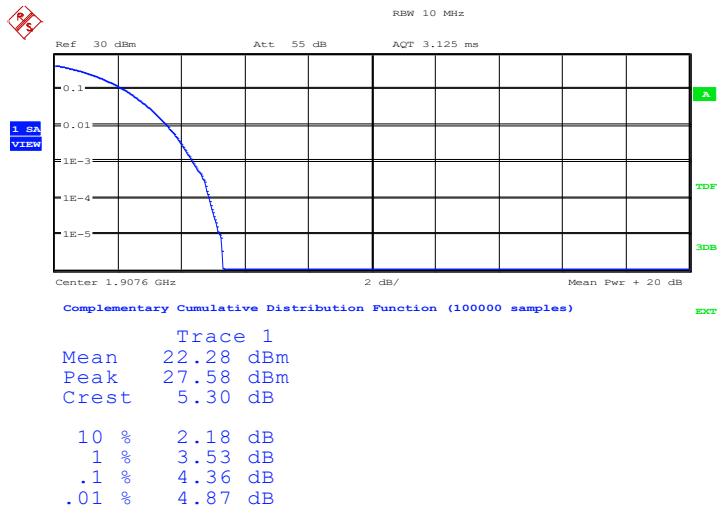

Date: 15.APR.2021 16:44:32




**WCDMA Band II (PAPR)-16QAM**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1852.4	4.33
1880.0	4.36
1907.6	4.26


**WCDMA Band II**

**Channel 9262- Peak-To-Average Power Ratio(PAPR)-16QAM**

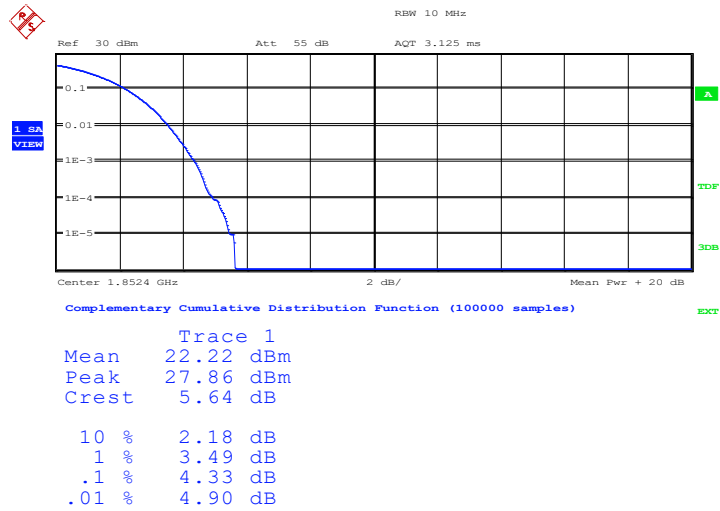

Date: 15.APR.2021 17:48:57


**Channel 9400- Peak-To-Average Power Ratio(PAPR)-16QAM**

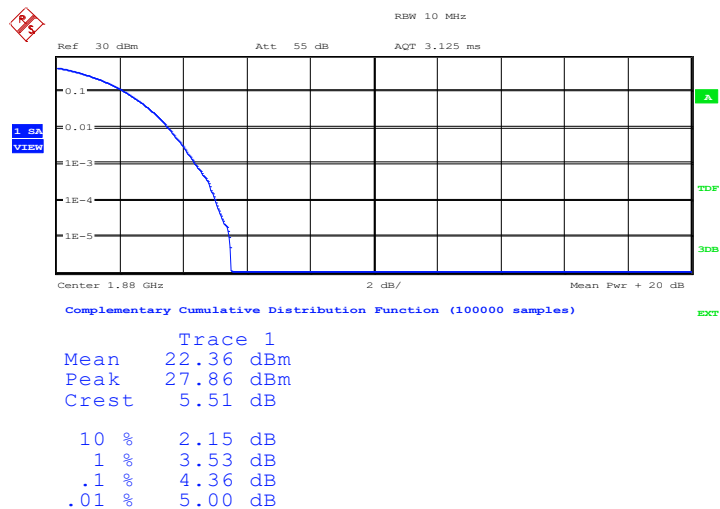

Date: 15.APR.2021 17:49:05



### Channel 9538- Peak-To-Average Power Ratio(PAPR)-16QAM

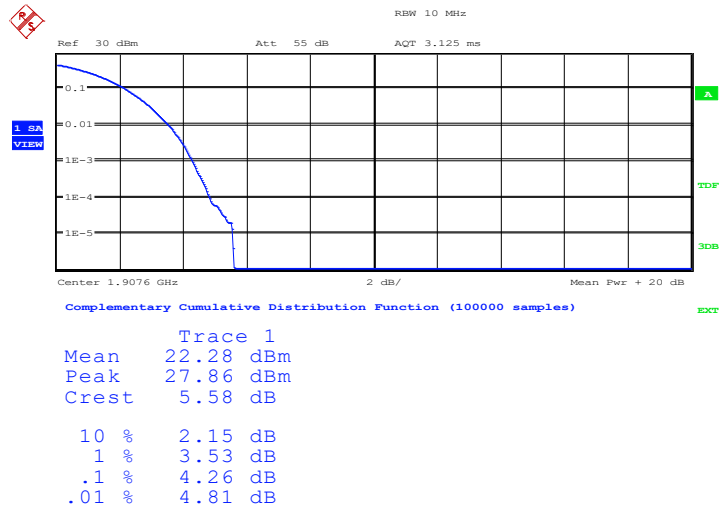

Date: 15.APR.2021 17:49:12




**WCDMA Band V (PAPR)-QPSK**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
826.4	4.13
836.6	4.01
846.6	4.04


**WCDMA Band V**

**Channel 4132- Peak-To-Average Power Ratio(PAPR)-QPSK**

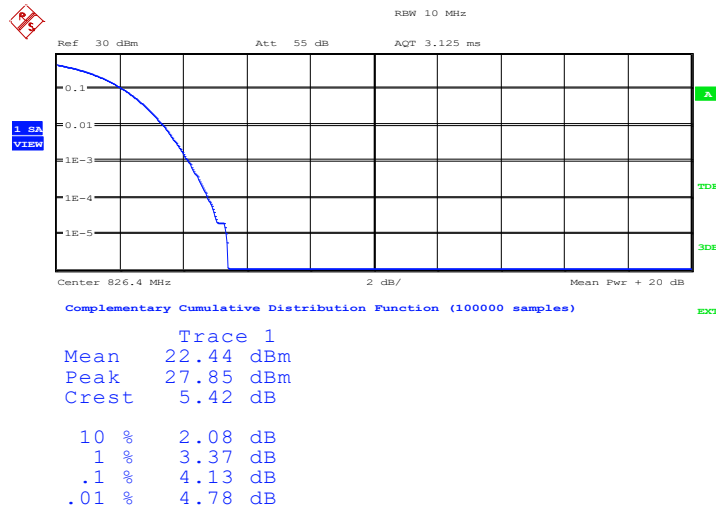

Date: 15.APR.2021 17:28:58


**Channel 4183- Peak-To-Average Power Ratio(PAPR)-QPSK**

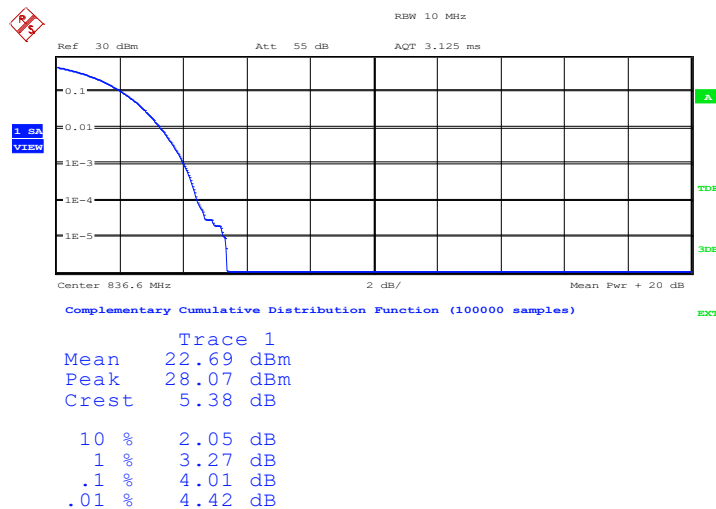

Date: 15.APR.2021 17:29:06



### Channel 4233- Peak-To-Average Power Ratio(PAPR)-QPSK

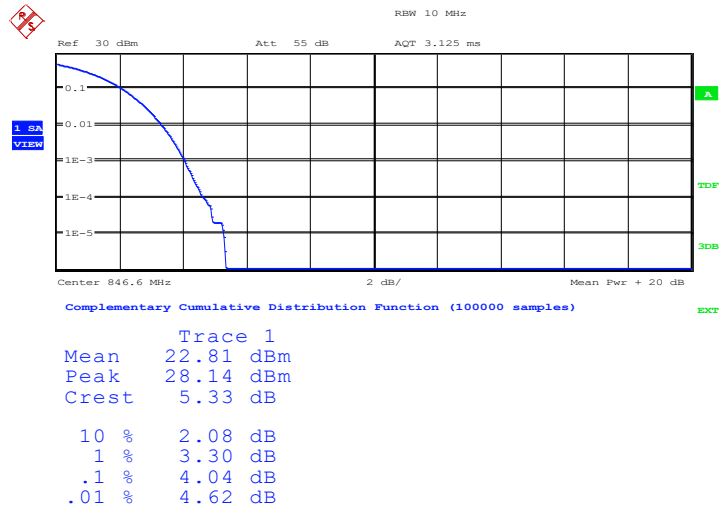

Date: 15.APR.2021 17:29:13




**WCDMA Band V (PAPR)-16QAM**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
826.4	4.10
836.6	4.01
846.6	4.10


**WCDMA Band V**

**Channel 4132- Peak-To-Average Power Ratio(PAPR)-16QAM**

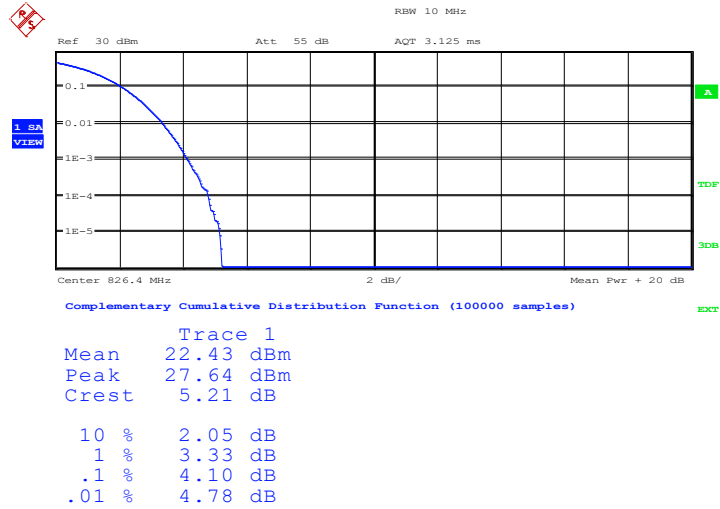

Date: 15.APR.2021 18:08:23


**Channel 4183- Peak-To-Average Power Ratio(PAPR)-16QAM**

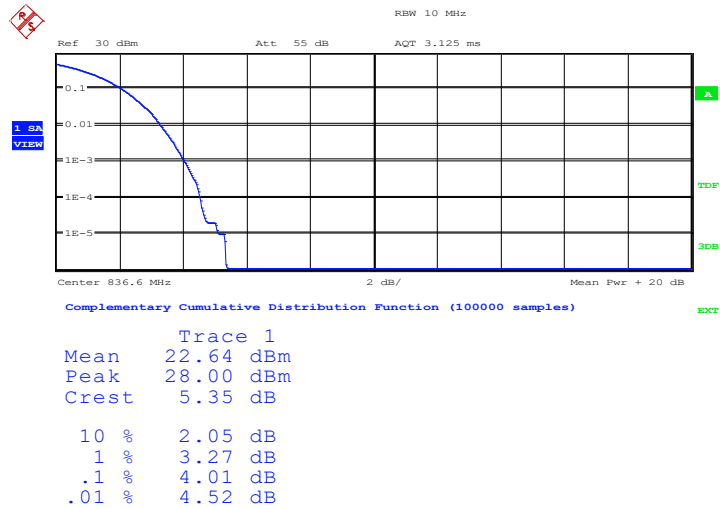

Date: 15.APR.2021 18:08:30



### Channel 4233- Peak-To-Average Power Ratio(PAPR)-16QAM

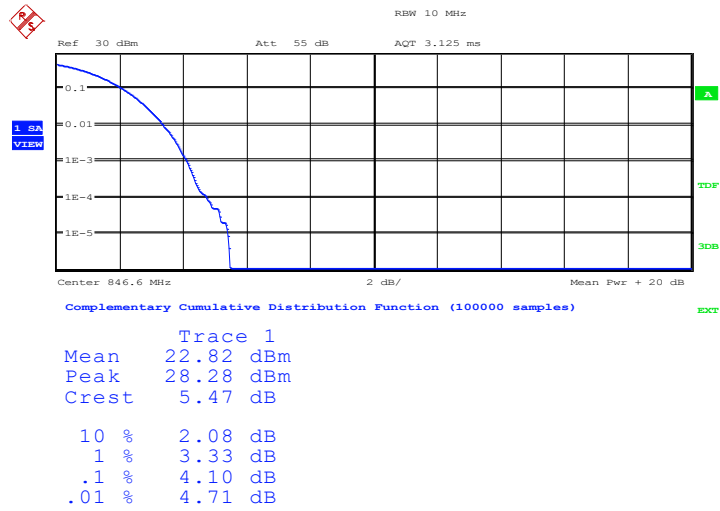

Date: 15.APR.2021 18:08:38




**WCDMA Band IV (PAPR)-QPSK**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1712.4	4.17
1740.0	4.20
1752.6	4.23


**WCDMA Band IV**

**Channel 1312- Peak-To-Average Power Ratio(PAPR)-QPSK**

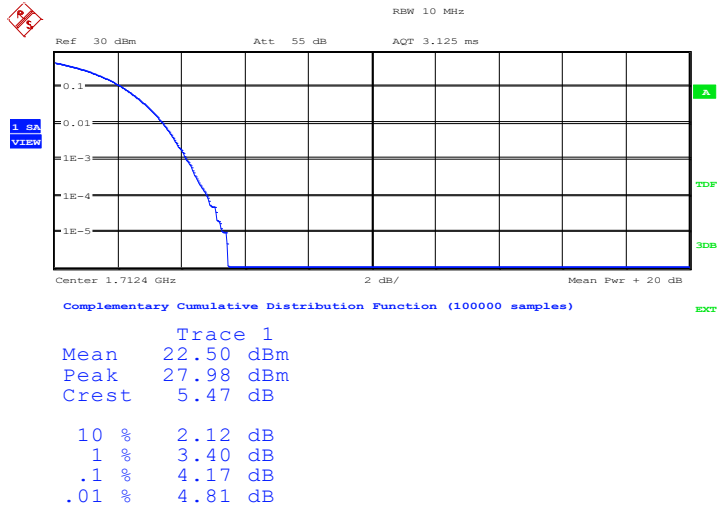

Date: 15.APR.2021 17:02:46

**Channel 1450- Peak-To-Average Power Ratio(PAPR)-QPSK**

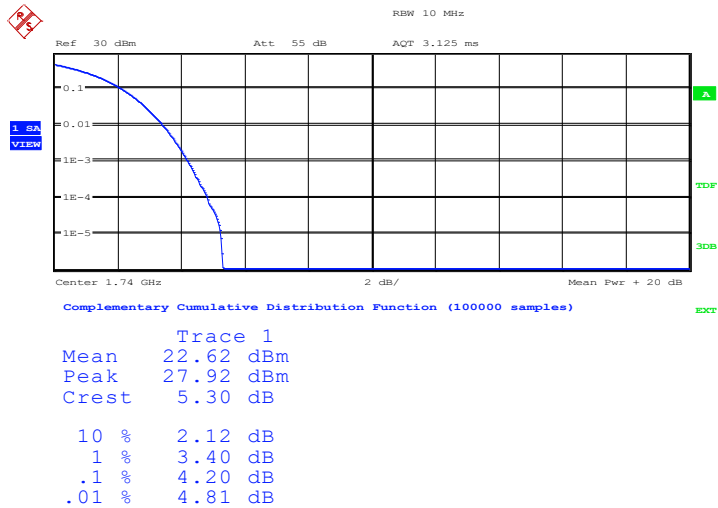


Date: 15.APR.2021 17:02:54





### Channel 1513- Peak-To-Average Power Ratio(PAPR)-QPSK

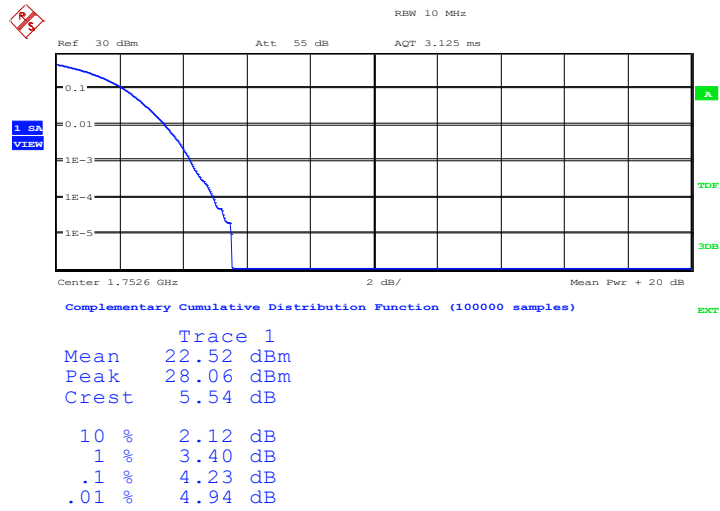

Date: 15.APR.2021 17:03:01




**WCDMA Band IV (PAPR)-16QAM**

Frequency(MHz)	Peak-To-Average Power Ratio(PAPR)(dB)
1712.4	4.17
1740.0	4.23
1752.6	4.20


**WCDMA Band IV**

**Channel 1312- Peak-To-Average Power Ratio(PAPR)-16QAM**

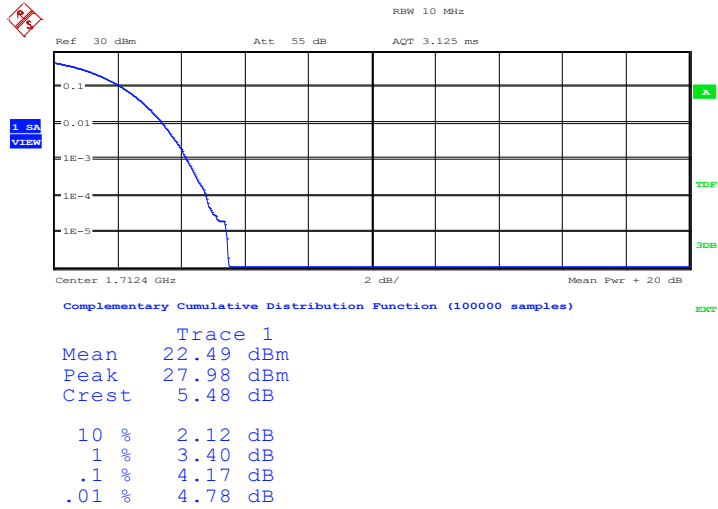

Date: 15.APR.2021 18:00:26

**Channel 1450- Peak-To-Average Power Ratio(PAPR)-16QAM**

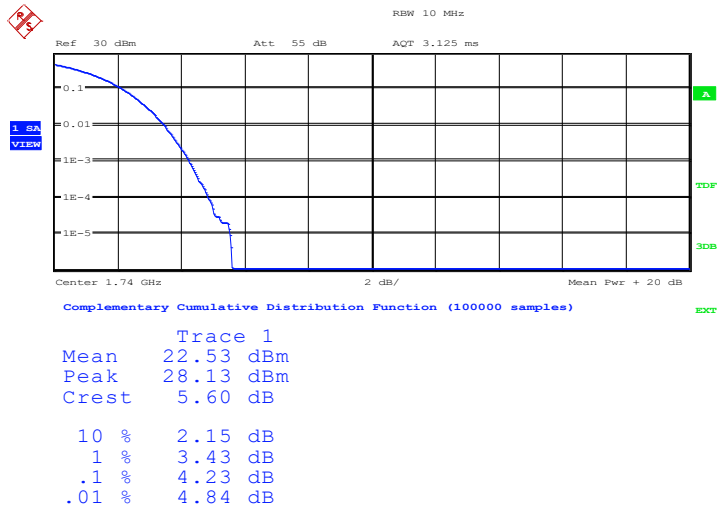


Date: 15.APR.2021 18:00:33



WCDMA Band IV

Channel 1513- Peak-To-Average Power Ratio(PAPR)-16QAM

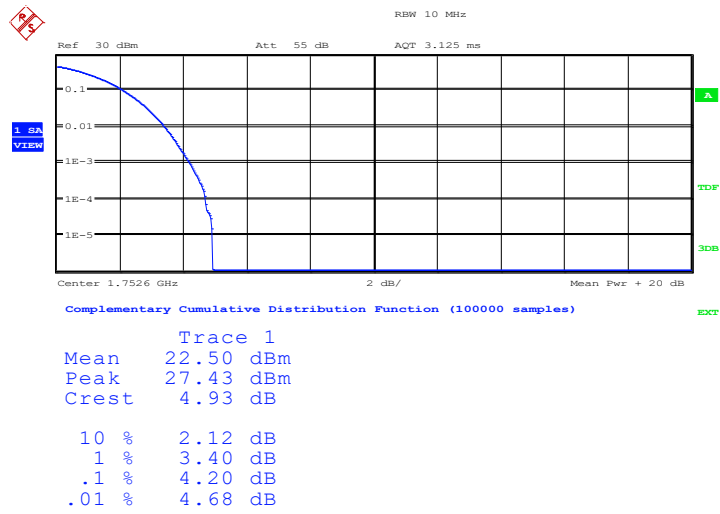

Date: 15.APR.2021 18:00:41

Note: Expanded measurement uncertainty is  $U = 0.48$  dB,  $k = 2$

\*\*\*END OF REPORT\*\*\*