



# FCC Test Report

APPLICANT : Guangdong OPPO Mobile  
Telecommunications Corp., Ltd.  
EQUIPMENT : Mobile Phone  
BRAND NAME : OPPO  
MODEL NAME : CPH2305  
FCC ID : R9C-CPH2305  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Nov. 11, 2021 ~ Nov. 15, 2021

We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055  
People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 8

    1.7. Test Software ..... 8

    1.8. Applicable Standards ..... 9

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1. Test Mode ..... 10

    2.2. Connection Diagram of Test System ..... 11

    2.3. Support Unit used in test configuration and system ..... 12

    2.4. EUT Operation Test Setup ..... 12

**3. TEST RESULT ..... 13**

    3.1. Test of AC Conducted Emission Measurement ..... 13

    3.2. Test of Radiated Emission Measurement ..... 17

**4. LIST OF MEASURING EQUIPMENT ..... 21**

**5. UNCERTAINTY OF EVALUATION ..... 22**

**APPENDIX A. SETUP PHOTOGRAPHS**



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC101422	Rev. 01	Initial issue of report	Dec. 02, 2021



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.16 dB at 0.59 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.03 dB at 201.69 MHz for peak

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

## 1.2. Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.  
NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2305
FCC ID	R9C-CPH2305
EUT supports Radios application	GSM/WCDMA/LTE/5G NR WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/BLE/ GNSS / NFC / WPT
IMEI Code	Conduction: 866483050044297/866483050044289 Radiation: 866483050046102/866483050046110
HW Version	11
SW Version	ColorOS V12.1
EUT Stage	Production Unit

**Remark:**

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	<p>GSM850: 824 MHz ~ 849 MHz            GSM1900: 1850MHz ~ 1910MHz            WCDMA Band II: 1850 MHz ~ 1910 MHz            WCDMA Band IV : 1710 MHz ~ 1755 MHz            WCDMA Band V: 824 MHz ~ 849 MHz            LTE Band 2 : 1850 MHz ~ 1910 MHz            LTE Band 4 : 1710 MHz ~ 1755 MHz            LTE Band 5 : 824 MHz ~ 849 MHz            LTE Band 7 : 2500 MHz ~ 2570 MHz            LTE Band 12 : 699 MHz ~ 716 MHz            LTE Band 13 : 777 MHz ~ 787 MHz            LTE Band 17 : 704 MHz ~ 716 MHz            LTE Band 25 : 1850 MHz ~ 1915 MHz            LTE Band 26 : 814 MHz ~ 849 MHz            LTE Band 38 : 2570 MHz ~ 2620 MHz            LTE Band 41 : 2496 MHz ~ 2690 MHz            LTE Band 66 : 1710 MHz ~ 1780 MHz            5G NR n2 : 1850 MHz ~ 1910 MHz            5G NR n5 : 824 MHz ~ 849 MHz            5G NR n7 : 2500 MHz ~ 2570 MHz            5G NR n12 : 699 MHz ~ 716 MHz            5G NR n13 : 777 MHz ~ 787 MHz            5G NR n25 : 1850 MHz ~ 1915 MHz            5G NR n26 : 814 MHz ~ 849 MHz            5G NR n38 : 2570 MHz ~ 2620 MHz            5G NR n41 : 2496 MHz ~ 2690 MHz            5G NR n66 : 1710 MHz ~ 1780 MHz            802.11b/g/n/ac/ax: 2400 MHz ~ 2483.5 MHz            802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz;                                              5250 MHz ~ 5350 MHz;                                              5470 MHz ~ 5725 MHz                                              5725 MHz ~ 5850 MHz            Bluetooth: 2400 MHz ~ 2483.5 MHz            NFC : 13.56 MHz            WPT: 110kHz~ 148.5 kHz</p>
<b>Rx Frequency</b>	<p>GSM850: 869 MHz ~ 894 MHz            GSM1900: 1930 MHz ~ 1990 MHz            WCDMA Band II: 1930 MHz ~ 1990 MHz            WCDMA Band IV : 2110 MHz ~ 2155 MHz            WCDMA Band V: 869 MHz ~ 894 MHz            LTE Band 2 : 1930 MHz ~ 1990 MHz            LTE Band 4 : 2110 MHz ~ 2155 MHz            LTE Band 5 : 869 MHz ~ 894 MHz            LTE Band 7 : 2620 MHz ~ 2690 MHz            LTE Band 12 : 729 MHz ~ 746 MHz            LTE Band 13 : 746 MHz ~ 756 MHz            LTE Band 17 : 734 MHz ~ 746 MHz            LTE Band 25 : 1930 MHz ~ 1995 MHz            LTE Band 26 : 859 MHz ~ 894 MHz            LTE Band 38: 2570 MHz ~ 2620 MHz            LTE Band 41 : 2496 MHz ~ 2690 MHz</p>



	<p>LTE Band 66 : 2110 MHz~ 2200 MHz  5G NR n2 : 1930 MHz ~ 1990 MHz  5G NR n5 : 869 MHz ~ 894 MHz  5G NR n7 : 2620 MHz ~ 2690 MHz  5G NR n12 : 729 MHz ~ 746 MHz  5G NR n13 : 746 MHz ~ 756 MHz  5G NR n25 : 1930 MHz ~ 1995 MHz  5G NR n26 : 859 MHz ~ 894 MHz  5G NR n38: 2570 MHz ~ 2620 MHz  5G NR n41 : 2496 MHz ~ 2690 MHz  5G NR n66 : 2110 MHz~ 2180 MHz  802.11b/g/n/ac/ax : 2400MHz ~ 2483.5 MHz  802.11a/n/ac/ax : 5150 MHz ~ 5250 MHz;  5250 MHz ~ 5350 MHz;  5470 MHz ~ 5725 MHz  5725 MHz ~ 5850 MHz  Bluetooth: 2400 MHz ~ 2483.5 MHz  NFC : 13.56 MHz  GNSS : 1559 MHz ~ 1610 MHz  WPT: 110kHz~ 148.5 kHz</p>
<b>Antenna Type</b>	<p>WWAN : Fixed Internal Antenna  WLAN : Fixed Internal Antenna  Bluetooth : Fixed Internal Antenna  GNSS: Fixed Internal Antenna  NFC: Fixed Internal Antenna  WPT: Fixed Internal Antenna</p>
<b>Type of Modulation</b>	<p>GSM/GPRS: GMSK  EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK  WCDMA : BPSK (Uplink)  HSDPA/DC-HSDPA : QPSK (Uplink)  HSUPA : QPSK (Uplink)  HSPA+ : 16QAM (16QAM uplink is not supported)  DC-HSDPA : 64QAM  LTE: QPSK / 16QAM / 64QAM / 256QAM(Downlink only)  5G NR:  DFT-s-OFDM (QPSK / 16QAM / 64QAM / 256QAM)  CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)  802.11b : DSSS (DBPSK / DQPSK / CCK)  802.11a/g/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)  Bluetooth LE : GFSK  Bluetooth (1Mbps) : GFSK  Bluetooth (2Mbps) :<math>\pi/4</math>-DQPSK  Bluetooth (3Mbps) : 8-DPSK  GNSS : BPSK  NFC: ASK  WPT: ASK</p>

Note: GNSS = Galileo + GLONASS + GPS+ BDS

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH05-SZ	CN1256	421272

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b





## **1.8. Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Idle(Middle CH) + Camera(Rear) + Battery + USB Cable (Charging from Adapter) + SIM 1
	Mode 2: WCDMA Band V Idle(Low CH) + Camera(Front) + Battery + USB Cable (Charging from Adapter) + SIM 2
	Mode 3: LTE Band 12 Idle(Low CH) + MPEG4(Color bar) + Battery + USB Cable (Charging from Adapter) + SIM 1
	Mode 4: LTE Band 13 Idle(High CH) + MPEG4(Color bar) + Battery + USB Cable (Charging from Adapter) + SIM 2
	Mode 5: LTE Band 17 Idle(Middle CH) + H-Pattern + Battery + USB Cable (Data Link with Notebook) + SIM 1
	Mode 6: 5G:7A_n5A Idle(Middle CH) + H-Pattern + Battery + Charging from wireless charging + SIM 2
	Mode 7: 5G:n26 Idle(Low CH) + H-Pattern + Battery + USB Cable (Data Link with Notebook) + SIM 1
Radiated Emissions	Mode 1: GSM 850 Idle(Middle CH) + Camera(Rear) + Battery + USB Cable (Charging from Adapter) + SIM 1
	Mode 2: WCDMA Band V Idle(Low CH) + Camera(Front) + Battery + USB Cable (Charging from Adapter) + SIM 2
	Mode 3: LTE Band 12 Idle(Low CH) + MPEG4(Colour bar) + Battery + USB Cable (Charging from Adapter) + SIM 1
	Mode 4: LTE Band 13 Idle(High CH) + Camera(Rear) + Battery + USB Cable (Charging from Adapter) + SIM 2
	Mode 5: LTE Band 17 Idle(Middle CH) + H-Pattern + Battery + USB Cable (Data Link with Notebook) + SIM 1
	Mode 6: 5G:7A_n5A Idle(Middle CH) + Camera(Rear) + Battery + Charging from wireless charging + SIM 2
	Mode 7: 5G:n26 Idle(Low CH) + Camera(Rear) + Battery + Reverse charge + USB Cable (Charging from Adapter) + SIM 1
	Mode 8: GSM 850 Idle(Middle CH) + Camera(Rear) + Battery + Reverse charge + SIM 1
	Mode 9: GSM 850 Idle(Middle CH) + MP3(Max volume) + Battery + Type C

	<p style="text-align: center;">Earphone + SIM 1</p> <p style="text-align: center;">Mode 10 : GSM 850 Idle(Middle CH) + Data from iPhone to EUT + Battery + Lightning to Type A cable + Type A to Type C cable + SIM 1</p>
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 7; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 1; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook means data application transferred mode between EUT and Notebook</li> <li>4. Data link from iphone to EUT via lightning to Type-A cable + Type-A to Type-C cable</li> <li>5. Pre-scanned Low/Middle/High channel for, the worst channel was recorded in this report.</li> </ol>	

## 2.2.Connection Diagram of Test System

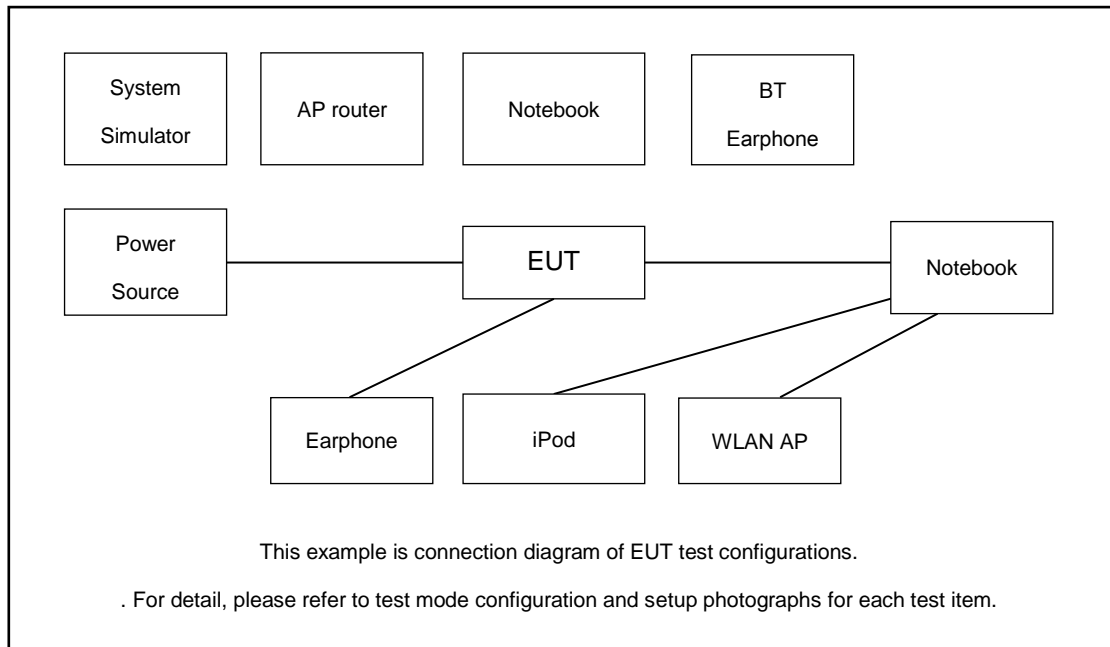

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(5G)	Anritsu	MT8000A	N/A	N/A	Unshielded,1.8m
2.	BaseStation(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
3.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	Router	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
6.	Phone	iPhone5	A1530	N/A	N/A	N/A
7.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	Notebook	DELL	Inspiron15-7570	FCC DoC	N/A	DC O/P: Shielded, 1.8 m
9.	iPod	apple	MC69029/A	N/A	N/A	N/A
10.	iPod	Apple	MC525 ZP/A	FCC DoC	Shielded, 1.0m	N/A
11.	wireless charging	N/A	N/A	N/A	N/A	N/A
12.	Type A to Type C cable	Oppo	N/A	N/A	N/A	N/A

### 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE or 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Execute “Music Player” to play MP3 file.
5. Execute “H Pattern” to show H Pattern via USB Cable on the Notebook.
6. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

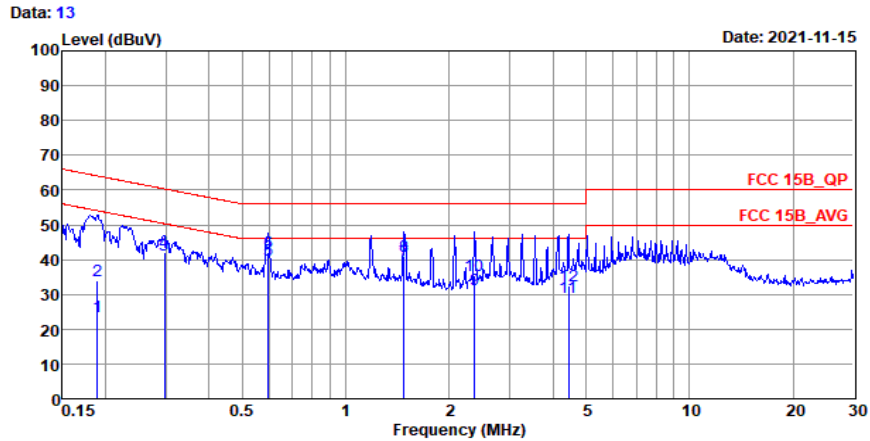


Site : C001-SZ  
 Condition: FCC 15B\_QP LISN\_20210901\_L LINE  
 Project : 101422  
 Mode : Mode 7  
 IMEI : 866483050044297/866483050044289

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	23.73	-30.33	54.06	3.50	10.20	10.03	Average
2	0.19	34.13	-29.93	64.06	13.90	10.20	10.03	QP
3	0.30	41.20	-9.12	50.32	21.00	10.16	10.04	Average
4	0.30	42.10	-18.22	60.32	21.90	10.16	10.04	QP
5 *	0.59	39.84	-6.16	46.00	19.70	10.10	10.04	Average
6	0.59	42.04	-13.96	56.00	21.90	10.10	10.04	QP
7	1.48	39.49	-6.51	46.00	19.30	10.13	10.06	Average
8	1.48	40.79	-15.21	56.00	20.60	10.13	10.06	QP
9	2.37	31.38	-14.62	46.00	11.20	10.05	10.13	Average
10	2.37	35.28	-20.72	56.00	15.10	10.05	10.13	QP
11	4.45	29.17	-16.83	46.00	8.90	10.00	10.27	Average
12	4.45	32.47	-23.53	56.00	12.20	10.00	10.27	QP



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

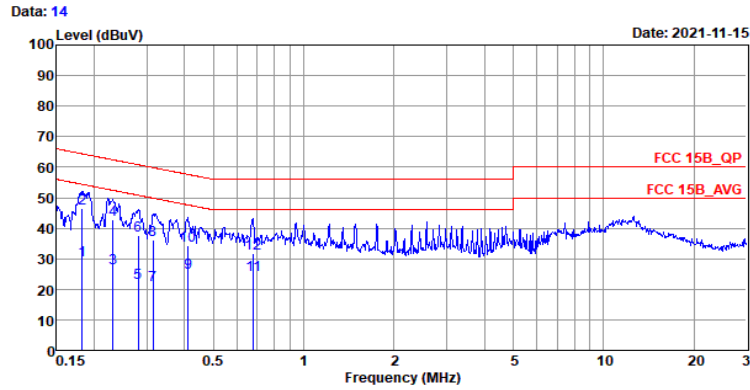

Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_20210901\_N NEUTRAL  
 Project : 101422  
 Mode : Mode 7  
 IMEI : 866483050044297/866483050044289

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dB	dBuV	dBuV	dB	dB	
1	0.18	29.42	-24.95	54.37	9.10	10.30	10.02 Average
2 *	0.18	46.62	-17.75	64.37	26.30	10.30	10.02 QP
3	0.23	27.09	-25.30	52.39	6.80	10.26	10.03 Average
4	0.23	42.69	-19.70	62.39	22.40	10.26	10.03 QP
5	0.28	22.26	-28.55	50.81	2.00	10.22	10.04 Average
6	0.28	37.56	-23.25	60.81	17.30	10.22	10.04 QP
7	0.31	21.54	-28.30	49.84	1.30	10.20	10.04 Average
8	0.31	36.14	-23.70	59.84	15.90	10.20	10.04 QP
9	0.41	25.64	-21.95	47.59	5.40	10.19	10.05 Average
10	0.41	34.34	-23.25	57.59	14.10	10.19	10.05 QP
11	0.68	24.86	-21.14	46.00	4.60	10.22	10.04 Average
12	0.68	31.76	-24.24	56.00	11.50	10.22	10.04 QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

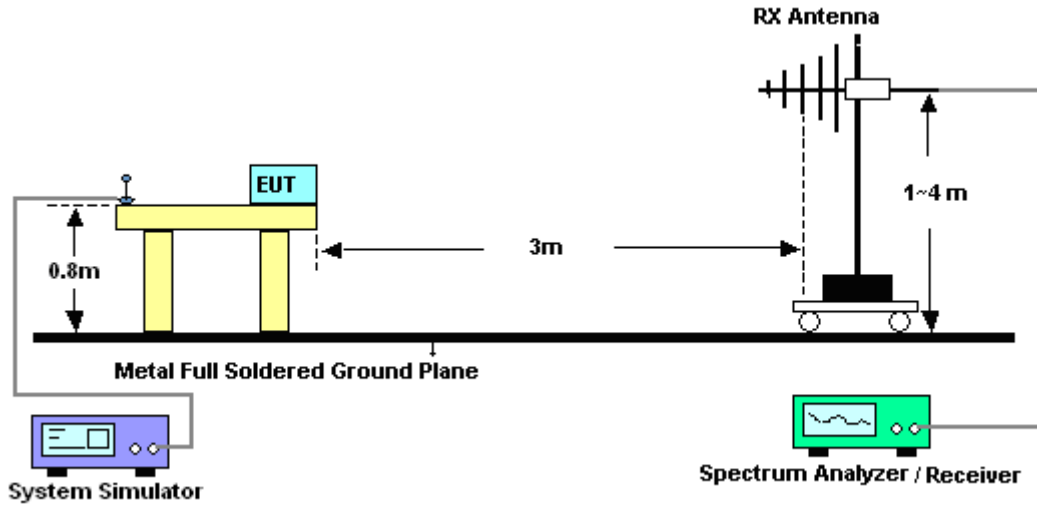


For radiated emissions above 1GHz

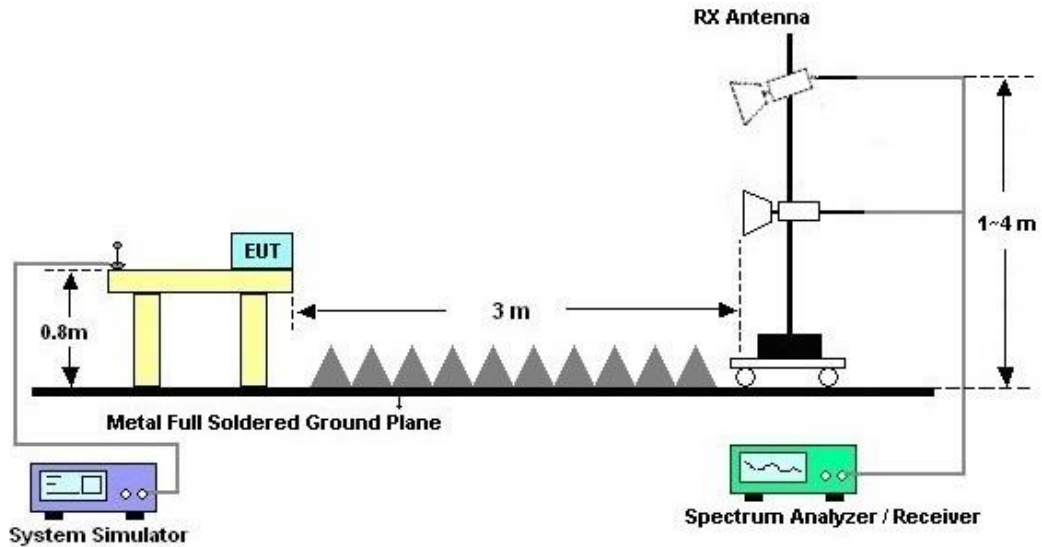



3.2.5. Test Result of Radiated Emission

Test Engineer :	Zhicheng Li	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

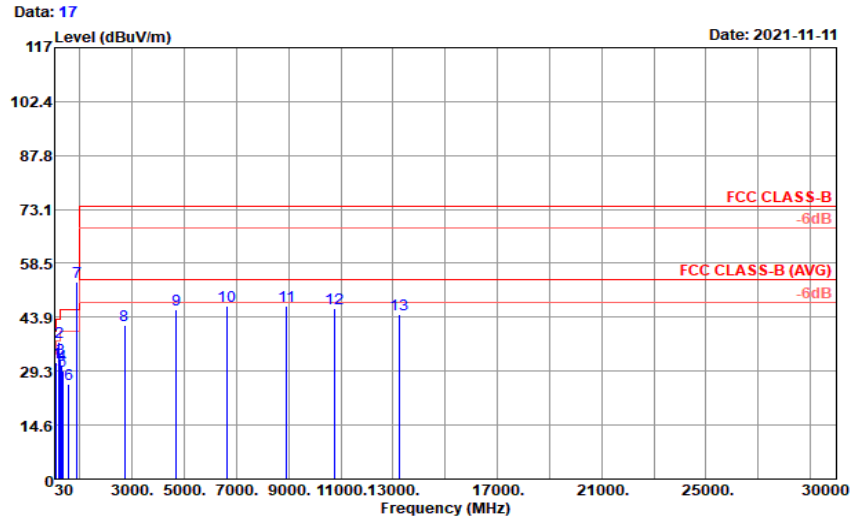


Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	91.11	31.65	-11.85	43.50	50.51	13.94	2.38	35.18	---	---	Peak
2	201.69	37.23	-6.27	43.50	53.13	16.45	2.75	35.10	157	241	QP
3	256.01	32.65	-13.35	46.00	46.38	18.37	2.89	34.99	---	---	Peak
4	307.42	30.94	-15.06	46.00	42.74	19.90	3.20	34.90	---	---	Peak
5	327.79	29.33	-16.67	46.00	40.52	20.50	3.21	34.90	---	---	Peak
6	564.47	25.62	-20.38	46.00	31.38	25.09	3.72	34.57	---	---	Peak
7 *	881.66	53.30			54.53	28.88	4.19	34.30	---	---	Peak
8	2708.00	41.64	-32.36	74.00	55.64	27.92	8.33	50.25	---	---	Peak
9	4706.00	45.83	-28.17	74.00	54.07	31.04	10.28	49.56	---	---	Peak
10	6648.00	46.79	-27.21	74.00	50.20	34.43	11.44	49.28	---	---	Peak
11	8926.00	47.02	-26.98	74.00	46.05	37.60	12.90	49.53	---	---	Peak
12	10782.00	46.26	-27.74	74.00	40.29	40.29	13.85	48.17	---	---	Peak
13	13235.00	44.58	-29.42	74.00	36.59	39.48	15.30	46.79	---	---	Peak



Test Engineer :	Zhicheng Li	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7is system simulator signal which can be ignored.		

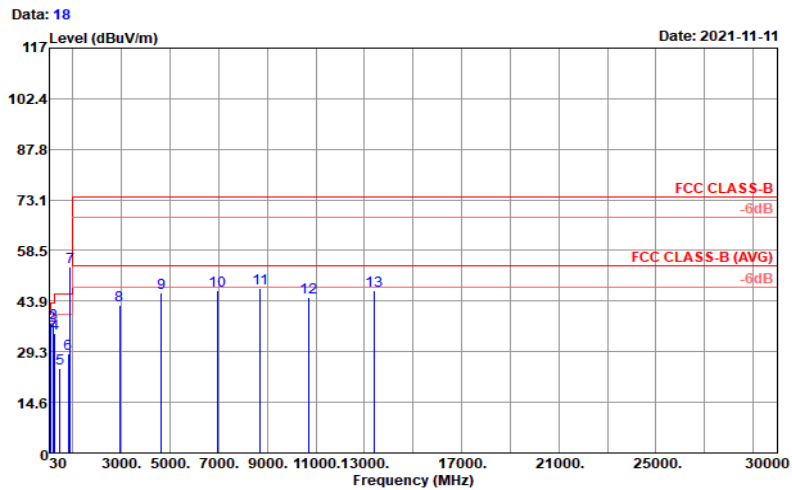

Site : 03CH05-SZ  
 Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	33.88	33.40	-6.60	40.00	47.36	19.08	1.96	35.00	100	169 QP	
2	90.14	36.84	-6.66	43.50	55.75	13.92	2.35	35.18	---	---	Peak
3	201.69	37.47	-6.03	43.50	53.37	16.45	2.75	35.10	100	59 QP	
4	262.80	34.51	-11.49	46.00	47.96	18.58	2.94	34.97	---	---	Peak
5	453.89	24.44	-21.56	46.00	32.61	23.22	3.31	34.70	---	---	Peak
6	807.94	28.83	-17.17	46.00	30.88	28.28	3.97	34.30	---	---	Peak
7 *	881.66	53.63			54.86	28.88	4.19	34.30	---	---	Peak
8	2914.00	42.73	-31.27	74.00	55.37	28.63	8.73	50.00	---	---	Peak
9	4648.00	46.35	-27.65	74.00	54.60	31.09	10.23	49.57	---	---	Peak
10	6952.00	46.92	-27.08	74.00	50.18	35.09	11.73	50.08	---	---	Peak
11	8700.00	47.47	-26.53	74.00	46.83	37.28	12.98	49.62	---	---	Peak
12	10712.00	45.04	-28.96	74.00	39.60	40.20	13.47	48.23	---	---	Peak
13	13379.00	46.80	-27.20	74.00	39.50	39.71	14.49	46.90	---	---	Peak

Note:

- Level(dBuV/m) = Read Level(dBuV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBuV/m) – Limit Line(dBuV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	May. 21, 2021	Nov. 11, 2021-	May. 20, 2022	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 07, 2021	Nov. 11, 2021-	Apr. 06, 2022	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Mar. 25, 2021	Nov. 11, 2021-	Mar. 24, 2022	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 07, 2021	Nov. 11, 2021-	Apr. 06, 2022	Radiation (03CH05-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 11, 2021	Nov. 11, 2021-	Apr. 10, 2022	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM01G18GA	060781	1GHz~18GHz	Apr. 07, 2021	Nov. 11, 2021-	Apr. 06, 2022	Radiation (03CH05-SZ)
HF Amplifier	EM Electronics	EM18G40G	060778	18GHz~40GHz	Apr. 07, 2021	Nov. 11, 2021-	Apr. 06, 2022	Radiation (03CH05-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	00983	15GHz~40GHz	Apr. 11, 2021	Nov. 11, 2021-	Apr. 10, 2022	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	NCR	Nov. 11, 2021-	NCR	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Nov. 11, 2021-	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Nov. 11, 2021-	NCR	Radiation (03CH05-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Nov. 15, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Nov. 15, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 27, 2021	Nov. 15, 2021	Oct. 27, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 14, 2021	Nov. 15, 2021	Jul. 13, 2022	Conduction (CO01-SZ)



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------