

TEST REPORT

Applicant: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address: NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China
Equipment Type: Mobile Phone
Model Name: CPH2339
Brand Name: OPPO
FCC ID: R9C-CPH2339
Test Standard: 47 CFR Part 15 Subpart B
Test Date: Feb. 22, 2022 - Feb. 23, 2022
Date of Issue: Mar. 31, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Sijie Zheng

Checked by: Xia Long

Approved by: Liao Jianming
(Technical Director)

Sijie Zheng

Xia Long

Jm Liao

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Mar. 31, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Identification of the Testing Laboratory.....	4
1.2	Identification of the Responsible Testing Location.....	4
2	PRODUCT INFORMATION.....	5
2.1	Applicant Information.....	5
2.2	Manufacturer Information.....	5
2.3	Factory Information.....	5
2.4	General Description for Equipment under Test (EUT).....	5
2.5	Ancillary Equipment.....	6
2.6	Technical Information.....	8
3	SUMMARY OF TEST RESULTS.....	9
3.1	Test Standards.....	9
3.2	Verdict.....	9
3.3	Test Uncertainty.....	9
4	GENERAL TEST CONFIGURATIONS.....	10
4.1	Test Environments, Test Date and Test Engineer.....	10
4.2	Test Equipment List.....	10
4.3	Test Enclosure list.....	12
4.4	Test Configurations.....	14
4.5	Test Setups.....	15
4.6	Test Conditions.....	17
5	TEST ITEMS.....	18
5.1	Emission Tests.....	18
	ANNEX A TEST RESULTS.....	22
A.1	Radiated Emission.....	22

A.2	Conducted Emission	30
ANNEX B	TEST SETUP PHOTOS	34
ANNEX C	EUT EXTERNAL PHOTOS.....	34
ANNEX D	EUT INTERNAL PHOTOS.....	34

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

2.2 Manufacturer Information

Manufacturer	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

2.3 Factory Information

Factory	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	CPH2339
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	11
Software Version	ColorOS V12.1
Dimensions (Approx.)	N/A
Weight (Approx.)	about 190g(with battery)

2.5 Ancillary Equipment

Ancillary Equipment 1	Li-Polymer Battery 1	
	Brand Name	SUPERVOOC
	Model No.	BLP923
	Serial No.	N/A
	Capacitance	Rated: 4880mAh/18.88Wh Typical: 5000mAh/19.35Wh
	Rated Voltage	3.87 V
	Limited Voltage	4.45 V
	Manufacturer	Dongguan NVT Technology Co., Ltd
Ancillary Equipment 2	Li-Polymer Battery 2	
	Brand Name	SUPERVOOC
	Model No.	BLP923
	Serial No.	N/A
	Capacitance	Rated: 4880mAh/18.88Wh Typical: 5000mAh/19.35Wh
	Rated Voltage	3.87V
	Limited Voltage	4.45 V
	Manufacturer	Chongqing CosMX Battery Co., Ltd.
Ancillary Equipment 3	Power Supply Unit 1	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDYH
	Serial No.	Huntkey
	Rated Input	100-240VAC 50/60Hz 1.2A
	Rated Output	5VDC 2A 10W or 5-11VDC 3.0A Max 33.0WMax
Ancillary Equipment 4	Power Supply Unit 2	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDEH
	Serial No.	Huntkey
	Rated Input	100-240VAC 50/60Hz 1.2A
	Rated Output	5VDC 2A 10W or 5-11VDC 3.0A Max 33.0WMax
Ancillary Equipment 5	Power Supply Unit 3	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDEH
	Serial No.	GOLDEN LAKE
	Rated Input	100-240VAC 50/60Hz 1.2A
	Rated Output	5VDC 2A 10W or 5-11VDC 3.0A Max 33.0WMax
Ancillary Equipment 6	Power Supply Unit 4	

	Brand Name	SUPERVOOC
	Model No.	VCB3HDEH
	Serial No.	Yohoo
	Rated Input	100-240VAC 50/60Hz 1.2A
	Rated Output	5VDC 2A 10W or 5-11VDC 3.0A Max 33.0WMax
Ancillary Equipment 7	Power Supply Unit 5	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDUH
	Serial No.	Huntkey
	Rated Input	100-240VAC 50/60Hz 1.2A
Ancillary Equipment 8	Power Supply Unit 6	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDUH
	Serial No.	GOLDEN LAKE
	Rated Input	100-240VAC 50/60Hz 1.2A
Ancillary Equipment 9	Power Supply Unit 7	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDUH
	Serial No.	Yohoo
	Rated Input	100-240VAC 50/60Hz 1.2A
Ancillary Equipment 10	Power Supply Unit 8	
	Brand Name	SUPERVOOC
	Model No.	VCB3HDAH
	Serial No.	Huntkey
	Rated Input	100-240VAC 50/60Hz 1.2A
Ancillary Equipment 11	USB Cable 1	
	Model No.	DL143
	Length (Approx.)	1.0 m
Ancillary Equipment 12	USB Cable 2	
	Model No.	DL150
	Length (Approx.)	1.0 m
<p>Note 1: Letter in () means plug type.</p> <p>Note 2: All adapters are tested, only the worst data of VCB3HDUH(GOLDEN LAKE) shown in this report.</p> <p>Note 3: All USB Cable are tested, only the worst data of DL143 shown in this report.</p>		

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/17/26/66 LTE TDD Band 38/41 LTE CA Uplink (UL): CA_7C, CA_38C, CA_41C 5G Network SA: NR n5/n7/n38/n41 NSA(EN-DC): DC_5A_n7A, DC_7A_n5A, DC_66A_n7A Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GPS, GLONASS, BDS, Galileo, SBAS, FM Receiver, NFC
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

The Highest Speed of Processor	2.4GHz
--------------------------------	--------

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.22 dB
Radiated emissions (30 MHz-1 GHz)-10m	4.80 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.76 dB
Radiated emissions (1 GHz-18 GHz)-3m	4.88 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments, Test Date and Test Engineer

Test items	Voltage	Temperature	Relative Humidity	Ambient Pressure	Test Date	Test Engineer
Radiated Emission	AC 120V/60Hz DC 3.87V(battery)	18.9℃	52%	101Pa	Feb. 22, 2022 - Feb. 23, 2022	Gu Shuaizhen
Conducted Emission	AC 230V/50Hz AC 120V/60Hz DC 3.87V(battery)	21℃	42%	101Pa	Feb. 23, 2022	Ye Guangqi

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz (10 m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.10.10	2022.10.09	<input type="checkbox"/>
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2018054558	2021.10.10	2022.10.09	<input type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01	<input type="checkbox"/>
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2021.08.15	2024.08.14	<input type="checkbox"/>
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		<input type="checkbox"/>

Radiated Emission Test For Frequency Below 1 GHz (3m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY55330120	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01	<input checked="" type="checkbox"/>
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2021.09.04	2024.09.03	<input checked="" type="checkbox"/>
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		<input checked="" type="checkbox"/>

Radiated Emission Test For Frequency Above 1 GHz (3m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	Agilent	N9038A	MY55330120	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
EMI Receiver	ROHDE & SCHWARZ	FSV40	101544	2022.01.04	2023.01.03	<input checked="" type="checkbox"/>
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
Amplifier (18-40GHz)	COM-MV	KA_LNA18-40G-01	18050001	2021.10.20	2022.10.19	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	1917	2019.07.02	2022.07.01	<input checked="" type="checkbox"/>
Test Antenna-Horn	A-INFOMW	LB-180400KF	J211060273	2021.07.02	2024.07.01	<input checked="" type="checkbox"/>
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2021.09.04	2024.09.03	<input checked="" type="checkbox"/>
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		<input checked="" type="checkbox"/>

Conducted disturbance Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2021.10.10	2022.10.09	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.08	2022.06.07	<input checked="" type="checkbox"/>
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	N/A	2022.02.19	2025.02.18	<input checked="" type="checkbox"/>
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		<input checked="" type="checkbox"/>

4.3 Test Enclosure list

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Wireless Communications Test Set	R&S	CMW500	127801	N/A	Cal. Due 2023.01.03	<input checked="" type="checkbox"/>
PC	Dell	015K3N	N/A	N/A	Special Handled	<input type="checkbox"/>
5G Wireless Test Platform	Keysight	UXM E7515B	MY59321 617	N/A	Cal. Due 2022.10.10	<input checked="" type="checkbox"/>
Laptop	HONOR	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Printer	HP	DESKJET 1000	N/A	N/A	N/A	<input type="checkbox"/>
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	<input type="checkbox"/>
Mouse	Logitech	M100	N/A	N/A	N/A	<input type="checkbox"/>
USB disk	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
TF Card	Kingston	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	<input type="checkbox"/>
iPhone	Apple	A1586	N/A	N/A	N/A	<input type="checkbox"/>
Phone	MI	M4	N/A	N/A	N/A	<input type="checkbox"/>
Bluetooth Headset	SAMSUNG	Gear Circle	N/A	N/A	N/A	<input type="checkbox"/>
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	<input type="checkbox"/>
Headset	N/A	OPPO	N/A	1.1 m	N/A	<input checked="" type="checkbox"/>
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω/100 W	<input type="checkbox"/>


Artificial load	N/A	N/A	N/A	N/A	5 Ω /100 W	<input type="checkbox"/>
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	<input type="checkbox"/>
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DC Power Supply	ITECH	IT6863A	60001401 06872100 06	N/A	N/A	<input type="checkbox"/>
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	<input type="checkbox"/>
LCD Monitor	Dell	U241HB	N/A	N/A	N/A	<input type="checkbox"/>
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The GSM 850 MHz RX Test Mode</u> GSM 850 MHz RX + EUT + Adapter + USB Cable + Battery + Headset
TC02	<u>The EGPRS 850 MHz RX Test Mode</u> EGPRS 850 MHz RX + EUT + Adapter + USB Cable + Battery + Headset
TC03	<u>The WCDMA Band 5 RX Test Mode</u> WCDMA Band 5 RX + EUT + Adapter + USB Cable + Battery + Headset
TC04	<u>The FDD LTE Band 5 RX Test Mode</u> LTE Band 5 RX + EUT + Adapter + USB Cable + Battery + Headset
TC05	<u>The FDD LTE Band 12 RX Test Mode</u> LTE Band 12 RX + EUT + Adapter + USB Cable + Battery + Headset
TC06	<u>The FDD LTE Band 17 RX Test Mode</u> LTE Band 17 RX + EUT + Adapter + USB Cable + Battery + Headset
TC07	<u>The FDD LTE Band 26 RX Test Mode</u> LTE Band 26 RX + EUT + Adapter + USB Cable + Battery + Headset
TC08	<u>The n5 Test Mode</u> n5 RX + EUT + Adapter + USB Cable + Battery + Headset
TC09	<u>The Camera Test Mode</u> EUT + Adapter + USB Cable + Battery + Headset + TF Card
TC10	<u>The Video Play Test Mode</u> EUT + Adapter + USB Cable + Battery + Headset + TF Card
TC11	<u>The USB Test Mode</u> EUT + USB Cable + Battery + Laptop+ Headset + TF Card


4.5 Test Setups

Test Setup 1

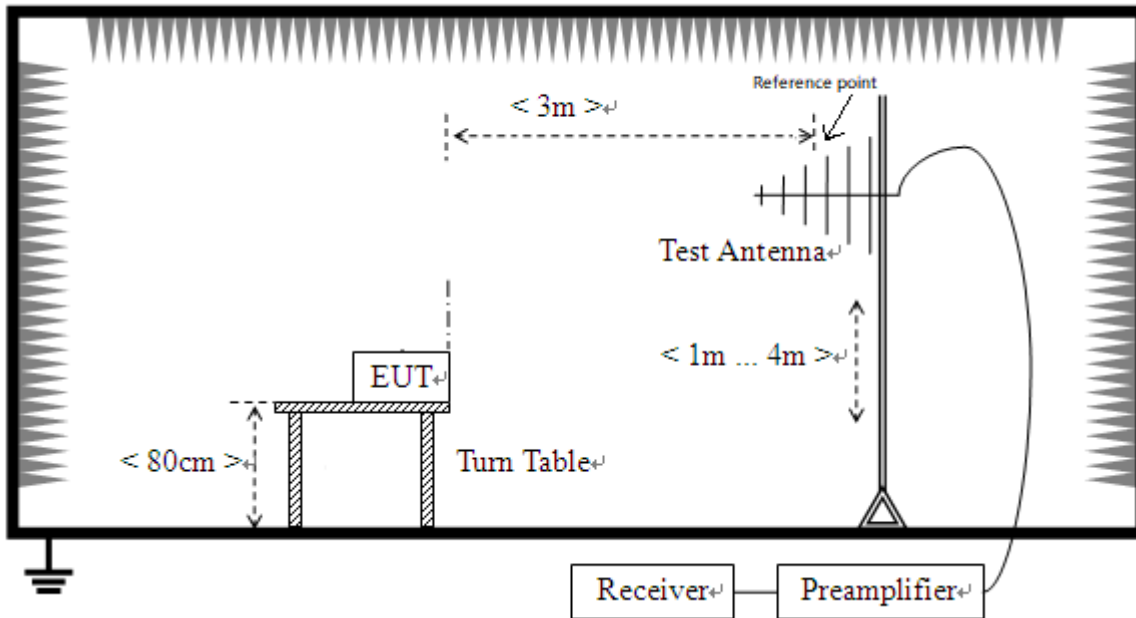


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

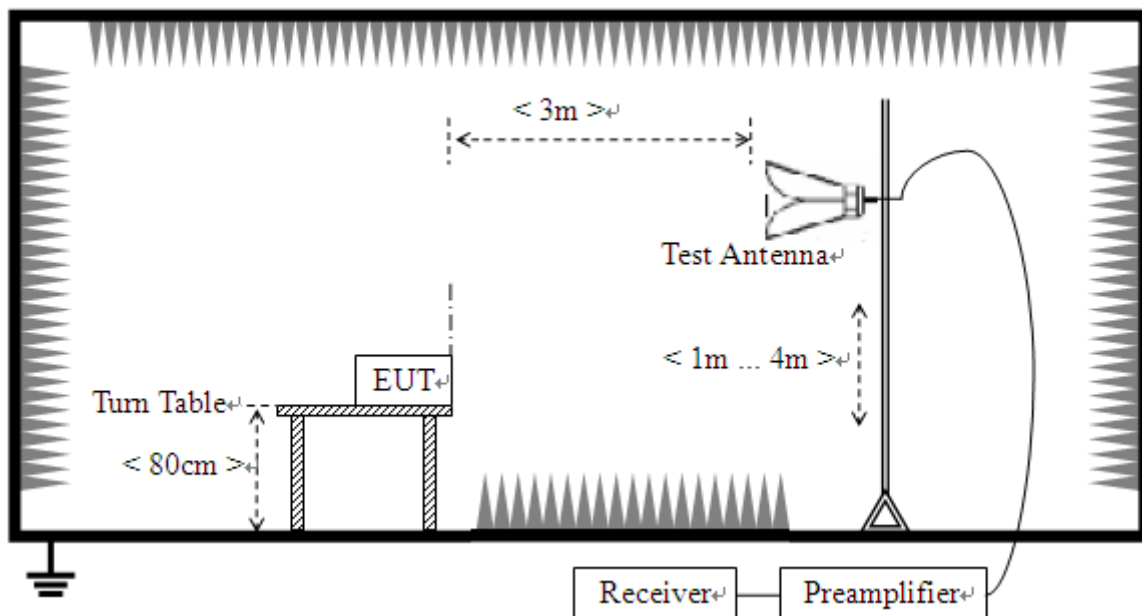

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

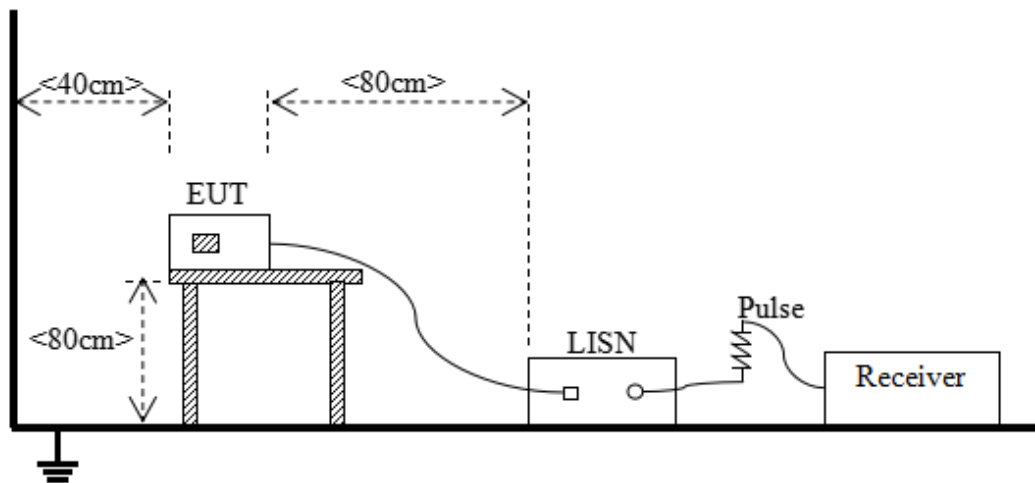

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC11 ^{Note}
Conducted Emission, AC Ports	Test Setup	Test Setup 3
	Test Configuration	TC01~TC11 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The Camera Test Mode is the worst mode in this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dBuV/m) = Reading (dBuV/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 KHz

VBW \geq RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dBuV) = Reading (dBuV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The Radiated Emission from 18G-40G is noise only, do not show on the report.

Test Data and Plots


The Camera Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

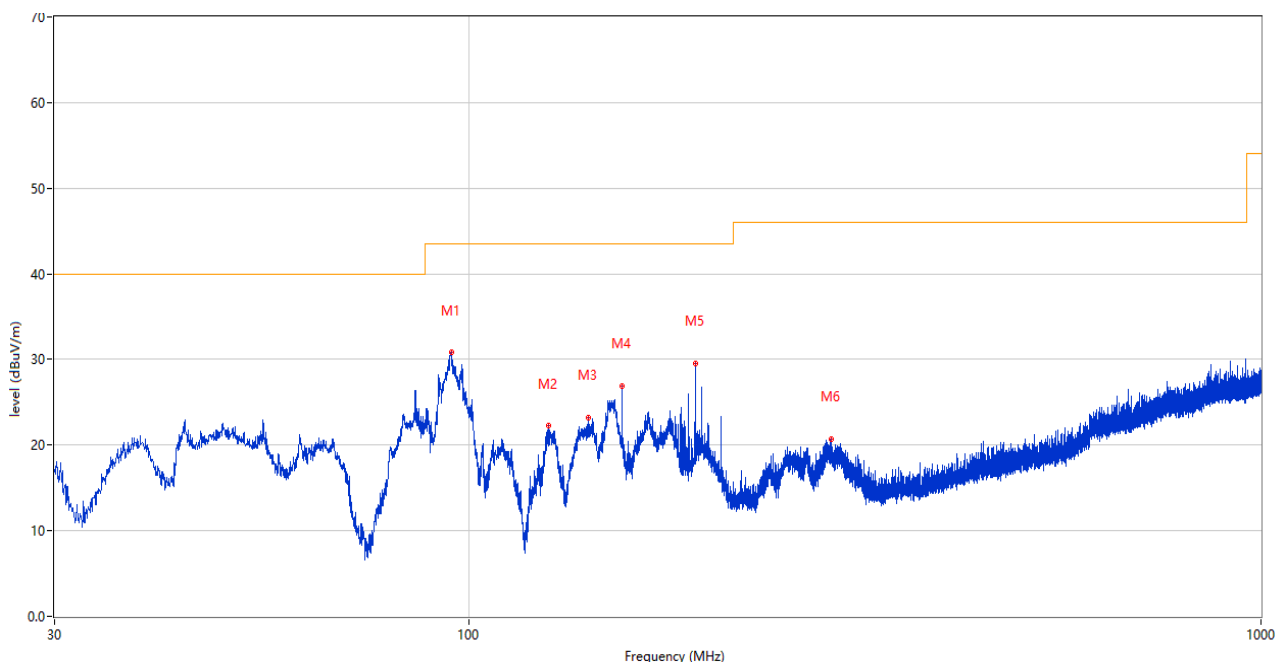


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	94.990	30.79	-27.58	43.5	-12.71	Peak	0.00	100	Vertical	Pass
2	126.127	22.21	-29.42	43.5	-21.29	Peak	58.00	100	Vertical	Pass
3	141.453	23.18	-30.29	43.5	-20.32	Peak	53.00	100	Vertical	Pass
4	156.052	26.85	-29.77	43.5	-16.65	Peak	294.00	100	Vertical	Pass
5	193.154	29.53	-27.07	43.5	-13.97	Peak	278.00	100	Vertical	Pass
6	287.098	20.75	-23.95	46.0	-25.25	Peak	255.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

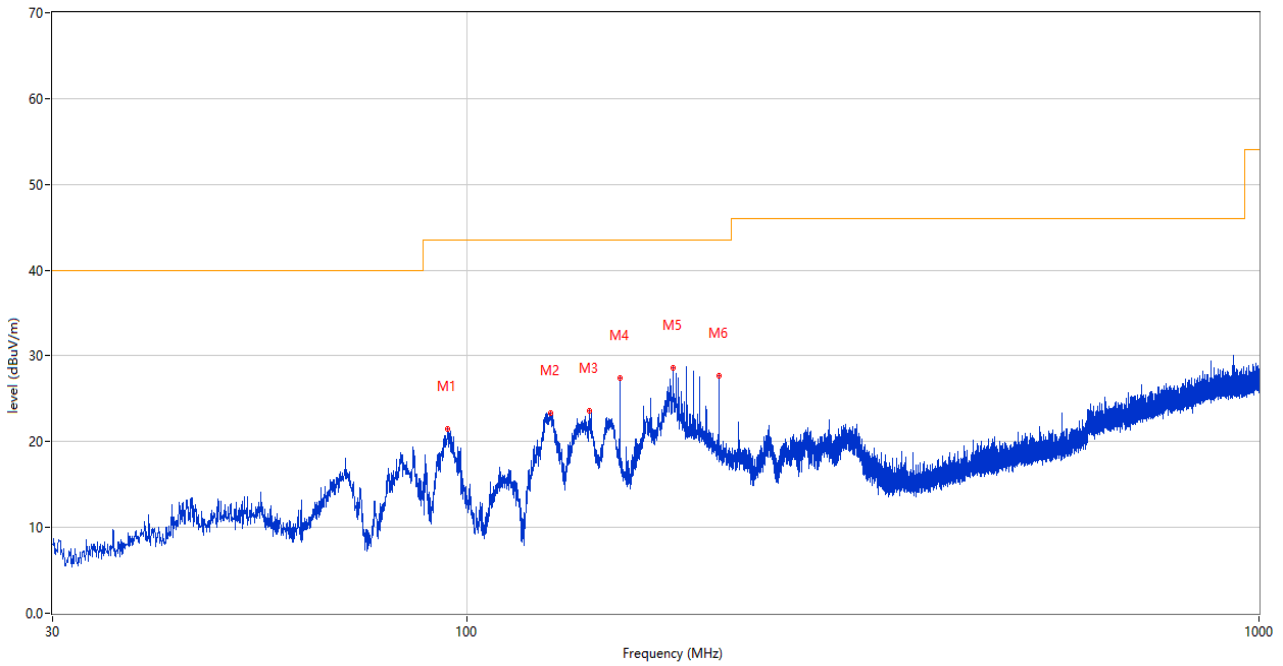


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	94.699	21.54	-27.61	43.5	-21.96	Peak	279.00	200	Horizontal	Pass
2	127.631	23.35	-29.62	43.5	-20.15	Peak	176.00	200	Horizontal	Pass
3	142.860	23.56	-30.23	43.5	-19.94	Peak	149.00	200	Horizontal	Pass
4	156.003	27.44	-29.78	43.5	-16.06	Peak	94.00	200	Horizontal	Pass
5	182.048	28.64	-28.30	43.5	-14.86	Peak	248.00	200	Horizontal	Pass
6	208.044	27.75	-26.66	43.5	-15.75	Peak	75.00	100	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz

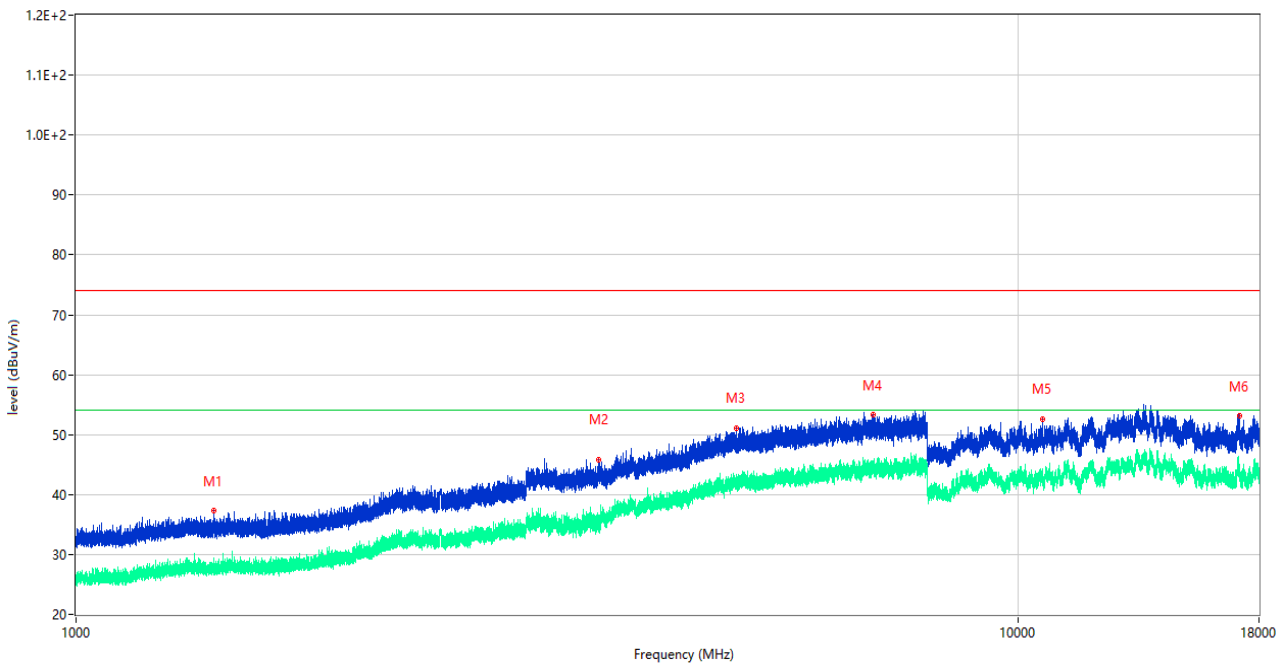

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1401.500	37.30	-16.55	74.0	-36.70	Peak	198.00	100	Vertical	Pass
1**	1401.500	28.02	-16.55	54.0	-25.98	AV	198.00	100	Vertical	Pass
2	3589.750	45.80	-4.93	74.0	-28.20	Peak	153.00	100	Vertical	Pass
2**	3589.750	36.59	-4.93	54.0	-17.41	AV	153.00	100	Vertical	Pass
3	5024.500	51.10	0.02	74.0	-22.90	Peak	4.00	100	Vertical	Pass
3**	5024.500	42.99	0.02	54.0	-11.01	AV	4.00	100	Vertical	Pass
4	7007.000	53.30	2.04	74.0	-20.70	Peak	42.00	100	Vertical	Pass
4**	7007.000	45.57	2.04	54.0	-8.43	AV	42.00	100	Vertical	Pass
5	10597.500	52.57	0.24	74.0	-21.43	Peak	87.00	100	Vertical	Pass
5**	10597.500	42.76	0.24	54.0	-11.24	AV	87.00	100	Vertical	Pass
6	17173.500	53.12	2.46	74.0	-20.88	Peak	87.00	100	Vertical	Pass
6**	17173.500	43.25	2.46	54.0	-10.75	AV	87.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

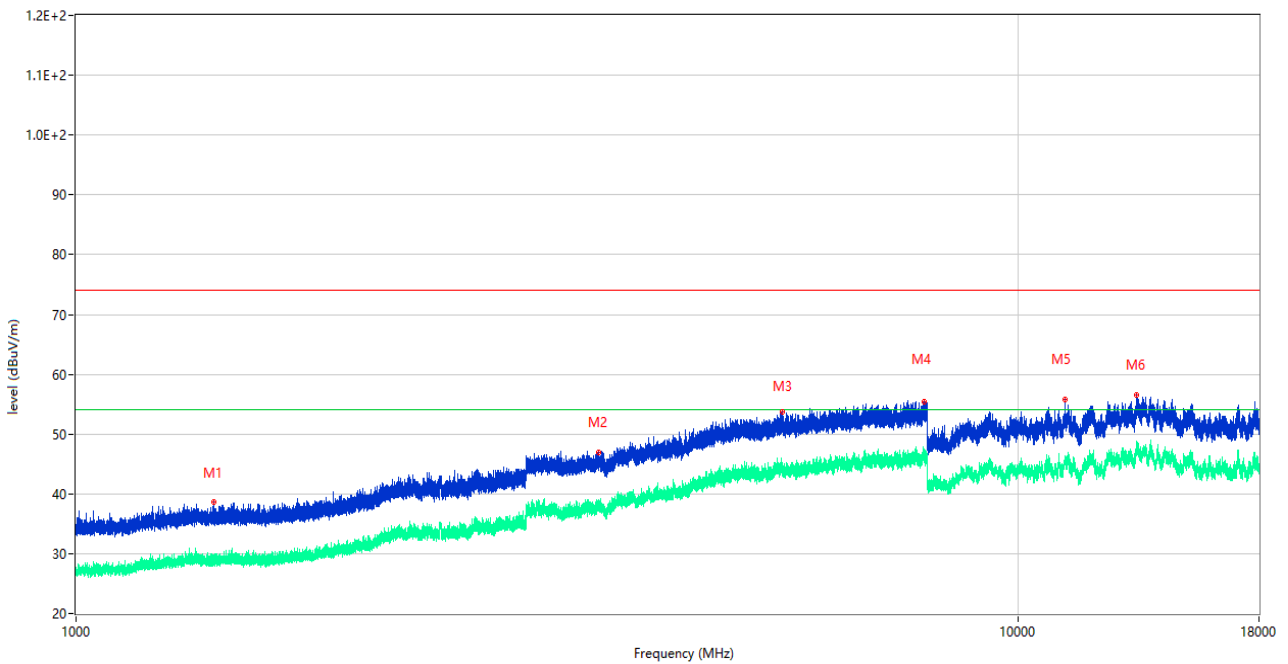


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1400.100	38.63	-16.54	74.0	-35.37	Peak	155.00	100	Horizontal	Pass
1**	1400.100	28.18	-16.54	54.0	-25.82	AV	155.00	100	Horizontal	Pass
2	3582.750	46.96	-5.28	74.0	-27.04	Peak	48.00	100	Horizontal	Pass
2**	3582.750	37.94	-5.28	54.0	-16.06	AV	48.00	100	Horizontal	Pass
3	5615.250	53.66	0.67	74.0	-20.34	Peak	246.00	100	Horizontal	Pass
3**	5615.250	43.86	0.67	54.0	-10.14	AV	246.00	100	Horizontal	Pass
4	7939.750	55.33	3.32	74.0	-18.67	Peak	259.00	100	Horizontal	Pass
4**	7939.750	46.49	3.32	54.0	-7.51	AV	259.00	100	Horizontal	Pass
5	11203.000	55.76	2.22	74.0	-18.24	Peak	107.00	100	Horizontal	Pass
5**	11203.000	45.82	2.22	54.0	-8.18	AV	107.00	100	Horizontal	Pass
6	13349.500	56.54	5.21	74.0	-17.46	Peak	107.00	100	Horizontal	Pass
6**	13349.500	47.98	5.21	54.0	-6.02	AV	107.00	100	Horizontal	Pass

Test Data and Plots


The USB Test Mode

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

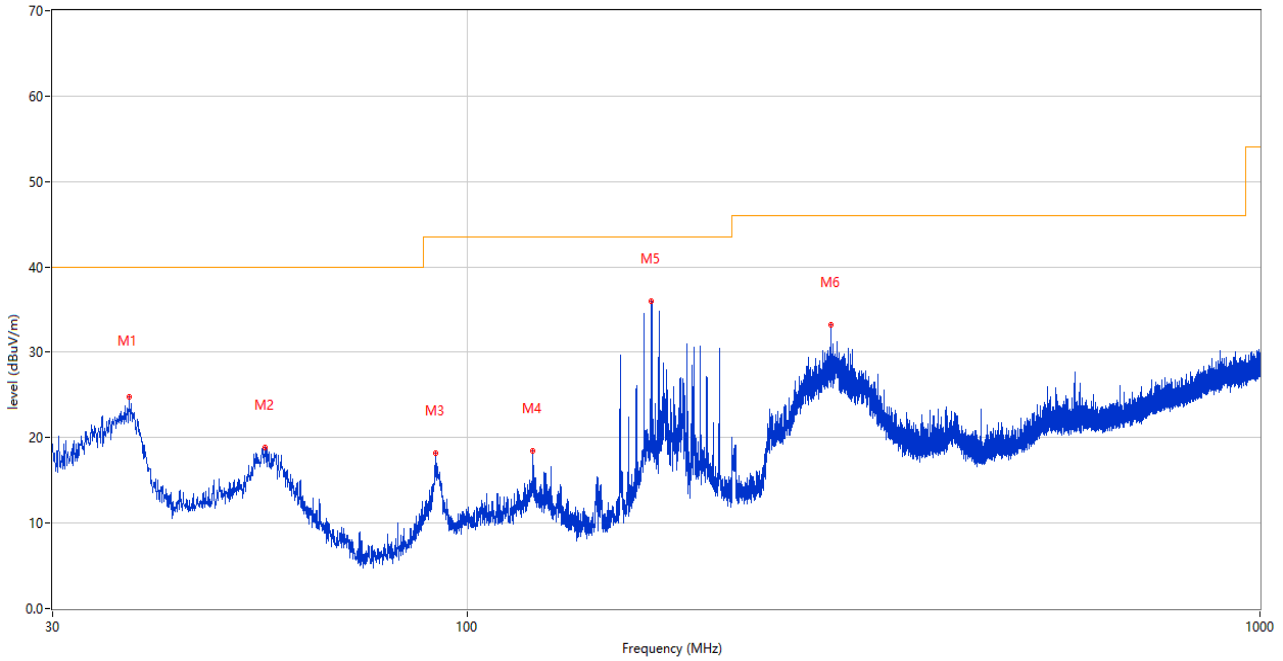


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	37.517	24.83	-27.41	40.0	-15.17	Peak	272.00	100	Vertical	Pass
2	55.559	18.88	-25.95	40.0	-21.12	Peak	179.00	100	Vertical	Pass
3	91.207	18.25	-28.26	43.5	-25.25	Peak	360.00	200	Vertical	Pass
4	121.083	18.41	-28.59	43.5	-25.09	Peak	297.00	100	Vertical	Pass
5	170.892	36.00	-29.17	43.5	-7.50	Peak	297.00	100	Vertical	Pass
6	287.293	33.27	-23.98	46.0	-12.73	Peak	360.00	200	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

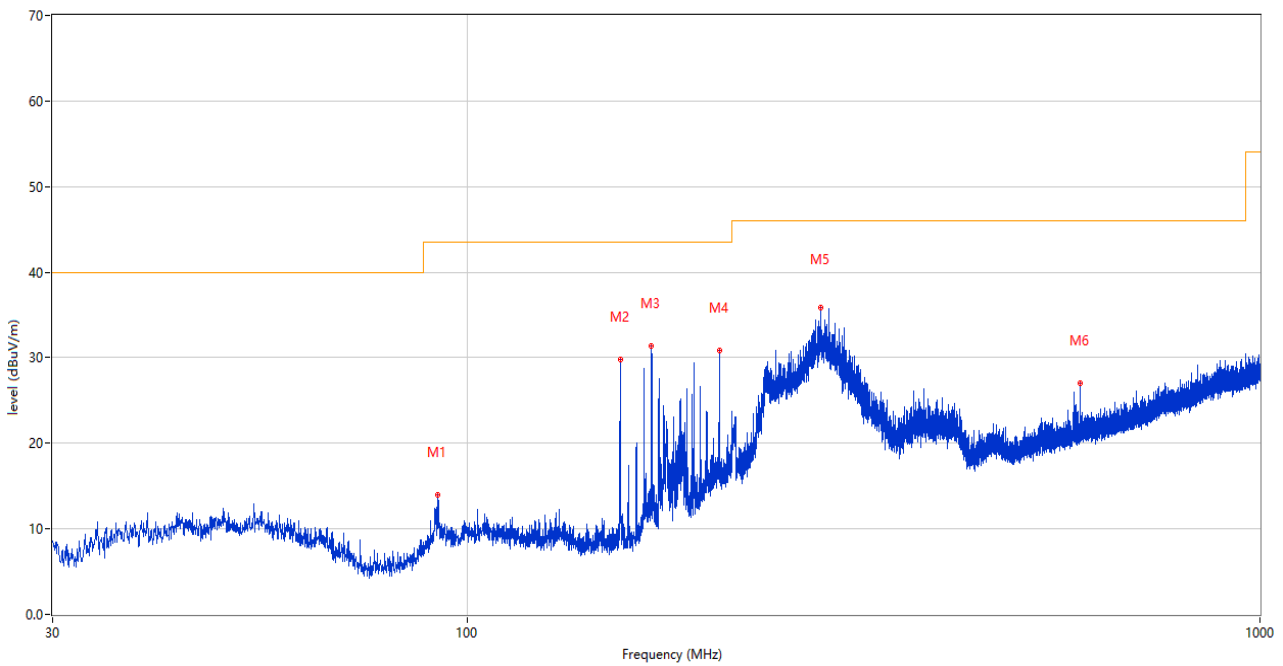


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	91.935	13.95	-28.10	43.5	-29.55	Peak	228.00	200	Horizontal	Pass
2	156.003	29.82	-29.78	43.5	-13.68	Peak	235.00	200	Horizontal	Pass
3	170.844	31.35	-29.17	43.5	-12.15	Peak	256.00	100	Horizontal	Pass
4	207.995	30.89	-26.66	43.5	-12.61	Peak	221.00	100	Horizontal	Pass
5	279.435	35.86	-24.21	46.0	-10.14	Peak	243.00	100	Horizontal	Pass
6	593.958	27.01	-16.07	46.0	-18.99	Peak	289.00	200	Horizontal	Pass

A.1.7 Test Antenna Vertical, 1 GHz – 18 GHz

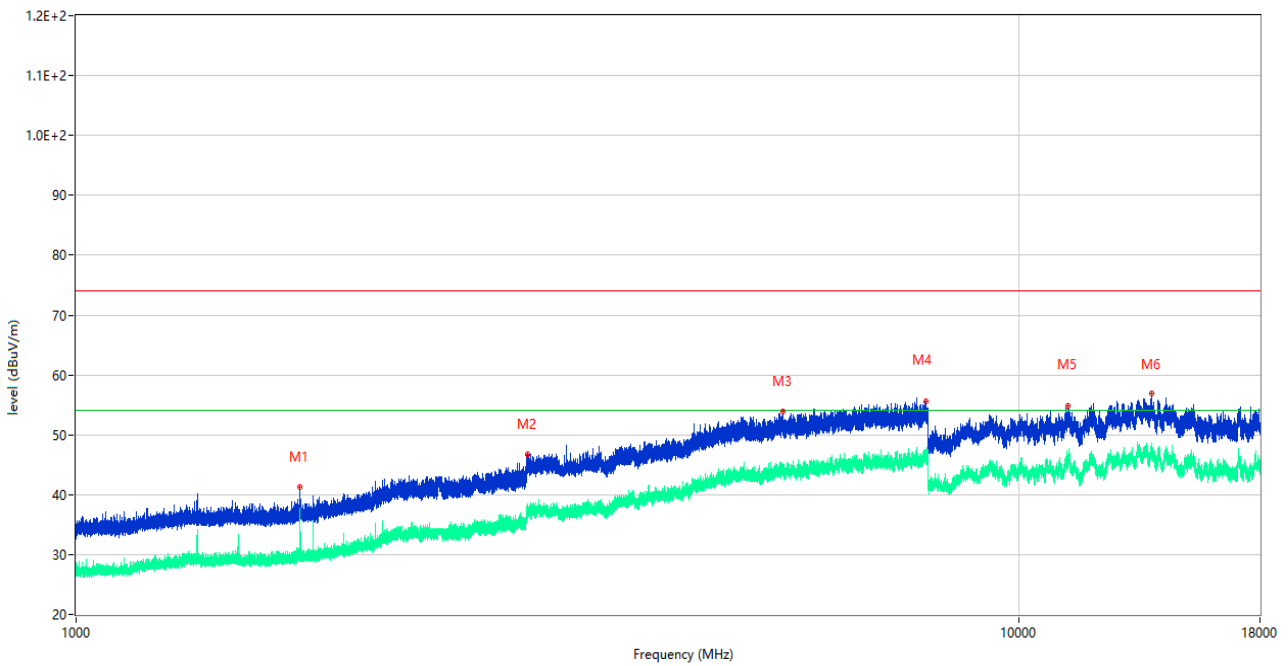

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1728.100	41.34	-16.46	74.0	-32.66	Peak	168.00	100	Vertical	Pass
1**	1728.100	37.69	-16.46	54.0	-16.31	AV	168.00	100	Vertical	Pass
2	3014.750	46.66	-6.69	74.0	-27.34	Peak	106.00	100	Vertical	Pass
2**	3014.750	36.93	-6.69	54.0	-17.07	AV	106.00	100	Vertical	Pass
3	5612.750	53.97	0.66	74.0	-20.03	Peak	93.00	100	Vertical	Pass
3**	5612.750	44.35	0.66	54.0	-9.65	AV	93.00	100	Vertical	Pass
4	7967.000	55.59	2.34	74.0	-18.41	Peak	216.00	100	Vertical	Pass
4**	7967.000	45.39	2.34	54.0	-8.61	AV	216.00	100	Vertical	Pass
5	11265.500	54.76	1.97	74.0	-19.24	Peak	200.00	100	Vertical	Pass
5**	11265.500	46.11	1.97	54.0	-7.89	AV	200.00	100	Vertical	Pass
6	13815.000	56.96	5.62	74.0	-17.04	Peak	238.00	100	Vertical	Pass
6**	13815.000	47.11	5.62	54.0	-6.89	AV	238.00	100	Vertical	Pass

A.1.8 Test Antenna Horizontal, 1 GHz – 18 GHz

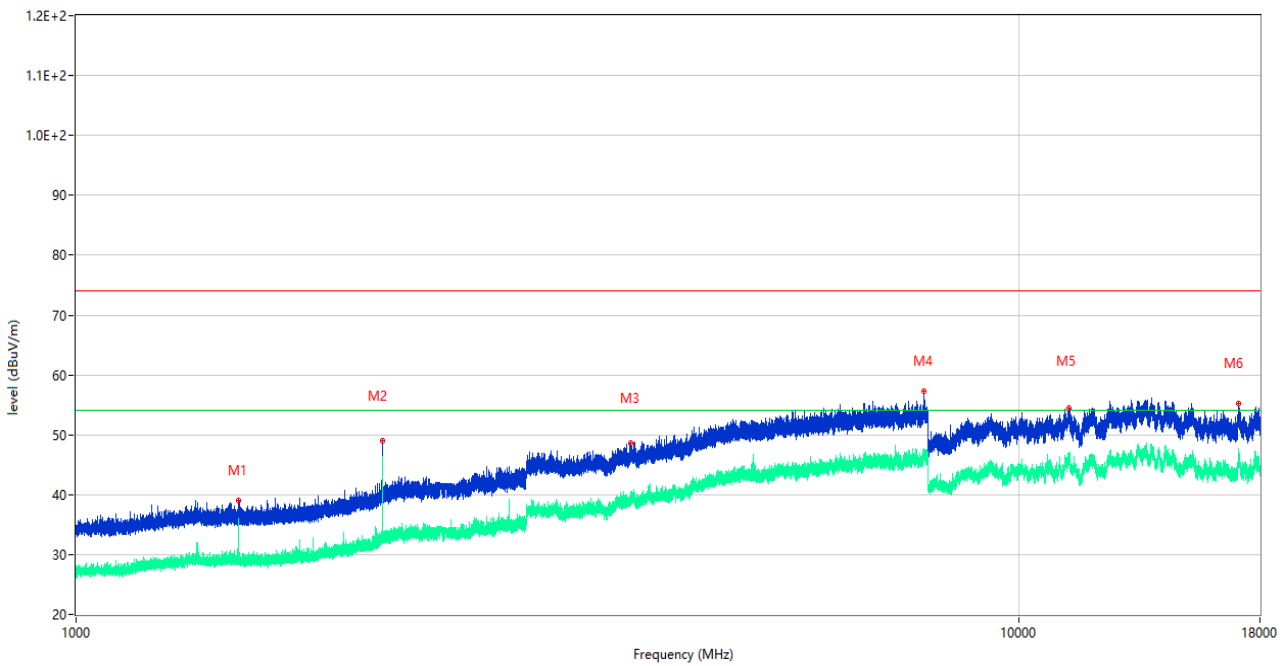

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.900	38.94	-16.62	74.0	-35.06	Peak	80.00	100	Horizontal	Pass
1**	1484.900	35.94	-16.62	54.0	-18.06	AV	80.00	100	Horizontal	Pass
2	2111.500	49.06	-13.11	74.0	-24.94	Peak	352.00	100	Horizontal	Pass
2**	2111.500	42.78	-13.11	54.0	-11.22	AV	352.00	100	Horizontal	Pass
3	3872.500	48.66	-2.88	74.0	-25.34	Peak	19.00	100	Horizontal	Pass
3**	3872.500	39.28	-2.88	54.0	-14.72	AV	19.00	100	Horizontal	Pass
4	7923.500	57.25	2.98	74.0	-16.75	Peak	106.00	100	Horizontal	Pass
4**	7923.500	46.99	2.98	54.0	-7.01	AV	106.00	100	Horizontal	Pass
5	11285.000	54.37	2.22	74.0	-19.63	Peak	0.00	100	Horizontal	Pass
5**	11285.000	46.13	2.22	54.0	-7.87	AV	0.00	100	Horizontal	Pass
6	17087.000	55.29	3.24	74.0	-18.71	Peak	248.00	100	Horizontal	Pass
6**	17087.000	45.89	3.24	54.0	-8.11	AV	248.00	100	Horizontal	Pass


A.2 Conducted Emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots


The Camera Test Mode

A.2.1 L Phase

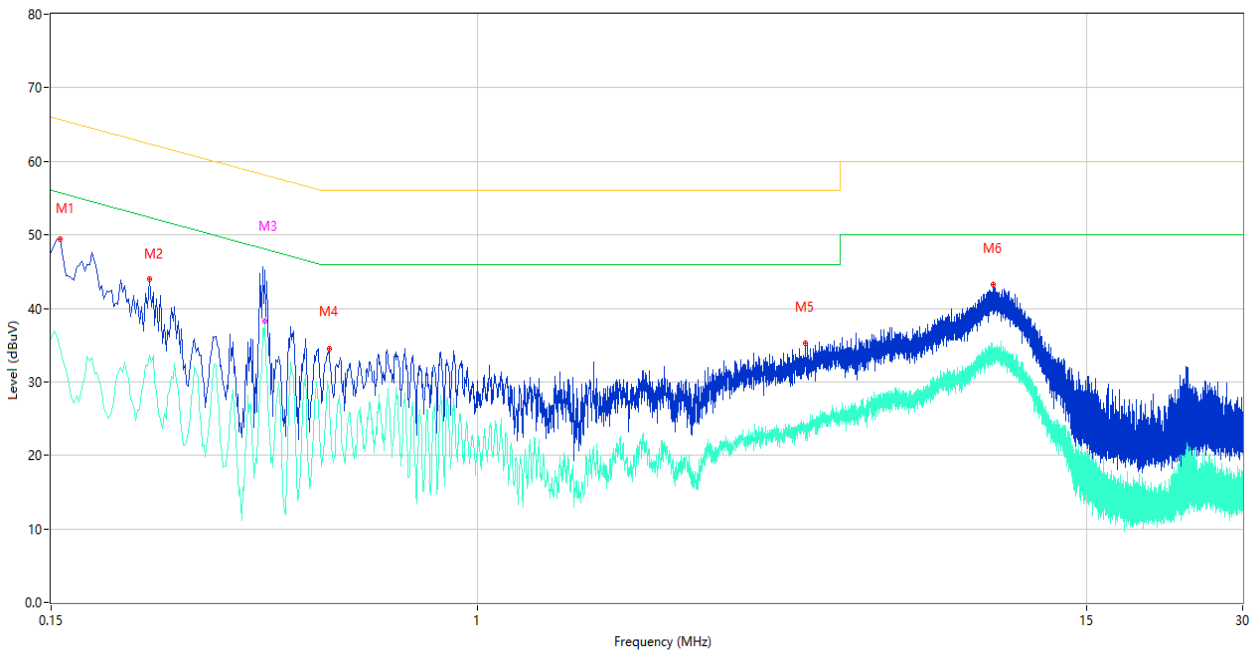

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	49.35	10.18	65.67	-16.32	Peak	L	Pass
1**	0.156	34.56	10.18	55.67	-21.11	AV	L	Pass
2	0.232	44.06	10.09	62.38	-18.32	Peak	L	Pass
2**	0.232	33.54	10.09	52.38	-18.84	AV	L	Pass
3	0.388	45.24	10.09	58.11	-12.87	Peak	L	Pass
3**	0.388	38.28	10.09	48.11	-9.83	AV	L	Pass
4	0.516	34.55	10.11	56.00	-21.45	Peak	L	Pass
4**	0.516	28.95	10.11	46.00	-17.05	AV	L	Pass
5	4.294	35.19	10.04	56.00	-20.81	Peak	L	Pass
5**	4.294	24.11	10.04	46.00	-21.89	AV	L	Pass
6	9.884	43.24	10.10	60.00	-16.76	Peak	L	Pass
6**	9.884	34.52	10.10	50.00	-15.48	AV	L	Pass

A.2.2 N Phase

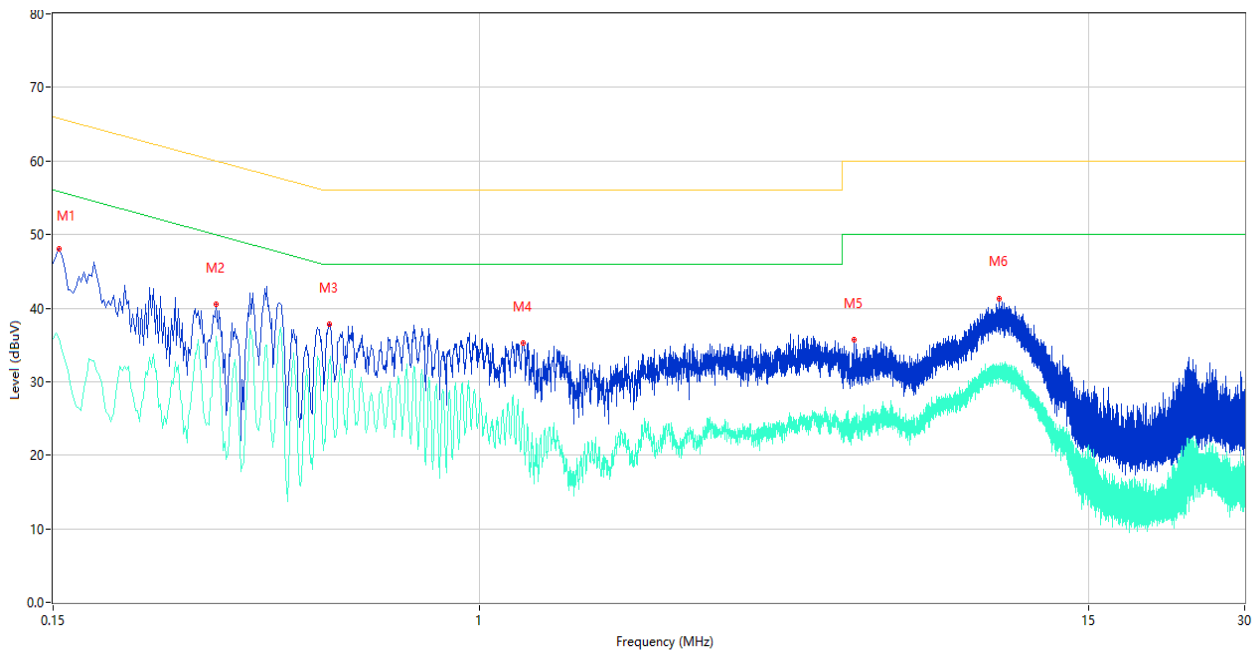


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	48.06	10.18	65.78	-17.72	Peak	N	Pass
1**	0.154	35.81	10.18	55.78	-19.97	AV	N	Pass
2	0.310	40.51	10.07	59.97	-19.46	Peak	N	Pass
2**	0.310	36.15	10.07	49.97	-13.82	AV	N	Pass
3	0.512	37.78	10.11	56.00	-18.22	Peak	N	Pass
3**	0.512	32.51	10.11	46.00	-13.49	AV	N	Pass
4	1.214	35.30	9.99	56.00	-20.70	Peak	N	Pass
4**	1.214	24.76	9.99	46.00	-21.24	AV	N	Pass
5	5.276	35.71	9.97	60.00	-24.29	Peak	N	Pass
5**	5.276	25.27	9.97	50.00	-24.73	AV	N	Pass
6	10.092	41.35	10.10	60.00	-18.65	Peak	N	Pass
6**	10.092	30.98	10.10	50.00	-19.02	AV	N	Pass

Test Data and Plots


The USB Test Mode

A.2.3 L Phase

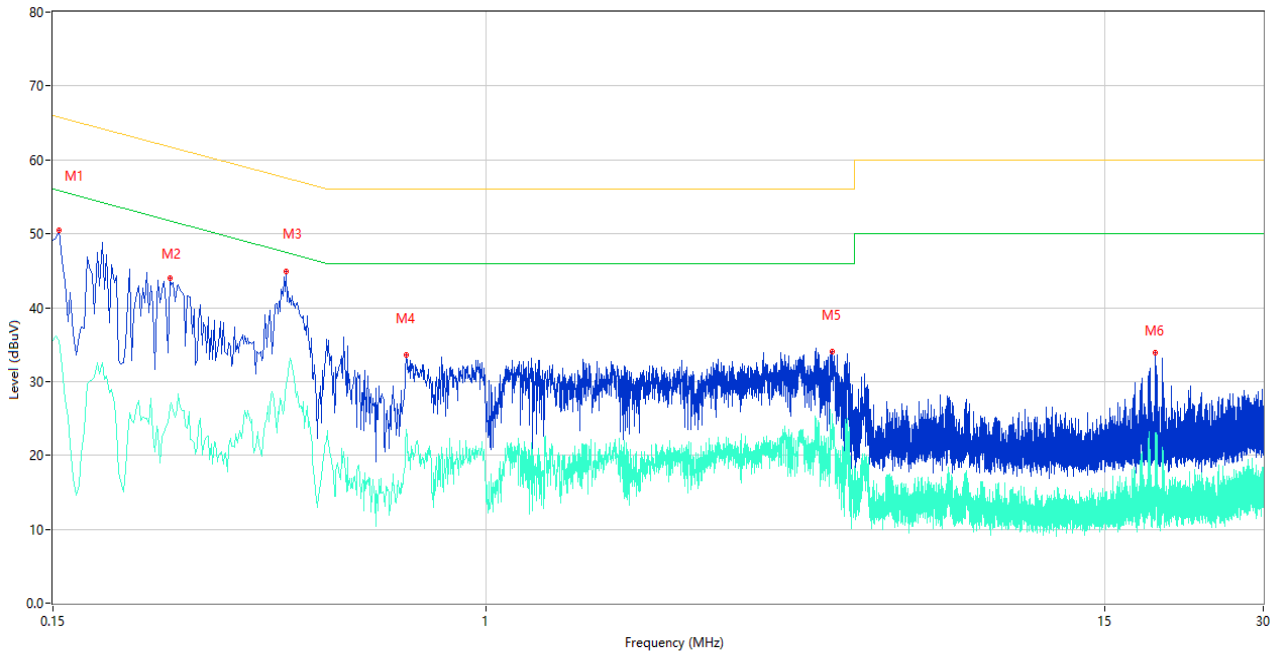

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	50.42	10.18	65.78	-15.36	Peak	L	Pass
1**	0.154	35.63	10.18	55.78	-20.15	AV	L	Pass
2	0.250	43.99	10.08	61.76	-17.77	Peak	L	Pass
2**	0.250	26.49	10.08	51.76	-25.27	AV	L	Pass
3	0.416	44.84	10.09	57.53	-12.69	Peak	L	Pass
3**	0.416	29.77	10.09	47.53	-17.76	AV	L	Pass
4	0.704	33.60	10.08	56.00	-22.40	Peak	L	Pass
4**	0.704	23.46	10.08	46.00	-22.54	AV	L	Pass
5	4.544	34.05	10.00	56.00	-21.95	Peak	L	Pass
5**	4.544	25.57	10.00	46.00	-20.43	AV	L	Pass
6	18.712	33.91	10.21	60.00	-26.09	Peak	L	Pass
6**	18.712	22.24	10.21	50.00	-27.76	AV	L	Pass

A.2.4 N Phase

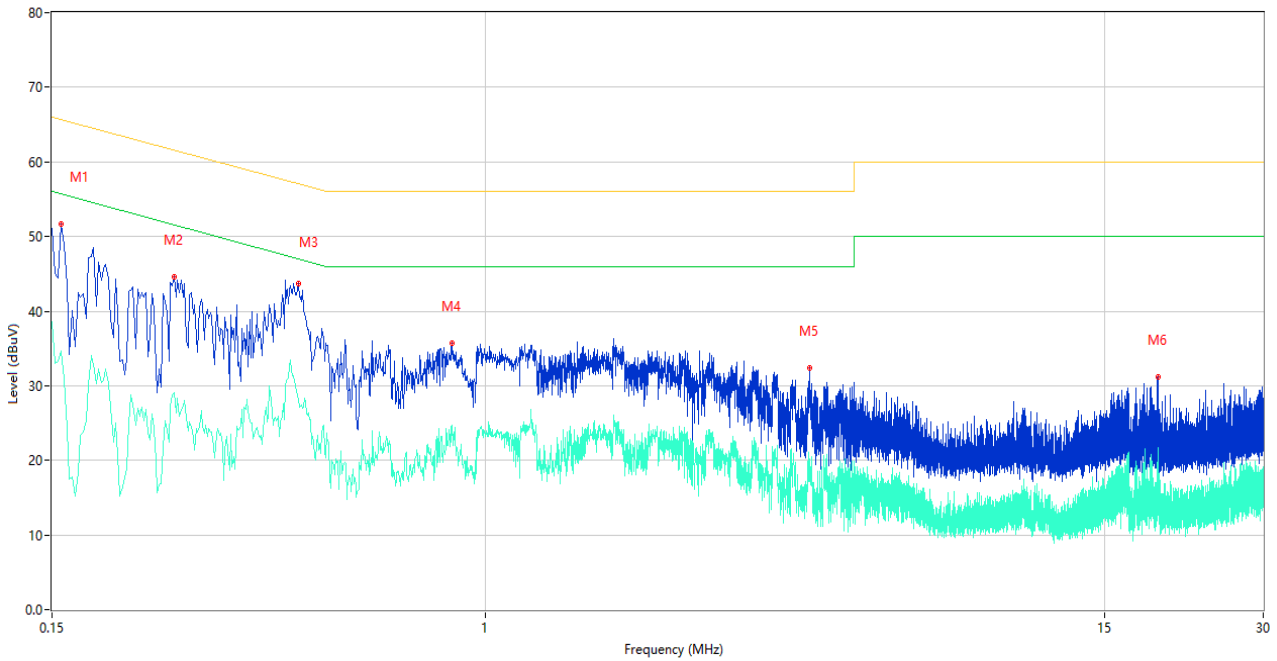

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	51.70	10.18	65.67	-13.97	Peak	N	Pass
1**	0.156	34.71	10.18	55.67	-20.96	AV	N	Pass
2	0.256	44.57	10.08	61.56	-16.99	Peak	N	Pass
2**	0.256	29.05	10.08	51.56	-22.51	AV	N	Pass
3	0.440	43.72	10.10	57.06	-13.34	Peak	N	Pass
3**	0.440	28.15	10.10	47.06	-18.91	AV	N	Pass
4	0.862	35.74	10.05	56.00	-20.26	Peak	N	Pass
4**	0.862	24.65	10.05	46.00	-21.35	AV	N	Pass
5	4.120	32.35	10.07	56.00	-23.65	Peak	N	Pass
5**	4.120	20.16	10.07	46.00	-25.84	AV	N	Pass
6	18.930	31.22	10.22	60.00	-28.78	Peak	N	Pass
6**	18.930	21.67	10.22	50.00	-28.33	AV	N	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2220432-AE-1.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2220432-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2220432-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
3. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
4. The test data and results are only valid for the tested samples provided by the customer.
5. This report shall not be partially reproduced without the written permission of the laboratory.
6. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--