



FCC Part 15C TEST REPORT

Issued to

GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP.,LTD

For

Mobile Phone

Model Name: OPPO N1
 Trade Name: OPPO
 Brand Name: OPPO
 FCC ID: R9C-N1
 Standard: 47 CFR Part 15 Subpart C
 Test date: 2013-9-18 to 2013-10-20
 Issue date: 2013-10-22

By

Shenzhen MORLAB Communication Technology Co., Ltd.



Tested by Nie Quan
 Nie Quan
 (Test Engineer)

Date 2013.10.22

Approved by Zeng Dexin
 Zeng Dexin
 Chief Engineer

Date

Review by Peng Huarui
 Peng Huarui
 (Project Manager)

Date 2013.10.22



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Facilities and Accreditations	5
2. 47 CFR PART 15C REQUIREMENTS.....	6
2.1. Antenna requirement.....	6
2.2. Peak Output Power.....	6
2.3. Bandwidth	8
2.4. Conducted Spurious Emissions.....	20
2.5. Power spectral density (PSD)	37
2.6. Restricted Frequency Bands.....	50
2.7. Conducted Emission	62
2.8. Radiated Emission.....	65
2.9. RF exposure evaluation.....	103

Change History		
Issue	Date	Reason for change
1.0	October 22, 2013	First edition

1. General Information

1.1. EUT Description

EUT Type: Mobile Phone
Serial No.....: (n.a, marked #1 by test site)
Hardware Version.....: 213055
Software Version: N1_11_130911
Applicant: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS
CORP.,LTD
NO.18 HAIBINROAD, WUSHA, CHANG'AN, DONGGUAN,
GUANGDONG, CHINA
Manufacturer: GUANGDONG OPPO MOBILE TELECOMMUNICATIONS
CORP.,LTD
NO.18 HAIBINROAD, WUSHA, CHANG'AN, DONGGUAN,
GUANGDONG, CHINA
Frequency Range.....: 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz
802.11n-40MHz: 2.422GHz- 2.452GHz
802.11a/n-20MHz: 5.745GHz- 5.825GHz
Channel Number.....: 802.11b/g/n-20MHz: 11
802.11n-40MHz: 7
802.11a/n:5
Modulation Type: DSSS (802.11b), OFDM (802.11g/n), DSSS+OFDM(802.11a/n)
Antenna Type.....: PIFA Antenna
Antenna Gain.....: 1.0dBi

Note 1: The EUT is Mobile Phone, it contains WIFI Module operating at 2.4GHz ISM band and 5.8GHz band; it supports 802.11a, 802.11b, 802.11g, 802.11n and they are all tested in this report.

Note 2: For 802.11b/g/n-20MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

Note 3: For 802.11a/n 5.8GHz, CH149(5745MHz), CH157(5785MHz) and CH165(5825GHz) are tested in this report

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 5: The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-12 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	Bandwidth	PASS
4	15.247(d)	Conducted Spurious Emission	PASS
5	15.247(d)	Restricted Frequency Bands	PASS
6	15.207	Conducted Emission	PASS
7	15.209 ,15.247(d)	Radiated Emission	PASS
8	15.247(e)	Power spectral density (PSD)	PASS
9	15.247(i), 1.1307&2.1093	RF exposure evaluation	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 V03 (04/09/2013).

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test Setup:

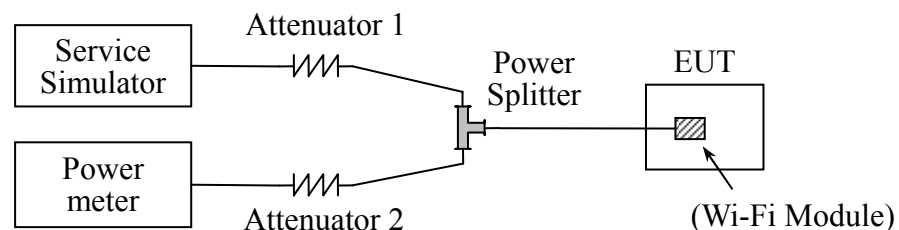

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EPM Series Power Meter	Agilent	E4418B	GB43318055	2013.05.12	2014.05.11
Power Sensor	Agilent	8482A	MY41091706	2013.05.12	2014.05.11

2.2.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.2.3.1. 802.11a Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
149	5745	13.06	0.020230	30	1	PASS
157	5785	12.91	0.019543			PASS
165	5825	13.11	0.020464			PASS

2.2.3.2. 802.11b Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.68	0.018535	30	1	PASS
6	2437	12.66	0.018450			PASS
11	2462	12.56	0.018030			PASS

2.2.3.3. 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.36	0.017219	30	1	PASS
6	2437	12.33	0.017100			PASS
11	2462	12.17	0.016482			PASS

2.2.3.4. 802.11n-20MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.34	0.017140	30	1	PASS
6	2437	12.29	0.016943			PASS
11	2462	12.14	0.016368			PASS
149	5745	13.13	0.020559	30	1	PASS
157	5785	12.97	0.019815			PASS
165	5825	13.12	0.020512			PASS

2.2.3.5. 802.11n-40MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2422	11.56	0.014322	30	1	PASS
6	2437	11.67	0.014689			PASS
11	2452	11.49	0.014093			PASS


2.3. Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:

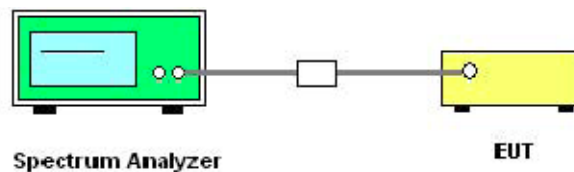

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11

2.3.3. Test Result


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

2.3.3.1. 802.11a Test mode

A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
149	5745	16.402	Plot A	≥ 500	PASS
157	5785	16.402	Plot B	≥ 500	PASS
165	5825	16.402	Plot C	≥ 500	PASS

B. Test Plots:

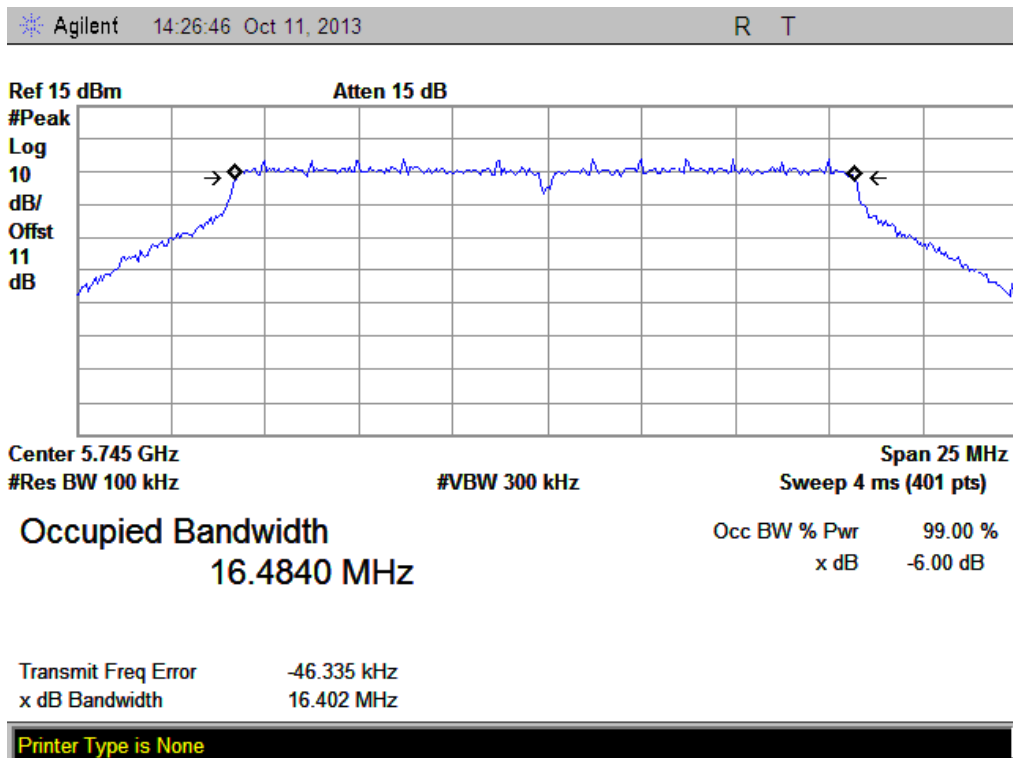

(Plot A: Channel 149: 5745MHz @ 802.11a)

Agilent 14:26:06 Oct 11, 2013 R T

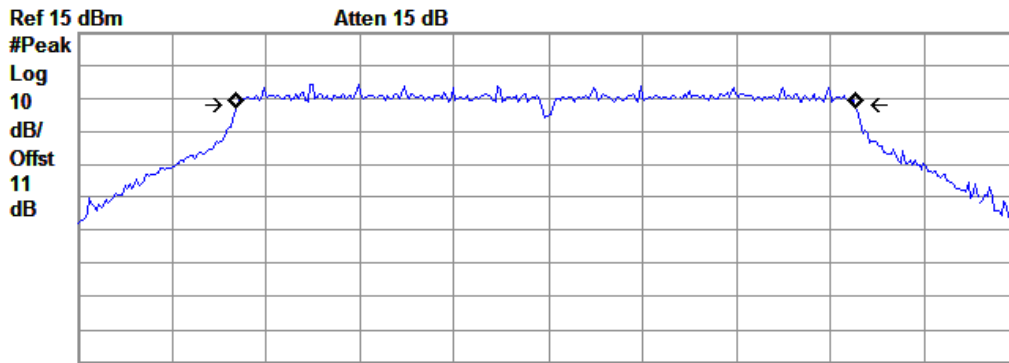

Center 5.785 GHz Span 25 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth
16.4736 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -45.097 kHz
x dB Bandwidth 16.402 MHz

Printer Type is None

(Plot B: Channel 157: 5785MHz @ 802.11a)

Agilent 14:25:13 Oct 11, 2013 R T

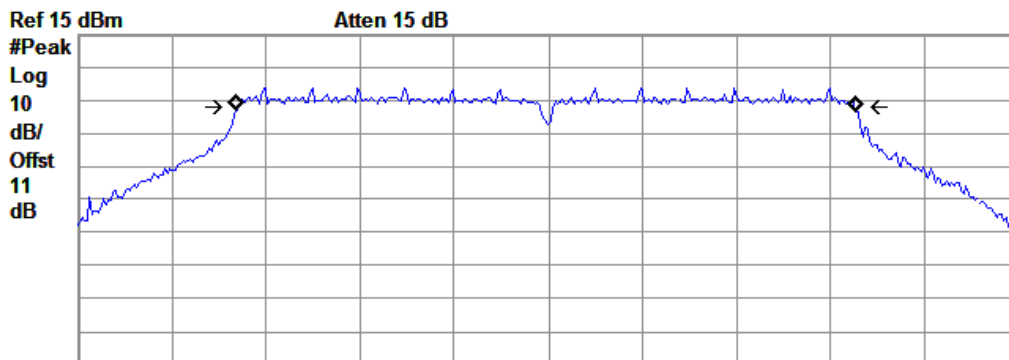

Center 5.825 GHz Span 25 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth
16.5089 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -39.458 kHz
x dB Bandwidth 16.402 MHz

Printer Type is None


(Plot C: Channel 165: 5825MHz @ 802.11a)

2.3.3.2. 802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
1	2412	8.084	Plot D	≥ 500	PASS
6	2437	8.595	Plot E	≥ 500	PASS
11	2462	9.091	Plot F	≥ 500	PASS


B. Test Plots

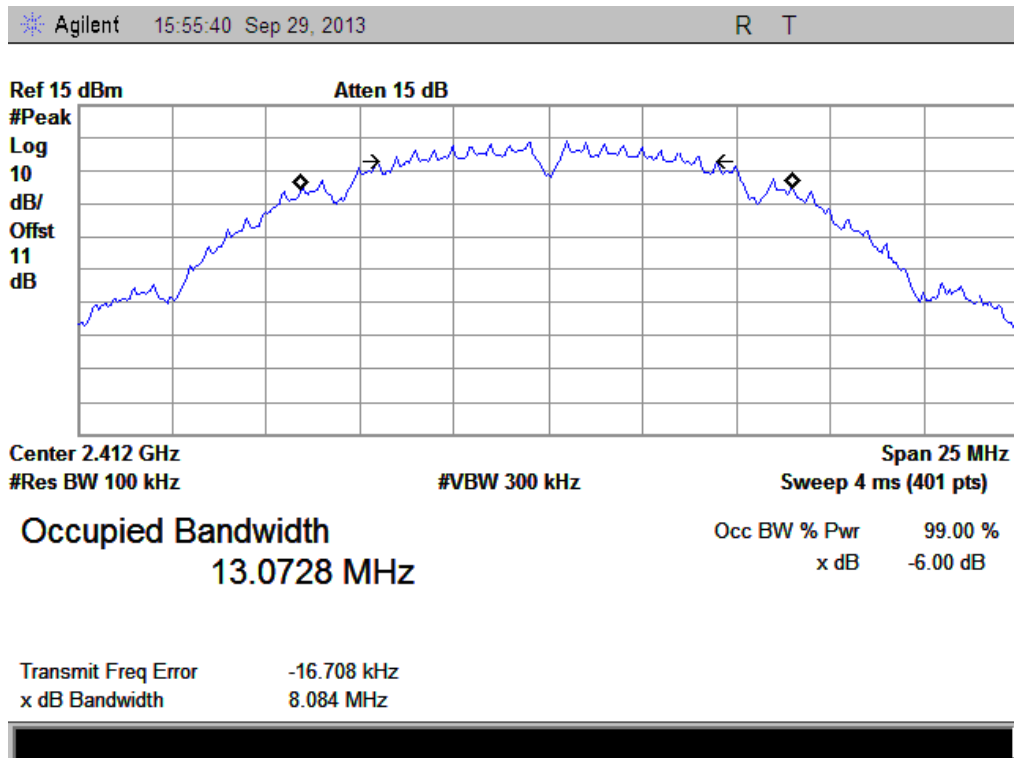

(Plot D: Channel 1: 2412MHz @ 802.11b)

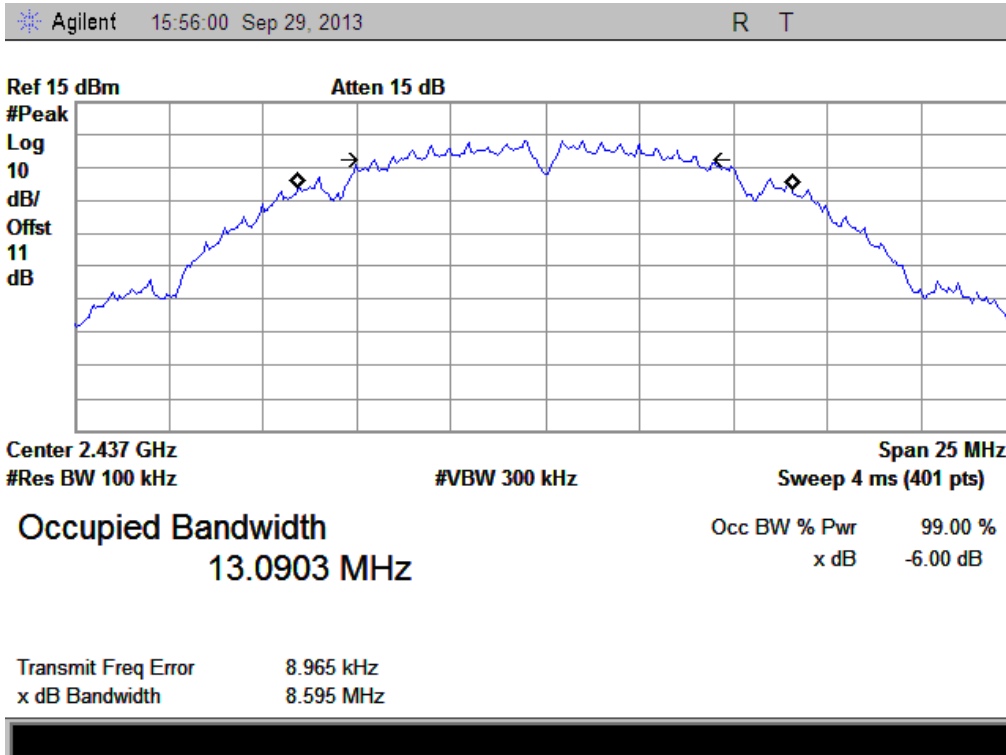

(Plot E: Channel 6: 2437 MHz @ 802.11b)

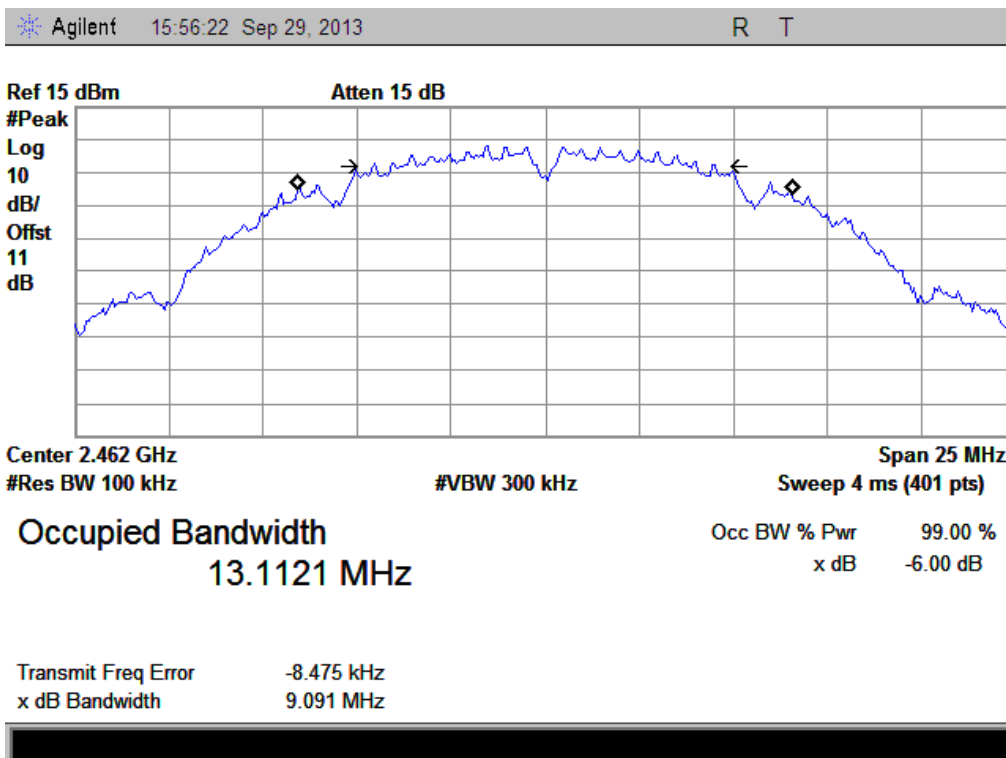


(Plot F: Channel 11: 2462MHz @ 802.11b)


2.3.3.3. 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	16.377	Plot G	≥ 500	PASS
6	2437	16.391	Plot H	≥ 500	PASS
11	2462	16.393	Plot I	≥ 500	PASS

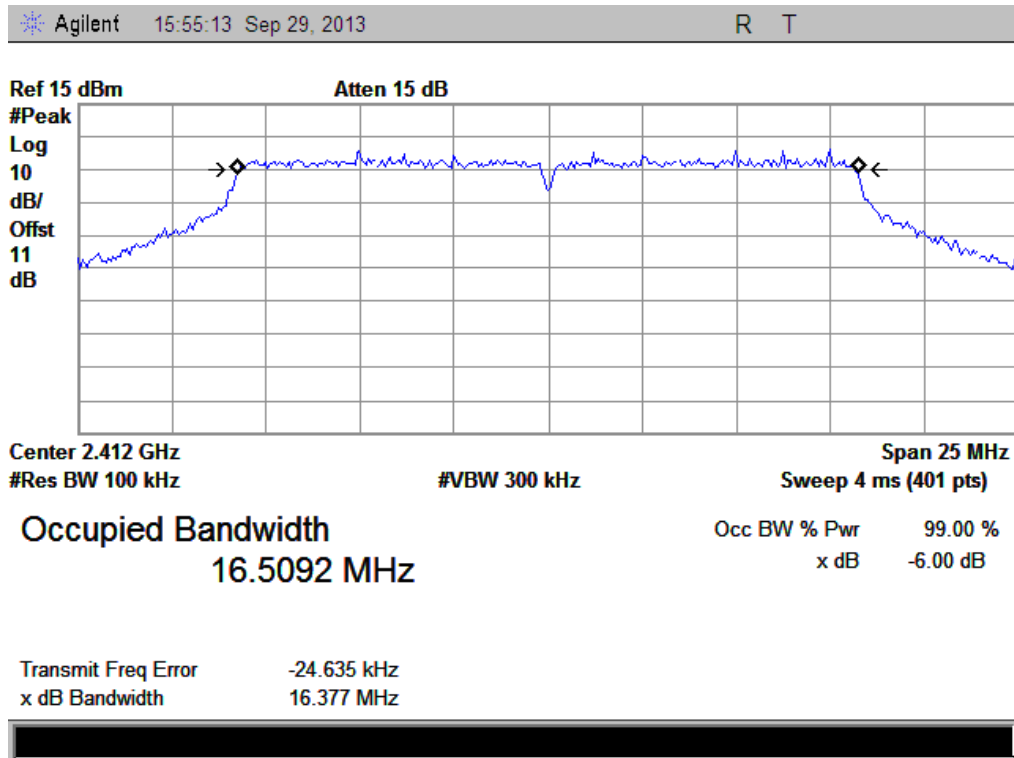B. Test Plots:


(Plot G: Channel 1: 2412MHz @ 802.11g)

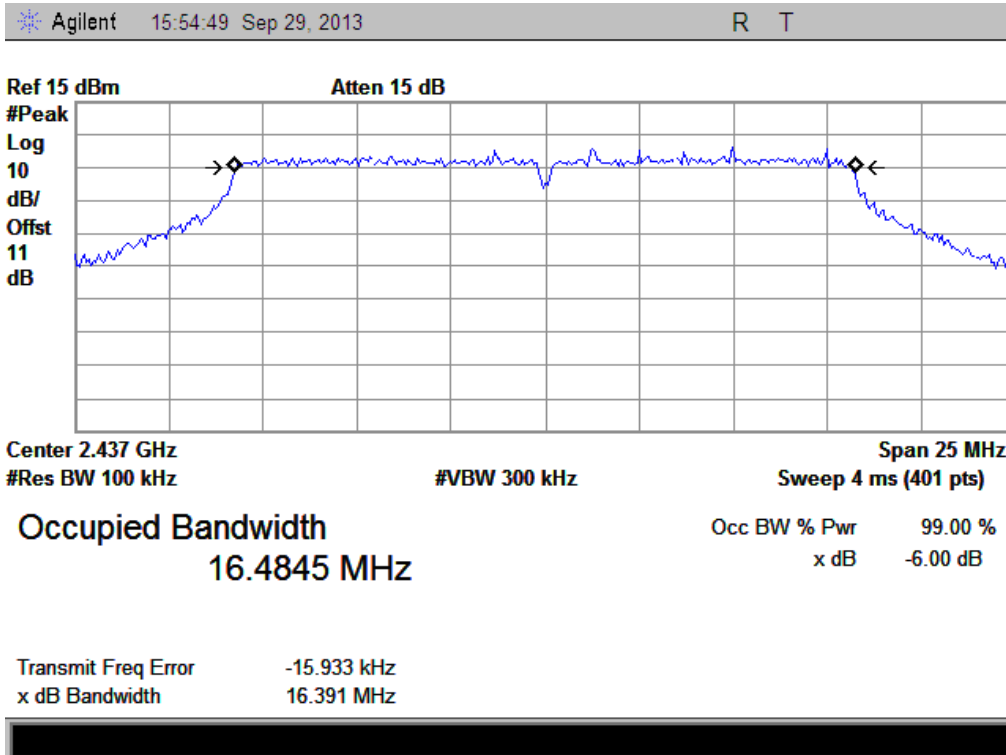

(Plot H: Channel 6: 2437MHz @ 802.11g)

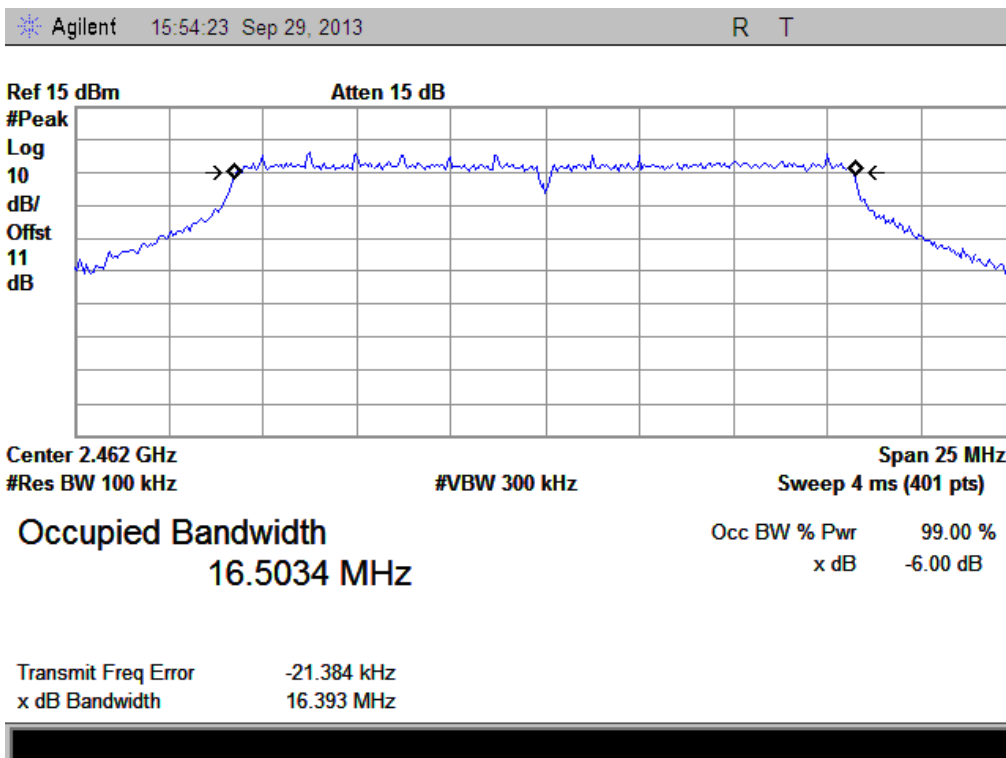


(Plot I: Channel 11: 2462MHz @ 802.11g)

2.3.3.4. 802.11n-20 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	17.610	Plot J	≥ 500	PASS
6	2437	17.567	Plot K	≥ 500	PASS
11	2462	17.572	Plot L	≥ 500	PASS
149	5745	17.642	Plot M	≥ 500	PASS
157	5785	17.637	Plot N	≥ 500	PASS
165	5825	17.614	Plot O	≥ 500	PASS


B. Test Plots:

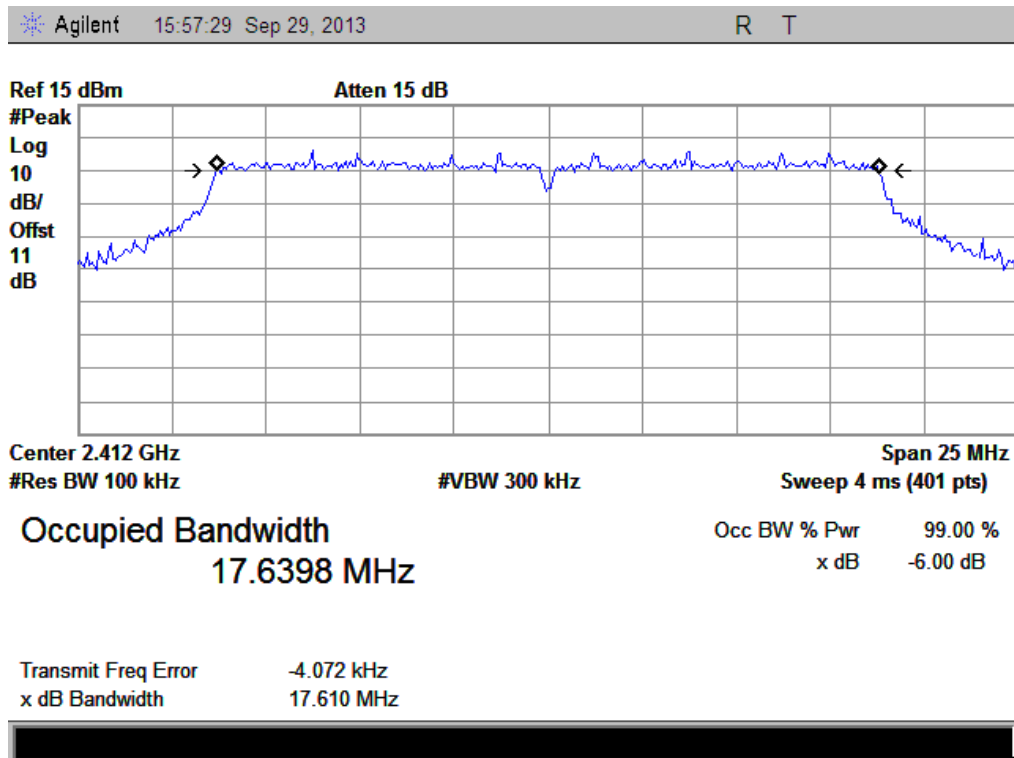

(Plot J: Channel 1: 2412MHz @ 802.11n-20)

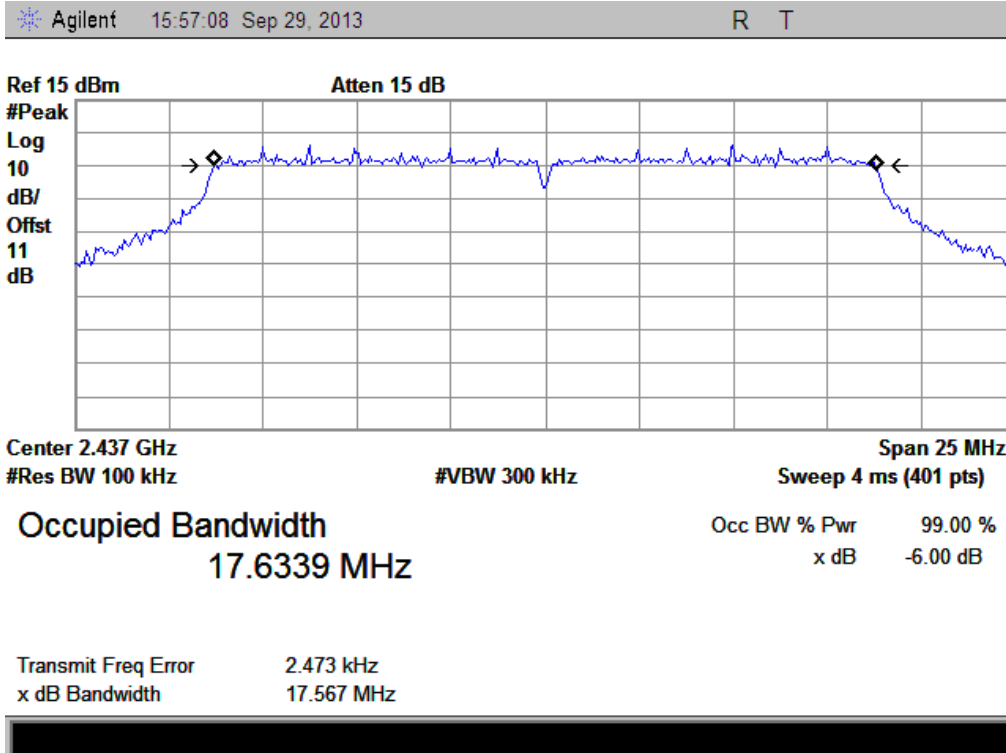


(Plot K: Channel 6: 2437MHz @ 802.11n-20)

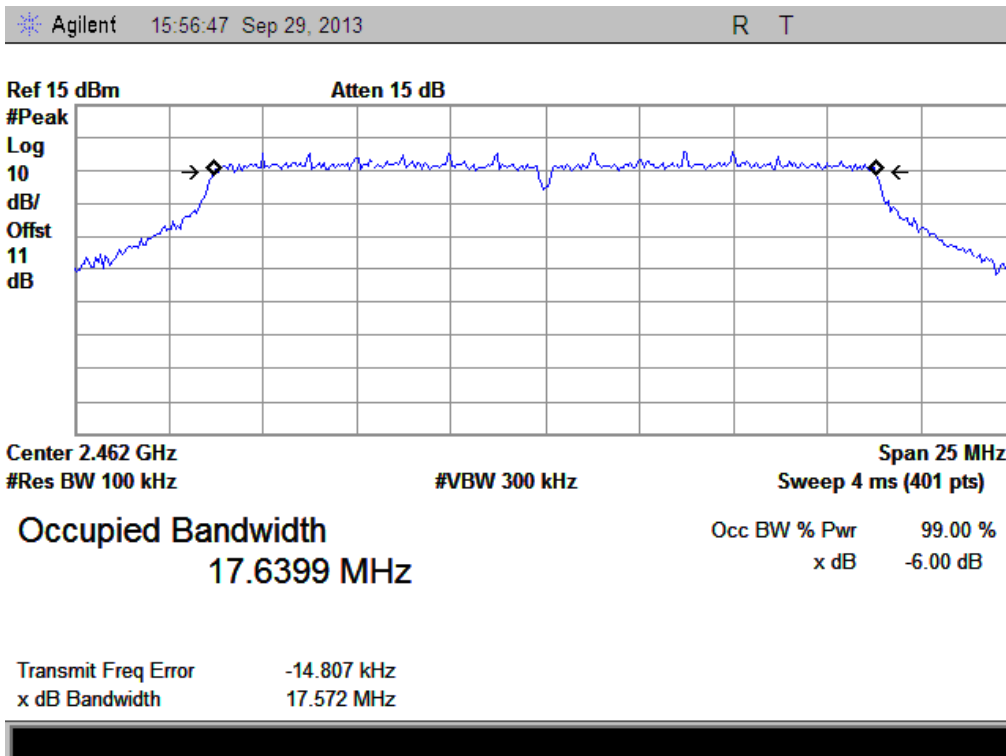

(Plot L: Channel 11: 2462MHz @ 802.11n-20)

Agilent 14:23:04 Oct 11, 2013 R T

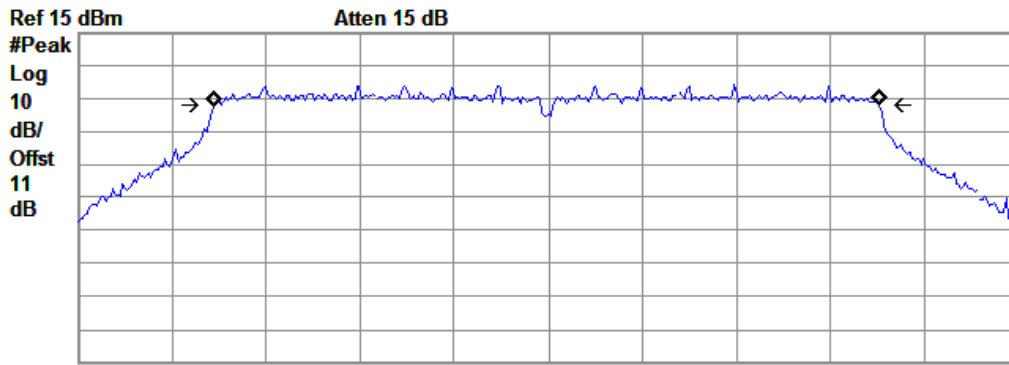

Center 5.745 GHz Span 25 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)

Occupied Bandwidth
 17.6397 MHz


Occ BW % Pwr 99.00 %
 x dB -6.00 dB

Transmit Freq Error -37.685 kHz
 x dB Bandwidth 17.642 MHz

Printer Type is None

(Plot M: Channel 149: 5745MHz @ 802.11n-20)

Agilent 14:23:51 Oct 11, 2013 R T

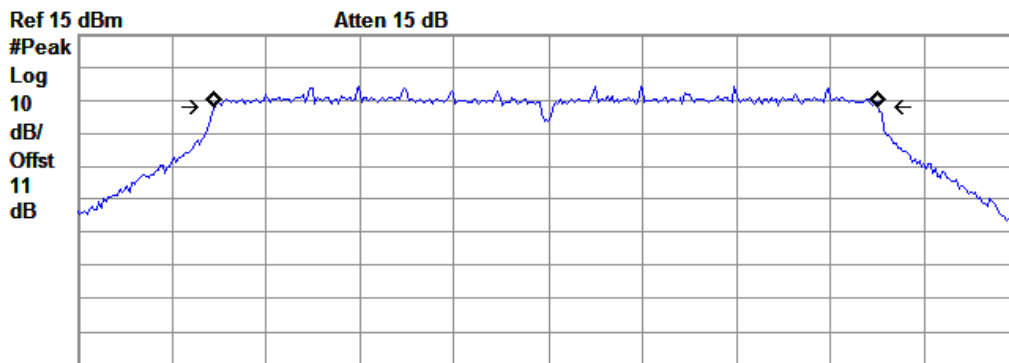

Center 5.785 GHz Span 25 MHz
 #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)


Occupied Bandwidth
 17.6443 MHz

Occ BW % Pwr 99.00 %
 x dB -6.00 dB

Transmit Freq Error -43.139 kHz
 x dB Bandwidth 17.637 MHz

Printer Type is None

(Plot N: Channel 157: 5785MHz @ 802.11n-20)

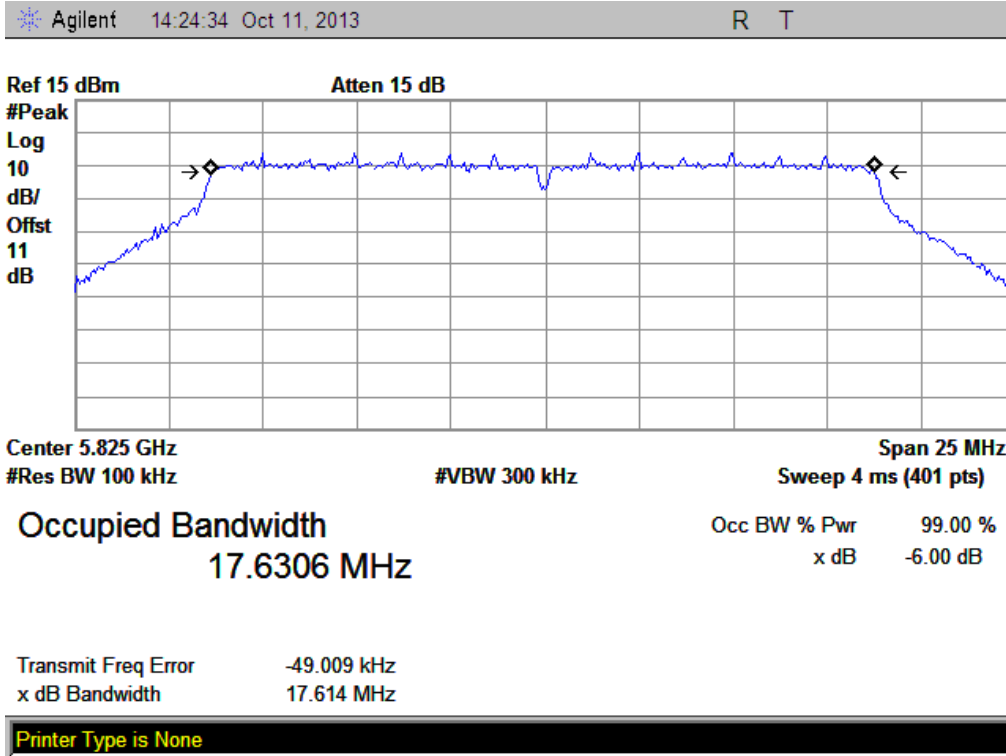


(Plot O: Channel 165: 5825MHz @ 802.11n-20)

2.3.3.5. 802.11n-40 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2422	35.153	Plot P	≥ 500	PASS
6	2437	35.334	Plot Q	≥ 500	PASS
11	2452	35.323	Plot R	≥ 500	PASS


B. Test Plots:

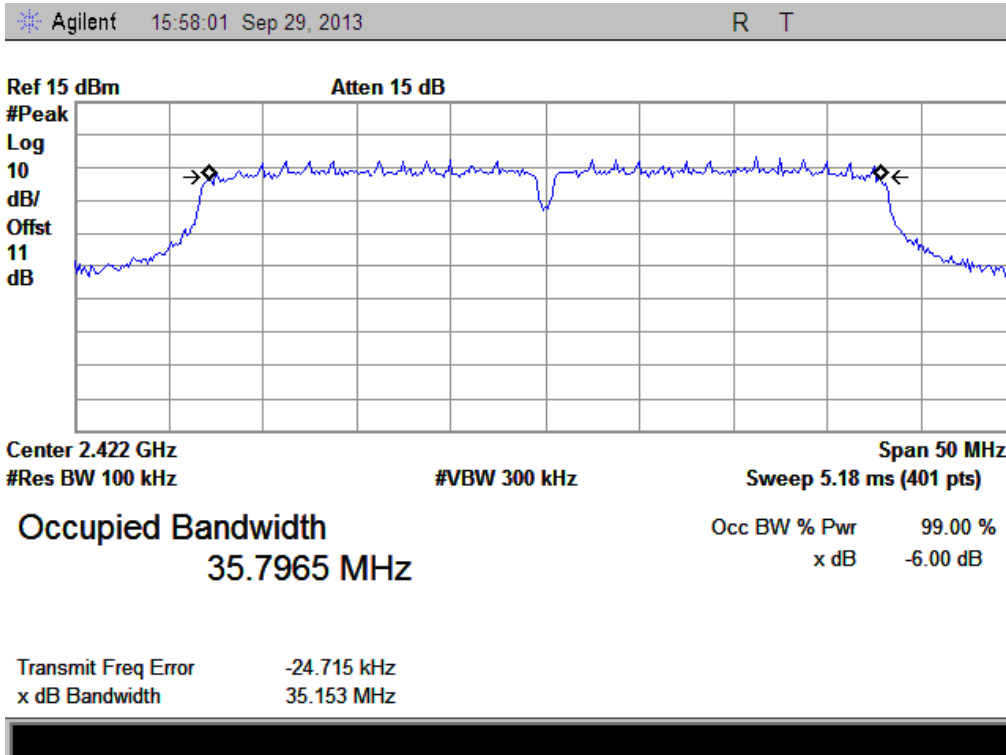

(Plot P: Channel 1: 2422MHz @ 802.11n-40)

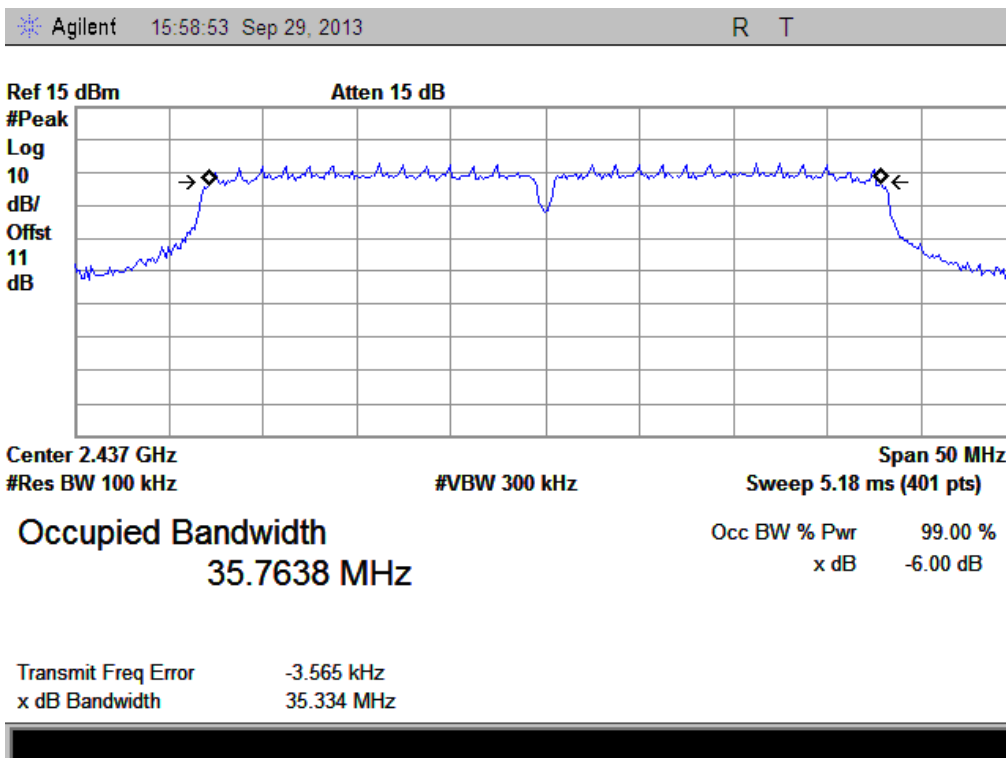

(Plot Q: Channel 6: 2437MHz @ 802.11n-40)

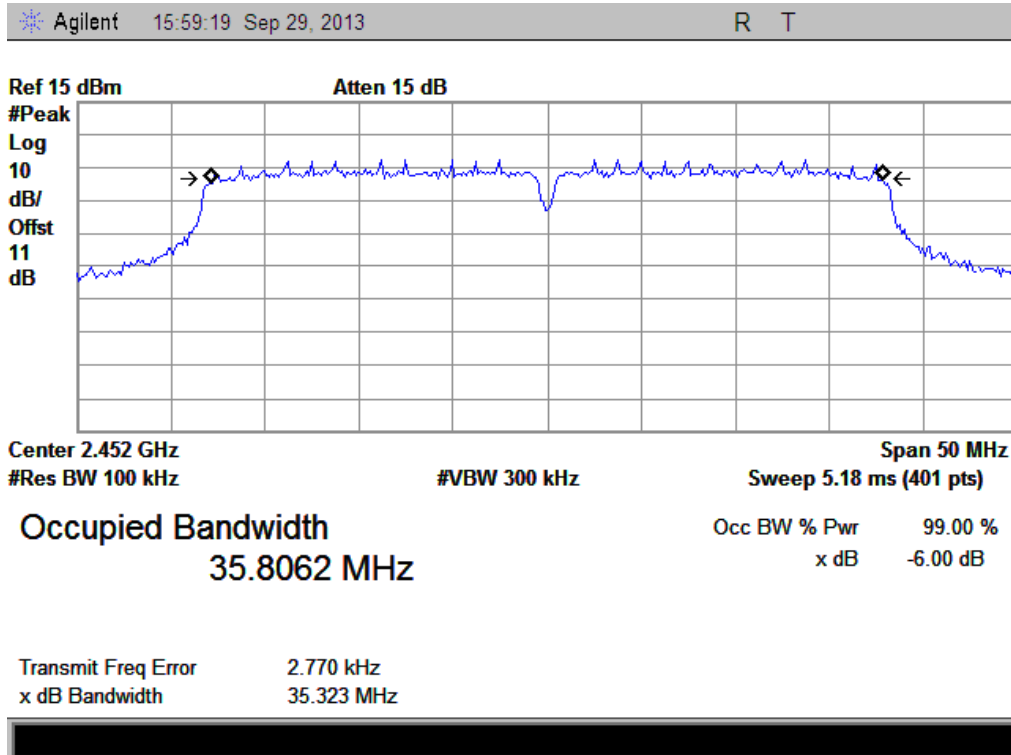

(Plot R: Channel 11: 2452MHz @ 802.11n-40)


2.4. Conducted Spurious Emissions

2.4.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

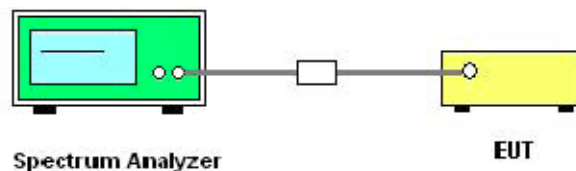

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11

2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.4.3.1. 802.11a Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
149	5745	-44.77	Plot A.1	-1.022	-21.0	PASS
157	5785	-46.40	Plot B.1	-0.876	-20.9	PASS
165	5825	-46.16	Plot C.1	-2.848	-22.8	PASS

B. Test Plots:



Note: the power of the Module transmitting frequency should be ignored.

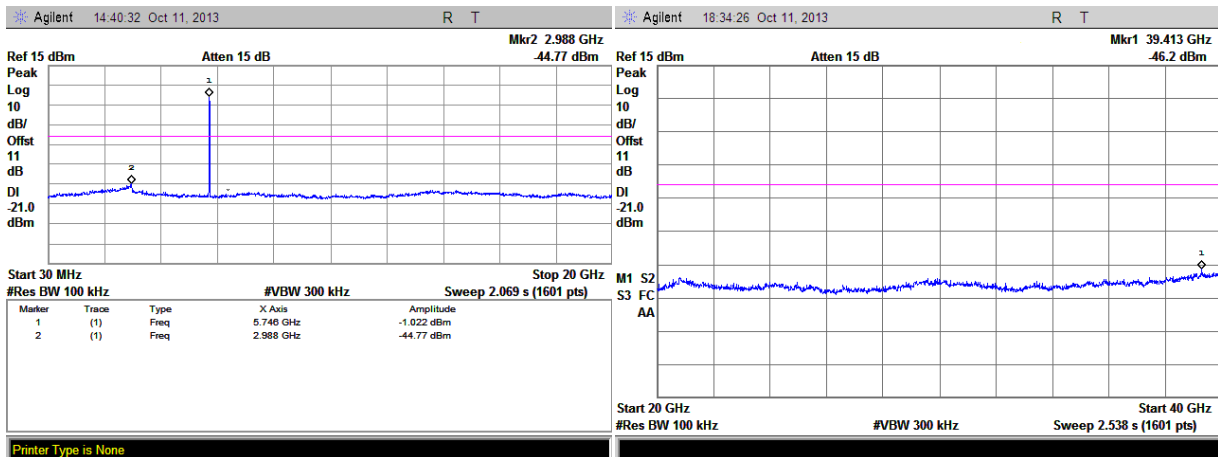



(Plot A.1: Channel = 149, 30MHz to 40GHz)

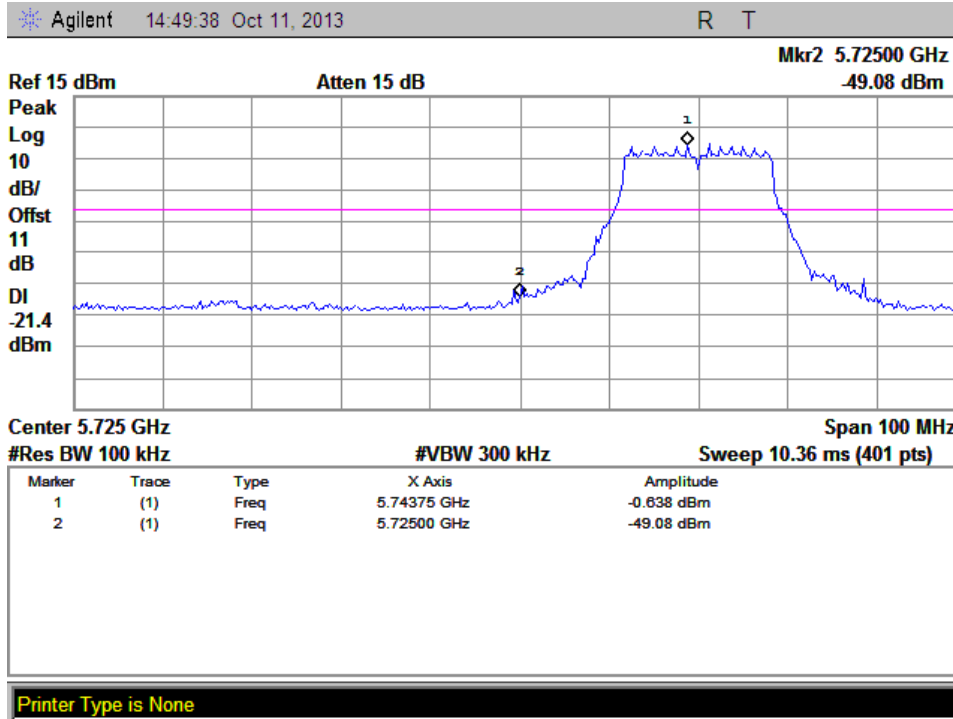


(Band Edge @ Channel = 149)

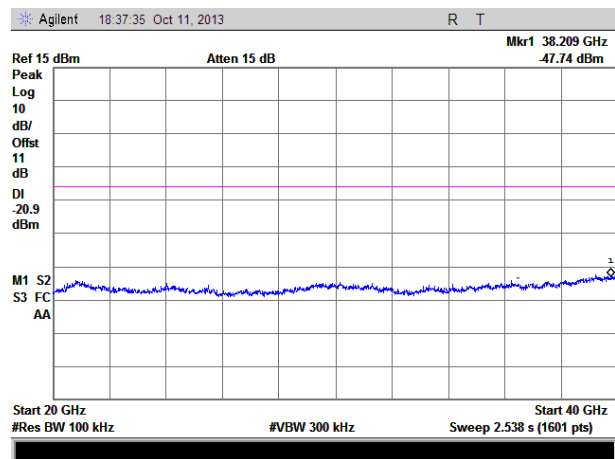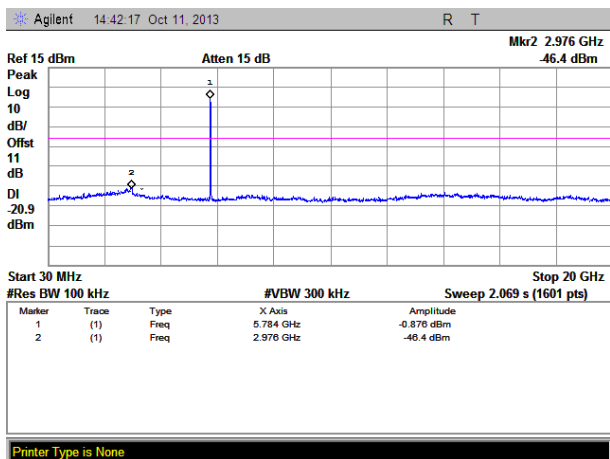

(Plot B.1: Channel = 157, 30MHz to 40GHz)

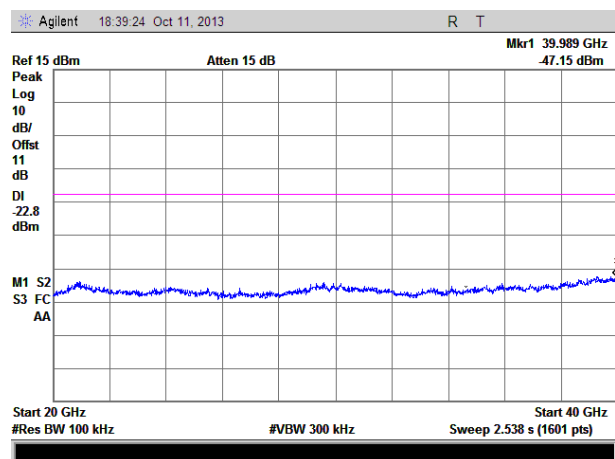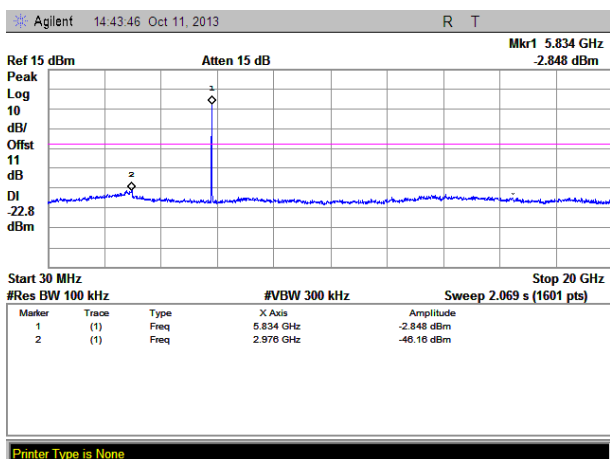

(Plot C.1: Channel = 165, 30MHz to 40GHz)

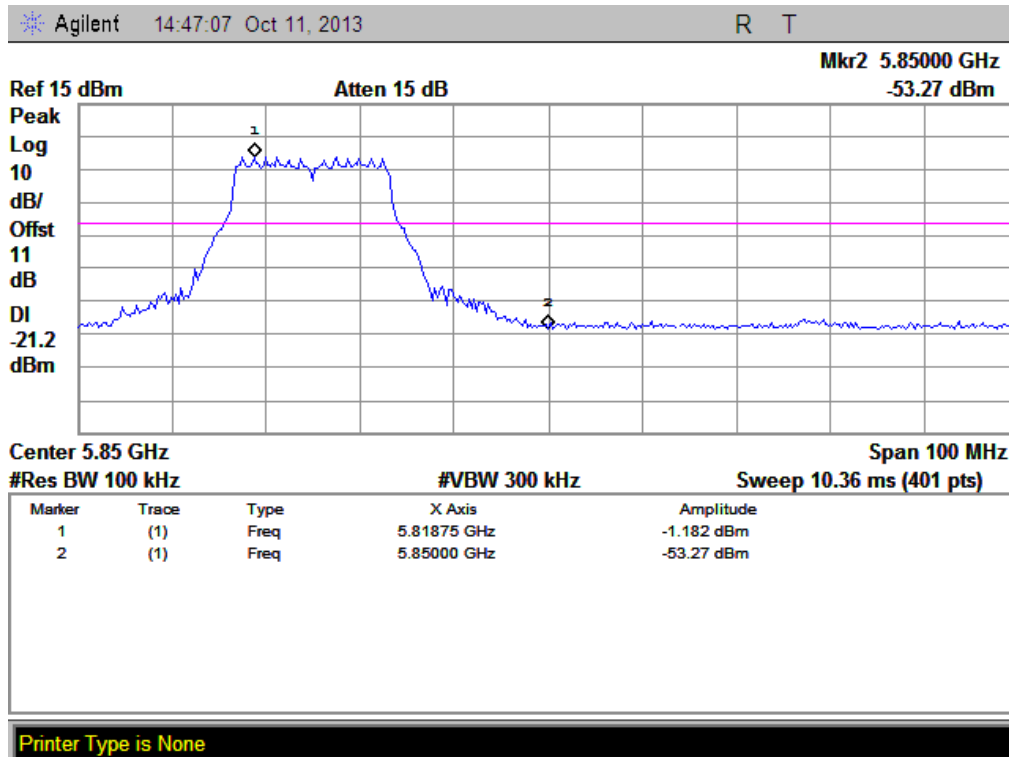

(Band Edge @ Channel = 165)


2.4.3.2. 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-45.94	Plot D.1	3.279	-16.7	PASS
6	2437	-45.61	Plot E.1	2.723	-17.3	PASS
11	2462	-45.99	Plot F.1	3.501	-16.5	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

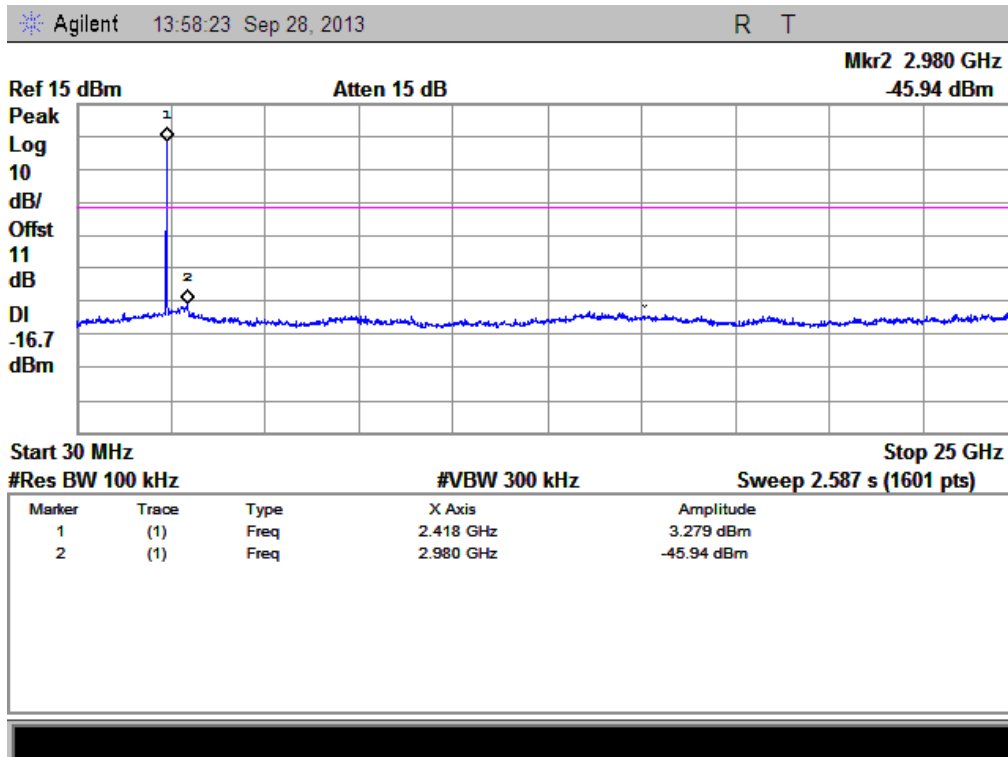


(Plot D.1: Channel = 1, 30MHz to 25GHz)

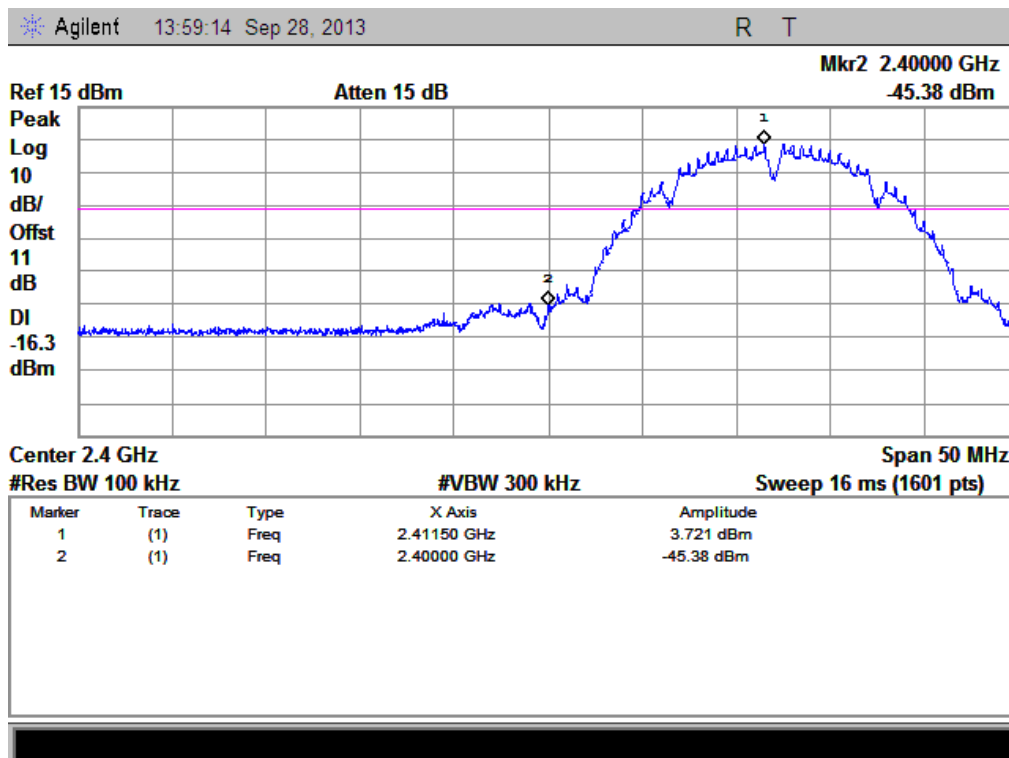


(Band Edge @ Channel = 1)

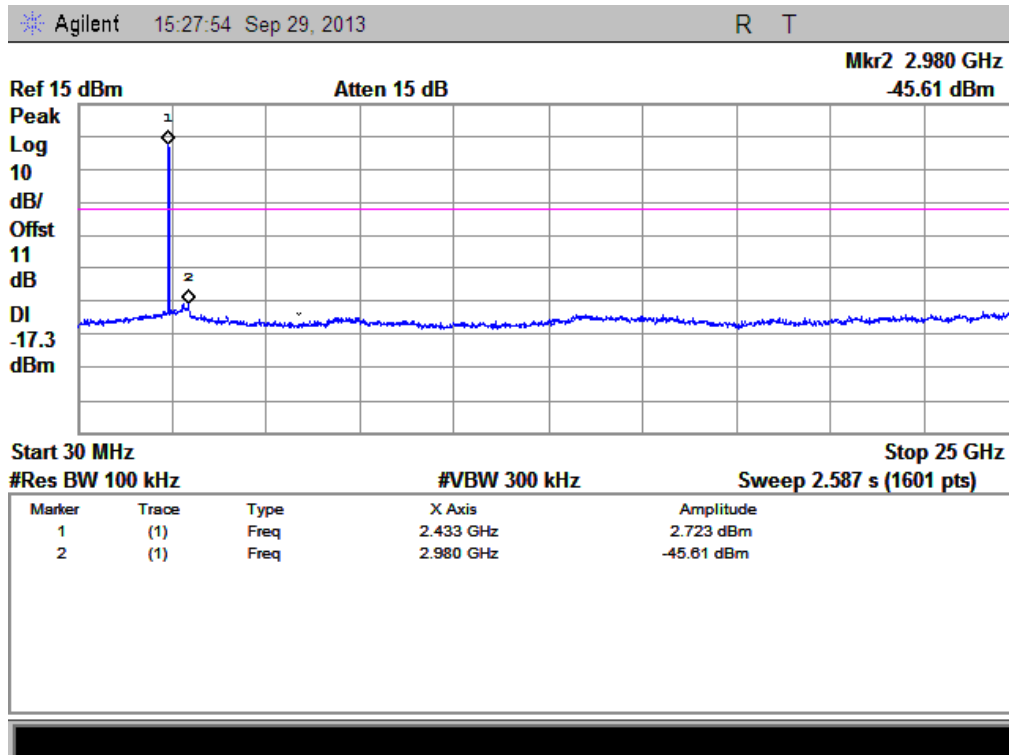

(Plot E.1: Channel = 6, 30MHz to 25GHz)

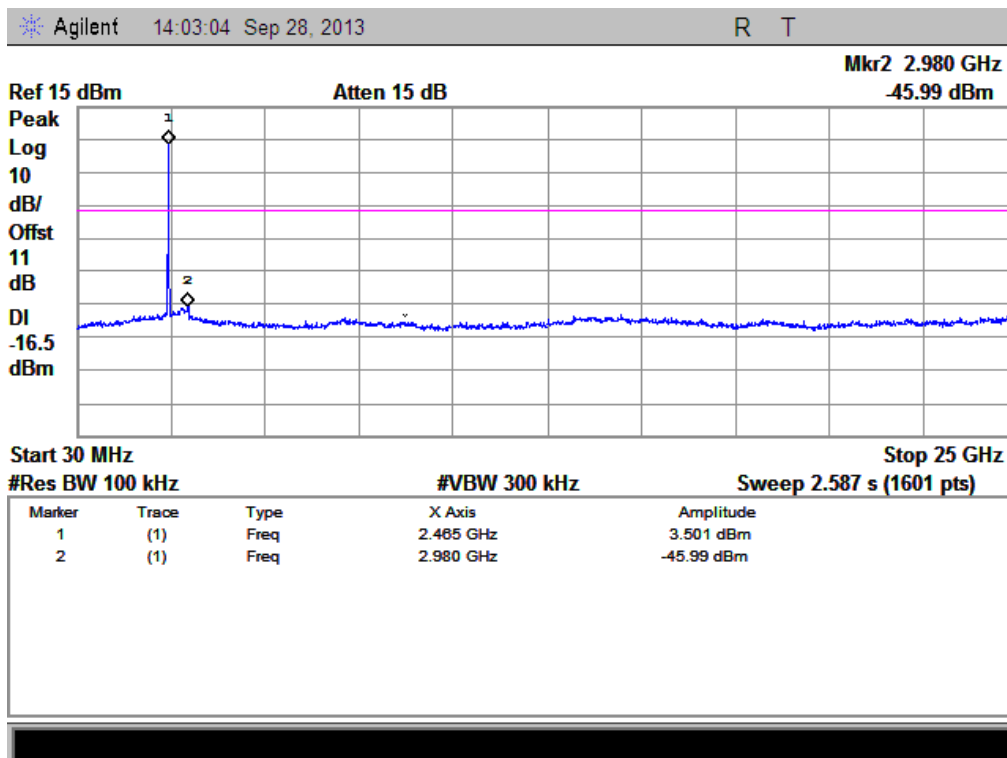

(Plot F.1: Channel = 11, 30MHz to 25GHz)

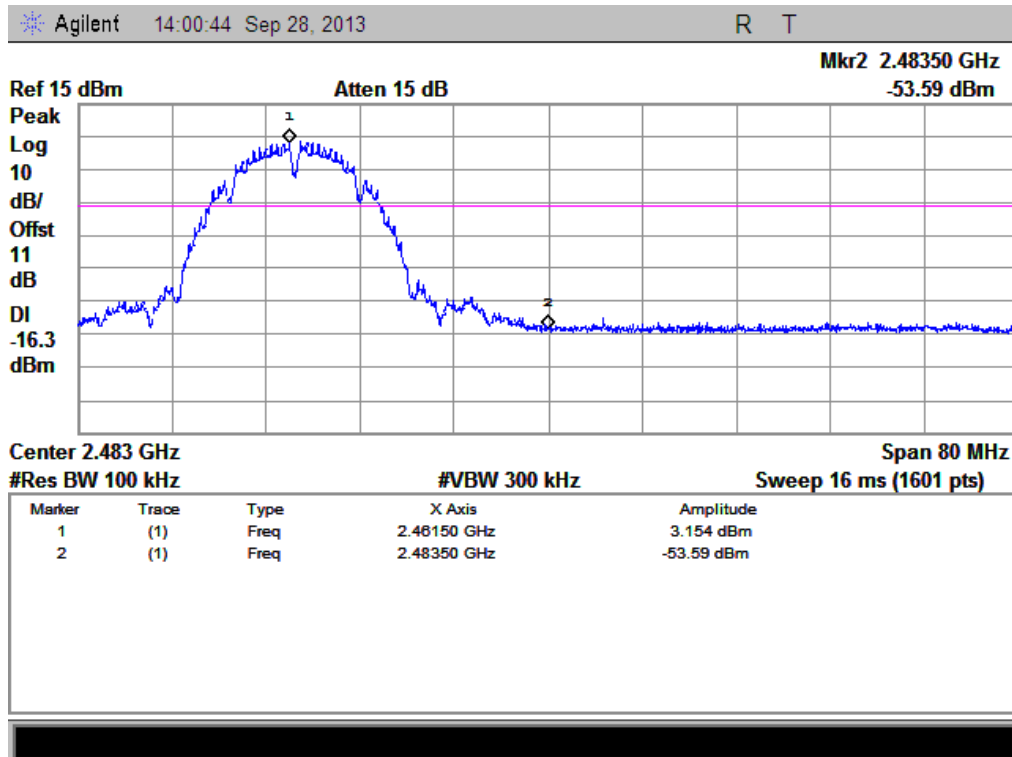

(Band Edge @ Channel = 11)


2.4.3.3. 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-45.72	Plot G.1	1.500	-18.5	PASS
6	2437	-46.50	Plot F.1	-1.298	-21.3	PASS
11	2462	-46.05	Plot I.1	1.165	-18.8	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

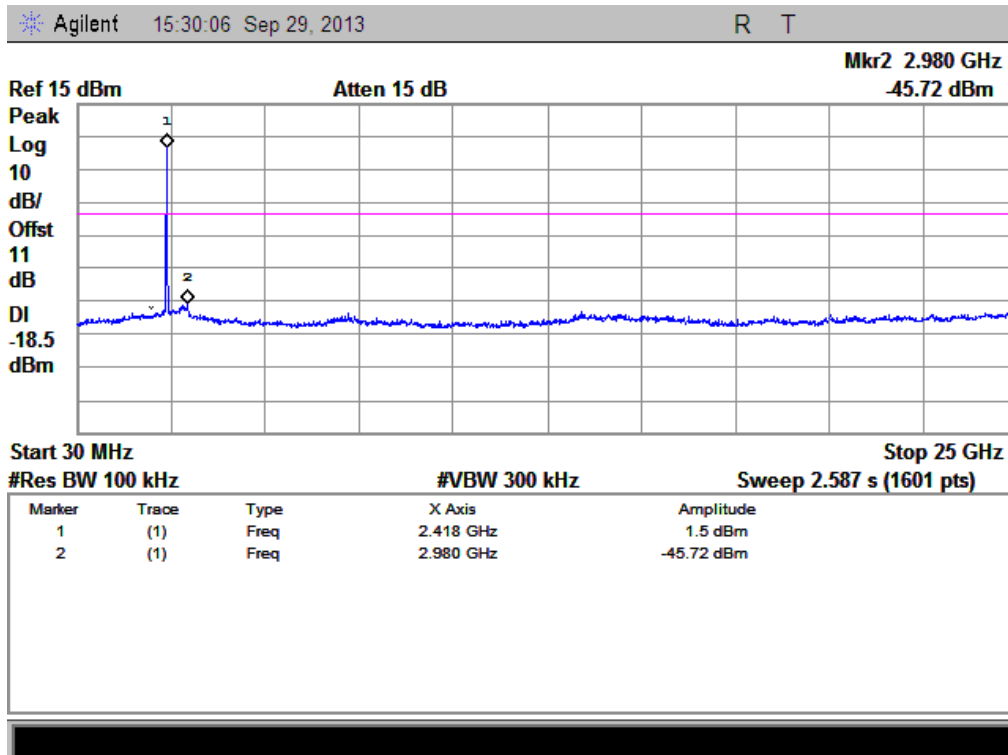


(Plot G.1: Channel = 1, 30MHz to 25GHz)

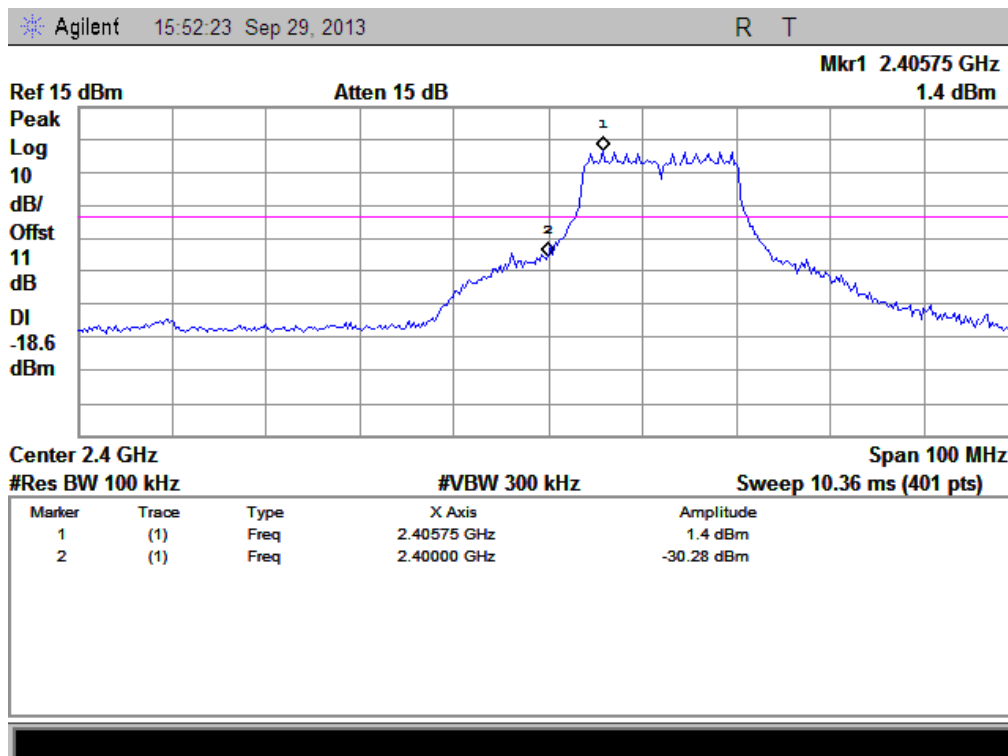


(Band Edge @ Channel = 1)

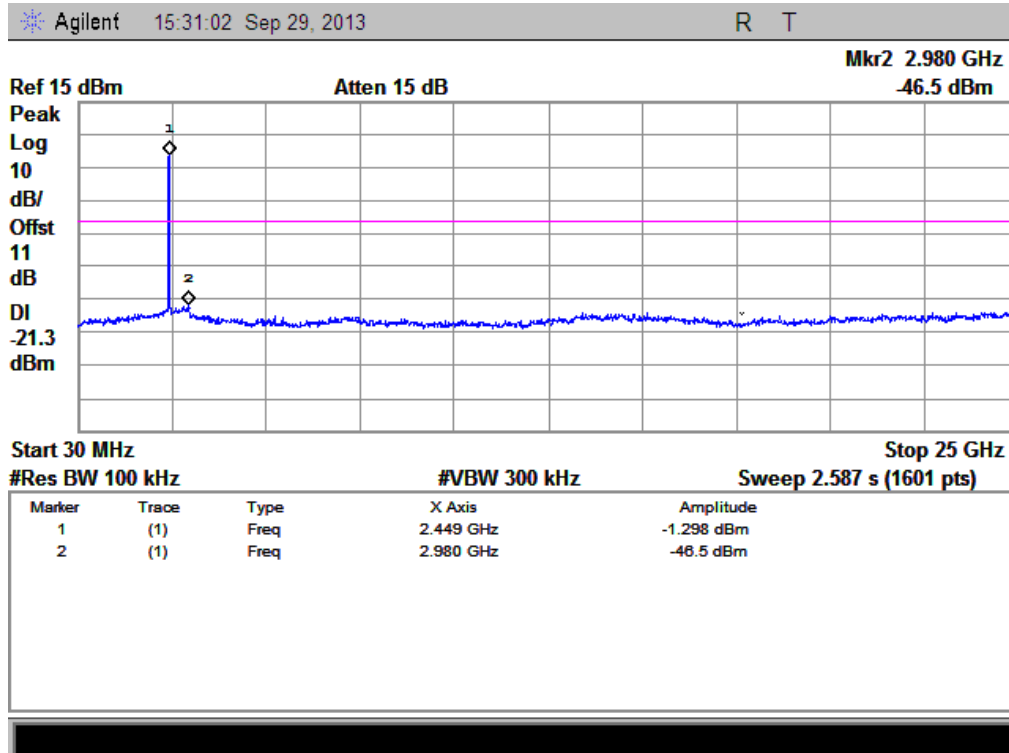

(Plot H.1: Channel = 6, 30MHz to 25GHz)

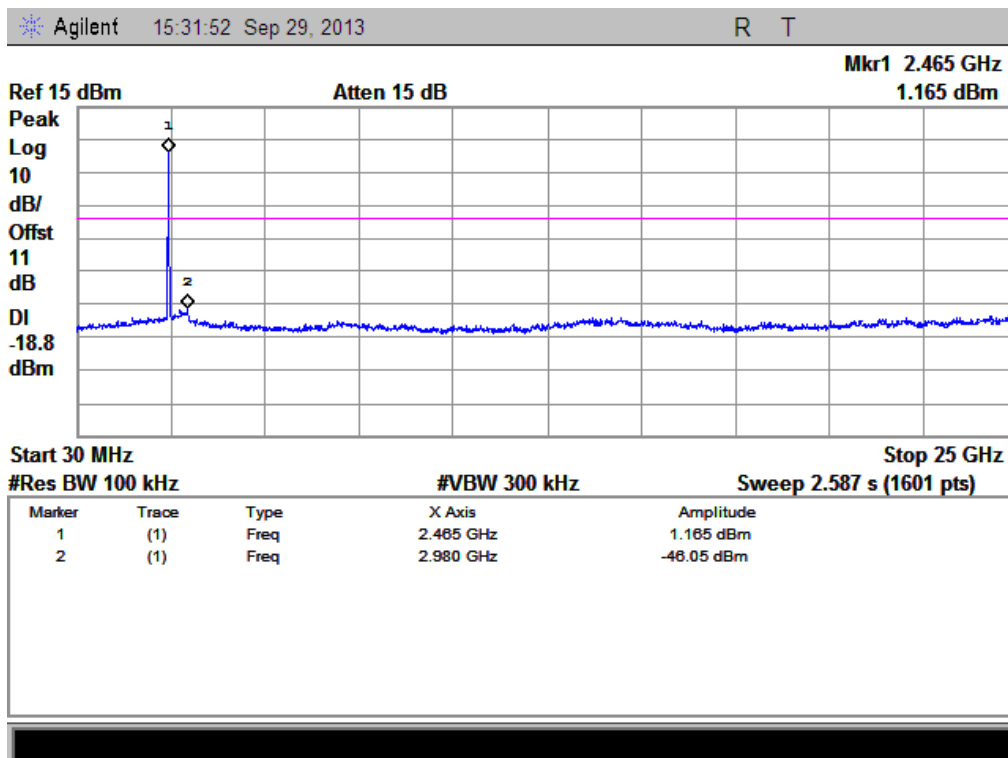

(Plot I.1: Channel = 11, 30MHz to 25GHz)

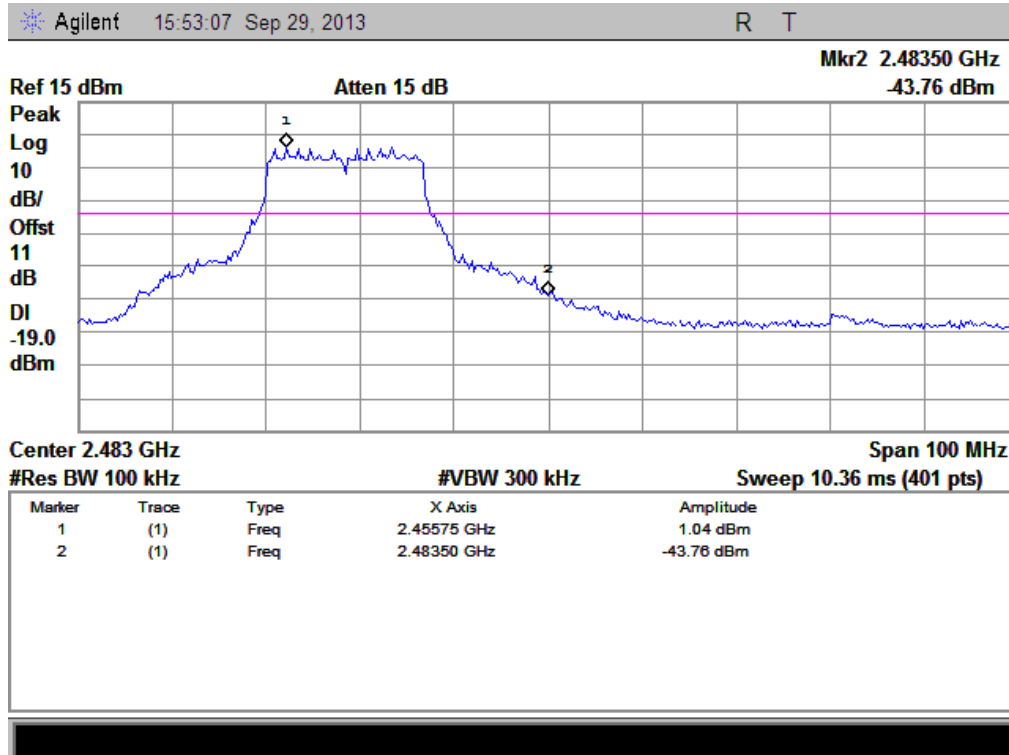

(Band Edge @ Channel = 11)


2.4.3.4. 802.11n -20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. of Band Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-46.85	Plot J.1	1.115	-18.9	PASS
6	2437	-46.37	Plot K.1	1.167	-18.8	PASS
11	2462	-46.43	Plot L.1	0.761	-19.2	PASS
149	5745	-45.26	Plot M.1	1.457	-18.5	PASS
157	5785	-46.69	Plot N.1	0.700	-19.3	PASS
165	5825	-46.04	Plot O.1	0.156	-19.8	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

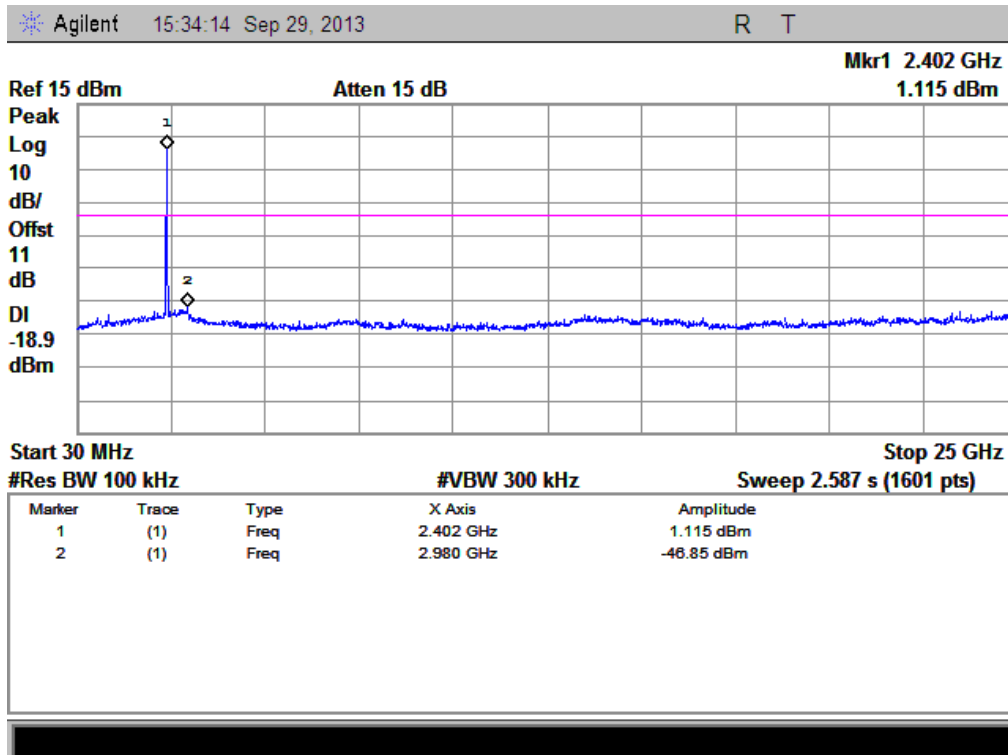


(Plot J.1: Channel = 1, 30MHz to 25GHz)

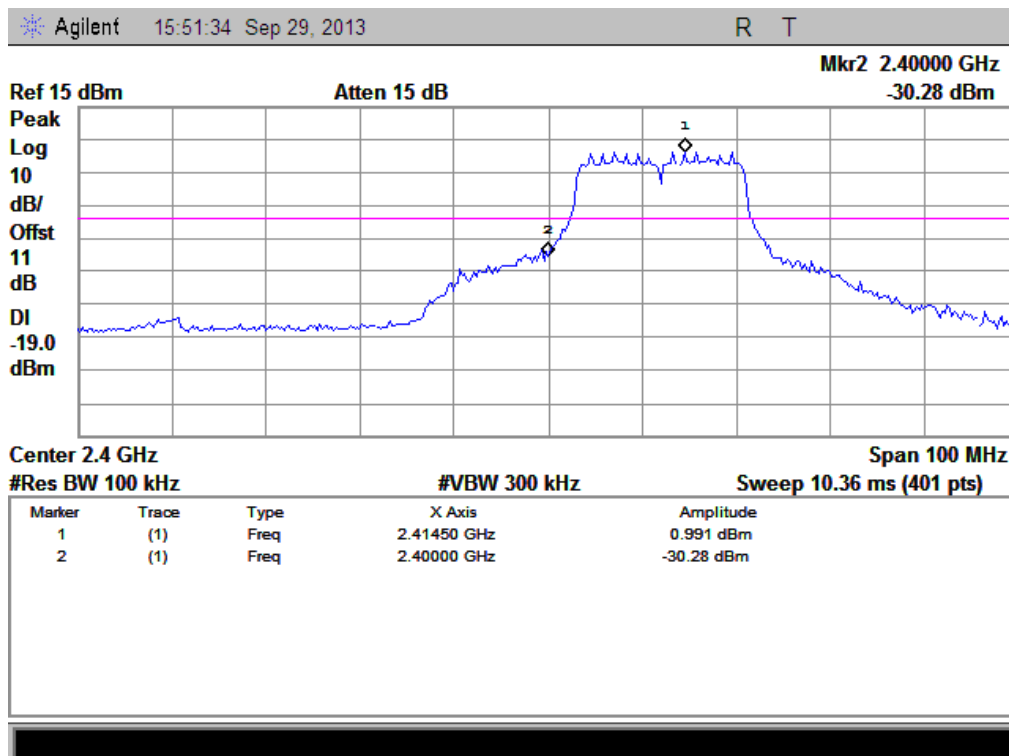


(Band Edge @ Channel = 1)

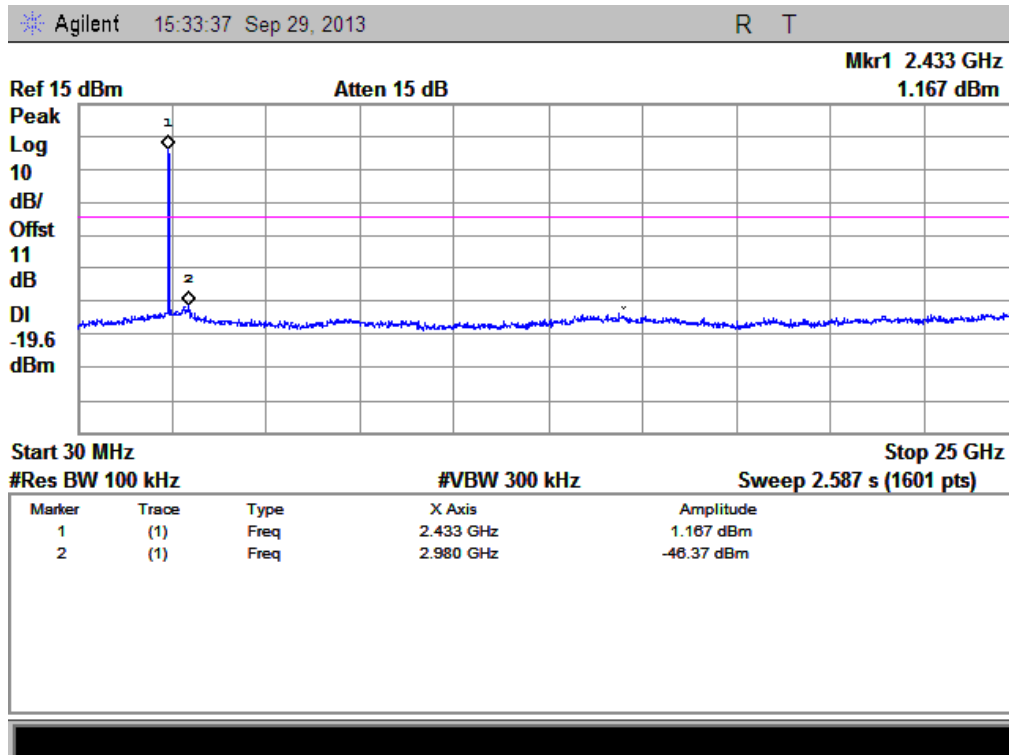



(Plot K.1: Channel = 6, 30MHz to 25GHz)

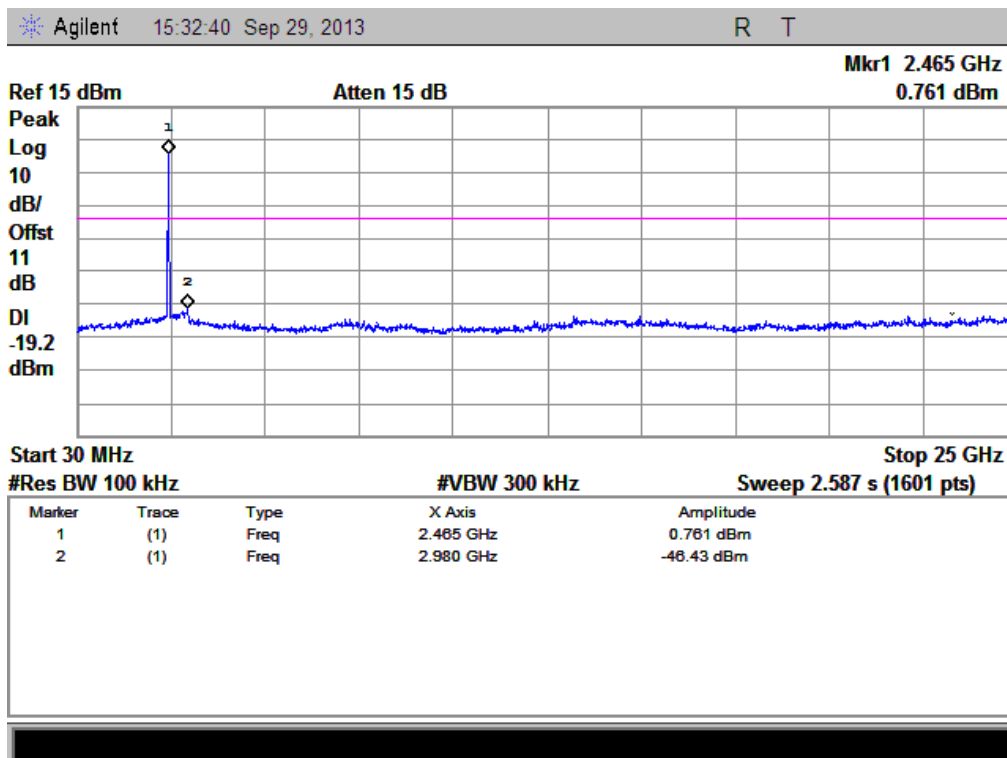


(Plot L.1: Channel = 11, 30MHz to 25GHz)\

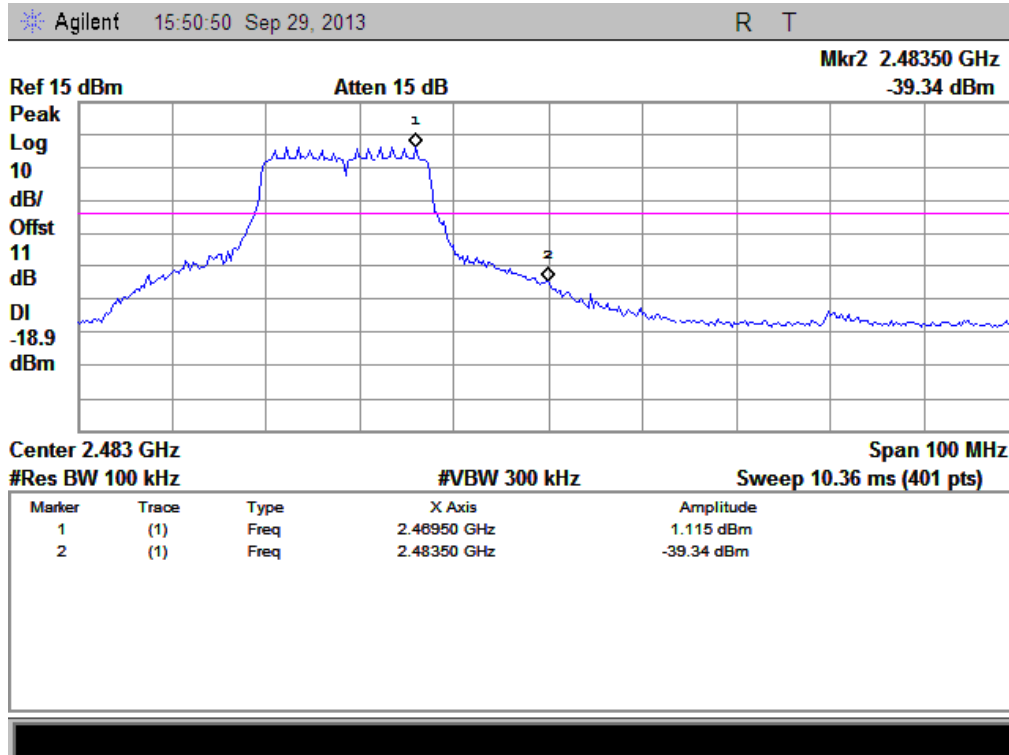


(Band Edge @ Channel = 11)

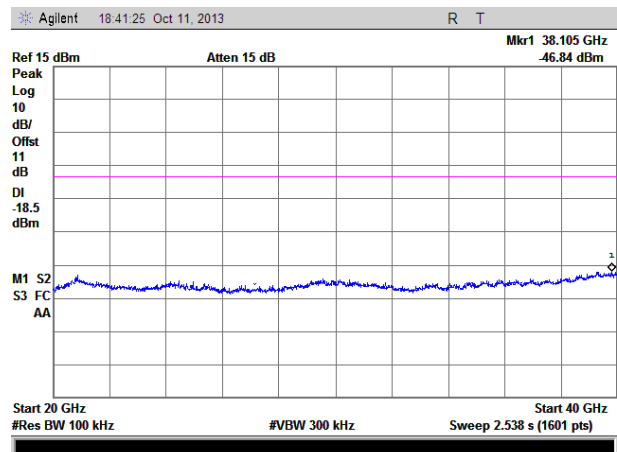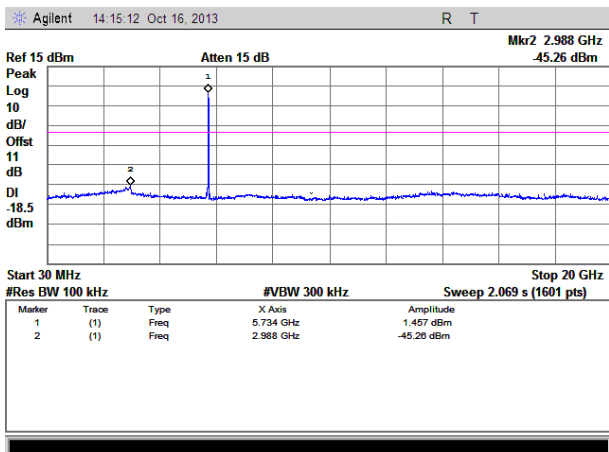


(Plot M.1: Channel = 149, 30MHz to 40GHz)

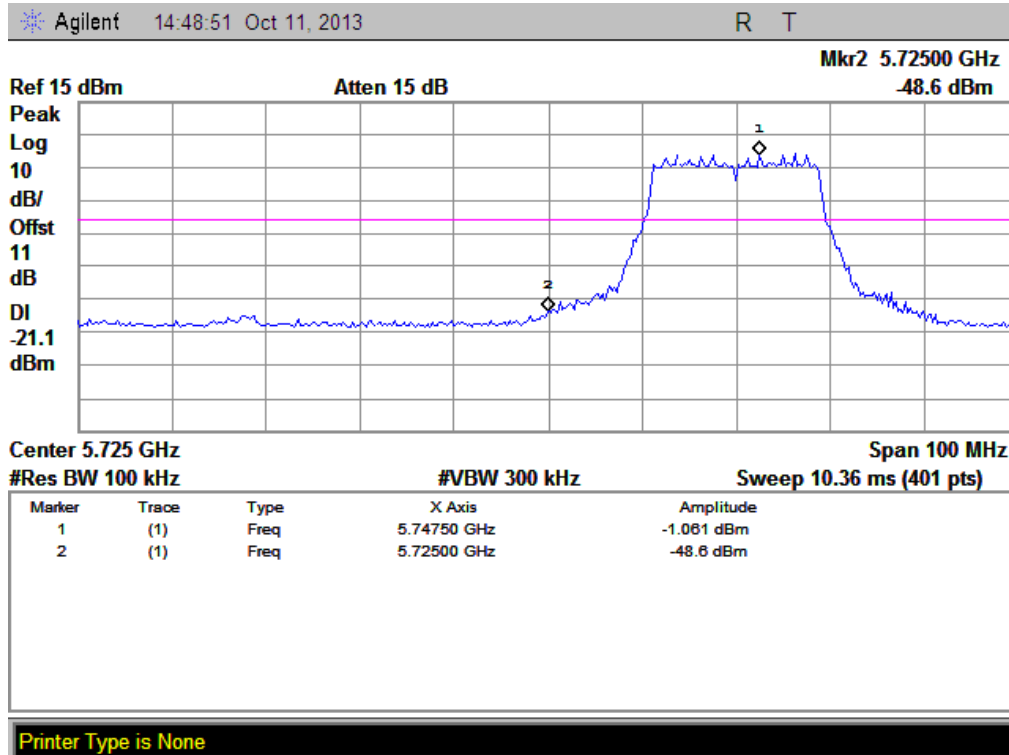

(Band Edge @ Channel = 149)

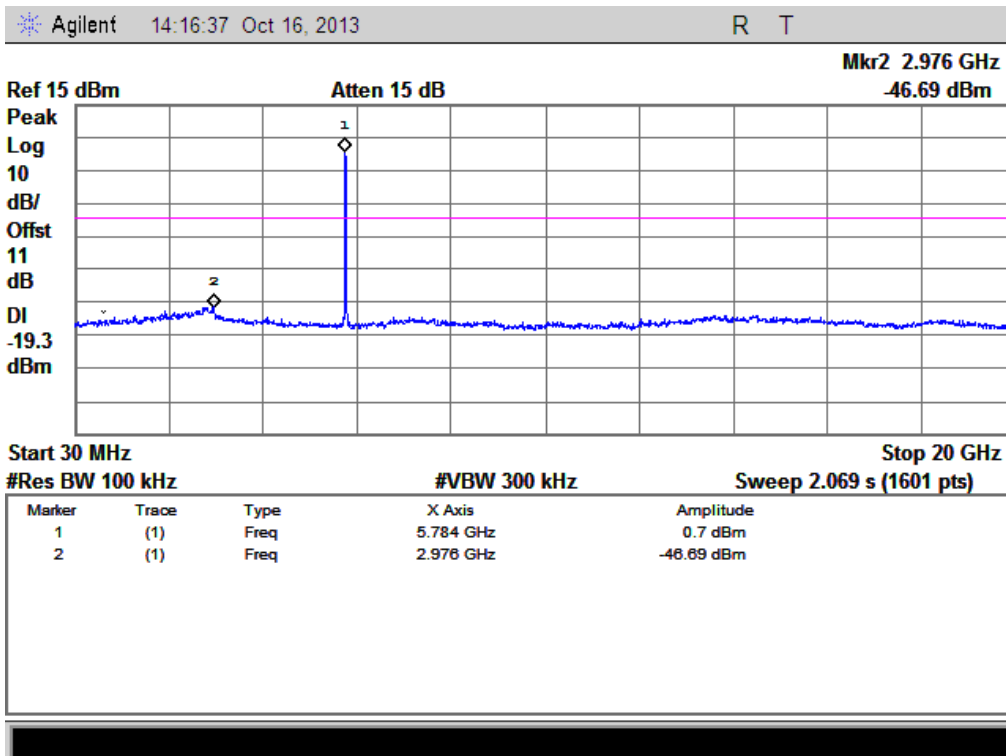

(Plot N.1: Channel = 157, 30MHz to 40GHz)

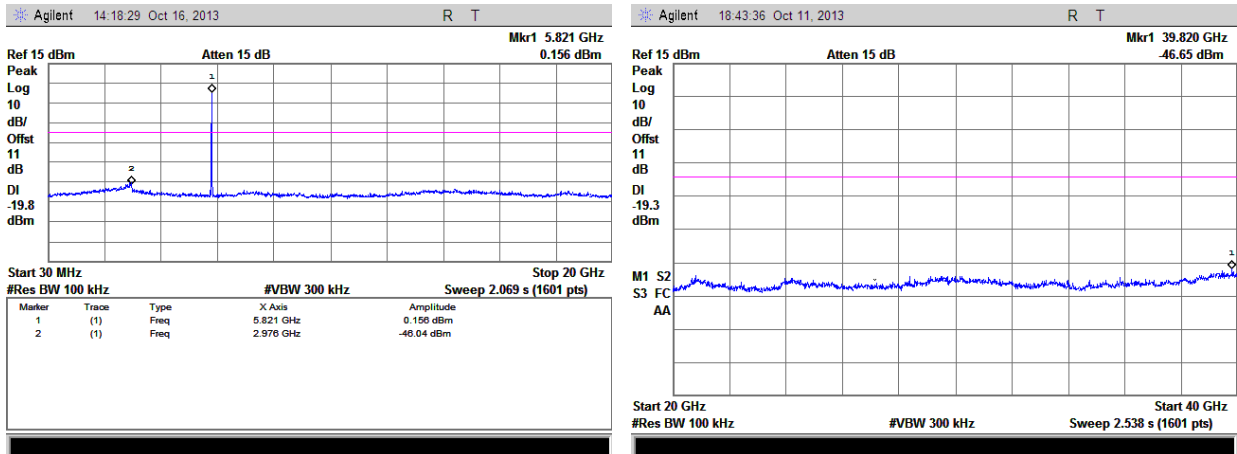

(Plot O.1: Channel = 165, 30MHz to 40GHz)



(Band Edge @ Channel = 165)


2.4.3.5. 802.11n -40MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
3	2422	-45.57	Plot P.1	-3.752	-23.8	PASS
6	2437	-47.65	Plot Q.1	-3.345	-23.3	PASS
9	2452	-46.90	Plot R.1	-2.850	-22.9	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

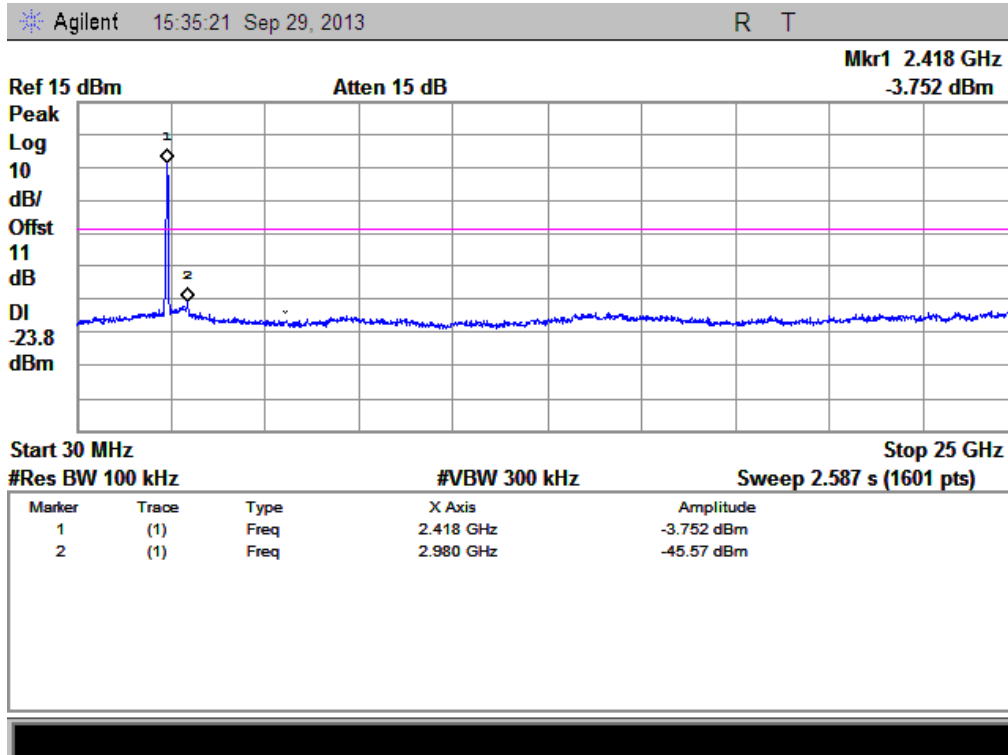


(Plot P.1: Channel = 3, 30MHz to 25GHz)

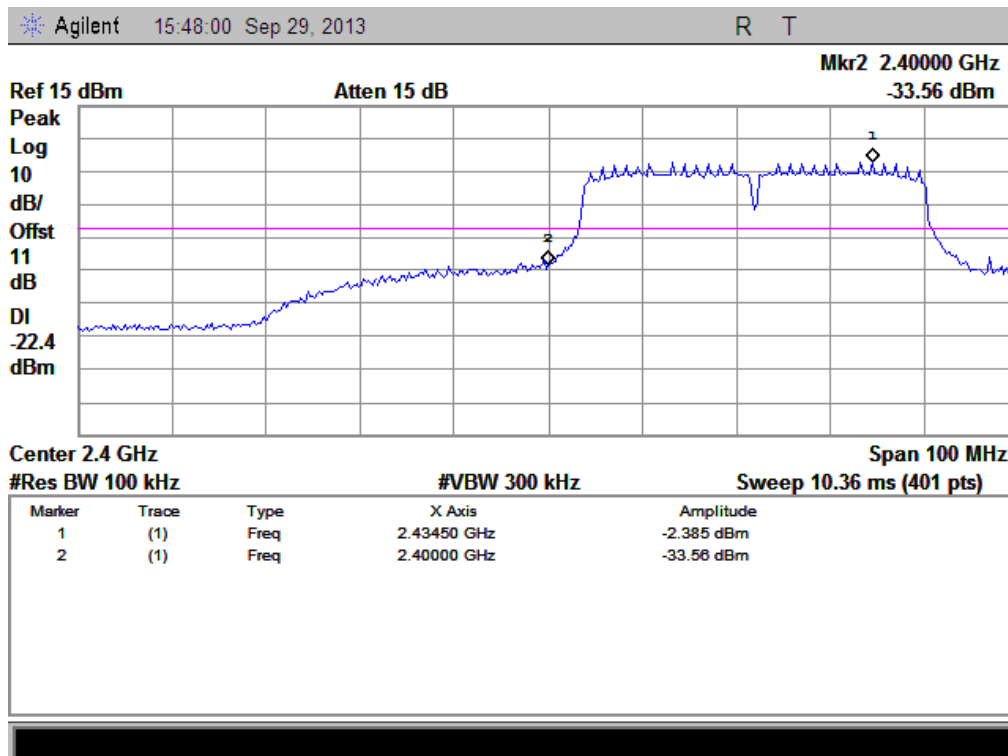


(Band Edge @ Channel = 3)

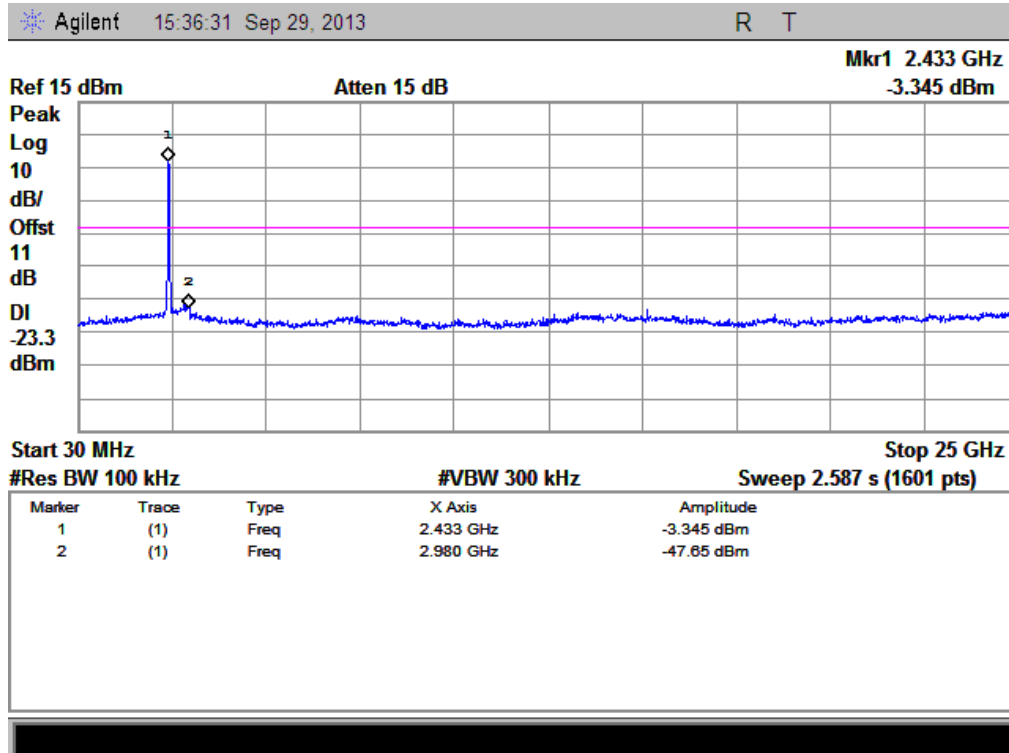

(Plot Q.1: Channel = 6, 30MHz to 25GHz)

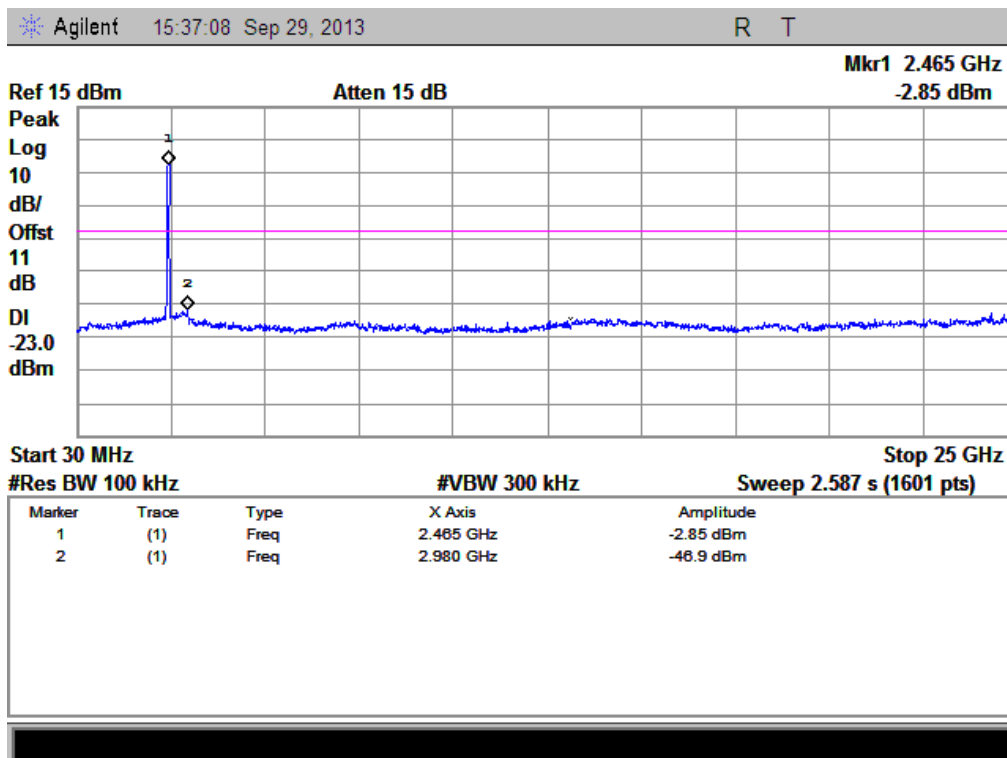

(Plot R.1: Channel = 9, 30MHz to 25GHz)

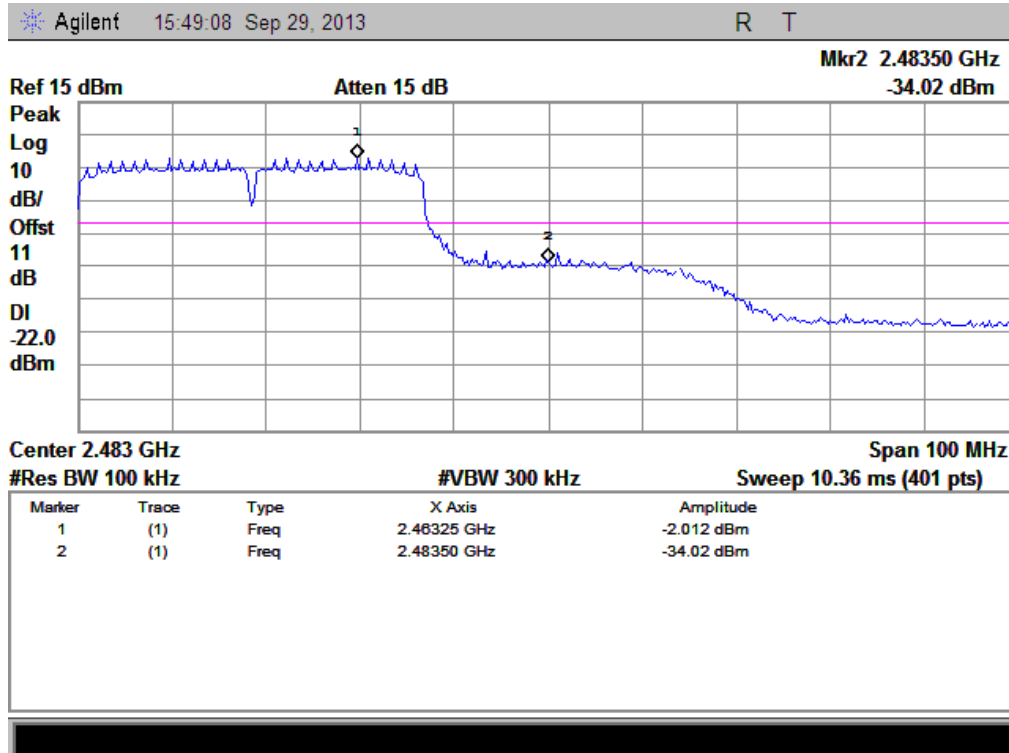

(Band Edge @ Channel = 9)


2.5. Power spectral density (PSD)

2.5.1. Requirement

According to FCC section 15.247(e), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

2.5.2. Test Description

A. Test Set:

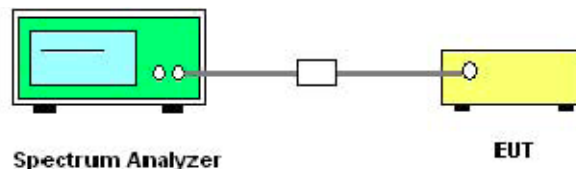

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11

2.5.3. Test Result


The lowest, middle and highest channels are tested to verify the band edge emissions.

2.5.3.1. 802.11a Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
149	5745	-13.80	Plot A	8	PASS
157	5785	13.68	Plot B	8	PASS
165	5825	-13.83	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

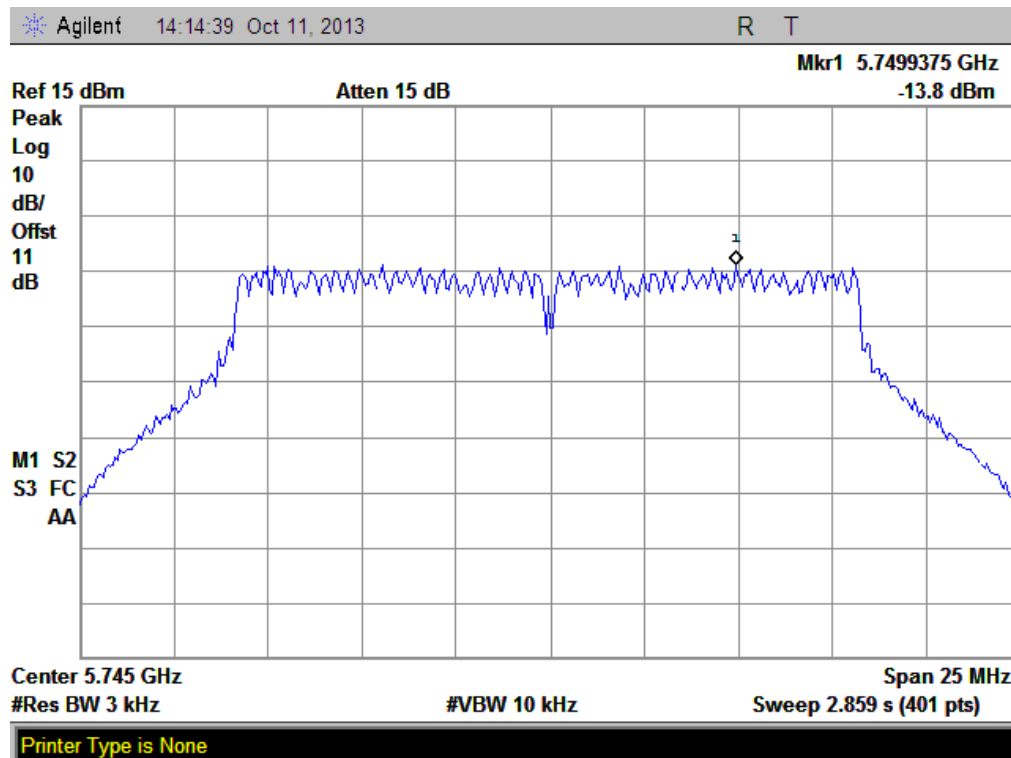

(Plot A: Channel = 149 @ 802.11a)

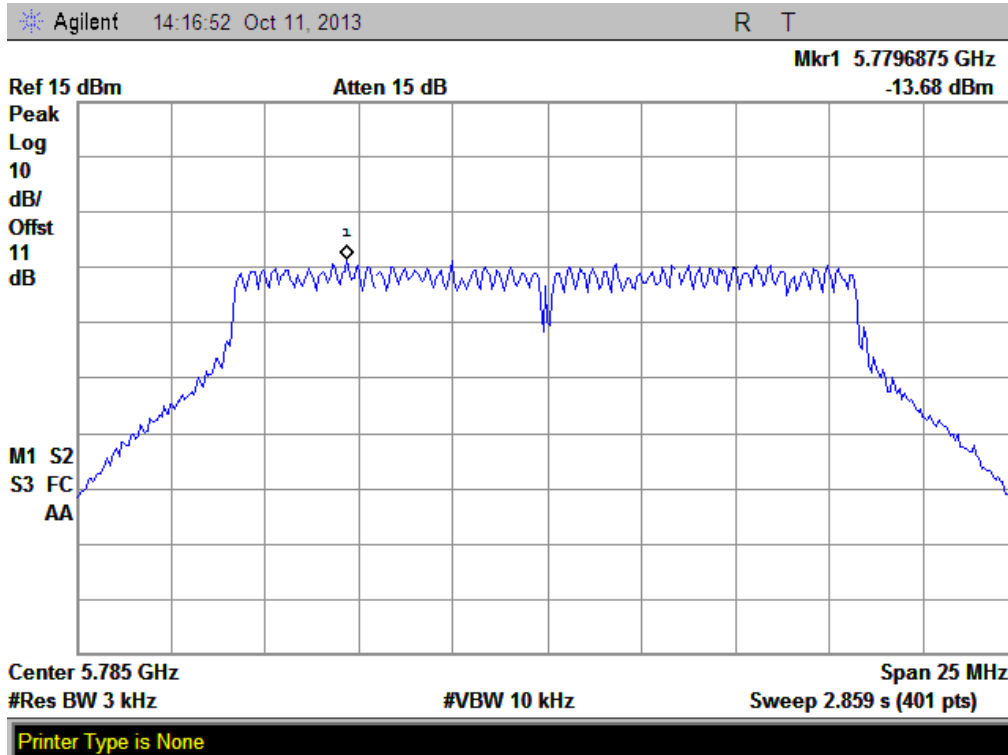

(Plot B: Channel = 157 @ 802.11a)

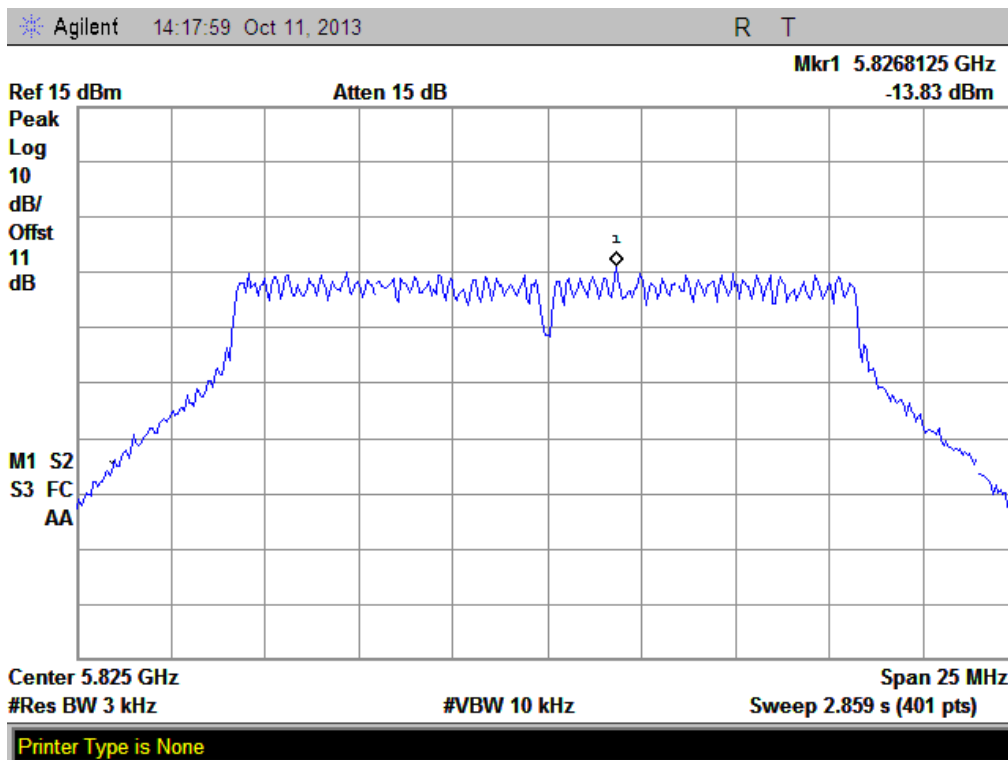


(Plot C: Channel = 165 @ 802.11a)

2.5.3.2. 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-10.10	Plot D	8	PASS
6	2437	-9.153	Plot E	8	PASS
11	2462	-9.753	Plot F	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

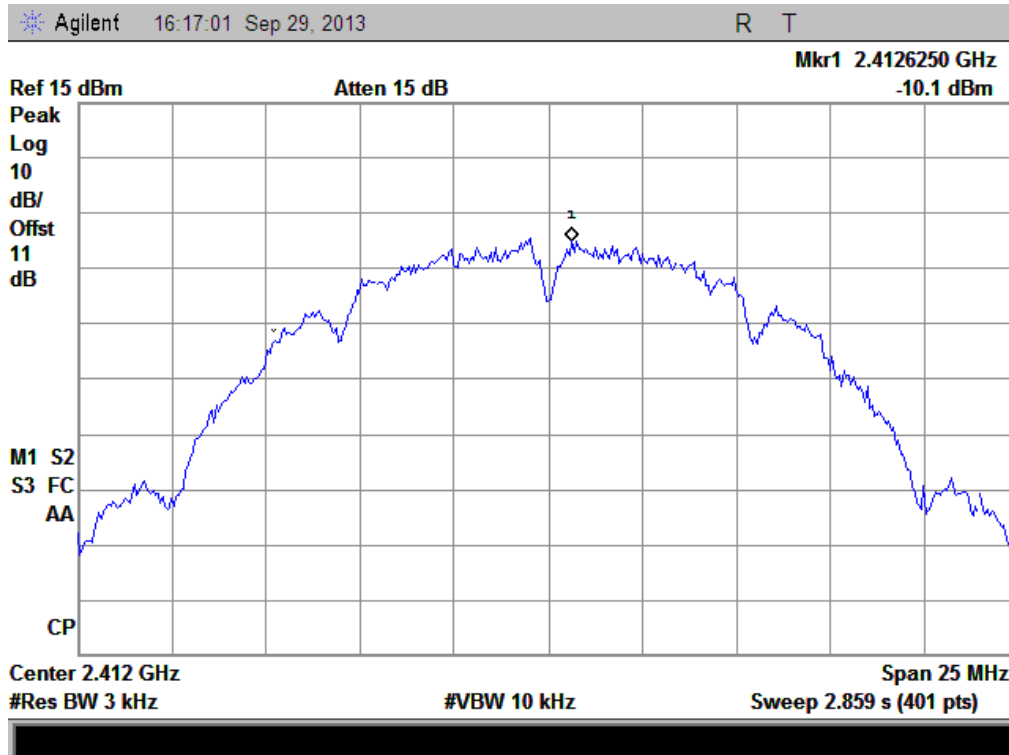

(Plot D: Channel = 1 @ 802.11b)



(Plot E: Channel = 6 @ 802.11b)

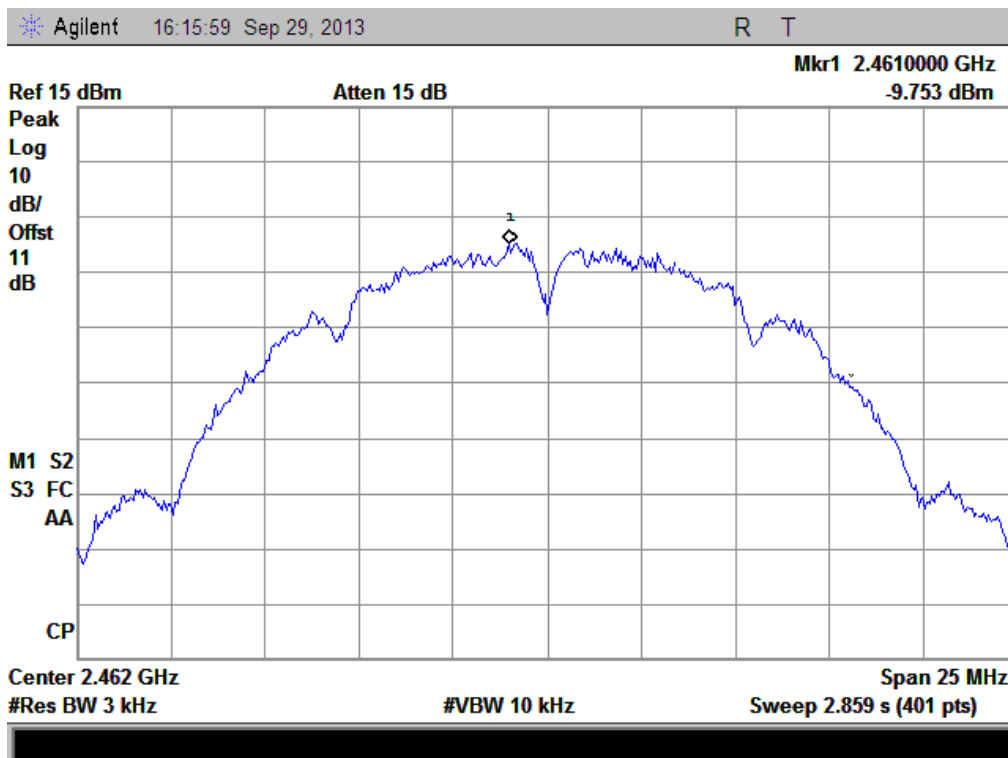


(Plot F: Channel = 11 @ 802.11b)

2.5.3.3. 802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-11.80	Plot G	8	PASS
6	2437	-12.85	Plot H	8	PASS
11	2462	-12.59	Plot I	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

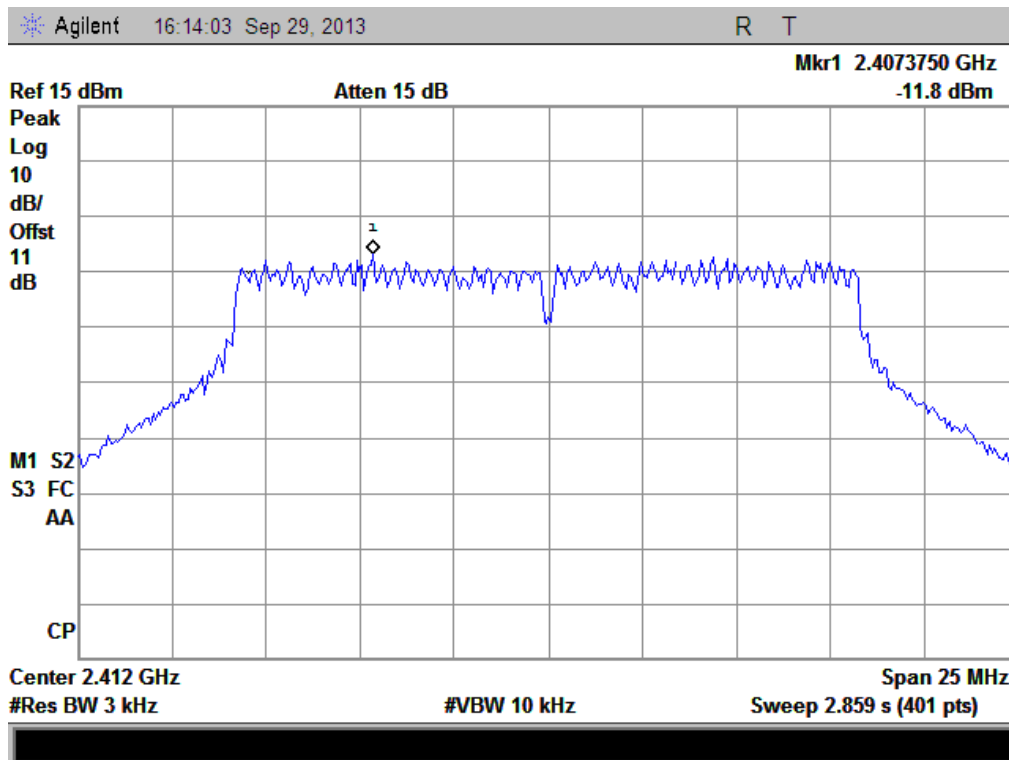

(Plot G: Channel = 1 @ 802.11g)

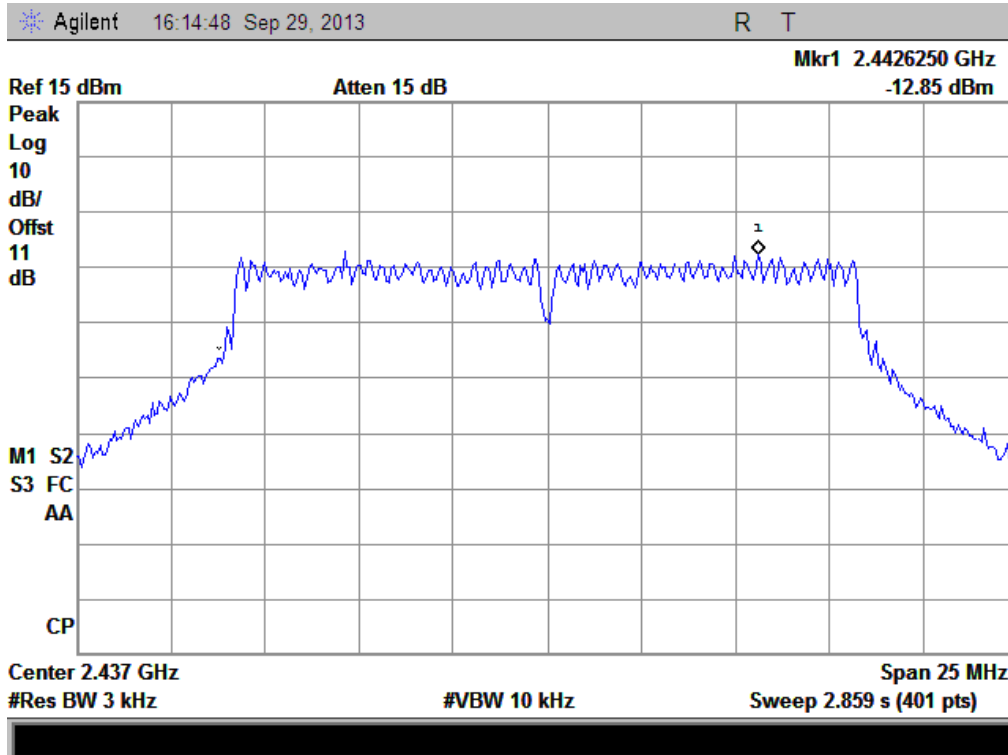

(Plot H: Channel = 6 @ 802.11g)

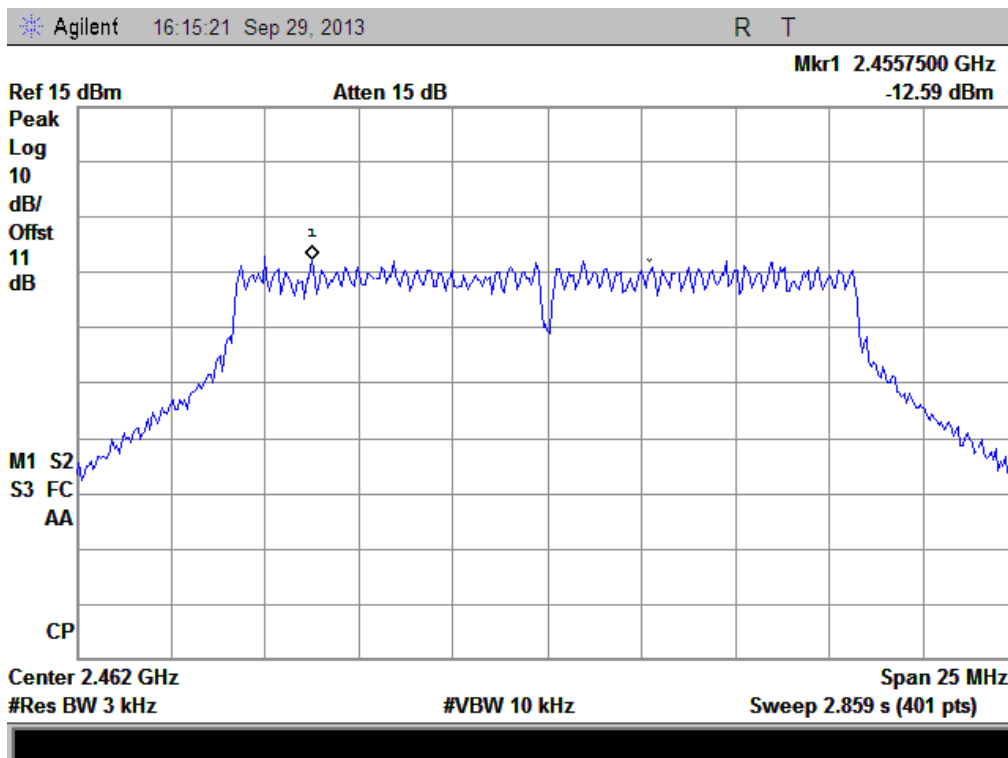

(Plot I: Channel = 11 @ 802.11g)


2.5.3.4. 802.11n-20MHz Test mode

A. Test Verdict:


Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-13.27	Plot J	8	PASS
6	2437	-12.11	Plot K	8	PASS
11	2462	-12.45	Plot L	8	PASS
149	5745	-13.73	Plot M	8	PASS
157	5785	-14.32	Plot N	8	PASS
165	5825	-14.74	Plot O	8	PASS

Measurement uncertainty: ± 1.3 dB


Test Plots:

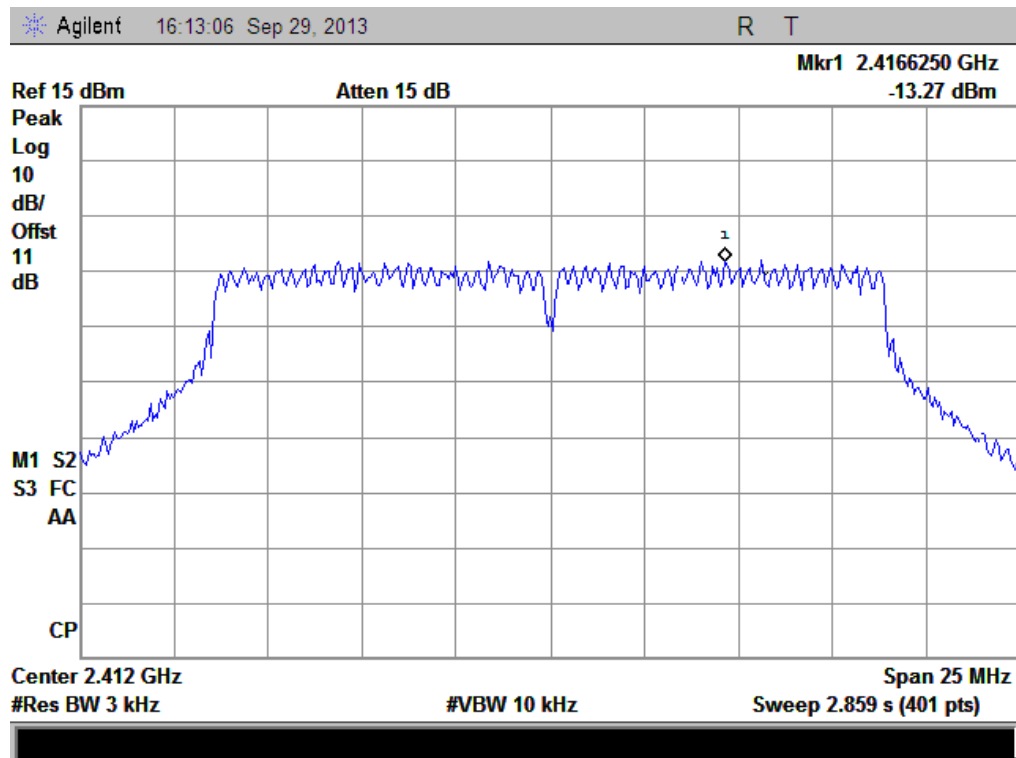


(Plot J: Channel = 1 @ 802.11n-20MHz)

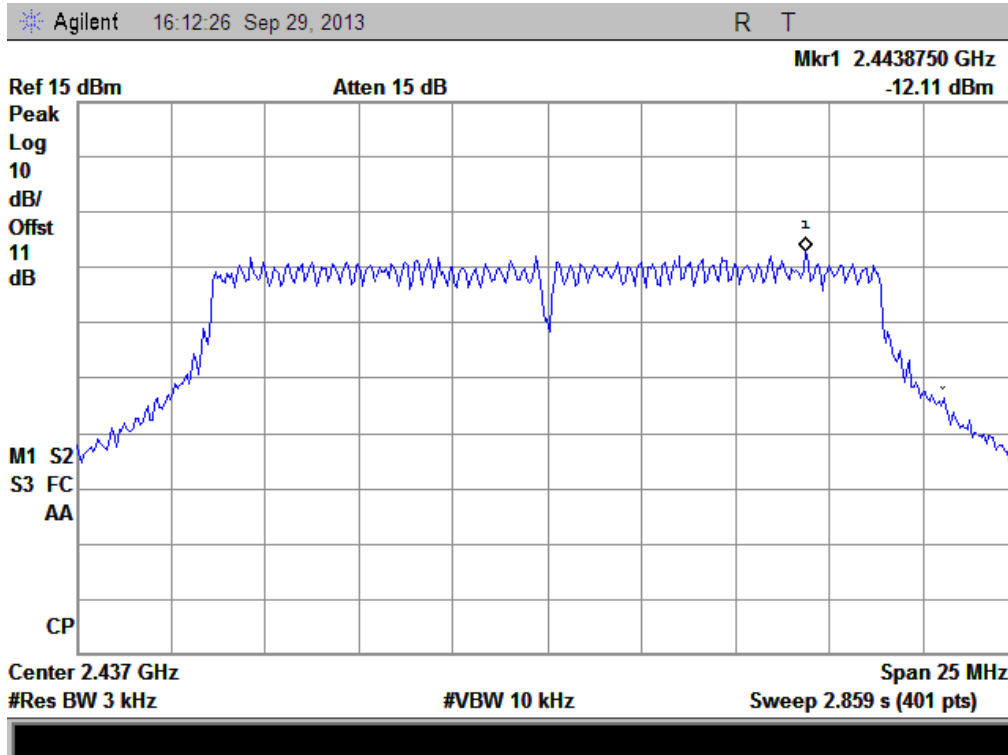


(Plot K: Channel = 6 @ 802.11n-20MHz)

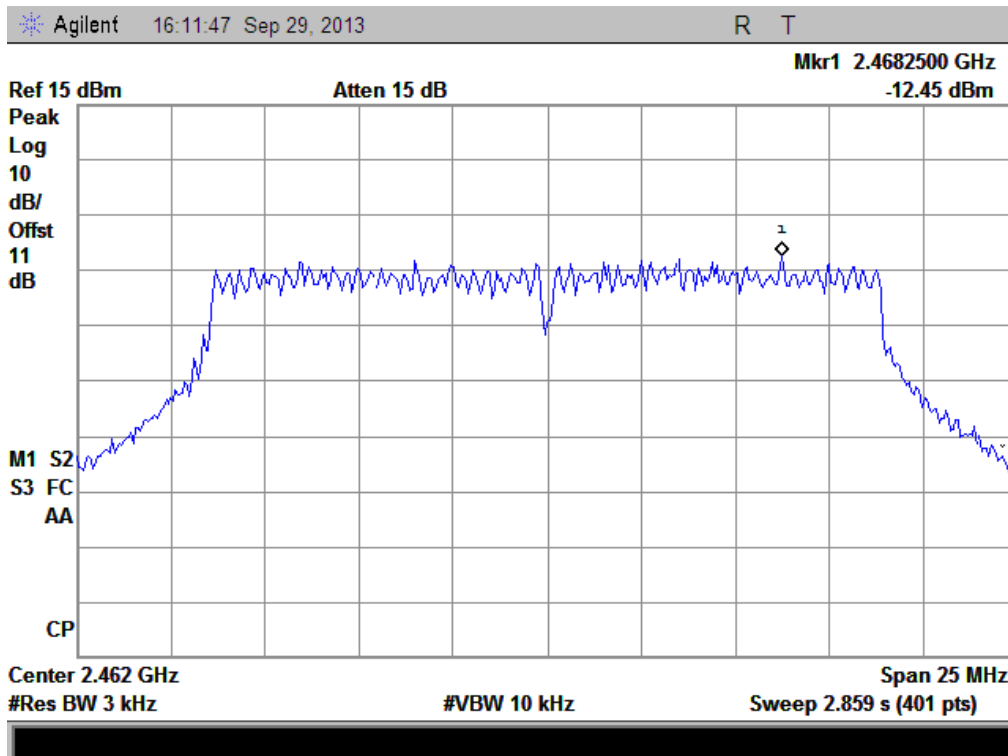


(Plot L: Channel = 11 @ 802.11n-20MHz)

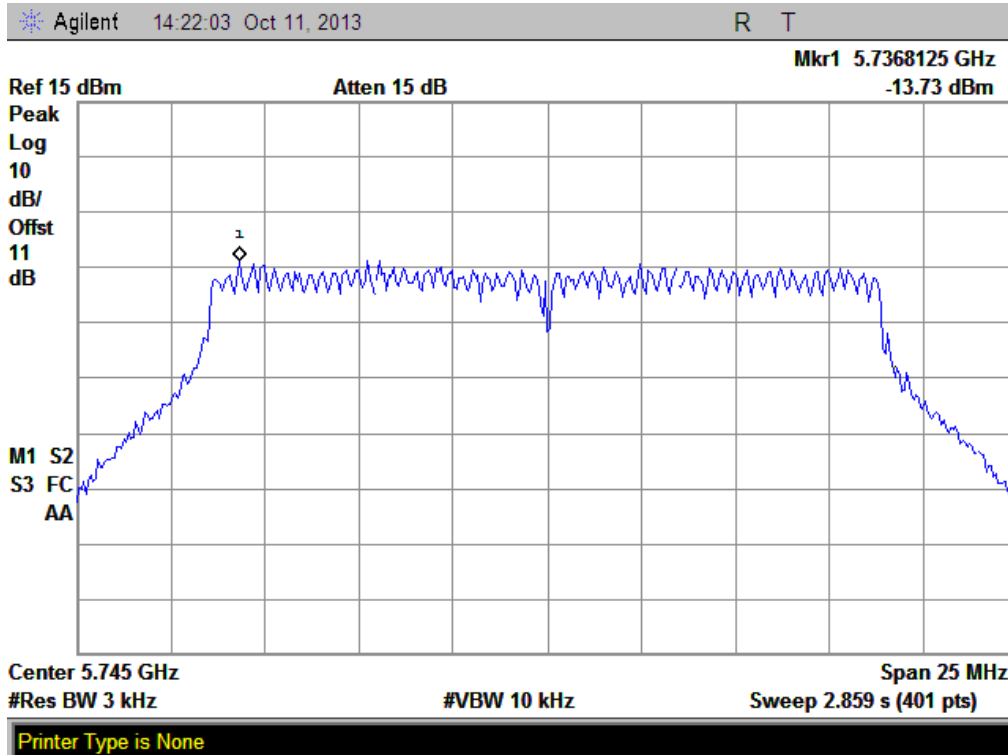

(Plot M: Channel = 149 @802.11n-20MHz)

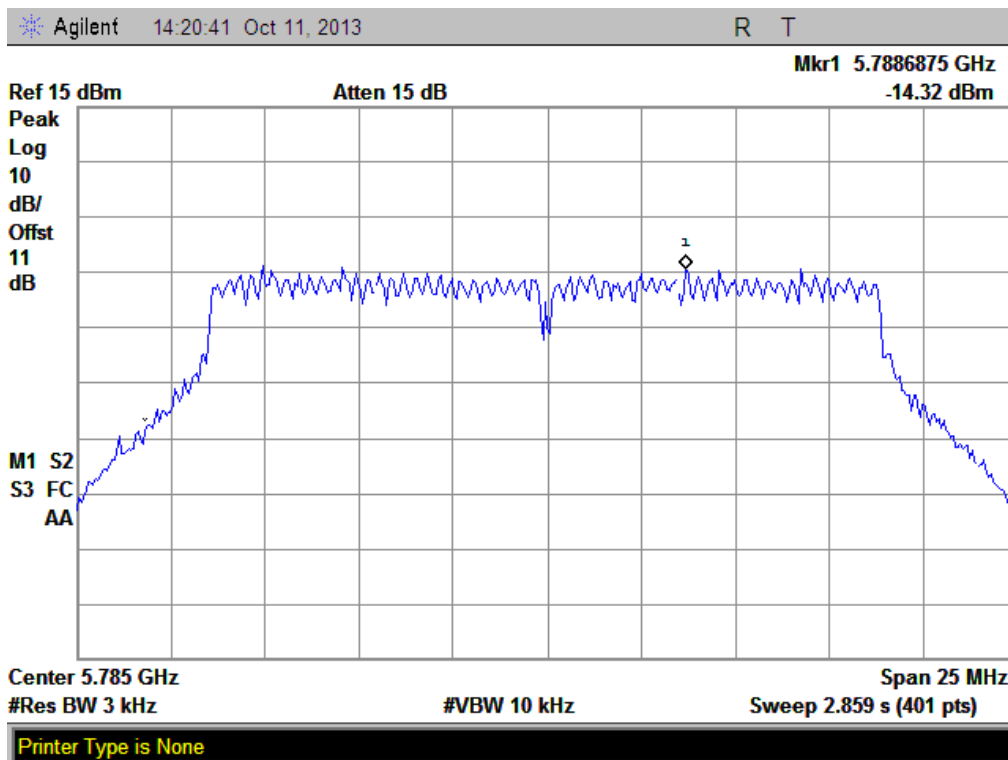

(Plot N: Channel = 157 @ 802.11n-20MHz)

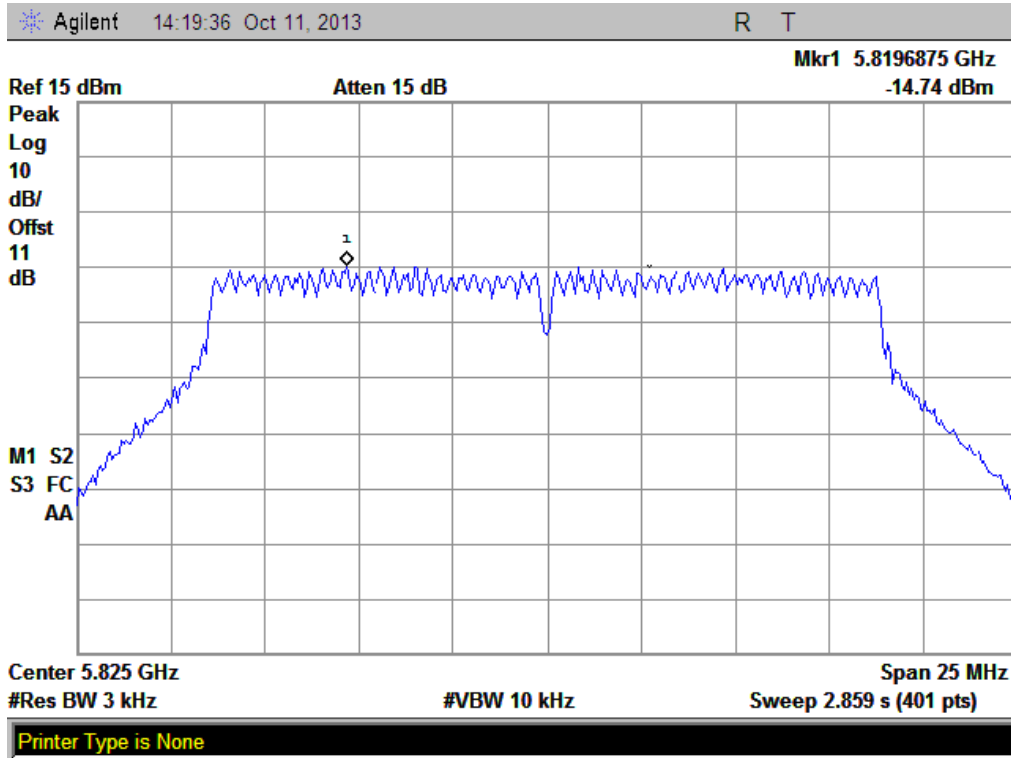


(Plot O: Channel = 165 @ 802.11n-20MHz)

2.5.3.5. 802.11n-40MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
3	2412	-15.36	Plot P	8	PASS
6	2437	-16.18	Plot Q	8	PASS
9	2462	-16.92	Plot R	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

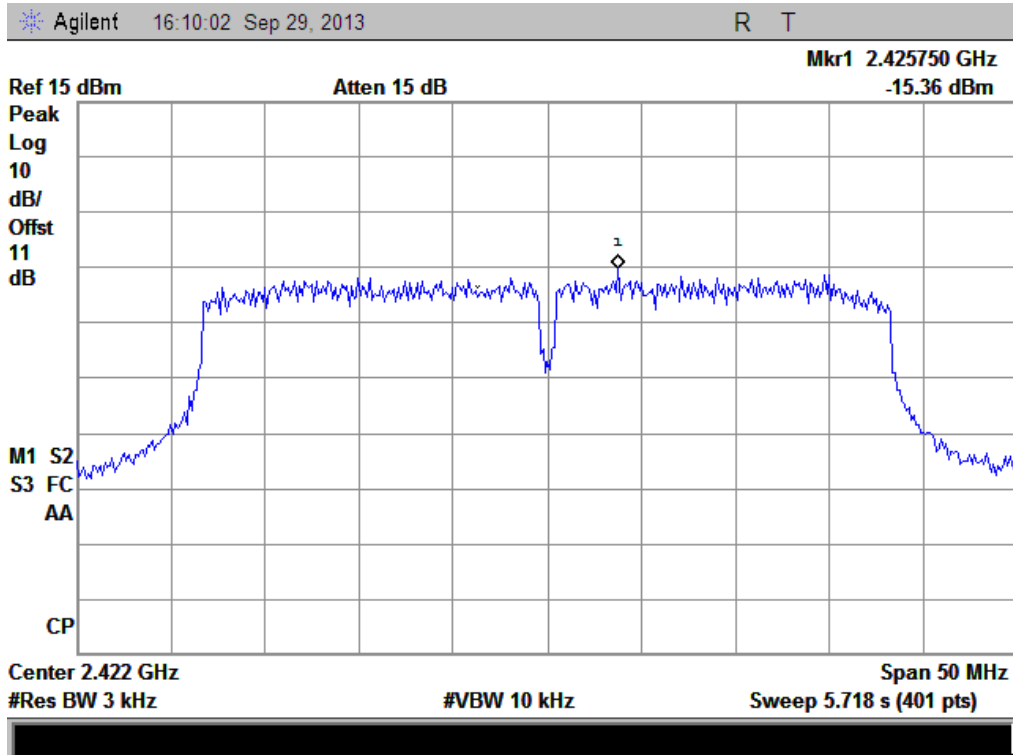

(Plot P: Channel = 3 @ 802.11n-40MHz)

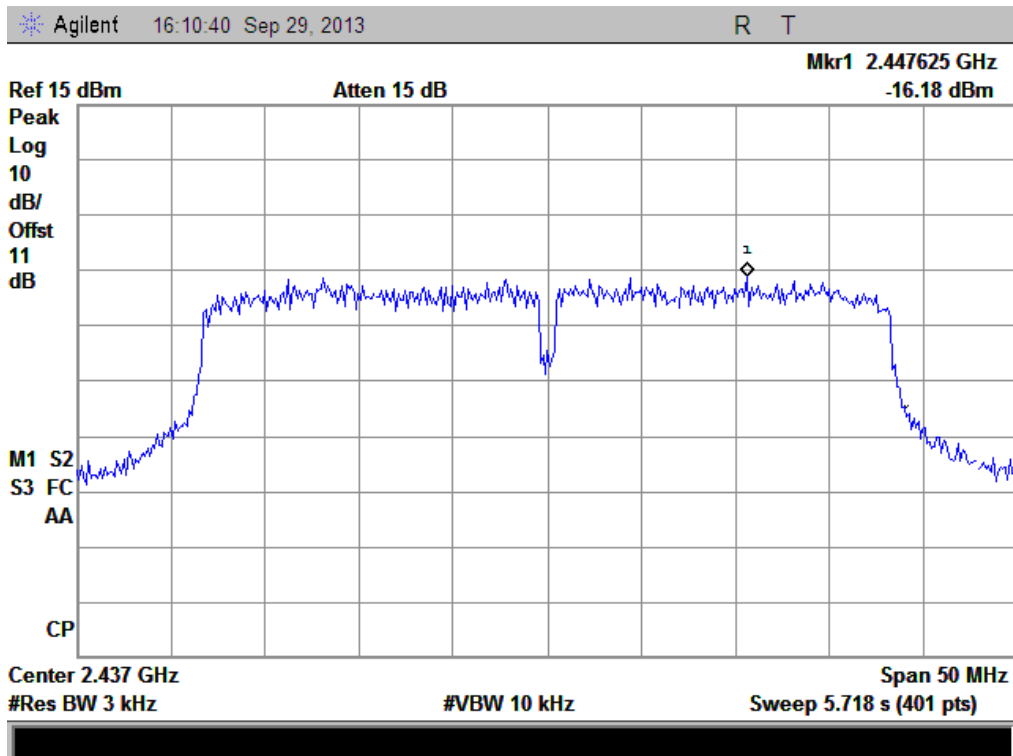

(Plot Q: Channel = 6 @ 802.11n-40MHz)

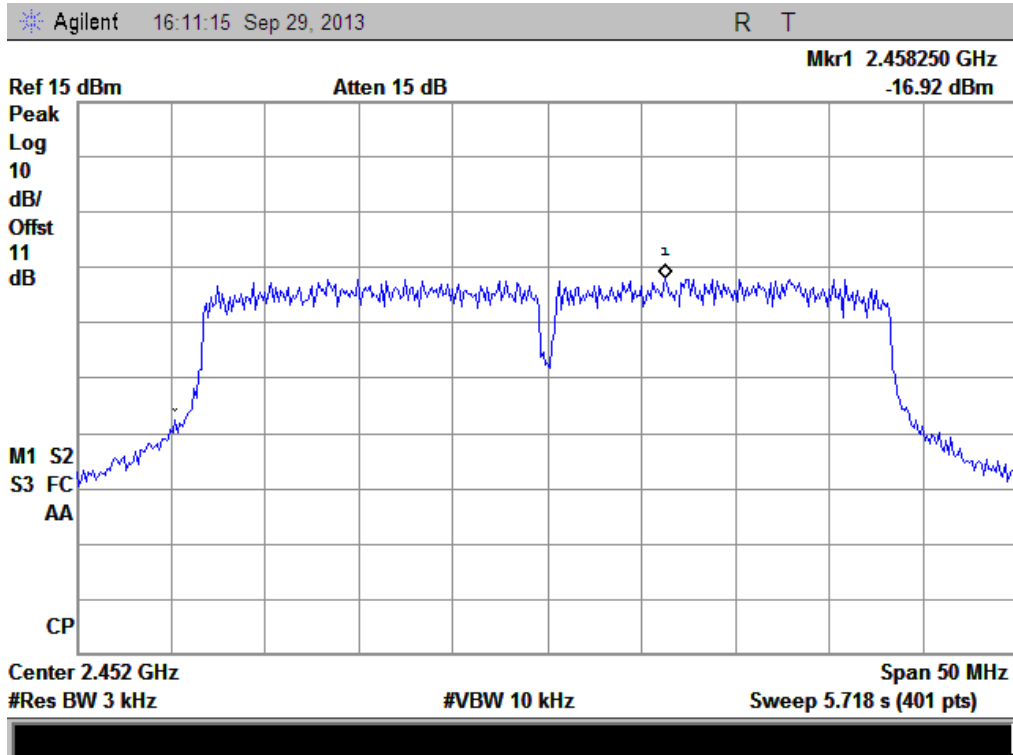

(Plot R: Channel = 9 @ 802.11n-40MHz)


2.6. Restricted Frequency Bands

2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2. Test Description

A. Test Setup

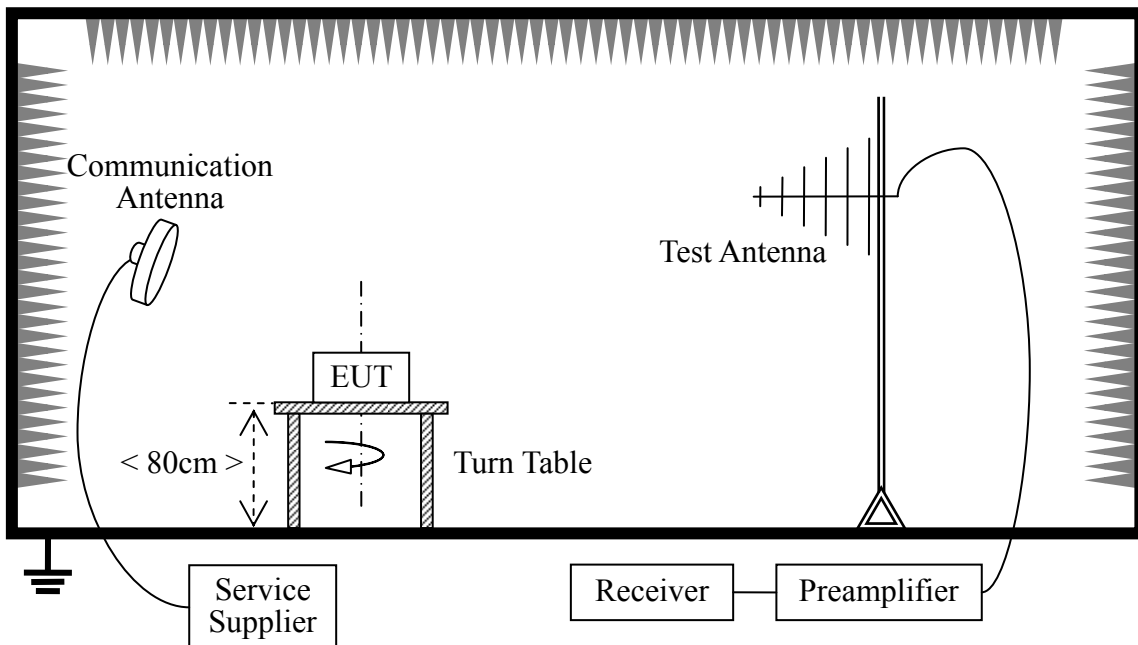

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05.12	2014.05.11
Test Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2013.05.12	2014.05.11

2.6.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.6.3.1. 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2397.44	PK	54.42	-30.93	32.56	56.05	74	Pass
1	2397.16	AV	43.86	-30.93	32.56	45.46	54	Pass
11	2490.89	PK	47.53	-29.05	32.50	50.98	74	Pass
11	2497.92	AV	35.71	-29.05	32.50	39.16	54	Pass


B. Test Plots:

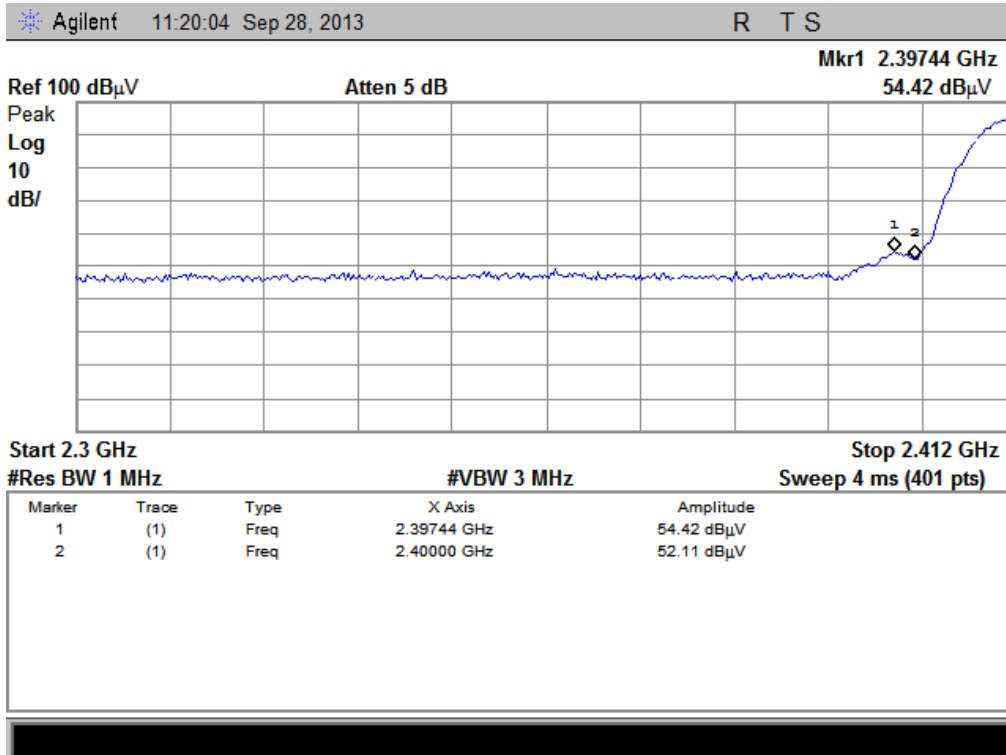


(Plot A1: Channel = 1 PEAK @ 802.11b)

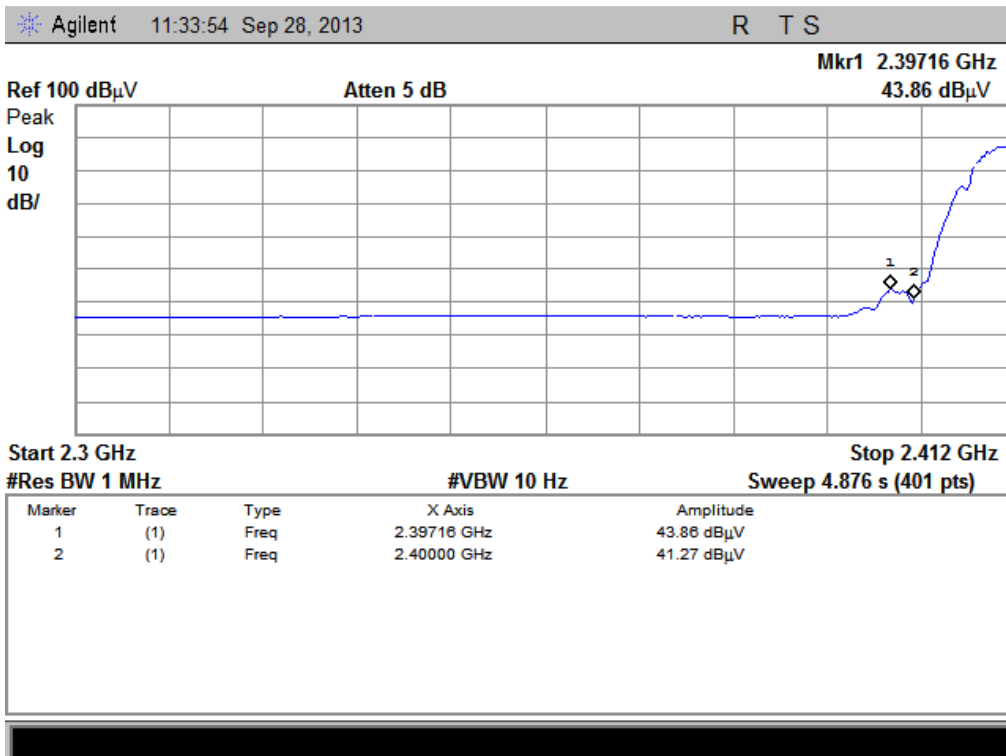

(Plot A2: Channel = 1 AVG @ 802.11b)

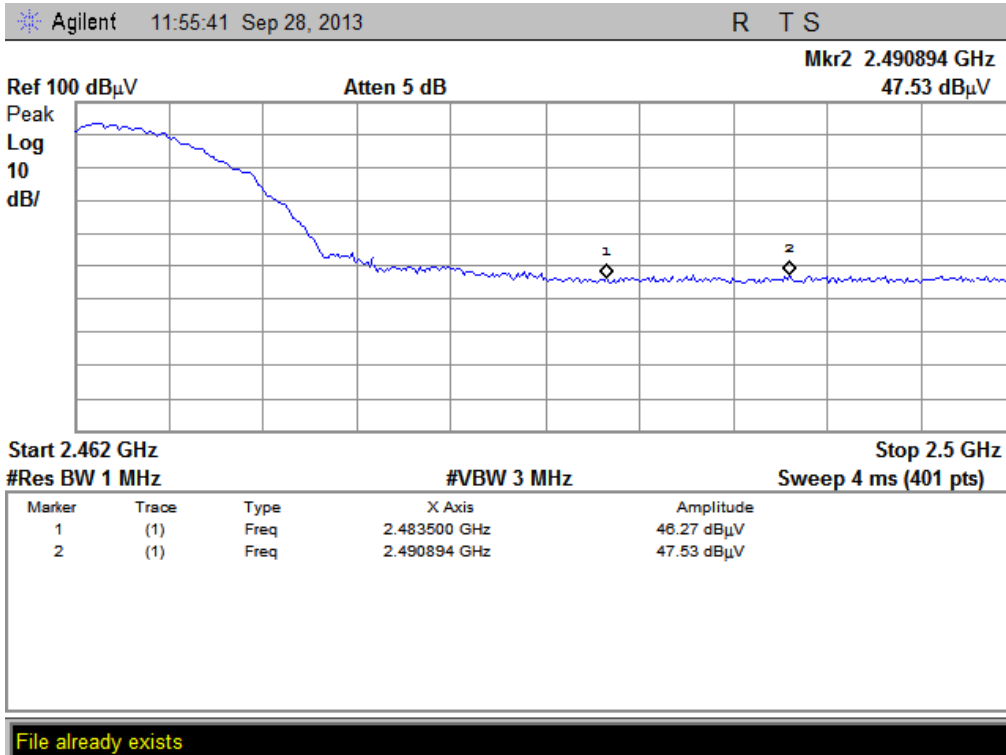

(Plot B1: Channel = 11 PEAK @ 802.11b)

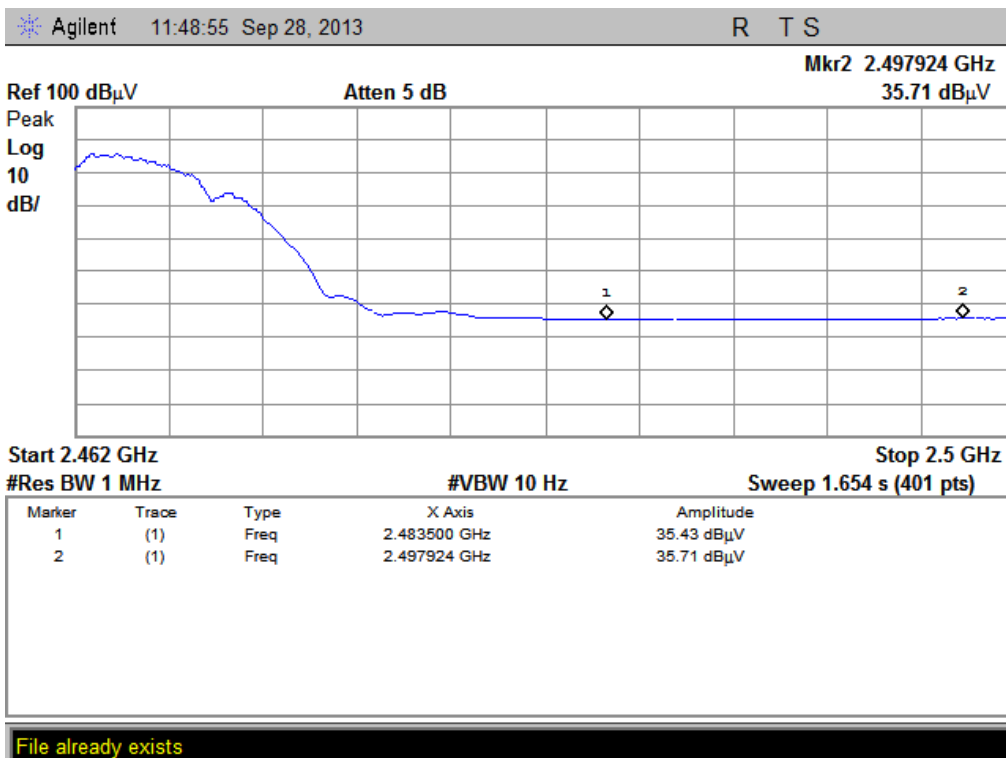

(Plot B2: Channel = 11 AVG @ 802.11b)


2.6.3.2. 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2397.44	PK	59.55	-30.93	32.56	61.18	74	Pass
1	2398.56	AV	43.88	-30.93	32.56	45.51	54	Pass
11	2484.33	PK	64.70	-29.05	32.50	68.15	74	Pass
11	2483.85	AV	46.87	-29.05	32.50	50.32	54	Pass


B. Test Plots:

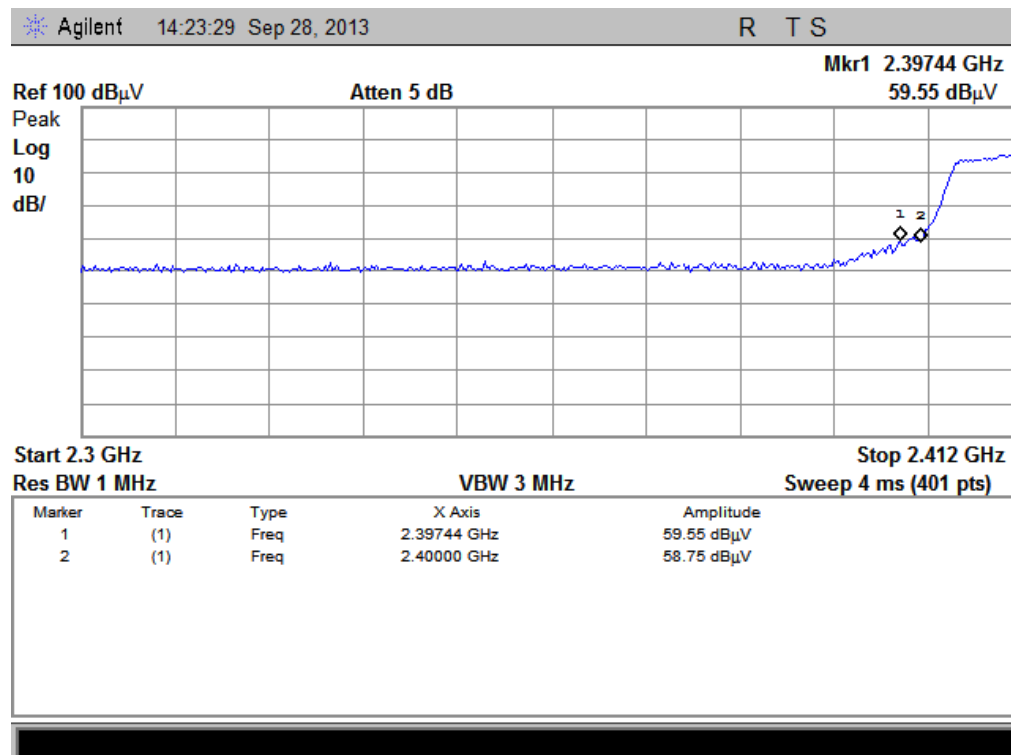


(Plot C1: Channel = 1 PEAK @ 802.11g)

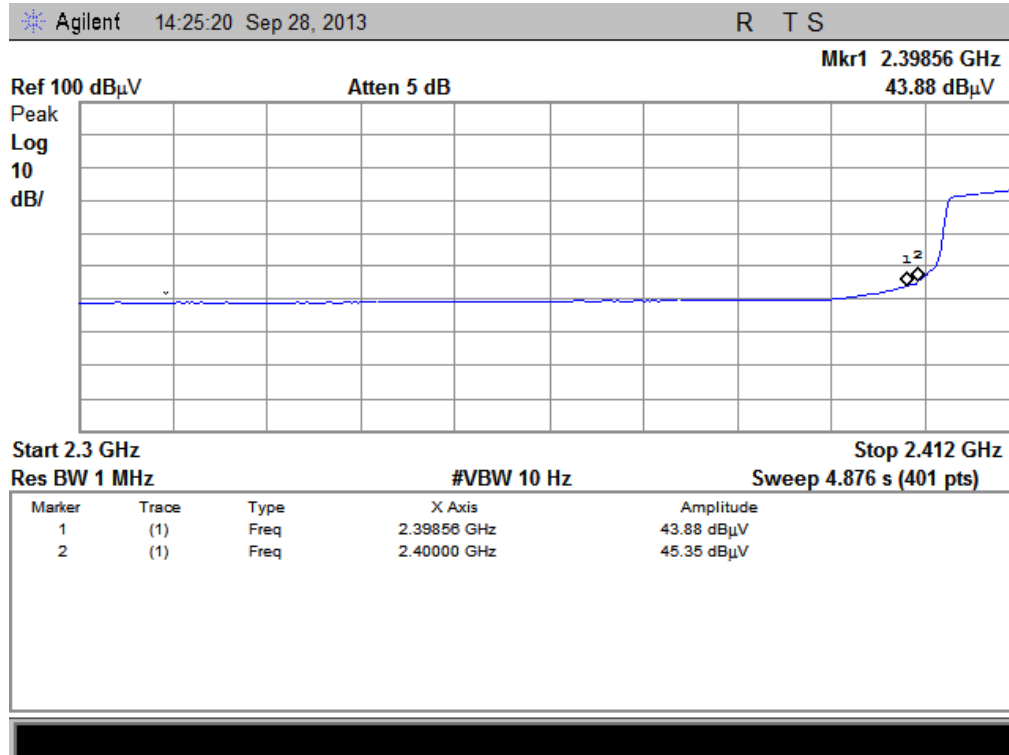

(Plot C2: Channel = 1 AVG @ 802.11g)

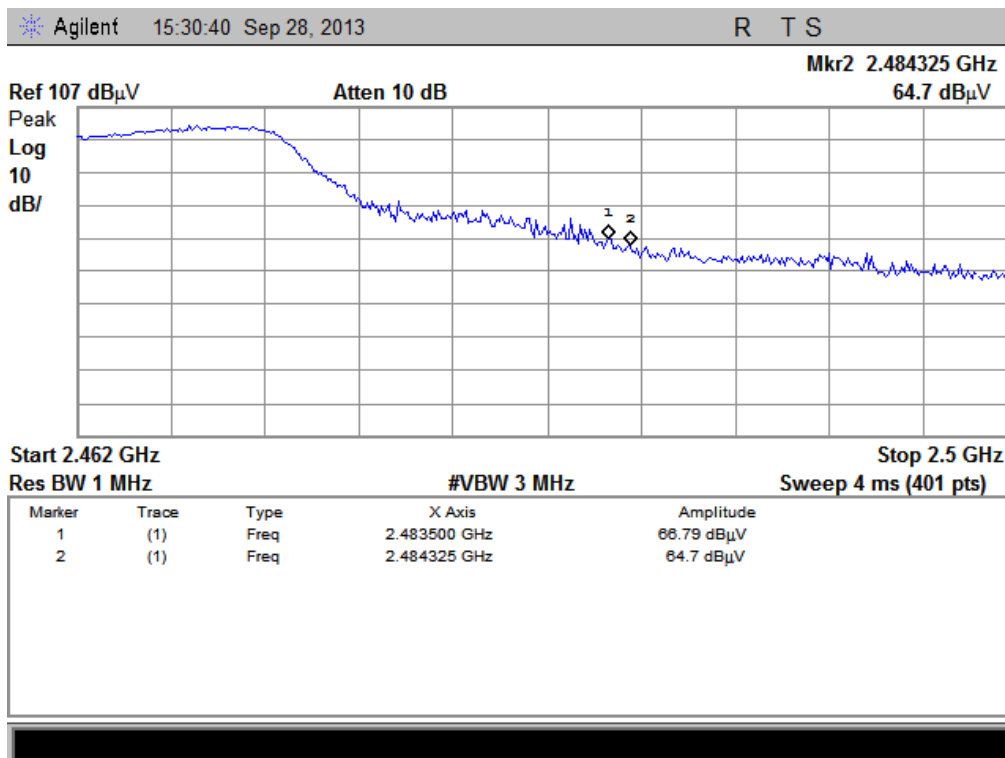

(Plot D1: Channel = 11 PEAK @ 802.11g)

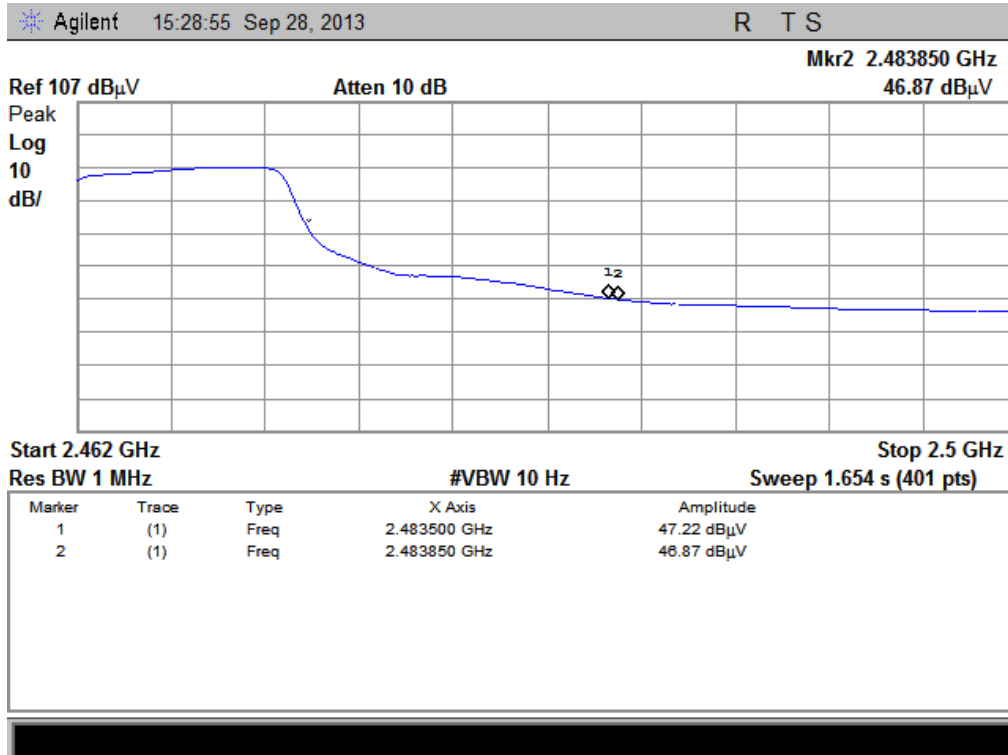

(Plot D2: Channel = 11 AVG @ 802.11g)


2.6.3.3. 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dB μ V)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2398.00	PK	60.62	-30.93	32.56	62.25	74	Pass
1	2398.56	AV	44.44	-30.93	32.56	46.07	54	Pass
11	2483.95	PK	67.28	-29.05	32.50	70.73	74	Pass
11	2483.50	AV	47.30	-29.05	32.50	50.75	54	Pass


B. Test Plots:

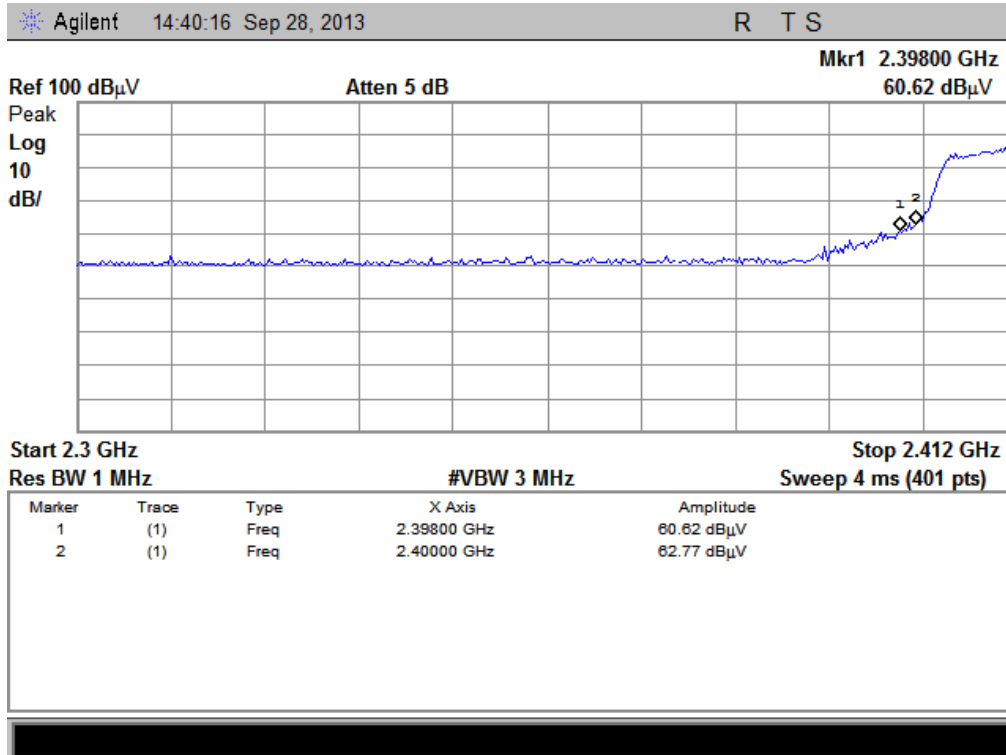


(Plot E1: Channel = 1 PEAK @ 802.11n-20)

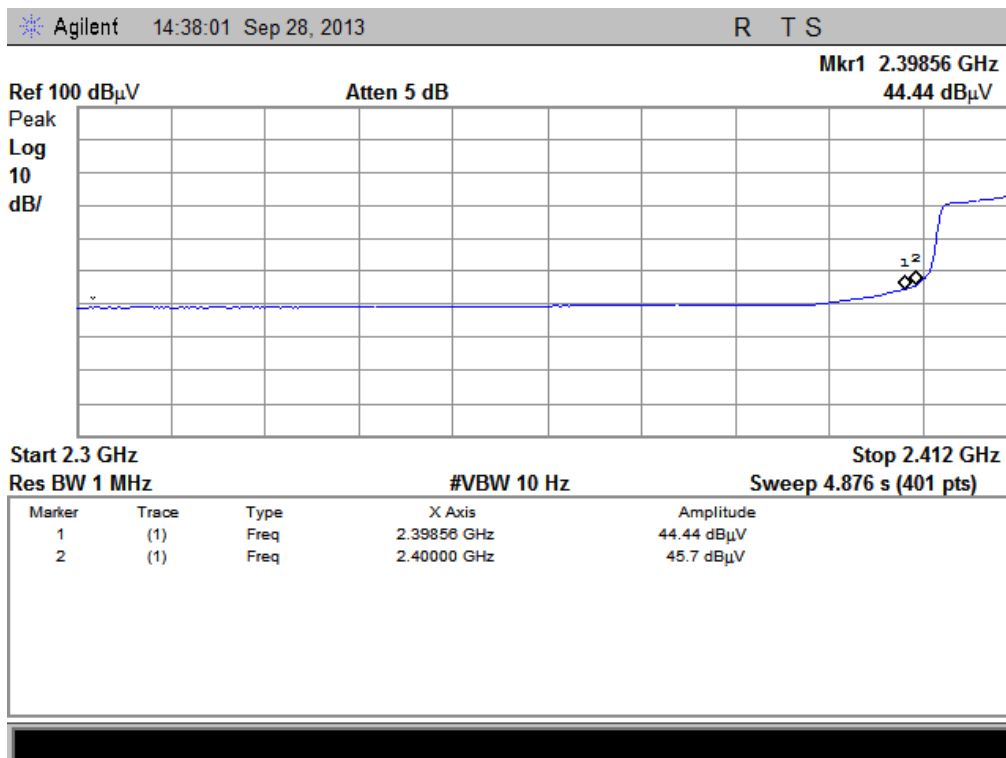

(Plot E2: Channel = 1 AVG @ 802.11n-20)

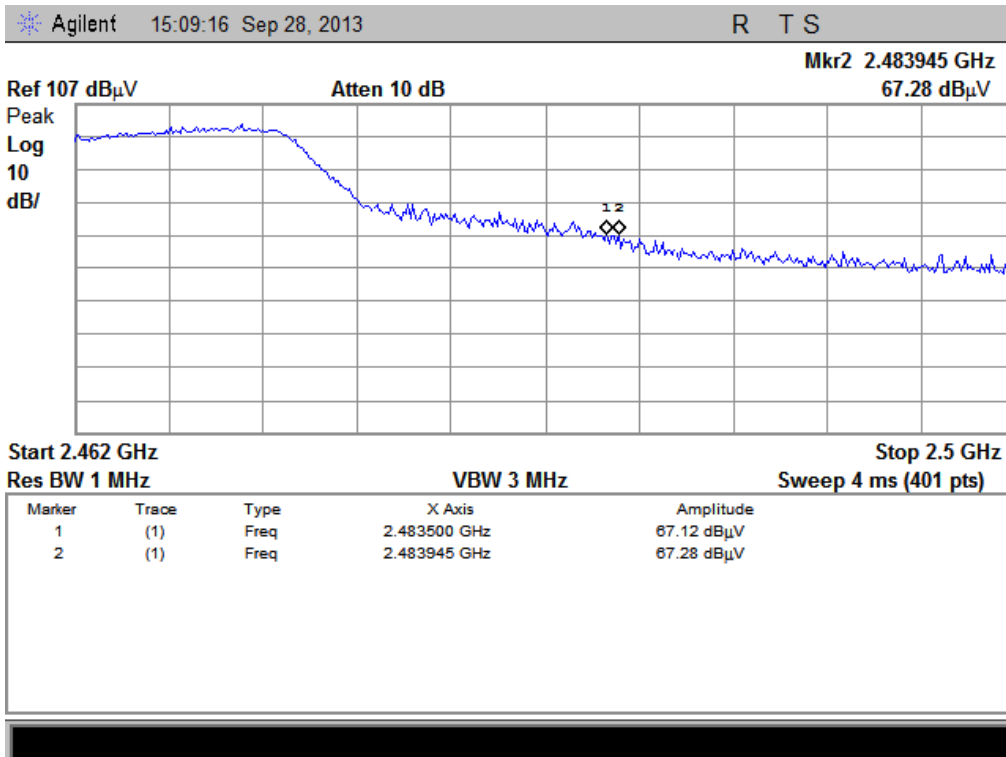

(Plot F1: Channel = 11 PEAK @ 802.11n-20)

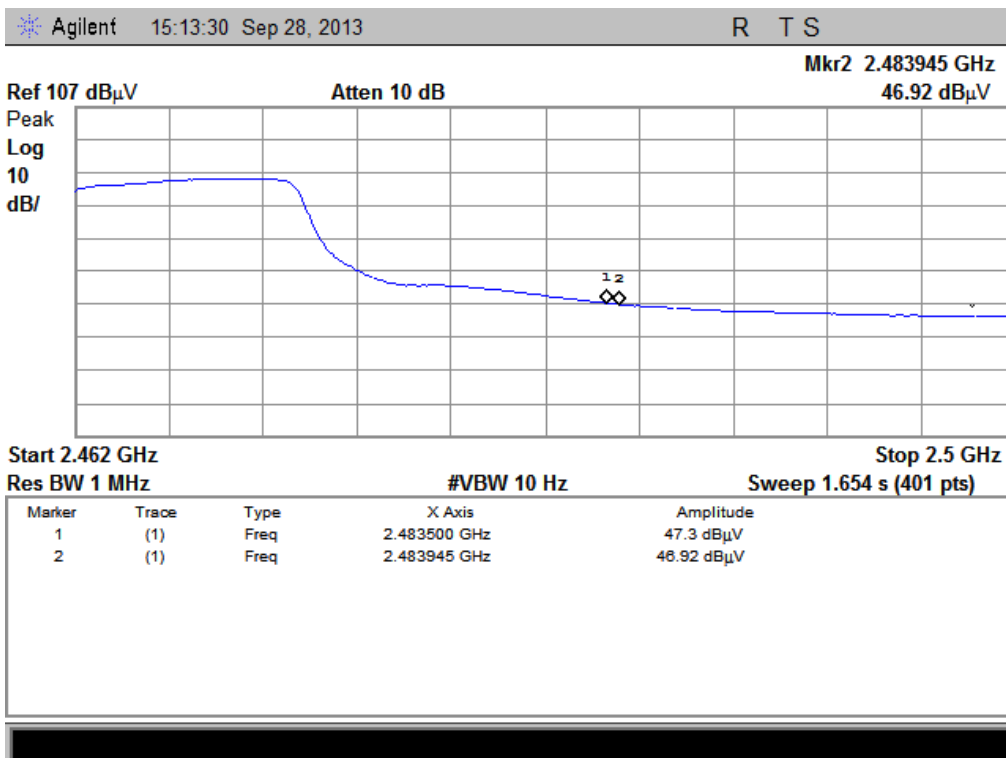

(Plot F2: Channel = 11 AVG @ 802.11n-20)


2.6.3.4. 802.11n-40MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2398.65	PK	55.34	-30.93	32.56	56.97	74	Pass
3	2398.37	AV	42.03	-30.93	32.56	43.66	54	Pass
9	2486.51	PK	66.51	-29.05	32.50	69.96	74	Pass
9	2485.66	AV	44.44	-29.05	32.50	47.89	54	Pass


B. Test Plots:

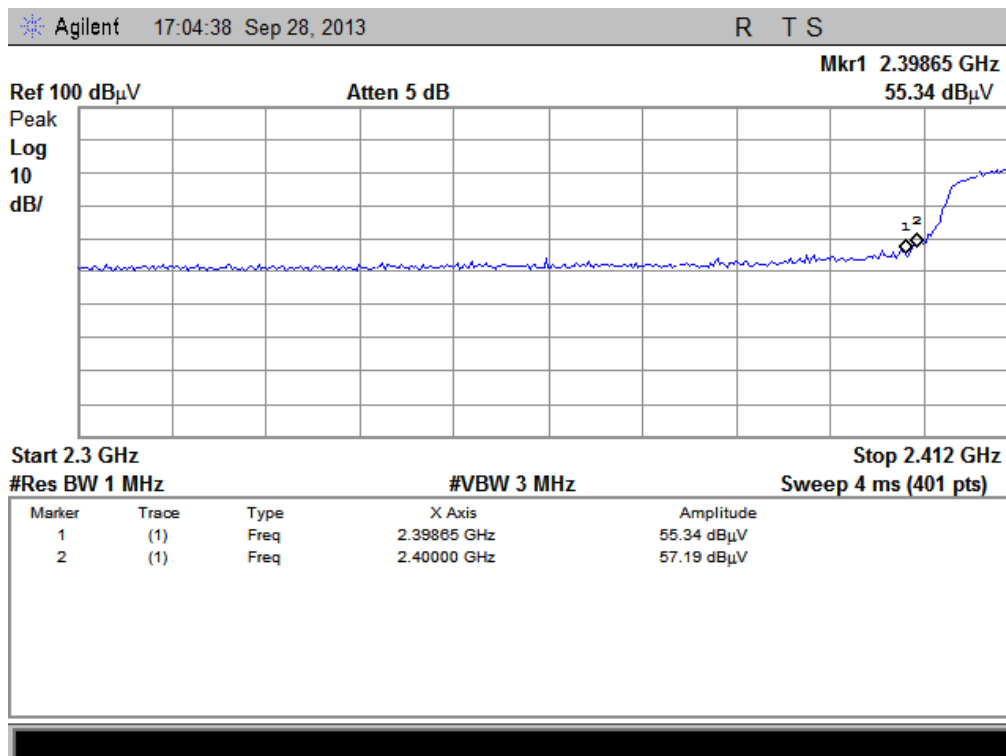


(Plot E1: Channel = 3 PEAK @ 802.11n-40)

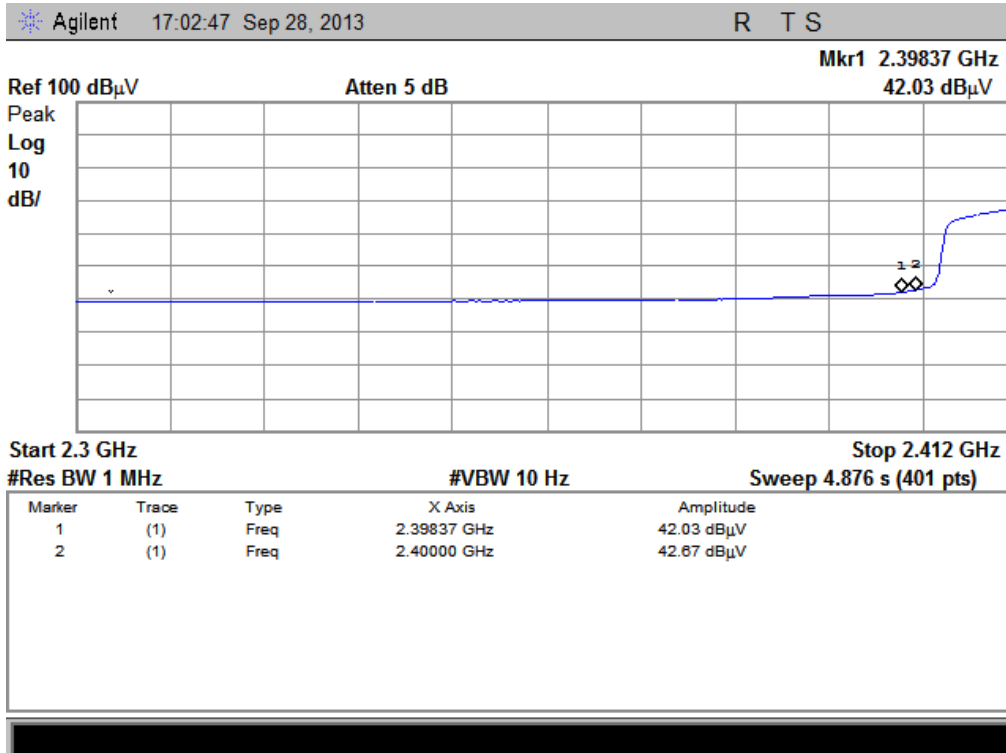

(Plot E2: Channel = 3 AVG @ 802.11n-40)

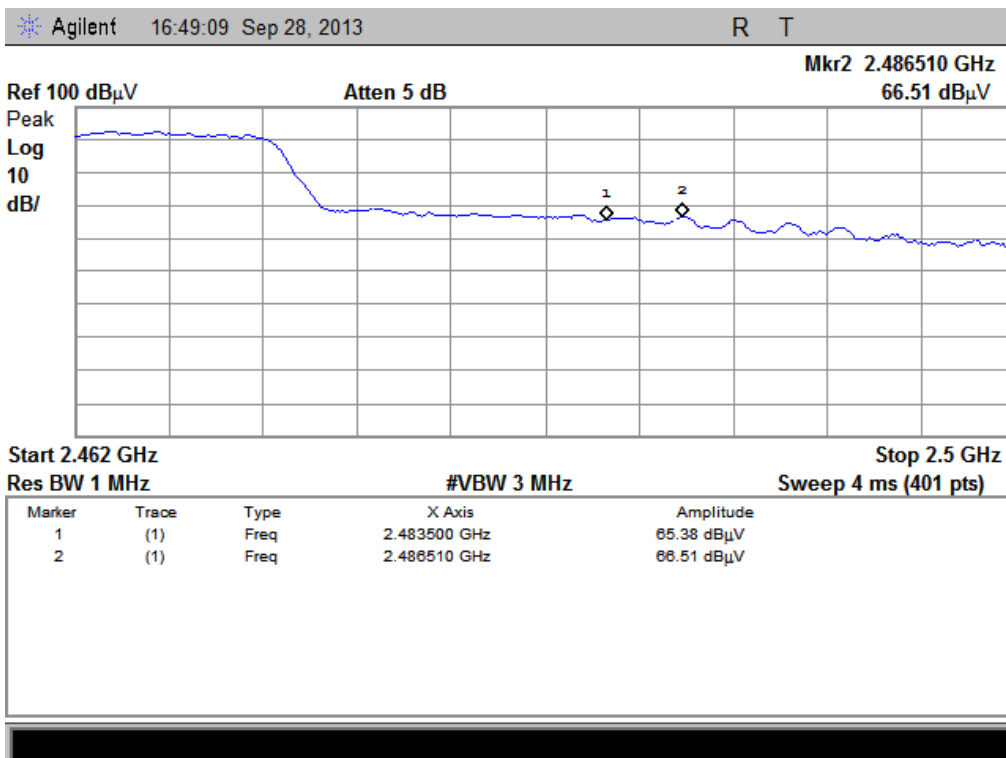

(Plot F1: Channel = 9 PEAK @ 802.11n-40)

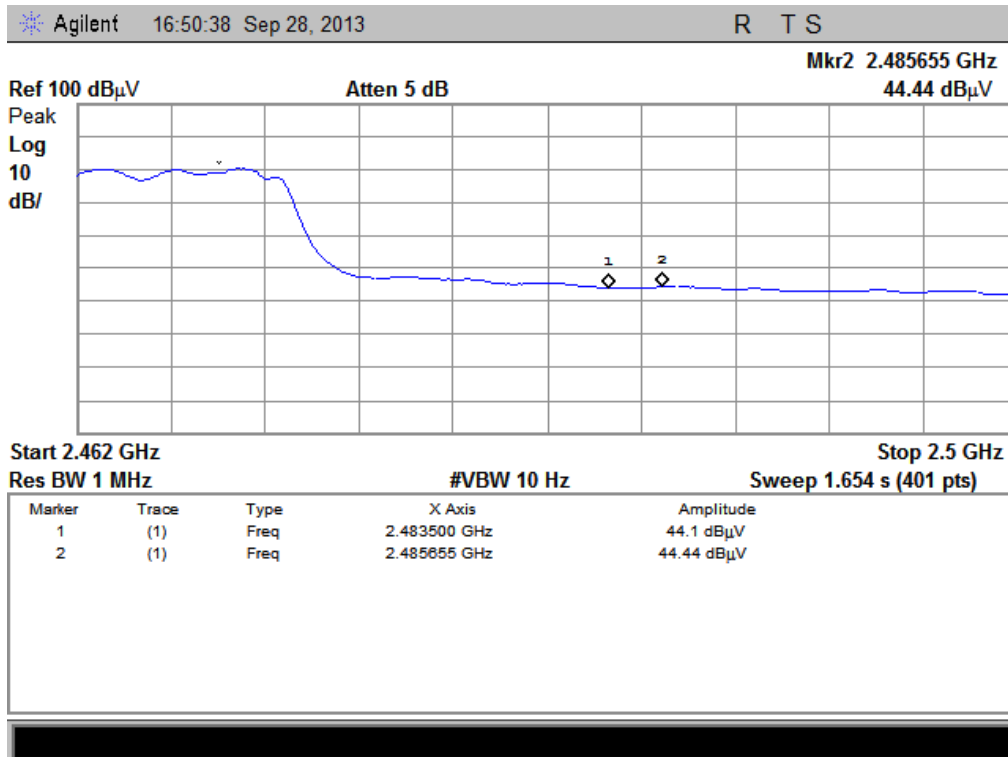

(Plot F2: Channel = 9 AVG @ 802.11n-40)

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

A. Test Setup:

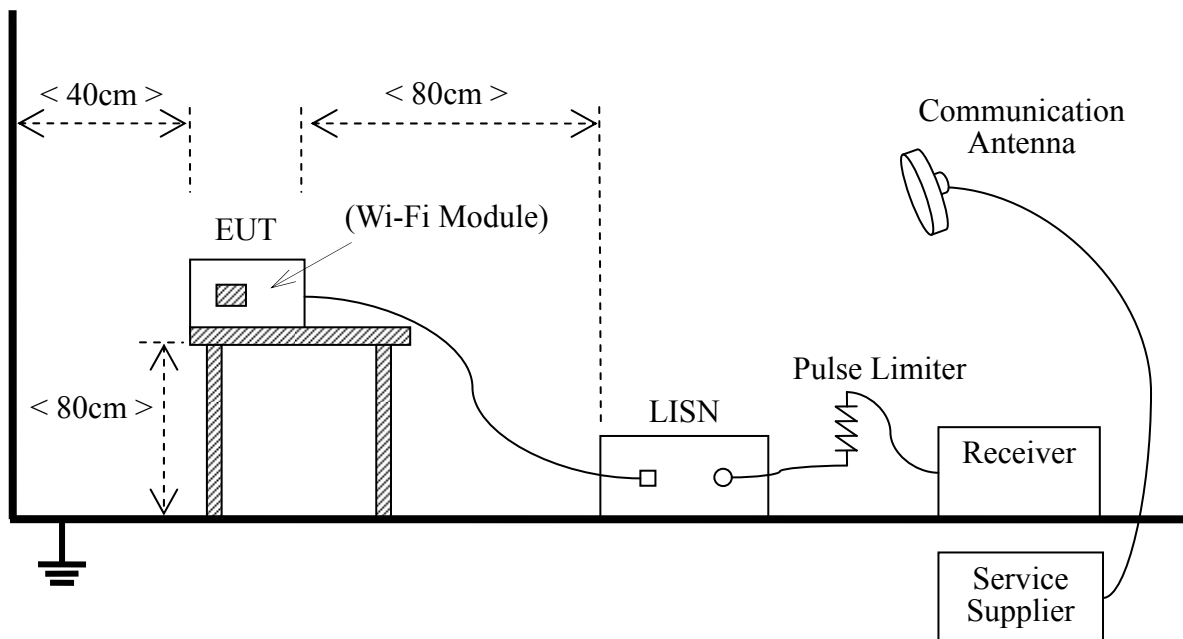

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the EUT is activated and controlled by the Wi-Fi Service Supplier (SS) via a Common Antenna.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
LISN	Schwarzbeck	NSLK 8127	812744	2013.05.12	2014.05.11
Service Supplier	R&S	CMU200	100448	2013.05.12	2014.05.11
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)


2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

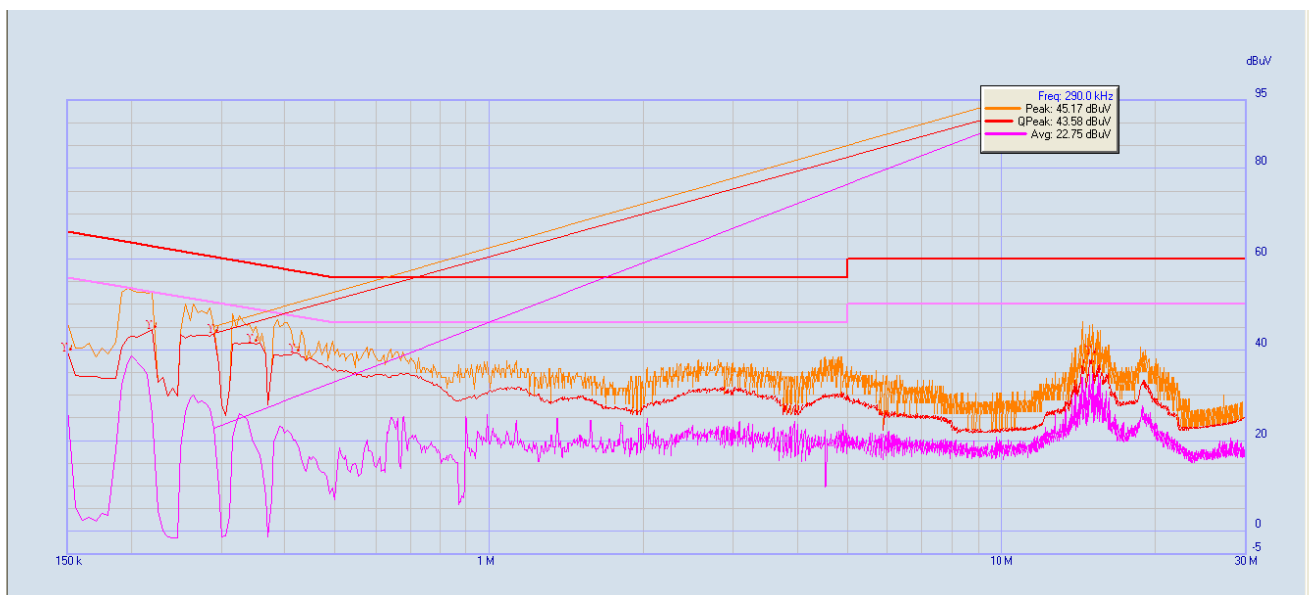

(Plot A: L Phase)

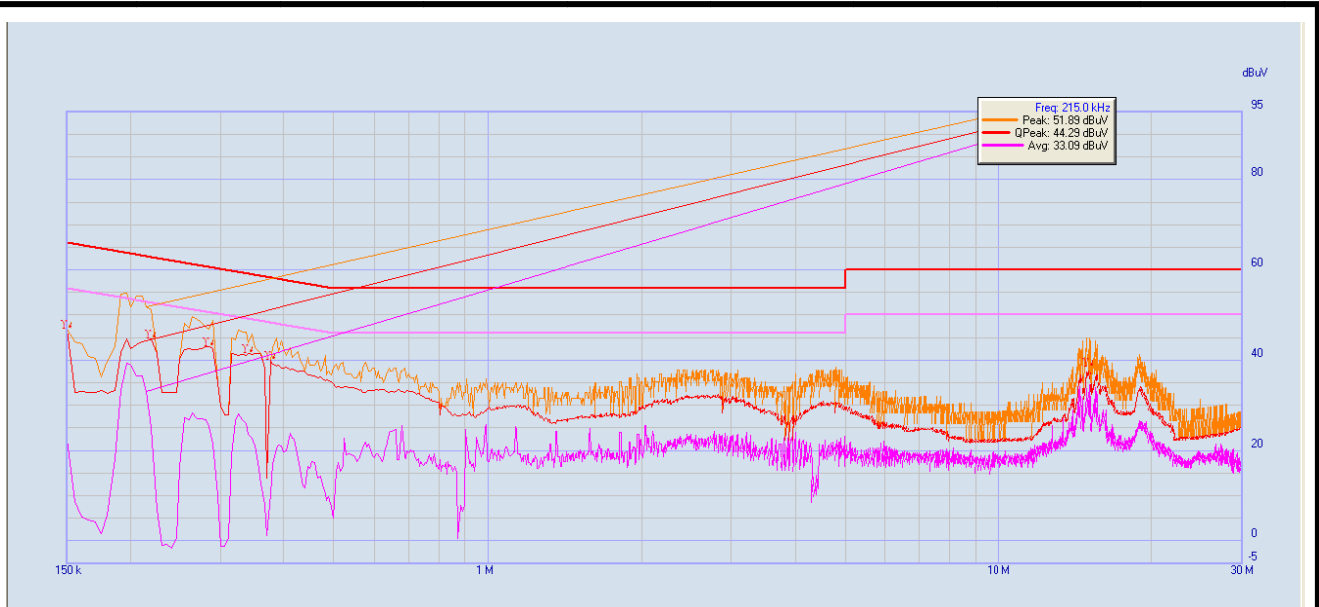

(Plot B: N Phase)

2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

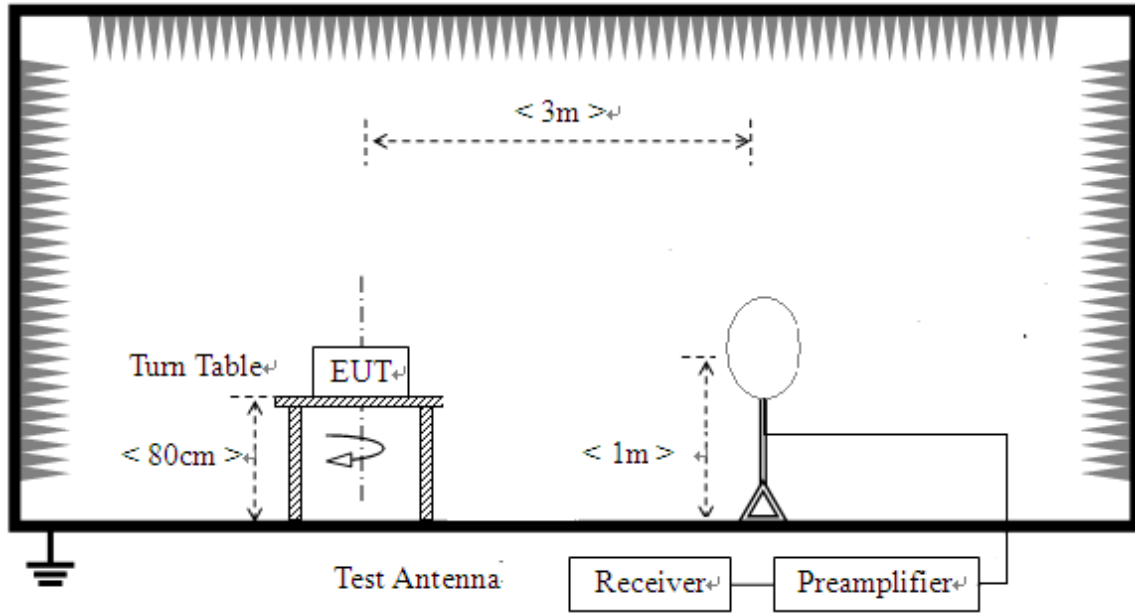

2) For radiated emissions from 30MHz to1GHz

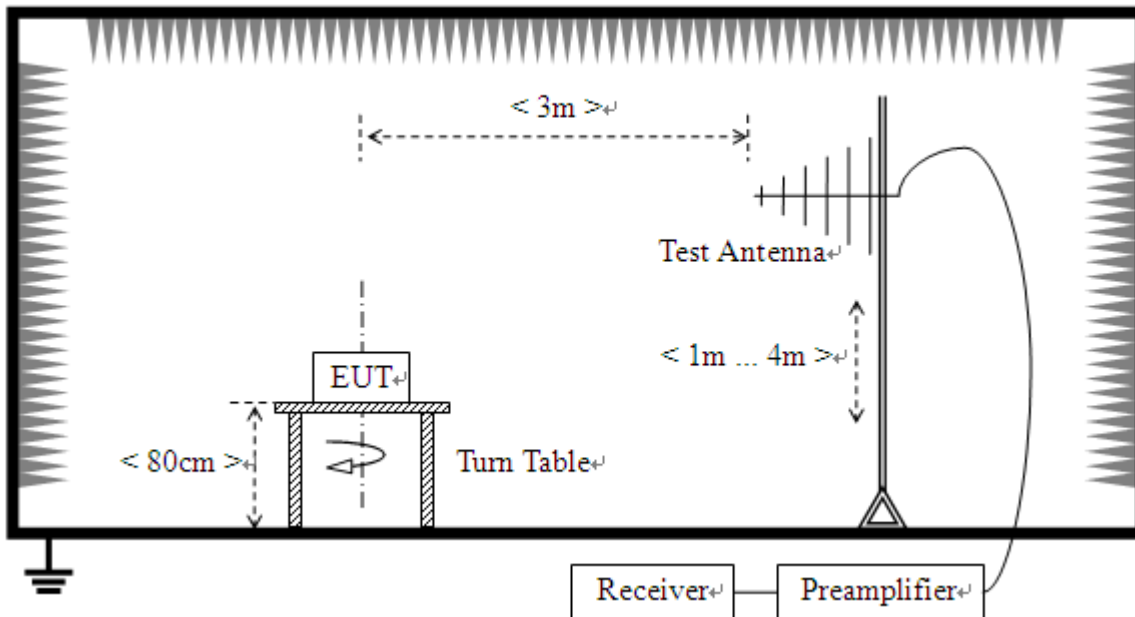

3) For radiated emissions above 1GHz

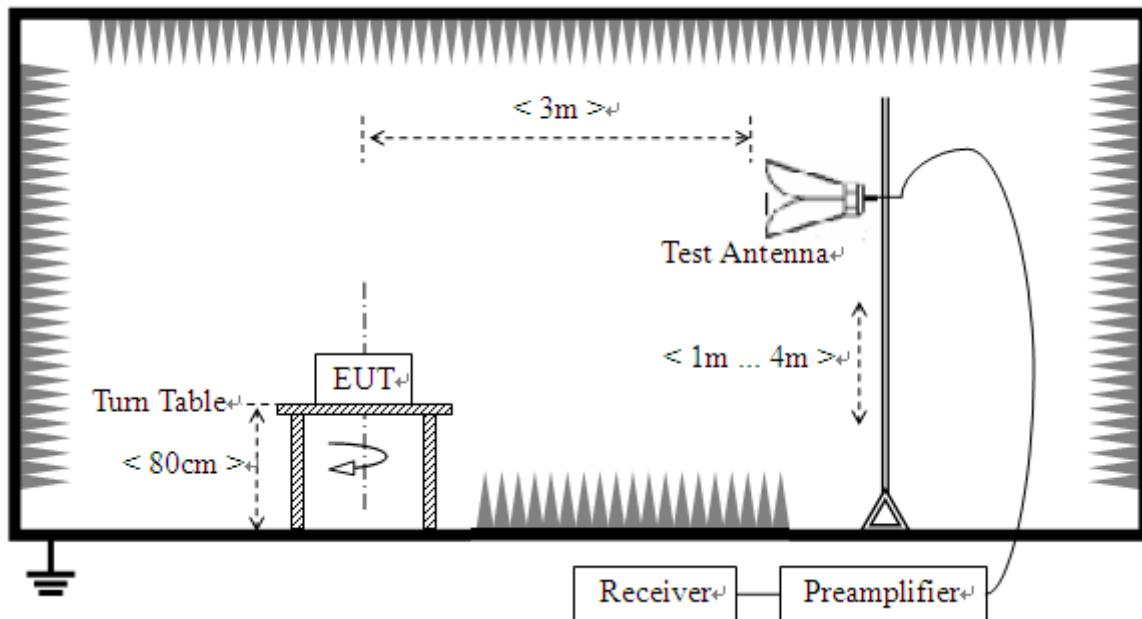

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2013.05.12	2014.05.11
Receiver	Agilent	E7405A	US44210471	2013.05.12	2014.05.11
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05.12	2014.05.11
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2013.05.12	2014.05.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120C-963	2013.05.12	2014.05.11
Test Antenna - Horn	R&S	HL050S7	71688	2013.05.12	2014.05.11
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2013.05.12	2014.05.11

2.8.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


2.8.3.1. 802.11a Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 149




(Plot A.1: 9kHz to 30MHz)

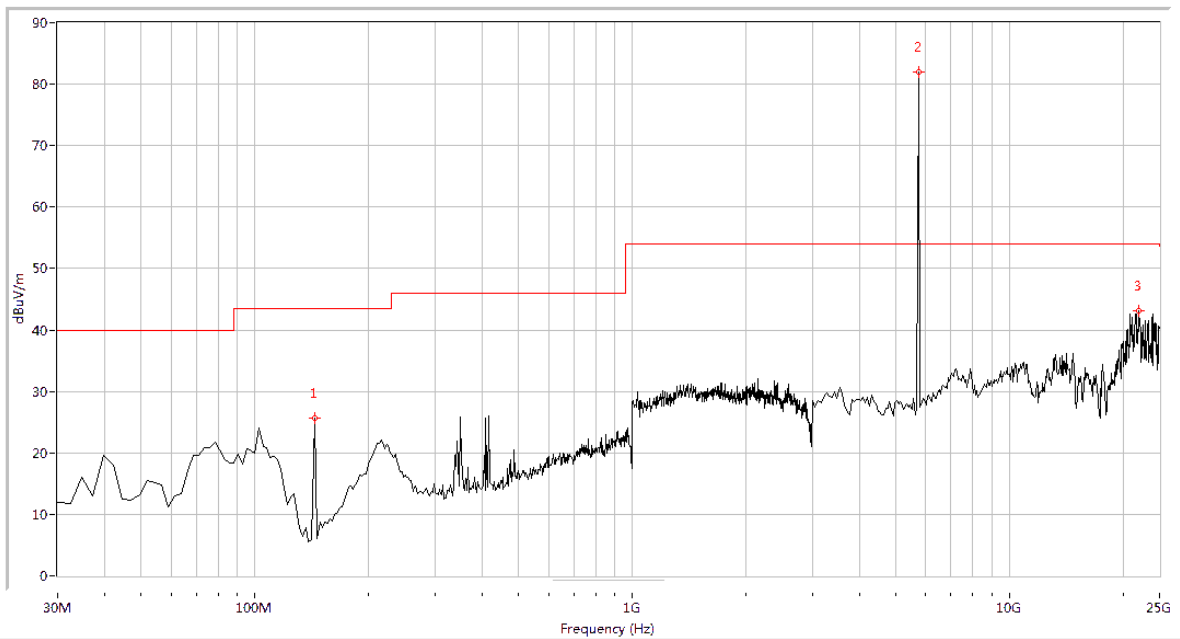


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
143.691	25.74	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
5745.000	82.06	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
22092.269	43.07	N.A	N.A	74.0	N.A	N.A	Vertical	PASS

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

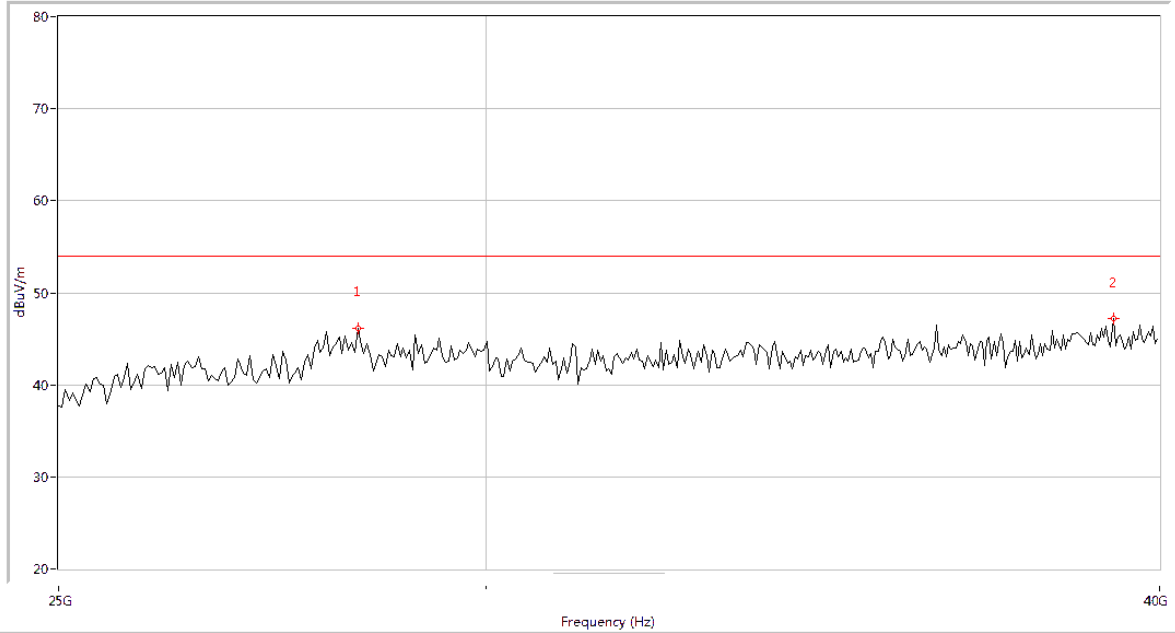


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28403.998	46.18	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
39214.467	47.18	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot A.3: Antenna Horizontal, 25MHz to 40GHz)

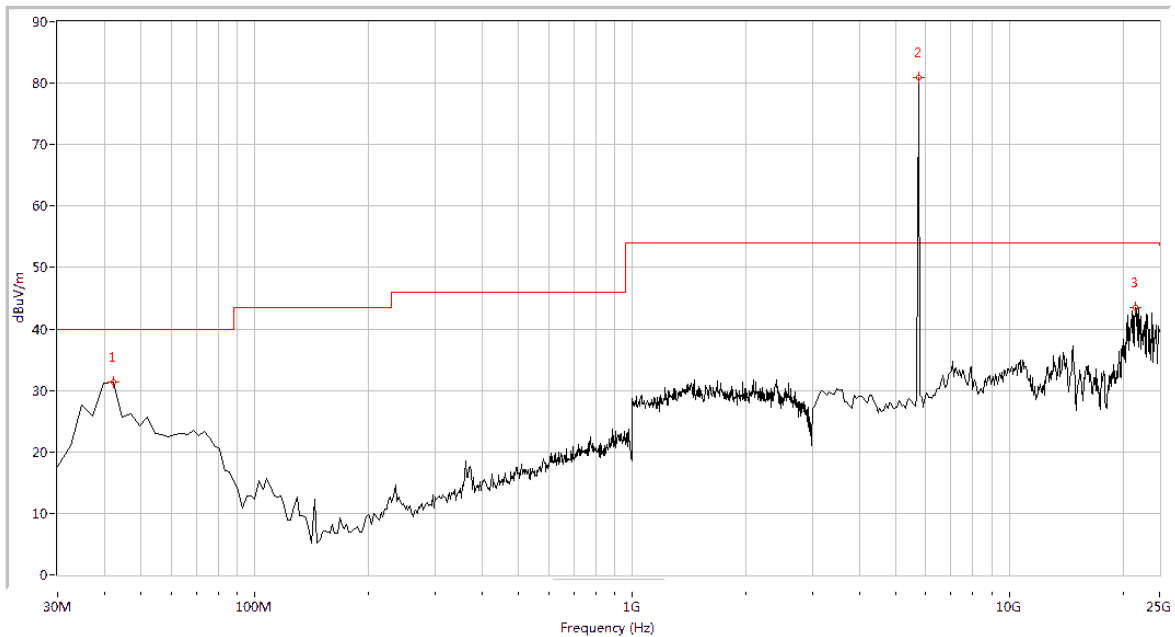

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	31.41	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
5745.000	80.94	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
21653.367	43.51	N.A	N.A	74.0	N.A	N.A	Vertical	PASS


(Plot A.4: Antenna Vertical, 30MHz to 25GHz)

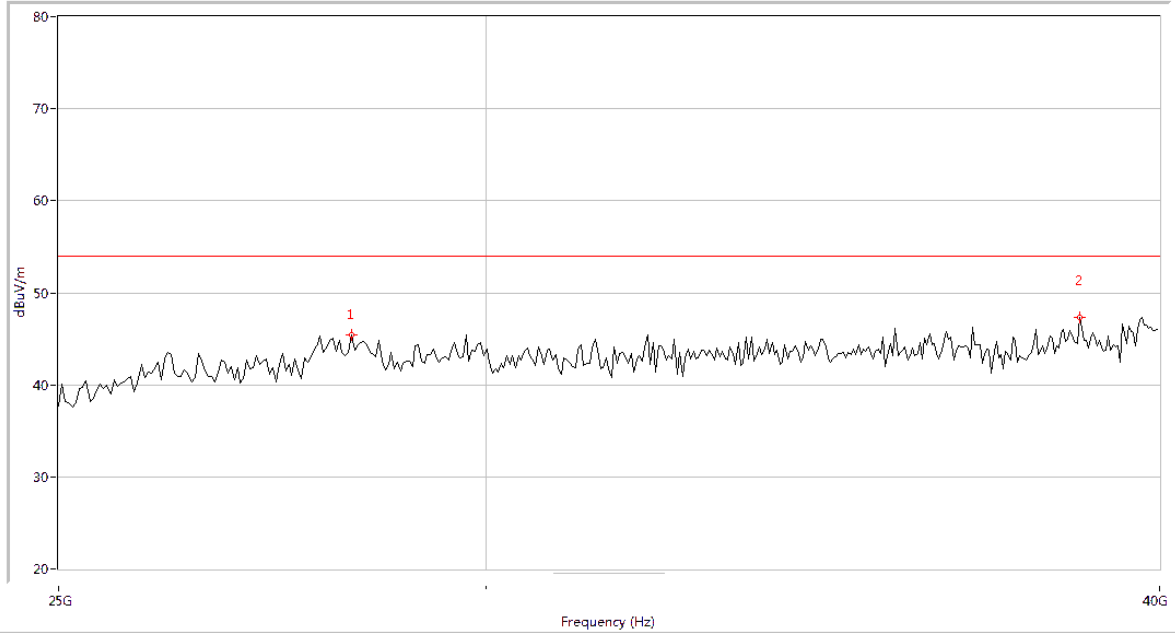


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28302.918	45.38	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
38625.337	47.34	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot A.5: Antenna Vertical, 25GHz to 40GHz)

Plot for Channel = 153

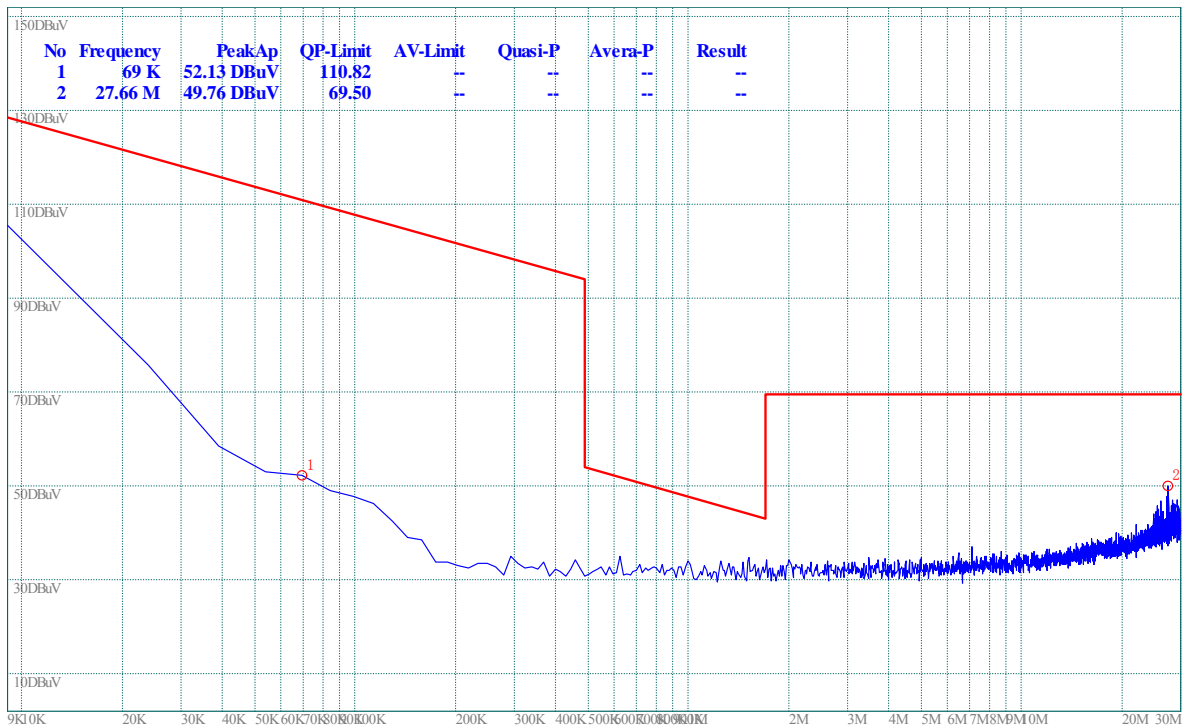


(Plot B.1: 9kHz to 30MHz)

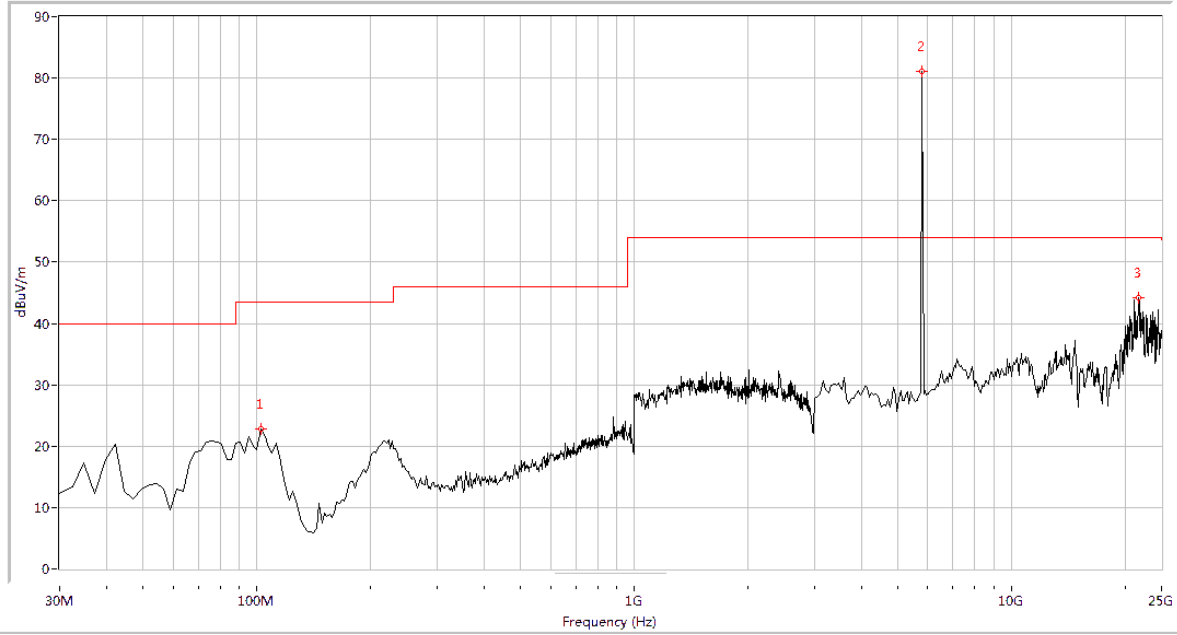


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	22.80	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
5785.000	81.17	N.A	N.A	N.A	N.A	54.0	Horizontal	N.A
21763.092	44.25	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

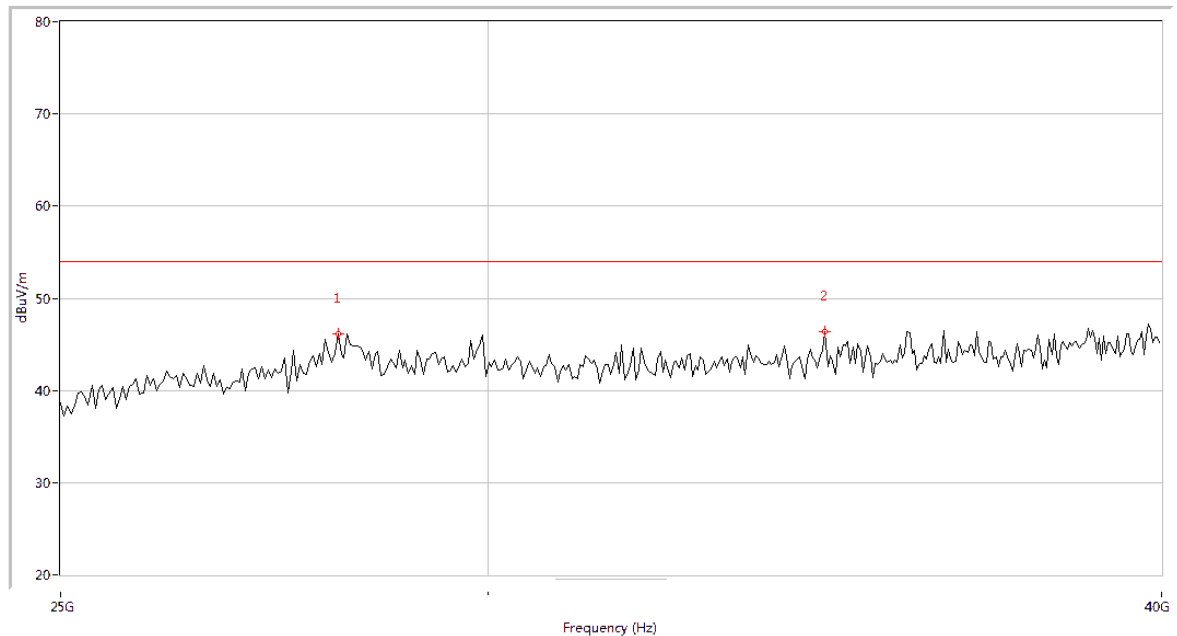


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28142.214	46.13	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
34655.087	46.34	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot B.3: Antenna Horizontal, 25GHz to 40GHz)

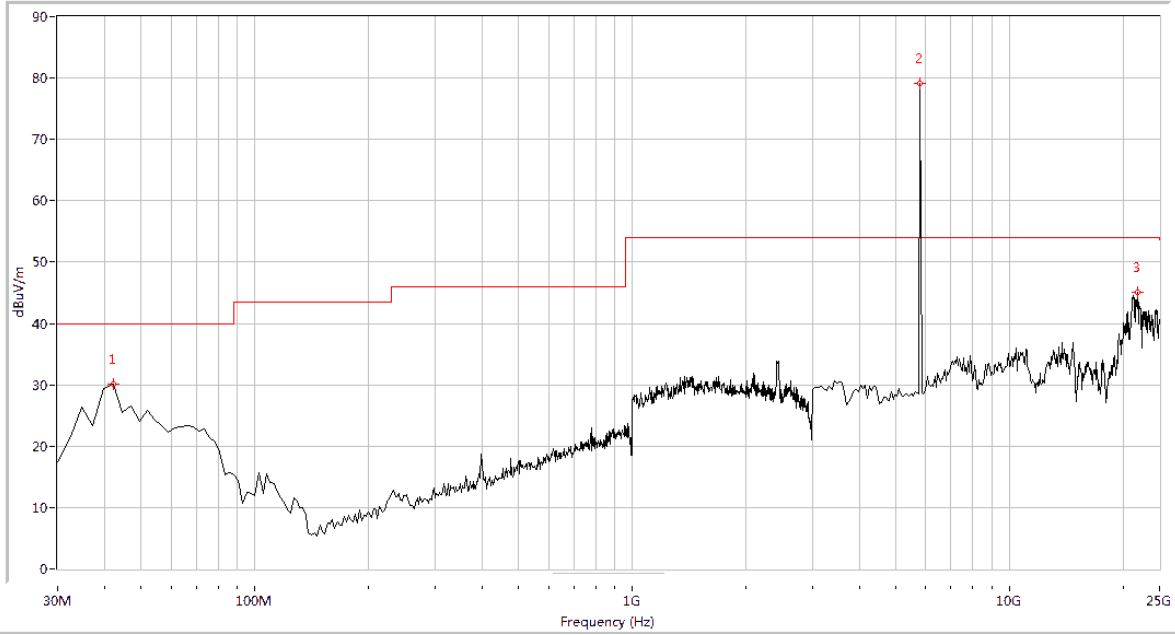


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	30.15	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
5785.000	79.20	N.A	N.A	N.A	N.A	54.0	Vertical	N.A
21872.818	45.11	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.4: Antenna Vertical, 30MHz to 40GHz)

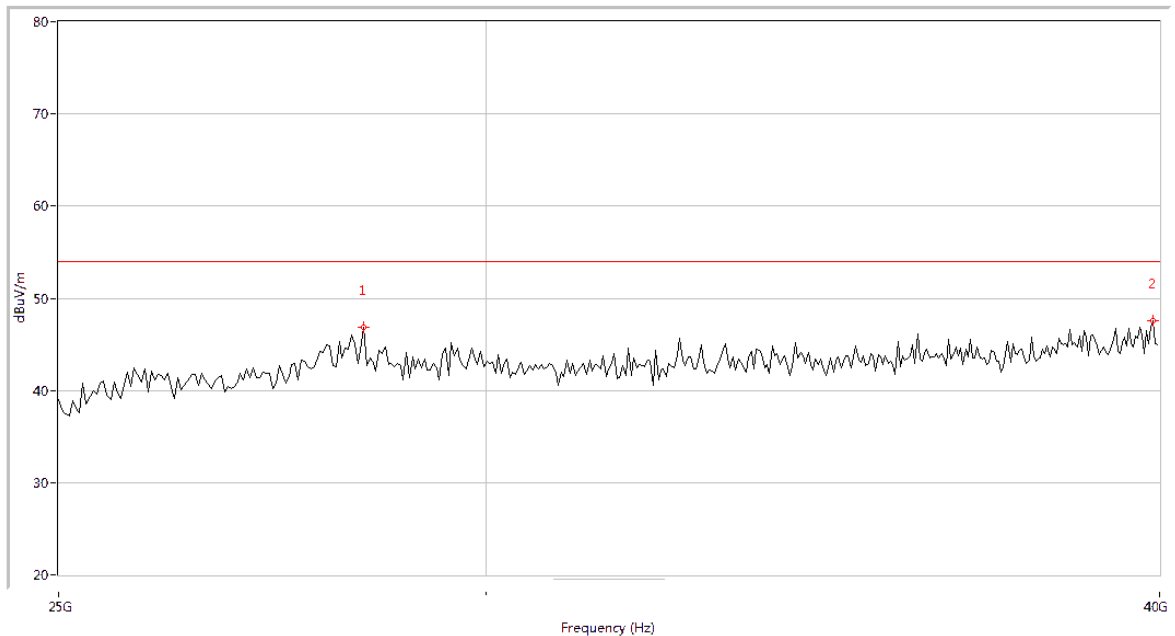


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28239.177	45.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
38760.559	48.64	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot B.5: Antenna Vertical, 25GHz to 40GHz)

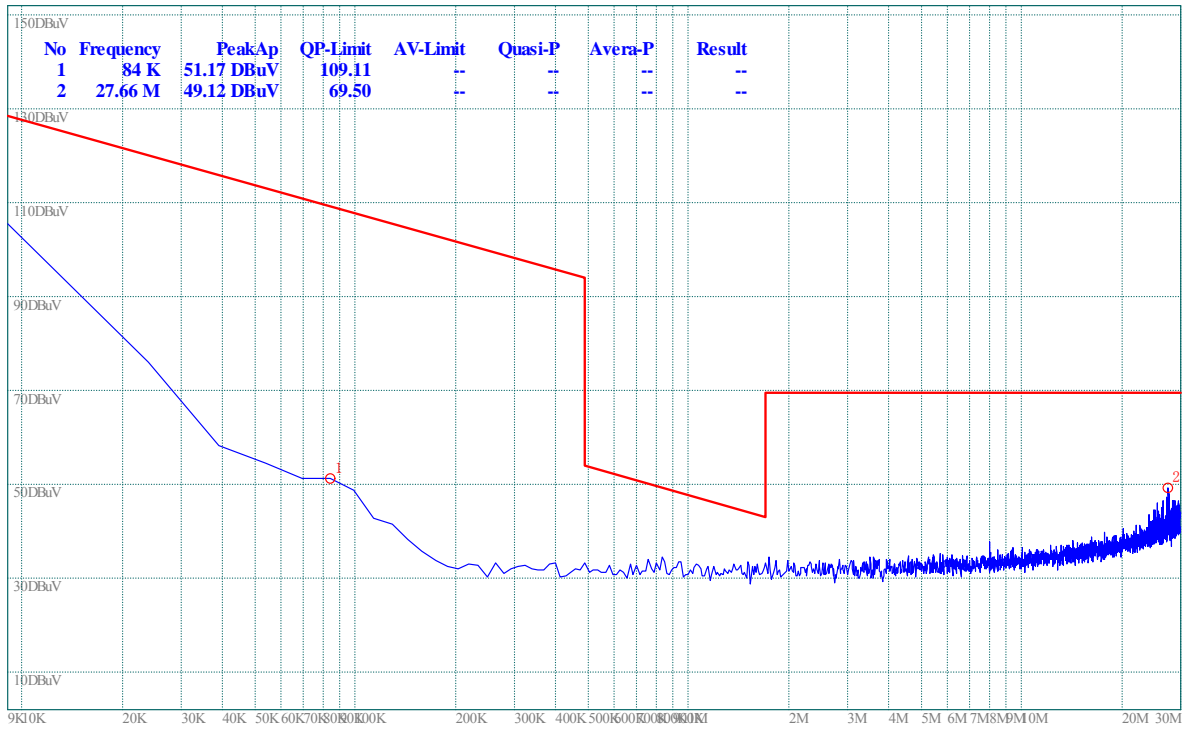
Plot for Channel = 165


(Plot C.1: 9kHz to 30MHz)

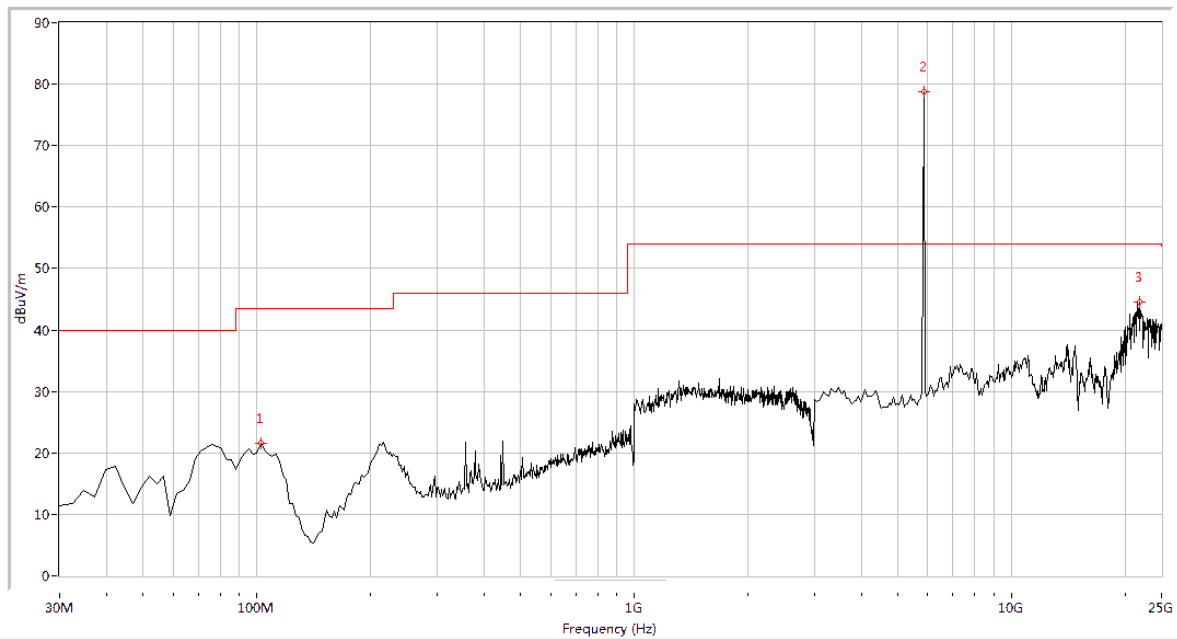


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	21.62	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
5825.000	78.73	N.A	N.A	N.A	N.A	54.0	Horizontal	N.A
21817.955	44.62	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

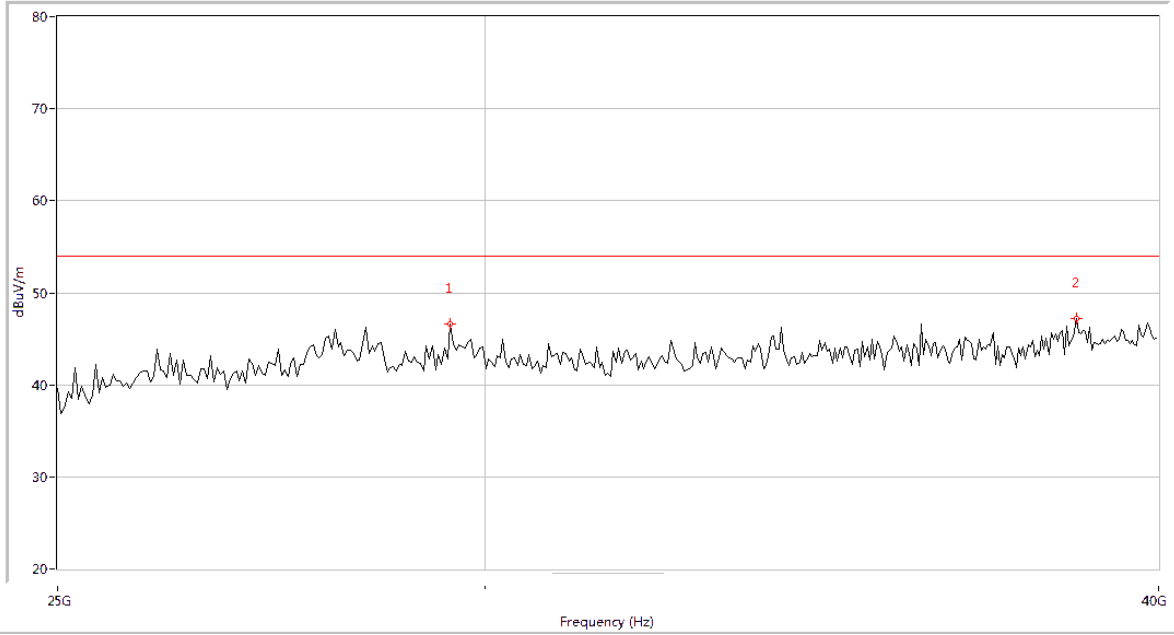


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
29561.359	46.61	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
38621.596	47.22	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot C.3: Antenna Horizontal, 25GHz to 40GHz)

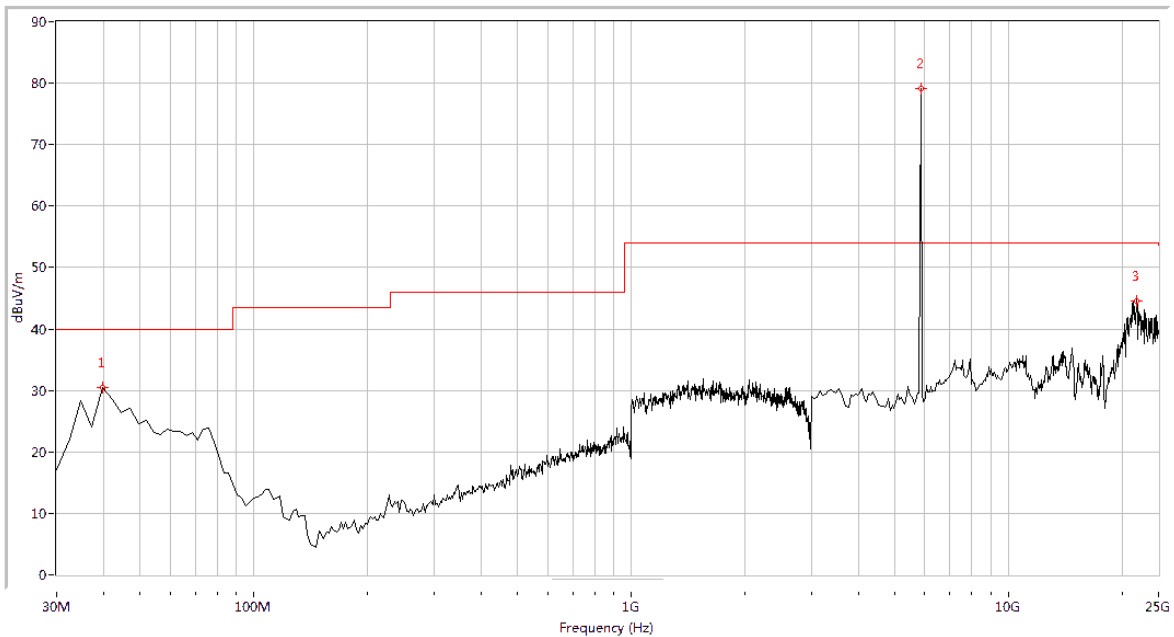

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
39.676	30.55	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
5825.000	79.20	N.A	N.A	N.A	N.A	54.0	Vertical	N.A
21817.955	44.50	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.4: Antenna Vertical, 30MHz to 25GHz)

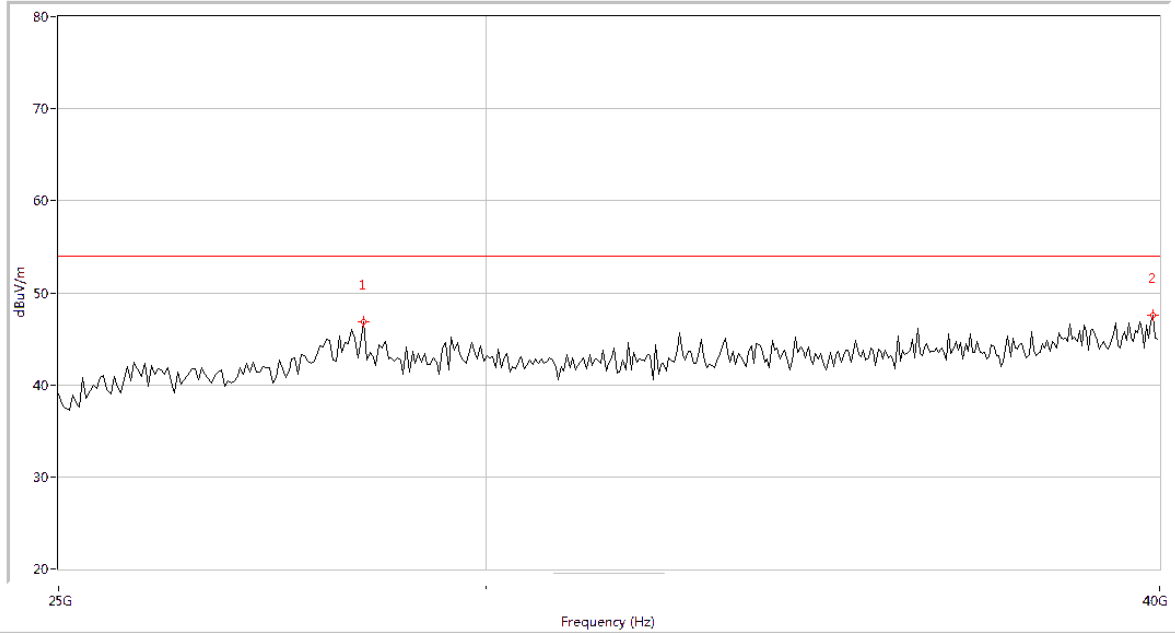

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28437.880	46.83	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
39848.778	47.54	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot C.5: Antenna Vertical, 25GHz to 40GHz)


2.8.3.2. 802.11b Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1




(Plot D.1: 9kHz to 30MHz)

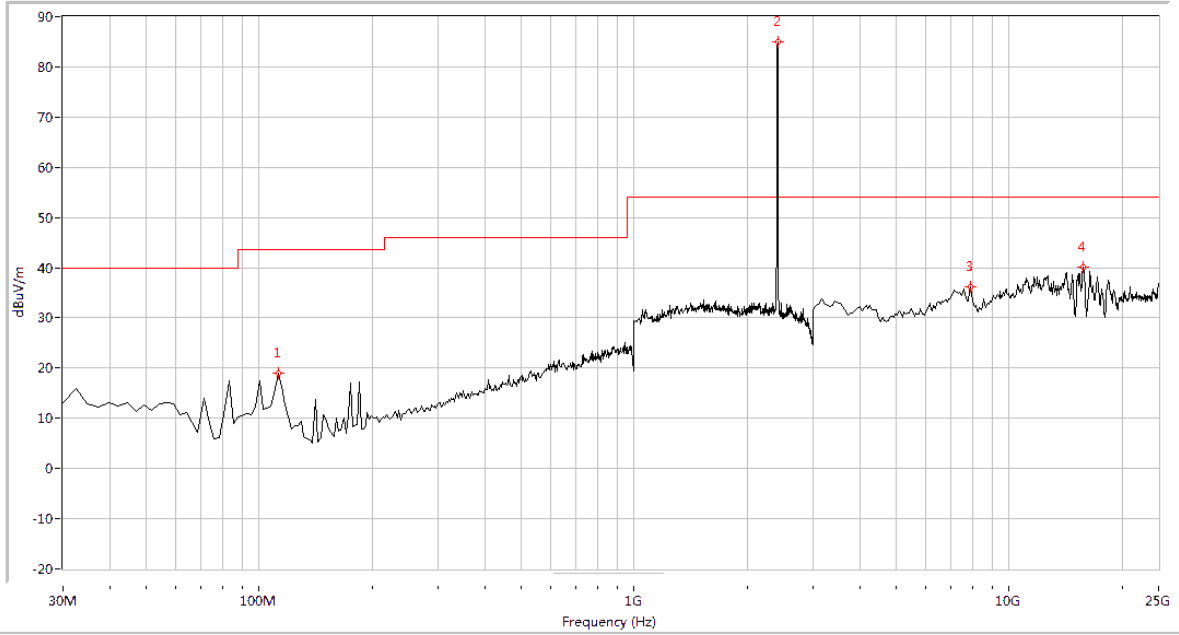


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	18.94	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2412.000	84.92	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
7882.793	36.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15728.180	40.15	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot D.2: Antenna Horizontal, 30MHz to 25GHz)

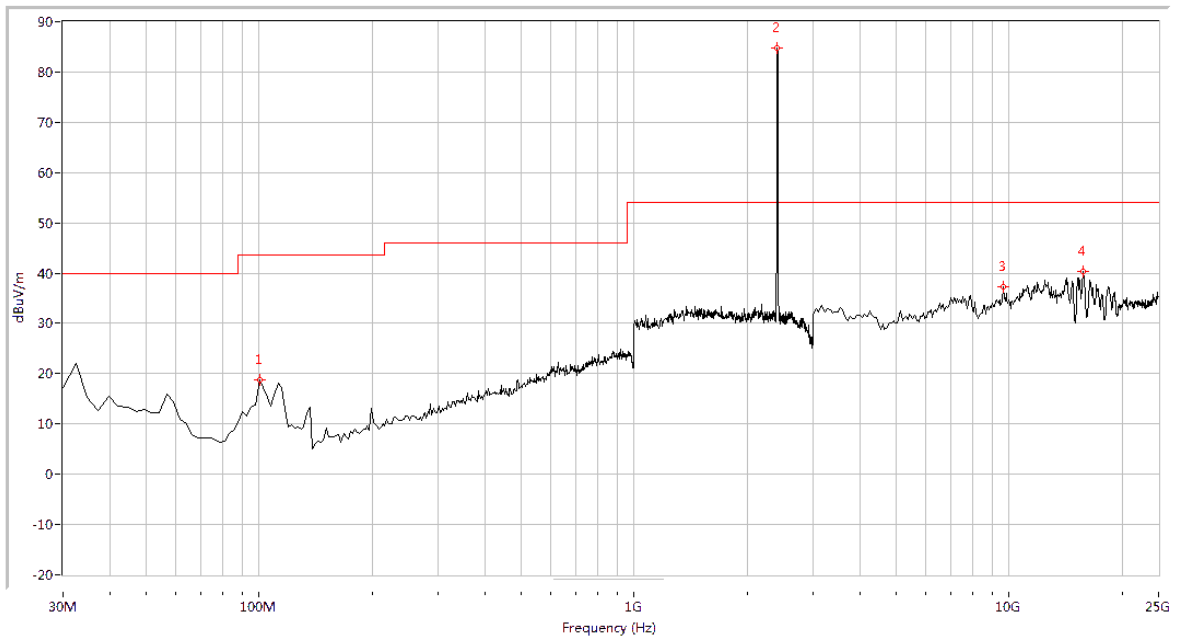


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
100.150	18.71	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2412.000	84.76	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
9638.404	37.28	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15783.042	40.34	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot D.3: Antenna Vertical, 30MHz to 25GHz)

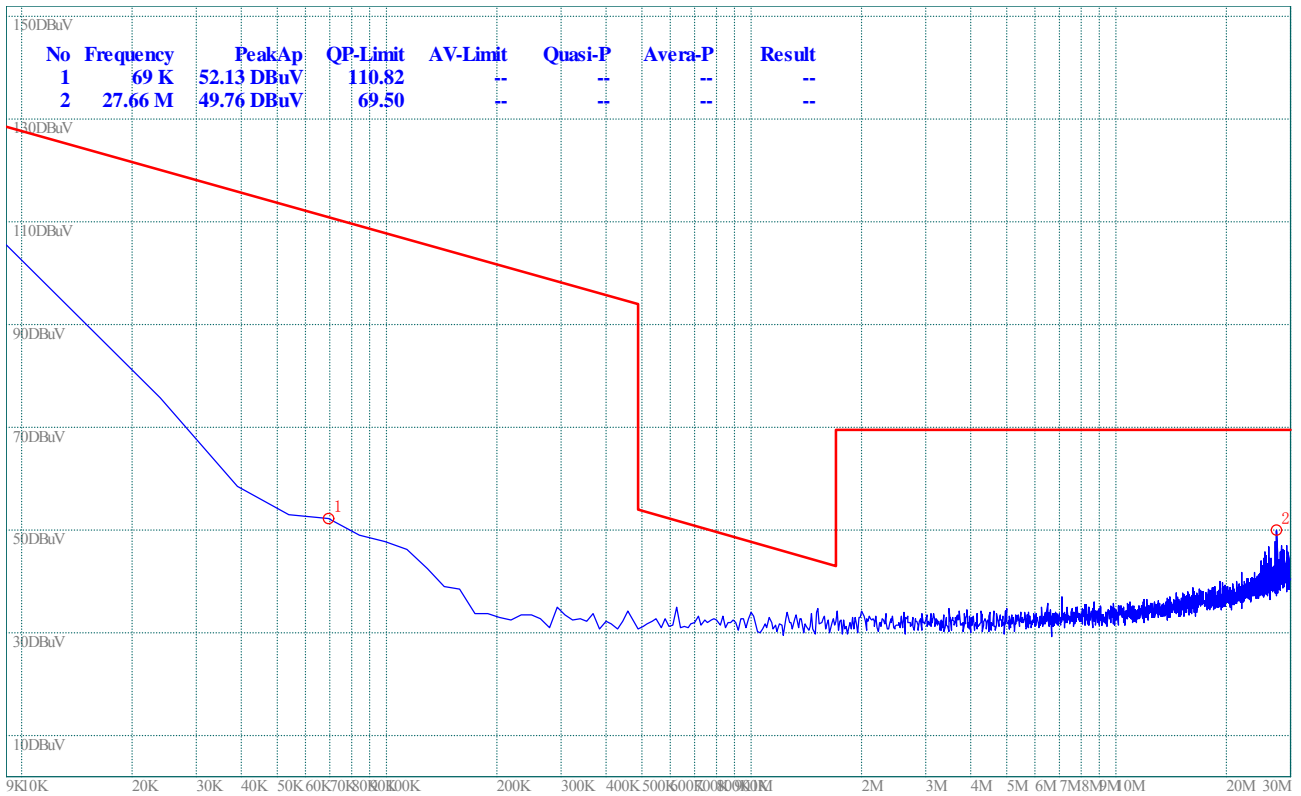
Plot for Channel = 6


(Plot E.1: 9kHz to 30MHz)

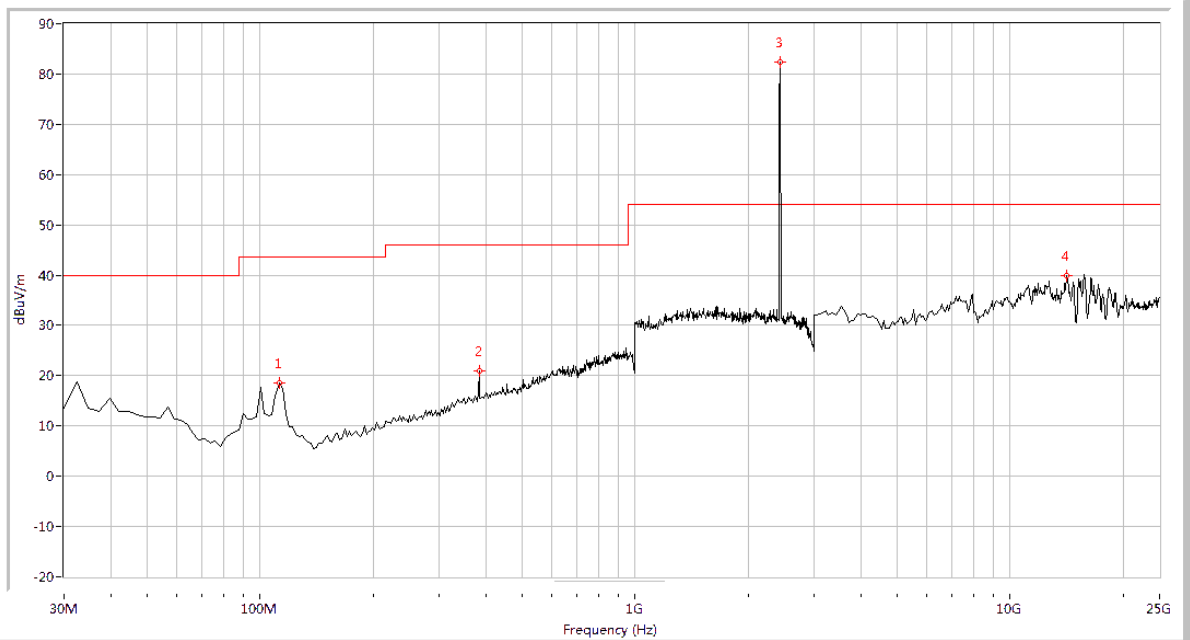

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	18.64	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
383.167	20.87	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	82.35	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
14137.157	39.80	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot E.2: Antenna Horizontal, 30MHz to 25GHz)

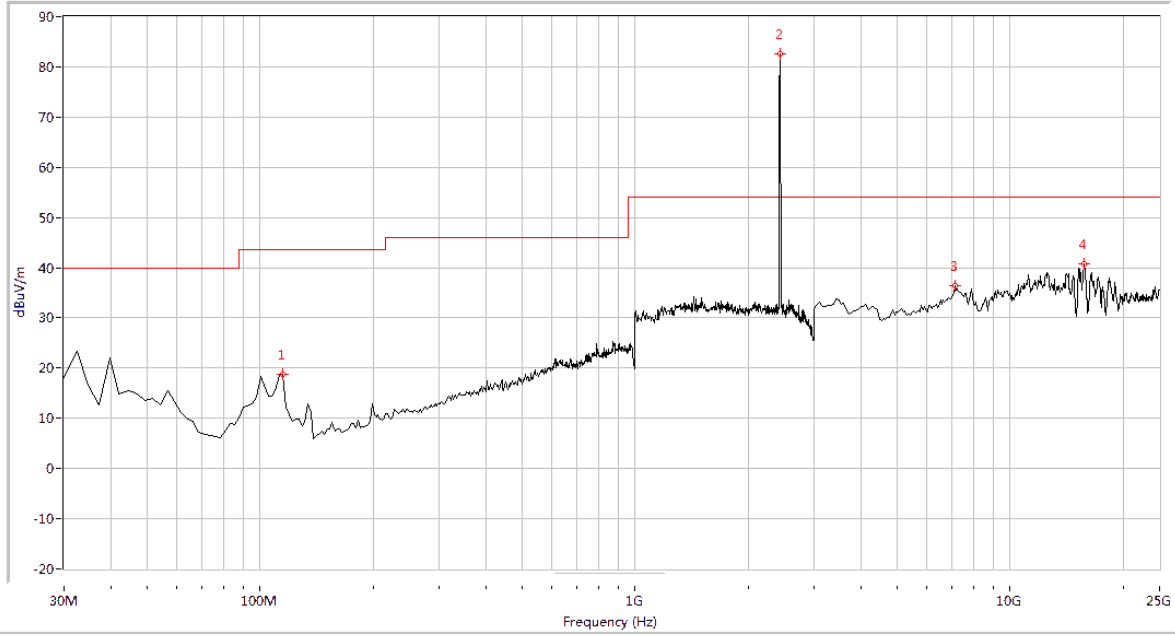


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
114.663	18.70	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2437.000	82.52	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
7114.713	36.35	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15783.042	40.76	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot E.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

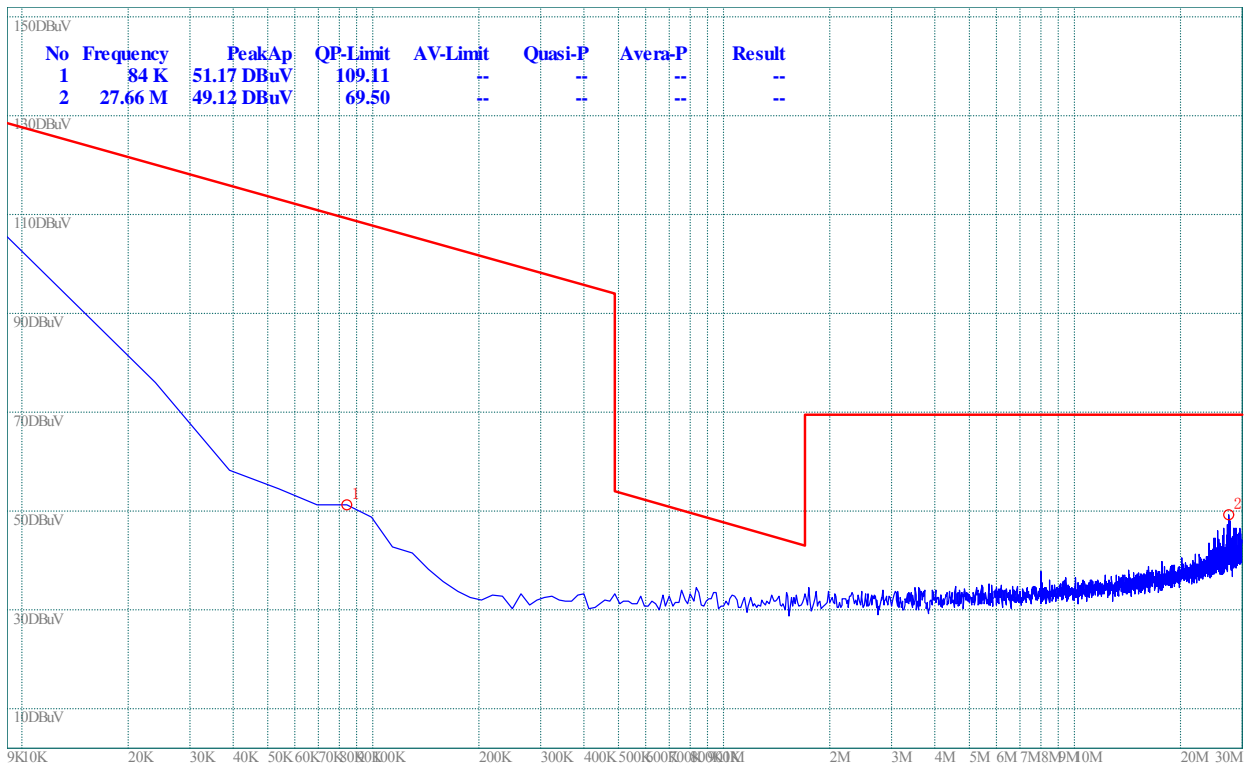


(Plot F.1: 9kHz to 30MHz)

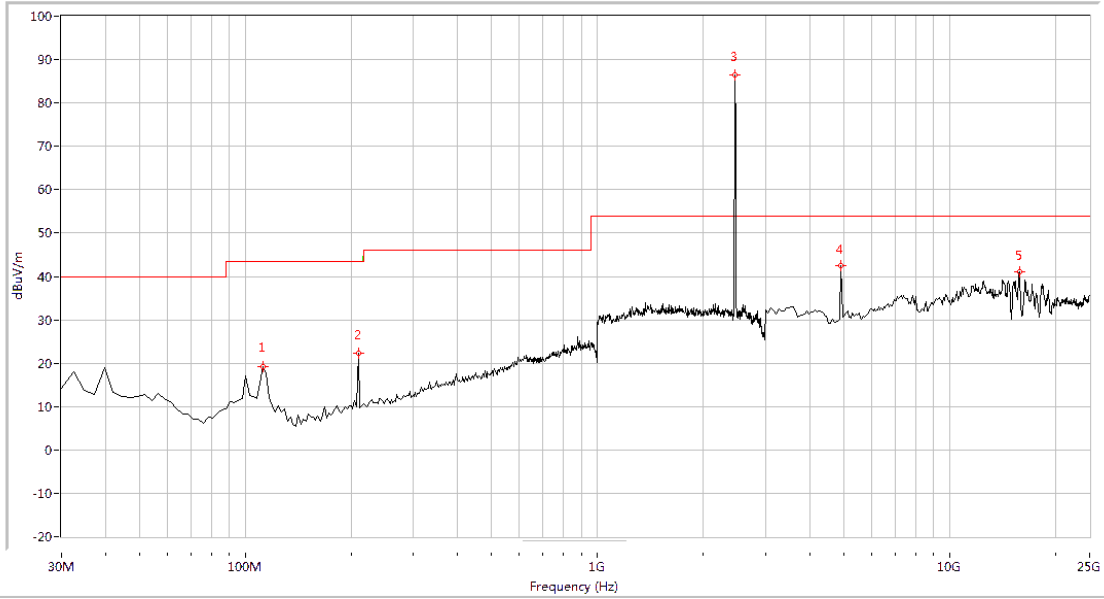

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	19.25	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
209.002	22.21	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2462.000	86.39	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
4920.200	42.42	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15783.042	40.95	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot F.2: Antenna Horizontal, 30MHz to 25GHz)

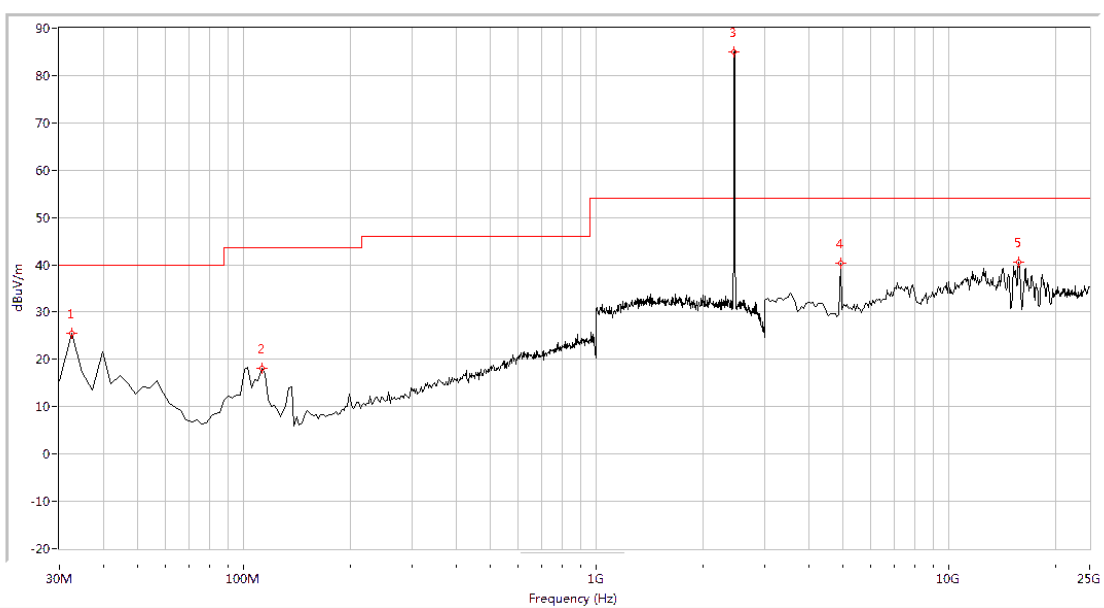

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	25.57	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
112.244	18.20	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2462.000	84.89	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
4920.200	40.41	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15783.042	40.49	N.A	N.A	74.0	N.A	54.0	Vertical	PASS


(Plot F.3: Antenna Vertical, 30MHz to 25GHz)

2.8.3.3. 802.11g Test mode


Also refer to following plots for the emissions falling in the restricted bands.

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

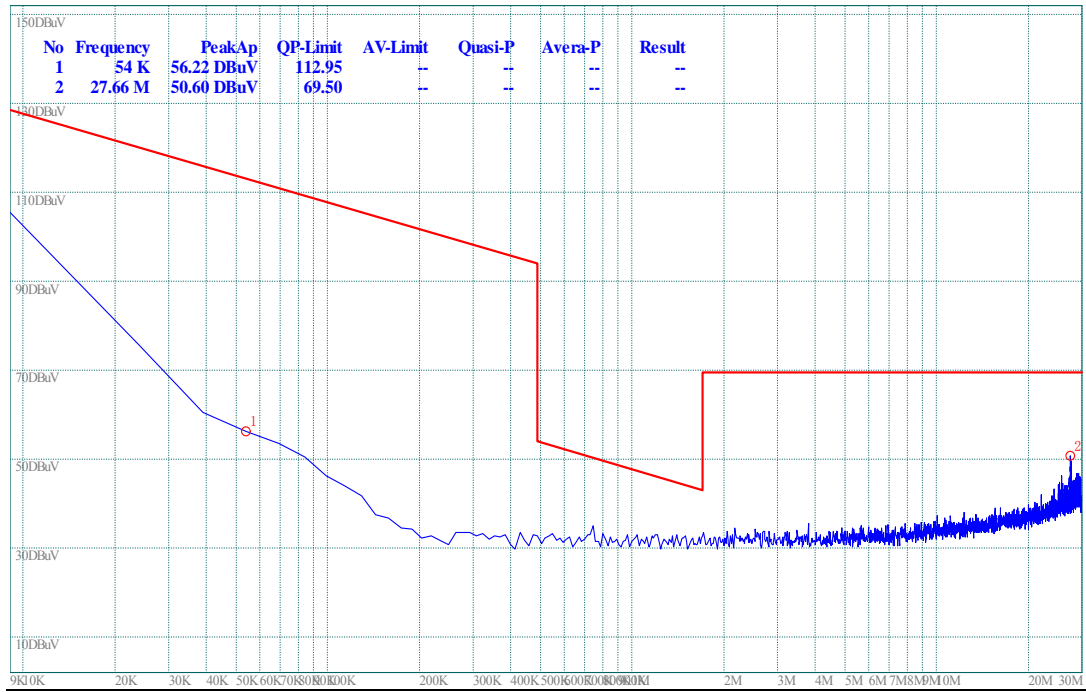


(Plot G.1: 9kHz to 30MHz)

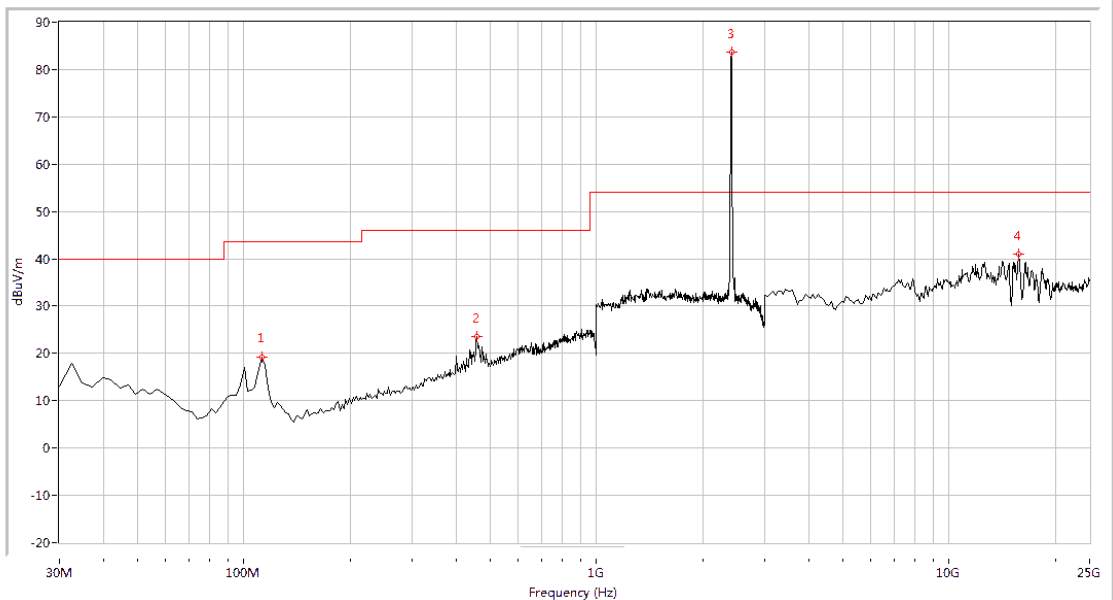

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Verdict
112.244	19.28	N.A	N.A	N.A	43.5	N.A	PASS
458.155	23.48	N.A	N.A	N.A	46.0	N.A	PASS
2412.000	83.66	N.A	N.A	N.A	N.A	N.A	N.A
15783.042	41.06	N.A	N.A	74.0	N.A	54.0	PASS


(Plot G.2: Antenna Horizontal, 30MHz to 25GHz)

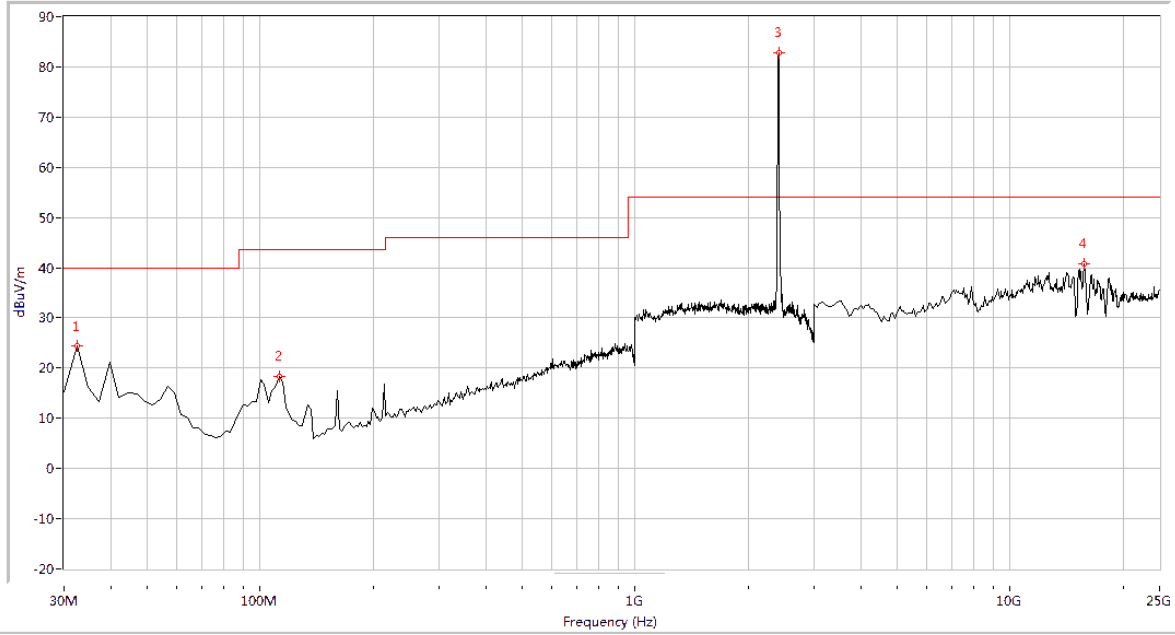


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	24.41	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
112.244	18.29	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2412.000	82.85	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15783.042	40.88	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot G.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

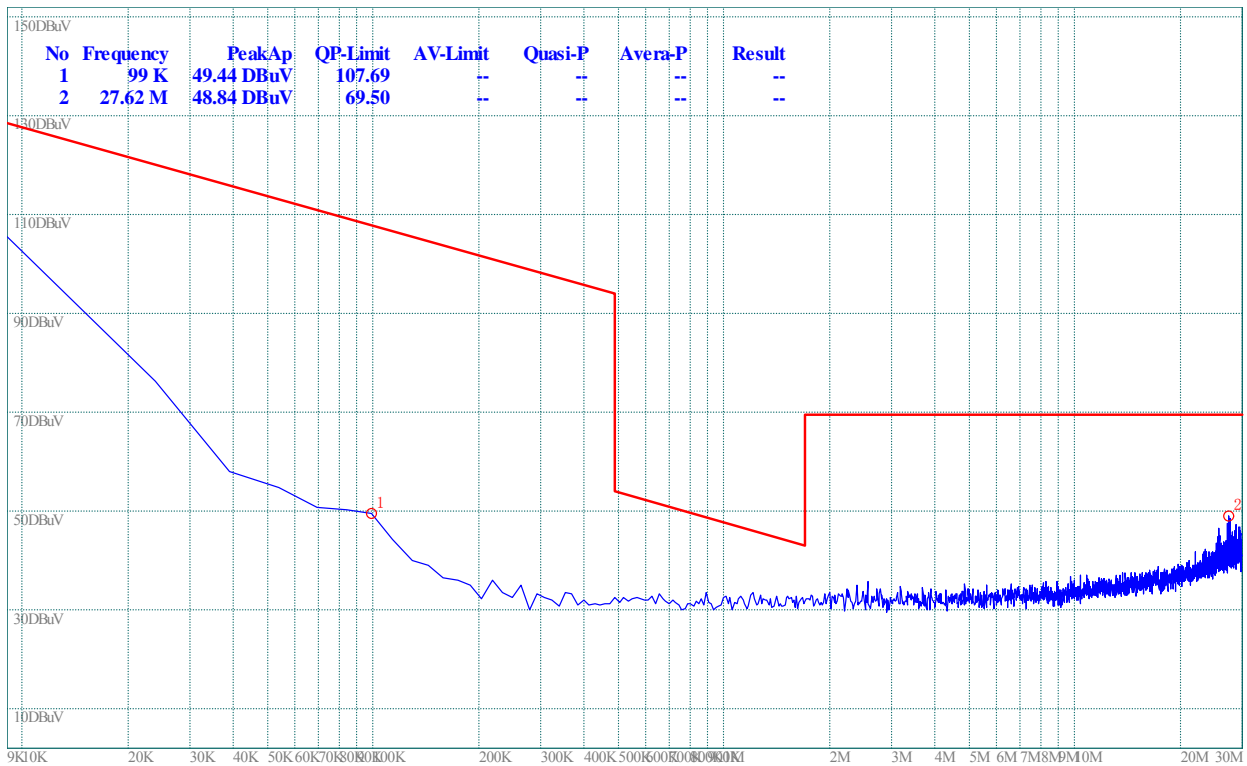


(Plot H.1: 9kHz to 30MHz)

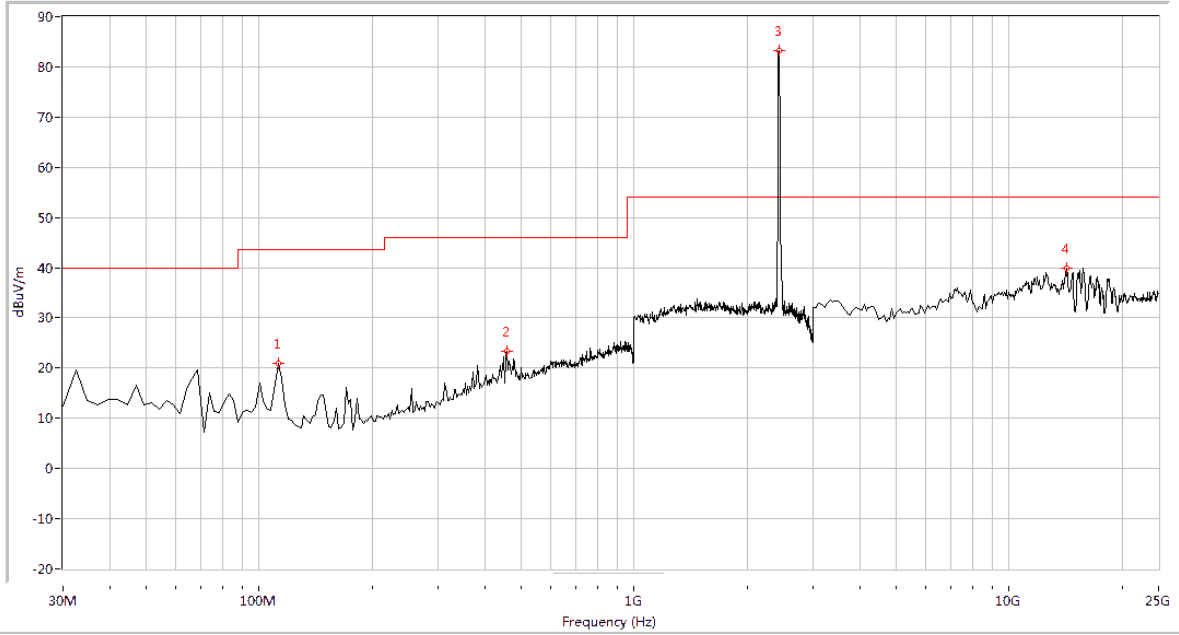


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	20.86	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
458.155	23.42	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	83.15	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
14192.020	39.83	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot H.2: Antenna Horizontal, 30MHz to 25GHz)

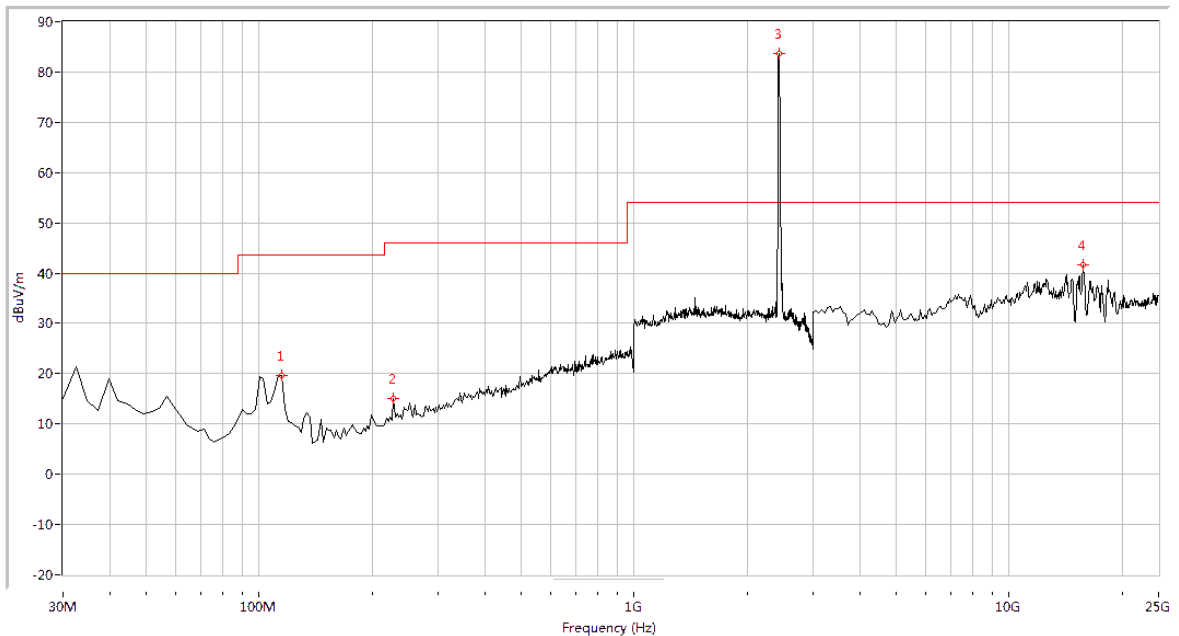


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
114.663	19.74	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
228.354	15.03	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
2437.000	83.79	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15728.180	41.75	N.A	N.A	74.0	N.A	54.0	Vertical	PASS


(Plot H.3: Antenna Vertical, 30MHz to 25GHz)

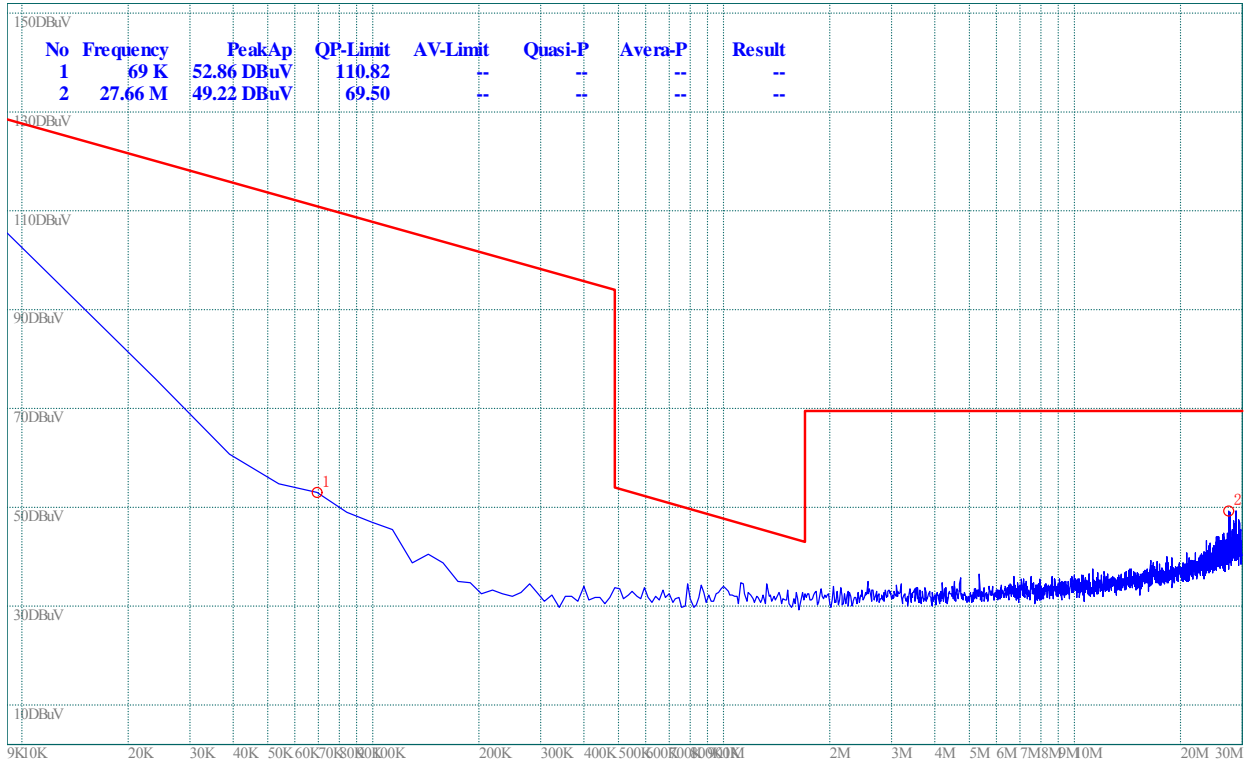Plot for Channel = 11


(Plot I.1: 9kHz to 30MHz)

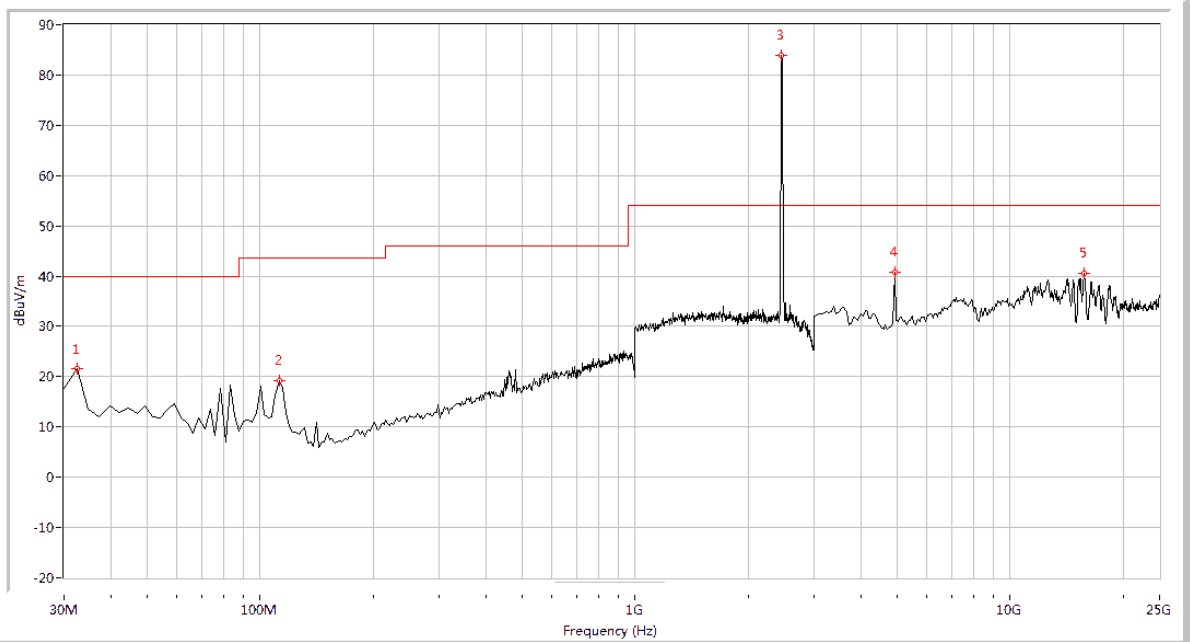

(Plot I.2: Antenna Horizontal, 30MHz to 25GHz)

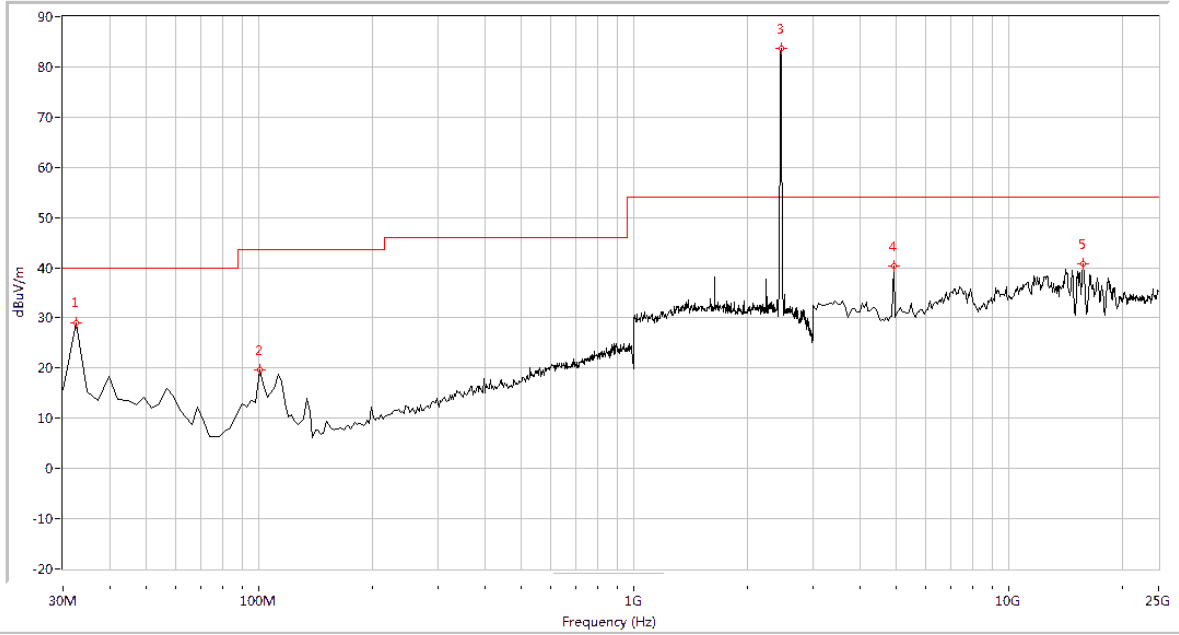


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	28.91	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
100.150	19.57	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2462.000	83.62	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
4920.200	40.31	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15783.042	40.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot I.3: Antenna Vertical, 30MHz to 25GHz)


2.8.3.4. 802.11n-20MHz Test mode

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 1

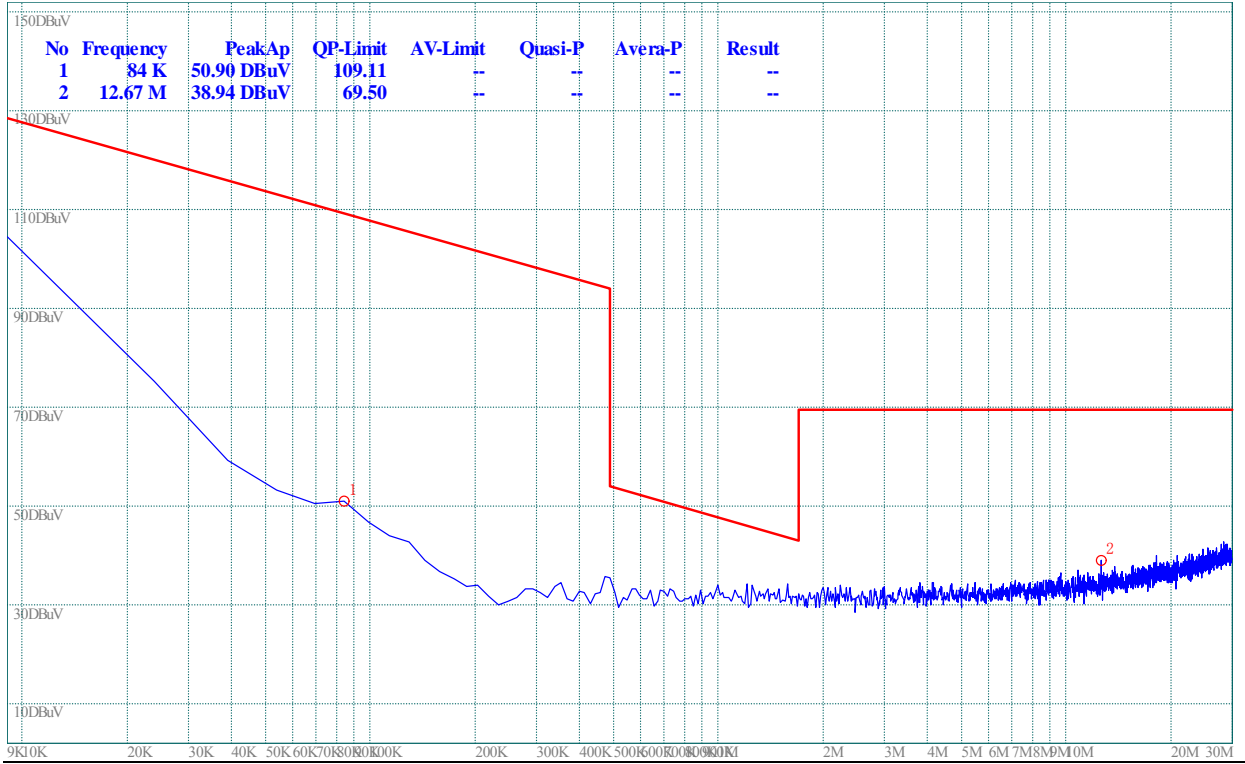

(Plot J.1: 9kHz to 30MHz)

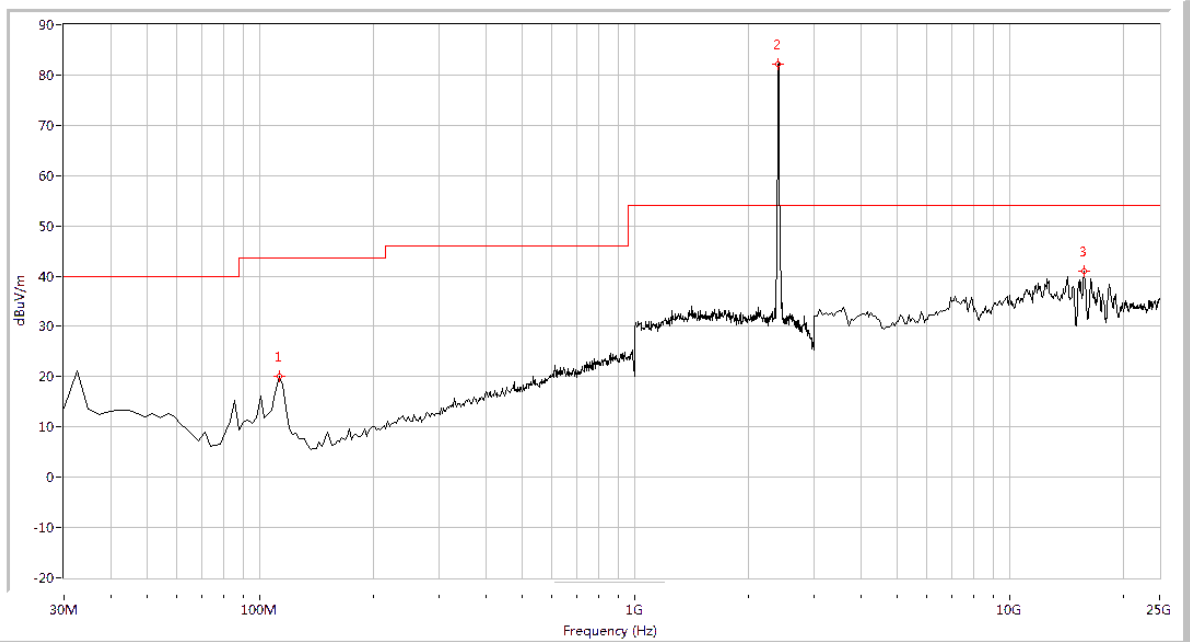

(Plot J.2: Antenna Horizontal, 30MHz to 25GHz)

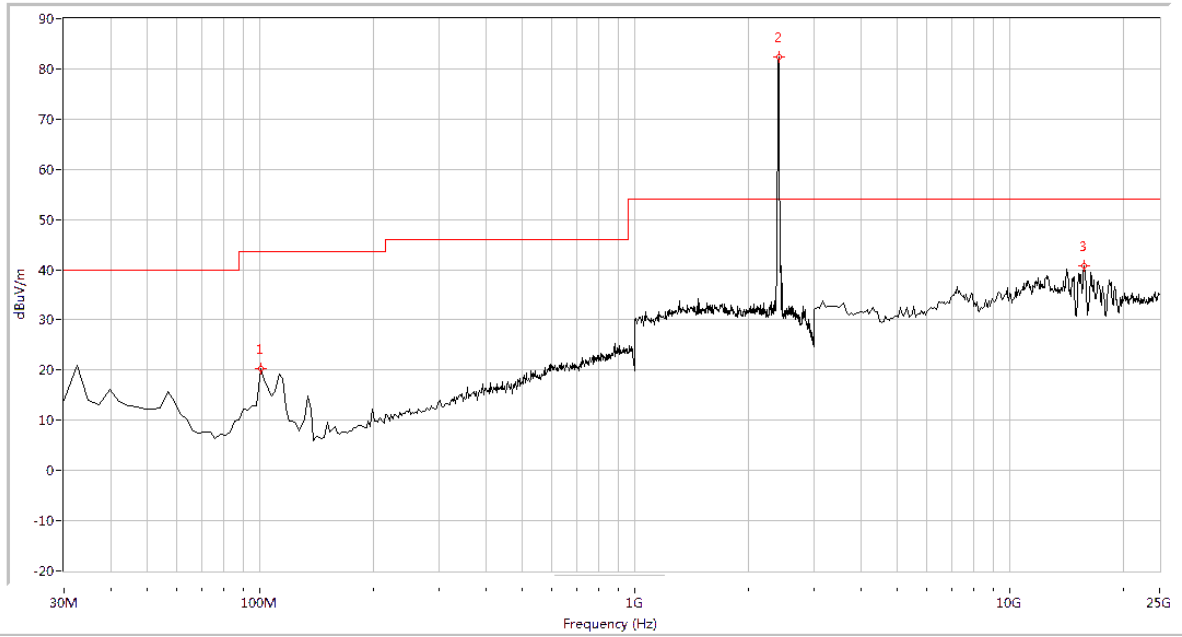


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
100.150	20.40	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2412.000	82.39	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15783.042	40.75	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot J.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6




(Plot K.1: 9kHz to 30MHz)

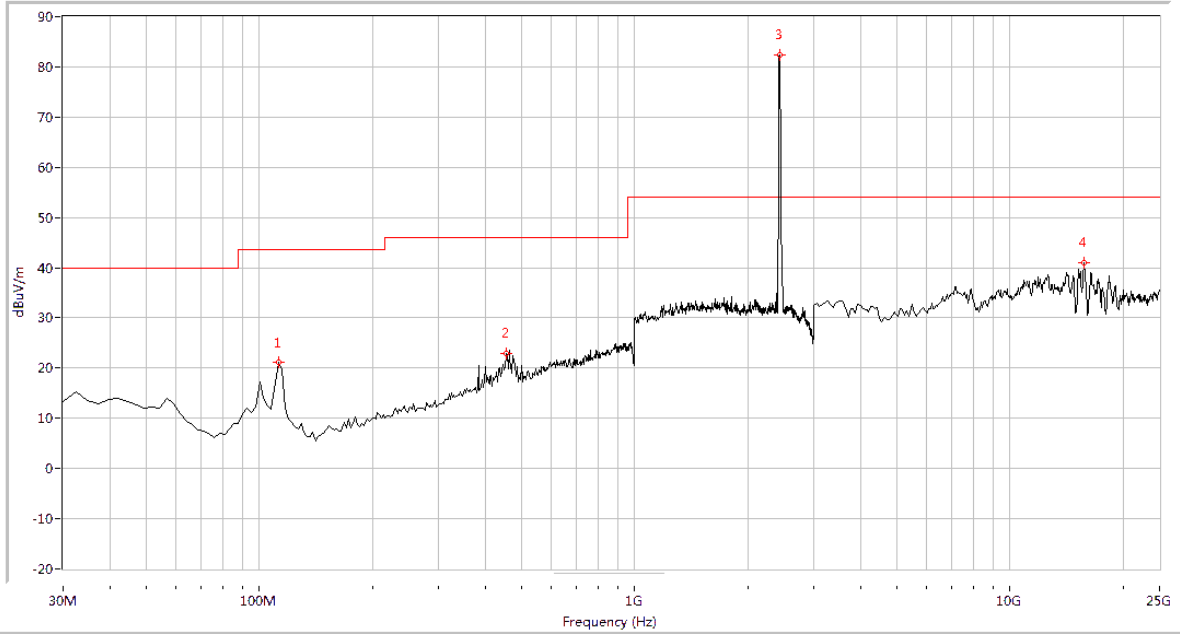

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	21.11	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
453.317	22.82	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2437.000	82.35	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
15783.042	41.01	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot K.2: Antenna Horizontal, 30MHz to 25GHz)

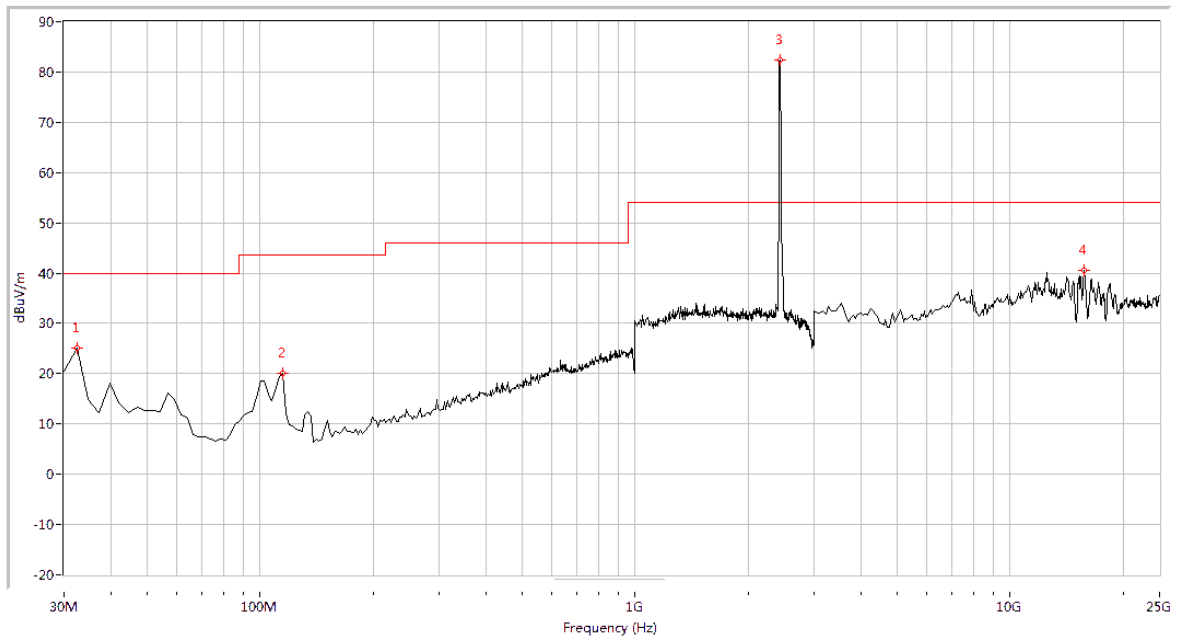


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	25.12	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
114.663	20.03	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2437.000	82.28	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15783.042	40.57	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot K.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

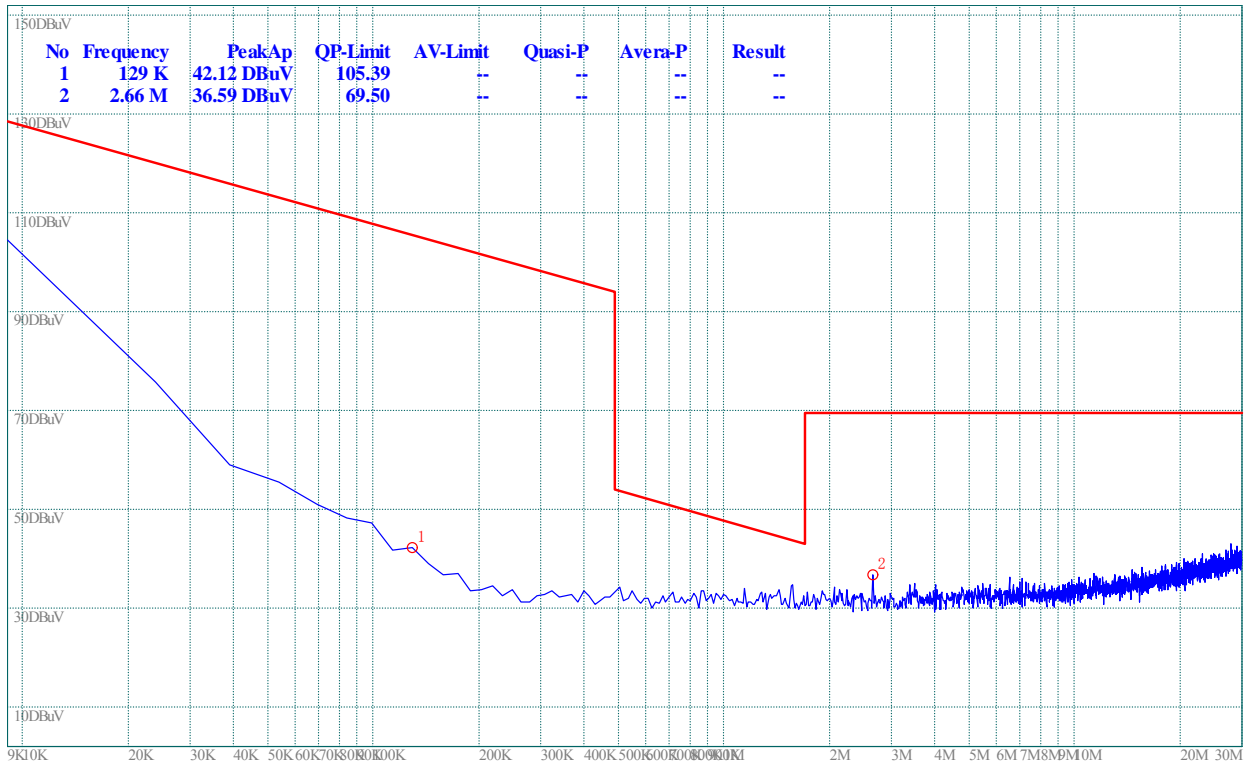


(Plot L.1: 9kHz to 30MHz)

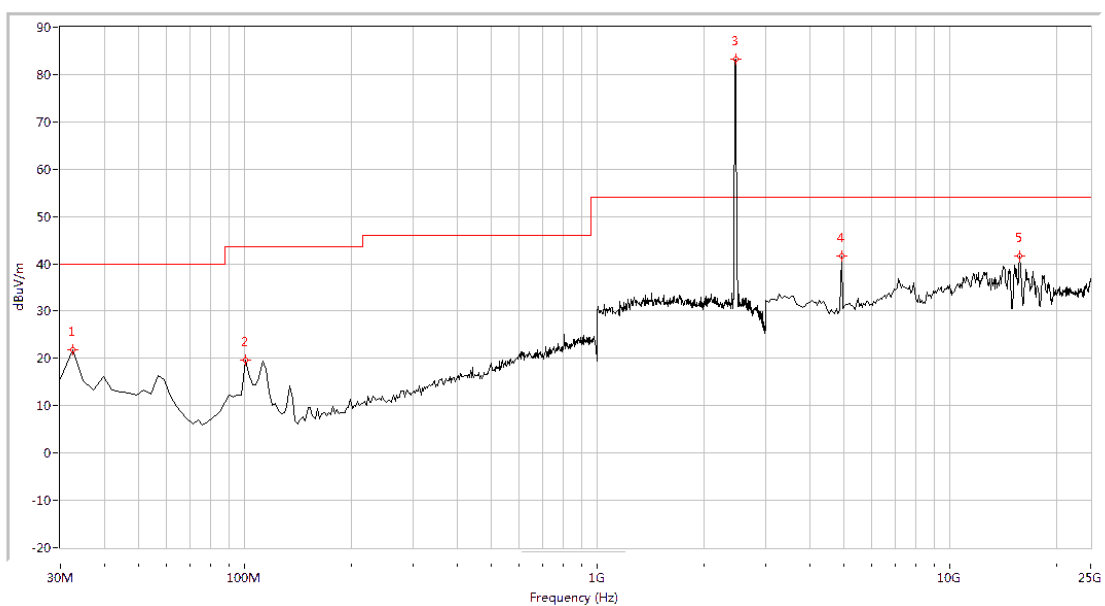

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	21.86	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
100.150	19.64	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2462.000	83.17	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
4920.200	41.72	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15783.042	41.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot L.2: Antenna Horizontal, 30MHz to 25GHz)

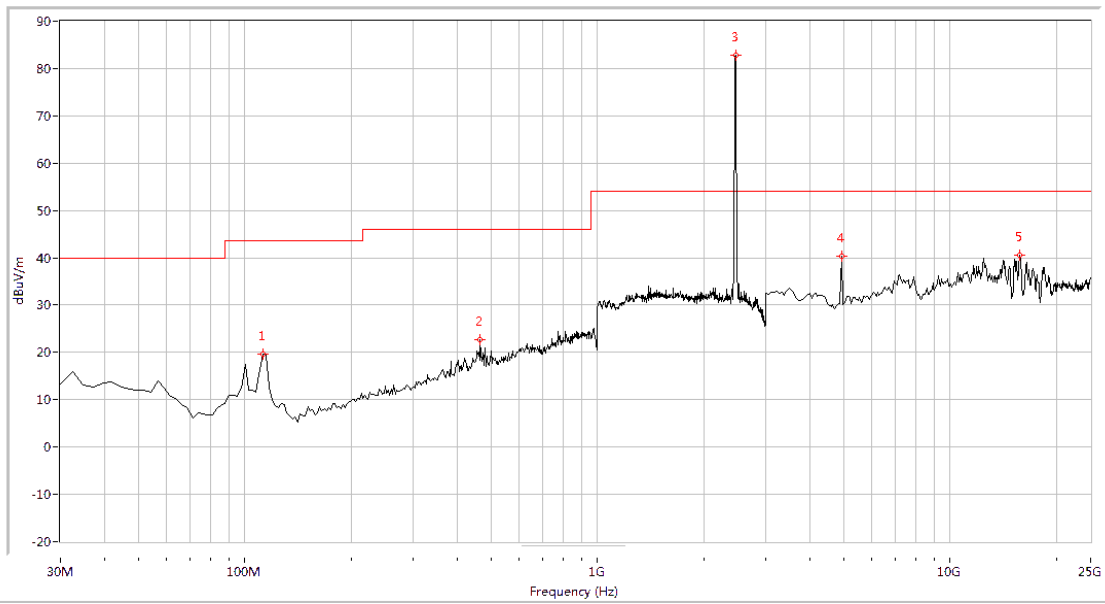


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	19.57	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
465.411	22.73	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2462.000	82.91	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
4920.200	40.38	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15783.042	40.48	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot L.3: Antenna Vertical, 30MHz to 25GHz)

Plots for Channel = 149




(Plot M.1: 9kHz to 30MHz)

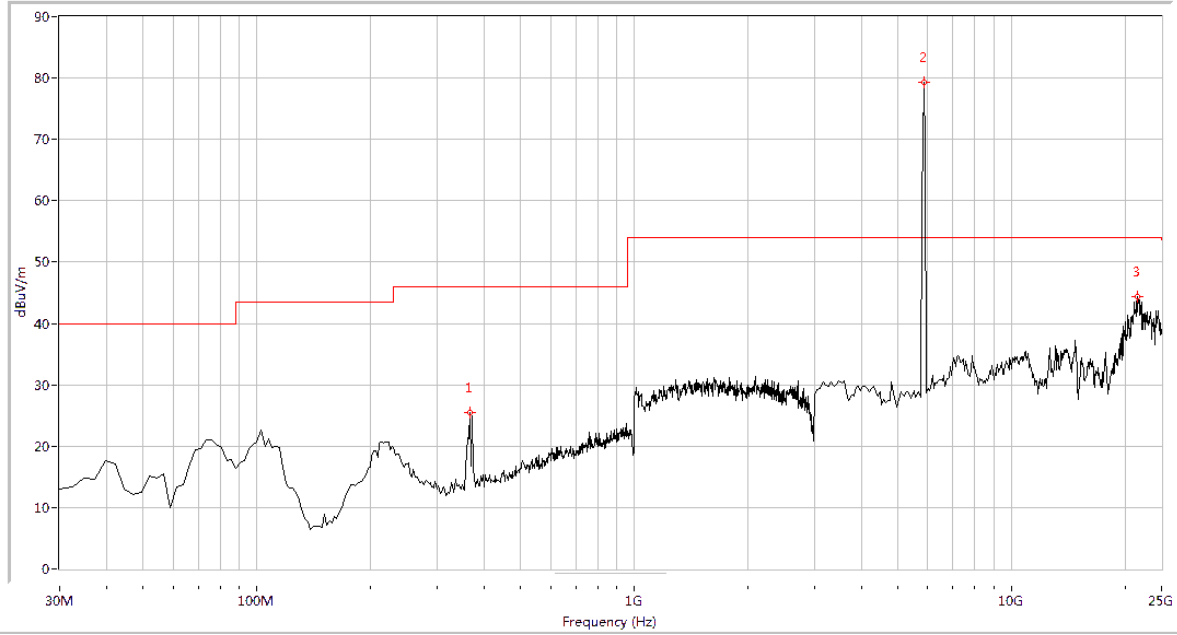


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
366.234	25.54	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
5745.000	79.37	N.A	N.A	N.A	N.A	54.0	Horizontal	N.A
21653.367	44.40	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot M.2: Antenna Horizontal, 30MHz to 25GHz)

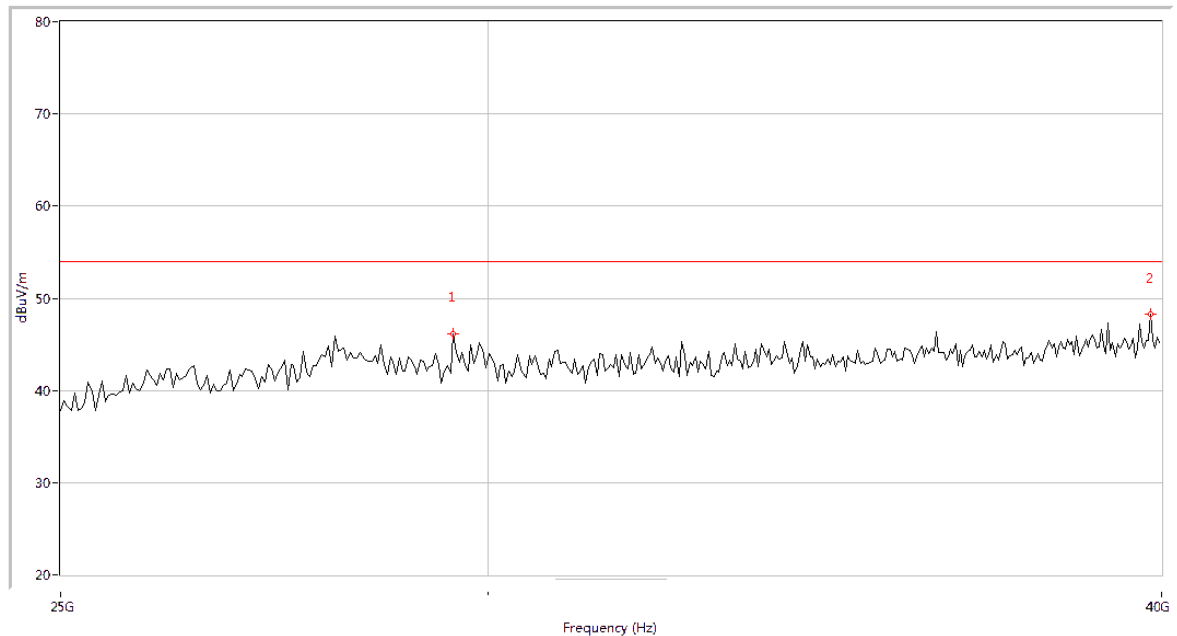


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
29526.359	46.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
39817.297	48.29	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot M.3: Antenna Horizontal, 25GHz to 40GHz)

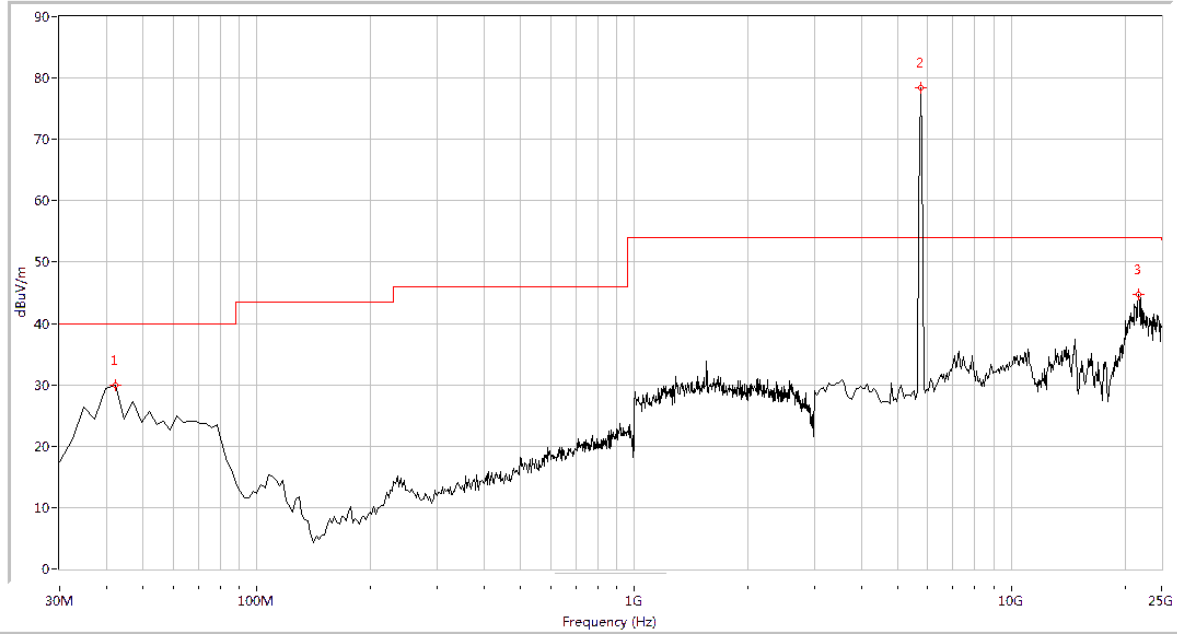

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	29.86	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
5745.000	78.45	N.A	N.A	N.A	N.A	54.0	Vertical	N.A
21708.229	44.78	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot M.4: Antenna Vertical, 30MHz to 25GHz)

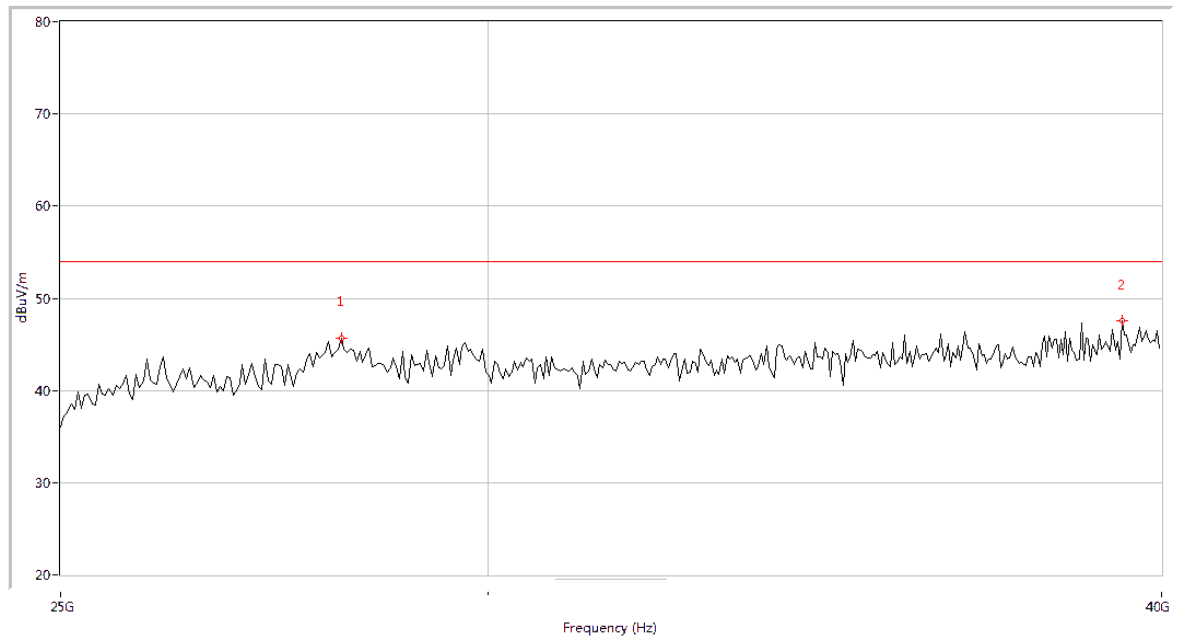


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28137.955	45.64	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
39302.668	47.58	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot M.5: Antenna Vertical, 25GHz to 40GHz)

Plot for Channel = 157




(Plot N.1: 9kHz to 30MHz)

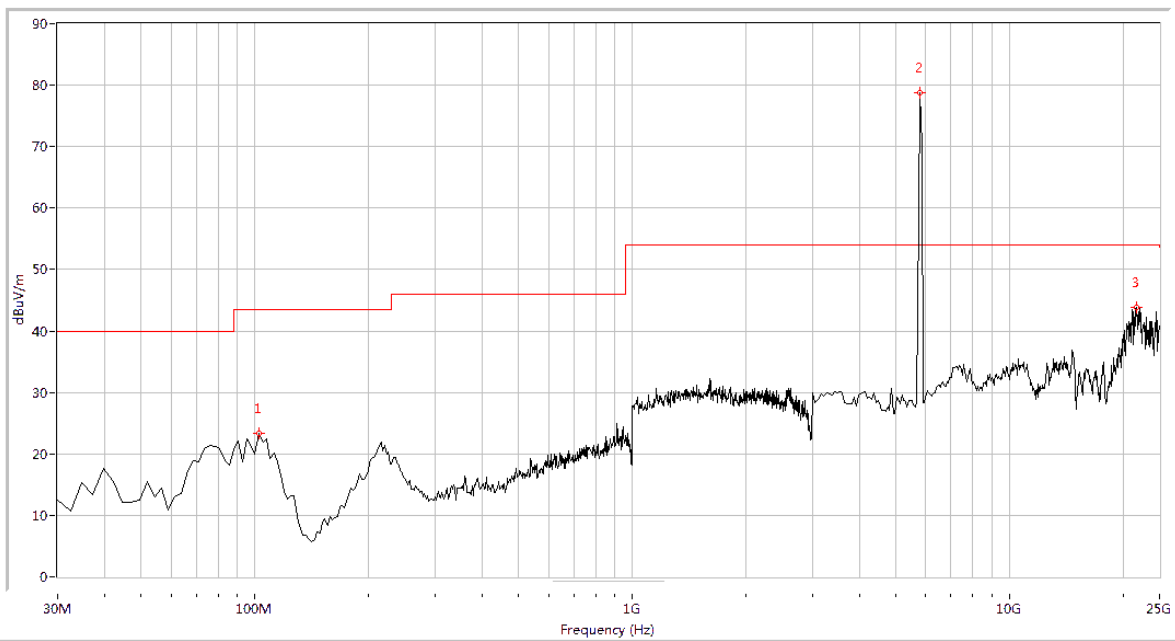


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	23.40	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
5785.000	78.76	N.A	N.A	N.A	N.A	54.0	Horizontal	N.A
21708.229	43.81	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot N.2: Antenna Horizontal, 30MHz to 25GHz)

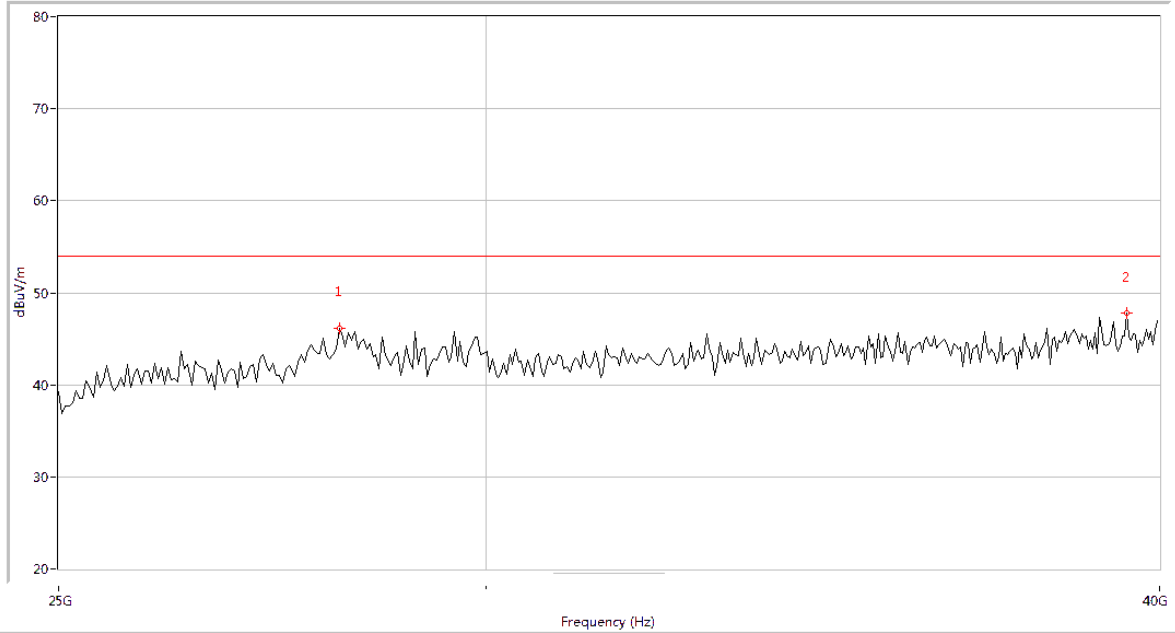


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28107.955	46.08	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
39434.890	47.74	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot N.3: Antenna Horizontal, 25MHz to 40GHz)

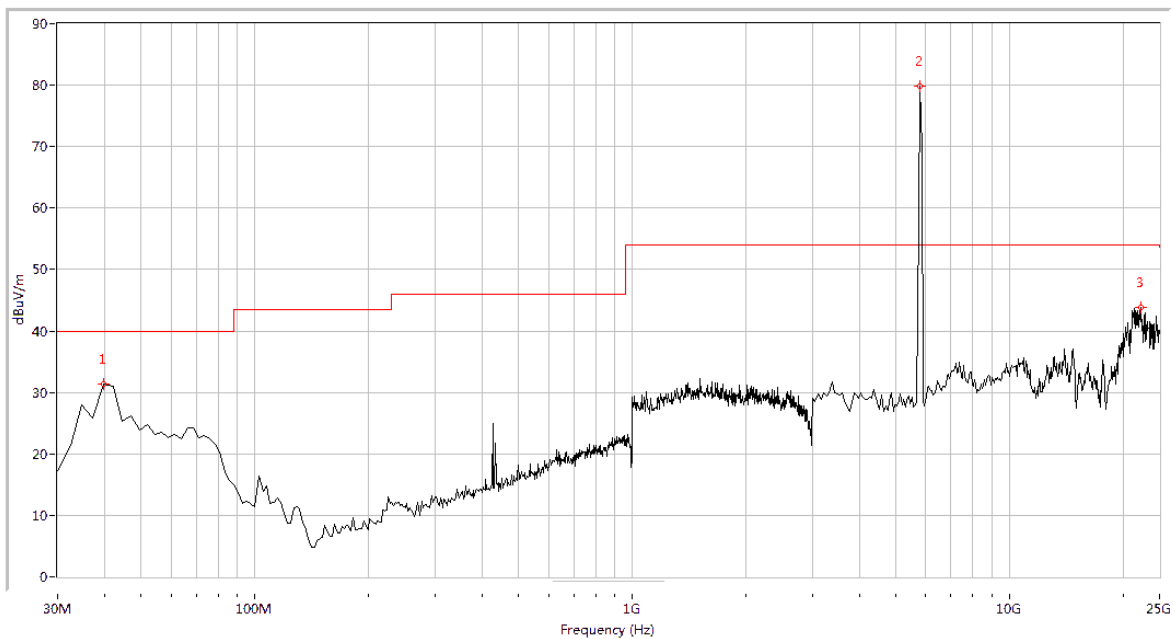

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	31.39	N.A	N.A	N.A	40.0	N.A	85.3	Vertical	PASS
5785.000	79.85	N.A	N.A	N.A	N.A	54.0	8.6	Vertical	N.A
22366.584	43.77	N.A	N.A	74.0	N.A	54.0	243.2	Vertical	PASS


(Plot N.4: Antenna Vertical, 30MHz to 25GHz)

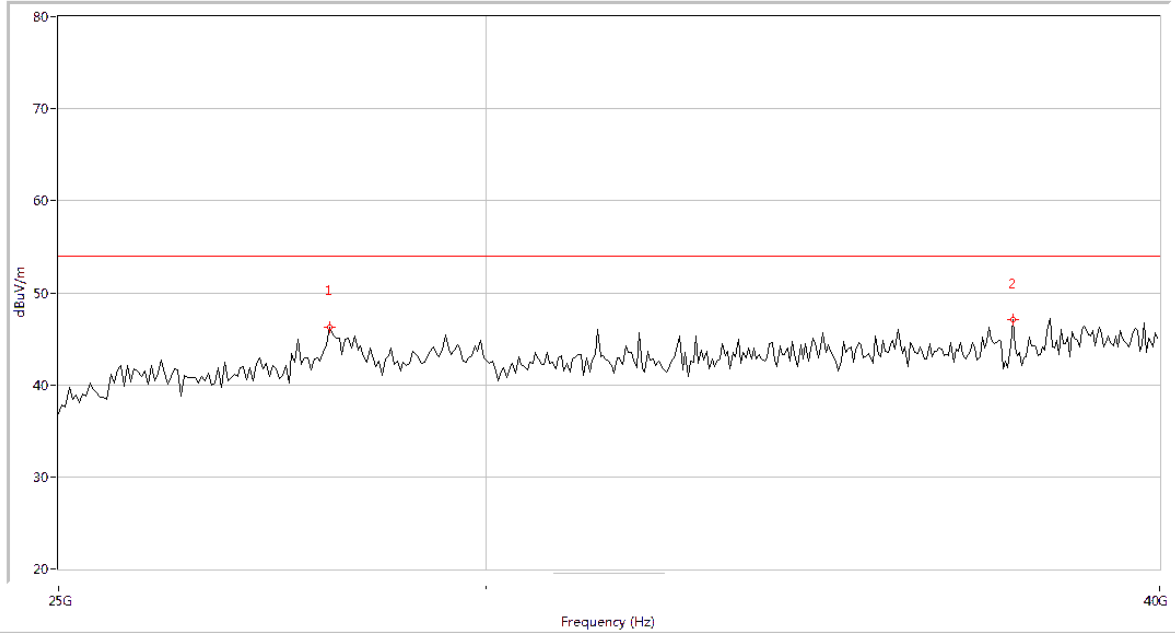


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
28063.733	46.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
37586.858	47.12	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot N.5: Antenna Vertical, 25GHz to 40GHz)

Plot for Channel = 165

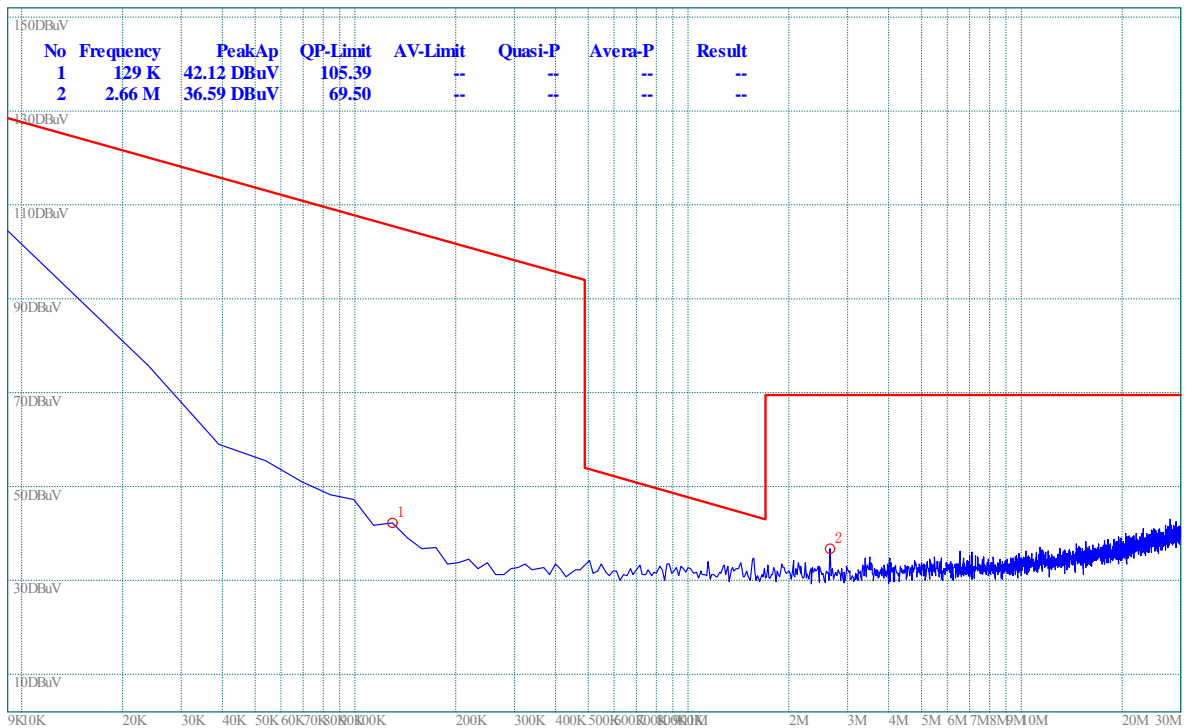


(Plot O.1: 9kHz to 30MHz)

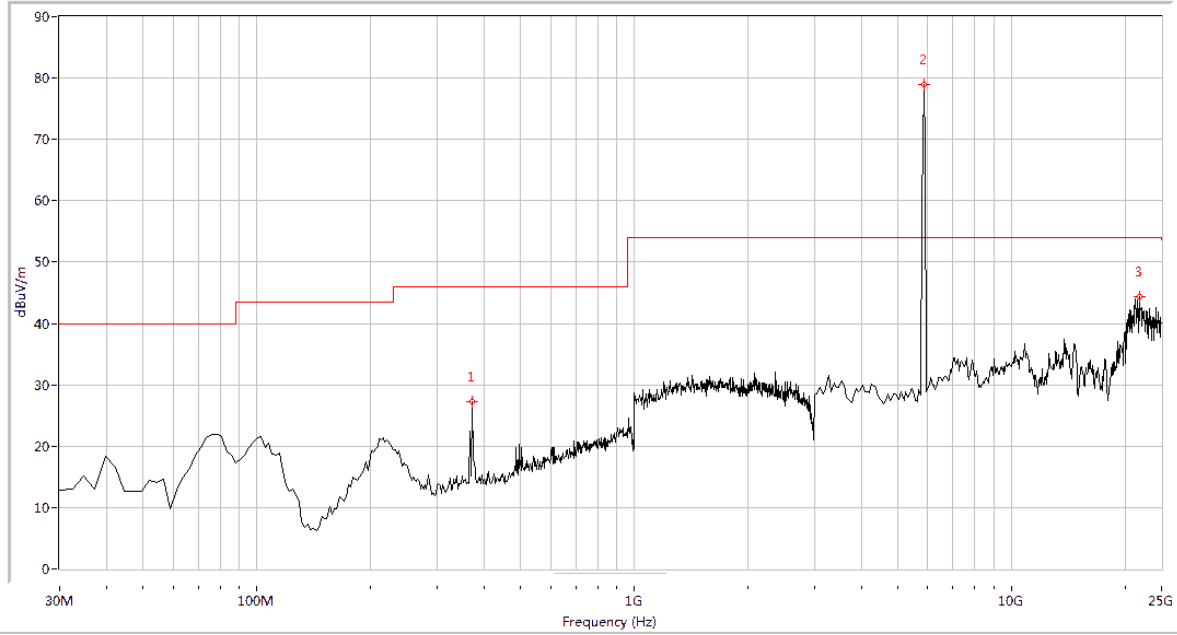


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
371.072	27.32	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
5825.000	78.95	N.A	N.A	N.A	N.A	54.0	Horizontal	N.A
21872.818	44.36	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot O.2: Antenna Horizontal, 30MHz to 25GHz)

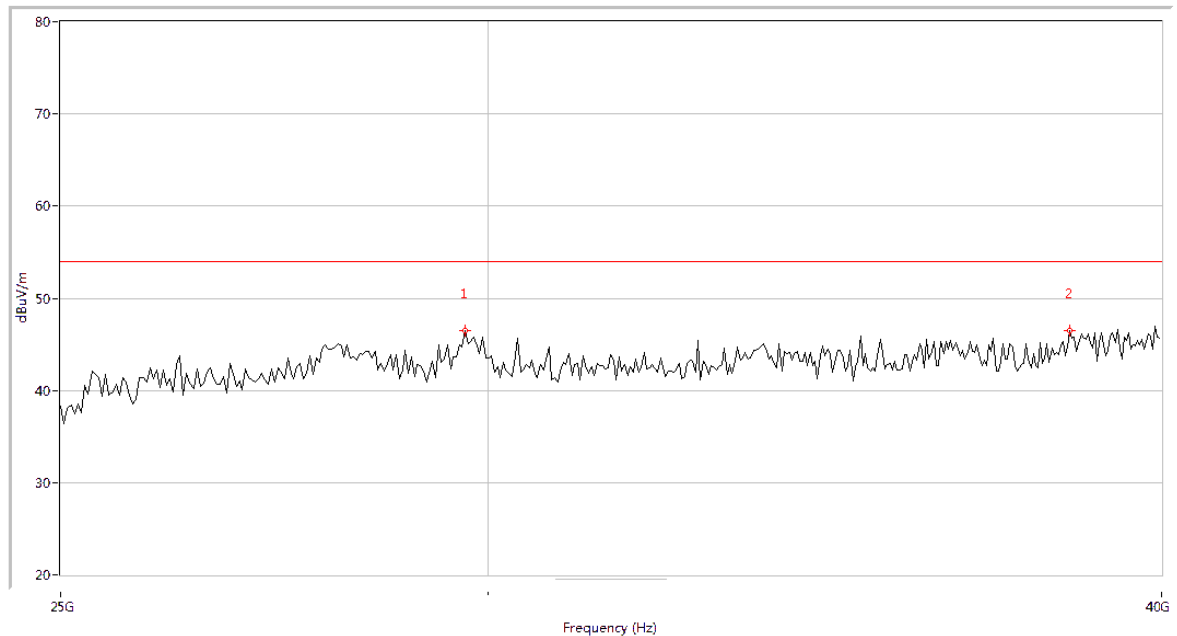


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
29781.322	46.47	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
38460.633	46.45	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot O.3: Antenna Horizontal, 25GHz to 40GHz)

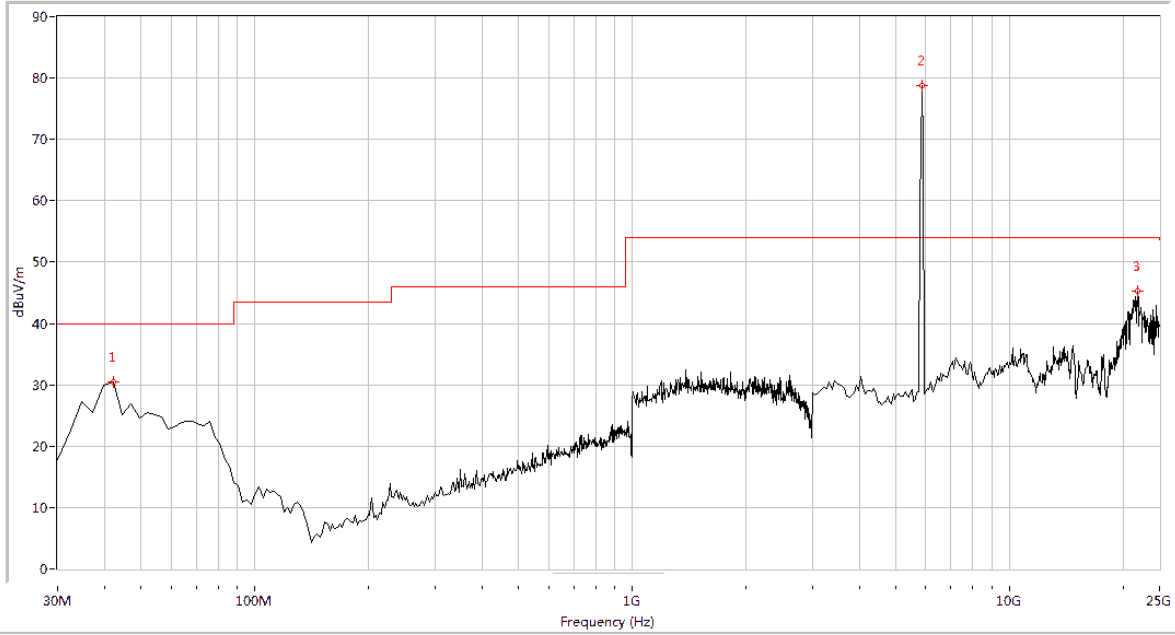

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	30.41	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
5825.000	78.82	N.A	N.A	N.A	N.A	54.0	Vertical	N.A
21817.955	45.30	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot O.4: Antenna Vertical, 30MHz to 25GHz)

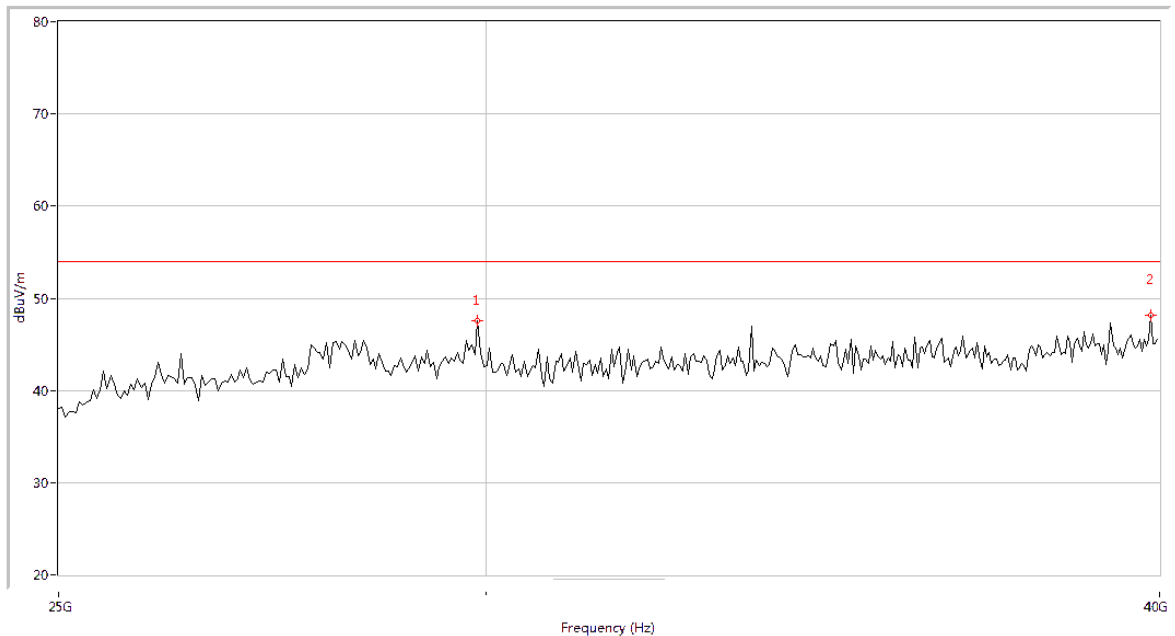


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
29901.025	47.51	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
39857.037	48.18	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot O.5: Antenna Vertical, 25GHz to 40GHz)


2.8.3.5. 802.11n-40MHz Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 3

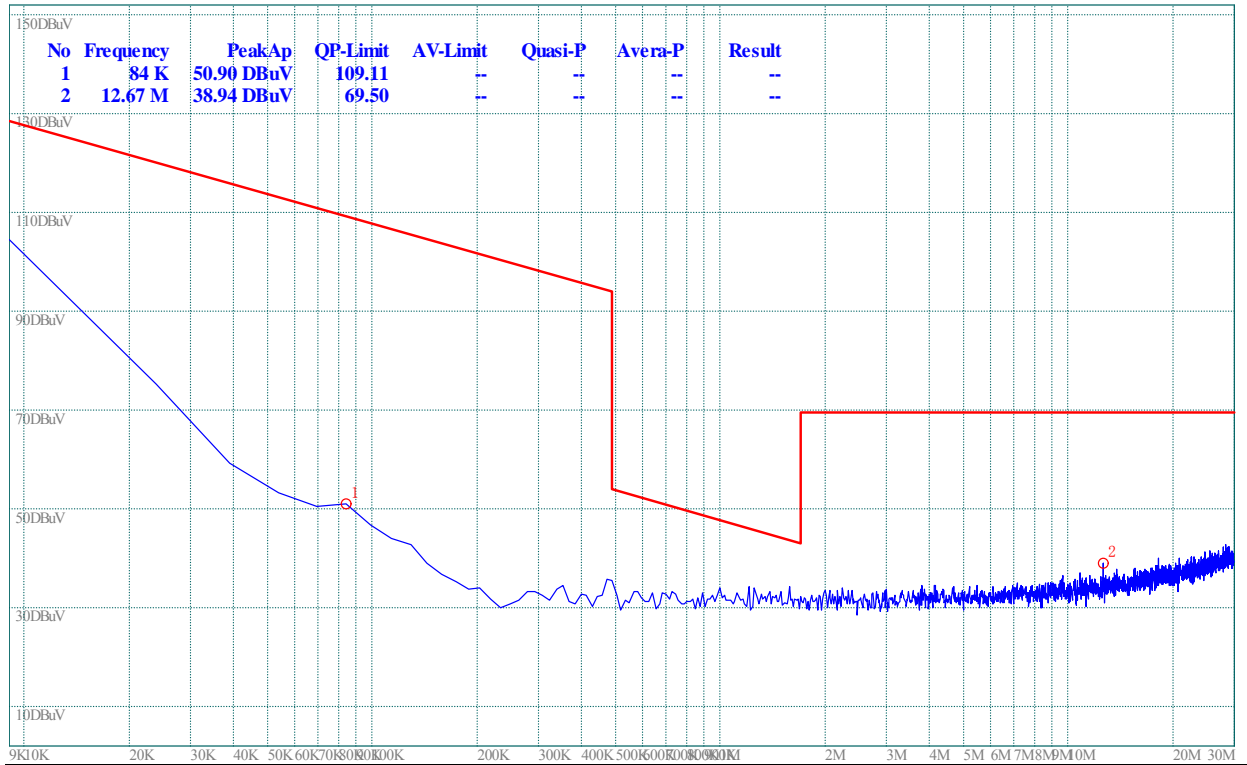


(Plot P.1: 9kHz to 30MHz)

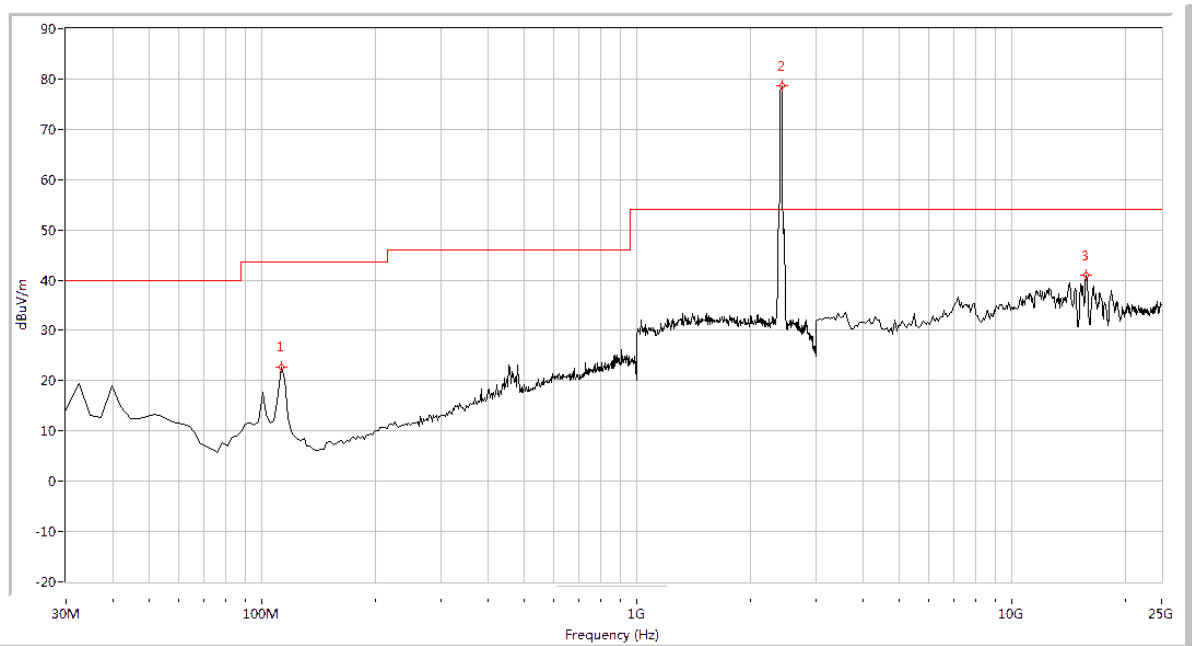

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	22.68	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2422.000	78.58	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
15728.180	41.10	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(Plot P.2: Antenna Horizontal, 30MHz to 25GHz)

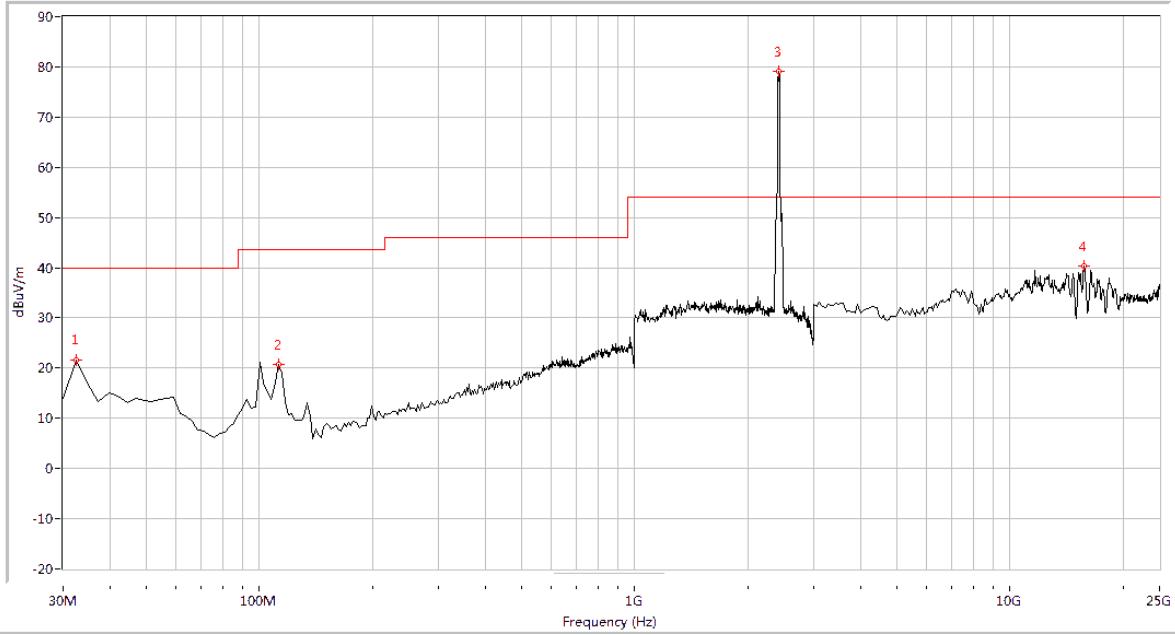


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	21.61	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
112.244	20.74	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2422.000	79.14	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15728.180	40.39	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot P.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

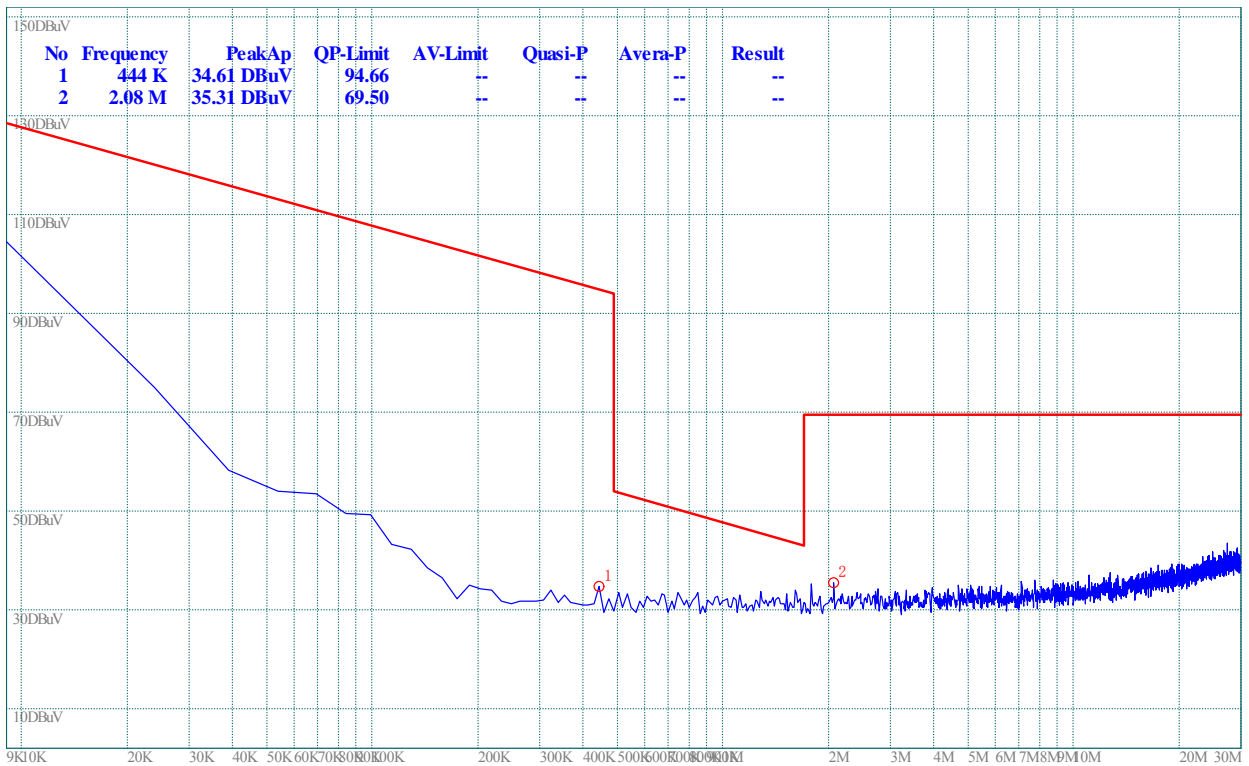


(Plot Q.1: 9kHz to 30MHz)

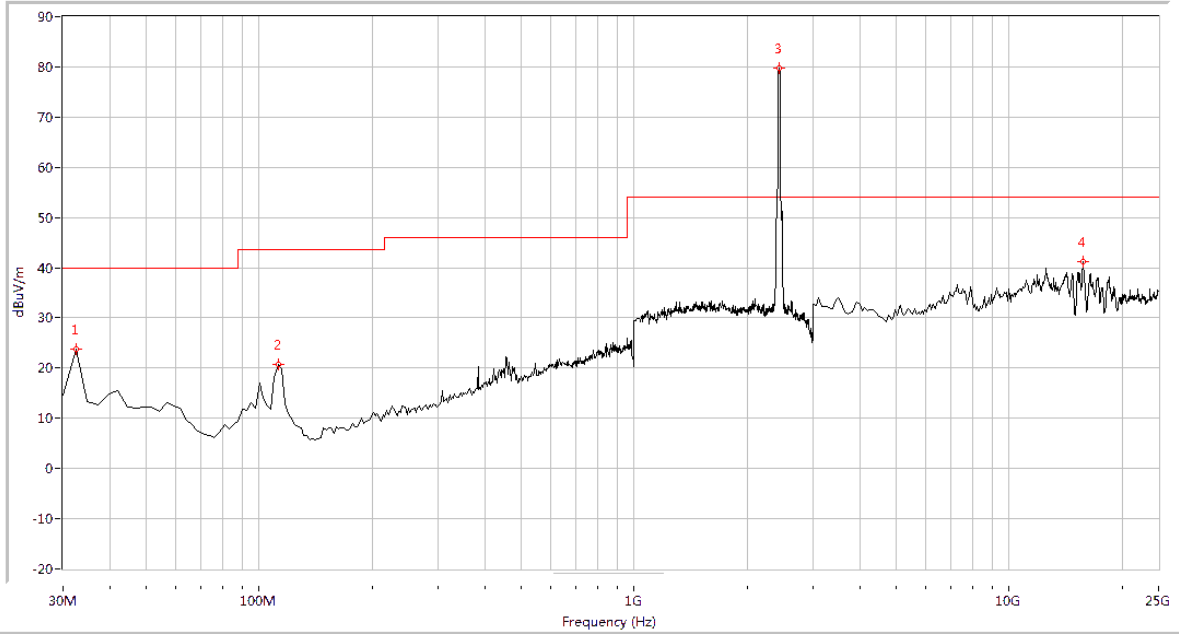


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	23.78	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
112.244	20.69	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2437.000	79.69	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
15728.180	41.31	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot Q.2: Antenna Horizontal, 30MHz to 25GHz)

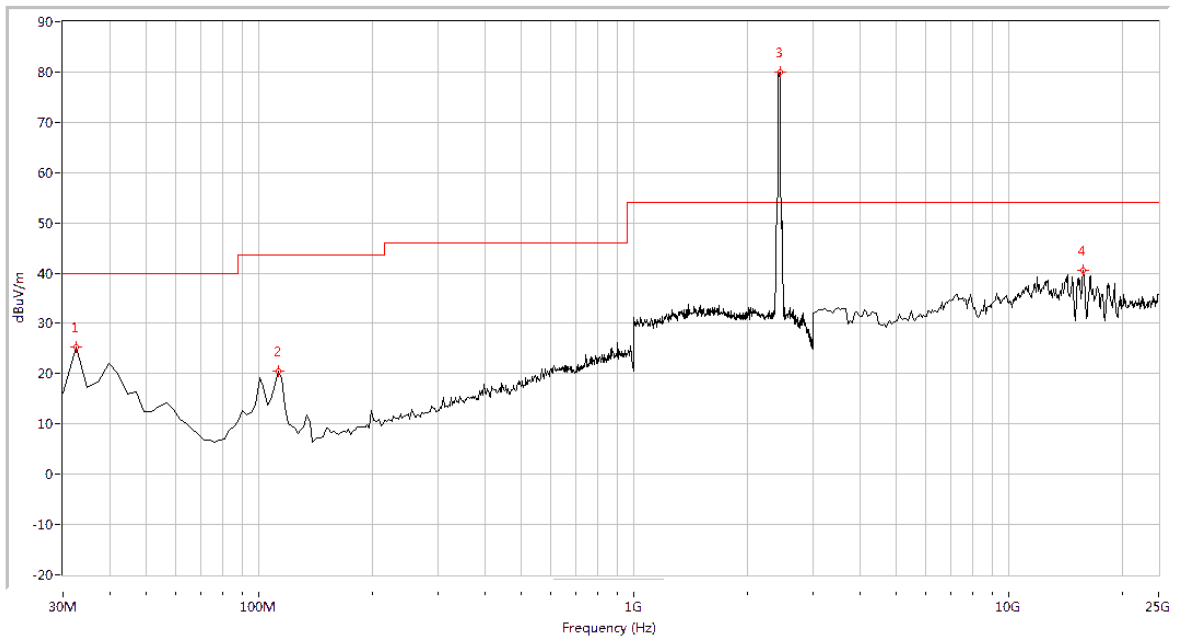


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	25.24	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
112.244	20.45	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2437.000	79.99	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15783.042	40.53	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot Q.3: Antenna Vertical, 30MHz to 25GHz)

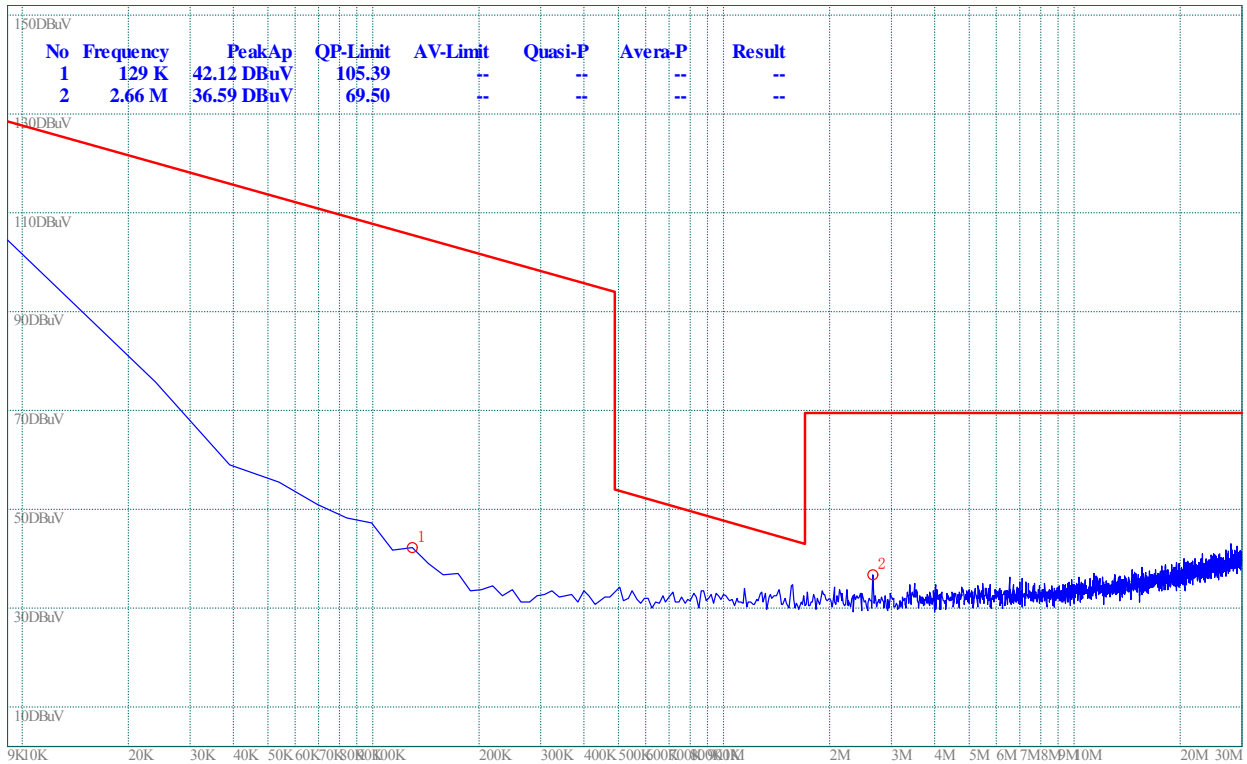
Plot for Channel = 9


(Plot R.1: 9kHz to 30MHz)

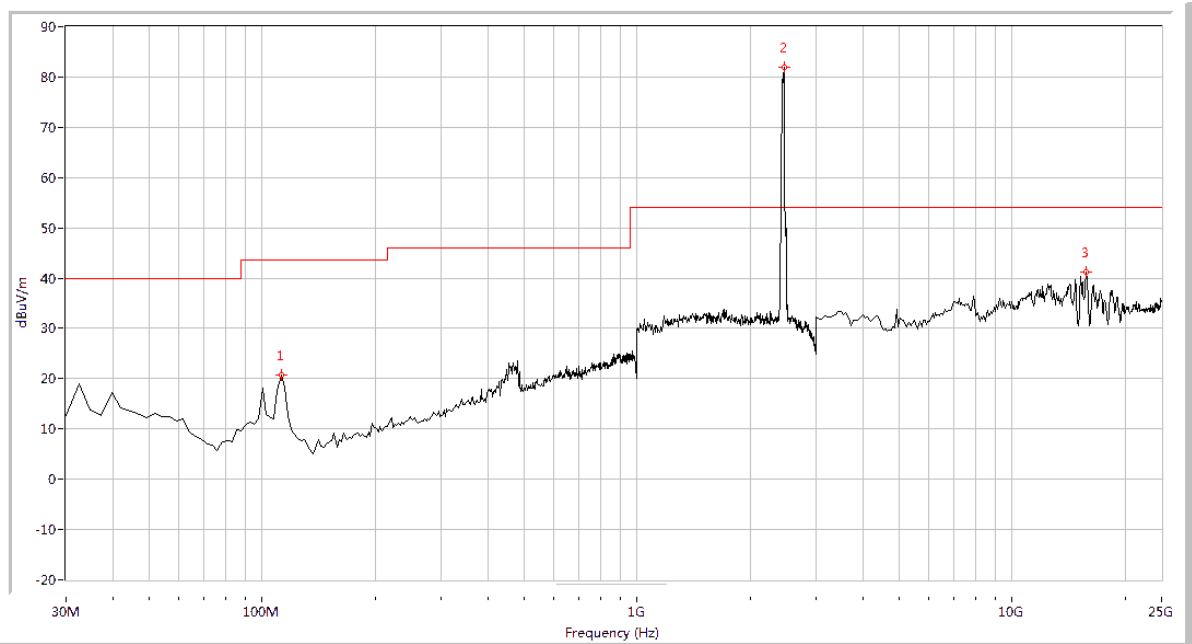

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
112.244	20.68	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
2452.000	81.84	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
15783.042	41.11	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Plot R.2: Antenna Horizontal, 30MHz to 25GHz)

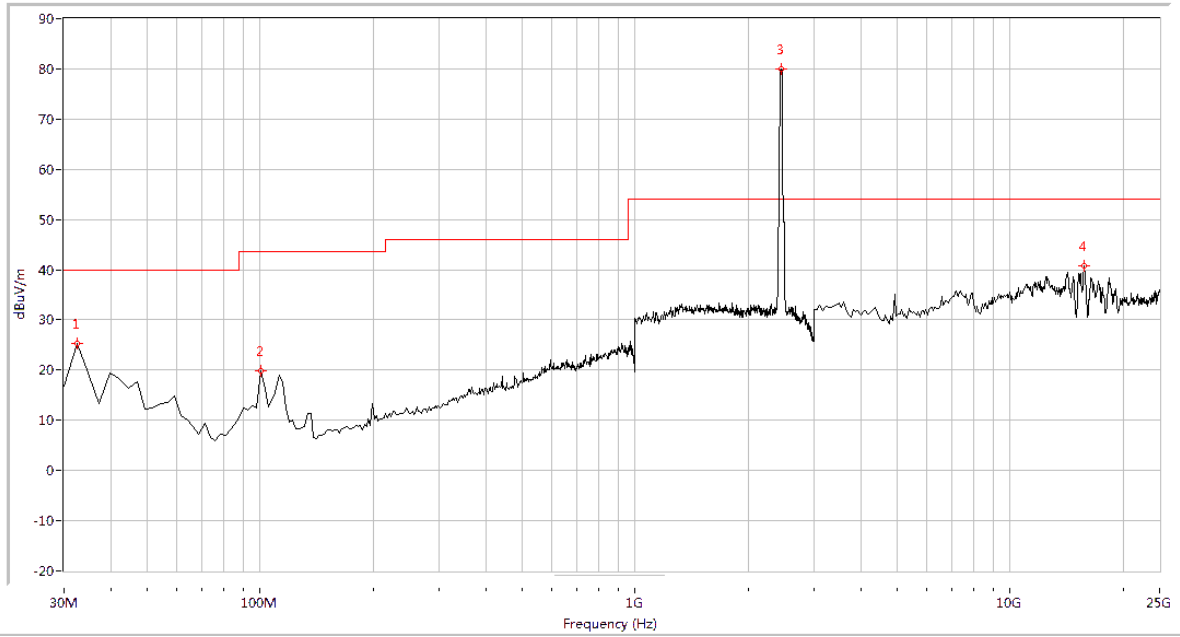

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
32.419	25.32	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
100.150	19.87	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
2452.000	80.04	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15783.042	40.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Plot R.3: Antenna Vertical, 30MHz to 25GHz)

2.9. RF exposure evaluation

2.9.1. Requirement

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

2.9.2. Result:

Please refer to SAR report.

**** END OF REPORT ****