



FCC SAR TEST REPORT



Issued to

GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD

For

Mobile Phone

Model Name : OPPO N5111
 Trade Name : OPPO
 Brand Name : OPPO
 FCC ID : R9C-N5111
 Standard : 47CFR 2.1093
 IEEE 1528-2013
 MAX SAR : Head: 0.308 W/kg
 Body: 0.784 W/kg
 Test date : 2014-5-6 to 2014-5-9
 Issue date : 2014-5-14

by

Shenzhen Morlab Communications Technology Co., Ltd.


FL.3, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District,
ShenZhen, GuangDong Province, P. R. China 518101

Tested by

Zou Jian
Zou Jian
(Test Engineer)

Date 2014.5.14

Approved by

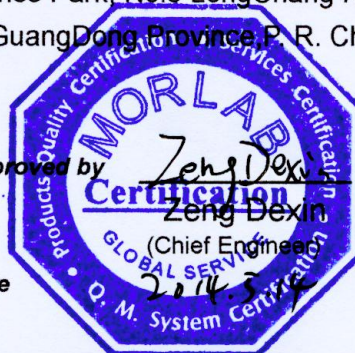

Zeng Dexin
(Chief Engineer)

Date

2014.5.14

Reviewed by

Zhu Zhan
Zhu Zhan
(SAR Specialist)

Date 2014.5.14

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate

DIRECTORY

1. TESTING LABORATORY	4
1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	4
1.2 ACCREDITATION CERTIFICATE	4
1.3 LIST OF TEST EQUIPMENTS	4
2. TECHNICAL INFORMATION	5
2.1 IDENTIFICATION OF APPLICANT	5
2.2 IDENTIFICATION OF MANUFACTURER	5
2.3 EQUIPMENT UNDER TEST (EUT)	5
2.3.1 PHOTOGRAPHS OF THE EUT	6
2.3.2 IDENTIFICATION OF ALL USED EUT	6
2.4 APPLIED REFERENCE DOCUMENTS	6
2.5 DEVICE CATEGORY AND SAR LIMITS	6
3. SPECIFIC ABSORPTION RATE (SAR)	7
3.1 INTRODUCTION	7
3.2 SAR DEFINITION	7
4. SAR MEASUREMENT SETUP	8
4.1 THE MEASUREMENT SYSTEM	8
4.2 PROBE	8
4.3 PROBE CALIBRATION PROCESS	10
4.3.1 DOSIMETRIC ASSESSMENT PROCEDURE	10
4.3.2 FREE SPACE ASSESSMENT PROCEDURE	10
4.3.3 TEMPERATURE ASSESSMENT PROCEDURE	10
4.4 PHANTOM	11
4.5 DEVICE HOLDER	11
5. TISSUE SIMULATING LIQUIDS	12
6. UNCERTAINTY ASSESSMENT	14



6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST 14

6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK 15

7. SAR MEASUREMENT EVALUATION..... 17

7.1 SYSTEM SETUP..... 17

7.2 VALIDATION RESULTS 18

8. OPERATIONAL CONDITIONS DURING TEST 19

8.1 INFORMATION ON THE TESTING 19

8.2 BODY-WORN CONFIGURATIONS 20

8.3 MEASUREMENT PROCEDURE 20

8.4 DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME 20

9. HOTSPOT MODE EVALUATION PROCEDURE 22

10. MEASUREMENT OF CONDUCTED OUTPUT POWER..... 23

11. TEST RESULTS LIST 27

12. MULTIPLE TRANSMITTERS EVALUATION 31

13. ANNEX A PHOTOGRAPHS OF THE EUT 34

14. ANNEX B GRAPH TEST RESULTS (TEST DATA) 34

15. ANNEX C SYSTEM PERFORMANCE CHECK DATA..... 34

Change History		
Issue	Date	Reason for change
1.0	May 14, 2014	First edition

1. TESTING LABORATORY

1.1 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China 518101

1.2 Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.3 List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2014-2-21	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2013-9-26	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2013-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2013-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2013-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2013-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2013-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2013-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2013-9-25	1year
11	Dielectric Probe Kit	Agilent (85033E)	2013-9-24	1year
12	Phantom	Satimo (SN:SN_36_08_SAM62)	2013-9-24	1year
13	Liquid	Satimo(Last Calibration: 2014-5-6 to 2014-5-9)	N/A	N/A
14	Dipole 835MHz	Satimo (SN 20/08 DIPC 99)	2013-9-25	1year
15	Dipole 1900MHz	Satimo (SN 30/13 DIP1G900-261)	2013-9-25	1year
16	Dipole 2450MHz	Satimo (SN 30/13 DIP2G450-263)	2013-9-25	1year

2. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

2.1 Identification of Applicant

Company Name:	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD
Address:	NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA

2.2 Identification of Manufacturer

Company Name:	GUANGDONG OPPO MOBILE TELECOMMUNICATIONS CORP., LTD
Address:	NO.18 HAIBIN ROAD, WUSHA, CHANG'AN, DONGGUAN, GUANGDONG, CHINA

2.3 Equipment Under Test (EUT)

Model Name:	OPPO N5111
Trade Name:	OPPO
Brand Name:	OPPO
Hardware Version:	214029
Software Version:	N5111_11_A.01_140422_SVN4107
Tx Frequency Bands:	GSM 850: 824-849 MHz; GSM 1900: 1850-1910 MHz; WCDMA Band II : 1850-1910MHz; WCDMA Band V: 824-849 MHz; 802.11 b/g/n20: 2412-2462 MHz; Bluetooth; Bluetooth4.0;
Uplink Modulations:	GSM/GPRS: GSMK; EDGE: GSMK/8PSK; WCDMA/HSDPA/HSUPA/HSPA+:QPSK; WiFi802.11g:OFDM(2.4GHz);WiFi802.11n20:OFDM(2.4GHz); Bluetooth: GFSK/ π /4-DQPSK/8-DPSK; Bluetooth: GFSK;
Multislot Class:	GPRS: Class 12; EDGE: Class 12;
GPRS Class:	Class B
DTM:	Not support
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
3GPP Version:	Release 9
Hotspot function:	Support
Battery Model:	BLP573
Battery specification:	2140mAh3.8V

2.3.1 Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

2.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	214029	N5111_11_A.01_140422_SVN4107

2.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB 447498 D01v05r02	General RF Exposure Guidance
4	KDB 248227 D01	SAR Measurement Procedures for 802.11 a/b/g Transmitters
5	KDB 941225 D01v02	SAR Measurement Procedures for 3G Devices
6	KDB 941225 D02v02r02	HSPA and 1x Advanced
7	KDB 941225 D03v01	SAR Test Reduction GSM GPRS EDGE
8	KDB 941225 D04v01	SAR for GSM E GPRS Dual Xfer Mode
9	KDB 941225 D06v01r01	Hotspot Mode SAR
10	KDB 865664 D01v01r02	SAR Measurement 100 MHz to 6 GHz
11	KDB 865664 D02v01r01	SAR Reporting
12	KDB 648474 D04v01r02	Handset SAR

2.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3. SPECIFIC ABSORPTION RATE (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR MEASUREMENT SETUP

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used


- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm

(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

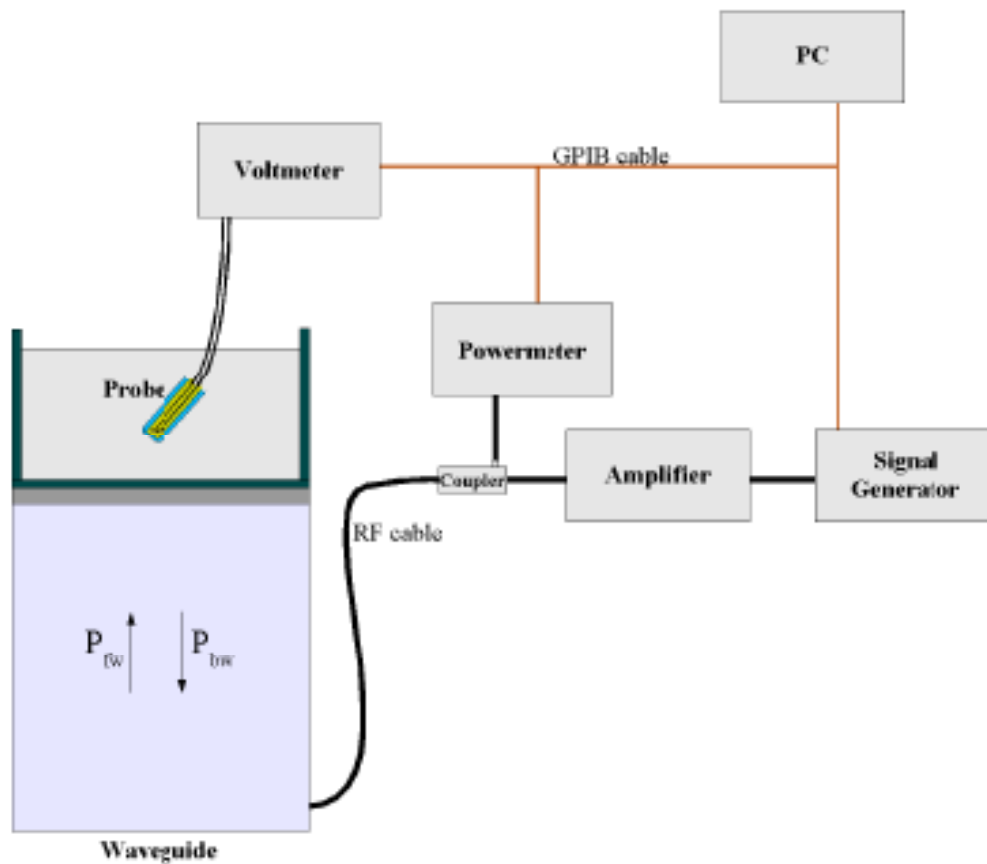

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

l = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2

4.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

δt = exposure time (30 seconds),

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

C = heat capacity of tissue (brain or muscle),

δT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is Middle than 1°.

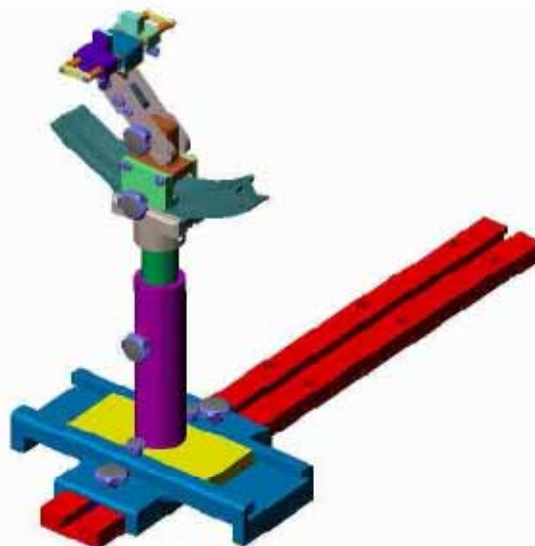

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Frequency Band (MHz)	835		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body
Ingredients (% by weight)						
Deionised Water	50.36	50.20	54.90	40.40	62.70	73.20
Salt(NaCl)	1.25	0.90	0.18	0.50	0.50	0.10
Sugar	0.00	48.50	0.00	58.00	0.00	0.00
Tween 20	48.39	0.00	0.00	0.00	0.00	0.00
HEC	0.00	0.20	0.00	1.00	0.00	0.00
Bactericide	0.00	0.20	0.00	0.10	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	36.80	0.00
DGBE	0.00	0.00	44.92	0.00	0.00	26.70
Diethylenglycol monohexylether	0.00	0.00	0.00	0.00	0.00	0.00
Measured dielectric parameters						
Dielectric Constant	41.50	56.10	39.90	53.30	39.20	52.70
Conductivity (S/m)	0.90	0.95	1.42	1.52	1.80	1.95

Note: Please refer to the validation results for dielectric parameters of each frequency band.



The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2014/5/6	Head 835	Relative Permittivity(ϵ_r):	41.08	41.5	-1.01	5
		Conductivity(σ):	0.91	0.90	1.11	5
	Body 835	Relative Permittivity(ϵ_r):	55.43	55.2	0.42	5
		Conductivity(σ):	0.95	0.97	-2.06	5
2014/5/8	Head 1900	Relative Permittivity(ϵ_r):	40.11	40.0	0.27	5
		Conductivity(σ):	1.41	1.40	0.71	5
	Body 1900	Relative Permittivity(ϵ_r):	53.09	53.17	-0.15	5
		Conductivity(σ):	1.52	1.51	0.66	5
2014/5/9	Head 2450	Relative Permittivity(ϵ_r):	39.31	39.20	0.28	5
		Conductivity(σ):	1.79	1.80	-0.56	5
	Body 2450	Relative Permittivity(ϵ_r):	52.42	52.52	-0.19	5
		Conductivity(σ):	1.89	1.90	-0.53	5

6. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Test sample Related									
Test sample positioning	E.4.2. 1	0.03	N	1	1	1	0.03	0.0 3	N- 1
Device Holder Uncertainty	E.4.1. 1	5.00	N	1	1	1	5.00	5.0 0	N- 1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞

Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK


a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞

Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞
Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.69	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.85	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.28	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	3.46	M
Combined Standard Uncertainty			RSS				8.83	8.83	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	17.66	

7. SAR MEASUREMENT EVALUATION

7.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

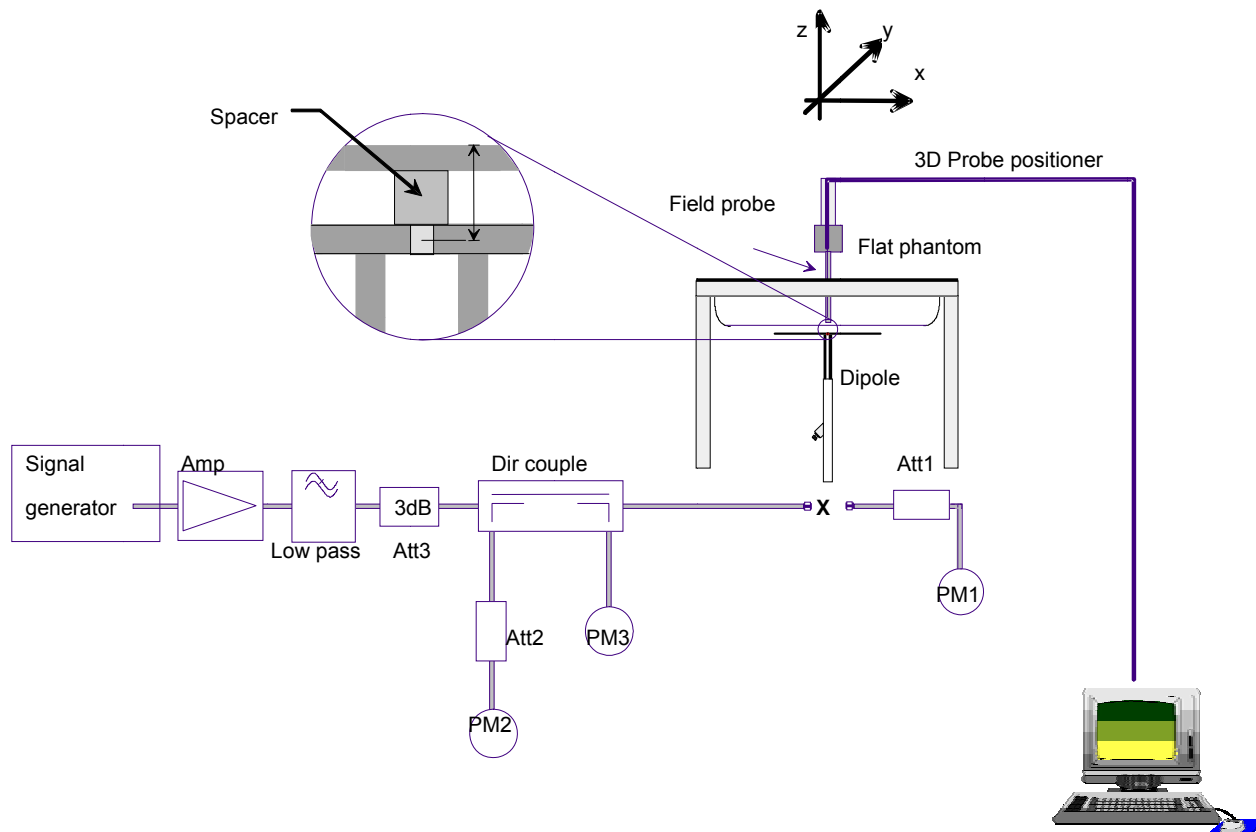

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

7.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	835MHz(H)	835MHz(B)
Target value 1W (1g)	9.71 W/Kg	10.02 W/Kg
Test value 1g (250 mW input power)	2.413 W/Kg (5.6)	2.456 W/Kg (5.6)
Normalized to 1W value(1g)	9.652 W/Kg	9.824 W/Kg

Frequency	1900MHz(H)	1900MHz(B)	2450MHz(H)	2450MHz(B)
Target value 1W (1g)	39.39 W/Kg	42.33 W/Kg	54.77 W/Kg	56.09 W/Kg
Test value 1g (250 mW input power)	9.747 W/Kg (5.8)	9.948 W/Kg (5.8)	12.726 W/Kg (5.9)	13.041 W/Kg (5.9)
Normalized to 1W value(1g)	38.988W/Kg	39.792 W/Kg	50.904 W/Kg	52.164 W/Kg

Note: System checks the specific test data please see Annex C.

8. OPERATIONAL CONDITIONS DURING TEST

8.1 Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its Highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

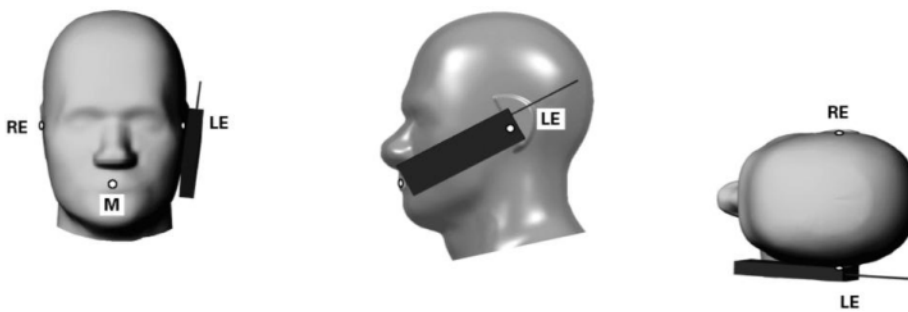


Illustration for Cheek Position

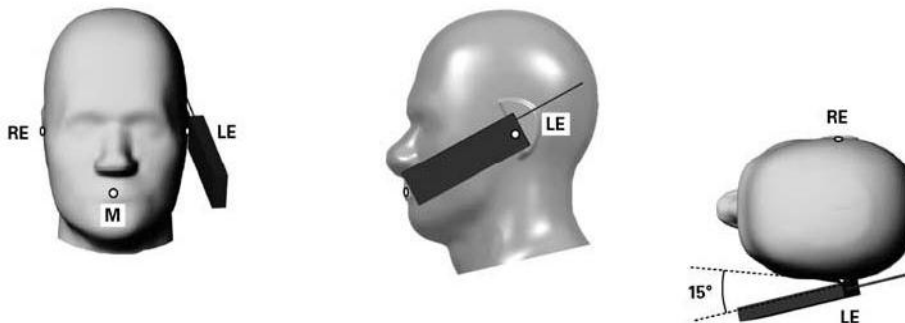


Illustration for Tilted Position

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the mouth by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

8.2 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

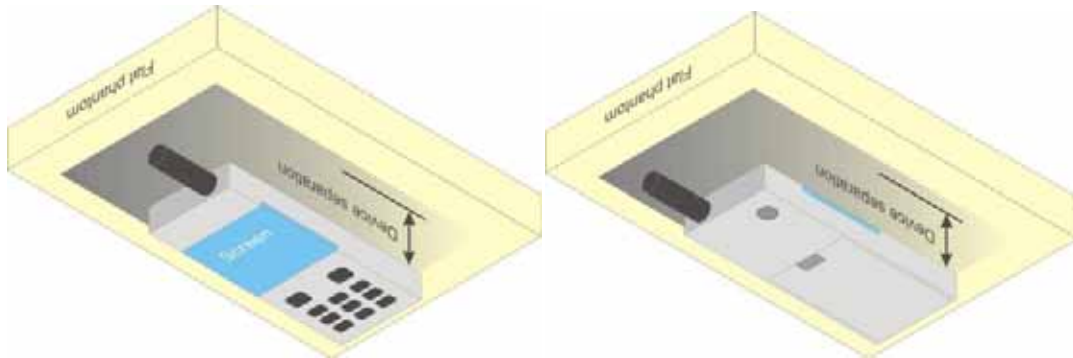


Illustration for Body Worn Position

8.3 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.



An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.


The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v01r01.

SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless mode that support wireless routing.

Edge configurations:

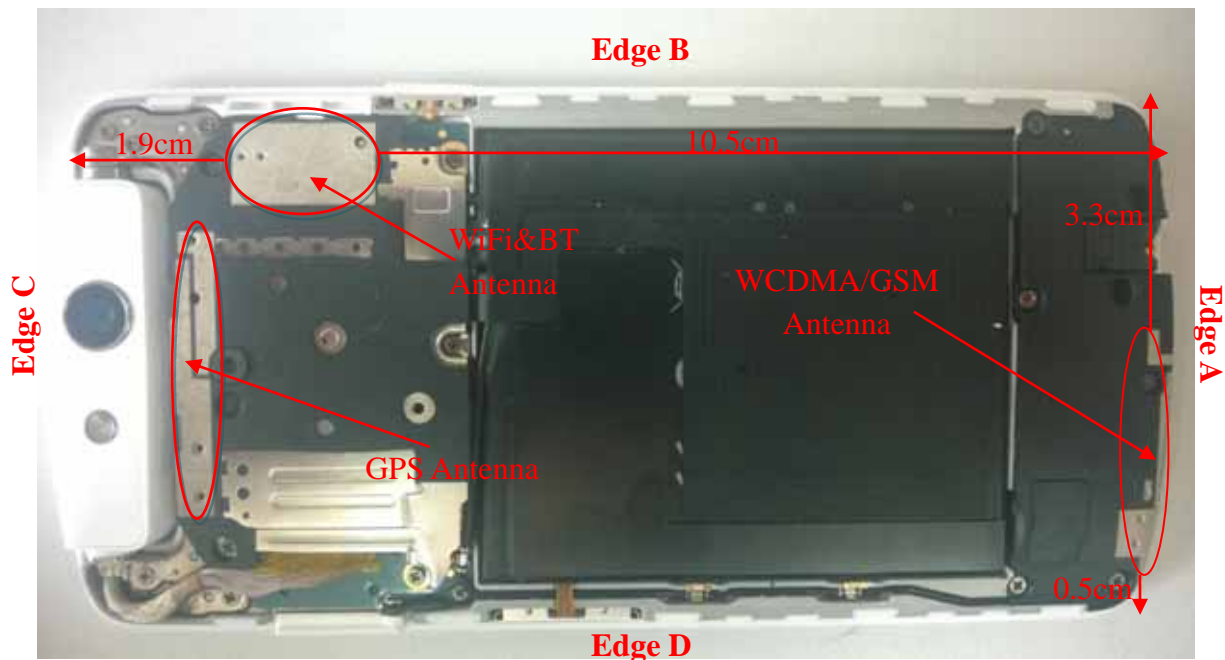

Assessment	Hotspot side for SAR					
	Test distance: 10mm					
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
WCDMA/GSM	Yes	Yes	Yes	Yes	No	No
WLAN&BT	Yes	Yes	No	Yes	Yes	No

10. MEASUREMENT OF CONDUCTED OUTPUT POWER

1. WCDMA mode conducted output power values

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	24.70	24.82	24.87	23.42	23.73	23.44
HSDPA	1	24.66	24.76	24.80	23.36	23.64	23.38
	2	24.69	24.71	24.82	23.34	23.70	23.40
	3	24.17	24.23	24.33	22.86	23.11	22.86
	4	24.13	24.28	24.29	22.84	23.17	22.89
HSUPA	1	24.67	24.79	24.75	23.37	23.64	23.43
	2	22.65	22.81	22.73	21.39	21.63	21.49
	3	23.63	23.74	23.69	22.35	22.67	22.46
	4	22.71	22.78	22.74	21.33	21.70	21.50
	5	24.62	24.73	24.75	23.34	23.66	23.39
HSPA+	1	24.64	24.77	24.78	23.35	23.70	23.43
Note:	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA/HSPA+ was tested by power meter.						

2. GSM Mode

Band	Channel	Frequency (MHz)	Output Power(dBm)
GSM 850	128	824.2	33.00
	190	836.6	32.99
	251	848.8	32.91
PCS 1900	512	1850.2	29.14
	661	1880.0	28.43
	810	1909.8	28.87

3. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.18	29.86	28.99	28.51
	190	836.6	31.28	29.96	29.09	28.61
	251	848.8	31.18	29.86	28.99	28.51
PCS 1900	512	1850.2	27.54	26.22	25.35	24.87
	661	1880.0	26.97	25.65	24.78	24.30
	810	1909.8	27.47	26.15	25.28	24.80

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	22.15	23.84	24.73	25.50
	190	836.6	22.25	23.94	24.83	25.60
	251	848.8	22.15	23.84	24.73	25.50
PCS 1900	512	1850.2	18.51	20.20	21.09	21.86
	661	1880.0	17.94	19.63	20.52	21.29
	810	1909.8	18.44	20.13	21.02	21.79

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

4. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	33.13	31.85	30.97	30.35
	190	836.6	33.13	31.85	30.97	30.35
	251	848.8	32.98	31.70	30.82	30.20
PCS 1900	512	1850.2	28.98	27.70	26.82	26.20
	661	1880.0	28.90	27.62	26.74	26.12
	810	1909.8	28.60	27.32	26.44	25.82

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	24.10	25.83	26.71	27.34
	190	836.6	24.10	25.83	26.71	27.34
	251	848.8	23.95	25.68	26.56	27.19
PCS 1900	512	1850.2	19.95	21.68	22.56	23.19
	661	1880.0	19.87	21.60	22.48	23.11
	810	1909.8	19.57	21.30	22.18	22.81

5. WiFi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
WiFi	1	2412	13.25	9.83	8.91
	6	2437	12.86	9.52	8.55
	11	2462	13.63	10.16	9.12

6. BT+EDR 2.1 peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	10.14	9.81	10.10
	39	2441	11.52	11.10	11.47
	78	2480	9.93	9.55	9.88

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
BT 4.0	0	2402	-1.86
	19	2440	-0.69
	39	2480	-2.94

11. TEST RESULTS LIST

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head		Cheek/Touch	128	0.099	1.122	0.111
		Ear/Tilt		0.088		0.099
Left Side Of Head		Cheek/Touch		0.086		0.096
		Ear/Tilt		0.065		0.073
Body (10mm Separation)	GSM	Back upward	190	0.179	1.035	0.201
		Front upward		0.170		0.191
	EDGE	Back upward	190	0.298	1.035	0.308
		Front upward		0.318		0.329
		Edge A		0.111		0.115
	Edge D	0.055		0.057		
	GPRS	Front upward	190	0.284	1.094	0.311

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations		Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head		Cheek/Touch	512	0.107	1.086	0.116
		Ear/Tilt		0.023		0.025
Left Side Of Head		Cheek/Touch		0.092		0.100
		Ear/Tilt		0.048		0.052
Body (10mm Separation)	GSM	Back upward	512	0.460	1.072	0.500
		Front upward		0.271		0.294
	EDGE	Back upward	512	0.475	1.072	0.509
		Front upward		0.270		0.289
		Edge A		0.365		0.391
	Edge D	0.206		0.221		
	GPRS	Back upward	512	0.462	1.030	0.476

Note:

1. GPRS/EDGE test Scenario(Based on the Max. Time-based Average Power)

Band	Channel	Slots	Power level	Duty Cycle
GPRS850	190	4	5	1:2
EDGE850	190	4	5	1:2
GPRS1900	512	4	0	1:2
EDGE1900	512	4	0	1:2

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	4233	0.097	1.030	0.100
	Ear/Tilt		0.046		0.047
Left Side Of Head	Cheek/Touch		0.058		0.060
	Ear/Tilt		0.034		0.035
Body (10mm Separation)	Back upward		0.063		0.065
	Front upward		0.173		0.178
	Edge A		0.187		0.193
	Edge D		0.023		0.024

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	9400	0.184	1.064	0.196
	Ear/Tilt		0.085		0.090
Left Side Of Head	Cheek/Touch		0.116		0.123
	Ear/Tilt		0.049		0.052
Body (10mm Separation)	Back upward		0.737		0.784
	Front upward		0.324		0.345
	Edge A		0.454		0.483
	Edge D		0.270		0.287

Summary of Measurement Results (WLAN 802.11b Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	11	0.171	1.089	0.186
	Ear/Tilt		0.164		0.179
Left Side Of Head	Cheek/Touch		0.283		0.308
	Ear/Tilt		0.238		0.259
Body (10mm Separation)	Back upward		0.108		0.118
	Front upward		0.061		0.066
	Edge B		0.086		0.094
	Edge C		0.038		0.041

Summary of Measurement Results (Bluetooth)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	39 GFSK	0.160	1.117	0.179
	Ear/Tilt		0.096		0.107
Left Side Of Head	Cheek/Touch		0.141		0.157
	Ear/Tilt		0.068		0.076

Note:

- When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05r01)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz
- BT & WiFi SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.
- During 802.11 testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal. The RF signal utilized in SAR measurement has almost 100% duty cycle, and



its crest factor is 1. Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.


- 4. IEEE Std 1528-2013 requires the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 5. Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.
- 6. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB higher than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities. This module supports 3GPP release R7 HSPA+ using QPSK only without 16QAM in the uplink. So PBA is not required for HSPA+.

7. Scaling Factor calculation

Band	Tune-up power tolerance(dBm)	SAR test channel Power (dBm)	Scaling Factor
GSM 850	PCL = 5, PWR =33+-0.5	33.00	1.122
GPRS 850	PCL = 5, PWR =28.5+-0.5(4 slots)	28.61	1.094
EDGE 850	PCL = 5, PWR =30+-0.5(4 slots)	30.35	1.035
GSM1900	PCL = 0, PWR =29+-0.5	29.14	1.086
GPRS 1900	PCL=0,PWR= 24.5+-0.5(4 slots)	24.87	1.030
EDGE 1900	PCL=0,PWR= 26+-0.5(4 slots)	26.20	1.072
WCDMA 850	Max output power =24(+1/-2)	24.87	1.030
WCDMA 1900	Max output power =23 (+1/-2)	23.73	1.064
802.11b	Max output power =13.5+-0.5	13.63	1.089
BT	Max output power =11.5+-0.5	11.52	1.117

12. MULTIPLE TRANSMITTERS EVALUATION

The are three transmitters build in EUT, as following:

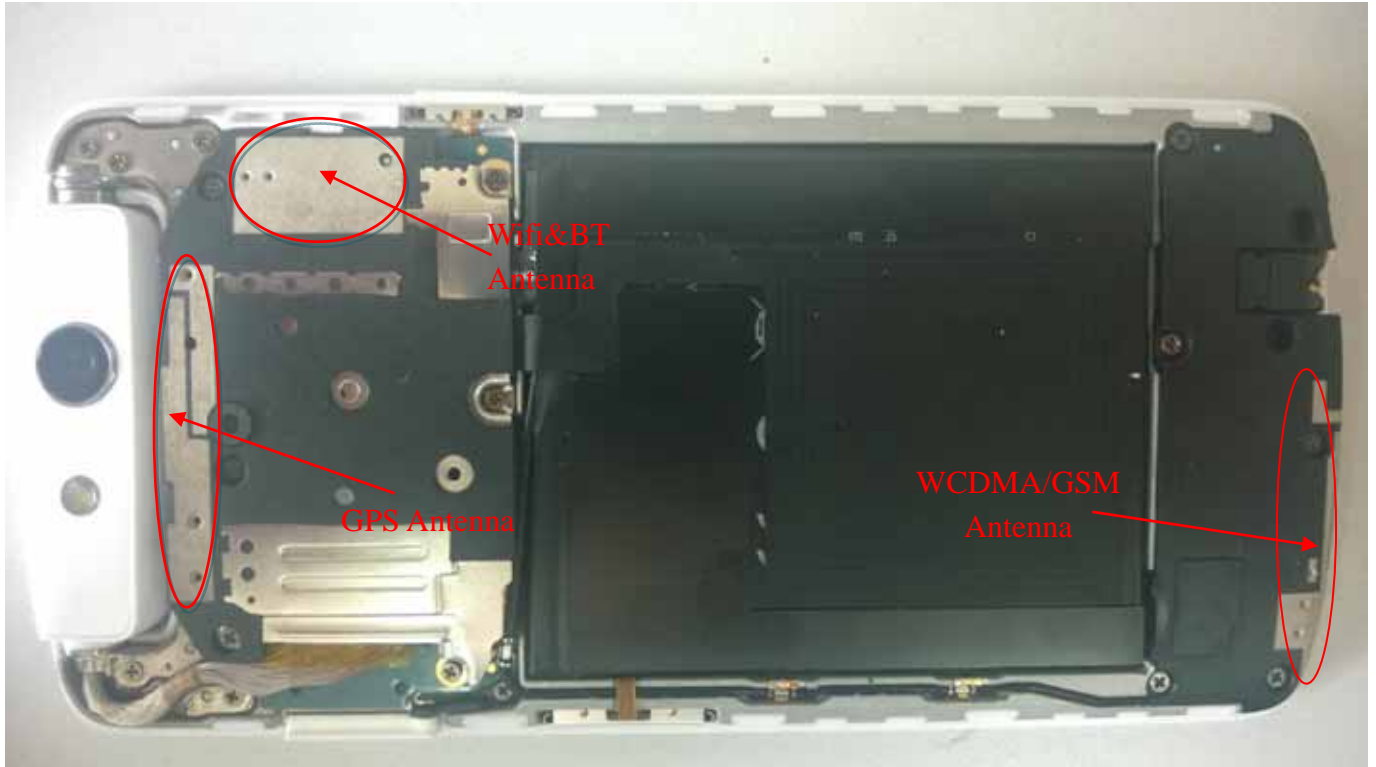

Stand-alone SAR

Test distance: 5mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	25.12	$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}]$ $\leq 3.0 \text{ for 1-g SAR}$	Yes
BT	15.85		Yes

Test distance: 10mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	25.12	$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}]$ $\leq 3.0 \text{ for 1-g SAR}$	Yes
BT	15.85		No

The Head SAR test for BT is required for highest power exceed the power threshold for 2450MHz at the test distance of 5mm, Body SAR for BT is not required.

The SAR test for 802.11b (2.4GHz) is required, 802.11g/HT20 is not required, for the maximum average output power is less than 1/4 dB Higher than measured on the corresponding 802.11b channels. As per KDB 248227

The BT stand-alone body SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$
W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

(Max power= 15.85 mW ; min. test separation distance= 10mm for body; $f=2.4\text{GHz}$)

BT estimated Body SAR = 0.327W/Kg (1g)

Simultaneous SAR

#	Simultaneous transmission conditions				Sum of WWAN& WLAN
	WWAN		WLAN		
	GSM	UMTS	802.11b/g/n	BT	
1	x		x		x
2		x	x		x
3	x			x	x
4		x		x	x

Note:

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the Wi-Fi transmitter and another WWAN transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and data transmission simultaneously.

4. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
5. Per KDB 447498D01v05r01, Simultaneous Transmission SAR Evaluation procedures is as followed:
 Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
 Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
 Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
 Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
 (The ratio is determined by: $(SAR1 + SAR2)^{1.5}/R_i \leq 0.04$,
 R_i is the separation distance between the peak SAR locations for the antenna pair in mm)
6. The NFC function operates at 13.56MHz, the power threshold of SAR evaluation is 474mW (Per KDB 447498 D01v05r02 Appendix C), the NFC operates at relatively much lower power; The NFC function is not active when carrying on the body. So SAR evaluation is not need for NFC function.

7. Applicable Multiple Scenario Evaluation

Test Position	Main Ant. SARMax (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SARMax(W/Kg)	Σ 1-g SARMax(W/Kg)	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.196	0.179	0.308	0.375	0.514
Body SAR	0.784	0.327	0.118	1.111	0.902

Simultaneous Transmission SAR evaluation is not required for WiFi and LTE&WCDMA&GSM, because the sum of 1g SARMax is **0.902W/Kg** < 1.6W/Kg for Wifi and LTE&WCDMA&GSM.

Simultaneous Transmission SAR evaluation is not required for BT and LTE&WCDMA&GSM, because the sum of 1g SARMax is **1.111W/Kg** < 1.6W/Kg for BT and LTE&WCDMA&GSM.

(According to KDB 447498D01v05r01, the sum of the Highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)



13. ANNEX A PHOTOGRAPHS OF THE EUT

14. ANNEX B GRAPH TEST RESULTS (TEST DATA)

15. ANNEX C SYSTEM PERFORMANCE CHECK DATA