





FCC PART 15C TEST REPORT

No.24T04Z101591-017

for

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: CPH2659

FCC ID:R9C-OP23216

with

Hardware Version:11

Software Version: Color OS 15.0

Issued Date: 2024-9-26

Note

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

 ${\bf Email:} \underline{\sf cttl_terminals@caict.ac.cn}, \ website: \underline{\sf www.chinattl.com}$





REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z101591-017	Rev.0	1 st edition	2024-9-26

Note: the latest revision of the test report supersedes all previous version.





CONTENTS

1. T	TEST LABORATORY	5
1.1.	INTRODUCTION &ACCREDITATION	5
1.2.		
1.3.	TESTING ENVIRONMENT	6
1.4.	Project data	6
1.5.	Signature	6
2. C	CLIENT INFORMATION	7
2.1.	APPLICANT INFORMATION	7
2.2.	MANUFACTURER INFORMATION	7
3. E	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT	8
3.3.	INTERNAL IDENTIFICATION OF AE	8
3.4.	NORMAL ACCESSORY SETTING	8
3.5.	GENERAL DESCRIPTION	8
4. R	REFERENCE DOCUMENTS	9
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	9
4.2.	REFERENCE DOCUMENTS FOR TESTING	9
5. T	TEST RESULTS	10
5.1.	SUMMARY OF EUT MODE	10
5.2.	SUMMARY OF TEST RESULTS	10
5.3.	STATEMENTS	10
6. T	TEST FACILITIES UTILIZED	11
7. M	MEASUREMENT UNCERTAINTY	12
7.1.	PEAK OUTPUT POWER - CONDUCTED	12
7.2.	Frequency Band Edges - Conducted	12
7.3.	Transmitter Spurious Emission - Conducted	12
7.4.	Transmitter Spurious Emission - Radiated	12
7.5.	TIME OF OCCUPANCY (DWELL TIME)	12
7.6.	20dB Bandwidth	12
7.7.	CARRIER FREQUENCY SEPARATION	13
7.8.	AC Powerline Conducted Emission	13
ANNE	EX A: EUT PARAMETERS	14
ANNE	EX B: DETAILED TEST RESULTS	15
B.1.	. Measurement Method	15
B.2.	. PEAK OUTPUT POWER	16





	B.3. FREQUENCY BAND EDGES - CONDUCTED	20
	B.4. Transmitter Spurious Emission - Conducted	. 27
	B.5. RADIATED UNWANTED EMISSION	. 52
	B.6. TIME OF OCCUPANCY (DWELL TIME)	. 64
	B.7. 20DB BANDWIDTH	75
	B.8. CARRIER FREQUENCY SEPARATION	. 81
	B.9. NUMBER OF HOPPING CHANNELS	. 84
	B.10. AC POWERLINE CONDUCTED EMISSION	. 88
	B.11. ANTENNA REQUIREMENT	. 92
	NNEX C. ACCREDITATION CERTIFICATE	0.1
А	NNHX C · ACCREDITATION CERTIFICATE.	91





1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website

1.2. Testing Location

Conducted testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191

Radiated testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,

P. R. China100191





1.3. Testing Environment

Normal Temperature: $20-27^{\circ}$ C Relative Humidity: 20-50%

1.4. Project data

Testing Start Date: 2024-8-6
Testing End Date: 2024-9-26

1.5. Signature

Wu Le

(Prepared this test report)

Sun Zhenyu

(Reviewed this test report)

Hu Xiaoyu

(Approved this test report)





2. ClientInformation

2.1. Applicant Information

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Address/Post: NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City,

Guangdong Province, P.R. China

Contact Name: Xiong Bo

Telephone: (86)76986076999 E-mail: xiongbo@oppo.com

2.2. Manufacturer Information

Address/Post:

Company Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City,

Guangdong Province, P.R. China

Contact Name: Xiong Bo

Telephone: (86)76986076999 E-mail: xiongbo@oppo.com





3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description Mobile Phone
Model Name CPH2659
FCC ID R9C-OP23216

Frequency Band ISM 2400MHz~2483.5MHz
Type of Modulation GFSK/π/4 DQPSK/8DPSK

Number of Channels 79

Power Supply 3.87V DC by Battery

Antenna 12 gain -0.5dBi Antenna 7 gain 2.5dBi Antenna 12 gain -7.9dBi

3.2. Internal Identification of EUT

EUT ID	* SN or IMEI	HW Version	SW Version	Date of receipt
EUT1	866185070033131	11	Color OS 15.0	2024-8-6
EUT2	866185070033115	11	Color OS 15.0	2024-8-6
EUT3	866185070035193/	11	Color OS 15.0	2024-8-6
	866185070035185			

^{*}EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer
AE1	Battery	BLPB05	Dongguan NVT Technology Co., Ltd
AE2	Adapter	VCB8OAUH	Dongguan Aohai Technology Co.,Ltd.
AE3	Cable	DL129	DUWEI

^{*}AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery should be used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of Mobile Phonewith integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.





4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	
FCC Part15	15.209 Radiated emission limits, general requirements;	2023
	15.247 Operation within the bands 902–928MHz,	
	2400-2483.5 MHz, and 5725-5850 MHz.	
ANCI 062 40	American National Standard of Procedures for	luna 2012
ANSI C63.10	Compliance Testing of Unlicensed Wireless Devices	June,2013





5. Test Results

5.1. Summary of EUT Mode

There modes are provided:

Mode	Conditions
Mode A	ANT12
Mode B	ANT7
Mode C	ANT13

^{*}For the test results, the EUT had been tested all conditions. But only the worst case(Mode B) was shown in test report except the "Peak Output Power" test was shown all conditions.

5.2. Summary of Test Results

Abbreviations used in this clause:

- **P** Pass, The EUT complies with the essential requirements in the standard.
- **F** Fail, The EUT does not comply with the essential requirements in the standard
- **NA** Not Applicable, The test was not applicable
- NP Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	Р
Frequency Band Edges- Conducted	15.247 (d)	Р
Transmitter Spurious Emission - Conducted	15.247 (d)	Р
Radiated Unwanted Emission	15.247, 15.205, 15.209	Р
Time of Occupancy (Dwell Time)	15.247 (a) (1)(iii)	Р
20dB Bandwidth	15.247 (a)(1)	NA
Carrier Frequency Separation	15.247 (a)(1)	Р
Number of hopping channels	15.247 (a)(iii)	Р
AC Powerline Conducted Emission	15.107, 15.207	Р
Antenna Requirement	15.203	Р

Please refer to ANNEX A for detail.

The measurement is made according to ANSI C63.10.

5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2





6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2025-03-09
2	Bluetooth Tester	CBT	100315	R&S	1 year	2025-03-08
3	Test Receiver	ESCI 3	100344	R&S	1 year	2025-04-01
4	LISN	ENV216	101200	R&S	1 year	2025-05-16
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103144	R&S	1 year	2024-11-26
2	EMI Antenna	VULB	01222	SCHWARZBECK	1 year	2025-07-30
	Livii Antenna	9163	01222	SCHWARZBECK	1 year	2023-07-30
3	EMI Antenna	3115	00167250	ETS-Lindgren	1 year	2025-04-11
4	Bluetooth Tester	CBT	101042	Rohde & Schwarz	1 year	2025-02-25





7. Measurement Uncertainty

7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

7.2. Frequency Band Edges- Conducted

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

7.4. Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

FrequencyRange	Uncertainty(dBm) (k=2)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	4.72
1GHz ≤ f ≤18GHz	4.84
18GHz ≤ f ≤40GHz	5.12

7.5. Time of Occupancy (Dwell Time)

Measurement Uncertainty:

Measurement Uncertainty(k=2)	0.88ms
------------------------------	--------

7.6. 20dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------





7.7. Carrier Frequency Separation

Measurement Uncertainty:

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

7.8. AC Powerline Conducted Emission

Measurement Uncertainty:

Measurement Uncertainty(k=2)	3.08dB
------------------------------	--------





ANNEX A: EUTparameters

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.






ANNEX B: Detailed Test Results

B.1. Measurement Method

B.1.1. Conducted Measurements

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



B.1.2. Radiated Emission Measurements

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360°and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.





B.2. Peak Output Power

B.2.1. Peak Output Power - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.5

a) Use the following spectrum analyzer settings:

Span: 6MHzRBW: 3MHzVBW: 3MHz

Sweep time: 2.5msDetector function: peak

• Trace: max hold

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power.

Measurement Limit:

Standard	Limits		
FCC Part 15.247(b)(1)	Bandwidth≤1MHz	30dBm (1W)	
	Bandwidth>1MHz	21dBm (125mW)	

Measurement Results:

ANT12

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	11.57	11.83	12.61	Р

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	13.48	14.33	14.53	Р

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	13.99	14.75	15.18	Р

Conclusion: PASS

ANT7

For GFSK

Channel	Ch 0	Ch 39	Ch 78	Conclusion
---------	------	-------	-------	------------





	2402 MHz	2441 MHz	2480 MHz	
Peak Conducted Output Power (dBm)	12.05	11.57	11.17	Р
Forπ/4 DQPSK				
Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	14.17	13.77	13.47	Р
For 8DPSK				
Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	14.59	14.31	13.59	Р
ANT13 For GFSK				
ANT13 For GFSK				
Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	11.21	11.55	11.51	Р
Forπ/4 DQPSK				
Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted Output Power (dBm)	13.55	13.75	13.92	Р
For 8DPSK				•
Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
Peak Conducted	14 05	14 34	14 10	Р

14.34

14.05

Conclusion: PASS

Output Power (dBm)

Ρ

14.10





B.2.2. E.I.R.P.

The radiated E.I.R.P. is listed below:

Antenna 12 gain =-0.5dBi

Antenna 7 gain = 2.5dBi

Antenna 13 gain =-7.9dBi

ANT12

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	11.07	11.33	12.11	Р

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	12.98	13.83	14.03	Р

For 8DPSK

Channel	Ch 0	Ch 39	Ch 78	Conclusion
Channel	2402 MHz	2441 MHz	2480 MHz	Conclusion
E.I.R.P (dBm)	13.49	14.25	14.68	Р

Note: E.I.R.P. are calculated with the antenna gain.

Conclusion: PASS

ANT7

For GFSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	14.55	14.07	13.67	Р

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	16.67	16.27	15.97	Р

For 8DPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	17.09	16.81	16.09	Р

Note: E.I.R.P. are calculated with the antenna gain.

Conclusion: PASS

ANT13

For GFSK

Channel	Ch 0	Ch 39	Ch 78	Conclusion
---------	------	-------	-------	------------





	2402 MHz	2441 MHz	2480 MHz	
E.I.R.P (dBm)	3.31	3.65	3.61	Р

Forπ/4 DQPSK

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
E.I.R.P (dBm)	5.65	5.85	6.02	Р

For 8DPSK

Channel	Ch 0	Ch 39	Ch 78	Conducion
Channel	2402 MHz	2441 MHz	2480 MHz	Conclusion
E.I.R.P (dBm)	6.15	6.44	6.20	Р

Note: E.I.R.P. are calculated with the antenna gain.

Conclusion: PASS





B.3. Frequency Band Edges – Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.6

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).

-Span: 10 MHz

Resolution Bandwidth: 100 kHzVideo Bandwidth: 300 kHz

Sweep Time:AutoDetector: PeakTrace: max hold

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel.

Observe the stored trace and measure the amplitude deltabetween the peak of the fundamental and the peak of the band-edge emission. This is not anabsolute field strength measurement; it is only a relative measurement to determine the amount bywhich the emission drops at the band edge relative to the highest fundamental emission level.

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-66.23	Р
0	Hopping ON	Fig.2	-67.46	Р
70	Hopping OFF	Fig.3	-69.79	Р
78	Hopping ON	Fig.4	-70.60	Р

Forπ/4 DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-64.36	Р
U	Hopping ON	Fig.6	-66.02	Р
78	Hopping OFF	Fig.7	-68.20	Р
	Hopping ON	Fig.8	-68.51	Р

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-63.09	Р
U	Hopping ON	Fig.10	-67.66	Р





70	Hopping OFF	Fig.11	-68.77	Р
70	Hopping ON	Fig.12	-67.58	Р

Conclusion: PASS
Test graphs as below

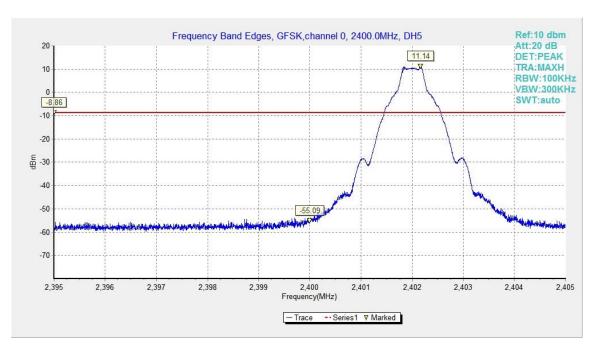


Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

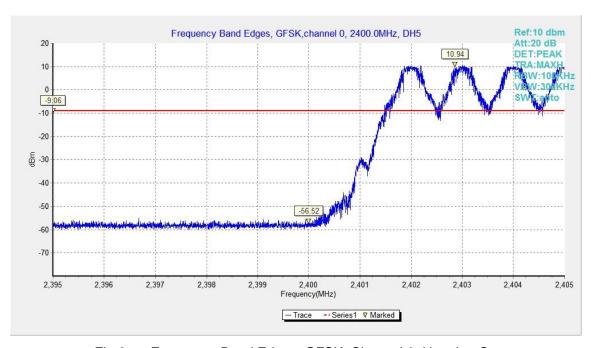


Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On





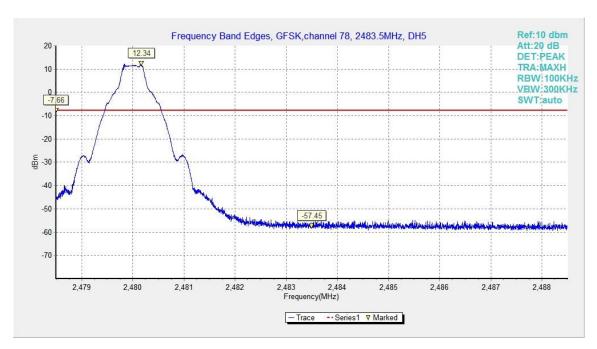


Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

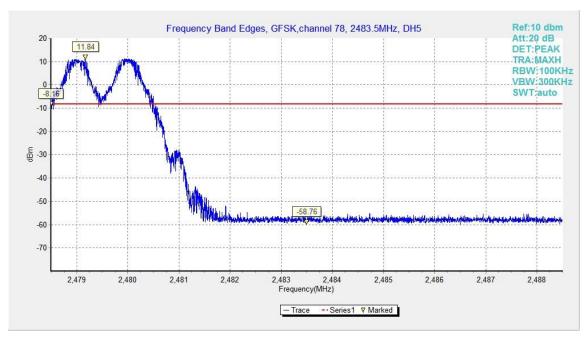


Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On





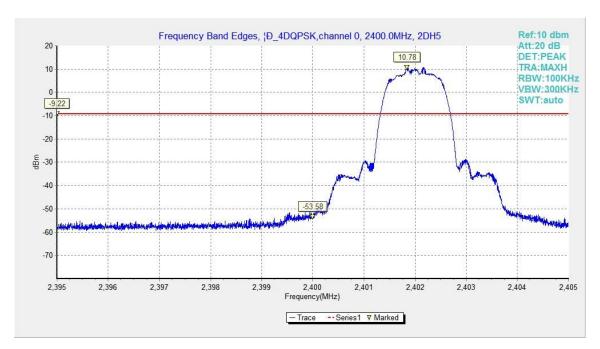


Fig.5. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off

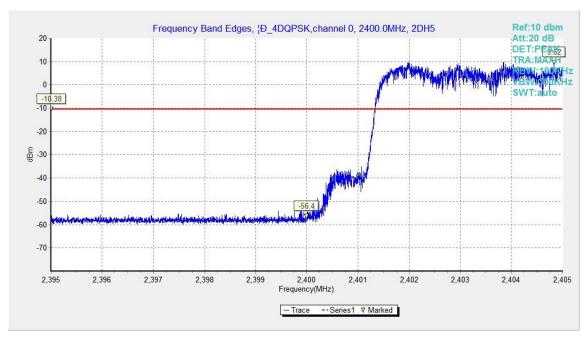


Fig.6. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping On





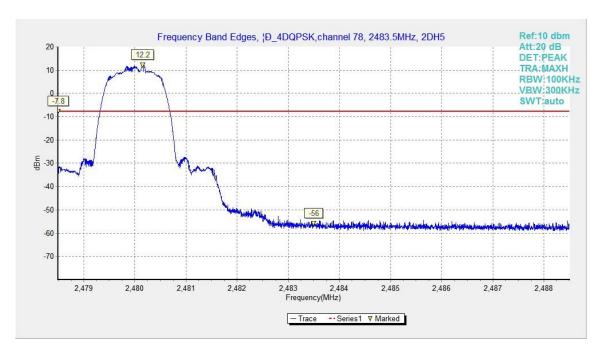


Fig.7. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off

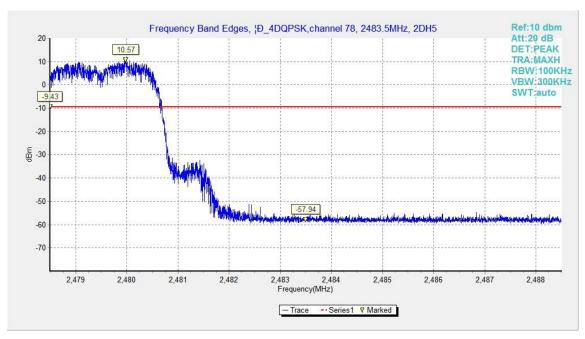


Fig.8. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping On





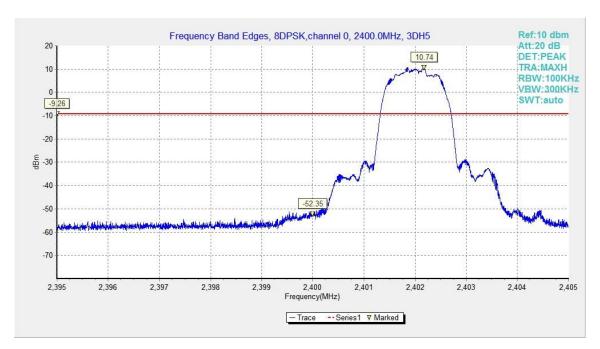


Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

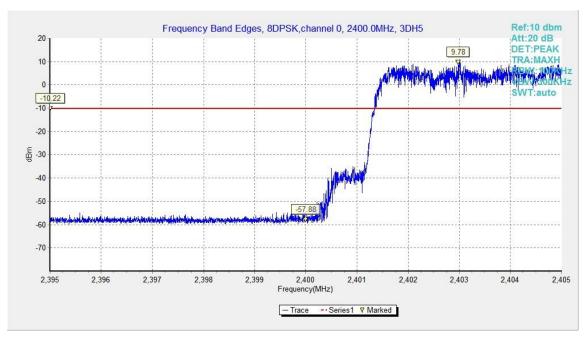


Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On





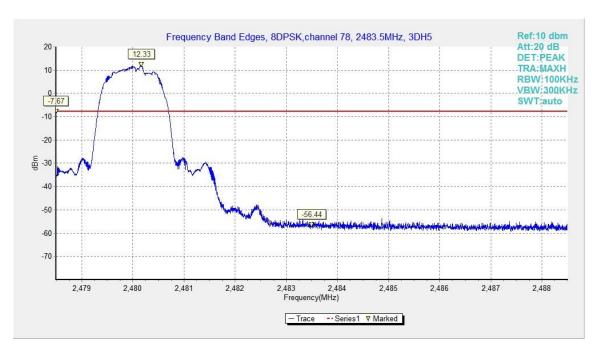


Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

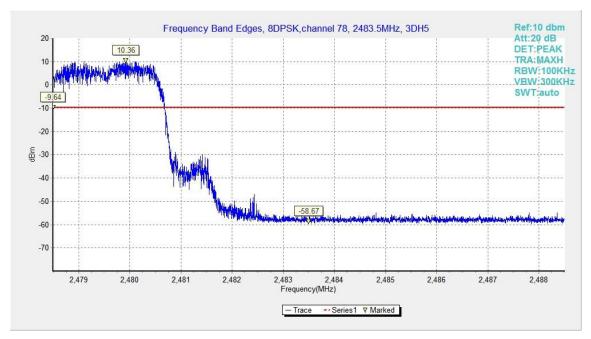


Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On





B.4. Transmitter Spurious Emission - Conducted

Method of Measurement: See ANSI C63.10-clause 7.8.8

Measurement Procedure - Reference Level

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW = 300 kHz.
- 3. Set the span to 5-30 % greater than the EBW.
- 4. Detector = peak.
- 5. Sweep time = auto couple.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

Measurement Procedure - Unwanted Emissions

- 1. Set RBW = 100 kHz.
- 2. Set VBW = 300 kHz.
- 3. Set span to encompass the spectrum to be examined.
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.
- 7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

Measurement Limit:

Standard	Limit	
ECC 47 CED Dort 15 247 (d)	20dB below peak output power in 100 kHz	
FCC 47 CFR Part 15.247 (d)	bandwidth	

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0	Center Frequency	Fig.13	Р





2402 MHz	30 MHz ~ 1 GHz	Fig.14	Р
	1 GHz ~ 3 GHz	Fig.15	Р
	3 GHz ~ 10 GHz	Fig.16	Р
	10 GHz ~ 26 GHz	Fig.17	Р
	Center Frequency	Fig.18	Р
Ch 20	30 MHz ~ 1 GHz	Fig.19	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.20	Р
211111112	3 GHz ~ 10 GHz	Fig.21	Р
	10 GHz ~ 26 GHz	Fig.22	Р
	Center Frequency	Fig.23	Р
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.24	Р
	1 GHz ~ 3 GHz	Fig.25	Р
	3 GHz ~ 10 GHz	Fig.26	Р
	10 GHz ~ 26 GHz	Fig.27	Р

For $\pi/4$ DQPSK

Channel	Frequency Range	Test Results	Conclusion
01.0	Center Frequency	Fig.28	Р
	30 MHz ~ 1 GHz	Fig.29	Р
Ch 0 2402 MHz	1 GHz ~ 3 GHz	Fig.30	Р
2 102 11112	3 GHz ~ 10 GHz	Fig.31	Р
	10 GHz ~ 26 GHz	Fig.32	Р
	Center Frequency	Fig.33	Р
Ch 20	30 MHz ~ 1 GHz	Fig.34	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.35	Р
	3 GHz ~ 10 GHz	Fig.36	Р
	10 GHz ~ 26 GHz	Fig.37	Р
Ch 78 2480 MHz	Center Frequency	Fig.38	Р
	30 MHz ~ 1 GHz	Fig.39	Р
	1 GHz ~ 3 GHz	Fig.40	Р
	3 GHz ~ 10 GHz	Fig.41	Р
	10 GHz ~ 26 GHz	Fig.42	Р

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	Р
	30 MHz ~ 1 GHz	Fig.44	Р
	1 GHz ~ 3 GHz	Fig.45	Р
	3 GHz ~ 10 GHz	Fig.46	Р
	10 GHz ~ 26 GHz	Fig.47	Р





01.00	Center Frequency	Fig.48	Р
	30 MHz ~ 1 GHz	Fig.49	Р
Ch 39 2441 MHz	1 GHz ~ 3 GHz	Fig.50	Р
	3 GHz ~ 10 GHz	Fig.51	Р
	10 GHz ~ 26 GHz	Fig.52	Р
	Center Frequency	Fig.53	Р
Ch 70	30 MHz ~ 1 GHz	Fig.54	Р
Ch 78 2480 MHz	1 GHz ~ 3 GHz	Fig.55	Р
	3 GHz ~ 10 GHz	Fig.56	Р
	10 GHz ~ 26 GHz	Fig.57	Р

Conclusion: PASS
Test graphs as below

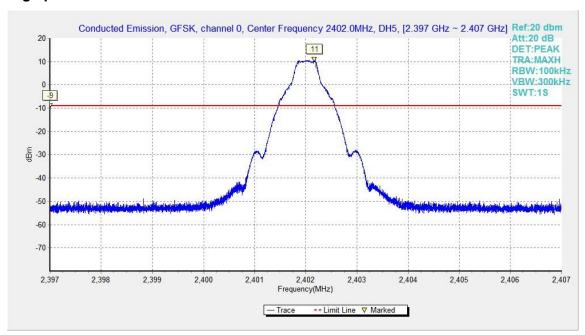


Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz





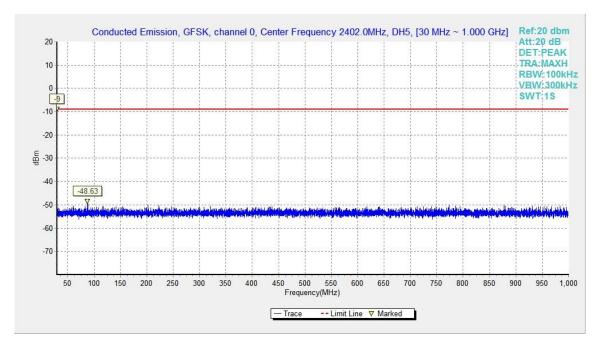


Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

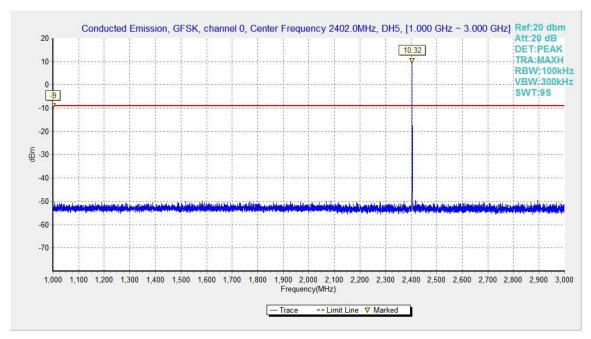


Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz





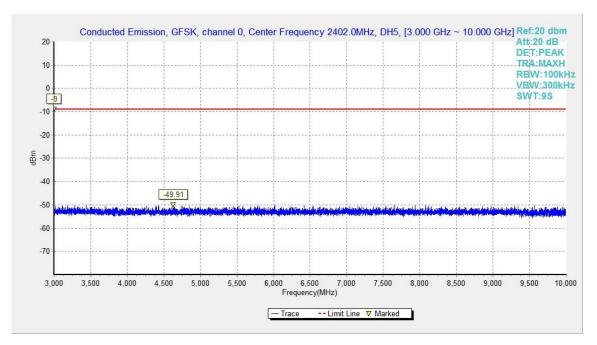


Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

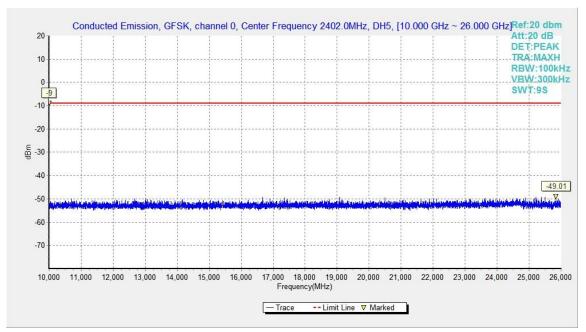


Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz





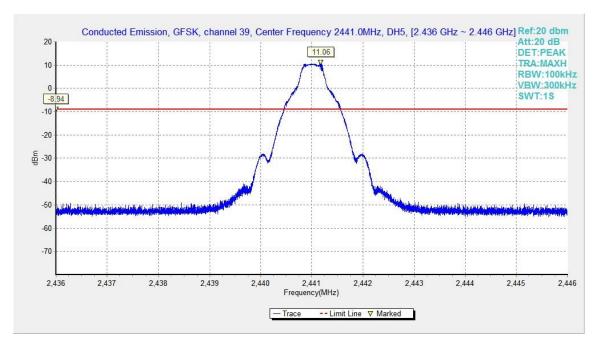


Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

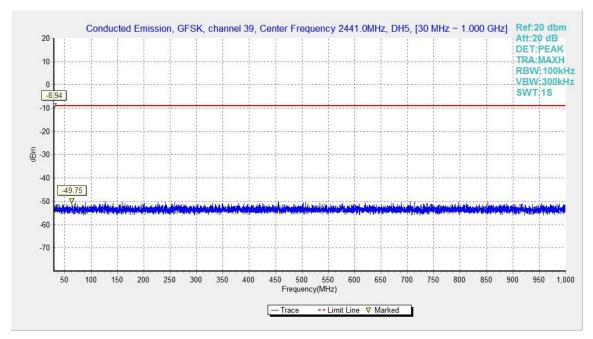


Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz



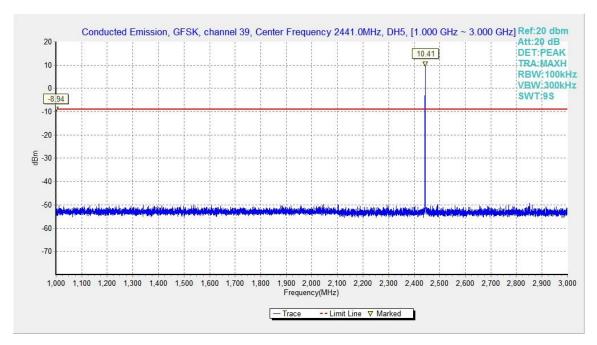


Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

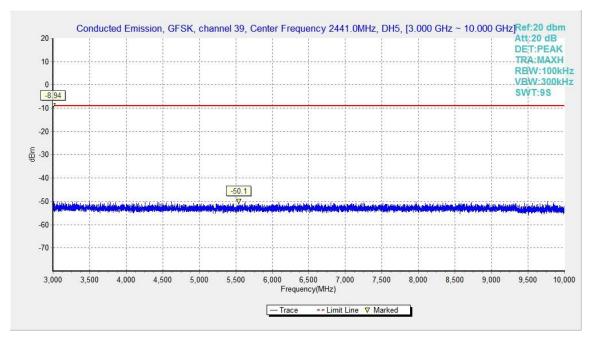


Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz - 10GHz



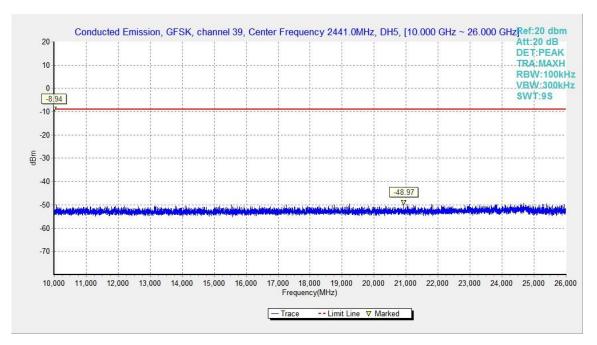


Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

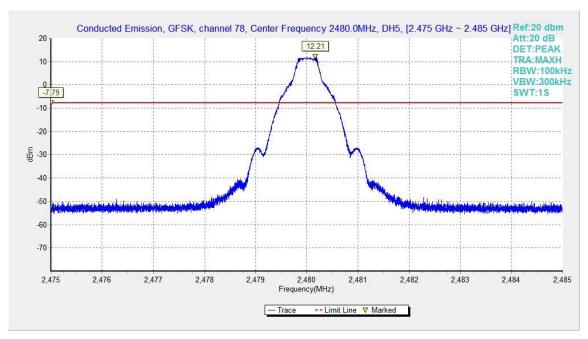


Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz





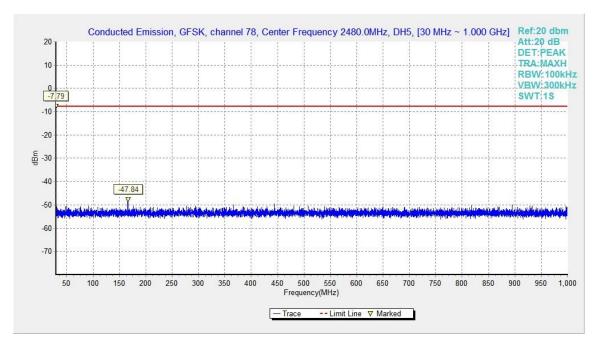


Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

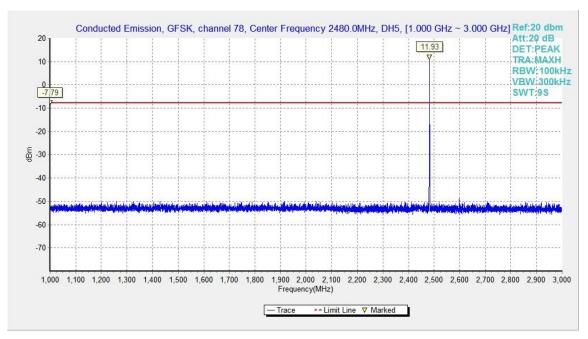


Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz



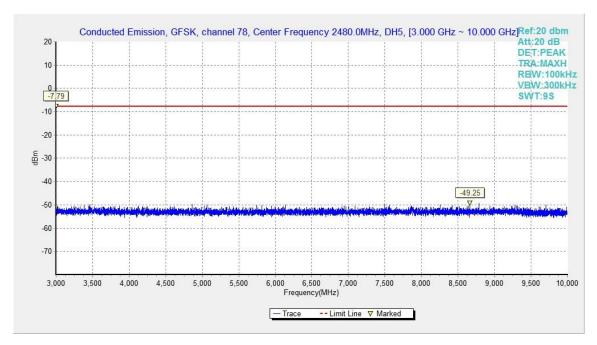


Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

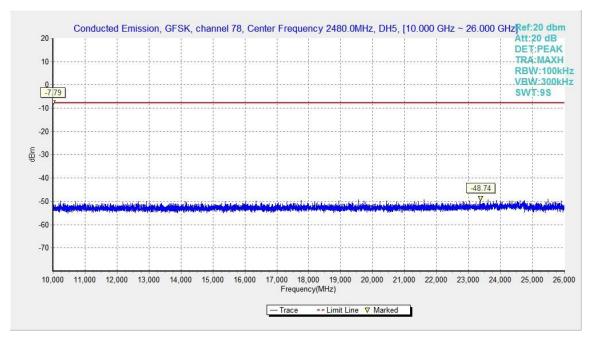


Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz





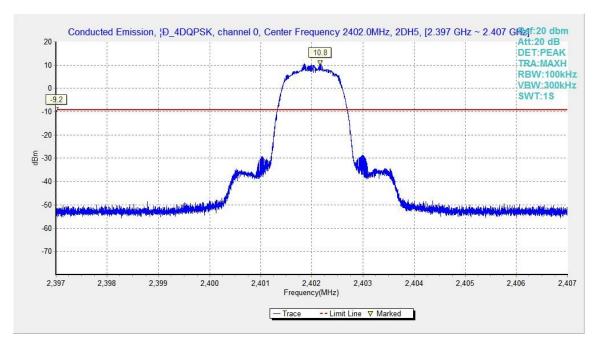


Fig.28. Conducted spurious emission: π/4 DQPSK, Channel 0,2402MHz

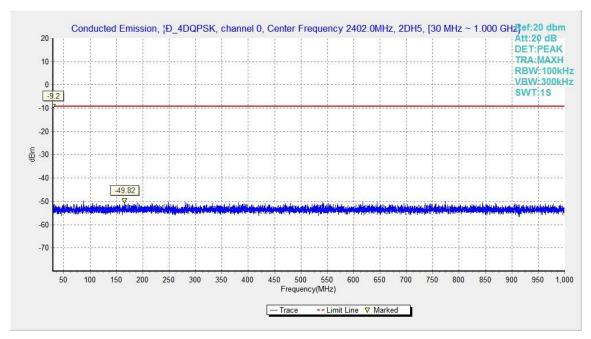


Fig.29. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 30MHz - 1GHz





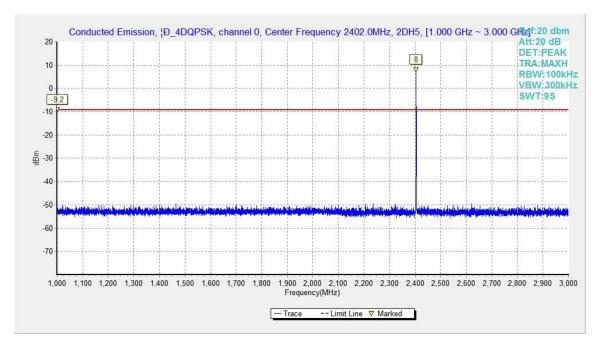


Fig.30. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0, 1GHz - 3GHz

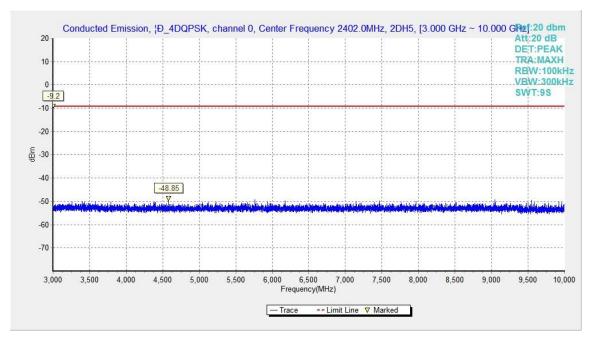


Fig.31. Conducted spurious emission: π/4 DQPSK, Channel 0, 3GHz - 10GHz



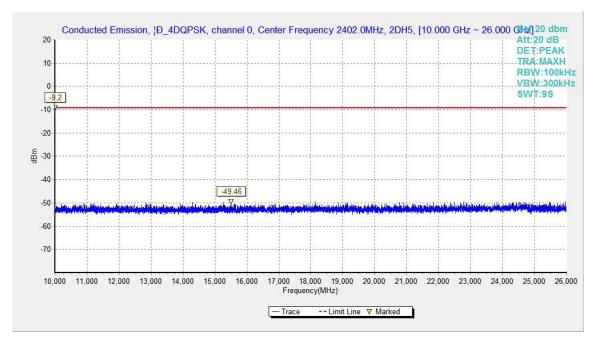


Fig.32. Conducted spurious emission: $\pi/4$ DQPSK, Channel 0,10GHz - 26GHz

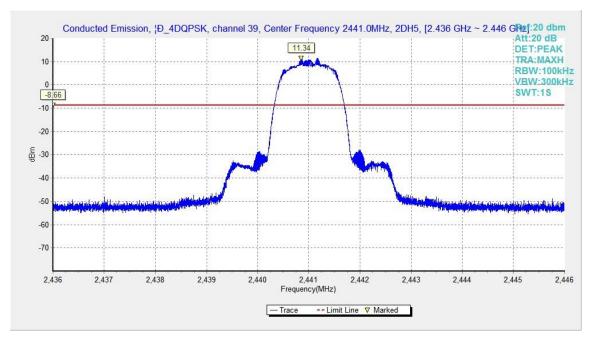


Fig.33. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 2441MHz





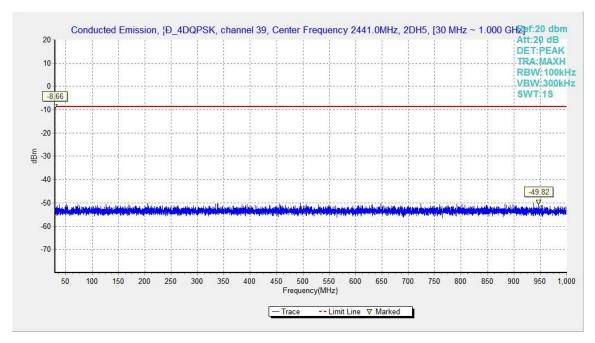


Fig.34. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 30MHz - 1GHz

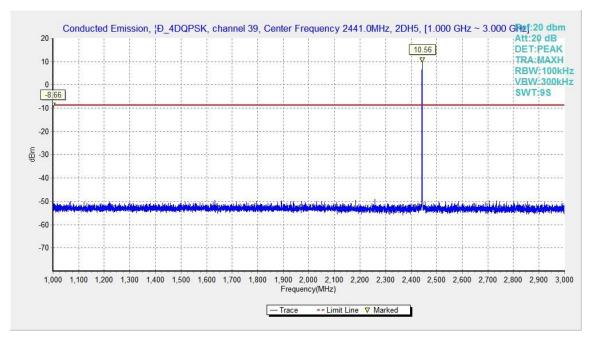


Fig.35. Conducted spurious emission: $\pi/4$ DQPSK, Channel 39, 1GHz - 3GHz



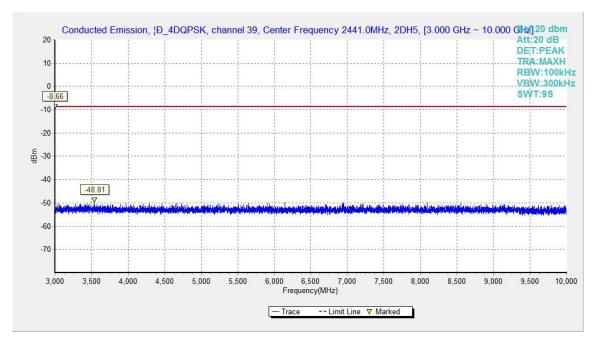


Fig.36. Conducted spurious emission: π/4 DQPSK, Channel 39, 3GHz - 10GHz

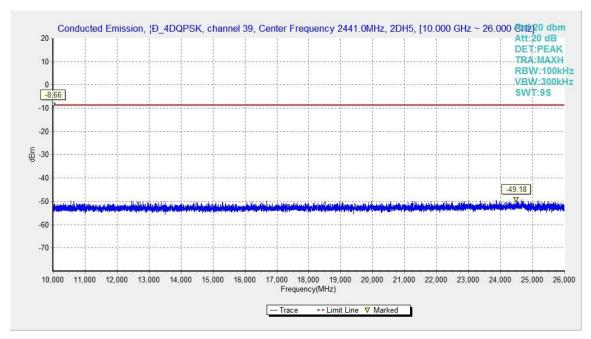


Fig.37. Conducted spurious emission: π/4 DQPSK, Channel 39, 10GHz – 26GHz





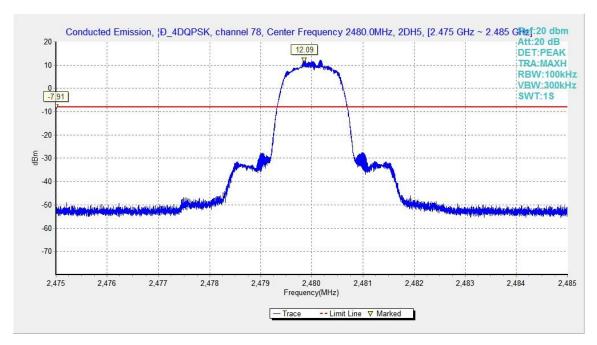


Fig.38. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 2480MHz

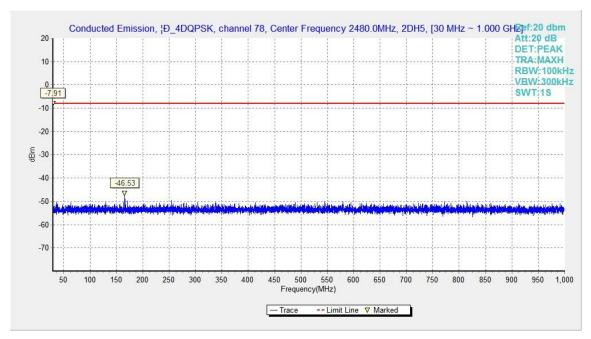


Fig.39. Conducted spurious emission: π/4 DQPSK, Channel 78, 30MHz - 1GHz





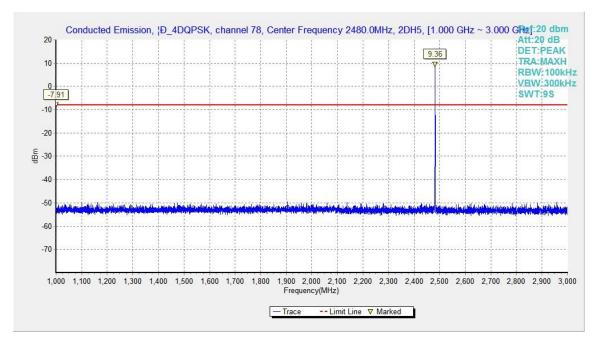


Fig.40. Conducted spurious emission: $\pi/4$ DQPSK, Channel 78, 1GHz - 3GHz

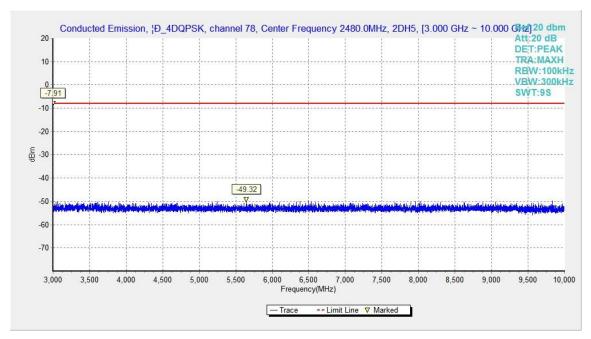


Fig.41. Conducted spurious emission: π/4 DQPSK, Channel 78, 3GHz - 10GHz





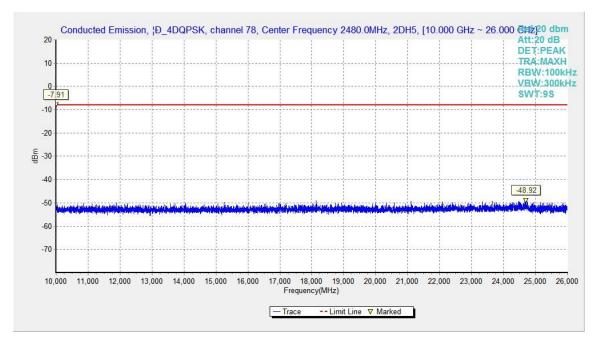


Fig.42. Conducted spurious emission: π/4 DQPSK, Channel 78, 10GHz - 26GHz

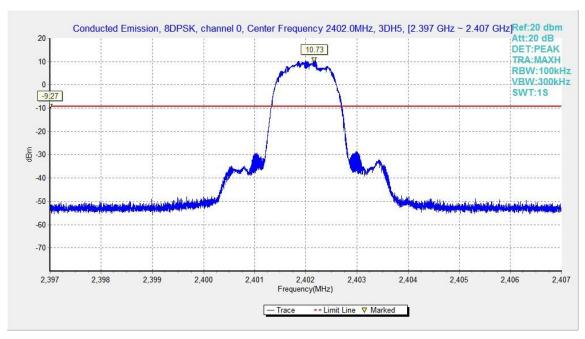


Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz





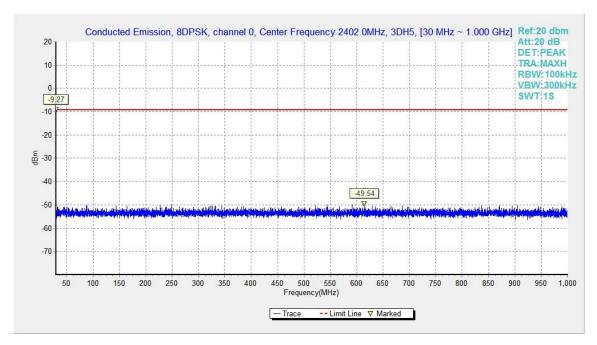


Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

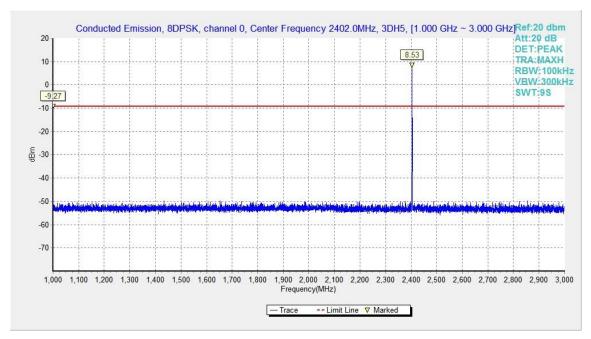


Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz



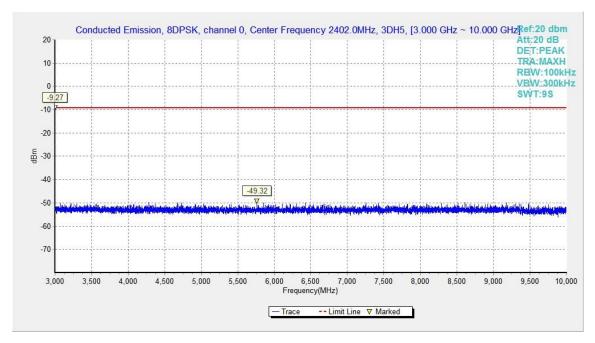


Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

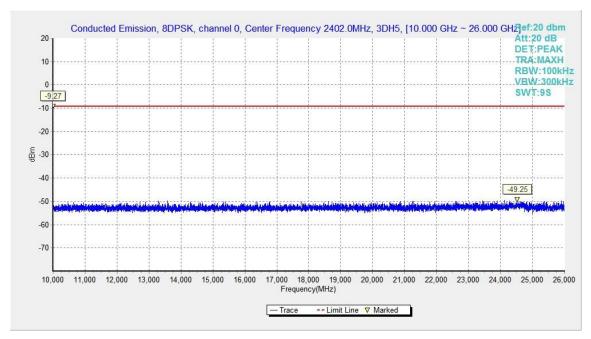


Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz





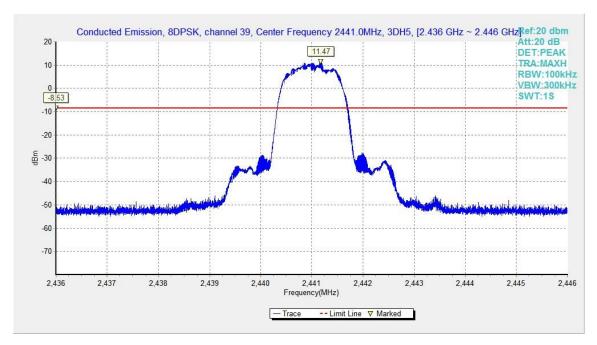


Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

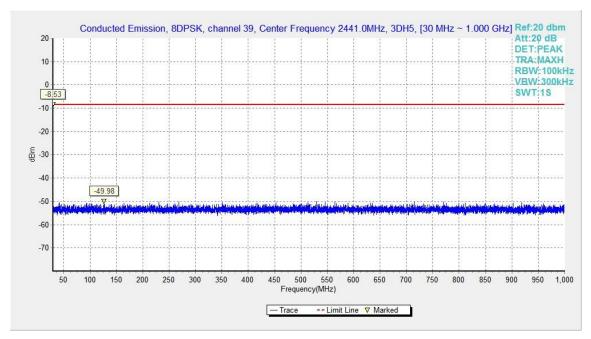


Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz





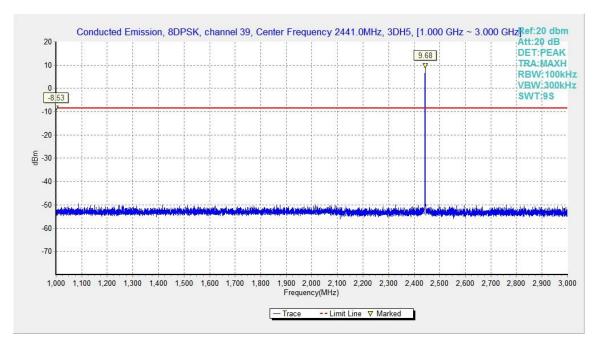


Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

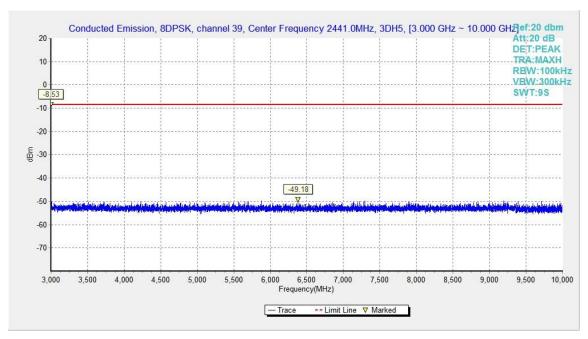


Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz





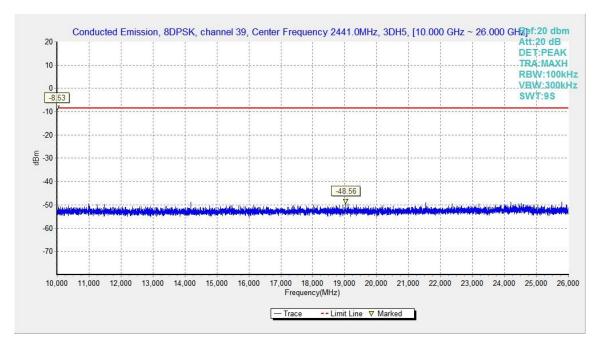


Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

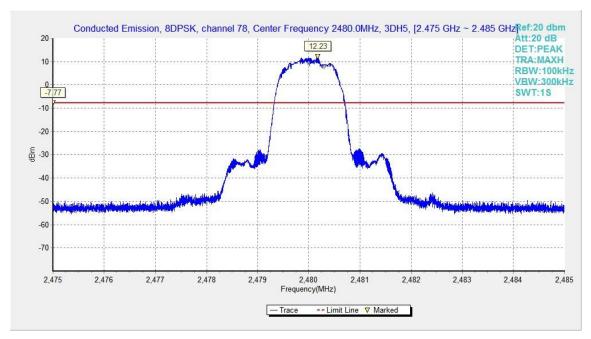


Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz





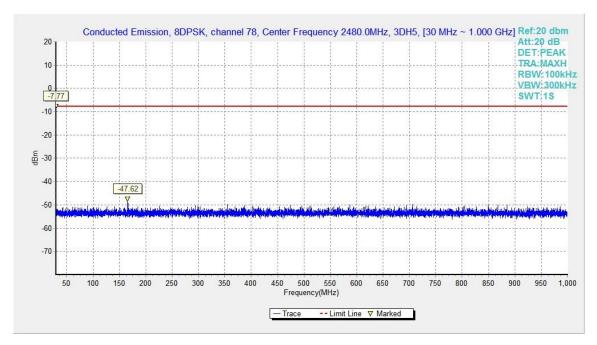


Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

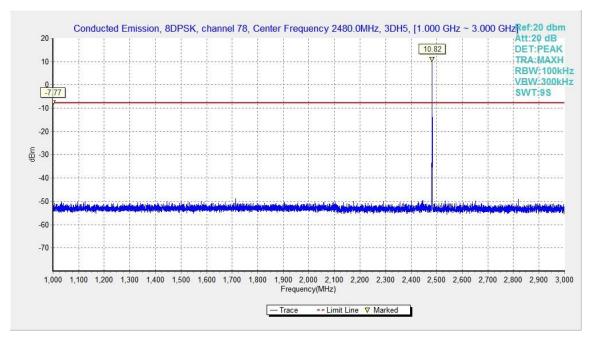


Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz