



Mode	23																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5748.83</td> <td>52.66</td> <td>68.30</td> <td>-15.64</td> <td>38.27</td> <td>35.15</td> <td>11.64</td> <td>32.40</td> <td>389 286 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5748.83	52.66	68.30	-15.64	38.27	35.15	11.64	32.40	389 286 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5748.83	52.66	68.30	-15.64	38.27	35.15	11.64	32.40	389 286 PEAK																														



		24																																																															
Mode		Band Edge - L																																																															
		U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																															
Pol.	Horizontal	Fundamental																																																															
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5454.19 52.29 74.00 -21.71</td> <td>38.54</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>222</td> <td>41 PEAK</td> </tr> <tr> <td>2 5462.51 52.00 68.30 -16.30</td> <td>38.23</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>222</td> <td>41 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5454.19 52.29 74.00 -21.71	38.54	34.81	11.10	32.16	222	41 PEAK	2 5462.51 52.00 68.30 -16.30	38.23	34.81	11.13	32.17	222	41 PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5670.00 98.61</td> <td>84.24</td> <td>35.03</td> <td>11.68</td> <td>32.34</td> <td>222</td> <td>41 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5670.00 98.61	84.24	35.03	11.68	32.34	222	41 PEAK
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5454.19 52.29 74.00 -21.71	38.54	34.81	11.10	32.16	222	41 PEAK																																																											
2 5462.51 52.00 68.30 -16.30	38.23	34.81	11.13	32.17	222	41 PEAK																																																											
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5670.00 98.61	84.24	35.03	11.68	32.34	222	41 PEAK																																																											
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5454.51 43.04 54.00 -10.96</td> <td>29.29</td> <td>34.81</td> <td>11.10</td> <td>32.16</td> <td>222</td> <td>41 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5454.51 43.04 54.00 -10.96	29.29	34.81	11.10	32.16	222	41 AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5670.00 92.12</td> <td>77.75</td> <td>35.03</td> <td>11.68</td> <td>32.34</td> <td>222</td> <td>41 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor					MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5670.00 92.12	77.75	35.03	11.68	32.34	222	41 AVERAGE							
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5454.51 43.04 54.00 -10.96	29.29	34.81	11.10	32.16	222	41 AVERAGE																																																											
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor																																																															
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5670.00 92.12	77.75	35.03	11.68	32.34	222	41 AVERAGE																																																											



Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.77</td> <td>54.12</td> <td>68.30</td> <td>-14.18</td> <td>39.74</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>222 41 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5726.77	54.12	68.30	-14.18	39.74	35.12	11.65	32.39	222 41 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5726.77	54.12	68.30	-14.18	39.74	35.12	11.65	32.39	222 41 PEAK																														







		24																																																								
Mode		Band Edge - L																																																								
		U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																								
Pol.	Vertical	Fundamental																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5410.64 51.97 74.00 -22.03</td> <td>38.33</td> <td>34.82</td> <td>10.92</td> <td>32.10</td> <td>381</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>2 5460.27 50.99 68.30 -17.31</td> <td>37.23</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>381</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5410.64 51.97 74.00 -22.03	38.33	34.82	10.92	32.10	381	89	PEAK	2 5460.27 50.99 68.30 -17.31	37.23	34.81	11.12	32.17	381	89	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5670.00 97.53 -</td> <td>83.15</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>381</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5670.00 97.53 -	83.15	35.04	11.68	32.34	381	89	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5410.64 51.97 74.00 -22.03	38.33	34.82	10.92	32.10	381	89	PEAK																																																			
2 5460.27 50.99 68.30 -17.31	37.23	34.81	11.12	32.17	381	89	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5670.00 97.53 -	83.15	35.04	11.68	32.34	381	89	PEAK																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5405.52 42.87 54.00 -11.13</td> <td>29.25</td> <td>34.82</td> <td>10.90</td> <td>32.10</td> <td>381</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5405.52 42.87 54.00 -11.13	29.25	34.82	10.90	32.10	381	89	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5670.00 91.19 -</td> <td>76.81</td> <td>35.04</td> <td>11.68</td> <td>32.34</td> <td>381</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5670.00 91.19 -	76.81	35.04	11.68	32.34	381	89	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5405.52 42.87 54.00 -11.13	29.25	34.82	10.90	32.10	381	89	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5670.00 91.19 -	76.81	35.04	11.68	32.34	381	89	AVERAGE																																																			



Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.10</td> <td>53.17</td> <td>68.30</td> <td>-15.13</td> <td>38.79</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>381 89 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5728.10	53.17	68.30	-15.13	38.79	35.12	11.65	32.39	381 89 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5728.10	53.17	68.30	-15.13	38.79	35.12	11.65	32.39	381 89 PEAK																														

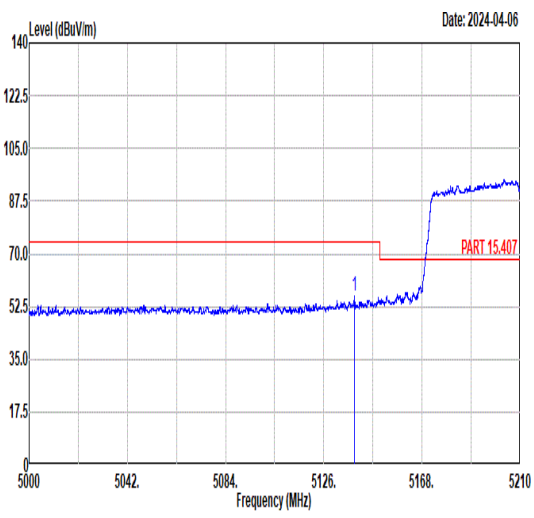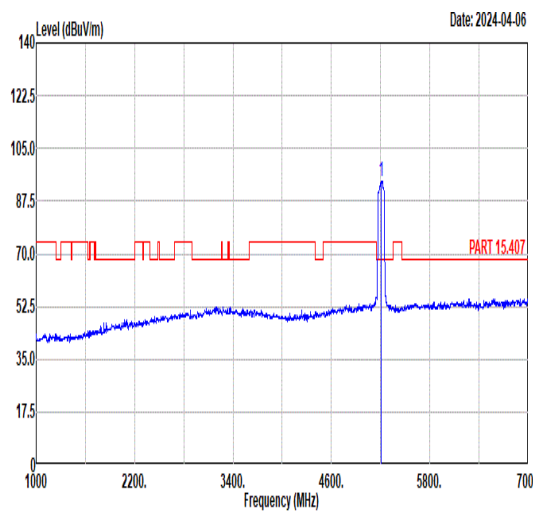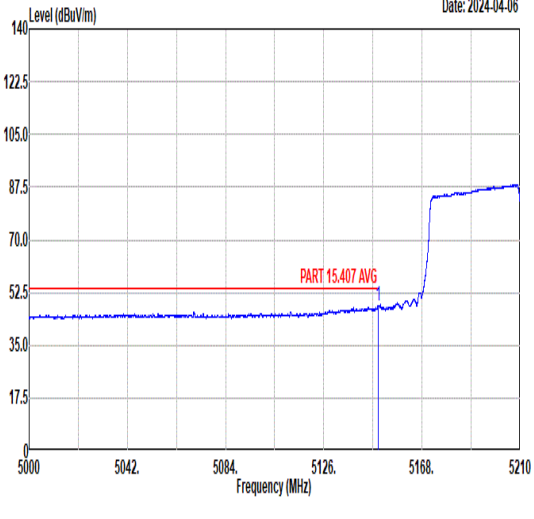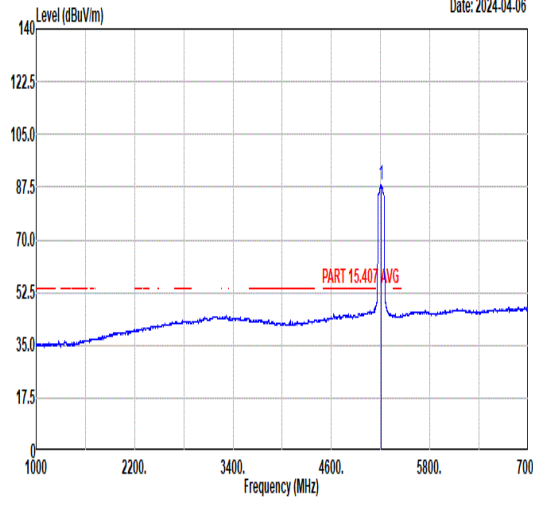

		25																																																																														
Mode		Band Edge - L																																																																														
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																														
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.15</td> <td>56.16</td> <td>74.00</td> <td>-17.84</td> <td>41.97</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>232</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5139.15	56.16	74.00	-17.84	41.97	34.87	11.09	31.77	232	45	PEAK	 <p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>93.99</td> <td>-----</td> <td>-----</td> <td>79.96</td> <td>34.86</td> <td>11.04</td> <td>31.87</td> <td>232</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	93.99	-----	-----	79.96	34.86	11.04	31.87	232	45	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5139.15	56.16	74.00	-17.84	41.97	34.87	11.09	31.77	232	45	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	93.99	-----	-----	79.96	34.86	11.04	31.87	232	45	PEAK																																																																					
Avg	 <p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.44</td> <td>48.09</td> <td>54.00</td> <td>-5.91</td> <td>33.91</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>232</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.44	48.09	54.00	-5.91	33.91	34.87	11.09	31.78	232	45	AVERAGE	 <p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.38</td> <td>-----</td> <td>-----</td> <td>74.32</td> <td>34.86</td> <td>11.05</td> <td>31.85</td> <td>232</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	88.38	-----	-----	74.32	34.86	11.05	31.85	232	45	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5149.44	48.09	54.00	-5.91	33.91	34.87	11.09	31.78	232	45	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5210.00	88.38	-----	-----	74.32	34.86	11.05	31.85	232	45	AVERAGE																																																																					



		25																																									
Mode		Band Edge - R																																									
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																									
Pol.	Horizontal	Fundamental																																									
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5385.88</td> <td>52.67</td> <td>74.00</td> <td>-21.33</td> <td>39.00</td> <td>34.82</td> <td>10.92</td> <td>32.07</td> <td>232</td> <td>45</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5385.88	52.67	74.00	-21.33	39.00	34.82	10.92	32.07	232	45	PEAK	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5385.88	52.67	74.00	-21.33	39.00	34.82	10.92	32.07	232	45	PEAK																																
Avg	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.15</td> <td>44.41</td> <td>54.00</td> <td>-9.59</td> <td>30.67</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>232</td> <td>45</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5354.15	44.41	54.00	-9.59	30.67	34.83	10.94	32.03	232	45	AVERAGE	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5354.15	44.41	54.00	-9.59	30.67	34.83	10.94	32.03	232	45	AVERAGE																																



		25																																																																												
Mode		Band Edge - L																																																																												
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																												
Pol.	Vertical	Fundamental																																																																												
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.15</td> <td>54.06</td> <td>74.00</td> <td>-19.94</td> <td>39.87</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>330</td> <td>92 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5139.15	54.06	74.00	-19.94	39.87	34.87	11.09	31.77	330	92 PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>90.07</td> <td>-----</td> <td>-----</td> <td>75.99</td> <td>34.86</td> <td>11.06</td> <td>31.84</td> <td>330</td> <td>92 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	90.07	-----	-----	75.99	34.86	11.06	31.84	330	92 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5139.15	54.06	74.00	-19.94	39.87	34.87	11.09	31.77	330	92 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5210.00	90.07	-----	-----	75.99	34.86	11.06	31.84	330	92 PEAK																																																																				
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.98</td> <td>47.17</td> <td>54.00</td> <td>-6.83</td> <td>33.00</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>330</td> <td>92 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.98	47.17	54.00	-6.83	33.00	34.87	11.08	31.78	330	92 AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>84.33</td> <td>-----</td> <td>-----</td> <td>70.25</td> <td>34.86</td> <td>11.06</td> <td>31.84</td> <td>330</td> <td>92 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	84.33	-----	-----	70.25	34.86	11.06	31.84	330	92 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5149.98	47.17	54.00	-6.83	33.00	34.87	11.08	31.78	330	92 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5210.00	84.33	-----	-----	70.25	34.86	11.06	31.84	330	92 AVERAGE																																																																				



		25																																								
Mode		Band Edge - R																																								
		U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																								
Pol.	Vertical	Fundamental																																								
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.38</td> <td>51.73</td> <td>74.00</td> <td>-22.27</td> <td>38.00</td> <td>34.81</td> <td>11.07</td> <td>32.15</td> <td>330</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5447.38	51.73	74.00	-22.27	38.00	34.81	11.07	32.15	330	92	PEAK	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5447.38	51.73	74.00	-22.27	38.00	34.81	11.07	32.15	330	92	PEAK																															
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.88</td> <td>44.37</td> <td>54.00</td> <td>-9.63</td> <td>30.61</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>330</td> <td>92</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.88	44.37	54.00	-9.63	30.61	34.81	11.12	32.17	330	92	AVERAGE	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5459.88	44.37	54.00	-9.63	30.61	34.81	11.12	32.17	330	92	AVERAGE																															



		26																																																
Mode		Band Edge - L																																																
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																
Pol.	Horizontal	Fundamental																																																
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5041.64 53.25 74.00 -20.75</td> <td>38.86</td> <td>34.89</td> <td>11.15</td> <td>31.65</td> <td>228</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		5041.64 53.25 74.00 -20.75	38.86	34.89	11.15	31.65	228	47	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5290.00 94.05 -----</td> <td>80.15</td> <td>34.84</td> <td>11.00</td> <td>31.94</td> <td>228</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		5290.00 94.05 -----	80.15	34.84	11.00	31.94	228	47	PEAK
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																												
5041.64 53.25 74.00 -20.75	38.86	34.89	11.15	31.65	228	47	PEAK																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																												
5290.00 94.05 -----	80.15	34.84	11.00	31.94	228	47	PEAK																																											
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5090.05 45.69 54.00 -8.31</td> <td>31.40</td> <td>34.88</td> <td>11.12</td> <td>31.71</td> <td>228</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		5090.05 45.69 54.00 -8.31	31.40	34.88	11.12	31.71	228	47	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5290.00 87.30 -----</td> <td>73.42</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>228</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		5290.00 87.30 -----	73.42	34.84	10.99	31.95	228	47	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																												
5090.05 45.69 54.00 -8.31	31.40	34.88	11.12	31.71	228	47	AVERAGE																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																												
5290.00 87.30 -----	73.42	34.84	10.99	31.95	228	47	AVERAGE																																											



		26																																								
Mode	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																									
Pol.	Horizontal		Fundamental																																							
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.00</td> <td>54.08</td> <td>74.00</td> <td>-19.92</td> <td>40.34</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>228</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5353.00	54.08	74.00	-19.92	40.34	34.83	10.94	32.03	228	47	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5353.00	54.08	74.00	-19.92	40.34	34.83	10.94	32.03	228	47	PEAK																															
Avg	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.96</td> <td>47.02</td> <td>54.00</td> <td>-6.98</td> <td>33.28</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>228</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5350.96	47.02	54.00	-6.98	33.28	34.83	10.94	32.03	228	47	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5350.96	47.02	54.00	-6.98	33.28	34.83	10.94	32.03	228	47	AVERAGE																															



		26																																																																														
Mode		Band Edge - L																																																																														
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																														
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5031.47</td> <td>52.54</td> <td>74.00</td> <td>-21.46</td> <td>38.13</td> <td>34.89</td> <td>11.15</td> <td>31.63</td> <td>341</td> <td>88</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5031.47	52.54	74.00	-21.46	38.13	34.89	11.15	31.63	341	88	PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>89.71</td> <td>-----</td> <td>-----</td> <td>75.86</td> <td>34.84</td> <td>10.98</td> <td>31.97</td> <td>341</td> <td>88</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	89.71	-----	-----	75.86	34.84	10.98	31.97	341	88	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5031.47	52.54	74.00	-21.46	38.13	34.89	11.15	31.63	341	88	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5290.00	89.71	-----	-----	75.86	34.84	10.98	31.97	341	88	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5105.15</td> <td>45.47</td> <td>54.00</td> <td>-8.53</td> <td>31.21</td> <td>34.88</td> <td>11.11</td> <td>31.73</td> <td>341</td> <td>88</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5105.15	45.47	54.00	-8.53	31.21	34.88	11.11	31.73	341	88	AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>83.21</td> <td>-----</td> <td>-----</td> <td>69.34</td> <td>34.84</td> <td>10.99</td> <td>31.96</td> <td>341</td> <td>88</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	83.21	-----	-----	69.34	34.84	10.99	31.96	341	88	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5105.15	45.47	54.00	-8.53	31.21	34.88	11.11	31.73	341	88	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5290.00	83.21	-----	-----	69.34	34.84	10.99	31.96	341	88	AVERAGE																																																																					



		26																																								
Mode		Band Edge - R																																								
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																								
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.44</td> <td>53.41</td> <td>74.00</td> <td>-20.59</td> <td>39.67</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>341</td> <td>88</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5350.44	53.41	74.00	-20.59	39.67	34.83	10.94	32.03	341	88	PEAK	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5350.44	53.41	74.00	-20.59	39.67	34.83	10.94	32.03	341	88	PEAK																															
Avg	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>46.01</td> <td>54.00</td> <td>-7.99</td> <td>32.27</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>341</td> <td>88</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5350.10	46.01	54.00	-7.99	32.27	34.83	10.94	32.03	341	88	AVERAGE	Blank	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																		
1	5350.10	46.01	54.00	-7.99	32.27	34.83	10.94	32.03	341	88	AVERAGE																															



		27																																																																								
Mode		Band Edge - L																																																																								
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																								
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.47 52.50 74.00 -21.50</td> <td>38.74</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>278</td> <td>49</td> <td>PEAK</td> </tr> <tr> <td>2 5465.13 53.78 68.30 -14.52</td> <td>40.00</td> <td>34.81</td> <td>11.14</td> <td>32.17</td> <td>278</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5458.47 52.50 74.00 -21.50	38.74	34.81	11.11	32.16	278	49	PEAK	2 5465.13 53.78 68.30 -14.52	40.00	34.81	11.14	32.17	278	49	PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 93.63 -</td> <td>79.56</td> <td>34.86</td> <td>11.45</td> <td>32.24</td> <td>278</td> <td>49</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5530.00 93.63 -	79.56	34.86	11.45	32.24	278	49	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5458.47 52.50 74.00 -21.50	38.74	34.81	11.11	32.16	278	49	PEAK																																																																			
2 5465.13 53.78 68.30 -14.52	40.00	34.81	11.14	32.17	278	49	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5530.00 93.63 -	79.56	34.86	11.45	32.24	278	49	PEAK																																																																			
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5451.27 45.05 54.00 -8.95</td> <td>31.31</td> <td>34.81</td> <td>11.08</td> <td>32.15</td> <td>278</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5451.27 45.05 54.00 -8.95	31.31	34.81	11.08	32.15	278	49	AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 86.89 -</td> <td>72.88</td> <td>34.84</td> <td>11.40</td> <td>32.23</td> <td>278</td> <td>49</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5530.00 86.89 -	72.88	34.84	11.40	32.23	278	49	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5451.27 45.05 54.00 -8.95	31.31	34.81	11.08	32.15	278	49	AVERAGE																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5530.00 86.89 -	72.88	34.84	11.40	32.23	278	49	AVERAGE																																																																			



Mode	27																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5734.12</td> <td>52.93</td> <td>68.30</td> <td>-15.37</td> <td>38.54</td> <td>35.13</td> <td>11.65</td> <td>32.39</td> <td>278 49 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5734.12	52.93	68.30	-15.37	38.54	35.13	11.65	32.39	278 49 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss Factor			Remark																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5734.12	52.93	68.30	-15.37	38.54	35.13	11.65	32.39	278 49 PEAK																														



		27																																																																								
Mode		Band Edge - L																																																																								
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																								
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5453.05 52.33 74.00 -21.67</td> <td>38.59</td> <td>34.81</td> <td>11.09</td> <td>32.16</td> <td>400</td> <td>86</td> <td>PEAK</td> </tr> <tr> <td>2 5468.35 52.54 68.30 -15.76</td> <td>38.76</td> <td>34.81</td> <td>11.15</td> <td>32.18</td> <td>400</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5453.05 52.33 74.00 -21.67	38.59	34.81	11.09	32.16	400	86	PEAK	2 5468.35 52.54 68.30 -15.76	38.76	34.81	11.15	32.18	400	86	PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 91.17 -----</td> <td>77.20</td> <td>34.83</td> <td>11.37</td> <td>32.23</td> <td>400</td> <td>86</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5530.00 91.17 -----	77.20	34.83	11.37	32.23	400	86	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5453.05 52.33 74.00 -21.67	38.59	34.81	11.09	32.16	400	86	PEAK																																																																			
2 5468.35 52.54 68.30 -15.76	38.76	34.81	11.15	32.18	400	86	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5530.00 91.17 -----	77.20	34.83	11.37	32.23	400	86	PEAK																																																																			
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.75 44.52 54.00 -9.48</td> <td>30.76</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>400</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5457.75 44.52 54.00 -9.48	30.76	34.81	11.11	32.16	400	86	AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5530.00 85.73 -----</td> <td>71.69</td> <td>34.85</td> <td>11.42</td> <td>32.23</td> <td>400</td> <td>86</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5530.00 85.73 -----	71.69	34.85	11.42	32.23	400	86	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5457.75 44.52 54.00 -9.48	30.76	34.81	11.11	32.16	400	86	AVERAGE																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5530.00 85.73 -----	71.69	34.85	11.42	32.23	400	86	AVERAGE																																																																			



Mode	27																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5749.87</td> <td>52.82</td> <td>68.30</td> <td>-15.48</td> <td>38.44</td> <td>35.15</td> <td>11.64</td> <td>32.41</td> <td>400 86 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5749.87	52.82	68.30	-15.48	38.44	35.15	11.64	32.41	400 86 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5749.87	52.82	68.30	-15.48	38.44	35.15	11.64	32.41	400 86 PEAK																														



		28																																																								
Mode		Band Edge - L																																																								
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																								
Pol.	Horizontal	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5456.47 54.38 74.00 -19.62</td> <td>40.62</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>227</td> <td>50</td> <td>PEAK</td> </tr> <tr> <td>2 5468.98 55.17 68.30 -13.13</td> <td>41.38</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>227</td> <td>50</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5456.47 54.38 74.00 -19.62	40.62	34.81	11.11	32.16	227	50	PEAK	2 5468.98 55.17 68.30 -13.13	41.38	34.81	11.16	32.18	227	50	PEAK	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5610.00 98.86 -</td> <td>84.49</td> <td>34.96</td> <td>11.71</td> <td>32.30</td> <td>227</td> <td>50</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5610.00 98.86 -	84.49	34.96	11.71	32.30	227	50	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5456.47 54.38 74.00 -19.62	40.62	34.81	11.11	32.16	227	50	PEAK																																																			
2 5468.98 55.17 68.30 -13.13	41.38	34.81	11.16	32.18	227	50	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5610.00 98.86 -	84.49	34.96	11.71	32.30	227	50	PEAK																																																			
Avg	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.02 45.81 54.00 -8.19</td> <td>32.05</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>227</td> <td>50</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5457.02 45.81 54.00 -8.19	32.05	34.81	11.11	32.16	227	50	AVERAGE	<p style="text-align: right;">Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5610.00 92.70 -</td> <td>78.33</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>227</td> <td>50</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5610.00 92.70 -	78.33	34.95	11.71	32.29	227	50	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5457.02 45.81 54.00 -8.19	32.05	34.81	11.11	32.16	227	50	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5610.00 92.70 -	78.33	34.95	11.71	32.29	227	50	AVERAGE																																																			



Mode	28																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5729.27</td> <td>57.07</td> <td>68.30</td> <td>-11.23</td> <td>42.69</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>227</td> <td>50 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5729.27	57.07	68.30	-11.23	42.69	35.12	11.65	32.39	227	50 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	5729.27	57.07	68.30	-11.23	42.69	35.12	11.65	32.39	227	50 PEAK																														



		28																																																																								
Mode		Band Edge - L																																																																								
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																								
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Margin</th> <th>Line</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.85</td> <td>54.16</td> <td>74.00</td> <td>-19.84</td> <td>40.40</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>380</td> <td>89 PEAK</td> </tr> <tr> <td>2</td> <td>5461.44</td> <td>54.36</td> <td>68.30</td> <td>-13.94</td> <td>40.59</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>380</td> <td>89 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5459.85	54.16	74.00	-19.84	40.40	34.81	11.12	32.17	380	89 PEAK	2	5461.44	54.36	68.30	-13.94	40.59	34.81	11.13	32.17	380	89 PEAK	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Margin</th> <th>Line</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>95.70</td> <td>-----</td> <td>81.35</td> <td>34.94</td> <td>11.70</td> <td>32.29</td> <td>380</td> <td>89 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	95.70	-----	81.35	34.94	11.70	32.29	380	89 PEAK
Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5459.85	54.16	74.00	-19.84	40.40	34.81	11.12	32.17	380	89 PEAK																																																																
2	5461.44	54.36	68.30	-13.94	40.59	34.81	11.13	32.17	380	89 PEAK																																																																
Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5610.00	95.70	-----	81.35	34.94	11.70	32.29	380	89 PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Margin</th> <th>Line</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.28</td> <td>45.89</td> <td>54.00</td> <td>-8.11</td> <td>32.13</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>380</td> <td>89 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5457.28	45.89	54.00	-8.11	32.13	34.81	11.11	32.16	380	89 AVERAGE	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit Margin</th> <th>Line</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>89.68</td> <td>-----</td> <td>75.31</td> <td>34.95</td> <td>11.71</td> <td>32.29</td> <td>380</td> <td>89 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	89.68	-----	75.31	34.95	11.71	32.29	380	89 AVERAGE											
Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5457.28	45.89	54.00	-8.11	32.13	34.81	11.11	32.16	380	89 AVERAGE																																																																
Freq	Level	Limit Margin	Line	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5610.00	89.68	-----	75.31	34.95	11.71	32.29	380	89 AVERAGE																																																																	



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-06</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5730.20</td> <td>56.07</td> <td>68.30</td> <td>-12.23</td> <td>41.69</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>380 89 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5730.20	56.07	68.30	-12.23	41.69	35.12	11.65	32.39	380 89 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5730.20	56.07	68.30	-12.23	41.69	35.12	11.65	32.39	380 89 PEAK																														



		29																																																																																																																			
Mode	Band Edge																																																																																																																				
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																				
Pol.	Horizontal		Fundamental																																																																																																																		
Peak																																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.37</td> <td>54.14</td> <td>68.30</td> <td>-14.16</td> <td>39.77</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>273</td> <td>55 PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>53.00</td> <td>68.43</td> <td>-15.43</td> <td>38.63</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>273</td> <td>55 PEAK</td> </tr> <tr> <td>3</td> <td>5717.60</td> <td>71.07</td> <td>110.13</td> <td>-39.06</td> <td>56.69</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>55 PEAK</td> </tr> <tr> <td>4</td> <td>5720.06</td> <td>70.32</td> <td>110.94</td> <td>-40.62</td> <td>55.93</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>55 PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB				1	5644.37	54.14	68.30	-14.16	39.77	35.00	11.69	32.32	273	55 PEAK	2	5650.17	53.00	68.43	-15.43	38.63	35.01	11.69	32.33	273	55 PEAK	3	5717.60	71.07	110.13	-39.06	56.69	35.10	11.66	32.38	273	55 PEAK	4	5720.06	70.32	110.94	-40.62	55.93	35.11	11.66	32.38	273	55 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.21</td> <td>-----</td> <td>-----</td> <td>93.83</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>273</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB				1	5745.00	108.21	-----	-----	93.83	35.14	11.64	32.40	273
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB																																																																																																															
1	5644.37	54.14	68.30	-14.16	39.77	35.00	11.69	32.32	273	55 PEAK																																																																																																											
2	5650.17	53.00	68.43	-15.43	38.63	35.01	11.69	32.33	273	55 PEAK																																																																																																											
3	5717.60	71.07	110.13	-39.06	56.69	35.10	11.66	32.38	273	55 PEAK																																																																																																											
4	5720.06	70.32	110.94	-40.62	55.93	35.11	11.66	32.38	273	55 PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB																																																																																																															
1	5745.00	108.21	-----	-----	93.83	35.14	11.64	32.40	273	55 PEAK																																																																																																											
Avg	Blank																																																																																																																				
			<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.80</td> <td>-----</td> <td>-----</td> <td>86.42</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>273</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB				1	5745.00	100.80	-----	-----	86.42	35.14	11.64	32.40	273	55 AVERAGE																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB																																																																																																															
1	5745.00	100.80	-----	-----	86.42	35.14	11.64	32.40	273	55 AVERAGE																																																																																																											



		29																																																																																																																				
Mode	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5627.55</td> <td>53.74</td> <td>68.30</td> <td>-14.56</td> <td>39.37</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>356</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>51.60</td> <td>68.43</td> <td>-16.83</td> <td>37.23</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>356</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5718.32</td> <td>69.94</td> <td>110.33</td> <td>-40.39</td> <td>55.55</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>356</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.93</td> <td>75.64</td> <td>112.92</td> <td>-37.28</td> <td>61.25</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>356</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5627.55	53.74	68.30	-14.56	39.37	34.98	11.70	32.31	356	92	PEAK	2	5650.17	51.60	68.43	-16.83	37.23	35.01	11.69	32.33	356	92	PEAK	3	5718.32	69.94	110.33	-40.39	55.55	35.11	11.66	32.38	356	92	PEAK	4	5720.93	75.64	112.92	-37.28	61.25	35.11	11.66	32.38	356	92	PEAK	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.10</td> <td>-----</td> <td>-----</td> <td>90.72</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>356</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	105.10	-----	-----	90.72	35.14	11.64	32.40	356	92	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5627.55	53.74	68.30	-14.56	39.37	34.98	11.70	32.31	356	92	PEAK																																																																																																											
2	5650.17	51.60	68.43	-16.83	37.23	35.01	11.69	32.33	356	92	PEAK																																																																																																											
3	5718.32	69.94	110.33	-40.39	55.55	35.11	11.66	32.38	356	92	PEAK																																																																																																											
4	5720.93	75.64	112.92	-37.28	61.25	35.11	11.66	32.38	356	92	PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	105.10	-----	-----	90.72	35.14	11.64	32.40	356	92	PEAK																																																																																																											
Avg	Blank	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.62</td> <td>-----</td> <td>-----</td> <td>84.24</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>356</td> <td>92</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	98.62	-----	-----	84.24	35.14	11.64	32.40	356	92	AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	98.62	-----	-----	84.24	35.14	11.64	32.40	356	92	AVERAGE																																																																																																											



Mode	29																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.95</td> <td>74.00</td> <td>-26.05</td> <td>44.95</td> <td>38.88</td> <td>14.83</td> <td>50.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.24</td> <td>68.30</td> <td>-18.06</td> <td>42.99</td> <td>41.61</td> <td>17.57</td> <td>51.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	47.95	74.00	-26.05	44.95	38.88	14.83	50.71	---	---	Peak	2	17235.00	50.24	68.30	-18.06	42.99	41.61	17.57	51.93	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.11</td> <td>74.00</td> <td>-26.89</td> <td>44.11</td> <td>38.88</td> <td>14.83</td> <td>50.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>49.25</td> <td>68.30</td> <td>-19.05</td> <td>42.00</td> <td>41.61</td> <td>17.57</td> <td>51.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	47.11	74.00	-26.89	44.11	38.88	14.83	50.71	---	---	Peak	2	17235.00	49.25	68.30	-19.05	42.00	41.61	17.57	51.93	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11490.00	47.95	74.00	-26.05	44.95	38.88	14.83	50.71	---	---	Peak																																																																																						
2	17235.00	50.24	68.30	-18.06	42.99	41.61	17.57	51.93	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11490.00	47.11	74.00	-26.89	44.11	38.88	14.83	50.71	---	---	Peak																																																																																						
2	17235.00	49.25	68.30	-19.05	42.00	41.61	17.57	51.93	---	---	Peak																																																																																						



Mode	30																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.13</td> <td>74.00</td> <td>-26.87</td> <td>43.89</td> <td>39.02</td> <td>14.88</td> <td>50.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.69</td> <td>68.30</td> <td>-17.61</td> <td>43.58</td> <td>41.56</td> <td>17.60</td> <td>52.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	47.13	74.00	-26.87	43.89	39.02	14.88	50.66	---	---	Peak	2	17355.00	50.69	68.30	-17.61	43.58	41.56	17.60	52.05	---	---	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.19</td> <td>74.00</td> <td>-26.81</td> <td>43.95</td> <td>39.02</td> <td>14.88</td> <td>50.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>49.81</td> <td>68.30</td> <td>-18.49</td> <td>42.70</td> <td>41.56</td> <td>17.60</td> <td>52.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	47.19	74.00	-26.81	43.95	39.02	14.88	50.66	---	---	Peak	2	17355.00	49.81	68.30	-18.49	42.70	41.56	17.60	52.05	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	47.13	74.00	-26.87	43.89	39.02	14.88	50.66	---	---	Peak																																																																																							
2	17355.00	50.69	68.30	-17.61	43.58	41.56	17.60	52.05	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	47.19	74.00	-26.81	43.95	39.02	14.88	50.66	---	---	Peak																																																																																							
2	17355.00	49.81	68.30	-18.49	42.70	41.56	17.60	52.05	---	---	Peak																																																																																							



		31																																																																																																																		
Mode	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.50</td> <td>69.63</td> <td>111.94</td> <td>-42.31</td> <td>55.30</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>271</td> <td>53</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.88</td> <td>70.47</td> <td>110.55</td> <td>-40.08</td> <td>56.14</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>271</td> <td>53</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.88</td> <td>51.43</td> <td>68.29</td> <td>-16.86</td> <td>37.18</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>271</td> <td>53</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5928.75</td> <td>53.37</td> <td>68.30</td> <td>-14.93</td> <td>39.12</td> <td>35.40</td> <td>11.40</td> <td>32.55</td> <td>271</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.50	69.63	111.94	-42.31	55.30	35.30	11.52	32.49	271	53	PEAK	2	5855.88	70.47	110.55	-40.08	56.14	35.30	11.52	32.49	271	53	PEAK	3	5924.88	51.43	68.29	-16.86	37.18	35.39	11.40	32.54	271	53	PEAK	4	5928.75	53.37	68.30	-14.93	39.12	35.40	11.40	32.55	271	53	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.59</td> <td>-----</td> <td>-----</td> <td>93.23</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>271</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	107.59	-----	-----	93.23	35.25	11.57	32.46	271	53	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																											
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5854.50	69.63	111.94	-42.31	55.30	35.30	11.52	32.49	271	53	PEAK																																																																																																									
2	5855.88	70.47	110.55	-40.08	56.14	35.30	11.52	32.49	271	53	PEAK																																																																																																									
3	5924.88	51.43	68.29	-16.86	37.18	35.39	11.40	32.54	271	53	PEAK																																																																																																									
4	5928.75	53.37	68.30	-14.93	39.12	35.40	11.40	32.55	271	53	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	107.59	-----	-----	93.23	35.25	11.57	32.46	271	53	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>86.51</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>271</td> <td>53</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	100.87	-----	-----	86.51	35.25	11.57	32.46	271	53	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																												
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5825.00	100.87	-----	-----	86.51	35.25	11.57	32.46	271	53	AVERAGE																																																																																																									



		31																																																																																																
Mode		Band Edge																																																																																																
		U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>67.82</td> <td>111.65</td> <td>-43.83</td> <td>53.49</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>357</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.25</td> <td>69.46</td> <td>110.73</td> <td>-41.27</td> <td>55.13</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>357</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.25</td> <td>51.98</td> <td>68.75</td> <td>-16.77</td> <td>37.73</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>357</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.00</td> <td>53.20</td> <td>68.30</td> <td>-15.10</td> <td>38.96</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>357</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5854.63	67.82	111.65	-43.83	53.49	35.30	11.52	32.49	357	90	PEAK	2	5855.25	69.46	110.73	-41.27	55.13	35.30	11.52	32.49	357	90	PEAK	3	5924.25	51.98	68.75	-16.77	37.73	35.39	11.40	32.54	357	90	PEAK	4	5932.00	53.20	68.30	-15.10	38.96	35.40	11.39	32.55	357	90	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>91.65</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>357</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5825.00	106.01	-----	-----	91.65	35.25	11.57	32.46	357	90	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5854.63	67.82	111.65	-43.83	53.49	35.30	11.52	32.49	357	90	PEAK																																																																																							
2	5855.25	69.46	110.73	-41.27	55.13	35.30	11.52	32.49	357	90	PEAK																																																																																							
3	5924.25	51.98	68.75	-16.77	37.73	35.39	11.40	32.54	357	90	PEAK																																																																																							
4	5932.00	53.20	68.30	-15.10	38.96	35.40	11.39	32.55	357	90	PEAK																																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5825.00	106.01	-----	-----	91.65	35.25	11.57	32.46	357	90	PEAK																																																																																							
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.68</td> <td>-----</td> <td>-----</td> <td>85.32</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>357</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5825.00	99.68	-----	-----	85.32	35.25	11.57	32.46	357	90	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5825.00	99.68	-----	-----	85.32	35.25	11.57	32.46	357	90	AVERAGE																																																																																							



Mode	31																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHZ																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.26</td> <td>74.00</td> <td>-26.74</td> <td>43.78</td> <td>39.16</td> <td>14.93</td> <td>50.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.74</td> <td>68.30</td> <td>-18.56</td> <td>42.77</td> <td>41.51</td> <td>17.63</td> <td>52.17</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.26	74.00	-26.74	43.78	39.16	14.93	50.61	---	---	Peak	2	17475.00	49.74	68.30	-18.56	42.77	41.51	17.63	52.17	---	---	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.54</td> <td>74.00</td> <td>-26.46</td> <td>44.06</td> <td>39.16</td> <td>14.93</td> <td>50.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.91</td> <td>68.30</td> <td>-18.39</td> <td>42.94</td> <td>41.51</td> <td>17.63</td> <td>52.17</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.54	74.00	-26.46	44.06	39.16	14.93	50.61	---	---	Peak	2	17475.00	49.91	68.30	-18.39	42.94	41.51	17.63	52.17	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.26	74.00	-26.74	43.78	39.16	14.93	50.61	---	---	Peak																																																																																							
2	17475.00	49.74	68.30	-18.56	42.77	41.51	17.63	52.17	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.54	74.00	-26.46	44.06	39.16	14.93	50.61	---	---	Peak																																																																																							
2	17475.00	49.91	68.30	-18.39	42.94	41.51	17.63	52.17	---	---	Peak																																																																																							



Mode	32																																																																																												
	Band Edge																																																																																												
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.51</td> <td>54.50</td> <td>68.30</td> <td>-13.80</td> <td>40.14</td> <td>34.97</td> <td>11.70</td> <td>32.31</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>5650.03</td> <td>53.26</td> <td>68.32</td> <td>-15.06</td> <td>38.89</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>3</td> <td>5719.92</td> <td>72.90</td> <td>110.78</td> <td>-37.88</td> <td>58.51</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>4</td> <td>5722.67</td> <td>80.85</td> <td>116.89</td> <td>-36.04</td> <td>66.47</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>273</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5624.51	54.50	68.30	-13.80	40.14	34.97	11.70	32.31	273	54 PEAK	2	5650.03	53.26	68.32	-15.06	38.89	35.01	11.69	32.33	273	54 PEAK	3	5719.92	72.90	110.78	-37.88	58.51	35.11	11.66	32.38	273	54 PEAK	4	5722.67	80.85	116.89	-36.04	66.47	35.11	11.65	32.38	273	54 PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>107.06</td> <td>-----</td> <td>-----</td> <td>92.68</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>273</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5745.00	107.06	-----	-----	92.68	35.14	11.64	32.40	273	54 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5624.51	54.50	68.30	-13.80	40.14	34.97	11.70	32.31	273	54 PEAK																																																																																			
2	5650.03	53.26	68.32	-15.06	38.89	35.01	11.69	32.33	273	54 PEAK																																																																																			
3	5719.92	72.90	110.78	-37.88	58.51	35.11	11.66	32.38	273	54 PEAK																																																																																			
4	5722.67	80.85	116.89	-36.04	66.47	35.11	11.65	32.38	273	54 PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5745.00	107.06	-----	-----	92.68	35.14	11.64	32.40	273	54 PEAK																																																																																			
Avg	Blank	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.66</td> <td>-----</td> <td>-----</td> <td>86.28</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>273</td> <td>54 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5745.00	100.66	-----	-----	86.28	35.14	11.64	32.40	273	54 AVERAGE																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5745.00	100.66	-----	-----	86.28	35.14	11.64	32.40	273	54 AVERAGE																																																																																			



		32																																																																																																
Mode		Band Edge																																																																																																
		U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																
Pol.	Vertical	Fundamental																																																																																																
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.87</td> <td>54.04</td> <td>68.30</td> <td>-14.26</td> <td>39.67</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>351</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.61</td> <td>52.75</td> <td>68.75</td> <td>-16.00</td> <td>38.38</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>351</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.63</td> <td>69.80</td> <td>110.70</td> <td>-40.90</td> <td>55.41</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>351</td> <td>92</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.38</td> <td>75.42</td> <td>116.23</td> <td>-40.81</td> <td>61.04</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>351</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5629.87	54.04	68.30	-14.26	39.67	34.98	11.70	32.31	351	92	PEAK	2	5650.61	52.75	68.75	-16.00	38.38	35.01	11.69	32.33	351	92	PEAK	3	5719.63	69.80	110.70	-40.90	55.41	35.11	11.66	32.38	351	92	PEAK	4	5722.38	75.42	116.23	-40.81	61.04	35.11	11.65	32.38	351	92	PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.12</td> <td>-----</td> <td>-----</td> <td>90.74</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>351</td> <td>92</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5745.00	105.12	-----	-----	90.74	35.14	11.64	32.40	351	92	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5629.87	54.04	68.30	-14.26	39.67	34.98	11.70	32.31	351	92	PEAK																																																																																							
2	5650.61	52.75	68.75	-16.00	38.38	35.01	11.69	32.33	351	92	PEAK																																																																																							
3	5719.63	69.80	110.70	-40.90	55.41	35.11	11.66	32.38	351	92	PEAK																																																																																							
4	5722.38	75.42	116.23	-40.81	61.04	35.11	11.65	32.38	351	92	PEAK																																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5745.00	105.12	-----	-----	90.74	35.14	11.64	32.40	351	92	PEAK																																																																																							
Avg	Blank	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.62</td> <td>-----</td> <td>-----</td> <td>84.24</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>351</td> <td>92</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5745.00	98.62	-----	-----	84.24	35.14	11.64	32.40	351	92	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5745.00	98.62	-----	-----	84.24	35.14	11.64	32.40	351	92	AVERAGE																																																																																							



Mode	32																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>44.71</td> <td>38.88</td> <td>14.83</td> <td>50.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>50.36</td> <td>68.30</td> <td>-17.94</td> <td>43.11</td> <td>41.61</td> <td>17.57</td> <td>51.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	47.71	74.00	-26.29	44.71	38.88	14.83	50.71	---	---	Peak	2	17235.00	50.36	68.30	-17.94	43.11	41.61	17.57	51.93	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.14</td> <td>74.00</td> <td>-26.86</td> <td>44.14</td> <td>38.88</td> <td>14.83</td> <td>50.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>49.38</td> <td>68.30</td> <td>-18.92</td> <td>42.13</td> <td>41.61</td> <td>17.57</td> <td>51.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	47.14	74.00	-26.86	44.14	38.88	14.83	50.71	---	---	Peak	2	17235.00	49.38	68.30	-18.92	42.13	41.61	17.57	51.93	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11490.00	47.71	74.00	-26.29	44.71	38.88	14.83	50.71	---	---	Peak																																																																																							
2	17235.00	50.36	68.30	-17.94	43.11	41.61	17.57	51.93	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11490.00	47.14	74.00	-26.86	44.14	38.88	14.83	50.71	---	---	Peak																																																																																							
2	17235.00	49.38	68.30	-18.92	42.13	41.61	17.57	51.93	---	---	Peak																																																																																							



Mode	33																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.67</td> <td>74.00</td> <td>-26.33</td> <td>44.43</td> <td>39.02</td> <td>14.88</td> <td>50.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.22</td> <td>68.30</td> <td>-18.08</td> <td>43.11</td> <td>41.56</td> <td>17.60</td> <td>52.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	47.67	74.00	-26.33	44.43	39.02	14.88	50.66	---	---	Peak	2	17355.00	50.22	68.30	-18.08	43.11	41.56	17.60	52.05	---	---	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.47</td> <td>74.00</td> <td>-26.53</td> <td>44.23</td> <td>39.02</td> <td>14.88</td> <td>50.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.11</td> <td>68.30</td> <td>-18.19</td> <td>43.00</td> <td>41.56</td> <td>17.60</td> <td>52.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	47.47	74.00	-26.53	44.23	39.02	14.88	50.66	---	---	Peak	2	17355.00	50.11	68.30	-18.19	43.00	41.56	17.60	52.05	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	47.67	74.00	-26.33	44.43	39.02	14.88	50.66	---	---	Peak																																																																																							
2	17355.00	50.22	68.30	-18.08	43.11	41.56	17.60	52.05	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11570.00	47.47	74.00	-26.53	44.23	39.02	14.88	50.66	---	---	Peak																																																																																							
2	17355.00	50.11	68.30	-18.19	43.00	41.56	17.60	52.05	---	---	Peak																																																																																							



		34																																																																																										
Mode		Band Edge																																																																																										
		U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																										
Pol.	Horizontal	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.75</td> <td>72.32</td> <td>118.21</td> <td>-45.89</td> <td>57.99</td> <td>35.29</td> <td>11.53</td> <td>32.49</td> <td>272</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.13</td> <td>71.28</td> <td>110.76</td> <td>-39.48</td> <td>56.95</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>272</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.88</td> <td>51.34</td> <td>68.29</td> <td>-16.95</td> <td>37.09</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>272</td> <td>54</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5948.63</td> <td>52.74</td> <td>68.30</td> <td>-15.56</td> <td>38.51</td> <td>35.43</td> <td>11.36</td> <td>32.56</td> <td>272</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5851.75	72.32	118.21	-45.89	57.99	35.29	11.53	32.49	272	54	PEAK	2	5855.13	71.28	110.76	-39.48	56.95	35.30	11.52	32.49	272	54	PEAK	3	5924.88	51.34	68.29	-16.95	37.09	35.39	11.40	32.54	272	54	PEAK	4	5948.63	52.74	68.30	-15.56	38.51	35.43	11.36	32.56	272	54	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.73</td> <td>-----</td> <td>-----</td> <td>93.37</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>272</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5825.00	107.73	-----	-----	93.37	35.25	11.57	32.46	272	54	PEAK
	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5851.75	72.32	118.21	-45.89	57.99	35.29	11.53	32.49	272	54	PEAK																																																																																	
2	5855.13	71.28	110.76	-39.48	56.95	35.30	11.52	32.49	272	54	PEAK																																																																																	
3	5924.88	51.34	68.29	-16.95	37.09	35.39	11.40	32.54	272	54	PEAK																																																																																	
4	5948.63	52.74	68.30	-15.56	38.51	35.43	11.36	32.56	272	54	PEAK																																																																																	
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5825.00	107.73	-----	-----	93.37	35.25	11.57	32.46	272	54	PEAK																																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.62</td> <td>-----</td> <td>-----</td> <td>87.26</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>272</td> <td>54</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5825.00	101.62	-----	-----	87.26	35.25	11.57	32.46	272	54	AVERAGE																																																														
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5825.00	101.62	-----	-----	87.26	35.25	11.57	32.46	272	54	AVERAGE																																																																																	



		34																																																																																																												
Mode		Band Edge																																																																																																												
		U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																												
Pol.	Vertical	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.50</td> <td>67.53</td> <td>111.94</td> <td>-44.41</td> <td>53.20</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>358</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5856.13</td> <td>68.02</td> <td>110.48</td> <td>-42.46</td> <td>53.69</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>358</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.75</td> <td>52.31</td> <td>69.12</td> <td>-16.81</td> <td>38.05</td> <td>35.39</td> <td>11.41</td> <td>32.54</td> <td>358</td> <td>89</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5942.13</td> <td>52.67</td> <td>68.30</td> <td>-15.63</td> <td>38.44</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>358</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.50	67.53	111.94	-44.41	53.20	35.30	11.52	32.49	358	89	PEAK	2	5856.13	68.02	110.48	-42.46	53.69	35.30	11.52	32.49	358	89	PEAK	3	5923.75	52.31	69.12	-16.81	38.05	35.39	11.41	32.54	358	89	PEAK	4	5942.13	52.67	68.30	-15.63	38.44	35.42	11.37	32.56	358	89	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>91.66</td> <td>35.26</td> <td>11.56</td> <td>32.47</td> <td>358</td> <td>89</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	106.01	-----	-----	91.66	35.26	11.56	32.47	358	89	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.50	67.53	111.94	-44.41	53.20	35.30	11.52	32.49	358	89	PEAK																																																																																																			
2	5856.13	68.02	110.48	-42.46	53.69	35.30	11.52	32.49	358	89	PEAK																																																																																																			
3	5923.75	52.31	69.12	-16.81	38.05	35.39	11.41	32.54	358	89	PEAK																																																																																																			
4	5942.13	52.67	68.30	-15.63	38.44	35.42	11.37	32.56	358	89	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	106.01	-----	-----	91.66	35.26	11.56	32.47	358	89	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>99.08</td> <td>-----</td> <td>-----</td> <td>84.72</td> <td>35.25</td> <td>11.57</td> <td>32.46</td> <td>358</td> <td>89</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	99.08	-----	-----	84.72	35.25	11.57	32.46	358	89	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	99.08	-----	-----	84.72	35.25	11.57	32.46	358	89	AVERAGE																																																																																																			



Mode	34																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>44.12</td> <td>39.16</td> <td>14.93</td> <td>50.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.74</td> <td>68.30</td> <td>-18.56</td> <td>42.77</td> <td>41.51</td> <td>17.63</td> <td>52.17</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.60	74.00	-26.40	44.12	39.16	14.93	50.61	---	---	Peak	2	17475.00	49.74	68.30	-18.56	42.77	41.51	17.63	52.17	---	---	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>43.87</td> <td>39.16</td> <td>14.93</td> <td>50.61</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.84</td> <td>68.30</td> <td>-18.46</td> <td>42.87</td> <td>41.51</td> <td>17.63</td> <td>52.17</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.35	74.00	-26.65	43.87	39.16	14.93	50.61	---	---	Peak	2	17475.00	49.84	68.30	-18.46	42.87	41.51	17.63	52.17	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.60	74.00	-26.40	44.12	39.16	14.93	50.61	---	---	Peak																																																																																							
2	17475.00	49.74	68.30	-18.56	42.77	41.51	17.63	52.17	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.35	74.00	-26.65	43.87	39.16	14.93	50.61	---	---	Peak																																																																																							
2	17475.00	49.84	68.30	-18.46	42.87	41.51	17.63	52.17	---	---	Peak																																																																																							



		35																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																											
Pol.	Horizontal	Fundamental																																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.45</td> <td>57.85</td> <td>68.30</td> <td>-10.45</td> <td>43.48</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>5651.31</td> <td>58.14</td> <td>69.27</td> <td>-11.13</td> <td>43.77</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>3</td> <td>5718.89</td> <td>78.03</td> <td>110.49</td> <td>-32.46</td> <td>63.64</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>78.47</td> <td>111.79</td> <td>-33.32</td> <td>64.08</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5649.45	57.85	68.30	-10.45	43.48	35.01	11.69	32.33	273	54 PEAK	2	5651.31	58.14	69.27	-11.13	43.77	35.01	11.69	32.33	273	54 PEAK	3	5718.89	78.03	110.49	-32.46	63.64	35.11	11.66	32.38	273	54 PEAK	4	5720.44	78.47	111.79	-33.32	64.08	35.11	11.66	32.38	273	54 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>104.20</td> <td>-----</td> <td>-----</td> <td>89.81</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>273</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5755.00	104.20	-----	-----	89.81	35.16	11.64	32.41	273	54 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5649.45	57.85	68.30	-10.45	43.48	35.01	11.69	32.33	273	54 PEAK																																																																																			
2	5651.31	58.14	69.27	-11.13	43.77	35.01	11.69	32.33	273	54 PEAK																																																																																			
3	5718.89	78.03	110.49	-32.46	63.64	35.11	11.66	32.38	273	54 PEAK																																																																																			
4	5720.44	78.47	111.79	-33.32	64.08	35.11	11.66	32.38	273	54 PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5755.00	104.20	-----	-----	89.81	35.16	11.64	32.41	273	54 PEAK																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>97.65</td> <td>-----</td> <td>-----</td> <td>83.26</td> <td>35.16</td> <td>11.64</td> <td>32.41</td> <td>273</td> <td>54 AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5755.00	97.65	-----	-----	83.26	35.16	11.64	32.41	273	54 AVERAGE																																																													
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																					
1	5755.00	97.65	-----	-----	83.26	35.16	11.64	32.41	273	54 AVERAGE																																																																																			



Mode	35																																																																								
	Band Edge - R																																																																								
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																								
Pol.	Horizontal	Fundamental																																																																							
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.06</td> <td>54.09</td> <td>112.94</td> <td>-58.85</td> <td>39.76</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>2</td> <td>5874.93</td> <td>51.84</td> <td>105.22</td> <td>-53.38</td> <td>37.53</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>3</td> <td>5924.65</td> <td>51.29</td> <td>68.46</td> <td>-17.17</td> <td>37.04</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>273</td> <td>54 PEAK</td> </tr> <tr> <td>4</td> <td>5948.64</td> <td>52.57</td> <td>68.30</td> <td>-15.73</td> <td>38.34</td> <td>35.43</td> <td>11.36</td> <td>32.56</td> <td>273</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.06	54.09	112.94	-58.85	39.76	35.30	11.52	32.49	273	54 PEAK	2	5874.93	51.84	105.22	-53.38	37.53	35.32	11.49	32.50	273	54 PEAK	3	5924.65	51.29	68.46	-17.17	37.04	35.39	11.40	32.54	273	54 PEAK	4	5948.64	52.57	68.30	-15.73	38.34	35.43	11.36	32.56	273	54 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																	
1	5854.06	54.09	112.94	-58.85	39.76	35.30	11.52	32.49	273	54 PEAK																																																															
2	5874.93	51.84	105.22	-53.38	37.53	35.32	11.49	32.50	273	54 PEAK																																																															
3	5924.65	51.29	68.46	-17.17	37.04	35.39	11.40	32.54	273	54 PEAK																																																															
4	5948.64	52.57	68.30	-15.73	38.34	35.43	11.36	32.56	273	54 PEAK																																																															



		35																																																																																																													
Mode		Band Edge - L																																																																																																													
		U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																													
Pol.	Vertical	Fundamental																																																																																																													
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.45</td> <td>56.52</td> <td>68.30</td> <td>-11.78</td> <td>42.15</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>367</td> <td>91 PEAK</td> </tr> <tr> <td>2</td> <td>5652.70</td> <td>57.93</td> <td>70.30</td> <td>-12.37</td> <td>43.56</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>367</td> <td>91 PEAK</td> </tr> <tr> <td>3</td> <td>5717.96</td> <td>74.46</td> <td>110.23</td> <td>-35.77</td> <td>60.07</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>367</td> <td>91 PEAK</td> </tr> <tr> <td>4</td> <td>5721.21</td> <td>77.05</td> <td>113.56</td> <td>-36.51</td> <td>62.67</td> <td>35.11</td> <td>11.65</td> <td>32.38</td> <td>367</td> <td>91 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5649.45	56.52	68.30	-11.78	42.15	35.01	11.69	32.33	367	91 PEAK	2	5652.70	57.93	70.30	-12.37	43.56	35.01	11.69	32.33	367	91 PEAK	3	5717.96	74.46	110.23	-35.77	60.07	35.11	11.66	32.38	367	91 PEAK	4	5721.21	77.05	113.56	-36.51	62.67	35.11	11.65	32.38	367	91 PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>102.97</td> <td>-----</td> <td>-----</td> <td>88.59</td> <td>35.14</td> <td>11.64</td> <td>32.40</td> <td>367</td> <td>91 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5755.00	102.97	-----	-----	88.59	35.14	11.64	32.40	367	91 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																							
1	5649.45	56.52	68.30	-11.78	42.15	35.01	11.69	32.33	367	91 PEAK																																																																																																					
2	5652.70	57.93	70.30	-12.37	43.56	35.01	11.69	32.33	367	91 PEAK																																																																																																					
3	5717.96	74.46	110.23	-35.77	60.07	35.11	11.66	32.38	367	91 PEAK																																																																																																					
4	5721.21	77.05	113.56	-36.51	62.67	35.11	11.65	32.38	367	91 PEAK																																																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																							
1	5755.00	102.97	-----	-----	88.59	35.14	11.64	32.40	367	91 PEAK																																																																																																					
Avg	<p style="text-align: center;">Blank</p>	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.38</td> <td>-----</td> <td>-----</td> <td>82.00</td> <td>35.15</td> <td>11.64</td> <td>32.41</td> <td>367</td> <td>91 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5755.00	96.38	-----	-----	82.00	35.15	11.64	32.41	367	91 AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																							
1	5755.00	96.38	-----	-----	82.00	35.15	11.64	32.41	367	91 AVERAGE																																																																																																					



Mode	35																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.84</td> <td>51.59</td> <td>111.17</td> <td>-59.58</td> <td>37.26</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>367</td> <td>91</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5873.76</td> <td>52.58</td> <td>105.55</td> <td>-52.97</td> <td>38.27</td> <td>35.32</td> <td>11.49</td> <td>32.50</td> <td>367</td> <td>91</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.46</td> <td>50.61</td> <td>68.60</td> <td>-17.99</td> <td>36.36</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>367</td> <td>91</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5934.79</td> <td>52.41</td> <td>68.30</td> <td>-15.89</td> <td>38.16</td> <td>35.41</td> <td>11.39</td> <td>32.55</td> <td>367</td> <td>91</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	51.59	111.17	-59.58	37.26	35.30	11.52	32.49	367	91	PEAK	2	5873.76	52.58	105.55	-52.97	38.27	35.32	11.49	32.50	367	91	PEAK	3	5924.46	50.61	68.60	-17.99	36.36	35.39	11.40	32.54	367	91	PEAK	4	5934.79	52.41	68.30	-15.89	38.16	35.41	11.39	32.55	367	91	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.84	51.59	111.17	-59.58	37.26	35.30	11.52	32.49	367	91	PEAK																																																																		
2	5873.76	52.58	105.55	-52.97	38.27	35.32	11.49	32.50	367	91	PEAK																																																																		
3	5924.46	50.61	68.60	-17.99	36.36	35.39	11.40	32.54	367	91	PEAK																																																																		
4	5934.79	52.41	68.30	-15.89	38.16	35.41	11.39	32.55	367	91	PEAK																																																																		



		36																																																																																																
Mode		Band Edge - L																																																																																																
		U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																
Pol.	Horizontal	Fundamental																																																																																																
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.24</td> <td>53.71</td> <td>68.30</td> <td>-14.59</td> <td>39.34</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>52.57</td> <td>68.67</td> <td>-16.10</td> <td>38.20</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.78</td> <td>62.83</td> <td>110.18</td> <td>-47.35</td> <td>48.45</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>61.15</td> <td>111.52</td> <td>-50.37</td> <td>46.76</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5645.24	53.71	68.30	-14.59	39.34	35.00	11.69	32.32	273	62	PEAK	2	5650.51	52.57	68.67	-16.10	38.20	35.01	11.69	32.33	273	62	PEAK	3	5717.78	62.83	110.18	-47.35	48.45	35.10	11.66	32.38	273	62	PEAK	4	5720.32	61.15	111.52	-50.37	46.76	35.11	11.66	32.38	273	62	PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>104.02</td> <td>-----</td> <td>-----</td> <td>89.63</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5795.00	104.02	-----	-----	89.63	35.21	11.62	32.44	273	62	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5645.24	53.71	68.30	-14.59	39.34	35.00	11.69	32.32	273	62	PEAK																																																																																							
2	5650.51	52.57	68.67	-16.10	38.20	35.01	11.69	32.33	273	62	PEAK																																																																																							
3	5717.78	62.83	110.18	-47.35	48.45	35.10	11.66	32.38	273	62	PEAK																																																																																							
4	5720.32	61.15	111.52	-50.37	46.76	35.11	11.66	32.38	273	62	PEAK																																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5795.00	104.02	-----	-----	89.63	35.21	11.62	32.44	273	62	PEAK																																																																																							
Avg	Blank	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.57</td> <td>-----</td> <td>-----</td> <td>83.18</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>273</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5795.00	97.57	-----	-----	83.18	35.21	11.62	32.44	273	62	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5795.00	97.57	-----	-----	83.18	35.21	11.62	32.44	273	62	AVERAGE																																																																																							



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>62.99</td> <td>110.83</td> <td>-47.84</td> <td>48.66</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5865.68</td> <td>62.35</td> <td>107.81</td> <td>-45.46</td> <td>48.04</td> <td>35.31</td> <td>11.50</td> <td>32.50</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>52.27</td> <td>68.40</td> <td>-16.13</td> <td>38.02</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5944.11</td> <td>52.32</td> <td>68.30</td> <td>-15.98</td> <td>38.09</td> <td>35.42</td> <td>11.37</td> <td>32.56</td> <td>273</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	62.99	110.83	-47.84	48.66	35.30	11.52	32.49	273	62	PEAK	2	5865.68	62.35	107.81	-45.46	48.04	35.31	11.50	32.50	273	62	PEAK	3	5924.74	52.27	68.40	-16.13	38.02	35.39	11.40	32.54	273	62	PEAK	4	5944.11	52.32	68.30	-15.98	38.09	35.42	11.37	32.56	273	62	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.99	62.99	110.83	-47.84	48.66	35.30	11.52	32.49	273	62	PEAK																																																																		
2	5865.68	62.35	107.81	-45.46	48.04	35.31	11.50	32.50	273	62	PEAK																																																																		
3	5924.74	52.27	68.40	-16.13	38.02	35.39	11.40	32.54	273	62	PEAK																																																																		
4	5944.11	52.32	68.30	-15.98	38.09	35.42	11.37	32.56	273	62	PEAK																																																																		



		36																																																																																																
Mode		Band Edge - L																																																																																																
		U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																
Pol.	Vertical	Fundamental																																																																																																
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.92</td> <td>53.16</td> <td>68.30</td> <td>-15.14</td> <td>38.79</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>52.67</td> <td>68.96</td> <td>-16.29</td> <td>38.30</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5711.35</td> <td>59.24</td> <td>108.38</td> <td>-49.14</td> <td>44.86</td> <td>35.10</td> <td>11.66</td> <td>32.38</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>57.51</td> <td>111.07</td> <td>-53.56</td> <td>43.12</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5649.92	53.16	68.30	-15.14	38.79	35.01	11.69	32.33	361	90	PEAK	2	5650.90	52.67	68.96	-16.29	38.30	35.01	11.69	32.33	361	90	PEAK	3	5711.35	59.24	108.38	-49.14	44.86	35.10	11.66	32.38	361	90	PEAK	4	5720.12	57.51	111.07	-53.56	43.12	35.11	11.66	32.38	361	90	PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>102.86</td> <td>-----</td> <td>-----</td> <td>88.47</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5795.00	102.86	-----	-----	88.47	35.21	11.62	32.44	361	90	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5649.92	53.16	68.30	-15.14	38.79	35.01	11.69	32.33	361	90	PEAK																																																																																							
2	5650.90	52.67	68.96	-16.29	38.30	35.01	11.69	32.33	361	90	PEAK																																																																																							
3	5711.35	59.24	108.38	-49.14	44.86	35.10	11.66	32.38	361	90	PEAK																																																																																							
4	5720.12	57.51	111.07	-53.56	43.12	35.11	11.66	32.38	361	90	PEAK																																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5795.00	102.86	-----	-----	88.47	35.21	11.62	32.44	361	90	PEAK																																																																																							
Avg	Blank	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>96.46</td> <td>-----</td> <td>-----</td> <td>82.07</td> <td>35.21</td> <td>11.62</td> <td>32.44</td> <td>361</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	1	5795.00	96.46	-----	-----	82.07	35.21	11.62	32.44	361	90	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																																										
1	5795.00	96.46	-----	-----	82.07	35.21	11.62	32.44	361	90	AVERAGE																																																																																							



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																												
Pol.	Vertical	Fundamental																																																																											
Peak	<p>The spectrum plot shows a blue signal line and a red limit line. The y-axis is Level (dBuV/m) from 0 to 140. The x-axis is Frequency (MHz) from 5795 to 5950. Four peaks are marked with vertical lines and numbered 1, 2, 3, and 4. A red line labeled 'PEAK_BE(B4)_16.24' is also present.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>61.36</td> <td>110.83</td> <td>-49.47</td> <td>47.03</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5862.58</td> <td>61.51</td> <td>108.68</td> <td>-47.17</td> <td>47.18</td> <td>35.31</td> <td>11.51</td> <td>32.49</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>51.96</td> <td>68.28</td> <td>-16.32</td> <td>37.71</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.94</td> <td>52.49</td> <td>68.30</td> <td>-15.81</td> <td>38.25</td> <td>35.40</td> <td>11.39</td> <td>32.55</td> <td>361</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.99	61.36	110.83	-49.47	47.03	35.30	11.52	32.49	361	90	PEAK	2	5862.58	61.51	108.68	-47.17	47.18	35.31	11.51	32.49	361	90	PEAK	3	5924.89	51.96	68.28	-16.32	37.71	35.39	11.40	32.54	361	90	PEAK	4	5930.94	52.49	68.30	-15.81	38.25	35.40	11.39	32.55	361	90	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.99	61.36	110.83	-49.47	47.03	35.30	11.52	32.49	361	90	PEAK																																																																		
2	5862.58	61.51	108.68	-47.17	47.18	35.31	11.51	32.49	361	90	PEAK																																																																		
3	5924.89	51.96	68.28	-16.32	37.71	35.39	11.40	32.54	361	90	PEAK																																																																		
4	5930.94	52.49	68.30	-15.81	38.25	35.40	11.39	32.55	361	90	PEAK																																																																		



		37																																																																																																										
Mode		Band Edge - L																																																																																																										
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																										
Peak	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5644.66</td> <td>59.40</td> <td>68.30</td> <td>-8.90</td> <td>45.03</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>270</td> <td>48</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.68</td> <td>60.80</td> <td>69.54</td> <td>-8.74</td> <td>46.43</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>270</td> <td>48</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5704.13</td> <td>72.72</td> <td>106.36</td> <td>-33.64</td> <td>58.34</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>270</td> <td>48</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>71.18</td> <td>111.07</td> <td>-39.89</td> <td>56.79</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>270</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5644.66	59.40	68.30	-8.90	45.03	35.00	11.69	32.32	270	48	PEAK	2	5651.68	60.80	69.54	-8.74	46.43	35.01	11.69	32.33	270	48	PEAK	3	5704.13	72.72	106.36	-33.64	58.34	35.09	11.66	32.37	270	48	PEAK	4	5720.12	71.18	111.07	-39.89	56.79	35.11	11.66	32.38	270	48	PEAK	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>86.35</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>270</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	100.74	-----	-----	86.35	35.18	11.63	32.42	270	48	PEAK
	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5644.66	59.40	68.30	-8.90	45.03	35.00	11.69	32.32	270	48	PEAK																																																																																																	
2	5651.68	60.80	69.54	-8.74	46.43	35.01	11.69	32.33	270	48	PEAK																																																																																																	
3	5704.13	72.72	106.36	-33.64	58.34	35.09	11.66	32.37	270	48	PEAK																																																																																																	
4	5720.12	71.18	111.07	-39.89	56.79	35.11	11.66	32.38	270	48	PEAK																																																																																																	
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5775.00	100.74	-----	-----	86.35	35.18	11.63	32.42	270	48	PEAK																																																																																																	
Avg	Blank	<p style="text-align: right;">Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>92.87</td> <td>-----</td> <td>-----</td> <td>78.48</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>270</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	92.87	-----	-----	78.48	35.19	11.63	32.43	270	48	AVERAGE																																																																						
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																				
1	5775.00	92.87	-----	-----	78.48	35.19	11.63	32.43	270	48	AVERAGE																																																																																																	



Mode	37																																																																																						
	Band Edge - R																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																						
Pol.	Horizontal	Fundamental																																																																																					
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.99</td> <td>66.16</td> <td>110.83</td> <td>-44.67</td> <td>51.83</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>270</td> <td>48</td> <td></td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.25</td> <td>66.55</td> <td>106.81</td> <td>-40.26</td> <td>52.23</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>270</td> <td>48</td> <td></td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.89</td> <td>52.90</td> <td>68.28</td> <td>-15.38</td> <td>38.65</td> <td>35.39</td> <td>11.40</td> <td>32.54</td> <td>270</td> <td>48</td> <td></td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5937.29</td> <td>54.43</td> <td>68.30</td> <td>-13.87</td> <td>40.19</td> <td>35.41</td> <td>11.38</td> <td>32.55</td> <td>270</td> <td>48</td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	5854.99	66.16	110.83	-44.67	51.83	35.30	11.52	32.49	270	48		PEAK	2	5869.25	66.55	106.81	-40.26	52.23	35.32	11.50	32.50	270	48		PEAK	3	5924.89	52.90	68.28	-15.38	38.65	35.39	11.40	32.54	270	48		PEAK	4	5937.29	54.43	68.30	-13.87	40.19	35.41	11.38	32.55	270	48		PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																											
1	5854.99	66.16	110.83	-44.67	51.83	35.30	11.52	32.49	270	48		PEAK																																																																											
2	5869.25	66.55	106.81	-40.26	52.23	35.32	11.50	32.50	270	48		PEAK																																																																											
3	5924.89	52.90	68.28	-15.38	38.65	35.39	11.40	32.54	270	48		PEAK																																																																											
4	5937.29	54.43	68.30	-13.87	40.19	35.41	11.38	32.55	270	48		PEAK																																																																											



		37																																																																																										
Mode		Band Edge - L																																																																																										
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																										
Pol.	Vertical	Fundamental																																																																																										
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.00</td> <td>59.62</td> <td>68.30</td> <td>-8.68</td> <td>45.25</td> <td>35.00</td> <td>11.69</td> <td>32.32</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.10</td> <td>57.58</td> <td>69.12</td> <td>-11.54</td> <td>43.21</td> <td>35.01</td> <td>11.69</td> <td>32.33</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5707.10</td> <td>69.52</td> <td>107.19</td> <td>-37.67</td> <td>55.14</td> <td>35.09</td> <td>11.66</td> <td>32.37</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.58</td> <td>69.31</td> <td>112.11</td> <td>-42.80</td> <td>54.92</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5642.00	59.62	68.30	-8.68	45.25	35.00	11.69	32.32	364	90	PEAK	2	5651.10	57.58	69.12	-11.54	43.21	35.01	11.69	32.33	364	90	PEAK	3	5707.10	69.52	107.19	-37.67	55.14	35.09	11.66	32.37	364	90	PEAK	4	5720.58	69.31	112.11	-42.80	54.92	35.11	11.66	32.38	364	90	PEAK	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>99.15</td> <td>-----</td> <td>-----</td> <td>84.76</td> <td>35.18</td> <td>11.63</td> <td>32.42</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5775.00	99.15	-----	-----	84.76	35.18	11.63	32.42	364	90	PEAK
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5642.00	59.62	68.30	-8.68	45.25	35.00	11.69	32.32	364	90	PEAK																																																																																	
2	5651.10	57.58	69.12	-11.54	43.21	35.01	11.69	32.33	364	90	PEAK																																																																																	
3	5707.10	69.52	107.19	-37.67	55.14	35.09	11.66	32.37	364	90	PEAK																																																																																	
4	5720.58	69.31	112.11	-42.80	54.92	35.11	11.66	32.38	364	90	PEAK																																																																																	
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5775.00	99.15	-----	-----	84.76	35.18	11.63	32.42	364	90	PEAK																																																																																	
Avg	<p style="text-align: center;">Blank</p>	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>92.14</td> <td>-----</td> <td>-----</td> <td>77.75</td> <td>35.19</td> <td>11.63</td> <td>32.43</td> <td>364</td> <td>90</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	1	5775.00	92.14	-----	-----	77.75	35.19	11.63	32.43	364	90	AVERAGE																																																														
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																																																																																					
1	5775.00	92.14	-----	-----	77.75	35.19	11.63	32.43	364	90	AVERAGE																																																																																	



Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.10</td> <td>64.02</td> <td>112.85</td> <td>-48.83</td> <td>49.69</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.33</td> <td>64.71</td> <td>106.79</td> <td>-42.08</td> <td>50.39</td> <td>35.32</td> <td>11.50</td> <td>32.50</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5883.85</td> <td>59.32</td> <td>98.63</td> <td>-39.31</td> <td>45.02</td> <td>35.34</td> <td>11.47</td> <td>32.51</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.15</td> <td>53.32</td> <td>68.30</td> <td>-14.98</td> <td>39.06</td> <td>35.40</td> <td>11.40</td> <td>32.54</td> <td>364</td> <td>90</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.10	64.02	112.85	-48.83	49.69	35.30	11.52	32.49	364	90	PEAK	2	5869.33	64.71	106.79	-42.08	50.39	35.32	11.50	32.50	364	90	PEAK	3	5883.85	59.32	98.63	-39.31	45.02	35.34	11.47	32.51	364	90	PEAK	4	5925.15	53.32	68.30	-14.98	39.06	35.40	11.40	32.54	364	90	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.10	64.02	112.85	-48.83	49.69	35.30	11.52	32.49	364	90	PEAK																																																															
2	5869.33	64.71	106.79	-42.08	50.39	35.32	11.50	32.50	364	90	PEAK																																																															
3	5883.85	59.32	98.63	-39.31	45.02	35.34	11.47	32.51	364	90	PEAK																																																															
4	5925.15	53.32	68.30	-14.98	39.06	35.40	11.40	32.54	364	90	PEAK																																																															



Mode	37																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-04-07</p>	<p>Date: 2024-04-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.99</td> <td>74.00</td> <td>-26.01</td> <td>44.81</td> <td>38.98</td> <td>14.87</td> <td>50.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>48.80</td> <td>68.30</td> <td>-19.50</td> <td>41.66</td> <td>41.57</td> <td>17.59</td> <td>52.02</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	47.99	74.00	-26.01	44.81	38.98	14.87	50.67	---	---	Peak	2	17325.00	48.80	68.30	-19.50	41.66	41.57	17.59	52.02	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.44</td> <td>74.00</td> <td>-26.56</td> <td>44.26</td> <td>38.98</td> <td>14.87</td> <td>50.67</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>49.38</td> <td>68.30</td> <td>-18.92</td> <td>42.24</td> <td>41.57</td> <td>17.59</td> <td>52.02</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	47.44	74.00	-26.56	44.26	38.98	14.87	50.67	---	---	Peak	2	17325.00	49.38	68.30	-18.92	42.24	41.57	17.59	52.02	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11550.00	47.99	74.00	-26.01	44.81	38.98	14.87	50.67	---	---	Peak																																																																																						
2	17325.00	48.80	68.30	-19.50	41.66	41.57	17.59	52.02	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11550.00	47.44	74.00	-26.56	44.26	38.98	14.87	50.67	---	---	Peak																																																																																						
2	17325.00	49.38	68.30	-18.92	42.24	41.57	17.59	52.02	---	---	Peak																																																																																						



Mode	38																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>36.79</td><td>17.15</td><td>40.00</td><td>-22.85</td><td>26.00</td><td>21.06</td><td>1.29</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>151.25</td><td>22.08</td><td>43.50</td><td>-21.42</td><td>34.50</td><td>16.48</td><td>2.20</td><td>31.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>266.68</td><td>27.27</td><td>46.00</td><td>-18.73</td><td>35.96</td><td>19.64</td><td>2.57</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>314.21</td><td>29.22</td><td>46.00</td><td>-16.78</td><td>37.60</td><td>19.72</td><td>2.77</td><td>30.87</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>620.73</td><td>25.43</td><td>46.00</td><td>-20.57</td><td>27.58</td><td>25.02</td><td>3.79</td><td>30.96</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>818.61</td><td>27.60</td><td>46.00</td><td>-18.40</td><td>28.13</td><td>26.25</td><td>4.30</td><td>31.08</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	36.79	17.15	40.00	-22.85	26.00	21.06	1.29	31.20	--	--	Peak	2	151.25	22.08	43.50	-21.42	34.50	16.48	2.20	31.10	--	--	Peak	3	266.68	27.27	46.00	-18.73	35.96	19.64	2.57	30.90	--	--	Peak	4	314.21	29.22	46.00	-16.78	37.60	19.72	2.77	30.87	--	--	Peak	5	620.73	25.43	46.00	-20.57	27.58	25.02	3.79	30.96	--	--	Peak	6	818.61	27.60	46.00	-18.40	28.13	26.25	4.30	31.08	--	--	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>31.29</td><td>40.00</td><td>-8.71</td><td>36.66</td><td>24.62</td><td>1.21</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>138.64</td><td>21.33</td><td>43.50</td><td>-22.17</td><td>32.85</td><td>17.46</td><td>2.14</td><td>31.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>265.71</td><td>23.92</td><td>46.00</td><td>-22.08</td><td>32.53</td><td>19.72</td><td>2.57</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>314.21</td><td>24.92</td><td>46.00</td><td>-21.08</td><td>33.30</td><td>19.72</td><td>2.77</td><td>30.87</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>501.42</td><td>22.69</td><td>46.00</td><td>-23.31</td><td>26.19</td><td>23.73</td><td>3.48</td><td>30.71</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>722.58</td><td>26.35</td><td>46.00</td><td>-19.65</td><td>27.61</td><td>25.52</td><td>4.09</td><td>30.87</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	31.29	40.00	-8.71	36.66	24.62	1.21	31.20	--	--	Peak	2	138.64	21.33	43.50	-22.17	32.85	17.46	2.14	31.12	--	--	Peak	3	265.71	23.92	46.00	-22.08	32.53	19.72	2.57	30.90	--	--	Peak	4	314.21	24.92	46.00	-21.08	33.30	19.72	2.77	30.87	--	--	Peak	5	501.42	22.69	46.00	-23.31	26.19	23.73	3.48	30.71	--	--	Peak	6	722.58	26.35	46.00	-19.65	27.61	25.52	4.09	30.87	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	36.79	17.15	40.00	-22.85	26.00	21.06	1.29	31.20	--	--	Peak																																																																																																																																																															
2	151.25	22.08	43.50	-21.42	34.50	16.48	2.20	31.10	--	--	Peak																																																																																																																																																															
3	266.68	27.27	46.00	-18.73	35.96	19.64	2.57	30.90	--	--	Peak																																																																																																																																																															
4	314.21	29.22	46.00	-16.78	37.60	19.72	2.77	30.87	--	--	Peak																																																																																																																																																															
5	620.73	25.43	46.00	-20.57	27.58	25.02	3.79	30.96	--	--	Peak																																																																																																																																																															
6	818.61	27.60	46.00	-18.40	28.13	26.25	4.30	31.08	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.97	31.29	40.00	-8.71	36.66	24.62	1.21	31.20	--	--	Peak																																																																																																																																																															
2	138.64	21.33	43.50	-22.17	32.85	17.46	2.14	31.12	--	--	Peak																																																																																																																																																															
3	265.71	23.92	46.00	-22.08	32.53	19.72	2.57	30.90	--	--	Peak																																																																																																																																																															
4	314.21	24.92	46.00	-21.08	33.30	19.72	2.77	30.87	--	--	Peak																																																																																																																																																															
5	501.42	22.69	46.00	-23.31	26.19	23.73	3.48	30.71	--	--	Peak																																																																																																																																																															
6	722.58	26.35	46.00	-19.65	27.61	25.52	4.09	30.87	--	--	Peak																																																																																																																																																															



Mode	39																																																																																																																																																																									
	LF																																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>34.85</td><td>17.44</td><td>40.00</td><td>-22.56</td><td>25.07</td><td>22.30</td><td>1.27</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>151.25</td><td>21.91</td><td>43.50</td><td>-21.59</td><td>34.33</td><td>16.48</td><td>2.20</td><td>31.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>265.71</td><td>27.83</td><td>46.00</td><td>-18.17</td><td>36.44</td><td>19.72</td><td>2.57</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>315.18</td><td>29.52</td><td>46.00</td><td>-16.48</td><td>37.87</td><td>19.74</td><td>2.78</td><td>30.87</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>556.71</td><td>23.20</td><td>46.00</td><td>-22.80</td><td>25.58</td><td>24.99</td><td>3.63</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>810.85</td><td>27.38</td><td>46.00</td><td>-18.62</td><td>28.00</td><td>26.19</td><td>4.28</td><td>31.09</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark	1	34.85	17.44	40.00	-22.56	25.07	22.30	1.27	31.20	--	--	Peak	2	151.25	21.91	43.50	-21.59	34.33	16.48	2.20	31.10	--	--	Peak	3	265.71	27.83	46.00	-18.17	36.44	19.72	2.57	30.90	--	--	Peak	4	315.18	29.52	46.00	-16.48	37.87	19.74	2.78	30.87	--	--	Peak	5	556.71	23.20	46.00	-22.80	25.58	24.99	3.63	31.00	--	--	Peak	6	810.85	27.38	46.00	-18.62	28.00	26.19	4.28	31.09	--	--	Peak	<p>Date: 2024-04-07</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>35.82</td><td>30.38</td><td>40.00</td><td>-9.62</td><td>38.62</td><td>21.68</td><td>1.28</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>137.67</td><td>21.18</td><td>43.50</td><td>-22.32</td><td>32.64</td><td>17.52</td><td>2.14</td><td>31.12</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>193.93</td><td>21.91</td><td>43.50</td><td>-21.59</td><td>35.21</td><td>15.32</td><td>2.30</td><td>30.92</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>265.71</td><td>24.19</td><td>46.00</td><td>-21.81</td><td>32.80</td><td>19.72</td><td>2.57</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>314.21</td><td>24.41</td><td>46.00</td><td>-21.59</td><td>32.79</td><td>19.72</td><td>2.77</td><td>30.87</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>505.30</td><td>23.09</td><td>46.00</td><td>-22.91</td><td>26.50</td><td>23.83</td><td>3.49</td><td>30.73</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark	1	35.82	30.38	40.00	-9.62	38.62	21.68	1.28	31.20	--	--	Peak	2	137.67	21.18	43.50	-22.32	32.64	17.52	2.14	31.12	--	--	Peak	3	193.93	21.91	43.50	-21.59	35.21	15.32	2.30	30.92	--	--	Peak	4	265.71	24.19	46.00	-21.81	32.80	19.72	2.57	30.90	--	--	Peak	5	314.21	24.41	46.00	-21.59	32.79	19.72	2.77	30.87	--	--	Peak	6	505.30	23.09	46.00	-22.91	26.50	23.83	3.49	30.73	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	34.85	17.44	40.00	-22.56	25.07	22.30	1.27	31.20	--	--	Peak																																																																																																																																																															
2	151.25	21.91	43.50	-21.59	34.33	16.48	2.20	31.10	--	--	Peak																																																																																																																																																															
3	265.71	27.83	46.00	-18.17	36.44	19.72	2.57	30.90	--	--	Peak																																																																																																																																																															
4	315.18	29.52	46.00	-16.48	37.87	19.74	2.78	30.87	--	--	Peak																																																																																																																																																															
5	556.71	23.20	46.00	-22.80	25.58	24.99	3.63	31.00	--	--	Peak																																																																																																																																																															
6	810.85	27.38	46.00	-18.62	28.00	26.19	4.28	31.09	--	--	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	35.82	30.38	40.00	-9.62	38.62	21.68	1.28	31.20	--	--	Peak																																																																																																																																																															
2	137.67	21.18	43.50	-22.32	32.64	17.52	2.14	31.12	--	--	Peak																																																																																																																																																															
3	193.93	21.91	43.50	-21.59	35.21	15.32	2.30	30.92	--	--	Peak																																																																																																																																																															
4	265.71	24.19	46.00	-21.81	32.80	19.72	2.57	30.90	--	--	Peak																																																																																																																																																															
5	314.21	24.41	46.00	-21.59	32.79	19.72	2.77	30.87	--	--	Peak																																																																																																																																																															
6	505.30	23.09	46.00	-22.91	26.50	23.83	3.49	30.73	--	--	Peak																																																																																																																																																															



Mode	40																																																																											
	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+LTE B13 Link Co-TX																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.77</td> <td>64.20</td> <td>74.00</td> <td>-9.80</td> <td>50.02</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>297</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.77	64.20	74.00	-9.80	50.02	34.87	11.09	31.78	297	54	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.58</td> <td>-----</td> <td>-----</td> <td>92.45</td> <td>34.87</td> <td>11.07</td> <td>31.81</td> <td>297</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	106.58	-----	-----	92.45	34.87	11.07	31.81	297	54	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5148.77	64.20	74.00	-9.80	50.02	34.87	11.09	31.78	297	54	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	106.58	-----	-----	92.45	34.87	11.07	31.81	297	54	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.85</td> <td>48.55</td> <td>54.00</td> <td>-5.45</td> <td>34.37</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>297</td> <td>54</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.85	48.55	54.00	-5.45	34.37	34.87	11.09	31.78	297	54	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.20</td> <td>-----</td> <td>-----</td> <td>85.09</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>297</td> <td>54</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	99.20	-----	-----	85.09	34.86	11.07	31.82	297	54	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.85	48.55	54.00	-5.45	34.37	34.87	11.09	31.78	297	54	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	99.20	-----	-----	85.09	34.86	11.07	31.82	297	54	AVERAGE																																																																	



Mode	40																																																																											
	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+LTE B13 Link Co-TX																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.99</td> <td>62.07</td> <td>74.00</td> <td>-11.93</td> <td>47.90</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>298</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.99	62.07	74.00	-11.93	47.90	34.87	11.08	31.78	298	293	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.85</td> <td>-----</td> <td>-----</td> <td>88.74</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>298</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	102.85	-----	-----	88.74	34.86	11.07	31.82	298	293	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.99	62.07	74.00	-11.93	47.90	34.87	11.08	31.78	298	293	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	102.85	-----	-----	88.74	34.86	11.07	31.82	298	293	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.51</td> <td>47.42</td> <td>54.00</td> <td>-6.58</td> <td>33.24</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>298</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.51	47.42	54.00	-6.58	33.24	34.87	11.09	31.78	298	293	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>96.20</td> <td>-----</td> <td>-----</td> <td>82.07</td> <td>34.87</td> <td>11.07</td> <td>31.81</td> <td>298</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.20	-----	-----	82.07	34.87	11.07	31.81	298	293	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.51	47.42	54.00	-6.58	33.24	34.87	11.09	31.78	298	293	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	96.20	-----	-----	82.07	34.87	11.07	31.81	298	293	AVERAGE																																																																	



Mode	40																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+LTE B13 Link Co-TX																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<p>Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>50.30</td> <td>68.30</td> <td>-18.00</td> <td>48.45</td> <td>38.47</td> <td>14.15</td> <td>50.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.29</td> <td>74.00</td> <td>-26.71</td> <td>40.43</td> <td>41.44</td> <td>16.85</td> <td>51.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	50.30	68.30	-18.00	48.45	38.47	14.15	50.77	---	---	Peak	2	15540.00	47.29	74.00	-26.71	40.43	41.44	16.85	51.43	---	---	Peak	<p>Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.63</td> <td>68.30</td> <td>-18.67</td> <td>47.78</td> <td>38.47</td> <td>14.15</td> <td>50.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.72</td> <td>74.00</td> <td>-26.28</td> <td>40.86</td> <td>41.44</td> <td>16.85</td> <td>51.43</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.63	68.30	-18.67	47.78	38.47	14.15	50.77	---	---	Peak	2	15540.00	47.72	74.00	-26.28	40.86	41.44	16.85	51.43	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10360.00	50.30	68.30	-18.00	48.45	38.47	14.15	50.77	---	---	Peak																																																																																											
2	15540.00	47.29	74.00	-26.71	40.43	41.44	16.85	51.43	---	---	Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10360.00	49.63	68.30	-18.67	47.78	38.47	14.15	50.77	---	---	Peak																																																																																											
2	15540.00	47.72	74.00	-26.28	40.86	41.44	16.85	51.43	---	---	Peak																																																																																											

Note: the highest signals over limit is co-location fundamental signal.



41																																																
Band Edge																																																
U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+BLE2M CH38+LTE B13 Link Co-TX																																																
Pol.	Horizontal																																															
Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5149.24</td> <td>64.23</td> <td>-9.77</td> <td>74.00</td> <td>50.86</td> <td>34.87</td> <td>11.09</td> <td>31.79</td> <td>146</td> <td>49</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	5149.24	64.23	-9.77	74.00	50.86	34.87	11.09	31.79	146	49	Peak											
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																								
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																									
1 *	5149.24	64.23	-9.77	74.00	50.86	34.87	11.09	31.79	146	49	Peak																																					
<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5180.00</td> <td>107.28</td> <td>38.98</td> <td>68.30</td> <td>93.17</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>146</td> <td>49</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>100.63</td> <td>-----</td> <td>-----</td> <td>86.52</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>146</td> <td>49</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	5180.00	107.28	38.98	68.30	93.17	34.86	11.07	31.82	146	49	Peak	2	5180.00	100.63	-----	-----	86.52	34.86	11.07	31.82	146	49	Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																									
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																									
1 *	5180.00	107.28	38.98	68.30	93.17	34.86	11.07	31.82	146	49	Peak																																					
2	5180.00	100.63	-----	-----	86.52	34.86	11.07	31.82	146	49	Average																																					
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>48.68</td> <td>-5.32</td> <td>54.00</td> <td>34.51</td> <td>34.87</td> <td>11.09</td> <td>31.79</td> <td>146</td> <td>49</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5149.76	48.68	-5.32	54.00	34.51	34.87	11.09	31.79	146	49	Average	Blank										
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																								
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																									
1	5149.76	48.68	-5.32	54.00	34.51	34.87	11.09	31.79	146	49	Average																																					



		41																																																																																				
Mode	Band Edge																																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+BLE2M CH38+LTE B13 Link Co-TX																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5149.50</td> <td>62.47</td> <td>-11.53</td> <td>74.00</td> <td>48.30</td> <td>34.87</td> <td>11.09</td> <td>31.79</td> <td>280</td> <td>293</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	5149.50	62.47	-11.53	74.00	48.30	34.87	11.09	31.79	280	293	Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5180.00</td> <td>104.30</td> <td>36.00</td> <td>68.30</td> <td>90.19</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>280</td> <td>293</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>97.53</td> <td>-----</td> <td>83.42</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td></td> <td>280</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 *	5180.00	104.30	36.00	68.30	90.19	34.86	11.07	31.82	280	293	Peak	2	5180.00	97.53	-----	83.42	34.86	11.07	31.82		280	293	Average
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																														
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1 *	5149.50	62.47	-11.53	74.00	48.30	34.87	11.09	31.79	280	293	Peak																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1 *	5180.00	104.30	36.00	68.30	90.19	34.86	11.07	31.82	280	293	Peak																																																																											
2	5180.00	97.53	-----	83.42	34.86	11.07	31.82		280	293	Average																																																																											
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>47.31</td> <td>-6.69</td> <td>54.00</td> <td>33.14</td> <td>34.87</td> <td>11.09</td> <td>31.79</td> <td>280</td> <td>293</td> <td>Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	5149.24	47.31	-6.69	54.00	33.14	34.87	11.09	31.79	280	293	Average	Blank																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																															
Freq	Level	Limit	Line	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																															
1	5149.24	47.31	-6.69	54.00	33.14	34.87	11.09	31.79	280	293	Average																																																																											



		41																																																																
Mode		Band Edge																																																																
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+BLE2M CH38+LTE B13 Link Co-TX																																																																
Pol.	Horizontal	Fundamental																																																																
Peak	<p>Data: 3 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2483.84</td> <td>51.39</td> <td>-22.61</td> <td>74.00</td> <td>43.14</td> <td>32.46</td> <td>7.88</td> <td>32.09 368 149 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1 * 2483.84	51.39	-22.61	74.00	43.14	32.46	7.88	32.09 368 149 Peak	<p>Data: 1 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2478.00</td> <td>100.35</td> <td>26.35</td> <td>74.00</td> <td>92.11</td> <td>32.45</td> <td>7.88</td> <td>32.09 368 149 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1 * 2478.00	100.35	26.35	74.00	92.11	32.45	7.88	32.09 368 149 Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																																																											
1 * 2483.84	51.39	-22.61	74.00	43.14	32.46	7.88	32.09 368 149 Peak																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																																																											
1 * 2478.00	100.35	26.35	74.00	92.11	32.45	7.88	32.09 368 149 Peak																																																											
Avg	<p>Data: 4 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 2485.44</td> <td>43.34</td> <td>-10.66</td> <td>54.00</td> <td>35.08</td> <td>32.47</td> <td>7.88</td> <td>32.09 368 149 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1 2485.44	43.34	-10.66	54.00	35.08	32.47	7.88	32.09 368 149 Average	<p>Data: 2 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2478.00</td> <td>100.04</td> <td>46.04</td> <td>54.00</td> <td>91.80</td> <td>32.45</td> <td>7.88</td> <td>32.09 368 149 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg	1 * 2478.00	100.04	46.04	54.00	91.80	32.45	7.88	32.09 368 149 Average
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																																																											
1 2485.44	43.34	-10.66	54.00	35.08	32.47	7.88	32.09 368 149 Average																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm deg																																																											
1 * 2478.00	100.04	46.04	54.00	91.80	32.45	7.88	32.09 368 149 Average																																																											



		41																																																																
Mode		Band Edge																																																																
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+BLE2M CH38+LTE B13 Link Co-TX																																																																
Pol.	Vertical	Fundamental																																																																
Peak	<p>Data: 7 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2484.24</td> <td>50.62</td> <td>-23.38</td> <td>74.00</td> <td>42.36</td> <td>32.47</td> <td>7.88</td> <td>32.09 373 110 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 2484.24	50.62	-23.38	74.00	42.36	32.47	7.88	32.09 373 110 Peak	<p>Data: 5 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2478.00</td> <td>97.86</td> <td>23.86</td> <td>74.00</td> <td>89.62</td> <td>32.45</td> <td>7.88</td> <td>32.09 373 110 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 2478.00	97.86	23.86	74.00	89.62	32.45	7.88	32.09 373 110 Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 2484.24	50.62	-23.38	74.00	42.36	32.47	7.88	32.09 373 110 Peak																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 2478.00	97.86	23.86	74.00	89.62	32.45	7.88	32.09 373 110 Peak																																																											
Avg	<p>Data: 8 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2484.64</td> <td>42.20</td> <td>-11.80</td> <td>54.00</td> <td>33.94</td> <td>32.47</td> <td>7.88</td> <td>32.09 373 110 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 2484.64	42.20	-11.80	54.00	33.94	32.47	7.88	32.09 373 110 Average	<p>Data: 6 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 2478.00</td> <td>97.57</td> <td>43.57</td> <td>54.00</td> <td>89.33</td> <td>32.45</td> <td>7.88</td> <td>32.09 373 110 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 2478.00	97.57	43.57	54.00	89.33	32.45	7.88	32.09 373 110 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 2484.64	42.20	-11.80	54.00	33.94	32.47	7.88	32.09 373 110 Average																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Loss	Factor	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 2478.00	97.57	43.57	54.00	89.33	32.45	7.88	32.09 373 110 Average																																																											







		41																																																																																																																																																
Mode		Harmonic																																																																																																																																																
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz+BLE2M CH38+LTE B13 Link Co-TX																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																
Peak Avg	<p>Data: 1 Date: 2024-04-09</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>47.78</td> <td>-26.22</td> <td>74.00</td> <td>36.25</td> <td>35.71</td> <td>8.53</td> <td>32.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>47.76</td> <td>-26.24</td> <td>74.00</td> <td>34.35</td> <td>36.77</td> <td>10.17</td> <td>33.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>* 10360.00</td> <td>49.88</td> <td>-18.42</td> <td>68.30</td> <td>32.27</td> <td>38.64</td> <td>12.06</td> <td>33.09</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>15540.00</td> <td>47.33</td> <td>-26.67</td> <td>74.00</td> <td>25.67</td> <td>41.08</td> <td>14.59</td> <td>34.01</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4956.00	47.78	-26.22	74.00	36.25	35.71	8.53	32.71	---	---	Peak	2	7434.00	47.76	-26.24	74.00	34.35	36.77	10.17	33.53	---	---	Peak	3	* 10360.00	49.88	-18.42	68.30	32.27	38.64	12.06	33.09	---	---	Peak	4	15540.00	47.33	-26.67	74.00	25.67	41.08	14.59	34.01	---	---	Peak	<p>Data: 2 Date: 2024-04-08</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>47.03</td> <td>-26.97</td> <td>74.00</td> <td>35.50</td> <td>35.71</td> <td>8.53</td> <td>32.71</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>47.73</td> <td>-26.27</td> <td>74.00</td> <td>34.32</td> <td>36.77</td> <td>10.17</td> <td>33.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>* 10360.00</td> <td>49.43</td> <td>-18.87</td> <td>68.30</td> <td>31.82</td> <td>38.64</td> <td>12.06</td> <td>33.09</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>15540.00</td> <td>47.84</td> <td>-26.16</td> <td>74.00</td> <td>26.18</td> <td>41.08</td> <td>14.59</td> <td>34.01</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	4956.00	47.03	-26.97	74.00	35.50	35.71	8.53	32.71	---	---	Peak	2	7434.00	47.73	-26.27	74.00	34.32	36.77	10.17	33.53	---	---	Peak	3	* 10360.00	49.43	-18.87	68.30	31.82	38.64	12.06	33.09	---	---	Peak	4	15540.00	47.84	-26.16	74.00	26.18	41.08	14.59	34.01	---	---	Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																										
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																																																																											
1	4956.00	47.78	-26.22	74.00	36.25	35.71	8.53	32.71	---	---	Peak																																																																																																																																							
2	7434.00	47.76	-26.24	74.00	34.35	36.77	10.17	33.53	---	---	Peak																																																																																																																																							
3	* 10360.00	49.88	-18.42	68.30	32.27	38.64	12.06	33.09	---	---	Peak																																																																																																																																							
4	15540.00	47.33	-26.67	74.00	25.67	41.08	14.59	34.01	---	---	Peak																																																																																																																																							
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																																																																											
1	4956.00	47.03	-26.97	74.00	35.50	35.71	8.53	32.71	---	---	Peak																																																																																																																																							
2	7434.00	47.73	-26.27	74.00	34.32	36.77	10.17	33.53	---	---	Peak																																																																																																																																							
3	* 10360.00	49.43	-18.87	68.30	31.82	38.64	12.06	33.09	---	---	Peak																																																																																																																																							
4	15540.00	47.84	-26.16	74.00	26.18	41.08	14.59	34.01	---	---	Peak																																																																																																																																							

Note: the highest signals over limit are co-location fundamental signal.



		42																																																																																										
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH104_5520MHz																																																																																											
Pol.	Horizontal		Fundamental																																																																																									
Peak	<p style="text-align: right;">Date: 2024-04-10</p>		<p style="text-align: right;">Date: 2024-04-10</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.40</td> <td>59.54</td> <td>74.00</td> <td>-14.46</td> <td>45.77</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>273</td> <td>356</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.25</td> <td>62.84</td> <td>68.30</td> <td>-5.46</td> <td>49.06</td> <td>34.81</td> <td>11.15</td> <td>32.18</td> <td>273</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.40	59.54	74.00	-14.46	45.77	34.81	11.12	32.16	273	356	PEAK	2	5468.25	62.84	68.30	-5.46	49.06	34.81	11.15	32.18	273	356	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5520.00</td> <td>108.96</td> <td>-----</td> <td>-----</td> <td>94.99</td> <td>34.83</td> <td>11.37</td> <td>32.23</td> <td>273</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5520.00	108.96	-----	-----	94.99	34.83	11.37	32.23	273	356
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.40	59.54	74.00	-14.46	45.77	34.81	11.12	32.16	273	356	PEAK																																																																																	
2	5468.25	62.84	68.30	-5.46	49.06	34.81	11.15	32.18	273	356	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5520.00	108.96	-----	-----	94.99	34.83	11.37	32.23	273	356	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2024-04-10</p>		<p style="text-align: right;">Date: 2024-04-10</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.06</td> <td>45.91</td> <td>54.00</td> <td>-8.09</td> <td>32.14</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>273</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.06	45.91	54.00	-8.09	32.14	34.81	11.12	32.16	273	356	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5520.00</td> <td>102.82</td> <td>-----</td> <td>-----</td> <td>88.87</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>273</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5520.00	102.82	-----	-----	88.87	34.82	11.35	32.22	273	356	AVERAGE											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.06	45.91	54.00	-8.09	32.14	34.81	11.12	32.16	273	356	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5520.00	102.82	-----	-----	88.87	34.82	11.35	32.22	273	356	AVERAGE																																																																																	

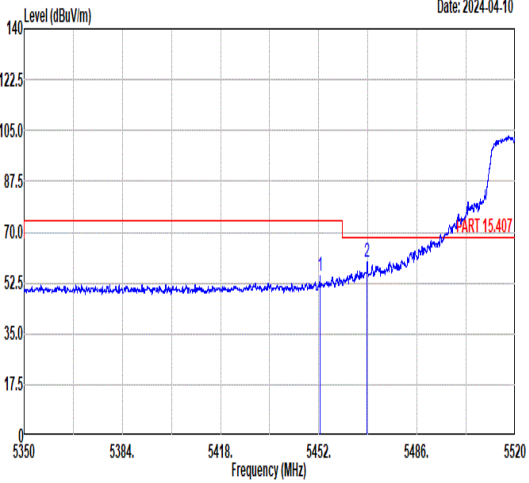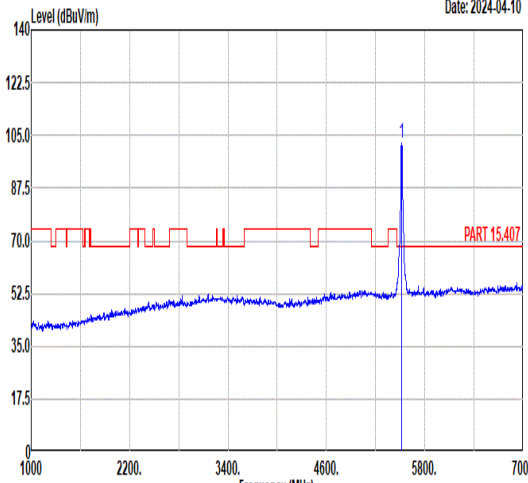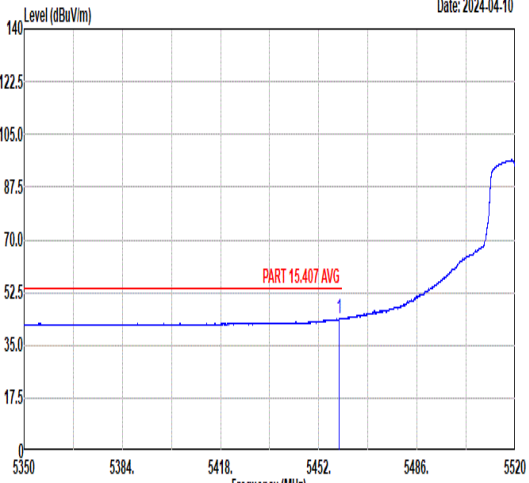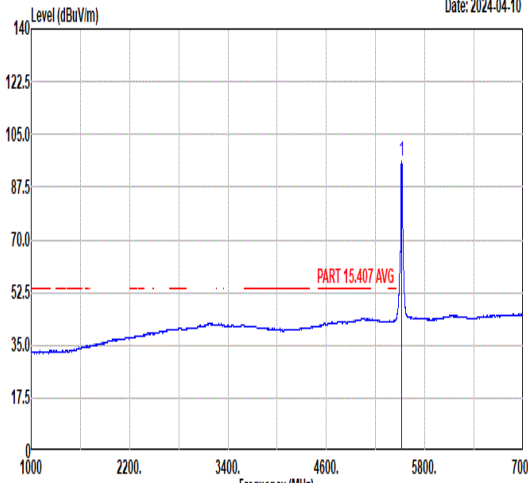

		42																																																								
Mode	Band Edge																																																									
	U-NII-2C_5.47-5.725_802.11a_CH104_5520MHz																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5452.43 54.96 74.00 -19.04</td> <td>41.22</td> <td>34.81</td> <td>11.09</td> <td>32.16</td> <td>300</td> <td>327</td> <td>PEAK</td> </tr> <tr> <td>2 5468.76 59.52 68.30 -8.78</td> <td>45.73</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>300</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5452.43 54.96 74.00 -19.04	41.22	34.81	11.09	32.16	300	327	PEAK	2 5468.76 59.52 68.30 -8.78	45.73	34.81	11.16	32.18	300	327	PEAK	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5520.00 102.37</td> <td>88.42</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>300</td> <td>327</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5520.00 102.37	88.42	34.82	11.35	32.22	300	327	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5452.43 54.96 74.00 -19.04	41.22	34.81	11.09	32.16	300	327	PEAK																																																			
2 5468.76 59.52 68.30 -8.78	45.73	34.81	11.16	32.18	300	327	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5520.00 102.37	88.42	34.82	11.35	32.22	300	327	PEAK																																																			
Avg	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.06 43.95 54.00 -10.05</td> <td>30.18</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>300</td> <td>327</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5459.06 43.95 54.00 -10.05	30.18	34.81	11.12	32.16	300	327	AVERAGE	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5520.00 95.96</td> <td>82.01</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>300</td> <td>327</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5520.00 95.96	82.01	34.82	11.35	32.22	300	327	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5459.06 43.95 54.00 -10.05	30.18	34.81	11.12	32.16	300	327	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5520.00 95.96	82.01	34.82	11.35	32.22	300	327	AVERAGE																																																			



		43																																																																															
Mode	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH136_5680MHz																																																																																
Pol.	Horizontal		Fundamental																																																																														
Peak																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.19</td> <td>60.06</td> <td>68.30</td> <td>-8.24</td> <td>45.68</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>261</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5725.19	60.06	68.30	-8.24	45.68	35.12	11.65	32.39	261	355	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>108.46</td> <td>-----</td> <td>-----</td> <td>94.08</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>261</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5680.00	108.46	-----	-----	94.08	35.05	11.68	32.35	261	355
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	5725.19	60.06	68.30	-8.24	45.68	35.12	11.65	32.39	261	355	PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	5680.00	108.46	-----	-----	94.08	35.05	11.68	32.35	261	355	PEAK																																																																						
Avg	Blank																																																																																
			<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>102.05</td> <td>-----</td> <td>-----</td> <td>87.67</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>261</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5680.00	102.05	-----	-----	87.67	35.05	11.68	32.35	261	355	AVERAGE																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	5680.00	102.05	-----	-----	87.67	35.05	11.68	32.35	261	355	AVERAGE																																																																						







		43																																																																														
Mode	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH136_5680MHz																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.34</td> <td>58.91</td> <td>68.30</td> <td>-9.39</td> <td>44.53</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>385</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.34	58.91	68.30	-9.39	44.53	35.12	11.65	32.39	385	95 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>102.75</td> <td>-----</td> <td>-----</td> <td>88.37</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>385</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	102.75	-----	-----	88.37	35.05	11.68	32.35	385	95 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5725.34	58.91	68.30	-9.39	44.53	35.12	11.65	32.39	385	95 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5680.00	102.75	-----	-----	88.37	35.05	11.68	32.35	385	95 PEAK																																																																						
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>96.46</td> <td>-----</td> <td>-----</td> <td>82.08</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>385</td> <td>95 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	96.46	-----	-----	82.08	35.05	11.68	32.35	385	95 AVERAGE																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5680.00	96.46	-----	-----	82.08	35.05	11.68	32.35	385	95 AVERAGE																																																																						



		44																																																								
Mode		Band Edge																																																								
		U-NII-2C_5.47-5.725_802.11n HT20_CH104_5520MHz																																																								
Pol.	Horizontal	Fundamental																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.89 63.79 74.00 -10.21</td> <td>50.02</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>273</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2 5466.04 62.30 68.30 -6.00</td> <td>48.51</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>273</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5458.89 63.79 74.00 -10.21	50.02	34.81	11.12	32.16	273	355	PEAK	2 5466.04 62.30 68.30 -6.00	48.51	34.81	11.15	32.17	273	355	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5520.00 108.67 -----</td> <td>94.72</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>273</td> <td>355</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5520.00 108.67 -----	94.72	34.82	11.35	32.22	273	355	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5458.89 63.79 74.00 -10.21	50.02	34.81	11.12	32.16	273	355	PEAK																																																			
2 5466.04 62.30 68.30 -6.00	48.51	34.81	11.15	32.17	273	355	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5520.00 108.67 -----	94.72	34.82	11.35	32.22	273	355	PEAK																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.99 46.60 54.00 -7.40</td> <td>32.84</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>273</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5459.99 46.60 54.00 -7.40	32.84	34.81	11.12	32.17	273	355	AVERAGE	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5520.00 101.94 -----</td> <td>87.99</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>273</td> <td>355</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		1 5520.00 101.94 -----	87.99	34.82	11.35	32.22	273	355	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5459.99 46.60 54.00 -7.40	32.84	34.81	11.12	32.17	273	355	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																				
1 5520.00 101.94 -----	87.99	34.82	11.35	32.22	273	355	AVERAGE																																																			

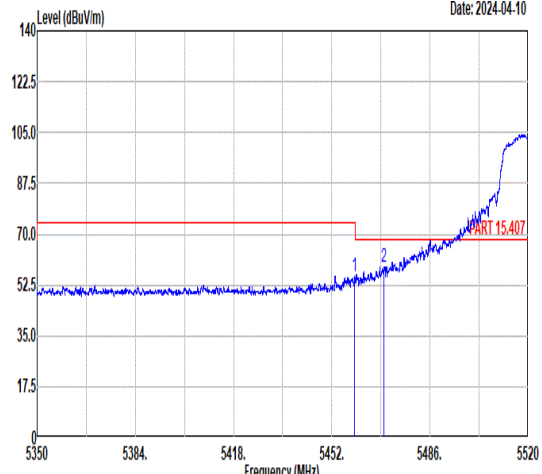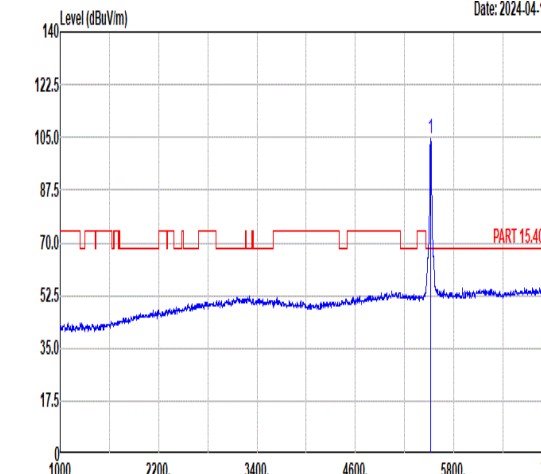
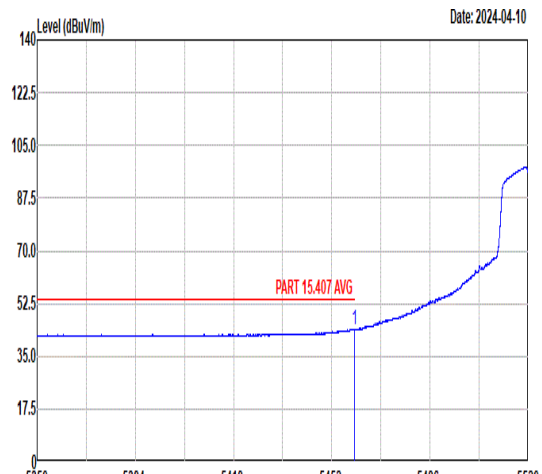
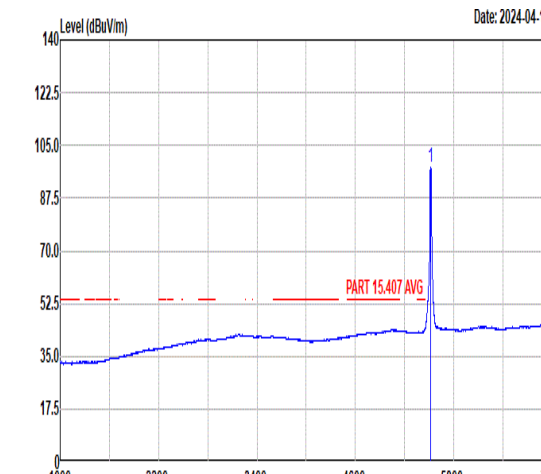


		44																																																																																										
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH104_5520MHz																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>55.26</td> <td>74.00</td> <td>-18.74</td> <td>41.50</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>300</td> <td>304</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.94</td> <td>58.84</td> <td>68.30</td> <td>-9.46</td> <td>45.05</td> <td>34.81</td> <td>11.16</td> <td>32.18</td> <td>300</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	55.26	74.00	-18.74	41.50	34.81	11.12	32.17	300	304	PEAK	2	5469.94	58.84	68.30	-9.46	45.05	34.81	11.16	32.18	300	304	PEAK	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5520.00</td> <td>104.44</td> <td>-----</td> <td>-----</td> <td>90.49</td> <td>34.82</td> <td>11.35</td> <td>32.22</td> <td>300</td> <td>304</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5520.00	104.44	-----	-----	90.49	34.82	11.35	32.22	300	304	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.92	55.26	74.00	-18.74	41.50	34.81	11.12	32.17	300	304	PEAK																																																																																	
2	5469.94	58.84	68.30	-9.46	45.05	34.81	11.16	32.18	300	304	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5520.00	104.44	-----	-----	90.49	34.82	11.35	32.22	300	304	PEAK																																																																																	
Avg	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.99</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>30.18</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>300</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.99	43.94	54.00	-10.06	30.18	34.81	11.12	32.17	300	304	AVERAGE	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5520.00</td> <td>97.83</td> <td>-----</td> <td>-----</td> <td>83.86</td> <td>34.83</td> <td>11.37</td> <td>32.23</td> <td>300</td> <td>304</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5520.00	97.83	-----	-----	83.86	34.83	11.37	32.23	300	304	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5459.99	43.94	54.00	-10.06	30.18	34.81	11.12	32.17	300	304	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5520.00	97.83	-----	-----	83.86	34.83	11.37	32.23	300	304	AVERAGE																																																																																	



		45																																																												
Mode		Band Edge																																																												
		U-NII-2C_5.47-5.725_802.11n HT20_CH136_5680MHz																																																												
Pol.	Horizontal	Fundamental																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.20</td> <td>61.30</td> <td>68.30</td> <td>-7.00</td> <td>46.92</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>257</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5726.20	61.30	68.30	-7.00	46.92	35.12	11.65	32.39	257	356	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>107.48</td> <td>-----</td> <td>-----</td> <td>93.10</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>257</td> <td>356</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5680.00	107.48	-----	-----	93.10	35.05	11.68	32.35	257	356	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																					
1	5726.20	61.30	68.30	-7.00	46.92	35.12	11.65	32.39	257	356	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																					
1	5680.00	107.48	-----	-----	93.10	35.05	11.68	32.35	257	356	PEAK																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>101.16</td> <td>-----</td> <td>-----</td> <td>86.78</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>257</td> <td>356</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg	1	5680.00	101.16	-----	-----	86.78	35.05	11.68	32.35	257	356	AVERAGE																													
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	cm	deg																																																					
1	5680.00	101.16	-----	-----	86.78	35.05	11.68	32.35	257	356	AVERAGE																																																			

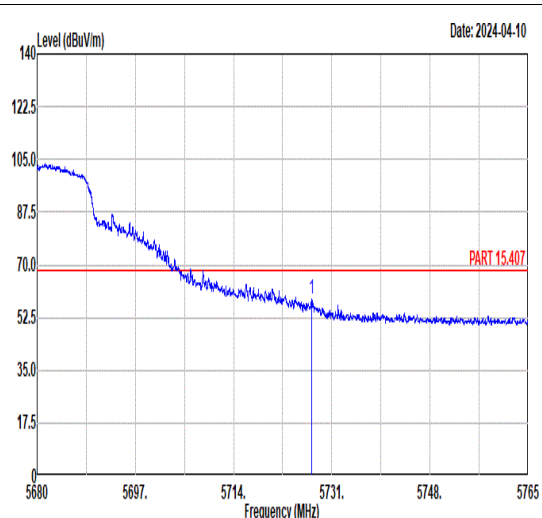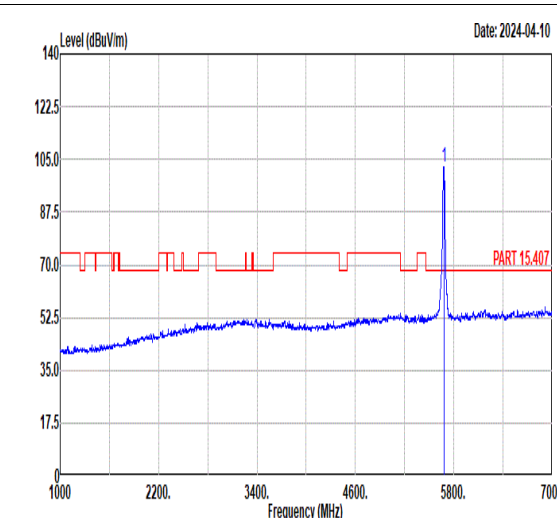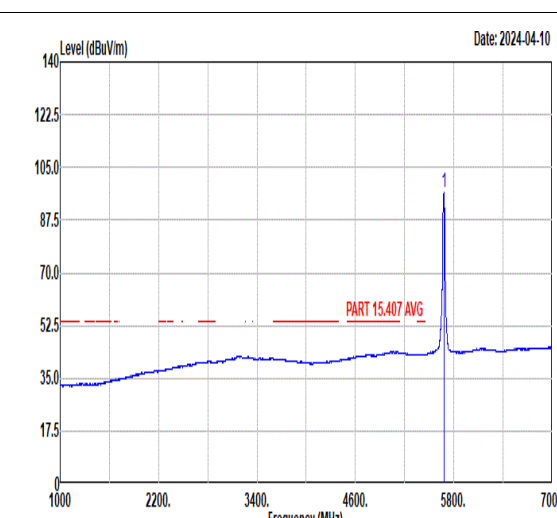

		45																																																																														
Mode		Band Edge																																																																														
		U-NII-2C_5.47-5.725_802.11n HT20_CH136_5680MHz																																																																														
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.57</td> <td>58.55</td> <td>68.30</td> <td>-9.75</td> <td>44.17</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>385</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.57	58.55	68.30	-9.75	44.17	35.12	11.65	32.39	385	95 PEAK	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>102.58</td> <td>-----</td> <td>-----</td> <td>88.20</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>385</td> <td>95 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	102.58	-----	-----	88.20	35.05	11.68	32.35	385	95 PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5727.57	58.55	68.30	-9.75	44.17	35.12	11.65	32.39	385	95 PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5680.00	102.58	-----	-----	88.20	35.05	11.68	32.35	385	95 PEAK																																																																						
Avg	Blank	 <p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5680.00</td> <td>96.43</td> <td>-----</td> <td>-----</td> <td>82.05</td> <td>35.05</td> <td>11.68</td> <td>32.35</td> <td>385</td> <td>95 AVERAGE</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5680.00	96.43	-----	-----	82.05	35.05	11.68	32.35	385	95 AVERAGE																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5680.00	96.43	-----	-----	82.05	35.05	11.68	32.35	385	95 AVERAGE																																																																						







		46																																																								
Mode		Band Edge - L																																																								
		U-NII-2C_5.47-5.725_802.11n HT40_CH126_5630MHz																																																								
Pol.	Horizontal	Fundamental																																																								
Peak	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5387.97 51.87 74.00 -22.13</td> <td>38.22</td> <td>34.82</td> <td>10.91</td> <td>32.08</td> <td>306</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 5463.26 50.95 68.30 -17.35</td> <td>37.18</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>306</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5387.97 51.87 74.00 -22.13	38.22	34.82	10.91	32.08	306	360	PEAK	2 5463.26 50.95 68.30 -17.35	37.18	34.81	11.13	32.17	306	360	PEAK	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5630.00 103.34</td> <td>88.97</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>306</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5630.00 103.34	88.97	34.98	11.70	32.31	306	360	PEAK
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5387.97 51.87 74.00 -22.13	38.22	34.82	10.91	32.08	306	360	PEAK																																																			
2 5463.26 50.95 68.30 -17.35	37.18	34.81	11.13	32.17	306	360	PEAK																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5630.00 103.34	88.97	34.98	11.70	32.31	306	360	PEAK																																																			
Avg	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.22 42.99 54.00 -11.01</td> <td>29.23</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>306</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5458.22 42.99 54.00 -11.01	29.23	34.81	11.11	32.16	306	360	AVERAGE	<p style="text-align: right;">Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5630.00 96.68</td> <td>82.31</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>306</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg		1 5630.00 96.68	82.31	34.98	11.70	32.31	306	360	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5458.22 42.99 54.00 -11.01	29.23	34.81	11.11	32.16	306	360	AVERAGE																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	Loss Factor	cm	deg																																																				
1 5630.00 96.68	82.31	34.98	11.70	32.31	306	360	AVERAGE																																																			



Mode	46																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH126_5630MHz																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.24</td> <td>54.18</td> <td>68.30</td> <td>-14.12</td> <td>39.80</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>306 360 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5725.24	54.18	68.30	-14.12	39.80	35.12	11.65	32.39	306 360 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5725.24	54.18	68.30	-14.12	39.80	35.12	11.65	32.39	306 360 PEAK																														

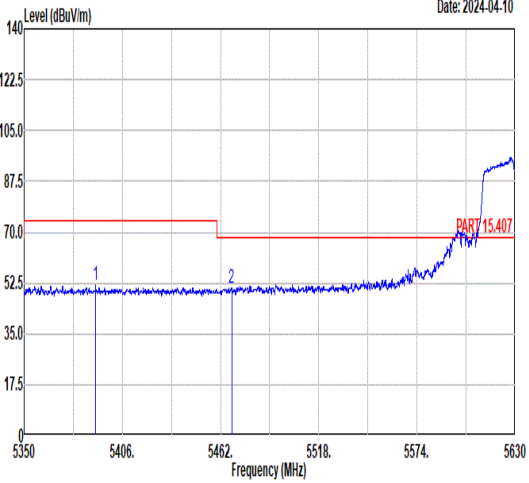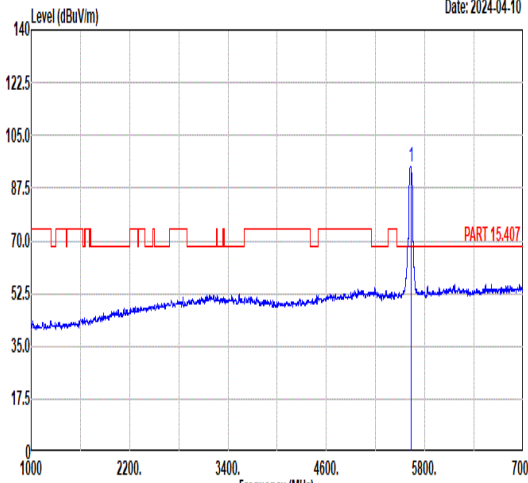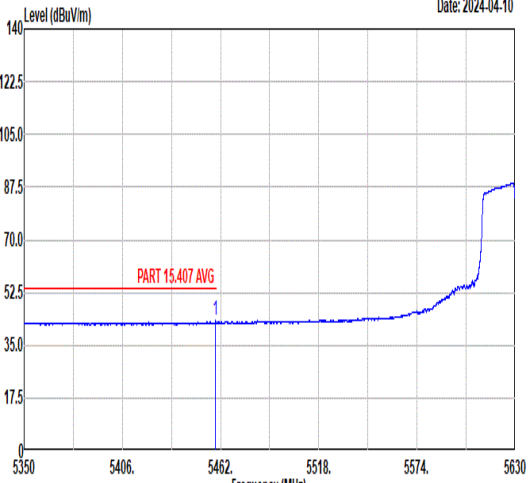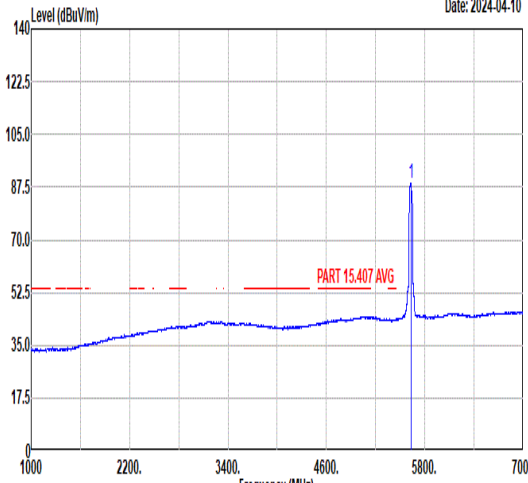

		46																																																																								
Mode		Band Edge - L																																																																								
		U-NII-2C_5.47-5.725_802.11n HT40_CH126_5630MHz																																																																								
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5390.77 51.89 74.00 -22.11</td> <td>38.24</td> <td>34.82</td> <td>10.91</td> <td>32.08</td> <td>239</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 5468.30 50.77 68.30 -17.53</td> <td>36.99</td> <td>34.81</td> <td>11.15</td> <td>32.18</td> <td>239</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5390.77 51.89 74.00 -22.11	38.24	34.82	10.91	32.08	239	360	PEAK	2 5468.30 50.77 68.30 -17.53	36.99	34.81	11.15	32.18	239	360	PEAK	 <p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5630.00 94.71</td> <td>80.35</td> <td>34.97</td> <td>11.70</td> <td>32.31</td> <td>239</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5630.00 94.71	80.35	34.97	11.70	32.31	239	360	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5390.77 51.89 74.00 -22.11	38.24	34.82	10.91	32.08	239	360	PEAK																																																																			
2 5468.30 50.77 68.30 -17.53	36.99	34.81	11.15	32.18	239	360	PEAK																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5630.00 94.71	80.35	34.97	11.70	32.31	239	360	PEAK																																																																			
Avg	 <p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.06 43.45 54.00 -10.55</td> <td>29.68</td> <td>34.81</td> <td>11.12</td> <td>32.16</td> <td>239</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5459.06 43.45 54.00 -10.55	29.68	34.81	11.12	32.16	239	360	AVERAGE	 <p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5630.00 88.67</td> <td>74.30</td> <td>34.98</td> <td>11.70</td> <td>32.31</td> <td>239</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor						MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 5630.00 88.67	74.30	34.98	11.70	32.31	239	360	AVERAGE								
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5459.06 43.45 54.00 -10.55	29.68	34.81	11.12	32.16	239	360	AVERAGE																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line (dB)	Level Factor	Loss Factor																																																																								
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5630.00 88.67	74.30	34.98	11.70	32.31	239	360	AVERAGE																																																																			




Mode	46																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH126_5630MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-04-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.00</td> <td>52.68</td> <td>68.30</td> <td>-15.62</td> <td>38.30</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>239 360 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5727.00	52.68	68.30	-15.62	38.30	35.12	11.65	32.39	239 360 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5727.00	52.68	68.30	-15.62	38.30	35.12	11.65	32.39	239 360 PEAK																														



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	97.20	1.39	0.719	1KHz
802.11n HT20	97.38	1.3	0.769	1KHz
802.11n HT40	94.74	0.648	1.543	3KHz
802.11ac VHT80	90.56	0.326	3.067	10KHz


802.11a

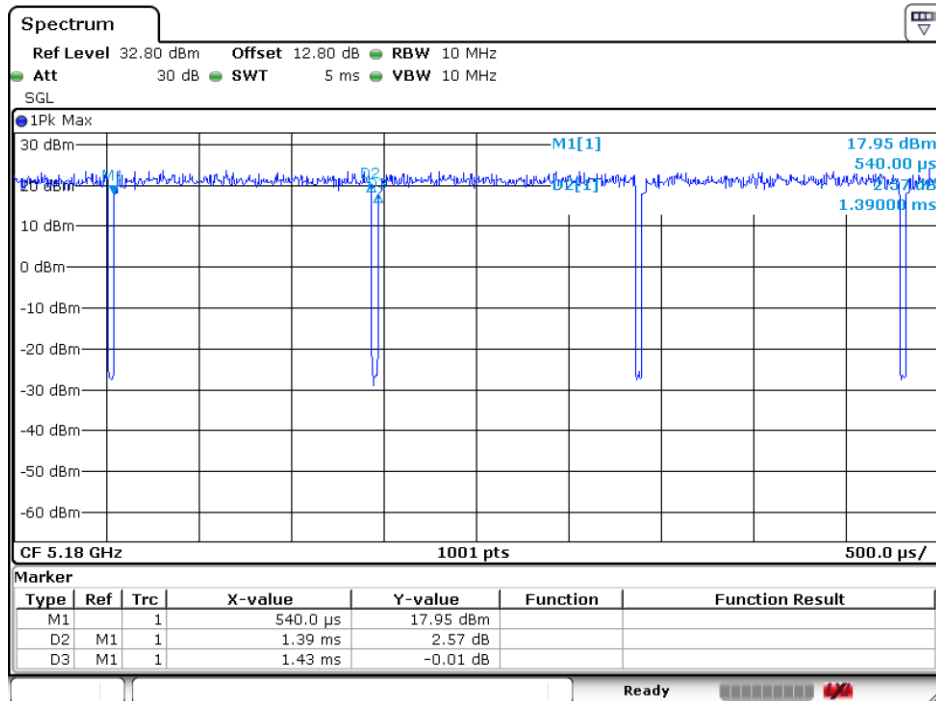

Date: 29.MAR.2024 14:03:10




802.11n HT20

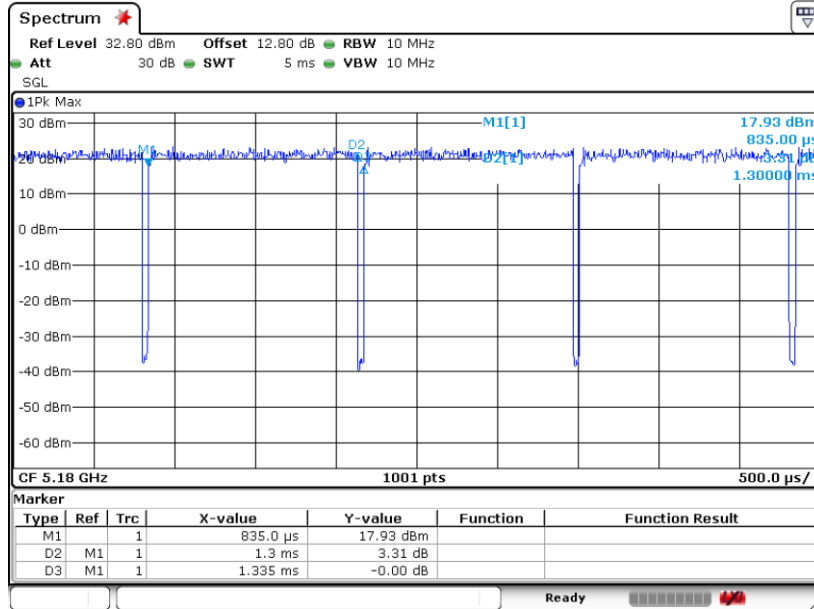

Date: 29.MAR.2024 14:38:41


802.11n HT40

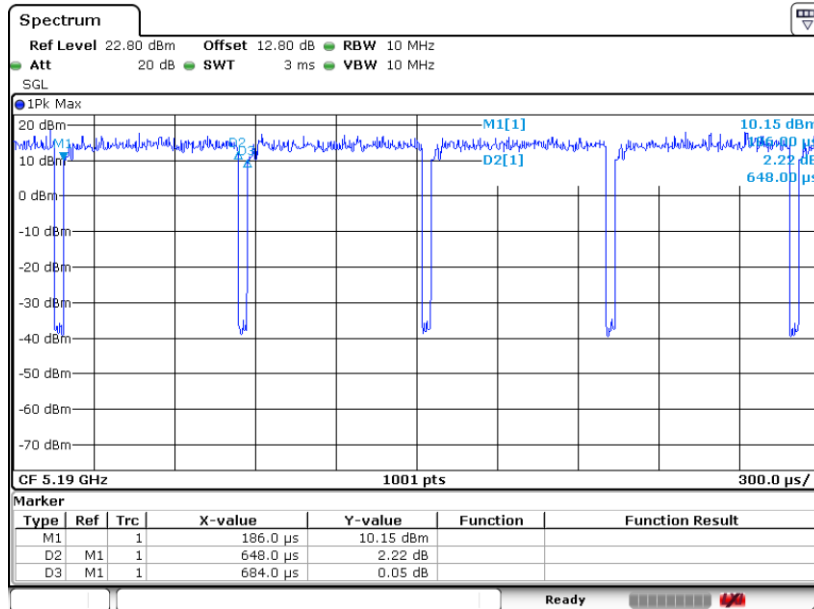

Date: 29.MAR.2024 14:48:31



802.11ac VHT80

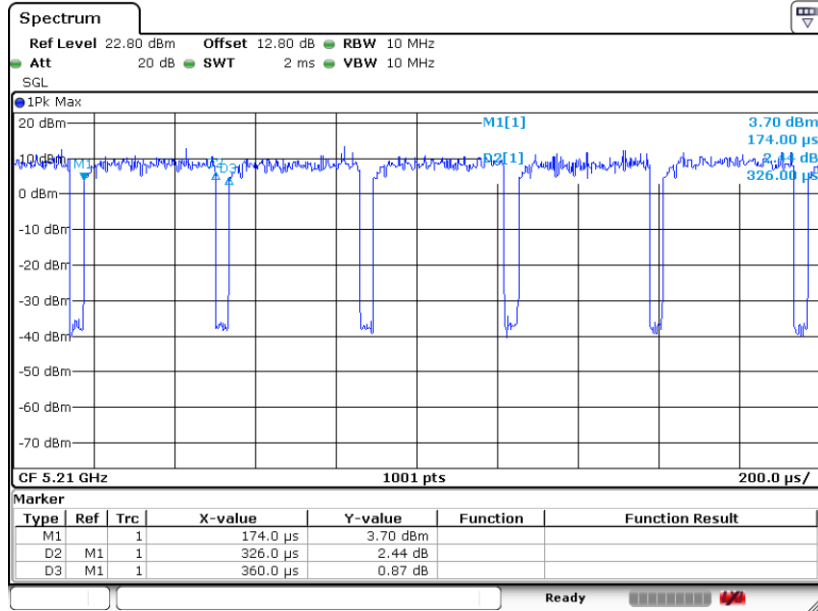

Date: 29.MAR.2024 14:54:08