



FCC RF Test Report

APPLICANT : Guangdong OPPO Mobile Telecommunications Corp., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : OPPO
MODEL NAME : CPH2639
FCC ID : R9C-OP23302
STANDARD : 47 CFR Part 2, 22, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Mar. 30, 2024 ~ May. 08, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Maximum ERP/EIRP and Emission Designator 7
1.7 Testing Location 9
1.8 Test Software 9
1.9 Applicable Standards 9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10
2.1 Test Mode 10
2.2 Connection Diagram of Test System 12
2.3 Support Unit used in test configuration and system 12
2.4 Measurement Results Explanation Example 13
2.5 Frequency List of Low/Middle/High Channels 13
3 CONDUCTED TEST ITEMS 16
3.1 Measuring Instruments 16
3.2 Test Setup 16
3.3 Test Result of Conducted Test 16
3.4 Conducted Output Power and ERP/EIRP 17
3.5 Peak-to-Average Ratio 18
3.6 Occupied Bandwidth 19
3.7 Conducted Band Edge 20
3.8 Conducted Spurious Emission 22
3.9 Frequency Stability 23
4 RADIATED TEST ITEMS 24
4.1 Measuring Instruments 24
4.2 Test Setup 24
4.3 Test Result of Radiated Test 25
4.4 Radiated Spurious Emission 26
5 LIST OF MEASURING EQUIPMENT 27
6 MEASUREMENT UNCERTAINTY 28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §27.53(h)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n66)	< 43+10log10(P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(h)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n66)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 26.32 dB at 10122.36 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.2 Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	OPPO
Model Name	CPH2639
FCC ID	R9C-OP23302
IMEI Code	Conducted : 860772070027175/860772070027167 Radiation : 860772070026672/860772070026664
HW Version	11
SW Version	ColorOS 14.0.1
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n26 : 824 MHz ~ 849 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz
Rx Frequency	5G NR n5 : 869 MHz ~ 894 MHz 5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n26 : 869 MHz ~ 894 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 2110 MHz~ 2200 MHz
Bandwidth	n5 : 5MHz / 10MHz / 15MHz / 20MHz / 25MHz n7 : 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz n26 : 5MHz / 10MHz / 15MHz / 20MHz n38 : 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n41 : 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz



	n66 : 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz
SCS	15kHz for FDD Bands, 30kHz for TDD Bands
Antenna Gain	<p><Ant. 0>: n5: -5.5 dBi n7: 0.1 dBi n26: -5.5 dBi n38: 0.1 dBi n41: 0.1 dBi n66: -0.9 dBi</p> <p><Ant. 1>: n5: -4.2 dBi n7: -0.3 dBi n26: -4.2 dBi n38: -0.2 dBi n41: -0.2 dBi n66: -2.3 dBi</p> <p><Ant. 4>: n7: -2.1 dBi n38: -2.3 dBi n41: -2.1 dBi n66: -6.6 dBi</p>
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP of Ant. 1 for n5/n26, and Ant. 0 for n7/n38/n41/n66 are shown in the report.
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. 5G NR n5/26/7/n66/n38/n41 support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
4. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP and Emission Designator

5G NR n5		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0619	4M46G7D	0.0484	4M48W7D
10	829.0 ~ 844.0	0.0612	9M27G7D	0.0482	9M29W7D
15	831.5 ~ 841.5	0.0625	14M1G7D	0.0489	14M1W7D
20	834.0 ~ 839.0	0.0627	18M9G7D	0.0475	18M9W7D
25	836.5	0.0473	23M7G7D	0.0389	23M8W7D
5G NR n26		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0630	4M46G7D	0.0493	4M48W7D
10	829.0 ~ 844.0	0.0632	9M27G7D	0.0490	9M29W7D
15	831.5 ~ 841.5	0.0628	14M1G7D	0.0500	14M1W7D
20	834.0 ~ 839.0	0.0647	18M9G7D	0.0520	18M9W7D
5G NR n66		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.2163	4M46G7D	0.1710	4M47W7D
10	1715.0 ~ 1775.0	0.2163	9M26G7D	0.1750	9M29W7D
15	1717.5 ~ 1772.5	0.2173	14M1G7D	0.1679	14M1W7D
20	1720.0 ~ 1770.0	0.2153	18M9G7D	0.1702	18M9W7D
30	1725.0 ~ 1765.0	0.2148	28M5G7D	0.1718	28M5W7D
40	1730.0 ~ 1760.0	0.2178	38M5G7D	0.1718	38M5W7D
5G NR n7		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.2547	4M46G7D	0.2099	4M49W7D
10	2505.0 ~ 2565.0	0.2472	9M28G7D	0.2028	9M29W7D
15	2507.5 ~ 2562.5	0.2636	14M1G7D	0.2123	14M1W7D
20	2510.0 ~ 2560.0	0.2594	18M9G7D	0.2061	19M0W7D
25	2512.5 ~ 2557.5	0.2649	23M7G7D	0.2270	23M8W7D
30	2515.0 ~ 2555.0	0.2661	28M5G7D	0.2291	28M6W7D
40	2520.0 ~ 2550.0	0.2649	38M6G7D	0.2178	38M6W7D
50	2525.0 ~ 2545.0	0.2710	48M2G7D	0.2178	48M3W7D



5G NR n38		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.2630	8M58G7D	0.2138	8M60W7D
15	2577.5 ~ 2612.5	0.2618	13M6G7D	0.2138	13M7W7D
20	2580.0 ~ 2610.0	0.2649	18M2G7D	0.2153	18M3W7D
30	2585.0 ~ 2605.0	0.2606	27M9G7D	0.2089	27M8W7D
40	2590.0 ~ 2600.0	0.2780	37M9G7D	0.2275	37M8W7D
5G NR n41		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2506.02 ~ 2679.99	0.2649	18M2G7D	0.2143	18M3W7D
30	2511.00 ~ 2674.98	0.2667	27M9G7D	0.2148	27M8W7D
40	2516.01 ~ 2670.00	0.2679	37M9G7D	0.2173	37M8W7D
50	2521.02 ~ 2664.99	0.2636	47M3G7D	0.2128	47M5W7D
60	2526.00 ~ 2659.98	0.2655	57M9G7D	0.2133	57M8W7D
70	2531.01 ~ 2655.00	0.2780	67M4G7D	0.2249	67M5W7D
80	2536.02 ~ 2649.99	0.2799	77M4G7D	0.2270	77M5W7D
90	2541.00 ~ 2644.98	0.2553	87M5G7D	0.2084	87M6W7D
100	2546.01 ~ 2640.00	0.2793	97M6G7D	0.2323	97M6W7D

Note:

1. 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5, expect the n5 25MHz BW is full tested.
2. 5G NR n41 overlaps the entire frequency range of n38. Therefore, the conducted test results provided in this report covers n41 as well as n38, except the BW 10M/15M of n38 are additional tested.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

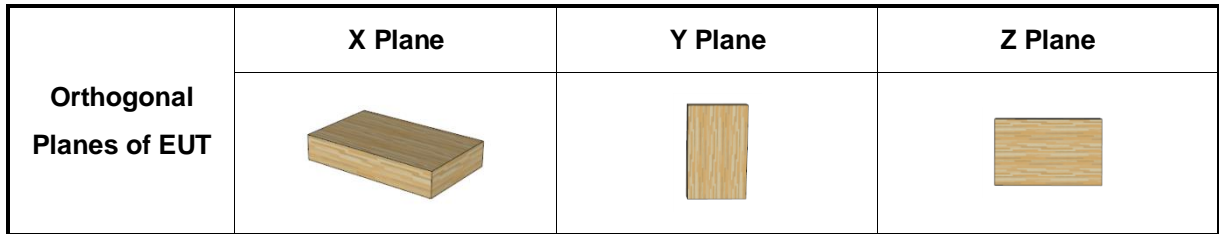


Test Items	5G NR	Bandwidth (MHz)													Modulation				RB #		Test Channel							
		5	10	15	20	25	30	35	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H			
Max. Output Power	n5	v	v	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
	n7	v	v	v	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	n38	-	v	v	v	-	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	n41	-	-	-	v	-	v	-	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	-	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n7				v			-			-	-	-	-	-	v						v			v			
	n26				v	-	-	-	-	-	-	-	-	-	-	v							v			v		
	n41	-	-	-	v	-		-							-	v							v			v		
	n66				v	-		-		-	-	-	-	-	-	v							v			v		
26dB and 99% Bandwidth	n5					v	-	-	-	-	-	-	-	-	-	v	v	v	v			v			v			
	n7	v	v	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v			v			v			
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v			v			v			
	n38	-	v	v		-		-		-	-	-	-	-	-	v	v	v	v			v			v			
	n41	-	-	-	v	-	v	-	v	v	v	v	v	v	v	-	v	v	v	v			v			v		
	n66	v	v	v	v	-	v	-	v	-	-	-	-	-	-	v	v	v	v			v			v			
Conducted Band Edge	n5					v	-	-	-	-	-	-	-	-	-	v						v	v	v			v	
	n7	v				v		-		v	-	-	-	-	-	v						v	v	v			v	
	n26	v	v		v	-	-	-	-	-	-	-	-	-	-	v						v	v	v			v	
	n38	-	v	v		-		-		-	-	-	-	-	-	v						v	v	v			v	
	n41	-	-	-	v	-		-			v				v	-	v						v	v	v			v
	n66	v			v	-		-	v	-	-	-	-	-	-	v						v	v	v			v	



Test Items	5G NR	Bandwidth (MHz)													Modulation				RB #		Test Channel				
		5	10	15	20	25	30	35	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Conducted Spurious Emission	n5				v	-	-	-	-	-	-	-	-	-	-	v				v		v	v	v	
	n7	v			v		-		v	-	-	-	-	-	-	v				v		v	v	v	
	n26	v	v		v	-	-	-	-	-	-	-	-	-	-	v				v		v	v	v	
	n38	-	v	v		-		-		-	-	-	-	-	-	v				v		v	v	v	
	n41	-	-	-	v	-		-			v				v	-	v				v		v	v	v
	n66	v			v	-		-	v	-	-	-	-	-	-	-					v		v	v	v
Frequency Stability	n7				v		-			-	-	-	-	-	-	v					v		v		
	n26				v	-	-	-	-	-	-	-	-	-	-	v					v		v		
	n38	-	v			-		-		-	-	-	-	-	-	v					v		v		
	n41	-	-	-	v	-		-								v					v		v		
	n66				v	-		-		-	-	-	-	-	-	v					v		v		
E.R.P / E.I.R.P	n5	v	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	
	n7	v	v	v	v	v	v	-	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	-	v	-	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	
	n41	-	-	-	v	-	v	-	v	v	v	v	v	v	v	-	v	v	v	v	v	v	v	v	
	n66	v	v	v	v	-	v	-	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n5	Worst Case																						v	
	n7	Worst Case																						v	
	n26	Worst Case																						v	
	n41	Worst Case																						v	
	n66	Worst Case																						v	
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.60V. ; High Voltage =4.50V																								

2.2 Connection Diagram of Test System

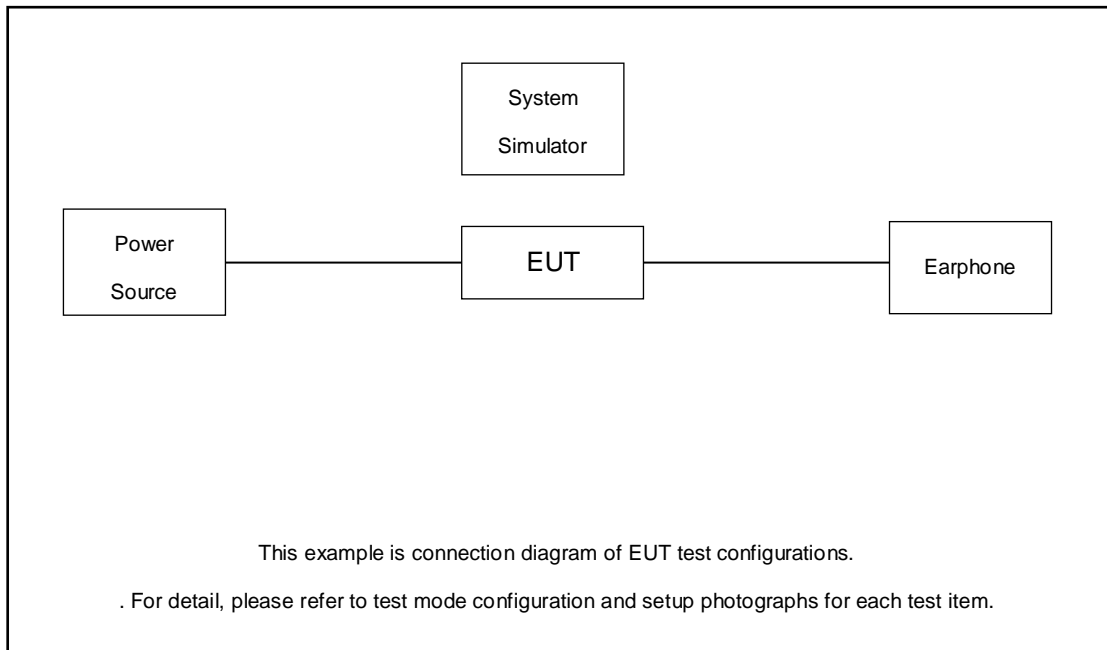

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss

$$\text{Offset} = \text{RF cable loss}$$

Following shows an offset computation example with cable loss 7.5 dB

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.5 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel	-	167300	-
	Frequency	-	836.5	-
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	505000	507000	509000
	Frequency	2525	2535	2545
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List for SCS 30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
70	Channel	506202	518598	531000
	Frequency	2531.01	2592.99	2655
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99

5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

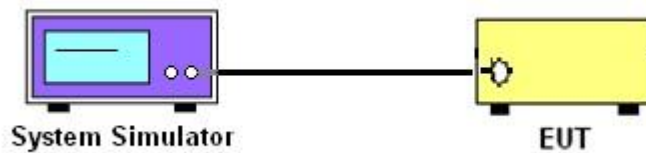

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

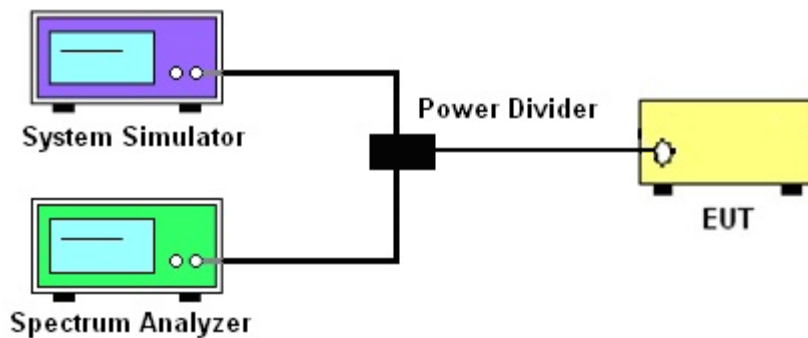

3.2.3 Frequency Stability

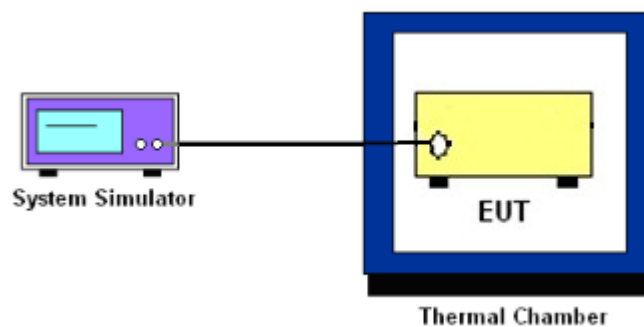

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

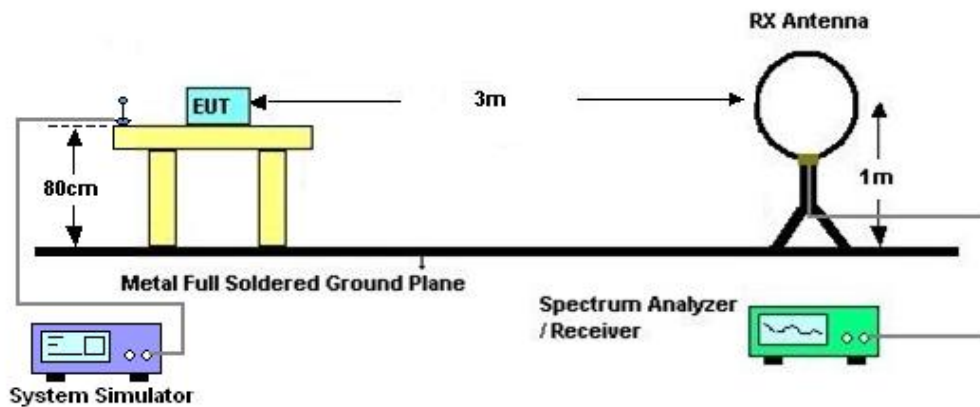

4.2.2 For radiated test from 30MHz to 1GHz

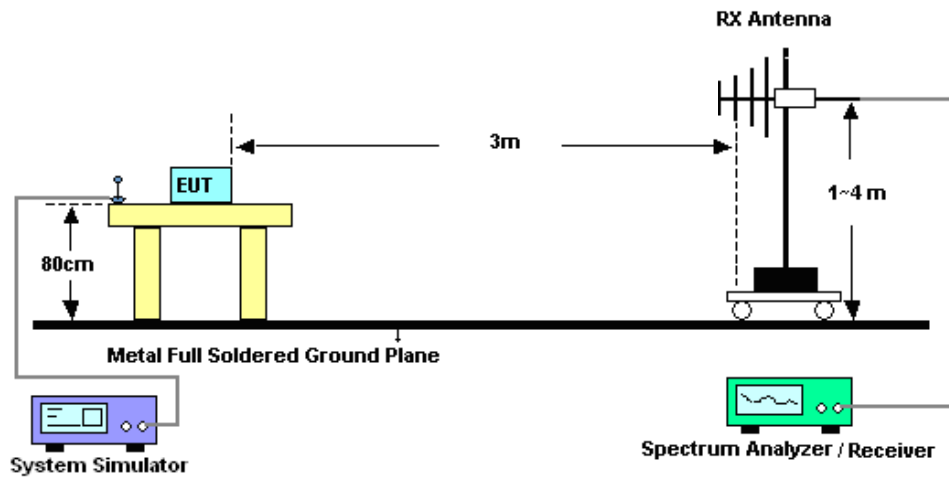

4.2.3 For radiated test above 1GHz

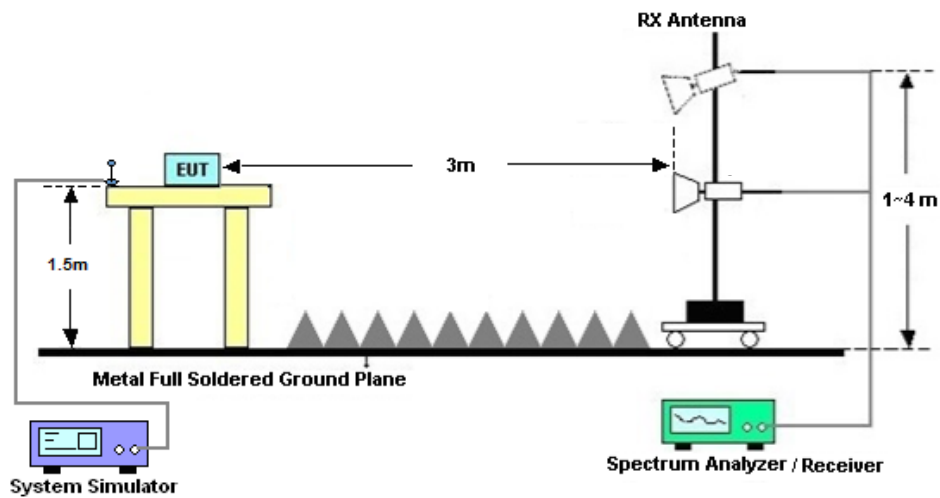

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Apr. 10, 2024~ May. 08, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 05, 2024		Apr. 04, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Apr. 10, 2024~ May. 08, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Apr. 10, 2024~ May. 08, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Apr. 10, 2024~ May. 08, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 18, 2023	Mar. 30, 2024~ Apr. 07, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Mar. 30, 2024~ Apr. 07, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Mar. 30, 2024~ Apr. 07, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 14, 2023	Mar. 30, 2024~ Apr. 07, 2024	May 13, 2024	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 07, 2023	Mar. 30, 2024~ Apr. 07, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 08, 2023	Mar. 30, 2024~ Apr. 07, 2024	Jul. 07, 2024	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 18, 2023	Mar. 30, 2024~ Apr. 07, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Mar. 30, 2024~ Apr. 07, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Mar. 30, 2024~ Apr. 07, 2024	Jul. 06, 2024	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Aug. 21, 2023	Mar. 30, 2024~ Apr. 07, 2024	Aug. 20, 2024	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 18, 2023	Mar. 30, 2024~ Apr. 07, 2024	Oct. 17, 2024	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 30, 2024~ Apr. 07, 2024	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 30, 2024~ Apr. 07, 2024	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.1 dB
---------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.9 dB
---------------------------------------------------------------------	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N5 (ANT1)

Transmitter Conducted Output Power And ERP, (G_T - L_C)=-4.2dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	24.26	17.91	0.0618
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	23.18	16.83	0.0482
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	24.27	17.92	0.0619
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.2	16.85	0.0484
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	24.15	17.8	0.0603
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	22.97	16.62	0.0459
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	24.22	17.87	0.0612
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	23.18	16.83	0.0482
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	24.12	17.77	0.0598
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.17	16.82	0.0481
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	24.17	17.82	0.0605
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	23.1	16.75	0.0473
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	24.31	17.96	0.0625
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	23.16	16.81	0.0480
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	24.31	17.96	0.0625
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.24	16.89	0.0489
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	24.23	17.88	0.0614
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	23.18	16.83	0.0482
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	23.85	17.5	0.0562
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	24.04	17.69	0.0587
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.22	17.87	0.0612
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	22.85	16.5	0.0447
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	22.9	16.55	0.0452
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	23.03	16.68	0.0466
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	21.39	15.04	0.0319
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	21.11	14.76	0.0299
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	21.16	14.81	0.0303
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	19.34	12.99	0.0199
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	19.27	12.92	0.0196


5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	19.39	13.04	0.0201
5	15	20	166800	834	CP-OFDM QPSK	53@26	22.35	16	0.0398
5	15	20	166800	834	CP-OFDM QPSK	1@1	22.34	15.99	0.0397
5	15	20	166800	834	CP-OFDM QPSK	1@104	22.5	16.15	0.0412
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	23.92	17.57	0.0571
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	24.01	17.66	0.0583
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	24.32	17.97	0.0627
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	22.95	16.6	0.0457
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.94	16.59	0.0456
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	23.06	16.71	0.0469
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	21.45	15.1	0.0324
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	21.17	14.82	0.0303
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	21.2	14.85	0.0305
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	19.43	13.08	0.0203
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	19.36	13.01	0.0200
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	19.42	13.07	0.0203
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	22.4	16.05	0.0403
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	22.38	16.03	0.0401
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	22.62	16.27	0.0424
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	23.93	17.58	0.0573
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	24.04	17.69	0.0587
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	24.28	17.93	0.0621
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	22.99	16.64	0.0461
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	22.95	16.6	0.0457
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	23.12	16.77	0.0475
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	21.42	15.07	0.0321
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	21.1	14.75	0.0299
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	21.22	14.87	0.0307
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	19.44	13.09	0.0204
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	19.31	12.96	0.0198
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	19.44	13.09	0.0204
5	15	20	167800	839	CP-OFDM QPSK	53@26	22.43	16.08	0.0406
5	15	20	167800	839	CP-OFDM QPSK	1@1	22.43	16.08	0.0406
5	15	20	167800	839	CP-OFDM QPSK	1@104	22.61	16.26	0.0423
5	15	25	167300	836.5	DFT-s-OFDM QPSK	64@32	23.05	16.7	0.0468

5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@1	23.1	16.75	0.0473
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@131	22.88	16.53	0.0450
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	64@32	21.99	15.64	0.0366
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.25	15.9	0.0389
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	1@131	21.98	15.63	0.0366
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	64@32	20.6	14.25	0.0266
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	1@1	20.32	13.97	0.0249
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	1@131	20.12	13.77	0.0238
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	64@32	18.53	12.18	0.0165
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	1@1	18.52	12.17	0.0165
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	1@131	18.22	11.87	0.0154
5	15	25	167300	836.5	CP-OFDM QPSK	67@33	21.57	15.22	0.0333
5	15	25	167300	836.5	CP-OFDM QPSK	1@1	21.61	15.26	0.0336
5	15	25	167300	836.5	CP-OFDM QPSK	1@131	21.37	15.02	0.0318


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
5	15	25	167300	836.5	CP-OFDM QPSK	133@0	23.73	24.63
5	15	25	167300	836.5	CP-OFDM 16 QAM	133@0	23.751	24.67
5	15	25	167300	836.5	CP-OFDM 64 QAM	133@0	23.734	24.67
5	15	25	167300	836.5	CP-OFDM 256 QAM	133@0	23.755	24.65


N5(25M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

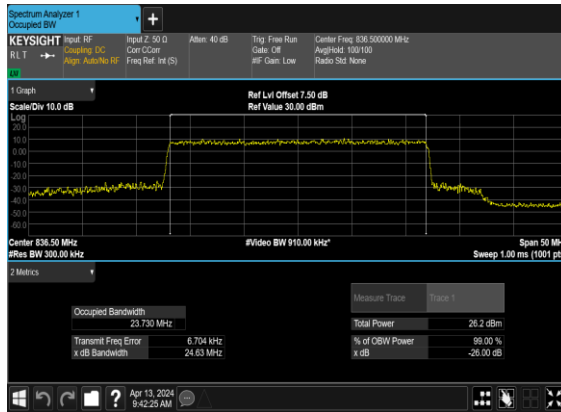


N5(25M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

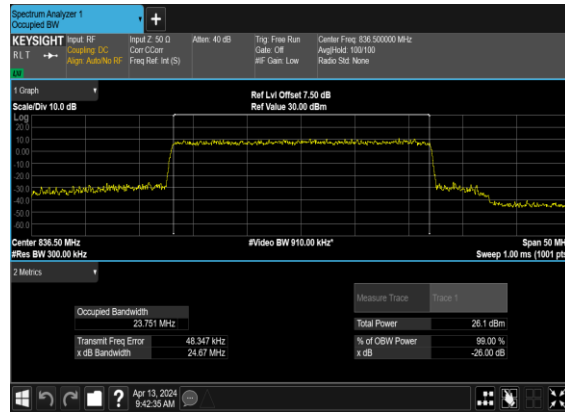

N5(25M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

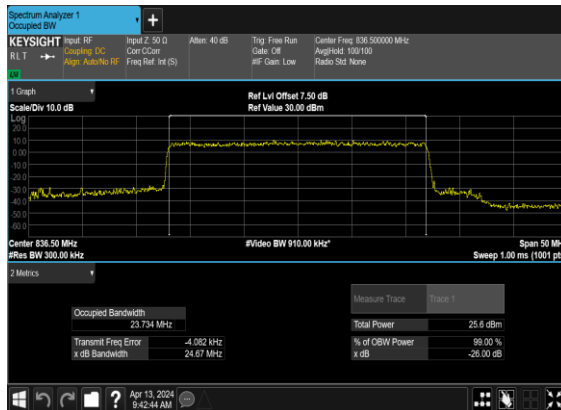


N5(25M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

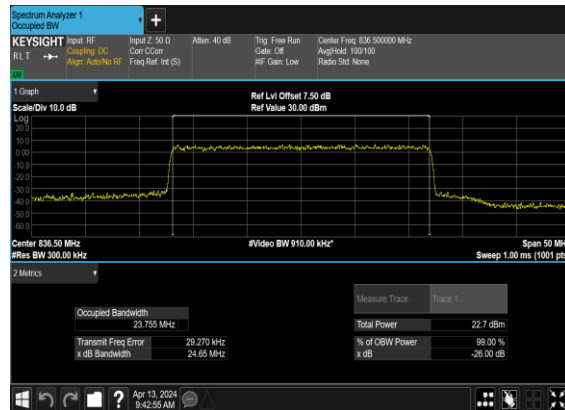

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS


N5(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

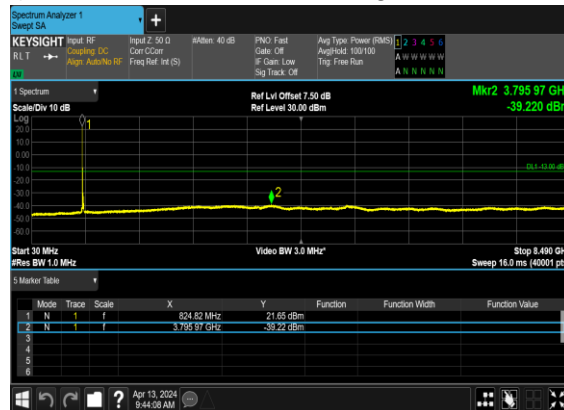


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	see graph	PASS


N5(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

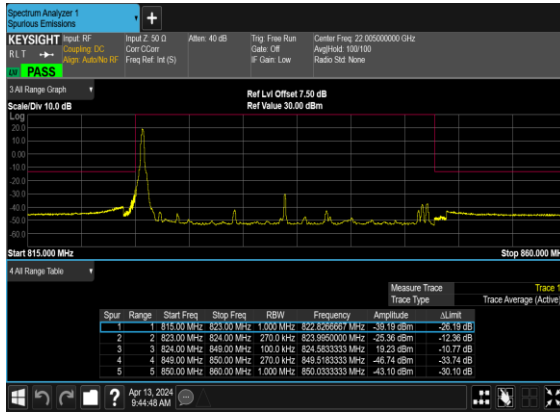

N5(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

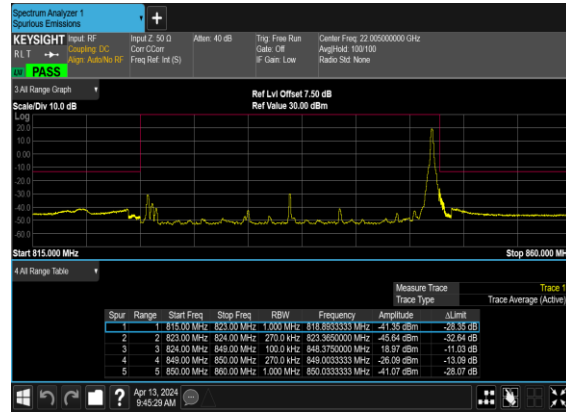

N5(25M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

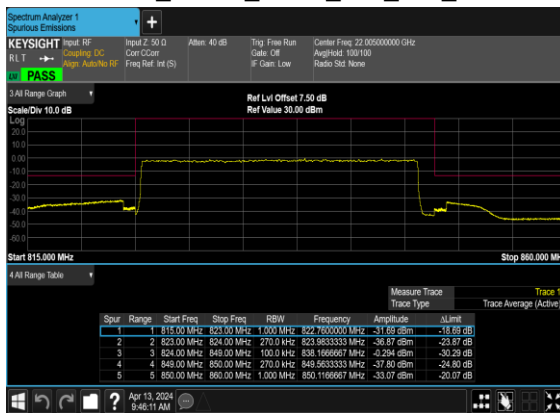

FR1 N7(ANT0)

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=0.1dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	23.93	24.03	0.2529
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	23.12	23.22	0.2099
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	23.96	24.06	0.2547
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.05	23.15	0.2065
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	23.95	24.05	0.2541
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	22.96	23.06	0.2023
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	23.74	23.84	0.2421
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	22.97	23.07	0.2028
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	23.65	23.75	0.2371
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.65	22.75	0.1884
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	23.83	23.93	0.2472
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	22.82	22.92	0.1959
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	23.99	24.09	0.2564
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.17	23.27	0.2123
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	23.76	23.86	0.2432
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.8	22.9	0.1950
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	24.11	24.21	0.2636
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	23.07	23.17	0.2075
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	23.75	23.85	0.2427
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	22.95	23.05	0.2018
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	23.58	23.68	0.2333
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.59	22.69	0.1858
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	24.04	24.14	0.2594
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	23.04	23.14	0.2061
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@1	24.13	24.23	0.2649
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@1	23.46	23.56	0.2270
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@1	24	24.1	0.2570
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.05	23.15	0.2065
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@1	24.02	24.12	0.2582

7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@1	23.46	23.56	0.2270
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@1	23.92	24.02	0.2523
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@1	23.29	23.39	0.2183
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@1	23.89	23.99	0.2506
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@1	22.88	22.98	0.1986
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@1	24.15	24.25	0.2661
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@1	23.5	23.6	0.2291
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@1	23.91	24.01	0.2518
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@1	23.28	23.38	0.2178
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@1	24.13	24.23	0.2649
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.22	23.32	0.2148
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@1	23.96	24.06	0.2547
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@1	22.96	23.06	0.2023
7	15	50	505000	2525	DFT-s-OFDM QPSK	135@67	23.79	23.89	0.2449
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@1	23.74	23.84	0.2421
7	15	50	505000	2525	DFT-s-OFDM QPSK	1@268	24.02	24.12	0.2582
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	135@67	22.89	22.99	0.1991
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@1	23.18	23.28	0.2128
7	15	50	505000	2525	DFT-s-OFDM 16 QAM	1@268	23.16	23.26	0.2118
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	135@67	21.49	21.59	0.1442
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@1	21.52	21.62	0.1452
7	15	50	505000	2525	DFT-s-OFDM 64 QAM	1@268	21.54	21.64	0.1459
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	135@67	18.11	18.21	0.0662
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@1	19.81	19.91	0.0979
7	15	50	505000	2525	DFT-s-OFDM 256 QAM	1@268	19.72	19.82	0.0959
7	15	50	505000	2525	CP-OFDM QPSK	135@67	22.38	22.48	0.1770
7	15	50	505000	2525	CP-OFDM QPSK	1@1	22.62	22.72	0.1871
7	15	50	505000	2525	CP-OFDM QPSK	1@268	22.56	22.66	0.1845
7	15	50	507000	2535	DFT-s-OFDM QPSK	135@67	23.91	24.01	0.2518
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@1	24.14	24.24	0.2655
7	15	50	507000	2535	DFT-s-OFDM QPSK	1@268	23.62	23.72	0.2355
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	135@67	22.99	23.09	0.2037
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.28	23.38	0.2178
7	15	50	507000	2535	DFT-s-OFDM 16 QAM	1@268	22.79	22.89	0.1945
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	135@67	21.6	21.7	0.1479
7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@1	21.64	21.74	0.1493


7	15	50	507000	2535	DFT-s-OFDM 64 QAM	1@268	21.17	21.27	0.1340
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	135@67	19.99	20.09	0.1021
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.8	19.9	0.0977
7	15	50	507000	2535	DFT-s-OFDM 256 QAM	1@268	19.44	19.54	0.0899
7	15	50	507000	2535	CP-OFDM QPSK	135@67	22.56	22.66	0.1845
7	15	50	507000	2535	CP-OFDM QPSK	1@1	22.74	22.84	0.1923
7	15	50	507000	2535	CP-OFDM QPSK	1@268	22.23	22.33	0.1710
7	15	50	509000	2545	DFT-s-OFDM QPSK	135@67	24.23	24.33	0.2710
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@1	23.59	23.69	0.2339
7	15	50	509000	2545	DFT-s-OFDM QPSK	1@268	23.29	23.39	0.2183
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	135@67	23.28	23.38	0.2178
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@1	22.77	22.87	0.1936
7	15	50	509000	2545	DFT-s-OFDM 16 QAM	1@268	22.49	22.59	0.1816
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	135@67	21.81	21.91	0.1552
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@1	21.09	21.19	0.1315
7	15	50	509000	2545	DFT-s-OFDM 64 QAM	1@268	20.92	21.02	0.1265
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	135@67	18.82	18.92	0.0780
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@1	19.37	19.47	0.0885
7	15	50	509000	2545	DFT-s-OFDM 256 QAM	1@268	19.24	19.34	0.0859
7	15	50	509000	2545	CP-OFDM QPSK	135@67	22.64	22.74	0.1879
7	15	50	509000	2545	CP-OFDM QPSK	1@1	22.22	22.32	0.1706
7	15	50	509000	2545	CP-OFDM QPSK	1@268	21.99	22.09	0.1618

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0028	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0039	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0055	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0028	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0041	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0046	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0064	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0032	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0028	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0069	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0023	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0062	PASS	50°C

Peak to Average Ratio


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	5.82	13	PASS

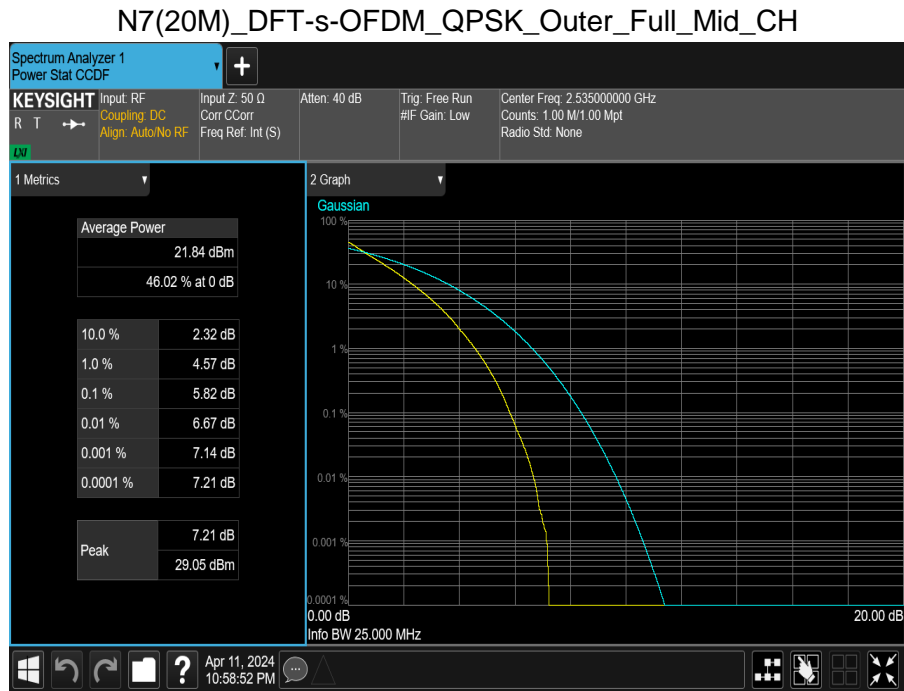


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4627	4.769
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.472	4.797
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.489	4.824
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4742	4.835
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2757	9.691
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2762	9.732
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2935	9.75
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.2736	9.733
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.118	14.66
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.096	14.69
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.096	14.77
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.098	14.65
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.893	19.71
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.933	19.67
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.958	19.67
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	18.892	19.62
7	15	25	507000	2535.0	CP-OFDM QPSK	133@0	23.733	24.62
7	15	25	507000	2535.0	CP-OFDM 16 QAM	133@0	23.75	24.69
7	15	25	507000	2535.0	CP-OFDM 64 QAM	133@0	23.727	24.63
7	15	25	507000	2535.0	CP-OFDM 256 QAM	133@0	23.762	24.69
7	15	30	507000	2535.0	CP-OFDM QPSK	160@0	28.542	29.64
7	15	30	507000	2535.0	CP-OFDM 16 QAM	160@0	28.516	29.62
7	15	30	507000	2535.0	CP-OFDM 64 QAM	160@0	28.582	29.69
7	15	30	507000	2535.0	CP-OFDM 256 QAM	160@0	28.609	29.62
7	15	40	507000	2535.0	CP-OFDM QPSK	216@0	38.608	39.89
7	15	40	507000	2535.0	CP-OFDM 16 QAM	216@0	38.557	40.02
7	15	40	507000	2535.0	CP-OFDM 64 QAM	216@0	38.624	39.95
7	15	40	507000	2535.0	CP-OFDM 256 QAM	216@0	38.601	39.98
7	15	50	507000	2535.0	CP-OFDM QPSK	270@0	48.161	49.73
7	15	50	507000	2535.0	CP-OFDM 16 QAM	270@0	48.183	49.79
7	15	50	507000	2535.0	CP-OFDM 64 QAM	270@0	48.271	49.77
7	15	50	507000	2535.0	CP-OFDM 256 QAM	270@0	48.213	49.73


N7(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

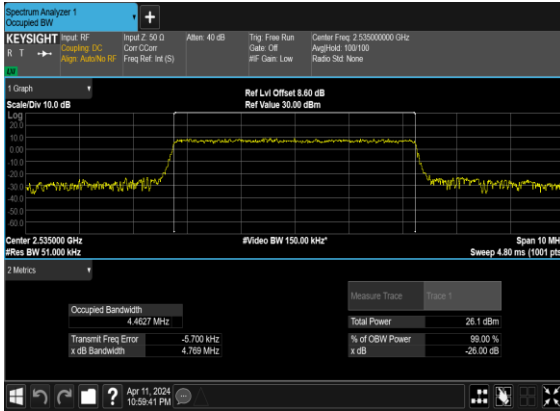


N7(5M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

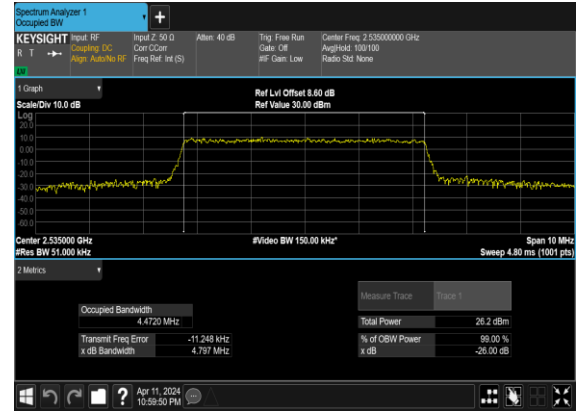


N7(5M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

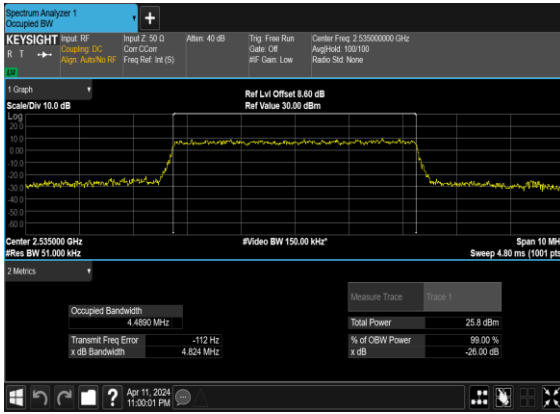


N7(5M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

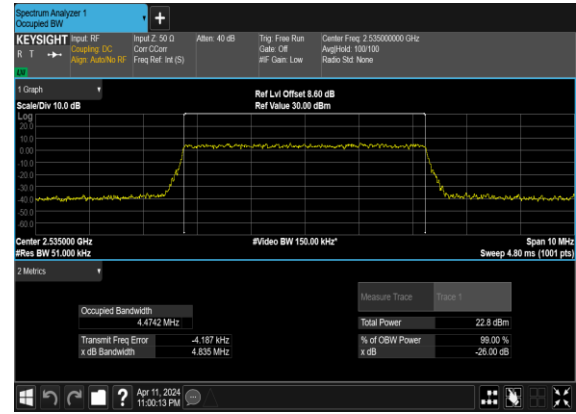


N7(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

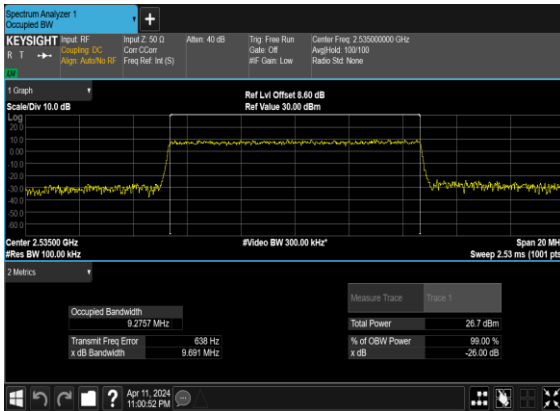


N7(10M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

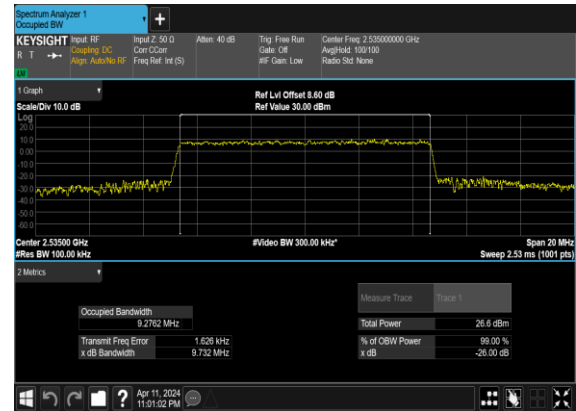

N7(10M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

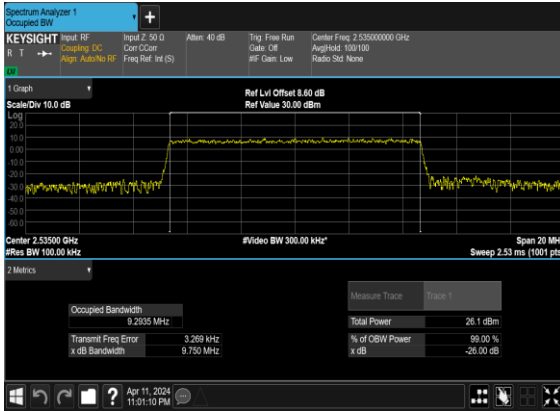

N7(10M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

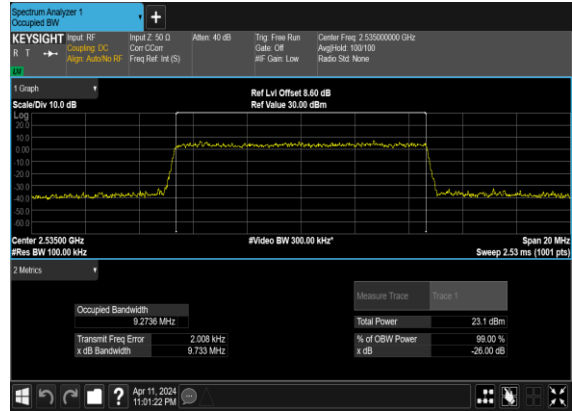


N7(15M)_CP- OFDM_QPSK_Outer_Full_Mid_CH




N7(15M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH




N7(15M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

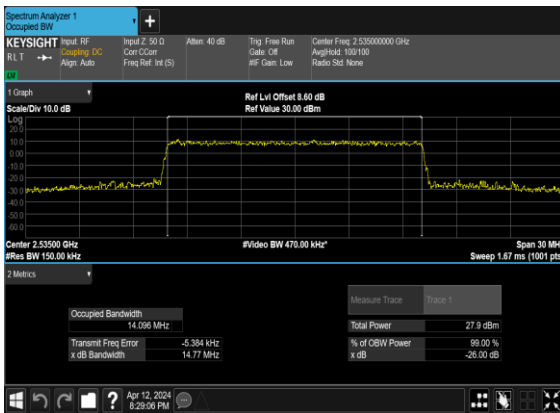


N7(15M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

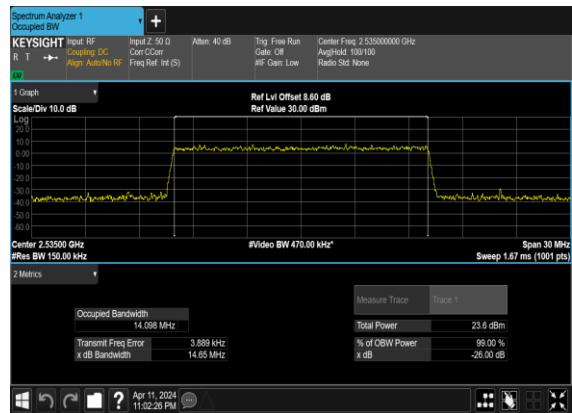


N7(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

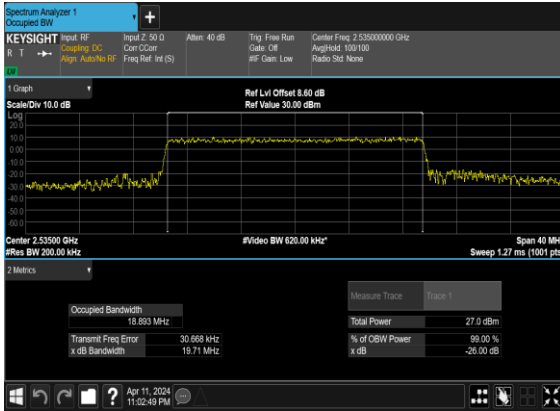


N7(20M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

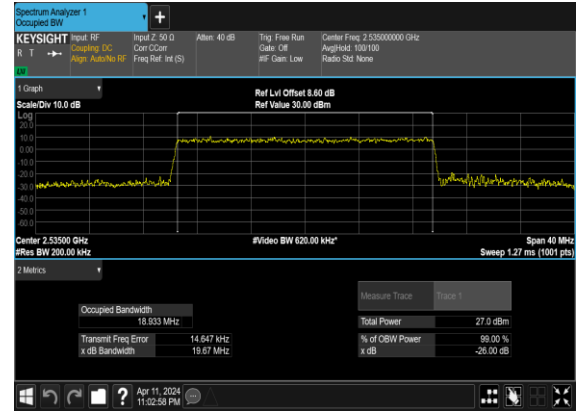


N7(20M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

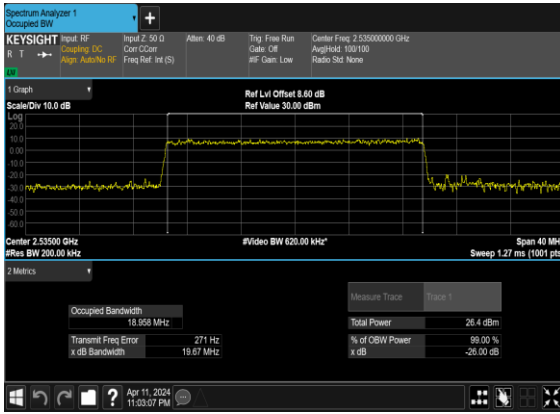


N7(20M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

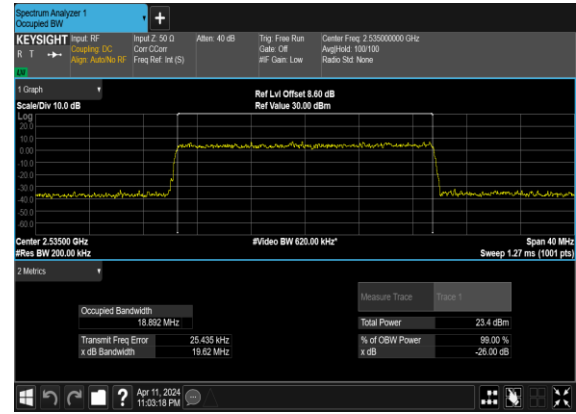


N7(25M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

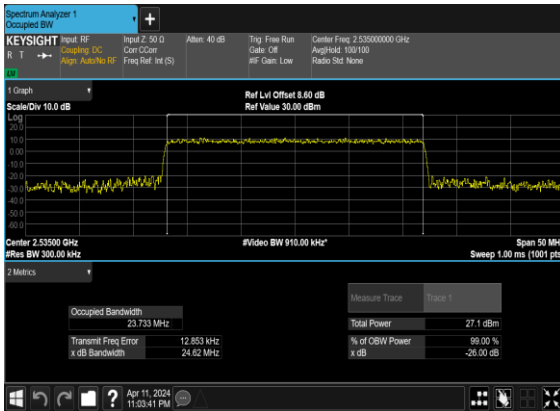


N7(25M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

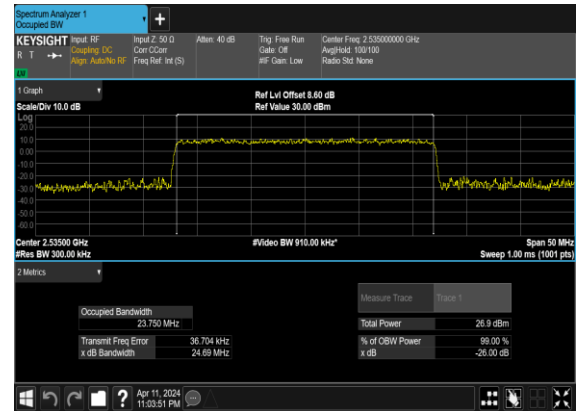


N7(25M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

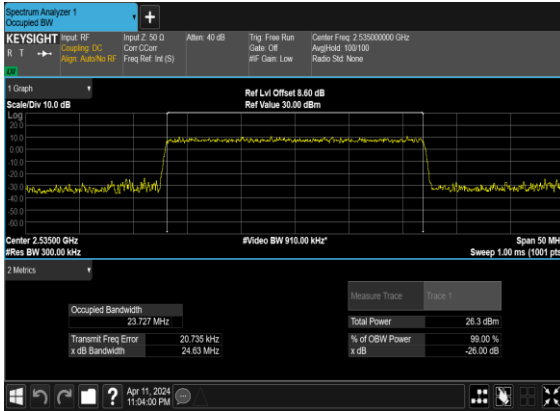


N7(25M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

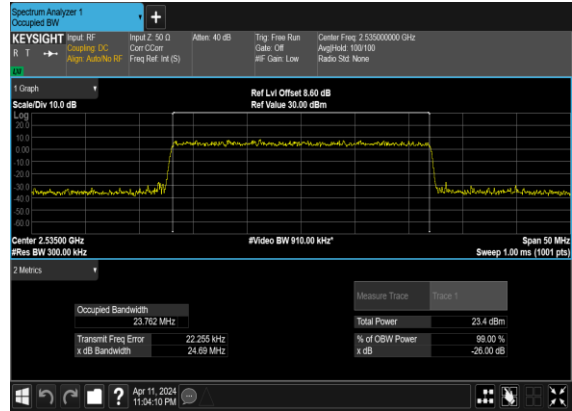


N7(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

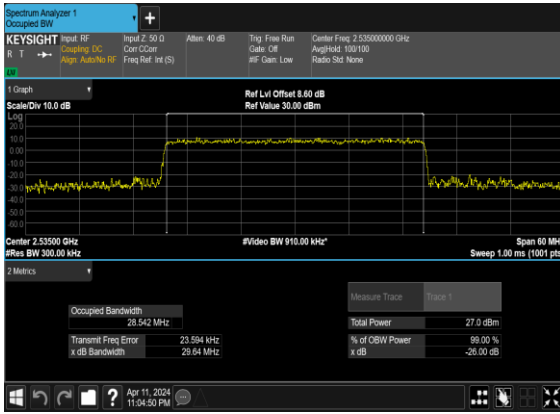


N7(30M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

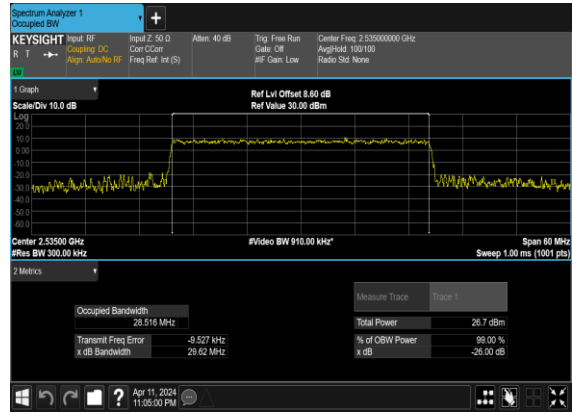


N7(30M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

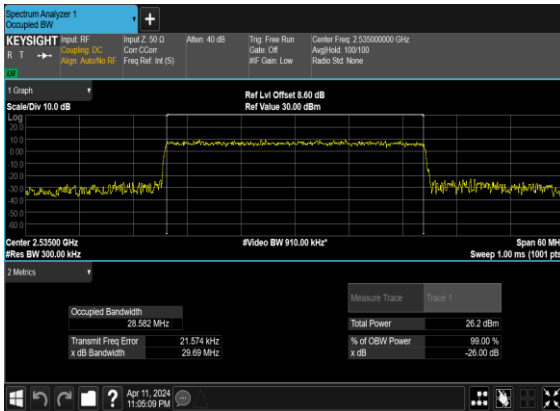


N7(30M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

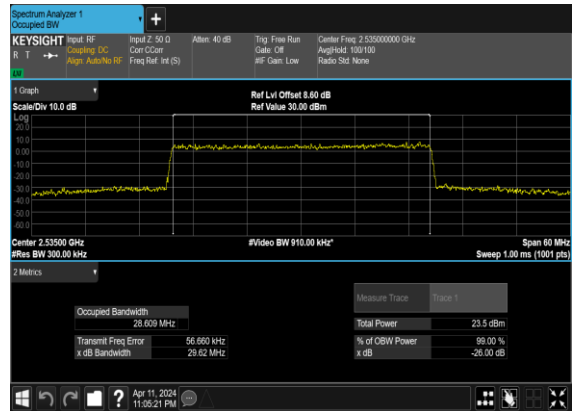


N7(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

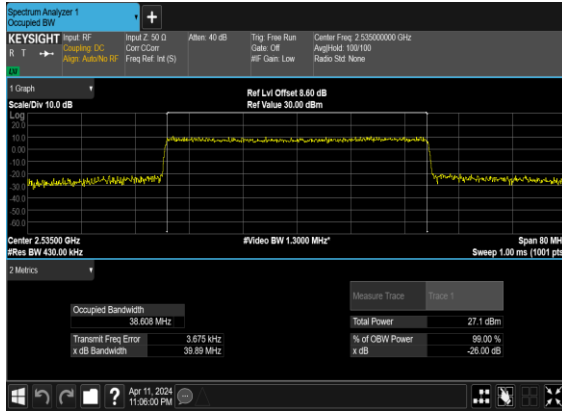


N7(40M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

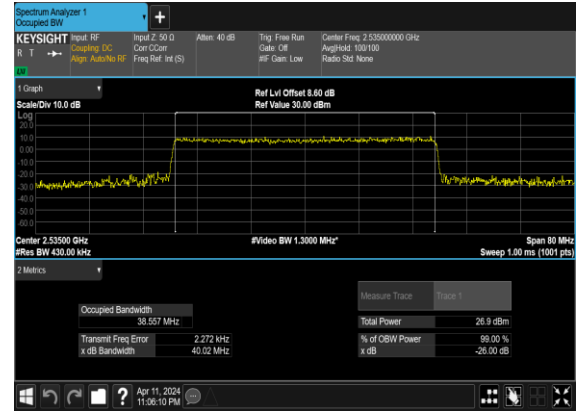


N7(40M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

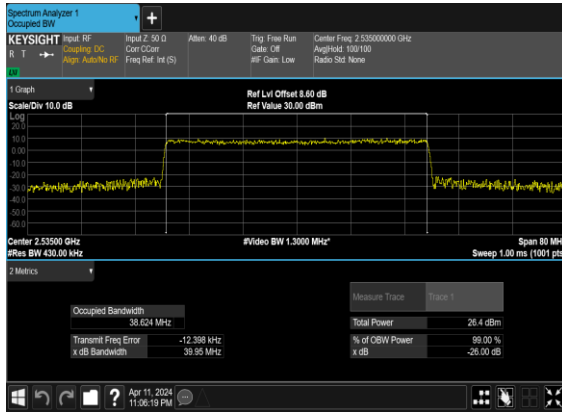


N7(40M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

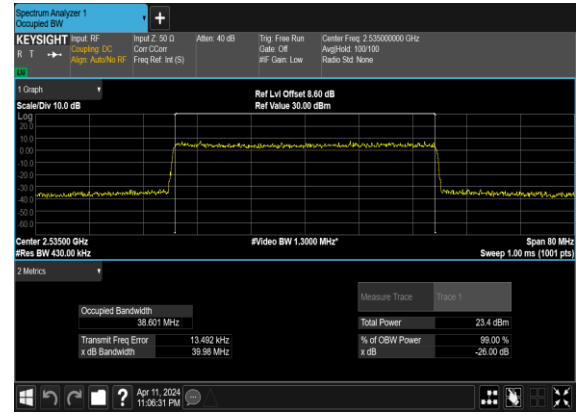


N7(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

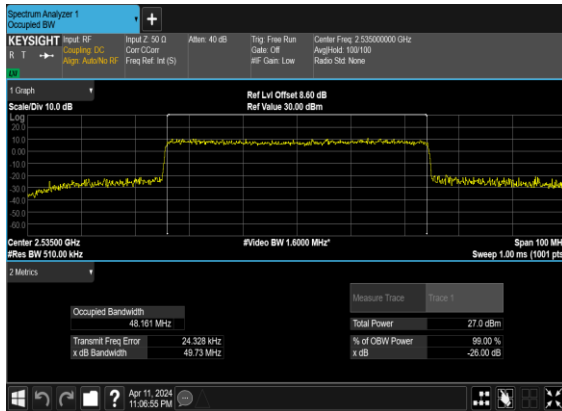


N7(50M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

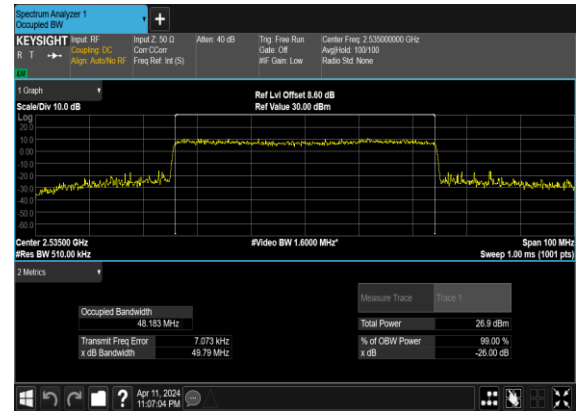

N7(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

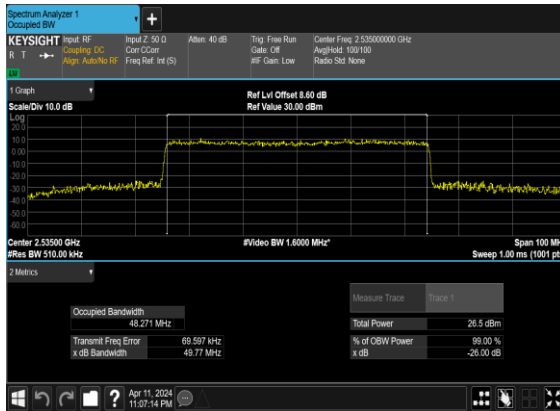

N7(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

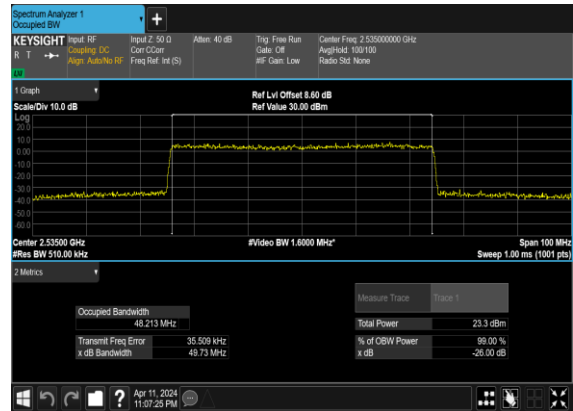


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH




N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

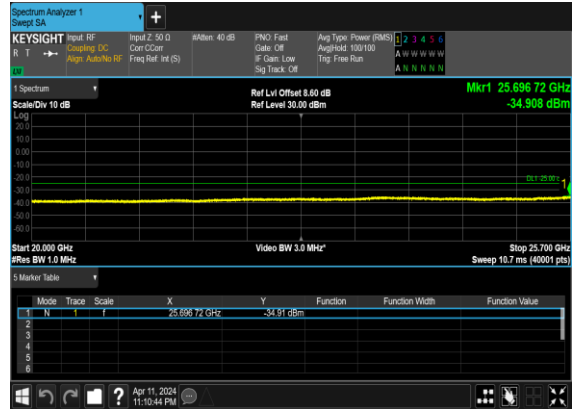


N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

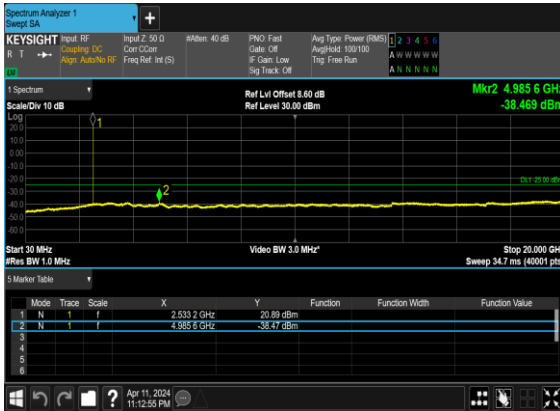


N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

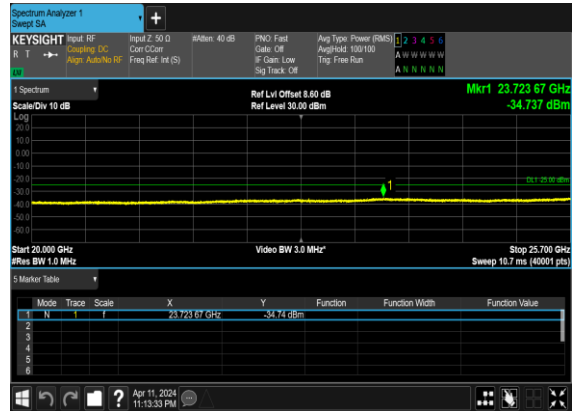


N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

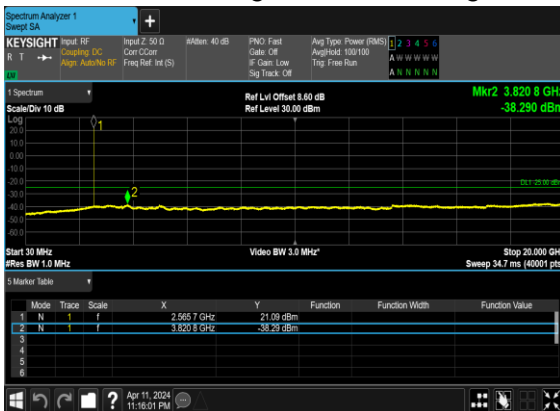


N7(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

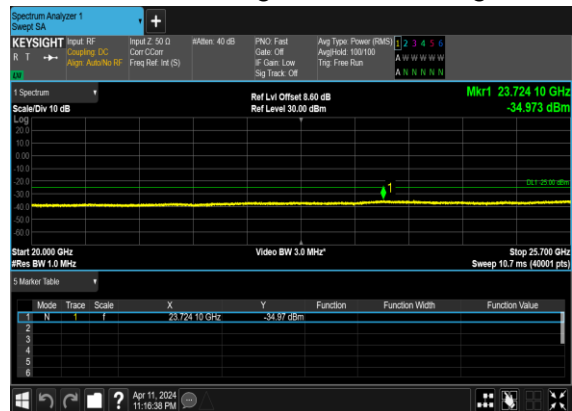


N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

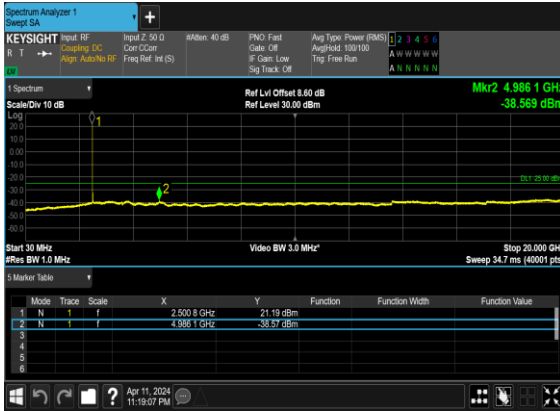


N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

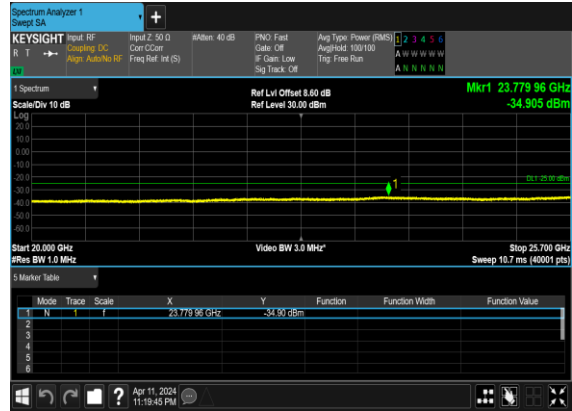

N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

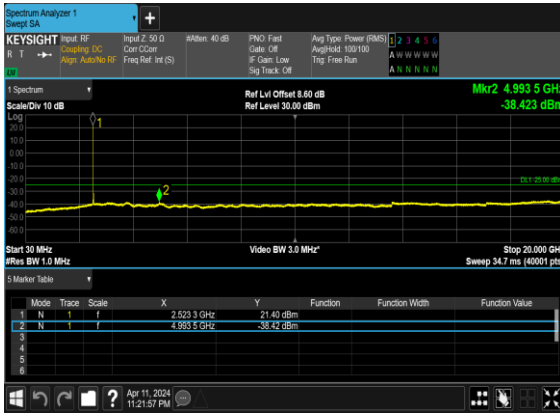


N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

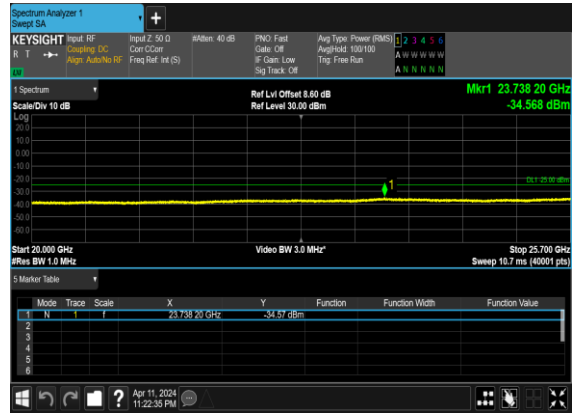

N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

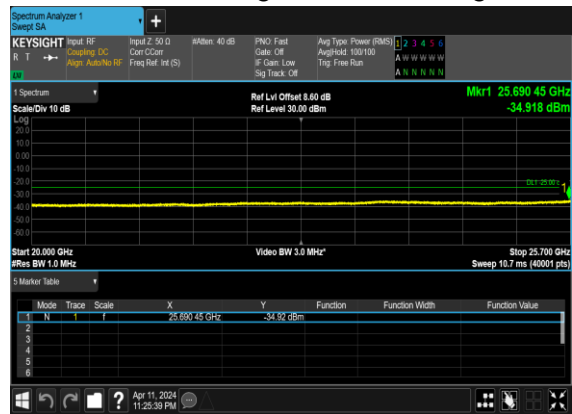


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH




N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

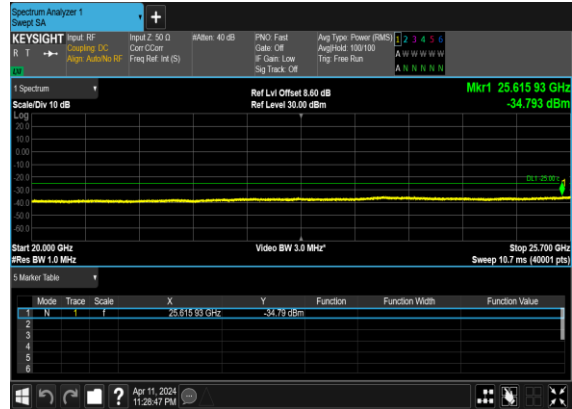


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

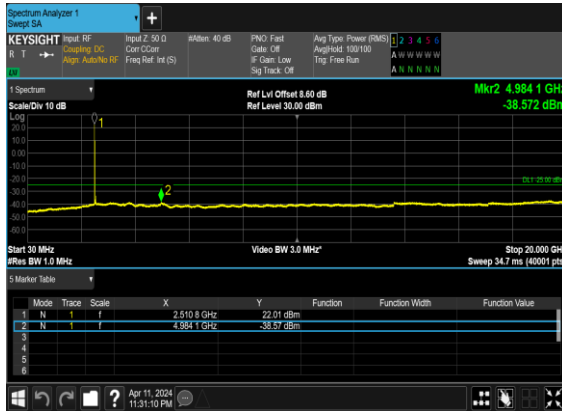


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

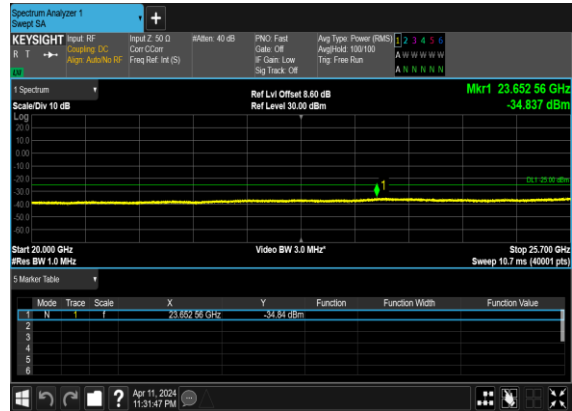

N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

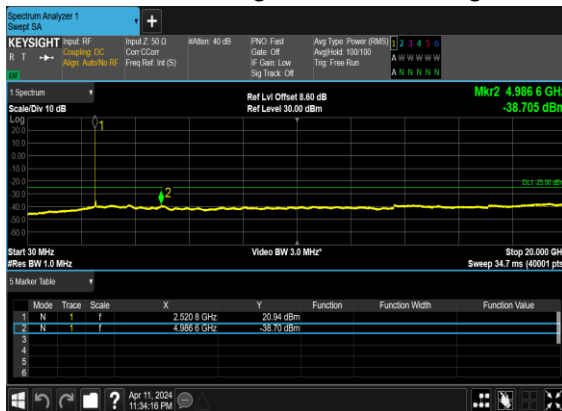


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

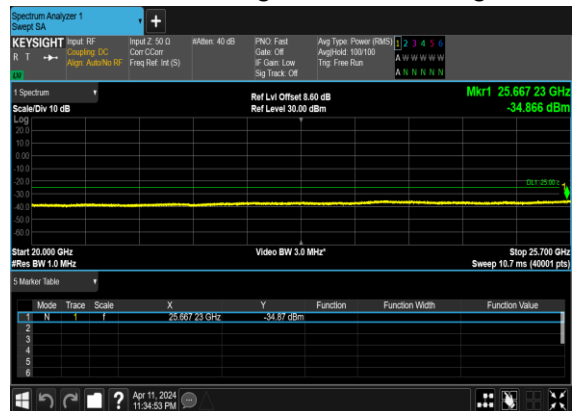


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	50	505000	2525.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	1@269	see graph	PASS
7	15	50	509000	2545.0	DFT-s-OFDM QPSK	270@0	see graph	PASS


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

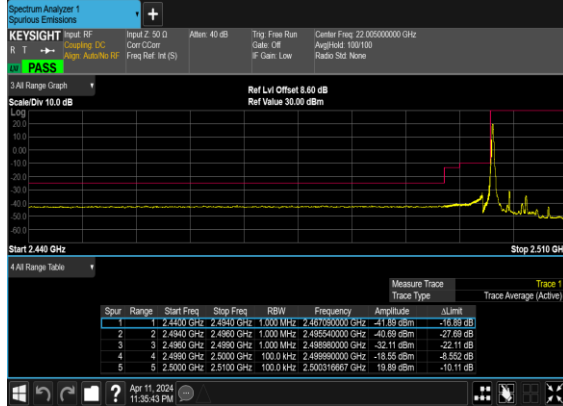


N7(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

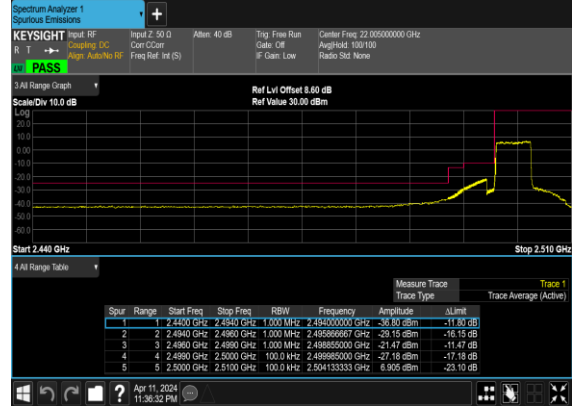


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

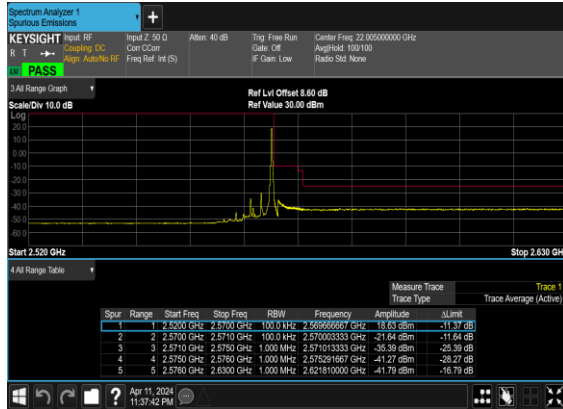


N7(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

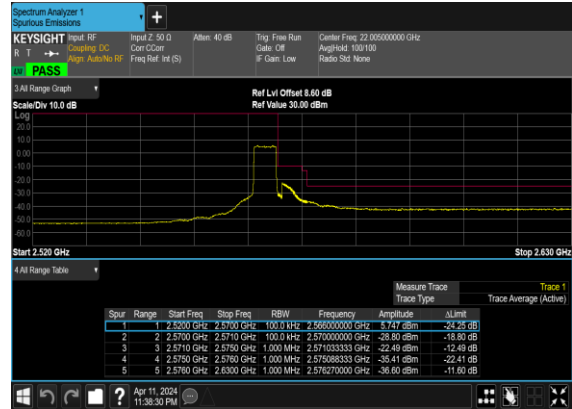


N7(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

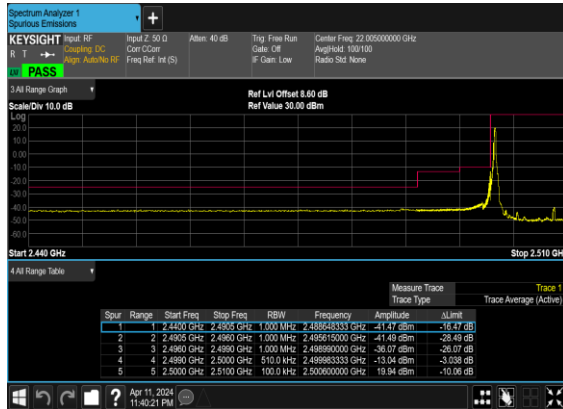


N7(25M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

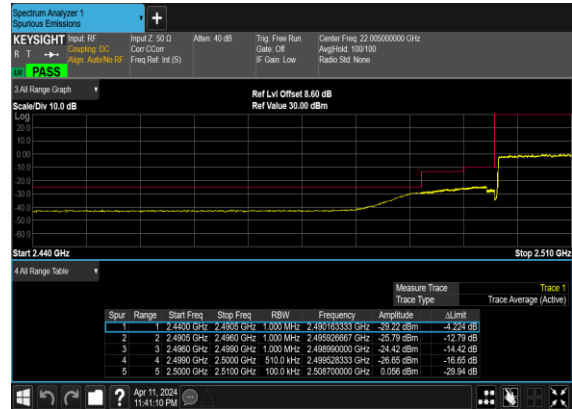


N7(25M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

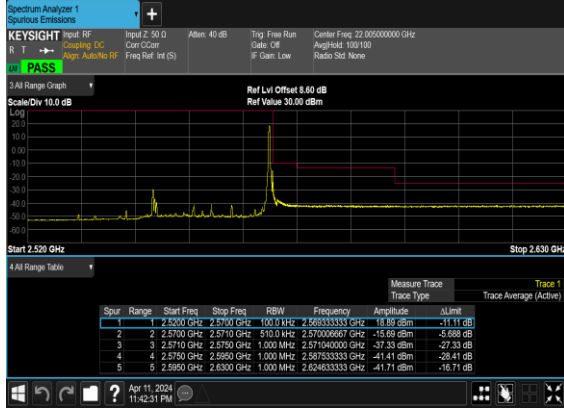


N7(25M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

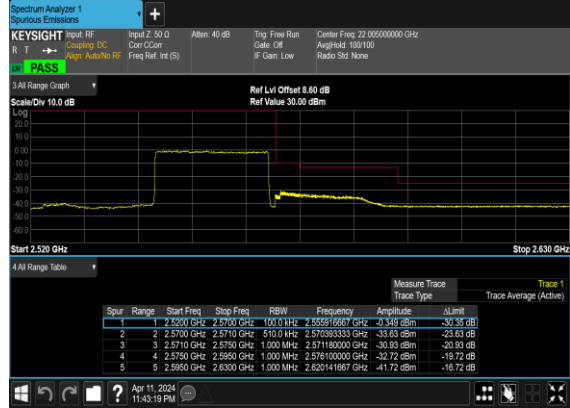


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

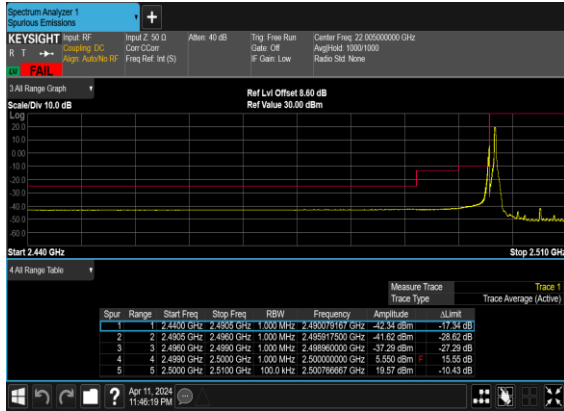


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH_CHP_PASS

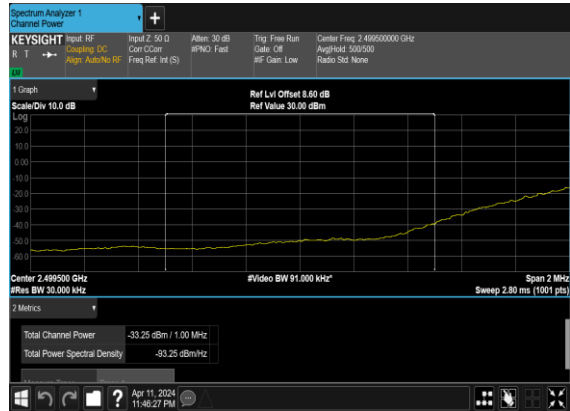


N7(50M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

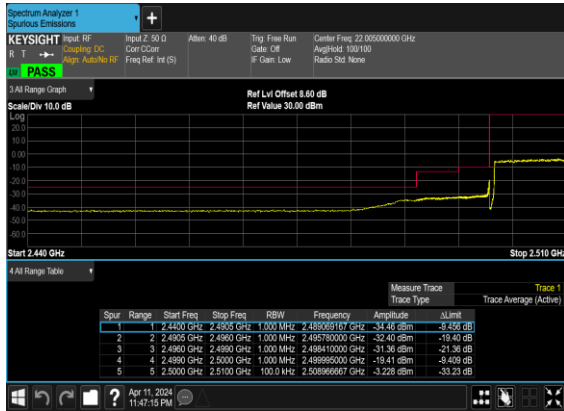


N7(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

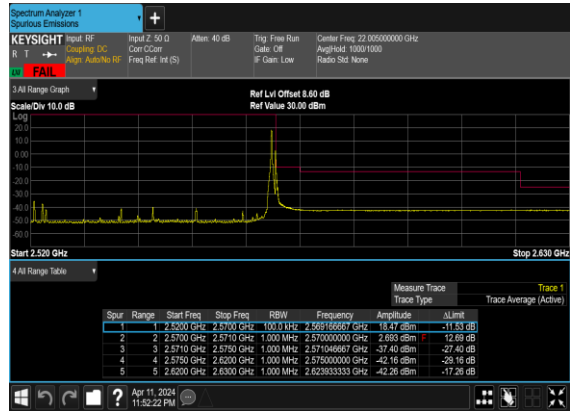

N7(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH_CHP
_PASS

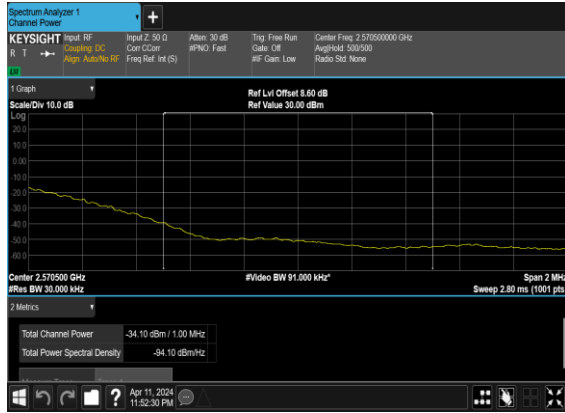

N7(50M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

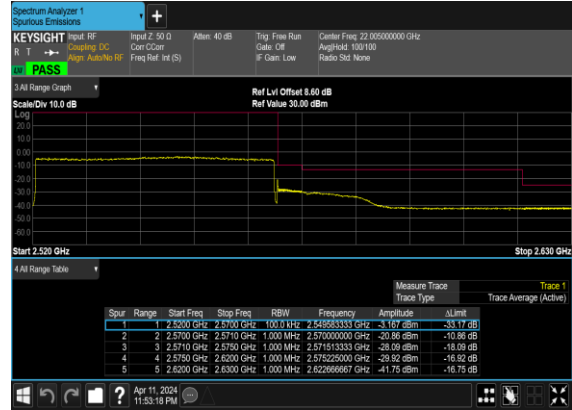

Note: "CHP" means channel power integrated method.

FR1 N26(ANT1)

Transmitter Conducted Output Power And ERP, (G_T - L_C)=-4.2dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
26	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	24.34	17.99	0.0630
26	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	23.28	16.93	0.0493
26	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	24.25	17.9	0.0617
26	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.2	16.85	0.0484
26	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	24.22	17.87	0.0612
26	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	23.1	16.75	0.0473
26	15	10	165800	829	DFT-s-OFDM QPSK	1@1	24.36	18.01	0.0632
26	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	23.22	16.87	0.0486
26	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	24.27	17.92	0.0619
26	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.25	16.9	0.0490
26	15	10	168800	844	DFT-s-OFDM QPSK	1@1	24.19	17.84	0.0608
26	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	23.11	16.76	0.0474
26	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	24.33	17.98	0.0628
26	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	23.34	16.99	0.0500
26	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	24.26	17.91	0.0618
26	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.21	16.86	0.0485
26	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	24.28	17.93	0.0621
26	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	23.21	16.86	0.0485
26	15	20	166800	834	DFT-s-OFDM QPSK	50@25	24.07	17.72	0.0592
26	15	20	166800	834	DFT-s-OFDM QPSK	1@1	24.31	17.96	0.0625
26	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.24	17.89	0.0615
26	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	23.08	16.73	0.0471
26	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	23.17	16.82	0.0481
26	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	23.03	16.68	0.0466
26	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	21.55	15.2	0.0331
26	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	21.3	14.95	0.0313
26	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	21.11	14.76	0.0299
26	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	19.53	13.18	0.0208
26	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	19.52	13.17	0.0207

26	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	19.31	12.96	0.0198
26	15	20	166800	834	CP-OFDM QPSK	53@26	22.55	16.2	0.0417
26	15	20	166800	834	CP-OFDM QPSK	1@1	22.64	16.29	0.0426
26	15	20	166800	834	CP-OFDM QPSK	1@104	22.61	16.26	0.0423
26	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	23.95	17.6	0.0575
26	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	24.46	18.11	0.0647
26	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	23.89	17.54	0.0568
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	22.97	16.62	0.0459
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	23.51	17.16	0.0520
26	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	22.77	16.42	0.0439
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	21.4	15.05	0.0320
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	21.61	15.26	0.0336
26	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	20.87	14.52	0.0283
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	19.59	13.24	0.0211
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	19.57	13.22	0.0210
26	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	19.42	13.07	0.0203
26	15	20	167300	836.5	CP-OFDM QPSK	53@26	22.6	16.25	0.0422
26	15	20	167300	836.5	CP-OFDM QPSK	1@1	22.67	16.32	0.0429
26	15	20	167300	836.5	CP-OFDM QPSK	1@104	22.6	16.25	0.0422
26	15	20	167800	839	DFT-s-OFDM QPSK	50@25	24.08	17.73	0.0593
26	15	20	167800	839	DFT-s-OFDM QPSK	1@1	24.26	17.91	0.0618
26	15	20	167800	839	DFT-s-OFDM QPSK	1@104	24.2	17.85	0.0610
26	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	23.15	16.8	0.0479
26	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	23.22	16.87	0.0486
26	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	23	16.65	0.0462
26	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	21.54	15.19	0.0330
26	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	21.35	15	0.0316
26	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	21.17	14.82	0.0303
26	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	19.49	13.14	0.0206
26	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	19.5	13.15	0.0207
26	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	19.36	13.01	0.0200
26	15	20	167800	839	CP-OFDM QPSK	53@26	22.62	16.27	0.0424
26	15	20	167800	839	CP-OFDM QPSK	1@1	22.65	16.3	0.0427
26	15	20	167800	839	CP-OFDM QPSK	1@104	22.64	16.29	0.0426


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0058	PASS	NV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0053	PASS	LV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0060	PASS	HV
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0041	PASS	-30°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0050	PASS	-20°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0060	PASS	-10°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0051	PASS	0°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0032	PASS	10°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0058	PASS	20°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0068	PASS	30°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0041	PASS	40°C
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	0.0053	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
26	15	20	167300	836.5	DFT-s-OFDM QPSK	100@0	5.2	13	PASS


N26(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

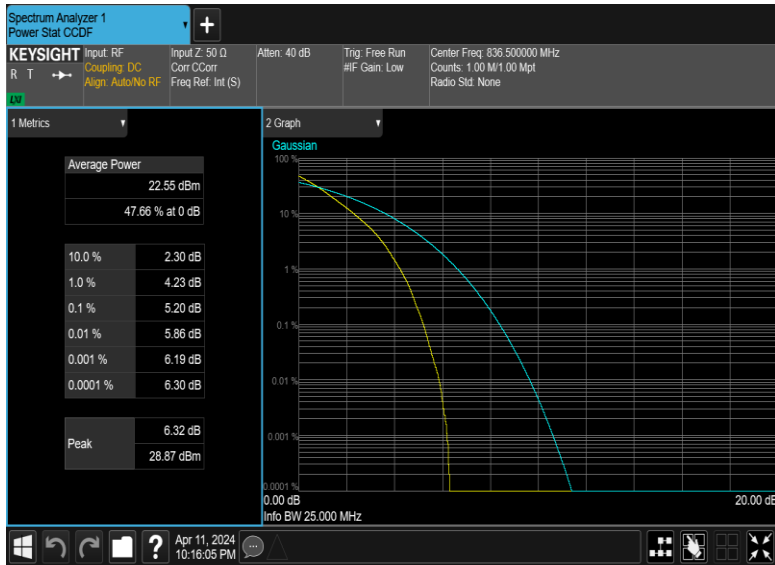


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
26	15	5	167300	836.5	CP-OFDM QPSK	25@0	4.4639	4.769
26	15	5	167300	836.5	CP-OFDM 16 QAM	25@0	4.4753	4.835
26	15	5	167300	836.5	CP-OFDM 64 QAM	25@0	4.4701	4.837
26	15	5	167300	836.5	CP-OFDM 256 QAM	25@0	4.4648	4.783
26	15	10	167300	836.5	CP-OFDM QPSK	52@0	9.2706	9.708
26	15	10	167300	836.5	CP-OFDM 16 QAM	52@0	9.2736	9.72
26	15	10	167300	836.5	CP-OFDM 64 QAM	52@0	9.2861	9.696
26	15	10	167300	836.5	CP-OFDM 256 QAM	52@0	9.2555	9.67
26	15	15	167300	836.5	CP-OFDM QPSK	79@0	14.087	14.69
26	15	15	167300	836.5	CP-OFDM 16 QAM	79@0	14.073	14.65
26	15	15	167300	836.5	CP-OFDM 64 QAM	79@0	14.124	14.74
26	15	15	167300	836.5	CP-OFDM 256 QAM	79@0	14.087	14.65
26	15	20	167300	836.5	CP-OFDM QPSK	106@0	18.906	19.66
26	15	20	167300	836.5	CP-OFDM 16 QAM	106@0	18.924	19.68
26	15	20	167300	836.5	CP-OFDM 64 QAM	106@0	18.885	19.67
26	15	20	167300	836.5	CP-OFDM 256 QAM	106@0	18.863	19.68


N26(5M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

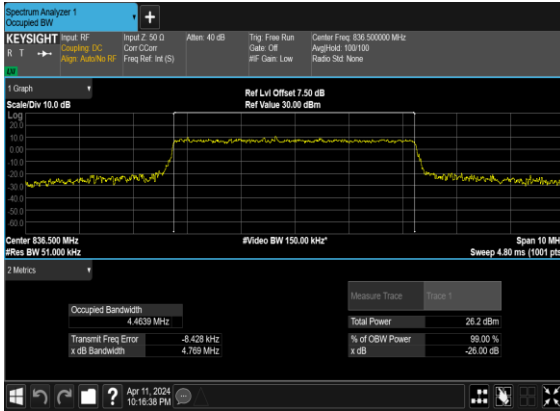


N26(5M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

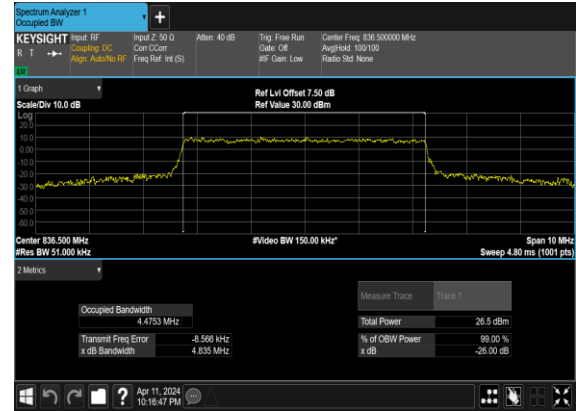


N26(5M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

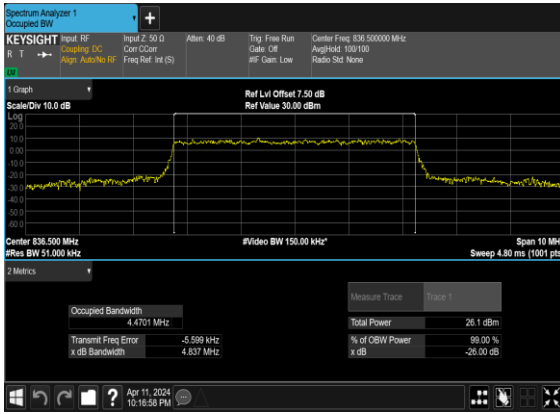

N26(5M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

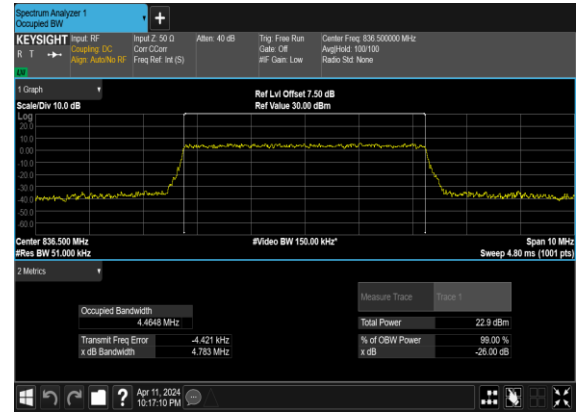

N26(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

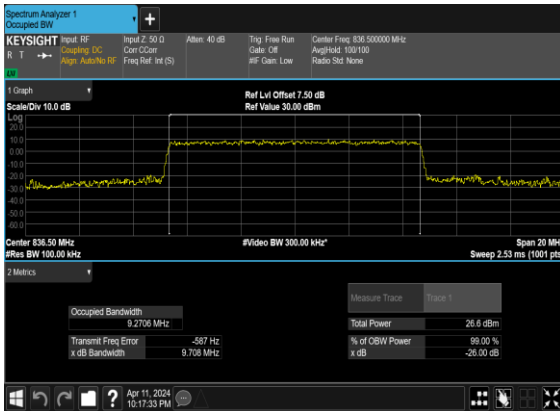

N26(10M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

