



TEST REPORT

APPLICANT : Guangdong OPPO Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Mobile Phone

MODEL NAME : CPH2641, CPH2669, CPH3669

BRAND NAME : OPPO

FCC ID : R9C-OP23318

STANDARD(S) : 47 CFR Part 2
47 CFR Part 90, Subpart S

RECEIPT DATE : 2024-05-07

TEST DATE : 2024-05-15 to 2024-05-30

ISSUE DATE : 2024-06-06



Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator 5**
- 1.4. Test Standards and Results 6**
- 1.5. Environmental Conditions 7**
- 2. 47 CFR Part 2, Part 90S Requirements 8**
- 2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P. 8**
- 2.2. Occupied Bandwidth 19**
- 2.3. Frequency Stability 31**
- 2.4. Conducted Spurious Emissions 33**
- 2.5. Band Edge 37**
- 2.6. Radiated Spurious Emissions 42**
- Annex A Test Uncertainty 57**
- Annex B Testing Laboratory Information 58**

Change History		
Version	Date	Reason for change
1.0	2024-06-06	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Applicant Address:	NO.18 HaiBin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China
Manufacturer:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Manufacturer Address:	NO.18 HaiBin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Mobile Phone	
Sample No.:	12#	
Hardware Version:	11	
Software Version:	ColorOS 14.0	
Modulation Type:	QPSK, 16QAM, 64QAM	
Operation Band:	Band 18, 26	
Frequency Range:	LTE Band 18	Tx: 815MHz–824MHz
		Rx: 860MHz–869MHz
	LTE Band 26	Tx: 814MHz–824MHz
		Rx: 859MHz–869MHz
Channel Bandwidth	LTE Band 18	5MHz
	LTE Band 26	1.4MHz, 3MHz, 5MHz, 10MHz
Antenna Type:	IFA Antenna	
Antenna Gain:	LTE Band 18	ANT 0: -5.90dBi; ANT 1: -5.30dBi
	LTE Band 26	ANT 0: -5.60dBi; ANT 1: -5.00dBi



Accessory Information:	Battery 1	
	Brand Name:	SUPERVOOC
	Model No.:	BLPA77
	Serial No.:	N/A
	Capacity:	Typical: 5100mAh, Rated: 4970mAh
	Rated Voltage:	3.91V
	Charge Limit:	4.5V
	Manufacturer:	SUNWODA Electronic Co., Ltd.
	Battery 2	
	Brand Name:	SUPERVOOC
	Model No.:	BLPA77
	Serial No.:	N/A
	Capacity:	Typical: 5100mAh, Rated: 4970mAh
	Rated Voltage:	3.91V
	Charge Limit:	4.5V
	Manufacturer:	Dongguan NVT Technology Co., Ltd.
	AC Adapter 1	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4JAUH
	Serial No.:	N/A
	Rated Output:	5V \Rightarrow 2A or 5V-11V \Rightarrow 4.1A
	Rated Input:	100-240V \sim 50/60Hz, 1.5A
	Manufacturer:	Jiangsu Chenyang Electron Co.,Ltd.
	AC Adapter 2	
	Brand Name:	SUPERVOOC
	Model No.:	VCB4JAUH
	Serial No.:	N/A
Rated Output:	5V \Rightarrow 2A or 5V-11V \Rightarrow 4.1A	
Rated Input:	100-240V \sim 50/60Hz, 1.5A	
Manufacturer:	Huizhou Golden Lake Industrial Co., Ltd.	
USB Cable		
Model No.:	DL154	



Note 1: According to the certificate holder, they declared that t product have three models as below:

Model Name	CPH2641	CPH2669	CPH3669
Memory	4G+128G	4G+256G	8G+256G
Camera	Back:8M, Front:5M	Back:50M, Front:5M	Back:50M, Front:5M

Their are accordant in both hardware and software versions, only the memory and the rear camera are different. The other are the same. The main measuring model is CPH2669, only the results for CPH2669 were recorded in this report.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

LTE Band 18	Maximum E.R.P./E.I.R.P. (W)			Emission Designator (99%OBW)		
BW(MHz)	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5	0.040	0.034	0.032	4M47G7D	4M47W7D	4M48W7D
LTE Band 26	Maximum E.R.P./E.I.R.P. (W)			Emission Designator (99%OBW)		
BW(MHz)	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10	0.041	0.033	0.030	8M93G7D	8M92W7D	8M93W7D
5	0.041	0.034	0.033	4M47G7D	4M48W7D	4M48W7D
3	0.040	0.032	0.032	2M70G7D	2M70W7D	2M71W7D
1.4	0.042	0.034	0.033	1M10G7D	1M10W7D	1M10W7D



1.4. Test Standards and Results

The objective of the report is to perform testing according to Part 2 and Part 90 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 90	Miscellaneous Wireless Communications Services

Test detailed items/section required by FCC rules and results are as below:

Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
2.1046, 90.635(b)	Transmitter Conducted Output Power and ERP/EIRP	May 27, 2024	Shen Biahong Gan Jing	PASS	No deviation
90.209	Occupied Bandwidth	May 17, 2024	Gan Jing	PASS	No deviation
2.1055, 90.213	Frequency Stability	May 17, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691	Conducted Spurious Emissions	May 17, 2024	Gan Jing	PASS	No deviation
2.1051, 90.691	Band Edge	May 17, 2024	Gan Jing	PASS	No deviation
2.1053, 90.691	Radiated Spurious Emissions	May 21 to 30, 2024	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 and ANSI/TIA-603-E-2016.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.47 CFR Part 2, Part 90S Requirements


2.1. Transmitter Conducted Output Power and E.R.P./E.I.R.P.

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

According to FCC section 90.635(b) for LTE Band 26, the maximum output power of the transmitter for mobile stations is 100 watts.

2.1.2. Test Description

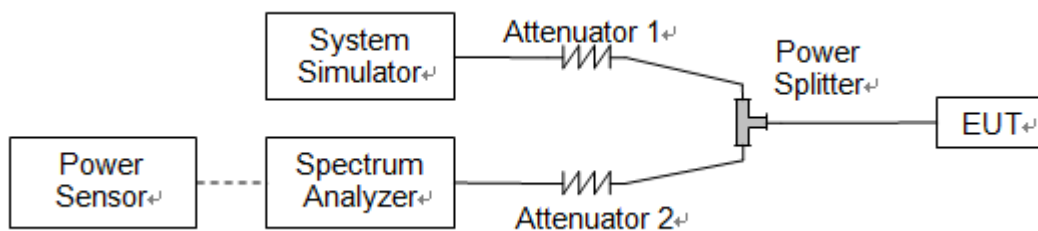

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.1.3. Test procedure

KDB 971168 D01v03 Section 5.2 and ANSI/TIA-603-E-2016.

$EIRP \text{ (dBm)} = \text{Conducted Output Power (dBm)} + \text{Antenna Gain (dBi)}$

$ERP \text{ (dBm)} = EIPR \text{ (dBm)} - 2.15$



2.1.4. Result

Conducted Output Power

LTE Band 18						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				23875	23895	23915
Frequency (MHz)				817.5	819.5	821.5
5	QPSK	1	0	22.97	22.82	22.86
5	QPSK	1	12	22.99	23.49	23.24
5	QPSK	1	24	23.21	22.82	22.79
5	QPSK	12	0	22.55	22.52	22.54
5	QPSK	12	7	22.56	22.55	22.91
5	QPSK	12	13	22.54	22.53	22.47
5	QPSK	25	0	22.57	22.58	22.43
5	16QAM	1	0	21.96	22.18	22.34
5	16QAM	1	12	22.35	22.82	22.66
5	16QAM	1	24	22.27	22.08	21.99
5	16QAM	12	0	21.50	21.41	21.45
5	16QAM	12	7	21.56	21.65	21.62
5	16QAM	12	13	21.58	21.52	21.49
5	16QAM	25	0	21.65	21.27	21.40
5	64QAM	1	0	22.13	22.34	22.08
5	64QAM	1	12	22.51	22.26	22.46
5	64QAM	1	24	22.06	22.32	21.80
5	64QAM	12	0	21.29	21.61	21.16
5	64QAM	12	7	21.45	21.83	21.38
5	64QAM	12	13	21.13	21.38	21.07
5	64QAM	25	0	21.83	21.51	21.44



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				/	26740	/
Frequency (MHz)				/	819.0	/
10	QPSK	1	0	/	23.00	/
10	QPSK	1	25	/	23.25	/
10	QPSK	1	49	/	23.33	/
10	QPSK	25	0	/	22.44	/
10	QPSK	25	12	/	22.57	/
10	QPSK	25	25	/	22.41	/
10	QPSK	50	0	/	22.52	/
10	16QAM	1	0	/	21.85	/
10	16QAM	1	25	/	22.36	/
10	16QAM	1	49	/	21.97	/
10	16QAM	25	0	/	21.40	/
10	16QAM	25	12	/	21.53	/
10	16QAM	25	25	/	21.35	/
10	16QAM	50	0	/	21.47	/
10	64QAM	1	0	/	21.83	/
10	64QAM	1	25	/	21.89	/
10	64QAM	1	49	/	21.99	/
10	64QAM	25	0	/	21.56	/
10	64QAM	25	12	/	21.69	/
10	64QAM	25	25	/	21.59	/
10	64QAM	50	0	/	21.39	/



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26715	26740	26765
Frequency (MHz)				816.5	819.0	821.5
5	QPSK	1	0	23.17	23.09	23.28
5	QPSK	1	12	22.94	23.21	23.29
5	QPSK	1	24	23.33	22.86	23.21
5	QPSK	12	0	22.48	22.67	22.50
5	QPSK	12	7	22.54	22.48	22.54
5	QPSK	12	13	22.44	22.52	22.49
5	QPSK	25	0	22.46	22.47	22.59
5	16QAM	1	0	21.96	21.73	22.01
5	16QAM	1	12	22.32	22.23	22.52
5	16QAM	1	24	22.01	21.89	22.02
5	16QAM	12	0	21.37	21.19	21.48
5	16QAM	12	7	21.56	21.51	21.82
5	16QAM	12	13	21.41	21.38	21.51
5	16QAM	25	0	20.79	20.84	21.45
5	64QAM	1	0	21.80	21.65	22.02
5	64QAM	1	12	22.15	22.33	22.22
5	64QAM	1	24	21.65	21.65	21.38
5	64QAM	12	0	21.03	21.13	21.24
5	64QAM	12	7	21.54	21.49	21.44
5	64QAM	12	13	21.35	21.18	21.42
5	64QAM	25	0	21.49	21.30	21.29



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819.0	822.5
3	QPSK	1	0	22.95	22.68	23.13
3	QPSK	1	8	23.14	23.19	23.16
3	QPSK	1	14	22.63	22.99	22.94
3	QPSK	8	0	22.30	22.43	22.56
3	QPSK	8	4	22.40	22.43	22.67
3	QPSK	8	7	22.29	22.40	22.56
3	QPSK	15	0	22.16	22.44	22.48
3	16QAM	1	0	22.19	21.94	21.72
3	16QAM	1	8	22.01	21.91	22.23
3	16QAM	1	14	22.02	21.87	22.06
3	16QAM	8	0	21.34	21.23	21.53
3	16QAM	8	4	21.47	21.48	21.58
3	16QAM	8	7	21.28	21.37	21.42
3	16QAM	15	0	21.24	21.57	21.48
3	64QAM	1	0	21.88	21.84	22.19
3	64QAM	1	8	21.39	21.90	21.79
3	64QAM	1	14	21.62	21.70	21.82
3	64QAM	8	0	21.17	21.42	21.07
3	64QAM	8	4	21.34	21.52	21.29
3	64QAM	8	7	21.30	21.42	21.27
3	64QAM	15	0	21.12	21.25	21.41



LTE Band 26						
BW [MHz]	Modulation	RB Size	RB Offset	Average Power Low Ch. / Freq.	Average Power Middle Ch. / Freq.	Average Power High Ch. / Freq.
Channel				26697	26740	26783
Frequency (MHz)				814.7	819.0	823.3
1.4	QPSK	1	0	22.89	23.10	22.77
1.4	QPSK	1	3	22.92	23.33	23.35
1.4	QPSK	1	5	23.04	23.11	23.00
1.4	QPSK	3	0	23.05	23.14	23.19
1.4	QPSK	3	1	23.25	23.23	22.83
1.4	QPSK	3	3	23.00	23.07	22.95
1.4	QPSK	6	0	22.18	22.36	22.36
1.4	16QAM	1	0	22.01	21.99	22.02
1.4	16QAM	1	3	22.17	22.04	22.25
1.4	16QAM	1	5	21.95	21.94	21.84
1.4	16QAM	3	0	22.15	22.19	22.34
1.4	16QAM	3	1	22.32	22.41	22.45
1.4	16QAM	3	3	22.44	22.37	22.25
1.4	16QAM	6	0	21.40	21.25	21.54
1.4	64QAM	1	0	22.06	21.53	22.03
1.4	64QAM	1	3	21.70	21.81	21.94
1.4	64QAM	1	5	21.67	21.55	21.38
1.4	64QAM	3	0	21.85	21.64	22.25
1.4	64QAM	3	1	22.16	22.37	22.34
1.4	64QAM	3	3	22.25	22.29	22.38
1.4	64QAM	6	0	21.45	21.40	21.48



Effective Radiated Power and Effective Isotropic Radiated Power

LTE Band 18				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26715		26740		26765	
Frequency (MHz)				816.5		819.0		821.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	15.52	0.036	15.37	0.034	15.41	0.035
5	QPSK	1	12	15.54	0.036	16.04	0.040	15.79	0.038
5	QPSK	1	24	15.76	0.038	15.37	0.034	15.34	0.034
5	QPSK	12	0	15.10	0.032	15.07	0.032	15.09	0.032
5	QPSK	12	7	15.11	0.032	15.10	0.032	15.46	0.035
5	QPSK	12	13	15.09	0.032	15.08	0.032	15.02	0.032
5	QPSK	25	0	15.12	0.033	15.13	0.033	14.98	0.031
5	16QAM	1	0	14.51	0.028	14.73	0.030	14.89	0.031
5	16QAM	1	12	14.90	0.031	15.37	0.034	15.21	0.033
5	16QAM	1	24	14.82	0.030	14.63	0.029	14.54	0.028
5	16QAM	12	0	14.05	0.025	13.96	0.025	14.00	0.025
5	16QAM	12	7	14.11	0.026	14.20	0.026	14.17	0.026
5	16QAM	12	13	14.13	0.026	14.07	0.026	14.04	0.025
5	16QAM	25	0	14.20	0.026	13.82	0.024	13.95	0.025
5	64QAM	1	0	14.68	0.029	14.89	0.031	14.63	0.029
5	64QAM	1	12	15.06	0.032	14.81	0.030	15.01	0.032
5	64QAM	1	24	14.61	0.029	14.87	0.031	14.35	0.027
5	64QAM	12	0	13.84	0.024	14.16	0.026	13.71	0.023
5	64QAM	12	7	14.00	0.025	14.38	0.027	13.93	0.025
5	64QAM	12	13	13.68	0.023	13.93	0.025	13.62	0.023
5	64QAM	25	0	14.38	0.027	14.06	0.025	13.99	0.025



LTE Band 26				Measured E.R.P.			
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.	Middle Ch. / Freq.		High Ch. / Freq.
Channel				/	26740		/
Frequency (MHz)				/	819		/
				/	dBm	W	/
10	QPSK	1	0	/	15.85	0.038	/
10	QPSK	1	25	/	16.10	0.041	/
10	QPSK	1	49	/	16.18	0.041	/
10	QPSK	25	0	/	15.29	0.034	/
10	QPSK	25	12	/	15.42	0.035	/
10	QPSK	25	25	/	15.26	0.034	/
10	QPSK	50	0	/	15.37	0.034	/
10	16QAM	1	0	/	14.70	0.030	/
10	16QAM	1	25	/	15.21	0.033	/
10	16QAM	1	49	/	14.82	0.030	/
10	16QAM	25	0	/	14.25	0.027	/
10	16QAM	25	12	/	14.38	0.027	/
10	16QAM	25	25	/	14.20	0.026	/
10	16QAM	50	0	/	14.32	0.027	/
10	64QAM	1	0	/	14.68	0.029	/
10	64QAM	1	25	/	14.74	0.030	/
10	64QAM	1	49	/	14.84	0.030	/
10	64QAM	25	0	/	14.41	0.028	/
10	64QAM	25	12	/	14.54	0.028	/
10	64QAM	25	25	/	14.44	0.028	/
10	64QAM	50	0	/	14.24	0.027	/



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26715		26740		26765	
Frequency (MHz)				816.5		819.0		821.5	
				dBm	W	dBm	W	dBm	W
5	QPSK	1	0	16.02	0.040	15.94	0.039	16.13	0.041
5	QPSK	1	12	15.79	0.038	16.06	0.040	16.14	0.041
5	QPSK	1	24	16.18	0.041	15.71	0.037	16.06	0.040
5	QPSK	12	0	15.33	0.034	15.52	0.036	15.35	0.034
5	QPSK	12	7	15.39	0.035	15.33	0.034	15.39	0.035
5	QPSK	12	13	15.29	0.034	15.37	0.034	15.34	0.034
5	QPSK	25	0	15.31	0.034	15.32	0.034	15.44	0.035
5	16QAM	1	0	14.81	0.030	14.58	0.029	14.86	0.031
5	16QAM	1	12	15.17	0.033	15.08	0.032	15.37	0.034
5	16QAM	1	24	14.86	0.031	14.74	0.030	14.87	0.031
5	16QAM	12	0	14.22	0.026	14.04	0.025	14.33	0.027
5	16QAM	12	7	14.41	0.028	14.36	0.027	14.67	0.029
5	16QAM	12	13	14.26	0.027	14.23	0.026	14.36	0.027
5	16QAM	25	0	13.64	0.023	13.69	0.023	14.30	0.027
5	64QAM	1	0	14.65	0.029	14.50	0.028	14.87	0.031
5	64QAM	1	12	15.00	0.032	15.18	0.033	15.07	0.032
5	64QAM	1	24	14.50	0.028	14.50	0.028	14.23	0.026
5	64QAM	12	0	13.88	0.024	13.98	0.025	14.09	0.026
5	64QAM	12	7	14.39	0.027	14.34	0.027	14.29	0.027
5	64QAM	12	13	14.20	0.026	14.03	0.025	14.27	0.027
5	64QAM	25	0	14.34	0.027	14.15	0.026	14.14	0.026



LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26705		26740		26775	
Frequency (MHz)				815.5		819.0		822.5	
				dBm	W	dBm	W	dBm	W
3	QPSK	1	0	15.80	0.038	15.53	0.036	15.98	0.040
3	QPSK	1	8	15.99	0.040	16.04	0.040	16.01	0.040
3	QPSK	1	14	15.48	0.035	15.84	0.038	15.79	0.038
3	QPSK	8	0	15.15	0.033	15.28	0.034	15.41	0.035
3	QPSK	8	4	15.25	0.033	15.28	0.034	15.52	0.036
3	QPSK	8	7	15.14	0.033	15.25	0.033	15.41	0.035
3	QPSK	15	0	15.01	0.032	15.29	0.034	15.33	0.034
3	16QAM	1	0	15.04	0.032	14.79	0.030	14.57	0.029
3	16QAM	1	8	14.86	0.031	14.76	0.030	15.08	0.032
3	16QAM	1	14	14.87	0.031	14.72	0.030	14.91	0.031
3	16QAM	8	0	14.19	0.026	14.08	0.026	14.38	0.027
3	16QAM	8	4	14.32	0.027	14.33	0.027	14.43	0.028
3	16QAM	8	7	14.13	0.026	14.22	0.026	14.27	0.027
3	16QAM	15	0	14.09	0.026	14.42	0.028	14.33	0.027
3	64QAM	1	0	14.73	0.030	14.69	0.029	15.04	0.032
3	64QAM	1	8	14.24	0.027	14.75	0.030	14.64	0.029
3	64QAM	1	14	14.47	0.028	14.55	0.029	14.67	0.029
3	64QAM	8	0	14.02	0.025	14.27	0.027	13.92	0.025
3	64QAM	8	4	14.19	0.026	14.37	0.027	14.14	0.026
3	64QAM	8	7	14.15	0.026	14.27	0.027	14.12	0.026
3	64QAM	15	0	13.97	0.025	14.10	0.026	14.26	0.027




LTE Band 26				Measured E.R.P.					
BW [MHz]	Modulation	RB Size	RB Offset	Low Ch. / Freq.		Middle Ch. / Freq.		High Ch. / Freq.	
Channel				26697		26740		26783	
Frequency (MHz)				814.7		819.0		823.3	
				dBm	W	dBm	W	dBm	W
1.4	QPSK	1	0	15.74	0.037	15.95	0.039	15.62	0.036
1.4	QPSK	1	3	15.77	0.038	16.18	0.041	16.20	0.042
1.4	QPSK	1	5	15.89	0.039	15.96	0.039	15.85	0.038
1.4	QPSK	3	0	15.90	0.039	15.99	0.040	16.04	0.040
1.4	QPSK	3	1	16.10	0.041	16.08	0.041	15.68	0.037
1.4	QPSK	3	3	15.85	0.038	15.92	0.039	15.80	0.038
1.4	QPSK	6	0	15.03	0.032	15.21	0.033	15.21	0.033
1.4	16QAM	1	0	14.86	0.031	14.84	0.030	14.87	0.031
1.4	16QAM	1	3	15.02	0.032	14.89	0.031	15.10	0.032
1.4	16QAM	1	5	14.80	0.030	14.79	0.030	14.69	0.029
1.4	16QAM	3	0	15.00	0.032	15.04	0.032	15.19	0.033
1.4	16QAM	3	1	15.17	0.033	15.26	0.034	15.30	0.034
1.4	16QAM	3	3	15.29	0.034	15.22	0.033	15.10	0.032
1.4	16QAM	6	0	14.25	0.027	14.10	0.026	14.39	0.027
1.4	64QAM	1	0	14.91	0.031	14.38	0.027	14.88	0.031
1.4	64QAM	1	3	14.55	0.029	14.66	0.029	14.79	0.030
1.4	64QAM	1	5	14.52	0.028	14.40	0.028	14.23	0.026
1.4	64QAM	3	0	14.70	0.030	14.49	0.028	15.10	0.032
1.4	64QAM	3	1	15.01	0.032	15.22	0.033	15.19	0.033
1.4	64QAM	3	3	15.10	0.032	15.14	0.033	15.23	0.033
1.4	64QAM	6	0	14.30	0.027	14.25	0.027	14.33	0.027

2.2. Occupied Bandwidth

2.2.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.2.2. Test Description

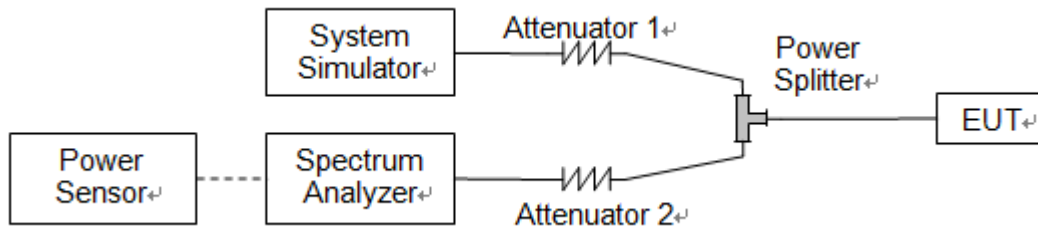

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.2.3. Test procedure

KDB 971168 D01v03 Section 4.1 and ANSI/TIA-603-E-2016.

**2.2.4. Test Result**

LTE Band	BW(MHz)	Channel Level	Channel	Frequency (MHz)	Modulation	99% BW (MHz)	26dB BW (MHz)	Verdict
B18 part90	5	Low	23875	817.5	16QAM	4.4705	4.8636	PASS
B18 part90	5	Low	23875	817.5	64QAM	4.4724	4.8554	PASS
B18 part90	5	Low	23875	817.5	QPSK	4.4660	4.8658	PASS
B18 part90	5	Mid	23895	819.5	16QAM	4.4650	4.8924	PASS
B18 part90	5	Mid	23895	819.5	64QAM	4.4781	4.8881	PASS
B18 part90	5	Mid	23895	819.5	QPSK	4.4687	4.8913	PASS
B18 part90	5	High	23915	821.5	16QAM	4.4645	4.9096	PASS
B18 part90	5	High	23915	821.5	64QAM	4.4773	4.8683	PASS
B18 part90	5	High	23915	821.5	QPSK	4.4692	4.9205	PASS




LTE Band	BW(MHz)	Channel Level	Channel	Frequency (MHz)	Modulation	99% BW (MHz)	26dB BW (MHz)	Verdict
B26 Part90	1.4	Low	26697	814.7	16QAM	1.1022	1.2836	PASS
B26 Part90	1.4	Low	26697	814.7	64QAM	1.0987	1.2946	PASS
B26 Part90	1.4	Low	26697	814.7	QPSK	1.0966	1.2845	PASS
B26 Part90	1.4	Mid	26740	819	16QAM	1.0998	1.2854	PASS
B26 Part90	1.4	Mid	26740	819	64QAM	1.0999	1.2900	PASS
B26 Part90	1.4	Mid	26740	819	QPSK	1.0981	1.2659	PASS
B26 Part90	1.4	High	26783	823.3	16QAM	1.0985	1.3006	PASS
B26 Part90	1.4	High	26783	823.3	64QAM	1.0987	1.2890	PASS
B26 Part90	1.4	High	26783	823.3	QPSK	1.0964	1.2783	PASS
B26 Part90	3	Low	26705	815.5	16QAM	2.7023	2.9909	PASS
B26 Part90	3	Low	26705	815.5	64QAM	2.7046	2.9688	PASS
B26 Part90	3	Low	26705	815.5	QPSK	2.6980	2.9824	PASS
B26 Part90	3	Mid	26740	819	16QAM	2.7043	2.9793	PASS
B26 Part90	3	Mid	26740	819	64QAM	2.6995	2.9822	PASS
B26 Part90	3	Mid	26740	819	QPSK	2.7007	2.9965	PASS
B26 Part90	3	High	26775	822.5	16QAM	2.7035	2.9927	PASS
B26 Part90	3	High	26775	822.5	64QAM	2.7065	2.9719	PASS
B26	3	High	26775	822.5	QPSK	2.6996	2.9896	PASS



Part90								
B26 Part90	5	Low	26715	816.5	16QAM	4.4784	4.9345	PASS
B26 Part90	5	Low	26715	816.5	64QAM	4.4768	4.9168	PASS
B26 Part90	5	Low	26715	816.5	QPSK	4.4692	4.9166	PASS
B26 Part90	5	Mid	26740	819	16QAM	4.4679	4.8731	PASS
B26 Part90	5	Mid	26740	819	64QAM	4.4705	4.9317	PASS
B26 Part90	5	Mid	26740	819	QPSK	4.4665	4.8929	PASS
B26 Part90	5	High	26765	821.5	16QAM	4.4688	4.9171	PASS
B26 Part90	5	High	26765	821.5	64QAM	4.4755	4.8845	PASS
B26 Part90	5	High	26765	821.5	QPSK	4.4713	4.9202	PASS
B26 Part90	10	Low	26740	819	16QAM	8.9099	9.6350	PASS
B26 Part90	10	Low	26740	819	64QAM	8.9189	9.5801	PASS
B26 Part90	10	Low	26740	819	QPSK	8.9273	9.6749	PASS
B26 Part90	10	Mid	26740	819	16QAM	8.9153	9.5783	PASS
B26 Part90	10	Mid	26740	819	64QAM	8.9301	9.6217	PASS
B26 Part90	10	Mid	26740	819	QPSK	8.9276	9.6704	PASS
B26 Part90	10	High	26740	819	16QAM	8.9107	9.6564	PASS
B26 Part90	10	High	26740	819	64QAM	8.9269	9.6530	PASS
B26 Part90	10	High	26740	819	QPSK	8.9160	9.6429	PASS




B18 part90 / 5MHz / 16QAM/ Low CH

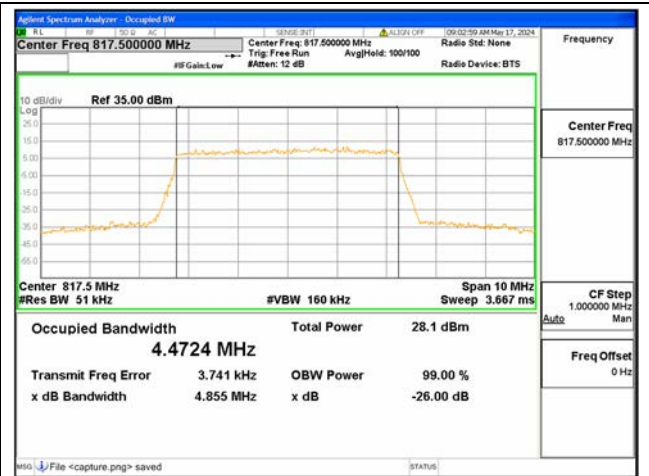


B18 part90 / 5MHz / 64QAM/ Low CH




B18 part90 / 5MHz / QPSK/ Low CH

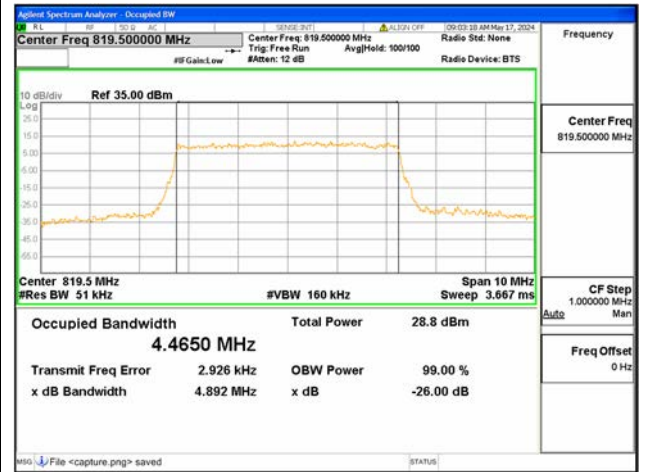


B18 part90 / 5MHz / 16QAM/ Mid CH

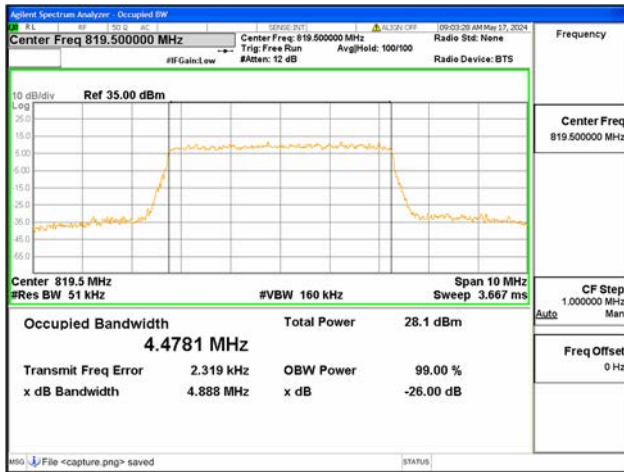


B18 part90 / 5MHz / 64QAM/ Mid CH

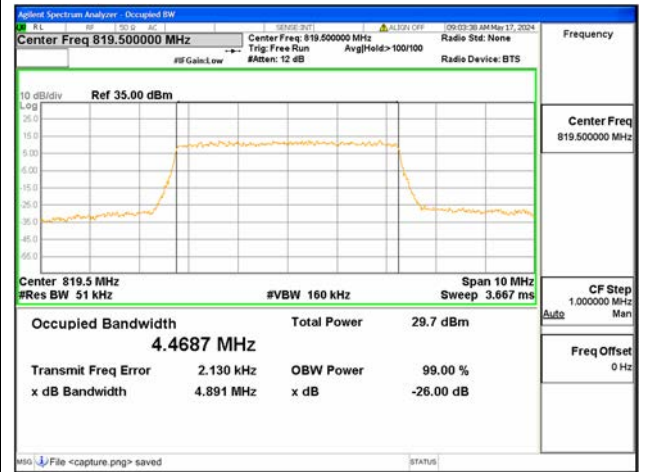


B18 part90 / 5MHz / QPSK/ Mid CH

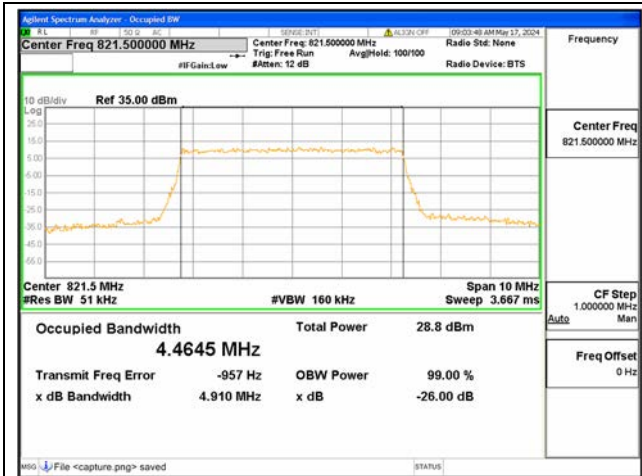


B18 part90 / 5MHz / 16QAM/ High CH

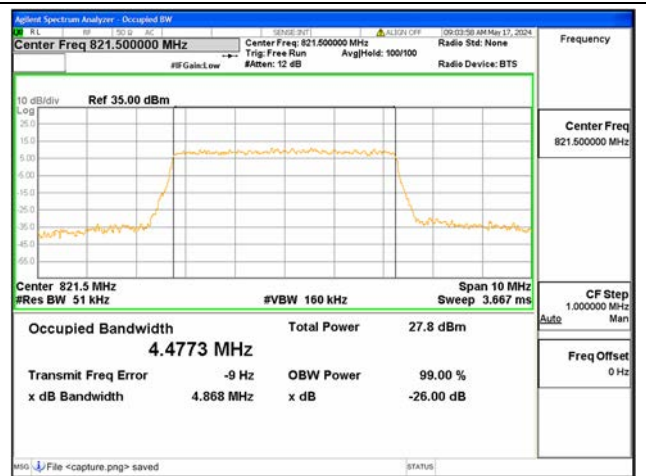

B18 part90 / 5MHz / 64QAM/ High CH

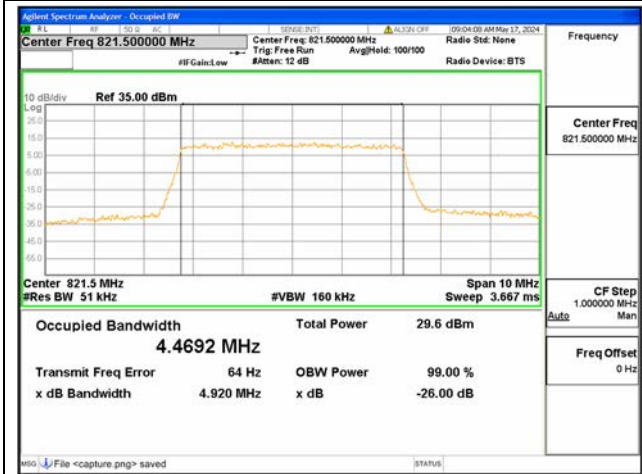

B18 part90 / 5MHz / QPSK/ High CH

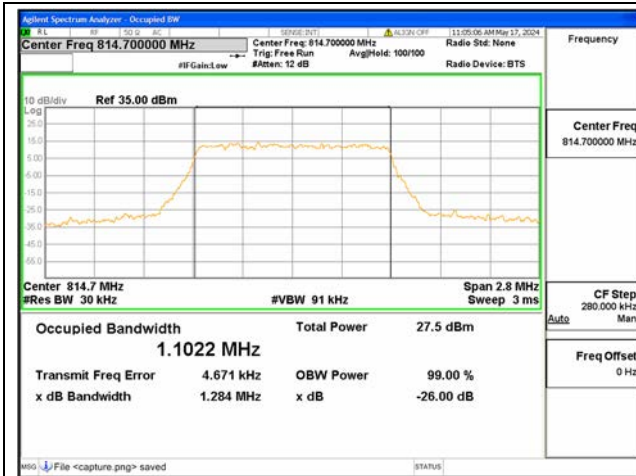


B26 Part90 / 1.4MHz / 16QAM/ Low CH



B26 Part90 / 1.4MHz / 64QAM/ Low CH




B26 Part90 / 1.4MHz / QPSK/ Low CH

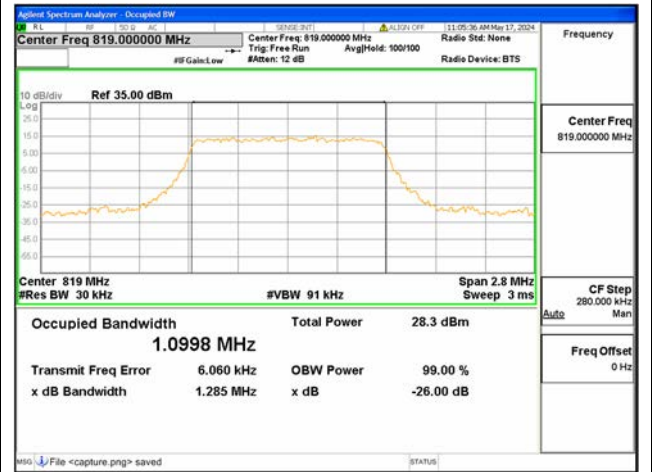

B26 Part90 / 1.4MHz / 16QAM/ Mid CH




B26 Part90 / 1.4MHz / 64QAM/ Mid CH

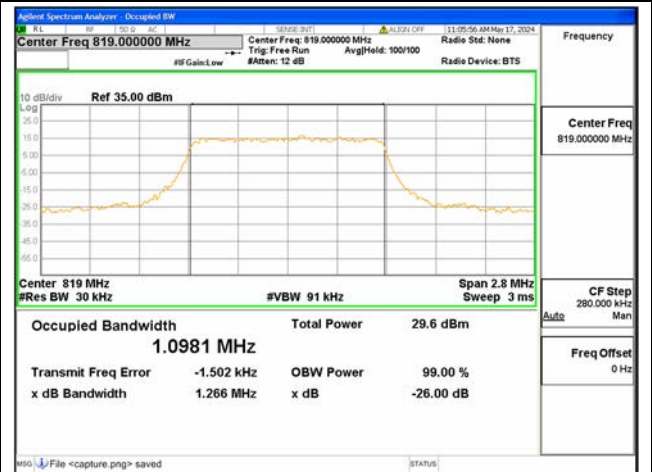


B26 Part90 / 1.4MHz / QPSK/ Mid CH




B26 Part90 / 1.4MHz / 16QAM/ High CH

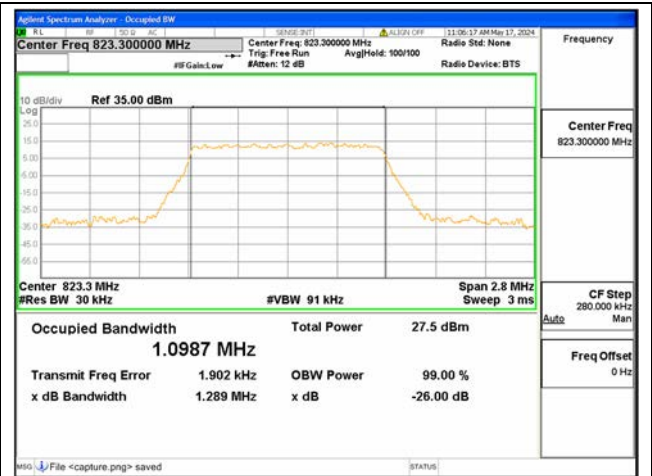


B26 Part90 / 1.4MHz / 64QAM/ High CH

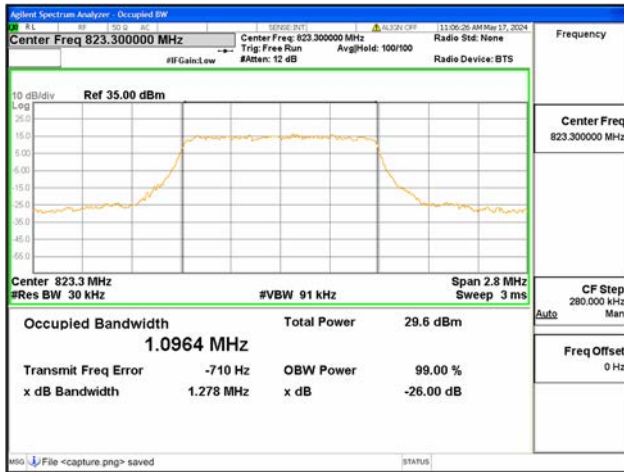


B26 Part90 / 1.4MHz / QPSK/ High CH

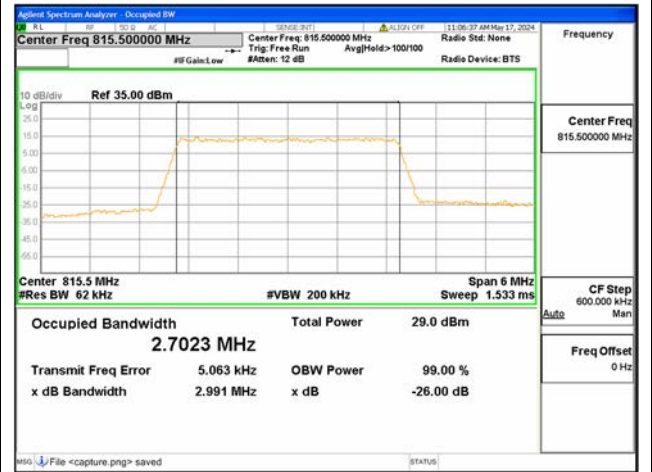


B26 Part90 / 3MHz / 16QAM/ Low CH

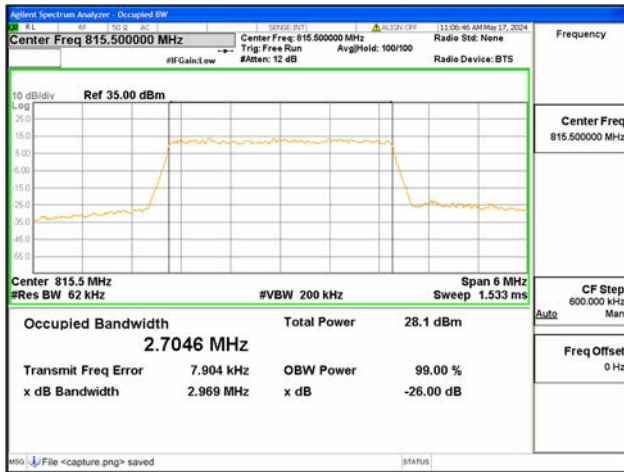

B26 Part90 / 3MHz / 64QAM/ Low CH

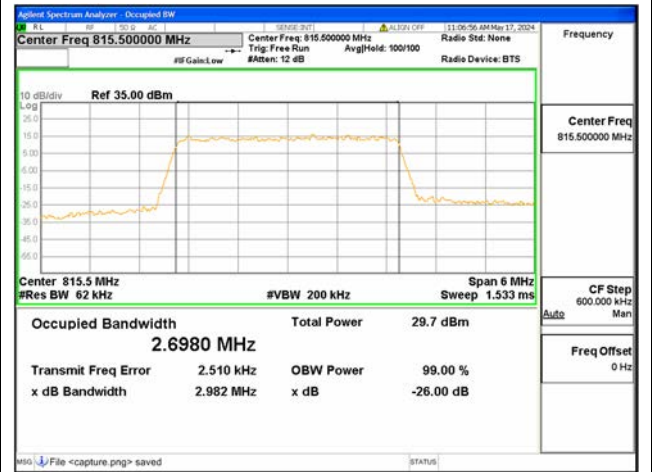


B26 Part90 / 3MHz / QPSK/ Low CH

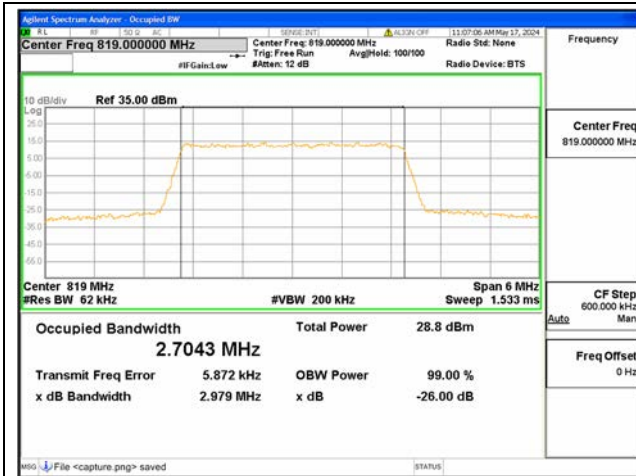

B26 Part90 / 3MHz / 16QAM/ Mid CH



B26 Part90 / 3MHz / 64QAM/ Mid CH

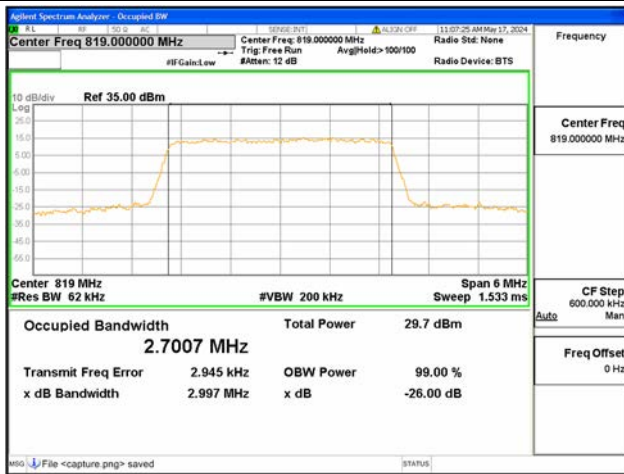

B26 Part90 / 3MHz / QPSK/ Mid CH



B26 Part90 / 3MHz / 16QAM/ High CH



B26 Part90 / 3MHz / 64QAM/ High CH




B26 Part90 / 3MHz / QPSK/ High CH




B26 Part90 / 5MHz / 16QAM/ Low CH



B26 Part90 / 5MHz / 64QAM/ Low CH

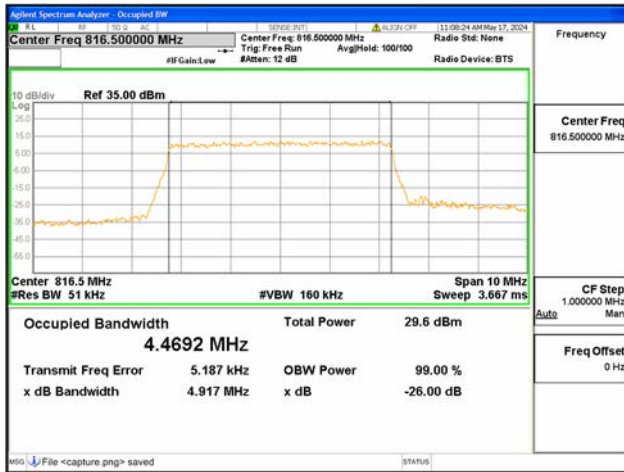

B26 Part90 / 5MHz / QPSK/ Low CH

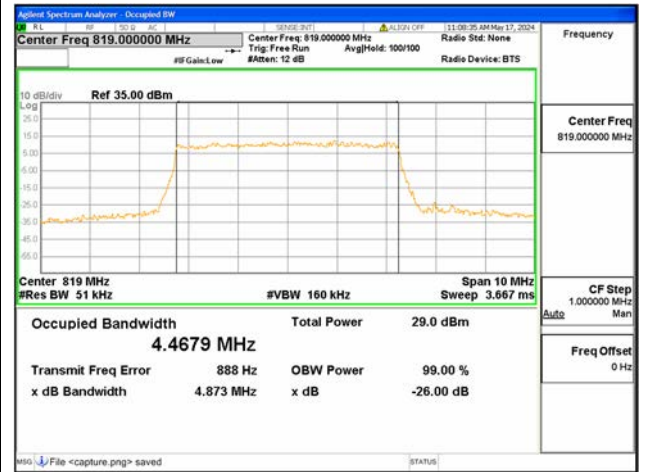

B26 Part90 / 5MHz / 16QAM/ Mid CH



B26 Part90 / 5MHz / 64QAM/ Mid CH




B26 Part90 / 5MHz / QPSK/ Mid CH




B26 Part90 / 5MHz / 16QAM/ High CH



B26 Part90 / 5MHz / 64QAM/ High CH

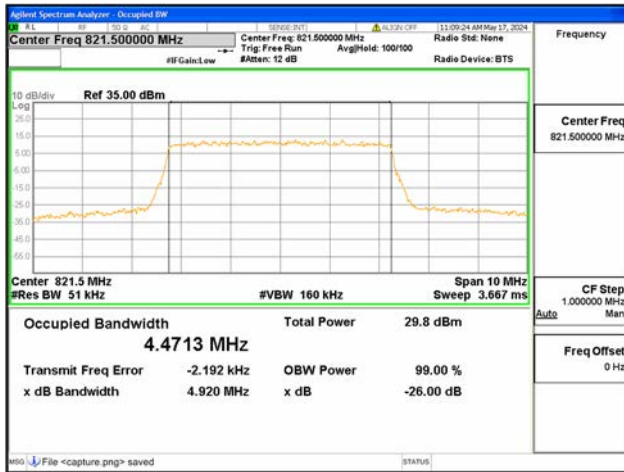

B26 Part90 / 5MHz / QPSK/ High CH

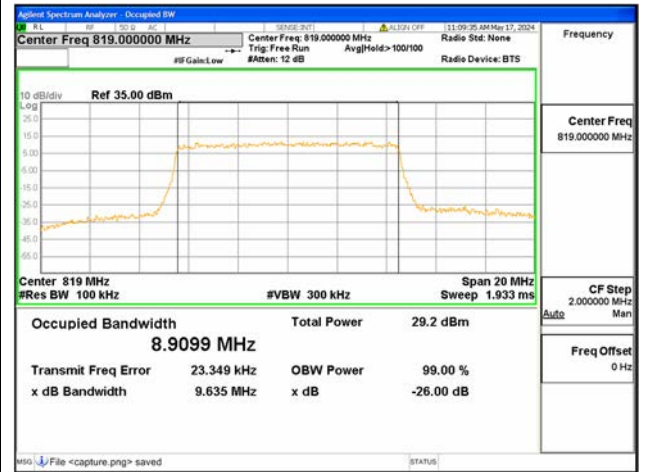

B26 Part90 / 10MHz / 16QAM/ Low CH



B26 Part90 / 10MHz / 64QAM/ Low CH



B26 Part90 / 10MHz / QPSK/ Low CH




B26 Part90 / 10MHz / 16QAM/ Mid CH



B26 Part90 / 10MHz / 64QAM/ Mid CH



B26 Part90 / 10MHz / QPSK/ Mid CH

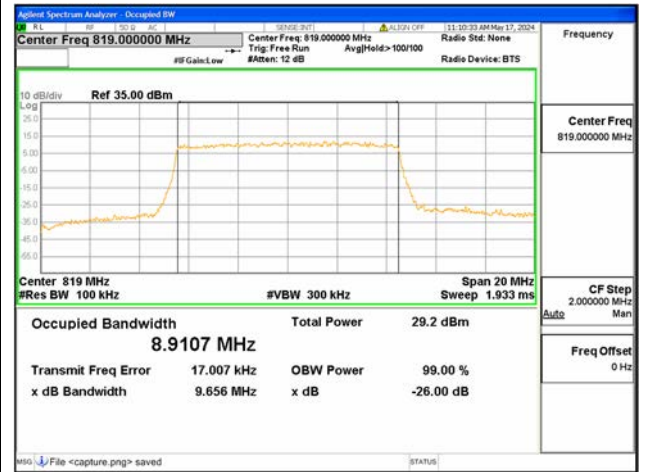

B26 Part90 / 10MHz / 16QAM/ High CH



B26 Part90 / 10MHz / 64QAM/ High CH



B26 Part90 / 10MHz / QPSK/ High CH

2.3. Frequency Stability


2.3.1. Requirement

According to FCC section 2.1055 & 90.213, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from 0°C to 35°C , which are specified by the applicant.

2.3.2. Test Description

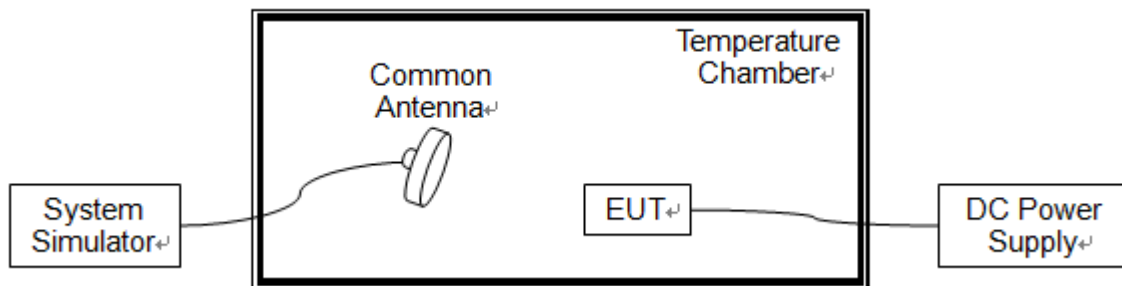

The EUT which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

2.3.3. Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.



2.3.4. Test Result

The nominal, highest and lowest extreme voltages are separately 3.91V, 4.50V and 3.50V, which are specified by the applicant; the normal temperature here used is 20°C.

LTE Band 18, 64QAM, Channel 23895, Frequency 819.5MHz					
Limit =Within Authorized Band					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.91	+20(Ref)	-15	-0.018	PASS
Normal		0	4	0.005	
Normal		+10	13	0.016	
Normal		+20	19	0.023	
Normal		+30	2	0.002	
Normal		+35	17	0.021	
High	4.50	+20	15	0.018	
BATT.ENDPOINT	3.50	+20	6	0.007	


LTE Band 26, 64QAM, Channel 26740, Frequency 819MHz					
Limit =±2.5ppm					
Voltage (%)	Power (VDC)	Temp (°C)	Fre. Dev. (Hz)	Deviation (ppm)	Result
Normal	3.91	+20(Ref)	15	0.018	PASS
Normal		0	14	0.017	
Normal		+10	15	0.018	
Normal		+20	23	0.028	
Normal		+30	-16	-0.020	
Normal		+35	2	0.002	
High	4.50	+20	16	0.020	
BATT.ENDPOINT	3.50	+20	14	0.017	

2.4. Conducted Spurious Emissions

2.4.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.4.2. Test Description

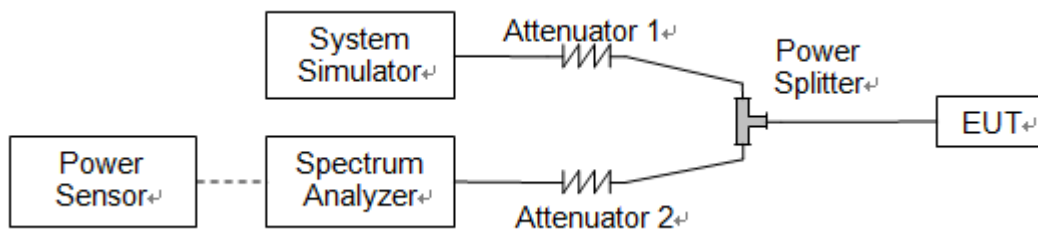


The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.4.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.




2.4.4. Test Result

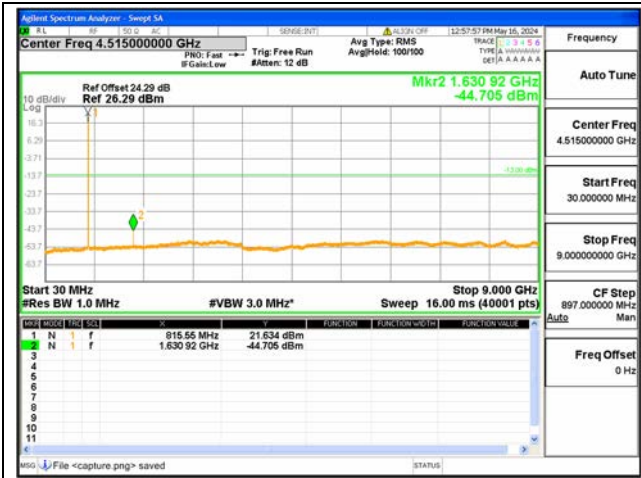


B18 part90 / 5MHz / Low CH / QPSK

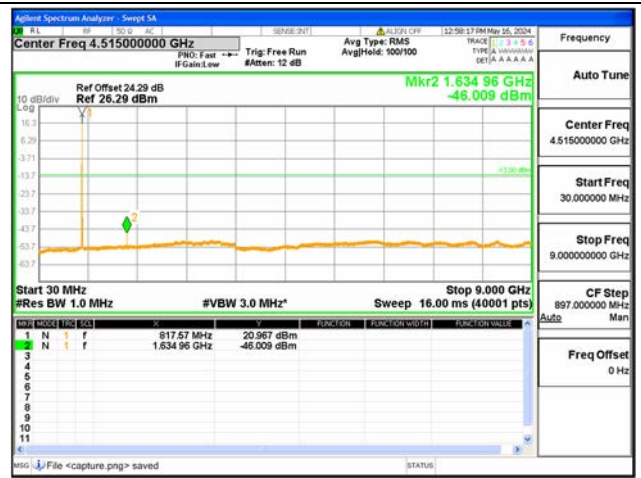


B18 part90 / 5MHz / Mid CH / QPSK

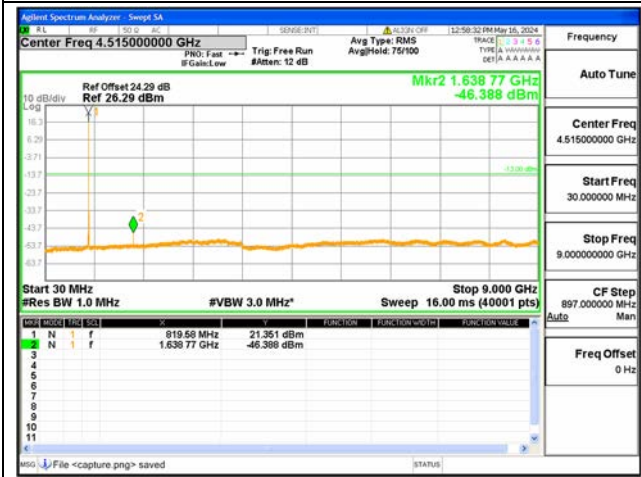


B18 part90 / 5MHz / High CH / QPSK

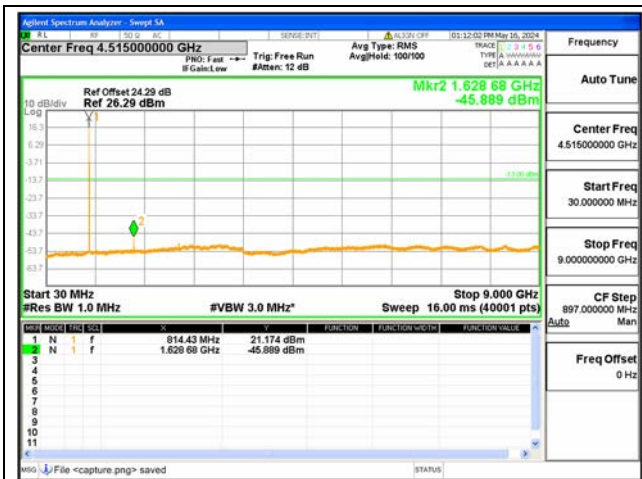


B26 Part90 / 1.4MHz / Low CH / QPSK

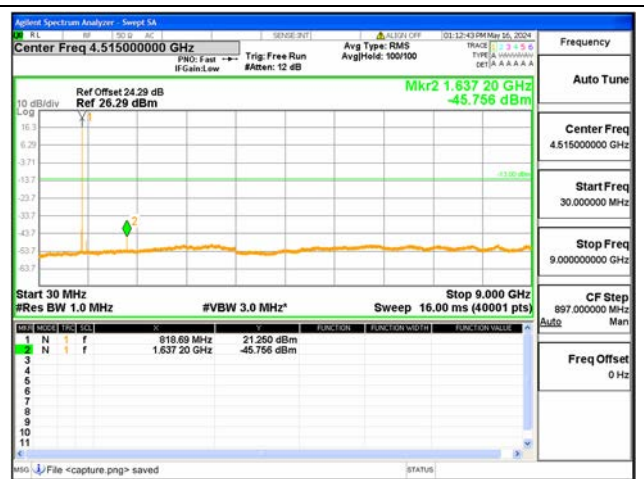


B26 Part90 / 1.4MHz / Mid CH / QPSK

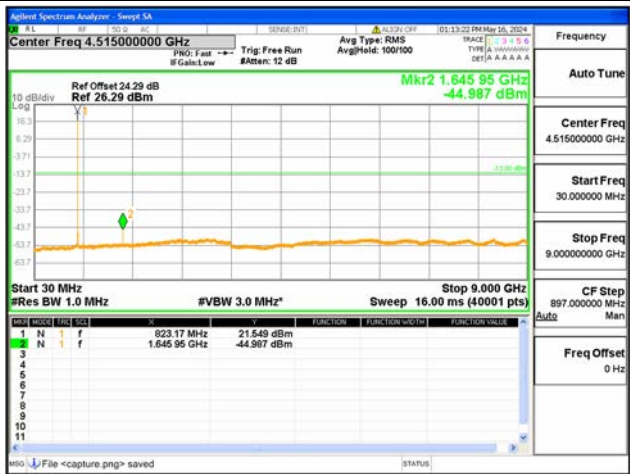


B26 Part90 / 1.4MHz / High CH / QPSK

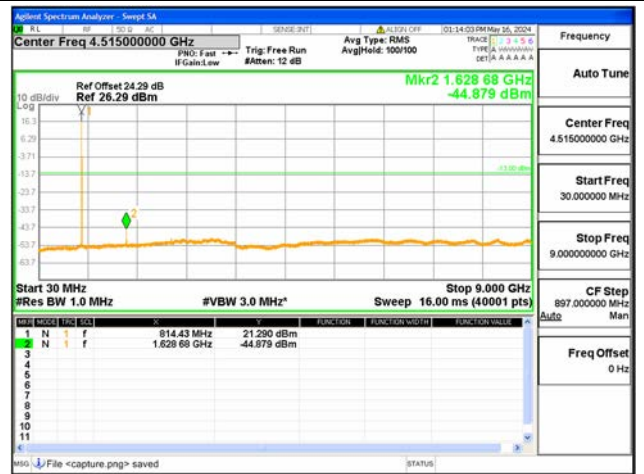

B26 Part90 / 3MHz / Low CH / QPSK

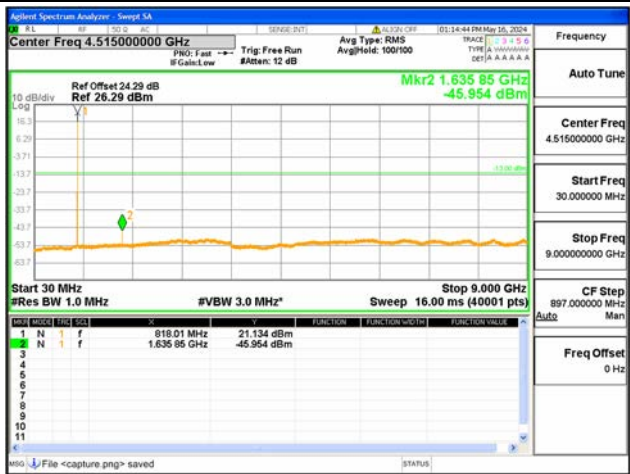


B26 Part90 / 3MHz / Mid CH / QPSK

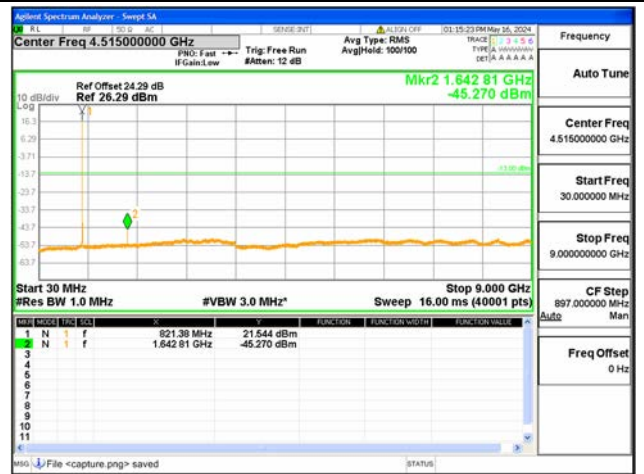


B26 Part90 / 3MHz / High CH / QPSK




B26 Part90 / 5MHz / Low CH / QPSK

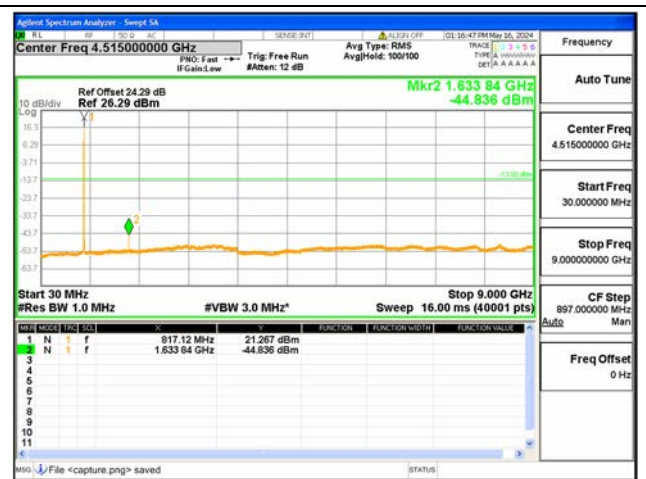


B26 Part90 / 5MHz / Mid CH / QPSK

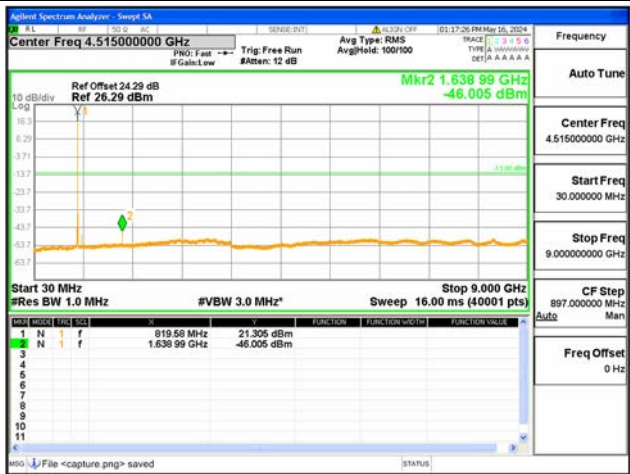


B26 Part90 / 5MHz / High CH / QPSK

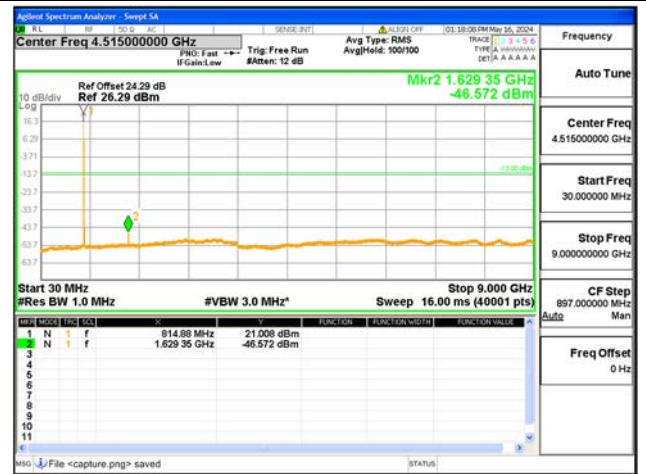

B26 Part90 / 10MHz / Low CH / QPSK

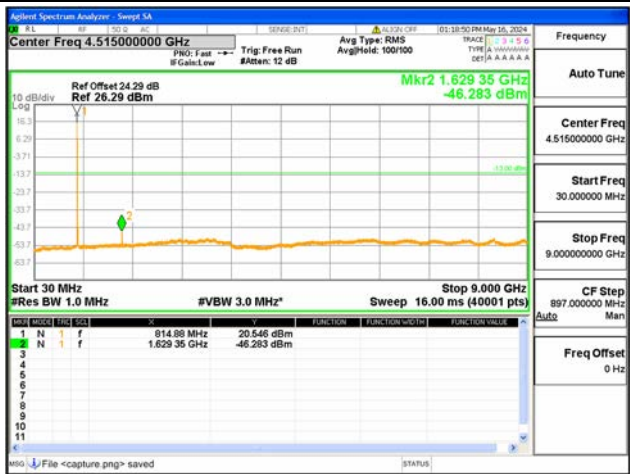

B26 Part90 / 10MHz / Mid CH / QPSK

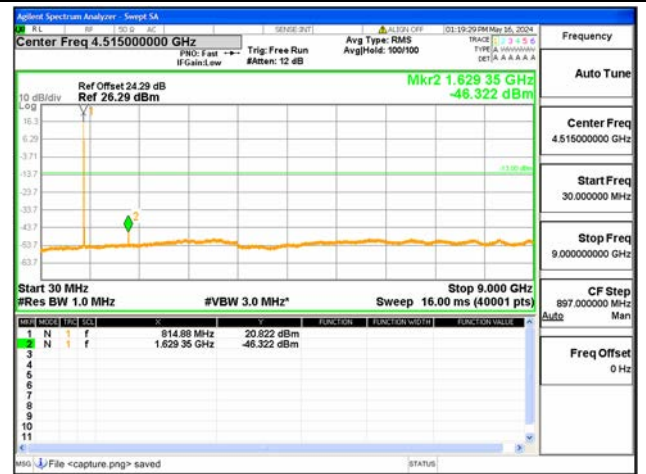

B26 Part90 / 10MHz / High CH / QPSK


2.5. Band Edge

2.5.1. Requirement

Band26

According to FCC section 90.961(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

2.5.2. Test Description

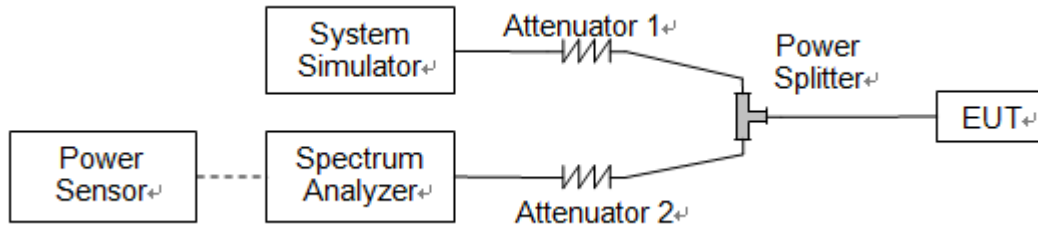

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.5.3. Test procedure


KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.




2.5.4. Test Result




B18 part90 / 5MHz / Low CH / QPSK / 1 RB

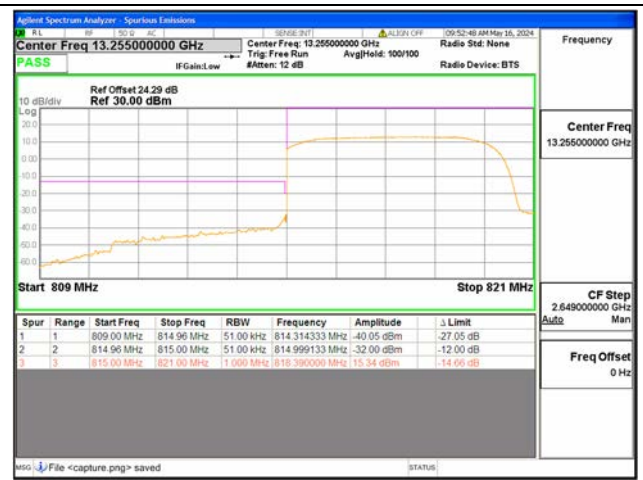


B18 part90 / 5MHz / Low CH / QPSK / FULL RB

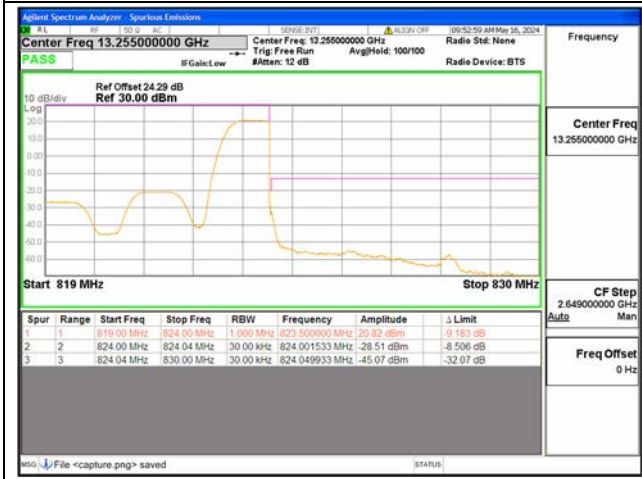

B18 part90 / 5MHz / High CH / QPSK / 1 RB

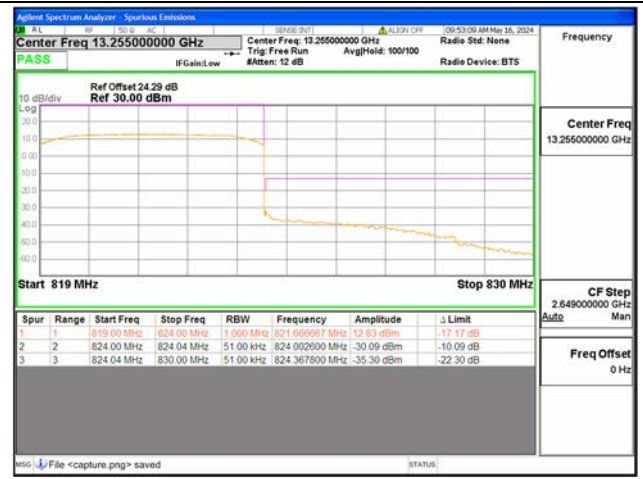


B18 part90 / 5MHz / High CH / QPSK / FULL RB

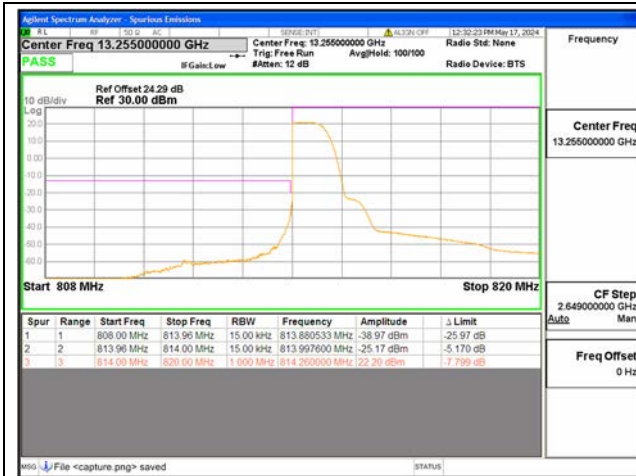


B26 Part90 / 1.4MHz / Low CH / QPSK / 1 RB



B26 Part90 / 1.4MHz / Low CH / QPSK / FULL RB

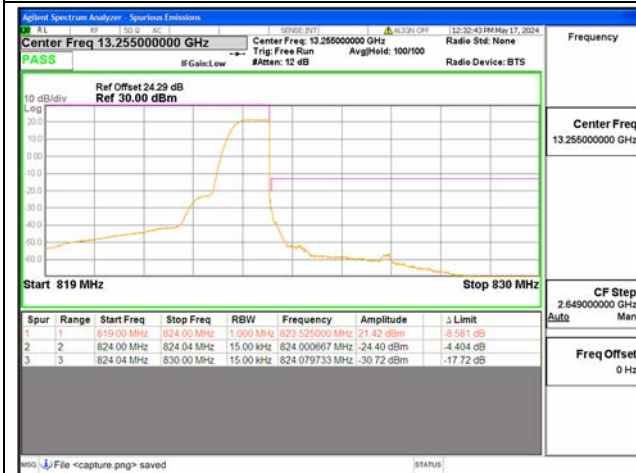


B26 Part90 / 1.4MHz / High CH / QPSK / 1 RB

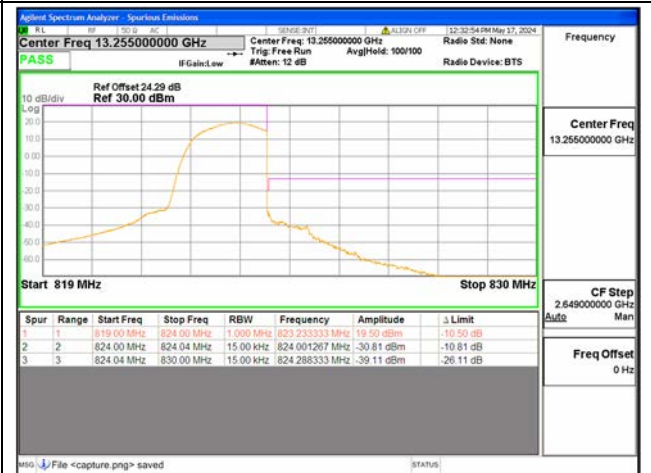


B26 Part90 / 1.4MHz / High CH / QPSK / FULL RB



B26 Part90 / 3MHz / Low CH / QPSK / 1 RB

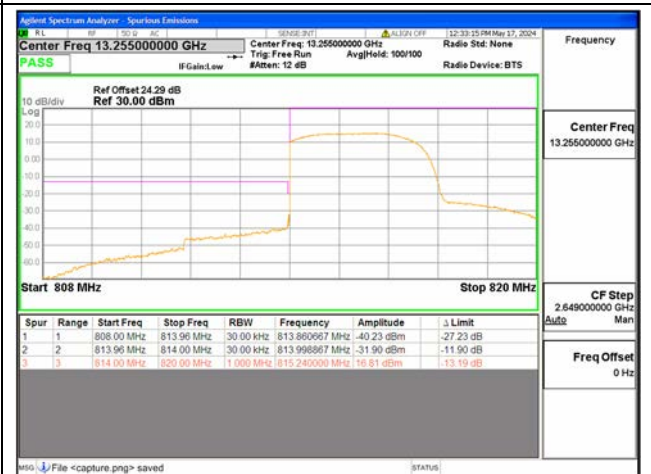


B26 Part90 / 3MHz / Low CH / QPSK / FULL RB

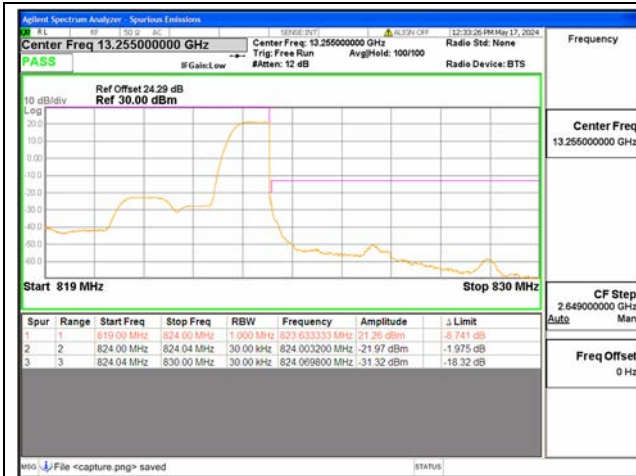


B26 Part90 / 3MHz / High CH / QPSK / 1 RB




B26 Part90 / 3MHz / High CH / QPSK / FULL RB

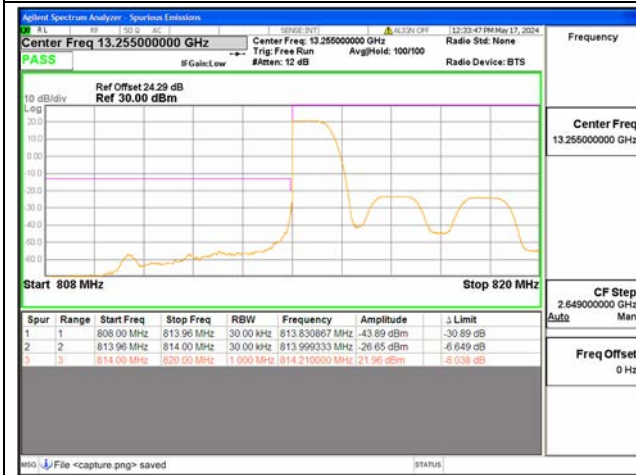

B26 Part90 / 5MHz / Low CH / QPSK / 1 RB

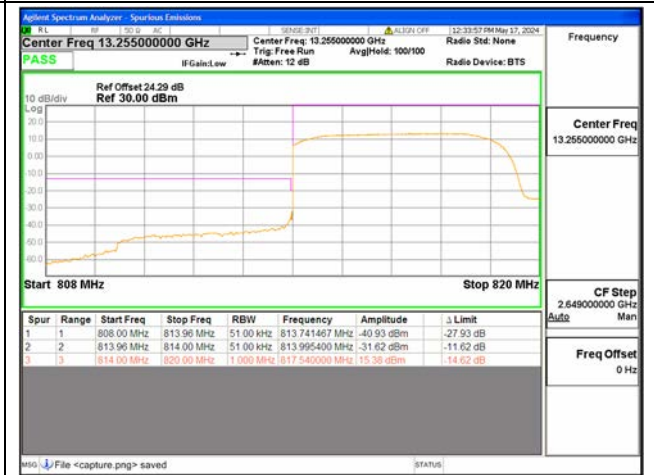


B26 Part90 / 5MHz / Low CH / QPSK / FULL RB

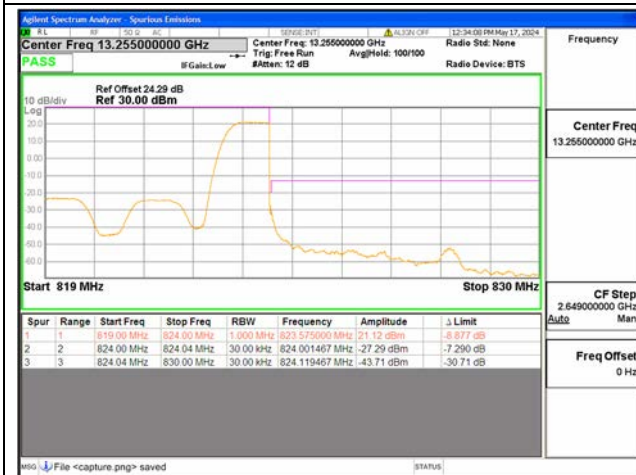

B26 Part90 / 5MHz / High CH / QPSK / 1 RB




B26 Part90 / 5MHz / High CH / QPSK / FULL RB

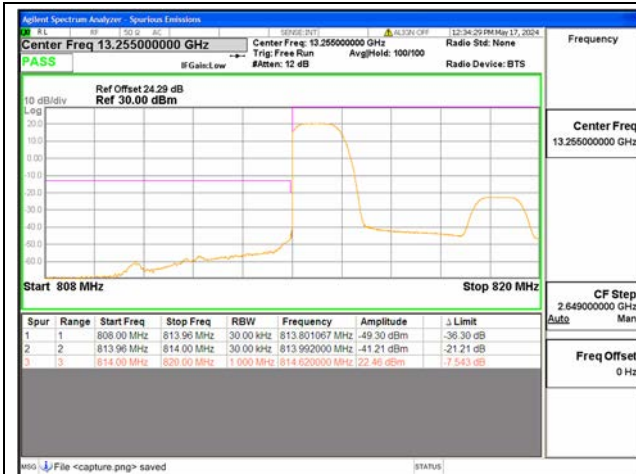


B26 Part90 / 10MHz / Low CH / QPSK / 1 RB



B26 Part90 / 10MHz / Low CH / QPSK / FULL RB

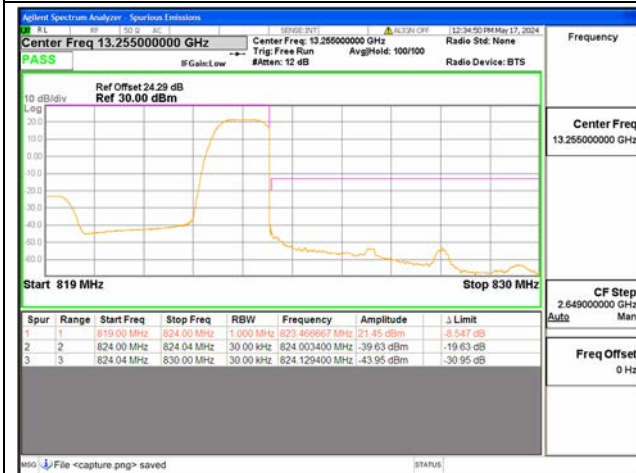

B26 Part90 / 10MHz / High CH / QPSK / 1 RB

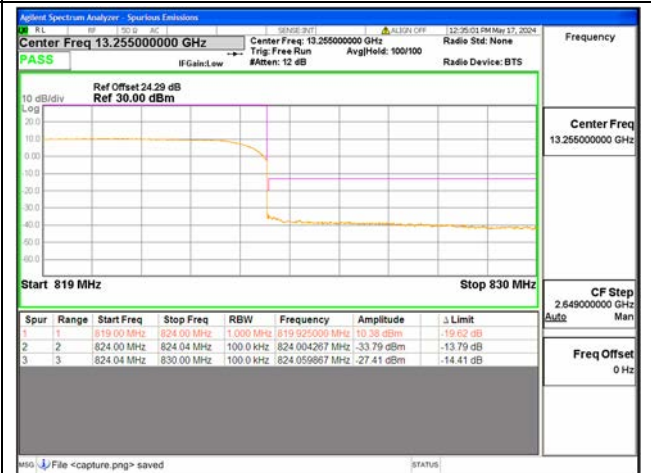


B26 Part90 / 10MHz / High CH / QPSK / FULL RB


2.6. Radiated Spurious Emissions

2.6.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.6.2. Test Description

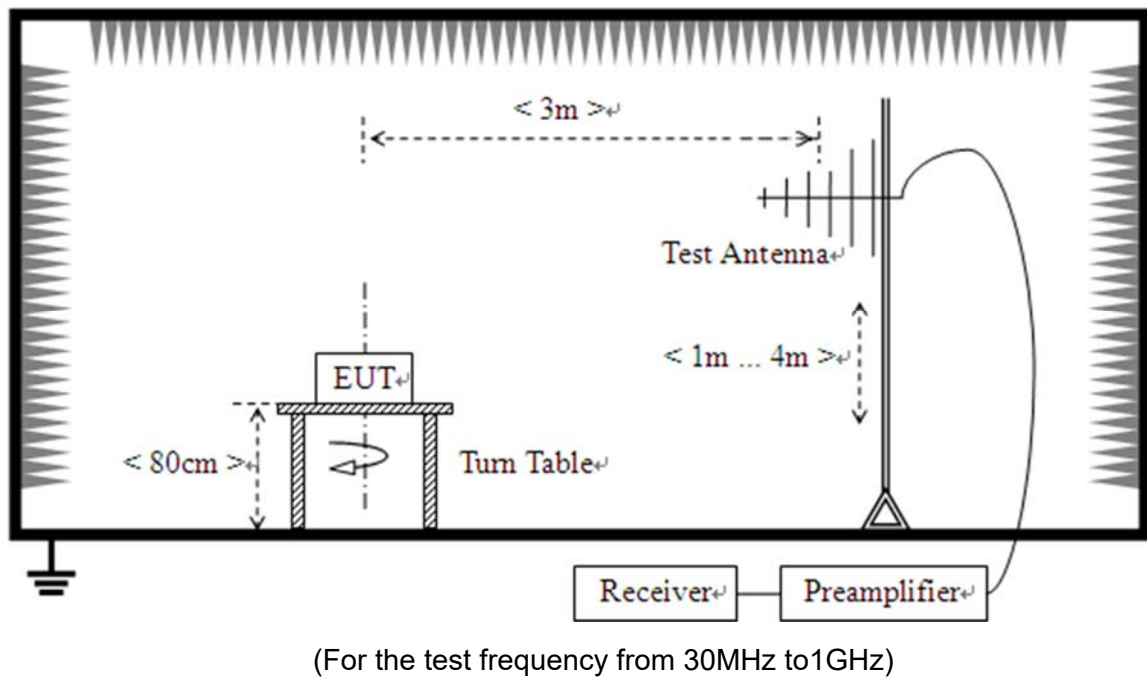

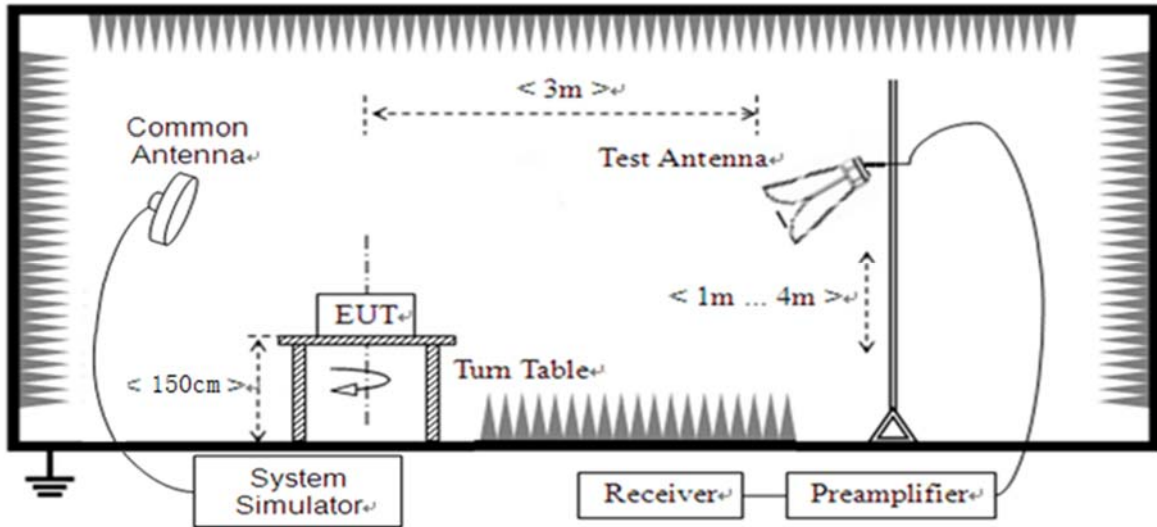

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.6.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.



2.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of A_{TOT} .

Note1: The power of the EUT transmitting frequency should be ignored.



Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note3: All bandwidth and modulation were considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.


Note 4: N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.

Note 5: The amplitude of emissions(18GHz to 10th harmonics) which are attenuated more than 20 dB below the limit are not be reported.


ANT 0

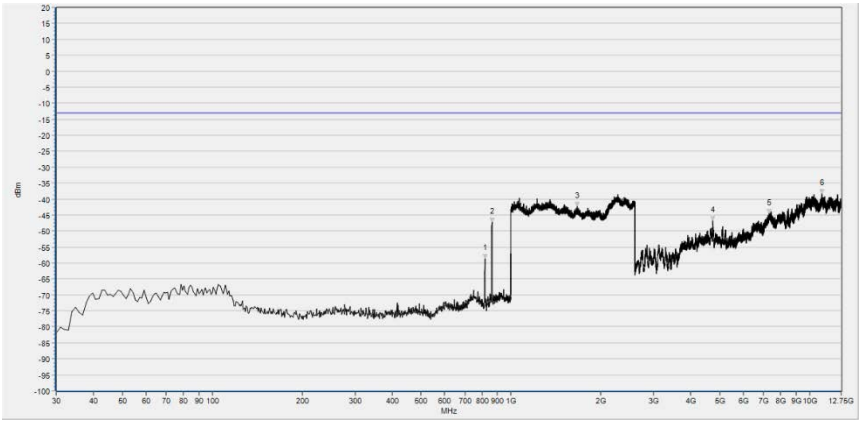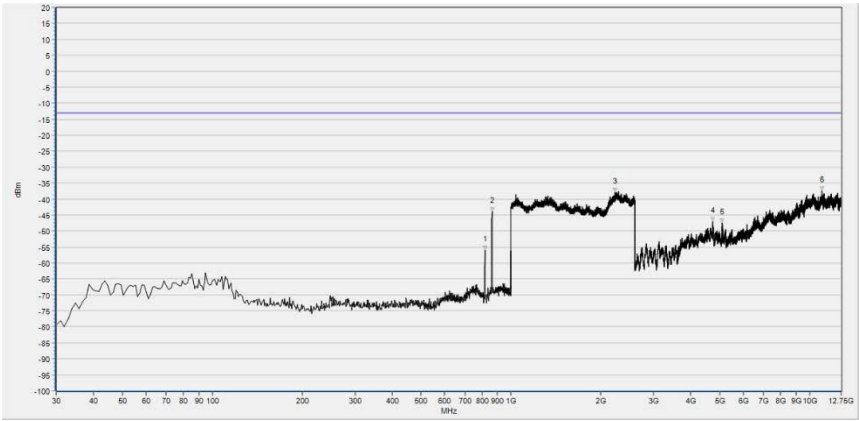LTE Band 18, 5MHz BW, Low Channel, QPSK					
					
No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-58.75	-13.00	Horizontal	N/A
2	863.230	-47.19	-13.00	Horizontal	N/A
3	1669.068	-42.41	-13.00	Horizontal	PASS
4	4748.500	-46.82	-13.00	Horizontal	PASS
5	7315.994	-44.58	-13.00	Horizontal	PASS
6	10998.345	-38.39	-13.00	Horizontal	PASS
					
No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-56.08	-13.00	Vertical	N/A
2	864.200	-43.92	-13.00	Vertical	N/A
3	2231.853	-37.97	-13.00	Vertical	PASS
4	4739.271	-47.04	-13.00	Vertical	PASS
5	5101.046	-47.43	-13.00	Vertical	PASS
6	10989.116	-37.45	-13.00	Vertical	PASS

LTE Band 18, 5MHz BW, Mid Channel, QPSK

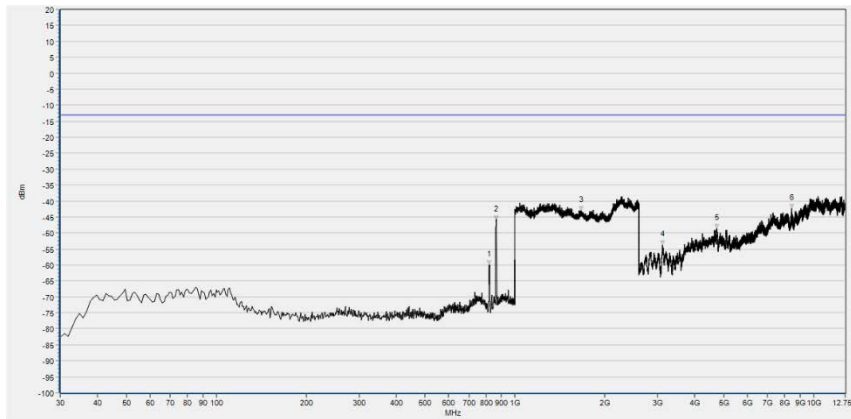


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-59.98	-13.00	Horizontal	N/A
2	864.200	-46.01	-13.00	Horizontal	N/A
3	1662.665	-43.10	-13.00	Horizontal	PASS
4	3122.359	-53.73	-13.00	Horizontal	PASS
5	4735.579	-48.56	-13.00	Horizontal	PASS
6	8436.388	-42.32	-13.00	Horizontal	PASS

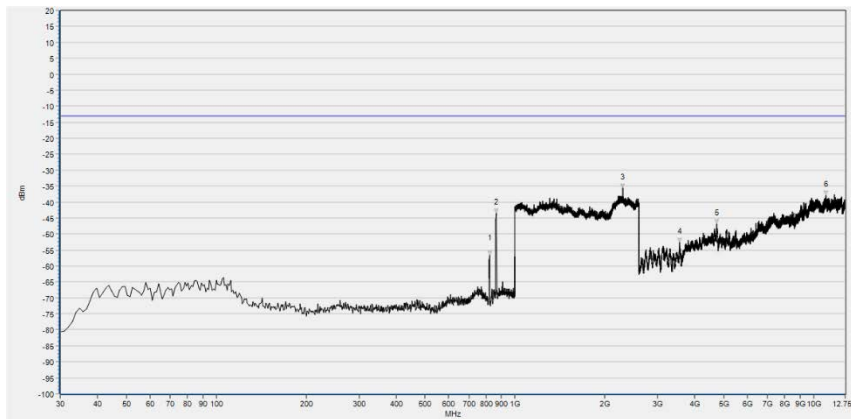


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	821.520	-56.75	-13.00	Vertical	N/A
2	864.200	-43.57	-13.00	Vertical	N/A
3	2297.159	-35.62	-13.00	Vertical	PASS
4	3556.119	-52.69	-13.00	Vertical	PASS
5	4733.733	-46.89	-13.00	Vertical	PASS
6	10992.808	-37.96	-13.00	Vertical	PASS

LTE Band 18, 5MHz BW, High Channel, QPSK

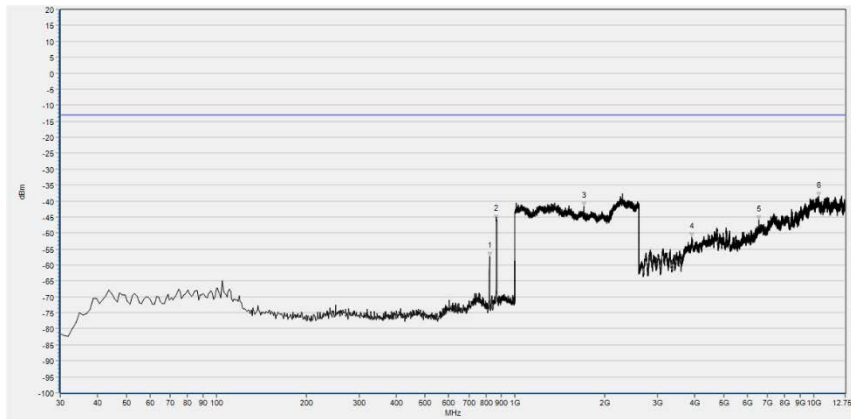


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-57.33	-13.00	Horizontal	N/A
2	864.200	-45.77	-13.00	Horizontal	N/A
3	1697.879	-41.73	-13.00	Horizontal	PASS
4	3914.203	-51.25	-13.00	Horizontal	PASS
5	6546.299	-45.94	-13.00	Horizontal	PASS
6	10411.384	-38.51	-13.00	Horizontal	PASS

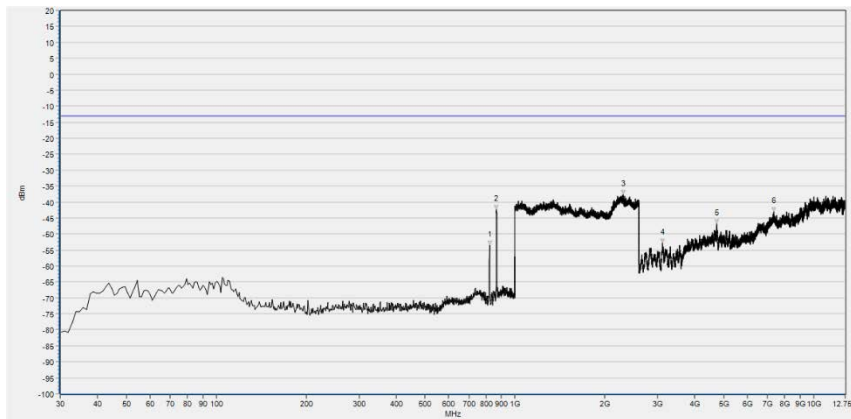


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-53.59	-13.00	Vertical	N/A
2	867.110	-42.45	-13.00	Vertical	N/A
3	2304.842	-37.63	-13.00	Vertical	PASS
4	3124.204	-52.79	-13.00	Vertical	PASS
5	4739.271	-46.88	-13.00	Vertical	PASS
6	7363.984	-43.02	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Low Channel, QPSK

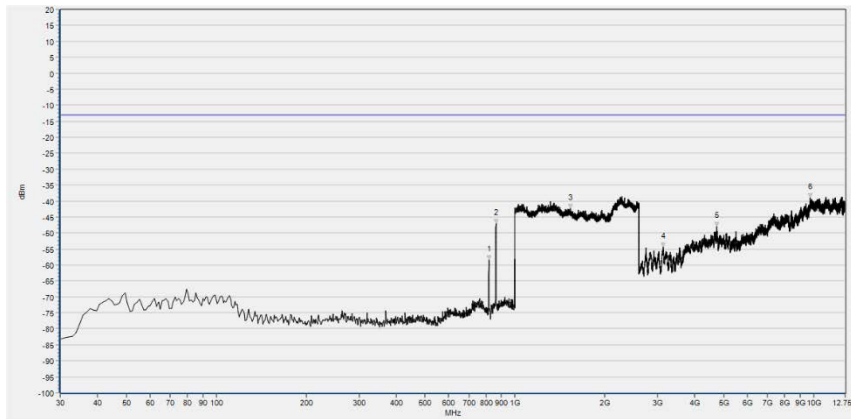


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-58.35	-13.00	Horizontal	N/A
2	863.230	-47.06	-13.00	Horizontal	N/A
3	1535.254	-42.34	-13.00	Horizontal	PASS
4	3135.279	-54.50	-13.00	Horizontal	PASS
5	4739.271	-47.84	-13.00	Horizontal	PASS
6	9756.128	-39.10	-13.00	Horizontal	PASS

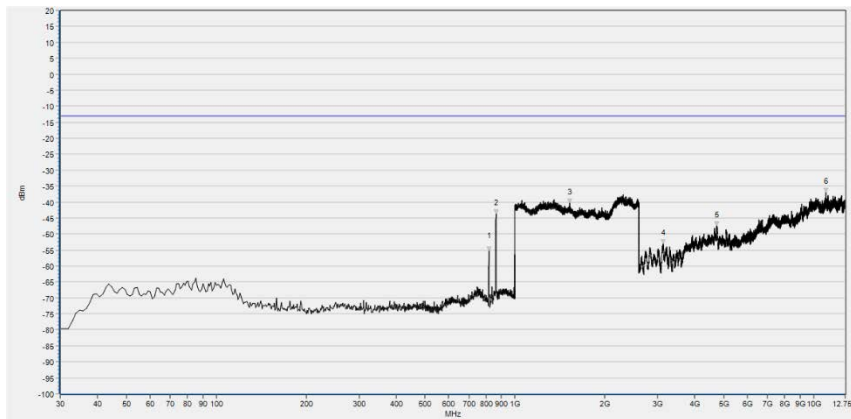


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-55.27	-13.00	Vertical	N/A
2	863.230	-43.58	-13.00	Vertical	N/A
3	1523.089	-40.37	-13.00	Vertical	PASS
4	3142.662	-53.18	-13.00	Vertical	PASS
5	4735.579	-47.54	-13.00	Vertical	PASS
6	10976.196	-36.98	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Mid Channel, QPSK

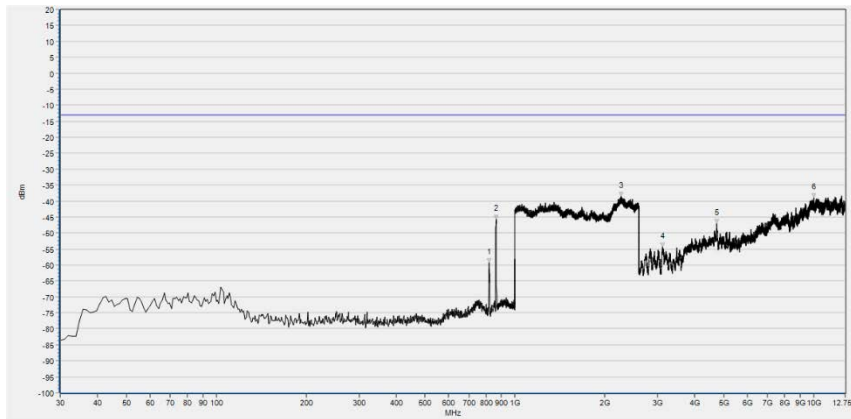


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-59.39	-13.00	Horizontal	N/A
2	866.140	-45.59	-13.00	Horizontal	N/A
3	2265.146	-38.49	-13.00	Horizontal	PASS
4	3126.050	-54.41	-13.00	Horizontal	PASS
5	4739.271	-47.10	-13.00	Horizontal	PASS
6	10005.310	-39.04	-13.00	Horizontal	PASS

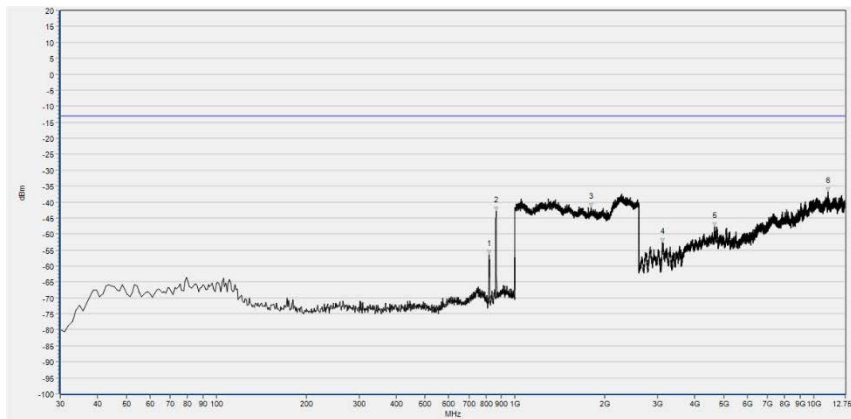


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-56.34	-13.00	Vertical	N/A
2	865.170	-42.84	-13.00	Vertical	N/A
3	1802.881	-41.68	-13.00	Vertical	PASS
4	3124.204	-52.70	-13.00	Vertical	PASS
5	4659.902	-47.72	-13.00	Vertical	PASS
6	11149.700	-36.72	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, High Channel, QPSK

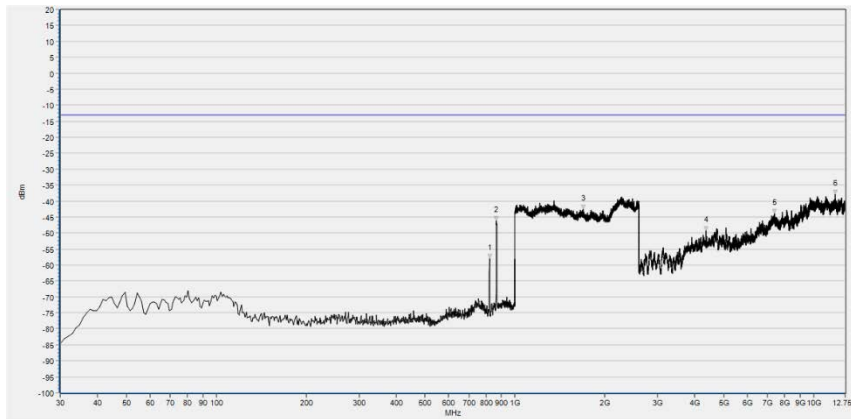


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	821.520	-57.93	-13.00	Horizontal	N/A
2	864.200	-46.24	-13.00	Horizontal	N/A
3	1688.275	-42.63	-13.00	Horizontal	PASS
4	4370.113	-49.25	-13.00	Horizontal	PASS
5	7393.517	-43.99	-13.00	Horizontal	PASS
6	11808.647	-37.81	-13.00	Horizontal	PASS

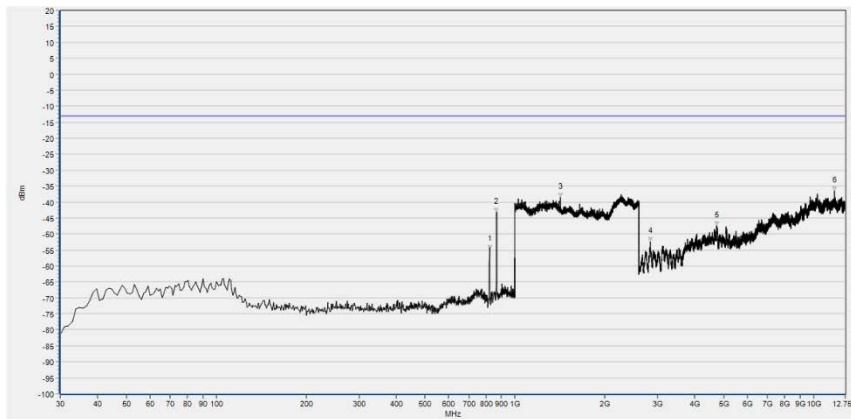


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	821.520	-54.80	-13.00	Vertical	N/A
2	865.170	-43.24	-13.00	Vertical	N/A
3	1418.727	-38.51	-13.00	Vertical	PASS
4	2841.799	-52.47	-13.00	Vertical	PASS
5	4739.271	-47.46	-13.00	Vertical	PASS
6	11764.348	-36.57	-13.00	Vertical	PASS


ANT 1

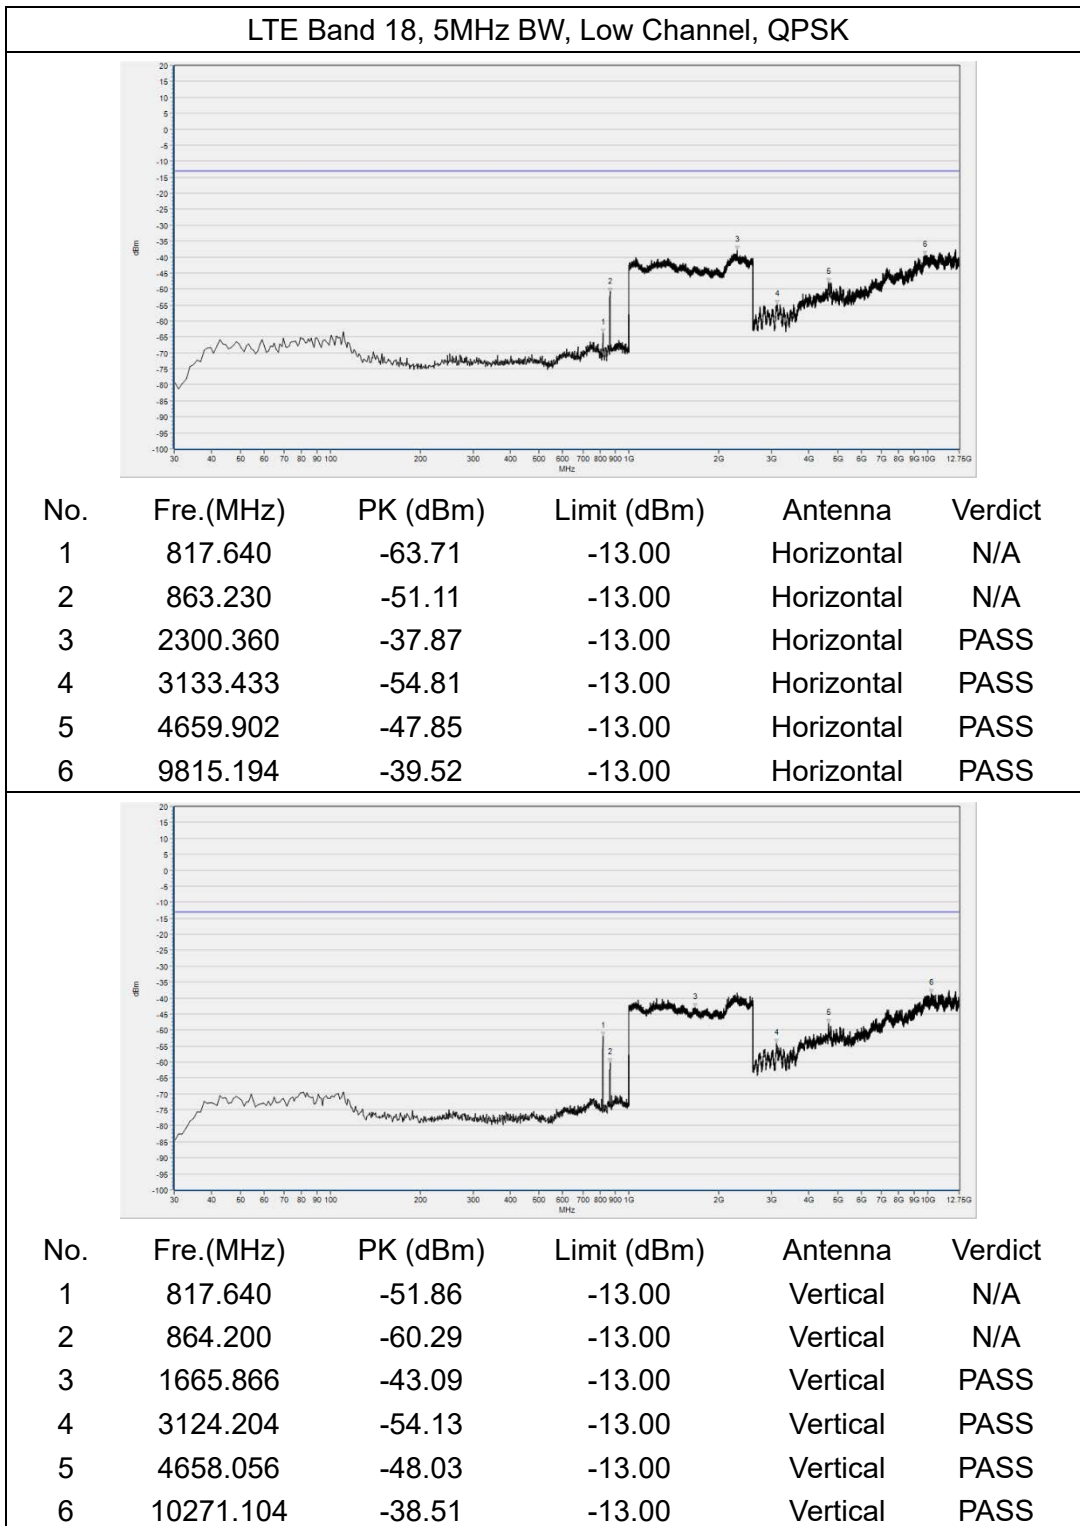

LTE Band 18, 5MHz BW, Mid Channel, QPSK

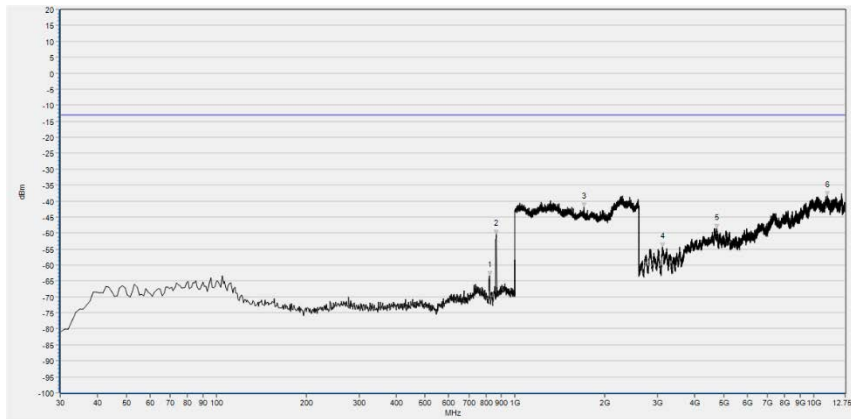


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	821.520	-63.26	-13.00	Horizontal	N/A
2	866.140	-50.45	-13.00	Horizontal	N/A
3	1704.922	-41.94	-13.00	Horizontal	PASS
4	3124.204	-54.37	-13.00	Horizontal	PASS
5	4744.808	-48.71	-13.00	Horizontal	PASS
6	11116.476	-38.41	-13.00	Horizontal	PASS

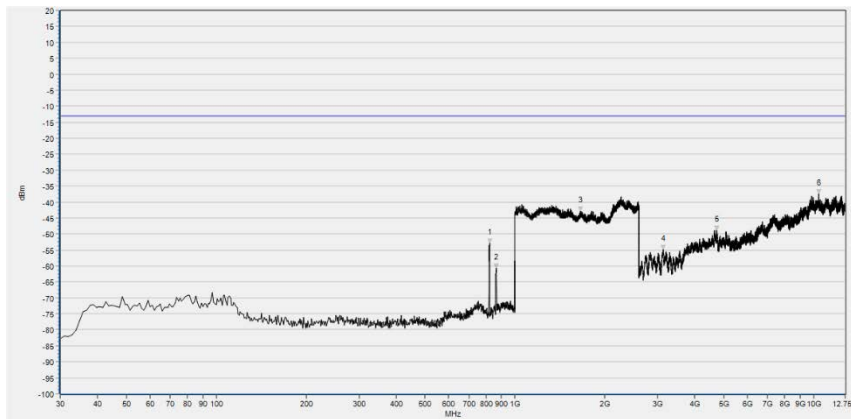


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	821.520	-52.85	-13.00	Vertical	N/A
2	864.200	-60.70	-13.00	Vertical	N/A
3	1657.543	-42.85	-13.00	Vertical	PASS
4	3133.433	-54.91	-13.00	Vertical	PASS
5	4737.425	-48.79	-13.00	Vertical	PASS
6	10396.618	-37.52	-13.00	Vertical	PASS



LTE Band 18, 5MHz BW, High Channel, QPSK

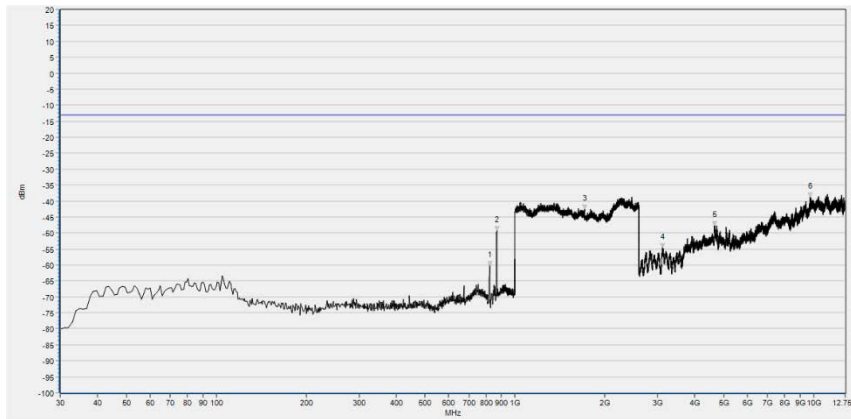


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-60.16	-13.00	Horizontal	N/A
2	868.080	-49.34	-13.00	Horizontal	N/A
3	1706.843	-42.57	-13.00	Horizontal	PASS
4	3120.513	-54.54	-13.00	Horizontal	PASS
5	4656.210	-47.78	-13.00	Horizontal	PASS
6	9737.670	-38.76	-13.00	Horizontal	PASS

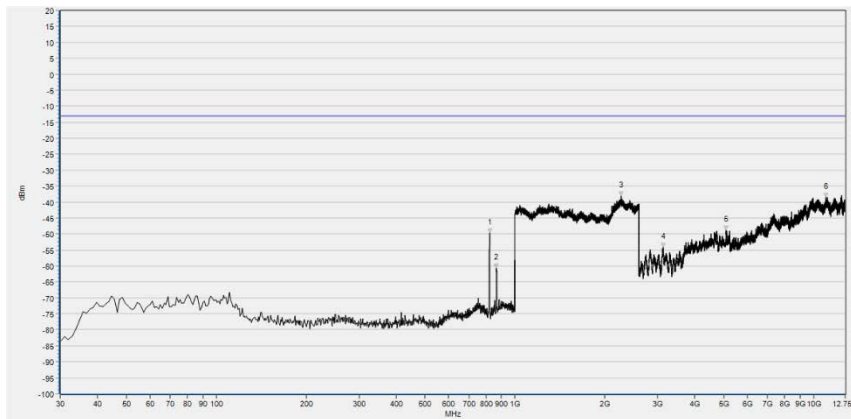


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-49.80	-13.00	Vertical	N/A
2	865.170	-60.61	-13.00	Vertical	N/A
3	2262.585	-38.10	-13.00	Vertical	PASS
4	3137.125	-54.10	-13.00	Vertical	PASS
5	5097.354	-48.92	-13.00	Vertical	PASS
6	11005.728	-38.63	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Low Channel, QPSK

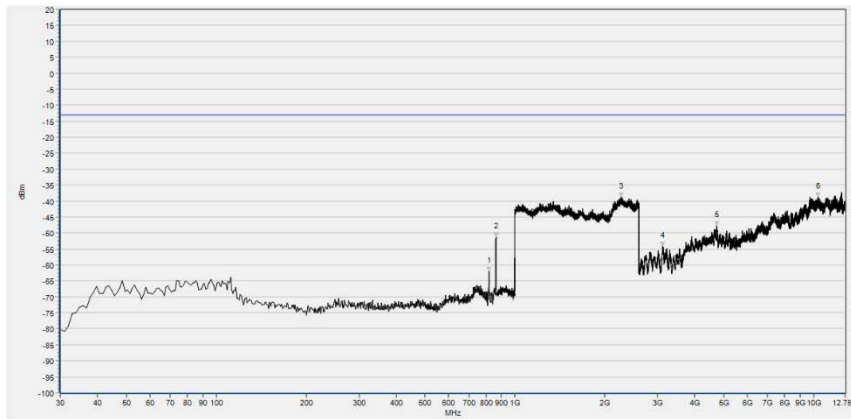


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-62.10	-13.00	Horizontal	N/A
2	863.230	-51.30	-13.00	Horizontal	N/A
3	2265.146	-38.78	-13.00	Horizontal	PASS
4	3126.050	-54.08	-13.00	Horizontal	PASS
5	4742.962	-47.64	-13.00	Horizontal	PASS
6	10368.931	-38.83	-13.00	Horizontal	PASS

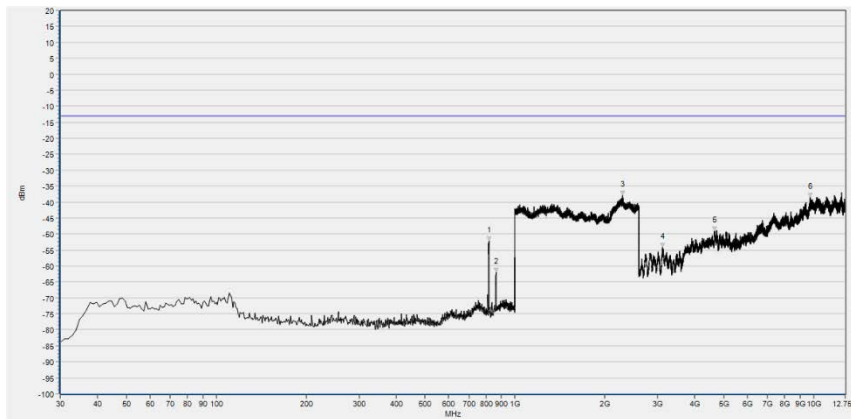


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-52.15	-13.00	Vertical	N/A
2	863.230	-61.95	-13.00	Vertical	N/A
3	2291.397	-37.98	-13.00	Vertical	PASS
4	3122.359	-54.13	-13.00	Vertical	PASS
5	4656.210	-49.10	-13.00	Vertical	PASS
6	9757.974	-38.57	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, Mid Channel, QPSK

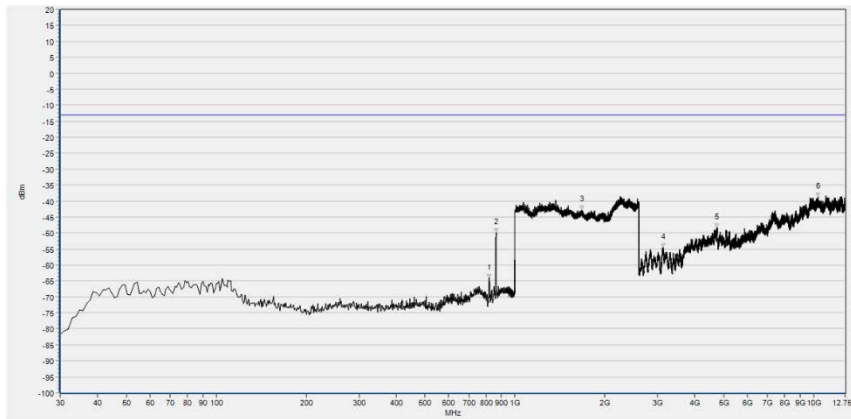


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-64.16	-13.00	Horizontal	N/A
2	866.140	-49.89	-13.00	Horizontal	N/A
3	1676.751	-42.80	-13.00	Horizontal	PASS
4	3133.433	-54.74	-13.00	Horizontal	PASS
5	4746.654	-48.41	-13.00	Horizontal	PASS
6	10356.010	-38.68	-13.00	Horizontal	PASS

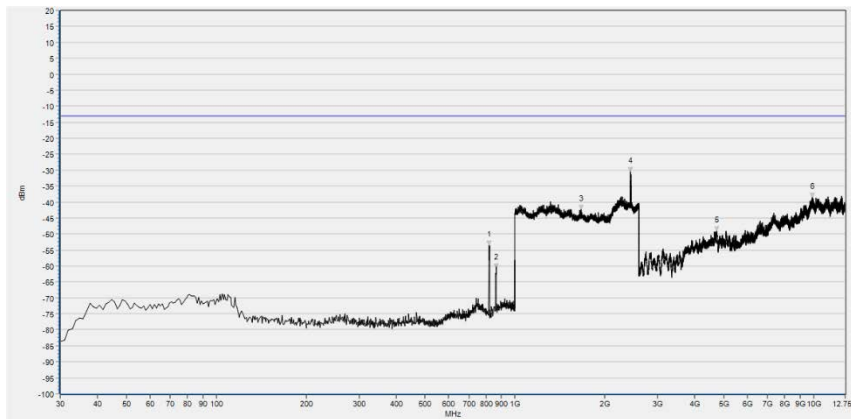


No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	817.640	-53.48	-13.00	Vertical	N/A
2	864.200	-60.67	-13.00	Vertical	N/A
3	1661.385	-42.32	-13.00	Vertical	PASS
4	2438.655	-30.50	-13.00	Vertical	PASS
5	4741.117	-48.98	-13.00	Vertical	PASS
6	9922.249	-38.66	-13.00	Vertical	PASS

LTE Band 26, 5MHz BW, High Channel, QPSK

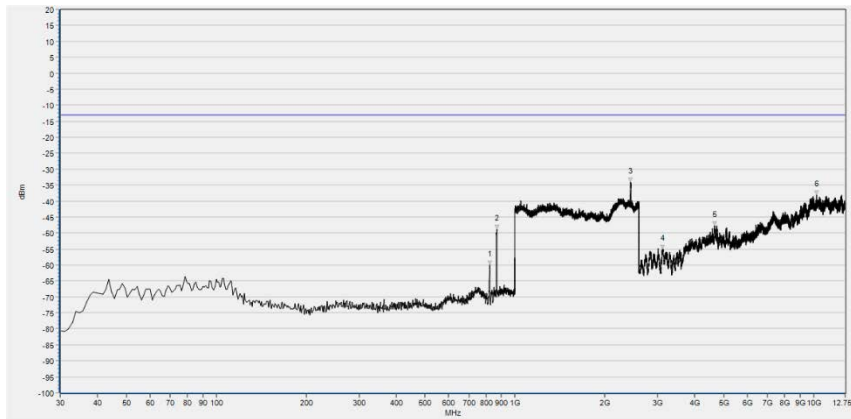

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	823.460	-60.10	-13.00	Horizontal	N/A
2	868.080	-48.89	-13.00	Horizontal	N/A
3	2439.936	-34.15	-13.00	Horizontal	PASS
4	3122.359	-55.12	-13.00	Horizontal	PASS
5	4663.593	-47.61	-13.00	Horizontal	PASS
6	10230.496	-38.11	-13.00	Horizontal	PASS

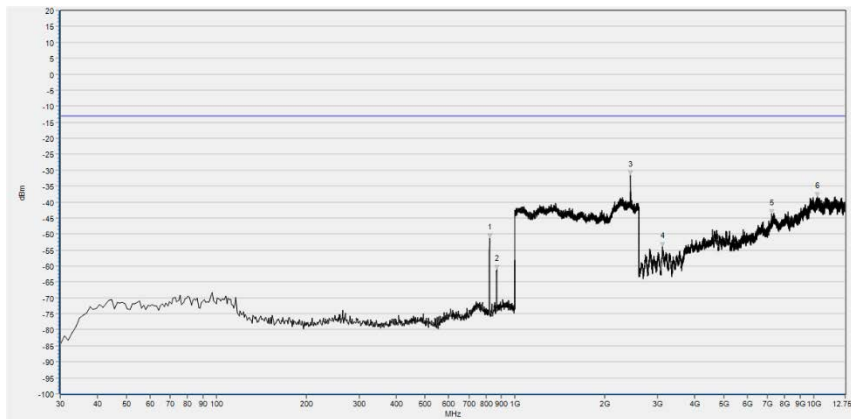

No.	Fre.(MHz)	PK (dBm)	Limit (dBm)	Antenna	Verdict
1	822.490	-51.22	-13.00	Vertical	N/A
2	868.080	-61.20	-13.00	Vertical	N/A
3	2438.655	-31.53	-13.00	Vertical	PASS
4	3120.513	-54.01	-13.00	Vertical	PASS
5	7220.013	-43.62	-13.00	Vertical	PASS
6	10280.333	-38.30	-13.00	Vertical	PASS

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	± 2.22 dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	± 2.77 dB
Band Edge	± 2.77 dB
Equivalent Isotropic Radiated Power	± 2.22 dB
Radiated Spurious Emissions	± 6 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2023.06.21	2024.06.20
Communication Test Station	6200995016	MT8820C	Anritsu	2023.06.21	2024.06.20
Temperature Chamber	S022177101 00089002	KMT-36LF 1A0	KOMEG	2023.09.19	2024.09.18

4.2 List of Software Used

Description	Manufacturer	Software Version
MOE-2023E Test System	MORLAB	V7.99
MORLAB EMCR	MORLAB	V1.2

**4.3 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2023.10.17	2024.10.16
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Horn	9120D-963	BBHA 9120D	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KK F-2	Qualwave	2023.07.04	2024.07.03
Preamplifier (10MHz-6GHz)	46732	S10M100L380 2	LUCIX CORP.	2023.07.04	2024.07.03
Preamplifier (2GHz-18GHz)	61171/61172	S020180L320 3	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-4 0C-S	Decentest	2023.06.27	2024.06.26
Notch Filter	N/A	WRCGV -LTE 18	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE 26	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09

END OF REPORT