FCC RF Test Report

APPLICANT: Guangdong OPPO Mobile

Telecommunications Corp., Ltd.

EQUIPMENT: Mobile Phone

BRAND NAME : OPPO

MODEL NAME : CPH2695

FCC ID : R9C-OP24253

STANDARD : 47 CFR Part 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

TEST DATE(S) : Sep. 30, 2024 ~ Oct. 05, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

JasonJia

Approved by: Jason Jia





Report No.: FW491912A

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 1 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

TABLE OF CONTENTS

RE	VISIC	ON HISTORY	3
SU	ММА	RY OF TEST RESULT	4
1	GEN	IERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Feature of Equipment Under Test	
	1.4	Product Specification of Equipment Under Test	5
	1.5	Modification of EUT	
	1.6	Maximum Conducted Power and Emission Designator	
	1.7	Testing Site	
	1.8	Test Software	
	1.9	Applied Standards	
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	8
	2.1	Test Mode	8
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	TES	T RESULT	11
	3.1	Conducted Output Power Measurement	11
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4	Emissions Mask – Out Of Band Emissions Measurement	15
	3.5	Field Strength of Spurious Radiation Measurement	16
	3.6	Frequency Stability Measurement	
4	LIST	OF MEASURING EQUIPMENT	21
5	MEA	ASUREMENT UNCERTAINTY	22
۸۶	DENI	DIX A. TEST RESULTS OF CONDUCTED TEST	
Ar	FENL	DIA A. 1EST RESULTS OF CONDUCTED TEST	
ΑF	PEND	DIX B. TEST RESULTS OF RADIATED TEST	
ΑF	PEND	DIX C. TEST SETUP PHOTOGRAPHS	

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 2 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW491912A	Rev. 01	Initial issue of report	Nov. 26, 2024

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253

Page Number : 3 of 21 Report Issued Date: Nov. 26, 2024 Report Version : Rev. 01

Report No.: FW491912A

SUMMARY OF TEST RESULT

Report FCC Rule Section		Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	_	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	_	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	§2.1053 Field Strength of Spurious < 43+10l		PASS	Under limit 44.61 dB at 3267.00 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or
 in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of
 non-compliance that may potentially occur if measurement uncertainty is taken into account.
- 2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 4 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

General Description

1.1 Applicant

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

Report No.: FW491912A

1.2 Manufacturer

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

NO.18 HaiBin Road, Wusha Village, Chang'an Town, DongGuan City, Guangdong Province, P.R. China

1.3 Feature of Equipment Under Test

Product Feature						
Equipment	Mobile Phone					
Brand Name	ОРРО					
Model Name	CPH2695					
FCC ID	R9C-OP24253					
IMEL Codo	Conducted: 866444070022655					
IMEI Code	Radiation: 866444070021277/866444070021269					
HW Version	11					
SW Version	ColorOS 15.0					
EUT Stage	Production Unit					

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
Tx Frequency	814 ~ 824 MHz						
Rx Frequency	859 ~ 869 MHz						
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz						
Maximum Output Power to Antenna	Ant0: 24.34 dBm						
Maximum Output Fower to Antenna	Ant1: 24.38 dBm						
Antenna Gain	Ant0: -7.5 dBi						
	Ant1: -5 dBi						
Type of Modulation	QPSK / 16QAM / 64QAM						

Note: Only maximum conducted Power of Ant.1 is shown in the report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

Sporton International Inc. (ShenZhen) : 5 of 21 Page Number TEL: +86-755-8637-9589 Report Issued Date: Nov. 26, 2024 FAX: +86-755-8637-9595 Report Version : Rev. 01

FCC ID: R9C-OP24253 Report Template No.: BU5-FWLTE Version 2.0

1.6 Maximum Conducted Power and Emission Designator

Ľ	TE Band 26	QP	SK	16QAM/64QAM			
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)		
1.4	814.7 ~ 823.3	0.2742	1M09G7D	0.2056	1M10W7D		
3	815.5 ~ 822.5	0.2735	2M72G7D	0.2208	2M72W7D		
5	816.5 ~ 821.5	0.2698	4M50G7D	0.2188	4M51W7D		
10	819.0	0.2692	9M01G7D	0.2228	8M99W7D		
15	824	0.2729	13M4G7D	0.2270	13M5W7D		

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)									
Test Site Location	Shenzhen, 518055 Peop TEL: +86-755-86379589	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595								
	Sporton Site No.	FCC Test Firm								
Test Site No.	Sporton Site No.	FCC Designation No.	Registration No.							
	TH01-SZ	CN1256	421272							

Test Firm	Sporton International Inc. (ShenZhen)							
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985							
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.					
	03CH01-SZ	CN1256	421272					

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 6 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

1.8 Test Software

Item Site		Manufacture	Name	Version	
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24	

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR 90(S)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 7 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report No.: FW491912A

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

		Bandwidth (MHz)				Modulation			RB#			Test Channel					
Test Items	Band	1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	Н
Max. Output Power	26	v	v	v	v	v	-	v	v	v		v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	٧					v		v	
Emission masks In-band emissions	26	v	٧	٧	v	v	•	v	>	v		v		٧	٧		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v				v			v	v	v
Frequency Stability	26				٧	v	-	v						v		٧	
Radiated Spurious Emission	26			v	v	v	-	v				v				v	v
Note	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power. 																

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 8 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report No.: FW491912A

2.2 Connection Diagram of Test System

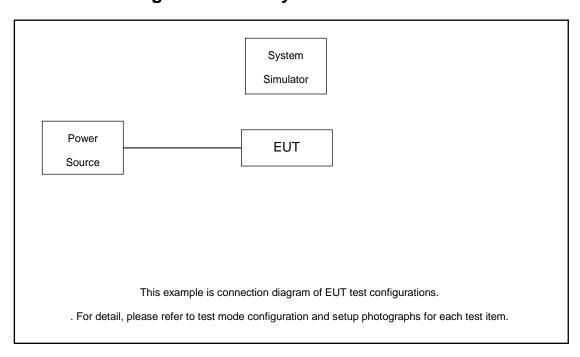

2.3 Support Unit used in test configuration and system

Item		Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord	
	1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

 $Offset = RF \ cable \ loss + attenuator \ factor.$

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

$$= 4.0 + 10 = 14.0 (dB)$$

Report No.: FW491912A

2.5 Frequency List of Low/Middle/High Channels

	LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest						
10	Channel	-	26740	-						
10	Frequency	-	819	-						
5	Channel	26715	26740	26765						
5	Frequency	816.5	819	821.5						
3	Channel	26705	26740	26775						
3	Frequency	815.5	819	822.5						
4.4	Channel	26697	26740	26783						
1.4	Frequency	814.7	819	823.3						

	LTE Band 26 Cross-rule Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	-	Middle	-							
15	Channel	-	26790	-							
15	Frequency	-	824	-							
10	Channel	-	26790	-							
	Frequency	-	824	-							
5	Channel	-	26790	-							
5	Frequency	-	824	-							
3	Channel	-	26790	-							
3	Frequency	-	824	-							
1.4	Channel	-	26790	-							
1.4	Frequency	-	824	-							

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 10 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 11 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

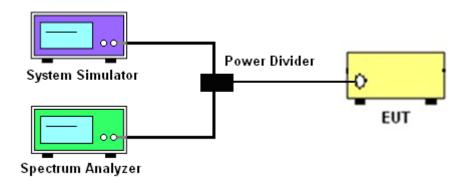

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 12 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log₁₀(f/6.1) decibels or 50 + 10 Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 43 + 10Log₁₀(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

Page Number : 13 of 21
Report Issued Date : Nov. 26, 2024

Report No.: FW491912A

Report Version : Rev. 01

3.3.4 Test Setup

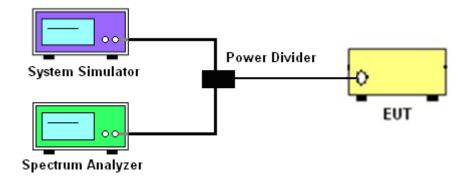

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 14 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

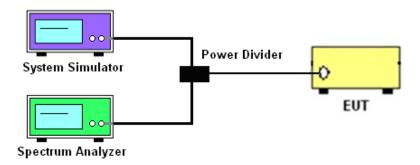

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 15 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report No.: FW491912A

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Page Number : 16 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01


Report No.: FW491912A

3.5.4 Test Setup

For radiated test from 30MHz

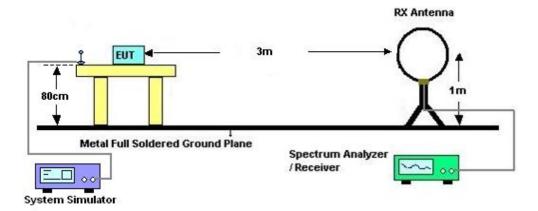


For radiated test from 30MHz to 1GHz

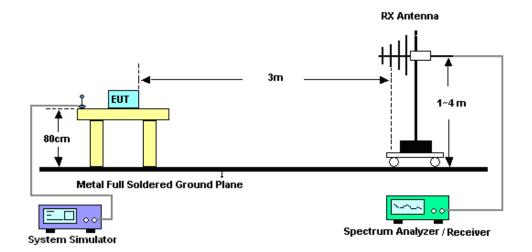

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 17 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report No.: FW491912A

For radiated test above 1GHz

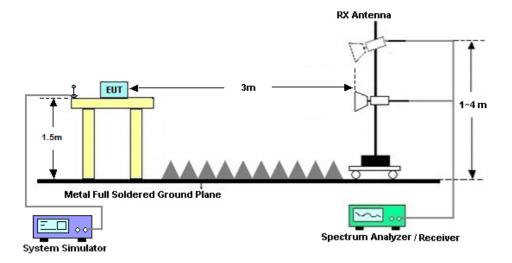

3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 18 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation


- 1. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
- 4. battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

Page Number : 19 of 21
Report Issued Date : Nov. 26, 2024

Report No.: FW491912A

Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

3.6.5 Test Setup

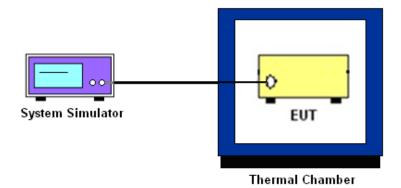

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 20 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 2.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Sep. 30, 2024~ Oct. 04, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Sep. 30, 2024~ Oct. 04, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Sep. 30, 2024~ Oct. 04, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Sep. 30, 2024~ Oct. 04, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Oct. 05, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 29, 2023	Oct. 05, 2024	Dec. 28, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 15, 2023	Oct. 05, 2024	Oct. 14, 2024	Radiation (03CH01-SZ
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Oct. 05, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Oct. 05, 2024	Jul. 03, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	Oct. 05, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 15, 2023	Oct. 05, 2024	Oct. 14, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	Oct. 15, 2023	Oct. 05, 2024	Oct. 14, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 05, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 05, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 21 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2.48dB
Confidence of 95% (U = 2Uc(y))	2.40UB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncerta Confidence of 9		3.53dB
Oominachee of 5	7/0 (O = 200(y))	

----- THE END -----

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : 22 of 21
Report Issued Date : Nov. 26, 2024
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 2.0

Appendix A. Test Results of Conducted Test

Test Engineer :	Khan 7han	Temperature :	22~23°C
	Khan Zhen	Relative Humidity :	40~42%

Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
	Cha	nnel		26790		
	Frequen	cy (MHz)		824		
15	QPSK	1	0	24.36		
15	QPSK	1	37	24.33		
15	QPSK	1	74	24.23		
15	QPSK	36	0	23.33		
15	QPSK	36	20	23.23		
15	QPSK	36	39	23.22		
15	QPSK	75	0	23.23		
15	16QAM	1	0	23.56		
15	64QAM	1	0	22.49		
	Cha	nnel		26740		
	Frequenc	cy (MHz)			819	
10	QPSK	1	0		24.30	
10	QPSK	1	25		24.29	
10	QPSK	1	49		24.18	
10	QPSK	25	0		23.27	
10	QPSK	25	12		23.22	
10	QPSK	25	25		23.15	
10	QPSK	50	0		23.17	
10	16QAM	1	0		23.48	
10	64QAM	1	0		22.38	
	Cha	nnel		26715	26740	26765
	Frequenc	cy (MHz)		816.5	819	821.5
5	QPSK	1	0	24.24	24.31	24.27
5	16QAM	1	0	23.30	23.37	23.40
	Cha	nnel		26705	26740	26775
	Frequen	cy (MHz)		815.5	819	822.5
3	QPSK	1	0	24.37	24.33	24.20
3	16QAM	1	0	23.44	23.42	23.38
	Cha	nnel		26697	26740	26783
	Frequenc	cy (MHz)		814.7	819	823.3
1.4	QPSK	1	0	24.27	24.38	24.29
1.4	16QAM	1	0	23.13	23.10	23.11

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number


: A1 of A28

LTE Band 26

Peak-to-Average Ratio

Mode	Lī				
Mod.	QPSK	16QAM	64QAM	Limit: 13dB	
RB Size	Full RB	Full RB	Full RB	Result	
Middle CH	5.25	6.09	6.32	PASS	

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : A2 of A28

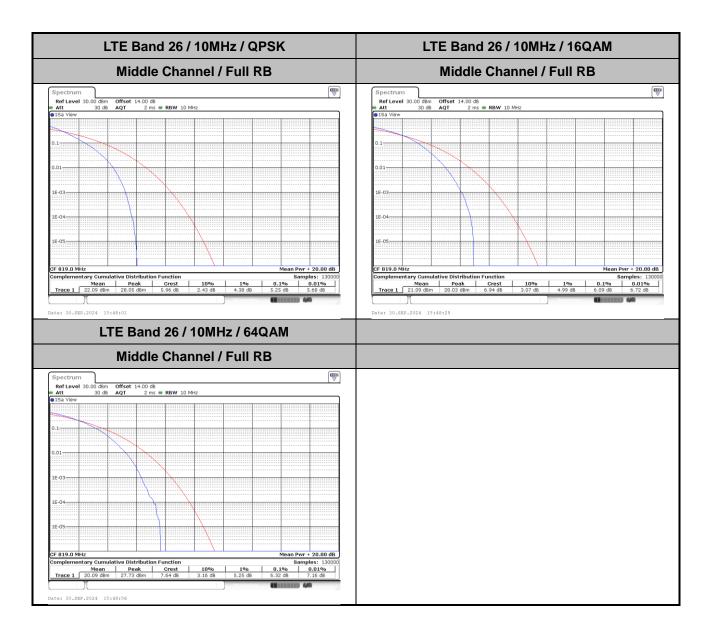



26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)												
BW	1.4	MHz 3MHz			5MHz 10		101	10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Middle CH	1.28	1.30	2.97	2.97	4.83	4.86	9.61	9.67	14.27	14.48	-	-	

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : A4 of A28

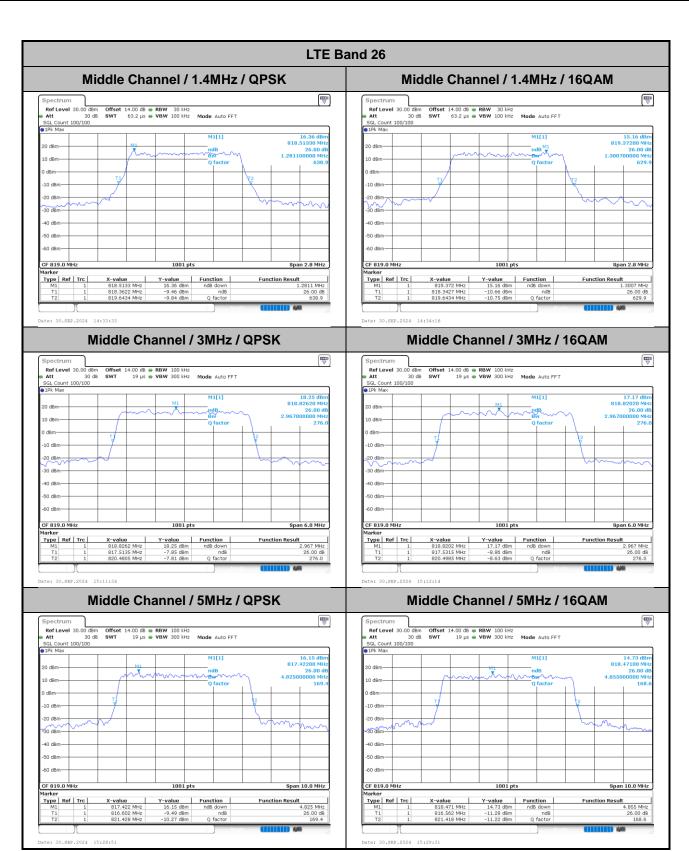

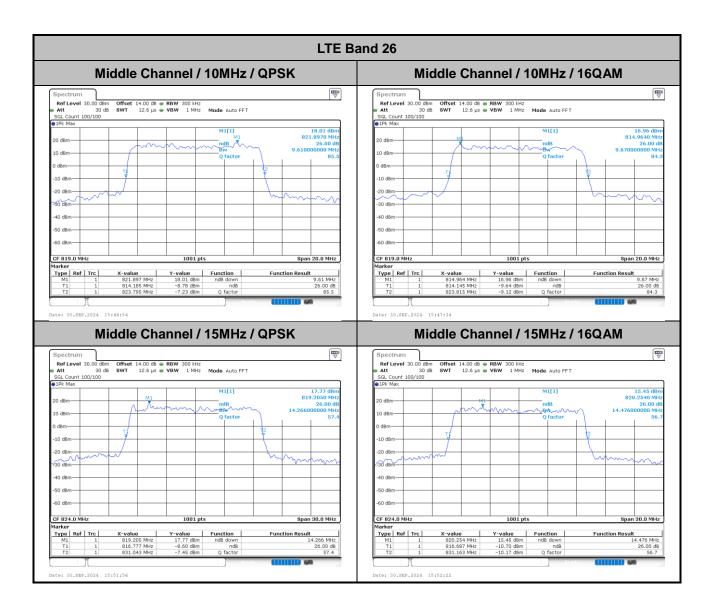


: A6 of A28


Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4	1.4MHz 3MHz			5MHz 10I		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	1.09	1.10	2.72	2.72	4.50	4.51	9.01	8.99	13.40	13.46	-	-


Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : A7 of A28

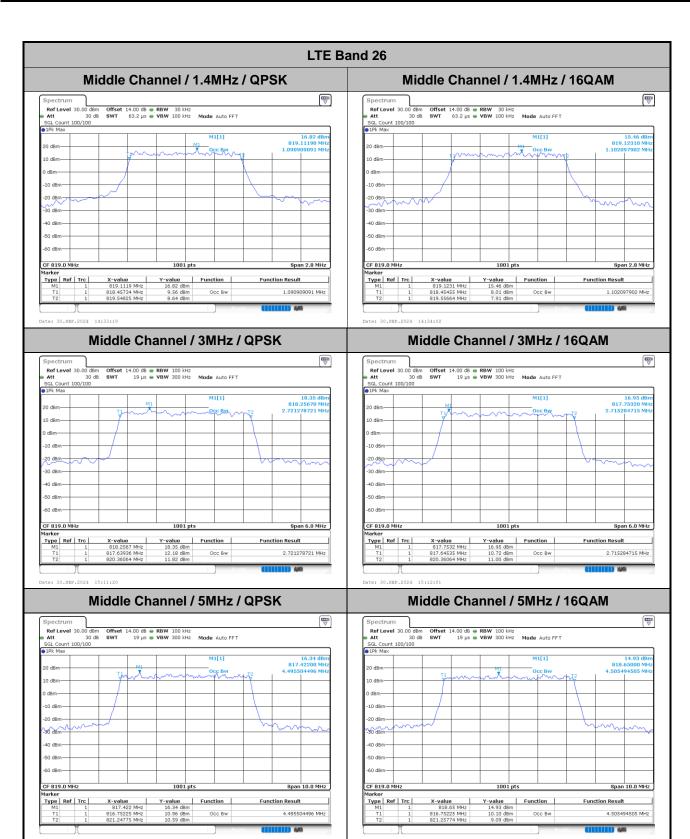


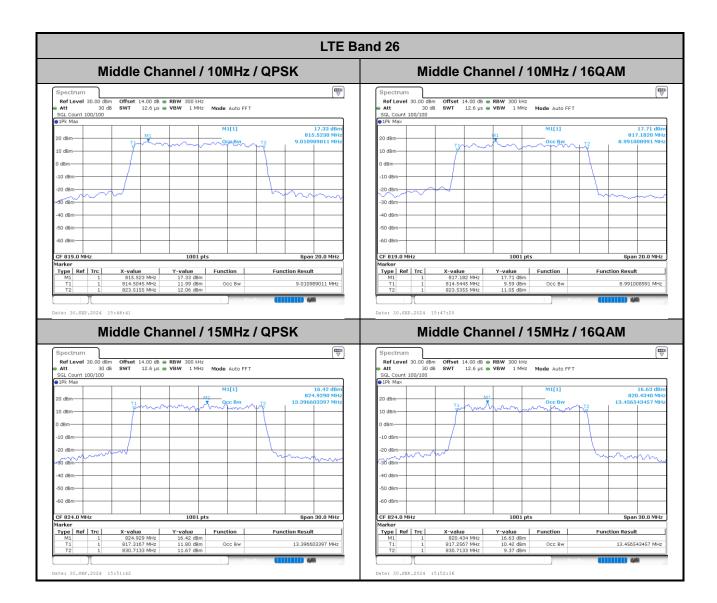



Emission masks - In-band emissions

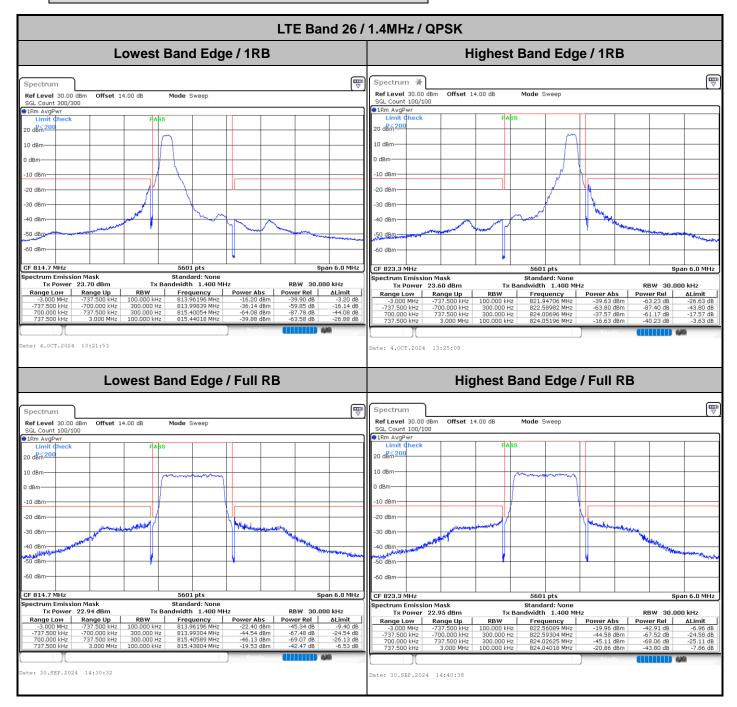



TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253

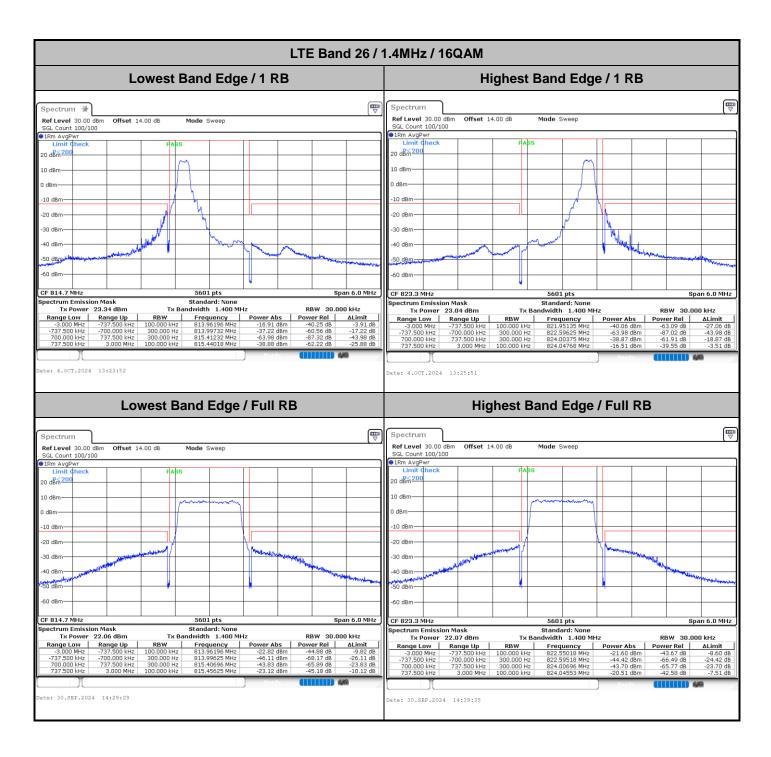


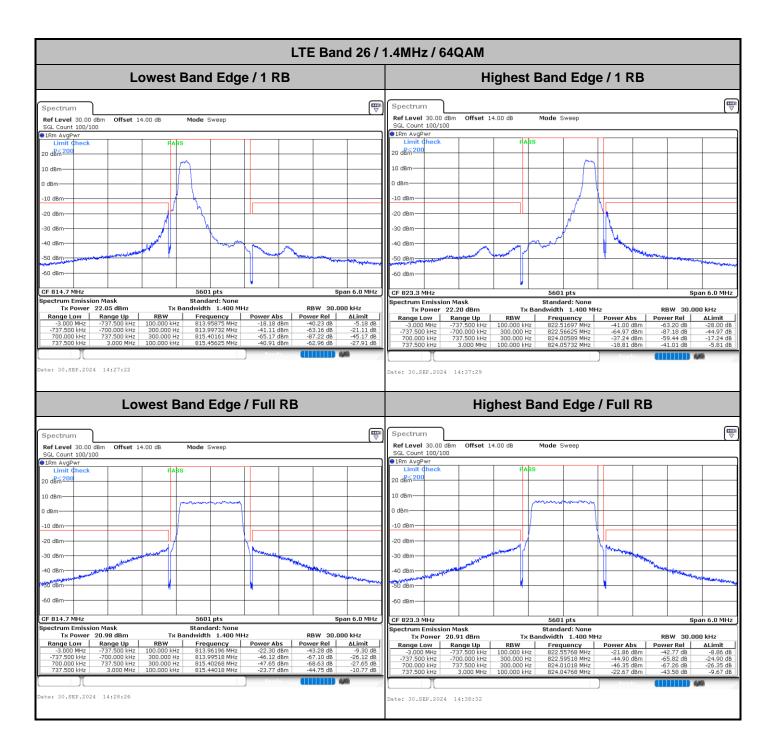


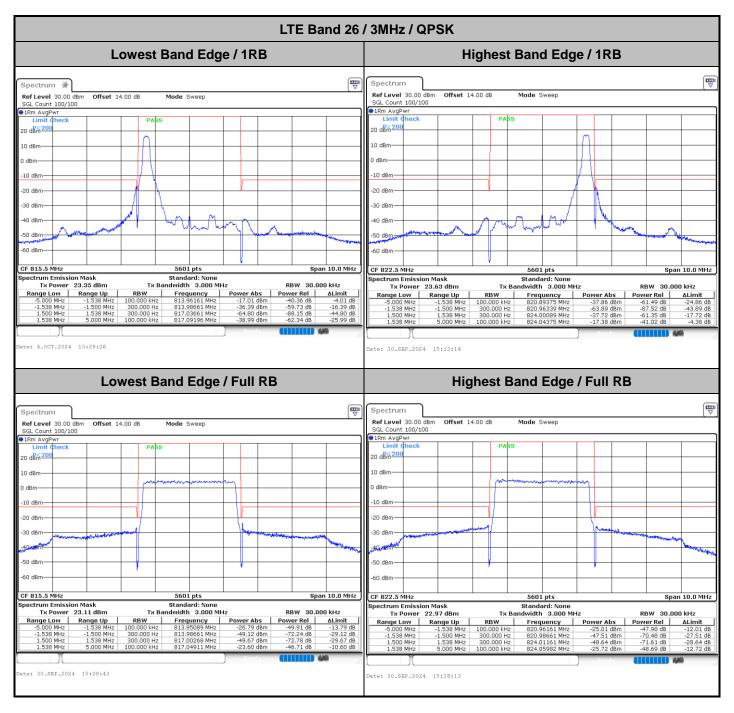


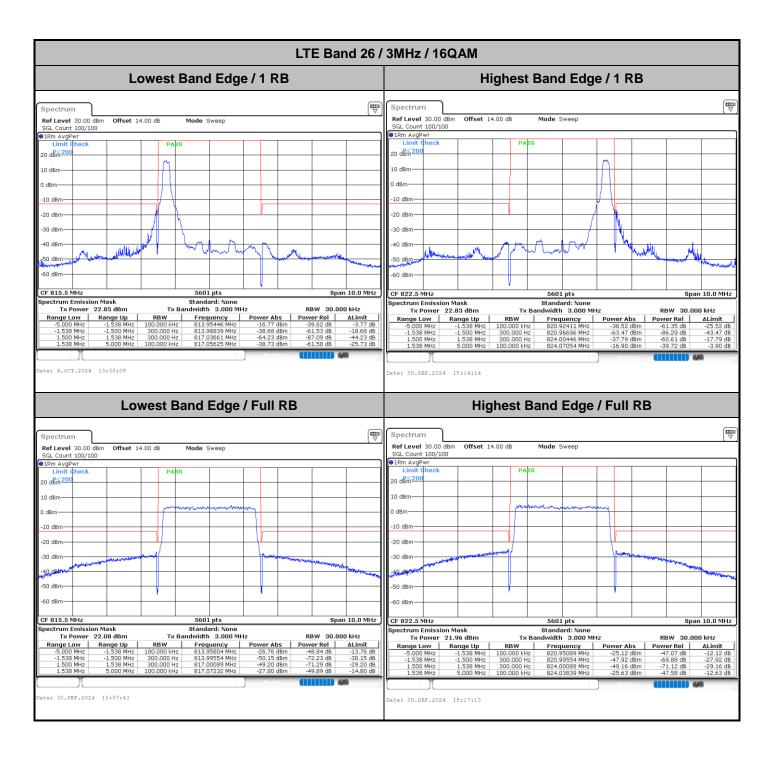


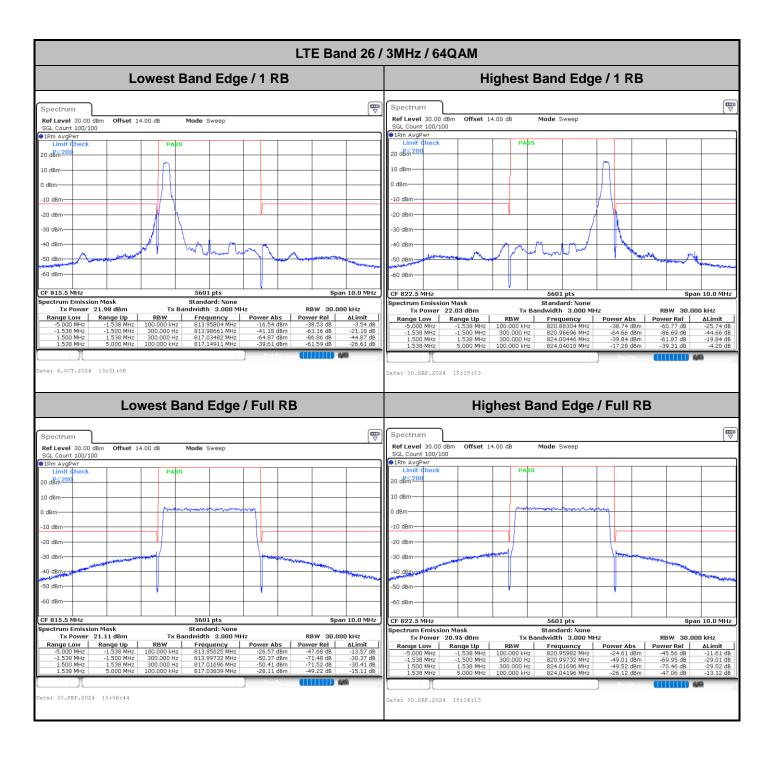


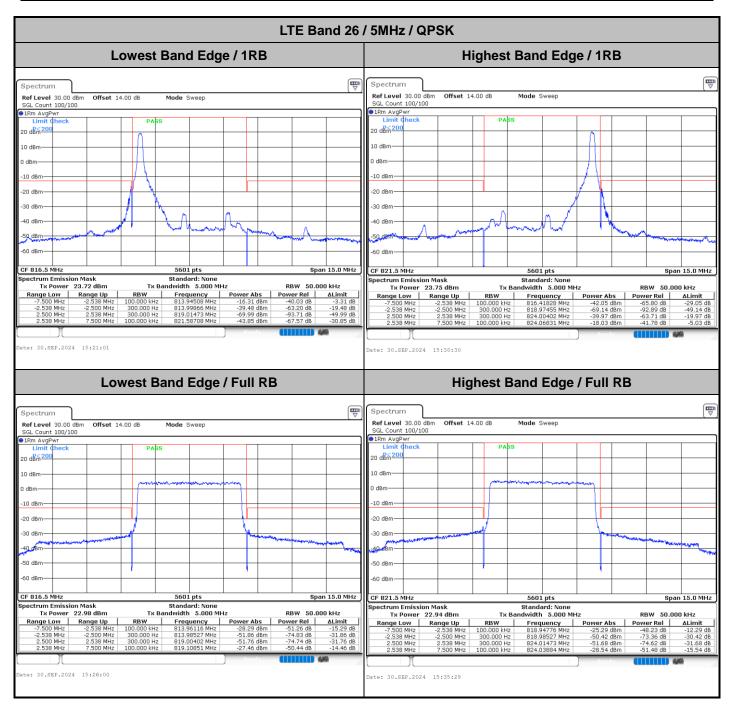


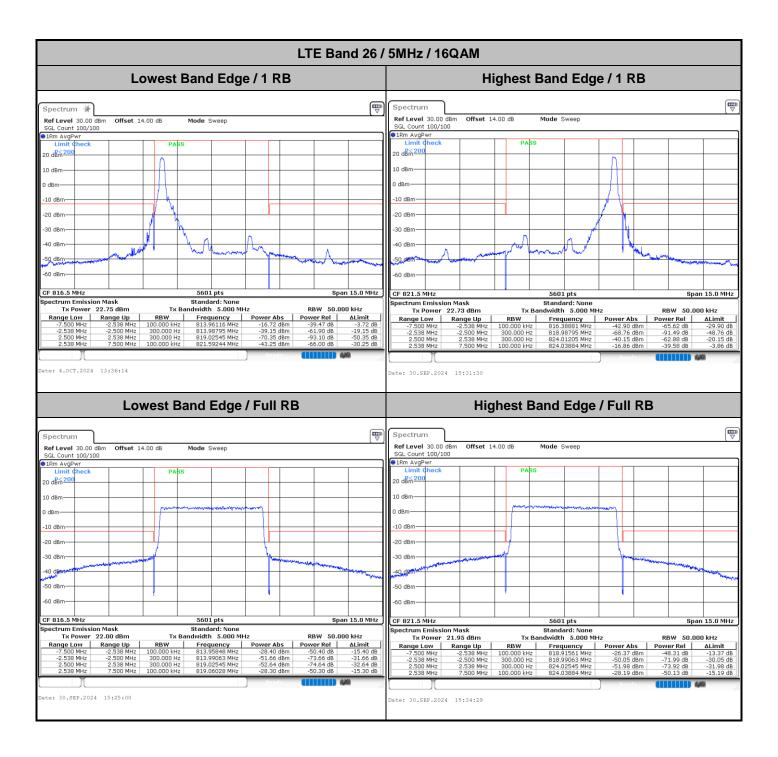


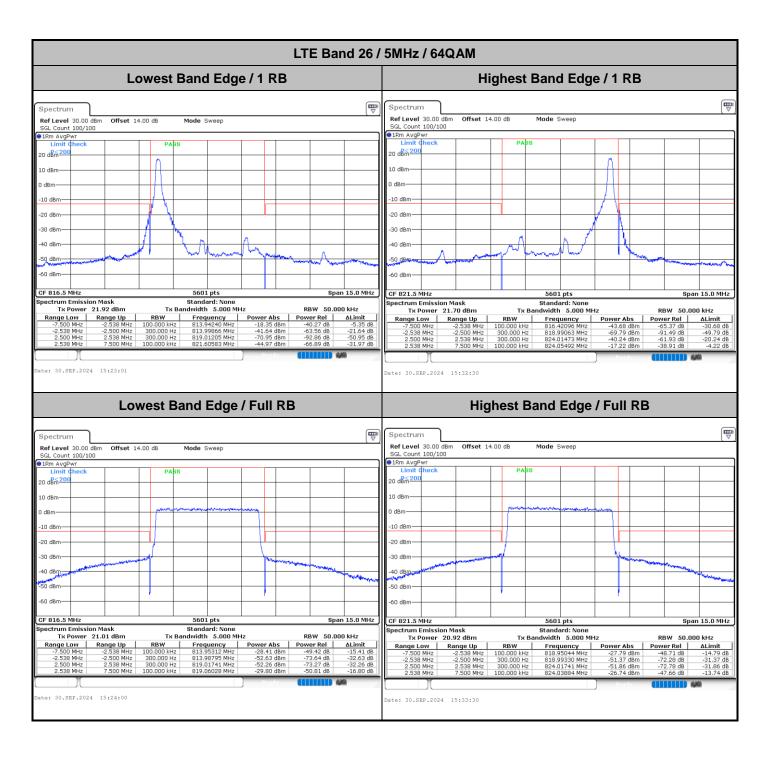


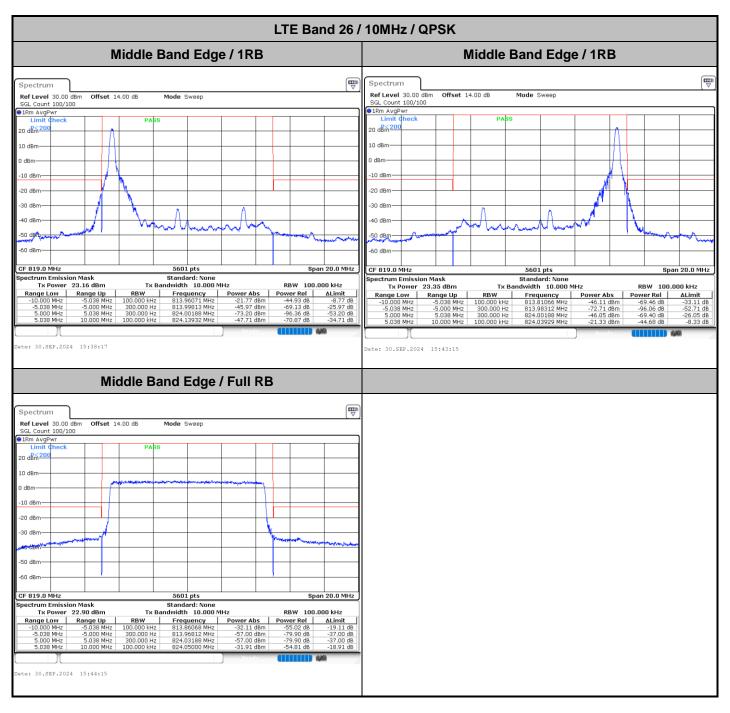

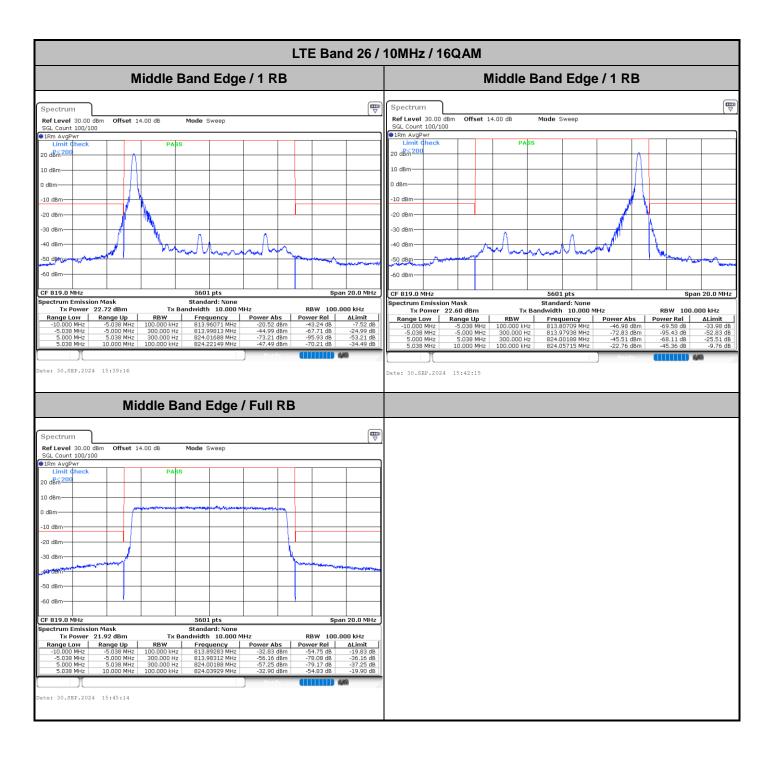


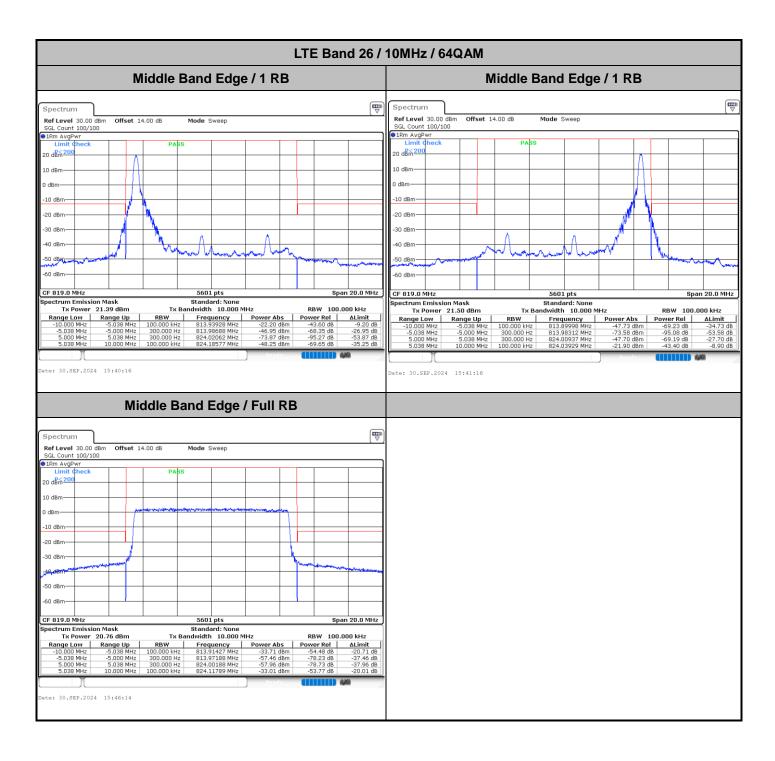

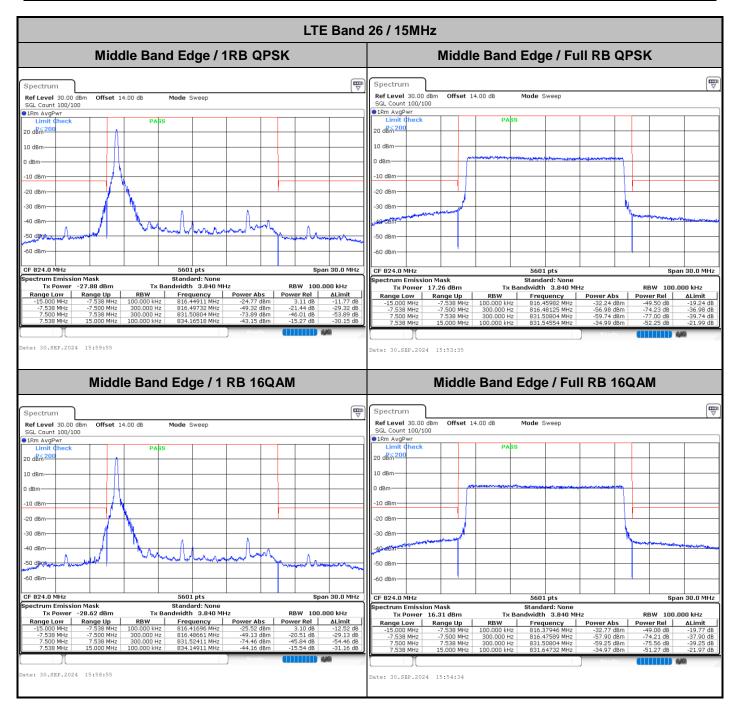


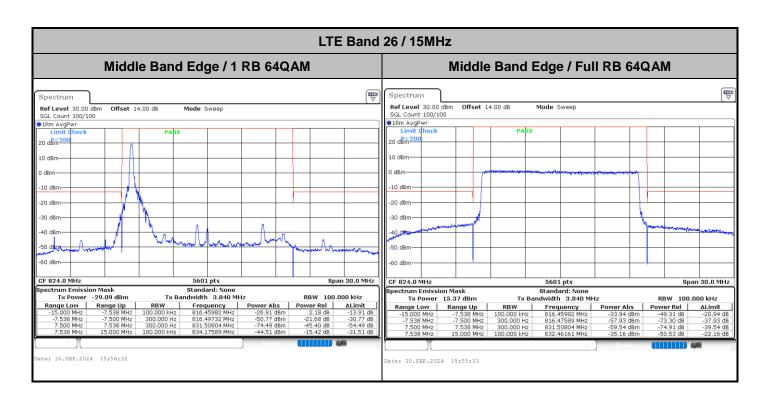



Emission masks - Out of band emissions

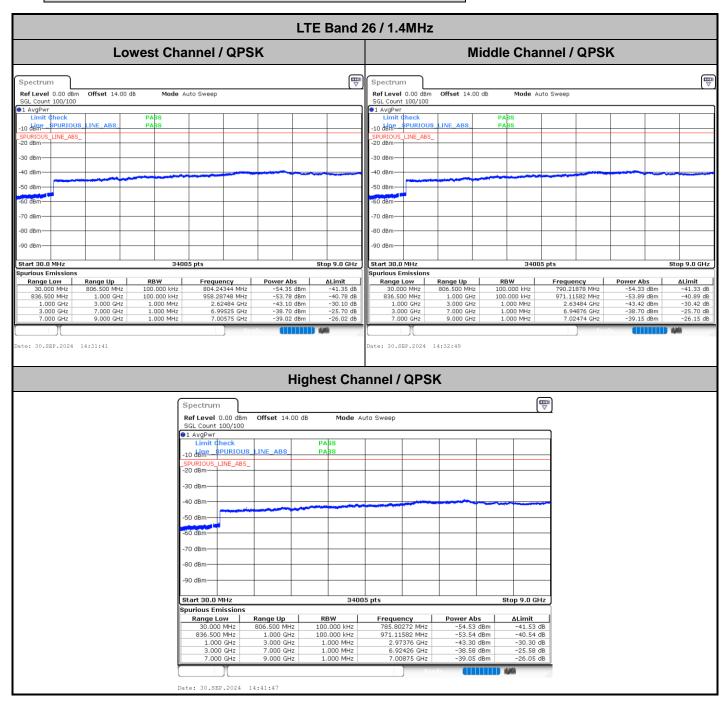


TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number : A24 of A28

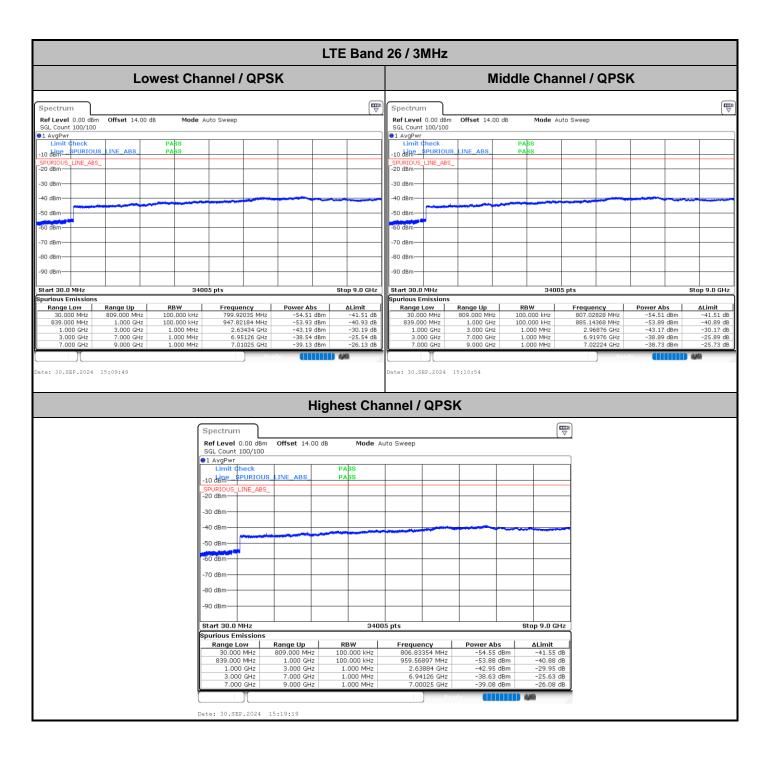

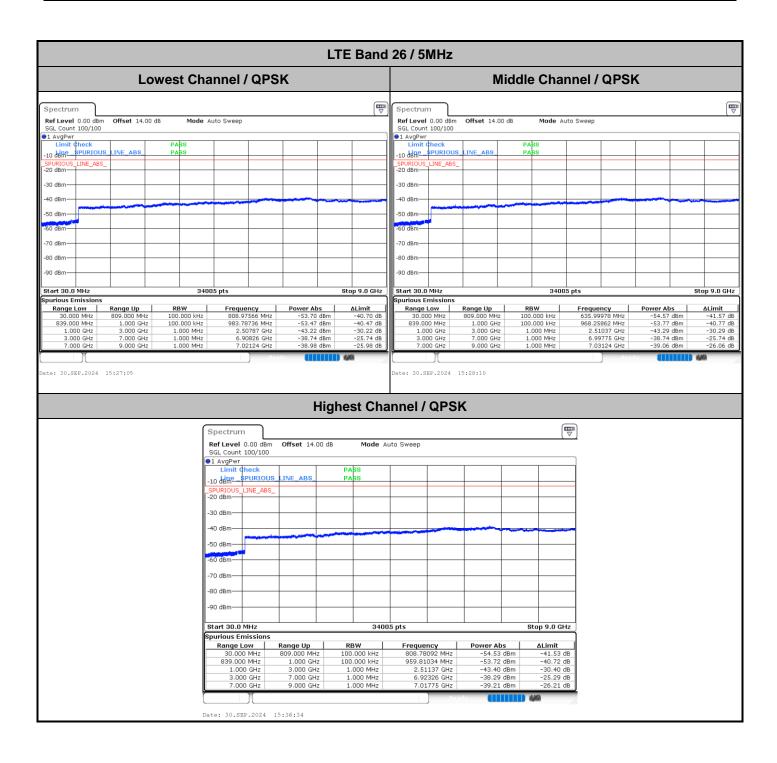

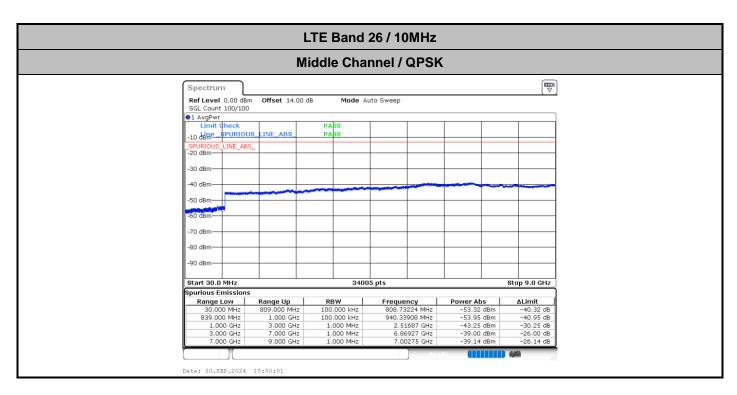

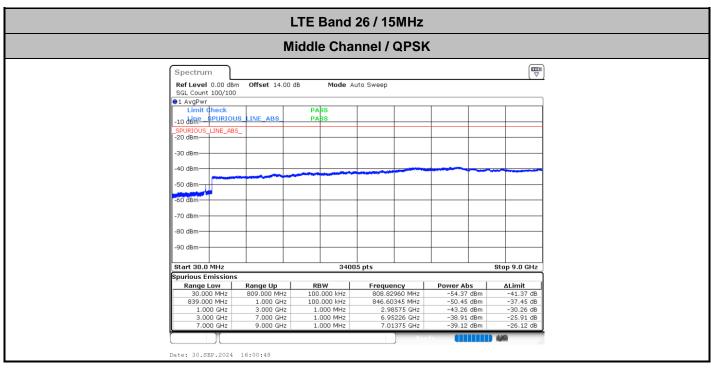

Frequency Stability

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit	
Temperature	Voltage	BW 10MHz	Note 2.	
(°C)	(Volt)	Deviation (ppm)	Result	
50	Normal Voltage	0.0006		
40	Normal Voltage	0.0004		
30	Normal Voltage	0.0018		
20(Ref.)	Normal Voltage	0.0000		
10	Normal Voltage	0.0022		
0	Normal Voltage	0.0025	DACC	
-10	Normal Voltage	0.0006	- PASS	
-20	Normal Voltage	0.0001		
-30	Normal Voltage	0.0004		
20	Maximum Voltage	0.0020		
20	Normal Voltage	0.0000		
20	Battery End Point	0.0020		

Test Conditions		LTE Band 26 (QPSK) / Low Channel	Limit
Temperature	Voltage	BW 15MHz	Note 2.
(°C)	(Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0013	
40	Normal Voltage	0.0001	
30	Normal Voltage	0.0029	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0015	
0	Normal Voltage	0.0016	DACC
-10	Normal Voltage	0.0013	PASS
-20	Normal Voltage	0.0007	
-30	Normal Voltage	0.0021	
20	Maximum Voltage	0.0050	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0001	

Note:

- 1. Normal Voltage = 3.92 V.; Minimum Voltage = 3.5 V.; Maximum Voltage = 4.3 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253 Page Number

: A28 of A28

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Reid Huang	Temperature :	22~25°C	
rest Engineer.		Relative Humidity :	48~52%	

Note: Pre-scanned harmonic for the different antennas, we choose the worst antenna mode to perform final test and record in the report.

	LTE Band 26 / 5MHz / QPSK / Ant. 1										
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
Middle	1633.5	-65.14	-13	-52.14	-77.17	-68.39	4.00	9.40	Н		
	2450.25	-59.65	-13	-46.65	-78.63	-63.22	4.88	10.60	Н		
	3267	-58.72	-13	-45.72	-79.58	-63.65	5.52	12.60	Н		
	1633.5	-64.52	-13	-51.52	-77.15	-67.77	4.00	9.40	V		
	2450.25	-59.64	-13	-46.64	-79.06	-63.21	4.88	10.60	V		
	3267	-57.61	-13	-44.61	-79.74	-62.54	5.52	12.60	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 10MHz / QPSK / Ant. 1									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1629	-64.53	-13	-51.53	-76.56	-67.78	4.00	9.40	Н
	2443.5	-60.15	-13	-47.15	-79.13	-63.72	4.88	10.60	Н
	3258	-59.18	-13	-46.18	-80.04	-64.11	5.52	12.60	Н
	1629	-64.72	-13	-51.72	-77.35	-67.97	4.00	9.40	V
	2443.5	-60.00	-13	-47.00	-79.42	-63.57	4.88	10.60	V
	3258	-57.97	-13	-44.97	-80.10	-62.90	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 15MHz / QPSK / Ant. 1										
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
High	1634.5	-65.44	-13	-52.44	-77.47	-68.61	4.10	9.42	Н	
	2451.75	-60.35	-13	-47.35	-79.33	-63.93	4.90	10.63	Н	
	3269	-59.05	-13	-46.05	-79.91	-63.97	5.55	12.62	Н	
	1634.5	-64.56	-13	-51.56	-77.19	-67.73	4.10	9.42	V	
	2451.75	-59.69	-13	-46.69	-79.11	-63.27	4.90	10.63	V	
	3269	-57.78	-13	-44.78	-79.91	-62.70	5.55	12.62	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Sporton International Inc. (ShenZhen)

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: R9C-OP24253