

FCC PART 15.247 MEASUREMENT AND TEST REPORT

For

Sunitec Enterprise Co., Ltd.

10F.-1, No.200, Jingping Rd., Zhonghe City, Taipei County Taiwan

FCC ID: RA8-BC004

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Bluetooth Speakerphone
Test Engineer: Kidd Yang <i>Kidd Yang</i>	
Report No.: RSZ08042201	
Test Date: 2008-04-24 to 2008-04-29	
Report Date: 2008-05-06	
Reviewed By: EMC Manager: Green Xu <i>Green Xu</i>	
Prepared By:	Bay Area Compliance Laboratories Corp.(Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
§15.247 (i) and §2.1091 - RF EXPOSURE.....	9
LIMIT	9
TEST DATA	9
§15.203 - ANTENNA REQUIREMENT.....	10
STANDARD APPLICABLE	10
ANTENNA CONNECTOR CONSTRUCTION	10
CFR47 §15.207- CONDUCTED EMISSIONS.....	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY.....	12
TEST DATA	13
PLOT(S) OF TEST DATA	13
CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY.....	18
TEST DATA	18
§15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
§15.247(a) (1) –20dB BANDWIDTH TESTING.....	25

APPLICABLE STANDARD25
TEST EQUIPMENT LIST AND DETAILS.....25
TEST PROCEDURE25
TEST DATA25

§15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST29
APPLICABLE STANDARD29
TEST EQUIPMENT LIST AND DETAILS.....29
TEST PROCEDURE29
TEST DATA29

§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....31
APPLICABLE STANDARD31
TEST EQUIPMENT LIST AND DETAILS.....31
TEST PROCEDURE31
TEST DATA31

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT35
APPLICABLE STANDARD35
TEST EQUIPMENT LIST AND DETAILS.....35
TEST PROCEDURE35
CORRECTED AMPLITUDE & MARGIN CALCULATION35
TEST DATA36

§15.247(d) - BAND EDGES TESTING.....37
APPLICABLE STANDARD37
TEST EQUIPMENT LIST AND DETAILS.....37
TEST PROCEDURE37
TEST DATA37

Declare Letter40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Sunitec Enterprise Co., Ltd.*'s product, model number: *BC331,BC351,BC371,4PR910* or the "EUT" as referred to in this report is a *Bluetooth Speakerphone*, which measures approximately 11.6 cm L x 4.7 cm W x 1.0 cm H, rated input voltage: DC 3.7V Battery.

The series products, model BC331, BC351, BC371, 4PR910, we select BC331 to test, there is no electrical change has been made to the equipment that alters the compliance characteristics. The difference of these models is the covers.

** All measurement and test data in this report was gathered from production sample serial number: 0804045 (Assigned by BAEL, Shenzhen). The EUT was received on 2008-04-22.*

Objective

This Type approval report is prepared on behalf of *Sunitec Enterprise Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

This is a C2PC application, the difference between the original one and the current one is PCB board. For the changes made to the device, radiated emission testing was performed.

Related Submittal(s)/Grant(s)

This is a C2PC application, the original application was granted on 2007-12-21.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp.(Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm> .

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.

Special Accessories

The special accessories were supplied by Bay Area Compliance Laboratories Corp. (Shenzhen)..

Equipment Modifications

No modifications were made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
COMPAQ	Laptop	PP2040	N/A	DoC


External I/O Cable

Cable Description	Length (M)	From Port	To
Unshielded Detachable USB Cable	9.5	EUT	Test PC

Configuration of Test Setup

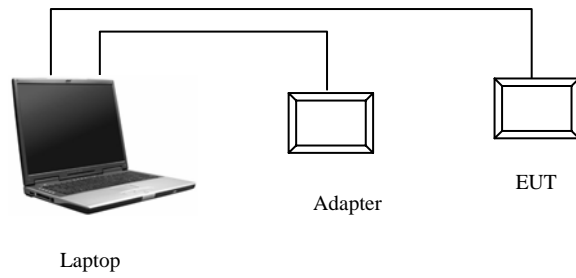

Block Diagram of Test Setup

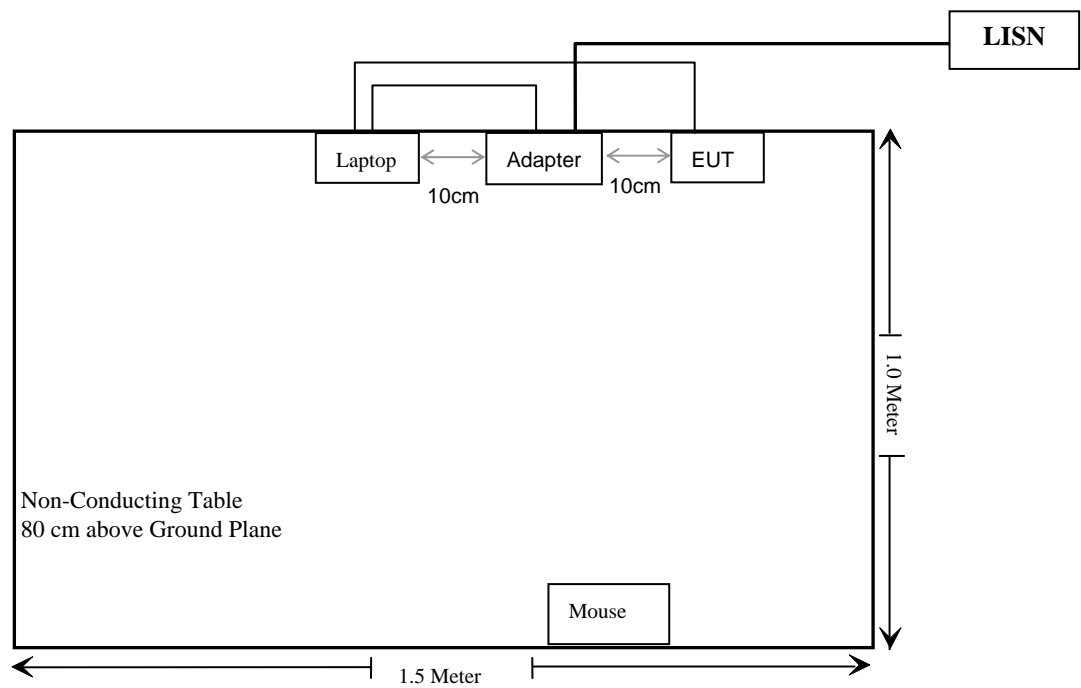

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247 (i) & §2.1091	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)	20dB Bandwidth Testing	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band Edges Testing	Compliant

§15.247 (i) and §2.1091 - RF EXPOSURE

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$$S = \frac{EIRP}{4\pi R^2}$$

where: EIRP = equivalent (or effective) isotropically radiated power

S = power density (in appropriate units, e.g. mW/cm²)

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

EIRP: -2.46 (dBm)

EIRP: 0.57 (mW)

Prediction distance: 20 (cm)

Predication frequency: 2441 (MHz)

The worst case is power density at predication frequency at 20 cm: 0.000113 (mW/cm²)

MPE limit for general population exposure at prediction frequency: 1 (mW/cm²)

0.000113(mW/cm²) < 1 (mW/cm²)

Result: Compliant.

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connector Construction

The EUT has a Intergral antennawhich built on the board, the gain is less than 0dBi, in accordance to the above sections, is considered sufficient to comply with the provisions of these sections. Please see EUT photo for details.


CFR47 §15.207- CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

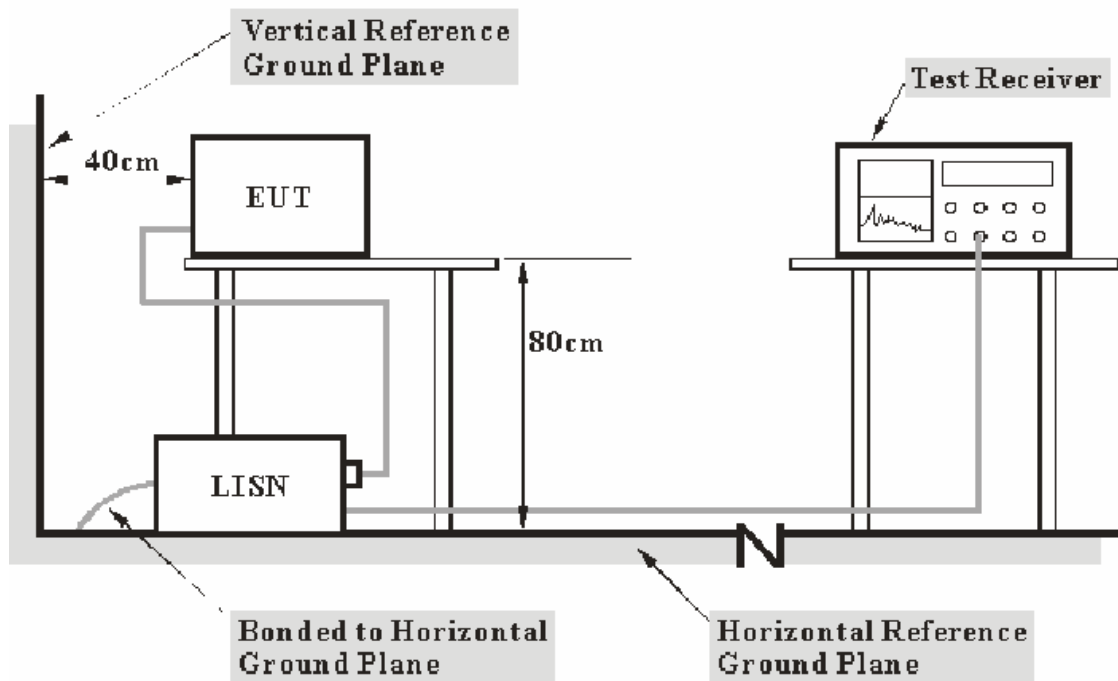

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	DE25330	2008-03-25	2009-03-25
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2008-03-26	2009-03-26

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

11.60 dB at 20.410 MHz in the **Hot** conductor mode

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Kidd Yang on 2008-04-29.


=Line Conducted Emissions				FCC PART 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector QP/AV	Hot/Neutral	Limit (dB μ V)	Margin (dB)
20.410	48.40	QP	Hot	60.00	11.60
21.025	48.00	QP	Neutral	60.00	12.00
3.595	42.80	QP	Neutral	56.00	13.20
23.075	45.80	QP	Hot	60.00	14.20
21.505	35.20	AV	Neutral	50.00	14.80
1.025	30.20	AV	Hot	46.00	15.80
3.565	39.30	QP	Hot	56.00	16.70
0.180	36.80	AV	Hot	54.49	17.69
3.645	26.60	AV	Neutral	46.00	19.40
15.380	40.40	QP	Neutral	60.00	19.60
0.300	30.00	AV	Hot	50.24	20.24
20.445	29.50	AV	Hot	50.00	20.50
0.180	33.30	AV	Neutral	54.49	21.19
1.025	34.70	QP	Hot	56.00	21.30
1.250	22.90	AV	Neutral	46.00	23.10
0.180	39.00	QP	Hot	64.49	25.49
1.250	29.80	QP	Neutral	56.00	26.20
3.620	19.60	AV	Hot	46.00	26.40
0.300	32.70	QP	Hot	60.24	27.54
0.295	22.80	AV	Neutral	50.38	27.58
0.180	36.60	QP	Neutral	64.49	27.89
0.295	29.40	QP	Neutral	60.38	30.98
15.555	18.80	AV	Neutral	50.00	31.20
23.130	16.80	AV	Hot	50.00	33.20

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Conducted emission test FCC part15

EUT: Bluetooth speakerphone
Manuf: SUNITEC M/N: BC331 (4PR910)
Op Cond: Charging
Operator: Andy
Test Spec: AC 120V/60Hz μ
Comment: Temp: 25 Humi 56%

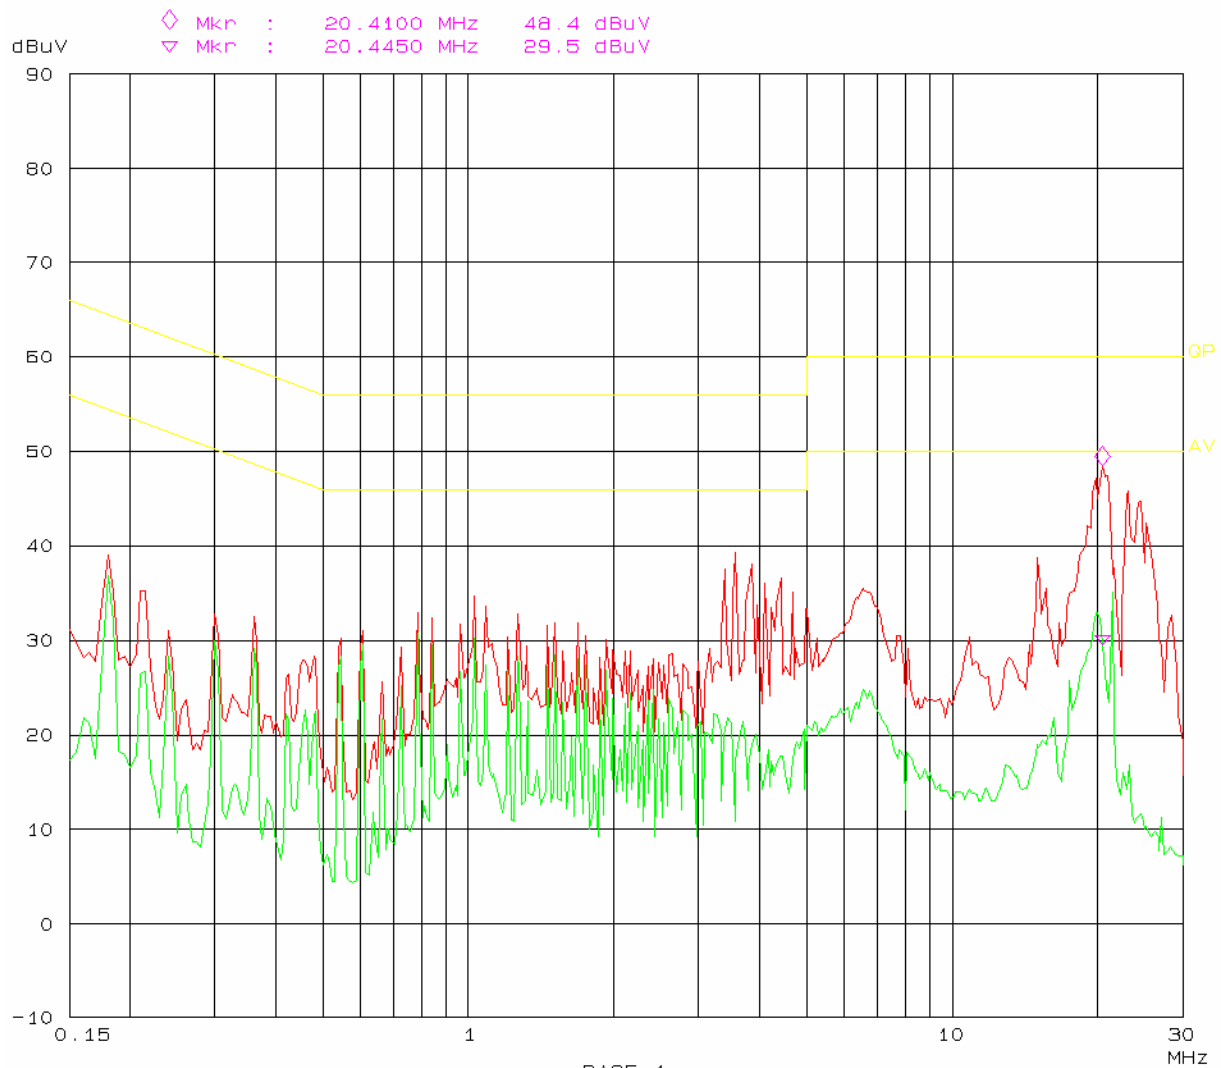

Conducted emission test FCC part15

EUT: Bluetooth speakerphone
Manuf: SUNITEC M/N: BC331 (4PR910)
Op Cond: Charging
Operator: Andy
Test Spec: AC 120V/60Hz N
Comment: Temp: 25 Humi 56%

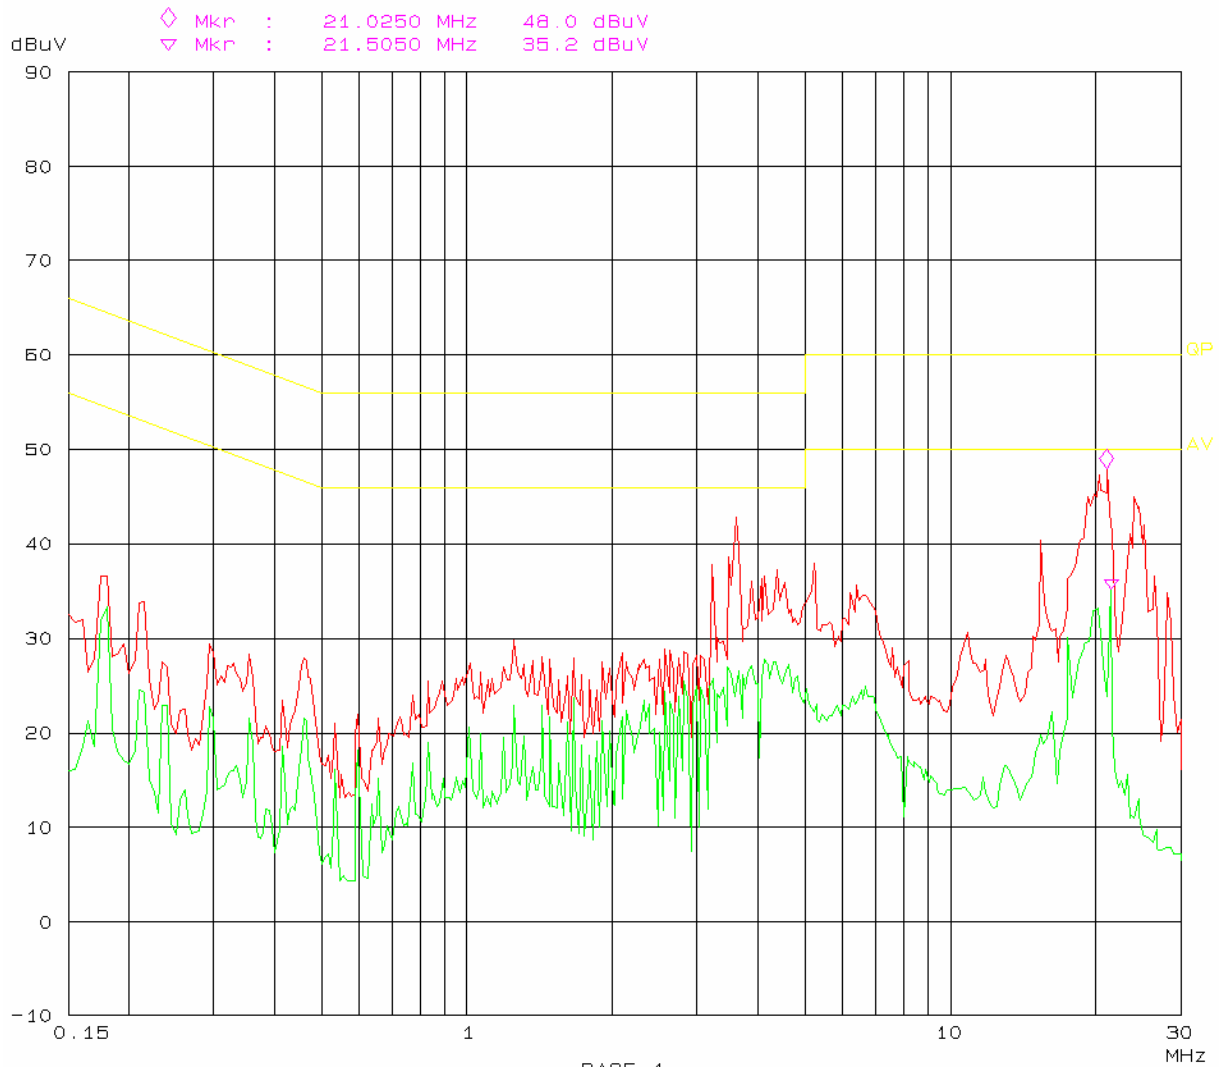

CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


47 Part 15.205, 15.209 and 15.247 (d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

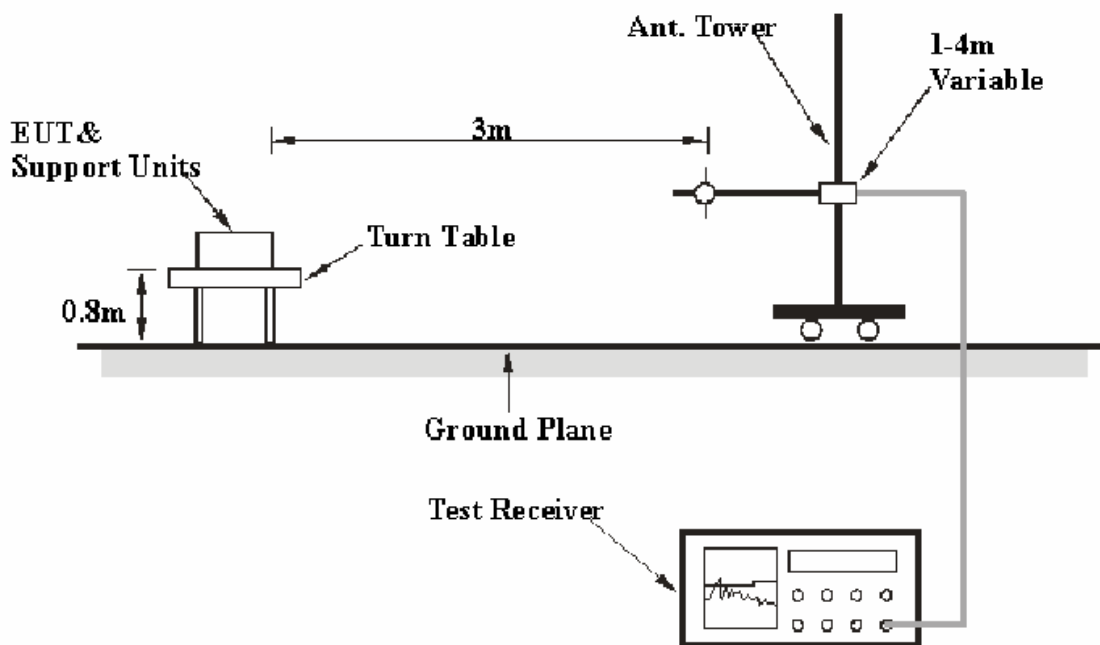

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.205; 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2007-11-15	2008-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2007-08-14	2008-08-14
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Agilent	Spectrum Analyzer	8564E	3943A01781	2007-11-22	2008-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the PK&AV detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.247, with the worst margin reading of:

8.6 dB at 383.891000 MHz in the Horizontal polarization, for below 1GHz
14.15 dB at 4804 MHz in the Vertical polarization, for above 1GHz (Low Channel)
10.83 dB at 4882 MHz in the Vertical polarization, for above 1GHz (Middle Channel)
12.73dB at 4960 MHz in the Vertical polarization, for above 1GHz (High Channel)

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.9 kPa

The testing was performed by Kidd Yang on 2008-04-24.

Test Mode: Transmitting

Below 1GHz

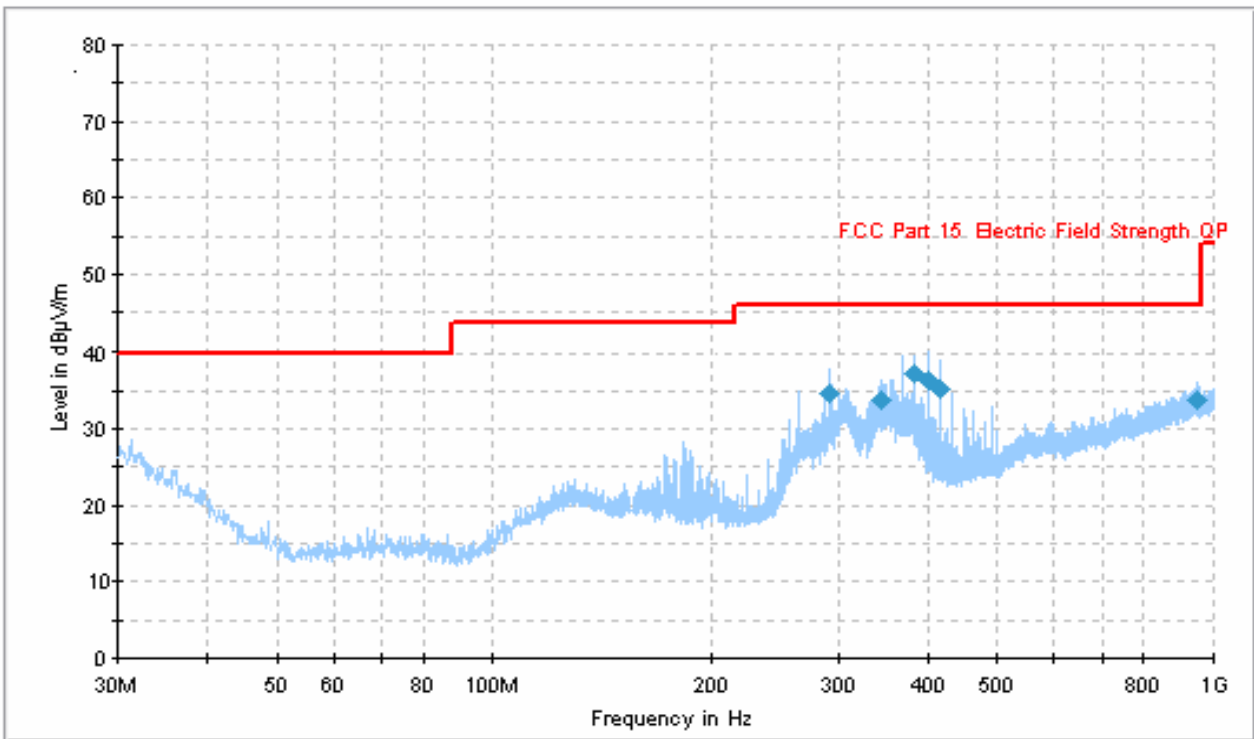

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
383.891000	37.4	132.0	H	143.0	-8.3	46.0	8.6
400.287938	36.3	383.0	H	4.0	-8.0	46.0	9.7
416.156188	35.2	130.0	H	129.0	-7.5	46.0	10.8
292.674250	34.6	198.0	H	168.0	-9.8	46.0	11.4
947.036812	33.9	102.0	H	343.0	1.9	46.0	12.1
344.709312	33.8	149.0	H	145.0	-8.9	46.0	12.2

Above 1 GHz

Freq. (MHz)	Receiver Reading (dBuV)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Pre- Amp. Gain (dB)	Corr. Amp. (dBuV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)	Remarks
Frequency In Low Channel = 2402MHz												
4804	37.61	AV	90	1.0	V	31.3	4.64	33.7	39.85	54	14.15	Harmonic
7206	33.40	AV	180	1.3	H	35.4	4.51	33.6	39.71	54	14.29	Harmonic
7206	32.21	AV	320	1.1	V	35.4	4.51	33.6	38.52	54	15.48	Harmonic
4804	36.22	AV	90	1.0	H	31.3	4.64	33.7	38.46	54	15.54	Harmonic
7206	45.92	PK	60	1.2	V	35.4	4.51	33.6	52.23	74	21.77	Harmonic
4804	49.54	PK	90	1.2	V	31.3	4.64	33.7	51.78	74	22.22	Harmonic
7206	44.85	PK	120	1.2	H	35.4	4.51	33.6	51.16	74	22.84	Harmonic
4804	48.32	PK	180	1.3	H	31.3	4.64	33.7	50.56	74	23.44	Harmonic
Frequency In Middle Channel = 2441MHz												
4882	40.63	AV	220	1.0	V	31.6	4.64	33.7	43.17	54	10.83	Harmonic
4882	39.53	AV	142	1.1	H	31.6	4.64	33.7	42.07	54	11.93	Harmonic
7323	34.26	AV	90	1.0	V	35.4	4.61	33.6	40.67	54	13.33	Harmonic
7323	33.85	AV	135	1.3	H	35.4	4.61	33.6	40.26	54	13.74	Harmonic
4882	51.14	PK	153	1.5	V	31.6	4.64	33.7	53.68	74	20.32	Harmonic
4882	50.52	PK	200	1.0	H	31.6	4.64	33.7	53.06	74	20.94	Harmonic
7323	46.28	PK	215	1.4	V	35.4	4.61	33.6	52.69	74	21.31	Harmonic
7323	45.57	PK	156	1.2	H	35.4	4.61	33.6	51.98	74	22.02	Harmonic
Frequency In High Channel = 2480MHz												
4960	38.42	AV	142	1.1	V	32.0	4.55	33.7	41.27	54	12.73	Harmonic
7440	32.30	AV	156	1.2	H	35.3	4.75	33.6	38.75	54	15.25	Harmonic
4960	35.02	AV	256	1.3	H	32.0	4.55	33.7	37.87	54	16.13	Harmonic
7440	31.38	AV	210	1.2	V	35.3	4.75	33.6	37.83	54	16.17	Harmonic
4960	49.24	PK	142	1.4	V	32.0	4.55	33.7	52.09	74	21.91	Harmonic
4960	48.35	PK	145	1.2	H	32.0	4.55	33.7	51.2	74	22.80	Harmonic
7440	44.53	PK	240	1.4	V	35.3	4.75	33.6	50.98	74	23.02	Harmonic
7440	43.22	PK	128	1.5	H	35.3	4.75	33.6	49.67	74	24.33	Harmonic

§15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Kidd Yang on 2008-04-29.


Test Result: Pass

Please refer to following table and plots

Test mode: Transmitting

Channel	Channel Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)
Low Channel	2402	1000	186.7
Adjacent Channel	2403		
Middle Channel	2441	1004	186.7
Adjacent Channel	2442		
High Channel	2480	1004	181.3
Adjacent Channel	2479		

Low Channel

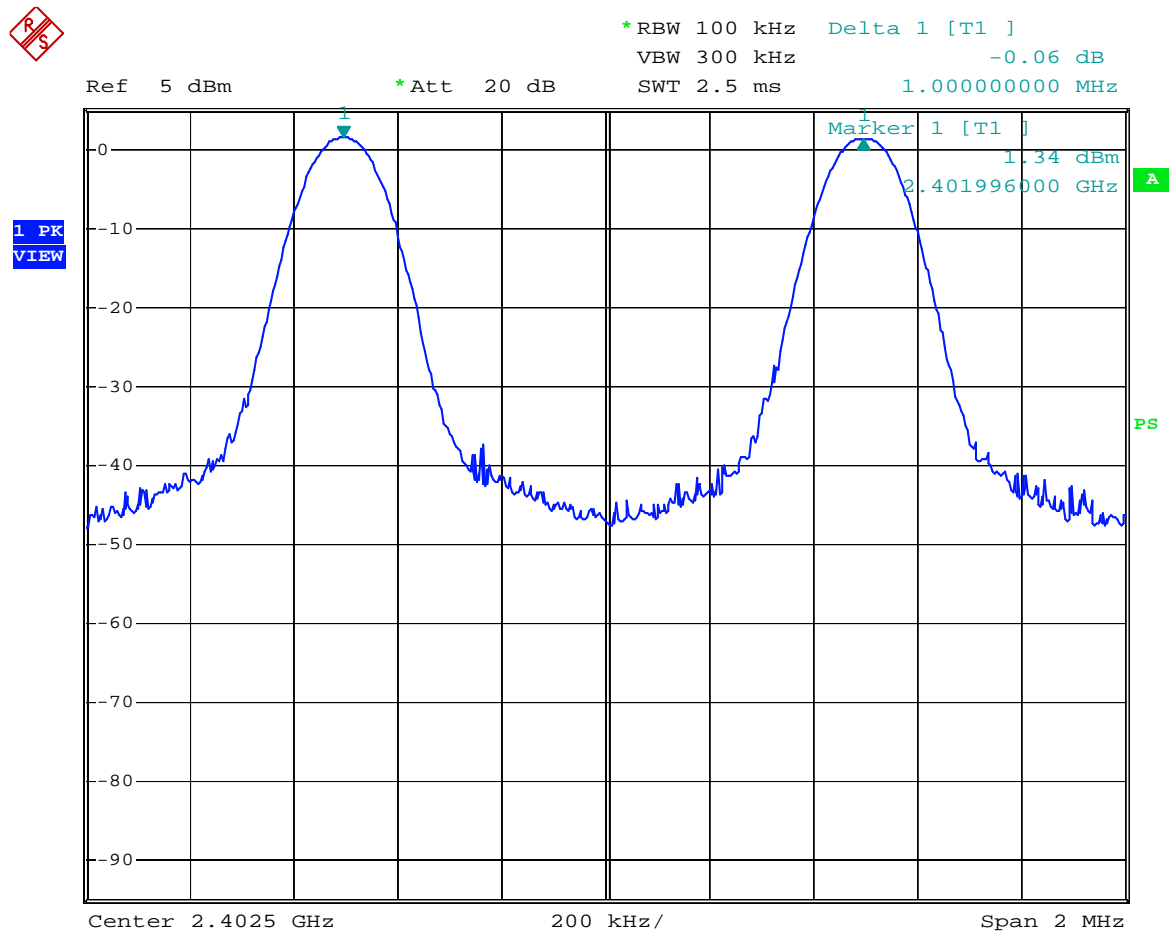

channel separation low channel

Middle Channel




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.08 dB
SWT 2.5 ms 1.004000000 MHz

Ref 5 dBm

*Att 20 dB

1. PK
VIEW

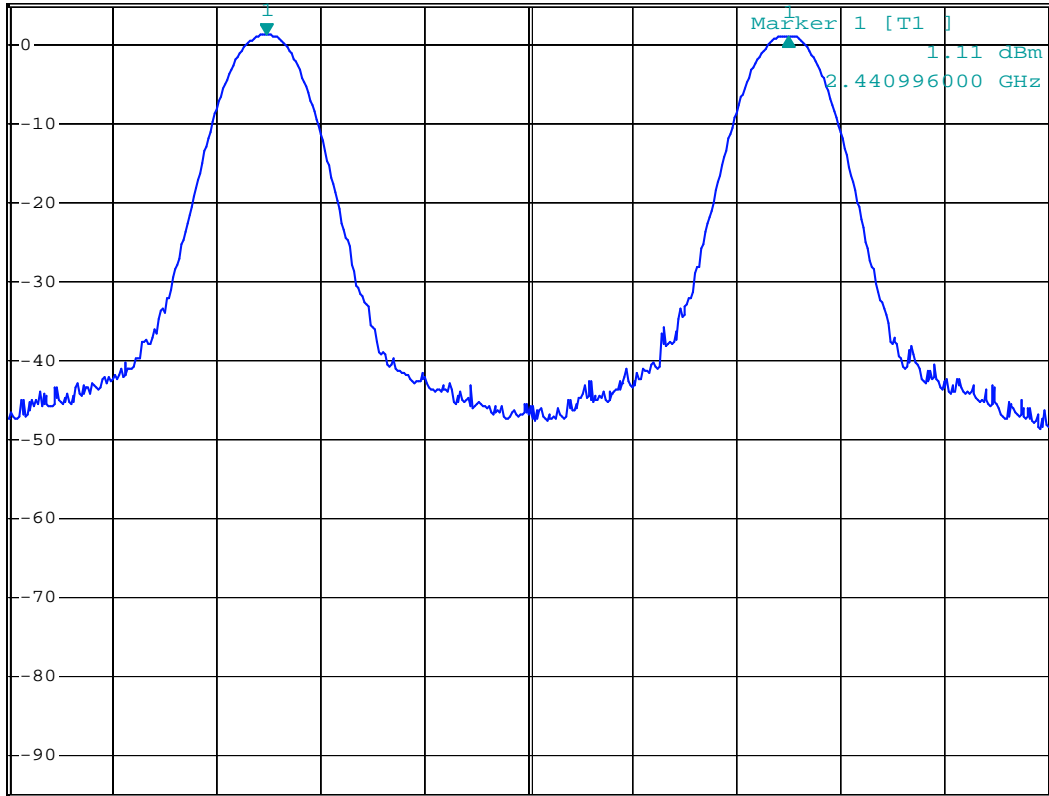

Center 2.4415 GHz

200 kHz/

Span 2 MHz

channel separation middle channel

High Channel




*RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.08 dB
SWT 2.5 ms 1.00400000 MHz

Ref 5 dBm

*Att 20 dB

1 PK
VIEW

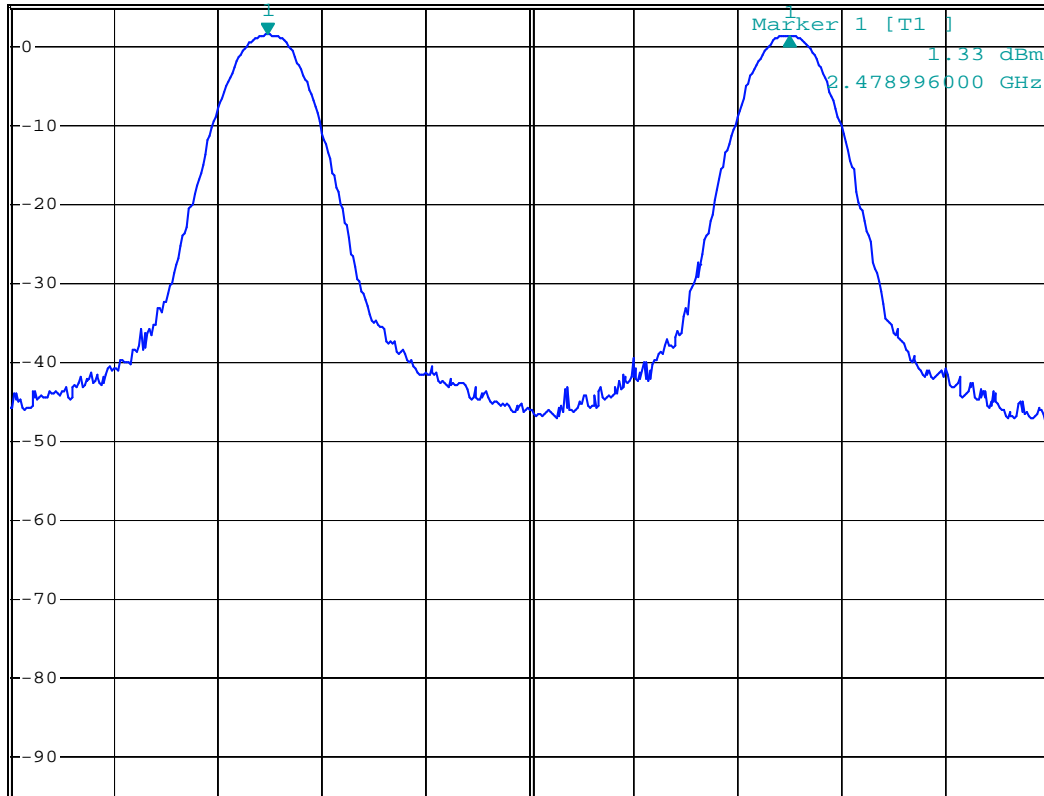

A

PS

Center 2.4795 GHz

200 kHz/

Span 2 MHz

channel separation high channel

§15.247(a) (1) –20dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Kidd Yang on 2008-04-29.

Test Mode: Transmitting

Channel	Channel Frequency (MHz)	20dB Bandwidth (kHz)
Low	2402	280
Mid	2441	280
High	2480	272

Test Result: Please refer to the following plots.

Low Channel




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 1.47 dBm
SWT 2.5 ms 2.402000000 GHz

Ref 5 dBm

*Att 20 dB

1 PK
VIEW

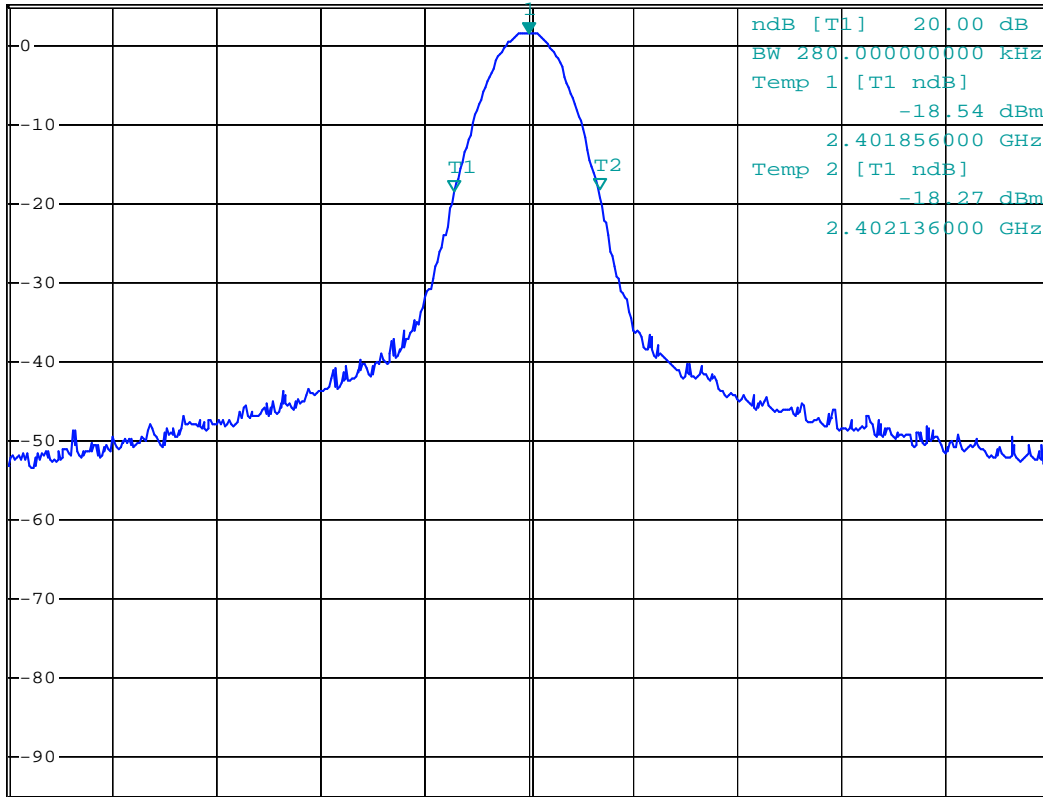

A

PS


Center 2.402 GHz

200 kHz/

Span 2 MHz

20 dB Bandwidth low channel

High Channel

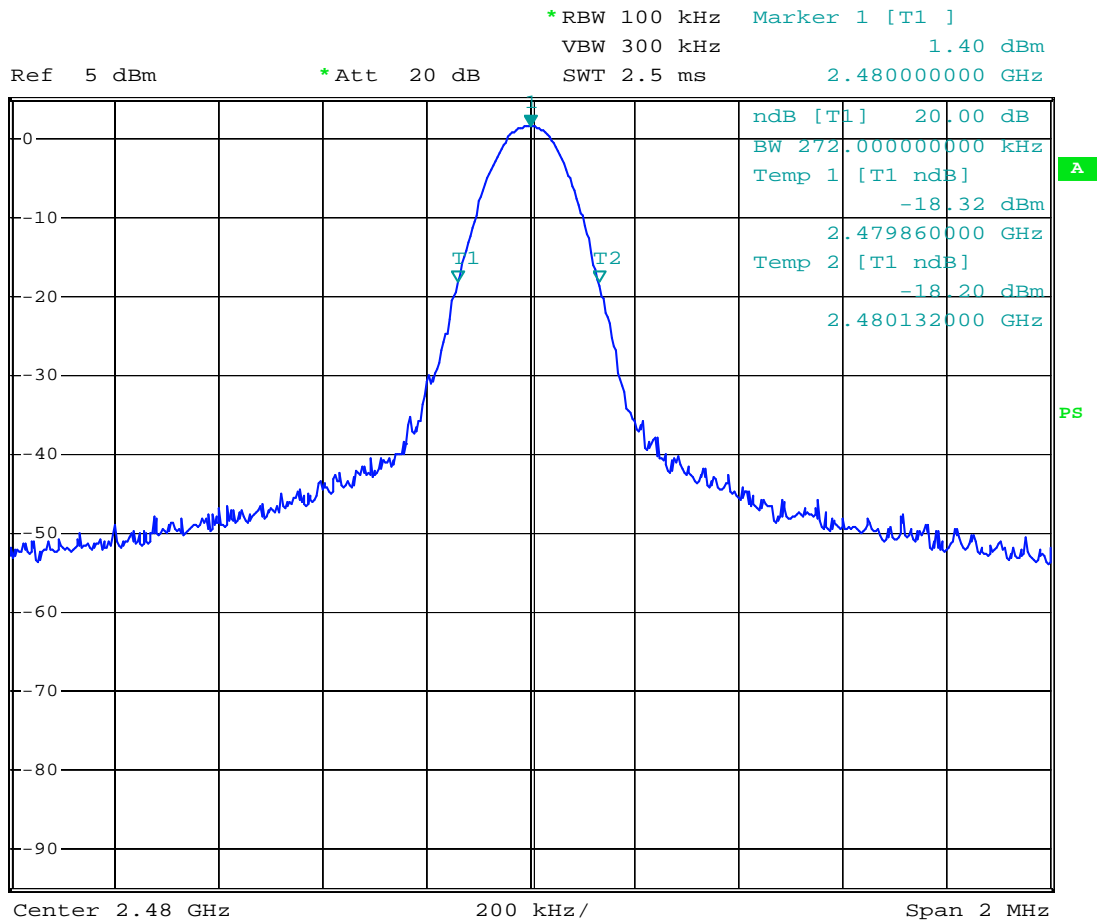

20 dB Bandwidth high channel

§15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Kidd Yang on 2008-04-29.

Test mode: Transmitting

Test Result: Pass

Please refer to following plot

Number of Hopping Channels

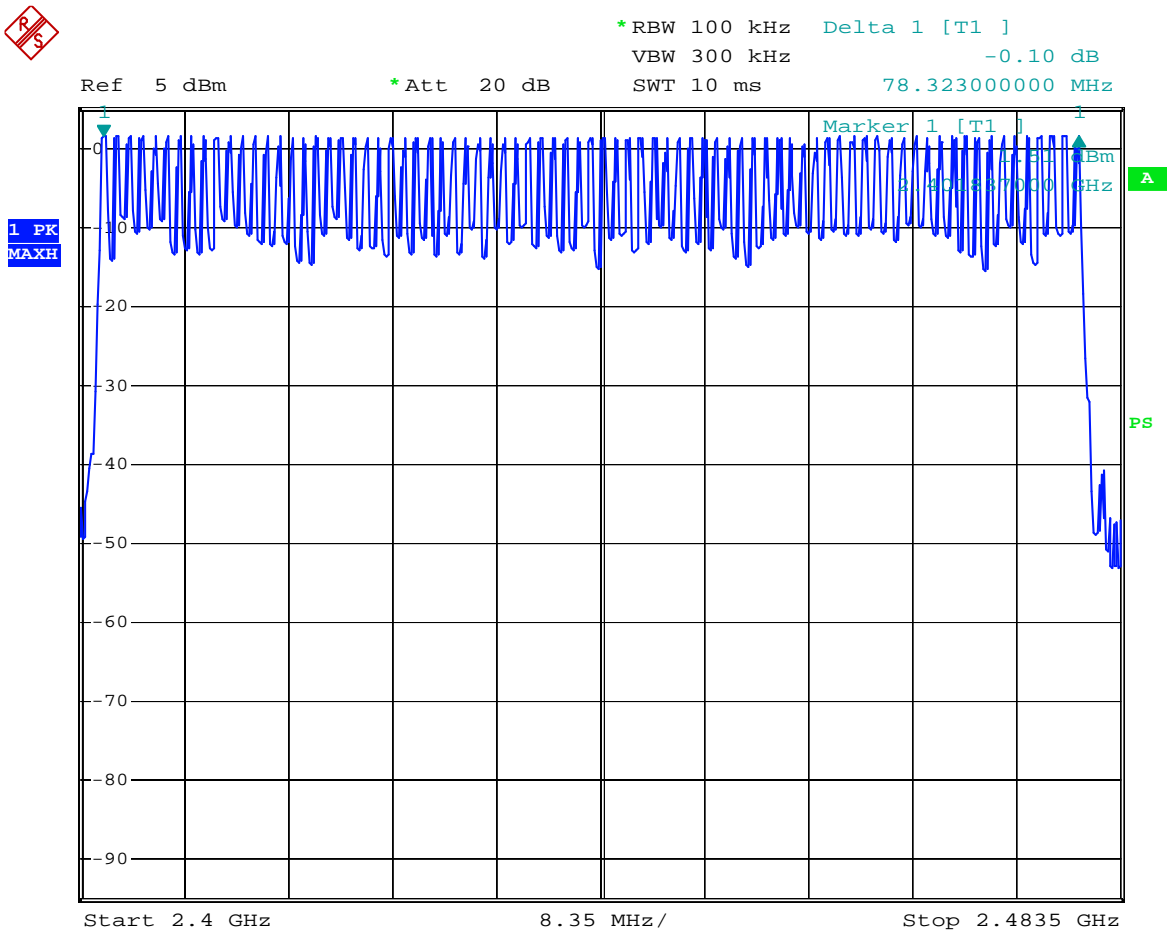

number of hopping channels

§15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s

Hopping Rate=1600/s

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Kidd Yang on 2008-04-29.

Test mode: Transmitting


Channel	Pulse width (ms)	Dwell time (Sec)	Limit (Sec)	Result
Low	0.560	0.1792	0.4	Pass
Mid	0.560	0.1792	0.4	Pass
High	0.560	0.1792	0.4	Pass

NOTE: Dwell time= Pulse time*(1600/2/79)*31.6S

Test Result: Pass

Please refer to following plots

Low Channel

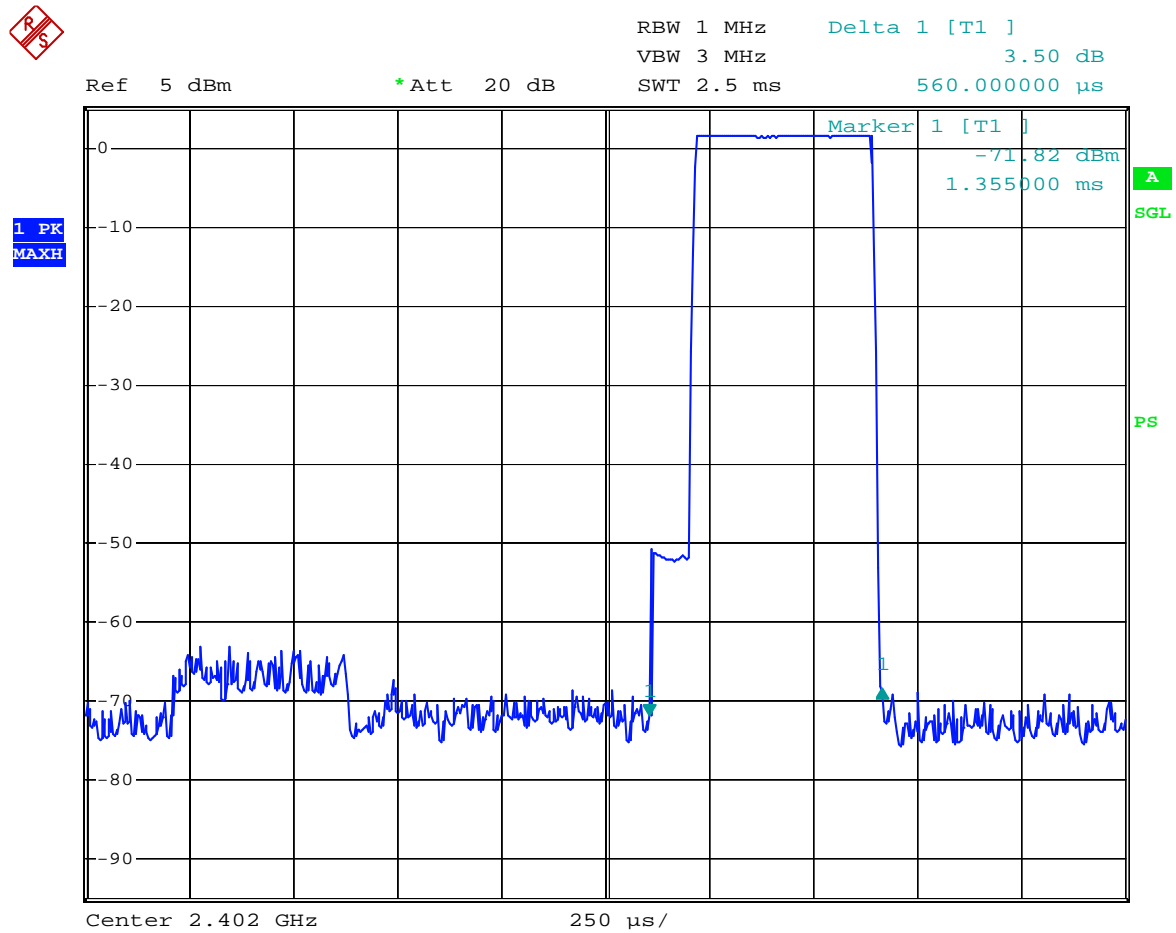


dwll time low channel

Middle Channel



Ref 5 dBm *Att 20 dB RBW 1 MHz Delta 2 [T1]
VEW 3 MHz 0.76 dB
SWT 2.5 ms 560.000000 μs


1 PK
MAXH

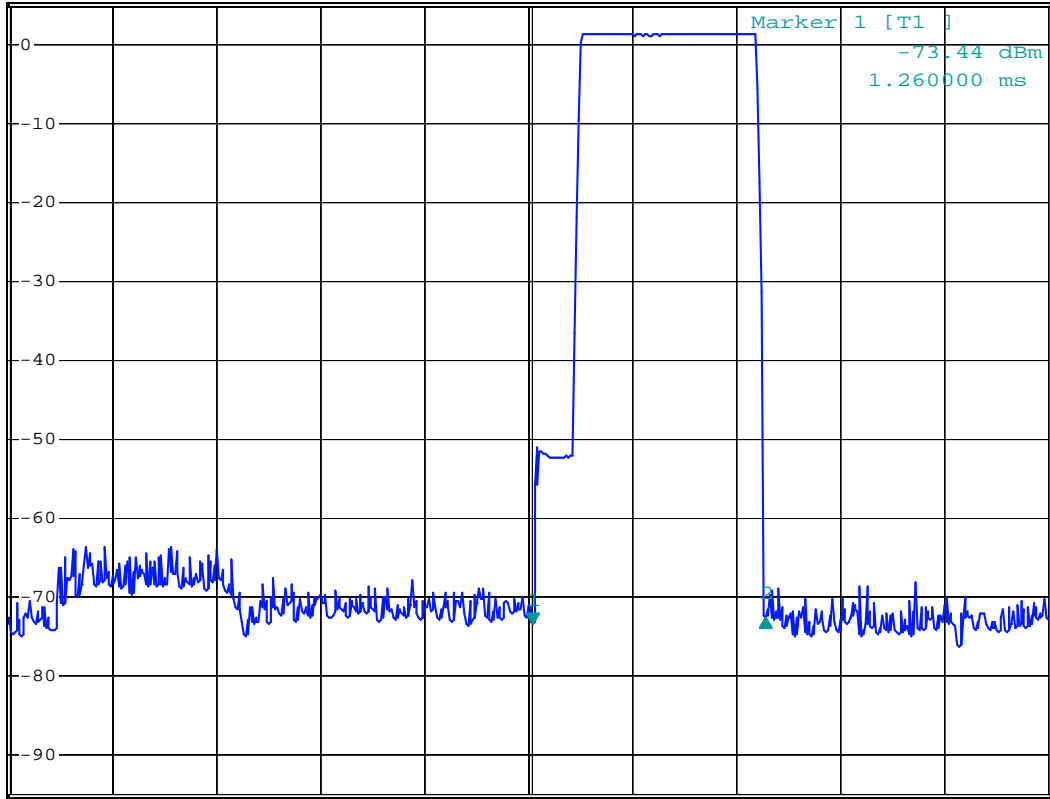

Center 2.441 GHz 250 μs/

dwll time middle channel

High Channel

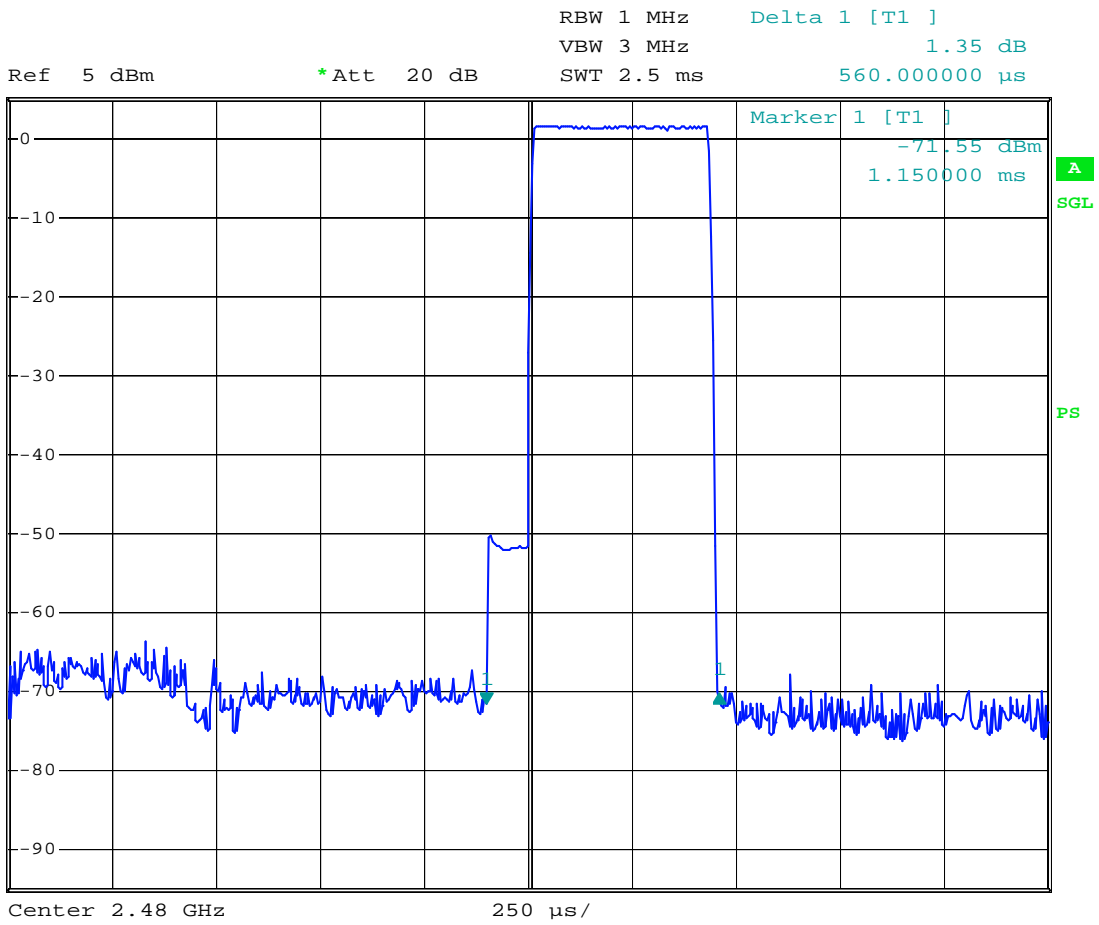

dwll time high channel

§15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2007-11-15	2008-11-15
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-09-29	2008-09-29
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2007-08-14	2008-08-14
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Agilent	Spectrum Analyzer	8564E	3943A01781	2007-11-22	2008-11-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp.(Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in peak detection modes.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa

The testing was performed by Kidd Yang on 2008-04-29.

Test Mode: Transmitting

Freq. (MHz)	Receiver Reading (dB μ V)	Detector PK/AV	Table Direction Degree	Test Antenna		Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	Tran. Factor (dB)	EIRP		FCC 15.247 Limit (mW)
				Height (m)	Factor (dB/m)					(dBm)	(mW)	
Low Channel												
2402	91.66	PK	90	1.0	30.6	3.61	35	90.87	95.27	-4.4	0.36	1000
Middle Channel												
2441	93.60	PK	120	1.1	30.6	3.61	35	92.81	95.27	-2.46	0.57	1000
High Channel												
2480	90.86	PK	60	1.4	30.6	3.61	35	90.07	95.27	-5.2	0.30	1000

Note: P (dBm) = E (dB μ V/m) – 95.27

§15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2007-10-16	2008-10-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Kidd Yang on 2008-04-29.

Test Mode: Transmitting


Frequency (MHz)	Attenuation (dBc)	Limit (dBc)
2399.9	54.23	20
2483.6	61.68	20

Note: Attenuation = Highest Peak – Emission Level

Test Result: Pass


Please refer to the following plots

Lowest Channel

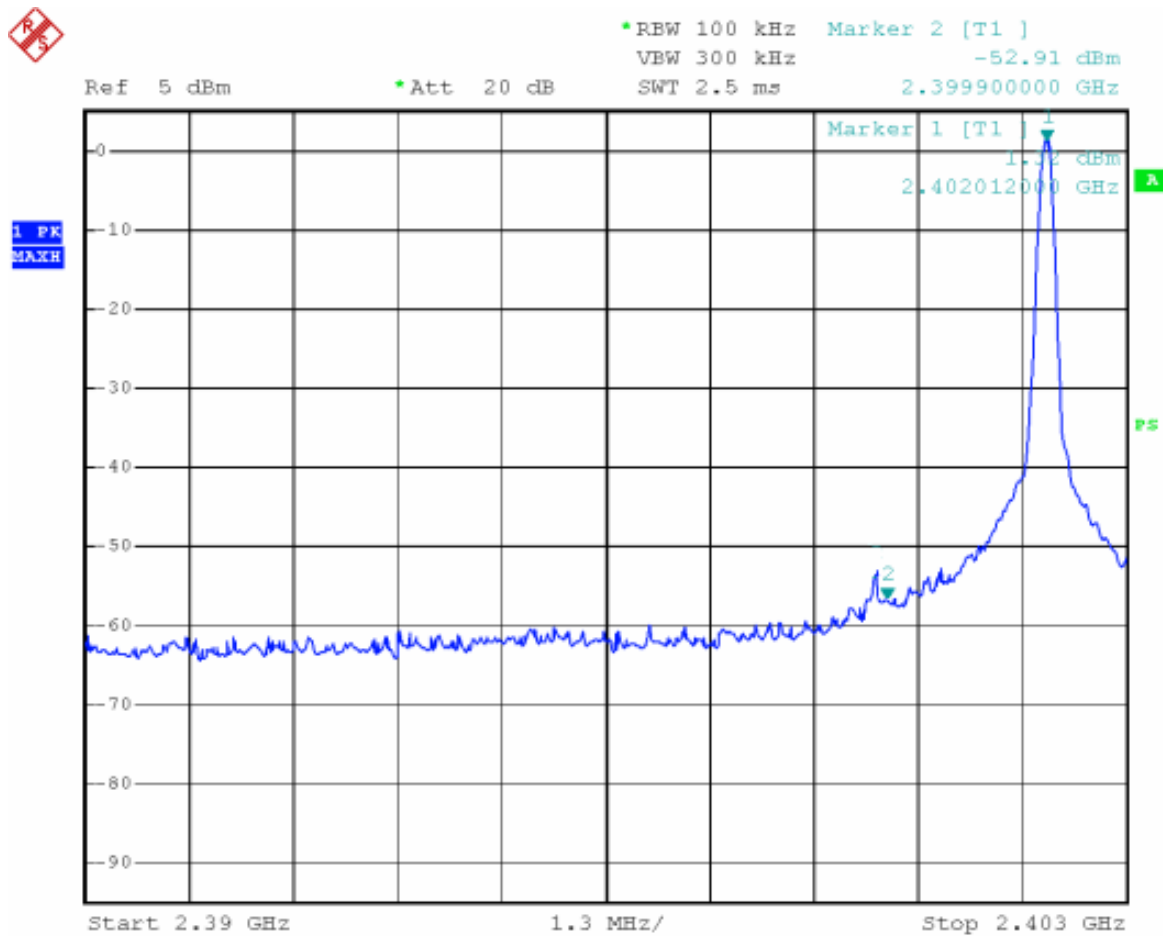

out of bandedge left

Highest Channel

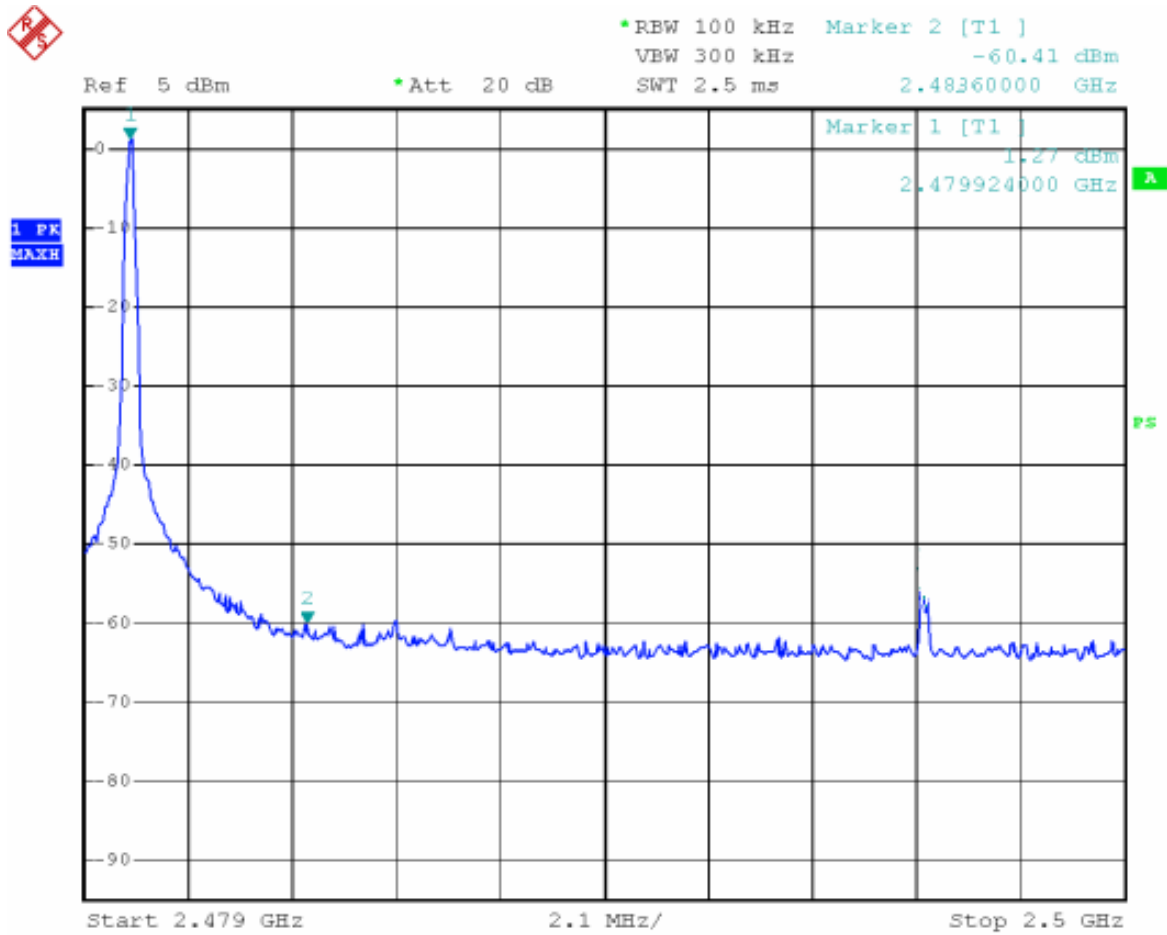

out of bandedge right

Date: 10.DEC.2007 05:47:53

Declare Letter

SUNITEC ENTERPRISE CO., LTD

To: Bay Area Compliance Laboratories Corp

Declaration letter

Dear Sir,

For our business issue and marketing requirement, we would like to list some model numbers on the FCC, CE certificates and reports, as following:

Model No.: BC331 (4PR910), BC351, BC371,

We declare that there is no electrical change has been made to the equipment that alters the compliance characteristics. The difference of these models is the covers. Additional, BC331 is same to 4PR910. Please kindly handle on the project.

Thank you!

Signature:

Handwritten signature in blue ink, appearing to read '韩江峰' (Han Jiangfeng) with the date '14/4-08' written to the right.

Printed name/ title: Han Jiangfeng / Engineer

Tel: (86)755 28016180

Fax: (86)755 29802984

Address: No.2,Qilin Road 2,Run Tang Ind, Dan-keng Vilage Fu Min Community.Guan-lan
Town, BaoAn District, Shenzhen GuangDong China

******End of Report******