



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**Solar Bluetooth Speakerphone**

**Model: BC976S, 100-4303**

**Brand: N/A**

**Test Report Number:**

**SZ111208B03-RP**

*Prepared for*

**Sunitec Enterprise Co., Ltd**

**10F.-1, No.200, Jingping Rd., Jhonghe City, Taipei County, 23581,  
Taiwan**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**Issued Date: December 15, 2011**



TESTING CERT #2861.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	SZ111208B03-RP	Initial Issue	ALL	Ruby Zhang



**TABLE OF CONTENTS**

**1. TEST RESULT CERTIFICATION .....4**

**2. EUT DESCRIPTION..... 5**

**3. TEST METHODOLOGY..... 6**

    3.1 DESCRIPTION OF TEST MODES ..... 6

**4. FACILITIES AND ACCREDITATIONS .....7**

    4.1 FACILITIES..... 7

    4.2 ACCREDITATIONS ..... 7

    4.3 MEASUREMENT UNCERTAINTY ..... 7

**5. SETUP OF EQUIPMENT UNDER TEST .....8**

    5.1 SETUP CONFIGURATION OF EUT ..... 8

    5.2 SUPPORT EQUIPMENT ..... 8

**6. FCC PART 15.247 REQUIREMENTS .....9**

    6.1 20DB BANDWIDTH..... 9

    6.2 PEAK POWER ..... 14

    6.3 PEAK POWER SPECTRAL DENSITY..... 16

    6.4 BAND EDGES MEASUREMENT ..... 17

    6.5 FREQUENCY SEPARATION ..... 27

    6.6 NUMBER OF HOPPING FREQUENCY..... 30

    6.7 TIME OF OCCUPANCY (DWELL TIME) ..... 33

    6.8 SPURIOUS EMISSIONS..... 40

    6.9 POWERLINE CONDUCTED EMISSIONS ..... 58



# 1. TEST RESULT CERTIFICATION

<b>Product:</b>	Solar Bluetooth Speakerphone
<b>Model:</b>	BC976S, 100-4303
<b>Brand:</b>	N/A
<b>Tested:</b>	December 8~13, 2011
<b>Applicant:</b>	<b>Sunitec Enterprise Co., Ltd</b> 10F.-1, No.200, Jingping Rd., Jhonghe City, Taipei County, 23581, Taiwan
<b>Manufacturer:</b>	<b>Sunitec Enterprise Co., Ltd</b> 10F.-1, No.200, Jingping Rd., Jhonghe City, Taipei County, 23581, Taiwan

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

---

**Tom Gan**  
Supervisor of EMC Dept.  
Compliance Certification Service Inc.

**Reviewed by:**

---

**Aven Zhou**  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Solar Bluetooth Speakerphone
<b>Model Number</b>	BC976S, 100-4303
<b>Brand</b>	N/A
<b>Model Discrepancy</b>	All models are identical to each other except for market designation for marketing purpose.
<b>Identify Number</b>	SZ111208B03-RP
<b>Car Charger Model No.</b>	CS0105/CU0105 I/P: DC12V-24V O/P: DC5.0V, 500mA DC Output Cable: Unshielded, 1.02m (USB Cable)
<b>Power Supply</b>	DC5V supplied by the car charger or DC3.7V supplied by the battery
<b>Received Date</b>	December 8, 2011
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	GFSK :12.47dBm 8DPSK :11.37dBm
<b>Modulation Technique</b>	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	Meander Line Antenna with 0 dBi gain(Max)
<b>Temperature Range</b>	-20°C ~ +60°C

**Note:** This submittal(s) (test report) is intended for FCC ID: RA8-BC011 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. TEST METHODOLOGY

#### 3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Not applicable, since EUT supplied by the DC Power	<input type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Above 1G, Channel Low (2402MHz) · Mid (2441MHz) and High (2480MHz) were chosen for full testing fo GFSK and 8DPSK.



### 4. FACILITIES AND ACCREDITATIONS

#### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	<b>A2LA</b>
<b>Taiwan</b>	<b>TAF</b>

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	<b>FCC</b>
<b>Japan</b>	<b>VCCI(C-3478, R-3135, T-652)</b>
<b>Canada</b>	<b>INDUSTRY CANADA</b>
<b>Taiwan</b>	<b>BSMI</b>
<b>Norway</b>	<b>Nemko</b>

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

#### 4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

<b>Measurement</b>	<b>Frequency</b>	<b>Uncertainty</b>
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB
	Above 1000MHz	+/- 5.04dB
Band Edges	+/-0.182 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 5. SETUP OF EQUIPMENT UNDER TEST

### 5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1.	Notebook	992F2VG	62P7043	N/A	IBM	Shielded 1.50m	Unshielded 1.80m
2.	DC Power Source	Q23003XE	018398	N/A	QJE	N/A	Unshielded 1.80m

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.





## 6. FCC PART 15.247 REQUIREMENTS

### 6.1 20DB BANDWIDTH


None; for reporting purpose only.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST CONFIGURATION



### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

### TEST RESULTS

No non-compliance noted




Test plot ( GFSK)

20dB Bandwidth (CH Low)

Agilent 19:16:41 Dec 8, 2011

R T

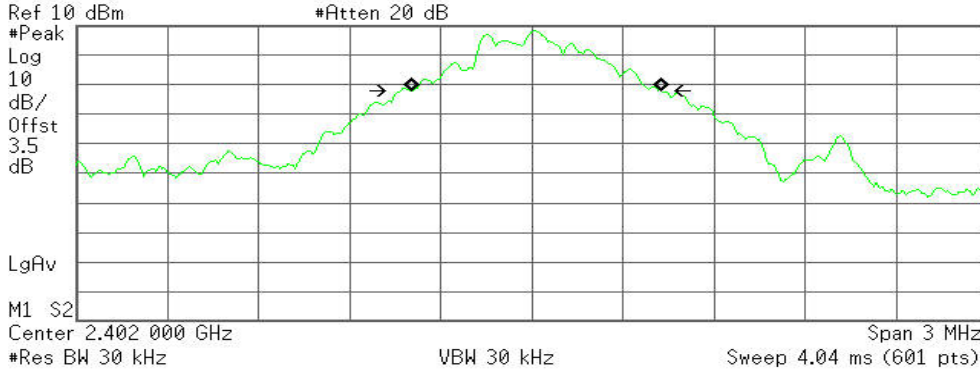

Occupied Bandwidth 819.6738 kHz


Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error 12.689 kHz  
x dB Bandwidth 848.605 kHz

20dB Bandwidth (CH Mid)

Agilent 19:15:57 Dec 8, 2011

R T

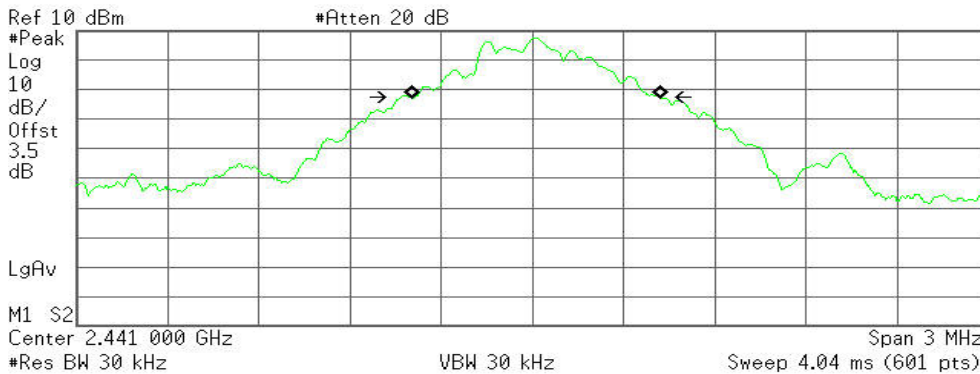

Occupied Bandwidth 815.3713 kHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB


Transmit Freq Error 12.848 kHz  
x dB Bandwidth 847.492 kHz



### 20dB Bandwidth (CH High)

Agilent 19:17:03 Dec 8, 2011

R T

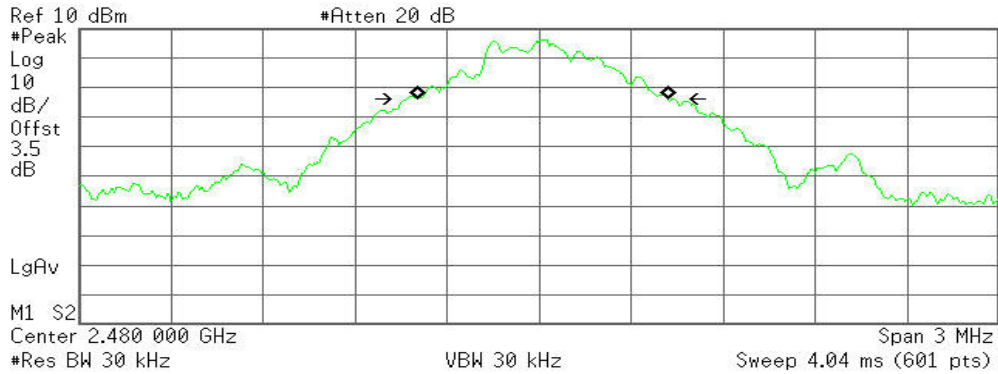

**Occupied Bandwidth**  
812.8414 kHz

**Occ BW % Pwr** 99.00 %  
**x dB** -20.00 dB

**Transmit Freq Error** 12.369 kHz  
**x dB Bandwidth** 872.107 kHz




**Test plot ( 8DPSK )**

**20dB Bandwidth (CH Low)**

Agilent 19:18:57 Dec 8, 2011

R T

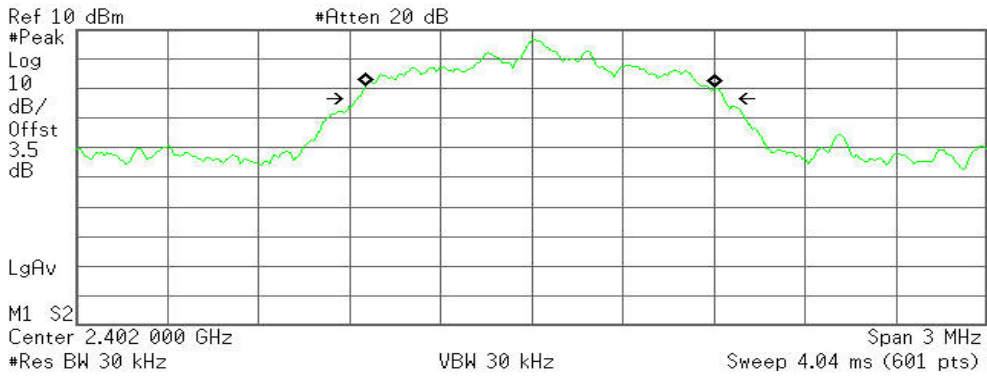

**Occupied Bandwidth**  
1.1503 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -20.00 dB

**Transmit Freq Error** 30.817 kHz  
**x dB Bandwidth** 1.207 MHz

**20dB Bandwidth (CH Mid)**

Agilent 19:18:30 Dec 8, 2011

R T

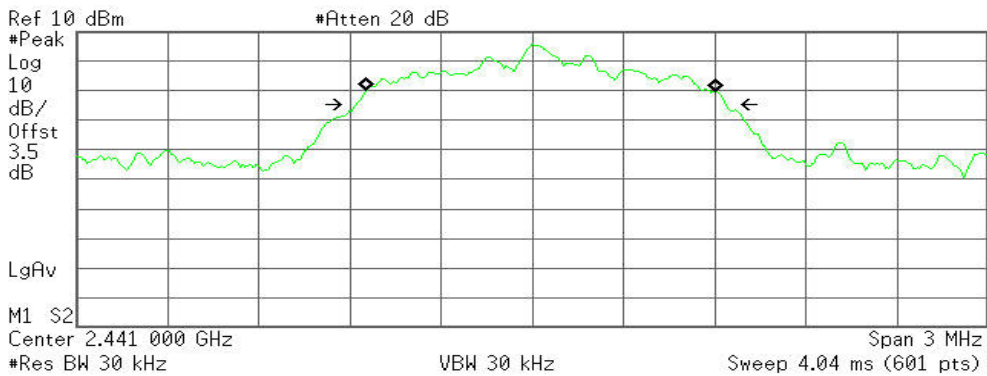

**Occupied Bandwidth**  
1.1505 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -20.00 dB


**Transmit Freq Error** 30.727 kHz  
**x dB Bandwidth** 1.214 MHz



### 20dB Bandwidth (CH High)

Agilent 19:18:00 Dec 8, 2011

R T

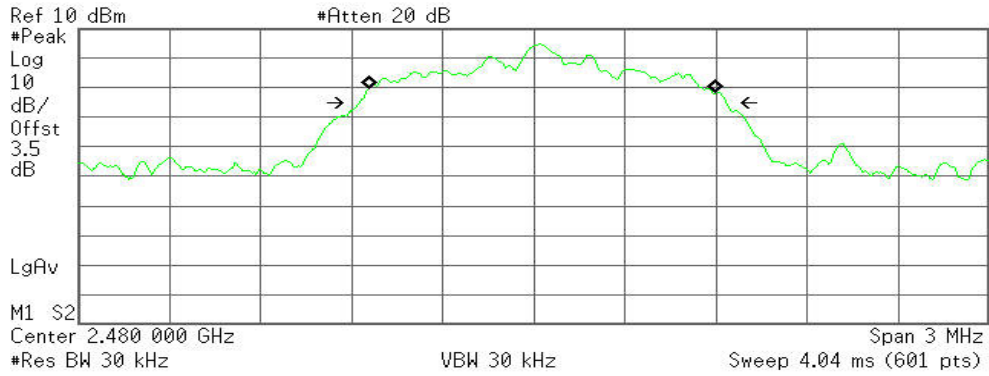

Occupied Bandwidth  
1.1440 MHz

Occ BW % Pwr 99.00 %  
x dB -20.00 dB

Transmit Freq Error 29.549 kHz  
x dB Bandwidth 1.211 MHz



## 6.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2487A	6K00001491	03/19/2011	03/19/2012
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



**TEST RESULTS**

No non-compliance noted

**Test Data**

**GFSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	8.97	350	12.47	0.01766	125	PASS
Mid	2441	8.27	350	11.77	0.01503		PASS
High	2480	7.64	350	11.14	0.01300		PASS

**8DPSK**

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	7.87	350	11.37	0.01371	125	PASS
Mid	2441	7.14	350	10.64	0.01159		PASS
High	2480	6.31	350	9.81	0.00957		PASS



### 6.3 PEAK POWER SPECTRAL DENSITY

#### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

#### TEST RESULTS

*Not applicable. Since EUT is the Bluetooth device.*





### 6.4 BAND EDGES MEASUREMENT


#### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012	
Amplifier	MITEQ	AM-1604-3000	1411843	03/18/2011	03/18/2012	
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2011	03/18/2012	
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/03/2011	06/03/2012	
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012	
Loop Antenna	A. R. A	PLA-1030/B	1029	03/19/2011	03/19/2012	
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012	
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R	
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2				

#### Test Configuration

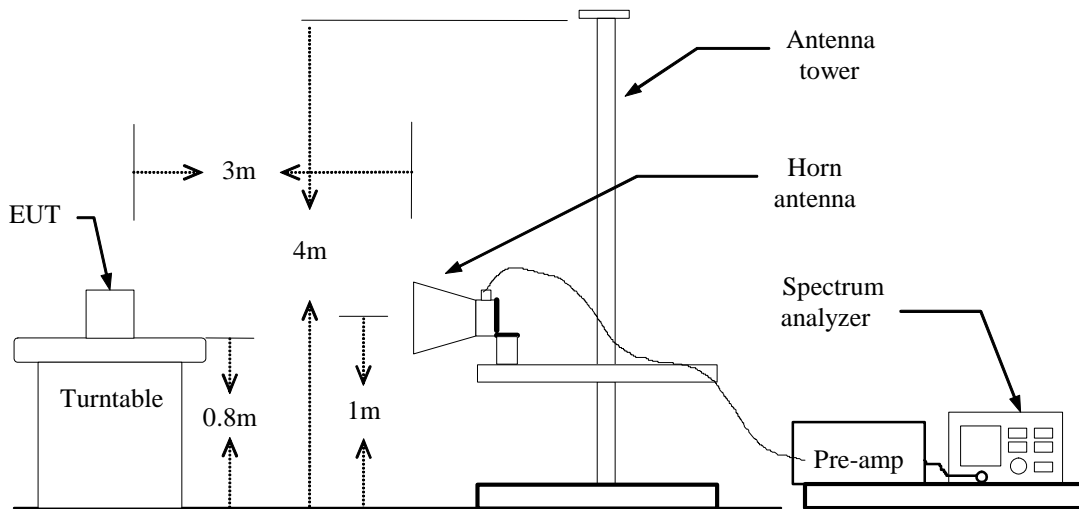



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=390Hz/ Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.



Test Data ( GFSK )


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 10:44:43 Dec 9, 2011

R T

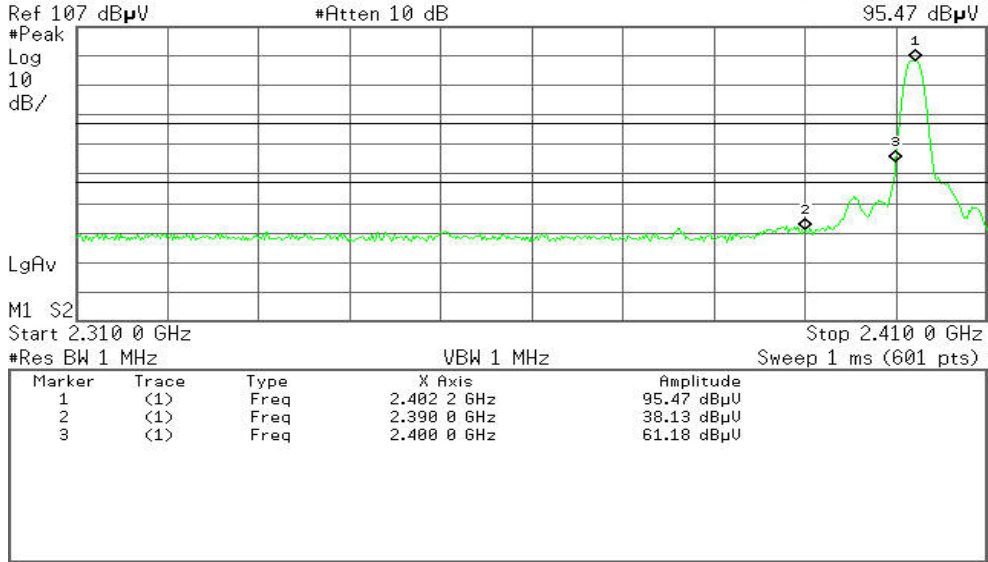


Detector mode: Average

Polarity: Vertical

Agilent 00:31:44 Dec 15, 2011

R T

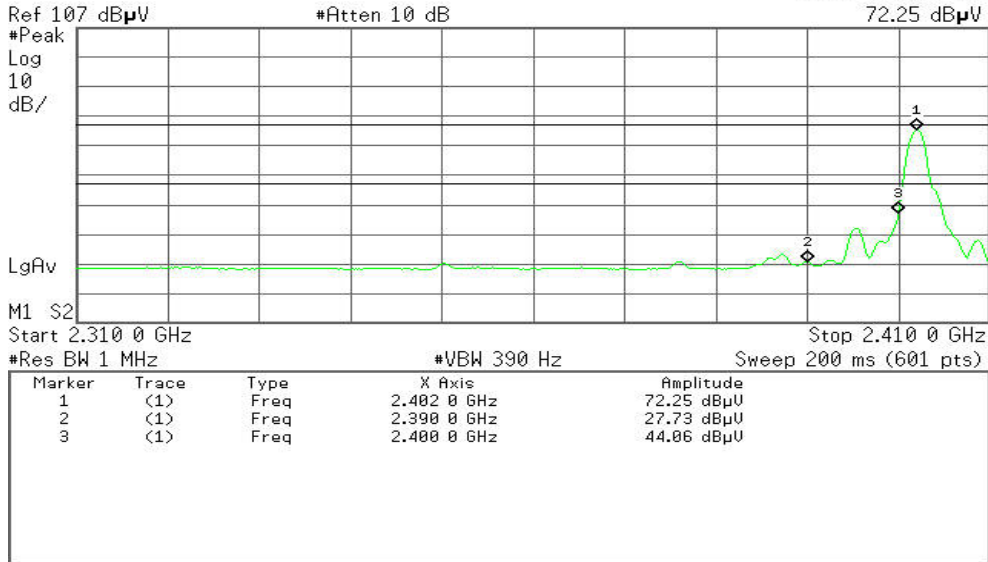




Detector mode: Peak

Polarity: Horizontal

Agilent 10:41:13 Dec 9, 2011

R T

Mkr1 2.402 2 GHz  
95.01 dBµV

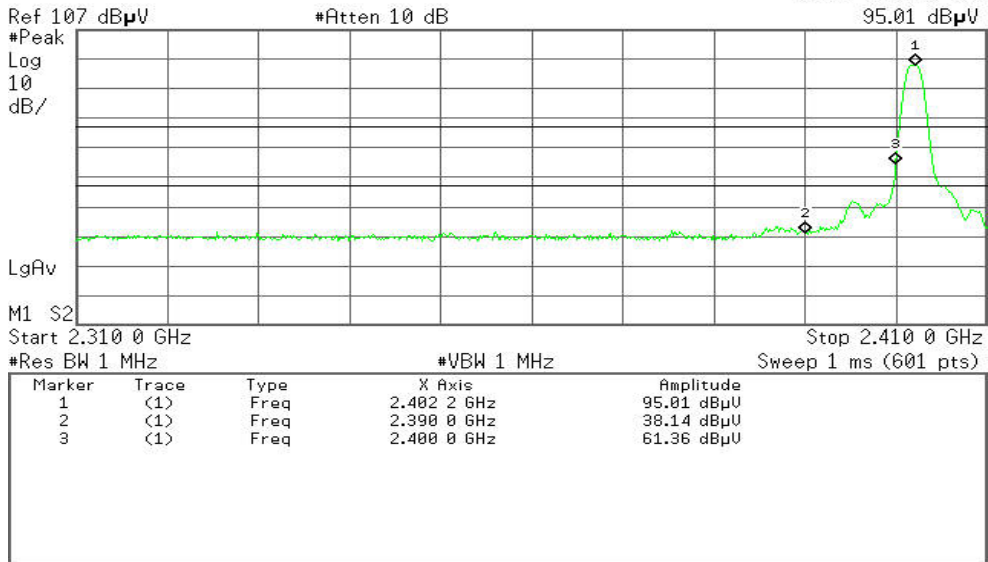


Detector mode: Average

Polarity: Horizontal

Agilent 00:30:11 Dec 15, 2011

R T

Mkr1 2.402 0 GHz  
72.079 dBµV

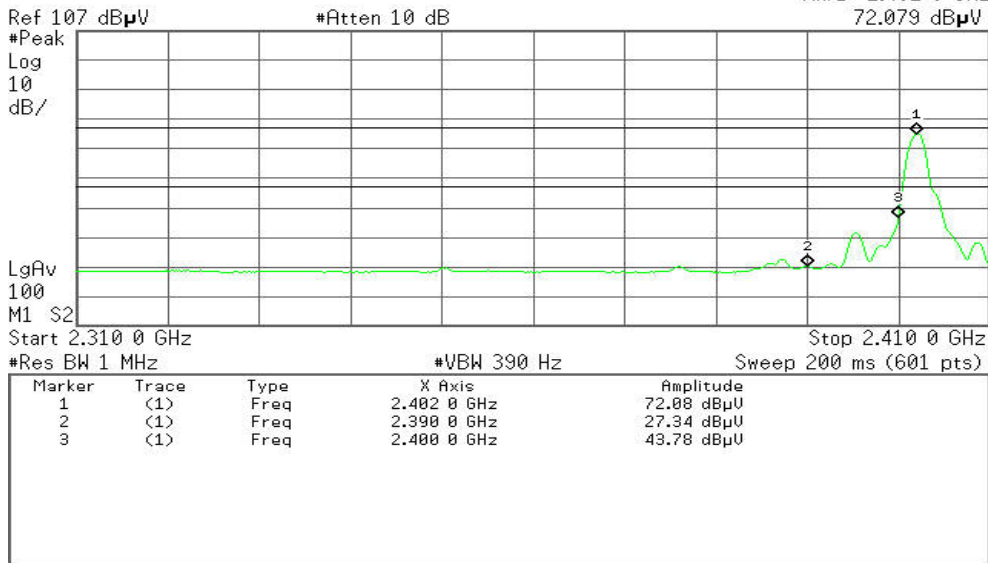



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 04:14:44 Dec 10, 2011

R T

Mkr2 2.483 50 GHz  
48.62 dBµV

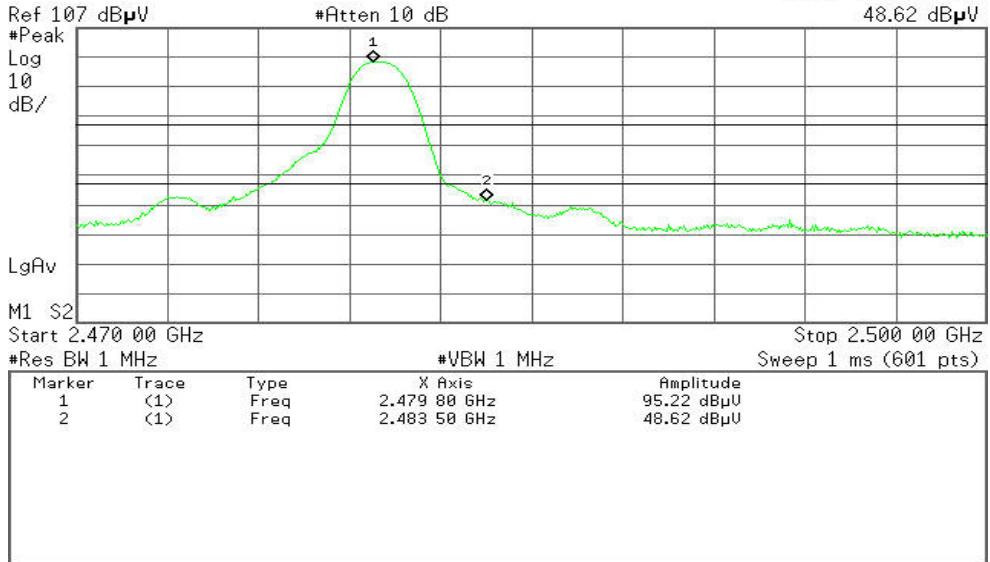


Detector mode: Average

Polarity: Vertical

Agilent 00:34:24 Dec 15, 2011

R T

Mkr1 2.480 10 GHz  
72.83 dBµV

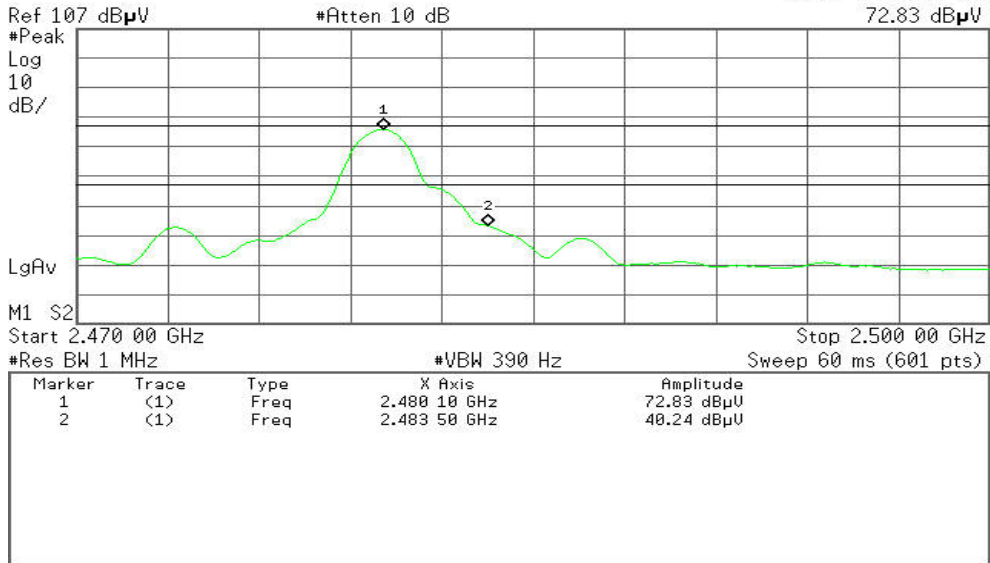




Detector mode: Peak

Polarity: Horizontal

Agilent 04:19:12 Dec 10, 2011

R T

Mkr1 2.479 80 GHz  
92.64 dBµV

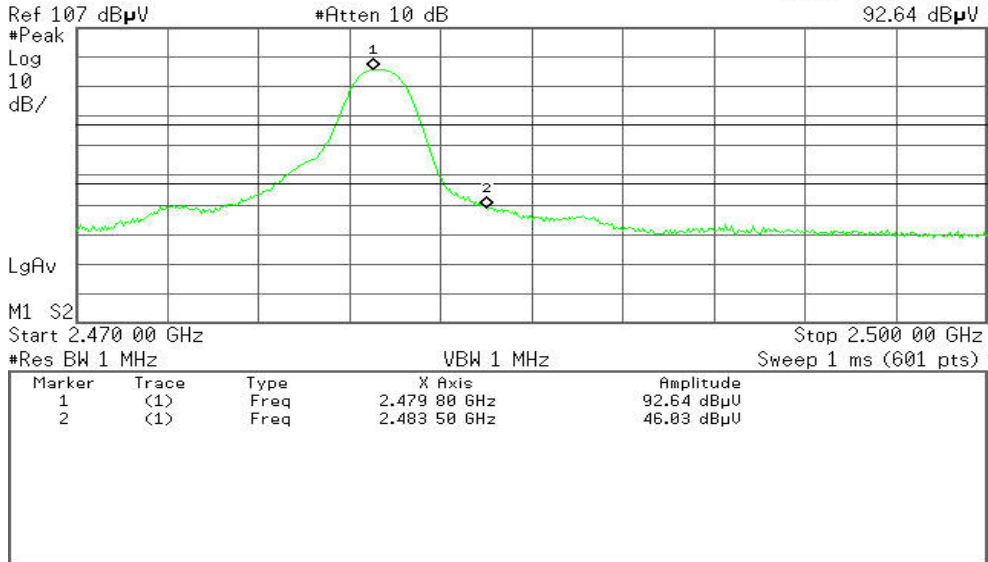


Detector mode: Average

Polarity: Horizontal

Agilent 00:35:44 Dec 15, 2011

R T

Mkr1 2.480 10 GHz  
72.87 dBµV

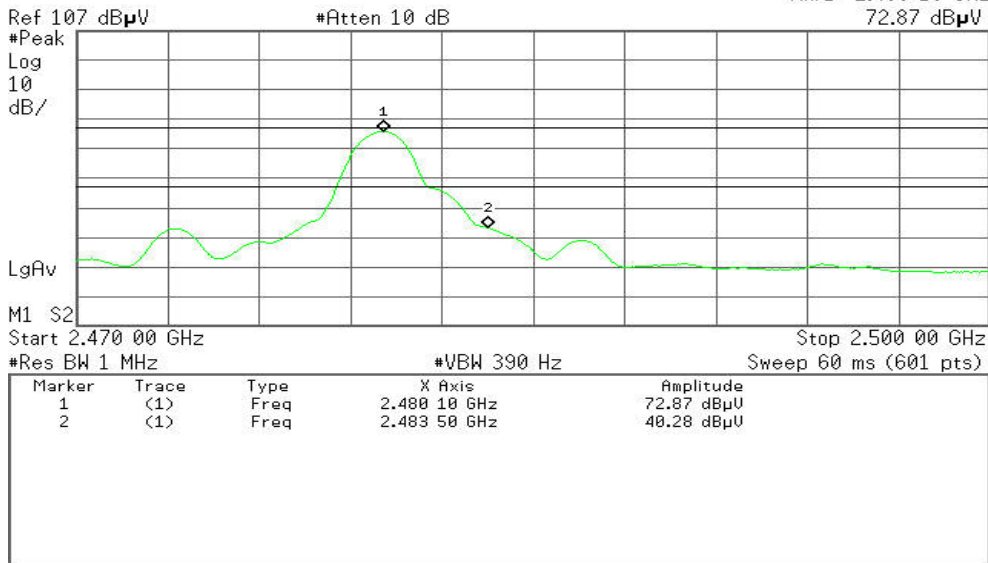



Test Data ( 8DPSK )


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 05:19:52 Dec 10, 2011

R T

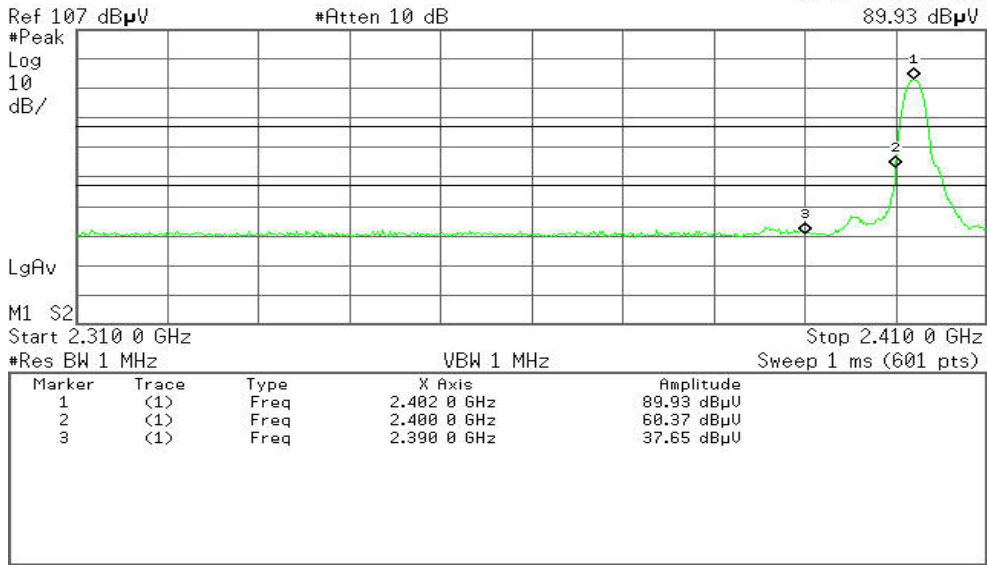


Detector mode: Average

Polarity: Vertical

Agilent 00:42:01 Dec 15, 2011

R T

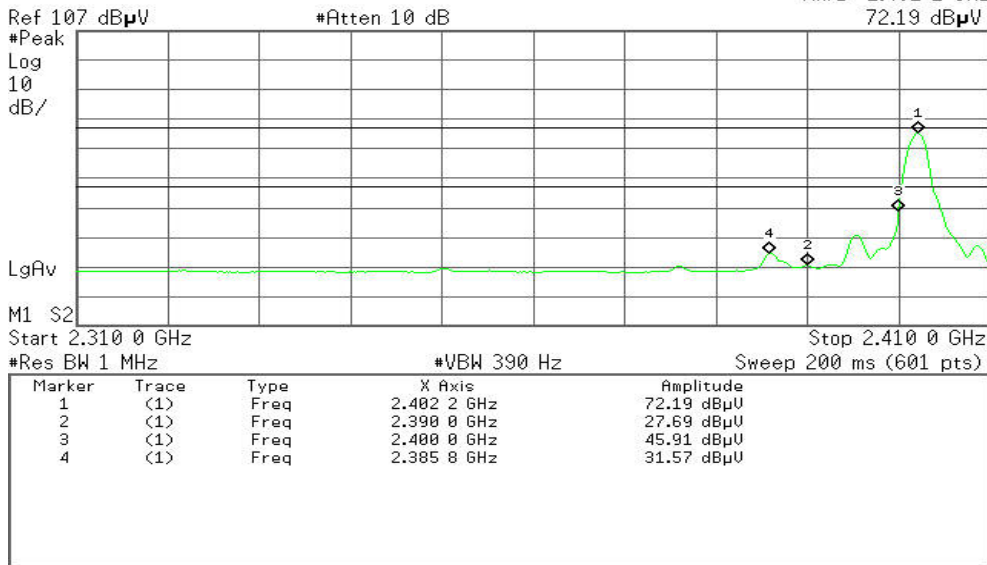




Detector mode: Peak

Polarity: Horizontal

Agilent 05:24:45 Dec 10, 2011

R T

Mkr1 2.402 0 GHz  
91.82 dBµV

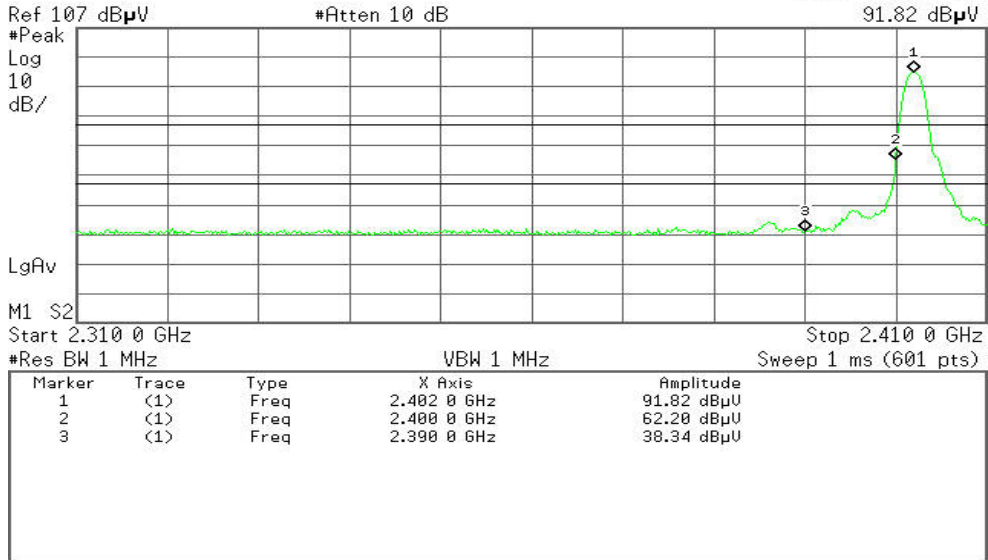

Detector mode: Average

Polarity: Horizontal

Agilent 00:43:24 Dec 15, 2011

R T

Mkr1 2.402 2 GHz  
69.55 dBµV







Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 05:13:41 Dec 10, 2011

R T

Mkr1 2.480 00 GHz  
92.88 dBµV

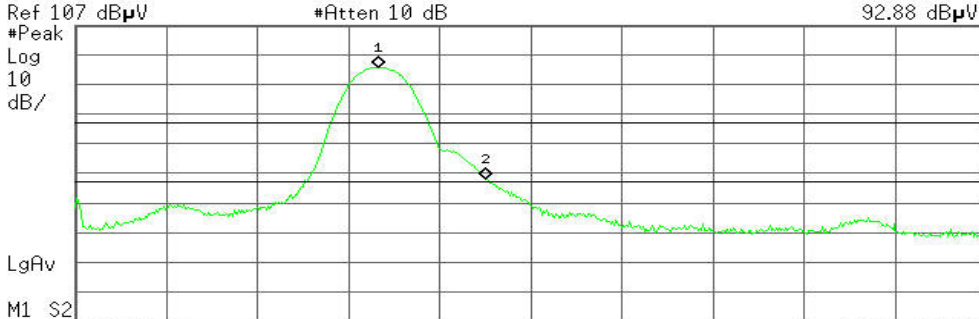

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	92.88 dBµV
2	(1)	Freq	2.483 50 GHz	54.87 dBµV


Detector mode: Average

Polarity: Vertical

Agilent 00:39:53 Dec 15, 2011

R T

Mkr1 2.480 15 GHz  
72.44 dBµV

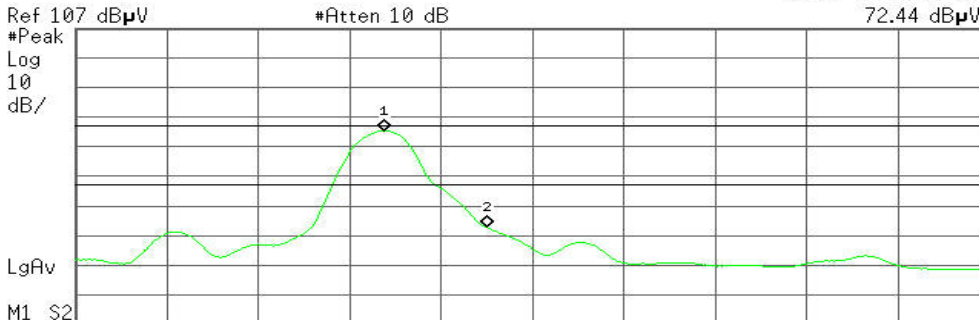

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 15 GHz	72.44 dBµV
2	(1)	Freq	2.483 50 GHz	39.74 dBµV




Detector mode: Peak

Polarity: Horizontal

Agilent 05:10:38 Dec 10, 2011

R T

Mkr1 2.480 00 GHz  
91.43 dBµV

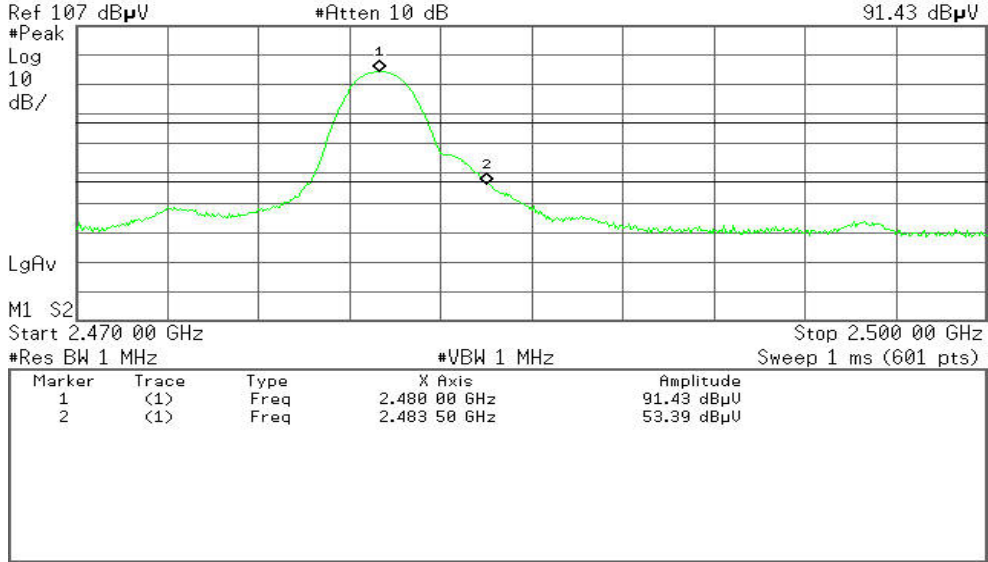


Detector mode: Average

Polarity: Horizontal

Agilent 00:38:34 Dec 15, 2011

R T

Mkr1 2.480 15 GHz  
71.69 dBµV

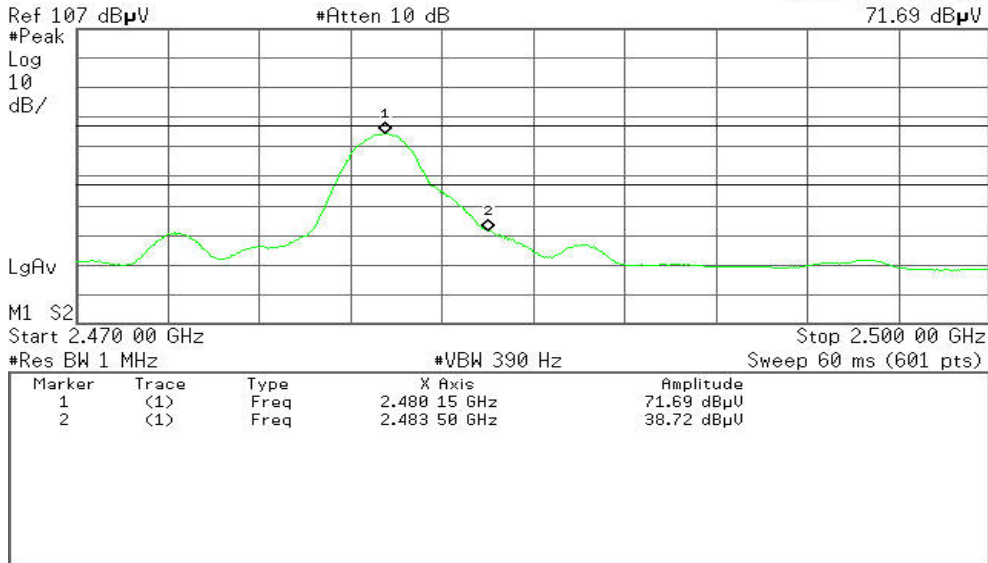



### 6.5 FREQUENCY SEPARATION

#### LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2011	07/22/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

#### TEST RESULTS

*No non-compliance noted*

##### Test Data

##### GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	581.405	> Two-thirds of the 20 dB Bandwidth	Pass

##### 8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	809.333	> Two-thirds of the 20 dB Bandwidth	Pass




**GFSK**

**Test Plot**

**Measurement of Channel Separation**

Agilent 19:39:18 Dec 8, 2011


R T

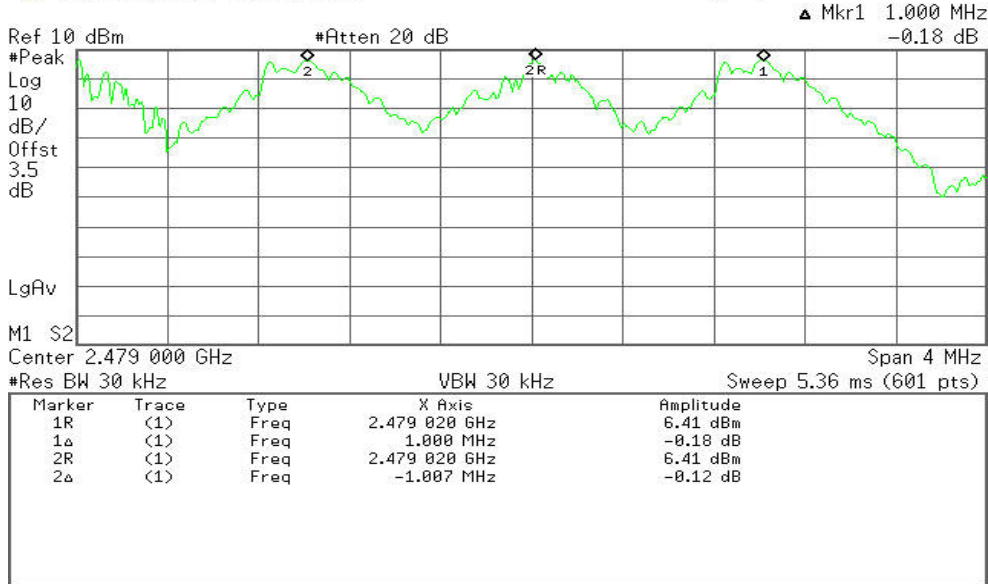

**20 dB bandwidth(CH High)**

Agilent 19:17:03 Dec 8, 2011

R T

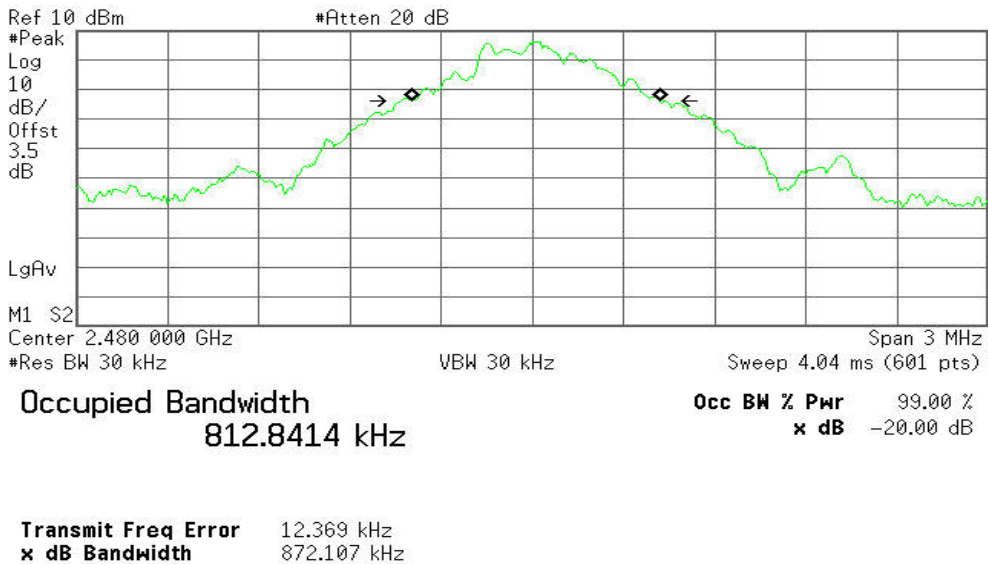




8DPSK

Test Plot

Measurement of Channel Separation

Agilent 19:37:37 Dec 8, 2011


R T

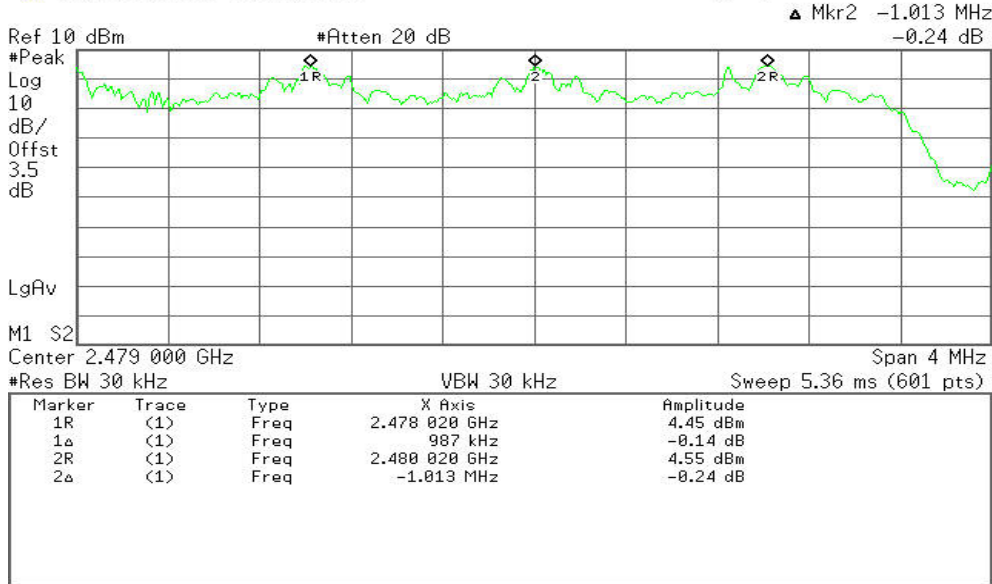

20 dB bandwidth(CH Mid)

Agilent 19:18:30 Dec 8, 2011

R T

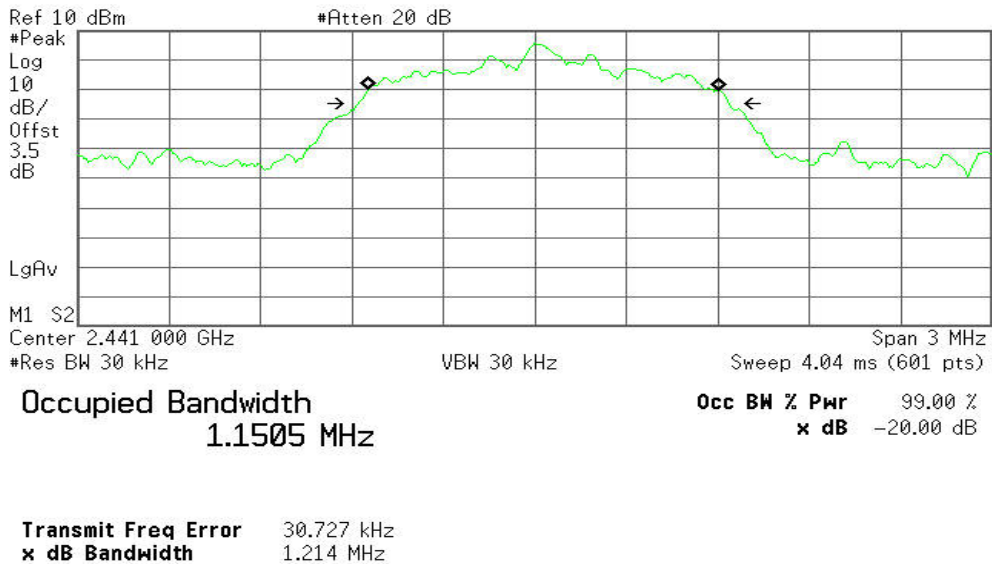



### 6.6 NUMBER OF HOPPING FREQUENCY

#### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2402MHz, Stop = 2441MHz, Sweep = 1ms and Start=2441MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




**Test Plot ( GFSK )**

**Channel Number**

**2.402 GHz – 2.441 GHz**

Agilent 19:23:35 Dec 8, 2011


R T

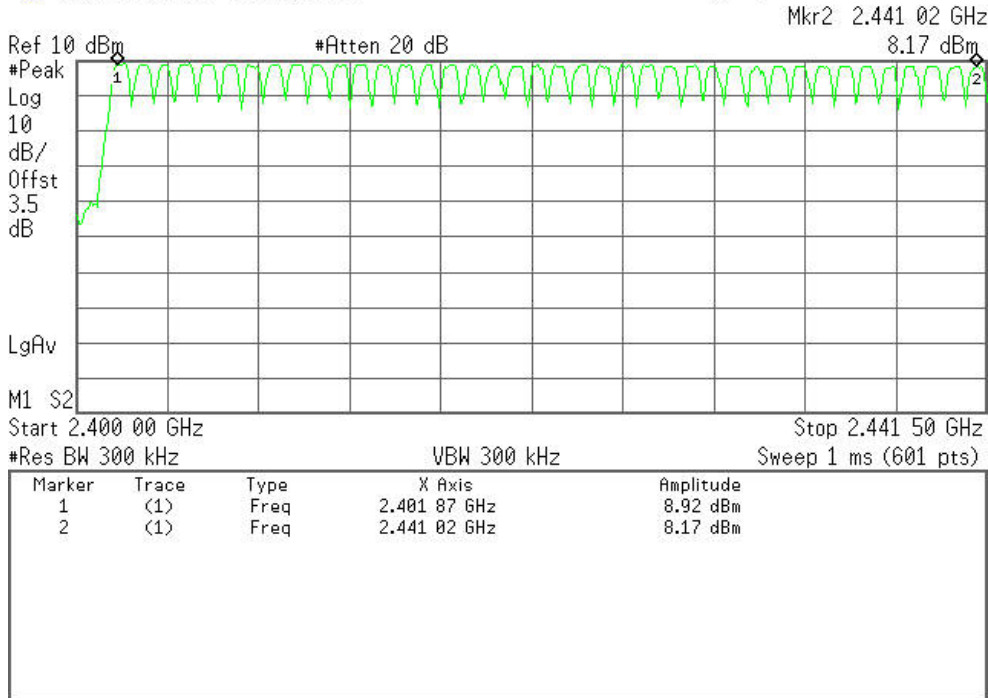

**2.441 GHz –2.4835 GHz**

Agilent 19:25:25 Dec 8, 2011

R T

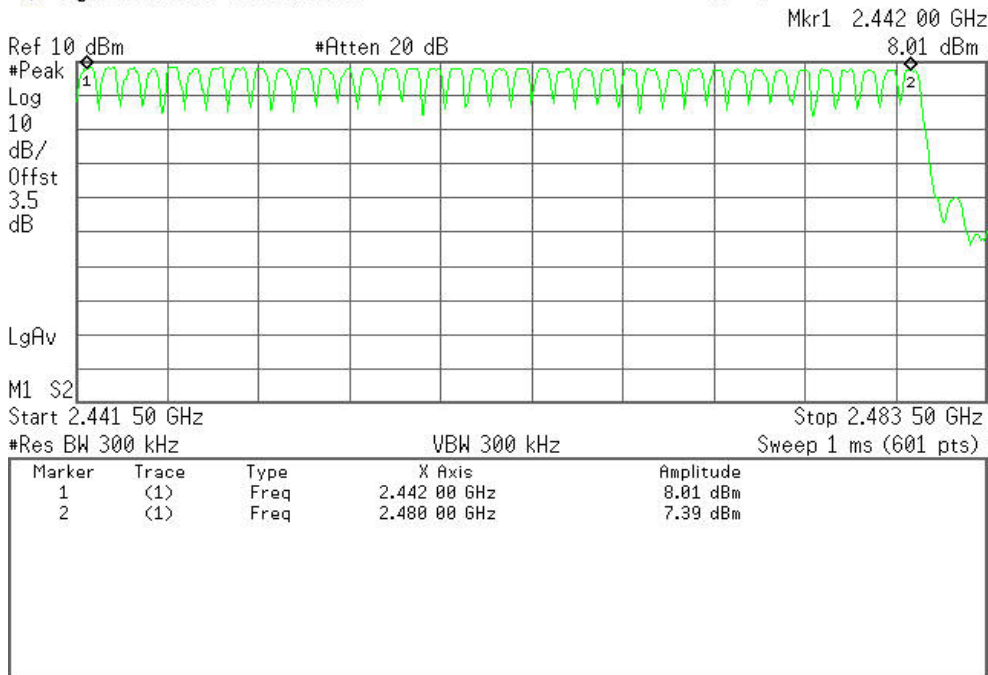




**Test Plot (8DPSK )**

**Channel Number**

**2.402 GHz – 2.441 GHz**

Agilent 19:22:05 Dec 8, 2011


R T

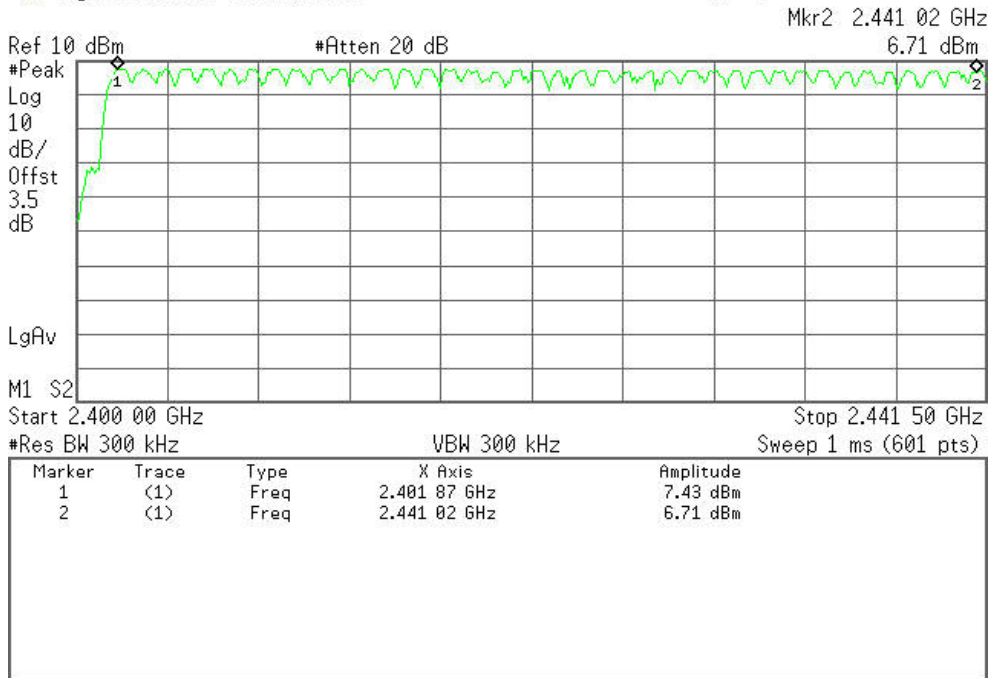

**2.441 GHz –2.4835 GHz**

Agilent 19:27:18 Dec 8, 2011

R T

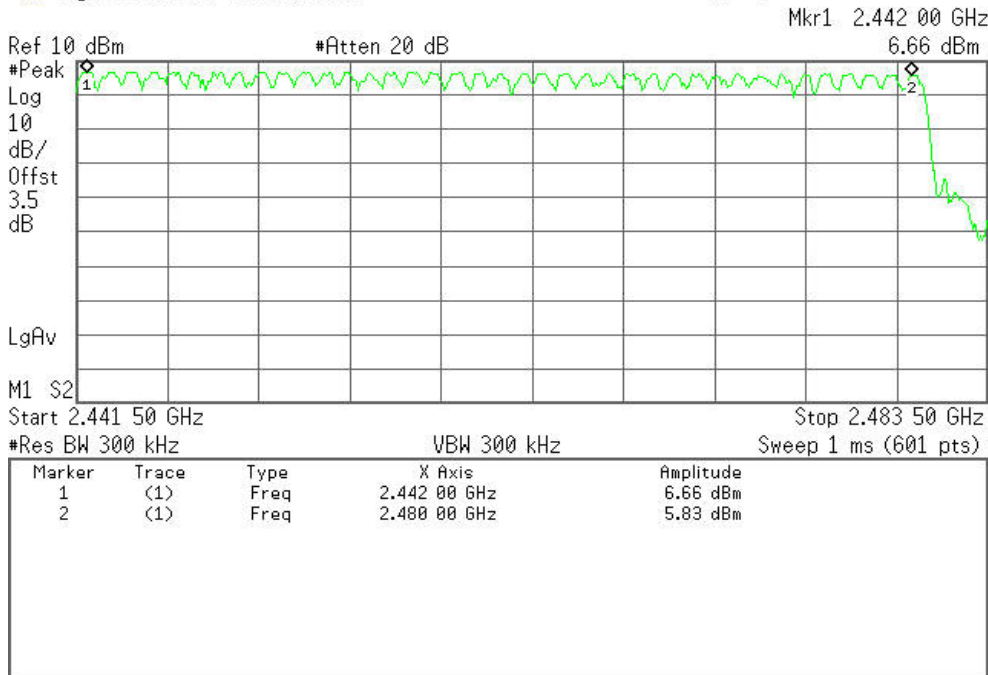





## 6.7 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



**TEST RESULTS**

*No non-compliance noted*

**Test Data**

**GFSK**

**DH 1**

CH Mid:  $0.512 * (1600/2)/79 * 31.6 = 163.744$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.512	163.744	31.60	400.00	PASS

**DH 3**

CH Mid:  $1.765 * (1600/4)/79 * 31.6 = 282.400$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.765	282.400	31.60	400.00	PASS

**DH 5**

CH Mid:  $3.013 * (1600/6)/79 * 31.6 = 321.387$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.013	321.387	31.60	400.00	PASS



**Test Data**

**8DPSK**

**DH 1**

CH Mid:  $0.525 * (1600/2)/79 * 31.6 = 168.000$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.525	168.000	31.60	400.00	PASS

**DH 3**

CH Mid:  $1.775 * (1600/4)/79 * 31.6 = 284.000$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.775	284.000	31.60	400.00	PASS

**DH 5**

CH Mid:  $3.027 * (1600/6)/79 * 31.6 = 322.880$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.027	322.880	31.60	400.00	PASS




**Test Plot**

**GFSK**

**DH 1**

**(CH Mid)**


Agilent 19:11:20 Dec 8, 2011

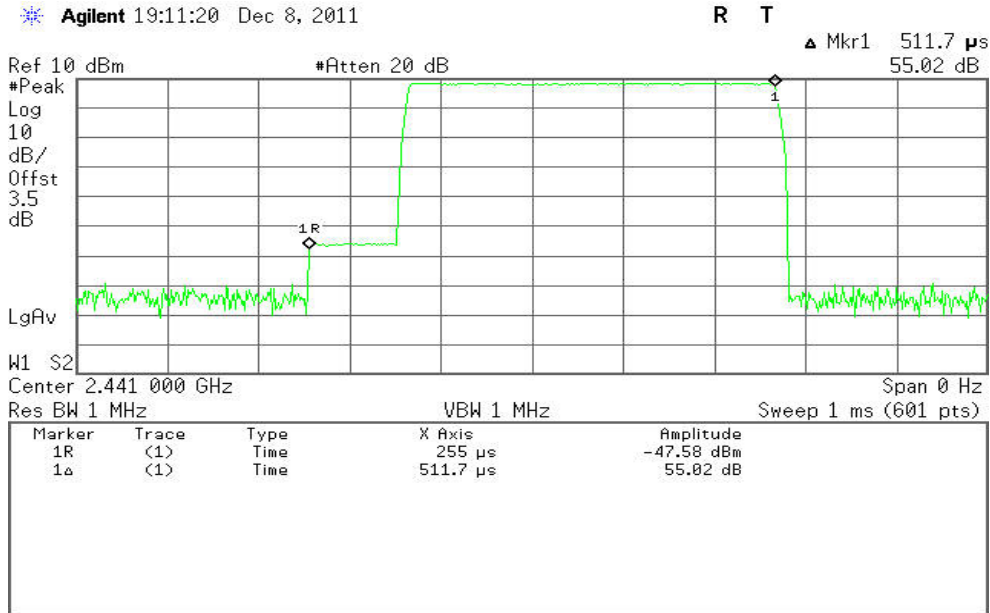

**DH 3**

**(CH Mid)**

Agilent 19:12:48 Dec 8, 2011

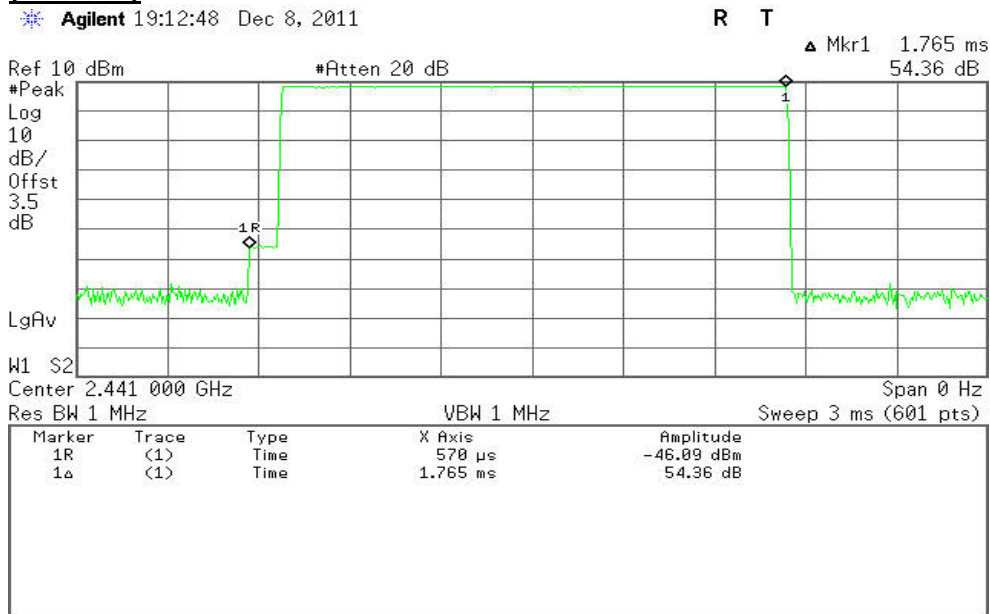




**DH 5**

**(CH Mid)**

Agilent 19:13:42 Dec 8, 2011

R T

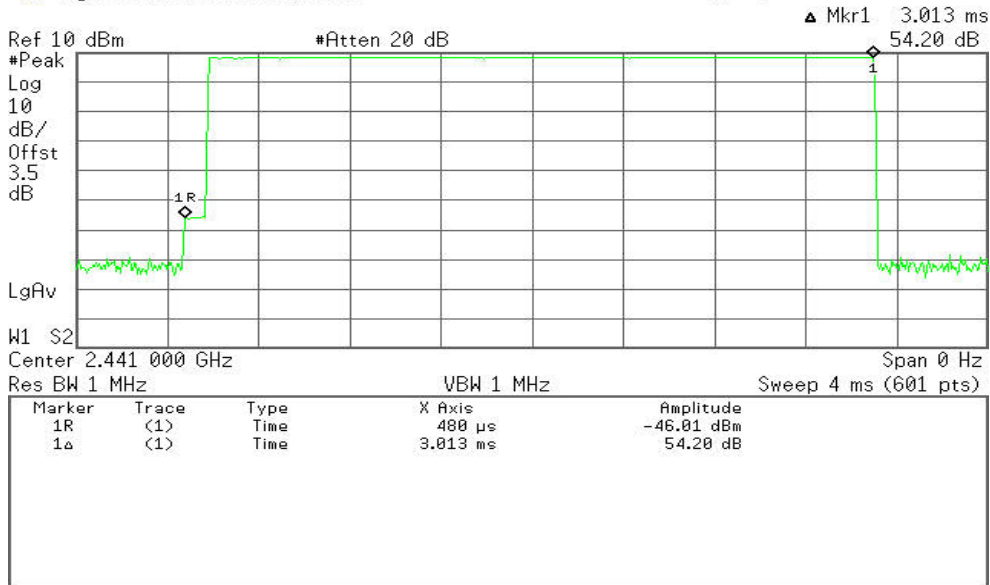




Test Plot  
8DPSK

DH 1

(CH Mid)

Agilent 19:07:17 Dec 8, 2011

R T

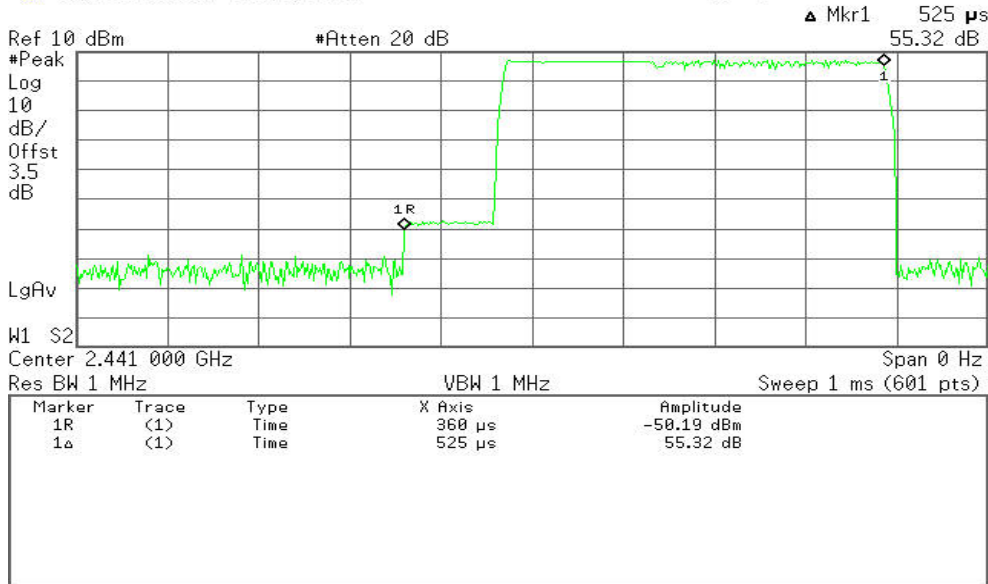


DH 3

(CH Mid)

Agilent 19:09:07 Dec 8, 2011

R T

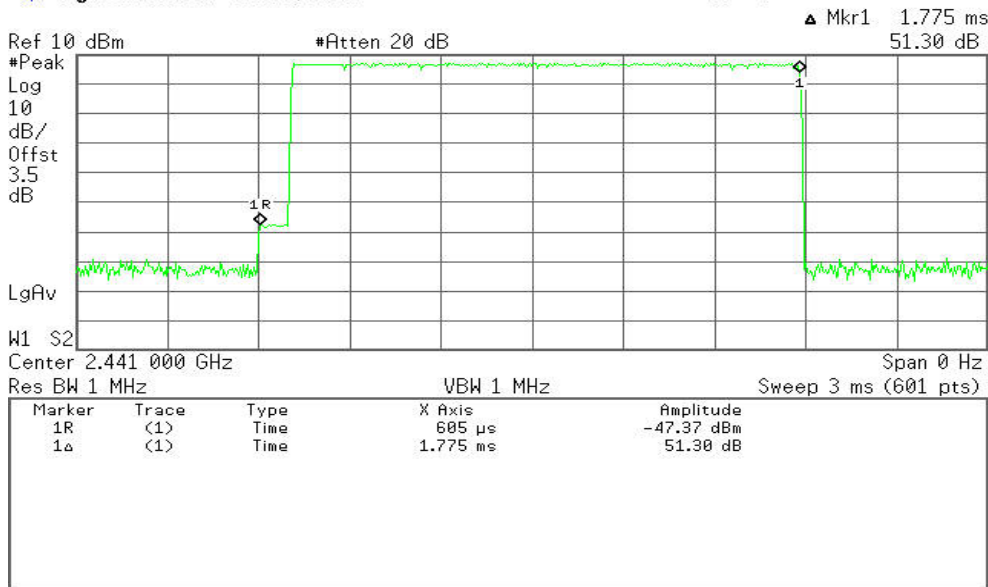




DH 5

(CH Mid)

Agilent 19:10:17 Dec 8, 2011

R T

Mkr1 3.027 ms

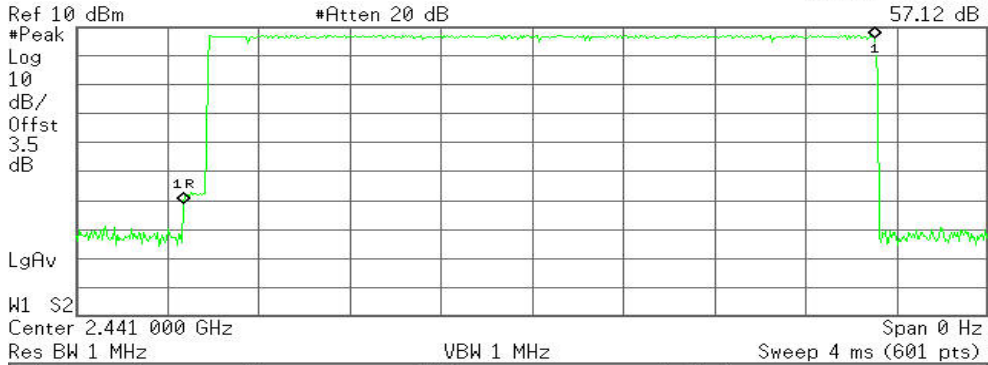

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	473.3 μs	-51.85 dBm
1Δ	(1)	Time	3.027 ms	57.12 dB



## 6.8 SPURIOUS EMISSIONS

### 6.8.1. Conducted Measurement

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*






Test Plot ( GFSK )

CH Low

30MHz ~2.9GHz

Agilent 19:47:37 Dec 8, 2011


R T

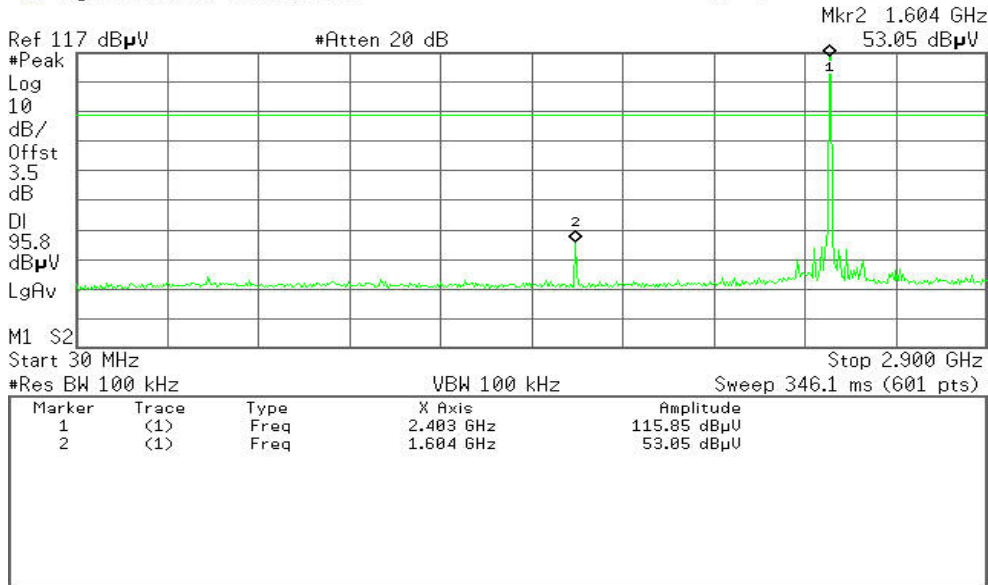

2.9MHz ~26.5GHz

Agilent 19:48:16 Dec 8, 2011

R T

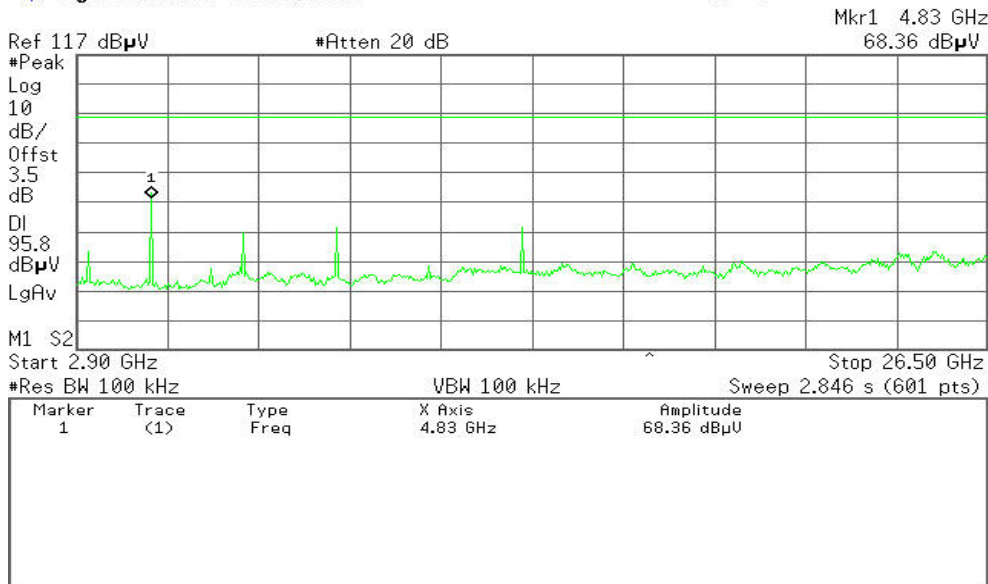




CH Mid

30MHz ~ 2.9GHz

Agilent 12:37:56 Dec 9, 2011


R T

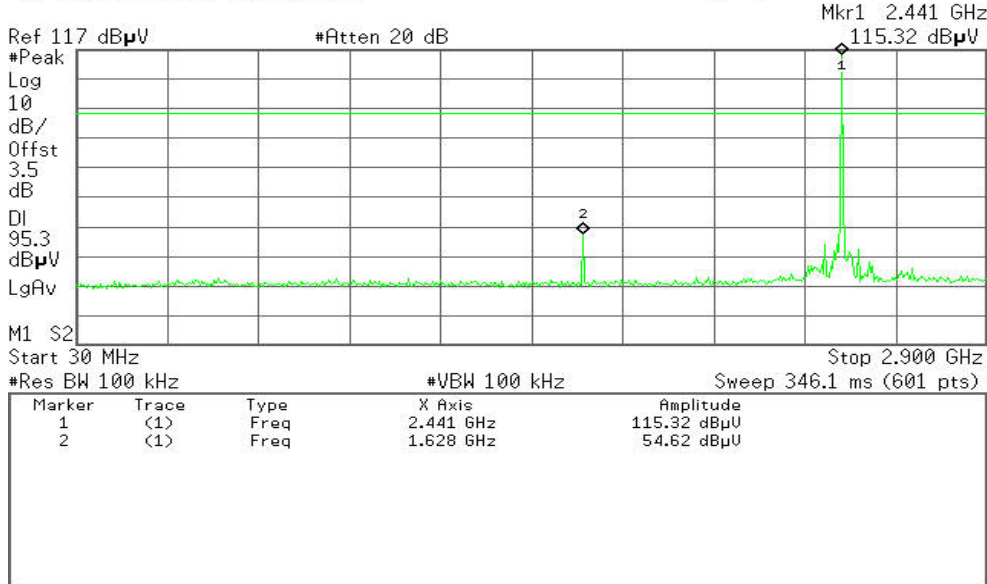

2.9GHz ~ 26.5GHz

Agilent 12:38:39 Dec 9, 2011

R T

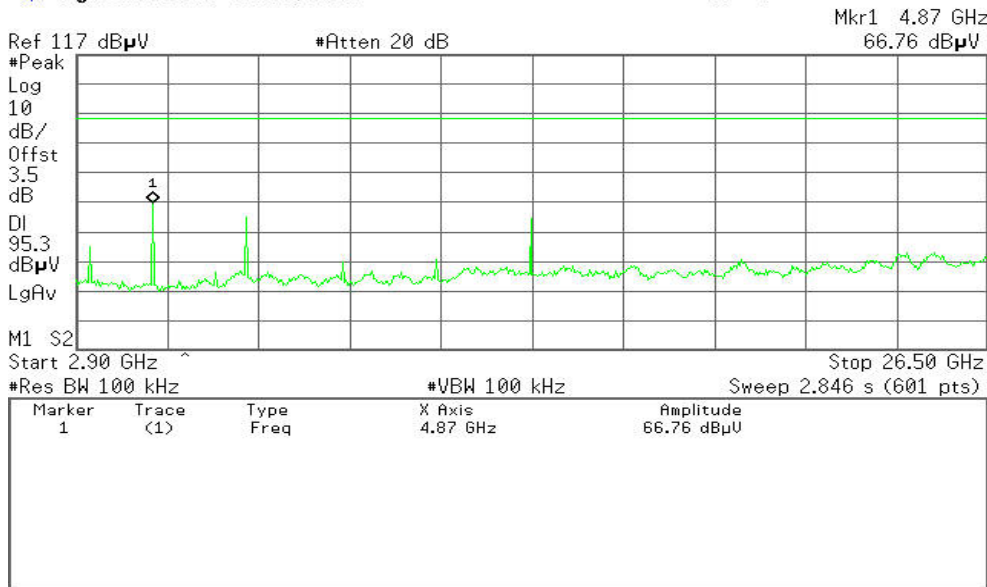




**CH High**

**30MHz ~ 2.9GHz**

Agilent 12:39:54 Dec 9, 2011


R T

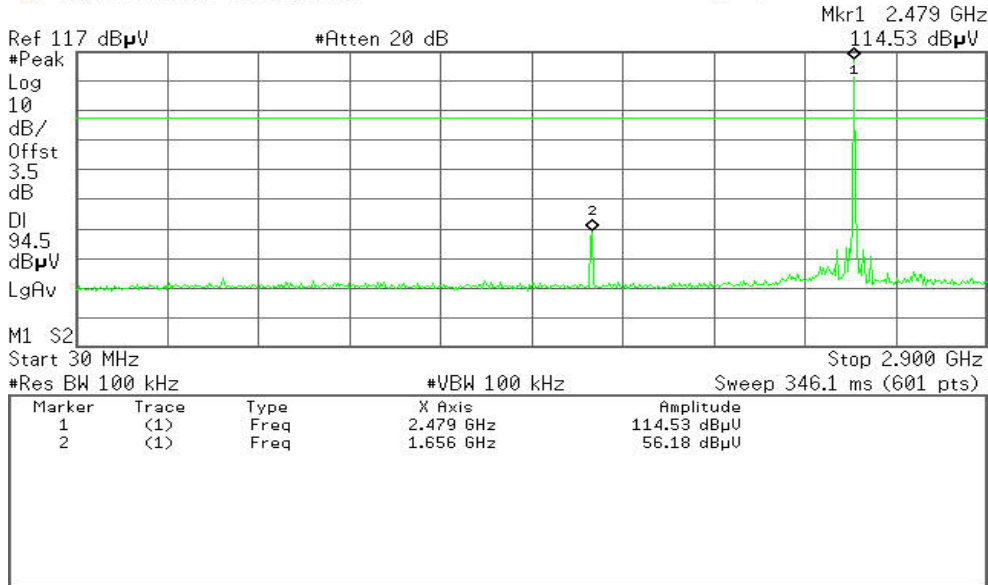

**2.9GHz ~ 26.5GHz**

Agilent 12:40:31 Dec 9, 2011

R T

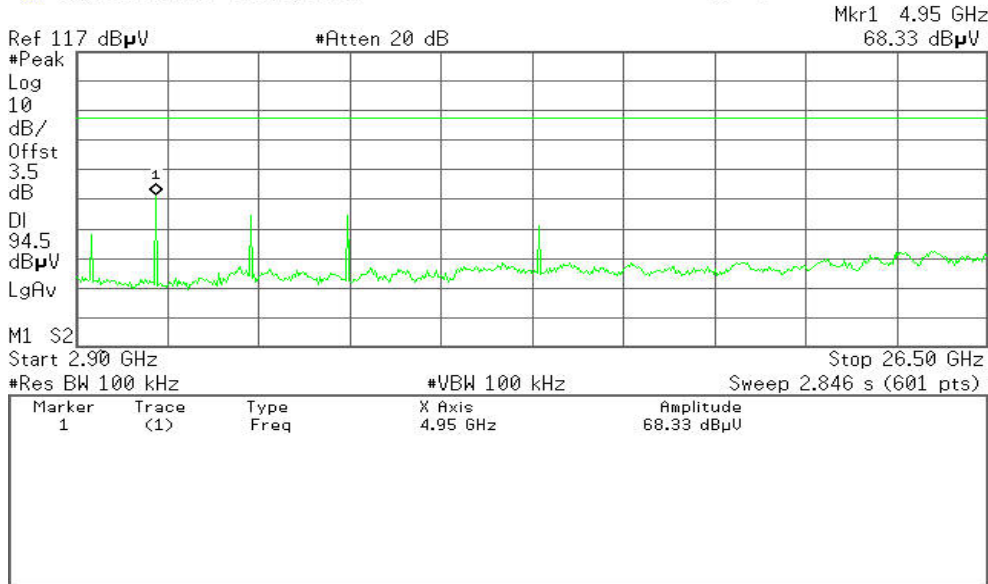




Test Plot (8DPSK )

CH Low

30MHz ~2.9GHz

Agilent 12:35:36 Dec 9, 2011


R T

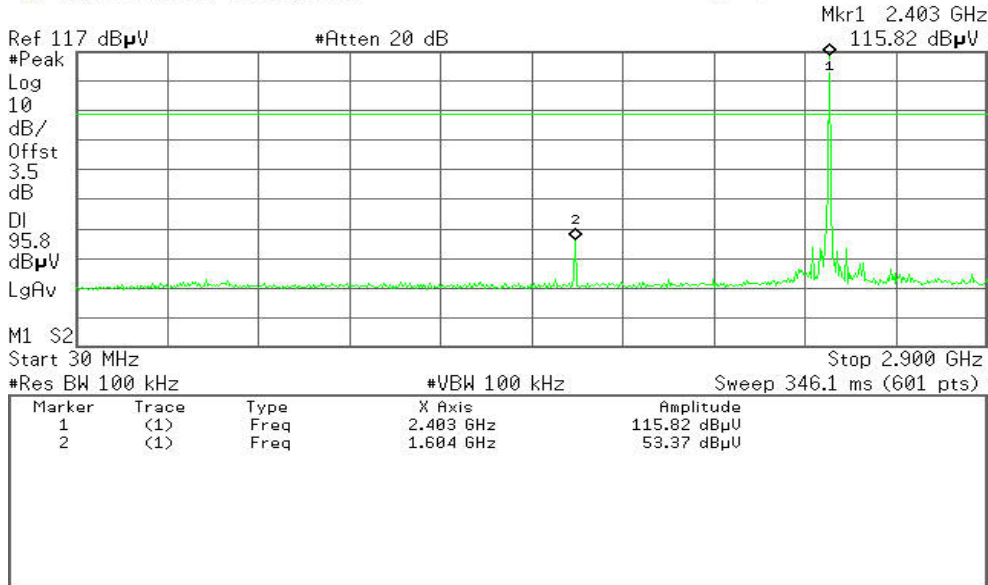

2.9MHz ~26.5GHz

Agilent 12:36:23 Dec 9, 2011

R T

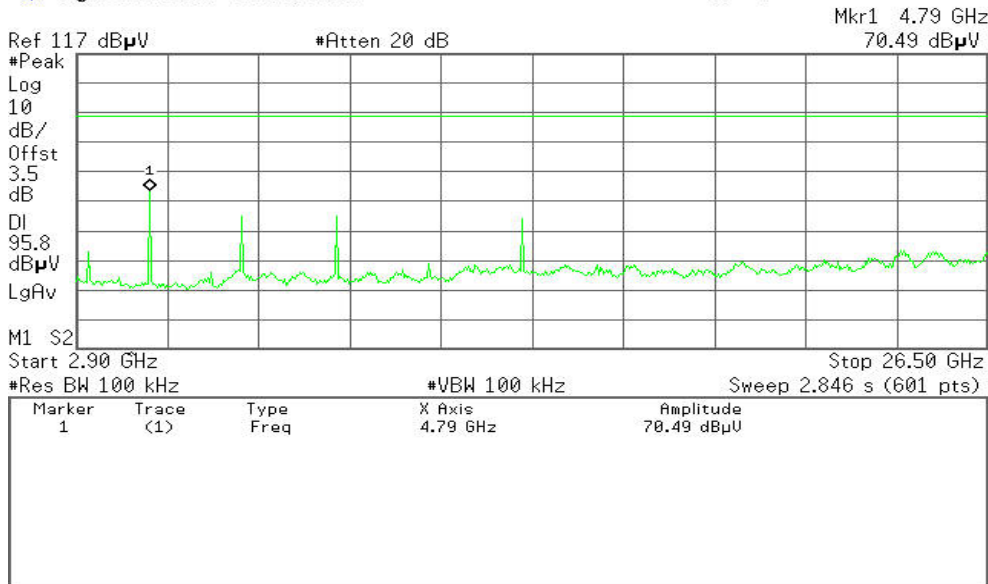




CH Mid

30MHz ~ 2.9GHz

Agilent 12:29:59 Dec 9, 2011


R T

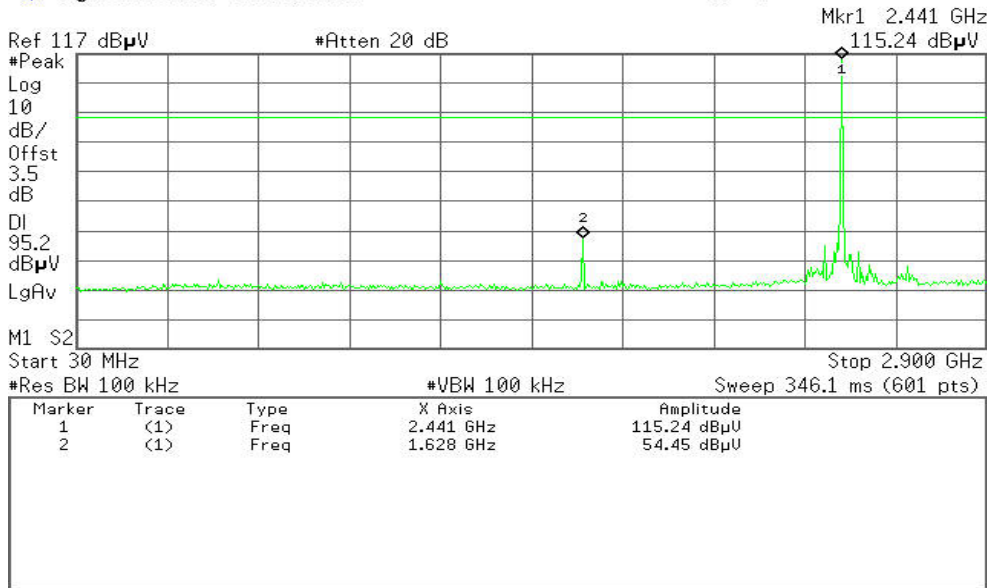

2.9GHz ~ 26.5GHz

Agilent 12:31:07 Dec 9, 2011

R T

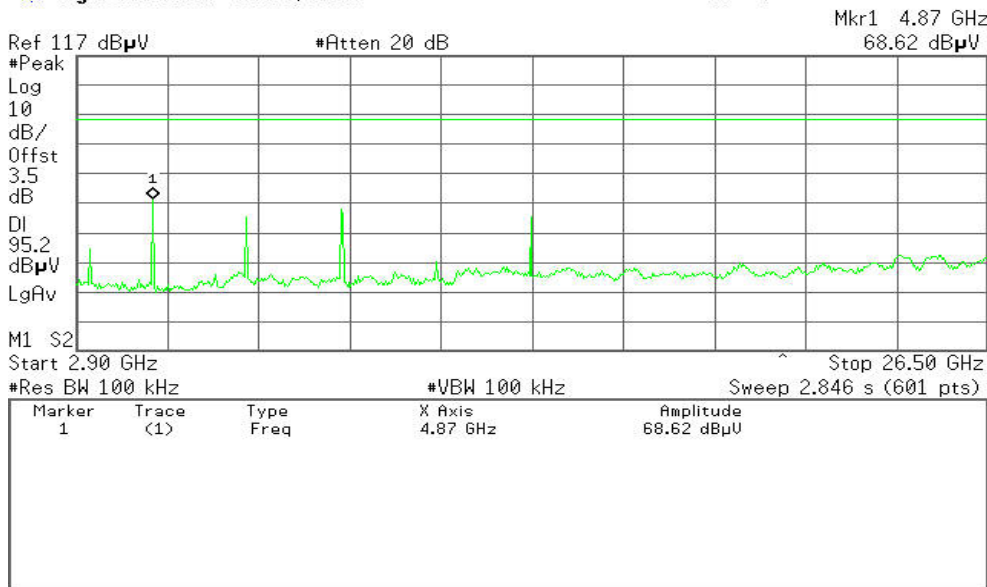




CH High

30MHz ~ 2.9GHz

Agilent 12:33:01 Dec 9, 2011


R T

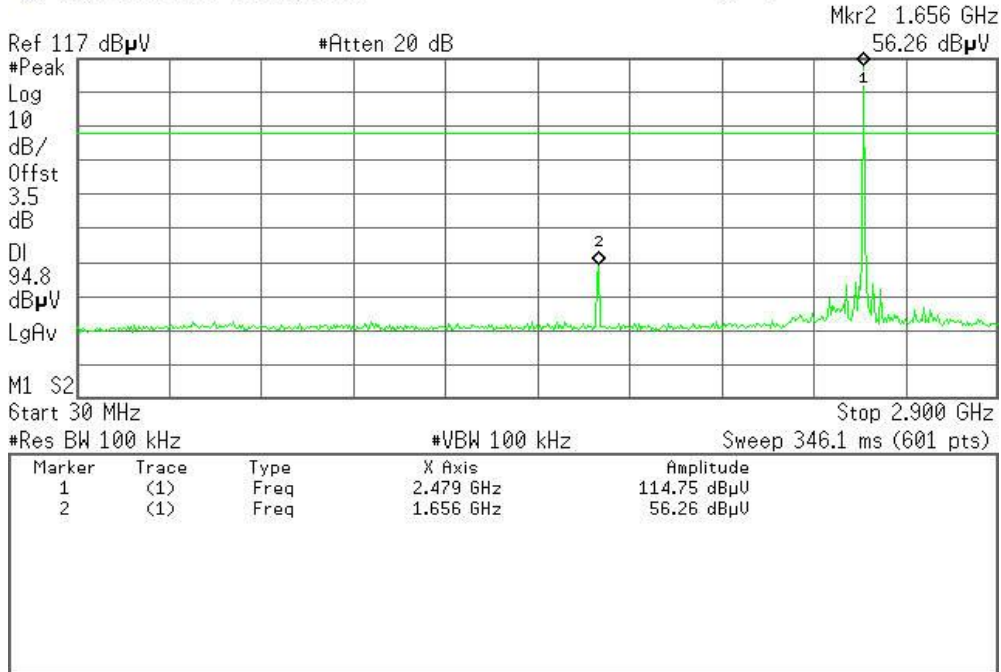

2.9GHz ~ 26.5GHz

Agilent 12:34:19 Dec 9, 2011

R T

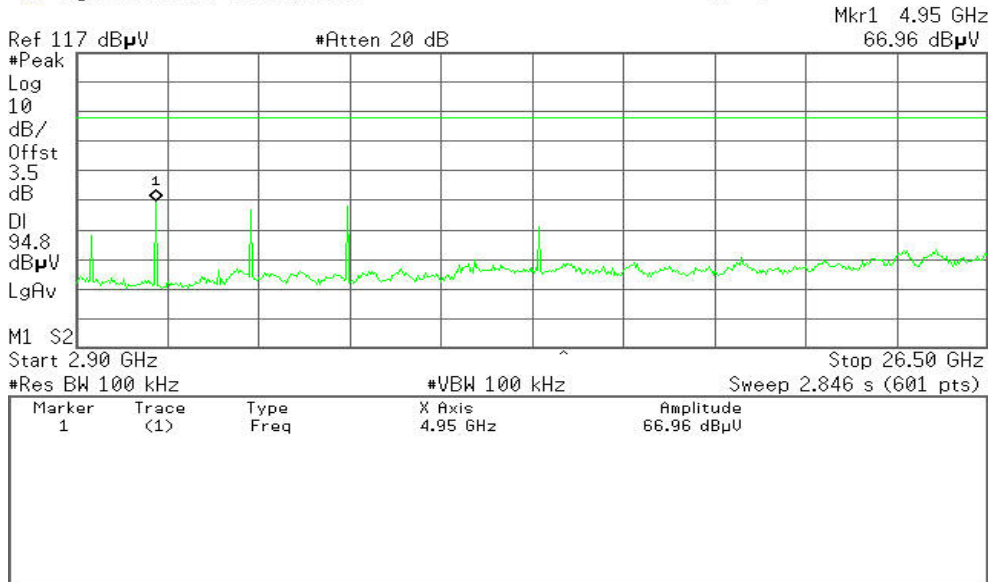



### 6.8.2. Radiated Emissions

#### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dBuV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



**MEASUREMENT EQUIPMENT USED**

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/19/2011	03/19/2012
Amplifier	MITEQ	AM-1604-3000	1411843	03/18/2011	03/18/2012
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2011	03/18/2012
Bilog Antenna	SCHAFFNER	CBL6143	5082	06/03/2011	06/03/2012
Horn Antenna	SCHWARZBECK	BBHA9120D	D286	03/19/2011	03/19/2012
Loop Antenna	A. R. A	PLA-1030/B	1029	03/19/2011	03/19/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


**Remark:** Each piece of equipment is scheduled for calibration once a year.






**Test Configuration**

**Below 1 GHz**

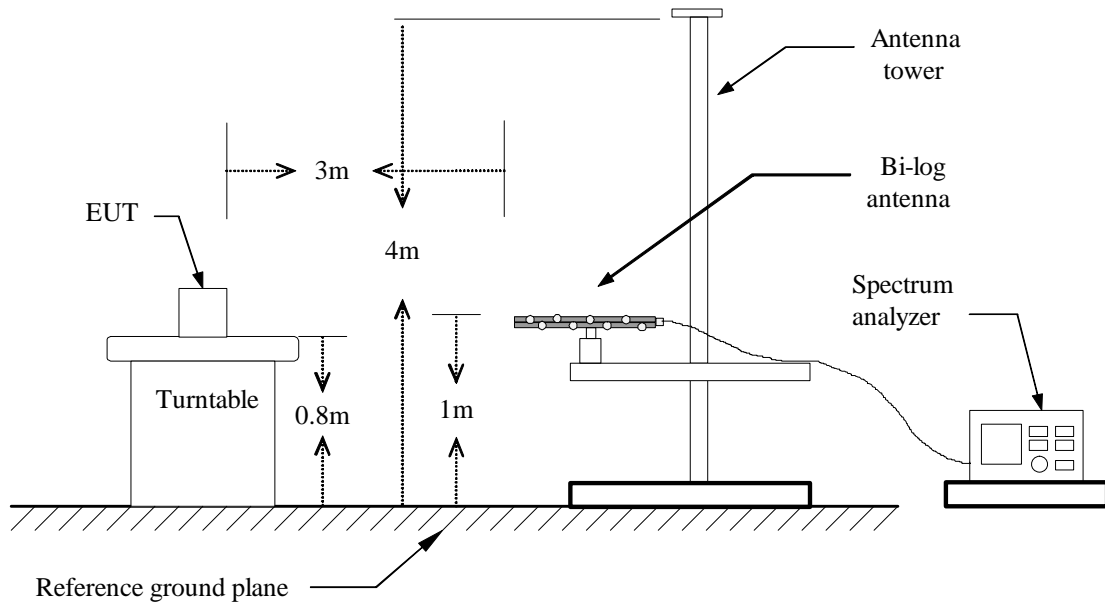

**Above 1 GHz**

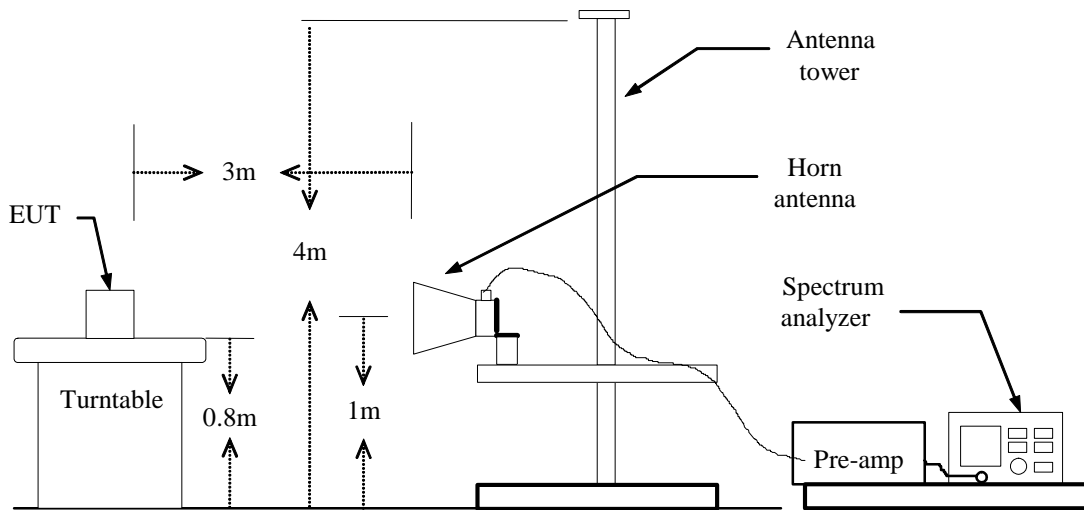



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: TX

Test Date: December 13, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Table with 8 columns: Frequency (MHz), Reading (dBuV), Correction Factor (dB/m), Result (dBuV/m), Limit (dBuV/m), Margin (dB), Antenna Pole (V/H), Remark. It contains two sets of data rows for various frequencies.

\*\*Remark: No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

- 1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Receiver reading
Correction Factor(dB/m) = Antenna factor + Cable loss - Amplifier gain
Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m) = Limit stated in standard
Margin(dB) = Measured (dBuV/m) - Limits (dBuV/m)
Antenna Pole(V/H) = Current carrying line of reading



Above 1 GHz

GFSK

Operation Mode:

TX(CH Low)

Test Date: December 13, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Table with 8 columns: Frequency (MHz), Reading (dBUV), Correction Factor (dB/m), Result (dBUV/m), Limit (dBUV/m), Margin (dB), Antenna Pole (V/H), Remark. It contains 15 rows of measurement data.

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded...
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode...
4. Spectrum setting:
a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBUV/m) =Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBUV/m) = Limit stated in standard
Margin (dB) = Result (dBUV/m)- Limit (dBUV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: December 12, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1630.0000	49.41	-10.28	39.13	74.00	-34.87	V	Peak
3430.0000	47.90	-4.88	43.02	74.00	-30.98	V	Peak
4885.0000	52.18	-0.38	51.80	74.00	-22.20	V	Peak
5830.0000	45.94	2.64	48.58	74.00	-25.42	V	Peak
6250.0000	45.60	3.79	49.39	74.00	-24.61	V	Peak
6865.0000	45.95	4.33	50.28	74.00	-23.72	V	Peak
2065.0000	48.48	-9.26	39.22	74.00	-34.78	H	Peak
2320.0000	49.48	-9.63	39.85	74.00	-34.15	H	Peak
2950.0000	49.45	-6.30	43.15	74.00	-30.85	H	Peak
4210.0000	45.92	-2.90	43.02	74.00	-30.98	H	Peak
4885.0000	57.18	-0.38	56.80	74.00	-17.20	H	Peak
4885.0000	35.48	-0.38	35.10	54.00	-18.90	H	AVG
6250.0000	45.60	3.79	49.39	74.00	-24.61	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH High)

Test Date: December 13, 2011

Temperature: 24 °C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2035.0000	48.36	-9.27	39.09	74.00	-34.91	V	Peak
2755.0000	48.89	-7.61	41.28	74.00	-32.72	V	Peak
3445.0000	47.79	-4.78	43.01	74.00	-30.99	V	Peak
4960.0000	59.98	-0.14	59.84	74.00	-14.16	V	Peak
4960.0000	37.73	-0.14	37.59	54.00	-16.41	V	AVG
6535.0000	45.63	4.02	49.65	74.00	-24.35	V	Peak
7435.0000	47.33	5.53	52.86	74.00	-21.14	V	Peak
2080.0000	48.67	-9.26	39.41	74.00	-34.59	H	Peak
2695.0000	49.34	-8.00	41.34	74.00	-32.66	H	Peak
3730.0000	47.05	-3.85	43.20	74.00	-30.80	H	Peak
4300.0000	45.24	-2.59	42.65	74.00	-31.35	H	Peak
4960.0000	54.64	-0.14	54.50	74.00	-19.50	H	Peak
4960.0000	35.62	-0.14	35.48	54.00	-18.52	H	AVG
7435.0000	48.54	5.53	54.07	74.00	-19.93	H	Peak
7435.0000	30.95	5.53	36.48	54.00	-17.52	H	AVG

Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum setting:
  - Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading



8DPSK

Operation Mode:

TX(CH Low)

Test Date: December 13, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1735.0000	53.16	-10.20	42.96	74.00	-31.04	V	Peak
2695.0000	49.10	-8.00	41.10	74.00	-32.90	V	Peak
4285.0000	46.93	-2.65	44.28	74.00	-29.72	V	Peak
4810.0000	47.09	-0.62	46.47	74.00	-27.53	V	Peak
6100.0000	45.93	3.38	49.31	74.00	-24.69	V	Peak
7225.0000	45.22	5.03	50.25	74.00	-23.75	V	Peak
1465.0000	49.21	-10.29	38.92	74.00	-35.08	H	Peak
2020.0000	48.76	-9.27	39.49	74.00	-34.51	H	Peak
2980.0000	47.77	-6.10	41.67	74.00	-32.33	H	Peak
3520.0000	46.20	-4.31	41.89	74.00	-32.11	H	Peak
4810.0000	47.41	-0.62	46.79	74.00	-27.21	H	Peak
7225.0000	45.67	5.03	50.70	74.00	-23.30	H	Peak

Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum setting:
  - Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
- Frequency (MHz) = Emission frequency in MHz

Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading

Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)

Pk = Peak Reading

AV. = Average Reading

Remark = Mark Peak Reading or Average Reading



Operation Mode: TX(CH Mid)

Test Date: December 13, 2011

Temperature: 24°C

Tested by: Sunday Hu

Humidity: 52% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1120.0000	49.64	-11.64	38.00	74.00	-36.00	V	Peak
1915.0000	47.86	-9.63	38.23	74.00	-35.77	V	Peak
2695.0000	49.15	-8.00	41.15	74.00	-32.85	V	Peak
3580.0000	46.66	-3.93	42.73	74.00	-31.27	V	Peak
4270.0000	46.06	-2.70	43.36	74.00	-30.64	V	Peak
4885.0000	45.66	-0.38	45.28	74.00	-28.72	V	Peak
1540.0000	49.21	-10.31	38.90	74.00	-35.10	H	Peak
2950.0000	47.49	-6.30	41.19	74.00	-32.81	H	Peak
3385.0000	47.78	-5.10	42.68	74.00	-31.32	H	Peak
4885.0000	50.72	-0.38	50.34	74.00	-23.66	H	Peak
6220.0000	45.57	3.81	49.38	74.00	-24.62	H	Peak
8425.0000	46.50	7.08	53.58	74.00	-20.42	H	Peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)  
 Pk = Peak Reading  
 AV. = Average Reading  
 Remark = Mark Peak Reading or Average Reading





Operation Mode: TX(CH High)
Temperature: 24 °C
Humidity: 52% RH

Test Date: December 13, 2011
Tested by: Sunday Hu
Polarity: Ver. / Hor.

Table with 8 columns: Frequency (MHz), Reading (dBuV), Correction Factor (dB/m), Result (dBuV/m), Limit (dBuV/m), Margin (dB), Antenna Pole (V/H), Remark. It contains two groups of data rows, one for frequencies 1525.0000 to 6925.0000 and another for 2395.0000 to 6970.0000.

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
Pk = Peak Reading
AV. = Average Reading
Remark = Mark Peak Reading or Average Reading



### 6.9 POWERLINE CONDUCTED EMISSIONS

#### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


#### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/19/2011	03/19/2012
LISN	SCHAFFNER	NNB42	2001/001	05/26/2011	05/26/2012
LISN	EMCO	3825/2	8901-1459	03/19/2011	03/19/2012
Temp. / Humidity Meter	VICTOR	VC230	N/A	03/31/2011	03/31/2012
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

**Remark:** Each piece of equipment is scheduled for calibration once a year.



## Test Configuration

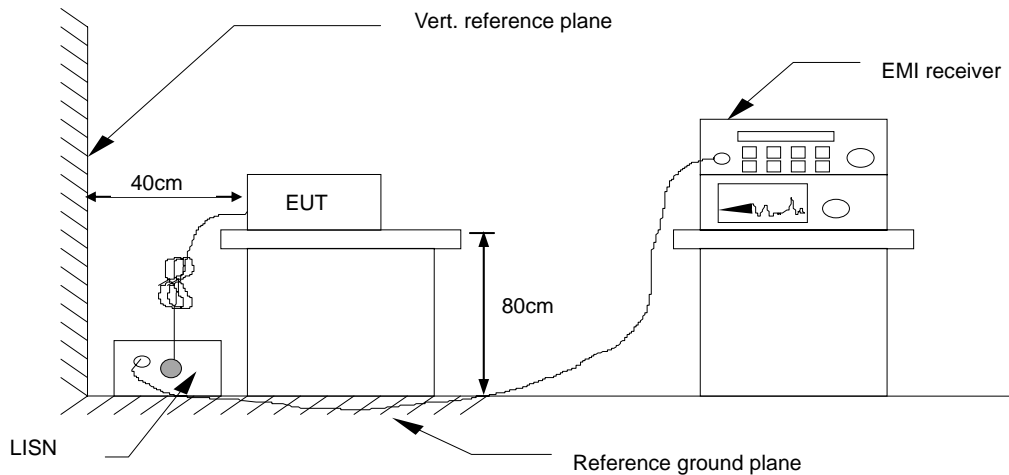

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

Not applicable, since EUT supplied by the DC Power.