



Excellence in Compliance Testing

Certification Test Report

FCC ID: RAB-IM710-200

FCC Rule Part: 15.247

ACS Report Number: 13-0004.W03.1A

Manufacturer: Converge Inc
Model: IM710-200

Test Begin Date: January 16, 2013
Test End Date: March 8, 2013

Report Issue Date: April 12, 2013



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 32 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES.....	8
4	LIST OF TEST EQUIPMENT.....	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207 IC: RSS-GEN 7.2.4.....	10
7.2.1	<i>Measurement Procedure.....</i>	10
7.2.2	<i>Measurement Results</i>	10
7.3	6DB / 99% BANDWIDTH – FCC: SECTION 15.247(A)(2) IC: RSS-210 A8.2(A).....	11
7.3.1	<i>Measurement Procedure.....</i>	11
7.3.2	<i>Measurement Results</i>	11
7.4	MAXIMUM PEAK CONDUCTED OUTPUT POWER LEVEL - FCC SECTION 15.247(B)(3) IC: RSS-210 A8.4(4)	17
7.4.1	<i>Measurement Procedure.....</i>	17
7.4.2	<i>Measurement Results</i>	17
7.5	MAXIMUM UNWANTED EMISSION LEVELS – FCC: SECTION 15.247(D), 15.205 IC: RSS-210 2.2, A8.5	18
7.5.1	<i>Unwanted Emissions into Non-restricted Frequency Bands</i>	18
7.5.1.1	Measurement Procedure.....	18
7.5.1.2	Measurement Results	18
7.5.2	<i>Unwanted Emissions into Restricted Frequency Bands</i>	26
7.5.2.1	Measurement Procedure.....	26
7.5.2.2	Measurement Results	26
7.5.2.3	Sample Calculation:	28
7.6	MAXIMUM POWER SPECTRAL DENSITY IN THE FUNDAMENTAL EMISSION – FCC: SECTION 15.247(E) IC: RSS-210 A8.2(B)	29
7.6.1	<i>Measurement Procedure.....</i>	29
7.6.2	<i>Measurement Results</i>	29
8	CONCLUSION	31

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations.

1.2 Product Description

The IM710-200 IntelliMODULE WiFi is a pluggable radio module that can be plugged into and removed from a compatible device, such as a thermostat chassis.

Technical Information:

Table 1.2-1: General Technical Information

Detail	Description
Frequency Range	802.11b/g/n HT20: 2412 – 2462 MHz
Number of Channels	802.11b/g/n HT20: 11
Modulation Format	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rates	802.11b: 1 – 11 Mbps 802.11g: 6 – 54 Mbps 802.11n HT 20: 6.5 – 65 Mbps
Number of Inputs/Outputs	1T1R
Operating Voltage	3.3VDC
Antenna Type / Gain	SM ceramic antenna, 0.5dBi

Manufacturer Information:

Comverge Inc
5390 Triangle Pkwy Suite 300
Norcross GA, 30092

Test Sample Serial Number: FCC 1

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

Testing was performed to determine worst-case mode of operation with respect to modulation and data rate. The following table details the parameters used for testing.

Table 1.3-1: Test Parameters

Mode of Operation	Data Rate (Mbps)	Channels Evaluated
802.11b	1	1, 6, 11
802.11g	6	1, 6, 11
802.11n HT20	6.5 (MCS0)	1, 6, 11

For the purpose of providing power and test mode programming, the EUT was evaluated connected to a test board.

For radiated emissions the EUT was tested in an orientation typical of final installation.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

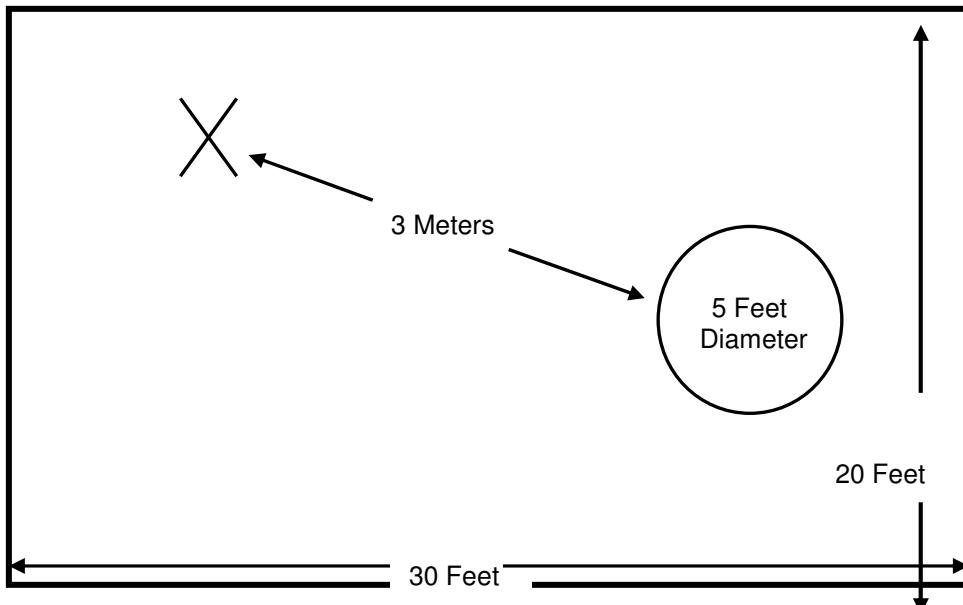


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

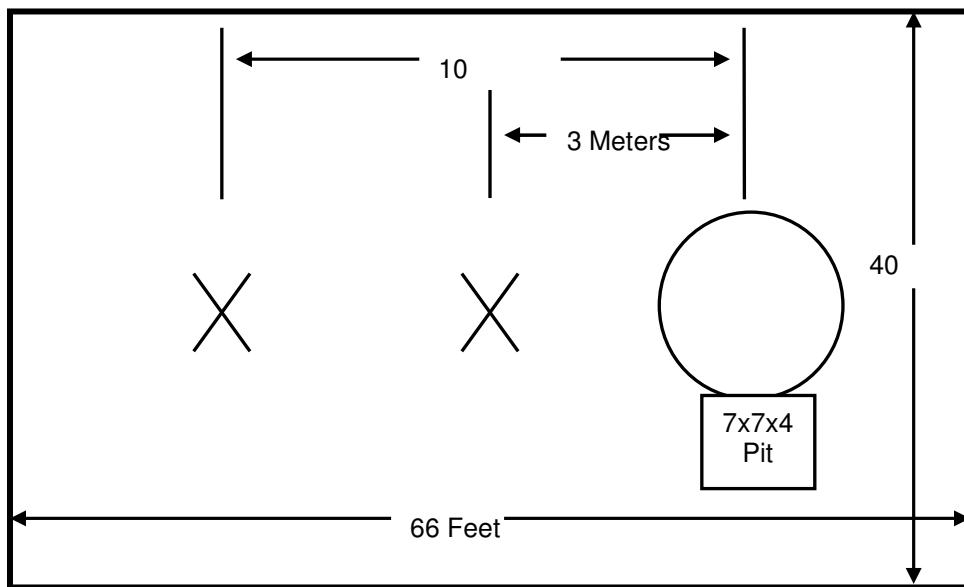


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

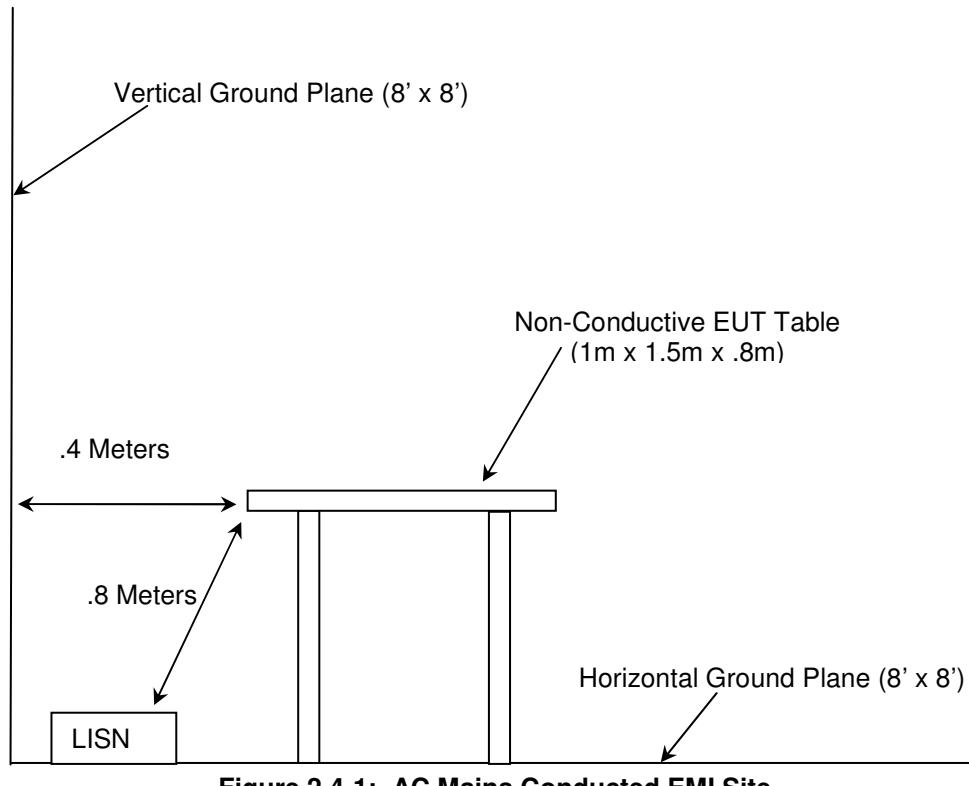


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2013
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2013
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v02 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, October 4, 2012

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment


AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	8/2/2012	8/2/2014
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	8/2/2012	8/2/2014
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/27/2011	4/27/2013
40	EMCO	3104	Antennas	3211	2/11/2011	2/11/2013
40	EMCO	3104	Antennas	3211	2/14/2013	2/14/2015
73	Agilent	8447D	Amplifiers	2727A05624	9/28/2012	9/28/2013
167	ACS	Chamber EMI Cable Set	Cable Set	167	12/17/2012	12/17/2013
267	Agilent	N1911A	Meters	MY45100129	1/23/2012	1/23/2014
268	Agilent	N1921A	Sensors	MY45240184	1/17/2012	1/17/2014
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	8/1/2012	8/1/2013
291	Florida RF Cables	SMRE-200W-12.0				
291	Florida RF Cables	SMRE	Cables	None	11/20/2012	11/20/2013
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	4/2/2012	4/2/2013
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	3/26/2013	3/26/2014
334	Rohde&Schwarz	3160-09	Antennas	49404	11/4/2010	NCR
335	Suhner	SF-102A	Cables	882/2A	8/2/2012	8/2/2013
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/2/2012	8/2/2013
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	8/2/2012	8/2/2013
345	Suhner Sucoflex	102A	Cables	1077/2A	8/2/2012	8/2/2013
412	Electro Metrics	LPA-25	Antennas	1241	7/27/2012	7/27/2014
422	Florida RF	SMS-200AW-72.0				
432	Microwave Circuits	H3G020G4	Cables	805	11/20/2012	11/20/2013
432	Microwave Circuits	H3G020G4	Filters	264066	7/2/2012	7/2/2013

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	Radio Module	Comverge	IntelliMODULE	FCC 4
2	Evaluation Board	Comverge	Usnap Extender Rev 2	N/A
3	Wall Wart Power Supply	Meanwell	GPSU15U-0	N/A

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

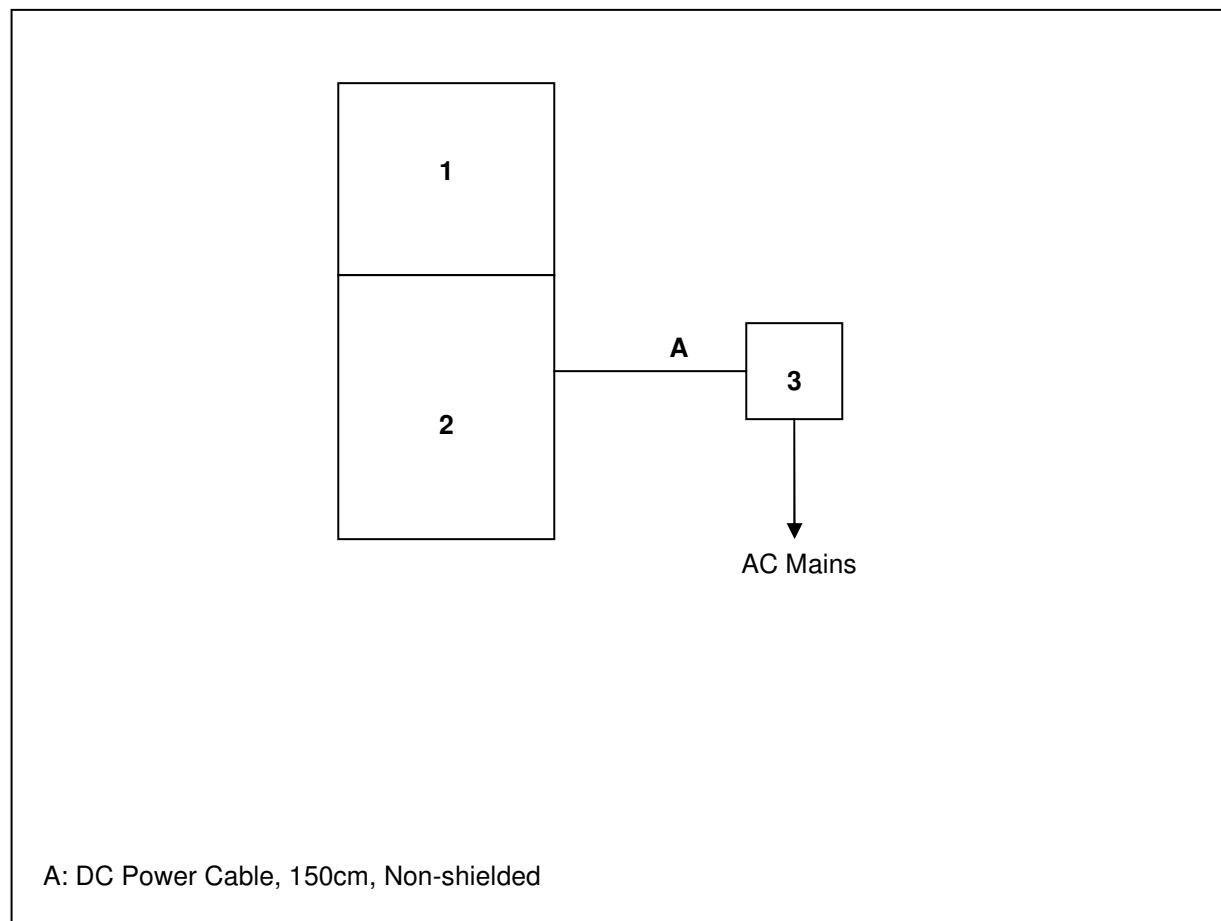

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT utilizes an SM ceramic antenna. The antenna is integral to the device and cannot be removed or replaced by the end user. The gain of the antenna is 0.5dBi.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Results of the test are shown below in and Tables 7.2.2-1 and 7.2.2-2.

Table 7.2.2-1: Conducted EMI Results – Line 1

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
5.00925	8.857	5.031	10.047	18.904	15.078	60	50	41.096	34.922
5.0057	8.933	4.876	10.047	18.98	14.923	60	50	41.02	35.077
3.57101	18.677	16.252	10.022	28.699	26.274	56	46	27.301	19.726
0.51235	16.07	13.216	9.99	26.059	23.206	56	46	29.941	22.794
0.318562	22.7	16.606	9.993	32.693	26.599	61.184	51.184	28.491	24.585
0.154506	36.543	28.408	10.02	46.563	38.429	65.871	55.871	19.308	17.442

Table 7.2.2-2: Conducted EMI Results – Line 2

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
14.0926	13.127	10.05	10.441	23.568	20.491	60	50	36.432	29.509
2.97757	15.28	12.388	10.012	25.292	22.4	56	46	30.708	23.6
2.73643	14.724	11.61	10.009	24.733	21.619	56	46	31.267	24.381
1.21374	14.287	11.35	9.989	24.276	21.339	56	46	31.724	24.661
0.51065	14.89	11.712	9.99	24.879	21.702	56	46	31.121	24.298
0.1641	37.176	29.254	9.996	47.172	39.25	65.597	55.597	18.425	16.347

7.3 6dB / 99% Bandwidth – FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a)

7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v02. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to approximately 1% to 5% of the DTS Bandwidth (6 dB bandwidth), not to exceed 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission, Option 1.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth was set to 3 times the resolution bandwidth. A sampling detector was used.

7.3.2 Measurement Results

Results are shown below in tables 7.3.2-1 to 7.3.2-3 and figures 7.3.2-1 to 7.3.2-18:

Table 7.3.2-1: 6dB / 99% Bandwidth – 802.11b

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	9.55	12.75
2437	9.55	12.65
2462	9.55	12.75



Figure 7.3.2-1: 6dB BW – 2412MHz



Figure 7.3.2-2: 6dB BW – 2437MHz

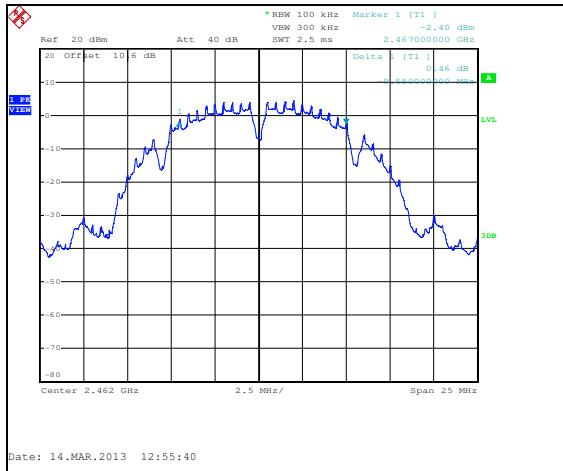


Figure 7.3.2-3: 6dB BW – 2462MHz



Figure 7.3.2-4: 99% OBW – 2412MHz



Figure 7.3.2-5: 99% OBW – 2437MHz

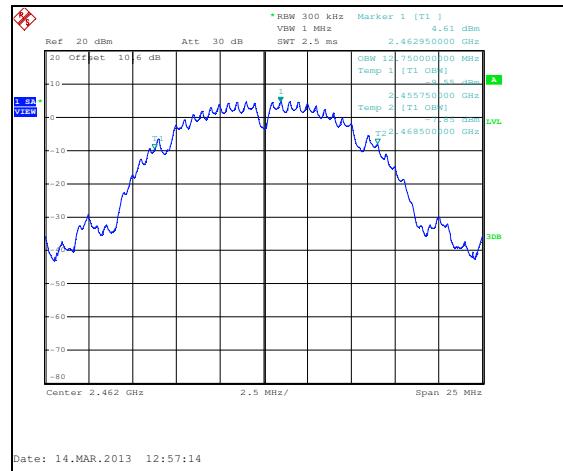
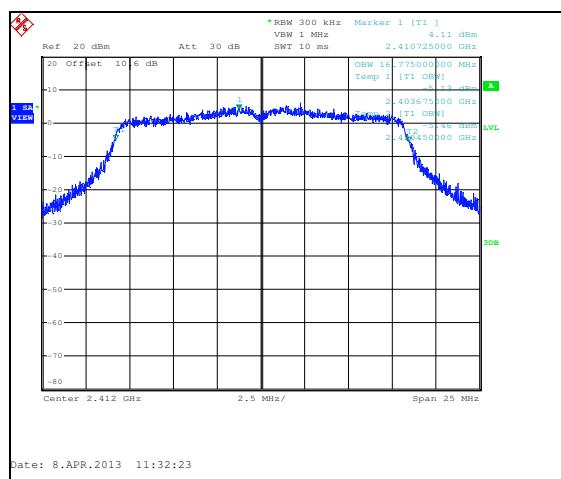
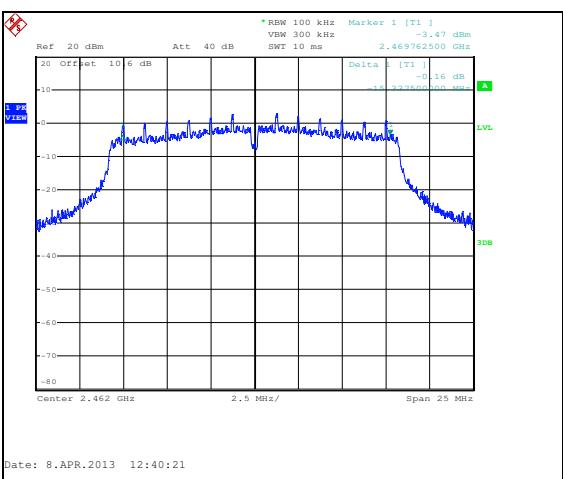
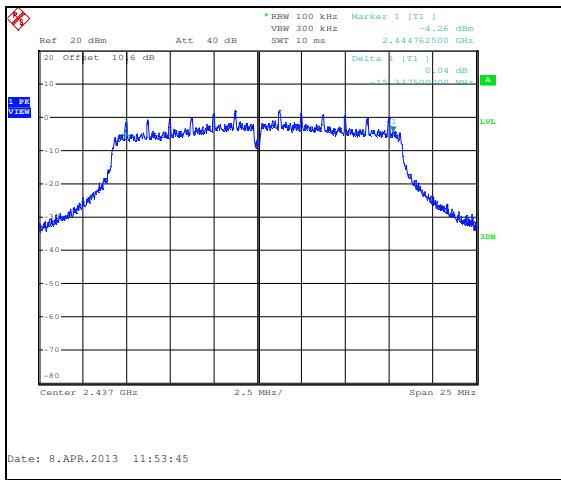
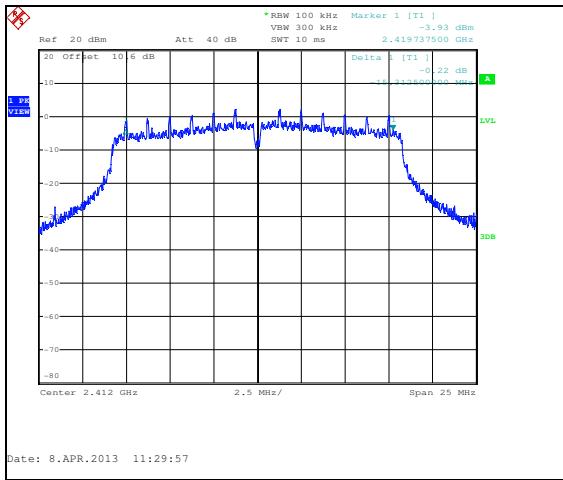


Figure 7.3.2-6: 99% OBW – 2462MHz

Table 7.3.2-2: 6dB / 99% Bandwidth – 802.11g

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	15.31	16.78
2437	15.34	16.78
2462	15.34	16.80



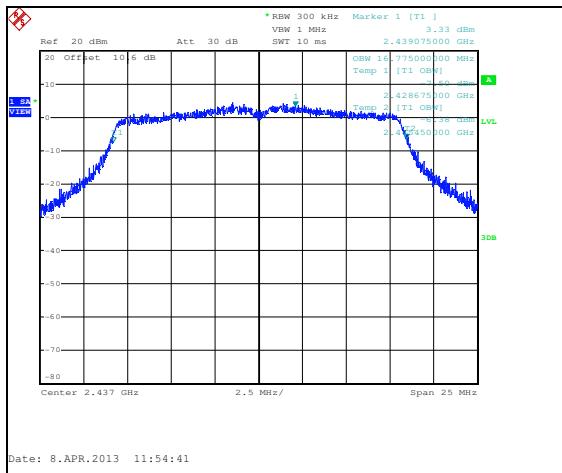


Figure 7.3.2-11: 99% OBW – 2437MHz

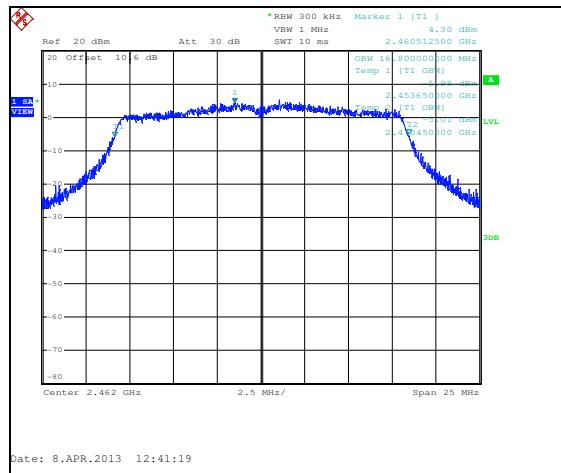


Figure 7.3.2-12: 99% OBW – 2462MHz

Table 7.3.2-3: 6dB / 99% Bandwidth – 802.11n HT20

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2412	15.13	17.83
2437	15.13	17.85
2462	15.15	17.89

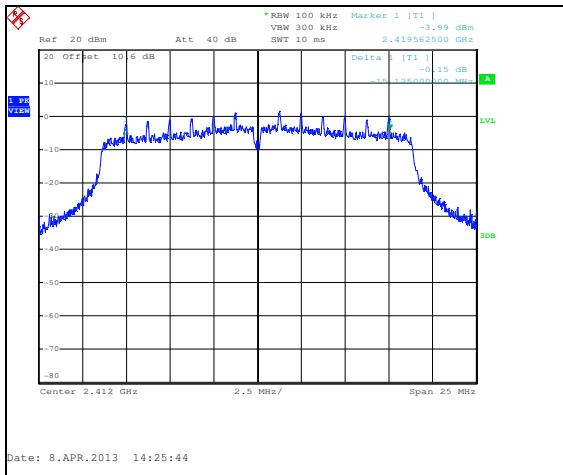


Figure 7.3.2-13: 6dB BW – 2412MHz

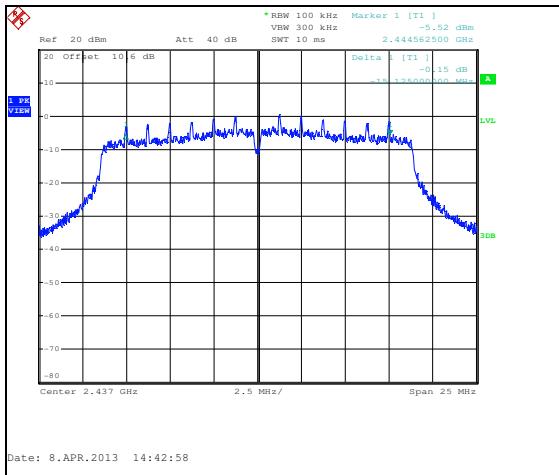


Figure 7.3.2-14: 6dB BW – 2437MHz

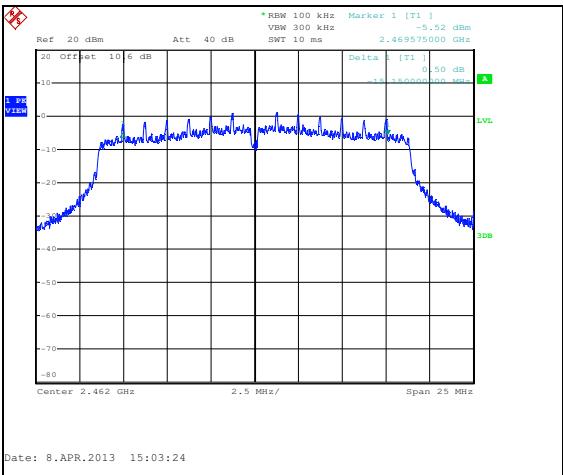


Figure 7.3.2-15: 6dB BW – 2462MHz

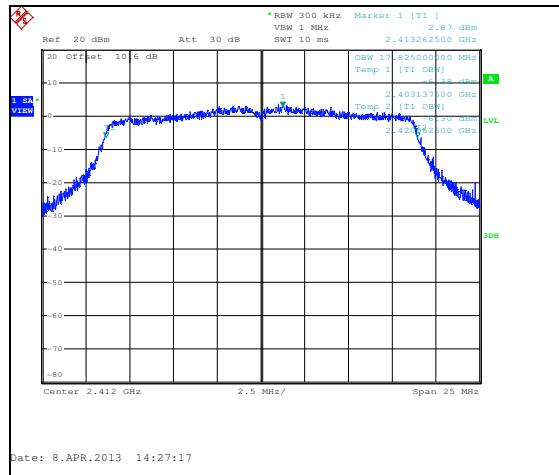


Figure 7.3.2-16: 99% OBW – 2412MHz

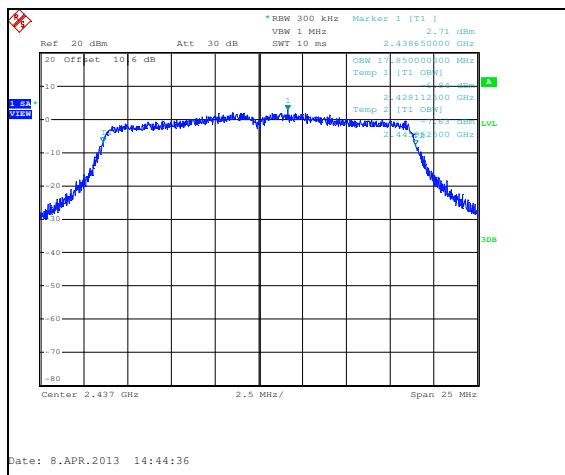


Figure 7.3.2-17: 99% OBW – 2437MHz

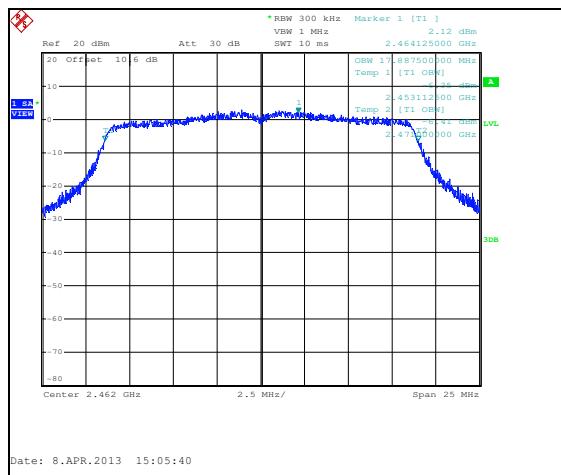


Figure 7.3.2-18: 99% OBW – 2462MHz

7.4 Maximum Peak Conducted Output Power Level - FCC Section 15.247(b)(3) IC: RSS-210 A8.4(4)**7.4.1 Measurement Procedure**

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance v02 Option 3 (Peak Power Meter Method). The RF output of the equipment under test was directly connected to the input of the wideband peak power meter applying suitable attenuation.

7.4.2 Measurement Results

Results are shown below in Table 7.4.2-1 to 7.4.2-3.

Table 7.4.2-1: Maximum Peak Conducted Output Power – 802.11b

Frequency (MHz)	Output Power (dBm)
2412	17.14
2437	17.35
2462	17.20

Table 7.4.2-2: Maximum Peak Conducted Output Power – 802.11g

Frequency (MHz)	Output Power (dBm)
2412	22.41
2437	22.65
2462	22.44

Table 7.4.2-3: Maximum Peak Conducted Output Power – 802.11n HT20

Frequency (MHz)	Output Power (dBm)
2412	21.51
2437	21.68
2462	21.58

7.5 Maximum Unwanted Emission Levels – FCC: Section 15.247(d), 15.205 IC: RSS-210 2.2, A8.5

7.5.1 Unwanted Emissions into Non-restricted Frequency Bands



7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Meas Guidance v02. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to \geq 300 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

RF Conducted Emissions are displayed in Figures 7.5.1.2-1 through 7.5.1.2-33.

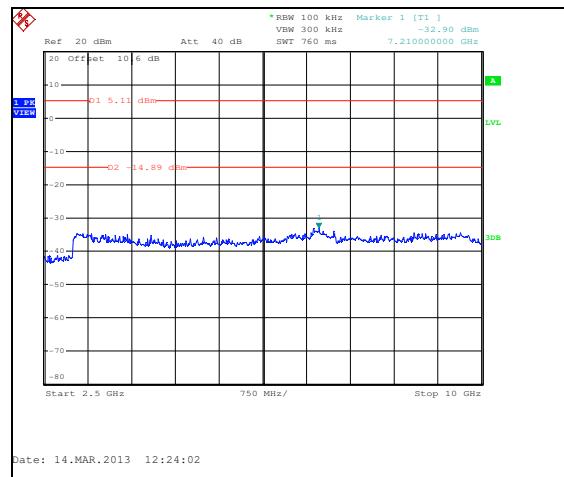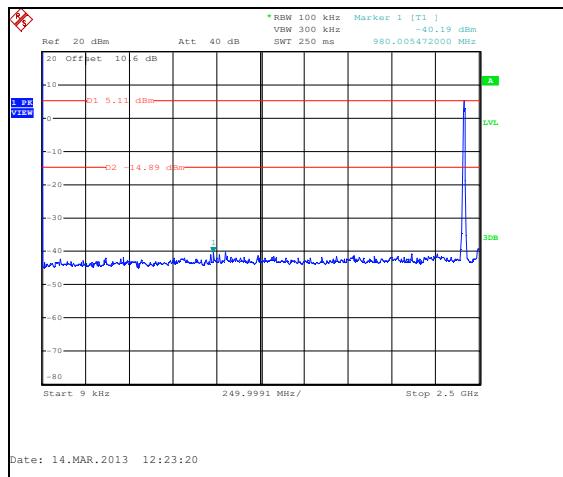

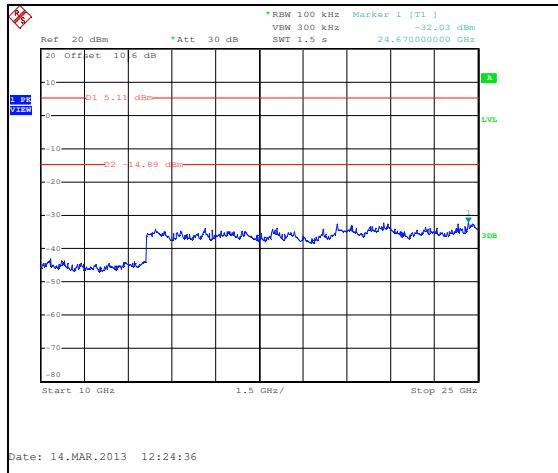


Figure 7.5.1.2-3: Conducted Emissions – 802.11b
2412 MHz

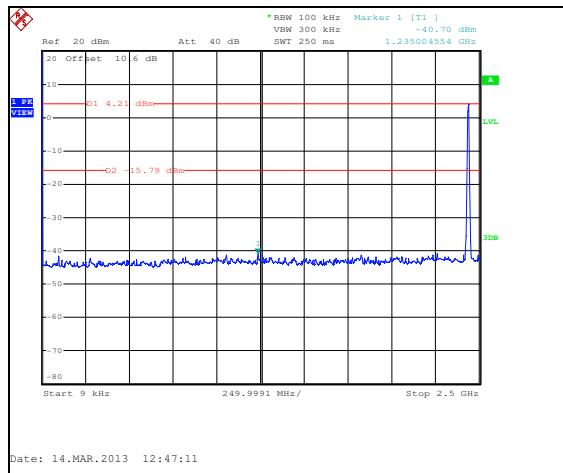


Figure 7.5.1.2-4: Conducted Emissions – 802.11b
2437 MHz

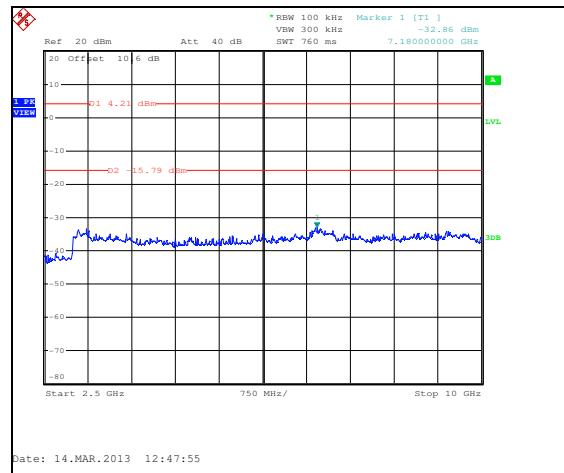


Figure 7.5.1.2-5: Conducted Emissions – 802.11b
2437 MHz

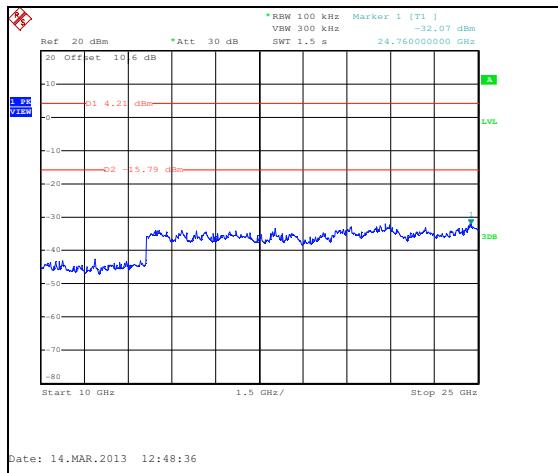
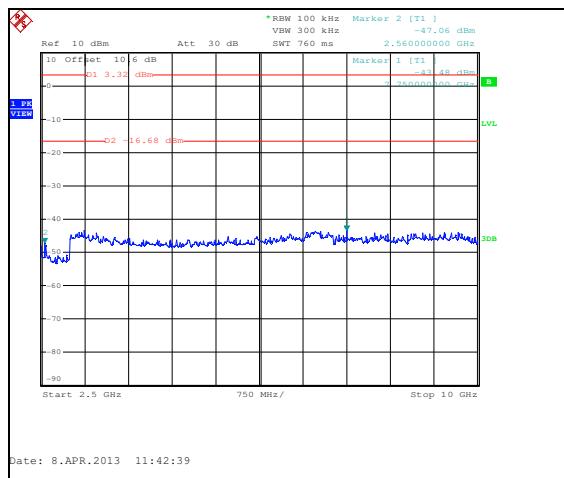
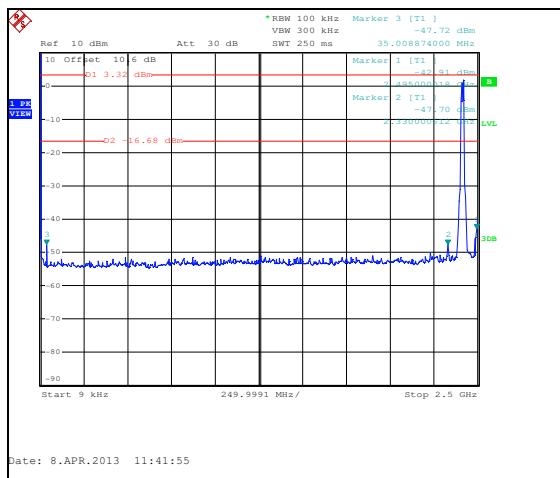
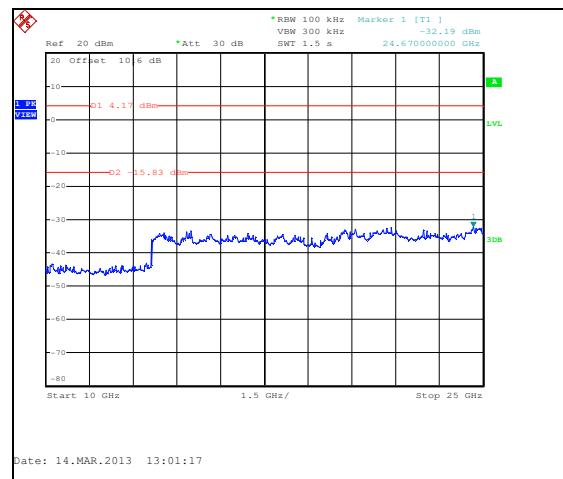
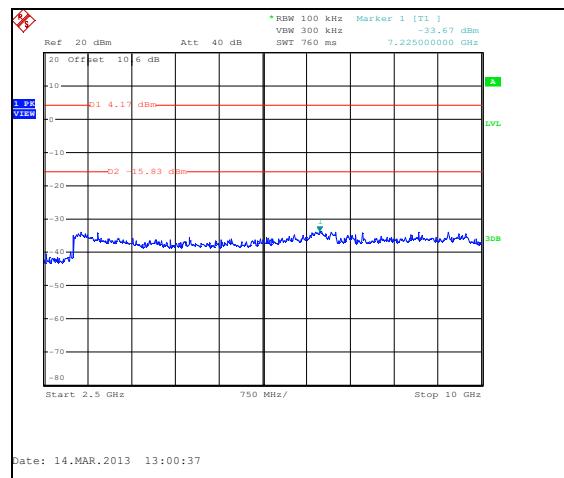
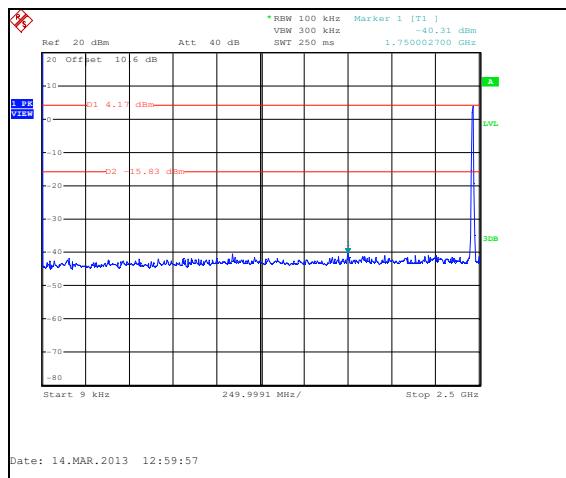


Figure 7.5.1.2-6: Conducted Emissions – 802.11b
2437 MHz



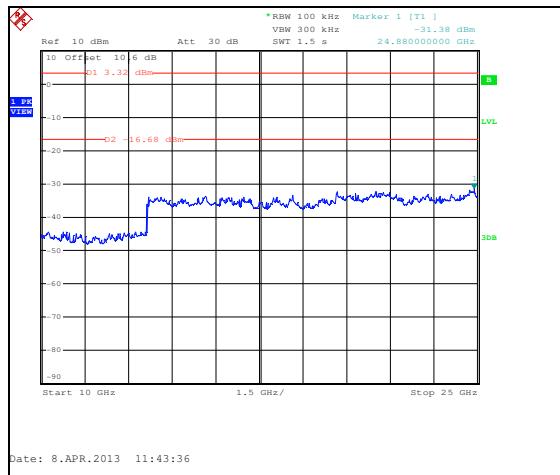


Figure 7.5.1.2-12: Conducted Emissions – 802.11g
2412 MHz

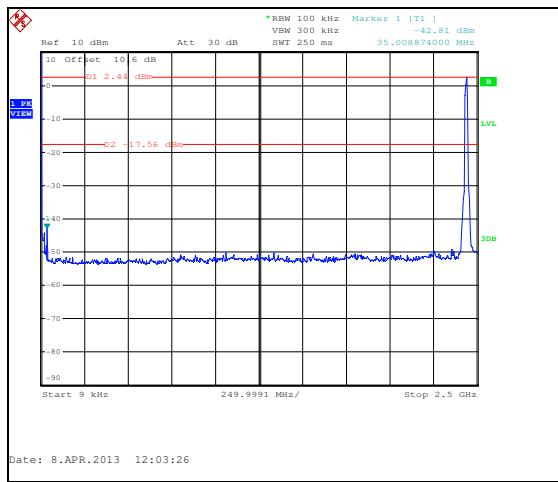


Figure 7.5.1.2-13: Conducted Emissions – 802.11g
2437 MHz

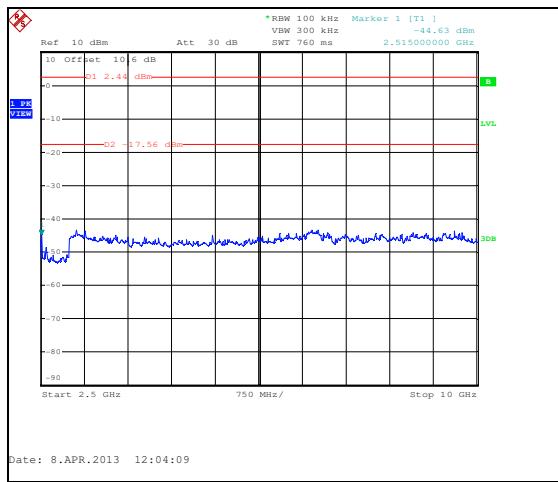


Figure 7.5.1.2-14: Conducted Emissions – 802.11g
2437 MHz

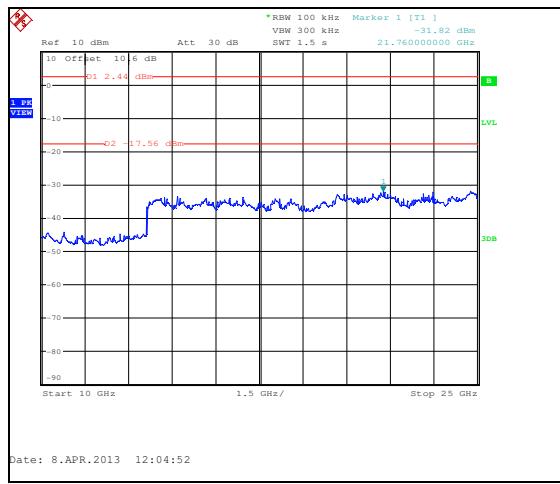
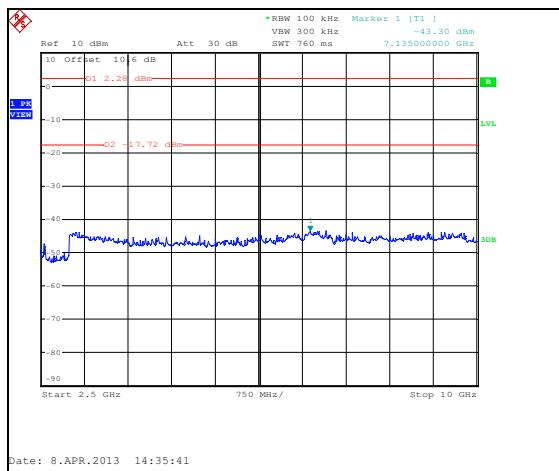
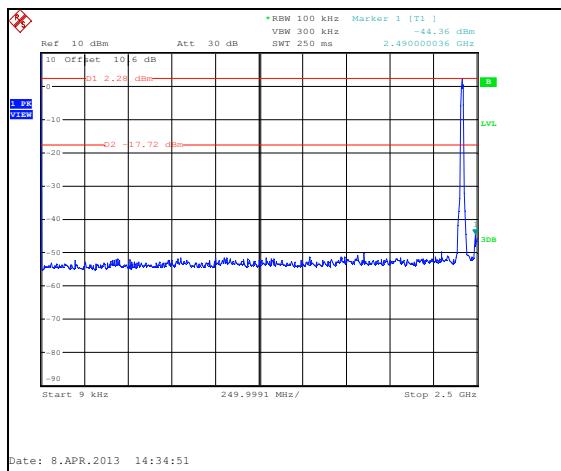
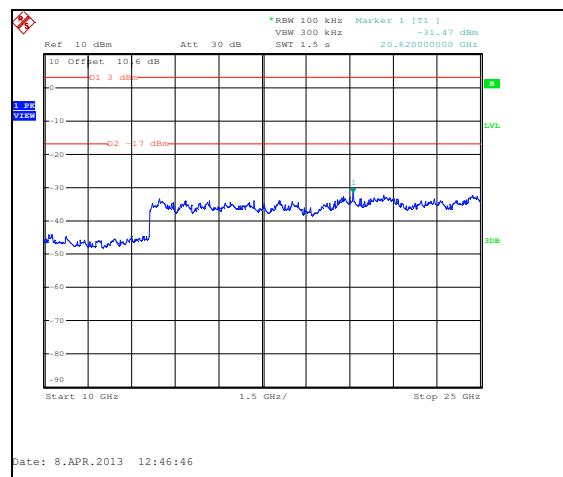
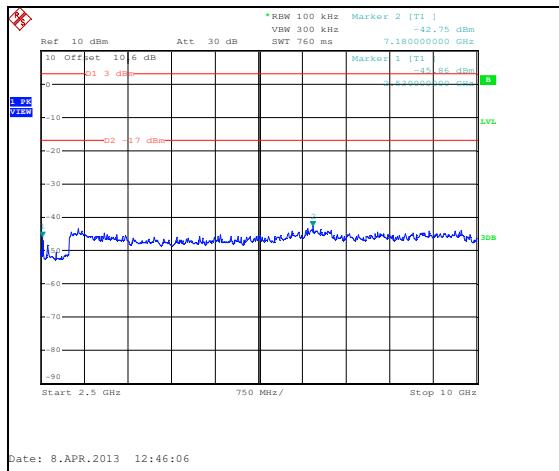
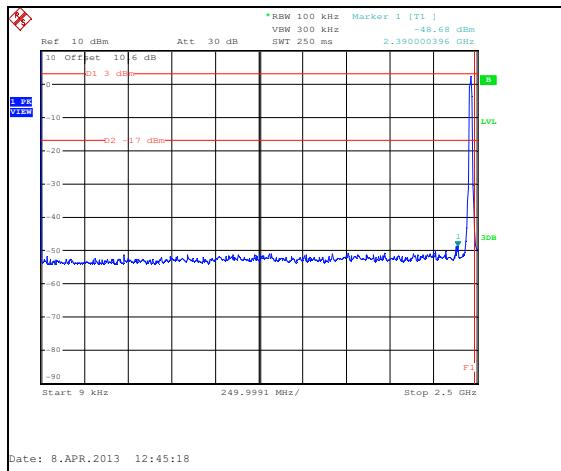


Figure 7.5.1.2-15: Conducted Emissions – 802.11g
2437 MHz



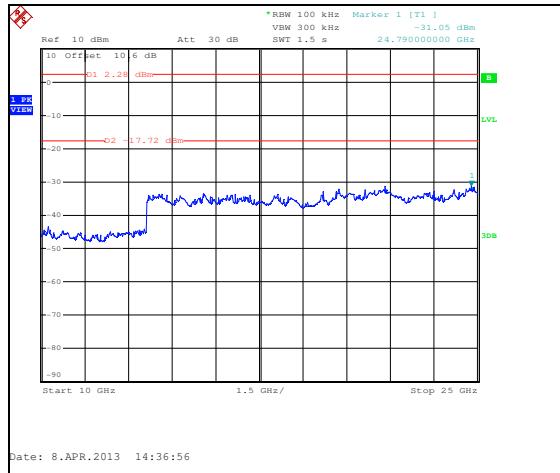


Figure 7.5.1.2-21: Conducted Emissions – 802.11nHT20
2412 MHz

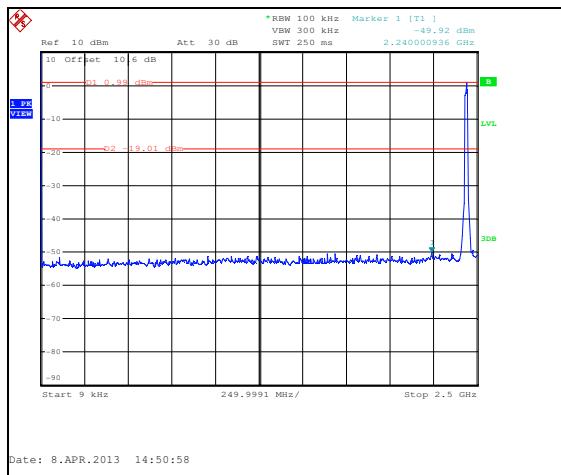


Figure 7.5.1.2-22: Conducted Emissions – 802.11nHT20
2437 MHz

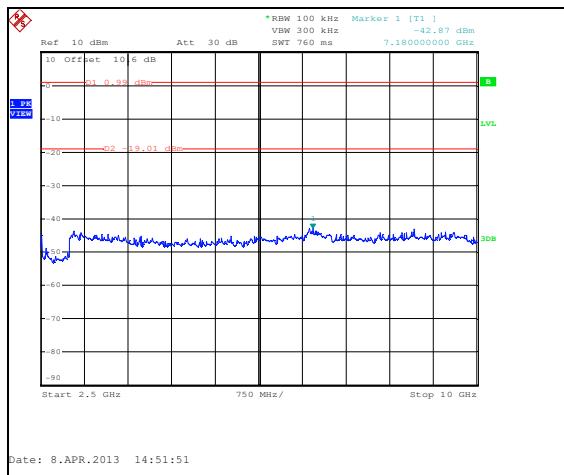


Figure 7.5.1.2-23: Conducted Emissions – 802.11nHT20
2437 MHz

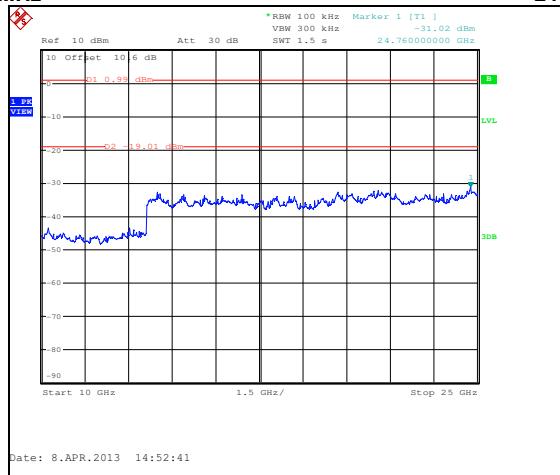


Figure 7.5.1.2-24: Conducted Emissions – 802.11nHT20
2437 MHz

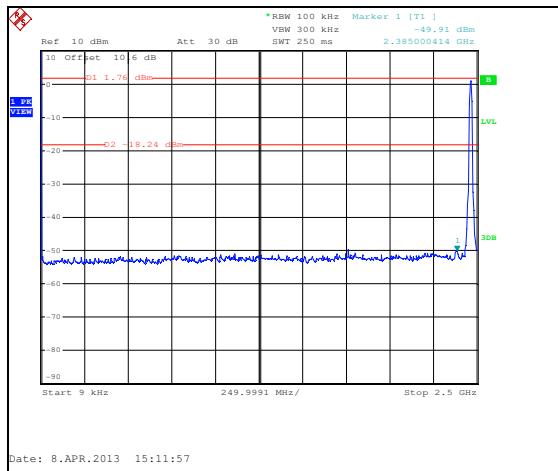


Figure 7.5.1.2-25: Conducted Emissions – 802.11nHT20 2462 MHz

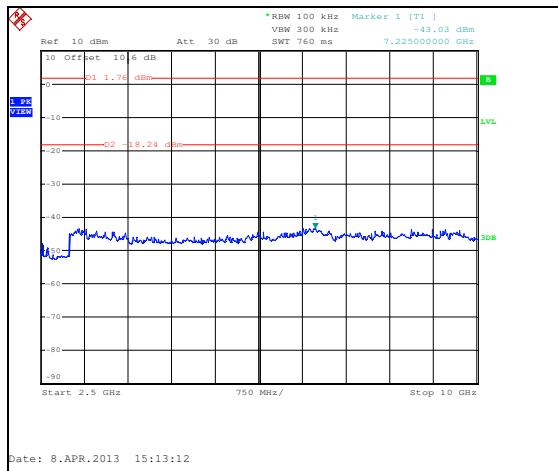


Figure 7.5.1.2-26: Conducted Emissions – 802.11nHT20 2462 MHz

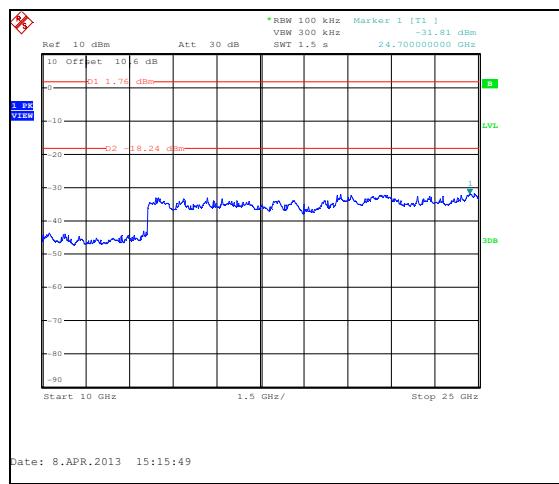


Figure 7.5.1.2-27: Conducted Emissions – 802.11nHT20 2462 MHz

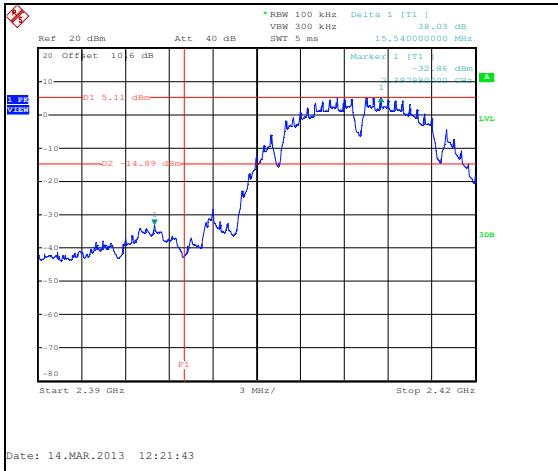


Figure 7.5.1.2-28: Lower Band-edge – 802.11b 2412 MHz

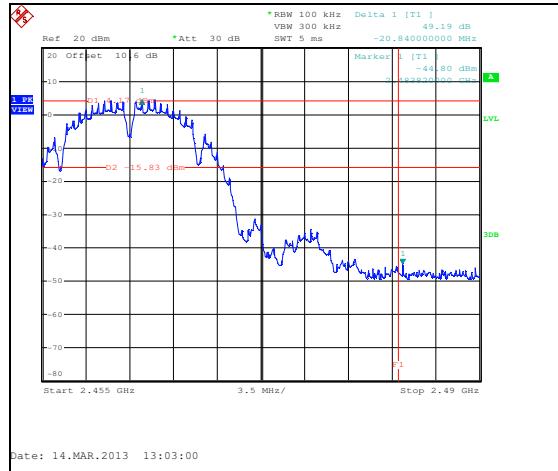
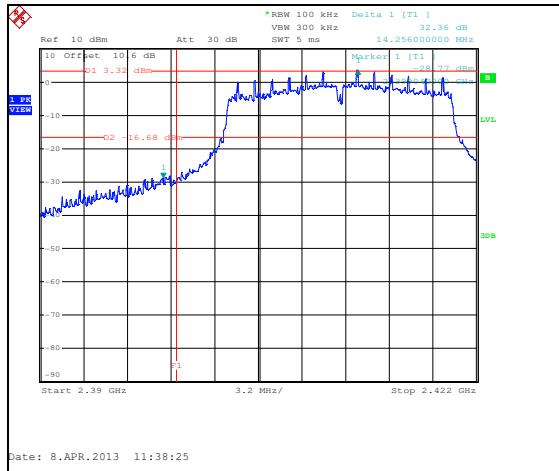
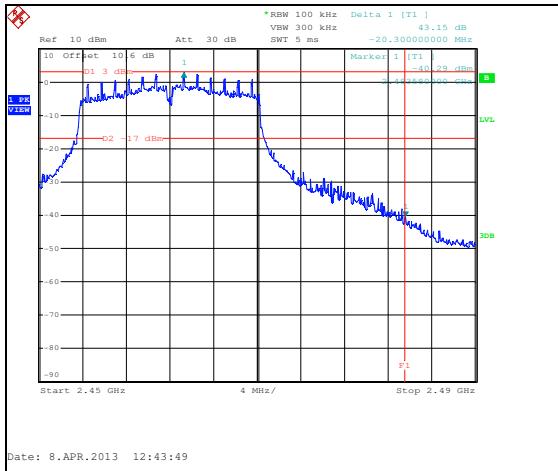
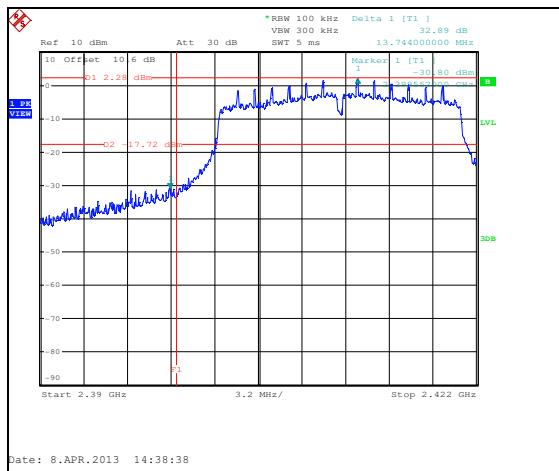
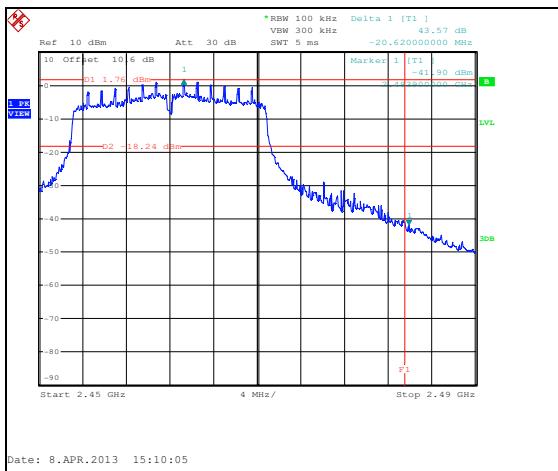


Figure 7.5.1.2-29: Upper Band-edge – 802.11b 2462 MHz

Figure 7.5.1.2-30: Lower Band-edge – 802.11g
2412 MHzFigure 7.5.1.2-31: Upper Band-edge – 802.11g
2462 MHzFigure 7.5.1.2-32: Lower Band-edge – 802.11n HT20
2412 MHzFigure 7.5.1.2-33: Upper Band-edge – 802.11n HT20
2462 MHz

7.5.2 Unwanted Emissions into Restricted Frequency Bands

7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

7.5.2.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in tables 7.5.2.2-1 to 7.5.2.2-3 below.

Table 7.5.2.2-1: Radiated Spurious Emissions Tabulated Data – 802.11b

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
4824	50.51	43.18	H	2.18	52.69	45.36	74.0	54.0	21.3	8.6
4824	53.15	48.52	V	2.18	55.33	50.70	74.0	54.0	18.7	3.3
2390	50.13	38.21	H	-5.30	44.83	32.91	74.0	54.0	29.2	21.1
2390	54.20	44.58	V	-5.30	48.90	39.28	74.0	54.0	25.1	14.7
2332	49.77	41.05	H	-5.56	44.21	35.49	74.0	54.0	29.8	18.5
2332	53.28	46.74	V	-5.56	47.72	41.18	74.0	54.0	26.3	12.8
2496.1	54.88	48.14	H	-4.83	50.05	43.31	74.0	54.0	24.0	10.7
2496.1	58.22	52.35	V	-4.83	53.39	47.52	74.0	54.0	20.6	6.5
2437 MHz										
4874	48.54	40.80	H	2.29	50.83	43.09	74.0	54.0	23.2	10.9
4874	50.85	45.37	V	2.29	53.14	47.66	74.0	54.0	20.9	6.3
2357	49.47	40.39	H	-5.45	44.02	34.94	74.0	54.0	30.0	19.1
2357	53.96	43.92	V	-5.45	48.51	38.47	74.0	54.0	25.5	15.5
2462 MHz										
4924	48.21	38.97	H	2.41	50.62	41.38	74.0	54.0	23.4	12.6
4924	49.19	40.64	V	2.41	51.60	43.05	74.0	54.0	22.4	11.0
2483.5	50.61	39.74	H	-4.89	45.72	34.85	74.0	54.0	28.3	19.2
2483.5	54.44	44.71	V	-4.89	49.55	39.82	74.0	54.0	24.5	14.2
2382.8	49.51	38.16	H	-5.34	44.17	32.82	74.0	54.0	29.8	21.2
2382.8	55.30	49.59	V	-5.34	49.96	44.25	74.0	54.0	24.0	9.7

Table 7.5.3.2-2: Radiated Spurious Emissions Tabulated Data – 802.11g

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
4824	50.19	36.68	V	2.18	52.37	38.86	74.0	54.0	21.6	15.1
2390	67.21	46.67	H	-5.30	61.91	41.37	74.0	54.0	12.1	12.6
2390	73.39	53.57	V	-5.30	68.09	48.27	74.0	54.0	5.9	5.7
2332	51.24	39.93	H	-5.56	45.68	34.37	74.0	54.0	28.3	19.6
2332	54.51	44.20	V	-5.56	48.95	38.64	74.0	54.0	25.1	15.4
2496.1	57.42	46.97	H	-4.83	52.59	42.14	74.0	54.0	21.4	11.9
2496.1	62.13	51.36	V	-4.83	57.30	46.53	74.0	54.0	16.7	7.5
2437 MHz										
2357	49.89	38.18	H	-5.45	44.44	32.73	74.0	54.0	29.6	21.3
2357	54.57	43.93	V	-5.45	49.12	38.48	74.0	54.0	24.9	15.5
2462 MHz										
2483.5	67.37	48.87	H	-4.89	62.48	43.98	74.0	54.0	11.5	10.0
2483.5	75.19	56.03	V	-4.89	70.30	51.14	74.0	54.0	3.7	2.9
2382.8	50.61	38.92	H	-5.34	45.27	33.58	74.0	54.0	28.7	20.4
2382.8	57.19	46.53	V	-5.34	51.85	41.19	74.0	54.0	22.1	12.8

Table 7.5.3.2-3: Radiated Spurious Emissions Tabulated Data – 802.11nHT20

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2412 MHz										
4824	49.79	36.43	V	2.18	51.97	38.61	74.0	54.0	22.0	15.4
2390	68.51	48.36	H	-5.30	63.21	43.06	74.0	54.0	10.8	10.9
2390	75.27	55.63	V	-5.30	69.97	50.33	74.0	54.0	4.0	3.7
2332	50.51	39.12	H	-5.56	44.95	33.56	74.0	54.0	29.1	20.4
2332	54.59	44.28	V	-5.56	49.03	38.72	74.0	54.0	25.0	15.3
2492	58.64	48.19	H	-4.85	53.79	43.34	74.0	54.0	20.2	10.7
2492	63.71	53.29	V	-4.85	58.86	48.44	74.0	54.0	15.1	5.6
2437 MHz										
2357	53.28	42.37	V	-5.45	47.83	36.92	74.0	54.0	26.2	17.1
2462 MHz										
2483.5	66.15	48.34	H	-4.89	61.26	43.45	74.0	54.0	12.7	10.6
2483.5	70.32	52.48	V	-4.89	65.43	47.59	74.0	54.0	8.6	6.4
2382.8	49.28	37.67	H	-5.34	43.94	32.33	74.0	54.0	30.1	21.7
2382.8	55.46	44.86	V	-5.34	50.12	39.52	74.0	54.0	23.9	14.5

7.5.2.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak (802.11b)

Corrected Level: $50.51 + 2.18 = 52.69 \text{ dBuV/m}$

Margin: $74 \text{ dBuV/m} - 52.69 \text{ dBuV/m} = 21.3 \text{ dB}$

Example Calculation: Average (802.11b)

Corrected Level: $43.18 + 2.18 - 0 = 45.36 \text{ dBuV}$

Margin: $54 \text{ dBuV} - 45.36 \text{ dBuV} = 8.6 \text{ dB}$

7.6 Maximum Power Spectral Density in the Fundamental Emission – FCC: Section 15.247(e) IC: RSS-210 A8.2(b)

7.6.1 Measurement Procedure

Power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v02 Option 1. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

7.6.2 Measurement Results

Results are shown below in table 7.6.2-1 to 7.6.2-3 and figures 7.6.2-1 – 7.6.2-9:

Table 7.6.2-1: Maximum Power Spectral Density – 802.11b

Frequency (MHz)	PSD Level (dBm)
2412	-8.55
2437	-9.27
2462	-9.42

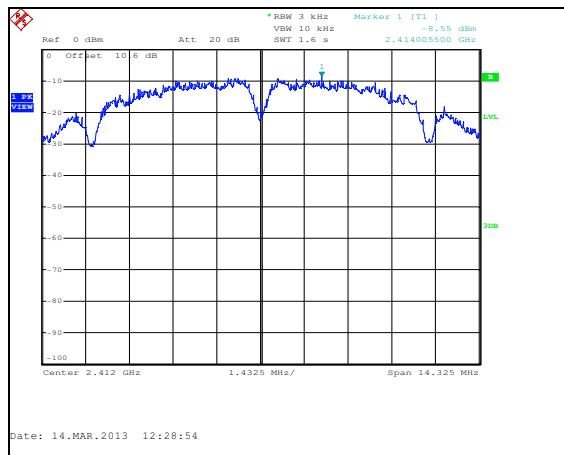


Figure 7.6.2-1: Power Spectral Density – 802.11b
2412 MHz

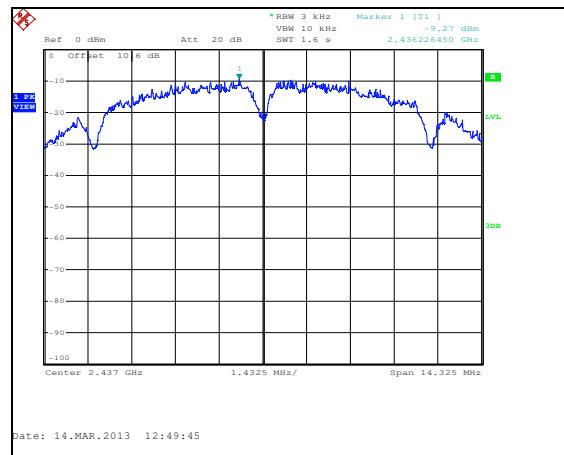


Figure 7.6.2-2: Power Spectral Density – 802.11b
2437 MHz

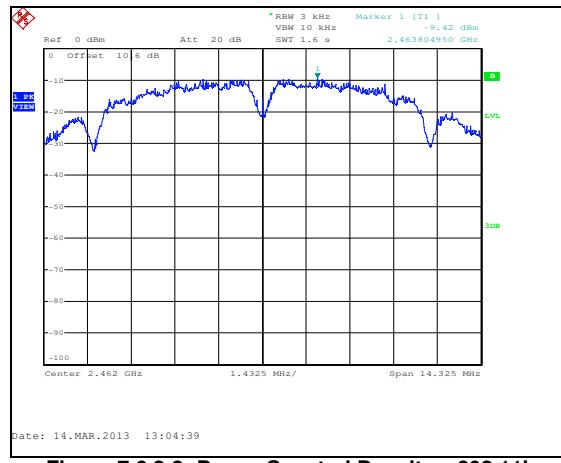


Figure 7.6.2-3: Power Spectral Density – 802.11b
2462 MHz

Table 7.6.2-2: Maximum Power Spectral Density – 802.11g

Frequency (MHz)	PSD Level (dBm)
2412	-11.79
2437	-11.91
2462	-12.12






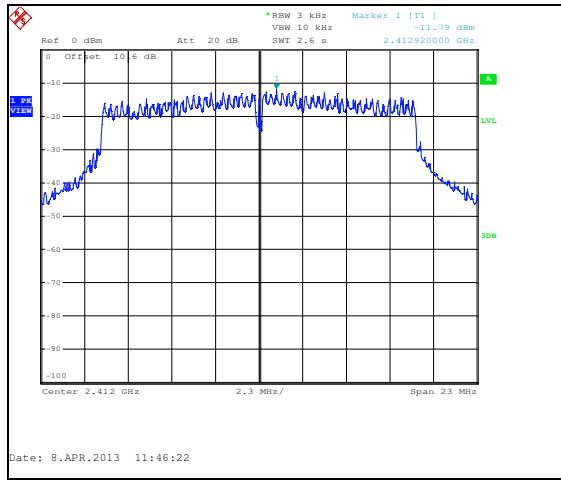
Figure 7.6.2-4: Power Spectral Density – 802.11g
2412 MHzFigure 7.6.2-5: Power Spectral Density – 802.11g
2437 MHzFigure 7.6.2-6: Power Spectral Density – 802.11g
2462 MHz

Table 7.6.2-3: Maximum Power Spectral Density – 802.11nHT20

Frequency (MHz)	PSD Level (dBm)
2412	-12.59
2437	-14.58
2462	-14.41

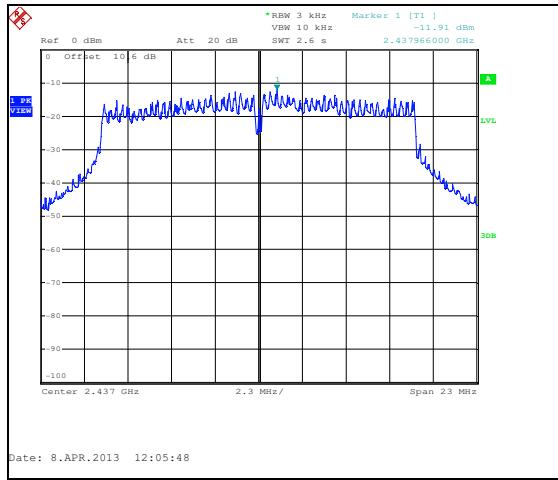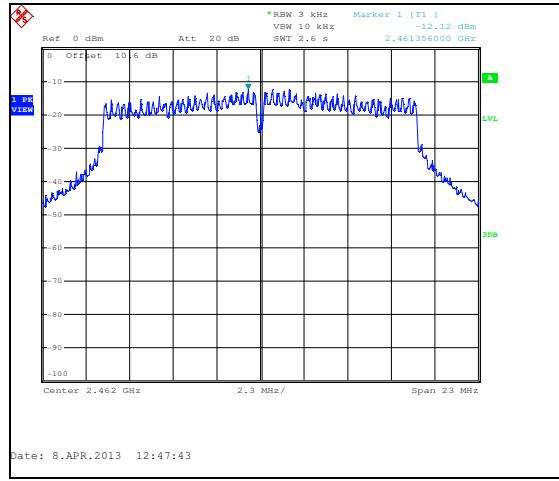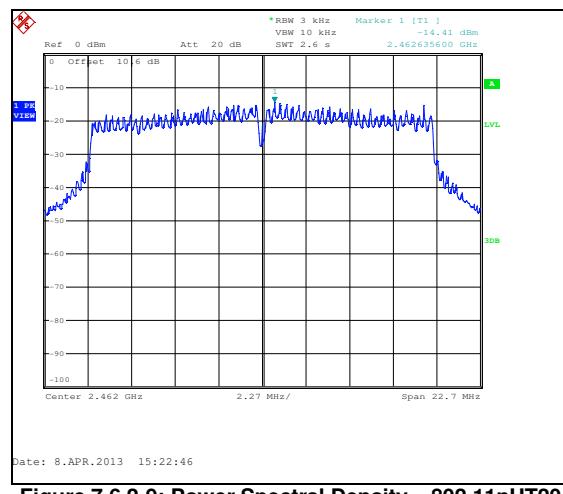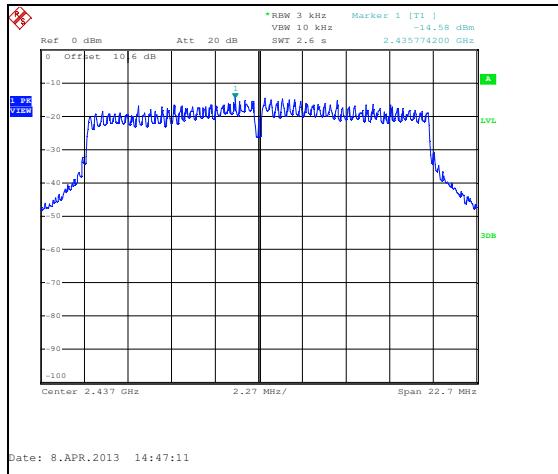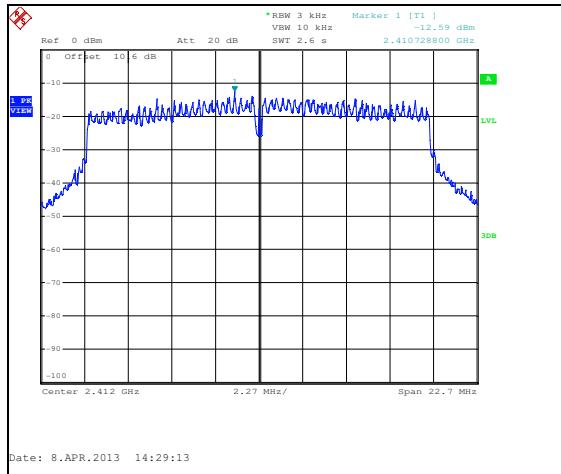

8 CONCLUSION

In the opinion of ACS, Inc. the IM710-200, manufactured by Comverge Inc meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT