

CFR 47 FCC Part 15.249

TEST REPORT

Product : **RF 2.4G Wireless Keyboard**

Trade Name : N/A

Model Number : PSK-4251B; ASK-4251B; KSK-3200RF

FCC ID : RAC4251B01

Prepared for

PRECISION SQUARED TECHNOLOGY CORPORATION

5F-7, NO.2 JIAN BA ROAD, CHUNG HO CITY, TAIPEI HSIENG, TAIWAN,
R.O.C.

TEL. : +886 2 8228 0125

FAX. : +886 2 8228 0105

Prepared by

Interocean EMC Technology Corp.

244 No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang,
Taipei County, Taiwan, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark :

The test report consists of **33** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.
The test results in the report only to the tested sample.

Table of Contents

1	General Information	4
1.1	Description of Equipment Under Test	4
1.2	Table for Carrier Frequencies	5
1.3	Test Facility	6
1.4	Test Equipment	7
1.5	Summary of Measurement	8
1.6	Justification	9
2	RF Radiated spurious emission test	10
2.1	Limit	10
2.2	Configuration of Measurement	10
2.3	Test Procedure	11
2.4	Test Result	11
3	Emission on the Band Edge test	16
3.1	Limit	16
3.2	Configuration of Measurement	16
3.3	Test Procedure	16
3.4	Test Result	16
4	AC Power Line Conducted Emission test	20
4.1	Limit	20
4.2	Configuration of Measurement	20
4.3	Test Procedures	21
4.4	Test Result	21
5	Photographs of Test	24
5.1	Power Line Conducted Emission Measurement	24
5.2	Radiated Emission Measurement	25
6	Photographs of EUT	26

Statement of Compliance

Applicant: PRECISION SQUARED TECHNOLOGY CORPORATION
Manufacturer: JING MOLD ELECTRONIC TECHNOLOGY (SHEN ZHEN) CO., LTD.
Product: RF 2.4G Wireless Keyboard
Model No.: PSK-4251B; ASK-4251B; KSK-3200RF
Tested Power Supply: DC 3V
Date of Final Test: Apr. 29, 2010
Configuration of Measurements and Standards Used :
FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2010/05/21

Project Engineer: Victor Chen
Victor Chen

Approved: Jerry Liu
Jerry Liu

1 General Information

1.1 Description of Equipment Under Test

Product	: RF 2.4G Wireless Keyboard
Model Number	: PSK-4251B; ASK-4251B; KSK-3200RF
Applicant	: PRECISION SQUARED TECHNOLOGY CORPORATION 5F-7, NO.2 JIAN BA ROAD, CHUNG HO CITY, TAIPEI HSIENG, TAIWAN, R.O.C.
Manufacturer	: JING MOLD ELECTRONIC TECHNOLOGY (SHEN ZHEN) CO., LTD. Xinqiao, 3rd Industrial Zone, Shajing Town, Paoan District, Shenzhen City, Guangdong Province. China, Shenzhen, Guangdong, China.
Operating Frequency	: 2405MHz ~ 2477MHz
Channel Number	: Refer to section 1.2
Type of Modulation	: GFSK
Antenna description	: This device uses PCB Print antenna. The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
Sample Receive date	: Apr. 02, 2010
Date of Test	: Apr. 13 ~ 29, 2010
Product information	: <u>Interface Port:</u> USB2.0 Port *1 <u>Data Cable:</u> USB Cable: ☒ Non-shielded ☒ Detachable, 1.8m ☒ w/o core
Additional Description	: 1. The EUT is " RF 2.4G Wireless Keyboard ". 2. The model PSK-4251B is representative selected in the test and included in this report. 3. All model included in this report, the difference is for different market; the rest parts are identical. 4. Difference between those models are only the model number different for the market strategy. 5. For more detail specification about EUT, please refer to the user's manual.

1.2 Table for Carrier Frequencies

CH No.	1	2	3	4	5	6	7	8	9	10	11
CF (MHz)	2405	2409	2413	2417	2421	2425	2429	2433	2437	2441	2445

CH No.	12	13	14	15	16	17	18	19
CF (MHz)	2449	2453	2457	2461	2465	2469	2473	2477

1.3 Test Facility

Site Description	:	☒ Conduction 2 ☒ OATS 2
Name of Firm	:	Interocean EMC Technology Corp.
Company web	:	http://www.ietc.com.tw
Site 1, 2 Location	:	No.5-2, Lin 1, Tin-Fu Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
Site 3, 4 Location	:	No. 12, Ruei-Shu Valley, Ruei-Ping Tsun, Lin-Kou Hsiang, Taipei County, Taiwan, R.O.C.
Site Filing	:	● Federal Communication Commissions – USA Registration No.: 96399 (OATS 1 & 2) Registration No.: 518958 (OATS 3 & 4) Designation No.: TW1020 ● Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan Member No.: 1349 Registration No. (Conducted Room): C-1094 Registration No. (Conducted Room): T-1562 Registration No. (OATS 1): R-1040 Registration No. (OATS 2): R-1041 ● Industry Canada (IC) OUR FILE: 46405-4437 Submission: 130946 Registration No. (OATS 1): 4437A-1 Registration No. (OATS 2): 4437A-2 Registration No. (OATS 3): 4437A-3 Registration No. (OATS 4): 4437A-4
Site Accreditation	:	● Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C. Accreditation No.: SL2-IN-E-0026 for CNS13438 / CISPR22 SL2-R1-E-0026 for CNS13439 / CISPR13 SL2-R2-E-0026 for CNS13439 / CISPR13 SL2-A1-E-0026 for CNS13783-1 / CISPR14-1 SL2-L1-E-0026 for CNS 14115 / CISPR 15 ● Taiwan Accreditation Foundation (TAF) Accrditation No.: 1113 ● TÜV NORD Certificate No: TNTW0801R-02



1.4 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSP30	100002	2010/12/08
Spectrum Analyzer	R&S	FSP40	100478	2011/04/20
Preamplifier	Agilent	8449B	3008A01434	2011/04/20
Preamplifier	Agilent	83050A	3950A00225	2010/08/10
Preamplifier	SCHAFFNER	CA30100	2	2010/11/03
Horn Antenna	COM-POWER	AH-118	10081	2010/05/12
Horn Antenna	Schwarzbeck	BBHA 9120	9120D-583	2011/02/09
Horn Antenna	Schwarzbeck	BBHA 9170	213	2010/06/08
Wide Bandwidth Sensor	Anritsu	MA2491A	728133	2010/11/13
Power Meter	Anritsu	ML2495A	736010	2010/11/13
Temp & Humidity chamber	GIAN FORCE	GTH-150-40-2P-U	MAA0305-012	2011/05/07

Note: The above equipments are within the valid calibration period.

1.5 Summary of Measurement

Report Clause	Test Parameter	Reference Document CFR47 Part15	Results
2	RF Radiated spurious emission test	§15.249(a)(c)(d)	Pass
3	Emission on the Band Edge	§15.249(d)	Pass
4	AC Power Line Conducted Emission test	§15.207	Pass

1.6 Justification

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of the frequency band were all arrive limit requirement, thus we evaluate the EUT pass the specified test.

2 RF Radiated spurious emission test

2.1 Limit

According to §15.249 (a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

For intentional radiator, the radiated emission shall comply with §15.209(a).


Frequency (MHz)	Field strength dB(μ V/m)	Measurement distance (meters)
1.705~30.0	29.5	30
30 ~ 88	40	3
88~216	43.5	3
216~960	46	3
Above 960	54	3

2.2 Configuration of Measurement

Measurement Frequency under 1GHz

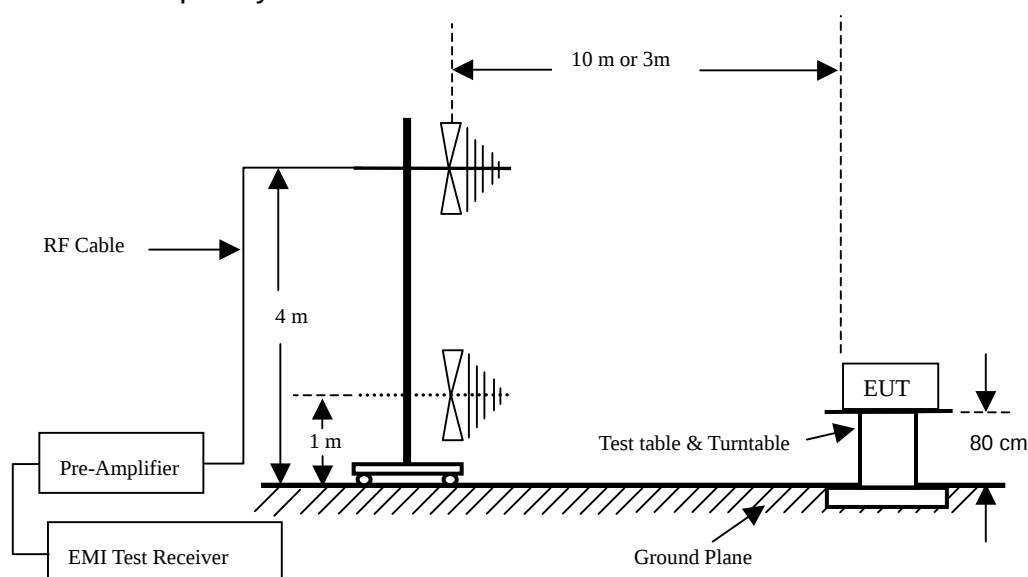

Measurement Frequency above 1GHz

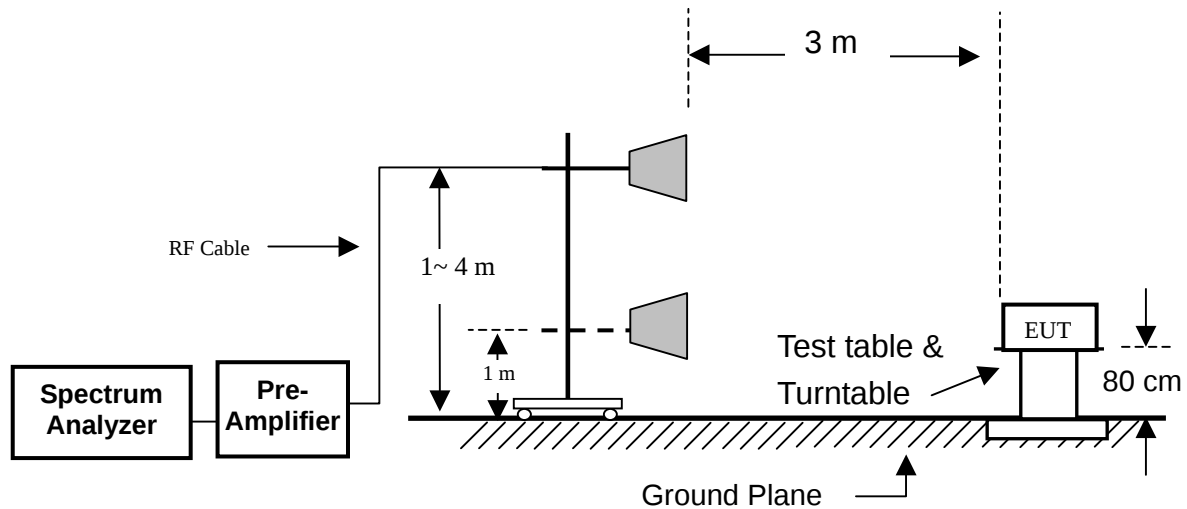

2.3 Test Procedure

The EUT was setup to ANSI C63.4, 2003.

Radiated emission measurements were performed from 30MHz to 40GHz. Spectrum Analyzer Resolution Bandwidth is 100kHz or greater for frequencies 30MHz to 1GHz, 1MHz for frequencies above 1GHz.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

2.4 The description of operation mode

Setup EUT to continuously transmit signal with 100% duty cycle during the test period.

2.5 Test Result

PASS.

The final test data is shown on as following pages.

Radiated spurious emission

Fundamental Emissions

Low channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
2405	H	87.92	26.42	31.35	92.85	94	-1.15	PK
2405	V	82.69	26.42	31.35	87.62	94	-6.38	PK

Middle channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
2441	H	88.39	26.41	31.49	93.47	94	-0.53	PK
2441	V	83.31	26.41	31.49	88.39	94	-5.61	PK

High channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
2477	H	88.27	26.40	31.62	93.49	94	-0.51	PK
2477	V	84.20	26.40	31.62	89.42	94	-4.58	PK

Remark :

1. Corrected Level = Reading – Preamp + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss

Radiated spurious emission

Test Environment

Ambient temperature : 24.0°C

Relative humidity : 68%

Radiated Emission below 1GHz

After verifying low, middle and high channel (2405MHz, 2441MHz and 2477MHz), the worse case was found at low channel, the data will present on report.

Worst case: low channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
64.750	H	29.23	13.35	7.74	23.62	40.00	-16.38	QP
79.550	H	30.10	13.33	8.22	24.99	40.00	-15.01	QP
197.440	H	24.19	13.23	18.70	29.66	43.52	-13.86	QP
323.520	H	25.18	13.18	16.64	28.64	46.02	-17.38	QP
653.420	H	23.18	12.84	23.21	33.55	46.02	-12.47	QP
791.285	H	21.18	13.08	24.74	32.84	46.02	-13.18	QP
121.230	V	24.85	13.36	14.12	25.61	43.52	-17.91	QP
164.230	V	23.19	13.15	17.39	27.43	43.52	-16.09	QP
272.000	V	26.13	13.46	21.18	33.85	46.02	-12.17	QP
323.520	V	31.60	13.18	16.64	35.06	46.02	-10.96	QP
416.230	V	24.15	12.53	19.35	30.97	46.02	-15.05	QP
662.285	V	21.16	12.86	23.32	31.62	46.02	-14.40	QP

Remark : Corrected Level = Reading + Correction Factor – Preamplifier

Correction Factor = Antenna Factor + Cable Loss

The present spurious only show those points are above noise level and the frequency range test from 30MHz to 1GHz.

Radiated spurious emission

Radiated Emission above 1GHz

Low Channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamp (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4810	H	45.69	25.84	37.48	57.33	74	-16.67	PK
4810	H	26.35	25.84	37.48	37.99	54	-16.01	AV
*7215	H	44.62	36.69	42.89	50.82	54	-3.18	PK
*9620	H	43.81	37.10	46.01	52.72	54	-1.28	PK
4810	V	53.51	25.84	37.48	65.15	74	-8.85	PK
4810	V	28.02	25.84	37.48	39.66	54	-14.34	AV
*7215	V	44.61	36.69	42.89	50.81	54	-3.19	PK
*9620	V	43.38	37.10	46.01	52.29	54	-1.71	PK

Middle Channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamp (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4882	H	50.03	25.82	37.59	61.80	74	-12.20	PK
4882	H	27.59	25.82	37.59	39.36	54	-14.64	AV
*7323	H	44.17	36.73	43.14	50.58	54	-3.42	PK
*9764	H	41.36	37.10	46.17	50.43	54	-3.57	PK
4882	V	51.57	25.82	37.59	63.34	74	-10.66	PK
4882	V	27.65	25.82	37.59	39.42	54	-14.58	AV
*7323	V	45.30	36.73	43.14	51.71	54	-2.29	PK
*9764	V	42.54	37.10	46.17	51.61	54	-2.39	PK

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

* Mark indicated background noise level.

High Channel								
Frequency (MHz)	Antenna Polarization	Reading (dB μ V)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Det. Mode
4954	H	52.21	25.81	37.72	64.12	74	-9.88	PK
4954	H	28.13	25.81	37.72	40.04	54	-13.96	AV
*7431	H	44.70	36.77	43.40	51.33	54	-2.67	PK
*9908	H	42.36	37.10	46.33	51.59	54	-2.41	PK
4954	V	47.78	25.81	37.72	59.69	74	-14.31	PK
4954	V	27.14	25.81	37.72	39.05	54	-14.95	AV
*7431	V	44.82	36.77	43.40	51.45	54	-2.55	PK
*9908	V	42.04	37.10	46.33	51.27	54	-2.73	PK

Remark : Corrected Level = Reading + Correction Factor – Preamplifier

Correction Factor = Antenna Factor + Cable Loss

* Mark indicated background noise level.


3 Emission on the Band Edge test

3.1 Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

3.2 Configuration of Measurement

Measurement Frequency above 1GHz

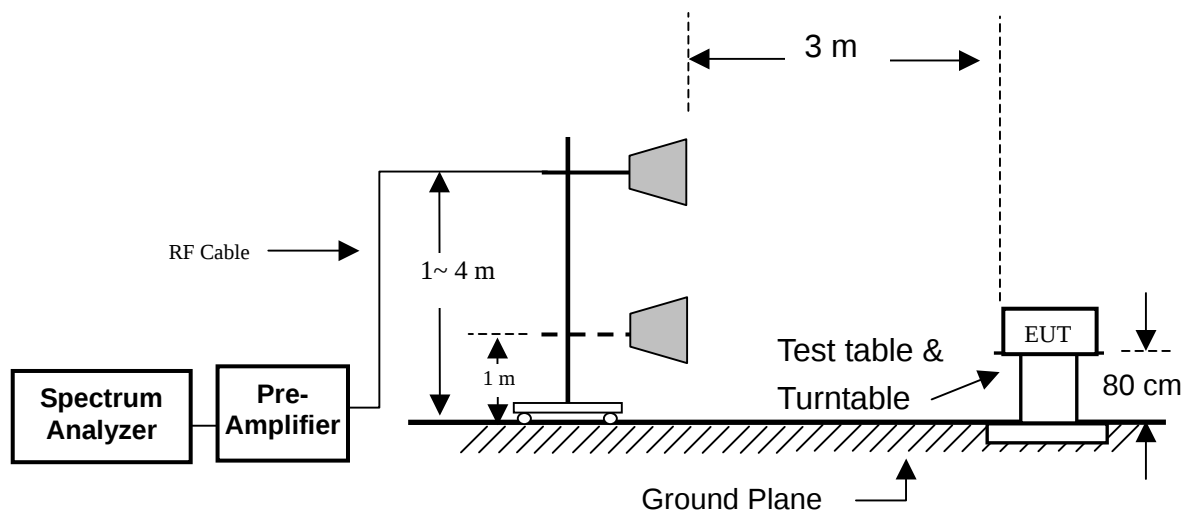

3.3 Test Procedure

The EUT was setup to ANSI C63.4, 2003.

Set RBW =1M, VBW= RBW for peak, and VBW=10Hz for average.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

3.4 Test Result


PASS.

The final test data is shown on as following pages.


Band edge

Frequency	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB μ V/m)	Limit (dBm)	Margin (dB)
2405	2310~2390	PK	52.57	74	-21.43
		AV	38.75	54	-15.25
2477	2483.5~2500	PK	61.23	74	-12.77
		AV	24.37	54	-29.63


2405MHz PK

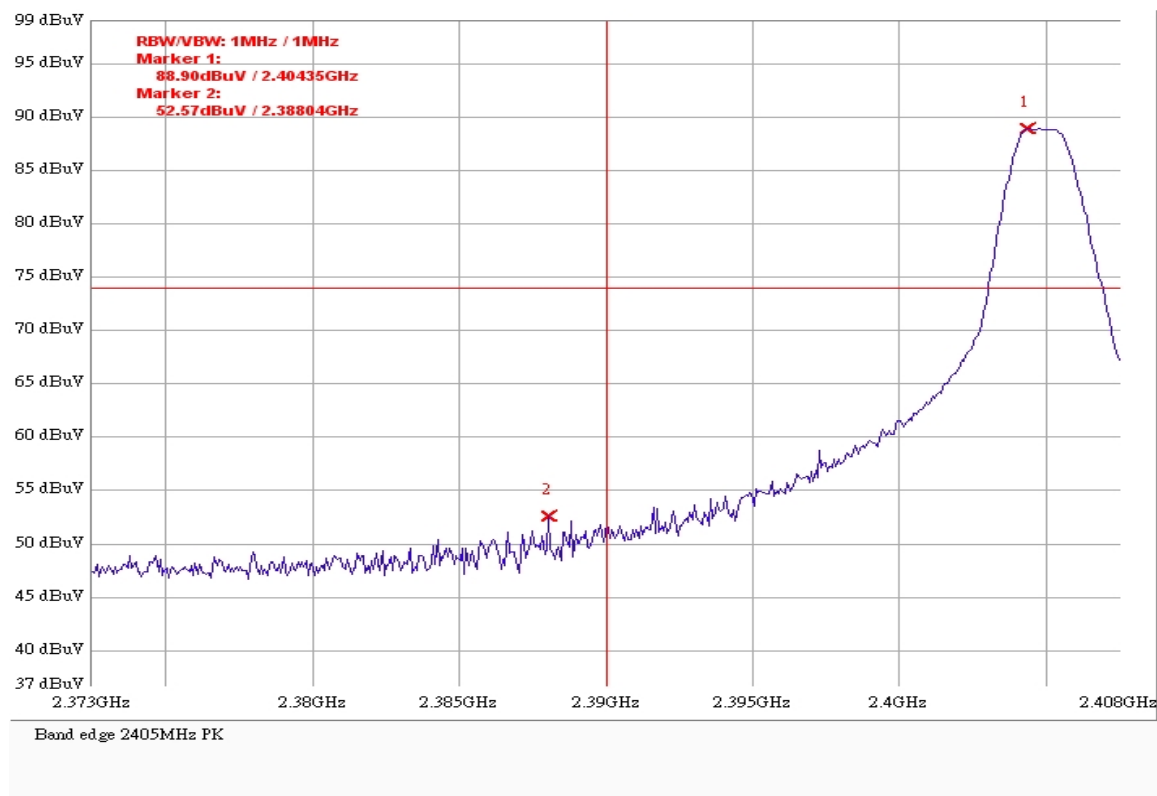


2405MHz AV

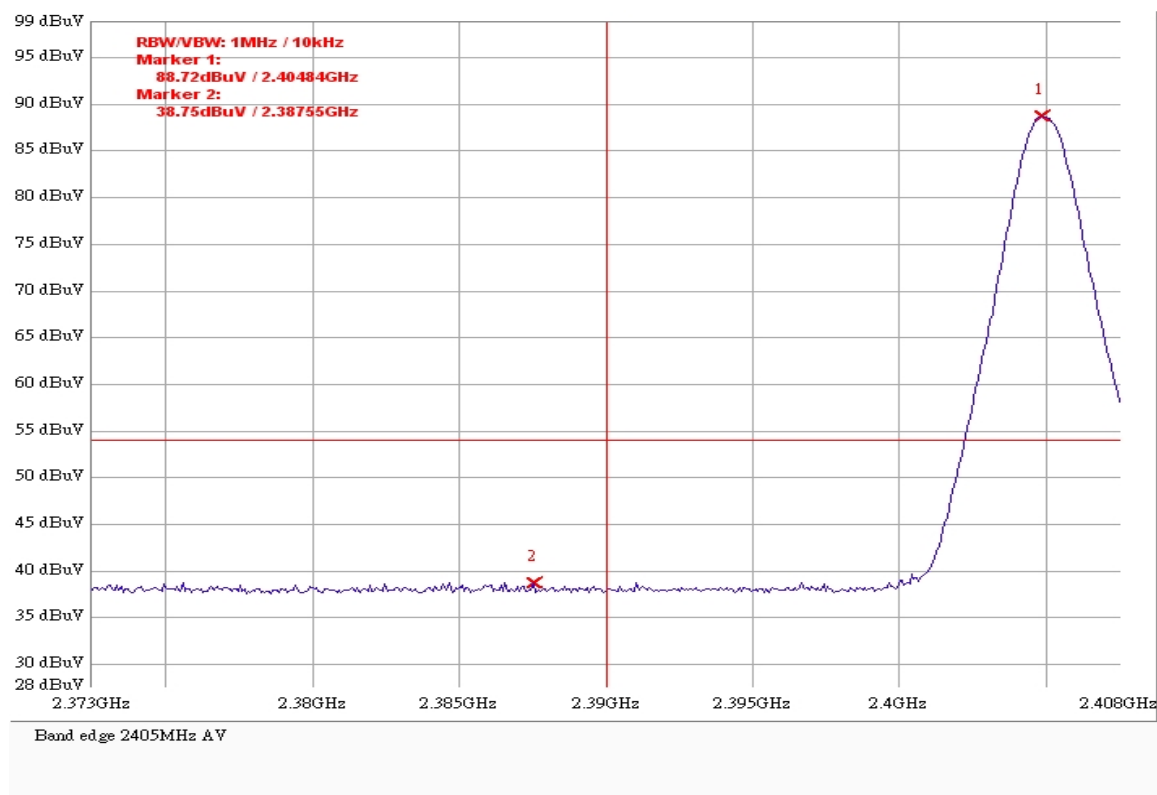

2477MHz PK

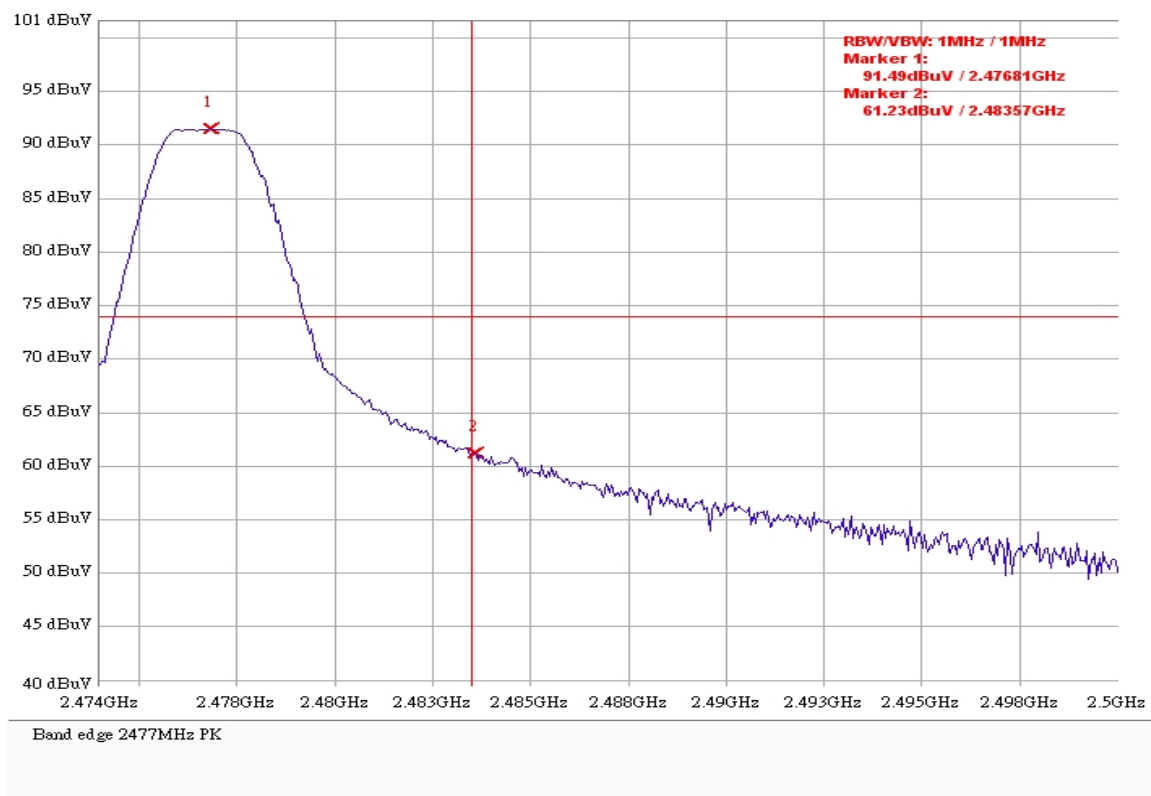

2477MHz AV

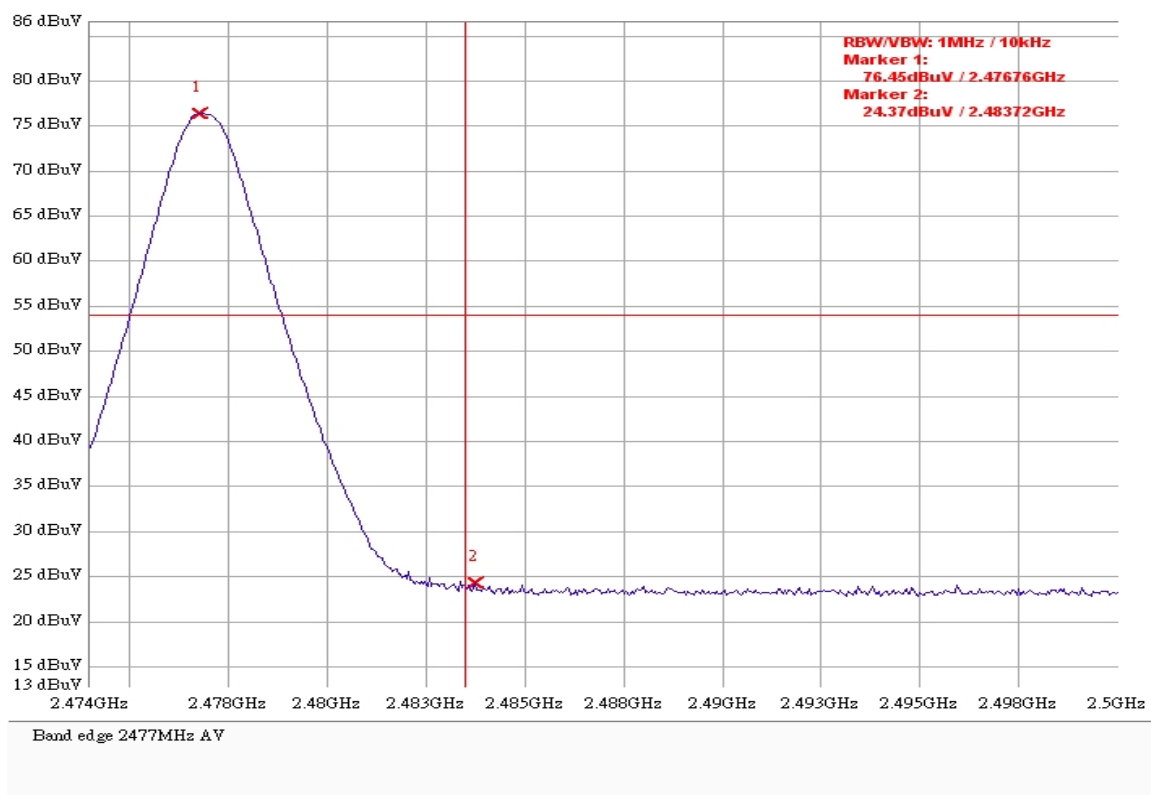


4 AC Power Line Conducted Emission test

4.1 Limit

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

4.2 Configuration of Measurement

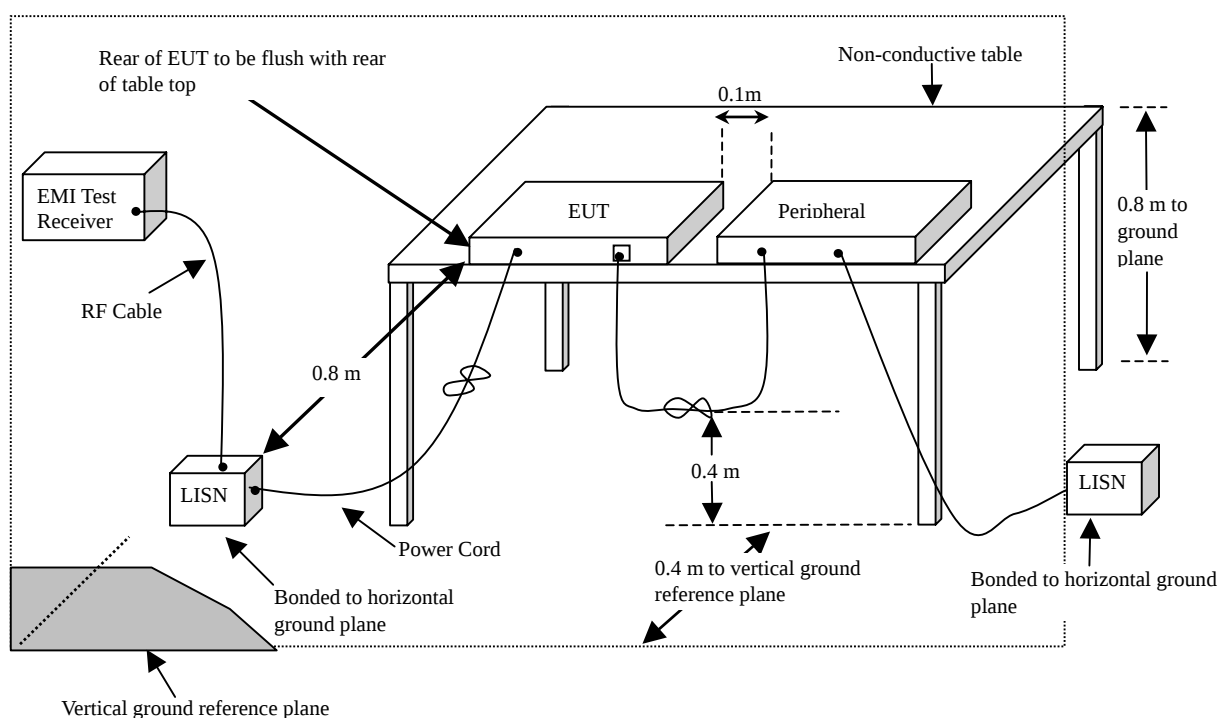

4.3 Test Procedures

The EUT was setup to ANSI C63.4, 2003.

- 1) The EUT was placed 80cm height above ground on a non-conductive table and vertical conducting plane located 40cm to the rear of the EUT.
- 2) The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50mH coupling impedance for the measuring equipment. The auxiliary equipment will place in secondary LISN.
- 3) Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

4.4 Test Result

PASS.

The final test data is shown on as following pages.


Power Line Conducted Test Data

EUT: RF 2.4G Wireless Keyboard	POLARITY: Line
CLIENT: PRECISION	DISTANCE:
MODEL: PSK-4251B	Serial No.:
RATING: DC 3V	FILE/DATA#: PRECISION.emi/5
Temperature: 23.1 °C	OPERATOR: Adam
Humidity: 66 %	TEST SITE: Conduction2

Frequency (MHz)	Factor (dB)	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.283	0.17	42.68	37.63	42.85	37.80	60.73	50.73	-17.88	-12.93
0.572	0.13	43.61	39.16	43.74	39.29	56.00	46.00	-12.26	-6.71
0.951	0.10	42.75	38.12	42.85	38.22	56.00	46.00	-13.15	-7.78
1.427	0.10	41.70	37.71	41.80	37.81	56.00	46.00	-14.20	-8.19
2.568	0.12	41.16	37.27	41.28	37.39	56.00	46.00	-14.72	-8.61
12.701	0.64	43.84	34.35	44.48	34.99	60.00	50.00	-15.52	-15.01

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

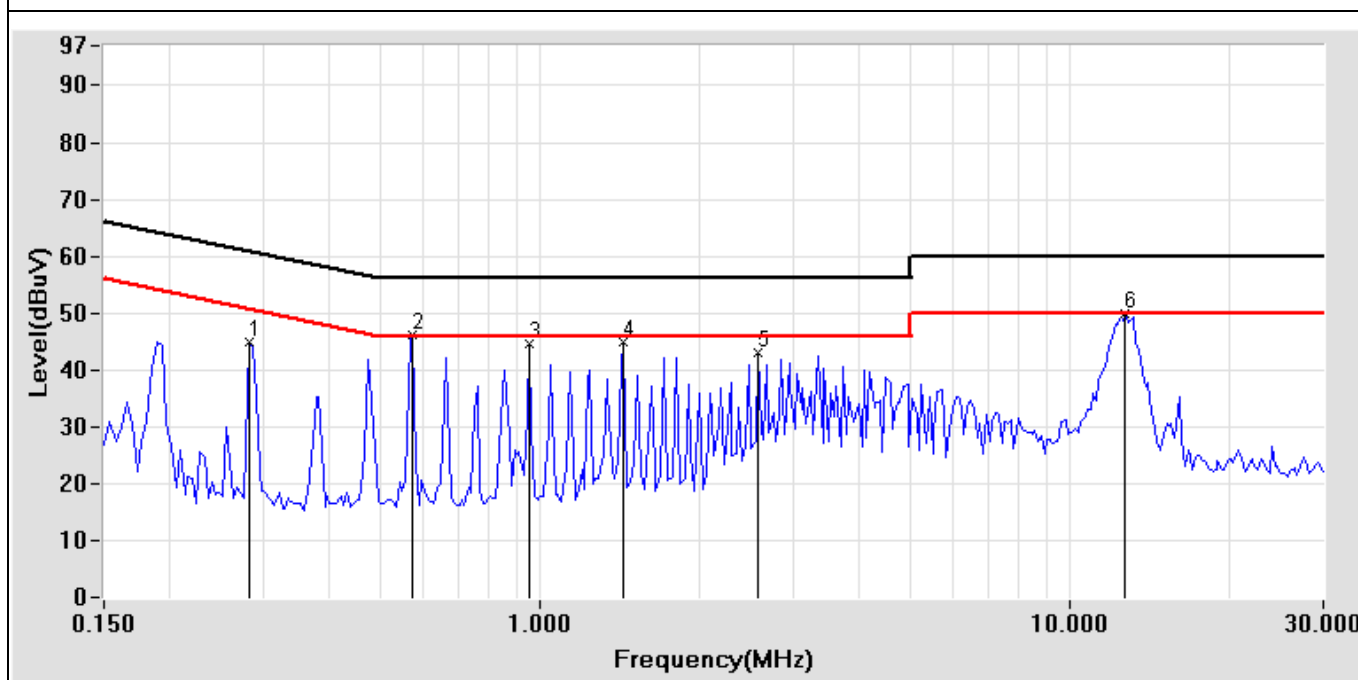

Test Mode: Mode 1: Charge Mode (USB Cable)

Power Line Conducted Test Data

EUT: RF 2.4G Wireless Keyboard

CLIENT: PRECISION

MODEL: PSK-4251B

RATING: DC 3V

Temperature: 23.1 °C

Humidity: 66 %

POLARITY: Neutral

DISTANCE:

Serial No.:

FILE/DATA#: PRECISION.emi/6


OPERATOR: Adam

TEST SITE: Conduction2

Frequency (MHz)	Factor (dB)	Meter Reading (dBμV)		Emission Level (dBμV)		Limits (dBμV)		Margin (dB)	
		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.287	0.17	43.67	38.67	43.84	38.84	60.61	50.61	-16.77	-11.77
0.572	0.13	44.04	39.77	44.17	39.90	56.00	46.00	-11.83	-6.10
0.951	0.10	43.26	39.29	43.36	39.39	56.00	46.00	-12.64	-6.61
1.330	0.10	41.97	38.24	42.07	38.34	56.00	46.00	-13.93	-7.66
1.806	0.11	42.04	38.34	42.15	38.45	56.00	46.00	-13.85	-7.55
12.810	0.57	44.01	34.31	44.58	34.88	60.00	50.00	-15.42	-15.12

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

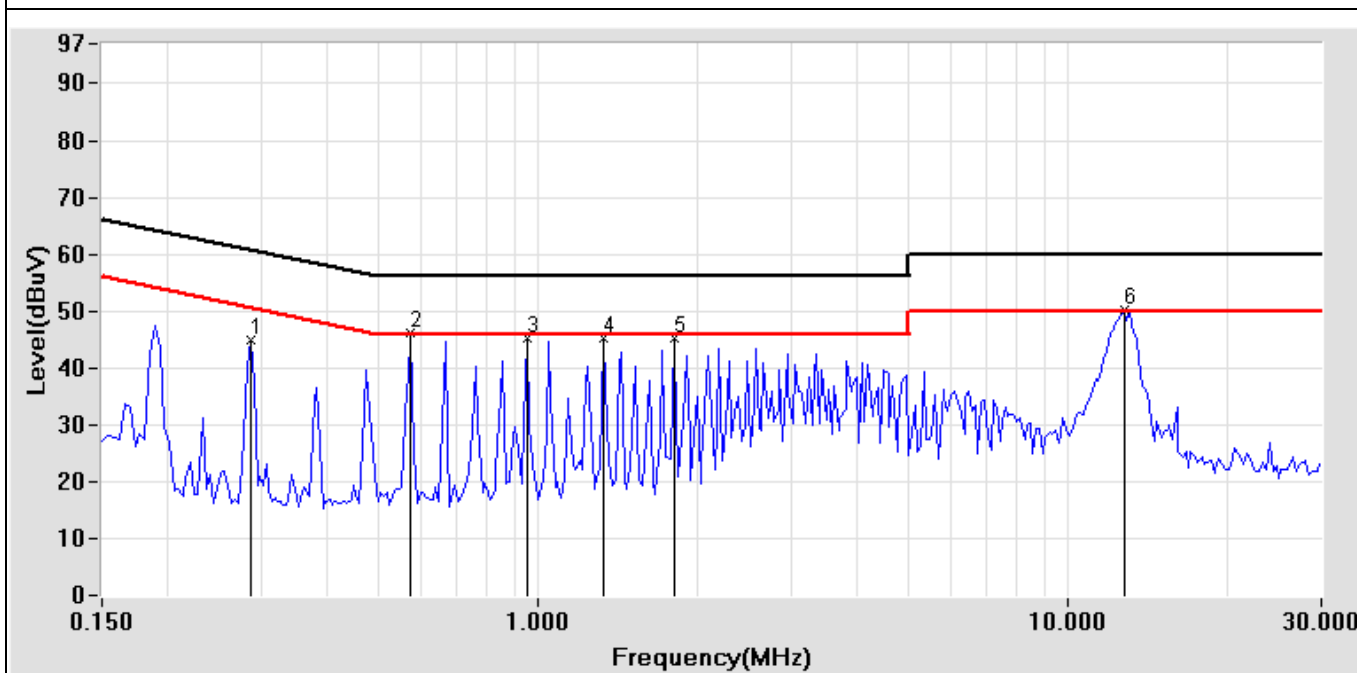

Test Mode: Mode 1: Charge Mode (USB Cable)