

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telephone: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of 151 Pages

Page 1 (151)

Recognized by the
Federal Communications Commission
FCC-Identification Number: 90462
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2-3250-01-01/03

FCC Part 24/15

One Touch 331P

FCC ID: RAD001

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 598-9075

Table of Contents

- 1 General information
 - 1.1 Notes
 - 1.2 Testing laboratory
 - 1.3 Details of applicant
 - 1.3 Application details
 - 1.5 Test item
 - 1.6 Test specifications

- 2 Technical test
 - 2.1 Summary of test results
 - 2.2 Test report

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 3 (151)

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Technical responsibility for area of testing :

2003-07-23 RSC 8411 Ames H.


Date	Section	Name	Signature
------	---------	------	-----------



Technical responsibility for area of testing :

2003-07-23 RSC8412 Hausknecht D.

Date	Section	Name	Signature
------	---------	------	-----------



CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 4 (151)

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : info@ict.cetecom.de

Internet : www.cetecom-ict.de

Accredited testing laboratory

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-166/98

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

1.3 Details of applicant

Name : ALCATEL BUSINESS SYSTEMS

Street : 32 avenue Kleber

City : 92707 Colombes

Country : France

Telephone : +33 1 55 66 32 20

Telefax : + 33 1 55 66 64 02

Contact : Mr. Jean Fleuriot

Telephone : +33 1 55 66 32 20

E-mail : jean.fleuriot@alcatel.fr

1.4 Application details

Date of receipt of application : 2003-05-20

Date of receipt of test item : 2003-07-02

Date of test : 2003-07-02 - 2003-07-03

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 5 (151)

1.5 Test item:

Type of equipment : **Mobile Phone**
Type designation : One Touch 331P
Manufacturer :
Street :
City :
Country :
Serial number : S/N:
Additional information :
Frequency : 1850.2 – 1909.8 MHz
Type of modulation : 300KGXW / 300KG7W
Number of channels : 300 (PCS1900)
Antenna : Integral antenna
Power supply : 3,7V DC NiMH Battery

Output power GSM 1900 : cond : 30.1 dBm Peak ,
ERP: 28.3 dBm (Burst);
EIRP: 30.4 dBm (Burst)

Temperature range : -30°C - +60°C
FCC – ID : RAD001
IC : - / -
IMEI : 350946.56.660137.2
Hardware Status : 01
Software Status : 01

Additional Accessories:

- 1) headset, reference 3DS 07855 AAAA (Supplier Merry)
- 2) headset, reference 3DS 07855 ABAA (Supplier Leemax)
- 3) battery, reference 3DS 09352 AAAA (Supplier BYD)
- 4) battery, reference 3DS 06641 AAAA (Supplier Sony)
- 5) single range charger, reference 3DS 09371 AGAA, 100-127V (Supplier Leader Electronics)
- 6) SMS keyboard, reference 3DS 07237 AAAA (Supplier Thong Fook Precision Industries)
- 7) Cigar lighter charger, reference 3DS 07848 AAAA (Supplier Primax)
- 8) Easy to install hands-free car kit, reference MP82 (Supplier Primax)

1.6 Test specifications: **FCC Part 24**
FCC Part 15

2 Technical test

For Part 24/22 we use the substitution method (TIA/EIA 603).

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

2.2 Test report

TEST REPORT

Test report no. : 2-3250-01-01/03

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 8 (151)

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED

PAGE

Part PCS 1900

POWER OUTPUT	SUBCLAUSE § 24.232	9
FREQUENCY STABILITY	SUBCLAUSE § 24.235	11
AFC FREQ ERROR vs. VOLTAGE		12
AFC FREQ ERROR vs. TEMPERATURE		12
EMISSIONS LIMITS	§24.238	14
CONDUCTED SPURIOUS EMISSIONS		72
BLOCK EDGE COMPLIAMNCE FOR BLOCK A, B, C, D, E AND F		81
OCCUPIED BANDWIDTH	§2.989	93
CONDUCTED EMISSIONS	§ 15.107/207	100
ADDITIONAL MEASUREMENTS FOR THE ANCILLARY EQUIPMENT	PART 15.109	103
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		129
TEST SITE		131
PHOTOGRAPHS OF THE EQUIPMENT		136

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 9 (151)

POWER OUTPUT

SUBCLAUSE § 24.232

Summary:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:

Conducted:

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	30.1	29.8
1880.0	0	29.8	29.0
1909.8	0	29.1	28.5
Measurement uncertainty		±0.5 dB	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference center of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1 \text{ dBi}$.

Limits:

Power Step	Peak EIRP (dBm)
0	<33

Power Measurements:

Radiated:

Frequency (MHz)	Power Step	BURST Peak (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	30.4	28.3	24.4	22.3
1880.0	0	30.2	28.1	24.2	22.1
1909.8	0	30.0	27.9	24.0	21.9
Measurement uncertainty		±3 dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 11 (151)

FREQUENCY STABILITY

SUBCLAUSE § 24.235

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.6 V dc.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 12 (151)

AFC FREQ ERROR vs. VOLTAGE



Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.2	+30	+0,00000160	+0,0160
3.3	+30	+0,00000160	+0,0160
3.4	+50	+0,00000266	+0,0266
3.5	+42	+0,00000223	+0,0223
3.6	+40	+0,00000213	+0,0213
3.7	+36	+0,00000191	+0,0191
3.8	+38	+0,00000202	+0,0202
3.9	+37	+0,00000197	+0,0197
4.0	+18	+0,00000096	+0,0096
4.1	+28	+0,00000149	+0,0149
4.2	+18	+0,00000096	+0,0096

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	+15	+0,00000027	+0,0027
-20	+15	+0,00000080	+0,0080
-10	+36	+0,00000191	+0,0191
±0.0	+44	+0,00000234	+0,0234
+10	+36	+0,00000191	+0,0191
+20	+38	+0,00000202	+0,0202
+30	+32	+0,00000170	+0,0170
+40	+28	+0,00000034	+0,0034
+50	+35	+0,00000186	+0,0186
+60	+48	+0,00000255	+0,0255

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

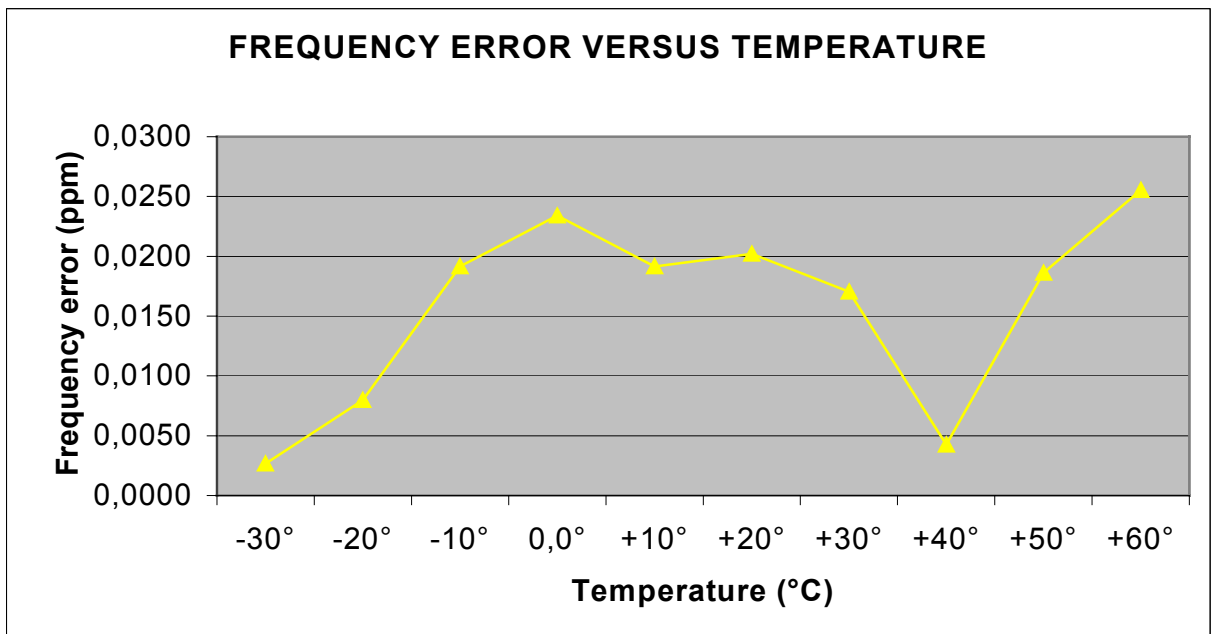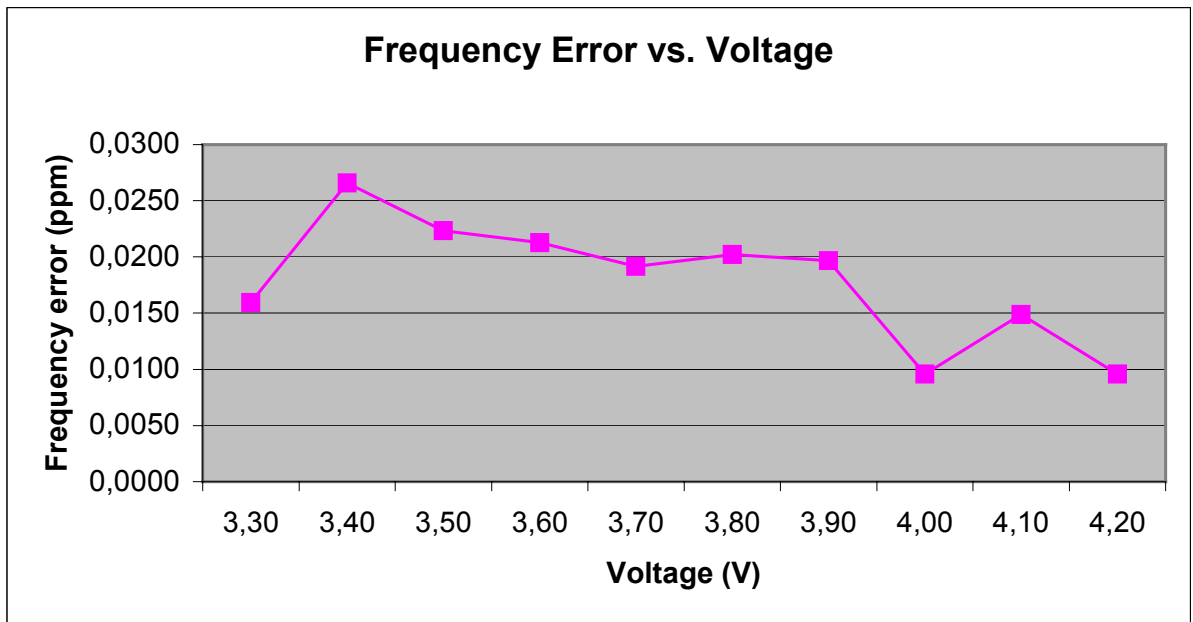

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 14 (151)

EMISSIONS LIMITS

§24.238

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 15 (151)

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

Test configuration: handset "One Touch 331P + Single range charger "3DS 09371 AGAA" 110 VAC + SMS keyboard "3DS 07237 AAAA"


EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		30.4	-13.0 (43.4 dBc)		carrier complies
3707.1		-22.5		52.9	
CH 661					
1880.0		30.2	-13.0 (43.2 dBc)		carrier
No traceable peak found					
CH 810					
1909.8		30.0	-13.0 (43.0 dBc)		carrier
No traceable peak found					
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24; 64

Channel 512 (up to 4 GHz - vertical)

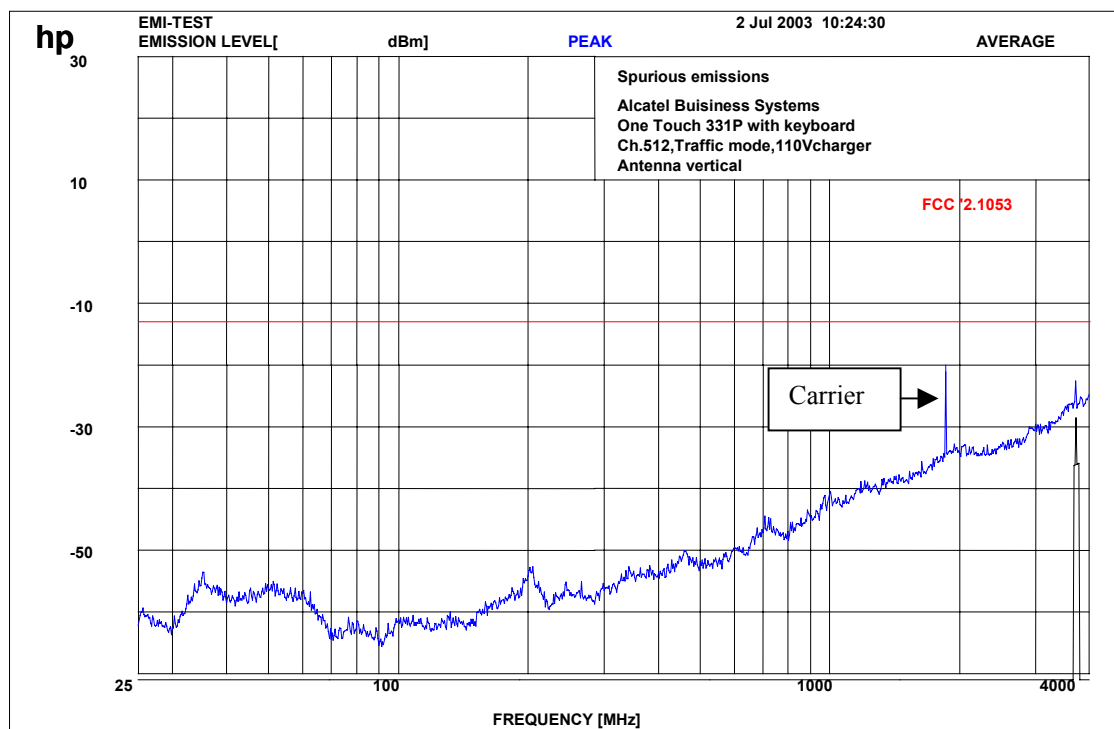

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 4 GHz - horizontal)

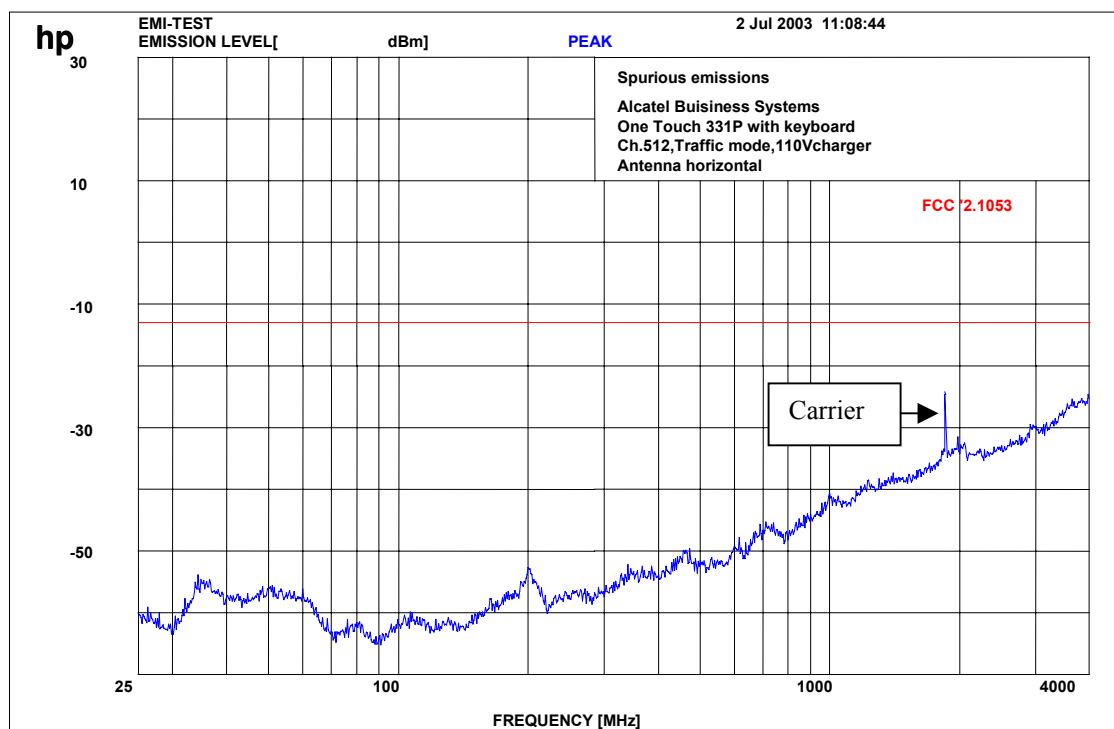

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 18 (151)

Channel 512 (up to 12 GHz - vertical)

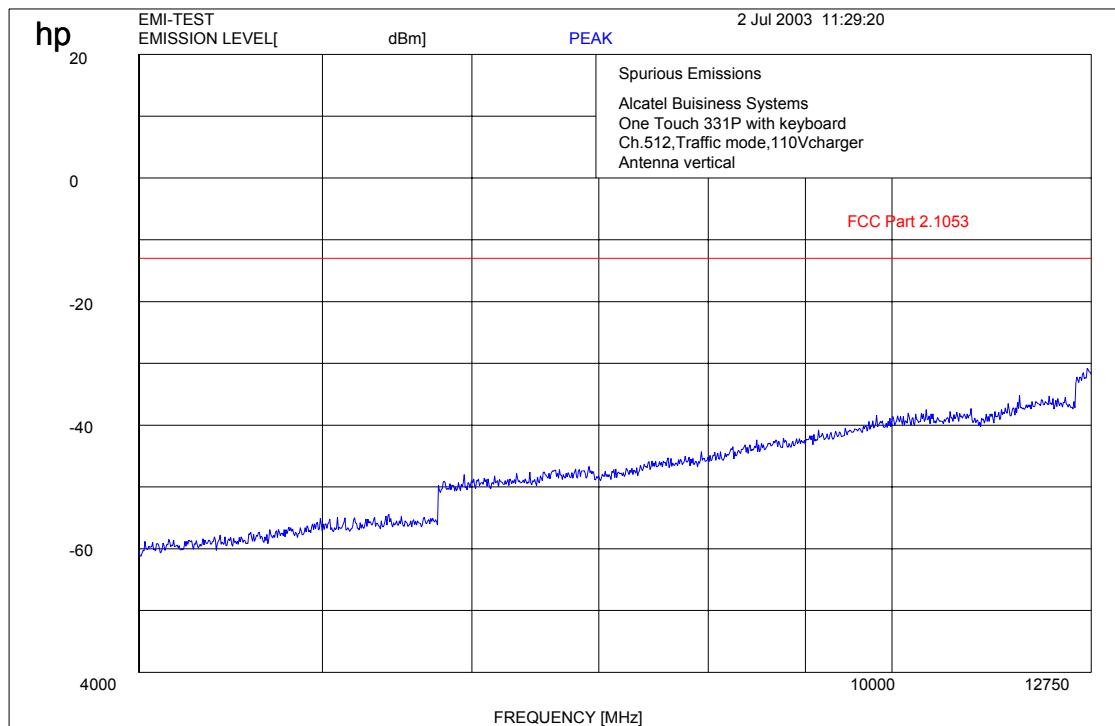

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 19 (151)

Channel 512 (up to 12 GHz - horizontal)

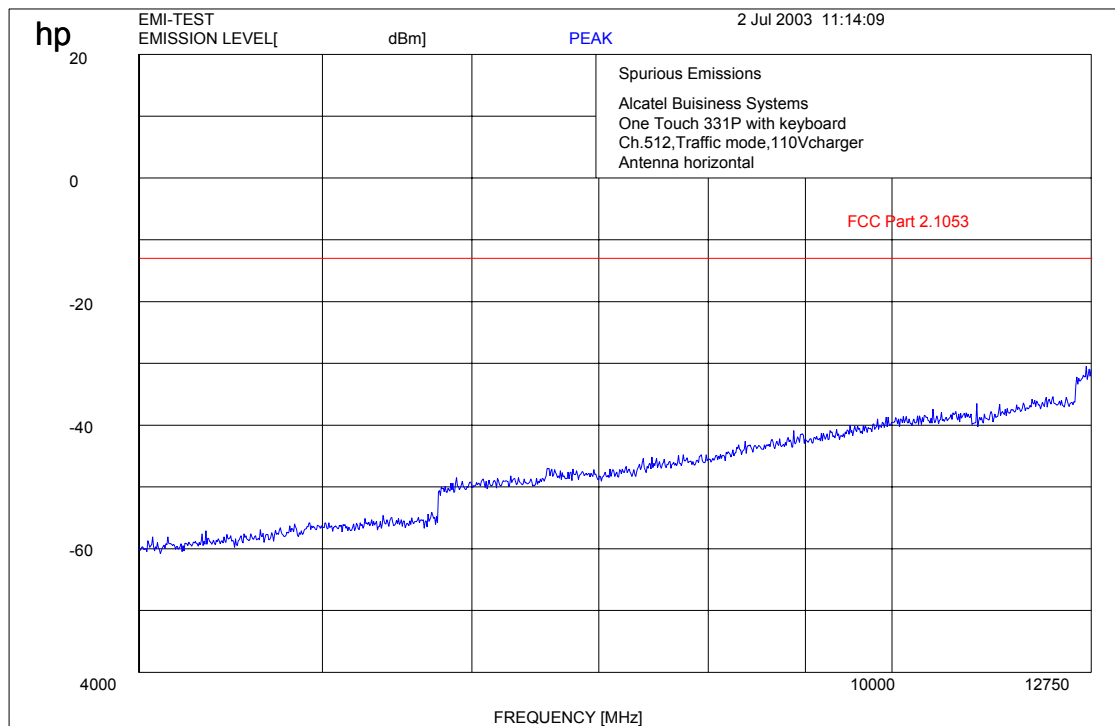

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 20 (151)

Channel 512 :- 20 GHz (vertical and horizontal)

No traceable peak found – Plot valid for all channels

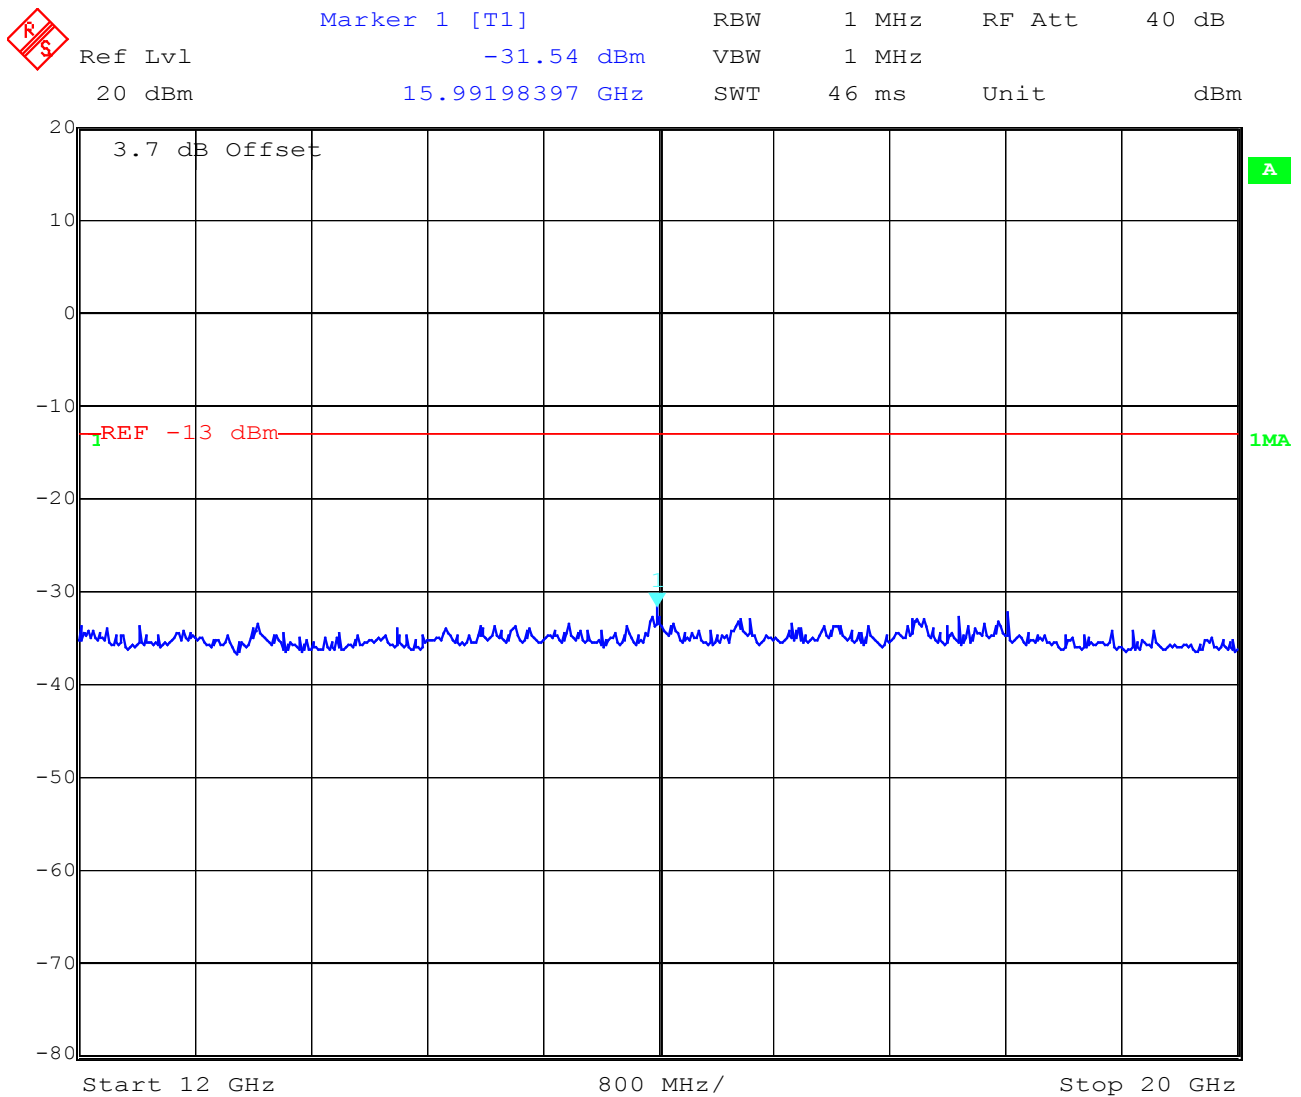


Date: 3.JUL.2003 07:41:58

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz - vertical)

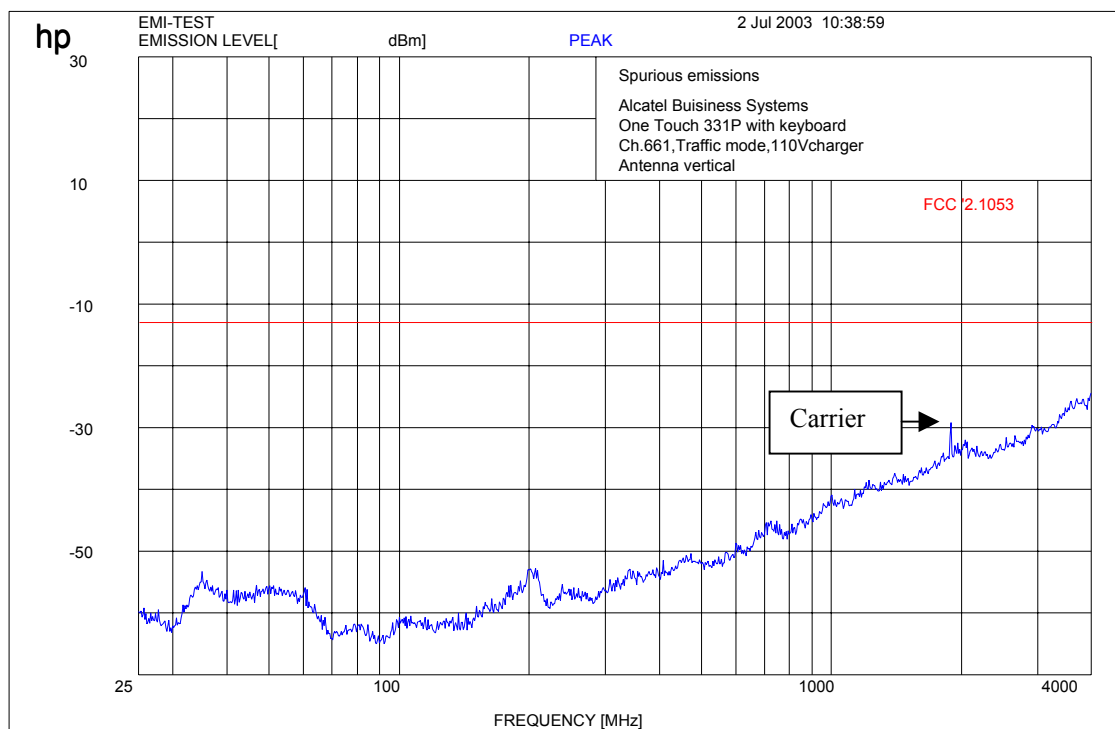

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz - horizontal)

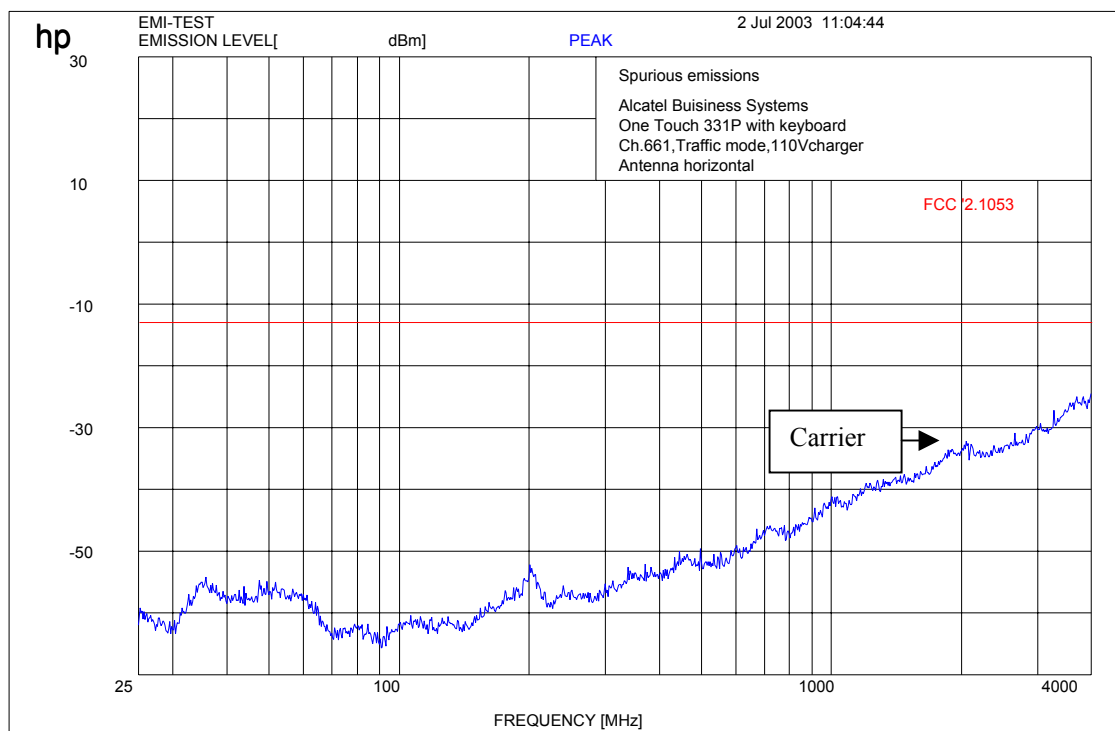

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 23 (151)

Channel 661 (up to 12 GHz - vertical)

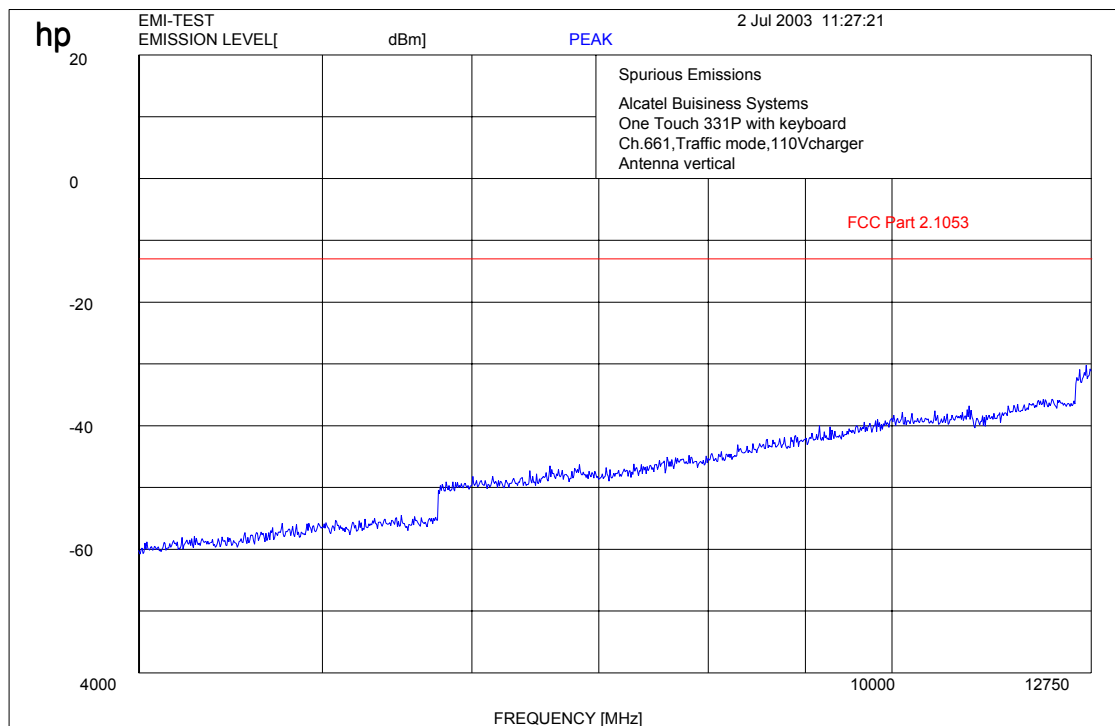

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 24 (151)

Channel 661 (up to 12 GHz - horizontal)

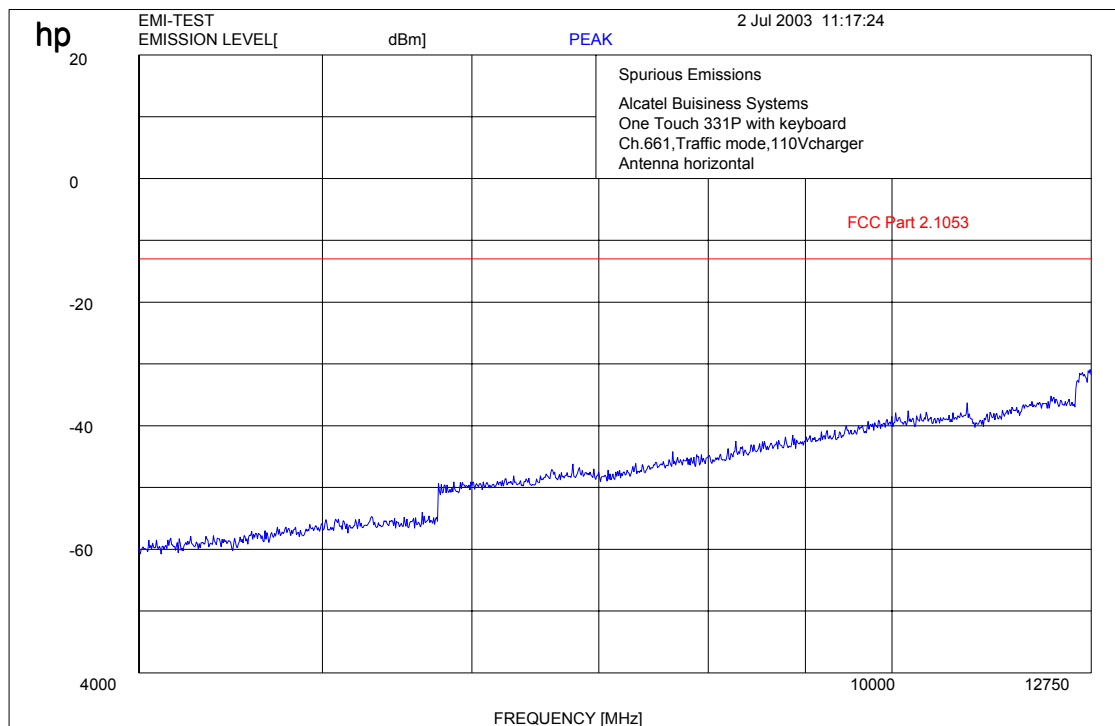

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 25 (151)


Channel 661 : -20 GHz (vertical and horizontal)

No traceable peak found / see plot on page 20

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

17 – 24; 64

Channel 810 (up to 4 GHz - vertical)

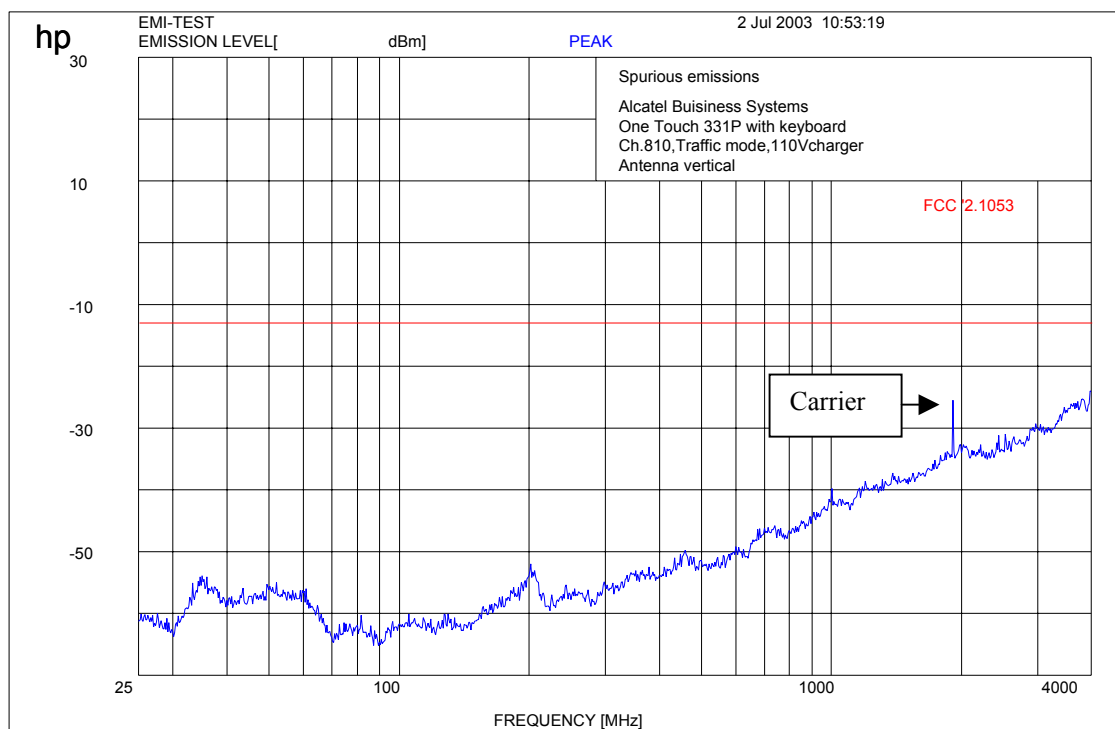

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 27 (151)

Channel 810 (up to 4 GHz - horizontal)

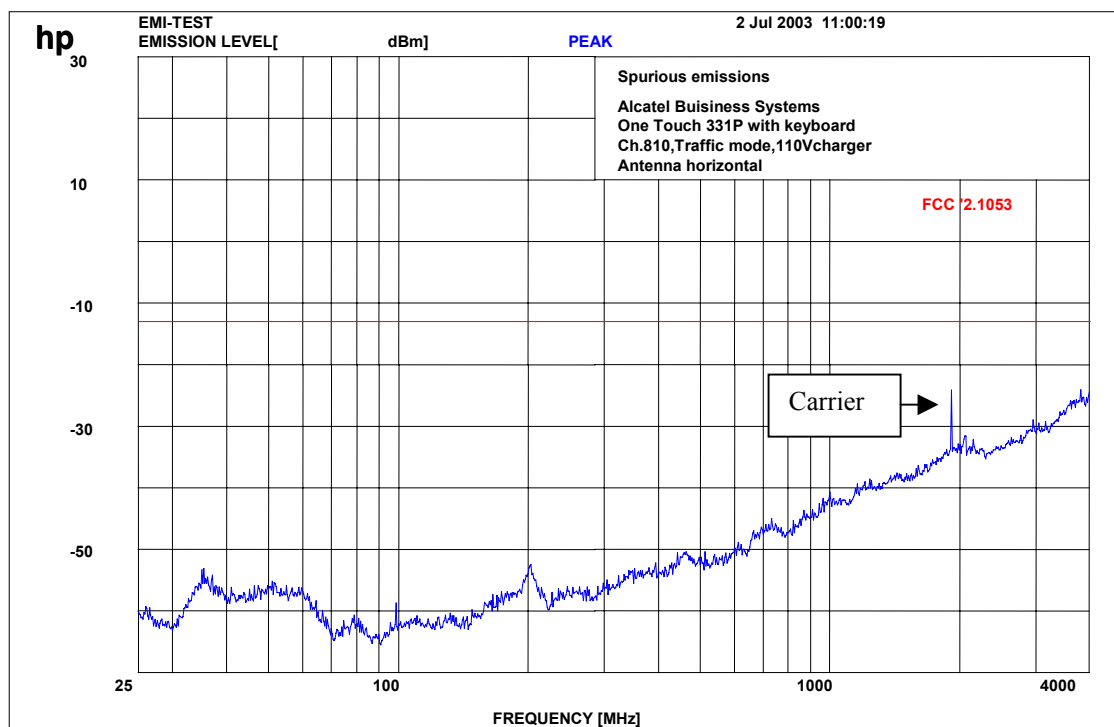

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 28 (151)

Channel 810 (up to 12 GHz – vertical)

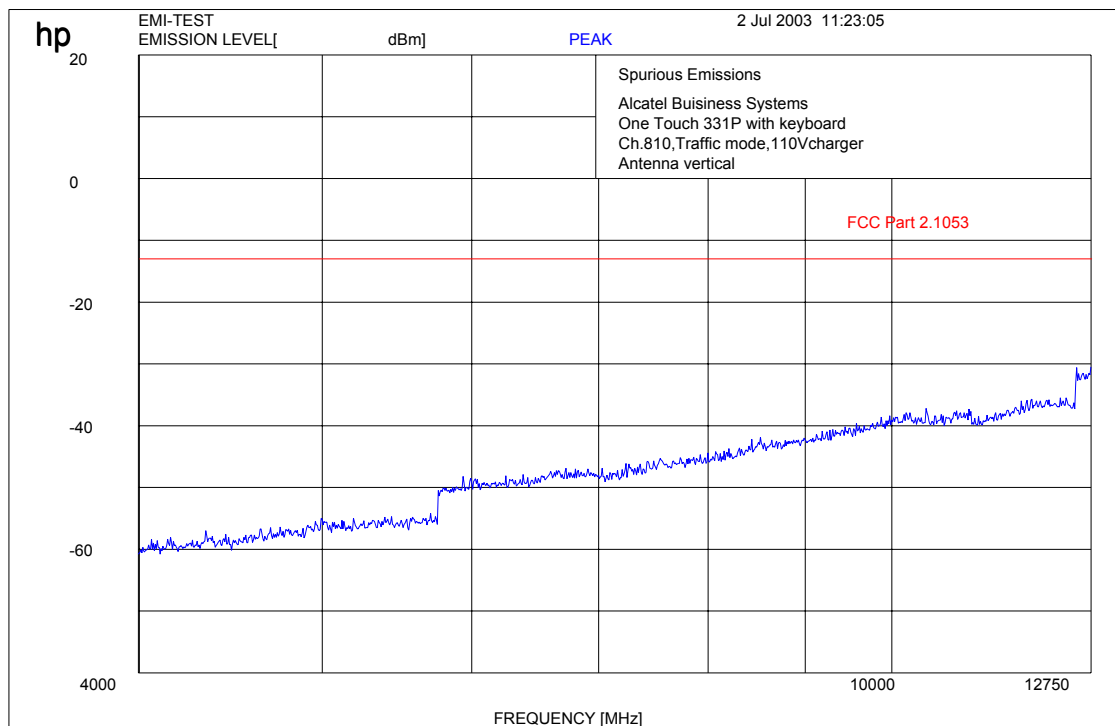

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 29 (151)

Channel 810 (up to 12 GHz – horizontal)

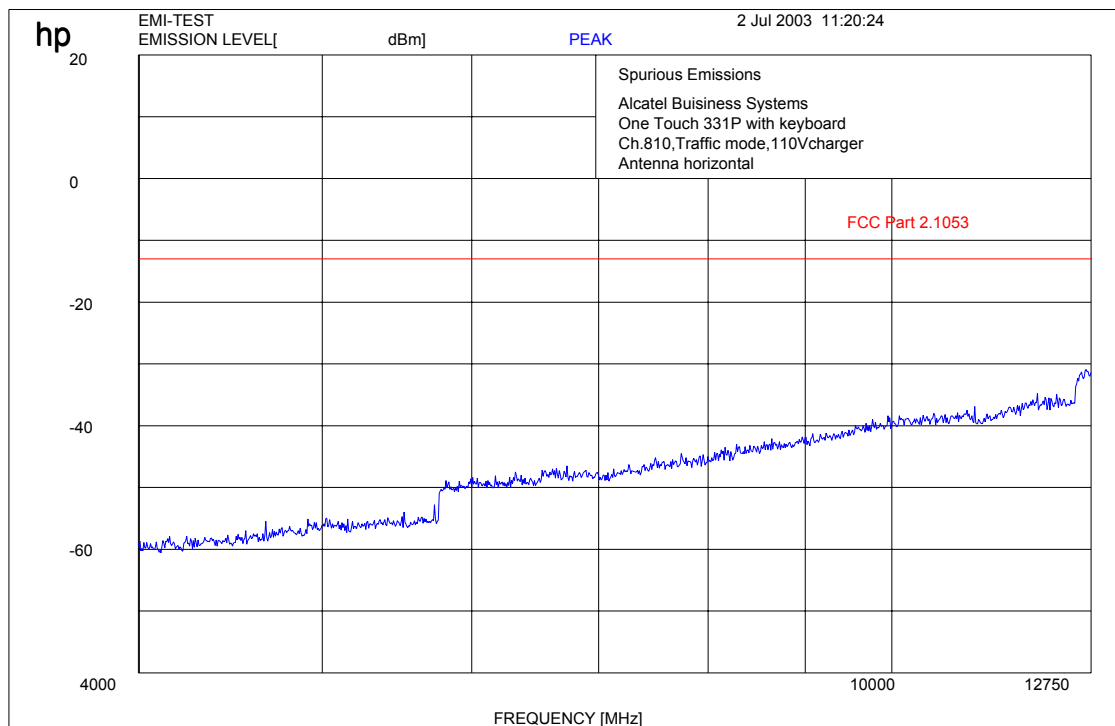

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 30 (151)

Channel 810 : -20 GHz (vertical and horizontal)

No traceable peak found / see plot on page 20

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 31 (151)

Idle-Mode (this is valid for all 3 channels and up to 4 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 32 (151)

Idle-Mode (this is valid for all 3 channels and up to 12 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Idle-Mode (this is valid for all 3 channels and up to 20 GHz)

Results see page 104

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 34 (151)

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:


Test configuration: handset "One Touch 331P + car kit "MP82"

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		30.4	-13.0 (43.4 dBc)		carrier
No traceable peak found					
CH 661					
1880.0		30.2	-13.0 (43.2 dBc)		carrier
No traceable peak found					
CH 810					
1909.8		30.0	-13.0 (43.0 dBc)		carrier
No traceable peak found					
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 512 (up to 4 GHz - vertical)

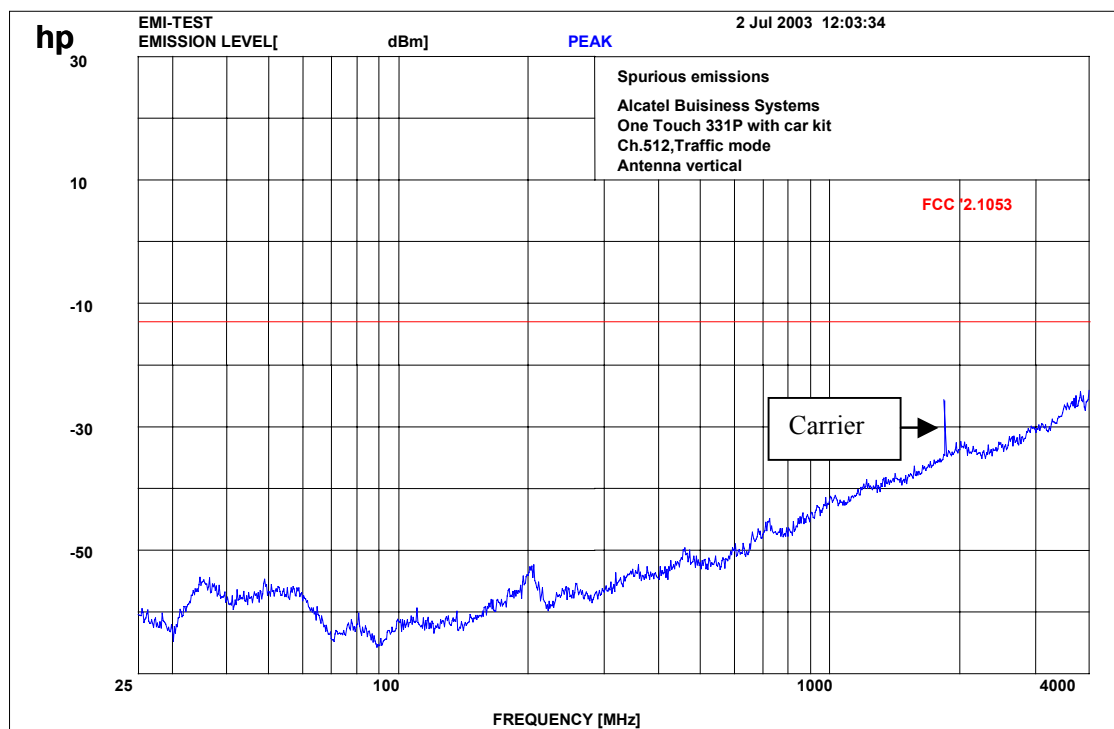

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 4 GHz - horizontal)

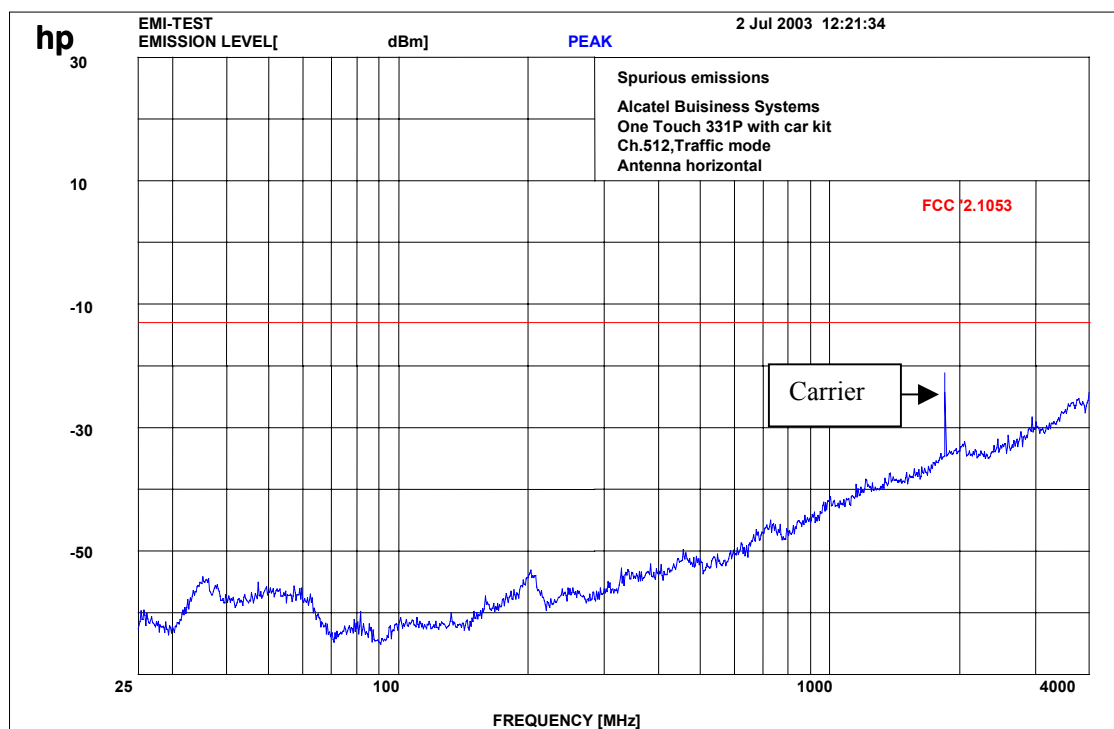

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz


$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 12 GHz - vertical)

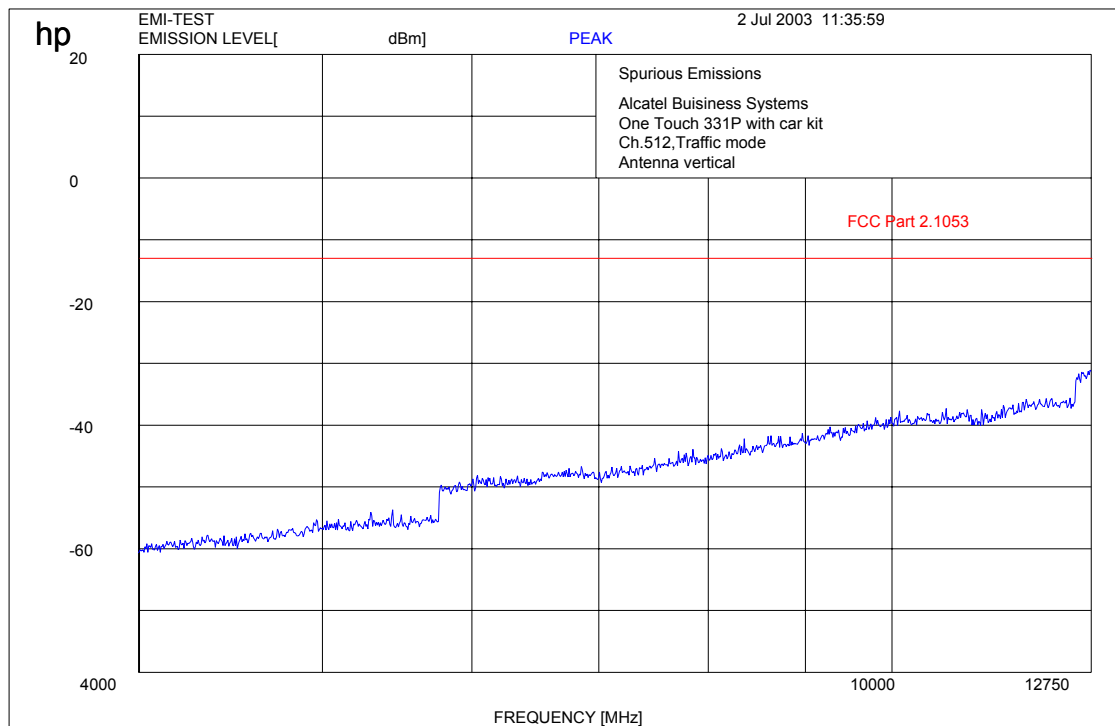

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 38 (151)

Channel 512 (up to 12 GHz - horizontal)

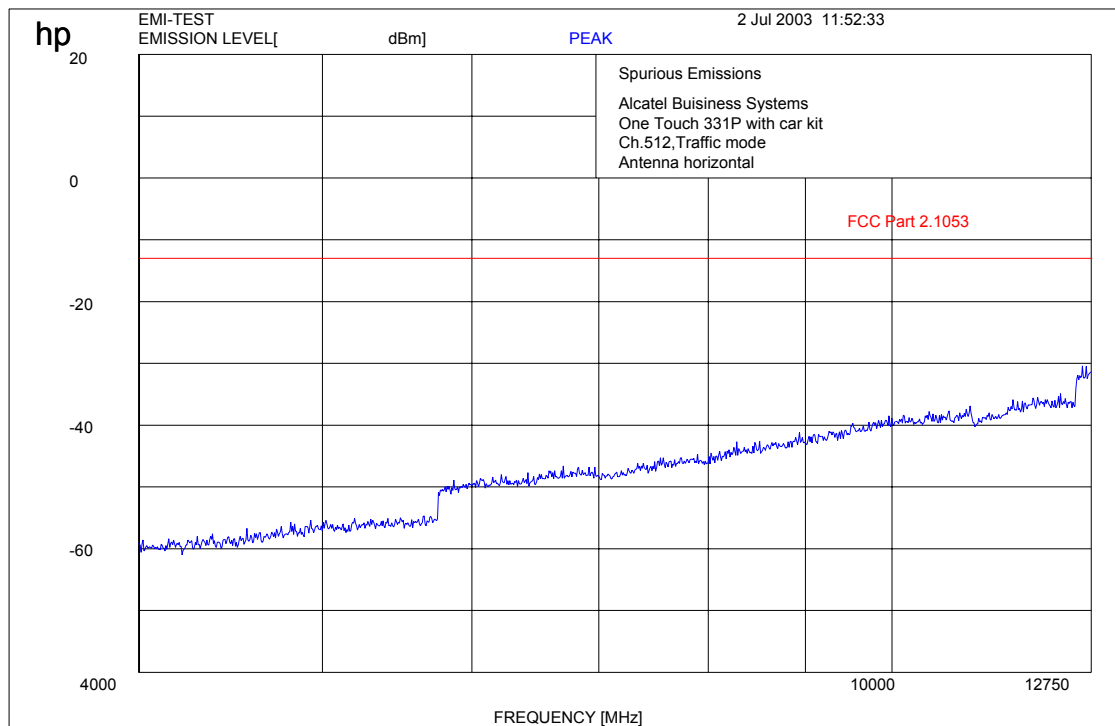

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 39 (151)

Channel 512 :- 20 GHz (vertical and horizontal)

No traceable peak found – Plot valid for all channels

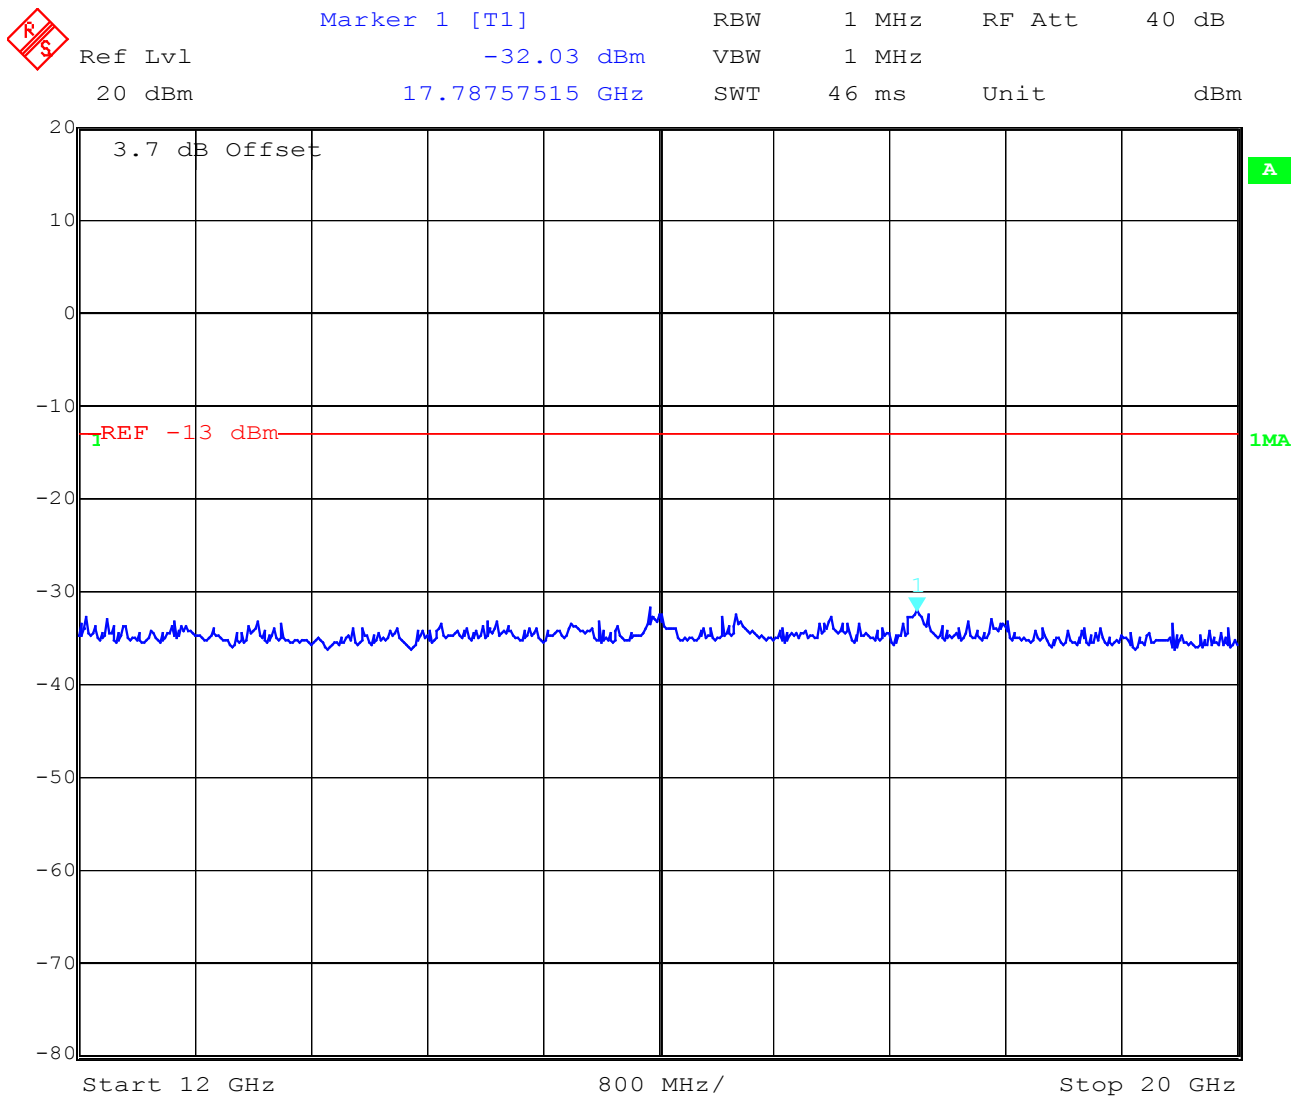


Date: 3.JUL.2003 07:42:25

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz - vertical)

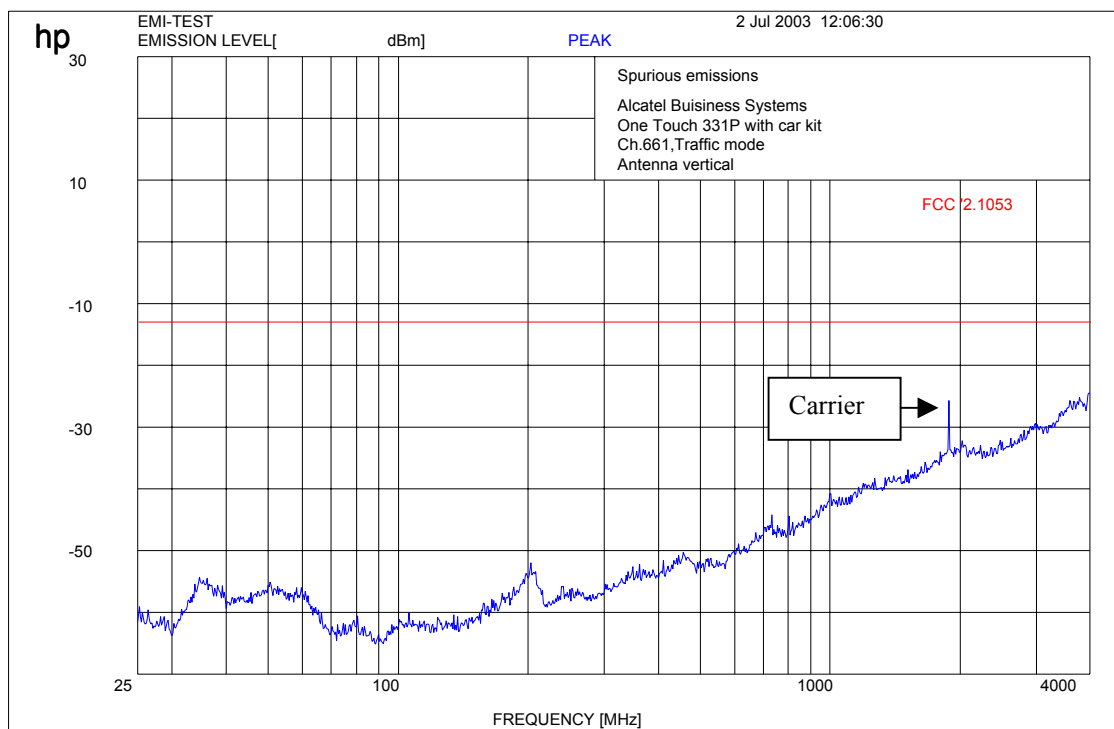

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz - horizontal)

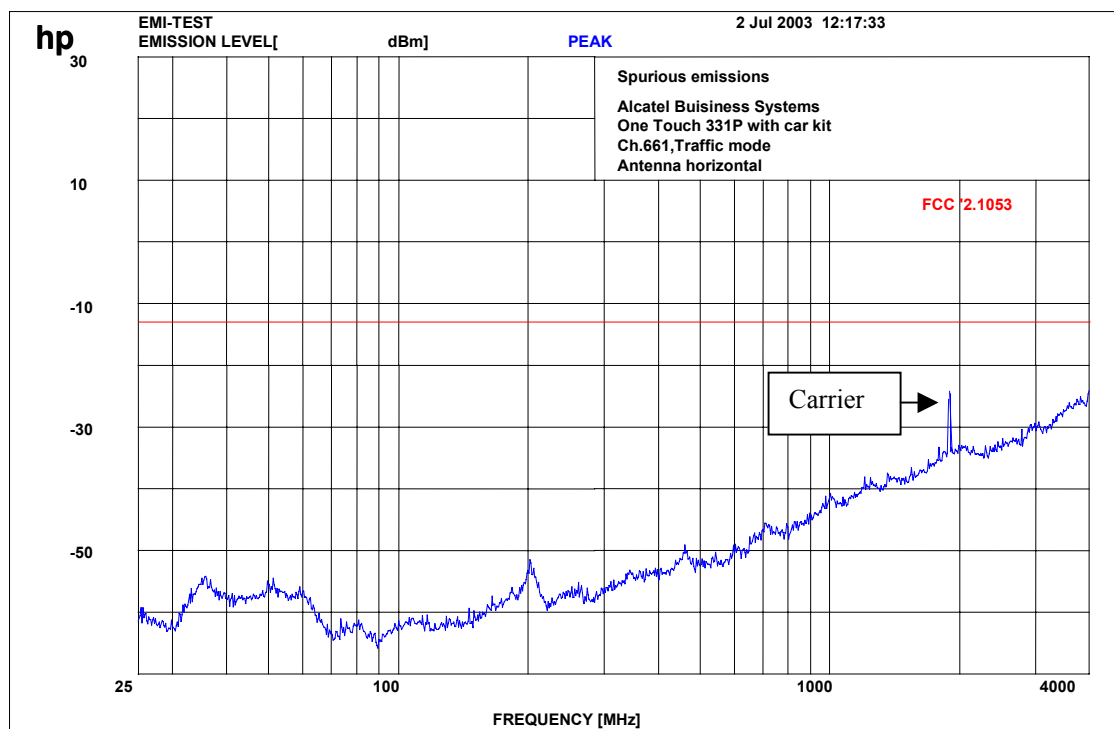

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 42 (151)

Channel 661 (up to 12 GHz - vertical)

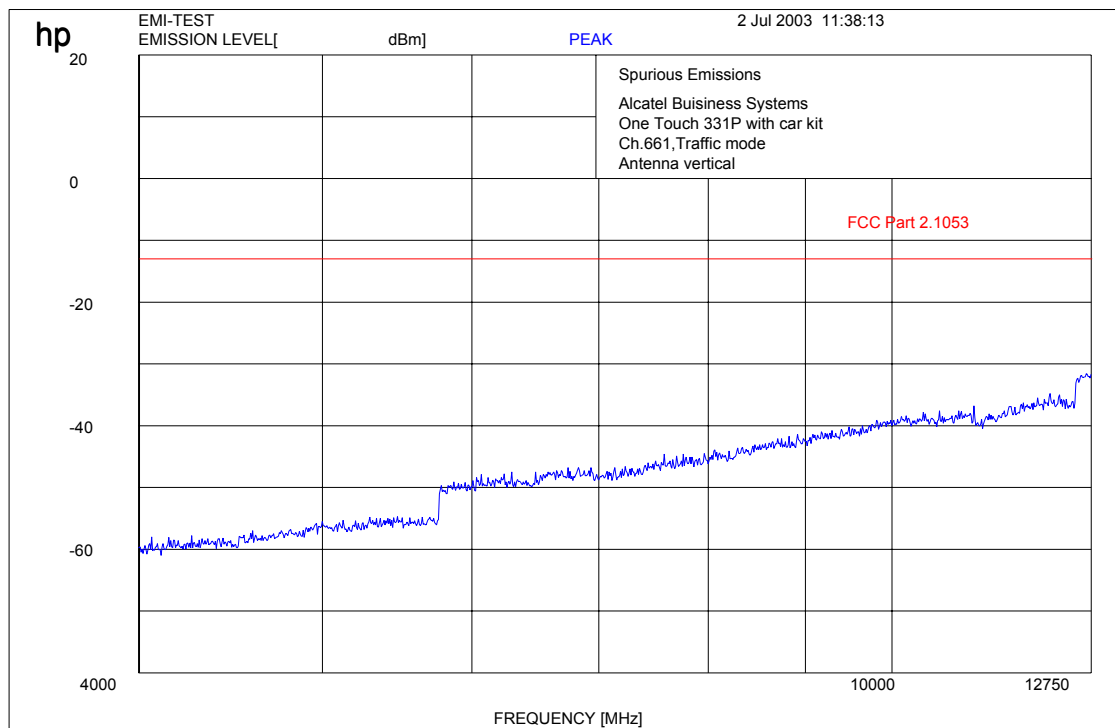

$f < 1 \text{ GHz} : \text{RBW/VBW} : 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW} / \text{VBW} 1 \text{ MHz}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 43 (151)

Channel 661 (up to 12 GHz - horizontal)

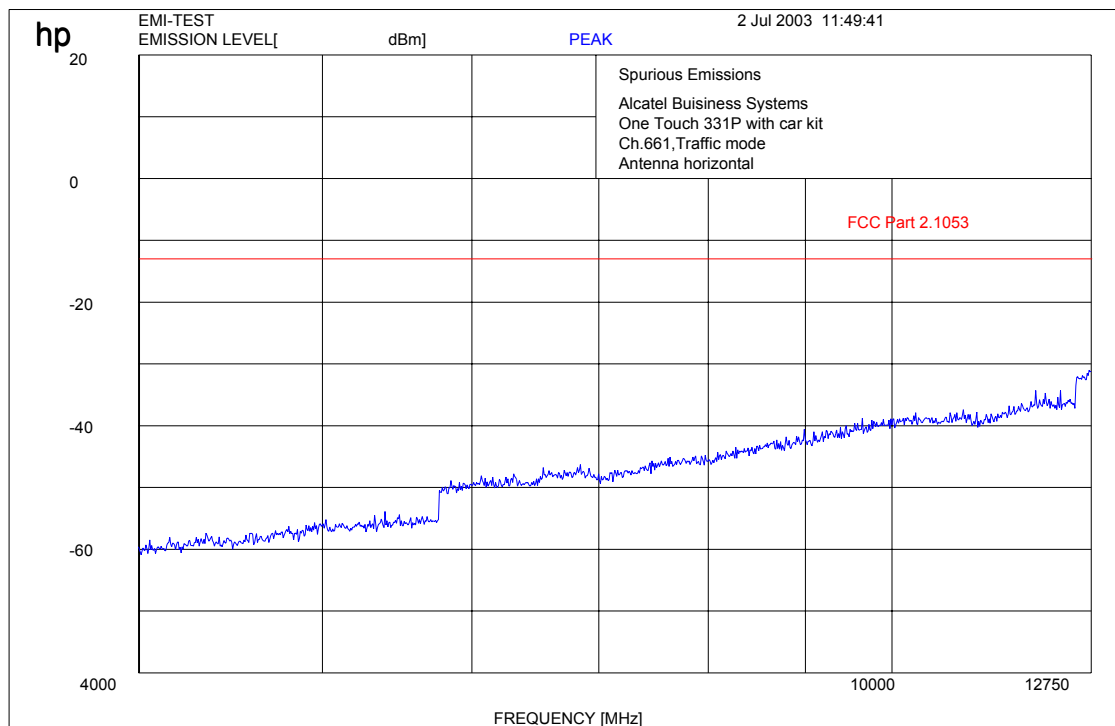

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 44 (151)

Channel 661 : -20 GHz (vertical and horizontal)


No traceable peak found / see plot on page 20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 810 (up to 4 GHz - vertical)

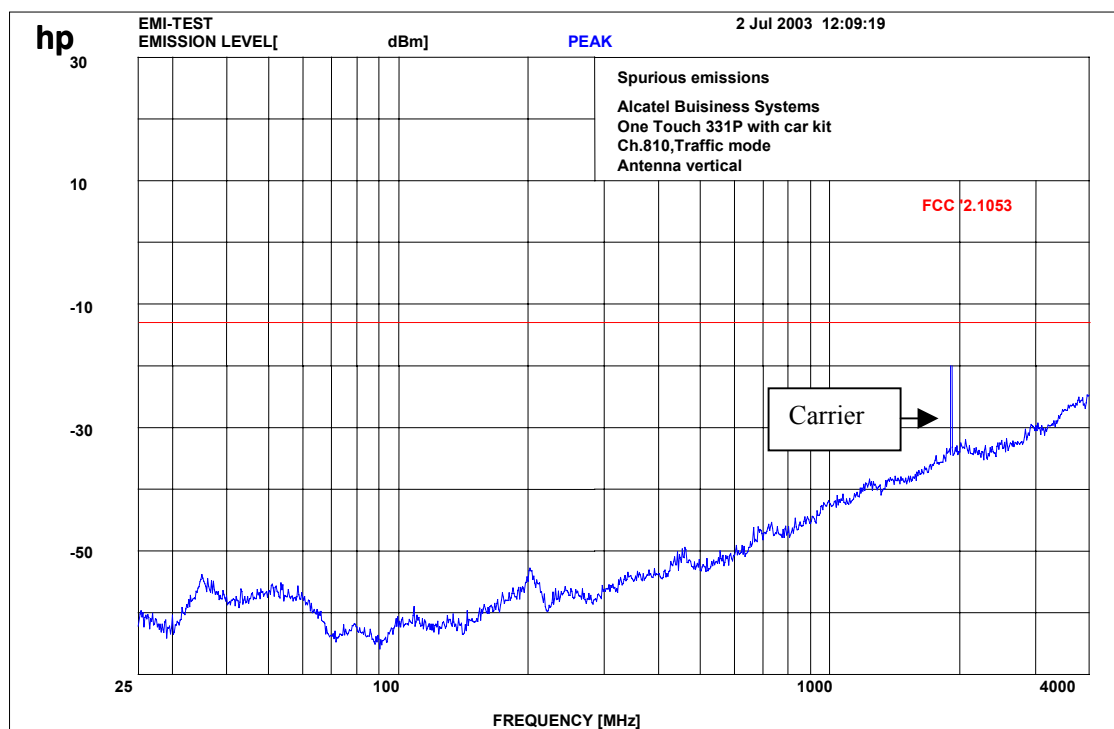

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 810 (up to 4 GHz - horizontal)

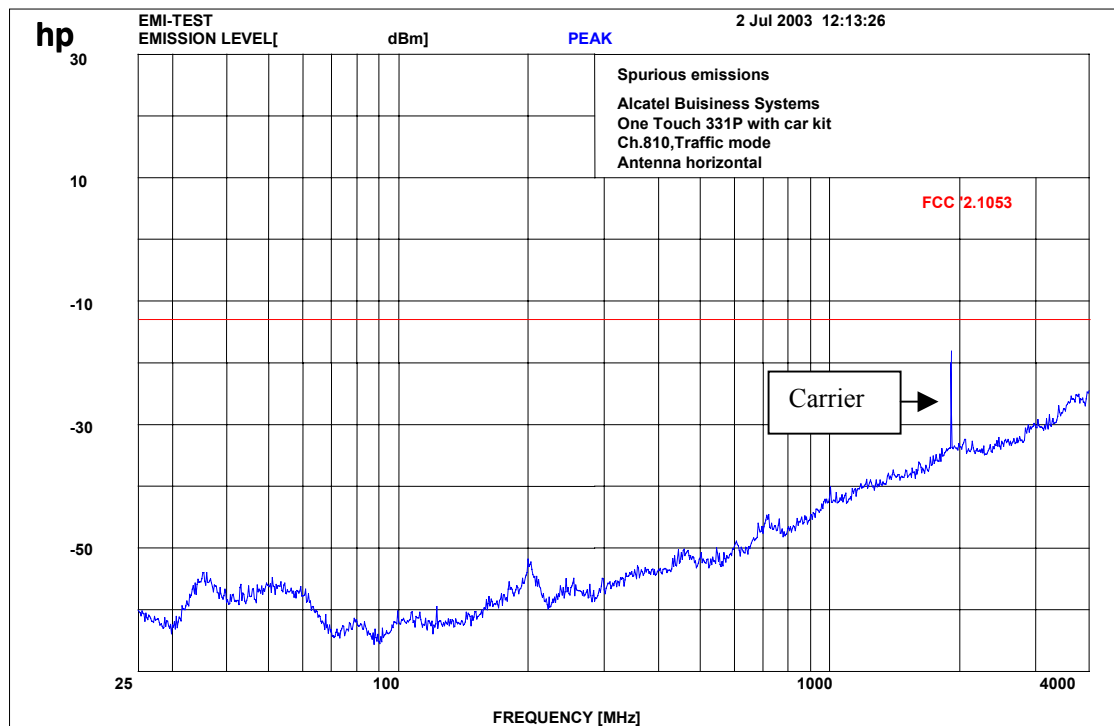

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 47 (151)

Channel 810 (up to 12 GHz – vertical)

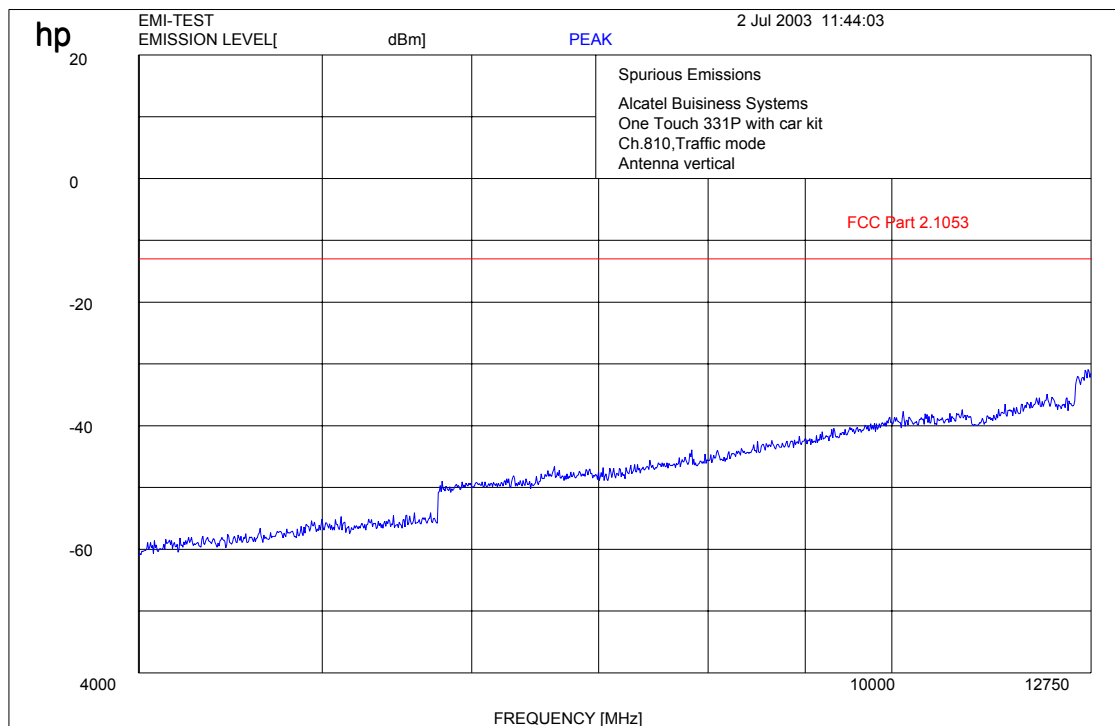

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 48 (151)

Channel 810 (up to 12 GHz – horizontal)

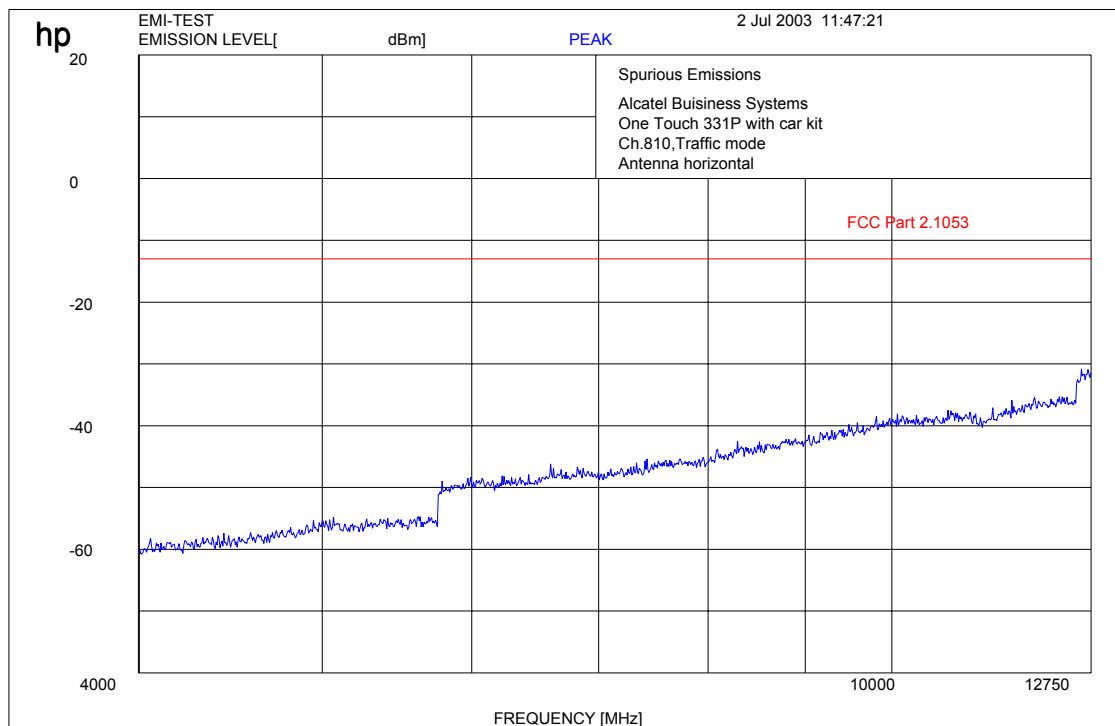

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 49 (151)

Channel 810 : -20 GHz (vertical and horizontal)

No traceable peak found / see plot on page 20

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)**

17 – 24; 64

Idle-Mode (this is valid for all 3 channels and up to 4 GHz)

Results see page 104

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 51 (151)

Idle-Mode (this is valid for all 3 channels and up to 12 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 52 (151)

Idle-Mode (this is valid for all 3 channels and up to 20 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 53 (151)

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

Test configuration: handset "One Touch 331P + Cigar lighter charger 24VDC "3DS 07848 AAAA" (Primax) + Headset "3DS 07855 AAAA" (Merry)


EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		30.4	-13.0 (43.4 dBc)		carrier
No traceable peak found					
CH 661					
1880.0		30.2	-13.0 (43.2 dBc)		carrier
No traceable peak found					
CH 810					
1909.8		30.0	-13.0 (43.0 dBc)		carrier
No traceable peak found					
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 4 GHz - vertical)

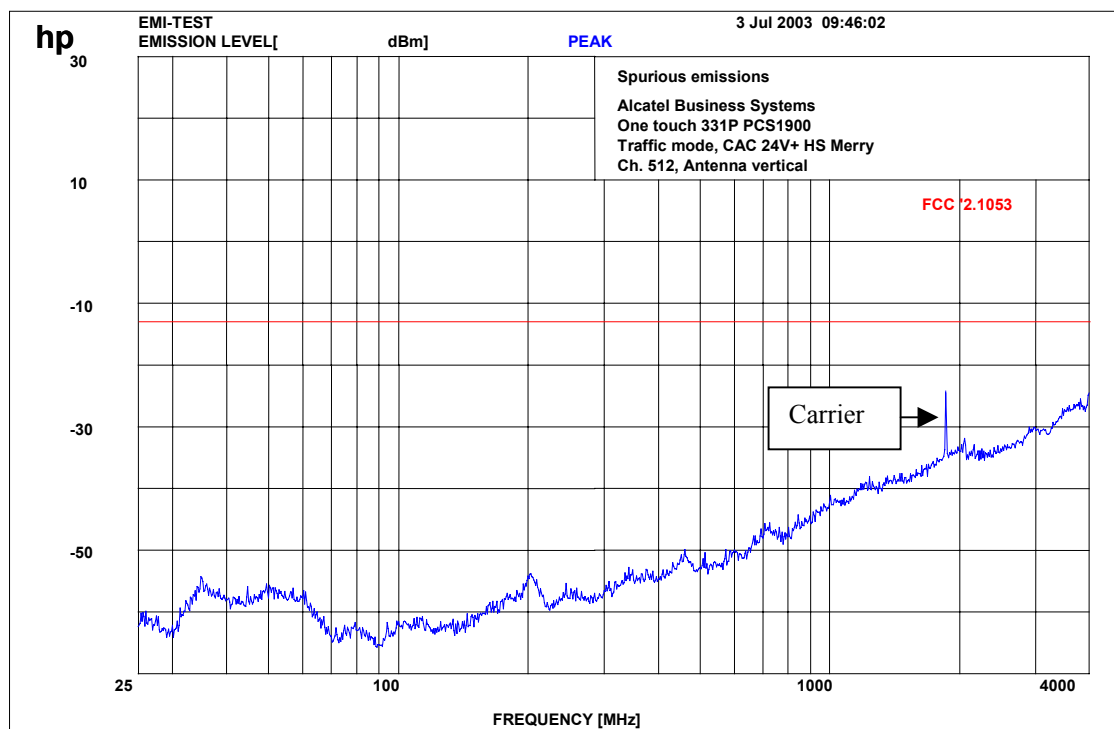

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 512 (up to 4 GHz - horizontal)

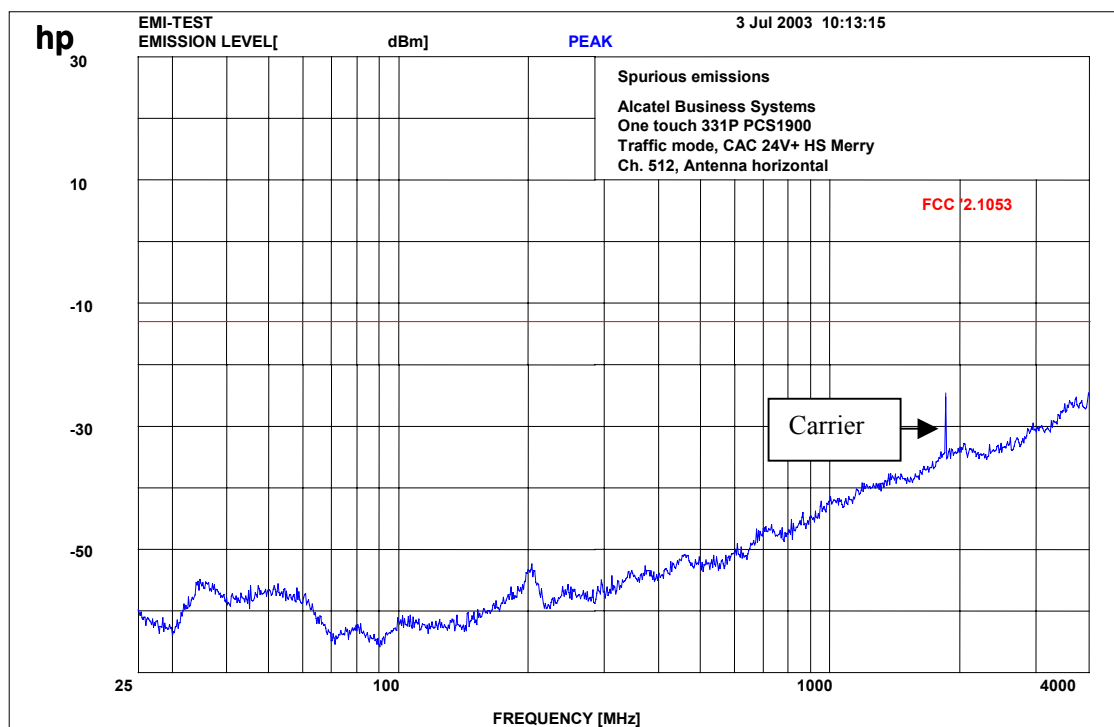

$f < 1 \text{ GHz} : \text{RBW/VBW} : 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW} / \text{VBW} 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 56 (151)

Channel 512 (up to 12 GHz - vertical)

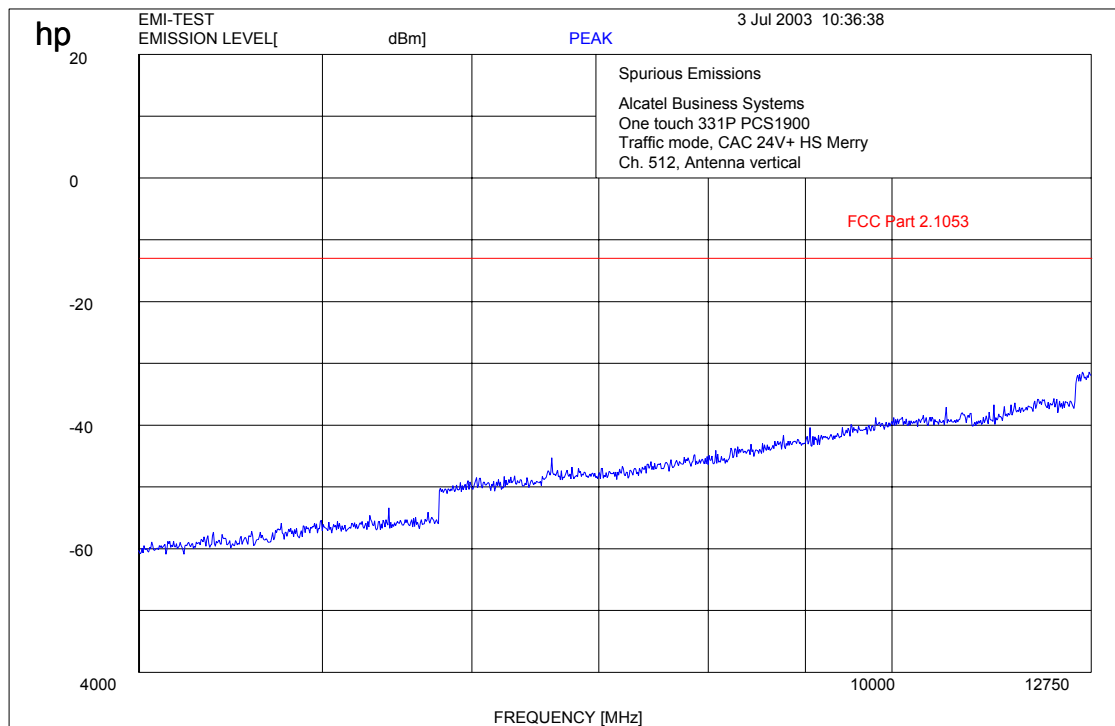

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 57 (151)

Channel 512 (up to 12 GHz - horizontal)

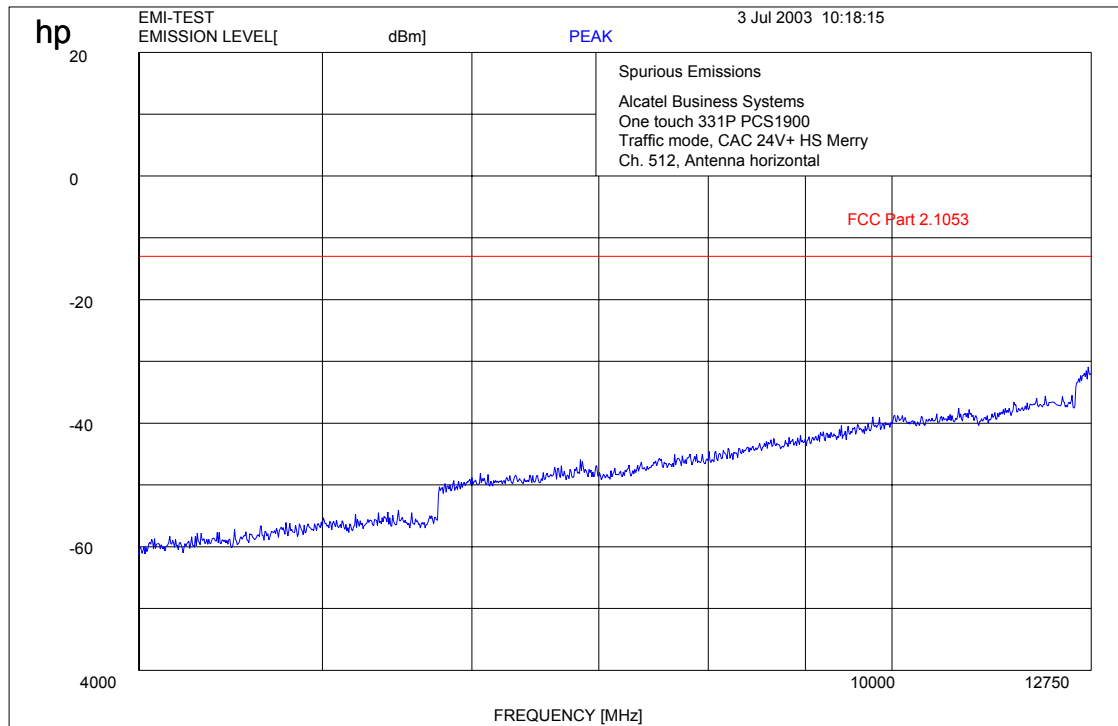

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 58 (151)

Channel 512 :- 20 GHz (vertical and horizontal)


No traceable peak found – Plot valid for all channels

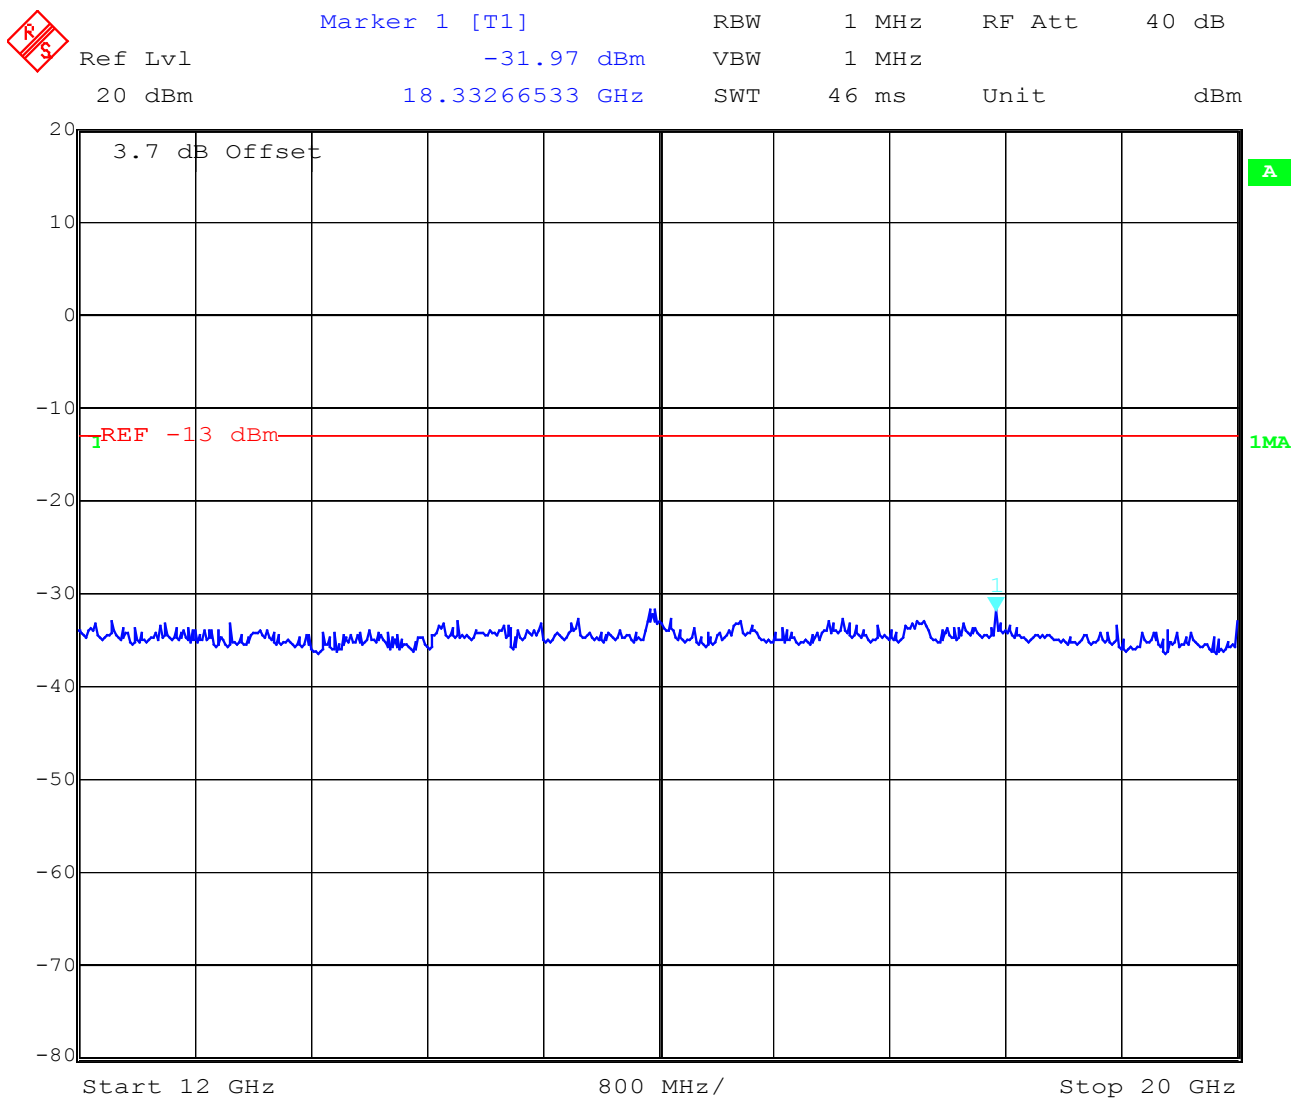

Date: 3.JUL.2003 07:42:46

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

Channel 661 (up to 4 GHz - vertical)

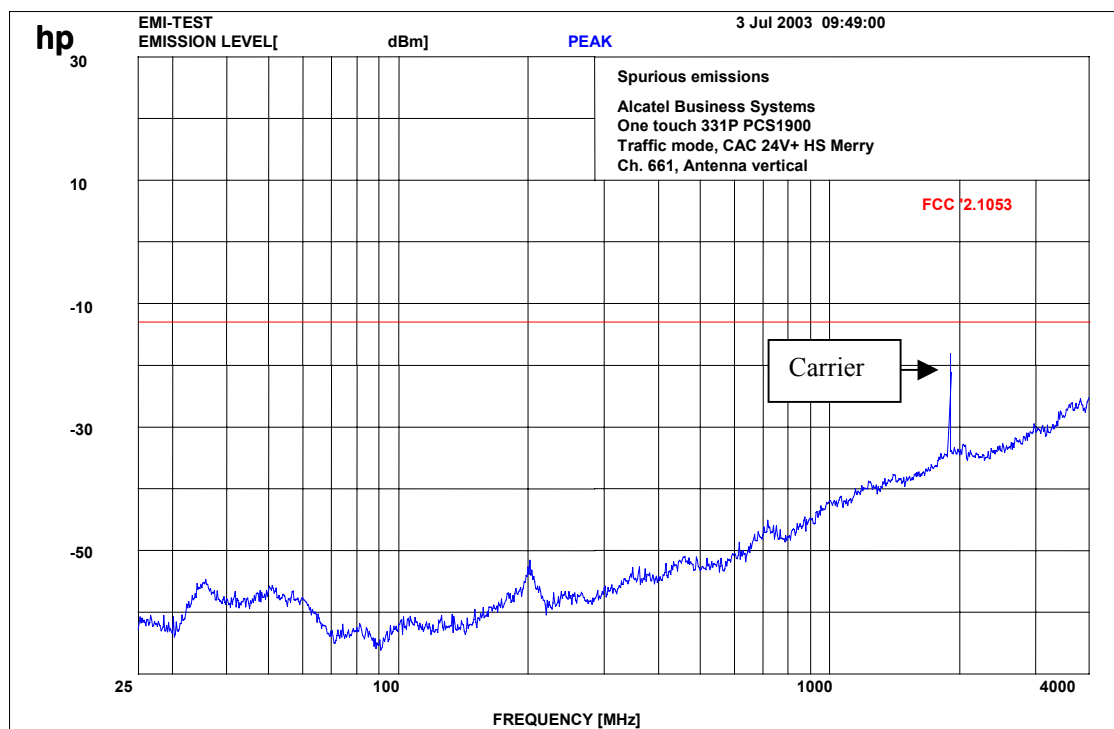

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 661 (up to 4 GHz - horizontal)

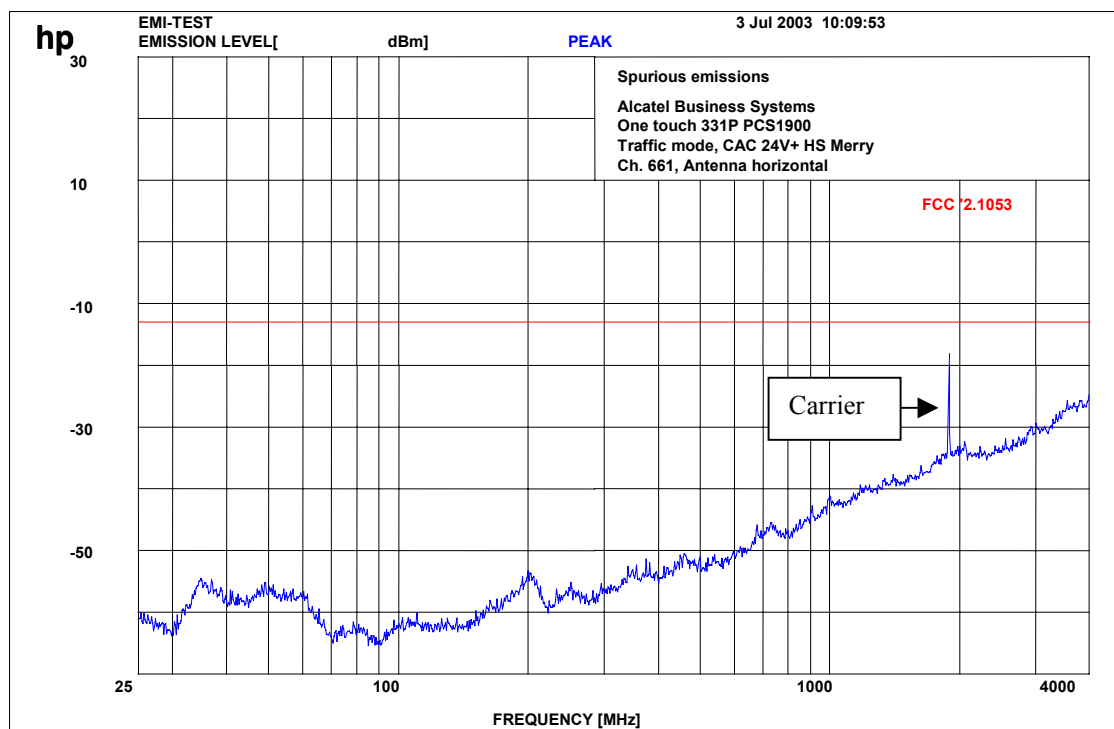

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 61 (151)

Channel 661 (up to 12 GHz - vertical)

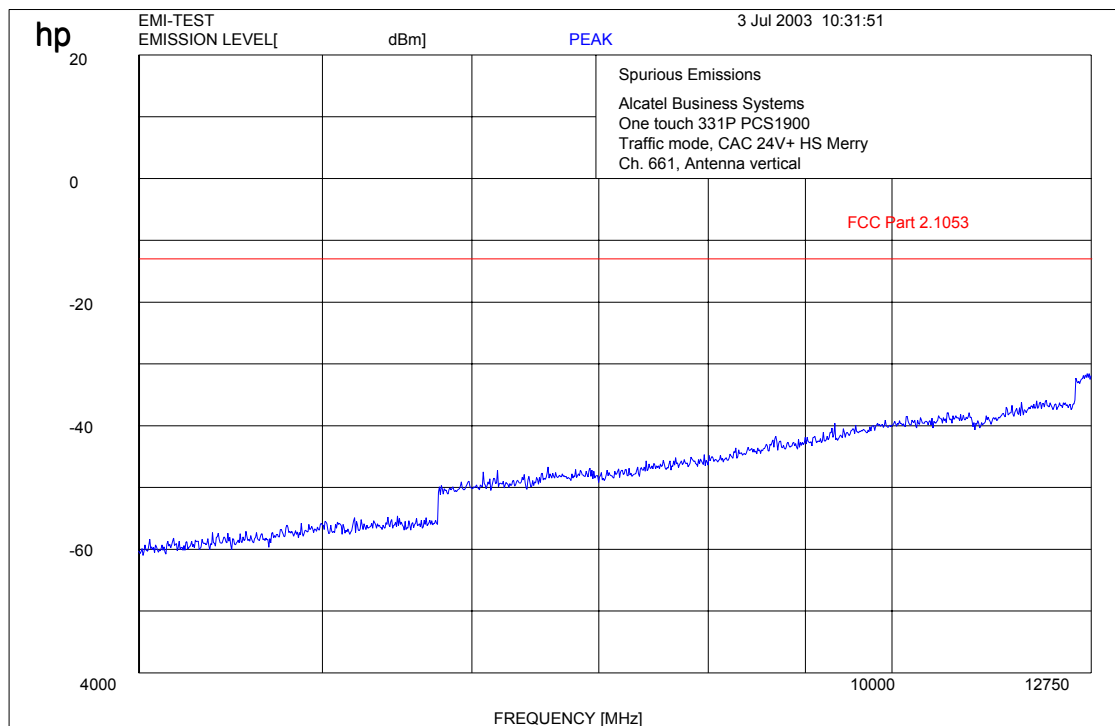

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 62 (151)

Channel 661 (up to 12 GHz - horizontal)

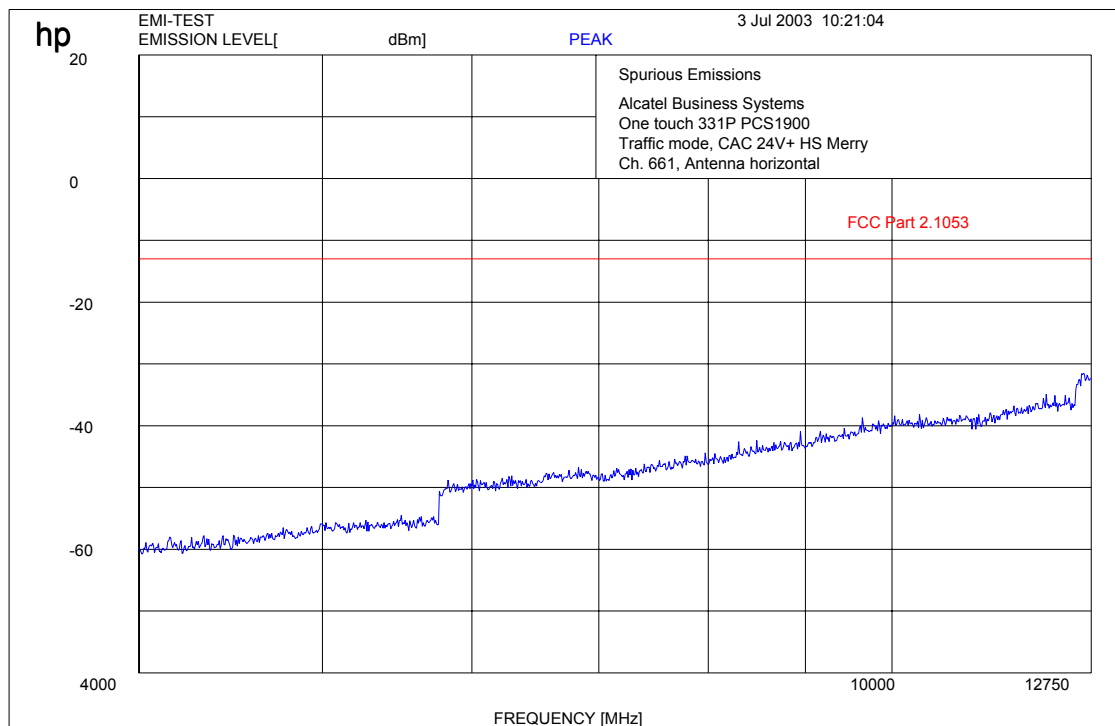

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW / VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 63 (151)

Channel 661 : -20 GHz (vertical and horizontal)


No traceable peak found / see plot on page 20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

Channel 810 (up to 4 GHz - vertical)

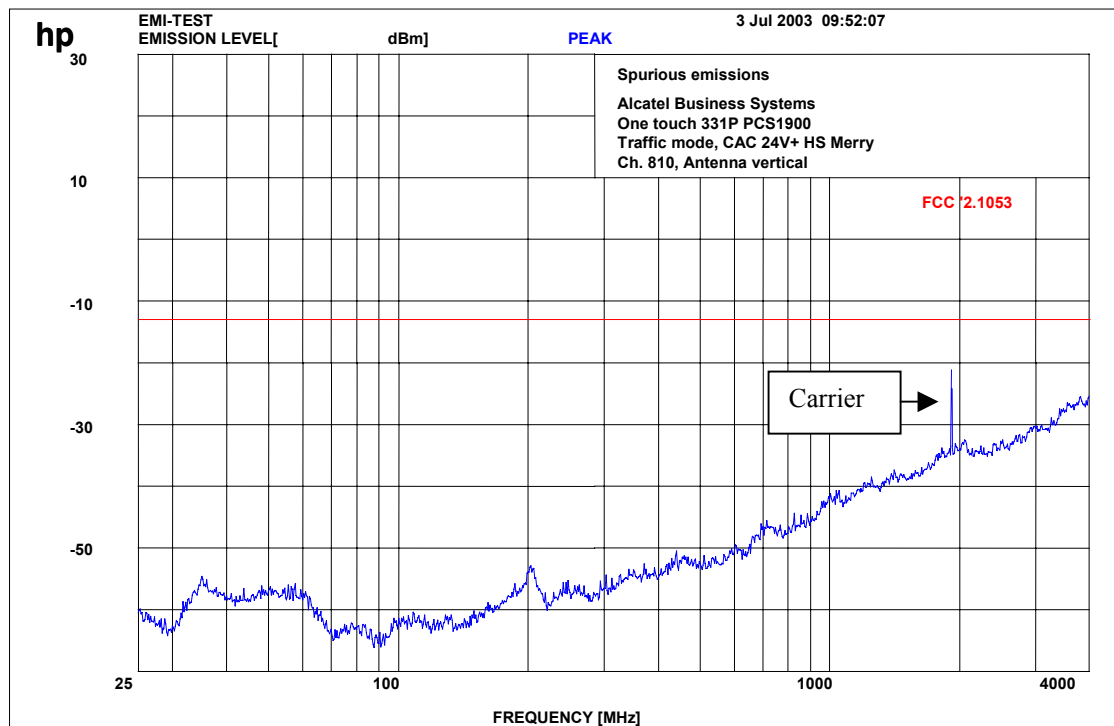

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

Channel 810 (up to 4 GHz - horizontal)

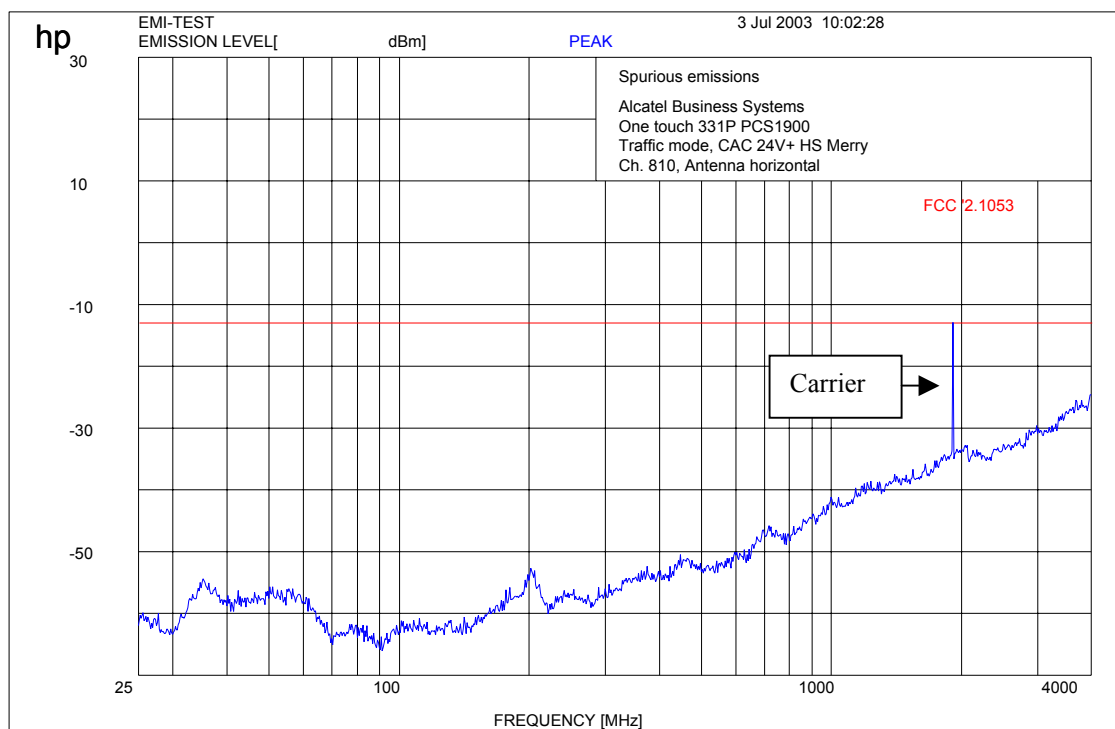

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 66 (151)

Channel 810 (up to 12 GHz – vertical)

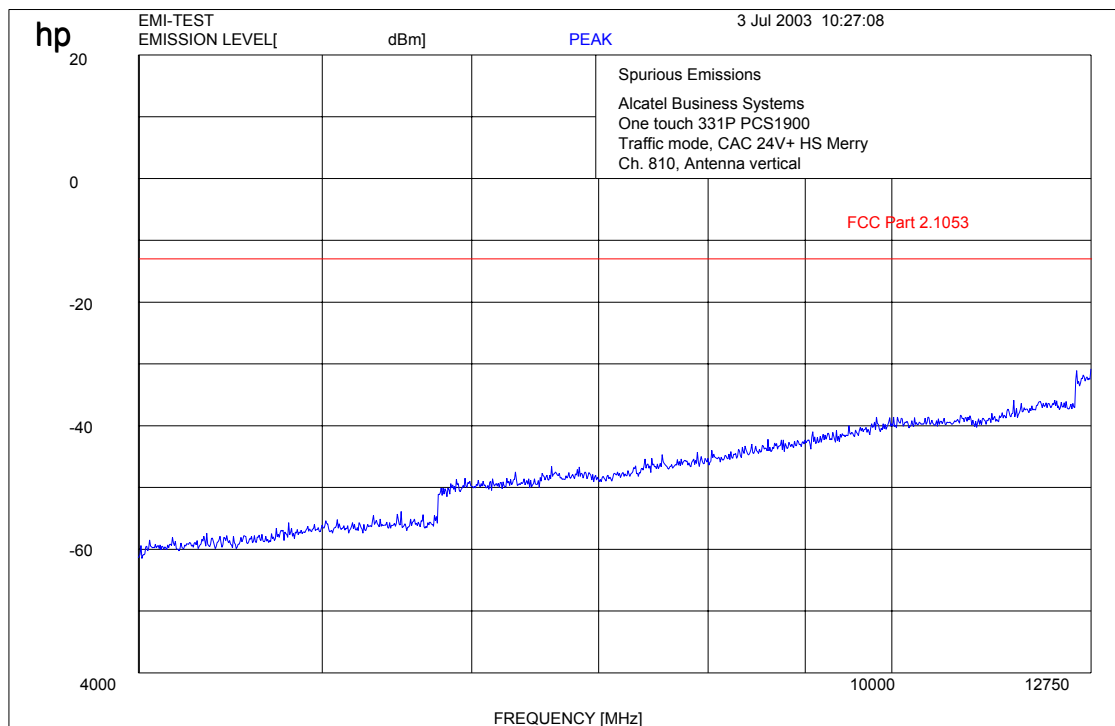

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 67 (151)

Channel 810 (up to 12 GHz – horizontal)

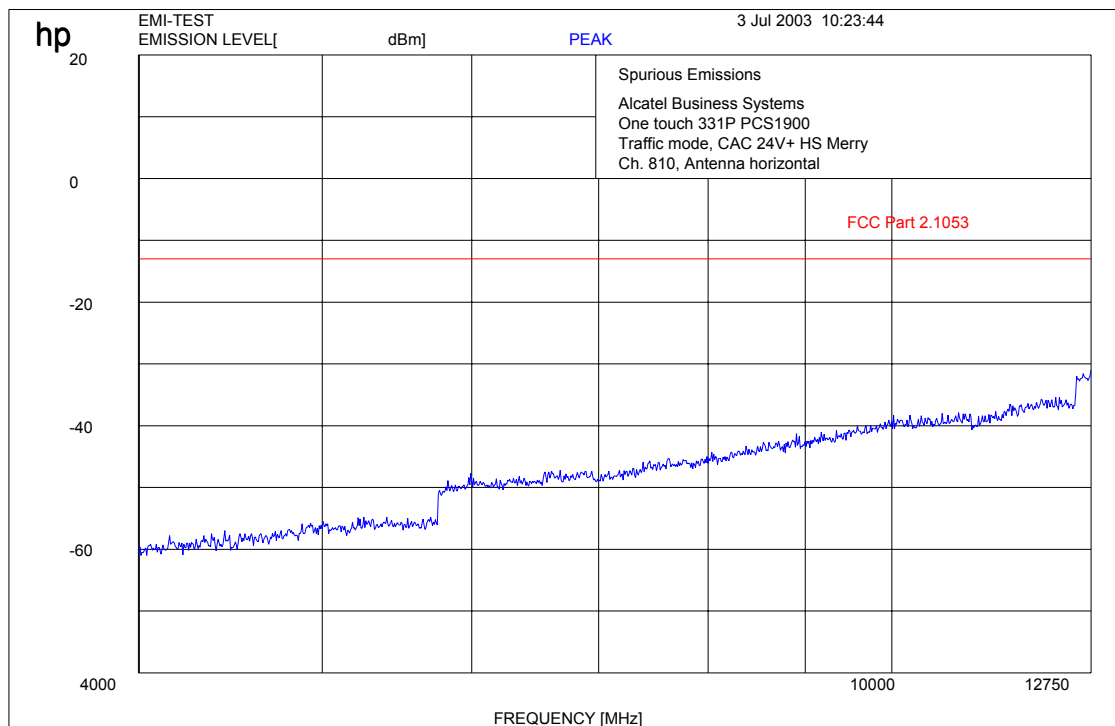

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 68 (151)

Channel 810 : -20 GHz (vertical and horizontal)

No traceable peak found / see plot on page 20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 69 (151)

Idle-Mode (this is valid for all 3 channels and up to 4 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 70 (151)

Idle-Mode (this is valid for all 3 channels and up to 12 GHz)

Results see page 104

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 71 (151)

Idle-Mode (this is valid for all 3 channels and up to 20 GHz)

Results see page 104

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 72 (151)

CONDUCTED SPURIOUS EMISSIONS

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
CH 512					
1850.2		30.1	-13.0 (43.1 dBc)		carrier
1849.98		-18.9		49.0	complies
1878.84		-33.1		63.2	
CH 661					
1880.0		29.8	-13.0 (42.8 dBc)		carrier
no traceable signal found					
CH 810					
1909.8		29.1	-13.0 (42.1 dBc)		carrier
1909.00		-27.6		56.7	complies
1910.02		-19.1		48.2	complies
Measurement uncertainty		± 0.5dB			

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03


Issue Date: 2003-07-04

Page 73 (151)

Measurements:

Channel: 512

	Ref Lvl	23 dBm	Marker 1 [T1]	-42.67 dBm	1.84900000 GHz	RBW	100 kHz	RF Att	40 dB
						VBW	100 kHz		
						SWT	470 ms	Unit	dBm

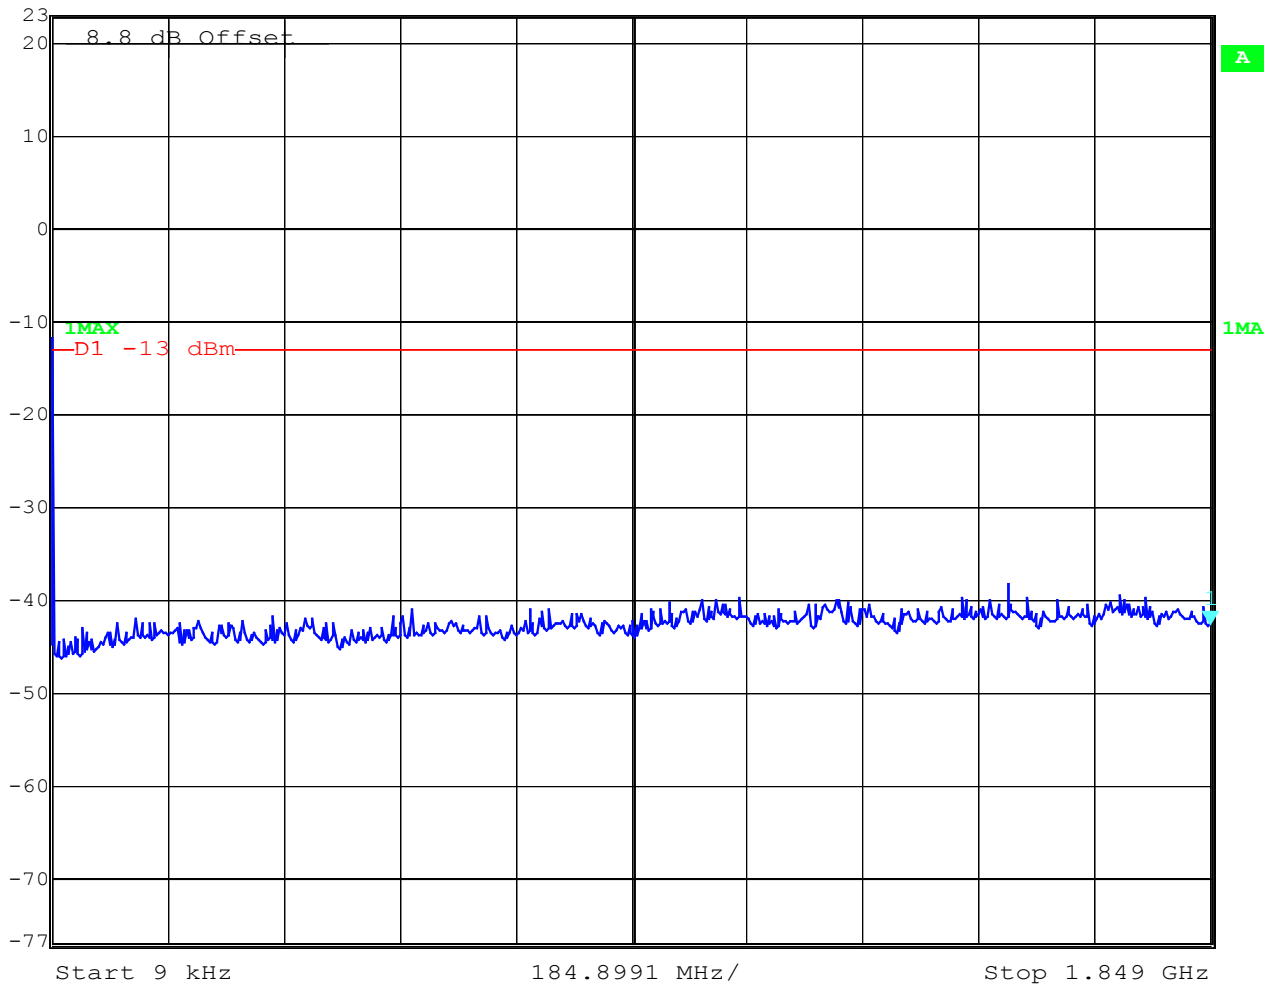

Date: 2.JUL.2003 15:35:47

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 74 (151)

Channel 512

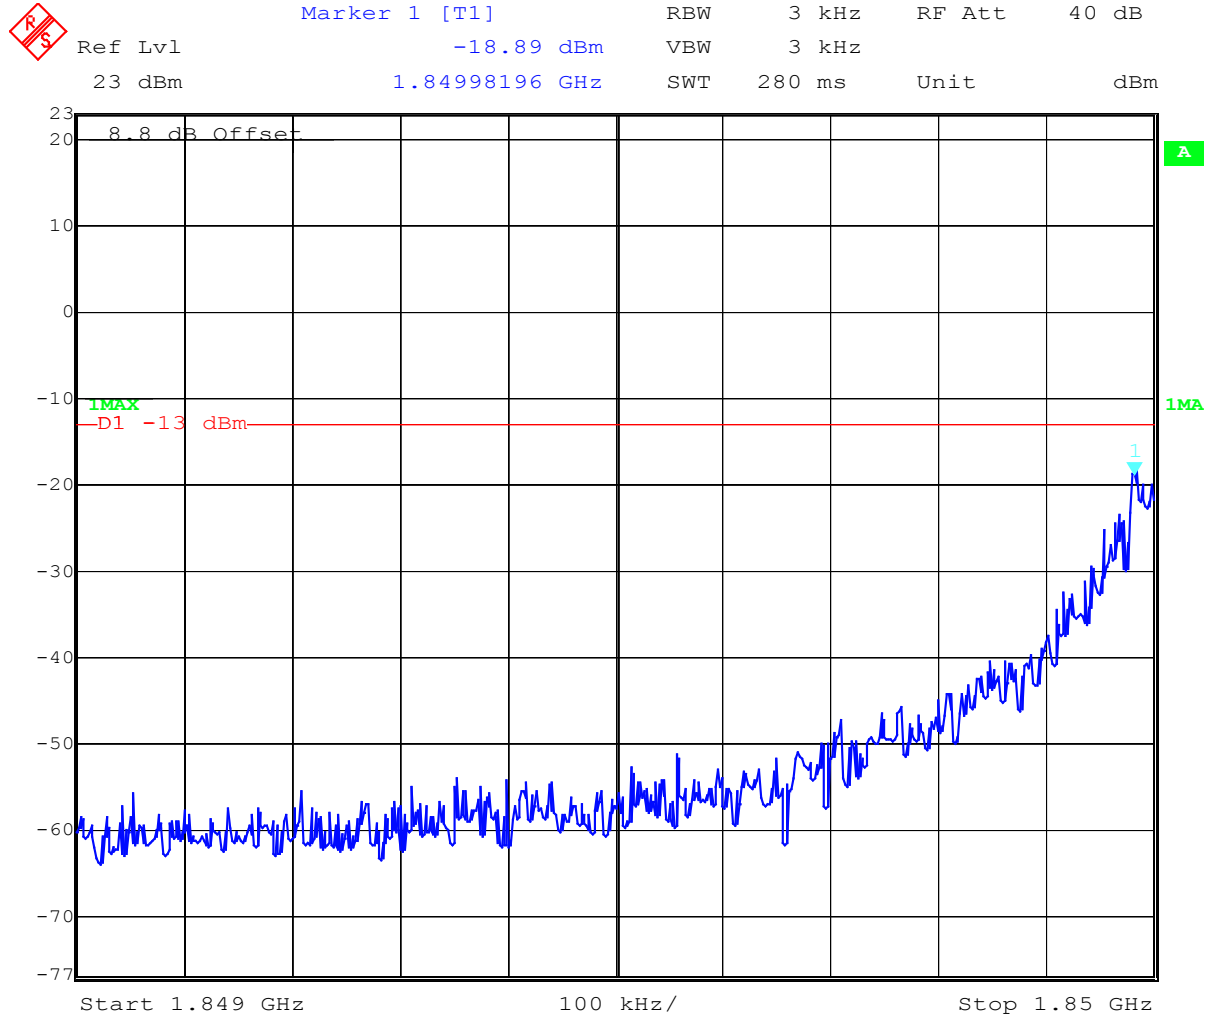

Date: 2.JUL.2003 15:36:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03


Issue Date: 2003-07-04

Page 75 (151)

Channel 512



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -33.13 dBm VBW 100 kHz
23 dBm 1.87884770 GHz SWT 5 ms Unit dBm

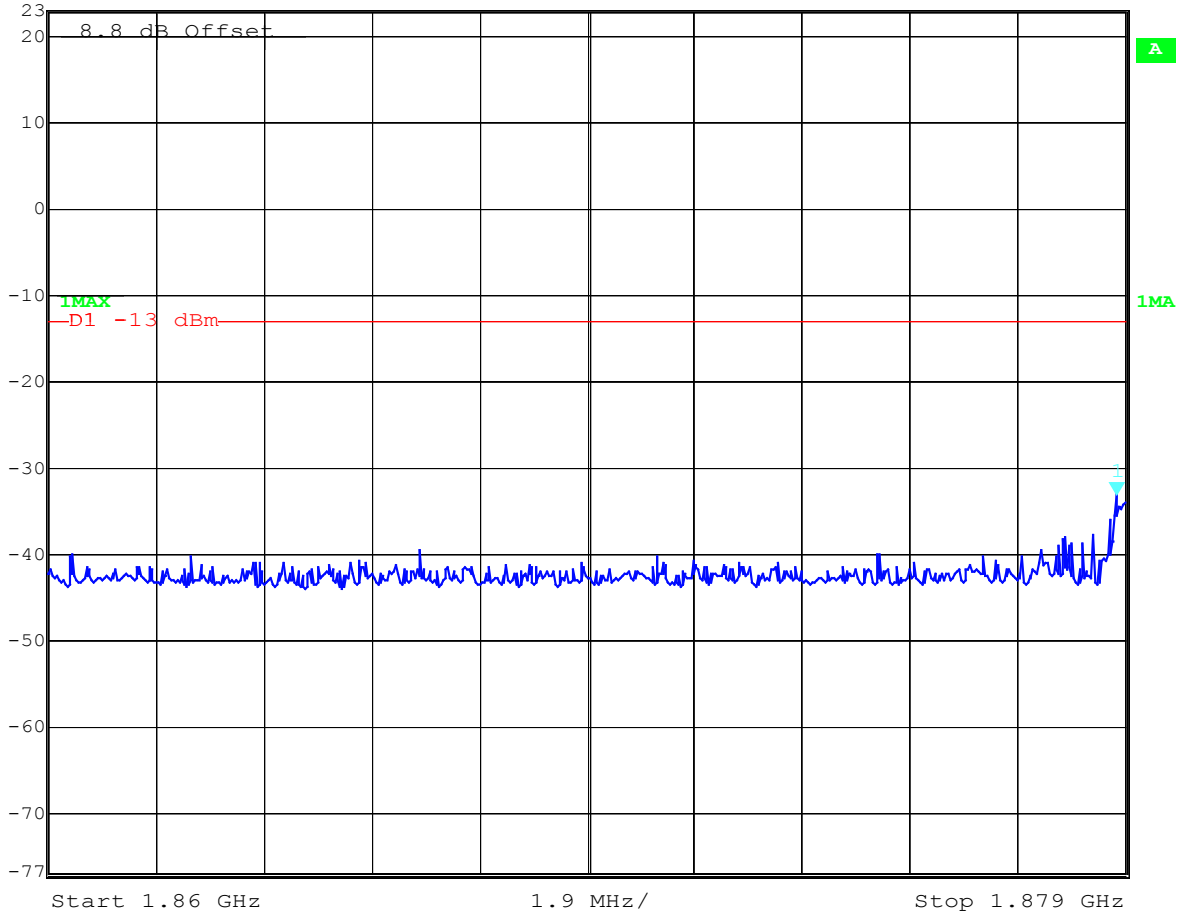

Date: 2.JUL.2003 15:37:05

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03


Issue Date: 2003-07-04

Page 76 (151)

Channel 661



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -33.51 dBm VBW 100 kHz
23 dBm 1.87884770 GHz SWT 470 ms Unit dBm

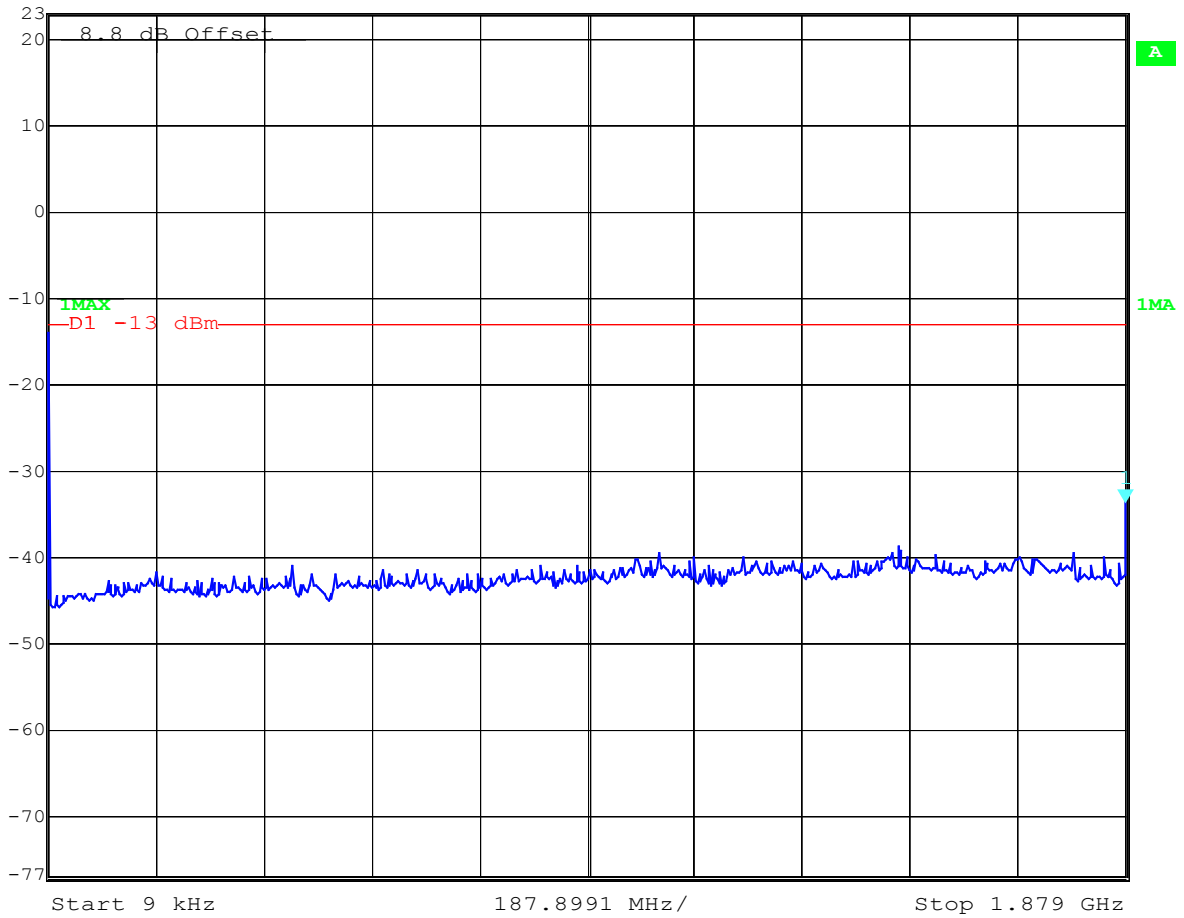

Date: 2.JUL.2003 15:39:18

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03


Issue Date: 2003-07-04

Page 77 (151)

Channel 661



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -41.26 dBm VBW 100 kHz
23 dBm 1.88100000 GHz SWT 4.6 s Unit dBm

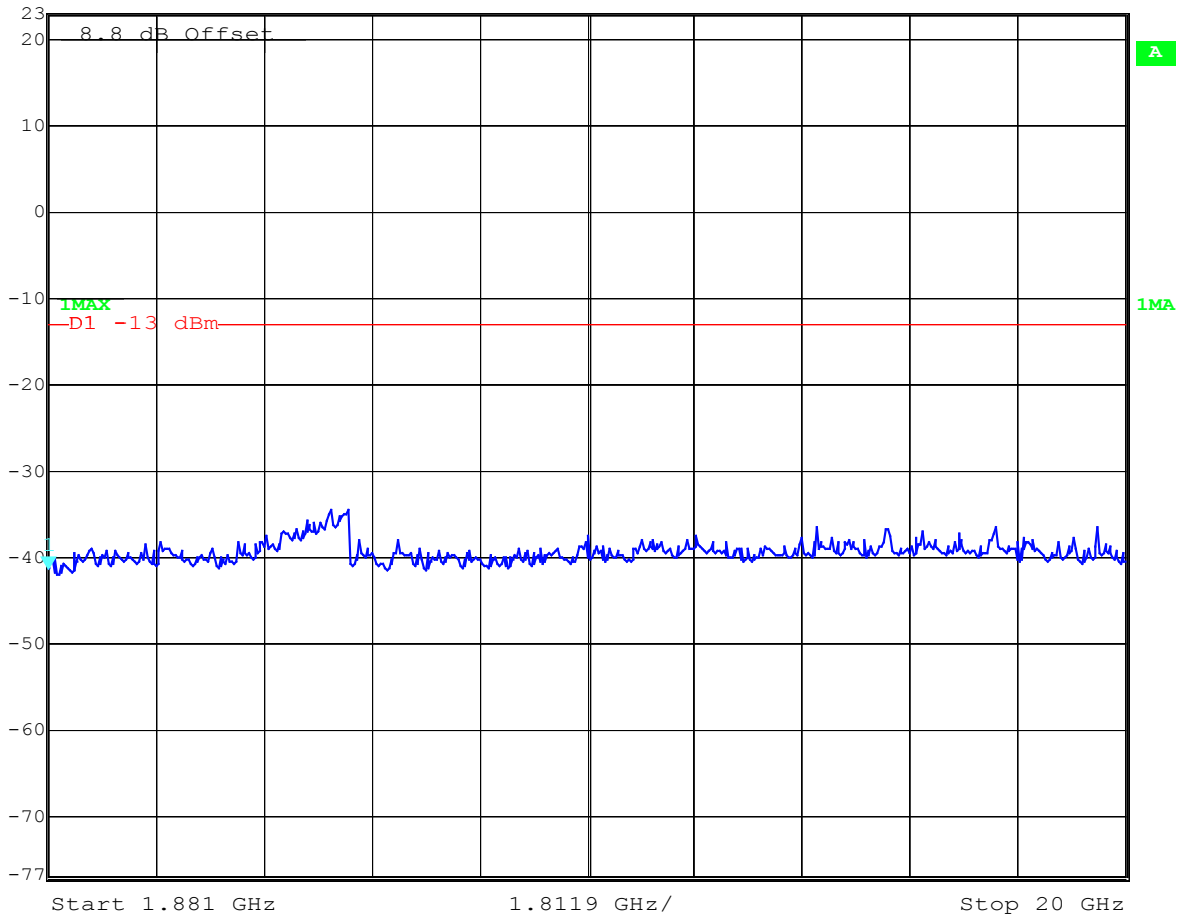

Date: 2.JUL.2003 15:39:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03


Issue Date: 2003-07-04

Page 78 (151)

Channel 810



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -27.63 dBm VBW 100 kHz
23 dBm 1.90900000 GHz SWT 480 ms Unit dBm

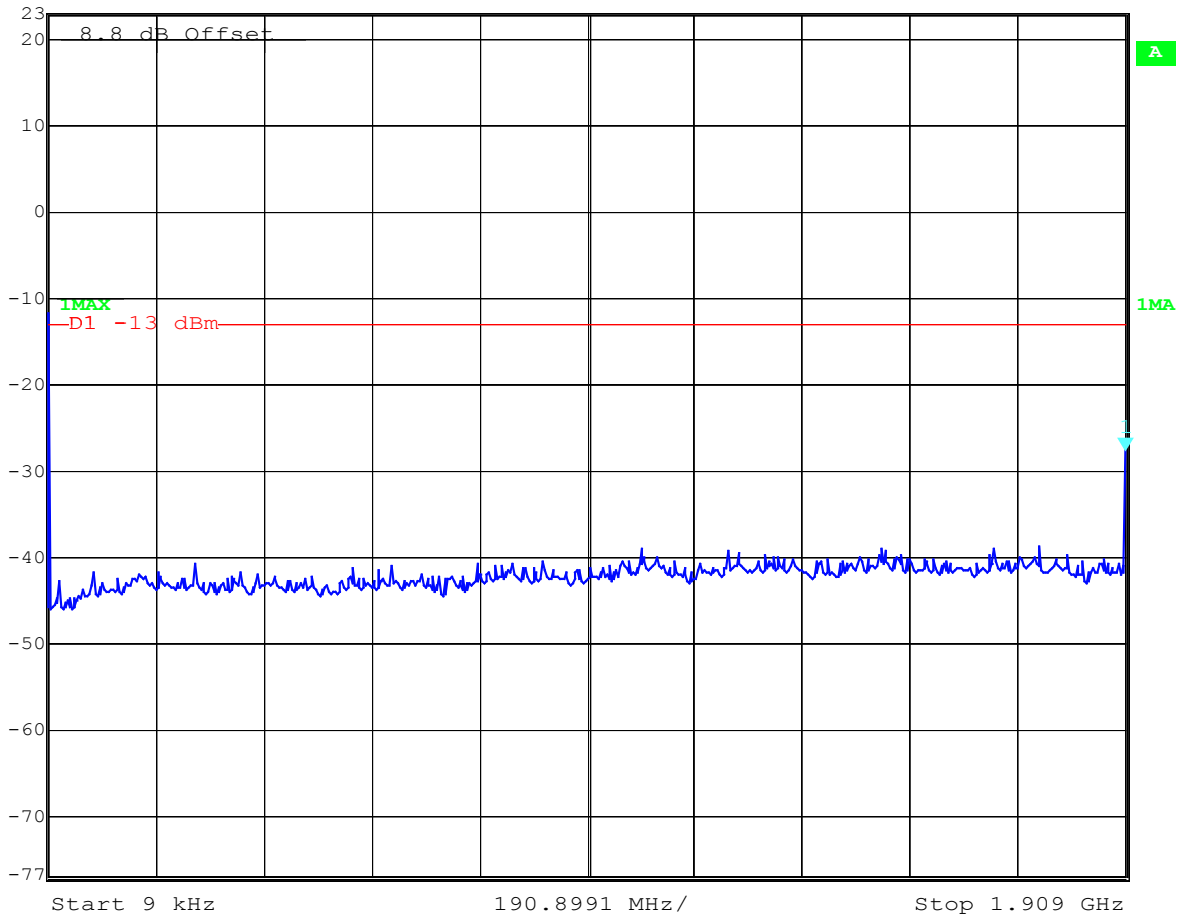

Date: 2.JUL.2003 15:40:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 79 (151)

Channel 810

 Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -19.06 dBm VBW 3 kHz
23 dBm 1.91002004 GHz SWT 280 ms Unit dBm

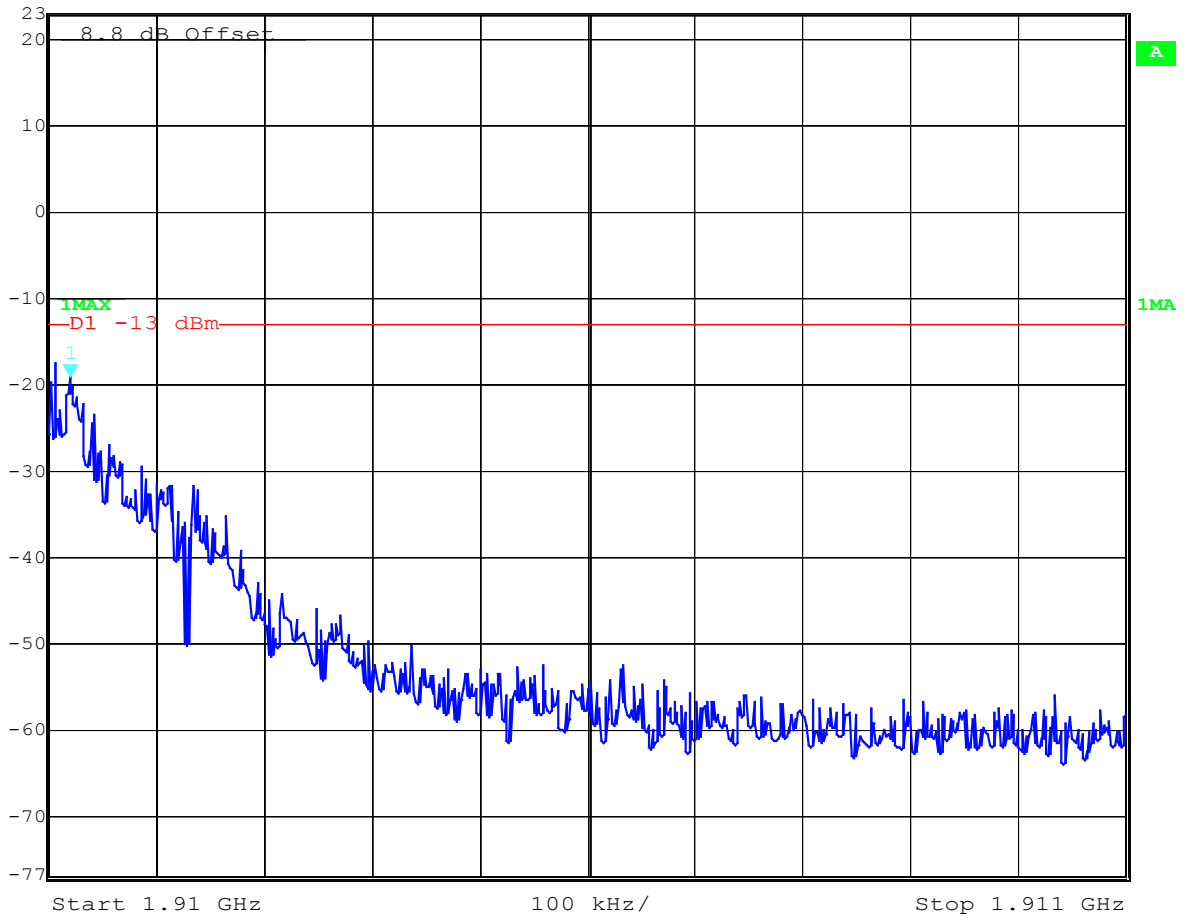

Date: 2.JUL.2003 15:40:57

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 80 (151)

Channel 810

 Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -40.70 dBm VBW 100 kHz
23 dBm 1.92000000 GHz SWT 4.6 s Unit dBm

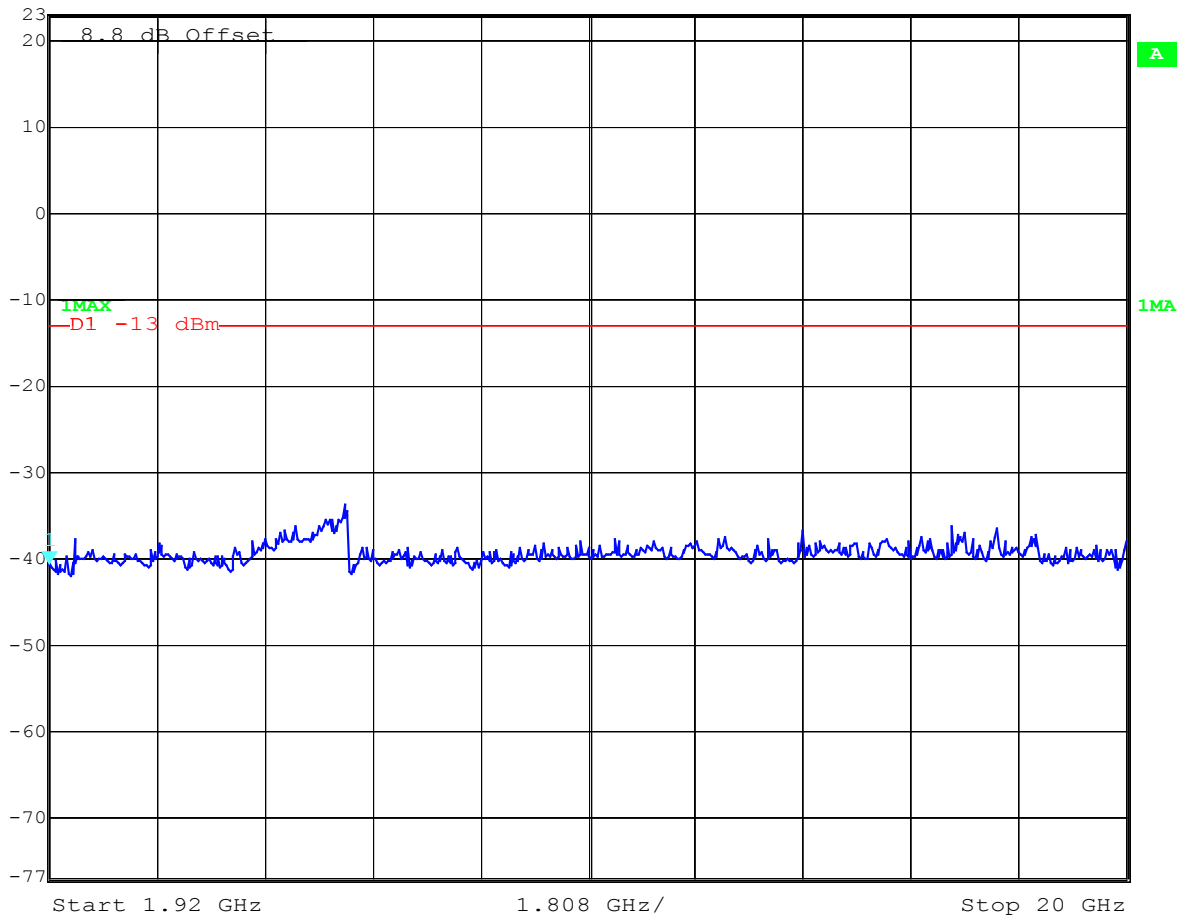

Date: 2.JUL.2003 15:41:20

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 81 (151)

BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F


Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Measurements:

Block A Channel 512

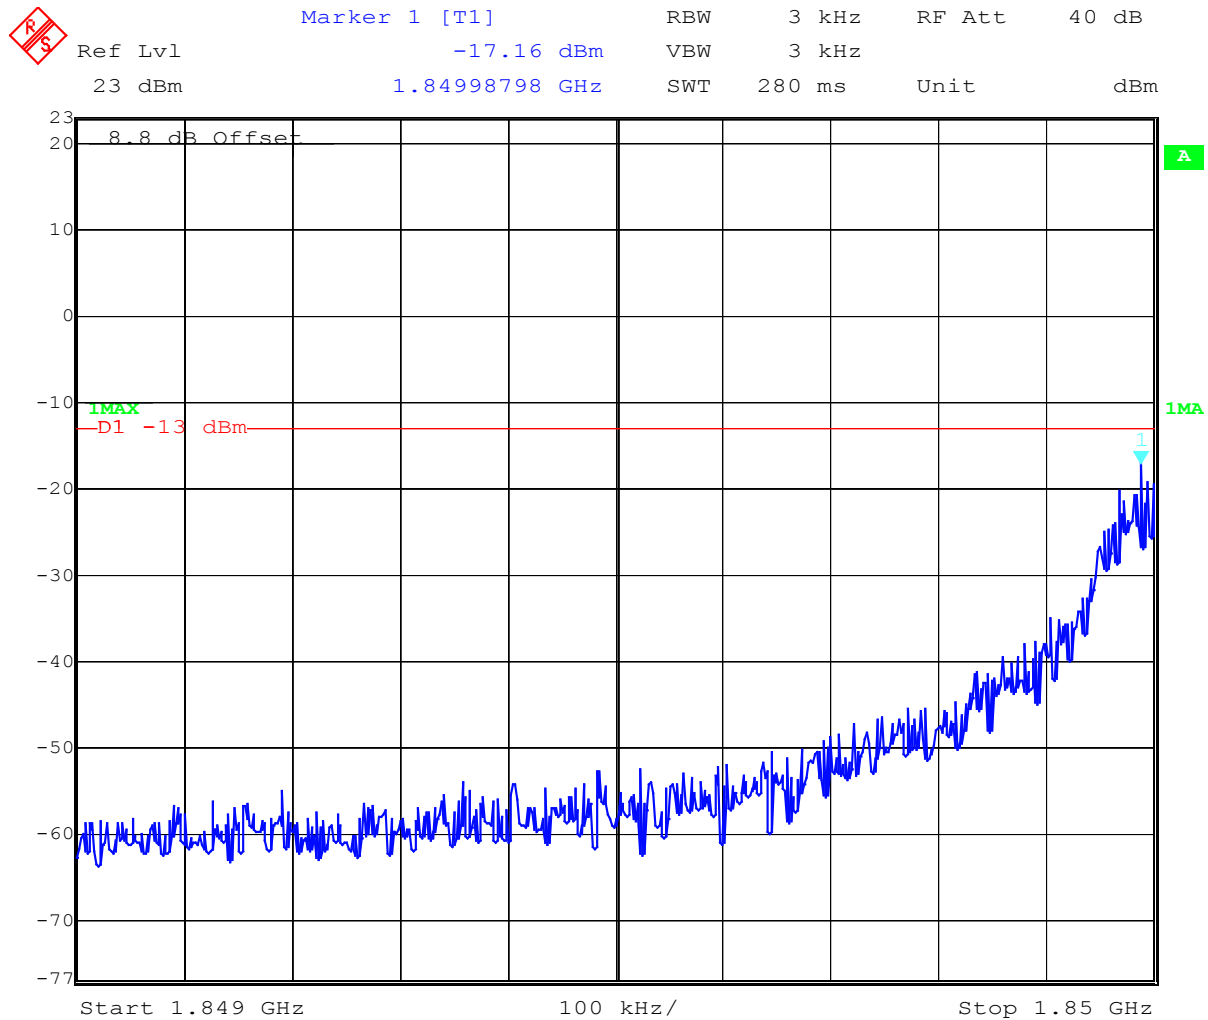

Date: 2.JUL.2003 15:41:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 82 (151)

Block A Channel 585

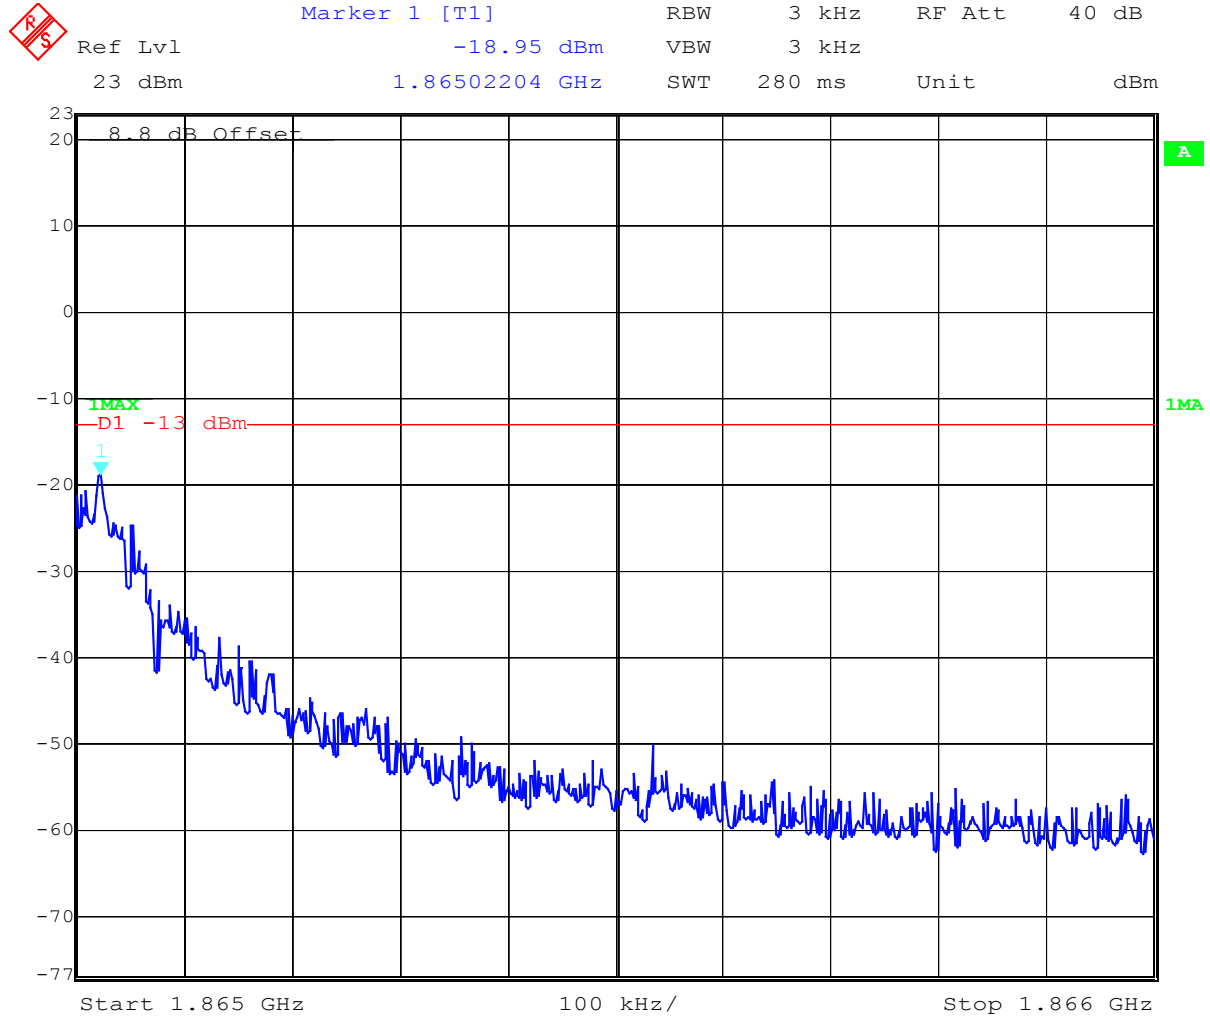

Date: 2.JUL.2003 15:42:43

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 83 (151)

Block B Channel 612

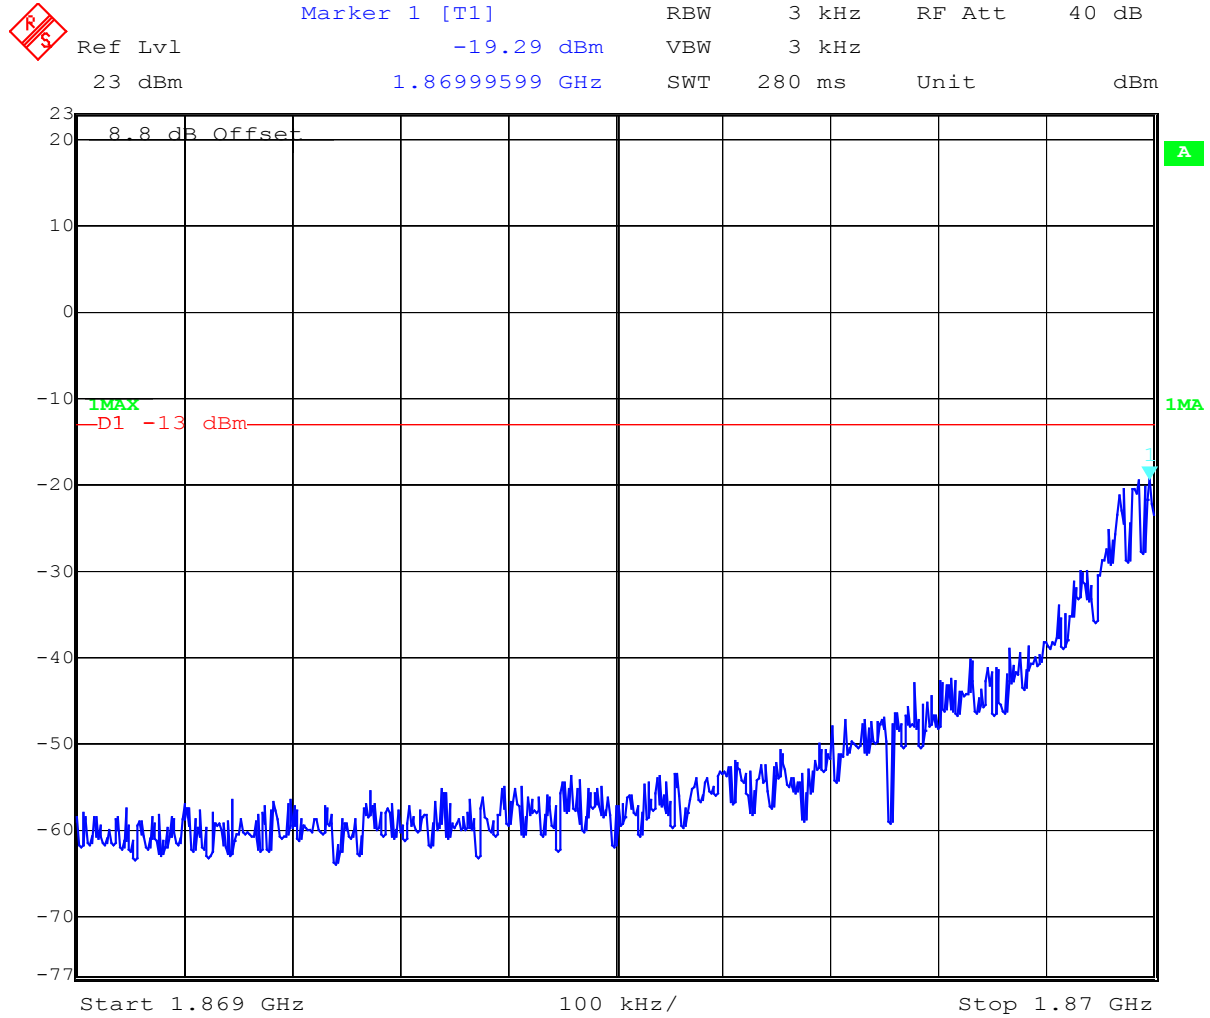

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Block B Channel 685

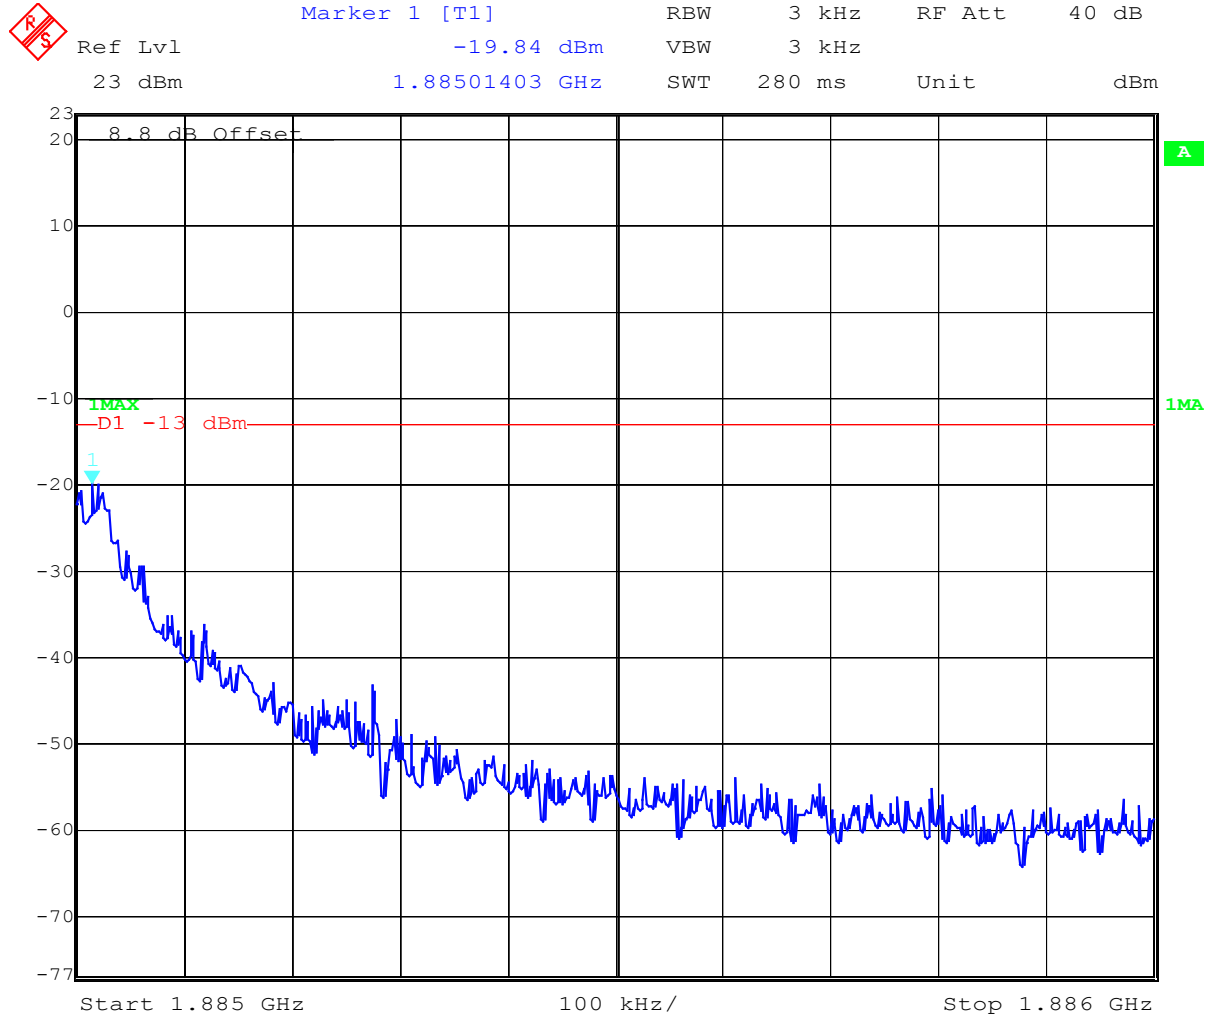

Date: 2.JUL.2003 15:43:52

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 85 (151)

Block C Channel 737

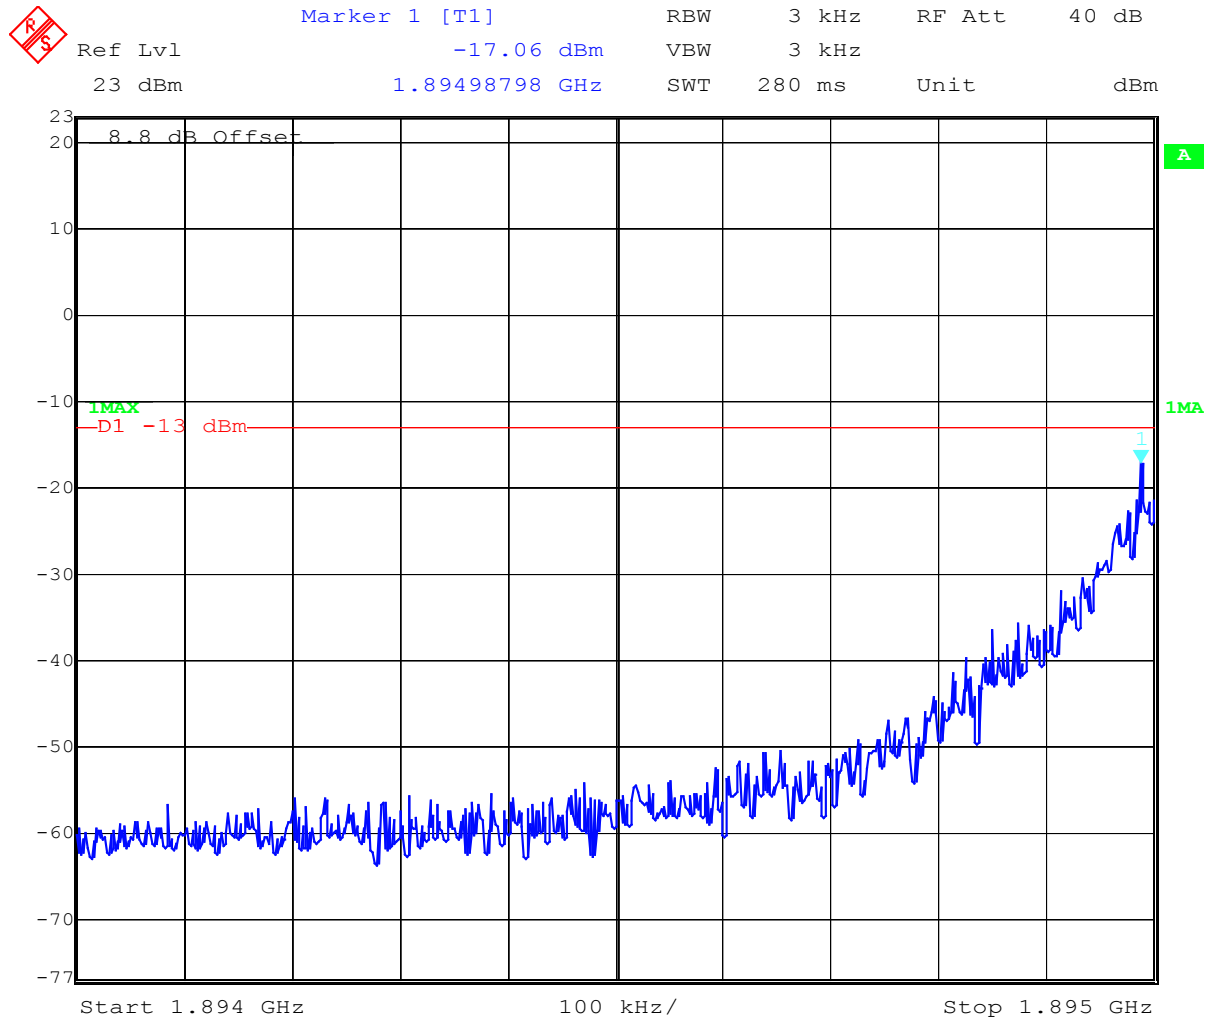

Date: 2.JUL.2003 15:44:28

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 86 (151)

Block C Channel 810

 Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -19.96 dBm VBW 3 kHz
23 dBm 1.91000401 GHz SWT 280 ms Unit dBm

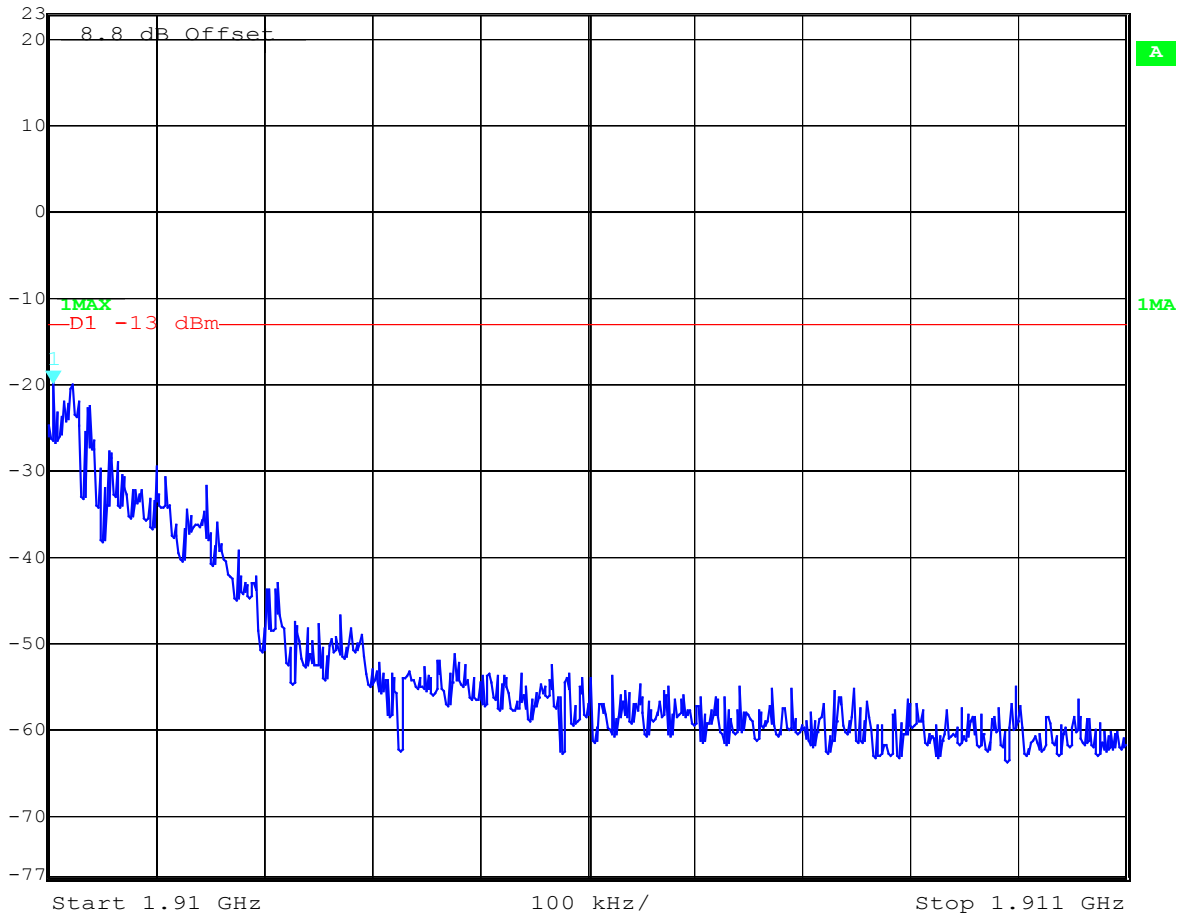

Date: 2.JUL.2003 15:44:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 87 (151)

Block D Channel 587

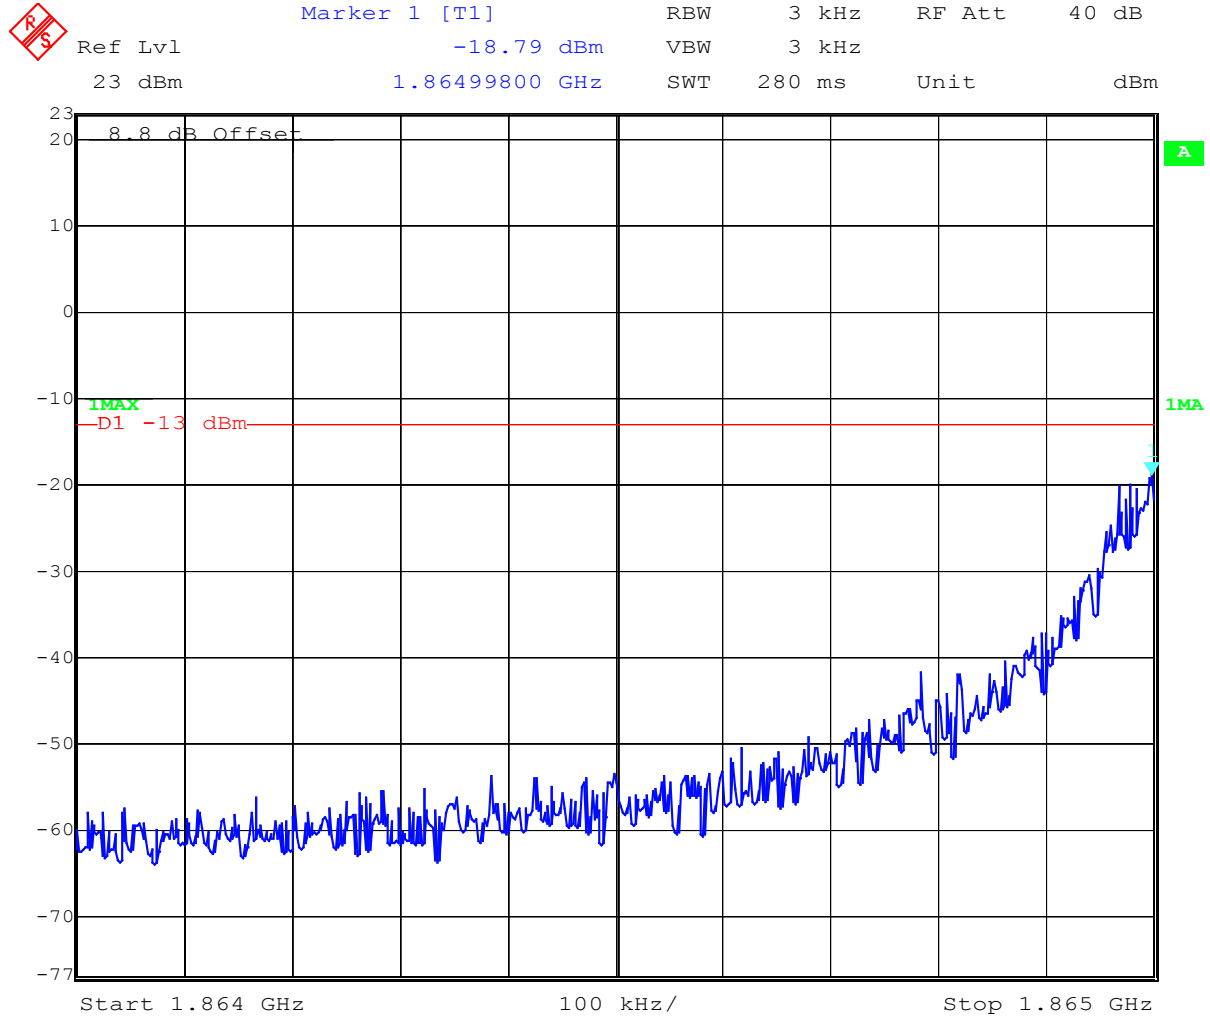

Date: 2.JUL.2003 15:45:22

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 88 (151)

Block D Channel 610

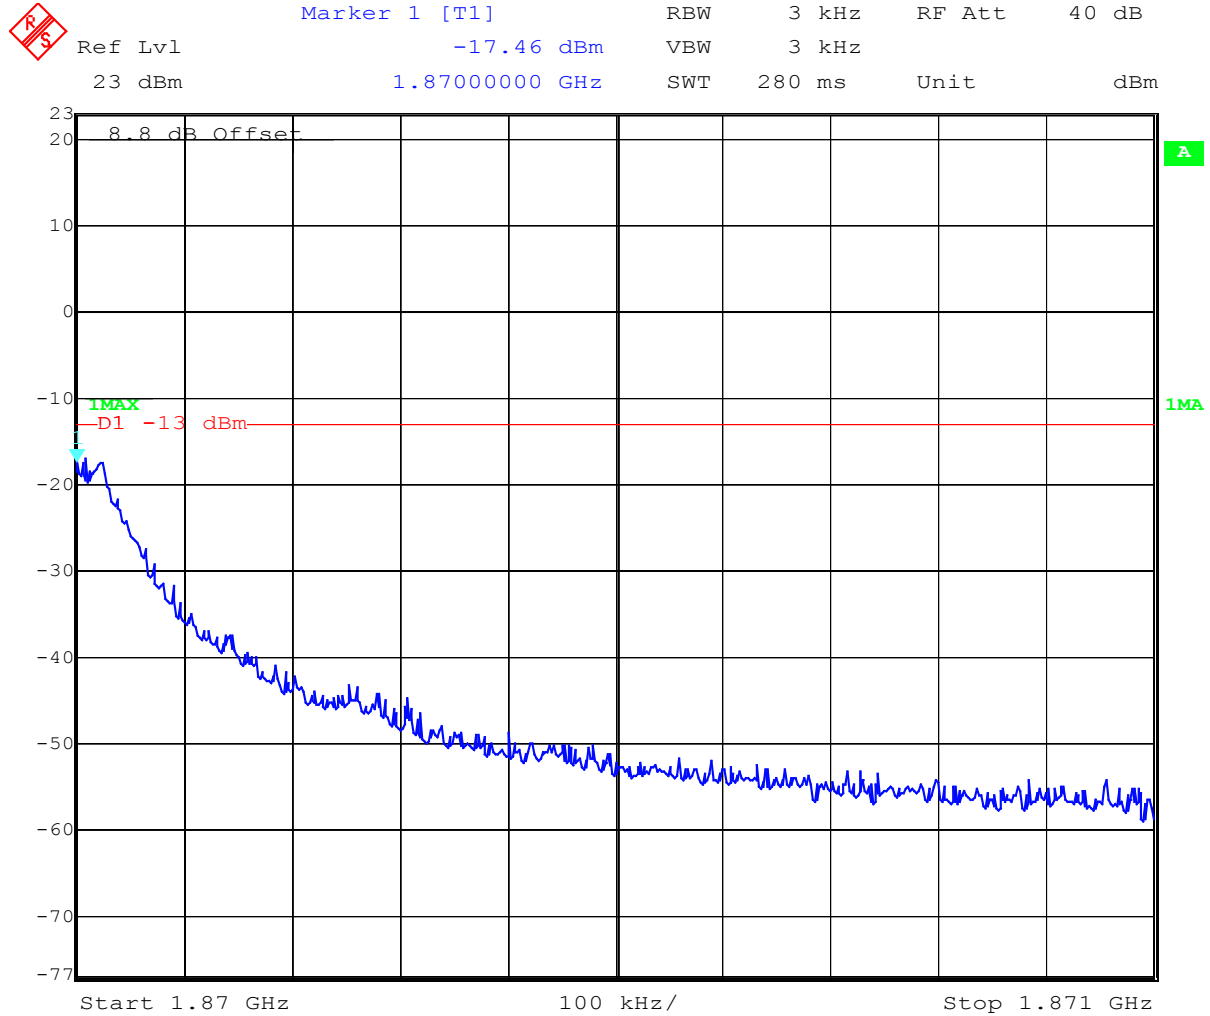

Date: 2.JUL.2003 15:48:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 89 (151)

Block E Channel 687

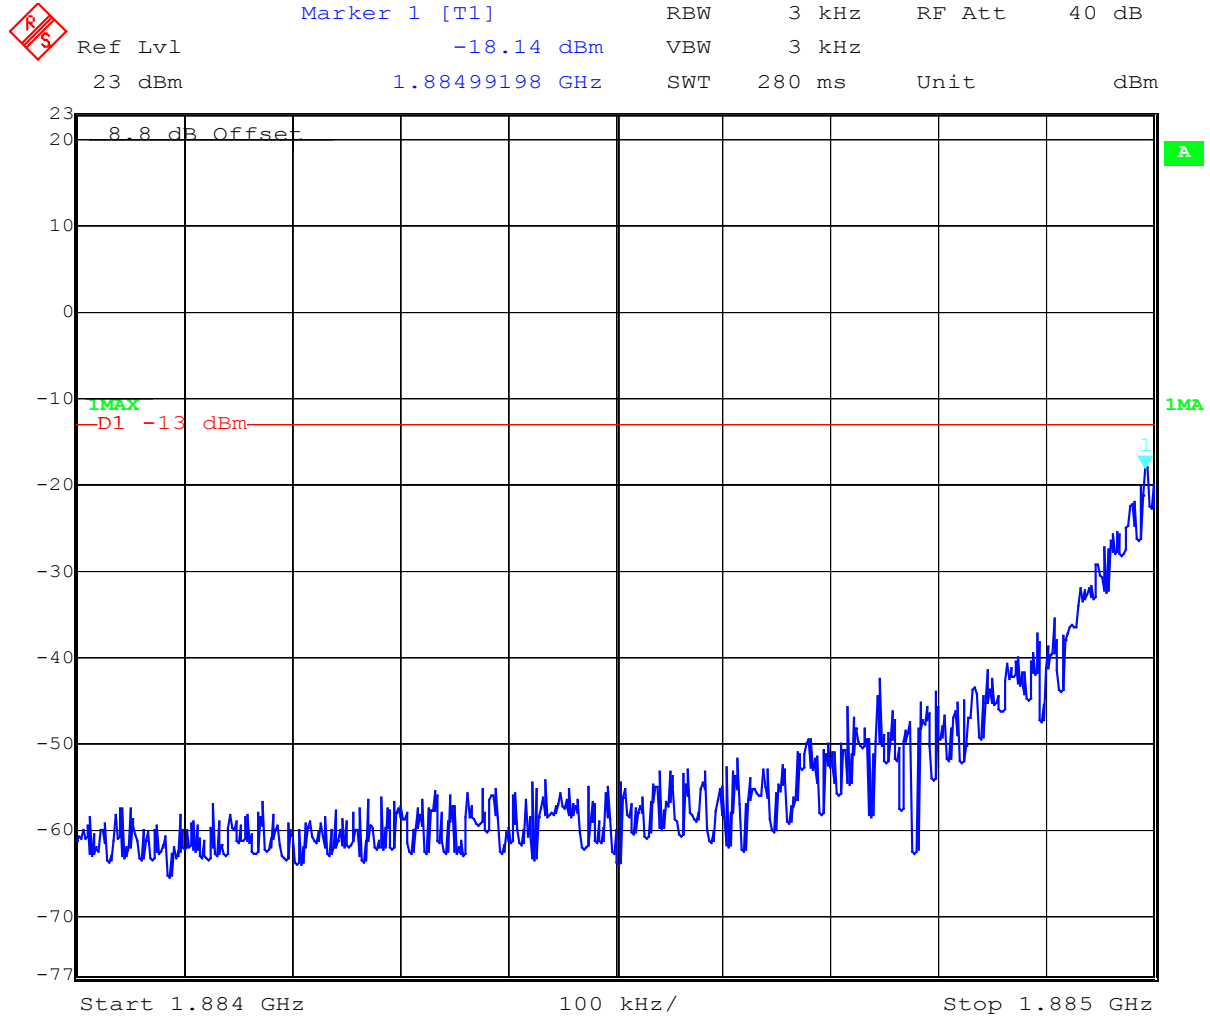

Date: 2.JUL.2003 15:49:26

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 90 (151)

Block E Channel 710

 Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -18.04 dBm VBW 3 kHz
23 dBm 1.89000200 GHz SWT 280 ms Unit dBm

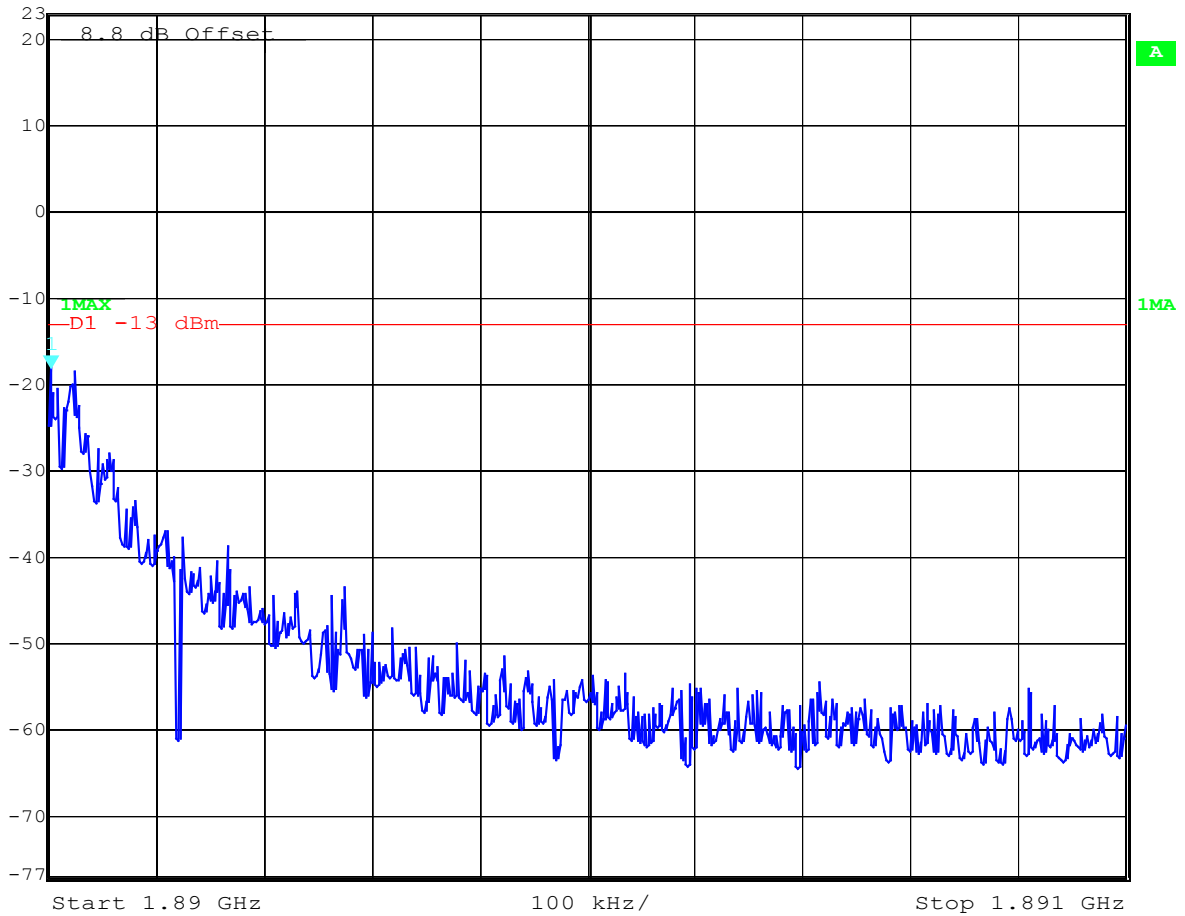

Date: 2.JUL.2003 15:49:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 91 (151)

Block F Channel 712

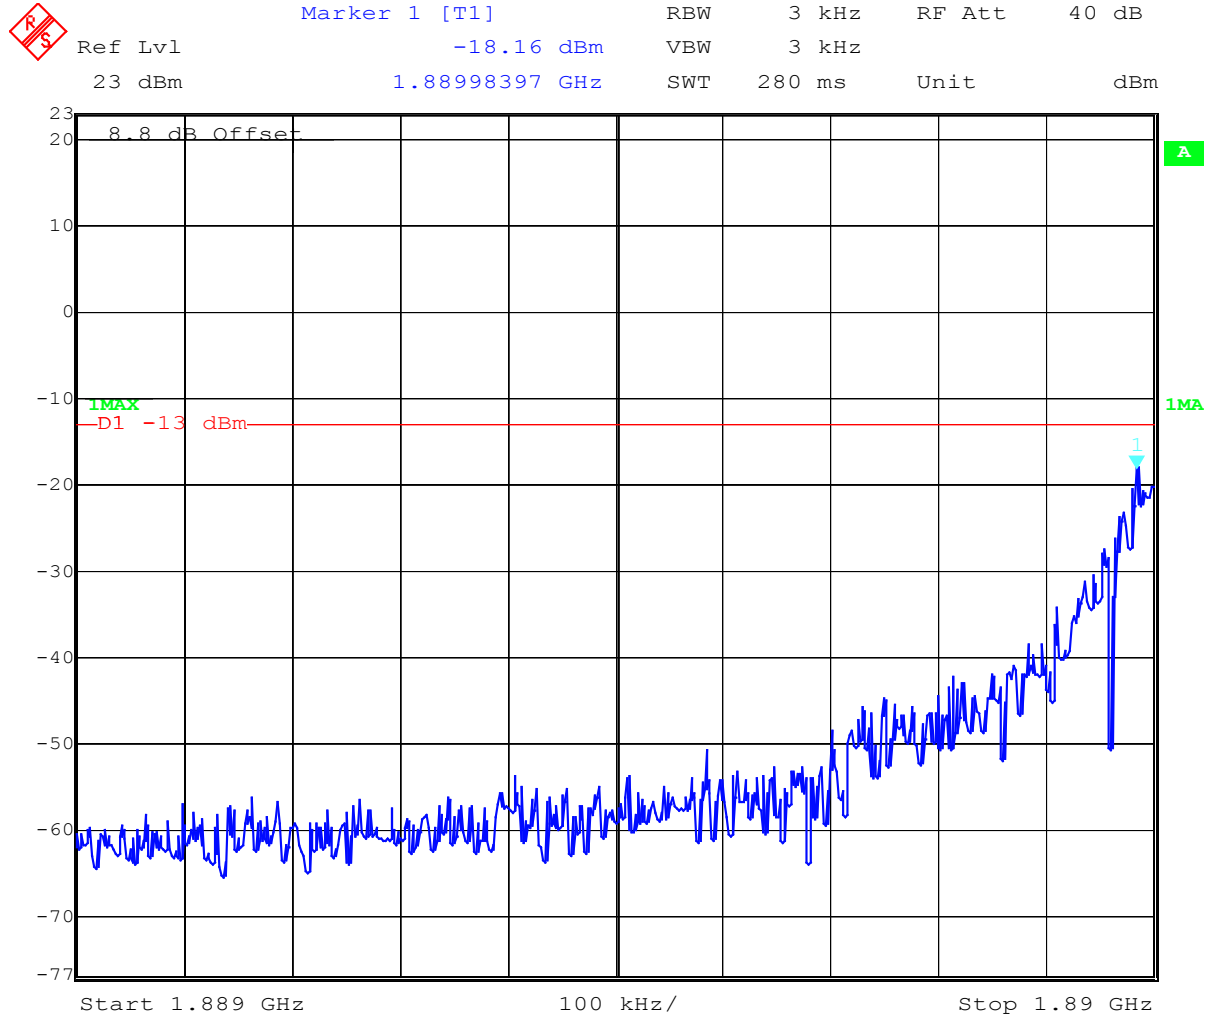

Date: 2.JUL.2003 15:50:22

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 92 (151)

Block F Channel 735

 Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -20.56 dBm VBW 3 kHz
23 dBm 1.89502405 GHz SWT 280 ms Unit dBm

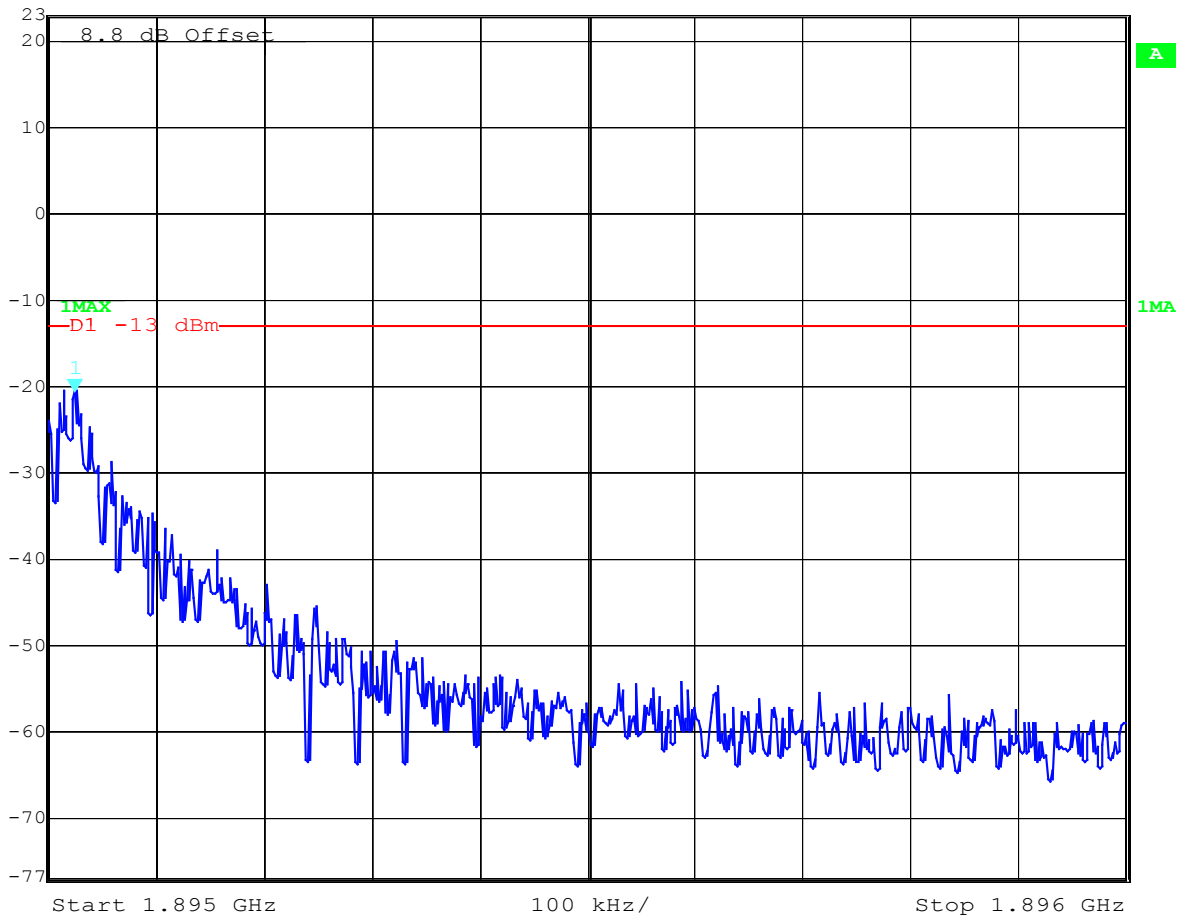

Date: 2.JUL.2003 15:50:46

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 93 (151)

OCCUPIED BANDWIDTH

§2.989

Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	278.557	310.621
1880.0 MHz	272.545	314.629
1909.8 MHz	262.525	308.617

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 277 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 94 (151)

Channel 512 99% Occupied Bandwidth

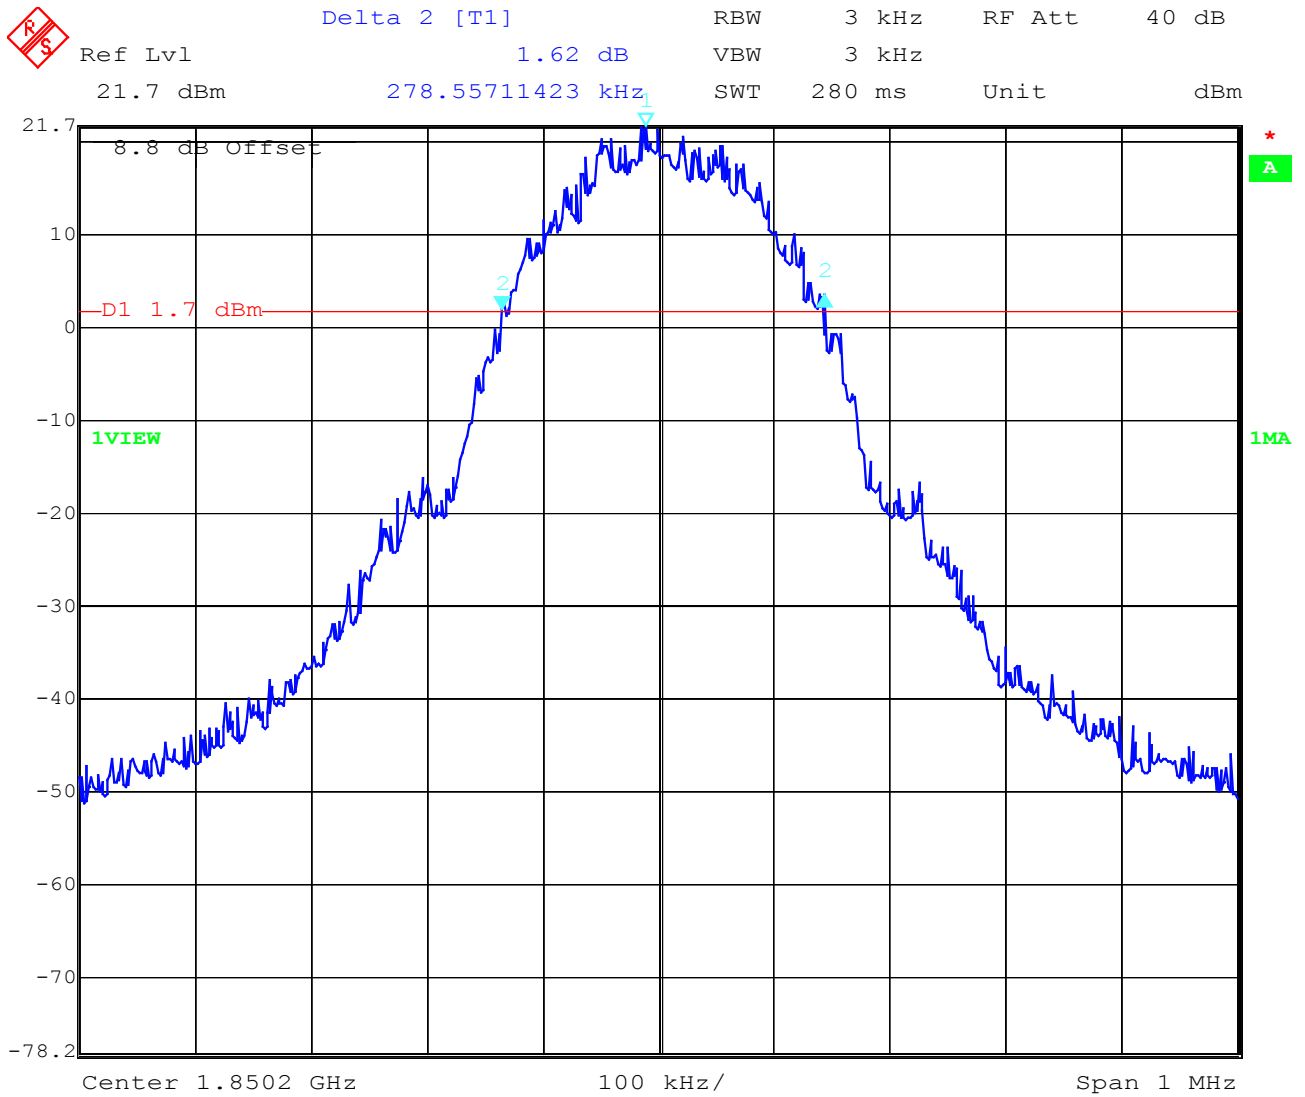

Date: 2.JUL.2003 15:53:27

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 95 (151)

Channel 512 -26 dBc Bandwidth

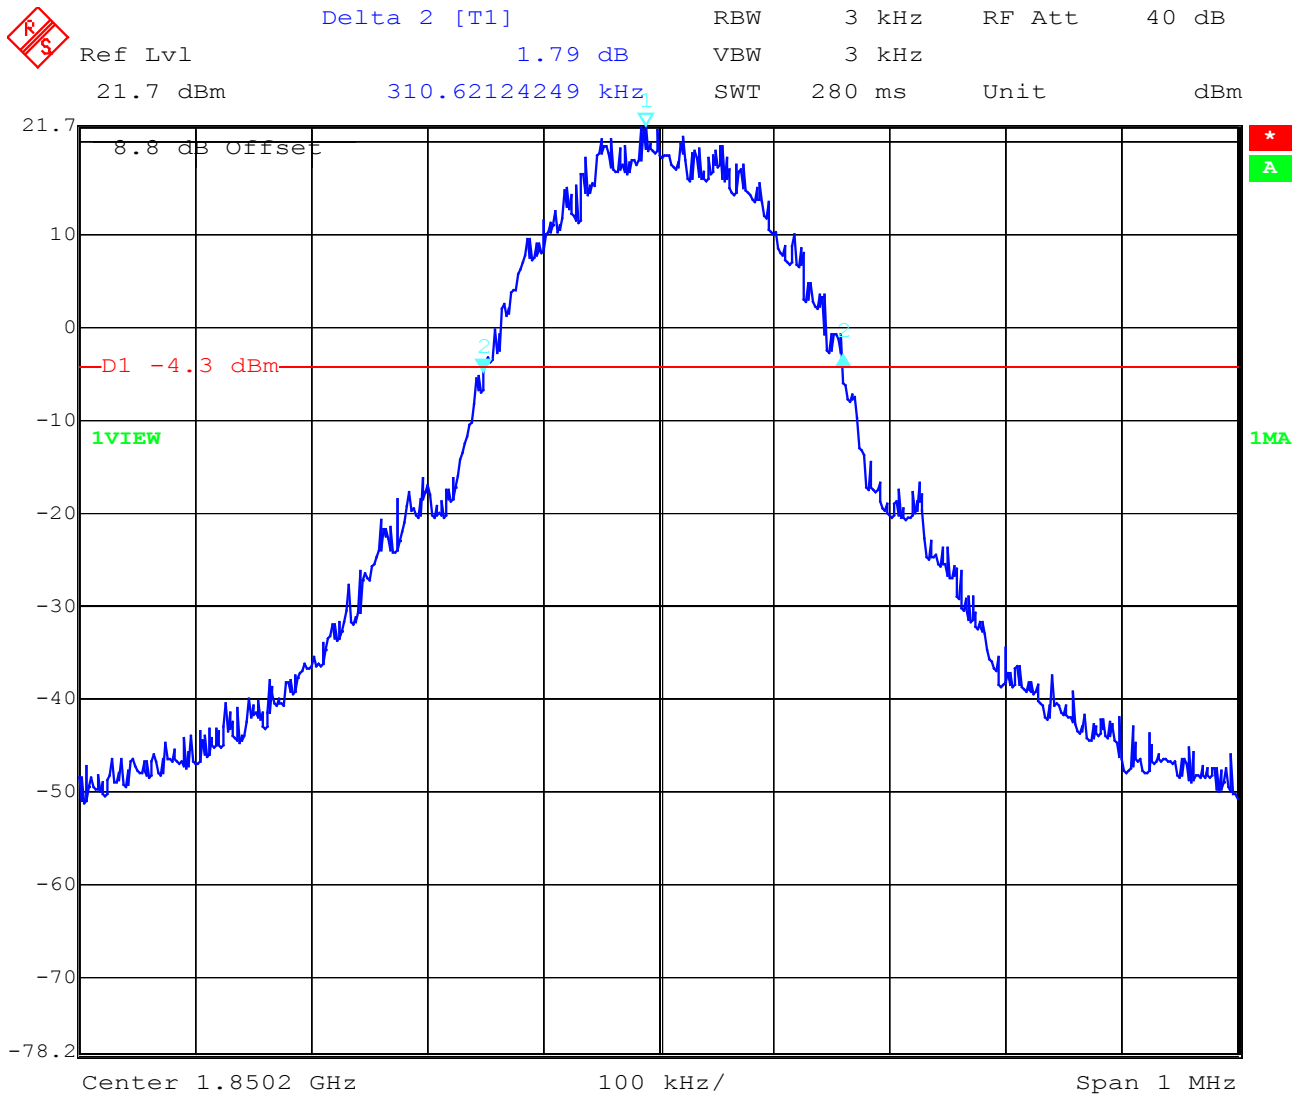

Date: 2.JUL.2003 15:54:09

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 96 (151)

Channel 661 99% Occupied Bandwidth

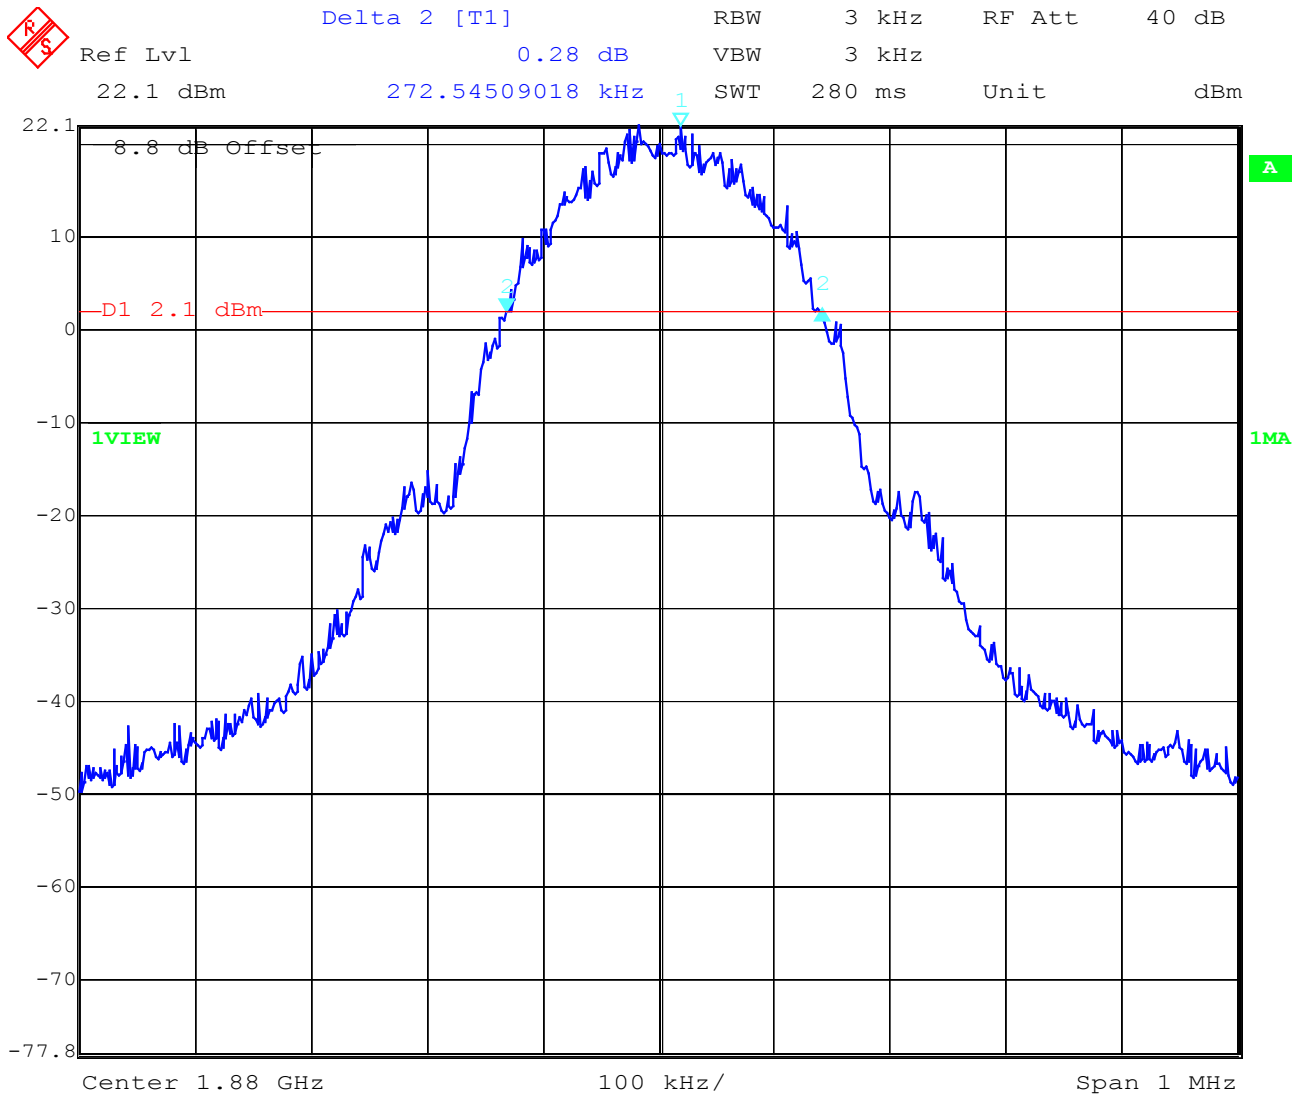

Date: 2.JUL.2003 15:56:32

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 97 (151)

Channel 661 -26 dBc Bandwidth

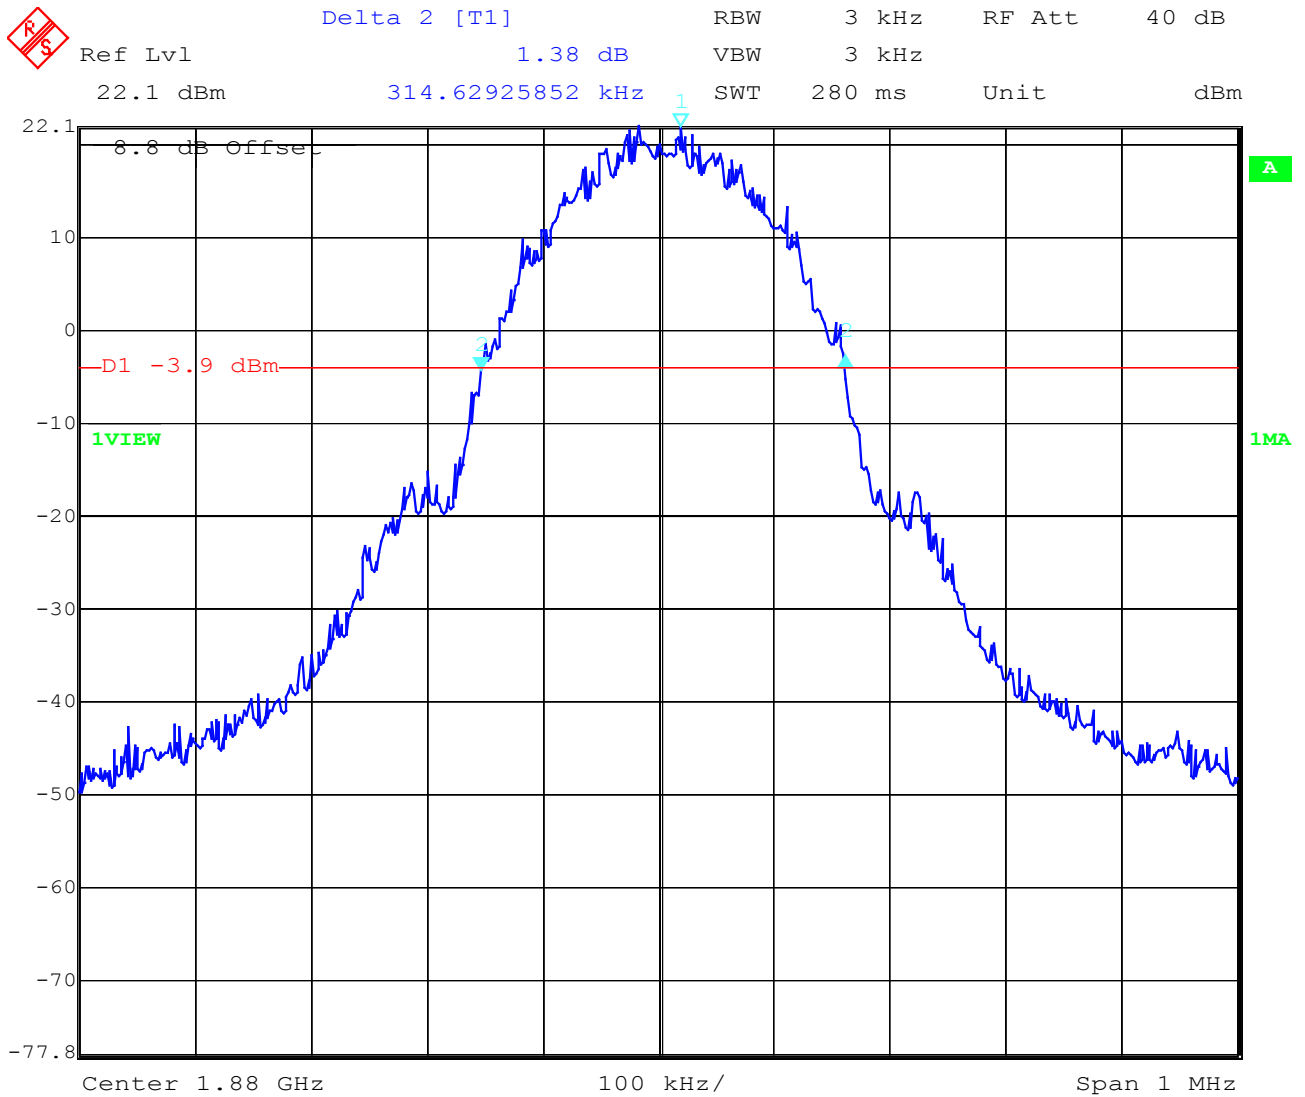

Date: 2.JUL.2003 15:57:14

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 98 (151)

Channel 810 99% Occupied Bandwidth

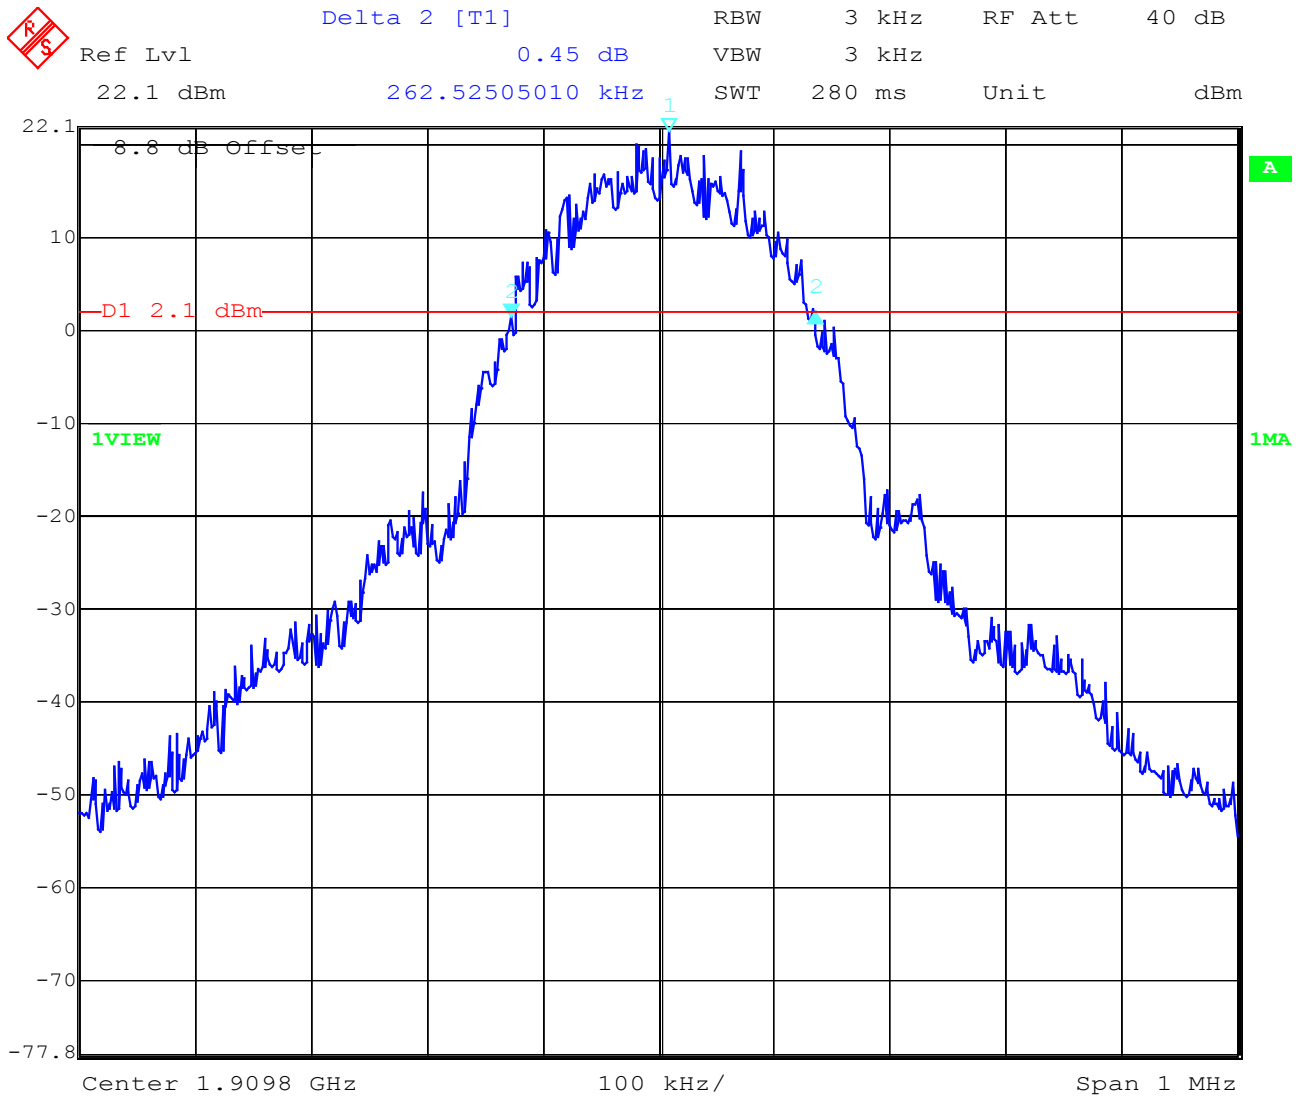

Date: 2.JUL.2003 15:59:40

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 99 (151)

Channel 810 -26 dBc Bandwidth

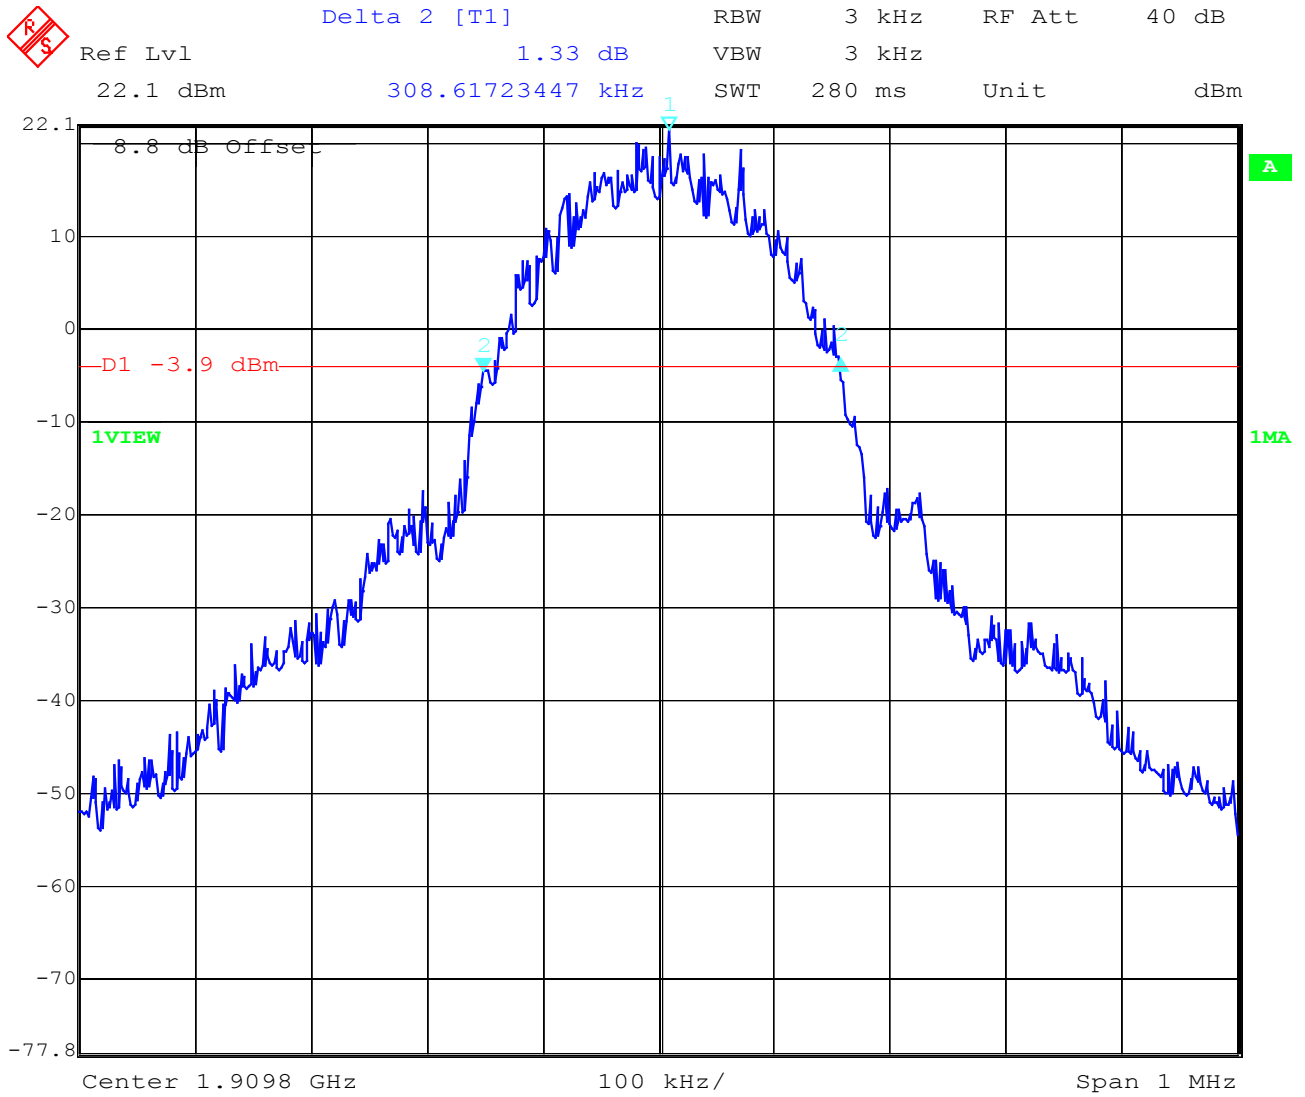

Date: 2.JUL.2003 15:59:10

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 100 (151)

CONDUCTED EMISSIONS

§ 15.107/207

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
Idle and traffic mode								
f (MHz)	Detector	Level (dB $\mu\text{V/m}$)	f (MHz)	Detector	Level (dB $\mu\text{V/m}$)	f (MHz)	Detector	Level (dB $\mu\text{V/m}$)
no traceable peak found								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30
30 - 88	100 / 40 dB $\mu\text{V/m}$	3
88 - 216	150 / 43.5 dB $\mu\text{V/m}$	3
216 - 960	200 / 46 dB $\mu\text{V/m}$	3
above 960	500 / 54 dB $\mu\text{V/m}$	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 101 (151)

CONDUCTED EMISSIONS

§ 15.107/207

EN 55022 / CISPR 22

EUT: One Touch 331P with Charger "3DS 09371 AGAA 110VAC
 Manufacturer: Alcatel
 Operating Condition: With keyboard unit "3DS 07237 AAAA", idle mode
 Test Site: Room 006
 Operator: Mr. Ames
 Test Specification: EN 55022 / CISPR 22
 Comment:
 Start of Test: 2003-07-03

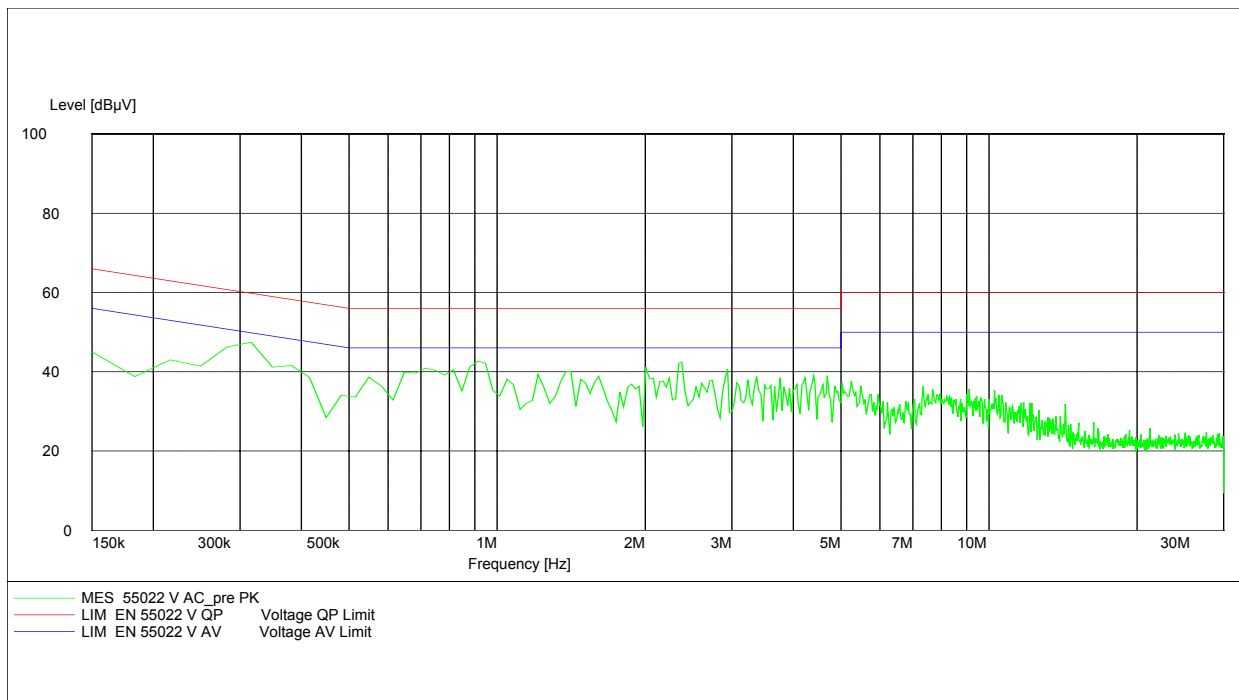

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 102 (151)

EN 55022 / CISPR 22

EUT: One Touch 331P with Charger "3DS 09371 AGAA" 110VAC
 Manufacturer: Alcatel
 Operating Condition: With keyboard unit "3DS 07237 AAAA", traffic mode
 Test Site: Room 006
 Operator: Mr. Ames
 Test Specification: EN 55022 / CISPR 22
 Comment:
 Start of Test: 2003-07-03

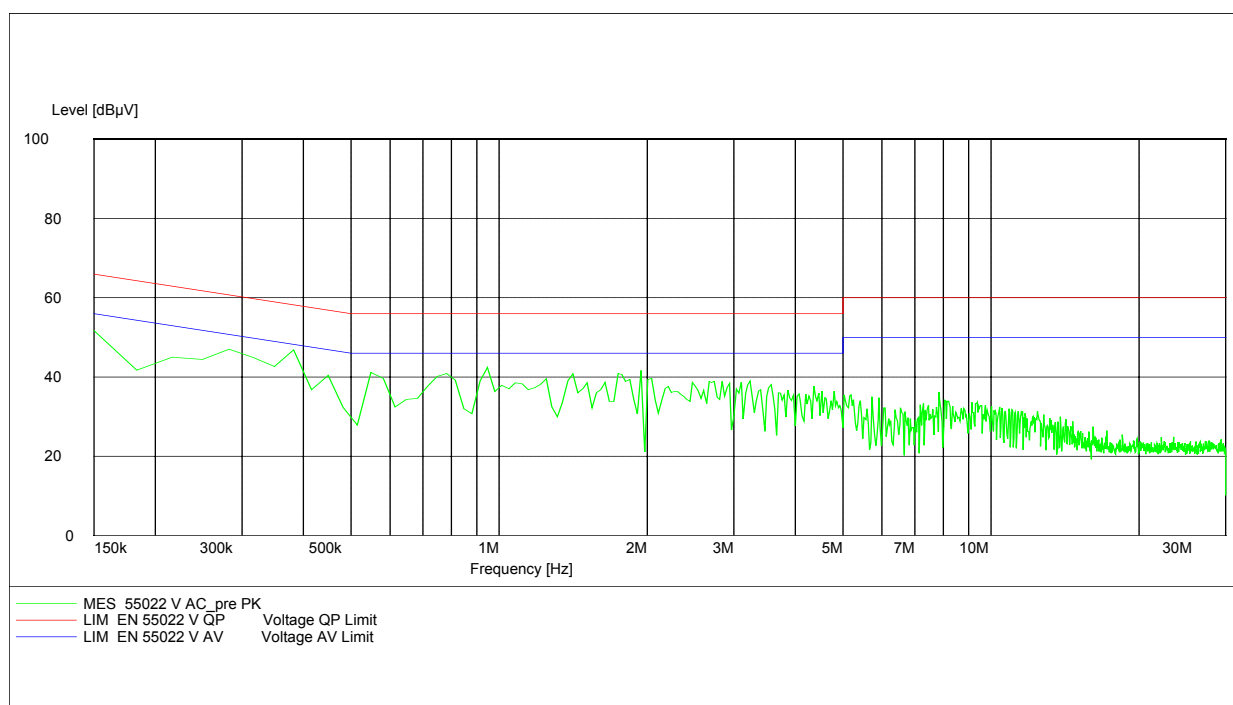

Limit § 15.207

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

ADDITIONAL MEASUREMENTS FOR THE ANCILLARY EQUIPMENT PART 15.109

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 104 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

SPURIOUS EMISSIONS LEVEL ($\mu\text{V/m}$)								
Idle mode								
f (MHz)	Detector	Level (dB $\mu\text{V/m}$)	f (MHz)	Detector	Level (dB $\mu\text{V/m}$)	f (MHz)	Detector	Level (dB $\mu\text{V/m}$)
no traceable peak found								
Measurement uncertainty			± 3 dB					

$f < 1$ GHz : RBW/VBW: 100 kHz

$f \geq 1$ GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB $\mu\text{V/m}$	30
30 - 88	100 / 40 dB $\mu\text{V/m}$	3
88 - 216	150 / 43.5 dB $\mu\text{V/m}$	3
216 - 960	200 / 46 dB $\mu\text{V/m}$	3
above 960	500 / 54 dB $\mu\text{V/m}$	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 105 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Part 15.209 Magnetics

EUT: One Touch 331P with car kit "MP82"
Manufacturer: Alcatel
Operating Condition: Idle mode
Test Site: Cetecom, Room 6
Operator: Mr. Ames
Test Specification: Part 15.209 Magnetics
Comment:
Start of Test: 2003-07-03 / 17:42:22

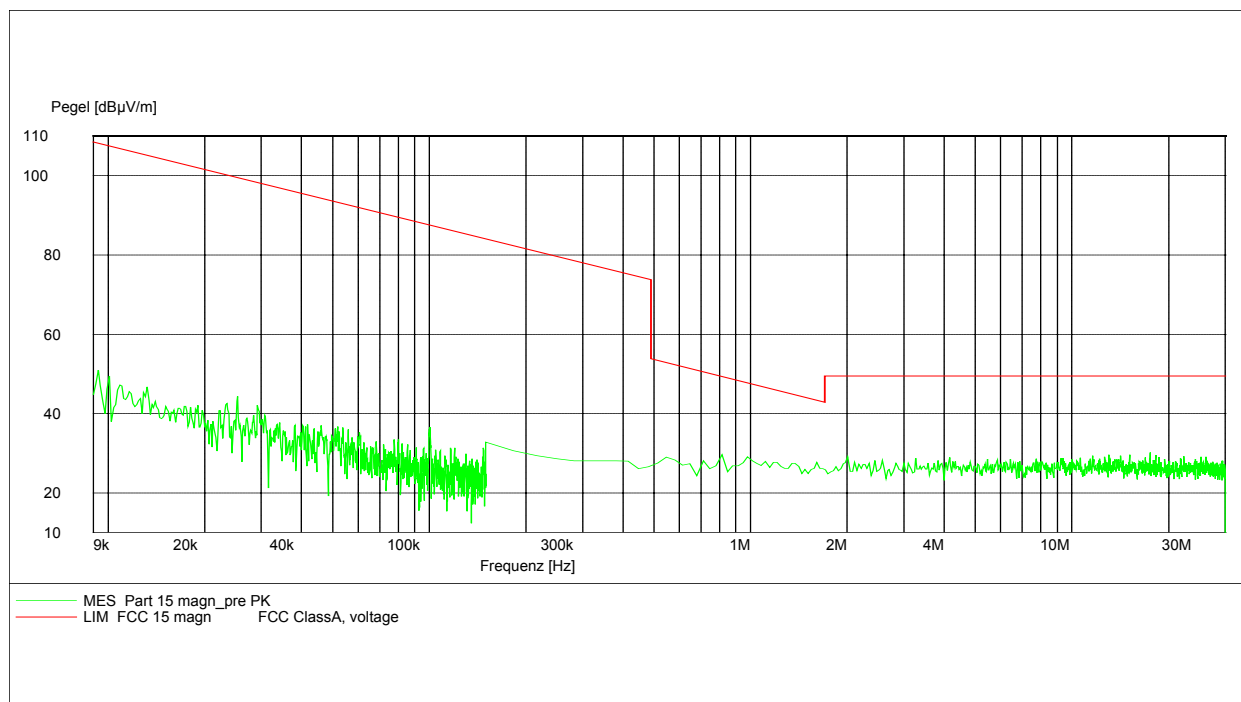

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 106 (151)

Part 15.209 Magnetics

EUT: One Touch 331P with Headset "3DS 07855 AAAA" Merry
Manufacturer: Alcatel
Operating Condition: Idle mode wth cigar lighter charger "3DS 07848 AAAA" 24V DC
Test Site: Cetecom, Room 6
Operator: Mr. Ames
Test Specification: Part 15.209 Magnetics
Comment:
Start of Test: 2003-07-03 / 17:38:17

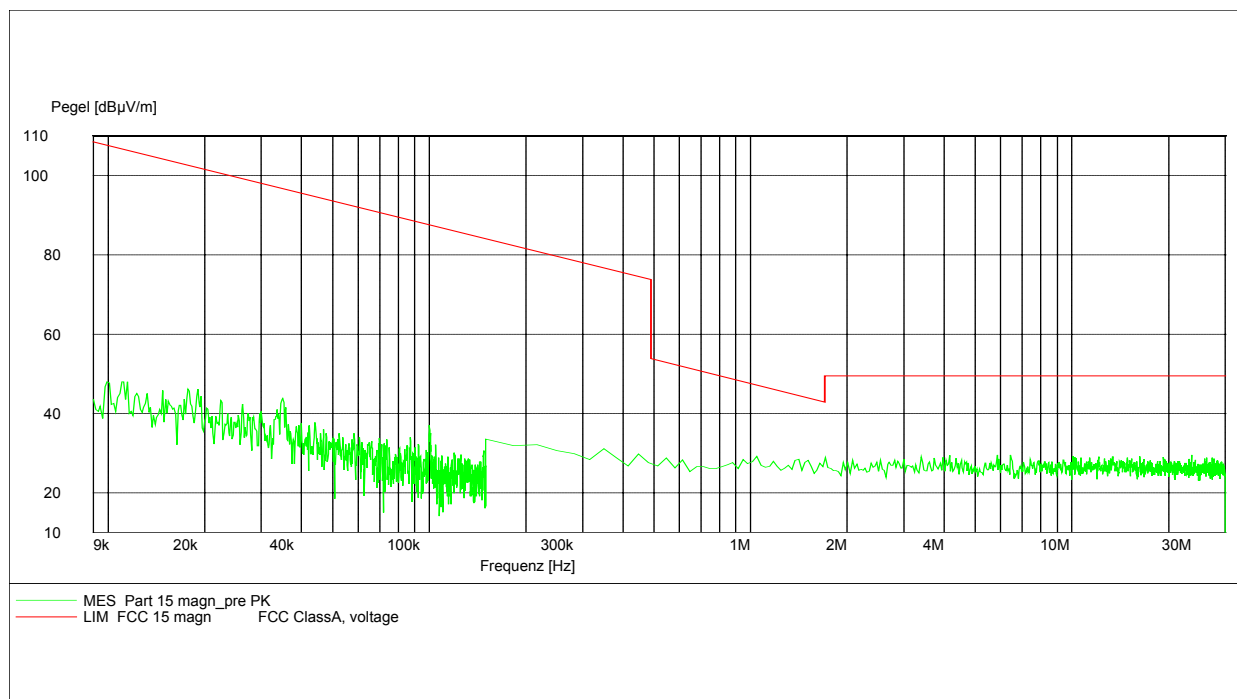

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 107 (151)

Part 15.209 Magnetics

EUT: One Touch 331P with Headset "3DS 07855 ABAA" Leemax
Manufacturer: Alcatel
Operating Condition: Idle mode
Test Site: Cetecom, Room 6
Operator: Mr. Ames
Test Specification: Part 15.209 Magnetics
Comment:
Start of Test: 2003-07-03 / 17:27:21

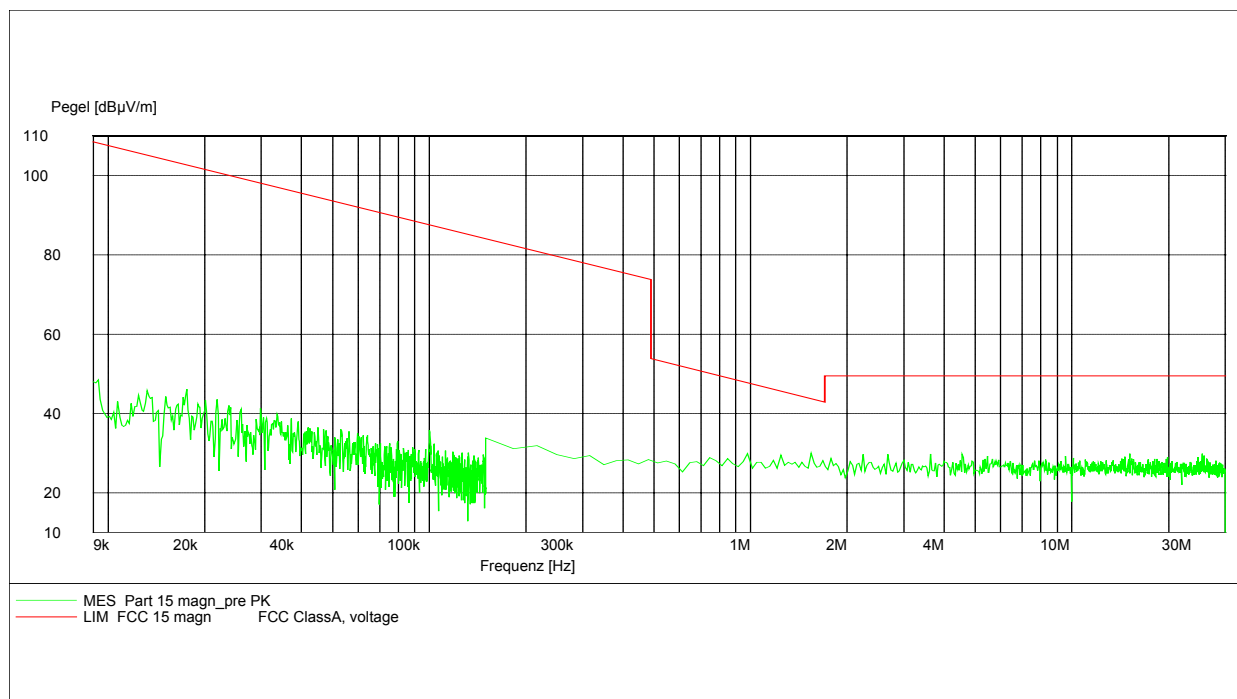

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 108 (151)

Part 15.209 Magnetics

EUT: One Touch 331P with Keyboard "3DS 07237 AAAA"
Manufacturer: Alcatel
Operating Condition: Idle mode
Test Site: Cetecom, Room 6
Operator: Mr. Ames
Test Specification: Part 15.209 Magnetics
Comment:
Start of Test: 2003-07-03 / 17:20:24

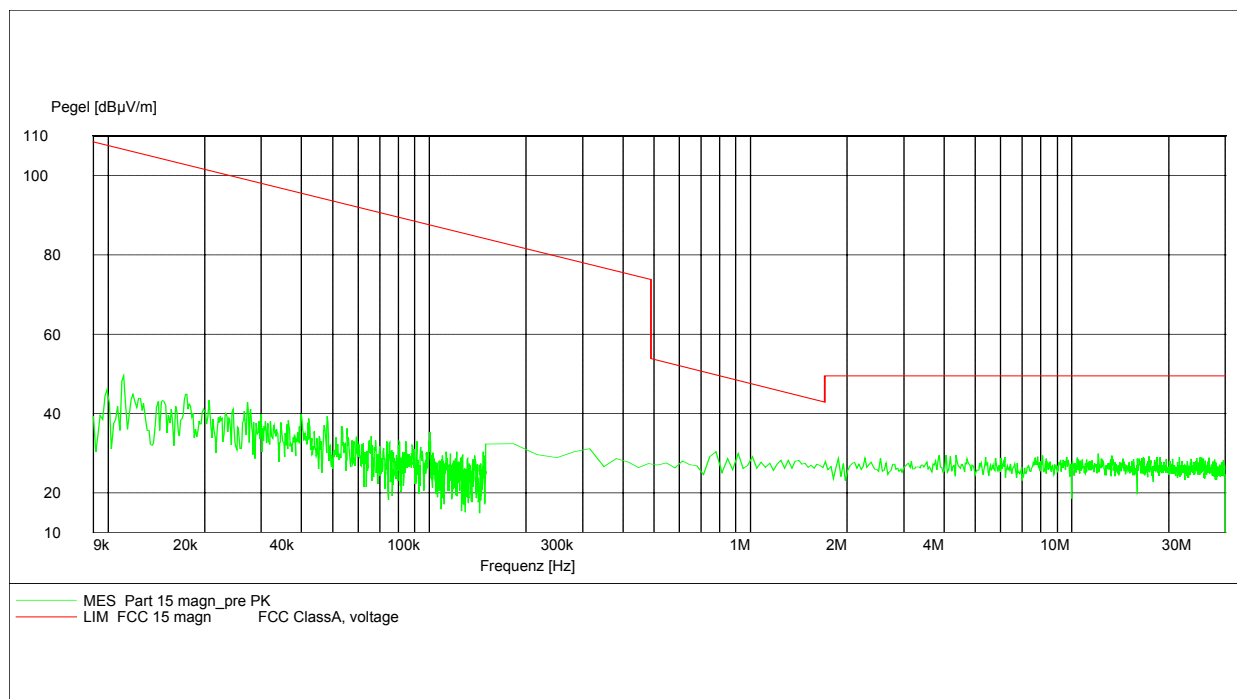

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Cigar lighter Charger “3DS 07848 AAAA” and Headset “3DS 07855 AAAA” Merry

CH 512 up to 4 GHz (vertical)

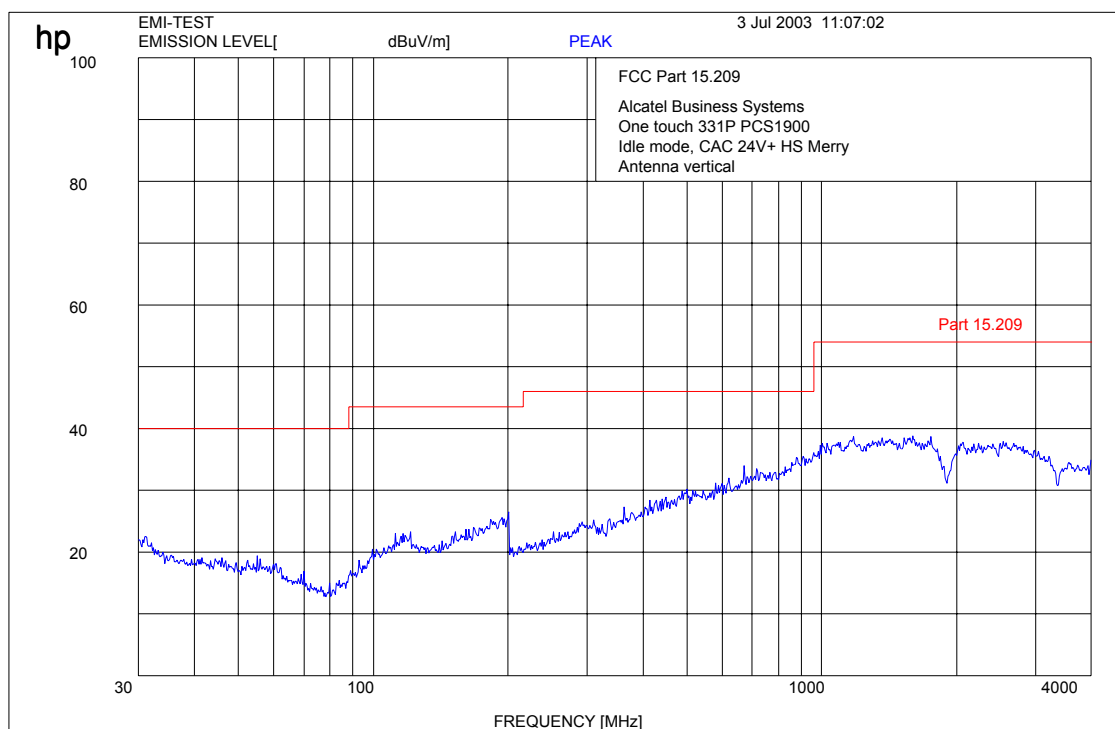

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Cigar lighter Charger “3DS 07848 AAAA” and Headset “3DS 07855 AAAA” Merry

CH 512 up to 4 GHz (horizontal)

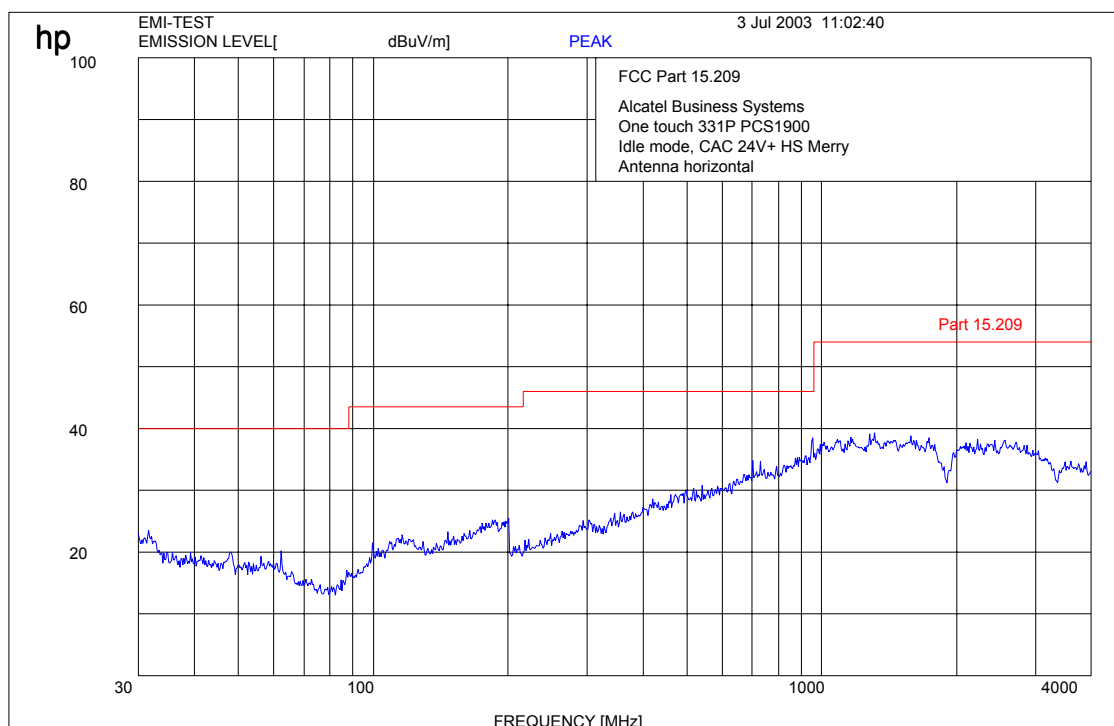

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Cigar lighter Charger “3DS 07848 AAAA” and Headset “3DS 07855 AAAA” Merry

CH 810 up to 12 GHz (vertical)

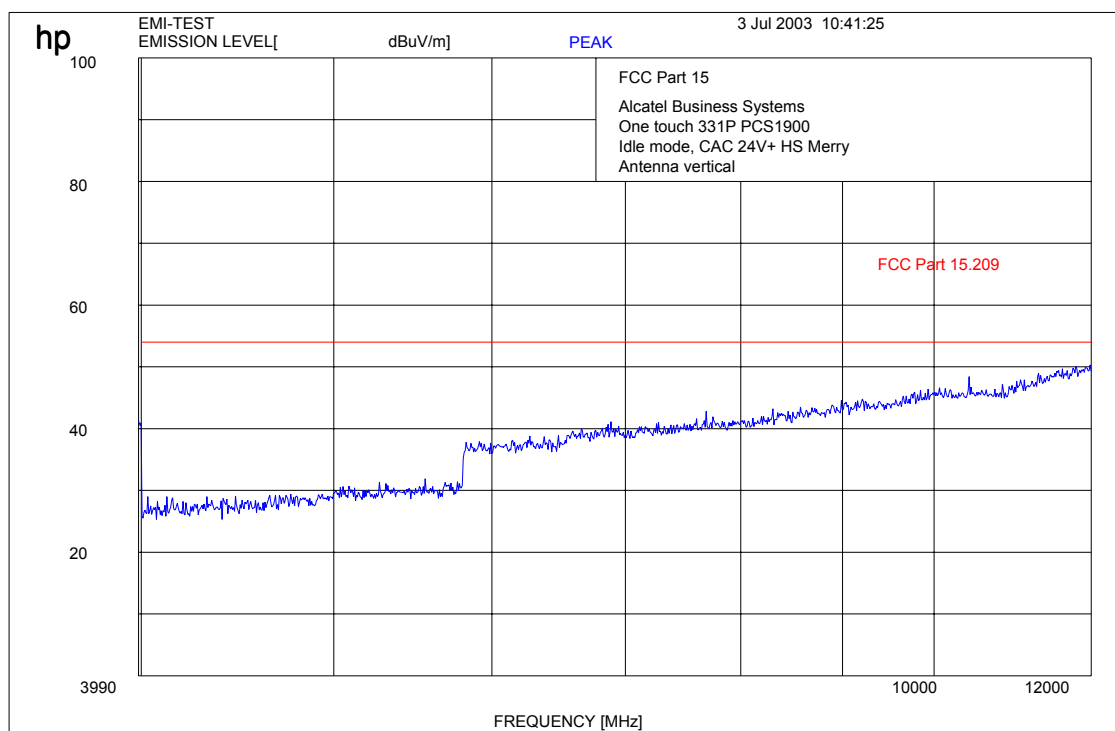

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Cigar lighter Charger “3DS 07848 AAAA” and Headset “3DS 07855 AAAA” Merry

CH 810 up to 12 GHz (horizontal)

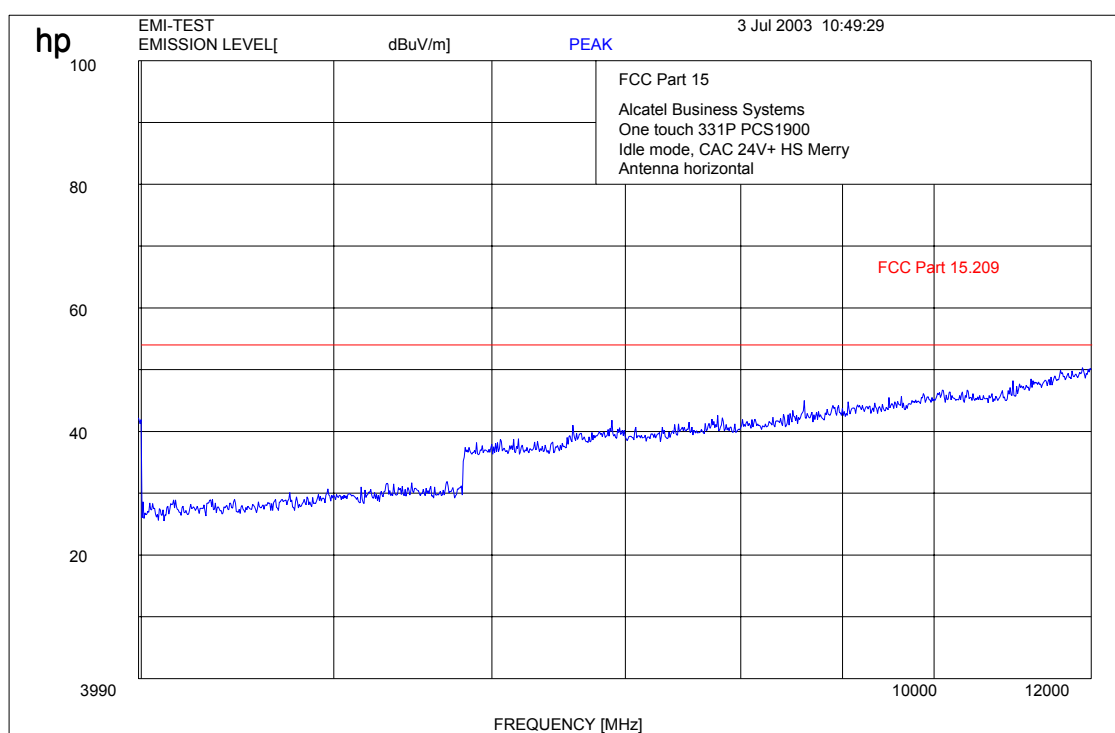

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 113 (151)


RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Cigar lighter Charger "3DS 07848 AAAA" and Headset "3DS 07855 AAAA" Merry

CH 512 up to 20 GHz (vertical and horizontal)

No traceable peak found – Plot valid for all channels and all test configurations

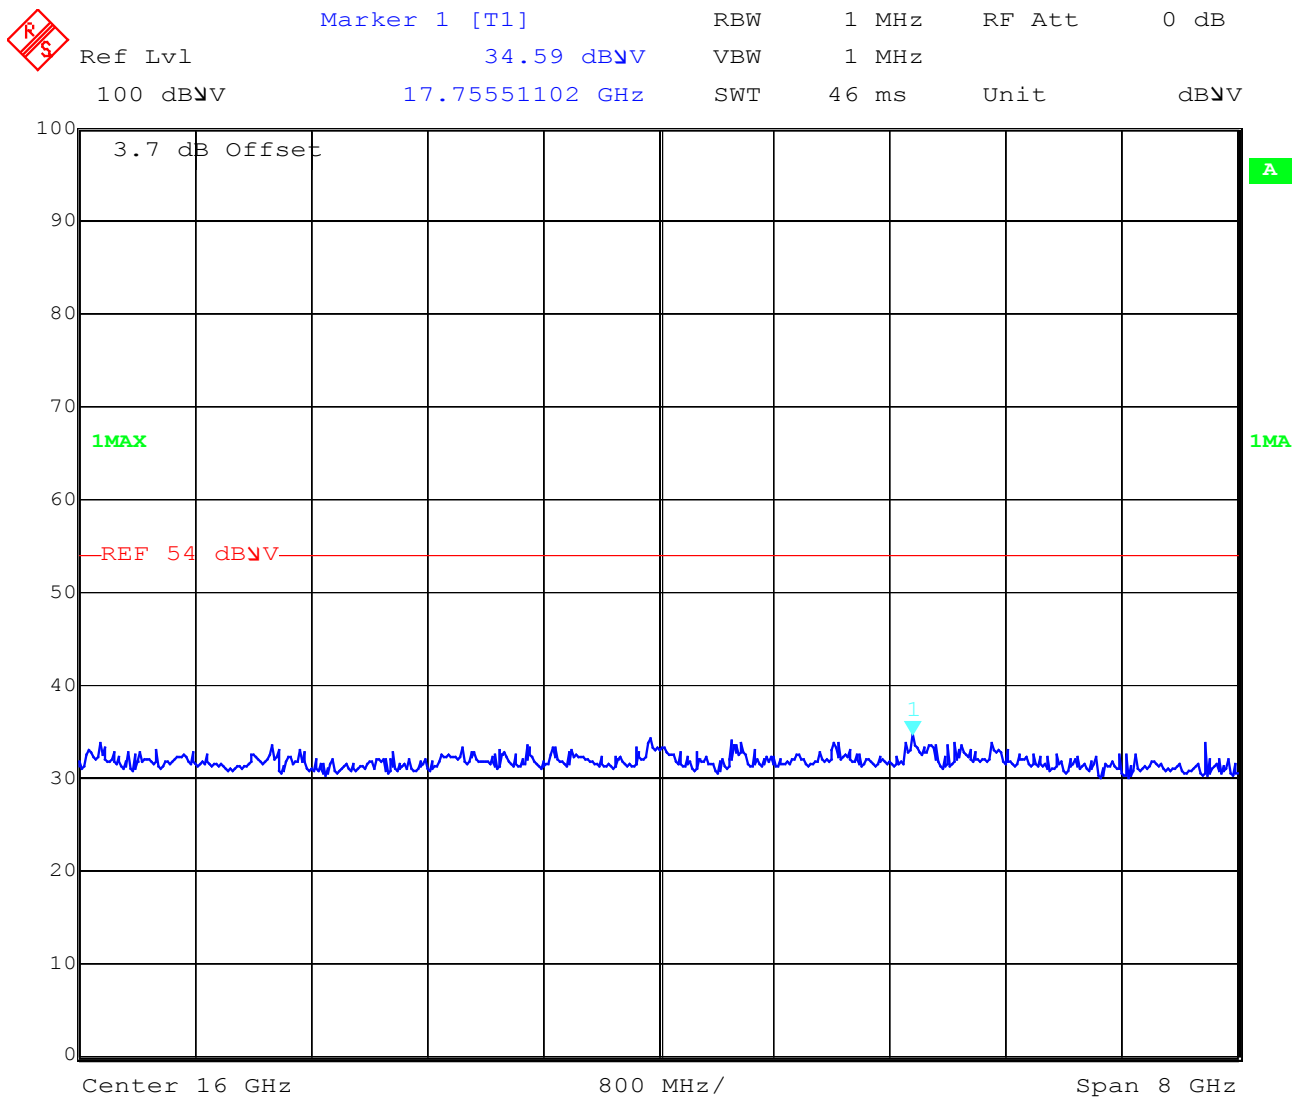

Date: 3.JUL.2003 07:50:06

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Headset “3DS 07855 ABAA” Leemax

CH 512 up to 4 GHz (vertical)

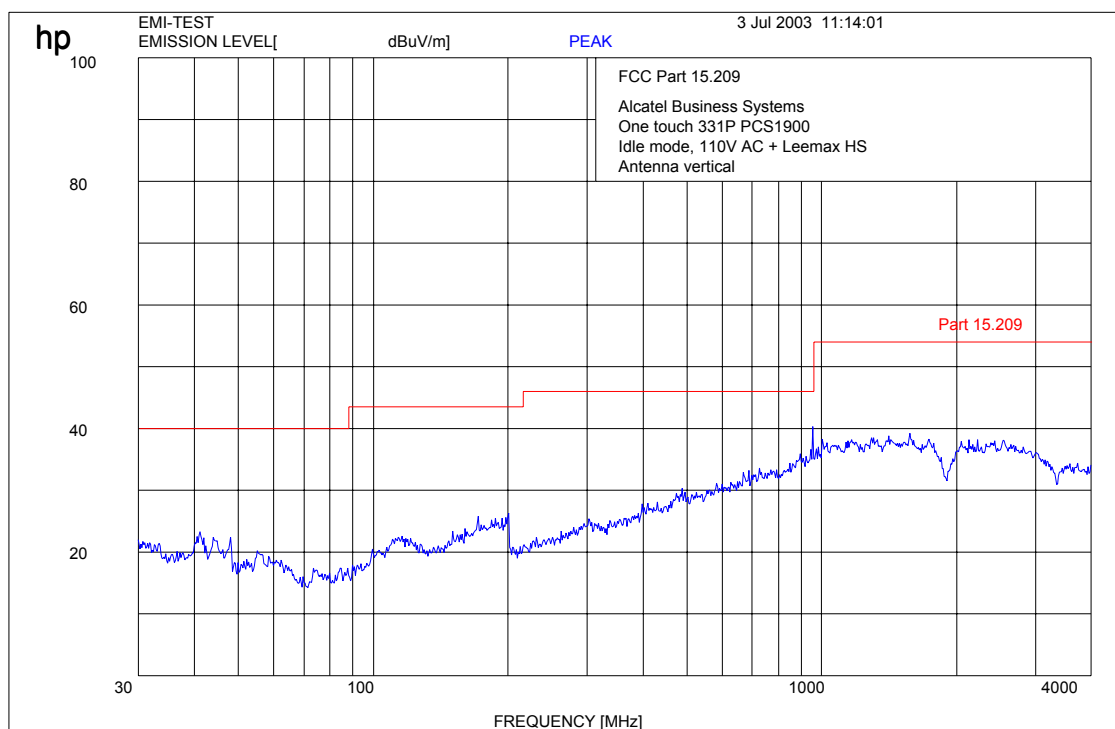

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Headset “3DS 07855 ABAA” Leemax

CH 512 up to 4 GHz (horizontal)

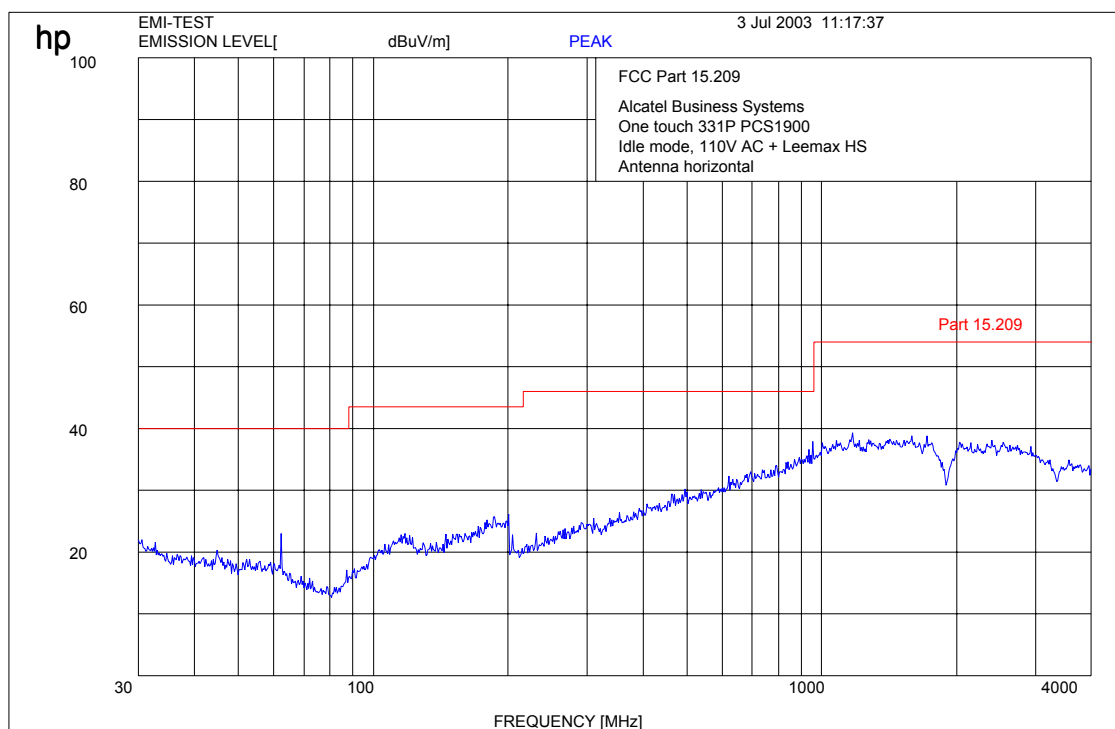

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Headset “3DS 07855 ABAA” Leemax

CH 810 up to 12 GHz (vertical)

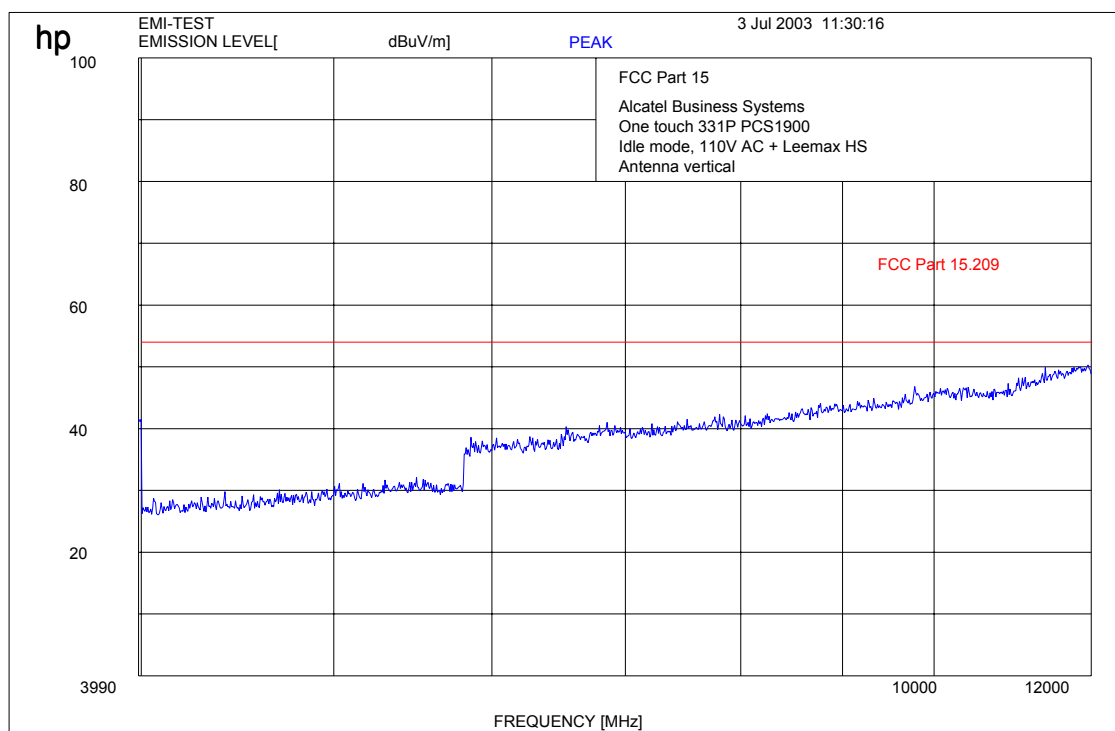

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Headset “3DS 07855 ABAA” Leemax

CH 810 up to 12 GHz (horizontal)

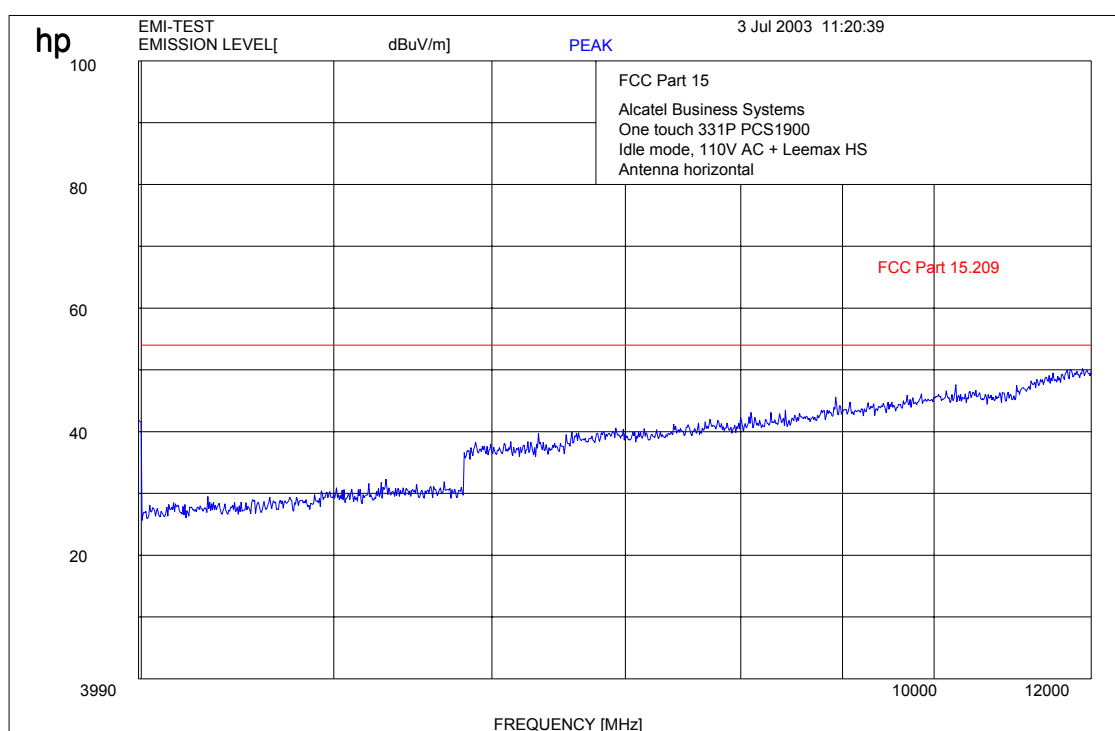

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 118 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Headset “3DS 07855 ABAA” Leemax

CH 512 up to 20 GHz (vertical and horizontal)

No traceable peak found / SEE PLOT ON PAGE 113

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Keyboard “3DS 07237 AAAA”

CH 512 up to 4 GHz (vertical)

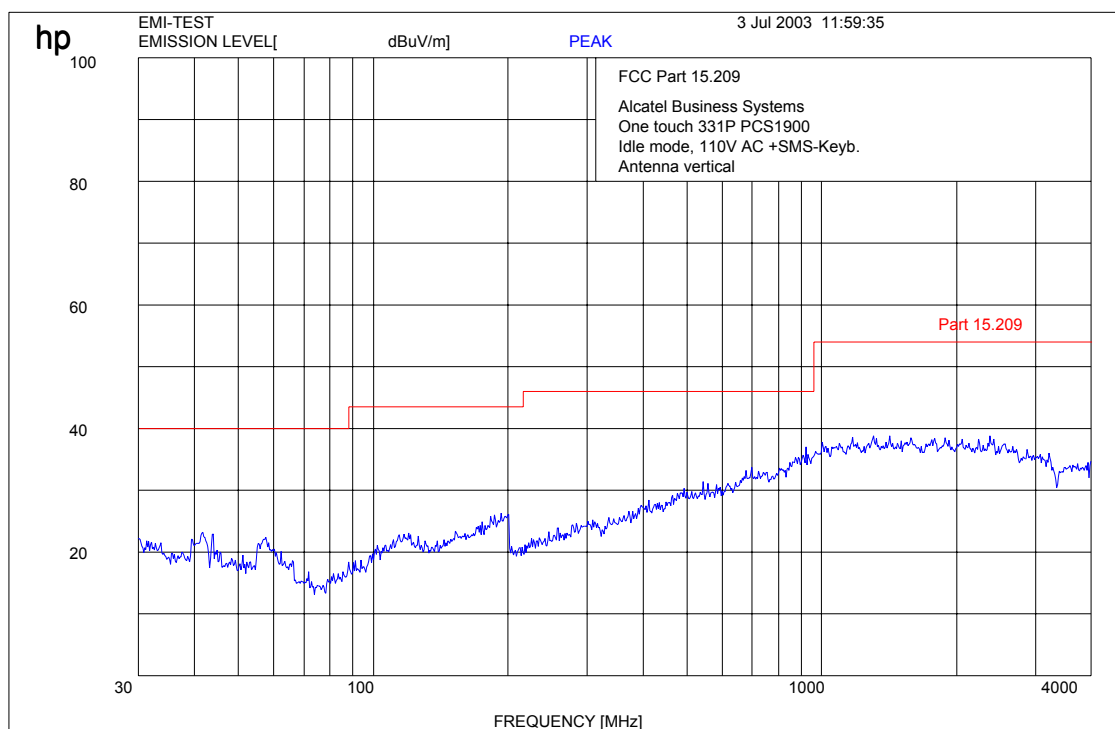

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Keyboard “3DS 07237 AAAA”

CH 512 up to 4 GHz (horizontal)

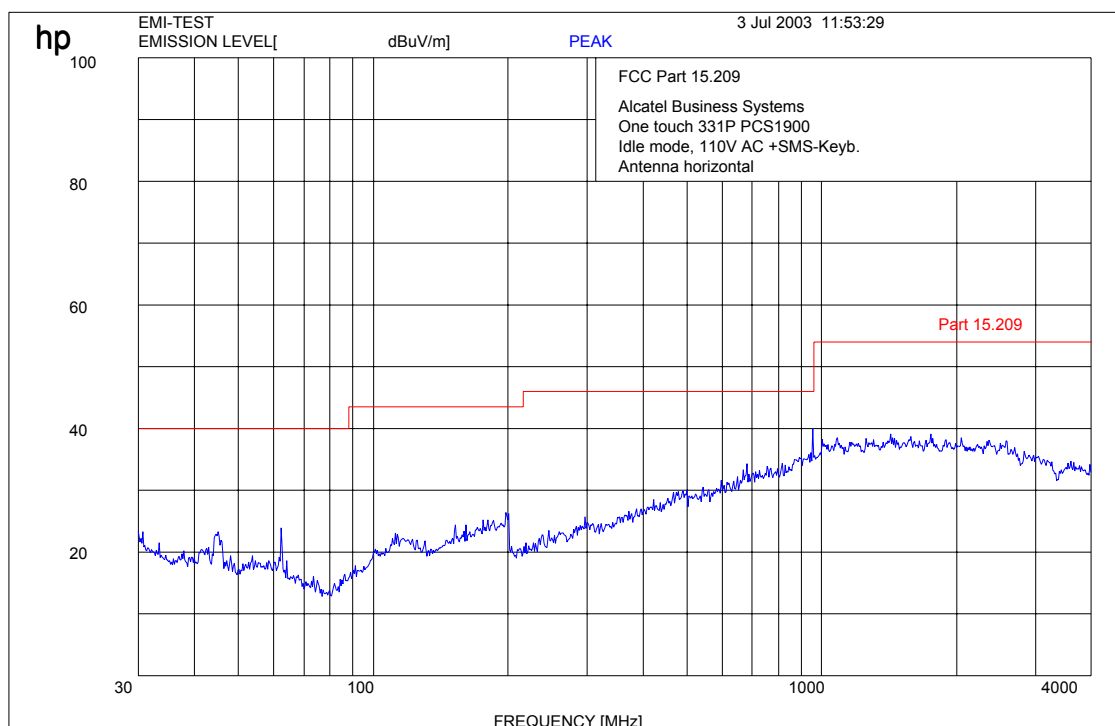

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Keyboard “3DS 07237 AAAA”

CH 810 up to 12 GHz (vertical)

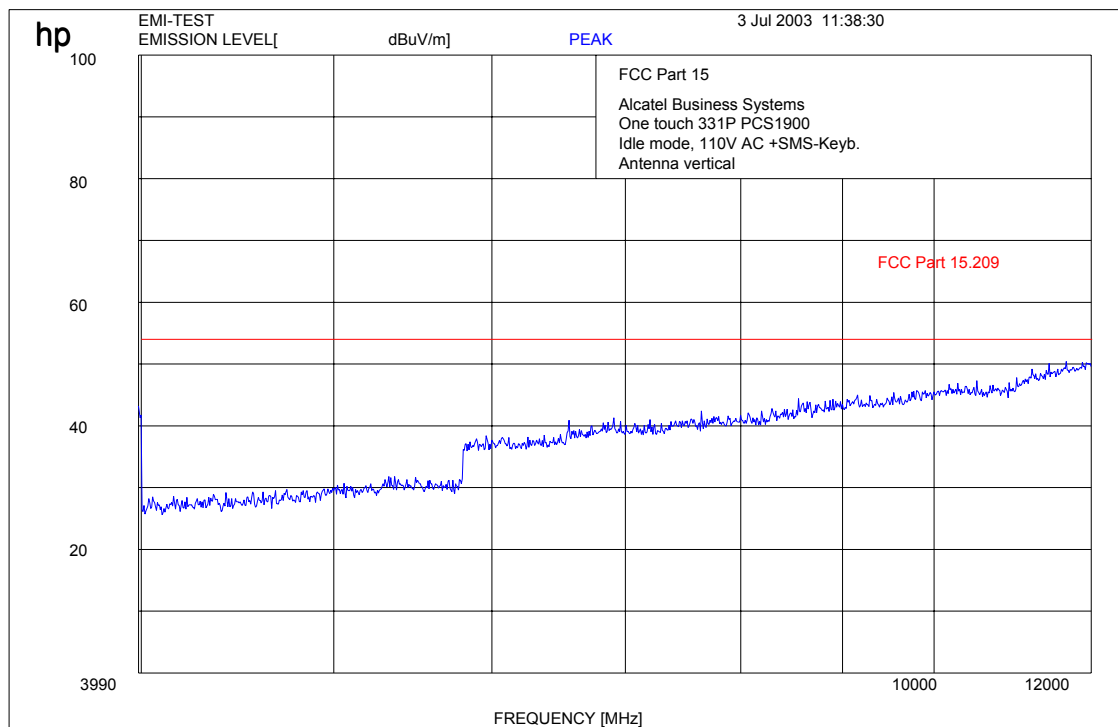

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24, 64

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Keyboard “3DS 07237 AAAA”

CH 810 up to 12 GHz (horizontal)

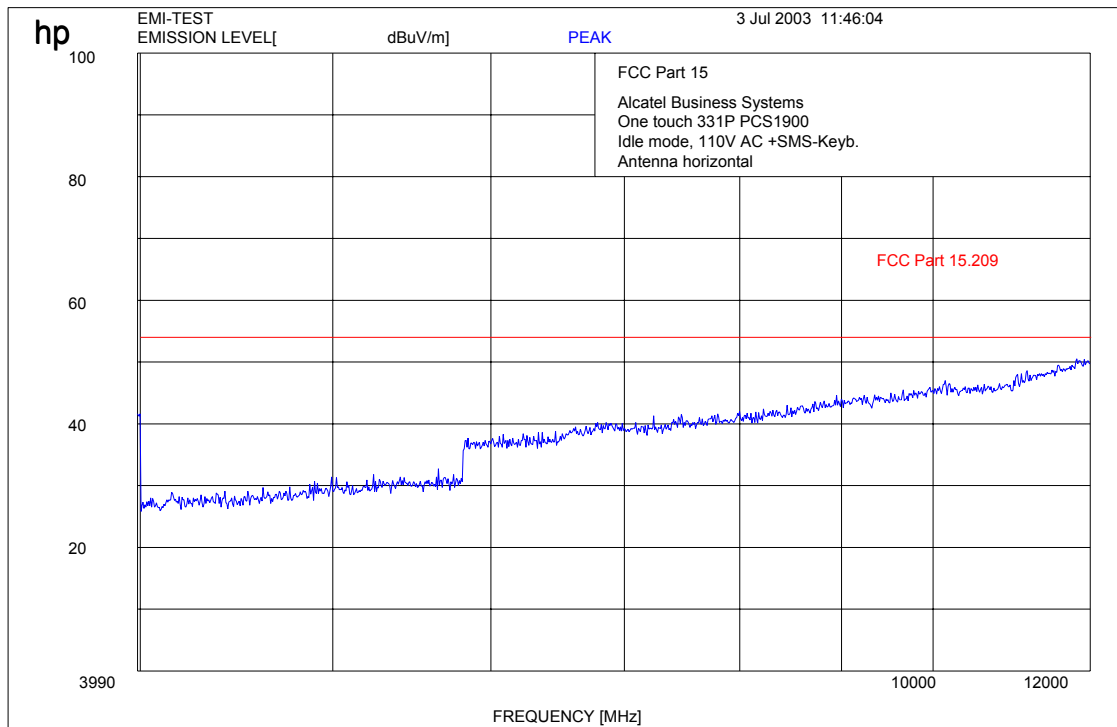

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03 Issue Date: 2003-07-04 Page 123 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Charger “3DS 09371 AGAA” and Keyboard “3DS 07237 AAAA”

CH 512 up to 20 GHz (vertical and horizontal)
No traceable peak found / SEE PLOT ON PAGE 113

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 124 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Car Kit "MP82"

CH 512 up to 4 GHz (vertical)

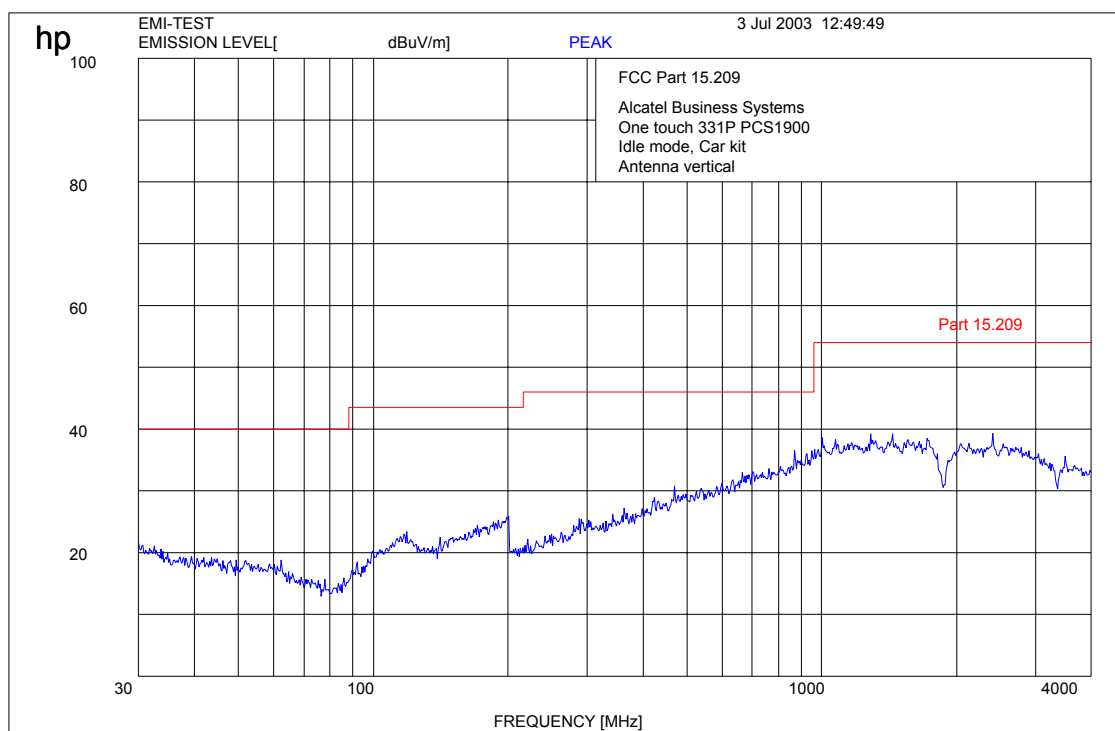

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 125 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Car Kit "MP82"

CH 512 up to 4 GHz (horizontal)

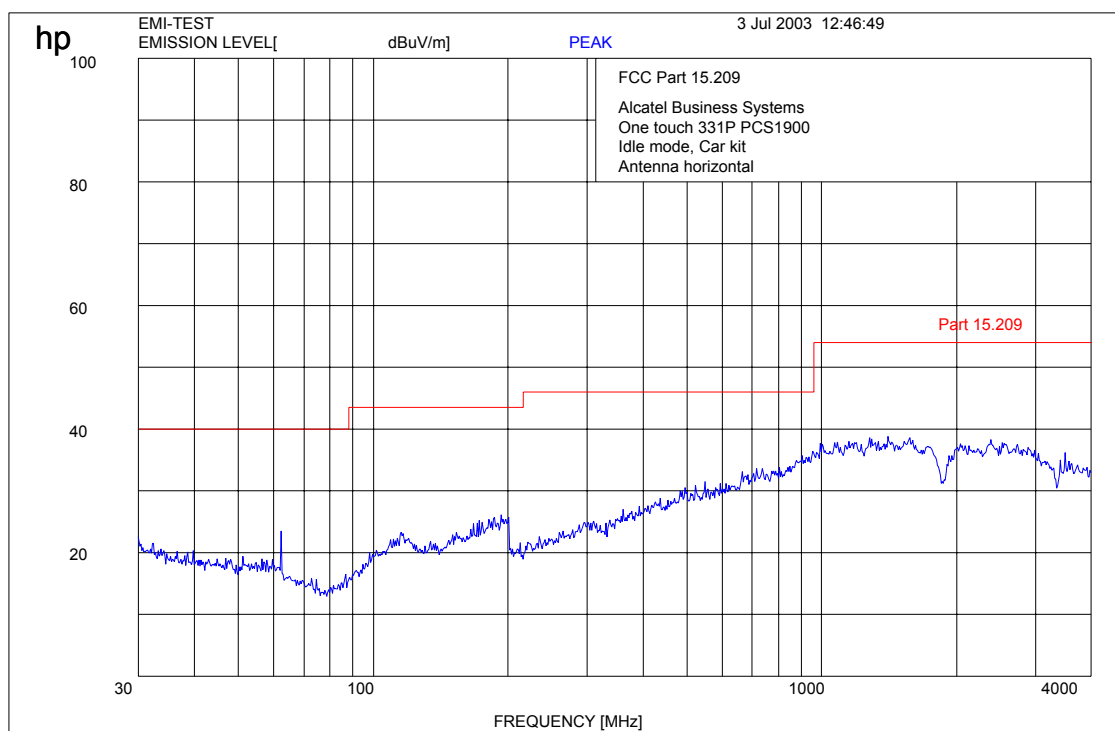

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 126 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Car Kit "MP82"

CH 810 up to 12 GHz (vertical)

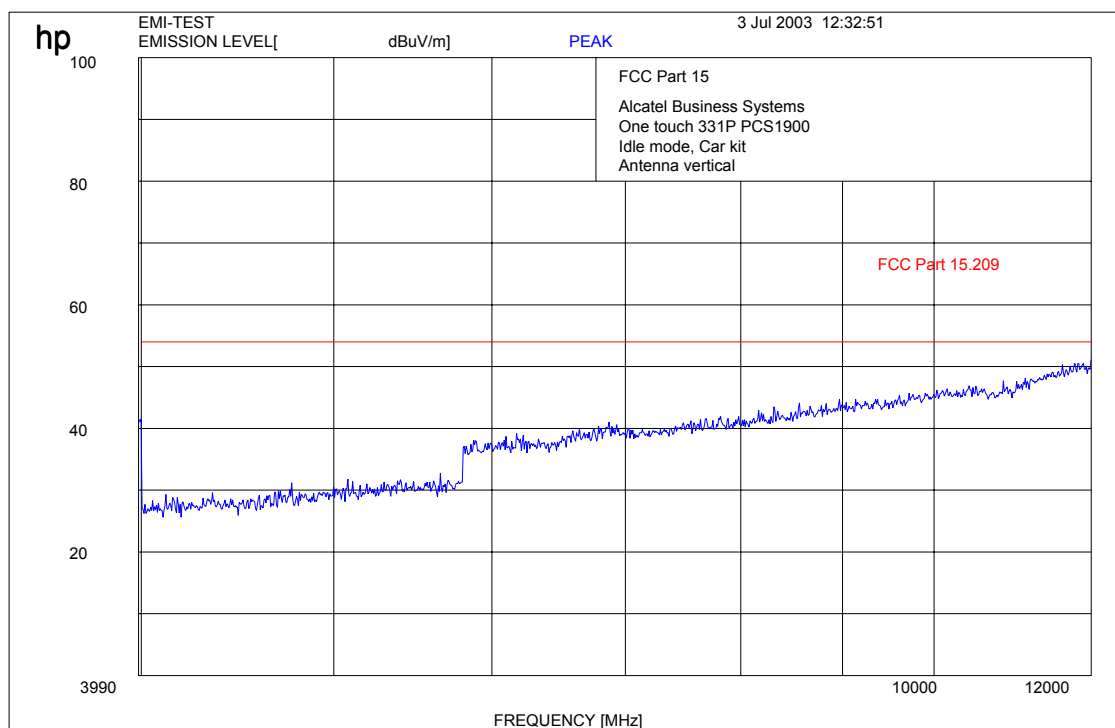

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 127 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Car Kit "MP82"

CH 810 up to 12 GHz (horizontal)

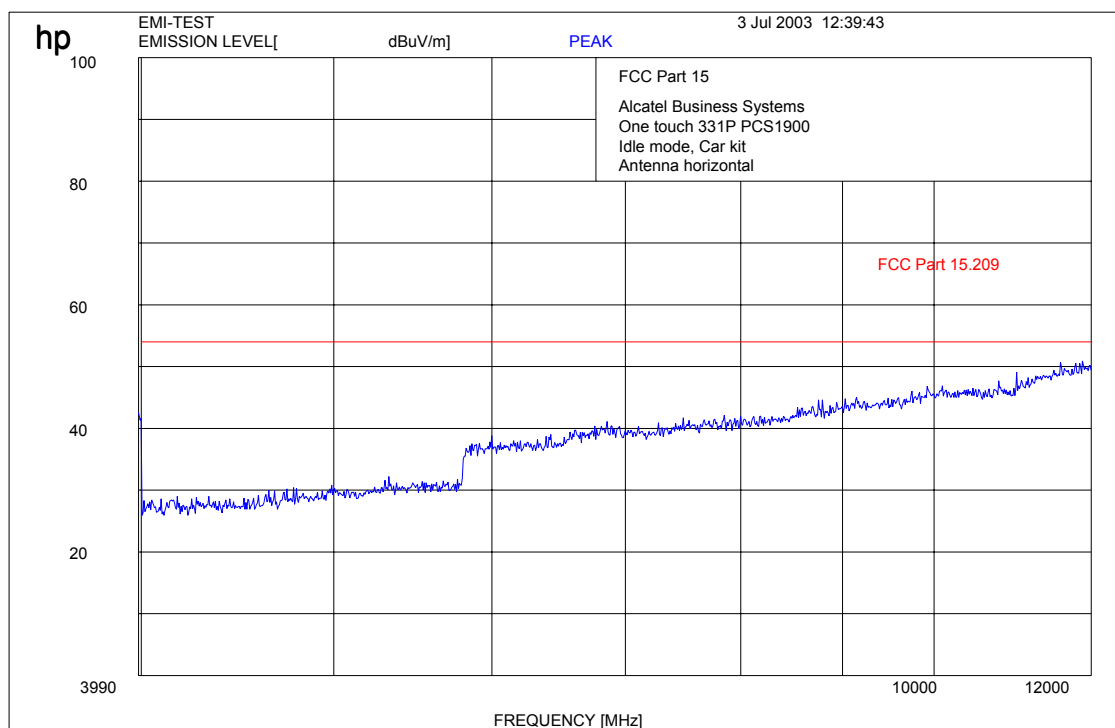

$f < 1 \text{ GHz}$: RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$: RBW/VBW 1 MHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 128 (151)

RECEIVER SPURIOUS RADIATION

§ 15.109

Test Configuration: One Touch 331P with Car Kit “MP82”

CH 512 up to 20 GHz (vertical and horizontal)

No traceable peak found /

SEE PLOT ON PAGE 113

CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 129 (151)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

CETECOM ICT Services GmbH


Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 130 (151)

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

Test site

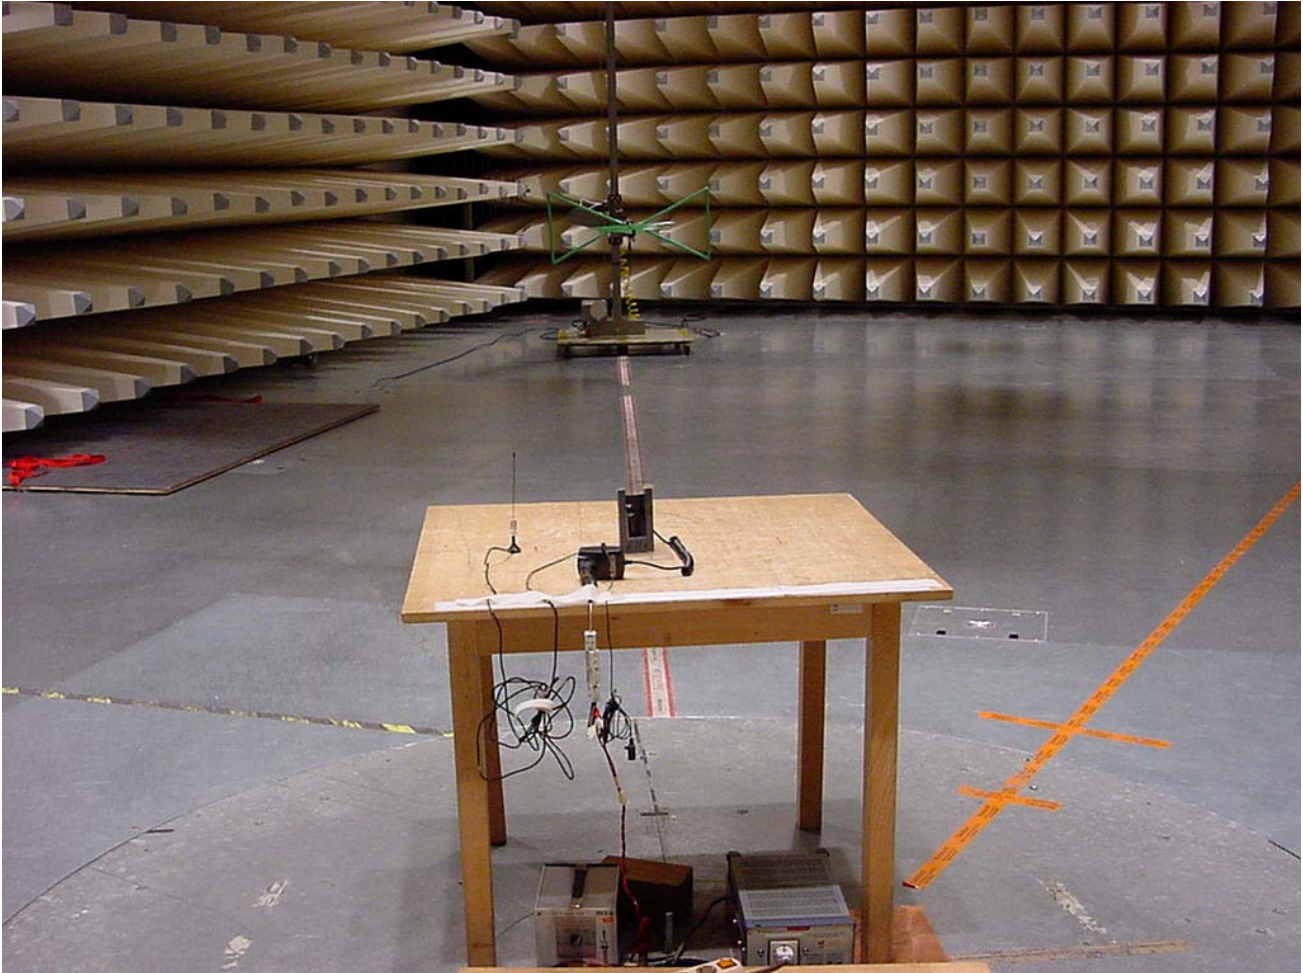

Test site

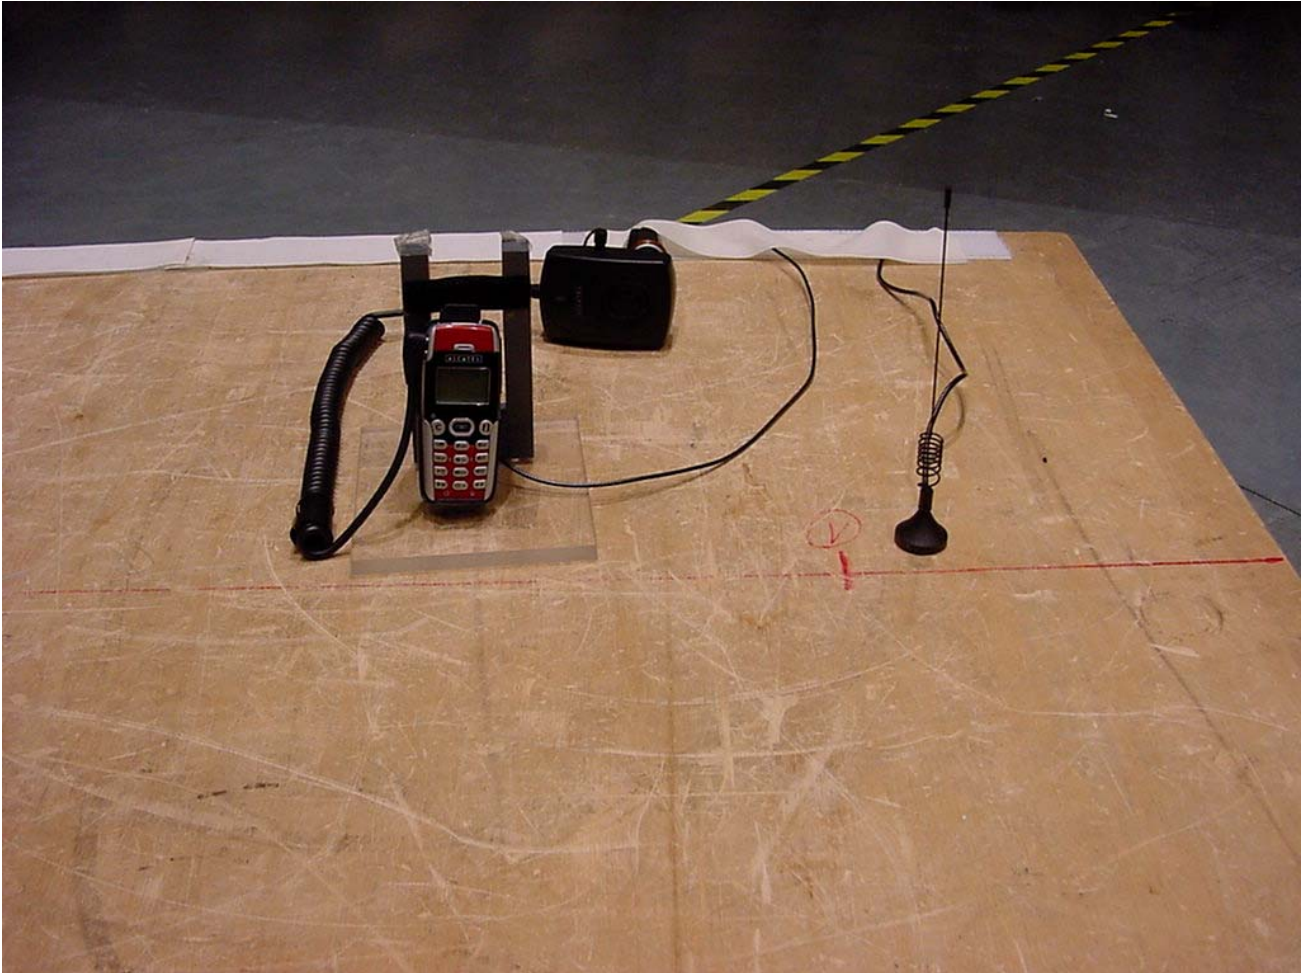


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04

Page 133 (151)

Test site

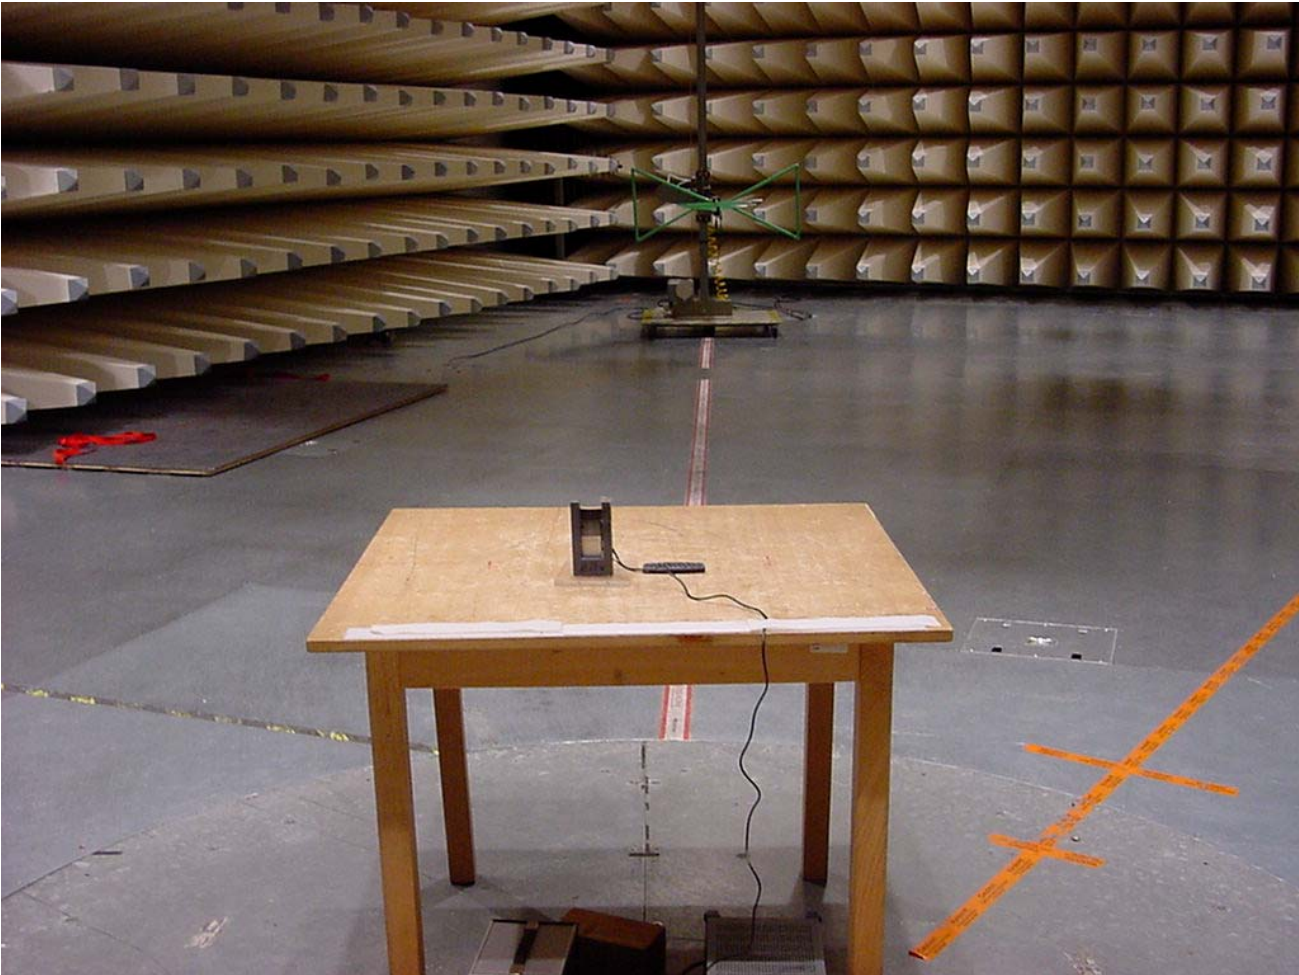


CETECOM ICT Services GmbH

Test report no.: 2-3250-01-01/03

Issue Date: 2003-07-04


Page 134 (151)

Test site

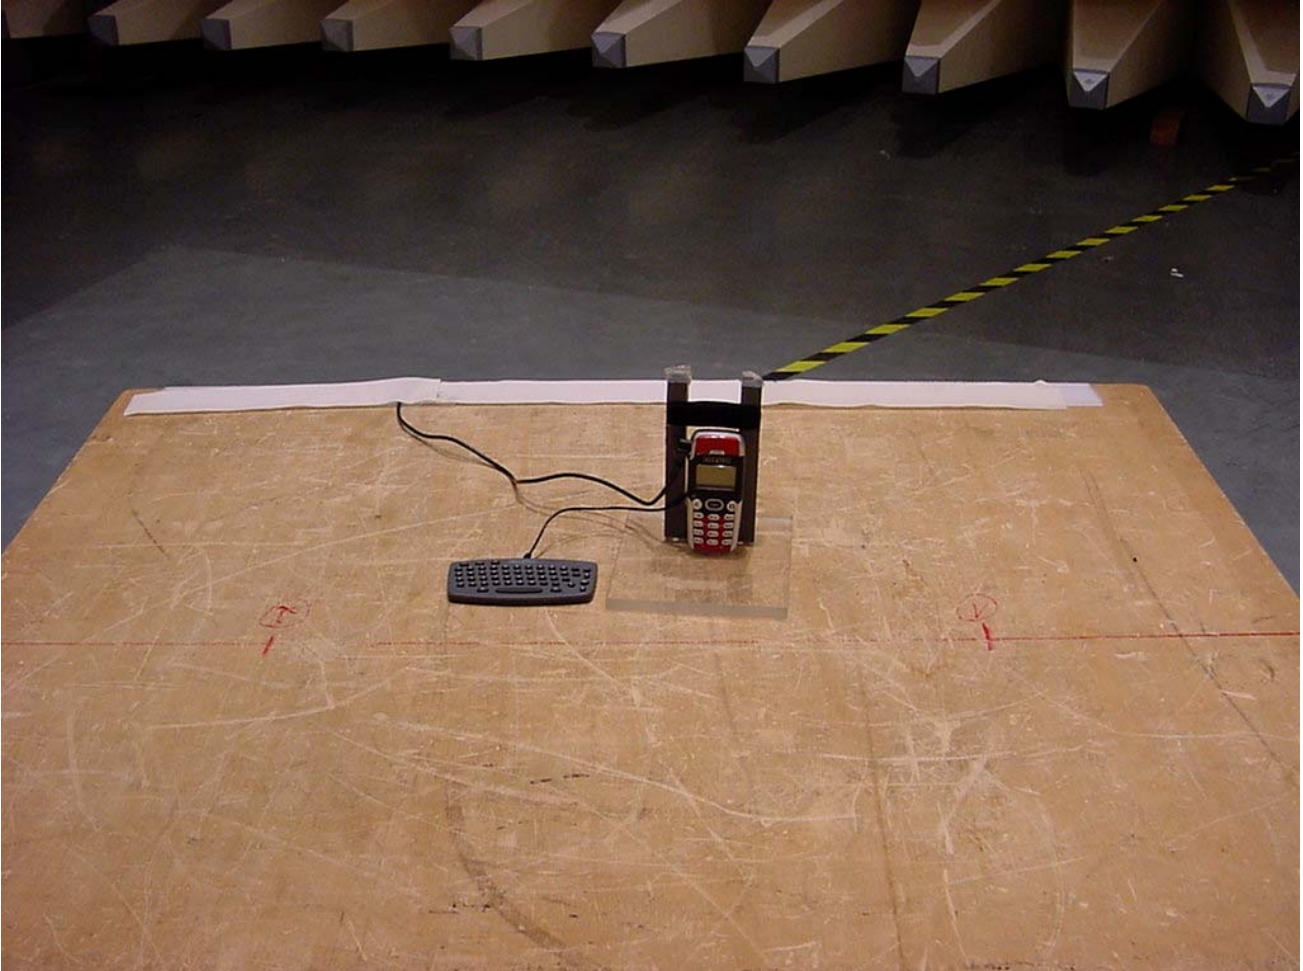

CETECOM ICT Services GmbH

Test site

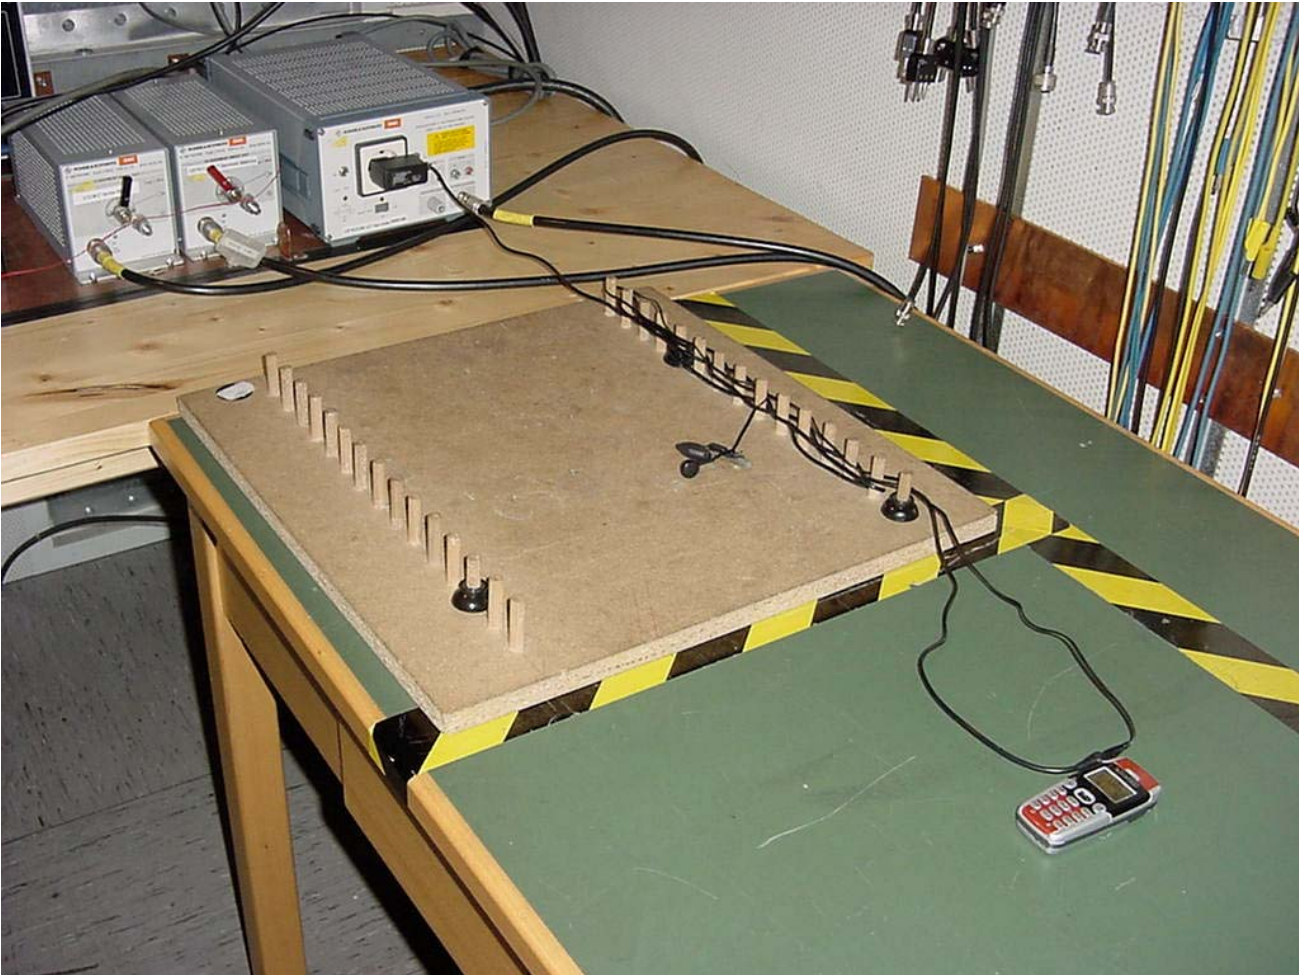

Photographs of the equipment




Photographs of the equipment



Photographs of the equipment




Photographs of the equipment

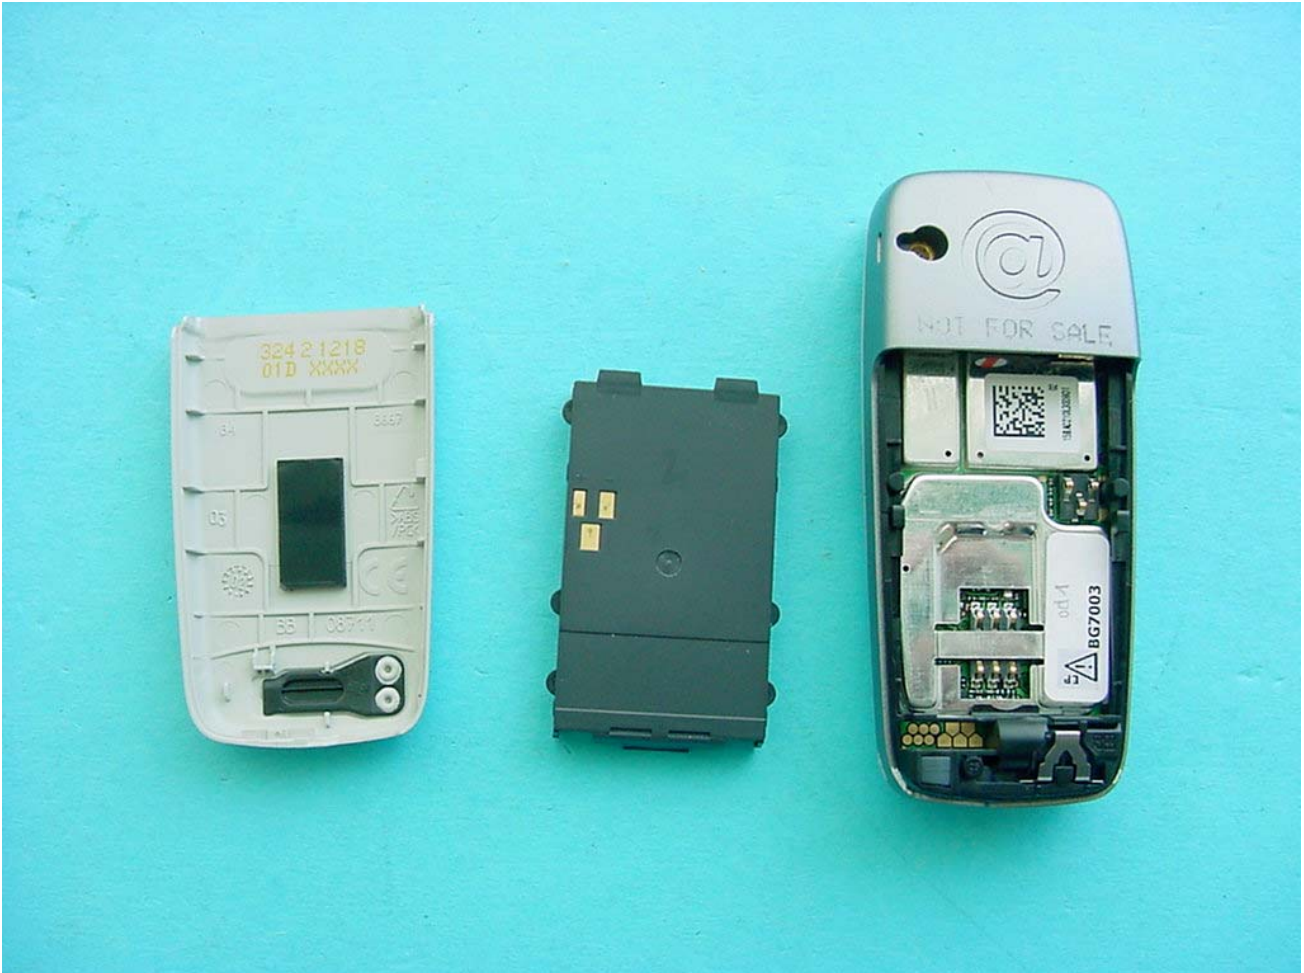

Photographs of the equipment



Photographs of the equipment

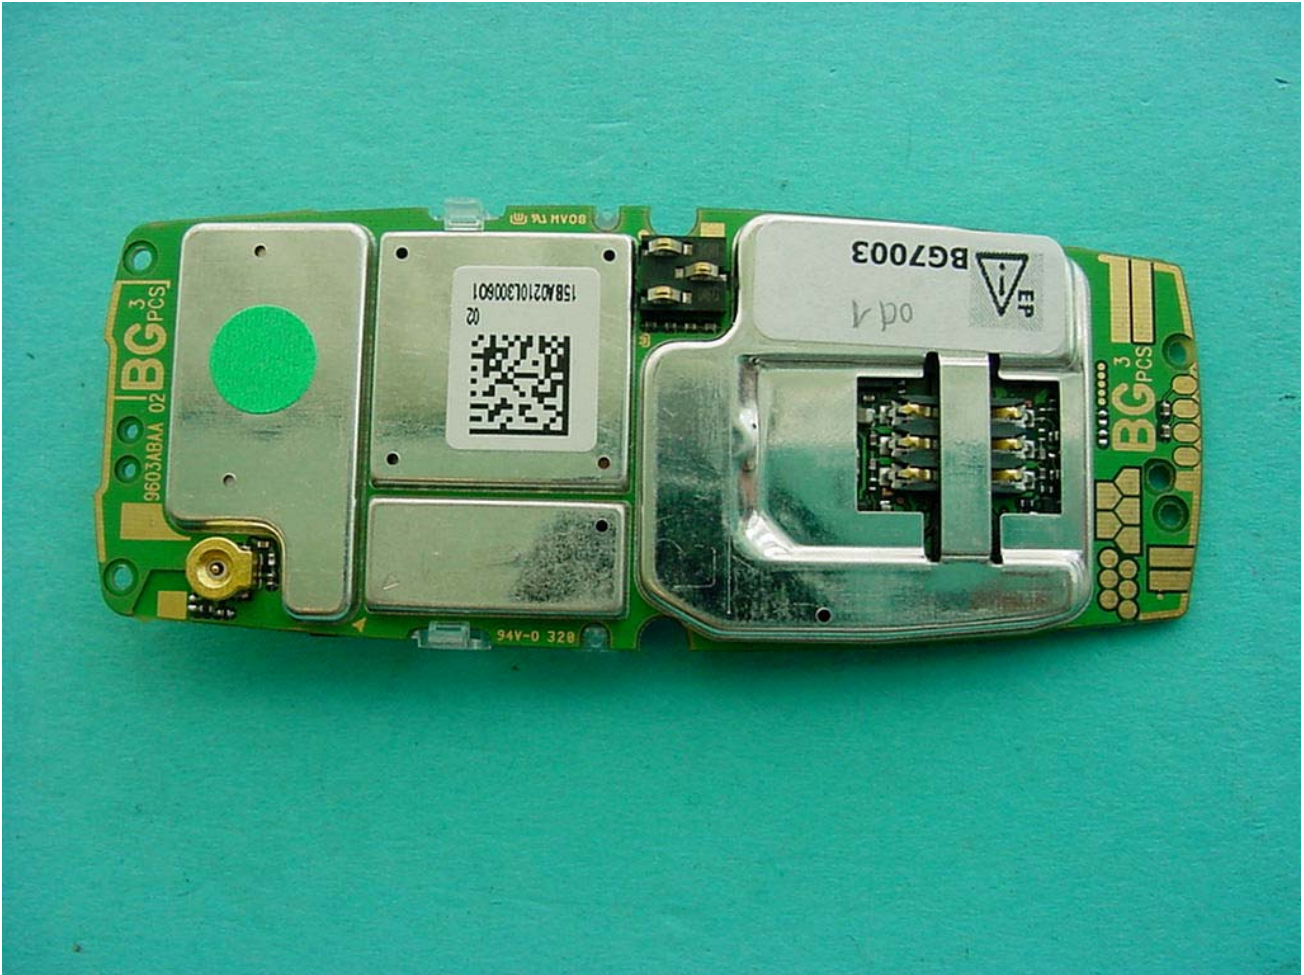

Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment



Photographs of the equipment

