

SAR TEST REPORT

Equipment Under Test : GSM 850&PCS1900MHz MOBILE PHONE

FCC ID : RAD016

Model No. : VLE5

Market Name : OT-E157a

Applicant : TCL&Alcatel Mobile Phones

Address of Applicant : 30/F, Times Square, 500 Zhangyang RD. Shanghai 200122, P.R.China

Date of Receipt : 2005.05.17

Date of Test : 2005.05.19 – 2005.06.16

Date of Issue : 2005.07.06

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1, C95.3, IEEE 1528-2002**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.

Tested by :

Date :

2005.07.06

Approved by :

Date :

2005.07.06

Contents

1. General Information	5
1.1 Test Laboratory.....	5
1.2 Details of Applicant	5
1.3 Description of EUT(s).....	5
1.4 Test Environment	6
1.5 Operation Configuration	6
1.6 The SAR Measurement System.....	6
1.7 SAR System Verification.....	8
1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHZ	9
1.9 Test Standards and Limits	10
2. Summary of Results.....	12
3. Instruments List	14
4. Measurements	15
4.1 FCC-OET65-LeftHandSide-Cheek-GSM850-Low	15
FCC-OET65-LeftHandSide-Cheek-GSM850-Low	15
4.2 FCC-OET65-LeftHandSide-Cheek-GSM850-Mid	16
FCC-OET65-LeftHandSide-Cheek-GSM850-Mid	16
4.3 FCC-OET65-LeftHandSide-Cheek-GSM850-High	18
FCC-OET65-LeftHandSide-Cheek-GSM850-High	18
4.4 FCC-OET65-LeftHandSide-Tilt-GSM850-Low	20
FCC-OET65-LeftHandSide-Tilt-GSM850-Low	20
4.5 FCC-OET65-LeftHandSide-Tilt-GSM850-Mid	21
FCC-OET65-LeftHandSide-Tilt-GSM850-Mid	22
4.6 FCC-OET65-LeftHandSide-Tilt-GSM850-High	23
FCC-OET65-LeftHandSide-Tilt-GSM850-High.....	23
4.7 FCC-OET65-RightHandSide-Cheek-GSM850-Low	25
FCC-OET65-RightHandSide-Cheek-GSM850-Low.....	25
4.8 FCC-OET65-RightHandSide-Cheek-GSM850-Mid	27
FCC-OET65-RightHandSide-Cheek-GSM850-Mid	27
4.9 FCC-OET65-RightHandSide-Cheek-GSM850-High	29
FCC-OET65-RightHandSide-Cheek-GSM850-High	29
4.10 FCC-OET65-RightHandSide-Tilt-GSM850-Low.....	30

FCC-OET65-RightHandSide-Tilt-GSM850-Low	30
4.11 FCC-OET65-RightHandSide-Tilt-GSM850-Mid	32
FCC-OET65-RightHandSide-Tilt-GSM850-Mid.....	32
4.12 FCC-OET65-RightHandSide-Tilt-GSM850-High	34
FCC-OET65-RightHandSide-Tilt-GSM850-High	34
4.13 FCC-OET65-Body-Worn-GSM850-Low	36
FCC-OET65-Body-Worn-GSM850-Low	36
4.14 FCC-OET65-Body-Worn-GSM850-Mid	38
FCC-OET65-Body-Worn-GSM850-Mid	38
4.15 FCC-OET65-Body-Worn-GSM850-High.....	40
FCC-OET65-Body-Worn-GSM850-High.....	40
4.16 FCC-OET65-LeftHandSide-Cheek-GSM1900-Low	42
FCC-OET65-LeftHandSide-Cheek-GSM1900-Low.....	42
4.17 FCC-OET65-LeftHandSide-Cheek-GSM1900-Mid	44
FCC-OET65-LeftHandSide-Cheek-GSM1900-Mid	44
4.18 FCC-OET65-LeftHandSide-Cheek-GSM1900-High	46
FCC-OET65-LeftHandSide-Cheek-GSM1900-High	46
4.19 FCC-OET65-LeftHandSide-Tilt-GSM1900-Low	48
FCC-OET65-LeftHandSide-Tilt-GSM1900-Low	48
4.20 FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid	50
FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid	50
4.21 FCC-OET65-LeftHandSide-Tilt-GSM1900-High	52
FCC-OET65-LeftHandSide-Tilt-GSM1900-High.....	52
4.22 FCC-OET65-RightHandSide-Cheek-GSM1900-Low	54
FCC-OET65-RightHandSide-Cheek-GSM1900-Low	54
4.23 FCC-OET65-RightHandSide-Cheek-GSM1900-Mid	56
FCC-OET65-RightHandSide-Cheek-GSM1900-Mid	56
4.24 FCC-OET65-RightHandSide-Cheek-GSM1900-High	58
FCC-OET65-RightHandSide-Cheek-GSM1900-High	58
4.25 FCC-OET65-RightHandSide-Tilt-GSM1900-Low	60
FCC-OET65-RightHandSide-Tilt-GSM1900-Low	60
4.26 FCC-OET65-RightHandSide-Tilt-GSM1900-Mid.....	62
FCC-OET65-RightHandSide-Tilt-GSM1900-Mid.....	62
4.27 FCC-OET65-RightHandSide-Tilt-GSM1900-High.....	64

FCC-OET65-RightHandSide-Tilt-GSM1900-High	64
4.28 FCC-OET65-Body-Worn-GSM1900-Low	66
FCC-OET65-Body-Worn-GSM1900-Low	66
4.29 FCC-OET65-Body-Worn-GSM1900-Mid	68
FCC-OET65-Body-Worn-GSM1900-Mid	68
4.30 FCC-OET65-Body-Worn-GSM1900-High.....	70
FCC-OET65-Body-Worn-GSM1900-High.....	70
Appendix.....	73
1. Photographs of Test Setup.....	73
2. Photographs of the EUT	76
3. Photographs of the battery	76
4. Photograph of the charger	77
5. Probe Calibration certificate.....	78
6. Uncertainty analysis	86
7. Phantom description	87

1. General Information

1.1 Test Laboratory

GSM Lab
SGS-CSTC Standards Technical Services Co.Ltd Shanghai Branch
9F,the 3rd Building, No.899, Yishan Rd, Xuhui District, Shanghai, China
Zip code: 200233
Telephone: +86 (0) 21 6495 1616
Fax: +86 (0) 21 6495 3679
Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name: TCL&Alcatel Mobile Phones
Address: 30/F, Times Square, 500 Zhangyang RD. Shanghai
200122, P.R.China

1.3 Description of EUT(s)

Brand name	Alcatel	
Model No.	VLE5	
Market Name	OT-E157a	
Serial No.	IMEI:00101600027008702900	
Battery Type	Lithium-Ion, 4.2Volt	
Provider of Battery	BYD	
Antenna Type	Internal Antenna	
Operation Mode	GSM850/PCS1900	
Modulation Mode	GMSK	
Frequency range	GSM850	Tx: 824~849 MHz
		Rx: 869~894 MHz
	GSM1900	Tx: 1850~1910 MHz
		Rx: 1930~1990 MHz
Maximum RF Conducted Power	GSM850: 33dBm, GSM1900: 30dBm	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 32%

1.5 Operation Configuration

Configuration 1: GSM 850, LeftHandSide Cheek & 15° Tilt Position

Configuration 2: GSM 850, RightHandSide Cheek & 15° Tilt Position

Configuration 3: GSM 850, BodyWorn (1.5cm between EUT and phantom)

Configuration 4: GSM 1900, LeftHandSide Cheek & 15° Tilt Position

Configuration 5: GSM 1900, RightHandSide Cheek & 15° Tilt Position

Configuration 6: GSM 1900, BodyWorn (1.5cm between EUT and phantom)

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig.a.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1774 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_{i1}|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- ¥ A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- ¥ A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- ¥ A data acquisition electronics (DAE) which performs the signal amplification, signal

multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

- ¥ The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

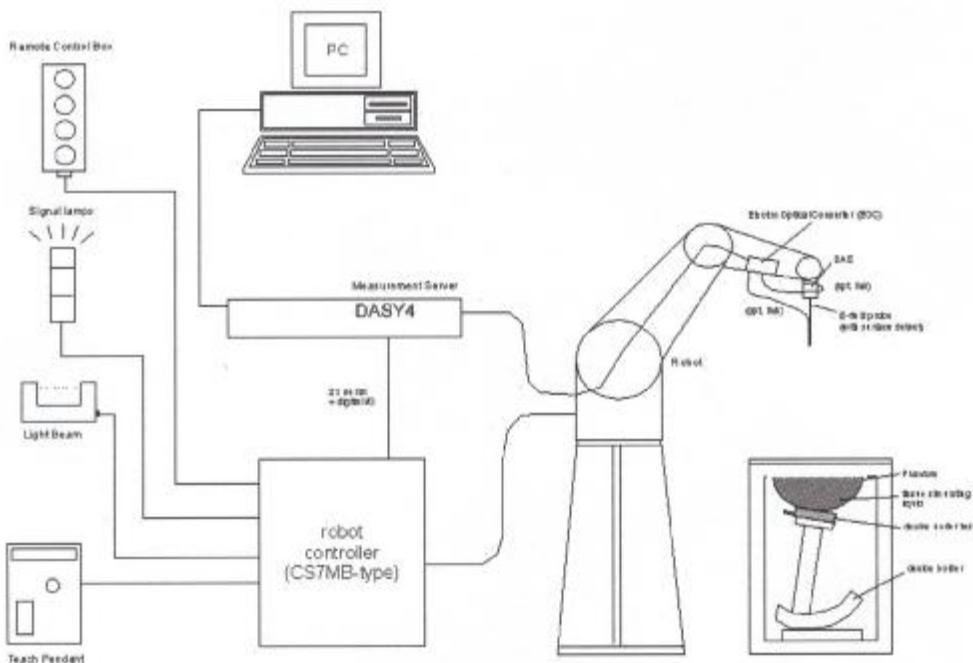


Fig. a SAR System Configuration

- ¥ The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- ¥ A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- ¥ A computer operating Windows 2000 or Windows XP.
- ¥ DASY4 software.
- ¥ Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.

- ÿ The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- ÿ The device holder for handheld mobile phones.
- ÿ Tissue simulating liquid mixed according to the given recipes.
- ÿ Validation dipole kits allowing to validate the proper functioning of the system.

1.7 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 850MHz and 1900MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

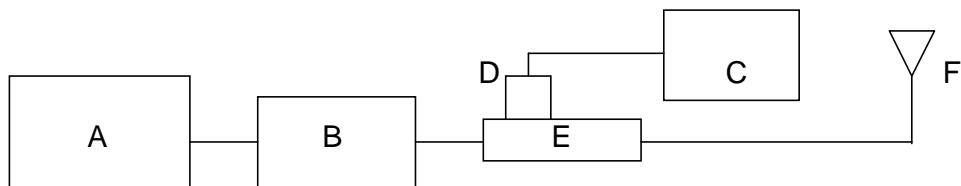


Fig. b the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Agilent Model 8449B Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna

Validation Kit	Frequency	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
ET3DV6 SN1774	900M Head	2.69	1.73	2.55	1.68	2005-05-19
ET3DV6 SN1774	900M Head	2.69	1.73	2.73	1.76	2005-06-16
ET3DV6 SN1774	900M Body	2.75	1.77	2.56	1.69	2005-05-25
ET3DV6 SN1774	1900M Head	10.4	5.35	10.33	5.26	2005-05-20
ET3DV6 SN1774	1900M Body	10.52	5.53	10.48	5.42	2005-05-20

Table 1. Result System Validation

1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ϵ)	Conductivity (σ)	Simulated Tissue Temp (°C)
850	Head	Measured, 2005-04-1	41.69	0.877	22
		Measured, 2005-06-16	41.68	0.874	22
		Recommended Limit	41.5±5%	0.90±10%	20-24
850	Body	Measured, 2005-04-6	52.52	0.997	22
		Recommended Limit	55.2±5%	0.97±10%	20-24
1900	Head	Measured, 2005-04-1	40.32	1.444	22
		Recommended Limit	40.0±5%	1.40±10%	20-24
1900	Body	Measured, 2005-04-6	51.52	1.521	22
		Recommended Limit	53.3±5%	1.52±10%	20-24

Table 2. Dielectric parameters for the Frequency Band 850MHz&1900MHz

1.9 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 3. RF Exposure Limits

Order No: SHGLO050500034GSM

Date: July 06, 2005

Page: 11 of 87

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

2. Summary of Results

Frequency Band	EUT position	Conducted Output Power (Average)	1g Average (mW/g)	Power Drift (dB)	Amb. Temp (°C)	Verdict
850 MHz	LeftHandSide Cheek, Low Channel	32.8	0.792	0.04	22	PASS
	LeftHandSide Cheek, Mid Channel	32.8	0.882	0.02	22	PASS
	LeftHandSide Cheek, High Channel	32.8	1.11	-0.1	22	PASS
	LeftHandSide Tilt, Low Channel	32.8	0.331	0.04	22	PASS
	LeftHandSide Tilt, Mid Channel	32.8	0.365	0.02	22	PASS
	LeftHandSide Tilt, High Channel	32.8	0.463	-0.04	22	PASS
	RightHandSide Cheek, Low Channel	32.8	0.801	-0.006	22	PASS
	RightHandSide Cheek, Mid Channel	32.8	0.887	-0.04	22	PASS
	RightHandSide Cheek, High Channel	32.8	1.11	-0.04	22	PASS
	RightHandSide Tilt, Low Channel	32.8	0.377	-0.01	22	PASS
	RightHandSide Tilt, Mid Channel	32.8	0.395	-0.04	22	PASS
	RightHandSide Tilt, High Channel	32.8	0.517	-0.2	22	PASS
	BodyWorn, Low Channel	32.8	0.52	-0.05	22	PASS
	BodyWorn, Mid Channel	32.8	0.617	-0.08	22	PASS
	BodyWorn, High Channel	32.8	0.64	-0.03	22	PASS
1900 MHz	LeftHandSide Cheek, Low Channel	29.5	0.314	0.2	22	PASS
	LeftHandSide Cheek, Mid Channel	29.5	0.422	0.008	22	PASS
	LeftHandSide Cheek, High Channel	29.5	0.336	-0.03	22	PASS
	LeftHandSide Tilt, Low Channel	29.5	0.465	-0.06	22	PASS
	LeftHandSide Tilt, Mid Channel	29.5	0.615	-0.08	22	PASS
	LeftHandSide Tilt, High Channel	29.5	0.487	-0.04	22	PASS
	RightHandSide Cheek, Low Channel	29.5	0.414	0.01	22	PASS

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 13 of 87

	RightHandSide Cheek, Mid Channel	29.5	0.561	-0.02	22	PASS
	RightHandSide Cheek, High Channel	29.5	0.454	0.02	22	PASS
	RightHandSide Tilt, Low Channel	29.5	0.519	0.8	22	PASS
	RightHandSide Tilt, Mid Channel	29.5	0.694	0.2	22	PASS
	RightHandSide Tilt, High Channel	29.5	0.571	0.07	22	PASS
	BodyWorn, Low Channel	29.5	0.173	-0.01	22	PASS
	BodyWorn, Mid Channel	29.5	0.298	-0.04	22	PASS
	BodyWorn, High Channel	29.5	0.331	0.001	22	PASS

Note:

1. In GSM850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In GSM1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
3. For the Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values.

3. Instruments List

Instrument	Model	Serial number	No.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.1 build 47	N/A	GSM-SAR-001	N/A
Probe	ET3DV6	1774	GSM-SAR-021	2004.10.26
DAE	DAE3	569	GSM-SAR-023	2005.3.20
Phantom	SAM	N/A	GSM-SAR-005	N/A
Robot	RX90L	N/A	GSM-SAR-008	N/A
900MHz system validation dipole	D900V2	184	GSM-SAR-013	2005.3.20
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2005.3.20
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2004.12.20
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2004.12.20
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2004.12.20
Agilent preamplifier	8449B	3008A01921	GSM-SAR-009	2004.12.20
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2004.12.20
Agilent power sensor	8481h	MY41091234	GSM-SAR-011	2004.12.20
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2004.12.20
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2004.12.20

4. Measurements

4.1 FCC-OET65-LeftHandSide-Cheek-GSM850-Low

Date/Time: 06/16/05 16:24:27

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM850-2.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM850-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.865816 \text{ mho/m}$, $\epsilon_r = 41.8373$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm


Reference Value = 29.7 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.849 mW/g

Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 1.09 W/kg
SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.539 mW/g
Reference Value = 29.7 V/m
Power Drift = 0.04 dB
Maximum value of SAR = 0.84 mW/g

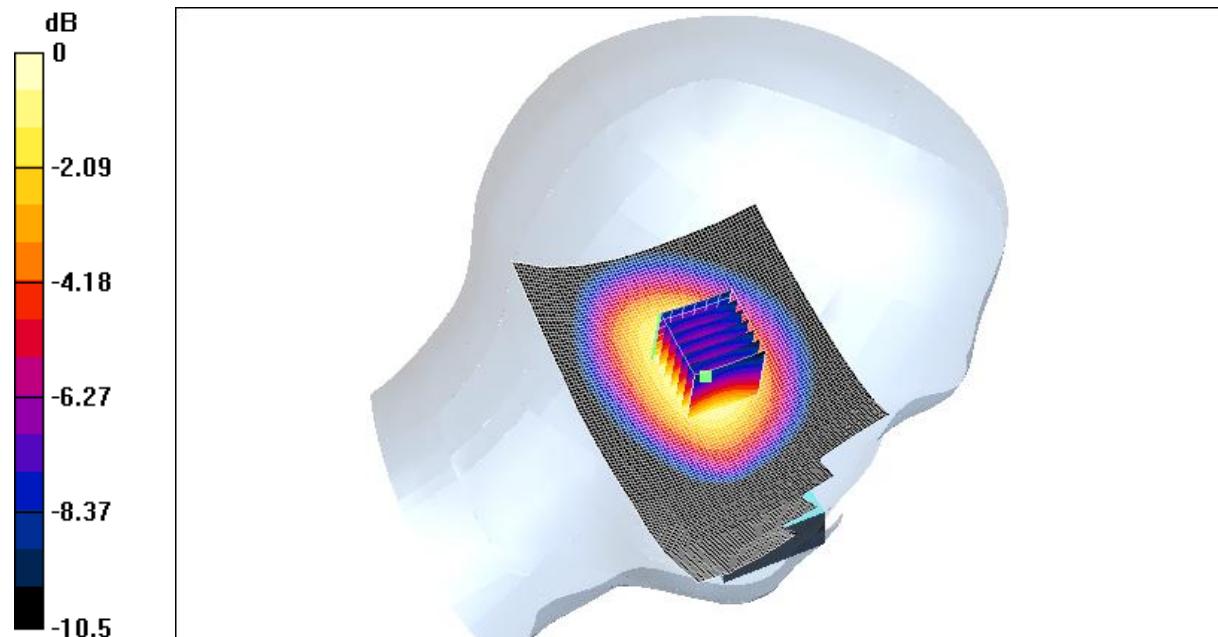

0 dB = 0.84mW/g

4.2 FCC-OET65-LeftHandSide-Cheek-GSM850-Mid

Date/Time: 06/16/05 16:24:27

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM850-2.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM850-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing; EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.8773 \text{ mho/m}$, $\epsilon_r = 41.699$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 30.9 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.942 mW/g

Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.882 mW/g; SAR(10 g) = 0.601 mW/g

Reference Value = 30.9 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.936 mW/g

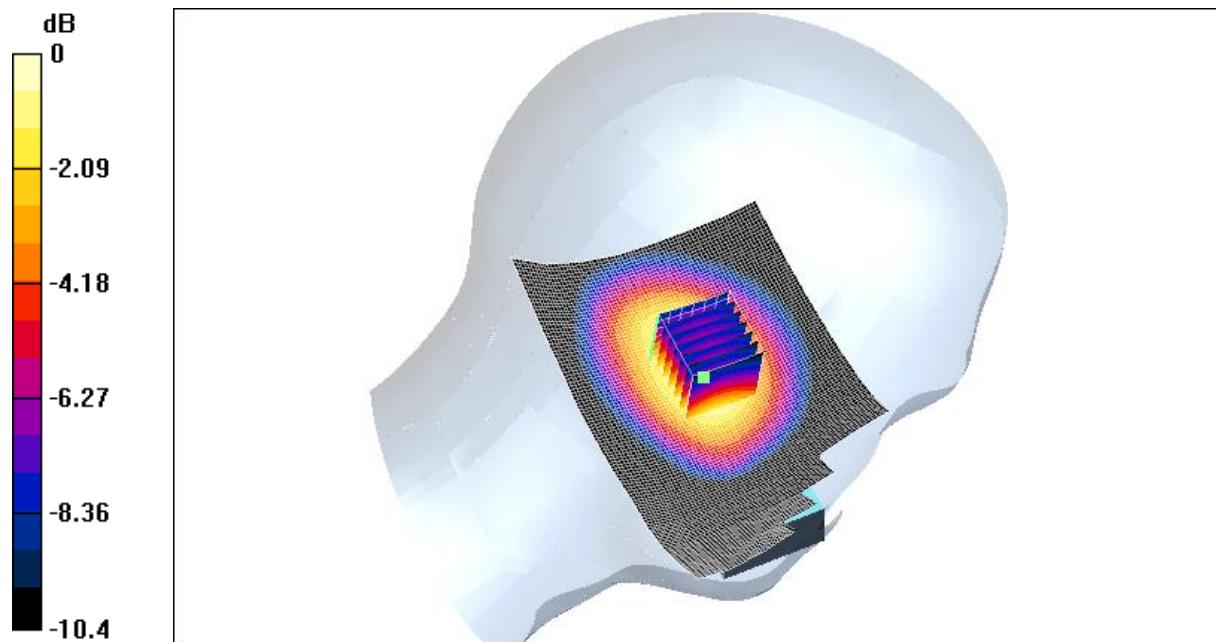

0 dB = 0.936mW/g

4.3 FCC-OET65-LeftHandSide-Cheek-GSM850-High

Date/Time: 06/16/05 16:24:27

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM850-2.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM850-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.889355 \text{ mho/m}$, $\epsilon_r = 41.5624$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 34.9 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 1.21 mW/g

Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.752 mW/g

Reference Value = 34.9 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 1.17 mW/g

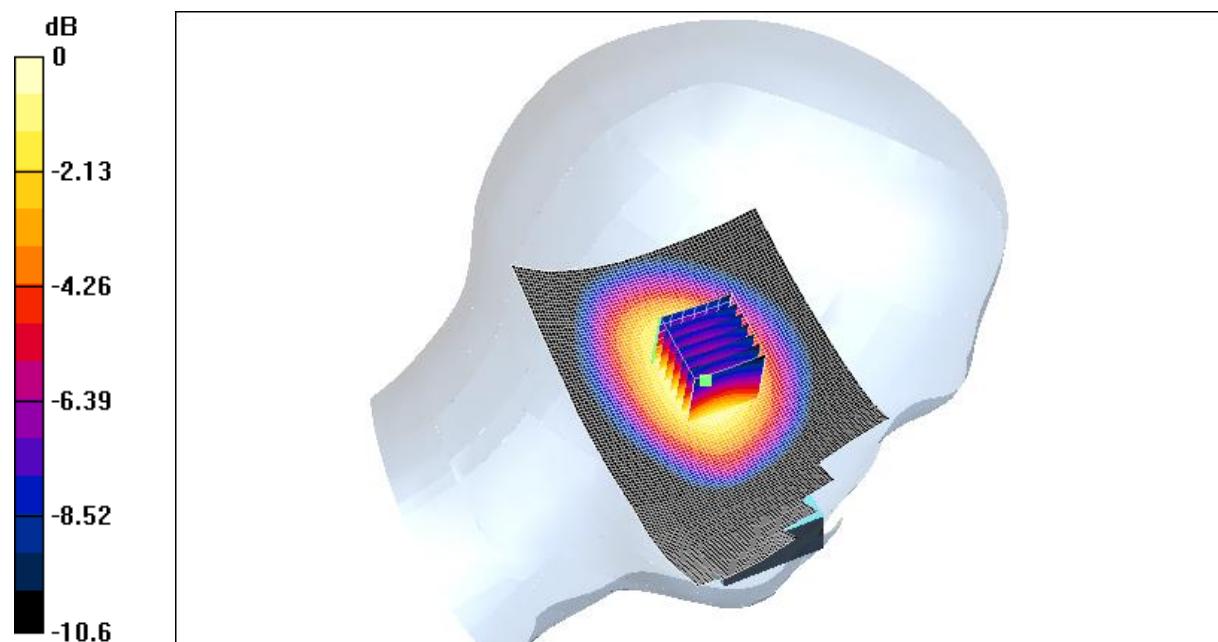

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 20 of 87

0 dB = 1.17mW/g

4.4 FCC-OET65-LeftHandSide-Tilt-GSM850-Low

Date/Time: 05/19/05 22:13:50

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM850.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM850-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.865816 \text{ mho/m}$, $\epsilon_r = 41.8373$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 19.6 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.366 mW/g

Tilt position - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.222 mW/g

Reference Value = 19.6 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.358 mW/g

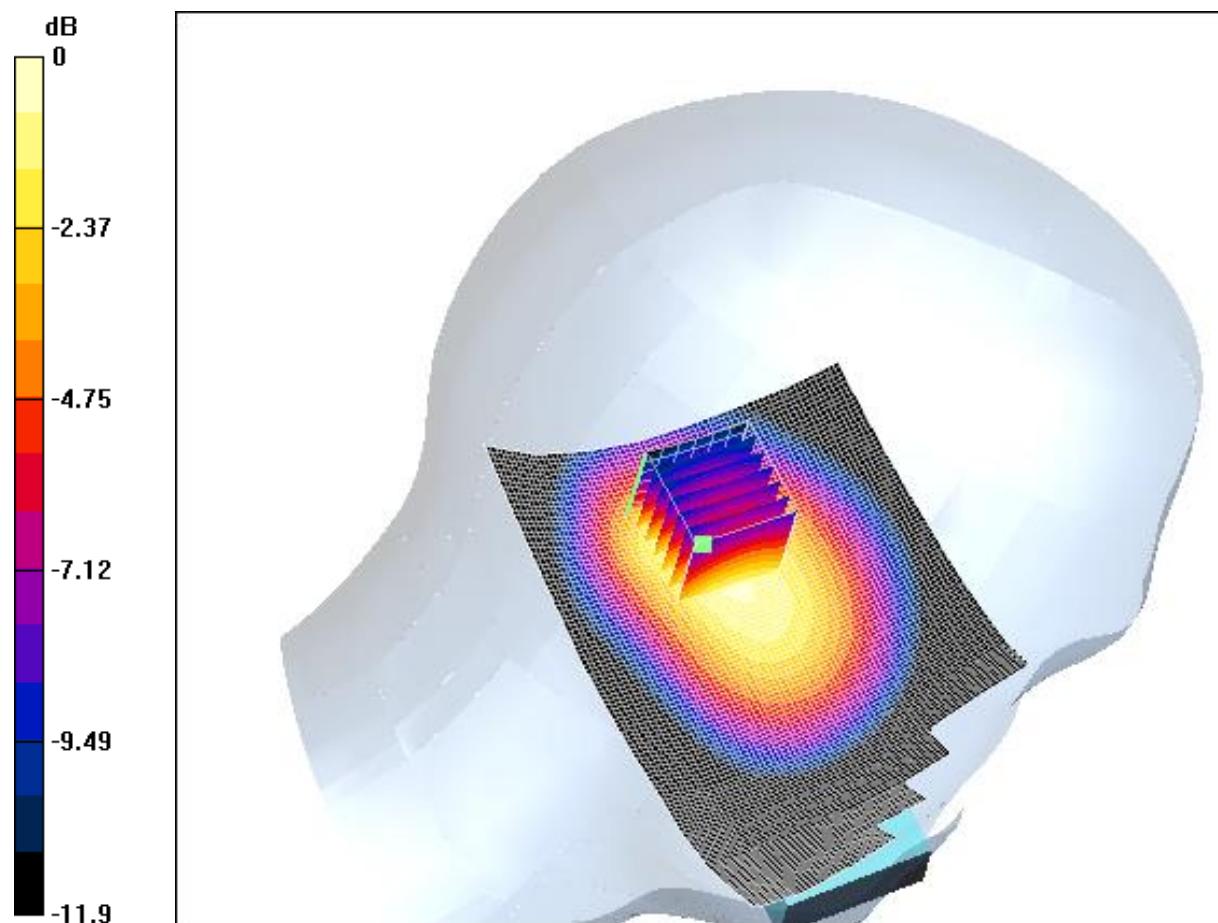

0 dB = 0.358mW/g

4.5 FCC-OET65-LeftHandSide-Tilt-GSM850-Mid

Date/Time: 05/19/05 22:13:50

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM850.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM850-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.8773 \text{ mho/m}$, $\epsilon_r = 41.699$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 20.6 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.404 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.244 mW/g

Reference Value = 20.6 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.396 mW/g

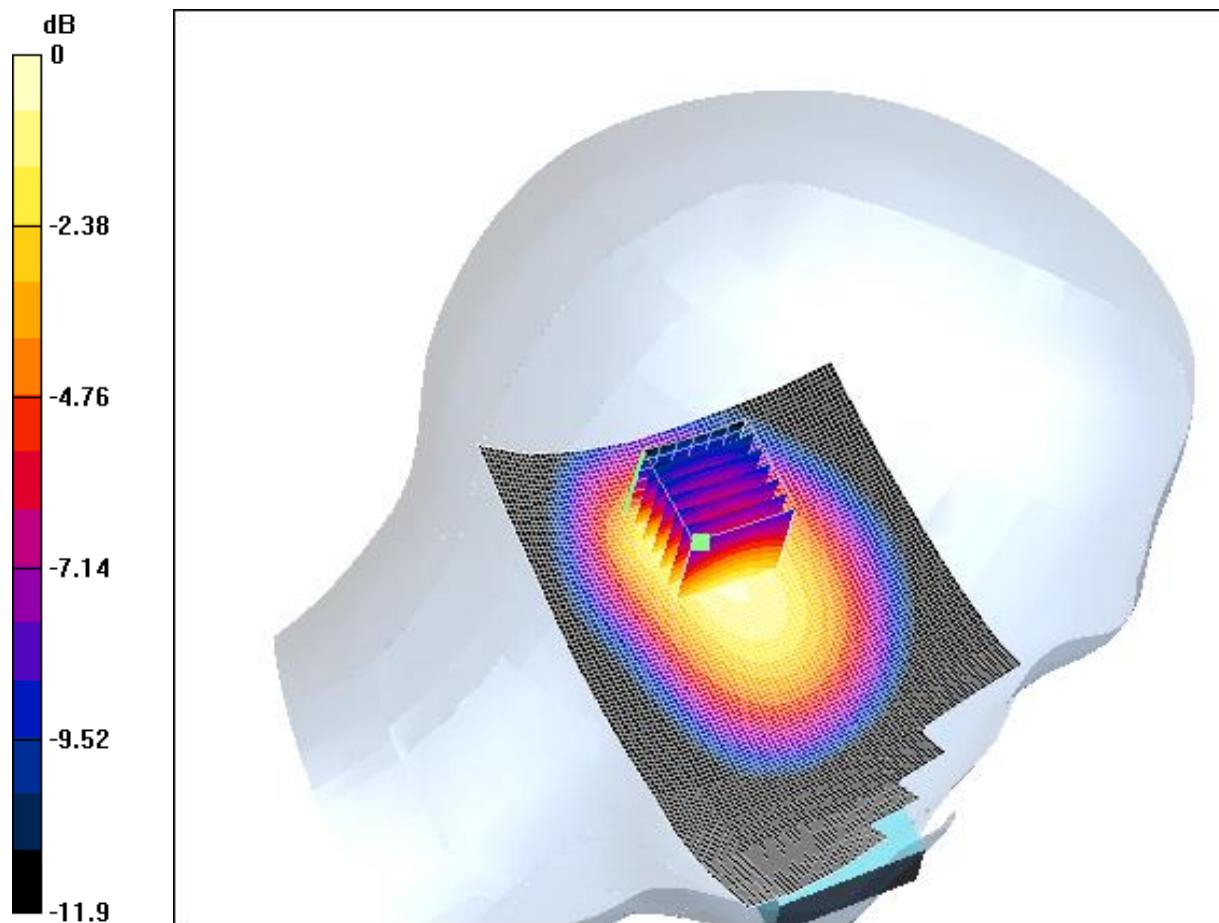

0 dB = 0.396mW/g

4.6 FCC-OET65-LeftHandSide-Tilt-GSM850-High

Date/Time: 05/19/05 22:13:50

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM850.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM850-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.889355 \text{ mho/m}$, $\epsilon_r = 41.5624$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 23.2 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.51 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.661 W/kg

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.308 mW/g

Reference Value = 23.2 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.503 mW/g

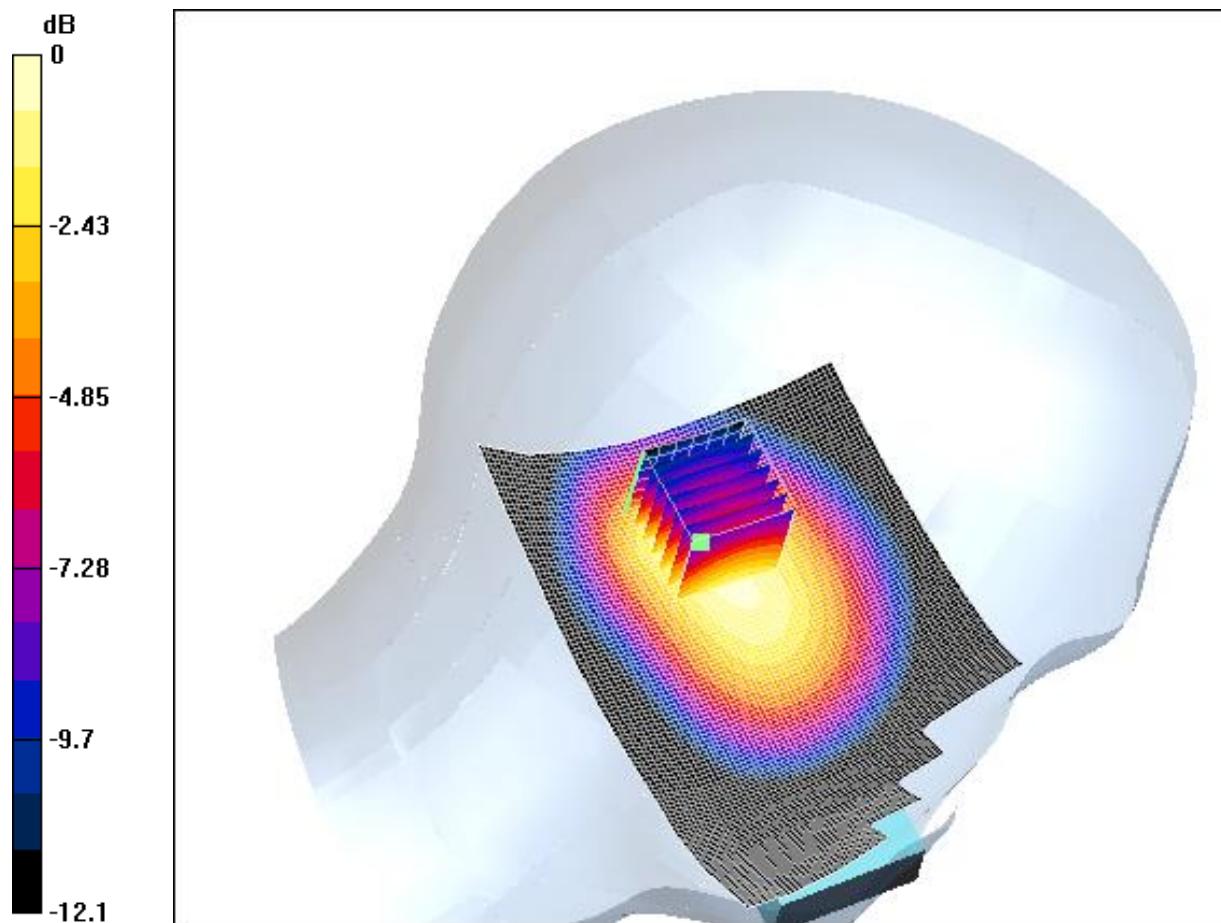

0 dB = 0.503mW/g

4.7 FCC-OET65-RightHandSide-Cheek-GSM850-Low

Date/Time: 06/16/05 17:33:51

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM850-7.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM850-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.865816 \text{ mho/m}$, $\epsilon_r = 41.8373$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 31.2 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 0.872 mW/g

Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.548 mW/g

Reference Value = 31.2 V/m

Power Drift = -0.006 dB

Maximum value of SAR = 0.846 mW/g

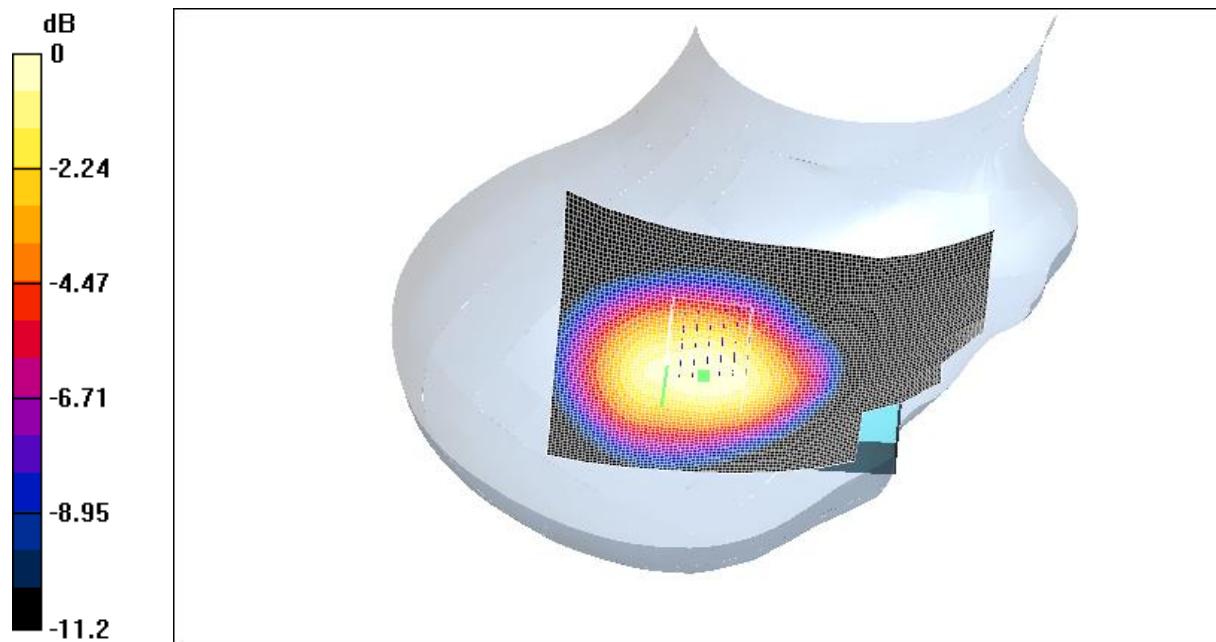

0 dB = 0.846mW/g

4.8 FCC-OET65-RightHandSide-Cheek-GSM850-Mid

Date/Time: 06/16/05 16:53:45

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM850-7.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM850-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.8773 \text{ mho/m}$, $\epsilon_r = 41.699$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 32.5 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.968 mW/g

Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.604 mW/g

Reference Value = 32.5 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.948 mW/g

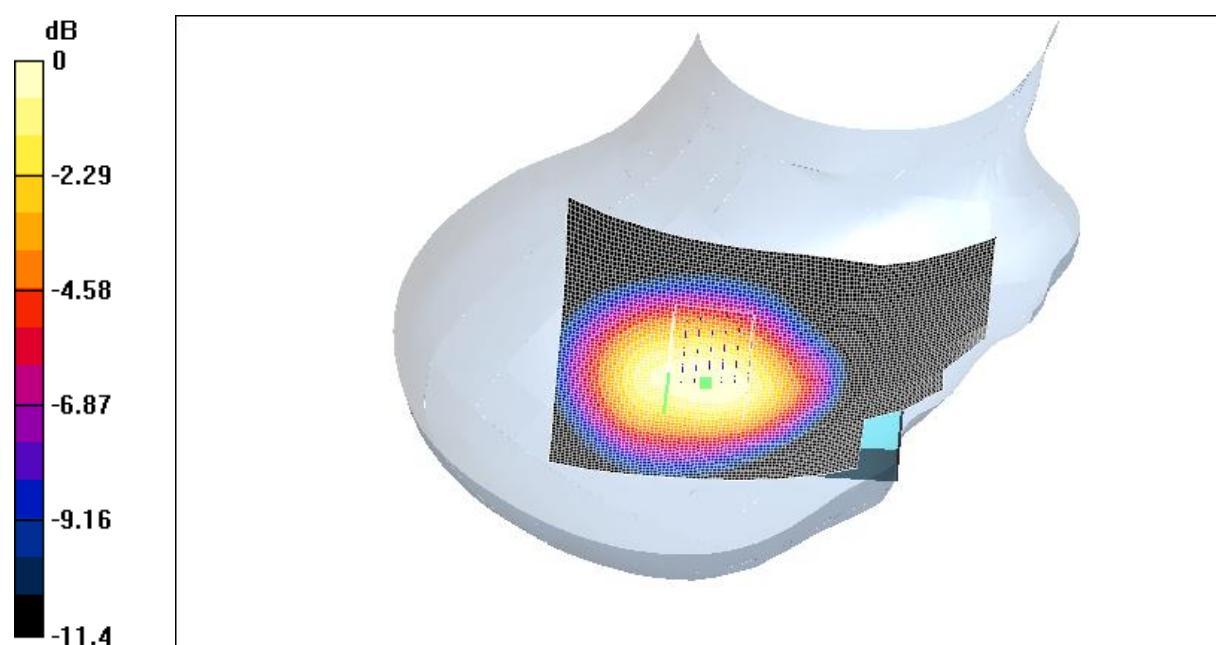

0 dB = 0.948mW/g

4.9 FCC-OET65-RightHandSide-Cheek-GSM850-High

Date/Time: 06/15/05 17:28:36

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM850-2.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM850-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.889355 \text{ mho/m}$, $\epsilon_r = 41.5624$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - High 1/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 35.4 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 1.18 mW/g

Cheek position - High 1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.747 mW/g

Reference Value = 35.4 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 1.18 mW/g

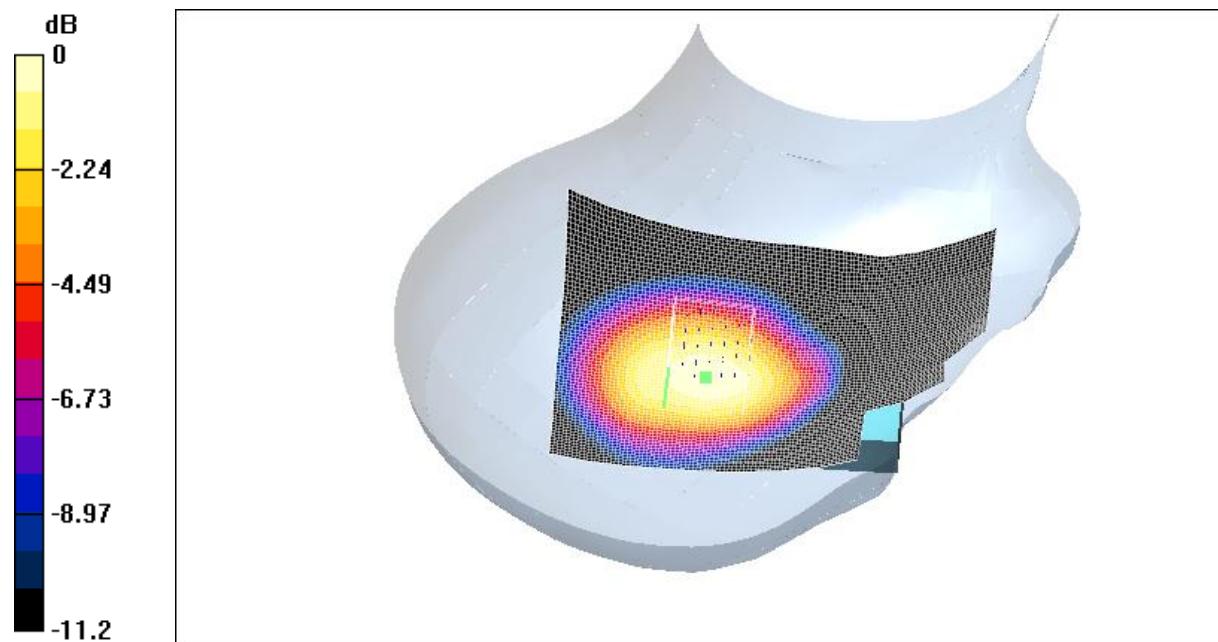

0 dB = 1.18mW/g

4.10 FCC-OET65-RightHandSide-Tilt-GSM850-Low

Date/Time: 05/20/05 10:49:38

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM850.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM850-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.865816 \text{ mho/m}$, $\epsilon_r = 41.8373$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 20.8 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.411 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.377 mW/g; SAR(10 g) = 0.246 mW/g

Reference Value = 20.8 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.397 mW/g

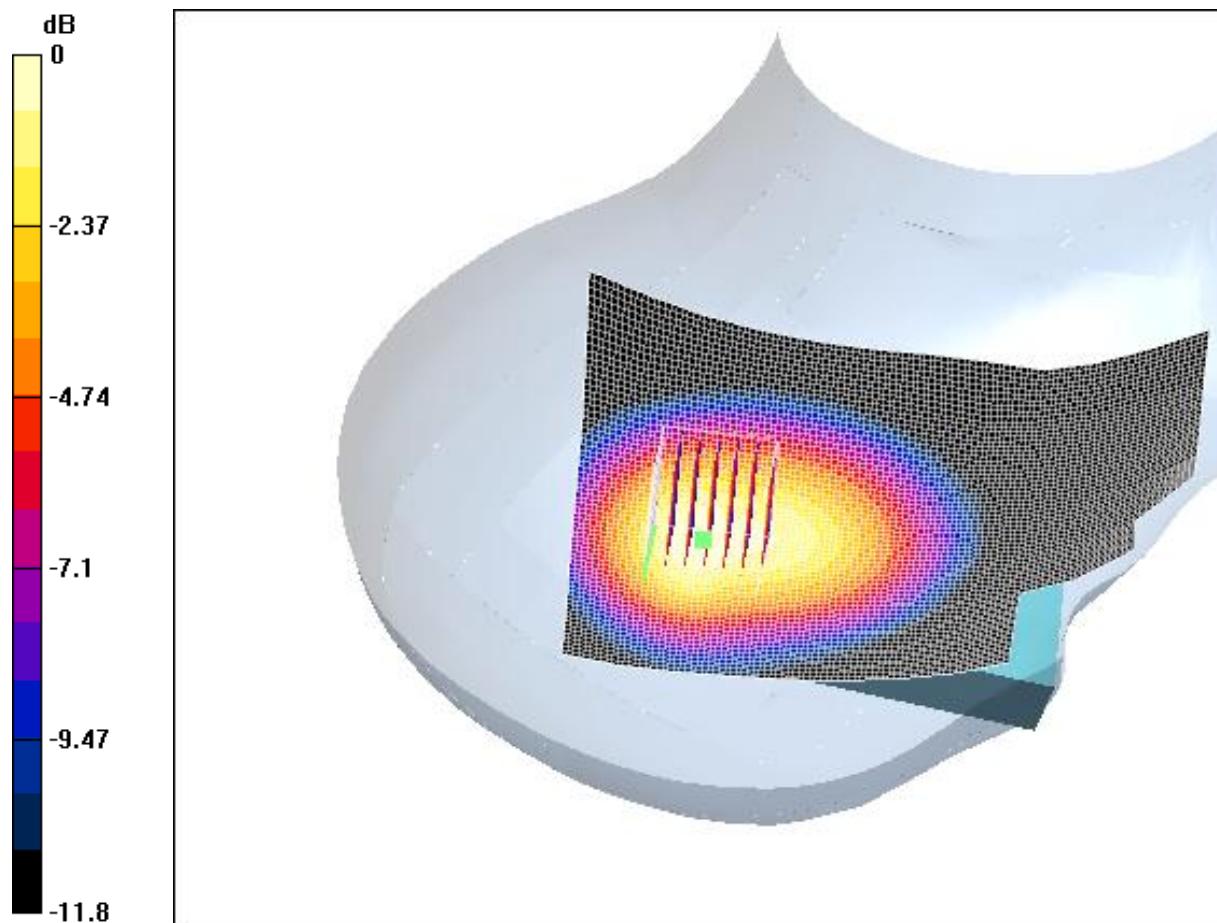

0 dB = 0.397mW/g

4.11 FCC-OET65-RightHandSide-Tilt-GSM850-Mid

Date/Time: 05/20/05 10:10:15

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM850.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM850-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.8773 \text{ mho/m}$, $\epsilon_r = 41.699$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 21.2 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.434 mW/g

Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.257 mW/g

Reference Value = 21.2 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.419 mW/g

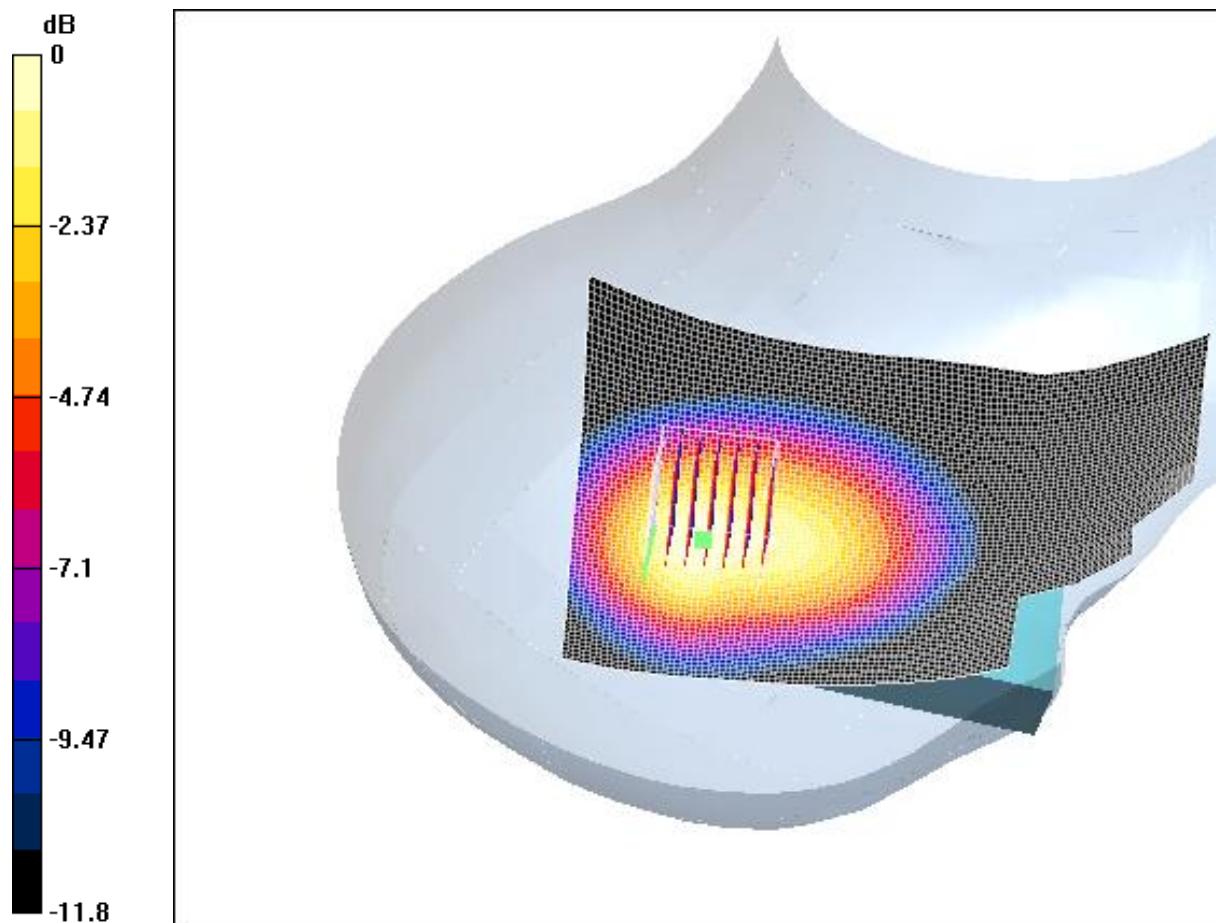

0 dB = 0.419mW/g

4.12 FCC-OET65-RightHandSide-Tilt-GSM850-High

Date/Time: 05/20/05 09:38:00

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM850.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM850-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850 ($\sigma = 0.889355 \text{ mho/m}$, $\epsilon_r = 41.5624$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 24.6 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.589 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.517 mW/g; SAR(10 g) = 0.337 mW/g

Reference Value = 24.6 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.548 mW/g

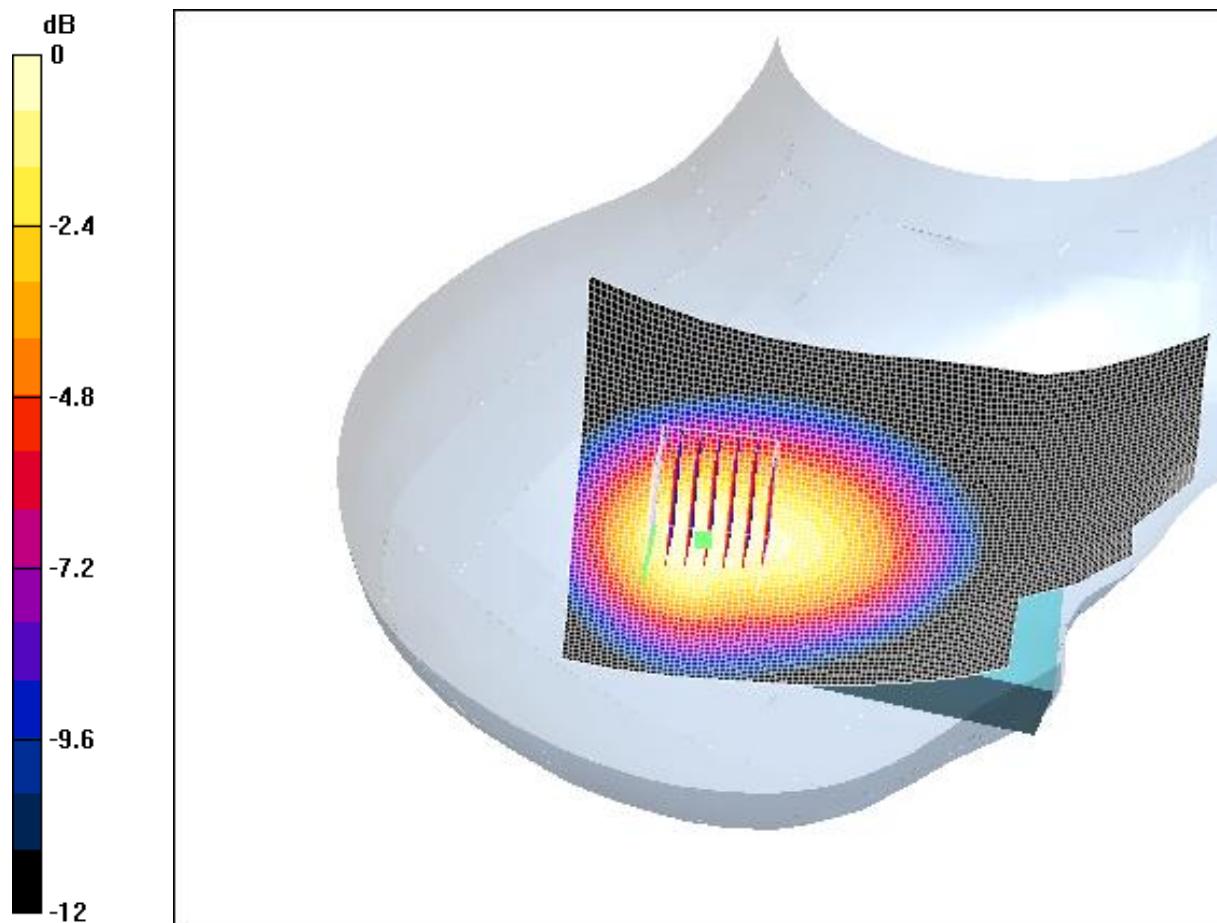

0 dB = 0.548mW/g

4.13 FCC-OET65-Body-Worn-GSM850-Low

Date/Time: 05/25/05 13:43:39

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM850.da4](#)

FCC-OET65-Body-Worn-GSM850-Low

DUT: GSM50034; Type: Body; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Body ($\sigma = 0.982648 \text{ mho/m}$, $\epsilon_r = 52.6441$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 16.3 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.558 mW/g

Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.52 mW/g; SAR(10 g) = 0.337 mW/g

Reference Value = 16.3 V/m

Power Drift = -0.05 dB

Maximum value of SAR = 0.558 mW/g

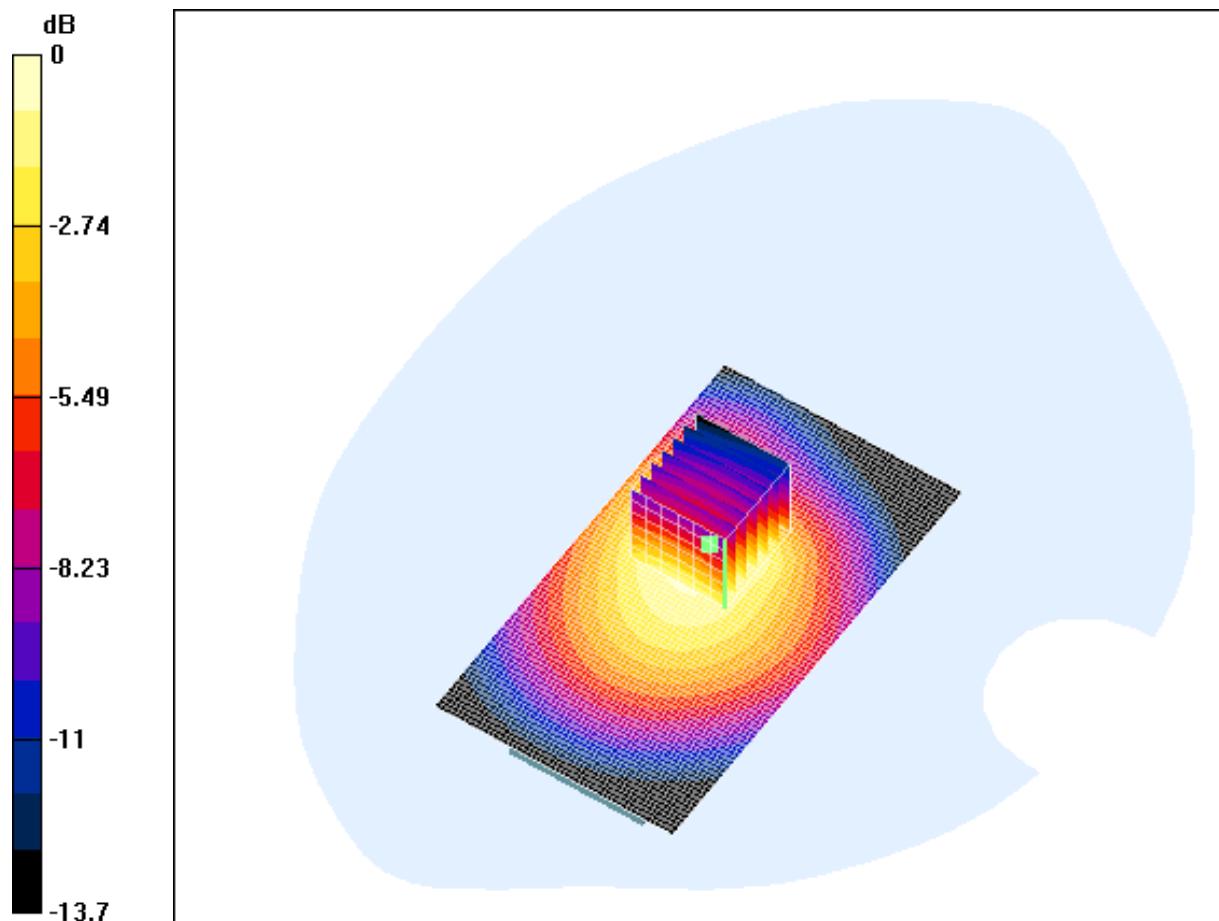

0 dB = 0.558mW/g

4.14 FCC-OET65-Body-Worn-GSM850-Mid

Date/Time: 05/25/05 13:43:39

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM850.da4](#)

FCC-OET65-Body-Worn-GSM850-Mid

DUT: GSM50034; Type: Body; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Body ($\sigma = 0.99717 \text{ mho/m}$, $\epsilon_r = 52.5261$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 17.1 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.66 mW/g

Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.397 mW/g

Reference Value = 17.1 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.661 mW/g

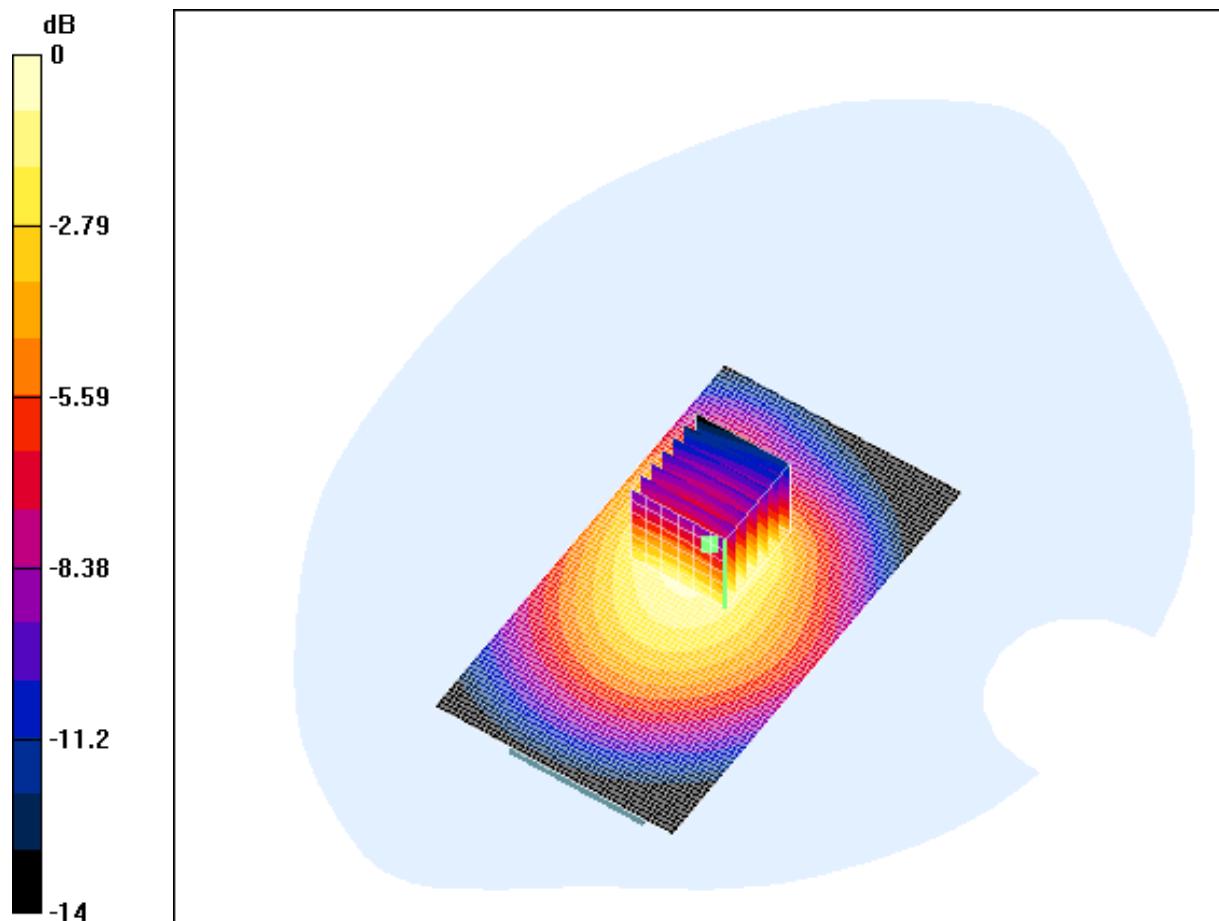

0 dB = 0.661mW/g

4.15 FCC-OET65-Body-Worn-GSM850-High

Date/Time: 05/25/05 13:43:39

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM850.da4](#)

FCC-OET65-Body-Worn-GSM850-High

DUT: GSM50034; Type: Body; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Body ($\sigma = 1.01257 \text{ mho/m}$, $\epsilon_r = 52.4876$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 16.4 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.677 mW/g

Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.64 mW/g; SAR(10 g) = 0.411 mW/g

Reference Value = 16.4 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.693 mW/g

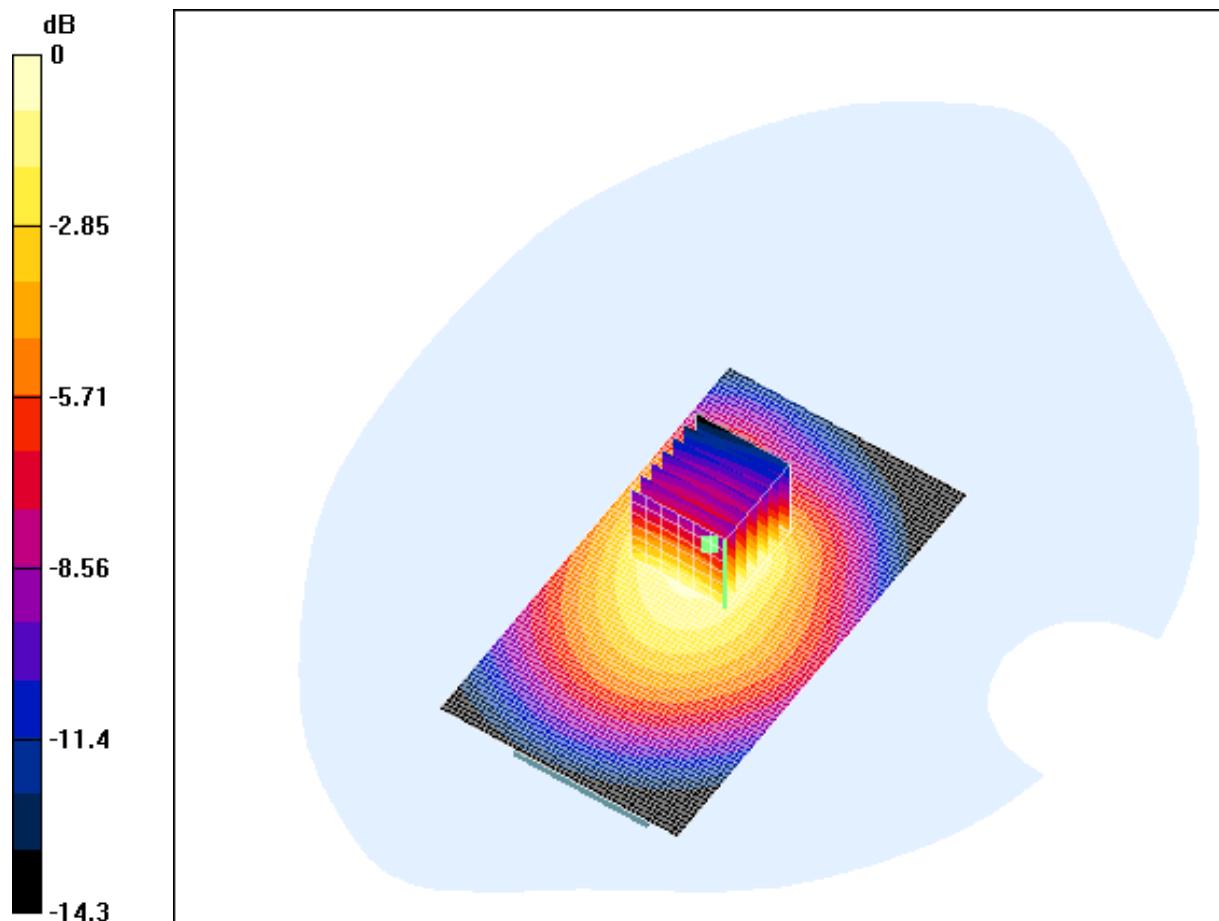

0 dB = 0.693mW/g

4.16 FCC-OET65-LeftHandSide-Cheek-GSM1900-Low

Date/Time: 05/20/05 19:40:28

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM1900-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.41808 \text{ mho/m}$, $\epsilon_r = 40.5312$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.4 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.35 mW/g

Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.172 mW/g

Reference Value = 13.4 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.351 mW/g

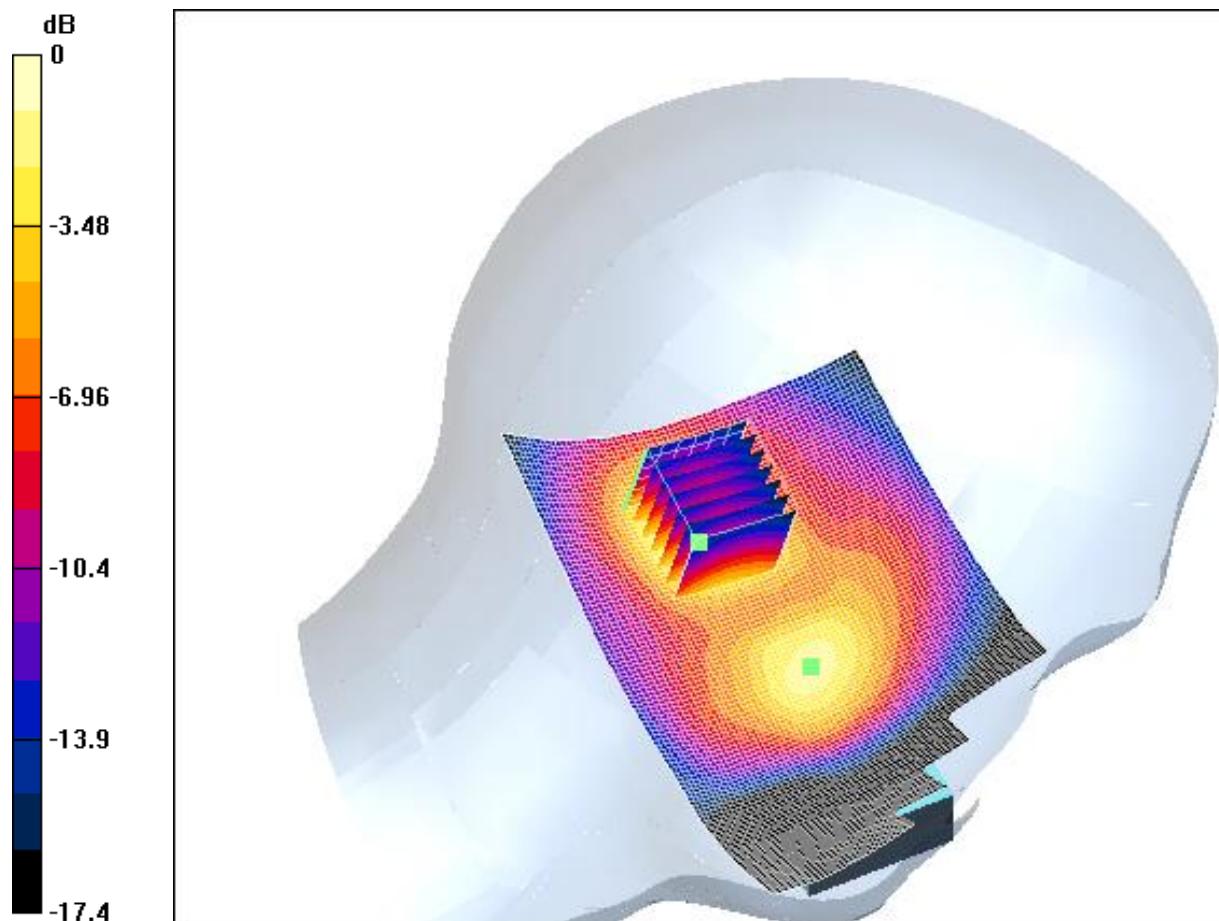

0 dB = 0.351mW/g

4.17 FCC-OET65-LeftHandSide-Cheek-GSM1900-Mid

Date/Time: 05/20/05 19:40:28

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM1900-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.44443 \text{ mho/m}$, $\epsilon_r = 40.3239$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 15.7 V/m

Power Drift = 0.008 dB

Maximum value of SAR = 0.466 mW/g

Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.228 mW/g

Reference Value = 15.7 V/m

Power Drift = 0.008 dB

Maximum value of SAR = 0.469 mW/g

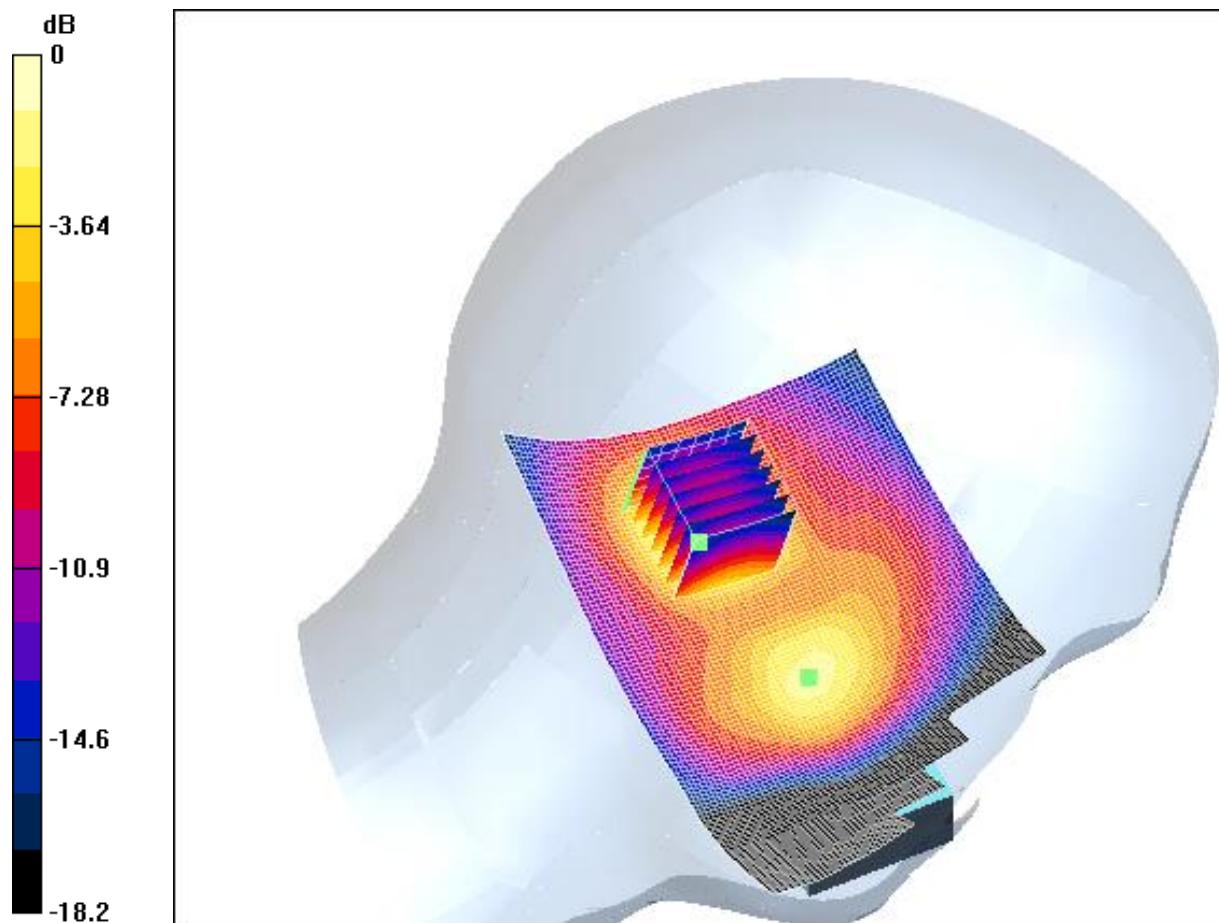

0 dB = 0.469mW/g

4.18 FCC-OET65-LeftHandSide-Cheek-GSM1900-High

Date/Time: 05/20/05 19:40:28

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Cheek-GSM1900-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.46824 \text{ mho/m}$, $\epsilon_r = 39.9929$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.9 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.373 mW/g

Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.178 mW/g

Reference Value = 13.9 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.374 mW/g

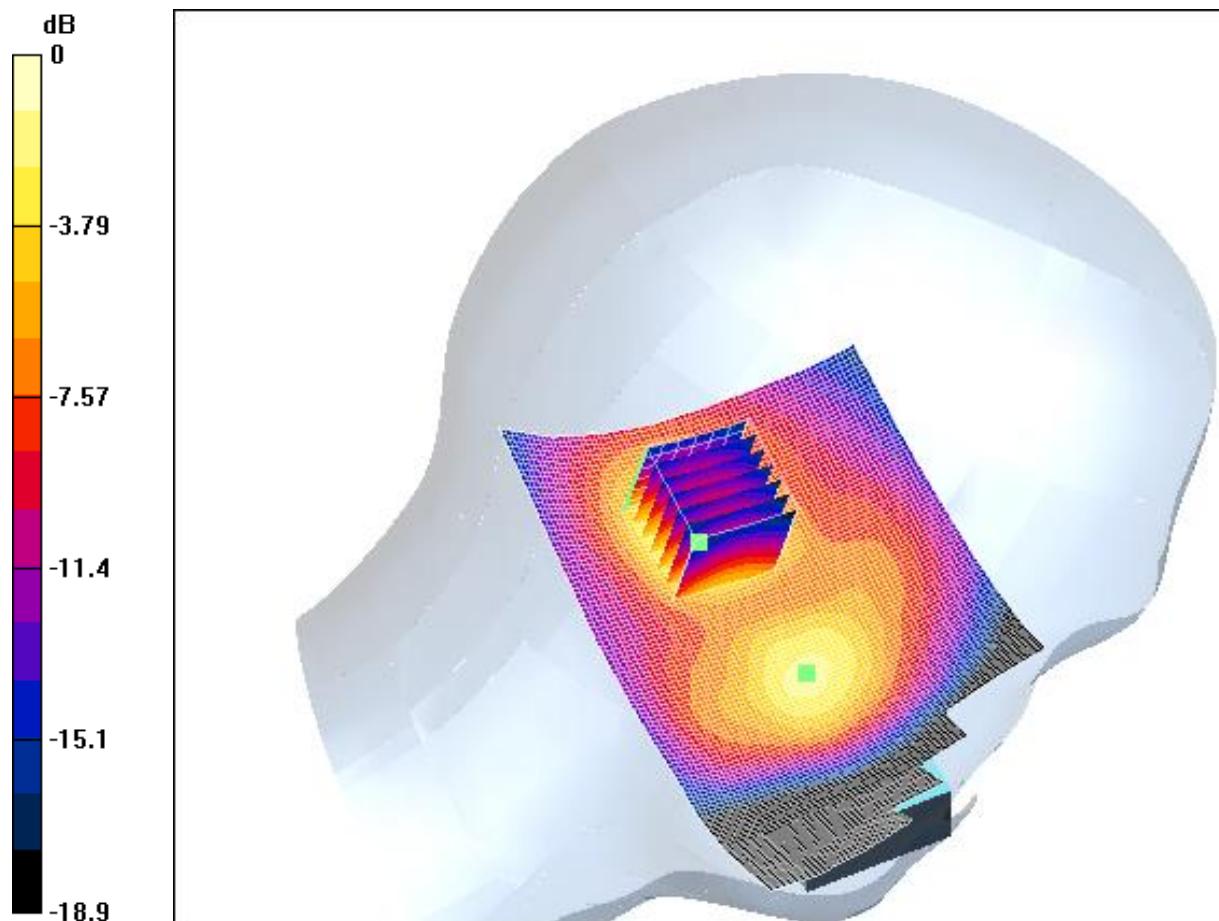

0 dB = 0.374mW/g

4.19 FCC-OET65-LeftHandSide-Tilt-GSM1900-Low

Date/Time: 05/20/05 19:34:40

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM1900-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.41808 \text{ mho/m}$, $\epsilon_r = 40.5312$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 15.5 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.518 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.246 mW/g

Reference Value = 15.5 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.521 mW/g

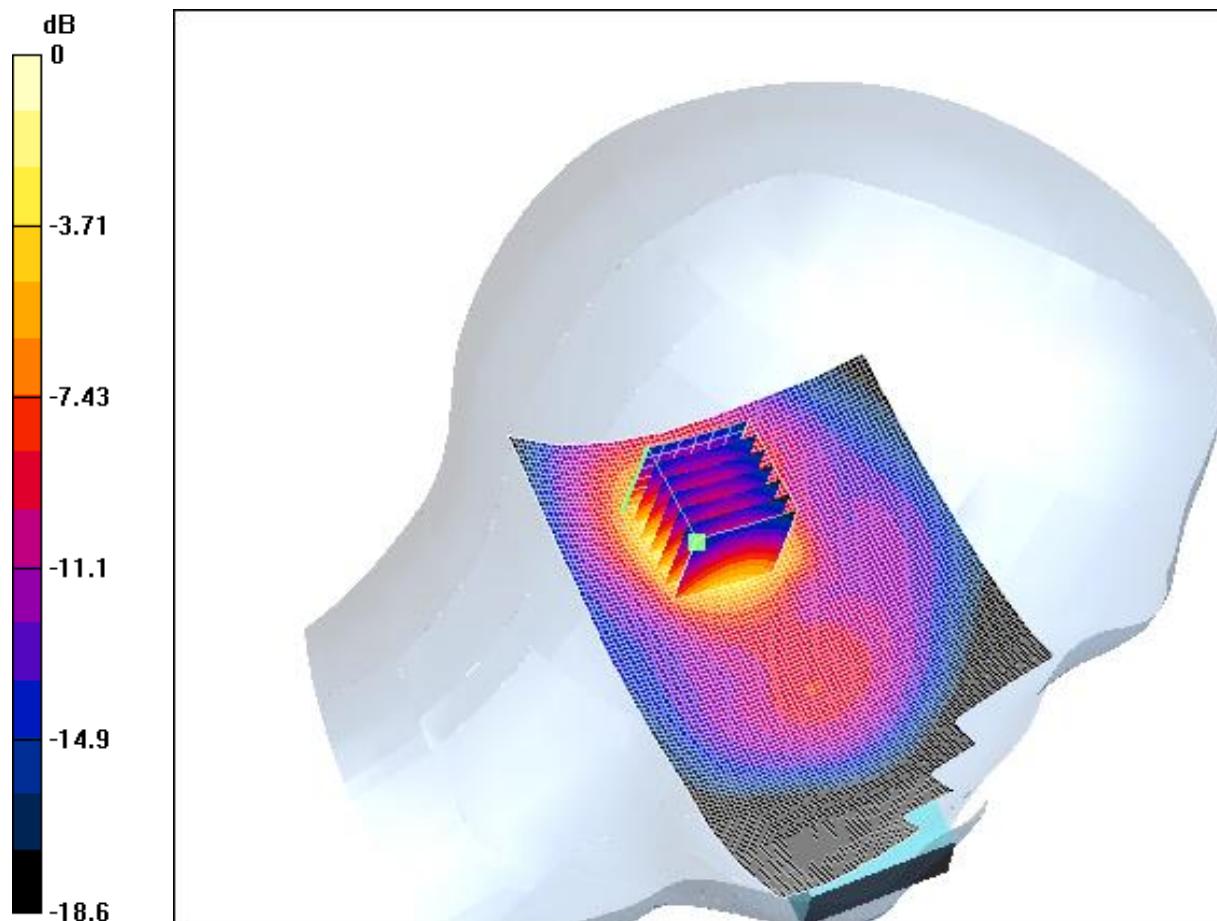

0 dB = 0.521mW/g

4.20 FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid

Date/Time: 05/20/05 19:34:40

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.44443 \text{ mho/m}$, $\epsilon_r = 40.3239$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 17.6 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.699 mW/g

Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.615 mW/g; SAR(10 g) = 0.321 mW/g

Reference Value = 17.6 V/m

Power Drift = -0.08 dB

Maximum value of SAR = 0.693 mW/g

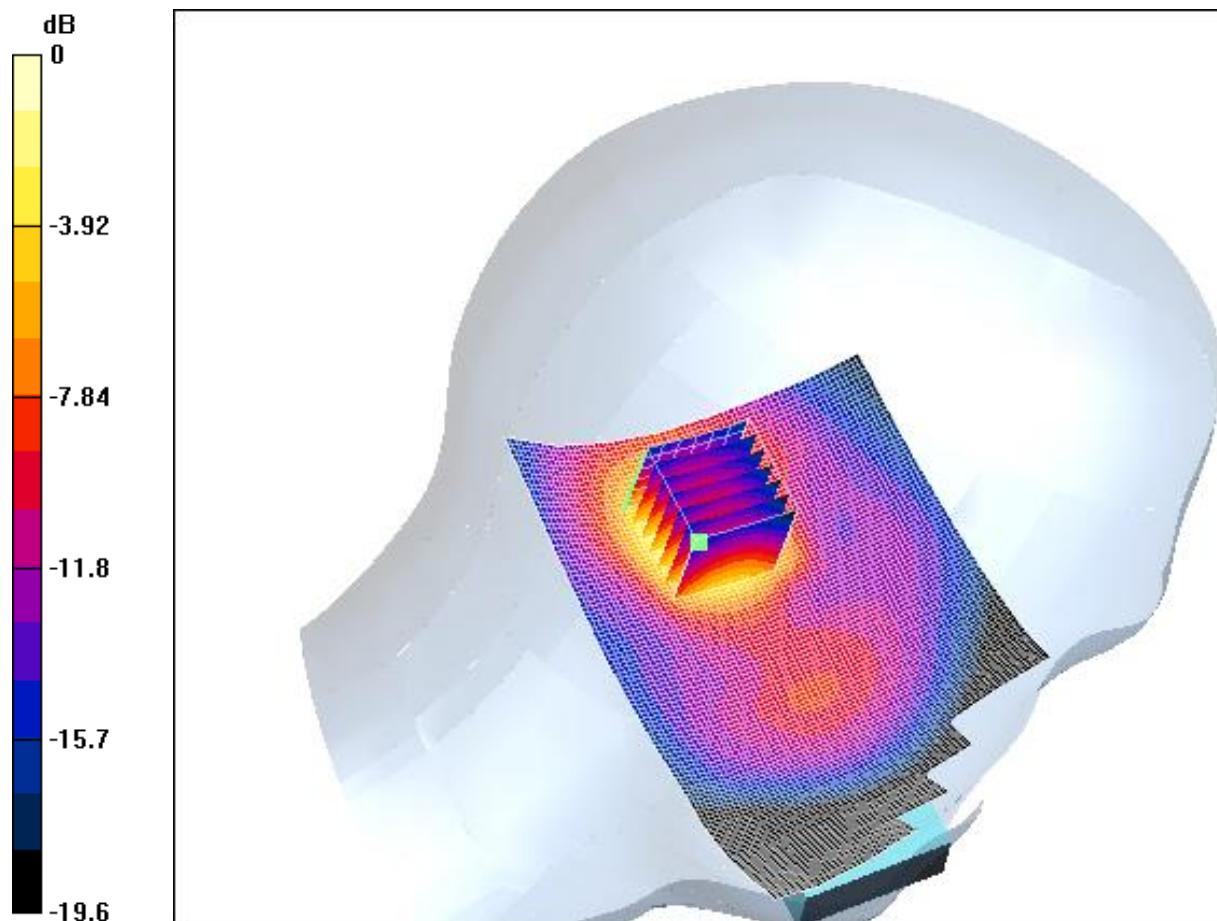

0 dB = 0.693mW/g

4.21 FCC-OET65-LeftHandSide-Tilt-GSM1900-High

Date/Time: 05/20/05 19:34:40

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-LeftHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-LeftHandSide-Tilt-GSM1900-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Left-Hand Side)

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.46824 \text{ mho/m}$, $\epsilon_r = 39.9929$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 15.3 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.55 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.249 mW/g

Reference Value = 15.3 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.54 mW/g

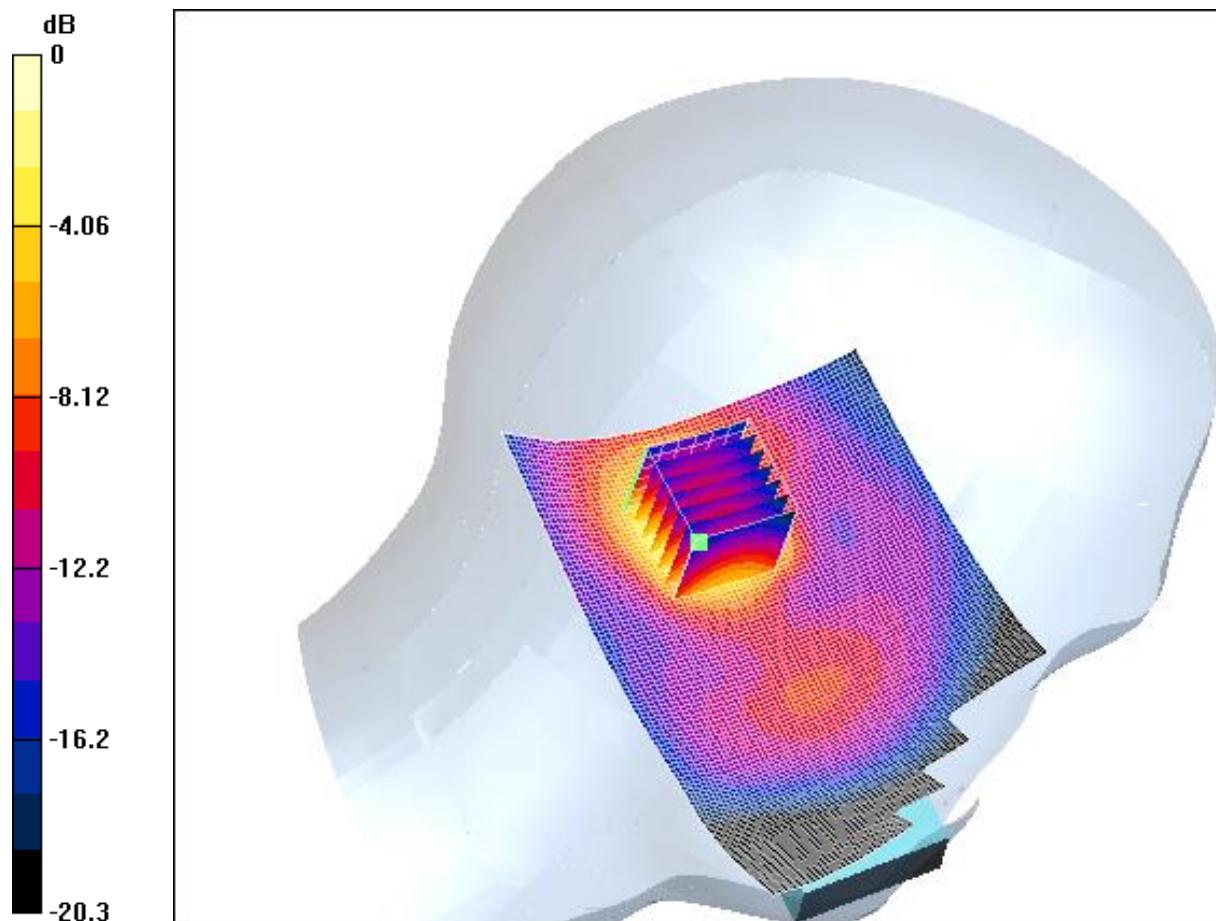

0 dB = 0.54mW/g

4.22 FCC-OET65-RightHandSide-Cheek-GSM1900-Low

Date/Time: 05/20/05 13:42:16

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM1900-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.41808 \text{ mho/m}$, $\epsilon_r = 40.5312$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 15.5 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.448 mW/g

Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.221 mW/g

Reference Value = 15.5 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.465 mW/g

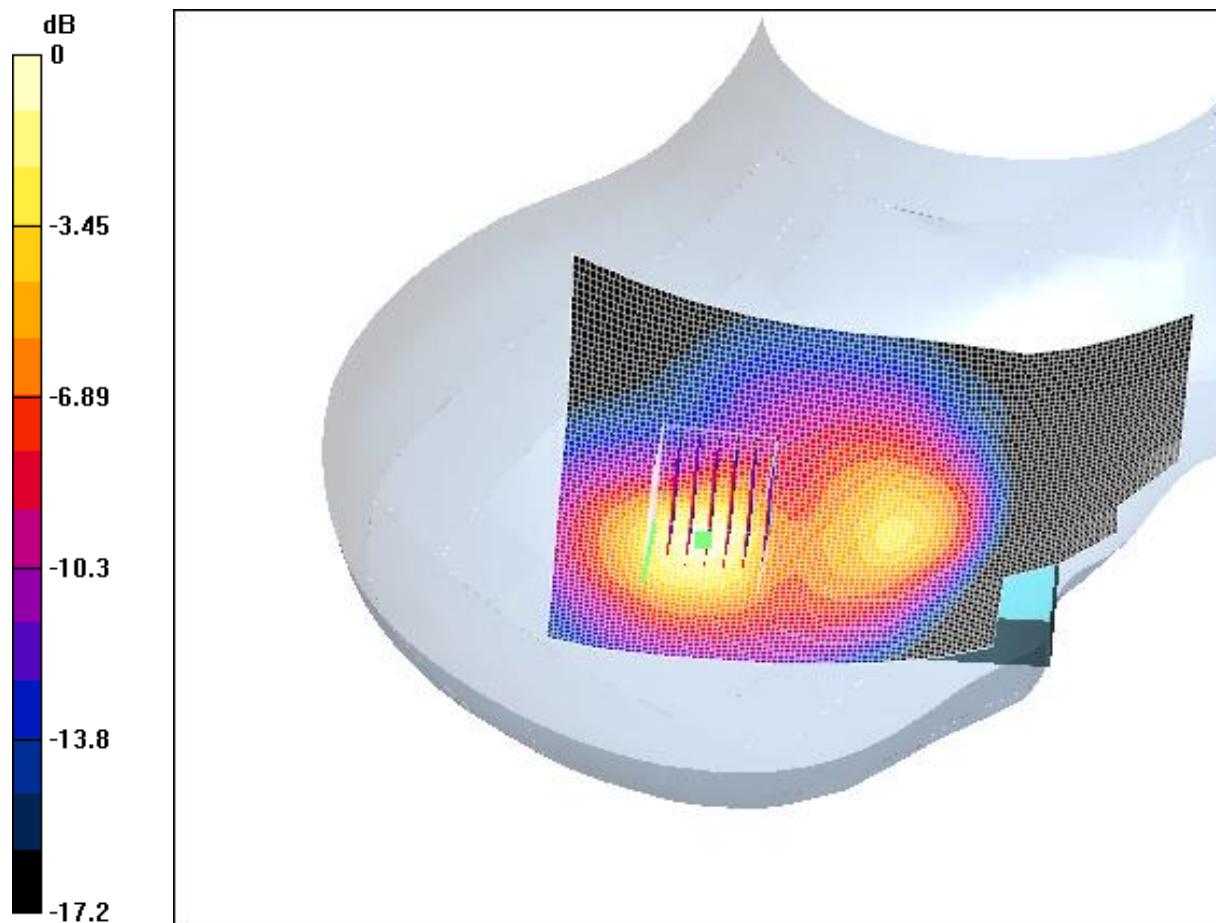

0 dB = 0.465mW/g

4.23 FCC-OET65-RightHandSide-Cheek-GSM1900-Mid

Date/Time: 05/20/05 14:14:12

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM1900-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.44443 \text{ mho/m}$, $\epsilon_r = 40.3239$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 17.8 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 0.592 mW/g

Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.294 mW/g

Reference Value = 17.8 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 0.618 mW/g

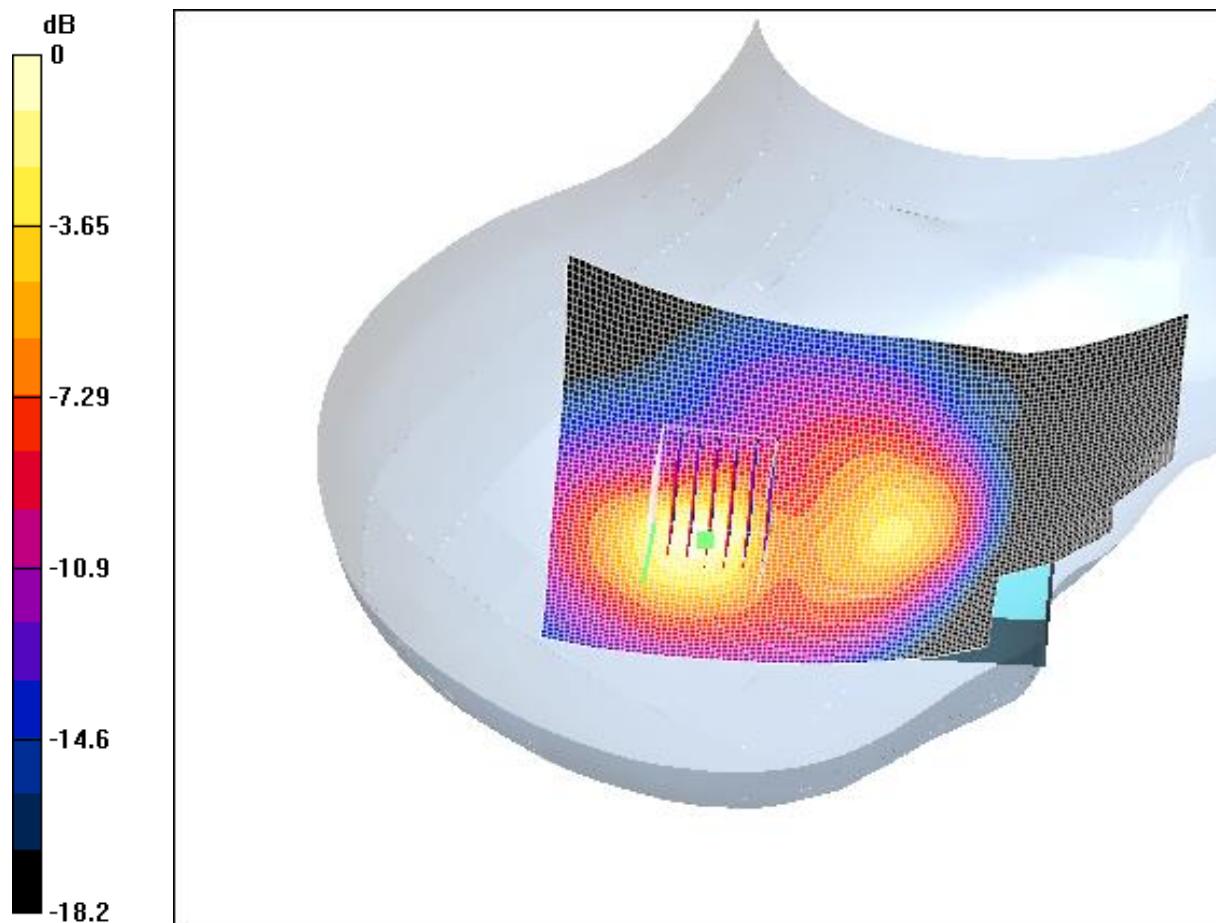

0 dB = 0.618mW/g

4.24 FCC-OET65-RightHandSide-Cheek-GSM1900-High

Date/Time: 05/20/05 14:49:50

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Cheek-GSM1900.da4](#)

FCC-OET65-RightHandSide-Cheek-GSM1900-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.46824 \text{ mho/m}$, $\epsilon_r = 39.9929$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Cheek position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 16 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.492 mW/g

Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.454 mW/g; SAR(10 g) = 0.235 mW/g

Reference Value = 16 V/m

Power Drift = 0.02 dB

Maximum value of SAR = 0.506 mW/g

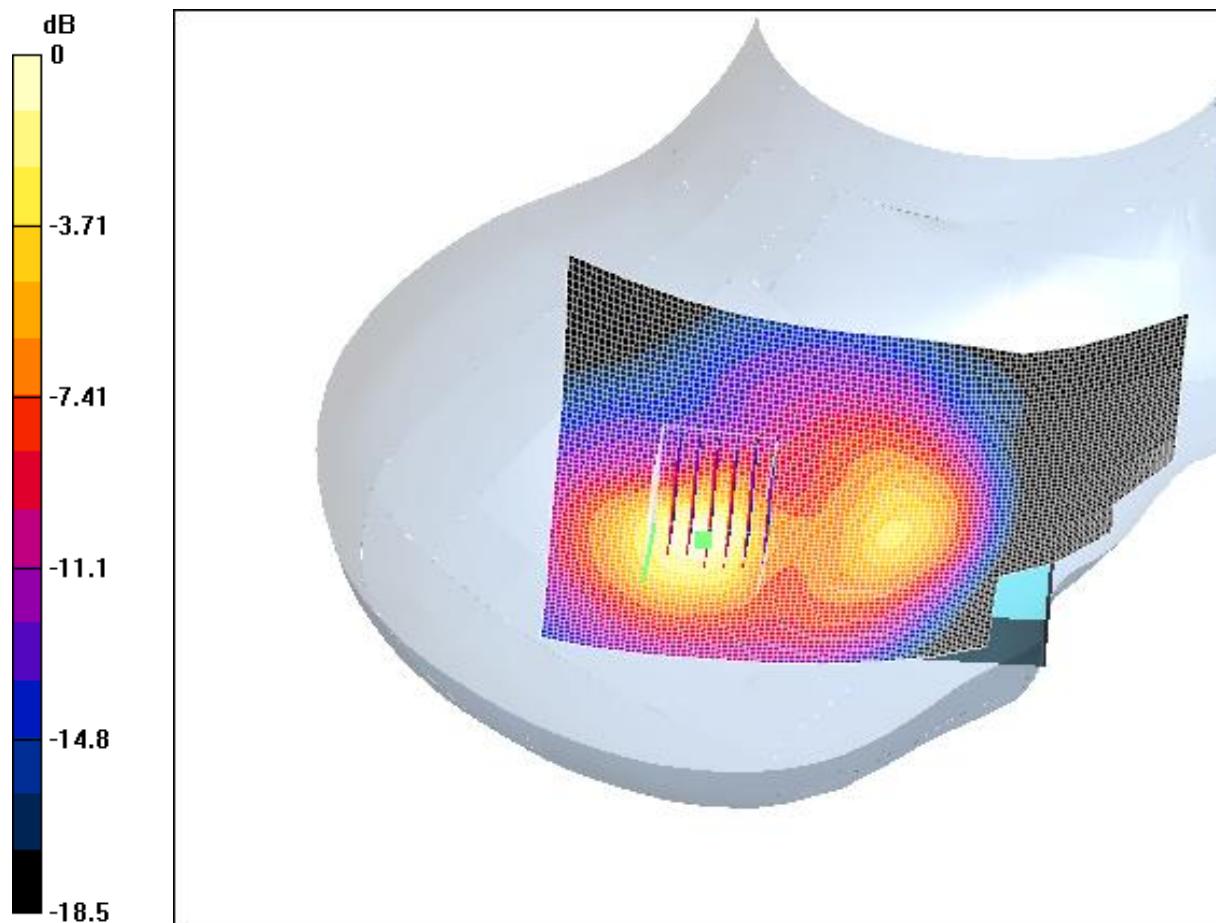

0 dB = 0.506mW/g

4.25 FCC-OET65-RightHandSide-Tilt-GSM1900-Low

Date/Time: 05/20/05 12:00:34

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM1900-Low

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.41808 \text{ mho/m}$, $\epsilon_r = 40.5312$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 14.8 V/m

Power Drift = 0.8 dB

Maximum value of SAR = 0.564 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.279 mW/g

Reference Value = 14.8 V/m

Power Drift = 0.8 dB

Maximum value of SAR = 0.577 mW/g

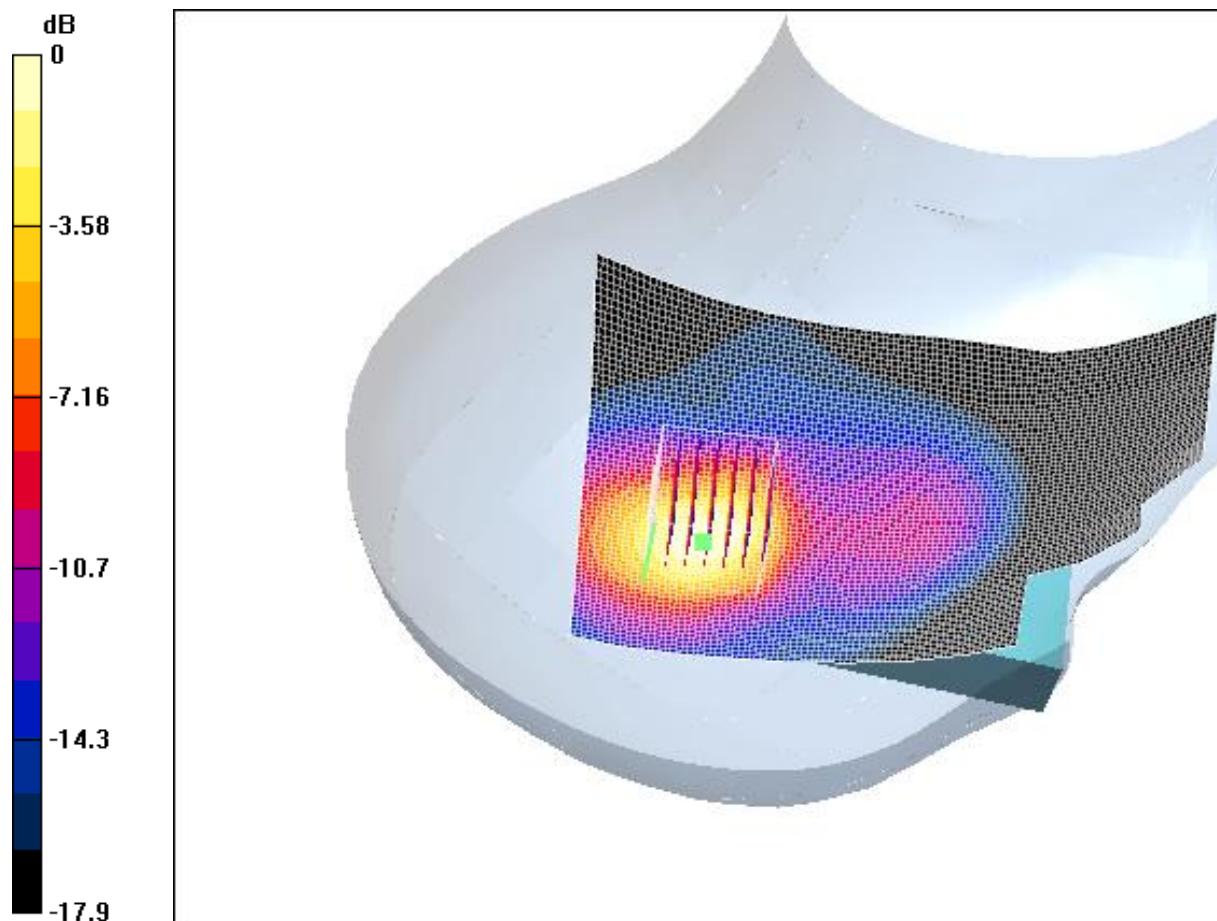

0 dB = 0.577mW/g

4.26 FCC-OET65-RightHandSide-Tilt-GSM1900-Mid

Date/Time: 05/20/05 12:32:43

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM1900-Mid

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.44443 \text{ mho/m}$, $\epsilon_r = 40.3239$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 18.3 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.733 mW/g

Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.365 mW/g

Reference Value = 18.3 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.773 mW/g

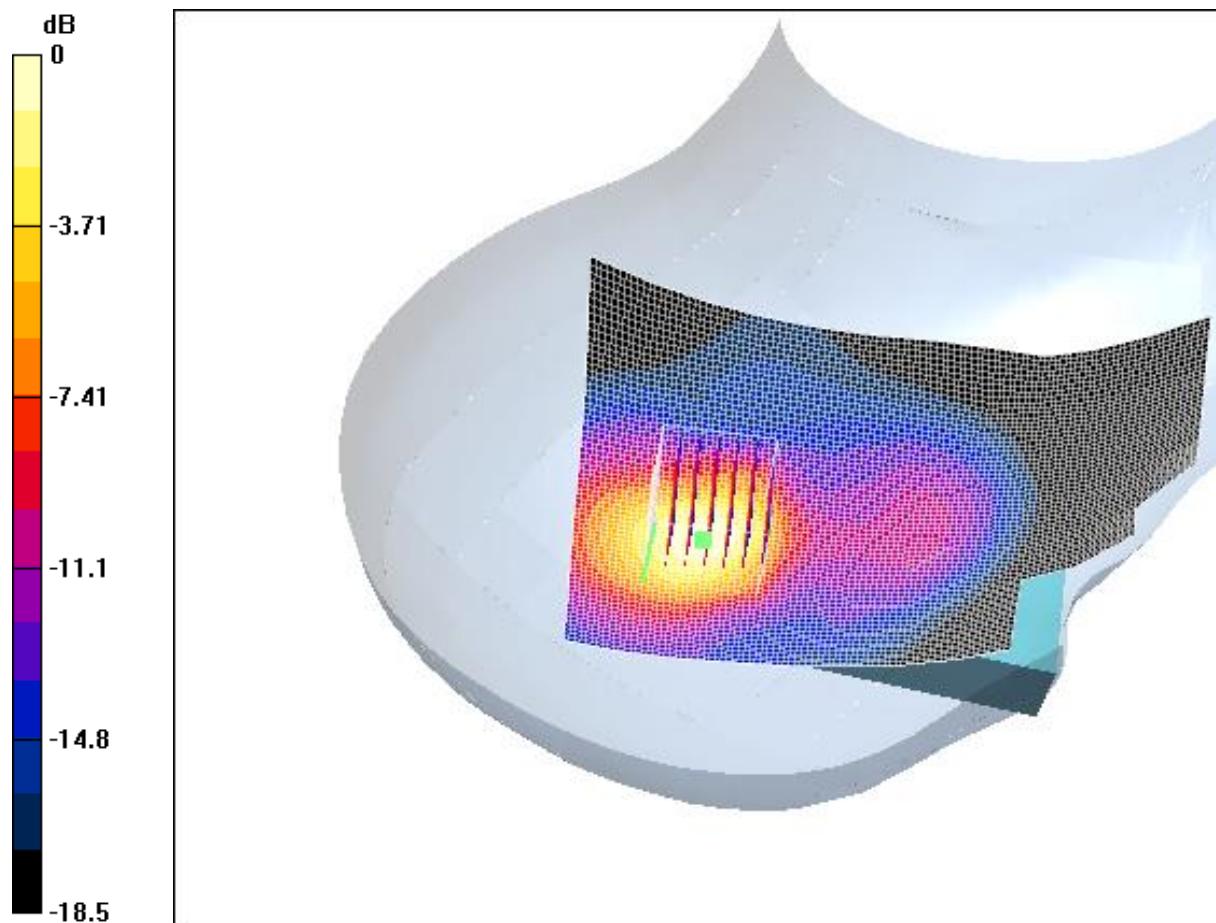

0 dB = 0.773mW/g

4.27 FCC-OET65-RightHandSide-Tilt-GSM1900-High

Date/Time: 05/20/05 13:04:57

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-RightHandSide-Tilt-GSM1900.da4](#)

FCC-OET65-RightHandSide-Tilt-GSM1900-High

DUT: GSM50034; Type: Head; Serial: 20050519

Program: Compliance Testing: EN 50361 Protocol Right-Hand Side)

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.46824 \text{ mho/m}$, $\epsilon_r = 39.9929$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Tilt position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 16.8 V/m

Power Drift = 0.07 dB

Maximum value of SAR = 0.601 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.963 W/kg

SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.295 mW/g

Reference Value = 16.8 V/m

Power Drift = 0.07 dB

Maximum value of SAR = 0.643 mW/g

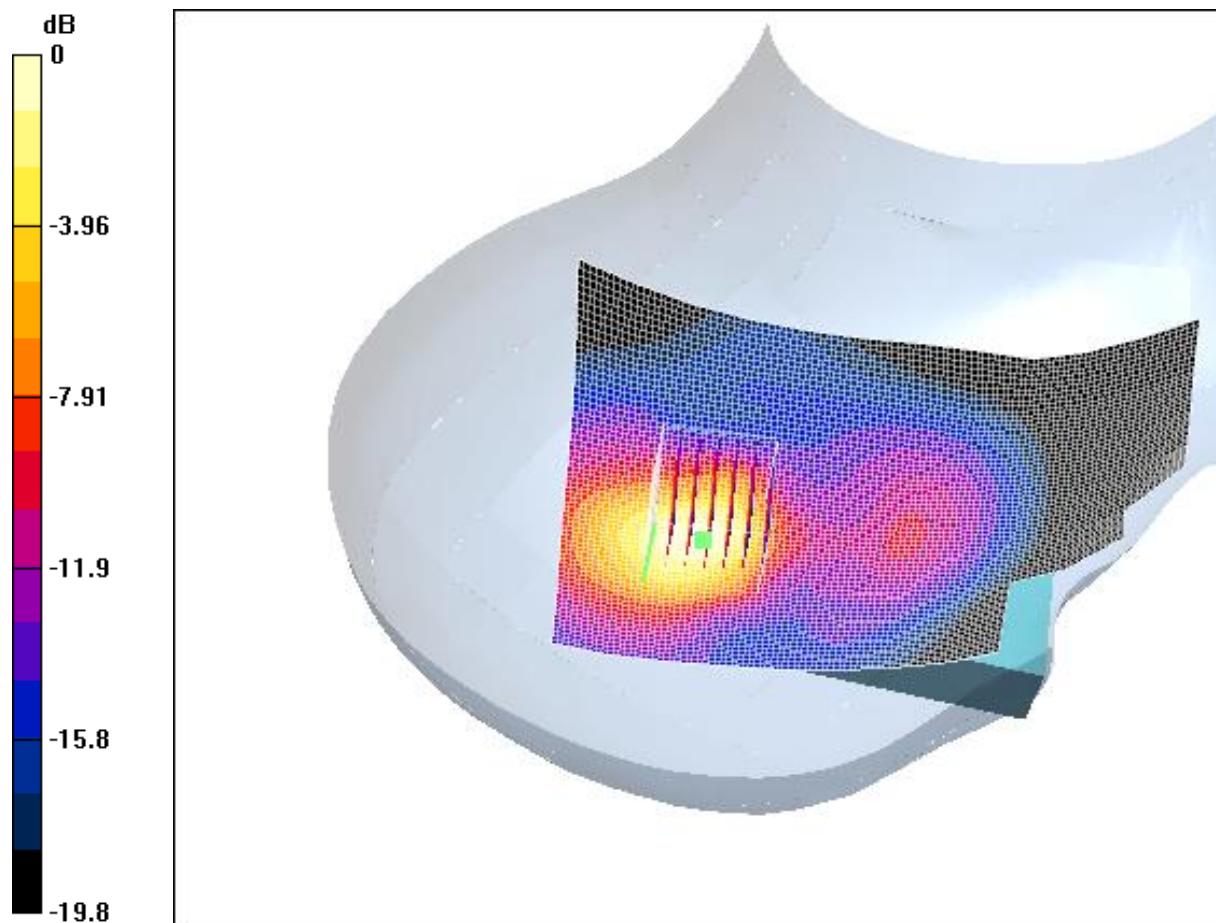

0 dB = 0.643mW/g

4.28 FCC-OET65-Body-Worn-GSM1900-Low

Date/Time: 05/20/05 21:49:31

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM1900.da4](#)

FCC-OET65-Body-Worn-GSM1900-Low

DUT: GSM50034; Type: Head; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.48803 \text{ mho/m}$, $\epsilon_r = 51.6495$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.58 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.185 mW/g

Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.247 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.111 mW/g

Reference Value = 9.58 V/m

Power Drift = -0.01 dB

Maximum value of SAR = 0.185 mW/g

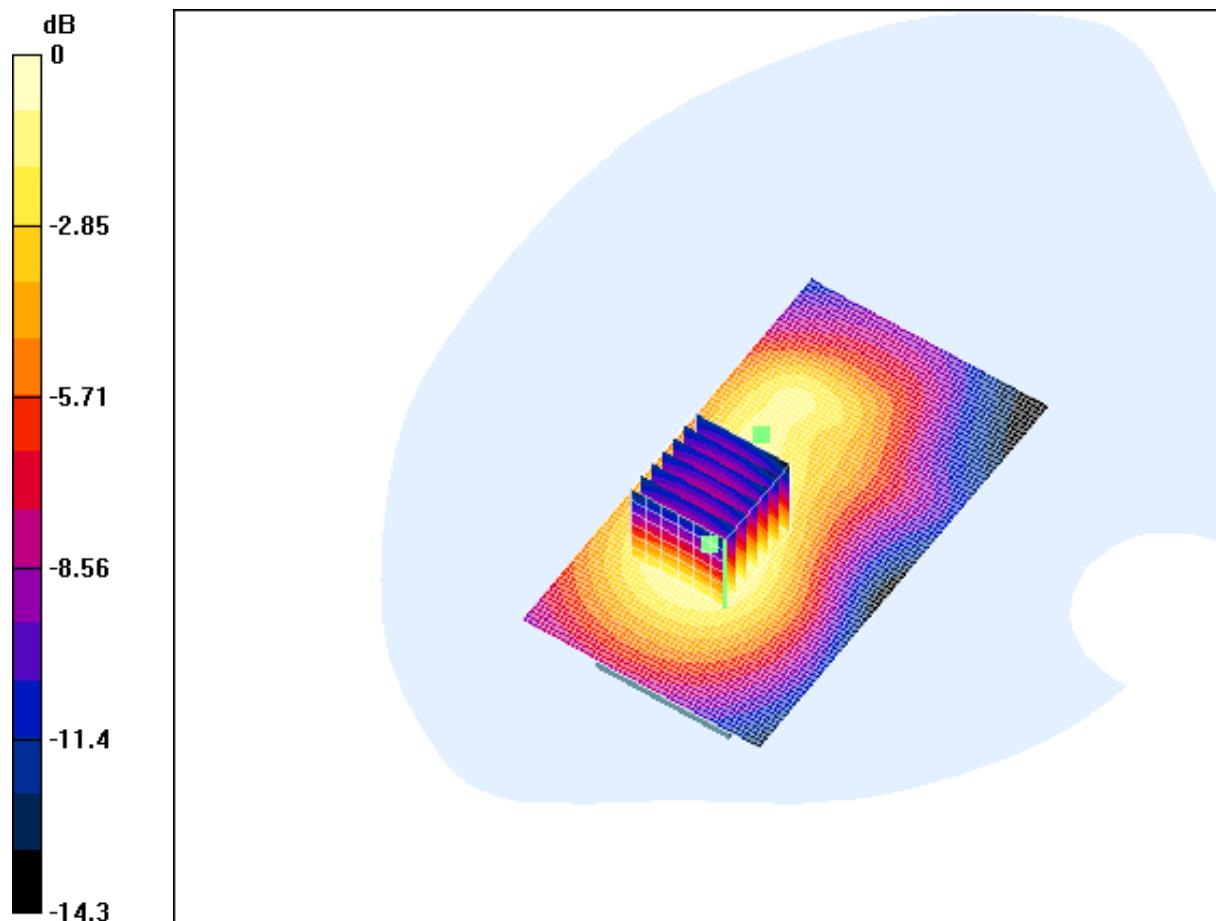

0 dB = 0.185mW/g

4.29 FCC-OET65-Body-Worn-GSM1900-Mid

Date/Time: 05/20/05 21:49:31

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM1900.da4](#)

FCC-OET65-Body-Worn-GSM1900-Mid

DUT: GSM50034; Type: Head; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.52127 \text{ mho/m}$, $\epsilon_r = 51.5237$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.5 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.325 mW/g

Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.298 mW/g; SAR(10 g) = 0.19 mW/g

Reference Value = 11.5 V/m

Power Drift = -0.04 dB

Maximum value of SAR = 0.316 mW/g

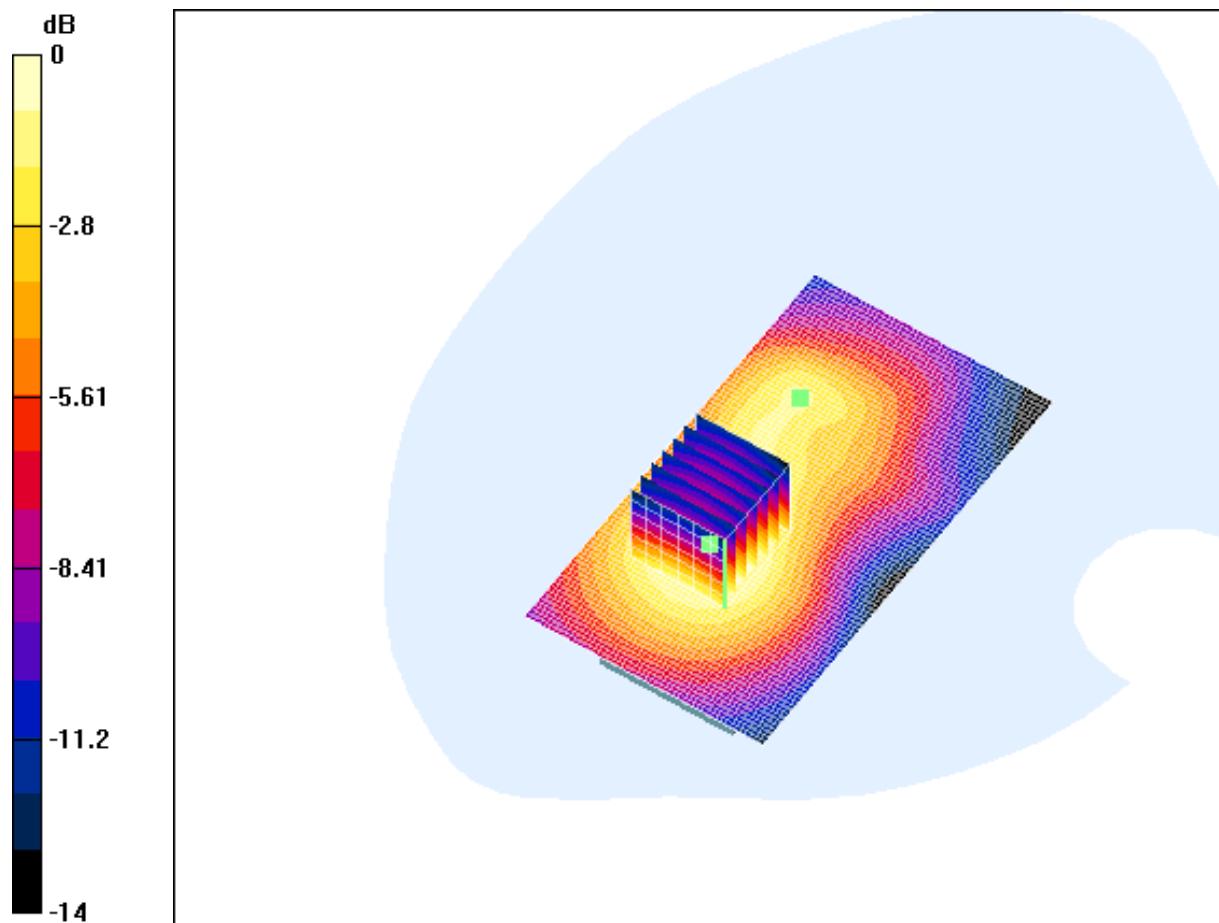

0 dB = 0.316mW/g

4.30 FCC-OET65-Body-Worn-GSM1900-High

Date/Time: 05/20/05 21:49:31

Test Laboratory: SGS-GSM

File Name: [FCC-OET65-Body-Worn-GSM1900.da4](#)

FCC-OET65-Body-Worn-GSM1900-High

DUT: GSM50034; Type: Head; Serial: 20050520

Program: Compliance Testing: FCC OET65 Protocol (Body Worn)

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 ($\sigma = 1.55344 \text{ mho/m}$, $\epsilon_r = 51.4693$, $\rho = 1000 \text{ kg/m}^3$)

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2003-6-4
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.5 V/m

Power Drift = 0.001 dB

Maximum value of SAR = 0.355 mW/g

Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.208 mW/g

Reference Value = 10.5 V/m


Power Drift = 0.001 dB

Maximum value of SAR = 0.354 mW/g

Order No: SHGLO050500034GSM

Date: July 06, 2005

Page: 72 of 87

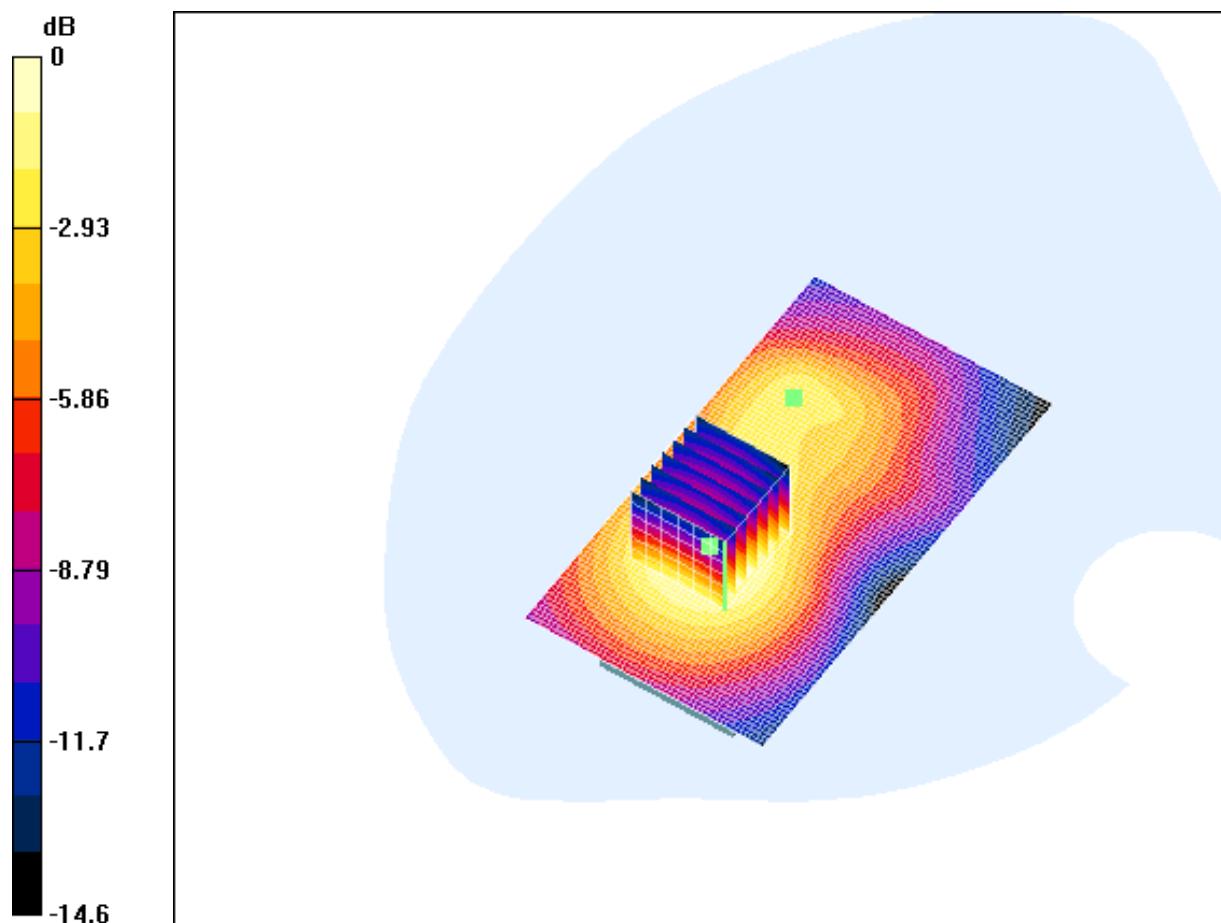

0 dB = 0.354mW/g

Appendix

1. Photographs of Test Setup

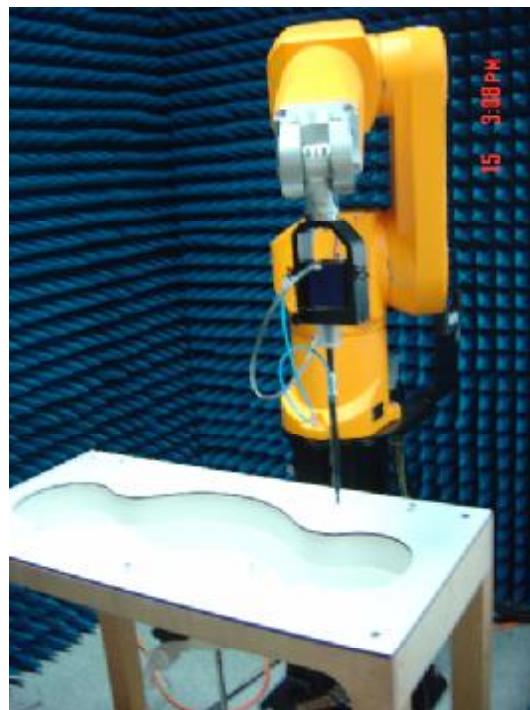


Fig.1 Photograph of the SAR measurement System

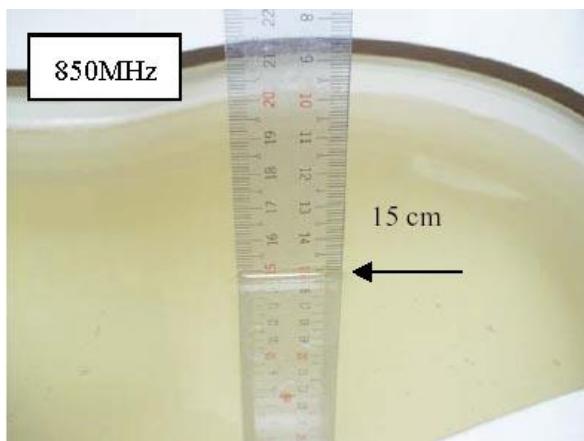


Fig.2 Photograph of the Tissue Simulant
Fluid Fluid Liquid depth 15cm
for Left-Head Side

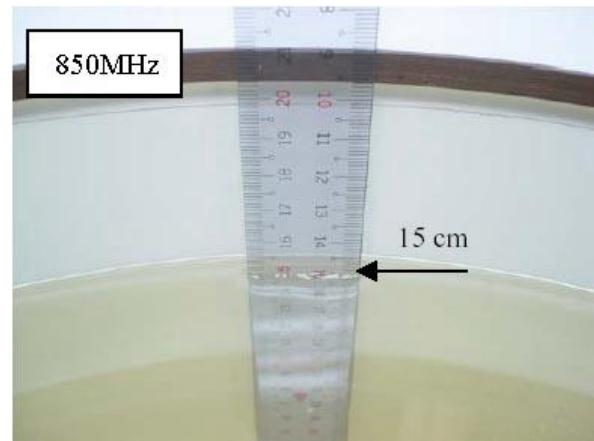


Fig.3 Photograph of the Tissue Simulant
Liquid depth 15cm for Body-Worn

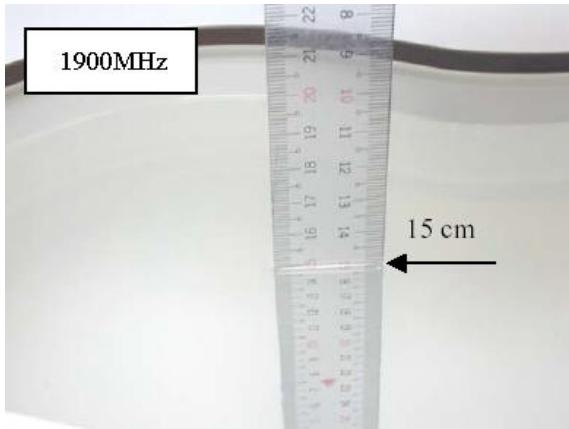


Fig.4 Photograph of the Tissue Simulant Fluid Fluid Liquid depth 15cm for Right-Head Side

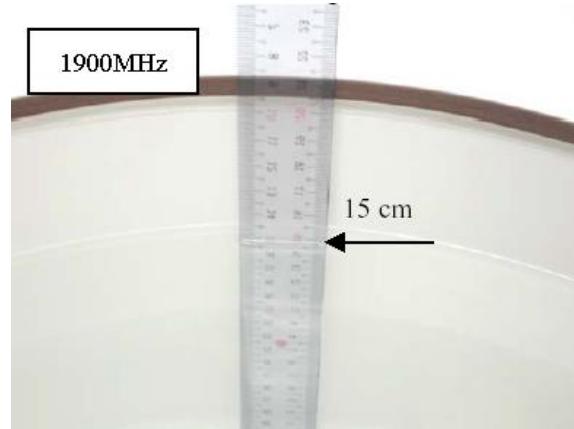


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn

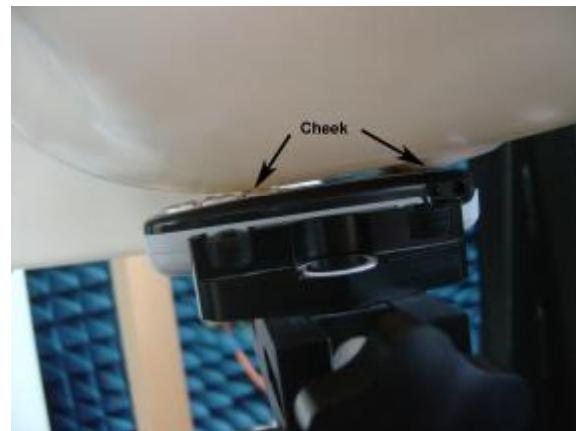
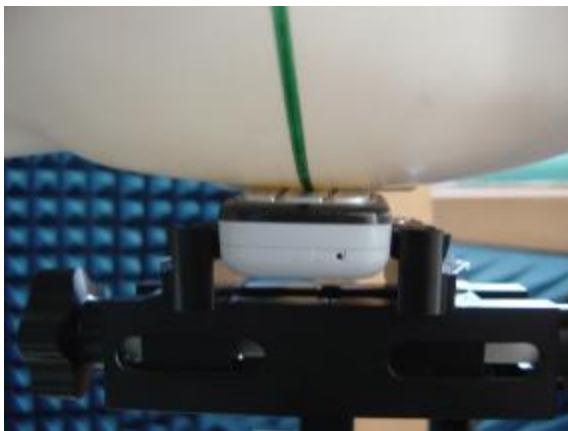


Fig.6 Photograph of the Left Hand Side Cheek status

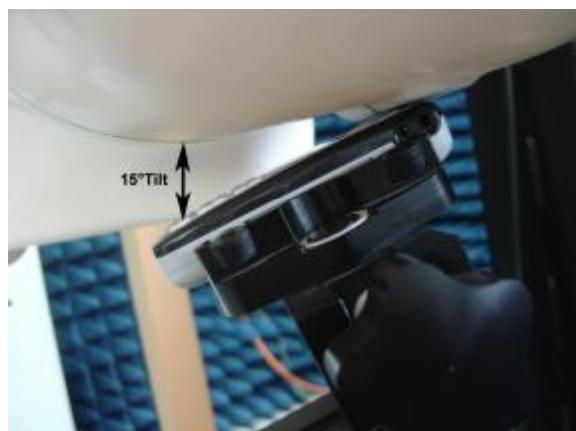


Fig.7 Photograph of the Left Hand Side Tilt status

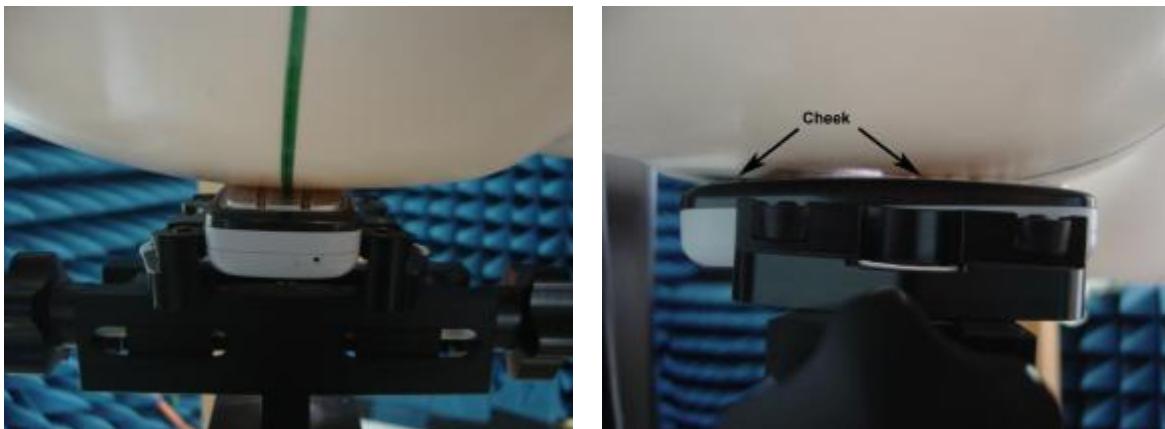


Fig.8 Photograph of the Right Hand Side Cheek status

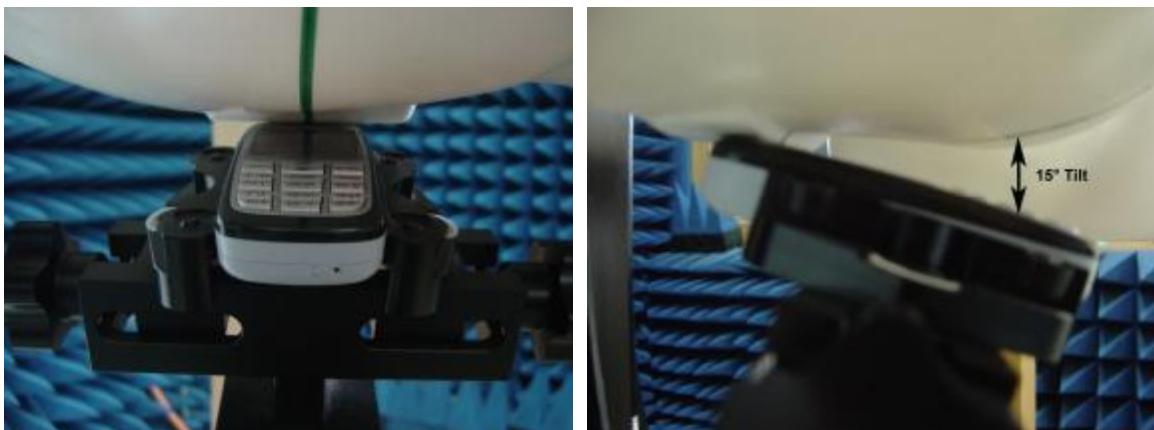


Fig.9 Photograph of the Right Hand Side Tilt status



Fig.10 Photograph of the BodyWorn status

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 76 of 87

2. Photographs of the EUT



Fig.11 Front View

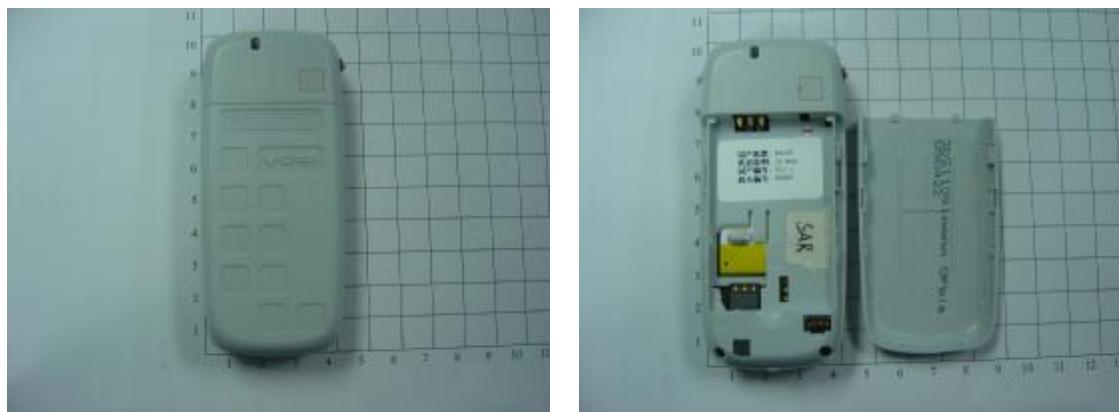


Fig.12 Back View

3. Photographs of the battery

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 77 of 87



Fig.13 Front view of battery

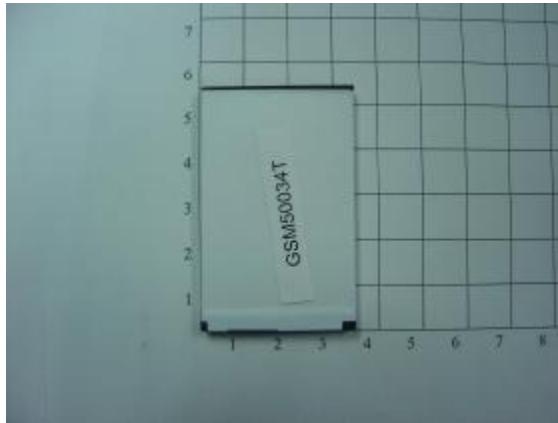


Fig.14 Back view of battery

4. Photograph of the charger



Fig.15 Charger

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 78 of 87

5. Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SGS China (Auden)

Certificate No: ET3-1774_Oct04

CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1774

Calibration procedure(s) QA CAL-01.v5
Calibration procedure for dosimetric E-field probes

Calibration date: October 26, 2004

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: 55054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: 55056 (20b)	3-May-04 (METAS, No. 251-00388)	May-05
Reference 30 dB Attenuator	SN: 55129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN:3013	8-Jan-04 (SPEAG, No. ES3-3013_Jan04)	Jan-05
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

Calibrated by:	Name	Function	Signature
	Nico Vetterli	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: October 28, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Order No: SHGLO050500034GSM
Date: July 06, 2005
Page: 79 of 87

ET3DV6 SN:1774

October 26, 2004

Probe ET3DV6

SN:1774

Manufactured:	April 15, 2003
Last calibrated:	May 23, 2003
Repaired:	October 18, 2004
Recalibrated:	October 26, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1774

October 26, 2004

DASY - Parameters of Probe: ET3DV6 SN:1774

Sensitivity in Free Space^A

NormX	1.92 ± 9.9%	µV/(V/m) ²
NormY	1.80 ± 9.9%	µV/(V/m) ²
NormZ	1.72 ± 9.9%	µV/(V/m) ²

Diode Compression^B

DCP X	93 mV
DCP Y	93 mV
DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	8.8	4.6
SAR _{be} [%] With Correction Algorithm	0.7	0.1

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	3.7 mm	4.7 mm
SAR _{be} [%] Without Correction Algorithm	12.5	8.3
SAR _{be} [%] With Correction Algorithm	0.7	0.1

Sensor Offset

Probe Tip to Sensor Center **2.7** mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ET3DV6 SN:1774

October 26, 2004

Frequency Response of E-Field

(TEM-Cell:ifil110 EXX, Waveguide: R22)

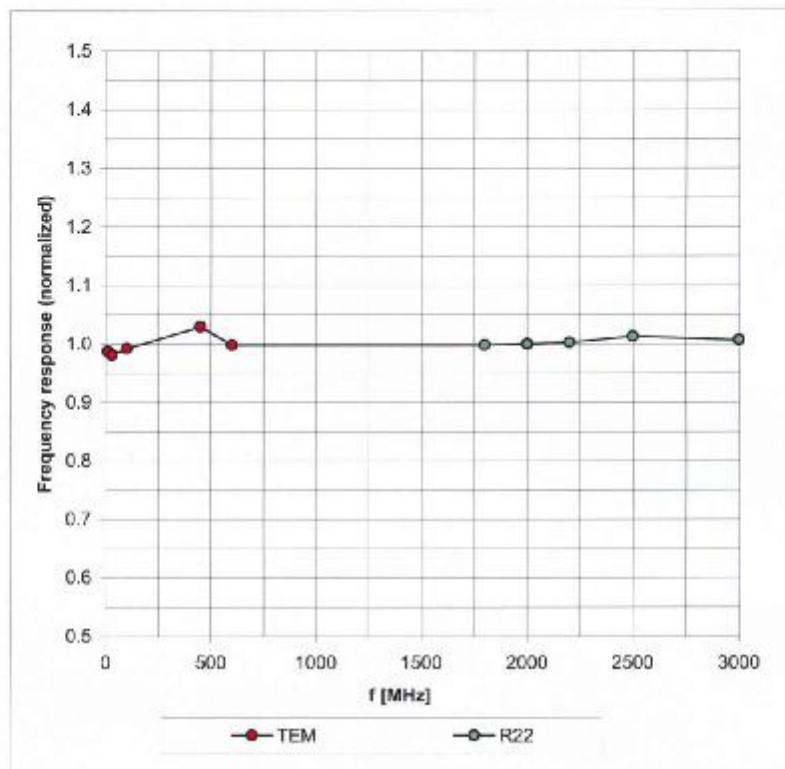


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1774

October 26, 2004

Dynamic Range f(SAR_{head})
(Waveguide R22, f = 1800 MHz)

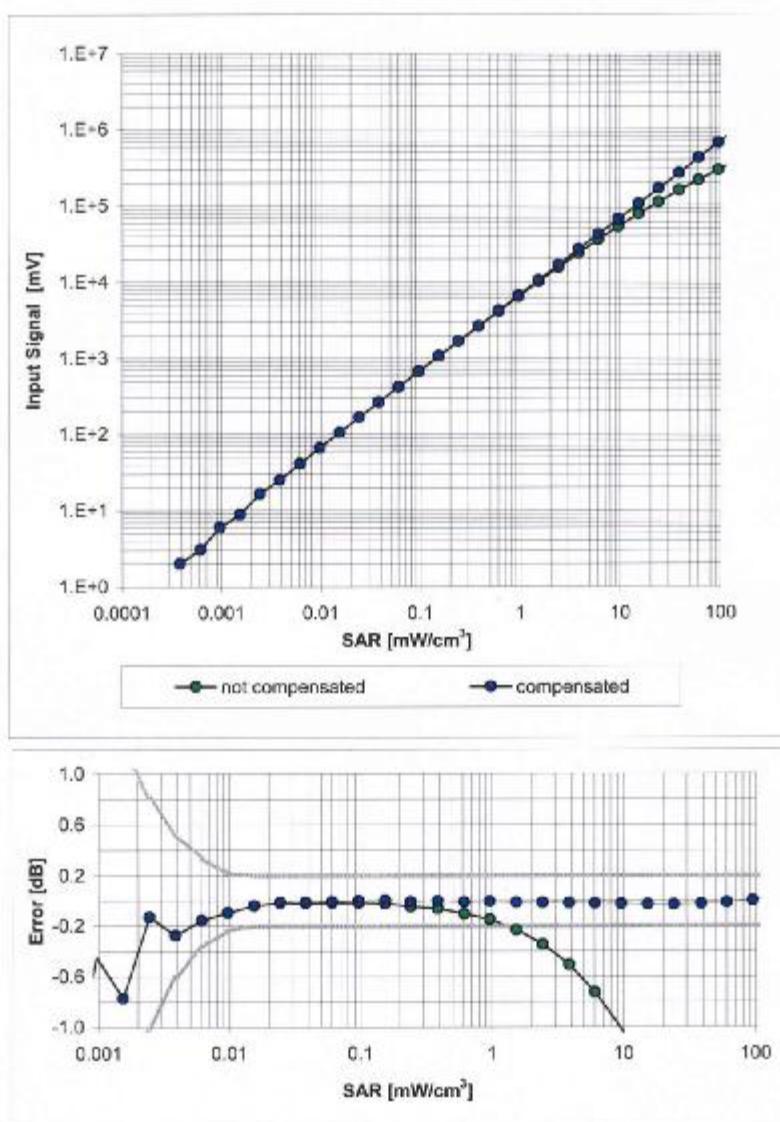


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1774

October 26, 2004

Conversion Factor Assessment

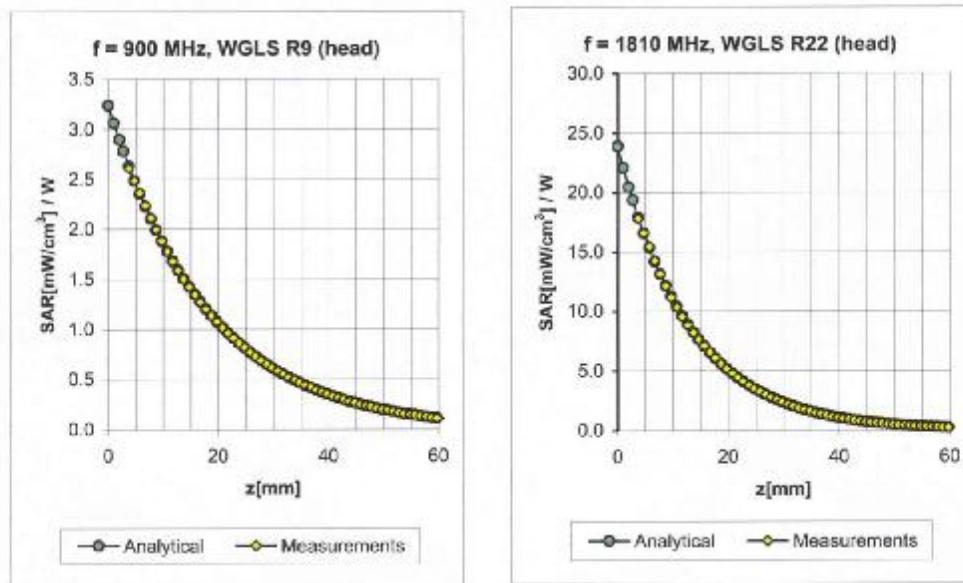

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	1.13	1.42	6.96	± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.09	1.46	6.61	± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.58	2.31	5.48	± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.54	2.52	5.25	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.63	2.30	4.70	± 11.8% (k=2)

835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.96	1.58	6.65	± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	1.00	1.57	6.36	± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.52	2.81	4.79	± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.52	2.98	4.66	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.62	2.18	4.35	± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY 4.3 B17 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1774

October 26, 2004

Deviation from Isotropy in HSL

Error (ϕ, θ), f = 900 MHz


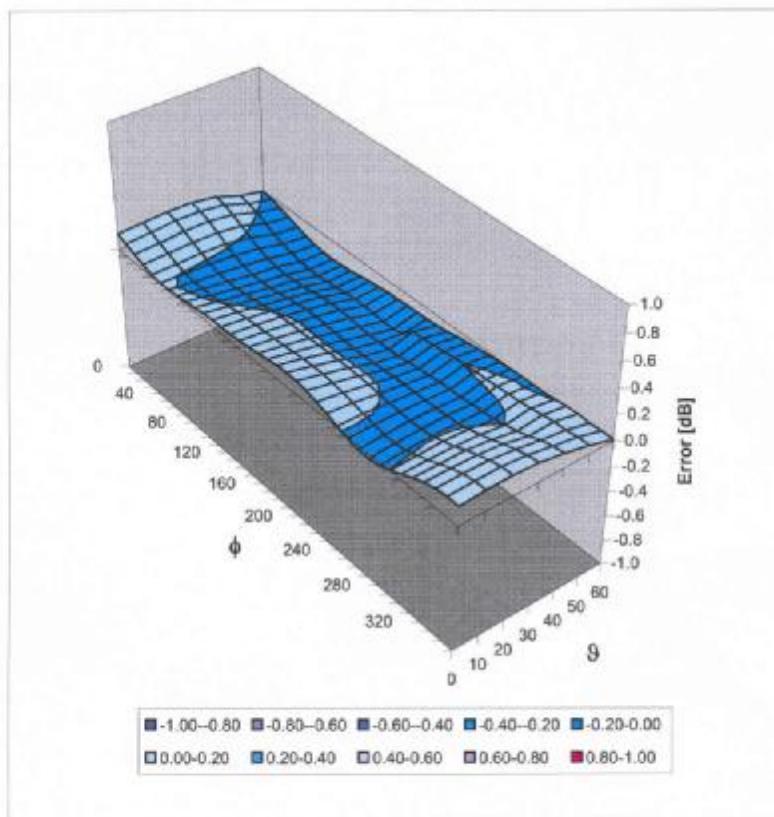


Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

ET3DV6 SN:1774

October 26, 2004

Receiving Pattern (ϕ), $\theta = 0^\circ$

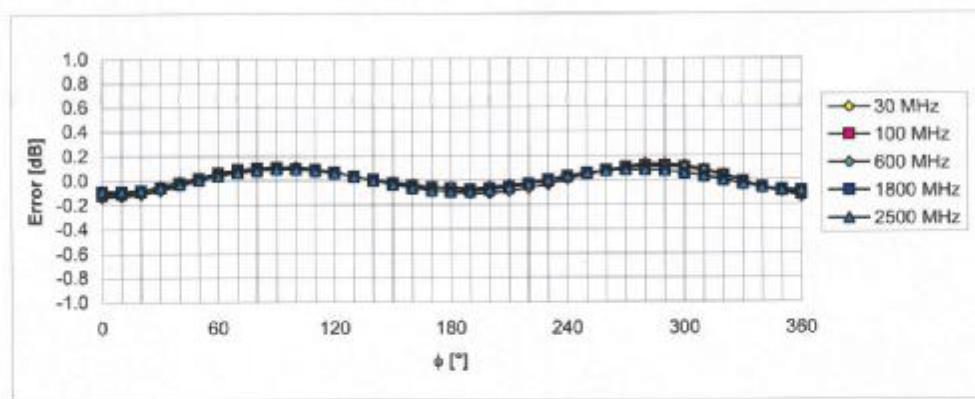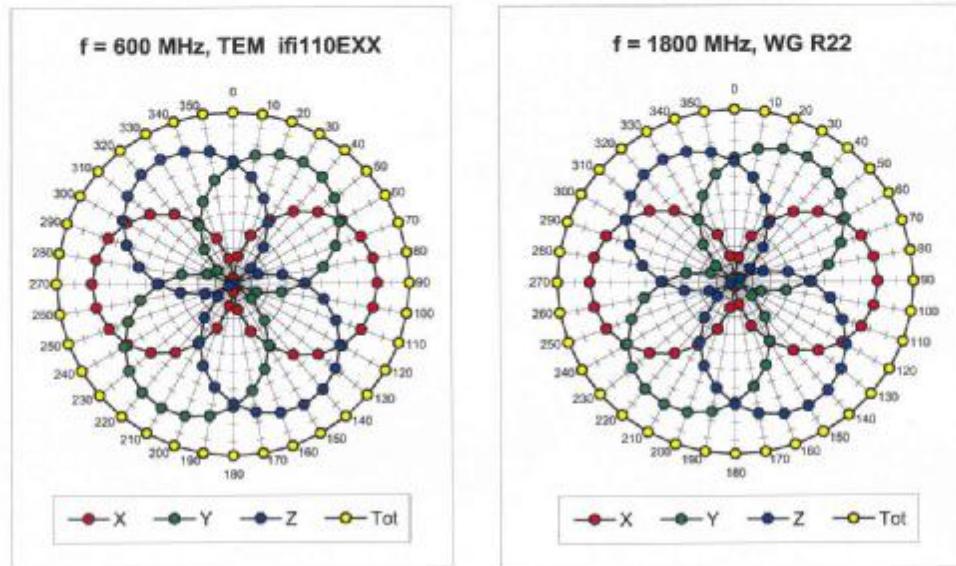

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

6. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(c_i) (1g)	(c_i) (10g)	Std. unc. (± %) (1g) (10g)	(v_i)
Measurement System							
Probe Calibration	4.8	N	1	1	1	4.8	4.8
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	0	R	$\sqrt{3}$	1	1	0	0
Boundary Effects	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
System Detection Limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	N	1	1	1	1.0	1.0
Response Time	0	R	$\sqrt{3}$	1	1	0	0
Integration Time	0	R	$\sqrt{3}$	1	1	0	0
RF Ambient Conditions	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7
Algorithms for Max. SAR Eval.	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Dipole							
Dipole Axis to Liquid Distance	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Input power and SAR drift meas.	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Phantom and Tissue Param.							
Phantom Uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid Conductivity (target)	5.0	R.	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined Stdandard Uncertainty						8.4	8.1
Coverage Factor for 95%	kp=2						
Expanded Uncertainty						16.8	16.2

Dasy4 Uncertainty Budget

7. Phantom description

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 77

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the
series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested
using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 60361
 - [2] IEEE P1528-200x draft 6.5
 - [3] IEC PT 62209 draft 0.9
- (*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 28.02.2002

Signature / Stamp

Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 77

The end