

**SGS-CSTC Standards  
Technical Services Co., Ltd.**

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 1 of 59

## ***FCC TEST REPORT(DOC)***

**Application No.:** SHEMO060400274IT

**Applicant:** T&A Mobile Phones

**Equipment Under Test (EUT):**

**NOTE:** The following sample(s) submitted was/were identified on behalf of the client as

**EUT Name:** GSM Mobile Phone

**Model No.:** C62Ca

**Marketing Name:** OT-E205a

**Item No.:** Not supplied by client

**Serial No.:** Not supplied by client

**Standards:** CFR 47 part 2: 2004,  
CFR 47 Part 15: 2005,  
ANSI C63.4: 2003

**Date of Receipt:** 18 April 2006

**Date of Test:** 20 April 2006 to 19 October 2006

**Date of Issue:** 23 October 2006

|                      |             |
|----------------------|-------------|
| <b>Test Result :</b> | <b>PASS</b> |
|----------------------|-------------|

Authorized Signature:



Tino Pan  
E&E Section Head  
SGS-CSTC Co., Ltd.



Jacky Cao  
E&E Project Engineer  
SGS-CSTC Co., Ltd

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK.. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

All test results in this report can be traceable to National or International Standards.

**SGS-CSTC Standards  
Technical Services Co., Ltd.**

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 2 of 59

## 2 Test Summary

| Test                               | Test Requirement | Test Method      | Class / Severity | Result |
|------------------------------------|------------------|------------------|------------------|--------|
| Radiated Emission<br>30MHz-1000MHz | CFR 47 Part 15   | ANSI C63.4: 2003 | Class B          | PASS   |
| Conducted Emission<br>150KHz-30MHz | CFR 47 Part 15   | ANSI C63.4: 2003 | Class B          | PASS   |

**Note:** OT-E205a has seven power adaptors (ASTEC: 3DS09371AGAA, 3DS09371AAAA , LEADER: 3DS09371AGAA, 3DS09371AAAA , Primax: 3DS07848AAAA, Tenpao: 3DS10628AGAA, SDS10628AHAA) and one earphone. The client declared the adapters of Tenpao: 3DS10628AGAA, SDS10628AHAA are the same in electric diagram, so we just have 3DS10628AGAA tested.

# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 3 of 59

## 3 Contents

|                                                      | Page      |
|------------------------------------------------------|-----------|
| <b>1 COVER PAGE.....</b>                             | <b>1</b>  |
| <b>2 TEST SUMMARY.....</b>                           | <b>2</b>  |
| <b>3 CONTENTS .....</b>                              | <b>3</b>  |
| <b>4 GENERAL INFORMATION.....</b>                    | <b>4</b>  |
| 4.1 CLIENT INFORMATION .....                         | 4         |
| 4.2 GENERAL DESCRIPTION OF E.U.T.....                | 4         |
| 4.3 DETAILS OF E.U.T. ....                           | 4         |
| 4.4 DESCRIPTION OF SUPPORT UNITS .....               | 5         |
| 4.5 STANDARDS APPLICABLE FOR TESTING.....            | 5         |
| 4.6 TEST LOCATION.....                               | 6         |
| 4.6 DEVIATION FROM STANDARDS .....                   | 6         |
| 4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....      | 6         |
| 4.8 MONITORING OF EUT FOR ALL IMMUNITY TEST.....     | 6         |
| 4.9 TEST CONFIDENT LEVEL .....                       | 6         |
| <b>5 EQUIPMENTS USED DURING TEST .....</b>           | <b>7</b>  |
| <b>6 EMISSION TEST RESULTS.....</b>                  | <b>8</b>  |
| 6.1 RADIATED EMISSIONS, 30MHz TO 1GHz .....          | 8         |
| 6.1.1 E.U.T. Operation.....                          | 8         |
| 6.1.2 Test setup: .....                              | 8         |
| 6.1.3 Test Result: .....                             | 9         |
| 6.2 CONDUCTED EMISSIONS, 150kHz TO 30MHz .....       | 33        |
| 6.2.1 E.U.T. Operation.....                          | 33        |
| 6.2.2 Test Result and Partial Measurement Data ..... | 33        |
| <b>7 PHOTOGRAPHS.....</b>                            | <b>56</b> |
| 7.1 RADIATED EMISSION TEST SETUP.....                | 56        |
| 7.2 CONDUCTED EMISSION TEST SETUP .....              | 57        |
| 7.3 EUT CONSTRUCTIONAL DETAILS .....                 | 57        |

# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 4 of 59

## 4 General Information

### 4.1 Client Information

Applicant: T&A Mobile Phones  
Address of Applicant: 3/F, B2 BLOCK, DIGITAL TECHNOLOGY YARD, GAOXIN  
NAN QI ROAD, NAN SHAN DISTRICT, SHENZHEN,  
GUANGDONG, P.R.CHINA

### 4.2 General Description of E.U.T.

EUT Name: GSM Mobile Phone  
Model No.: C62Ca  
Marketing Name: OT-E205a  
Brand Name: Not supplied by client  
Serial No.: Not supplied by client

### 4.3 Details of E.U.T.

Power Supply 01: AC to DC charger(Model number: 3DS09371AGAA Input: 100V-127V~, 50/60Hz 0.15A Output:DC 4.5V, 0.35A)

P/N: 3DS09371AGAA

Manufactures: Astec

Power Cord 01: 2 m

Power Supply 02: AC to DC charger(Model number: 3DS09371AGAA Input: 100V-127V~, 0.3A 50/60Hz Output:DC 4.5V, 0.35A)

P/N: 3DS09371AGAA

Manufactures: Leader

Power Cord 02: 2.05 m

Power Supply03: AC to DC charger (Model NO: 3DS09371AAAA Input: AC 220V-240V~, 50/60Hz 0.3A Output: DC 4.5V, 0.35A)

Manufactures: Astec

Power Cord03: 2m

Power Supply04: AC to DC charger (Model NO: 3DS09371AAAA Input: AC 220V-240V~, 50/60Hz 0.15A Output:DC 4.5V, 0.35A)

Manufactures: Leader

Power Cord04: 2.06m

## SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 5 of 59

Power Supply05: DC to DC charger (Model NO: 3DS07848AAAA Input: DC 12V/24V Output: DC 4.5V)  
Manufactures: Primax

Power Cord05: 2.64m

Power Supply06: AC to DC charger (Model NO: 3DS10628AGAA Input: AC 100V-240V~, 50/60Hz 100mA Output: DC 4.5V, 0.35A)  
Manufactures: Tenpao

Power Cord06: 2m

Power Supply07: AC to DC charger (Model NO: 3DS10628AHAA Input: AC 100V-240V~, 50/60Hz 100mA Output: DC 4.5V, 0.35A)  
Manufactures: Tenpao

Power Cord07: 2m

Headset P/N: 3DS07855AAAA  
Manufacturers: Merry

Batthey DC 3.7V / 650mAh  
Manufacturers: BYD

#### 4.4 Description of Support Units

| Name / Function | Model No | Remark |
|-----------------|----------|--------|
| N/A             | N/A      | N/A    |

#### 4.5 Standards Applicable for Testing

The customer requested EMC tests for a GSM Mobile Phone.

The standards used was CFR 47 part 2: 2004 and CFR 47 part 15: 2005:

**Table 1 : Tests Carried Out Under CFR 47 Part 15: 2005 :**

| Standard                    |                    | Status |
|-----------------------------|--------------------|--------|
| FCC Part 15 Subpart B: 2005 | Radiated Emission  | √      |
| FCC Part 15 Subpart B: 2005 | Conducted Emission | √      |

× Indicates that the test is not applicable  
√ Indicates that the test is applicable

## SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 6 of 59

### 4.6 Test Location

Radiated Emission was performed at:

SIMT EMC Laboratory, 1/F, Building No.1, Agriculture Machinery Materials Company  
No.716 Yi shan Road, Shanghai, P.R.China.

Tel: +86 21 64701390 Fax: +86 21 64514252

Conducted Emission was performed at SGS E&E EMC lab

SGS-CSTC EMC Laboratory, No.889 Yishan Road, Shanghai, P.R.China

Tel:+86 21 61402666 Fax: +86 21 54500954

### 4.6 Deviation from Standards

None.

### 4.7 Abnormalities from Standard Conditions

None.

### 4.8 Monitoring of EUT for All Immunity Test

N/A

### 4.9 Test Confident level

Test Confident level is recognized, certified, or accredited by the following organizations:

#### NVLAP – Lab Code: 200632-0

SIMT EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST).  
NVLAP Code: 200632-0. Effective through December 31, 2004.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room of SIMT have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: 1153.

Date of Registration: May 29, 2004. Valid until May 18, 2007

#### CNAL – LAB Code: L0134

SIMT EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.

#### FCC – Registration No.: 142171

SIMT EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 142171, December 9, 2002. With the above and NVLAP, SIMT is an authorized test laboratory for the DoC process.

# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 7 of 59

## 5 Equipments Used during Test

| Radiated Emission Test in<br>Chamber CFR 47 part 15: 2005 |                                         |              |           |            |            |            |
|-----------------------------------------------------------|-----------------------------------------|--------------|-----------|------------|------------|------------|
| Item                                                      | Test Equipment                          | Manufacturer | Model No. | Serial No. | Cal. Date  | Cal. Date  |
| 1                                                         | 10*12*6.5m SAC                          | Fronkonia    | NA        | NA         | 2006.07.28 | 2007.07.27 |
| 1                                                         | HORN ANTENNA                            | R&S          | HF 906    | 100023     | 2006.07.24 | 2007.07.23 |
| 2                                                         | BROADBAND ANTENNA                       | R&S          | HL 562    | 100019     | 2006.10.10 | 2007.10.09 |
| 3                                                         | EMI TEST RECEIVER                       | R&S          | ESI 26    | 838786/011 | 2006.08.13 | 2007.08.13 |
| 4                                                         | UNIVERSAL RADIO<br>COMMUNICATION TESTER | R&S          | CMU 200   | SHEM04-1   | 2006.09.01 | 2007.08.31 |

| Conducted Emission |                                            |                 |           |            |           |              |
|--------------------|--------------------------------------------|-----------------|-----------|------------|-----------|--------------|
| Item               | Test Equipment                             | Manufacturer    | Model No. | Serial No. | Cal. Date | Cal.Due date |
| 1                  | EMI test receiver                          | Rohde & Schwarz | ESCS30    | 100086     | 2006-6-29 | 2007-6-28    |
| 2                  | Line impedance<br>stabilization<br>network | ETS             | 3816/2    | 00034161   | 2006-6-29 | 2007-6-28    |

### General Equipment

| Item | Test Equipment                       | Manufacturer         | Model No. | Serial No.              | Cal. Date  | Cal. Date  |
|------|--------------------------------------|----------------------|-----------|-------------------------|------------|------------|
| 1    | Temperature, Humidity &<br>Barometer | Oregon<br>Scientific | BA-888    | EMC0001 to<br>EMC0004   | 2006.07.25 | 2007.07.24 |
| 2    | DMM                                  | Fluke                | 73        | 70681569 or<br>70671122 | 2006.07.23 | 2007.07.22 |

# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 8 of 59

## 6 Emission Test Results

### 6.1 Radiated Emissions, 30MHz to 1GHz

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| Test Requirement:     | CFR 47 Part 15                                  |
| Test Method:          | ANSI C63.4, CISPR 22                            |
| Test Date:            | 13 May 2006 to 19 October 2006                  |
| Frequency Range:      | 30MHz to 1GHz                                   |
| Measurement Distance: | 3m for ANSI C63.4 and 10m for CISPR 22          |
| Class:                | N/A                                             |
| Detector:             | Peak for pre-scan (120kHz resolution bandwidth) |


#### 6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 55 % RH Atmospheric Pressure: 1004 mbar

EUT Operation: EUT allocated channel mode Charging, GSM850, PCS 1900 with headset.

#### 6.1.2 Test setup:

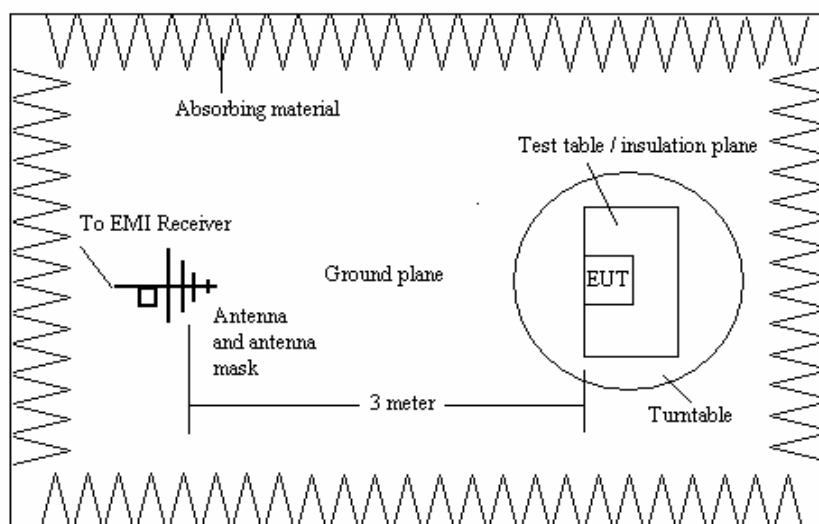



# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 9 of 59

## 6.1.3 Test Result:

GSM 850 connected: (test Mobile with 3DS09371AGAA of Leader power adaptor and headset.)

Horizontal:

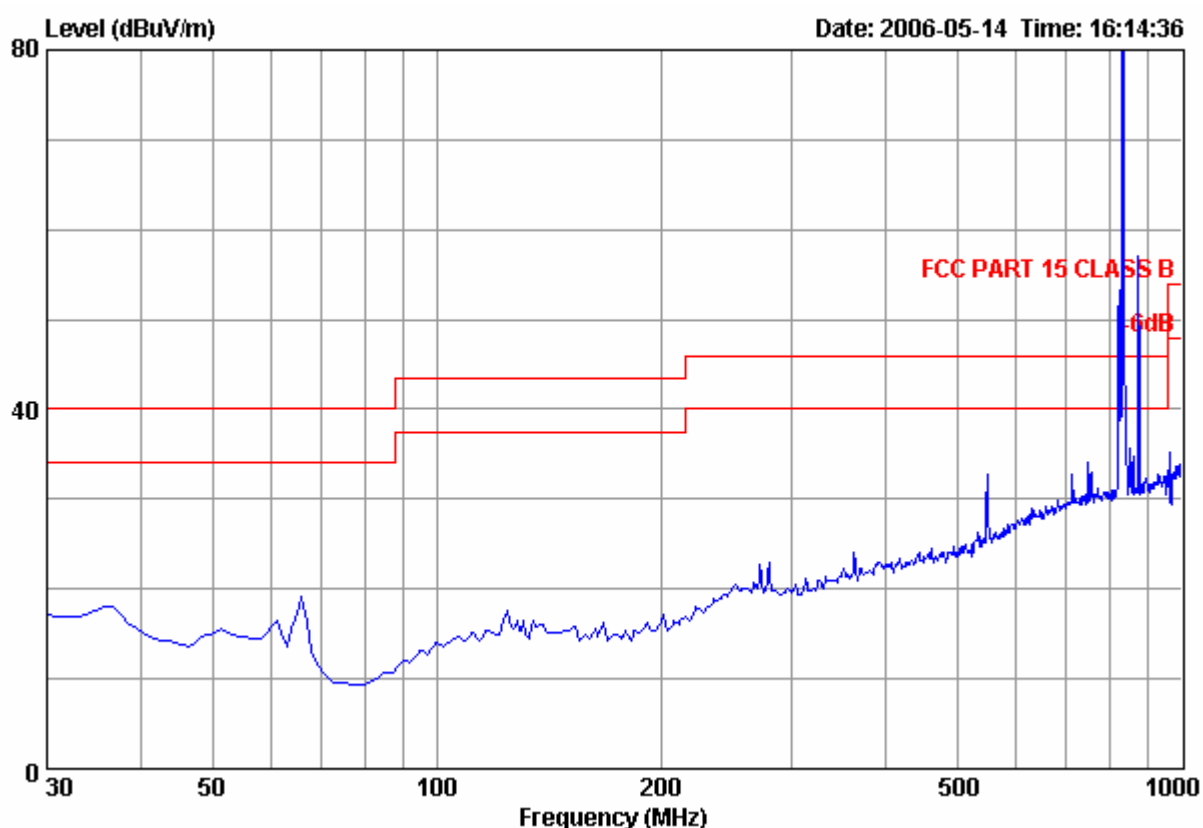

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 10 of 59

Vertical:

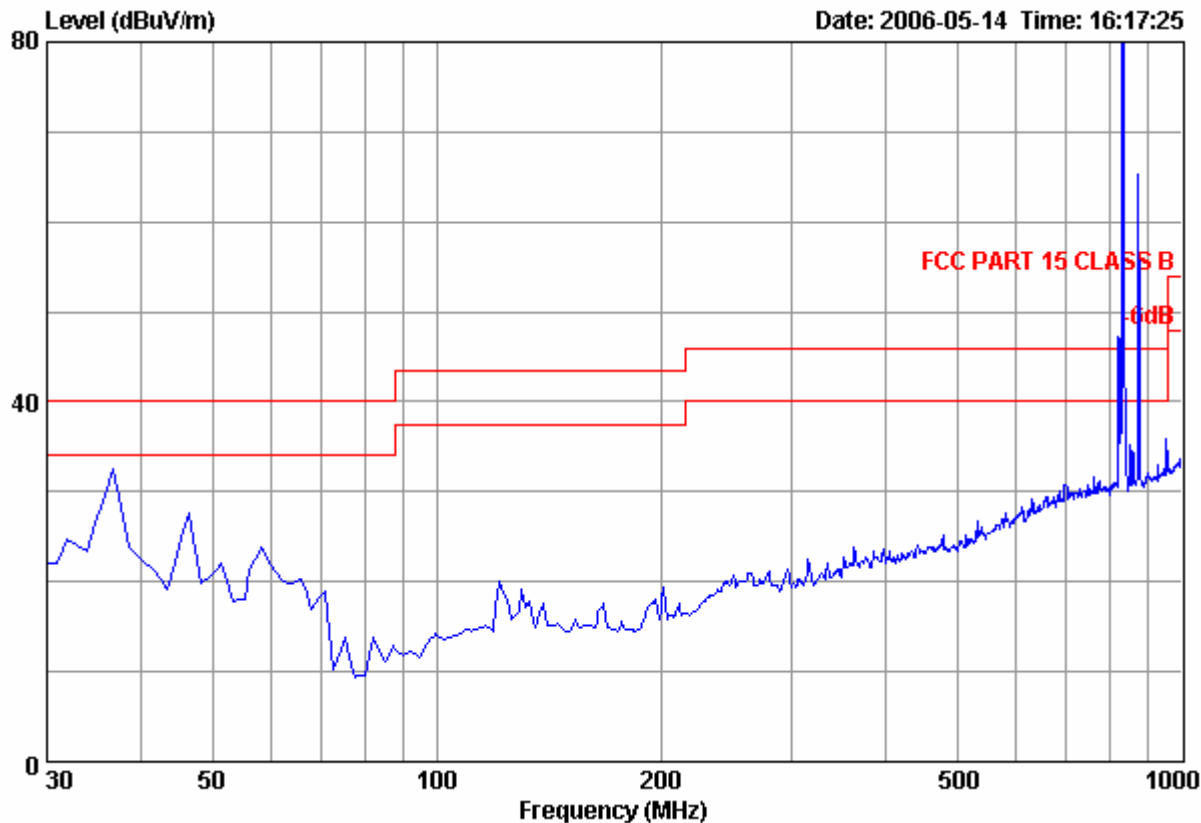

| Frequency<br>(MHz) | Antenna<br>Polarization | Receiver<br>QP Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(cm) | Turntable<br>Angle<br>(° ) |
|--------------------|-------------------------|------------------------------------|-------------------|----------------|---------------------------|----------------------------|
| 30                 | Horizontal              | *                                  | 40                | *              | -                         | -                          |
| 45                 | Horizontal              | *                                  | 40                | *              | -                         | -                          |
| 88                 | Horizontal              | *                                  | 43.5              | *              | -                         | -                          |
| 150                | Horizontal              | *                                  | 43.5              | *              | -                         | -                          |
| 216                | Horizontal              | *                                  | 46                | *              | -                         | -                          |
| 560                | Horizontal              | *                                  | 46                | *              | -                         | -                          |
| 960                | Horizontal              | *                                  | 54                | *              | -                         | -                          |
| 1000               | Horizontal              | *                                  | 54                | *              | -                         | -                          |

1. All readings are Peak values.
2. “\*” means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 11 of 59

GSM 850 connected: (test Mobile with 3DS09371AGAA of Astec power adaptor and headset.)

Horizontal:

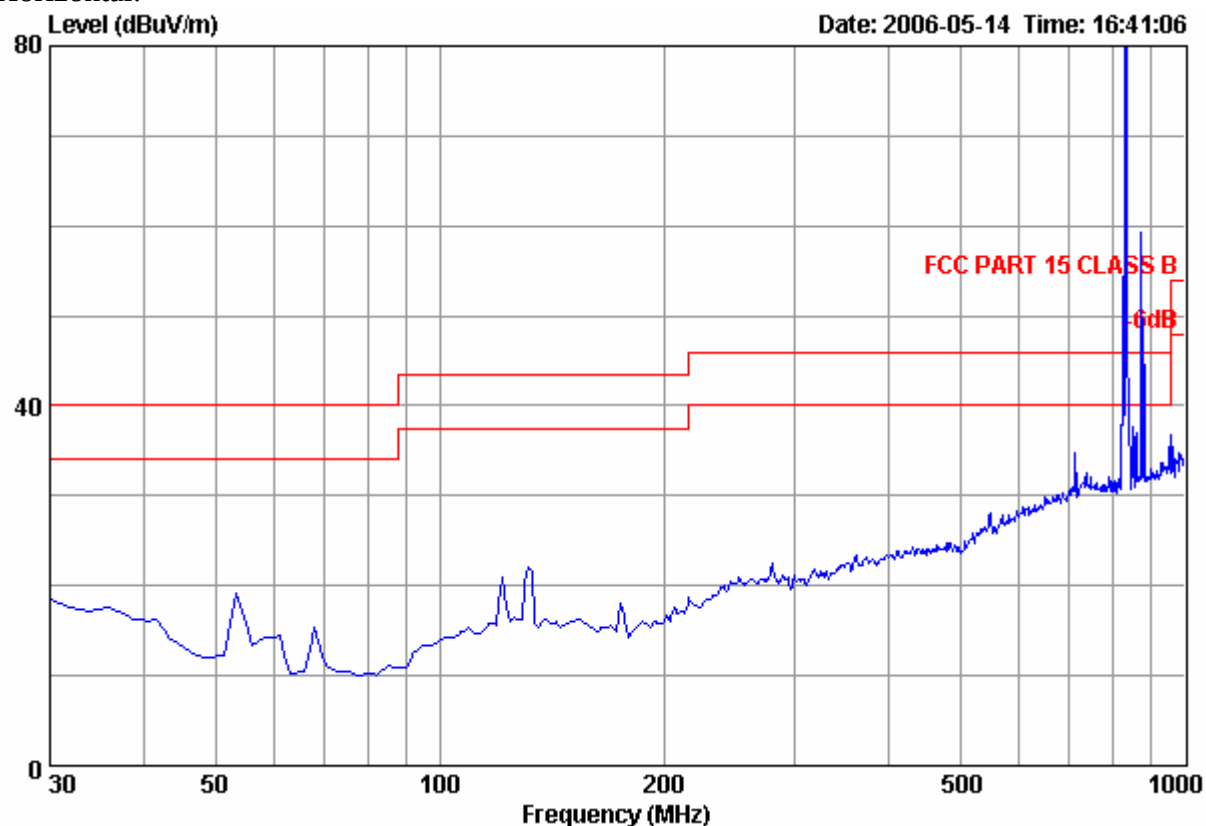

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 12 of 59

Vertical:

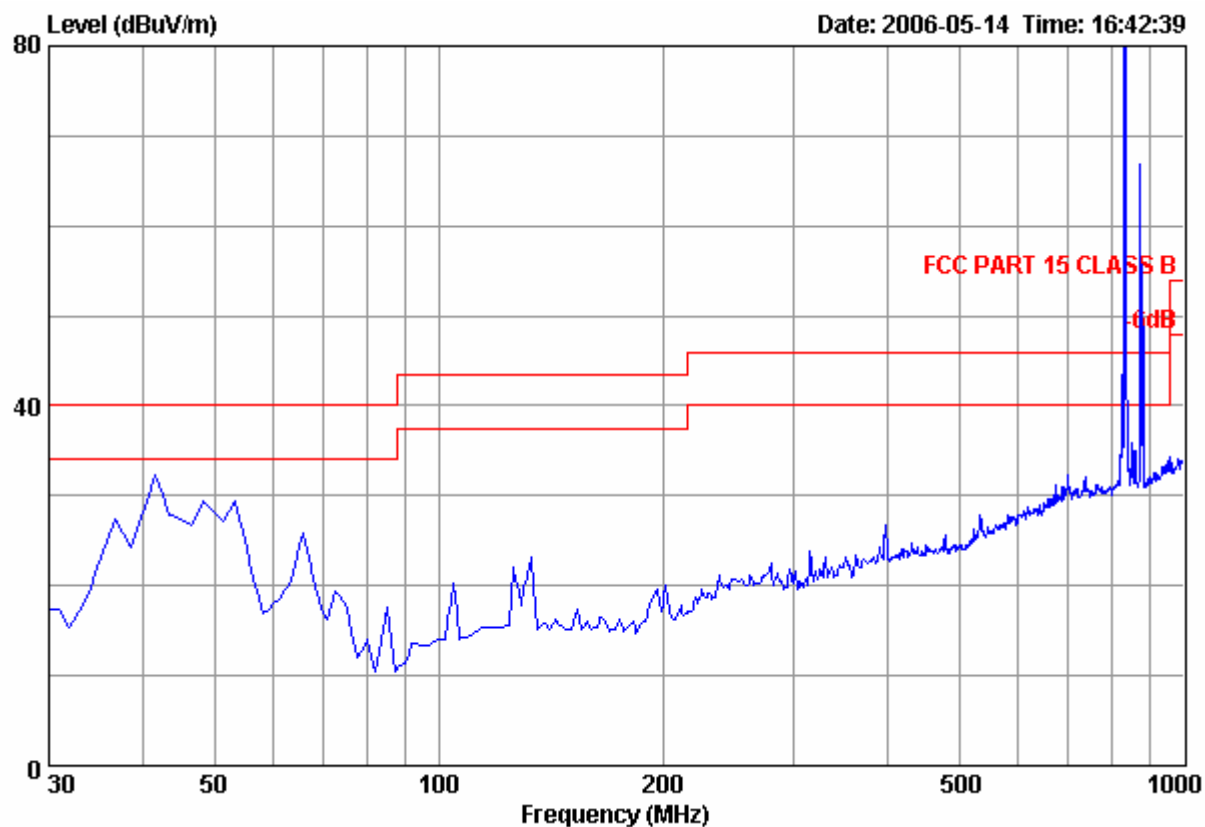

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 13 of 59

GSM 850 connected: (test Mobile with 3DS09371AAAA of Astec power adaptor and headset.)

Horizontal:

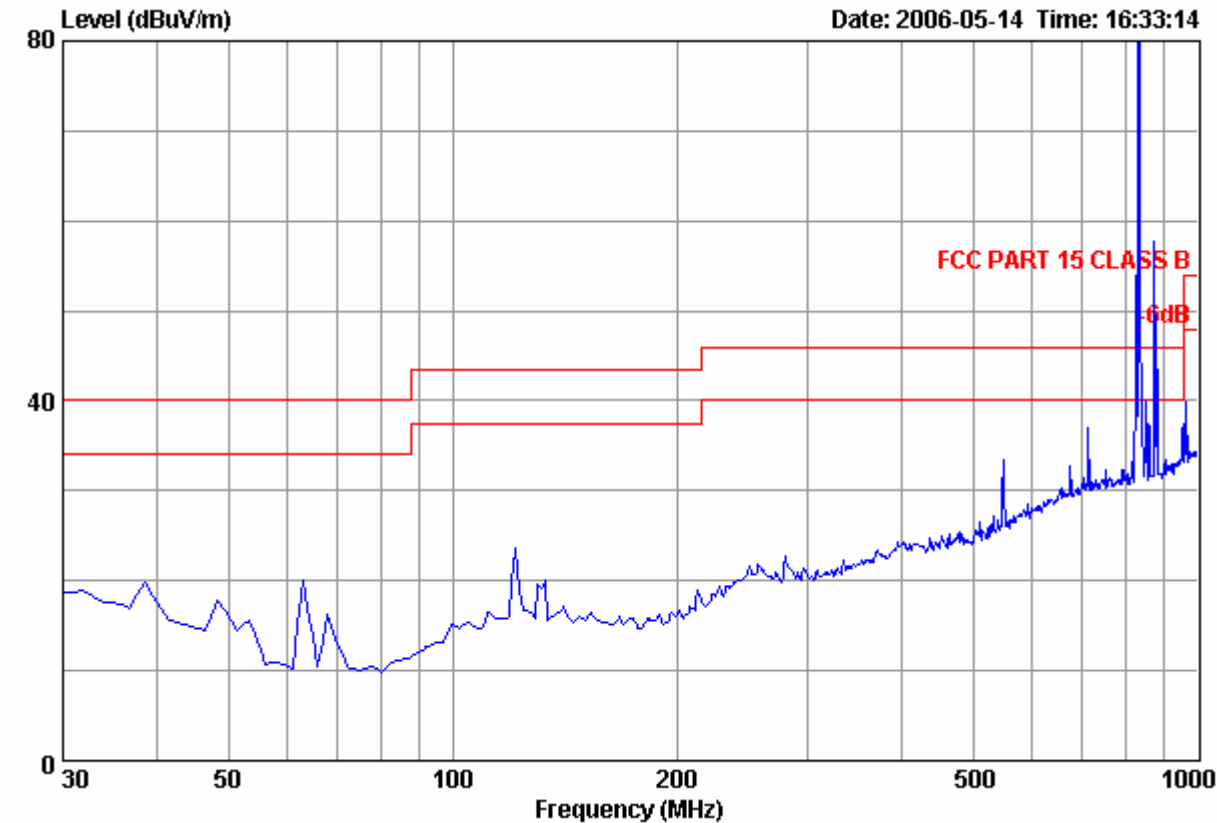

b

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. “\*” means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 14 of 59

Vertical:

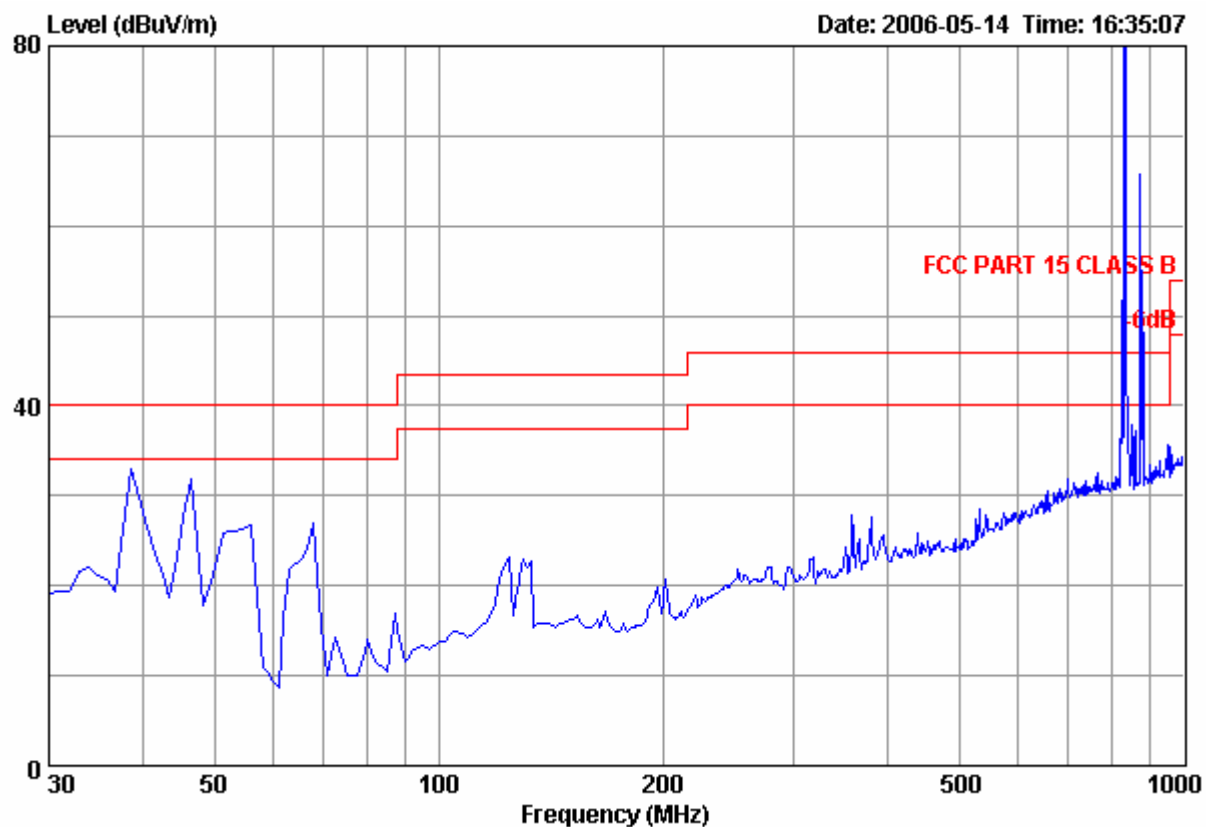

| Frequency<br>(MHz) | Antenna<br>Polarization | Receiver<br>QP Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(cm) | Turntable<br>Angle<br>(°) |
|--------------------|-------------------------|------------------------------------|-------------------|----------------|---------------------------|---------------------------|
| 30                 | Horizontal              | *                                  | 40                | *              | -                         | -                         |
| 45                 | Horizontal              | *                                  | 40                | *              | -                         | -                         |
| 88                 | Horizontal              | *                                  | 43.5              | *              | -                         | -                         |
| 150                | Horizontal              | *                                  | 43.5              | *              | -                         | -                         |
| 216                | Horizontal              | *                                  | 46                | *              | -                         | -                         |
| 560                | Horizontal              | *                                  | 46                | *              | -                         | -                         |
| 960                | Horizontal              | *                                  | 54                | *              | -                         | -                         |
| 1000               | Horizontal              | *                                  | 54                | *              |                           |                           |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 15 of 59

GSM 850 connected: (test Mobile with 3DS09371AAAA of Leader power adaptor and headset.)

Horizontal:

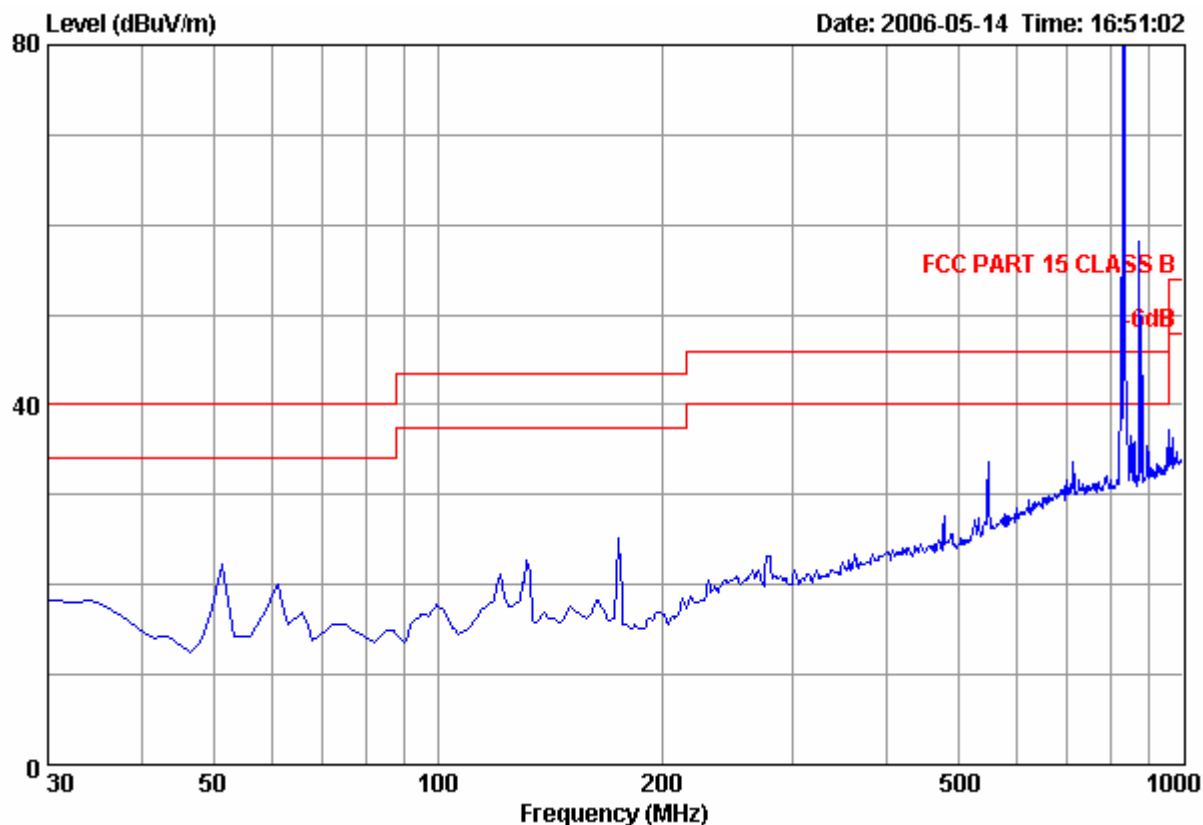

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 16 of 59

Vertical:

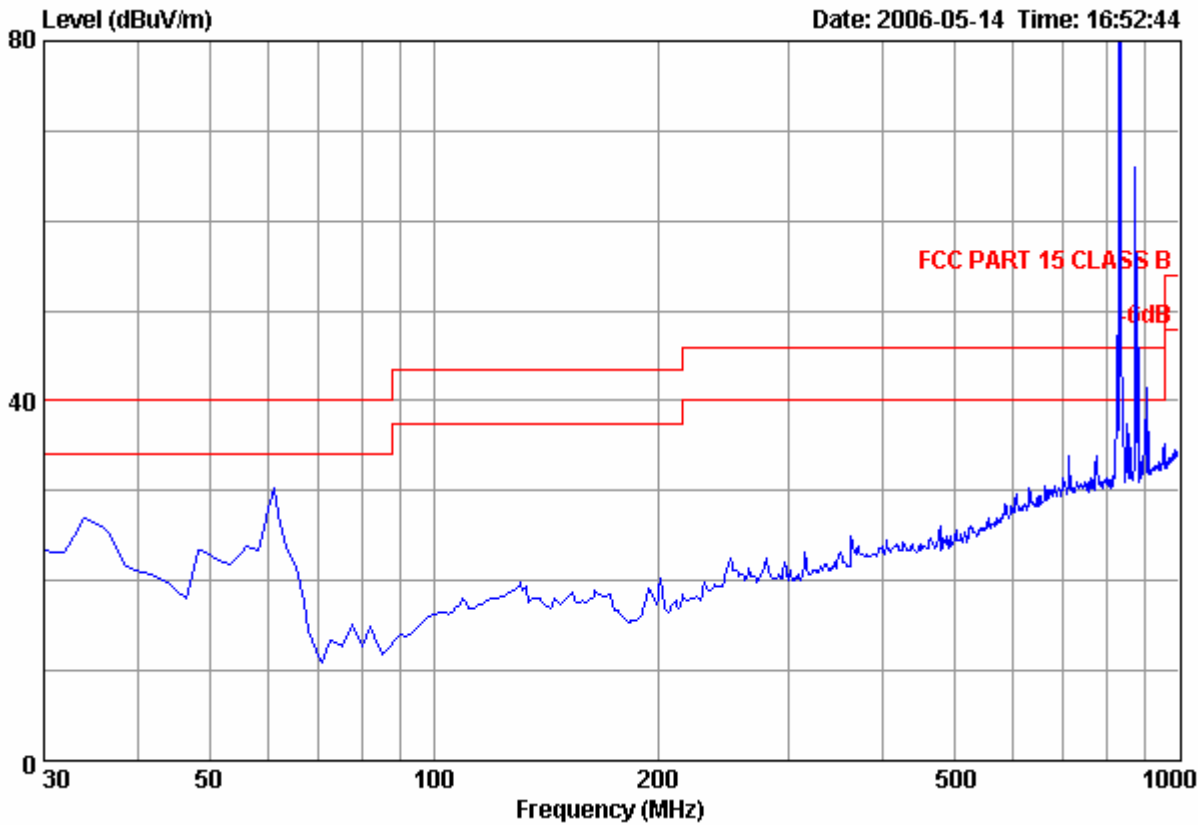

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.



# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 17 of 59

GSM 850 connected: (test Mobile with 3DS07848AAAA of Primax power adaptor and headset.)

Horizontal:

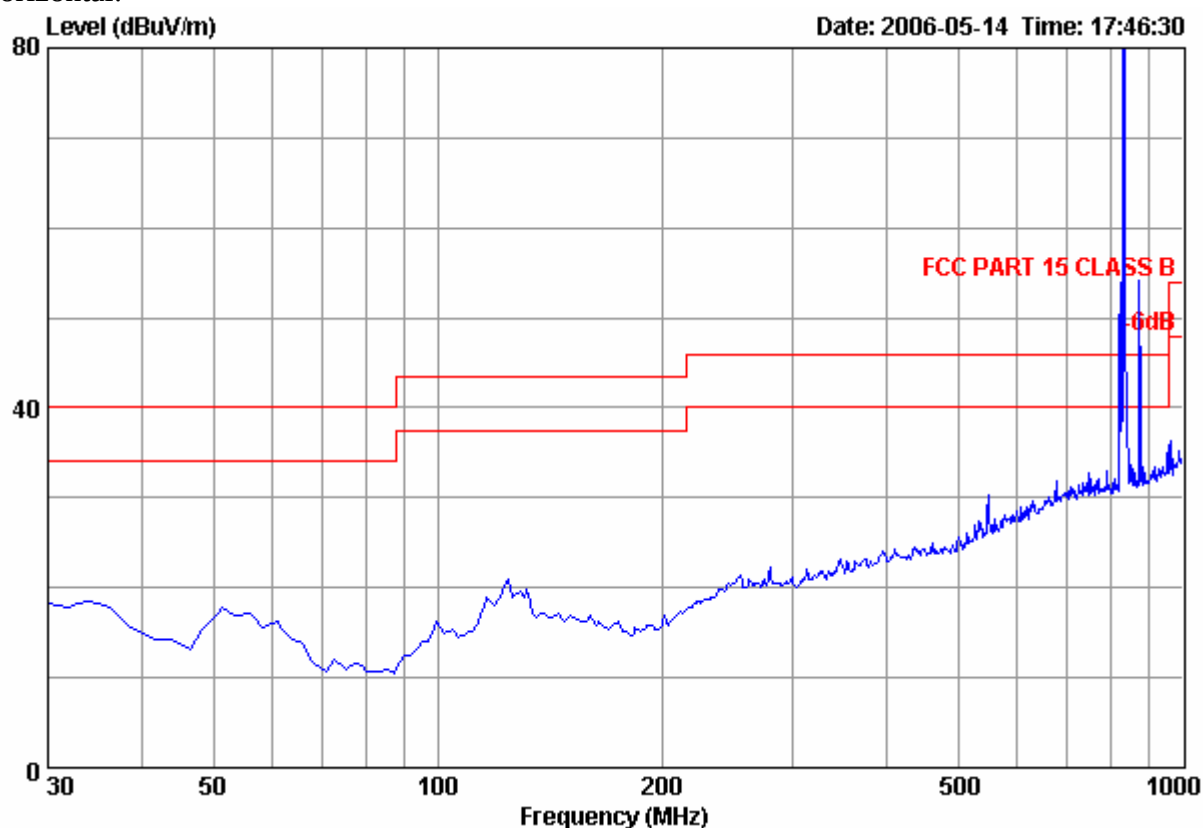

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 18 of 59

Vertical:

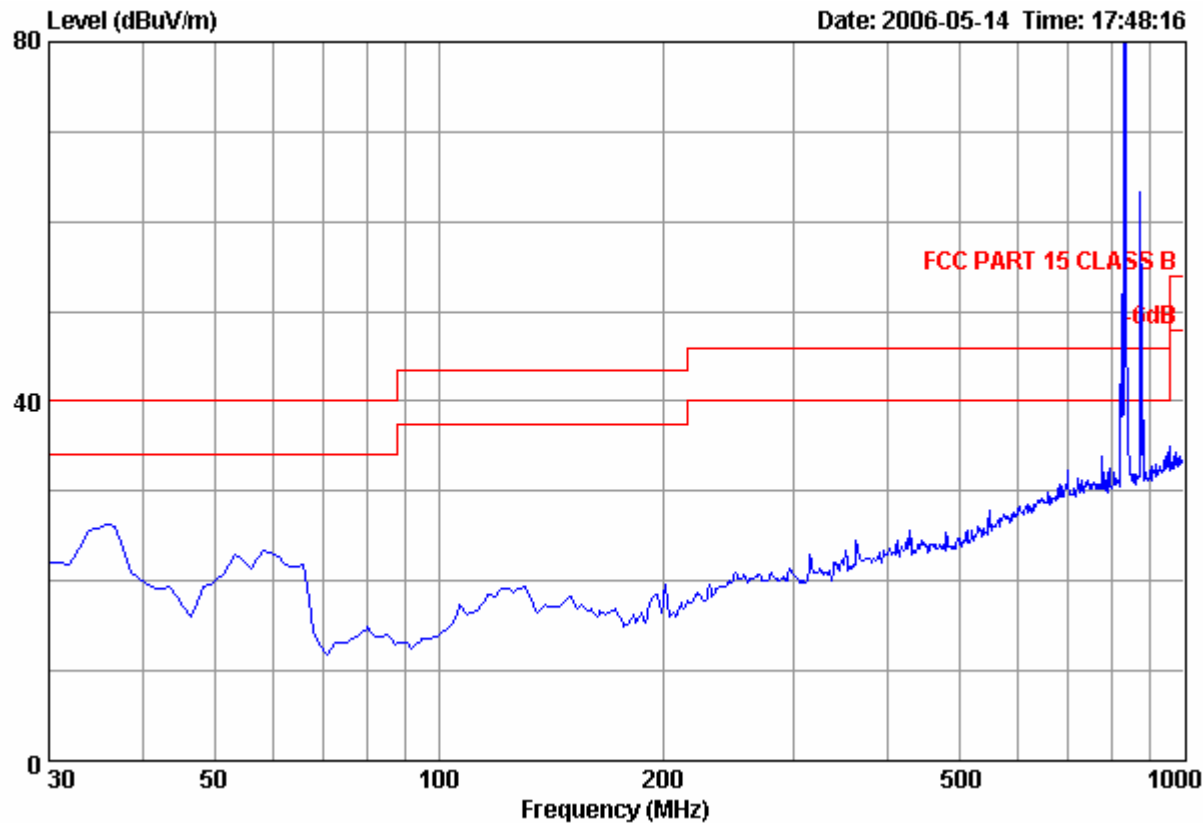

| Frequency<br>(MHz) | Antenna<br>Polarization | Receiver<br>QP Reading<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(cm) | Turntable<br>Angle<br>(° ) |
|--------------------|-------------------------|------------------------------------|-------------------|----------------|---------------------------|----------------------------|
| 30                 | Horizontal              | *                                  | 40                | *              | -                         | -                          |
| 45                 | Horizontal              | *                                  | 40                | *              | -                         | -                          |
| 88                 | Horizontal              | *                                  | 43.5              | *              | -                         | -                          |
| 150                | Horizontal              | *                                  | 43.5              | *              | -                         | -                          |
| 216                | Horizontal              | *                                  | 46                | *              | -                         | -                          |
| 560                | Horizontal              | *                                  | 46                | *              | -                         | -                          |
| 960                | Horizontal              | *                                  | 54                | *              | -                         | -                          |
| 1000               | Horizontal              | *                                  | 54                | *              |                           |                            |

- 1. All readings are Peak values.
- 2. “\*” means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 19 of 59

PCS 1900 connected: (test Mobile with 3DS09371AGAA of Leader power adaptor and headset. )

Horizontal:

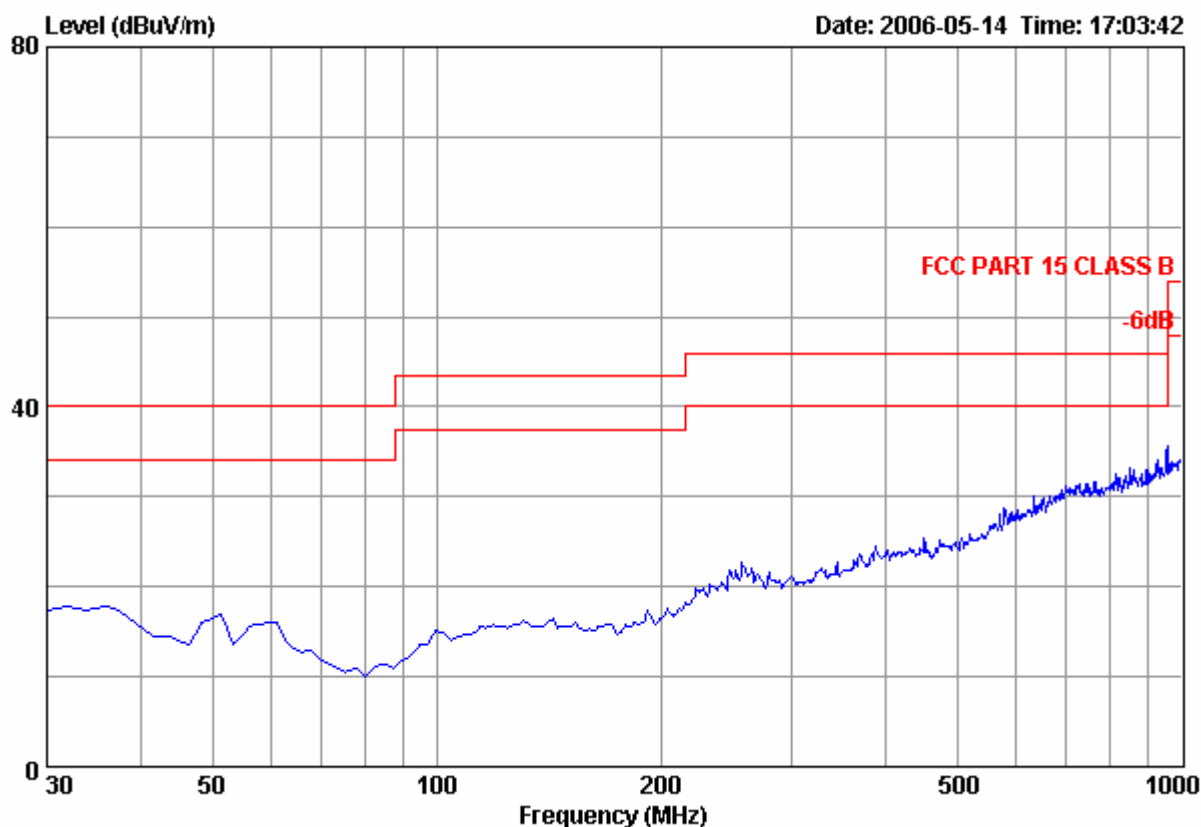

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 20 of 59

Vertical:

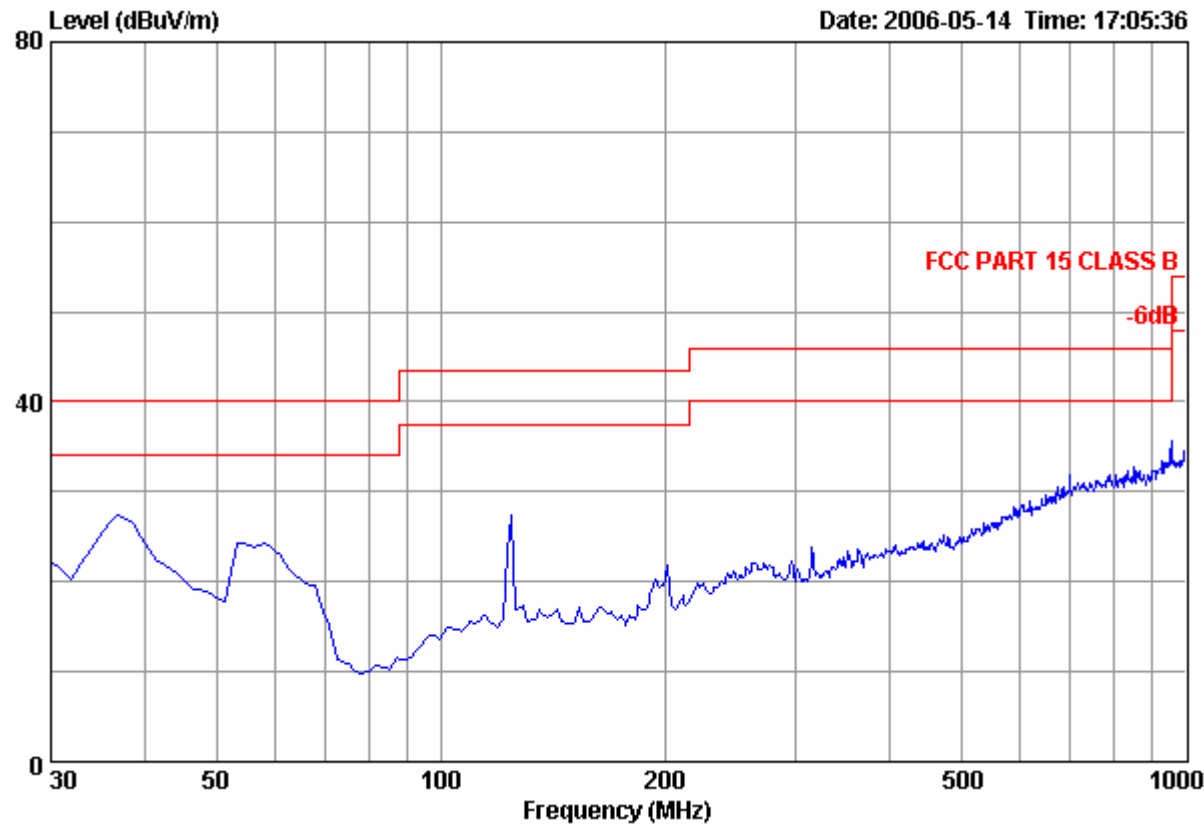

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. “\*” means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 21 of 59

PCS 1900 connected: (test Mobile with 3DS09371AGAA of Astec power adaptor and headset.)

Horizontal:

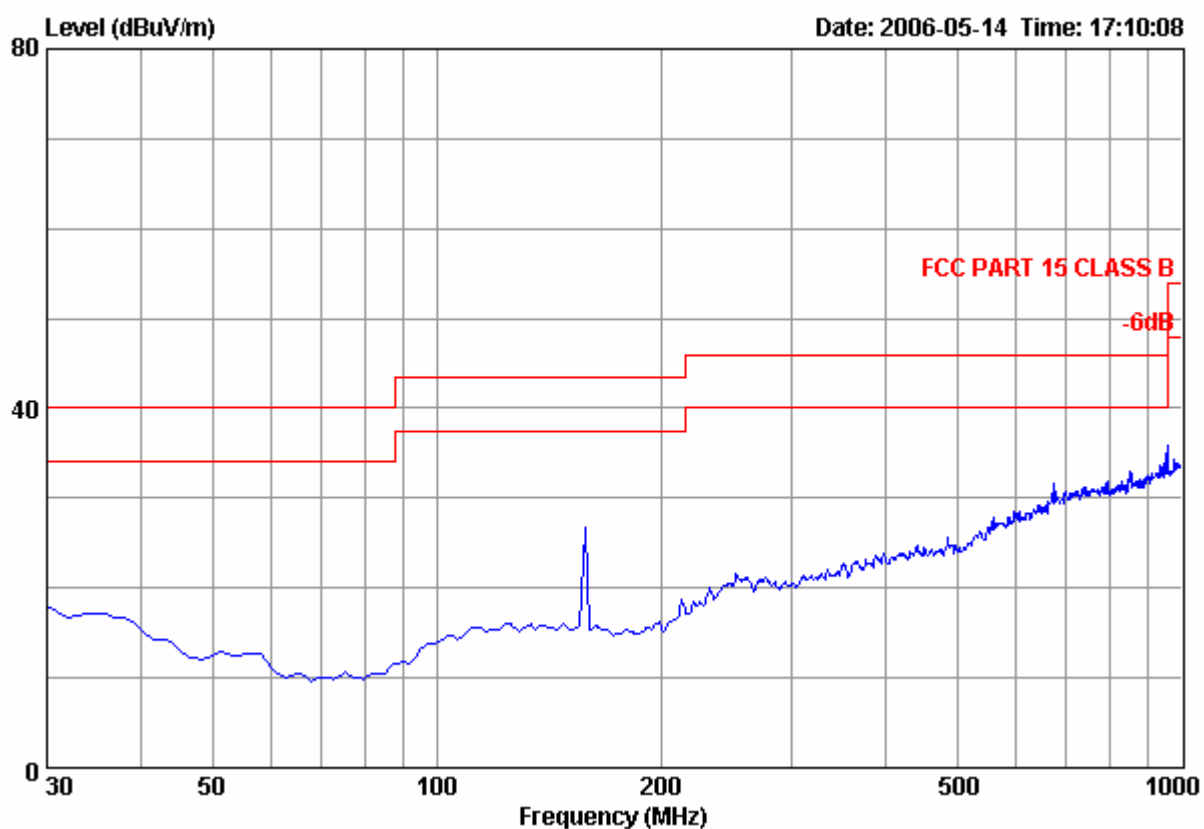

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 22 of 59

Vertical:

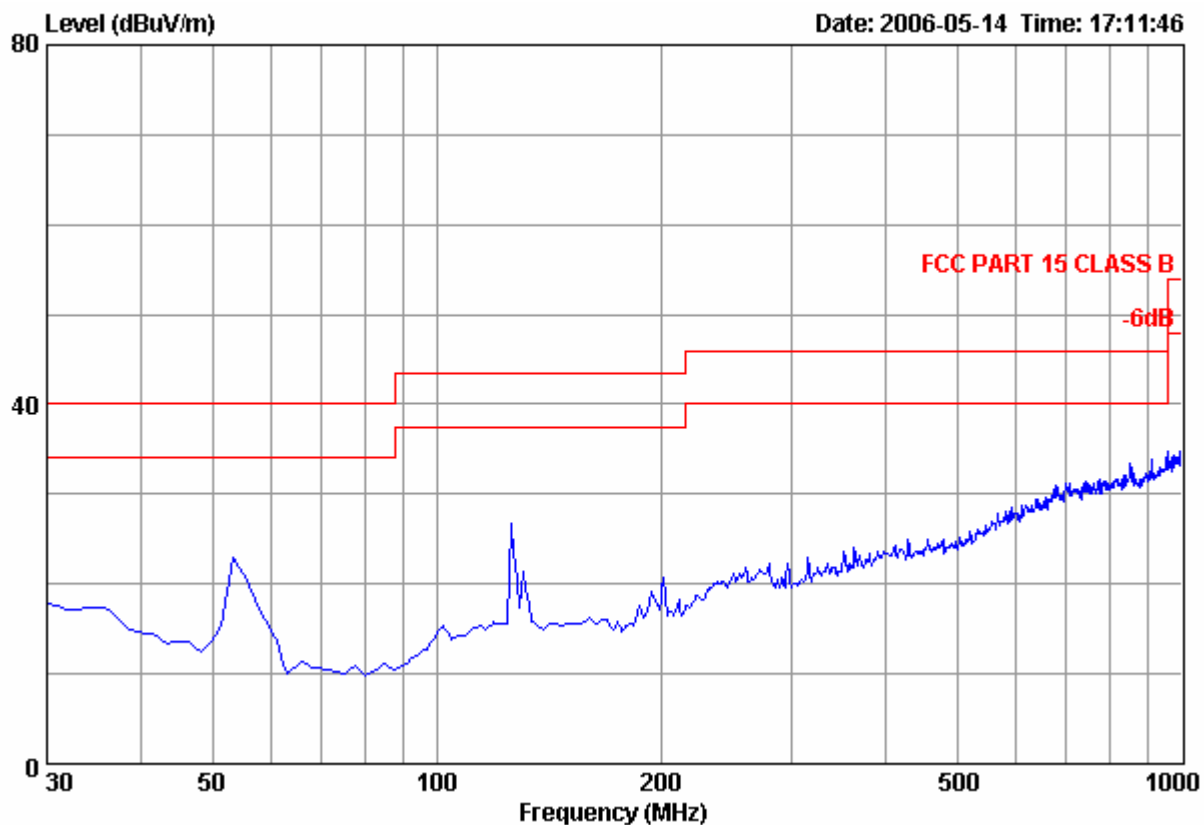

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 23 of 59

PCS 1900 connected: (test Mobile with 3DS09371AAAA of Astec power adaptor and headset.)

Horizontal:

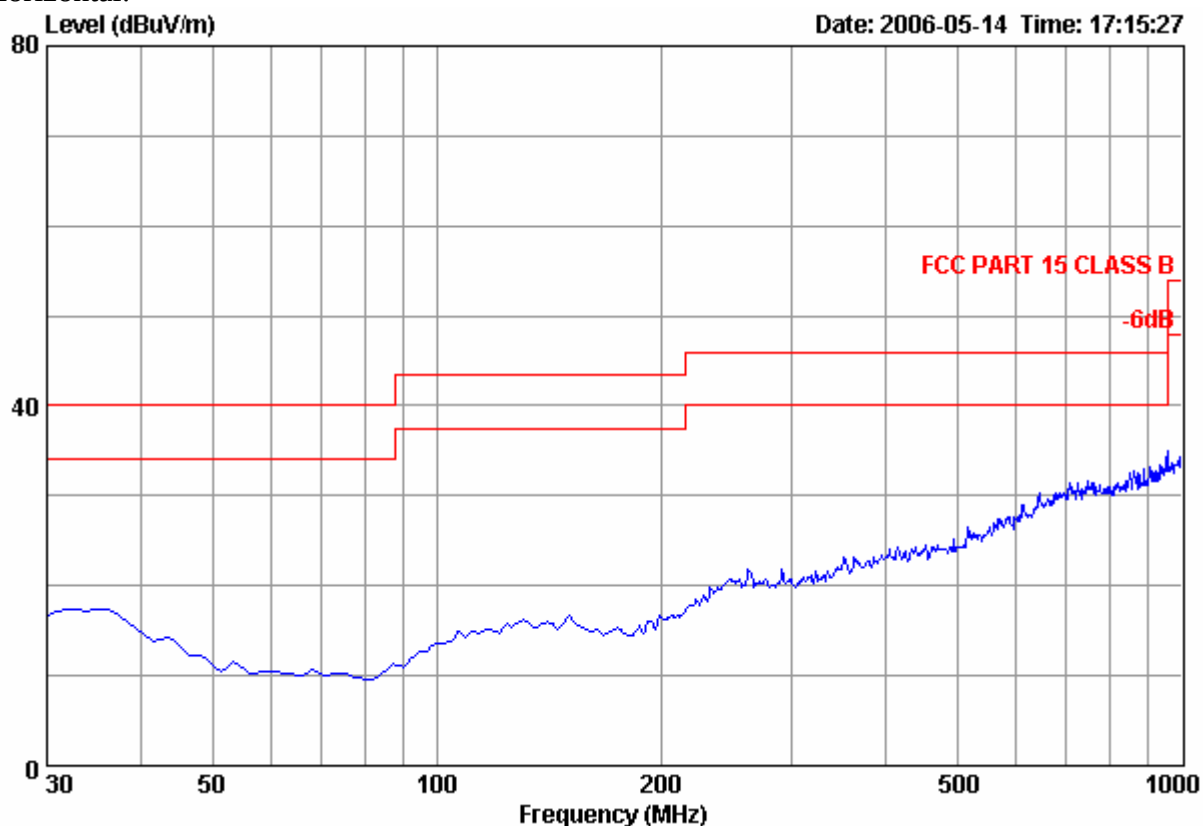

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 24 of 59

Vertical:

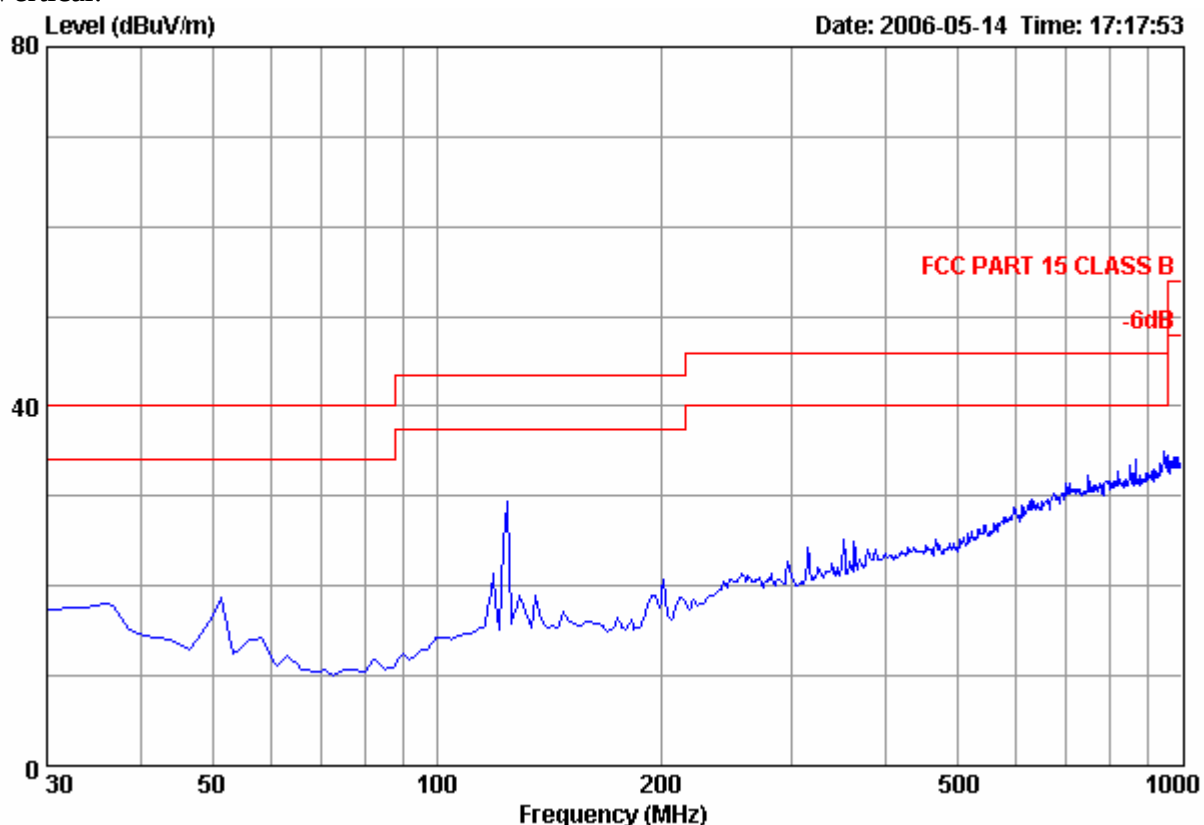

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.



# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 25 of 59

PCS 1900 connected: (test Mobile with 3DS09371AAAA of Leader power adaptor and headset.)

Horizontal:

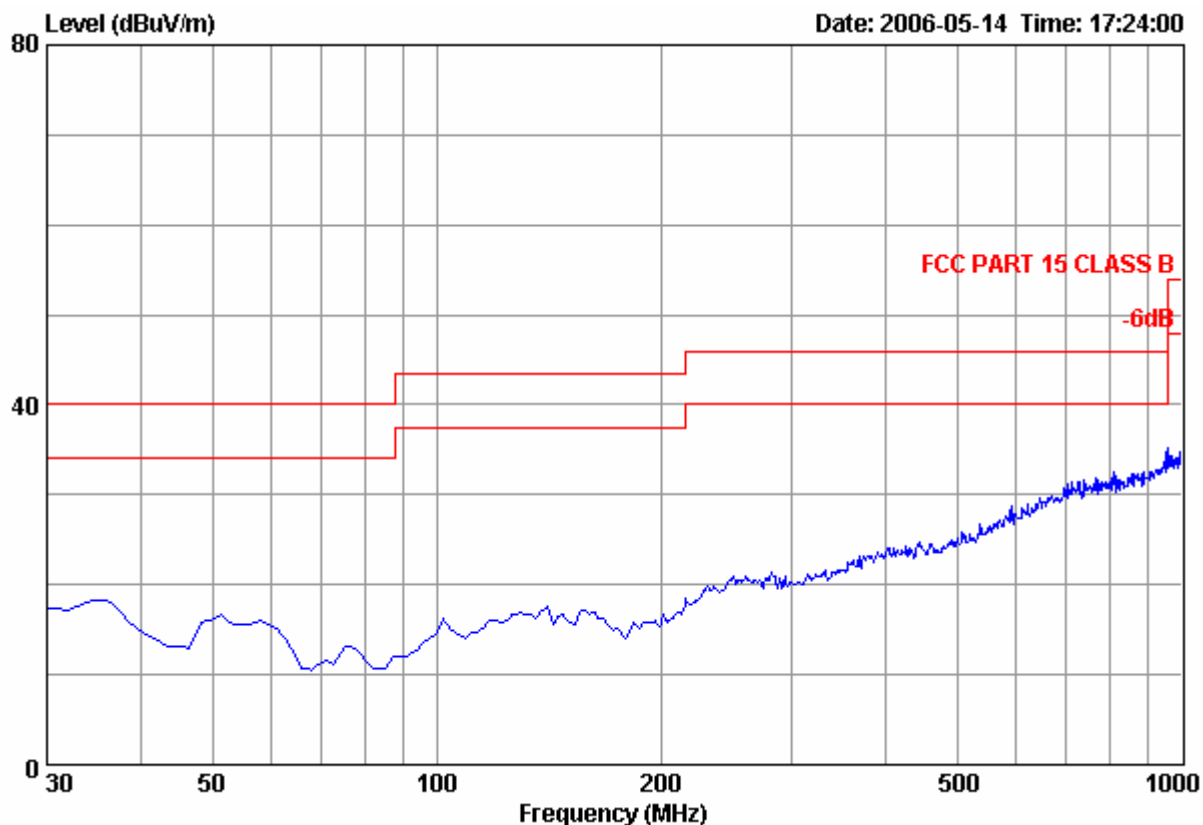

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 26 of 59

Vertical:

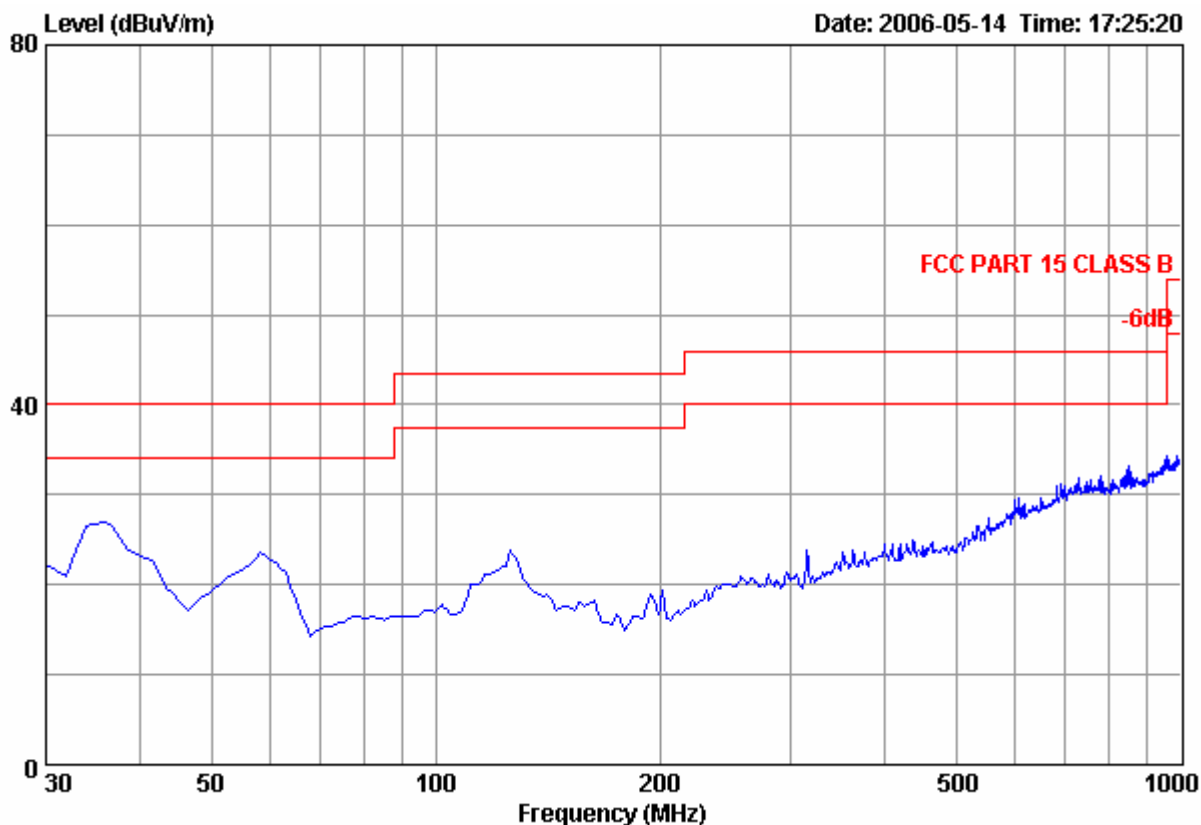

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 27 of 59

PCS 1900 connected: (test Mobile with 3DS07848AAAA of Primax power adaptor and headset.)

Horizontal:

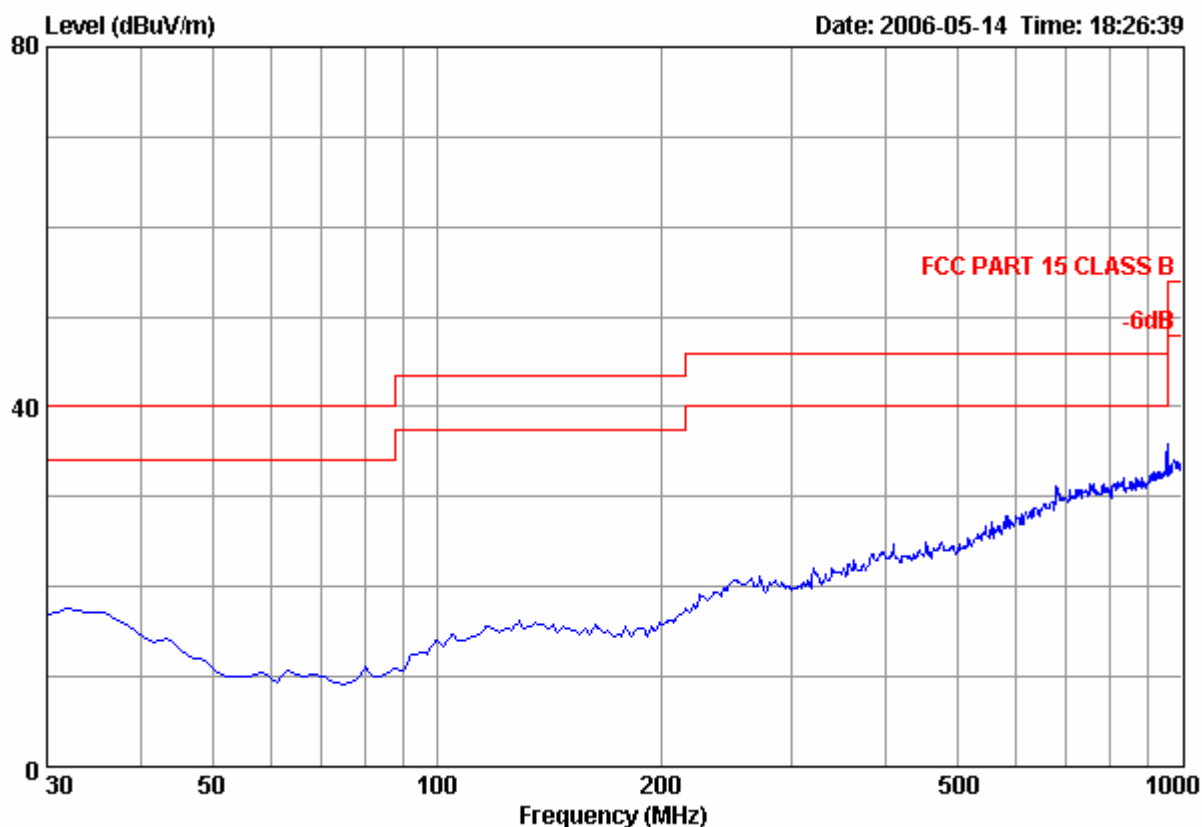

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           |                     |                     |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 28 of 59

Vertical:

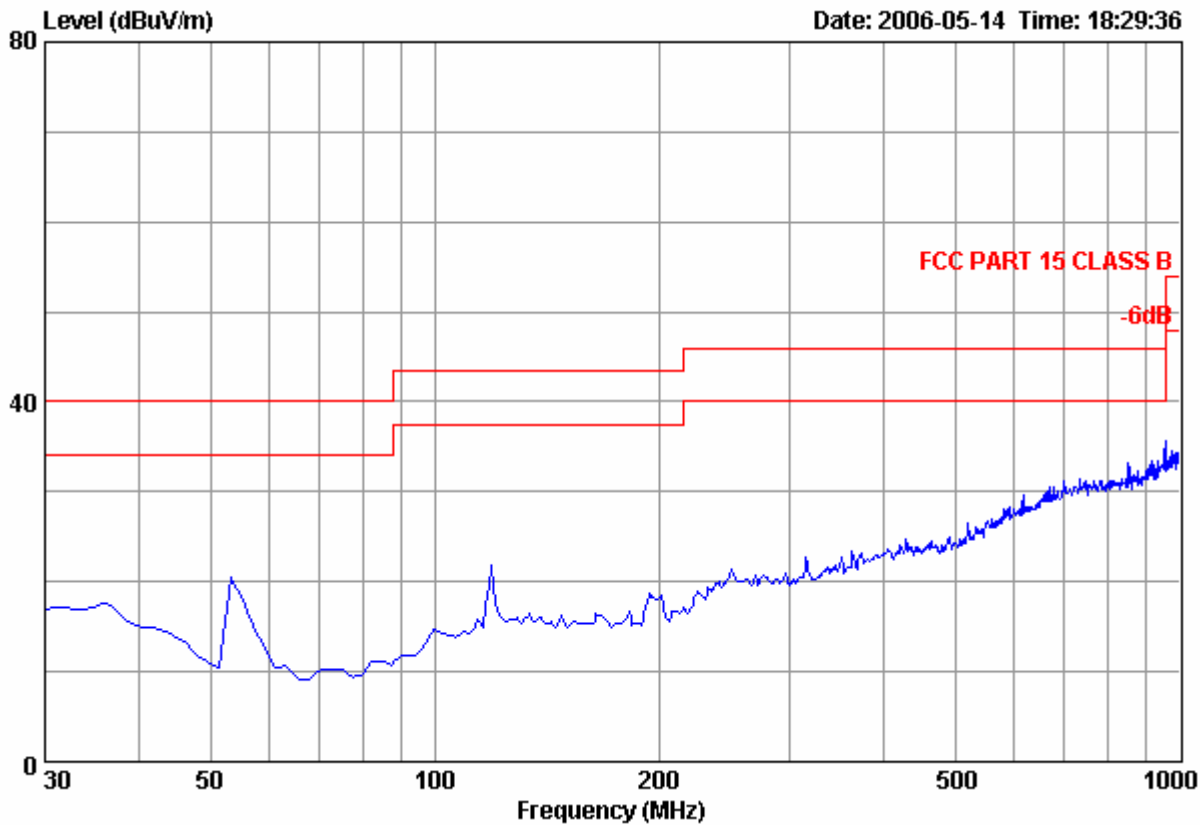

| Frequency (MHz) | Antenna Polarization | Receiver QP Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Turntable Angle (°) |
|-----------------|----------------------|------------------------------|----------------|-------------|---------------------|---------------------|
| 30              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 45              | Horizontal           | *                            | 40             | *           | -                   | -                   |
| 88              | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 150             | Horizontal           | *                            | 43.5           | *           | -                   | -                   |
| 216             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 560             | Horizontal           | *                            | 46             | *           | -                   | -                   |
| 960             | Horizontal           | *                            | 54             | *           | -                   | -                   |
| 1000            | Horizontal           | *                            | 54             | *           | -                   | -                   |

1. All readings are Peak values.
2. "\*" means the emission level is 6 dB below the relevant limit.

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 29 of 59

GSM 850 connected: (test OT-E205a with 3DS10628AGAA of Tenpao power adaptor )

Horizontal:

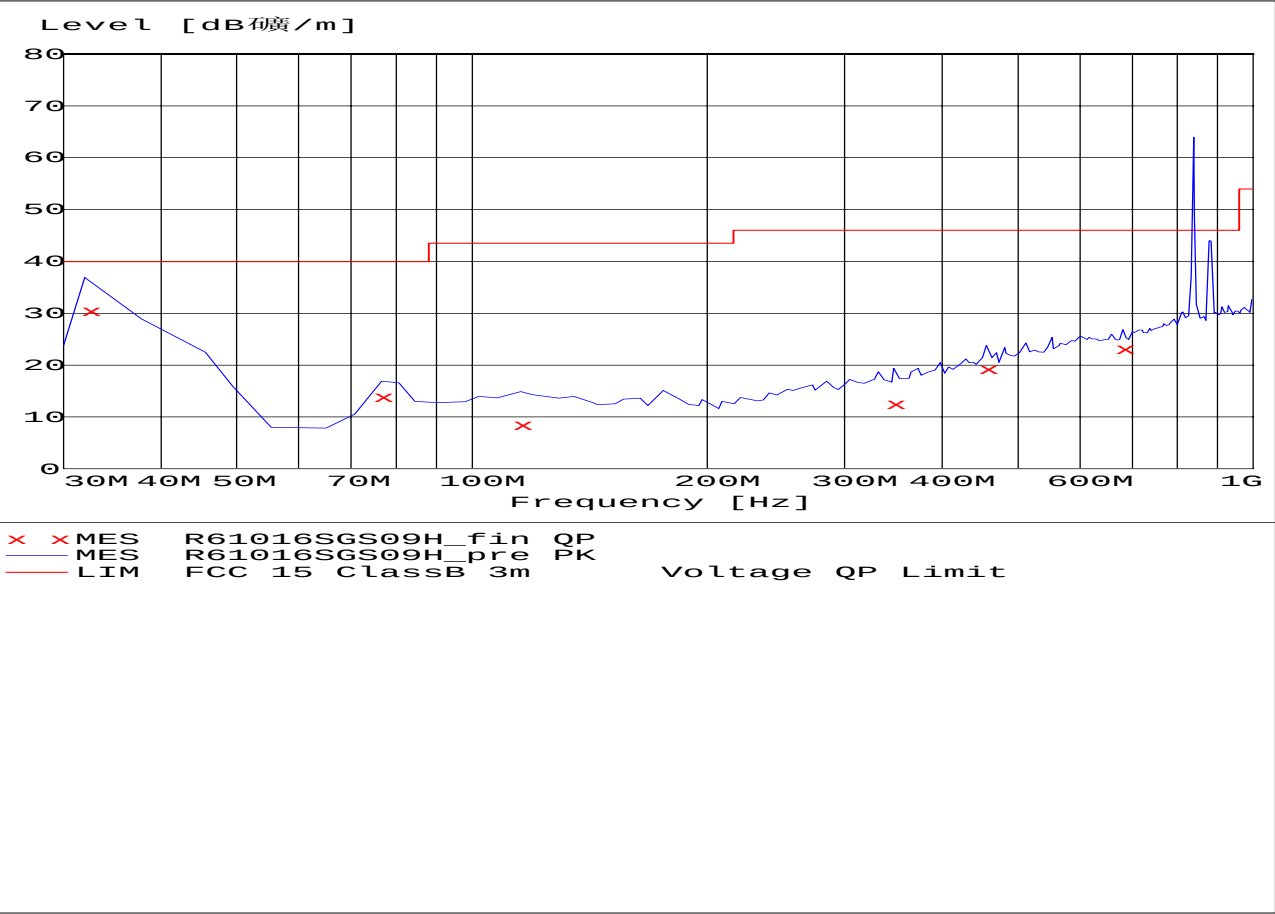

Frequency Level Height Azimuth Polarisation  
MHz dBµV/m cm deg

|            |       |       |        |            |
|------------|-------|-------|--------|------------|
| 32.327375  | 30.39 | 300.0 | 90.00  | HORIZONTAL |
| 76.653307  | 13.76 | 300.0 | 180.00 | HORIZONTAL |
| 115.531062 | 8.47  | 400.0 | 90.00  | HORIZONTAL |
| 346.853707 | 12.42 | 200.0 | 270.00 | HORIZONTAL |
| 455.711423 | 19.08 | 200.0 | 180.00 | HORIZONTAL |
| 681.202405 | 23.02 | 400.0 | 180.00 | HORIZONTAL |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 30 of 59

Vertical:

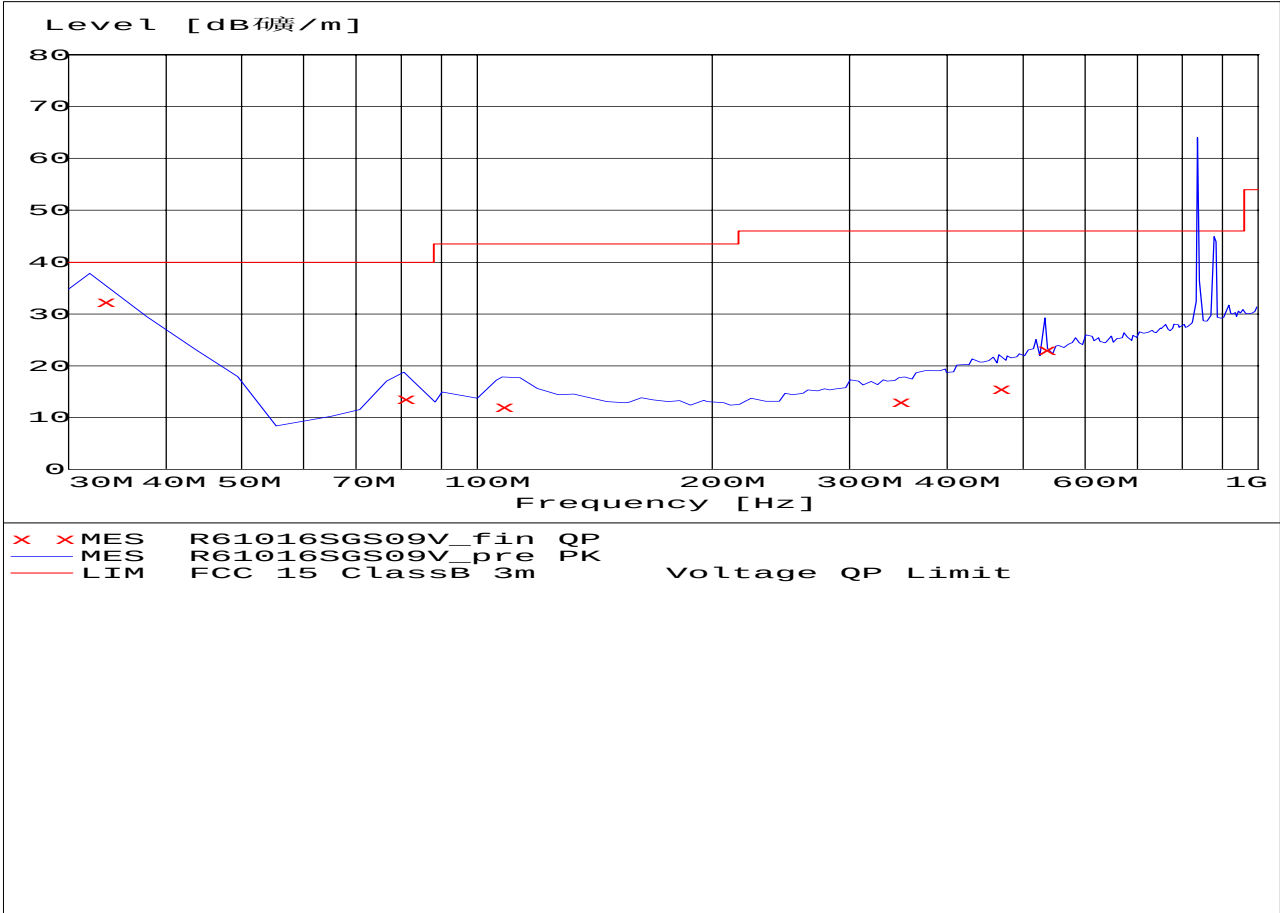

Frequency Level Height Azimuth Polarisation  
MHz dBµV/m cm deg

|            |       |       |        |          |
|------------|-------|-------|--------|----------|
| 33.244320  | 32.31 | 100.0 | 0.00   | VERTICAL |
| 80.541082  | 13.47 | 400.0 | 270.00 | VERTICAL |
| 107.755511 | 12.08 | 300.0 | 90.00  | VERTICAL |
| 346.853707 | 12.99 | 300.0 | 180.00 | VERTICAL |
| 465.430862 | 15.52 | 100.0 | 0.00   | VERTICAL |
| 533.466934 | 23.07 | 200.0 | 90.00  | VERTICAL |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 31 of 59

GSM 1900 connected: (test OT-E100a with 3DS10628AGAA of Tenpao power adaptor )

Horizontal:

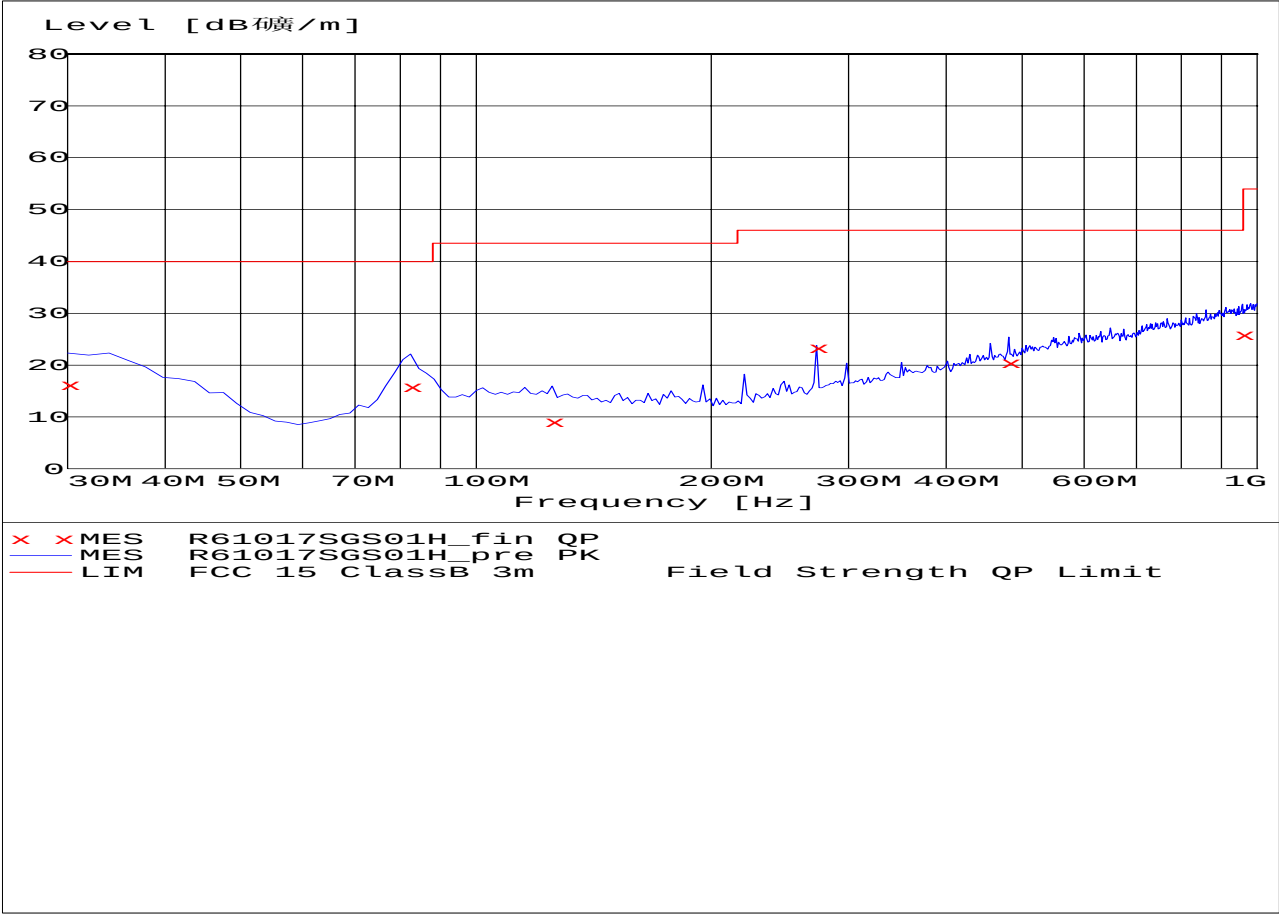

| Frequency  | Level  | Height | Azimuth | Polarisation | Limit  | Margin |
|------------|--------|--------|---------|--------------|--------|--------|
| MHz        | dBµV/m | cm     | deg     |              | dBµV/m | db     |
| 30.060120  | 16.12  | 200.0  | 0.00    | HORIZONTAL   | 40.00  | 23.88  |
| 82.484970  | 15.79  | 400.0  | 180.00  | HORIZONTAL   | 40.00  | 24.21  |
| 125.250501 | 8.97   | 300.0  | 0.00    | HORIZONTAL   | 43.50  | 34.53  |
| 272.965932 | 23.35  | 100.0  | 270.00  | HORIZONTAL   | 46.00  | 22.65  |
| 480.981964 | 20.41  | 100.0  | 90.00   | HORIZONTAL   | 46.00  | 25.59  |
| 957.234469 | 25.77  | 300.0  | 270.00  | HORIZONTAL   | 46.00  | 20.23  |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 32 of 59

Vertical:

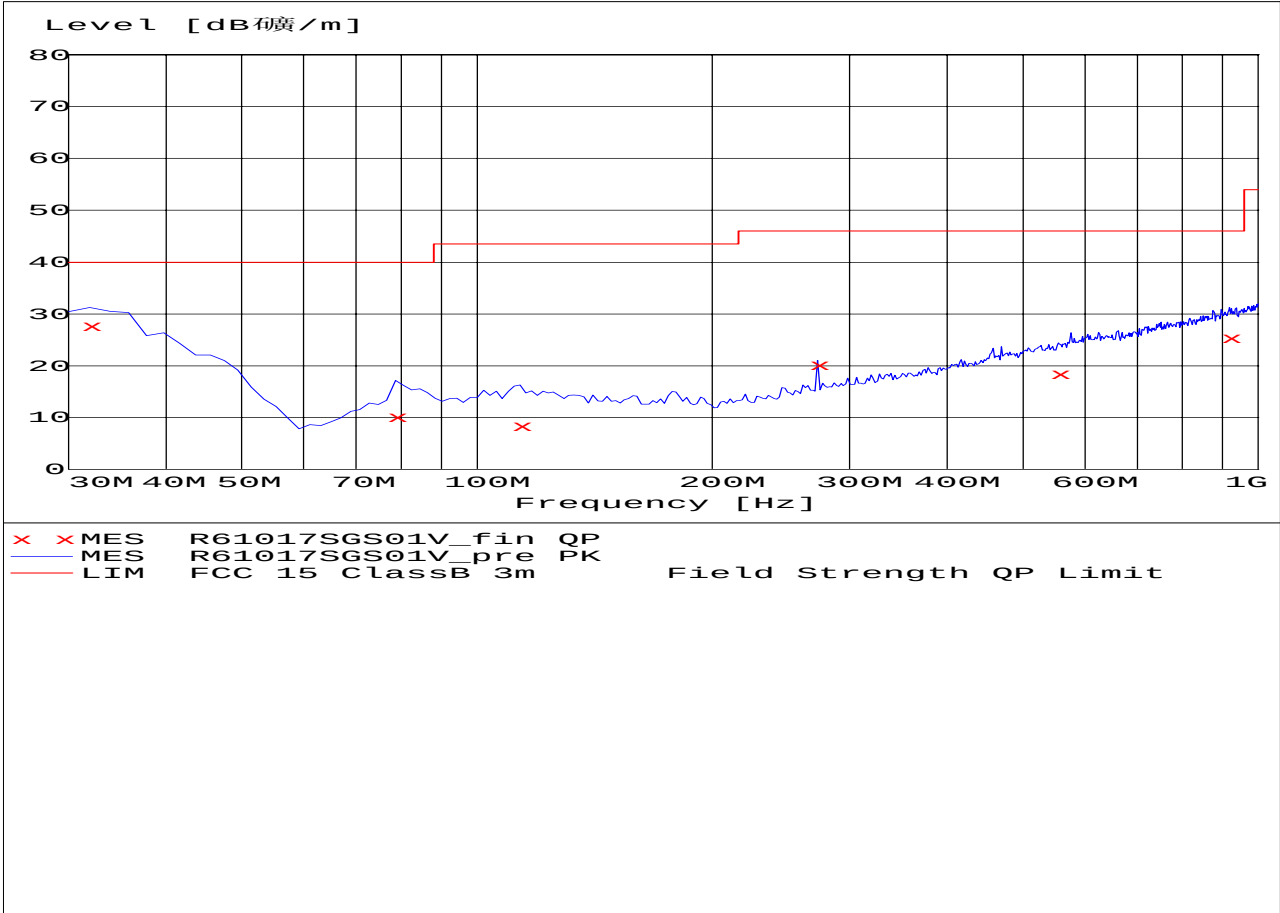

| Frequency  | Level  | Height | Azimuth | Polarisation | Limit  | Margin |
|------------|--------|--------|---------|--------------|--------|--------|
| MHz        | dBµV/m | cm     | deg     |              | dBµV/m | dB     |
| 31.943888  | 27.59  | 100.0  | 180.00  | VERTICAL     | 40.00  | 12.41  |
| 78.597194  | 10.13  | 300.0  | 90.00   | VERTICAL     | 40.00  | 29.87  |
| 113.587174 | 8.33   | 100.0  | 0.00    | VERTICAL     | 43.50  | 35.17  |
| 272.995992 | 20.21  | 100.0  | 180.00  | VERTICAL     | 46.00  | 25.79  |
| 554.849699 | 18.41  | 300.0  | 270.00  | VERTICAL     | 46.00  | 27.59  |
| 918.356713 | 25.27  | 100.0  | 0.00    | VERTICAL     | 46.00  | 20.73  |



## SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 33 of 59

### 6.2 Conducted Emissions, 150kHz to 30MHz

|                   |                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | CFR 47 part 15                                                                                                                                                      |
| Test Method:      | ANSI C63.4                                                                                                                                                          |
| Test Date:        | 24 April 2006 to 12 October 2006                                                                                                                                    |
| Frequency Range:  | 150kHz to 30MHz                                                                                                                                                     |
| Class:            | N/A                                                                                                                                                                 |
| Limit:            | 66 dB $\mu$ V - 56 dB $\mu$ V between 150kHz & 500kHz Quasi-peak<br>56 dB $\mu$ V between 0.5MHz & 5MHz Quasi-peak<br>60 dB $\mu$ V between 5MHz & 30MHz Quasi-peak |

#### 6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0°C Humidity: 58% RH Atmospheric Pressure:

EUT Operation: Test EUT is the in the allocated channel mode Charging, GSM850, PCS  
1900 with headset.

#### 6.2.2 Test Result and Partial Measurement Data

##### Pass

An initial pre-scan was performed in the Shielding room using the receiver in peak detection mode. The EUT was measured for 2 orthogonal polarities and peak emissions from the EUT were detected within 6dB of the class B limit line.

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 34 of 59

GSM 850 connected: (test Mobile with 3DS09371AGAA of Leader power adaptor and headset.)

L Line:

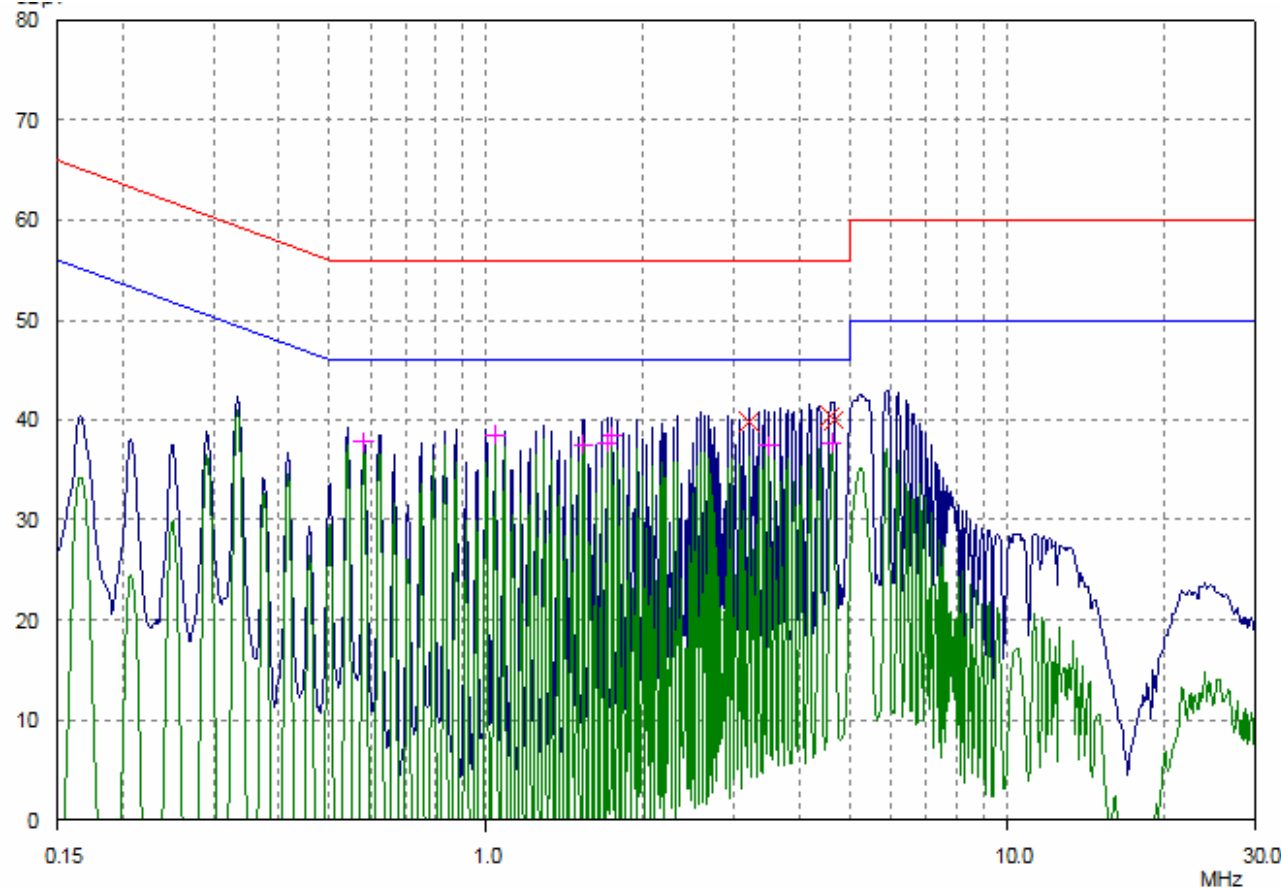

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 3.19842          | 39.75            | 56.00            | 16.25          |
| 4.57782          | 40.48            | 56.00            | 15.52          |
| 4.65136          | 40.00            | 56.00            | 16.00          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.58127          | 37.79            | 46.00            | 8.21           |
| 1.03992          | 38.38            | 46.00            | 7.62           |
| 1.53662          | 37.55            | 46.00            | 8.45           |
| 1.70432          | 37.72            | 46.00            | 8.28           |
| 1.74556          | 38.38            | 46.00            | 7.62           |
| 3.49141          | 37.40            | 46.00            | 8.60           |
| 4.61445          | 37.72            | 46.00            | 8.28           |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 35 of 59

N Line:

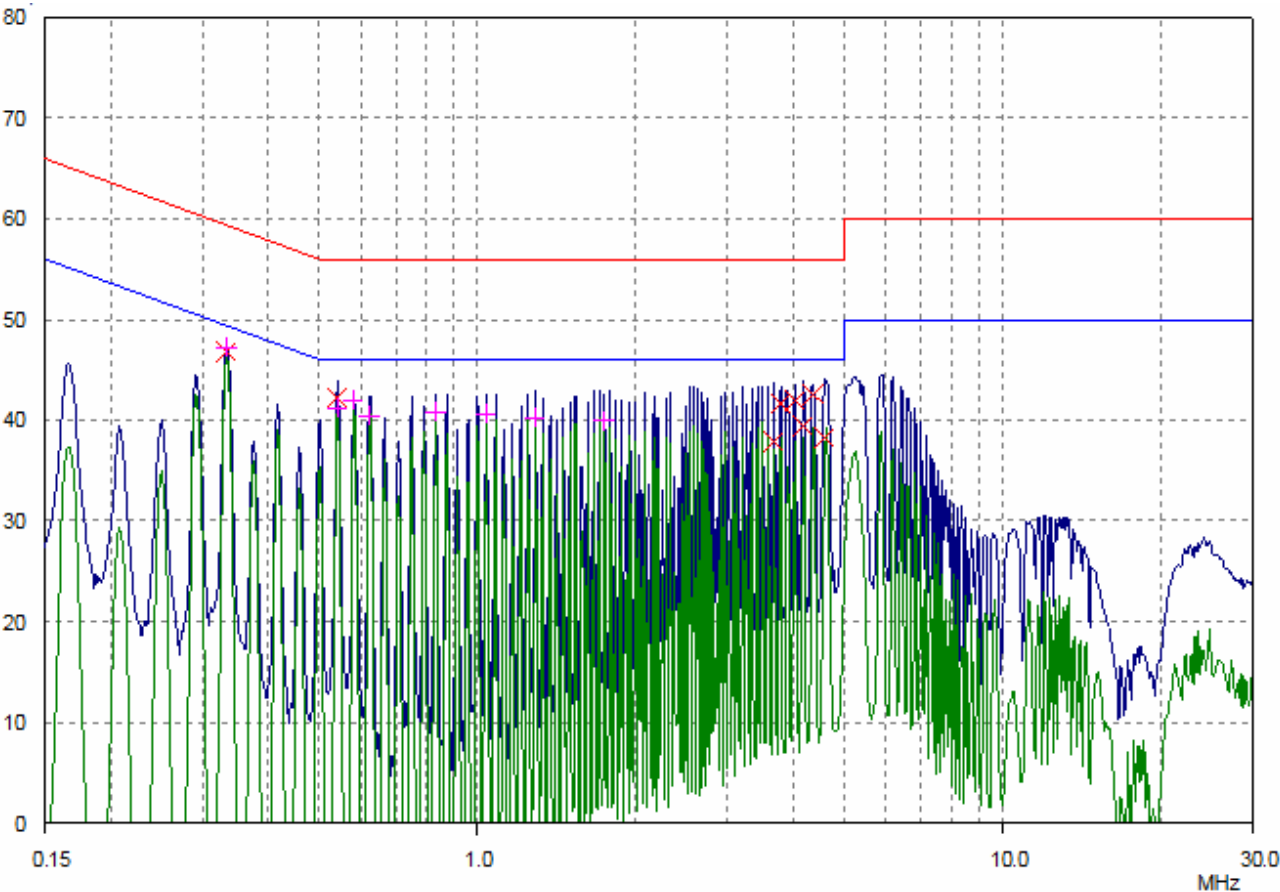

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.33277          | 46.80            | 59.38            | 12.58          |
| 0.54104          | 42.23            | 56.00            | 13.77          |
| 3.66239          | 37.85            | 56.00            | 18.15          |
| 3.781            | 41.62            | 56.00            | 14.38          |
| 4.02986          | 41.90            | 56.00            | 14.10          |
| 4.16038          | 39.41            | 56.00            | 16.59          |
| 4.36411          | 42.53            | 56.00            | 13.47          |
| 4.57782          | 38.28            | 56.00            | 17.72          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.33277          | 47.11            | 49.38            | 2.27           |
| 0.54104          | 41.28            | 46.00            | 4.72           |
| 0.58127          | 41.92            | 46.00            | 4.08           |
| 0.62449          | 40.39            | 46.00            | 5.61           |
| 0.83196          | 40.72            | 46.00            | 5.28           |
| 1.03992          | 40.62            | 46.00            | 5.38           |
| 1.28954          | 40.17            | 46.00            | 5.83           |
| 1.74556          | 39.98            | 46.00            | 6.02           |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 36 of 59

GSM 850 connected: (test Mobile with 3DS09371AGAA of Astec power adaptor and headset.)

L Line:

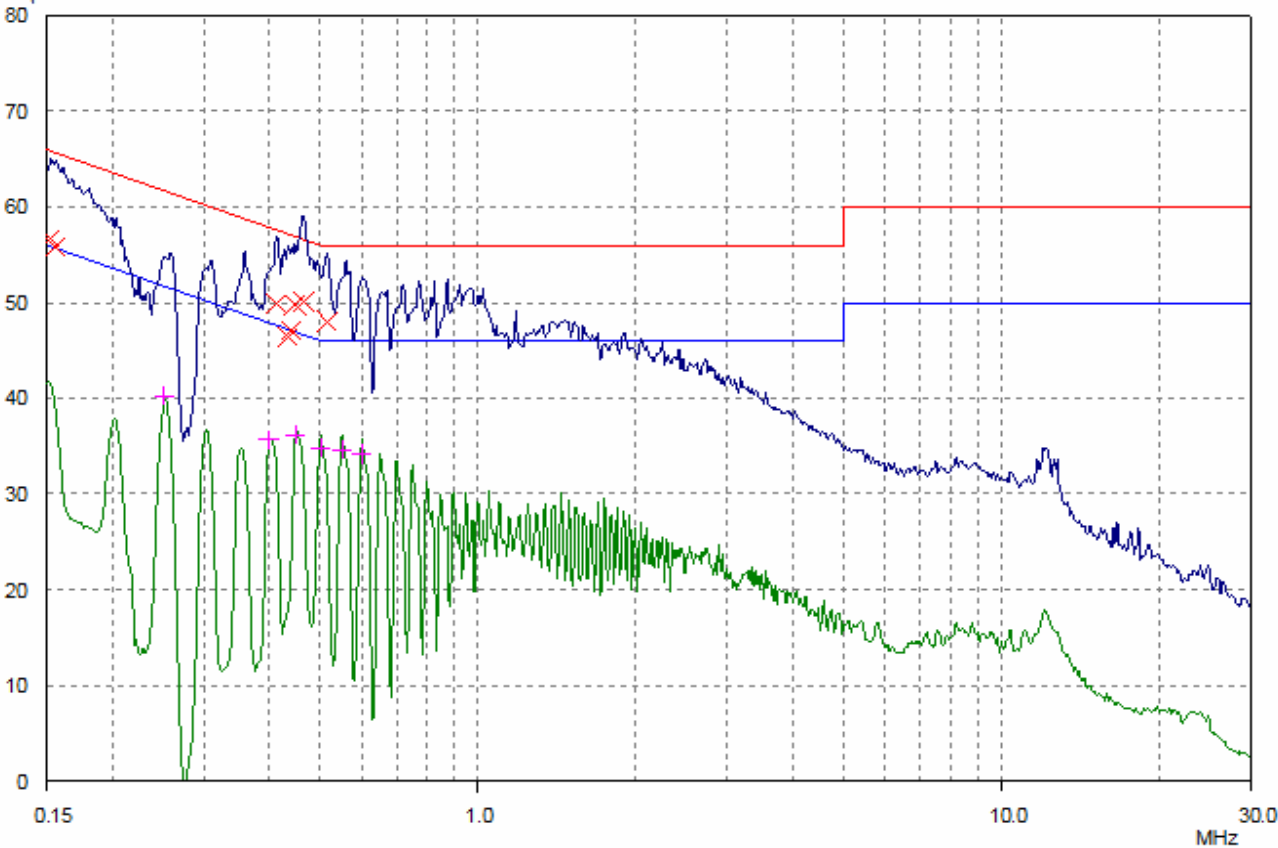

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.1524           | 56.68            | 65.87            | 9.19           |
| 0.15609          | 55.76            | 65.67            | 9.91           |
| 0.41264          | 49.87            | 57.59            | 7.72           |
| 0.43285          | 46.35            | 57.20            | 10.85          |
| 0.4398           | 47.10            | 57.07            | 9.97           |
| 0.44687          | 49.73            | 56.93            | 7.20           |
| 0.46503          | 50.07            | 56.60            | 6.53           |
| 0.51578          | 48.04            | 56.00            | 7.96           |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.25178          | 40.24            | 51.70            | 11.46          |
| 0.3997           | 35.73            | 47.86            | 12.13          |
| 0.45044          | 36.17            | 46.87            | 10.70          |
| 0.49961          | 34.77            | 46.01            | 11.24          |
| 0.54974          | 34.60            | 46.00            | 11.40          |
| 0.6001           | 34.10            | 46.00            | 11.90          |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 37 of 59

N Line:

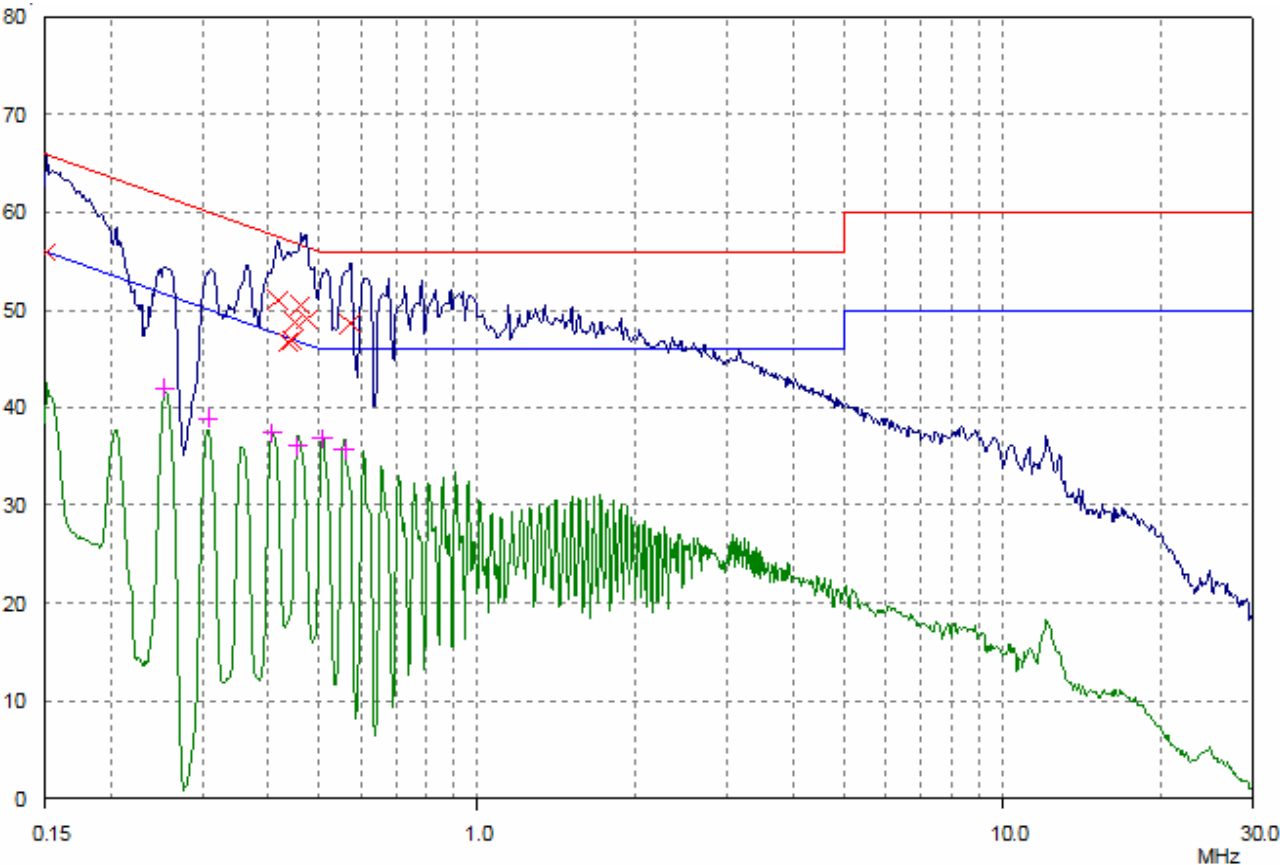

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.1512           | 55.94            | 65.93            | 9.99           |
| 0.41594          | 51.03            | 57.53            | 6.50           |
| 0.43631          | 46.74            | 57.13            | 10.39          |
| 0.44332          | 46.92            | 57.00            | 10.08          |
| 0.45044          | 48.77            | 56.87            | 8.10           |
| 0.46134          | 50.52            | 56.67            | 6.15           |
| 0.4725           | 49.04            | 56.47            | 7.43           |
| 0.57208          | 48.59            | 56.00            | 7.41           |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.25379          | 41.99            | 51.63            | 9.64           |
| 0.30728          | 38.87            | 50.04            | 11.17          |
| 0.40612          | 37.42            | 47.73            | 10.31          |
| 0.45405          | 36.08            | 46.80            | 10.72          |
| 0.50763          | 36.84            | 46.00            | 9.16           |
| 0.55857          | 35.72            | 46.00            | 10.28          |

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 38 of 59

GSM 850 connected: (test Mobile with 3DS09371AAAA of Astec power adaptor and headset.)

L Line:

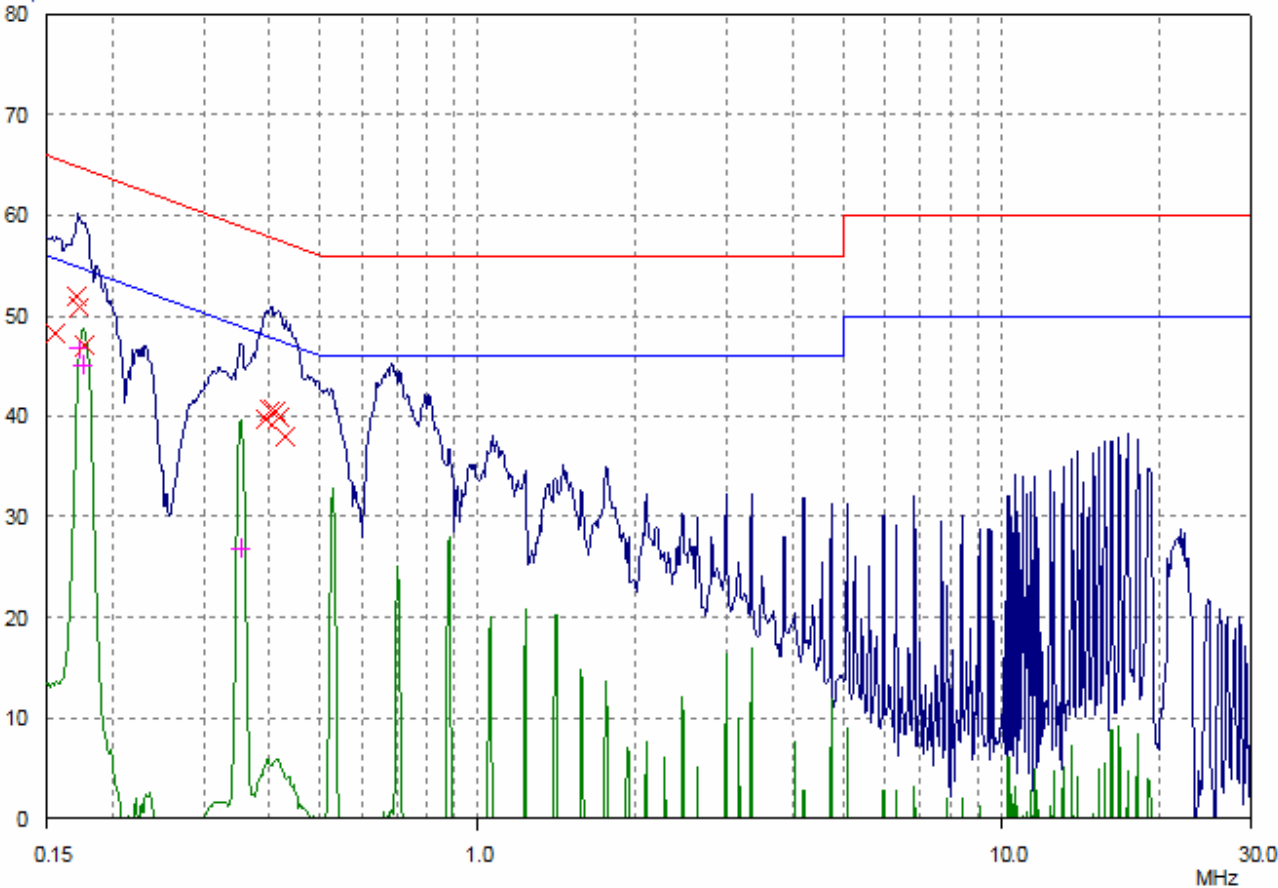

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.15609          | 48.28            | 65.67            | 17.39          |
| 0.17175          | 51.96            | 64.88            | 12.92          |
| 0.17332          | 50.90            | 64.80            | 13.90          |
| 0.17732          | 47.03            | 64.61            | 17.58          |
| 0.39338          | 39.67            | 57.99            | 18.32          |
| 0.40289          | 40.59            | 57.79            | 17.20          |
| 0.40937          | 40.53            | 57.66            | 17.13          |
| 0.41594          | 39.86            | 57.53            | 17.67          |
| 0.42941          | 37.99            | 57.26            | 19.27          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.17332          | 46.69            | 54.80            | 8.11           |
| 0.17591          | 45.04            | 54.68            | 9.64           |
| 0.35185          | 26.90            | 48.92            | 22.02          |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 39 of 59

N Line:

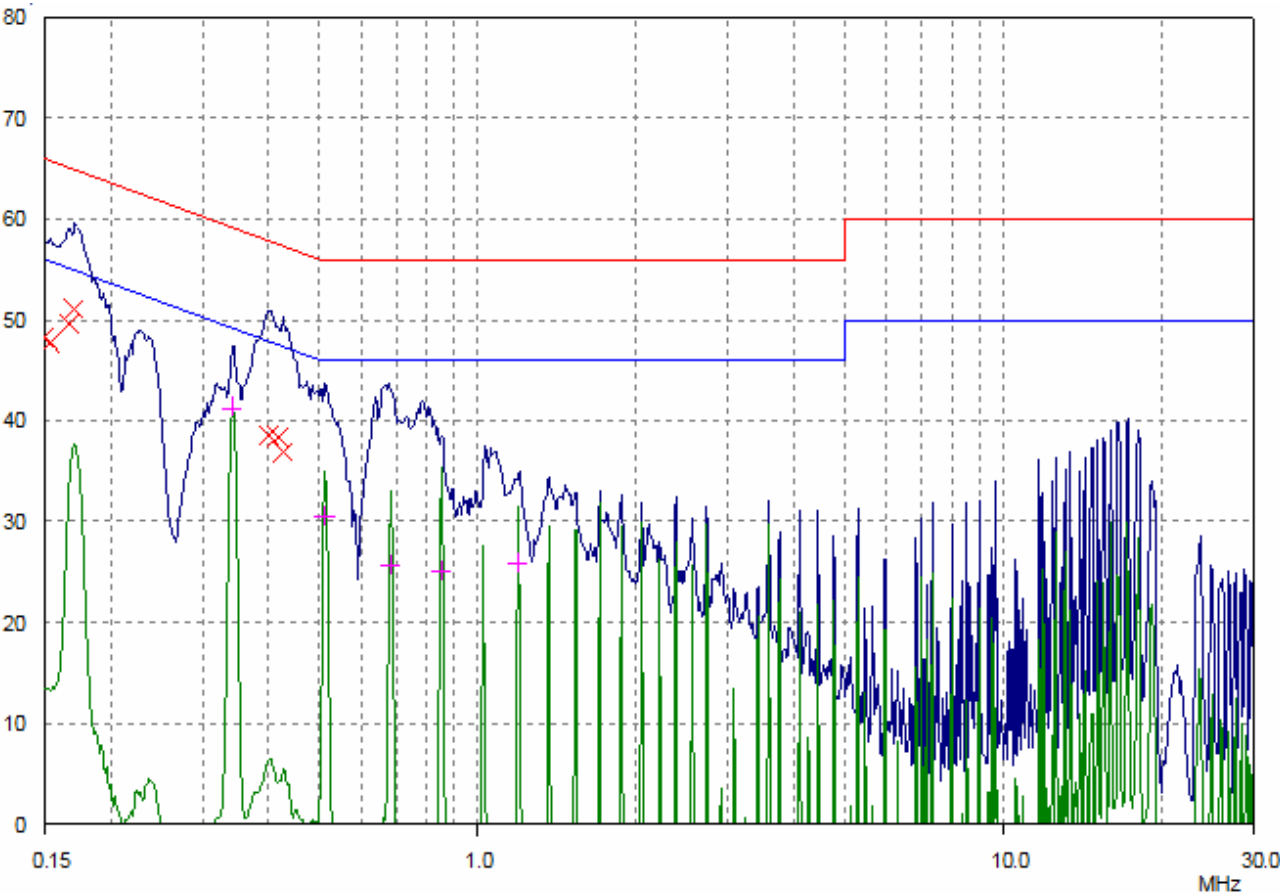

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.15             | 48.26            | 66.00            | 17.74          |
| 0.15362          | 47.72            | 65.80            | 18.08          |
| 0.16637          | 49.58            | 65.14            | 15.56          |
| 0.17039          | 51.02            | 64.94            | 13.92          |
| 0.3997           | 38.57            | 57.86            | 19.29          |
| 0.41594          | 38.42            | 57.53            | 19.11          |
| 0.42601          | 36.91            | 57.33            | 20.42          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.34082          | 41.28            | 49.18            | 7.90           |
| 0.51169          | 30.49            | 46.00            | 15.51          |
| 0.68169          | 25.66            | 46.00            | 20.34          |
| 0.85209          | 25.07            | 46.00            | 20.93          |
| 1.19077          | 25.81            | 46.00            | 20.19          |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 40 of 59

GSM 850 connected: (test Mobile with 3DS09371AAAA of Leader power adaptor and headset.)

L Line:

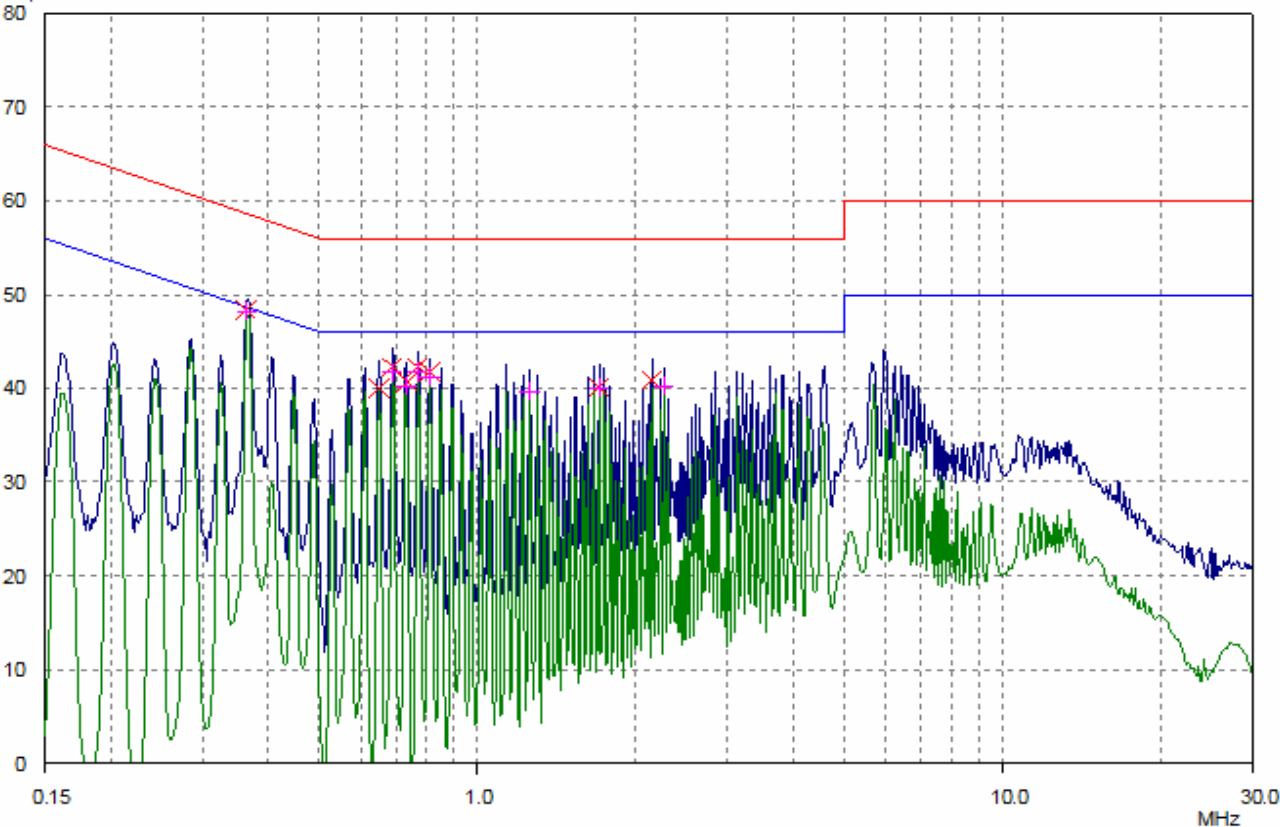

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.36325          | 48.37            | 58.65            | 10.28          |
| 0.64987          | 40.00            | 56.00            | 16.00          |
| 0.68715          | 42.31            | 56.00            | 13.69          |
| 0.73238          | 40.68            | 56.00            | 15.32          |
| 0.76824          | 42.27            | 56.00            | 13.73          |
| 0.81231          | 41.72            | 56.00            | 14.28          |
| 1.70432          | 40.07            | 56.00            | 15.93          |
| 2.14738          | 40.91            | 56.00            | 15.09          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.36325          | 48.24            | 48.65            | 0.41           |
| 0.68715          | 41.67            | 46.00            | 4.33           |
| 0.73238          | 40.15            | 46.00            | 5.85           |
| 0.76824          | 41.70            | 46.00            | 4.30           |
| 0.81231          | 41.22            | 46.00            | 4.78           |
| 1.25908          | 39.61            | 46.00            | 6.39           |
| 1.70432          | 40.07            | 46.00            | 5.93           |
| 2.27055          | 40.21            | 46.00            | 5.79           |




SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 41 of 59

N Line:

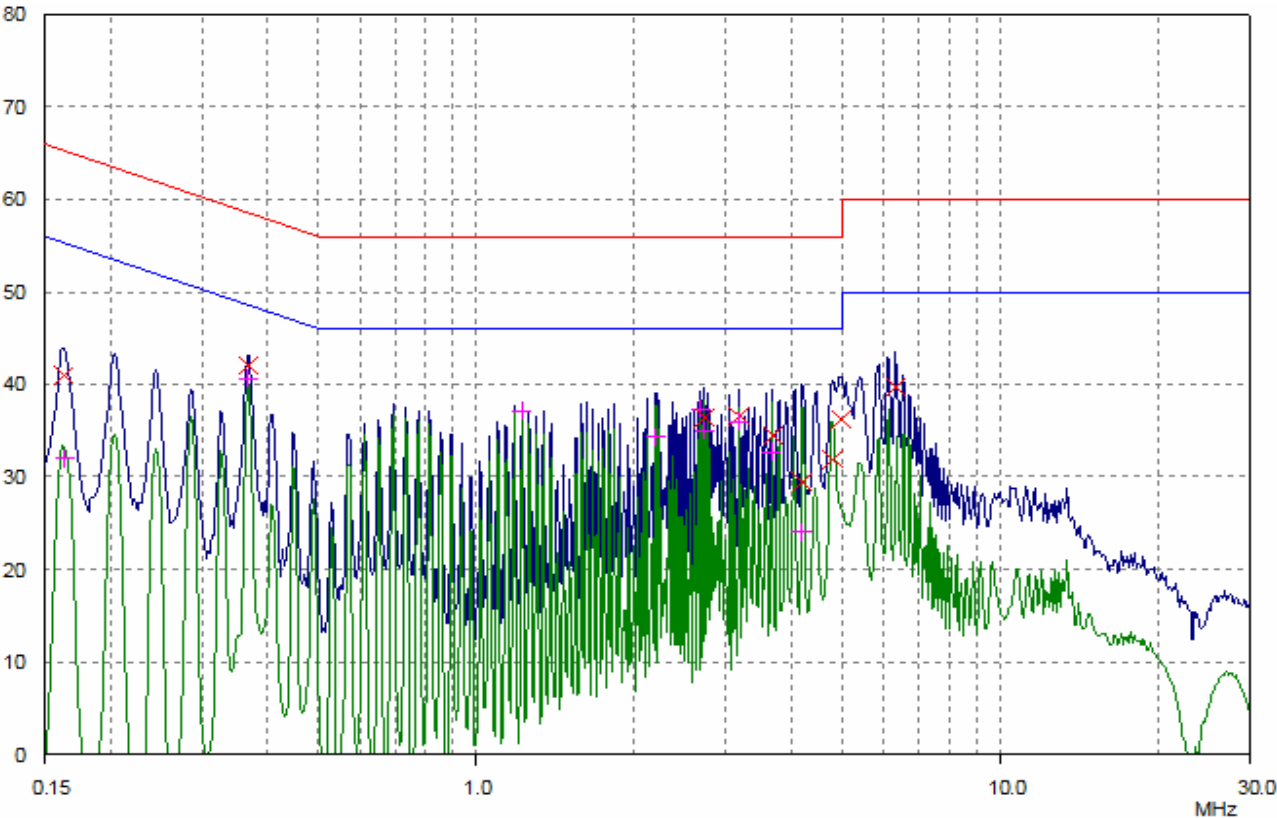

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.16374          | 40.98            | 65.27            | 24.29          |
| 0.36615          | 41.98            | 58.59            | 16.61          |
| 2.72724          | 36.36            | 56.00            | 19.64          |
| 3.17303          | 36.59            | 56.00            | 19.41          |
| 3.66239          | 34.47            | 56.00            | 21.53          |
| 4.19366          | 29.47            | 56.00            | 26.53          |
| 4.802            | 31.86            | 56.00            | 24.14          |
| 4.95752          | 36.17            | 56.00            | 19.83          |
| 6.29623          | 39.71            | 60.00            | 20.29          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.16374          | 31.96            | 55.27            | 23.31          |
| 0.36615          | 40.60            | 48.59            | 7.99           |
| 1.21958          | 37.18            | 46.00            | 8.82           |
| 2.19933          | 34.27            | 46.00            | 11.73          |
| 2.68413          | 37.39            | 46.00            | 8.61           |
| 2.72724          | 35.04            | 46.00            | 10.96          |
| 3.17303          | 35.90            | 46.00            | 10.10          |
| 3.66239          | 32.58            | 46.00            | 13.42          |
| 4.19366          | 24.04            | 46.00            | 21.96          |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 42 of 59

GSM 850 connected: (test Mobile with 3DS07848AAAA of Primax power adaptor and headset.)

Negative:

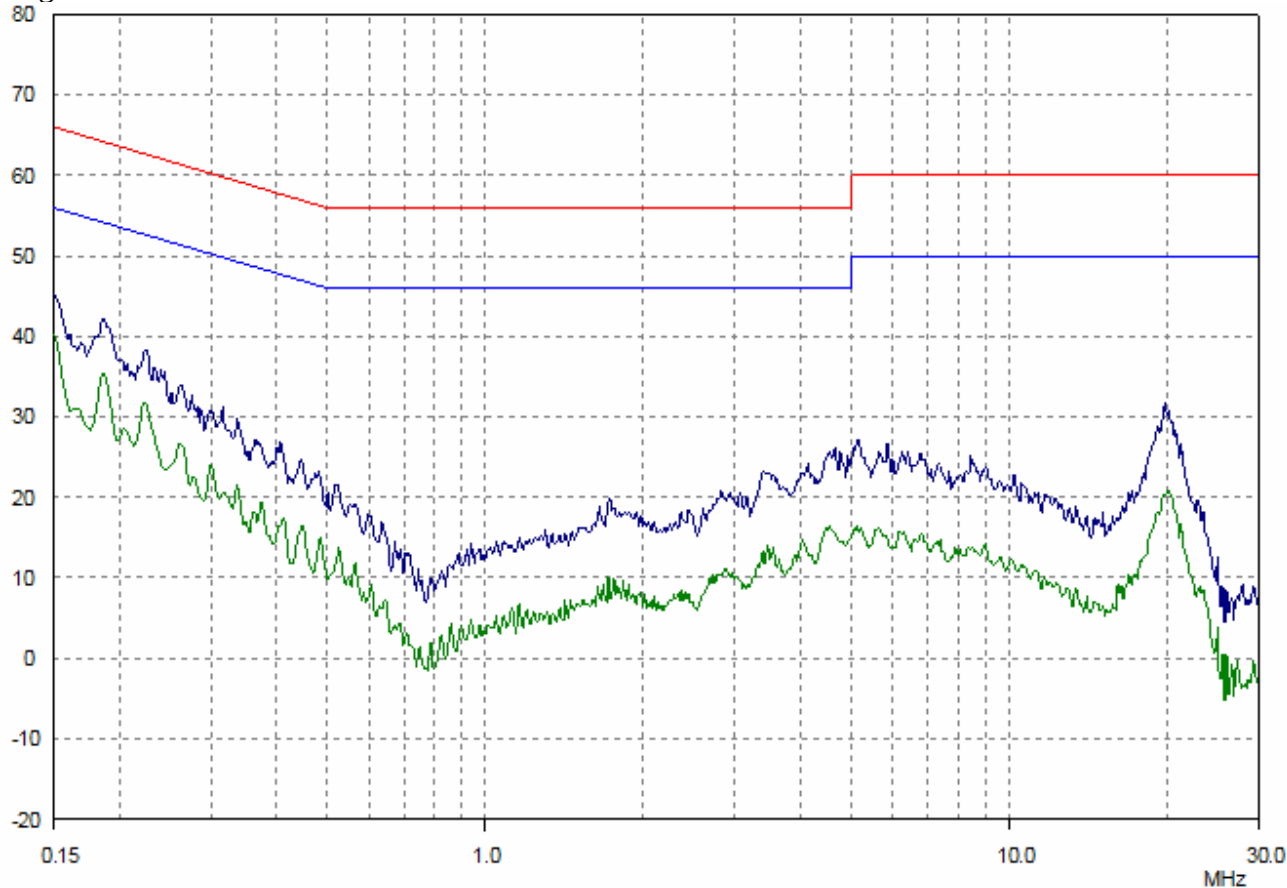

| Frequency | Receiver |        |        | Receiver |        |        |
|-----------|----------|--------|--------|----------|--------|--------|
| (MHz)     | QP       | Limit  | Margin | AV       | Limit  | Margin |
|           | Level    |        |        | Level    |        |        |
|           | (dBuV)   | (dBuV) | (dB)   | (dBuV)   | (dBuV) | (dB)   |
| 0.15      | *        | 66     | *      | *        | 56     | *      |
| 0.24      | *        | 63.43  | *      | *        | 53.44  | *      |
| 0.543     | *        | 56     | *      | *        | 46     | *      |
| 5.00      | *        | 56     | *      | *        | 46     | *      |
| 10.00     | *        | 60     | *      | *        | 50     | *      |
| 22.00     | *        | 60     | *      | *        | 50     | *      |
| 30.00     | *        | 60     | *      | *        | 50     | *      |

“\*” means the emission level is 6dB lower than the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 43 of 59

Positive:

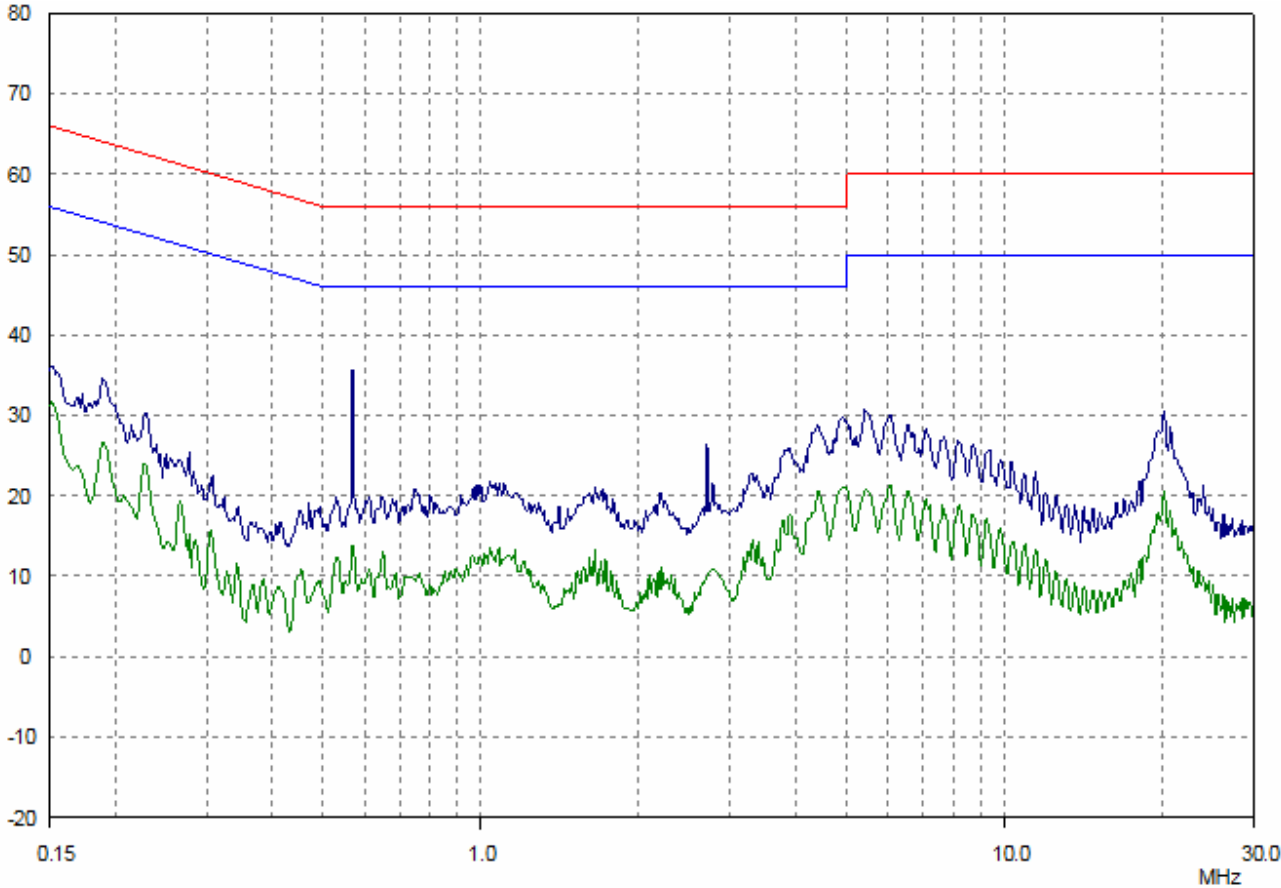

| Frequency | Receiver |        |        | Receiver |        |        |
|-----------|----------|--------|--------|----------|--------|--------|
|           | QP       | Limit  | Margin | AV       | Limit  | Margin |
| (MHz)     | Level    | (dBuV) | (dB)   | Level    | (dBuV) | (dB)   |
| 0.15      | *        | 66     | *      | *        | 56     | *      |
| 0.24      | *        | 63.43  | *      | *        | 53.44  | *      |
| 0.543     | *        | 56     | *      | *        | 46     | *      |
| 5.00      | *        | 56     | *      | *        | 46     | *      |
| 10.00     | *        | 60     | *      | *        | 50     | *      |
| 22.00     | *        | 60     | *      | *        | 50     | *      |
| 30.00     | *        | 60     | *      | *        | 50     | *      |

“\*” means the emission level is 6dB lower than the relevant limit.

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA060400274IT  
Page 44 of 59

PCS1900 connected: (test Mobile ith 3DS09371AGAA of Leader power adaptor and headset. )

L Line:

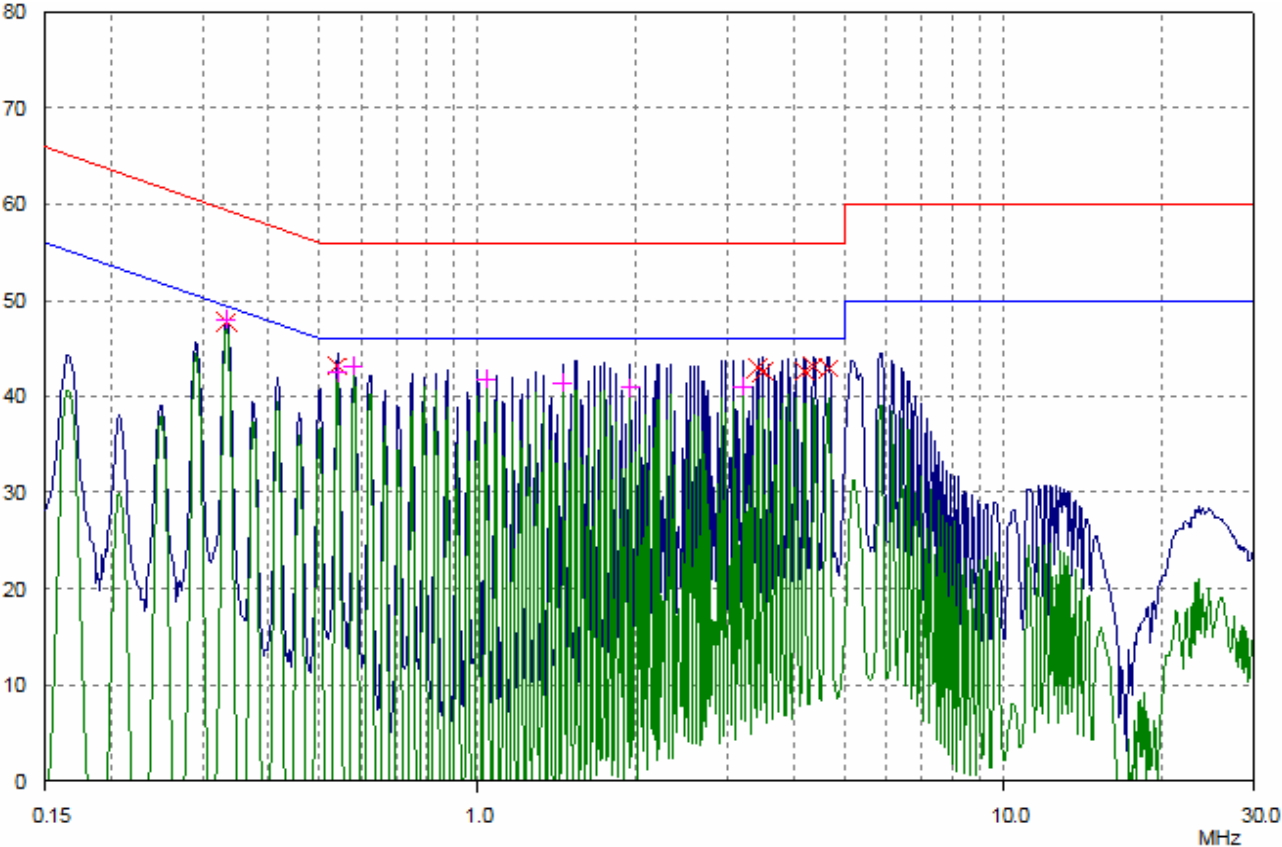

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.33277          | 47.71            | 59.38            | 11.67          |
| 0.54104          | 43.17            | 56.00            | 12.83          |
| 3.40894          | 42.95            | 56.00            | 13.05          |
| 3.49141          | 42.59            | 56.00            | 13.41          |
| 4.19366          | 42.65            | 56.00            | 13.35          |
| 4.36411          | 43.11            | 56.00            | 12.89          |
| 4.65136          | 42.96            | 56.00            | 13.04          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.33277          | 47.95            | 49.38            | 1.43           |
| 0.54104          | 42.44            | 46.00            | 3.56           |
| 0.58127          | 43.06            | 46.00            | 2.94           |
| 1.03992          | 41.75            | 46.00            | 4.25           |
| 1.45325          | 41.38            | 46.00            | 4.62           |
| 1.95156          | 40.85            | 46.00            | 5.15           |
| 3.19842          | 40.93            | 46.00            | 5.07           |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 45 of 59

N Line:

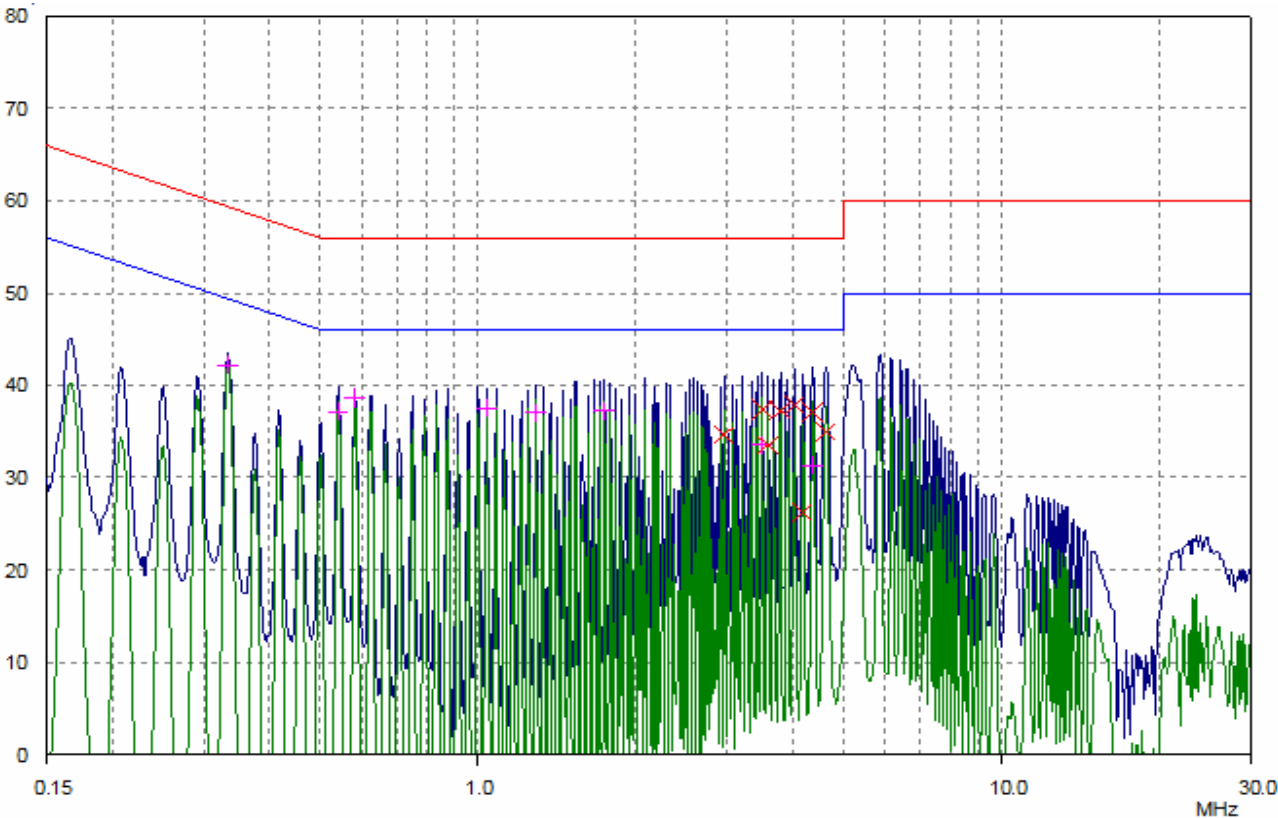

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 2.95345          | 34.65            | 56.00            | 21.35          |
| 3.49141          | 37.37            | 56.00            | 18.63          |
| 3.57588          | 33.51            | 56.00            | 22.49          |
| 3.781            | 37.25            | 56.00            | 18.75          |
| 4.02986          | 37.85            | 56.00            | 18.15          |
| 4.16038          | 26.15            | 56.00            | 29.85          |
| 4.36411          | 37.11            | 56.00            | 18.89          |
| 4.61445          | 34.95            | 56.00            | 21.05          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.33277          | 42.19            | 49.38            | 7.19           |
| 0.54104          | 37.15            | 46.00            | 8.85           |
| 0.58127          | 38.56            | 46.00            | 7.44           |
| 1.03992          | 37.53            | 46.00            | 8.47           |
| 1.28954          | 37.03            | 46.00            | 8.97           |
| 1.74556          | 37.23            | 46.00            | 8.77           |
| 3.49141          | 33.52            | 46.00            | 12.48          |
| 4.36411          | 31.29            | 46.00            | 14.71          |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 46 of 59

PCS 1900 connected: (test Mobile with 3DS09371AGAA of Astec power adaptor and headset.)

L Line:

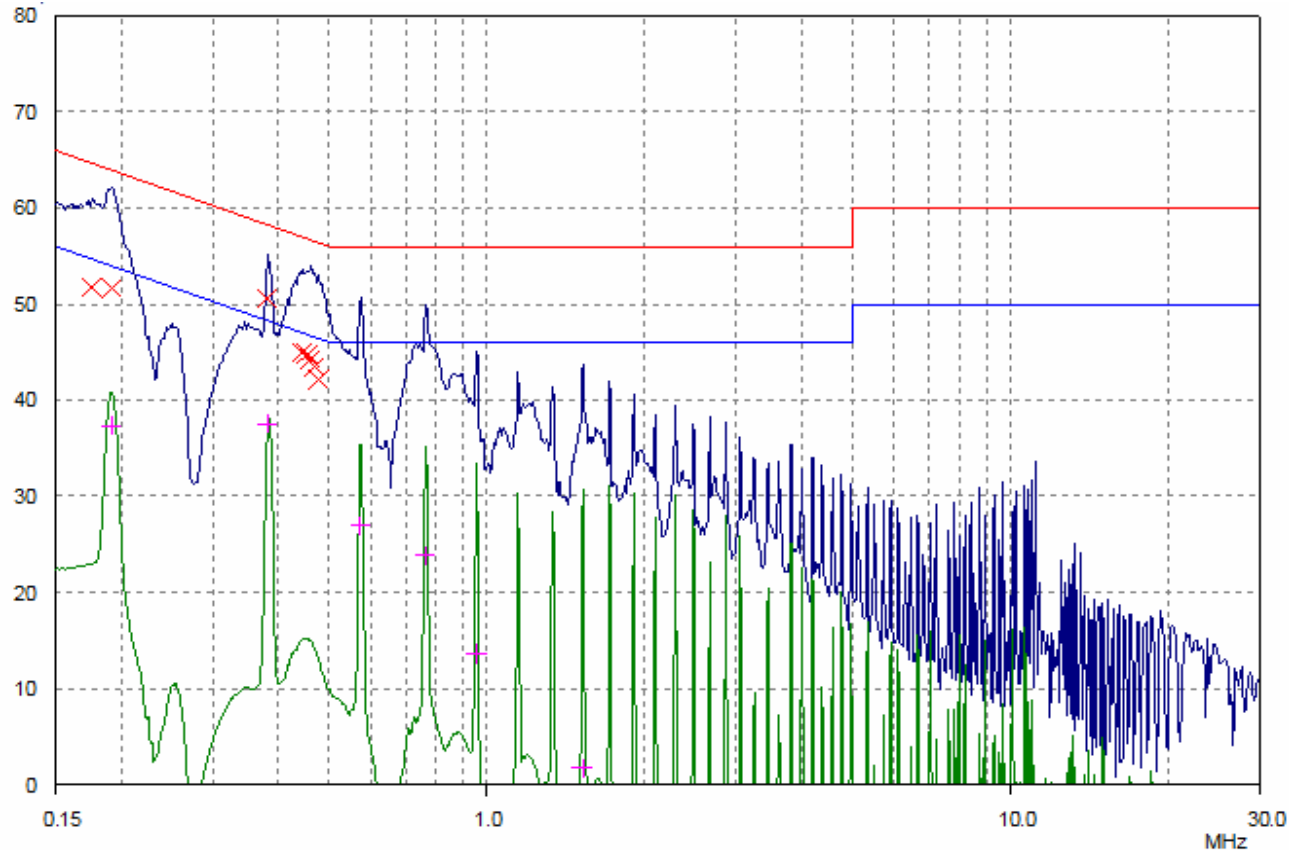

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.17591          | 51.76            | 64.68            | 12.92          |
| 0.19202          | 51.65            | 63.95            | 12.30          |
| 0.38104          | 50.56            | 58.26            | 7.70           |
| 0.44332          | 44.97            | 57.00            | 12.03          |
| 0.45405          | 44.78            | 56.80            | 12.02          |
| 0.46134          | 44.22            | 56.67            | 12.45          |
| 0.46875          | 43.45            | 56.54            | 13.09          |
| 0.47628          | 42.18            | 56.40            | 14.22          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.19202          | 37.34            | 53.95            | 16.61          |
| 0.38104          | 37.40            | 48.26            | 10.86          |
| 0.57208          | 26.97            | 46.00            | 19.03          |
| 0.76214          | 23.82            | 46.00            | 22.18          |
| 0.95265          | 13.51            | 46.00            | 32.49          |
| 1.52442          | 1.78             | 46.00            | 44.22          |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 47 of 59

N Line:

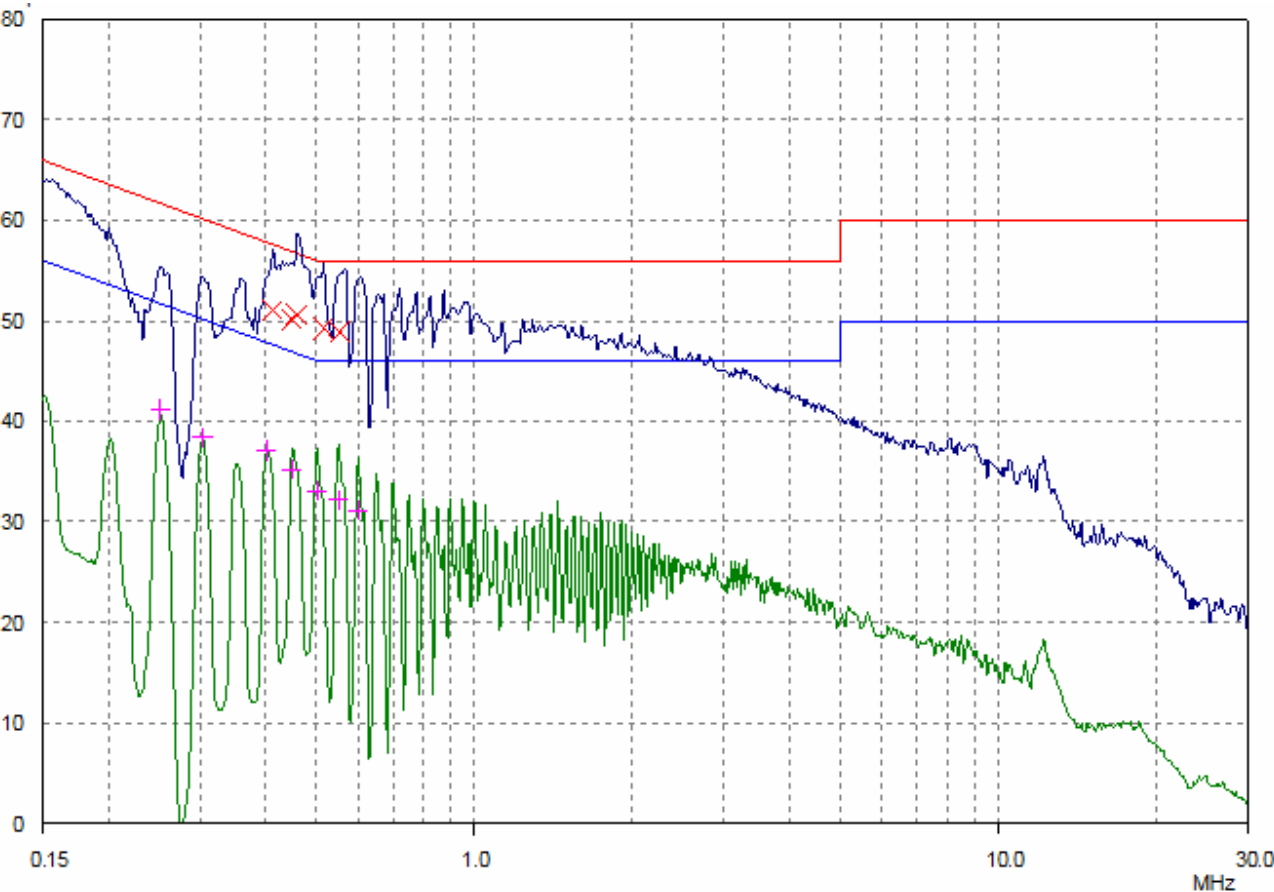

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.41264          | 51.04            | 57.59            | 6.55           |
| 0.45044          | 50.11            | 56.87            | 6.76           |
| 0.45768          | 50.66            | 56.73            | 6.07           |
| 0.51578          | 49.23            | 56.00            | 6.77           |
| 0.55413          | 48.91            | 56.00            | 7.09           |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.25178          | 41.12            | 51.70            | 10.58          |
| 0.30242          | 38.35            | 50.18            | 11.83          |
| 0.40289          | 37.08            | 47.79            | 10.71          |
| 0.45044          | 35.16            | 46.87            | 11.71          |
| 0.49961          | 33.08            | 46.01            | 12.93          |
| 0.54974          | 32.16            | 46.00            | 13.84          |
| 0.6001           | 31.01            | 46.00            | 14.99          |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 48 of 59

PCS 1900 connected: (test Mobile with 3DS09371AAAA of Astec power adaptor and headset.)

L Line:

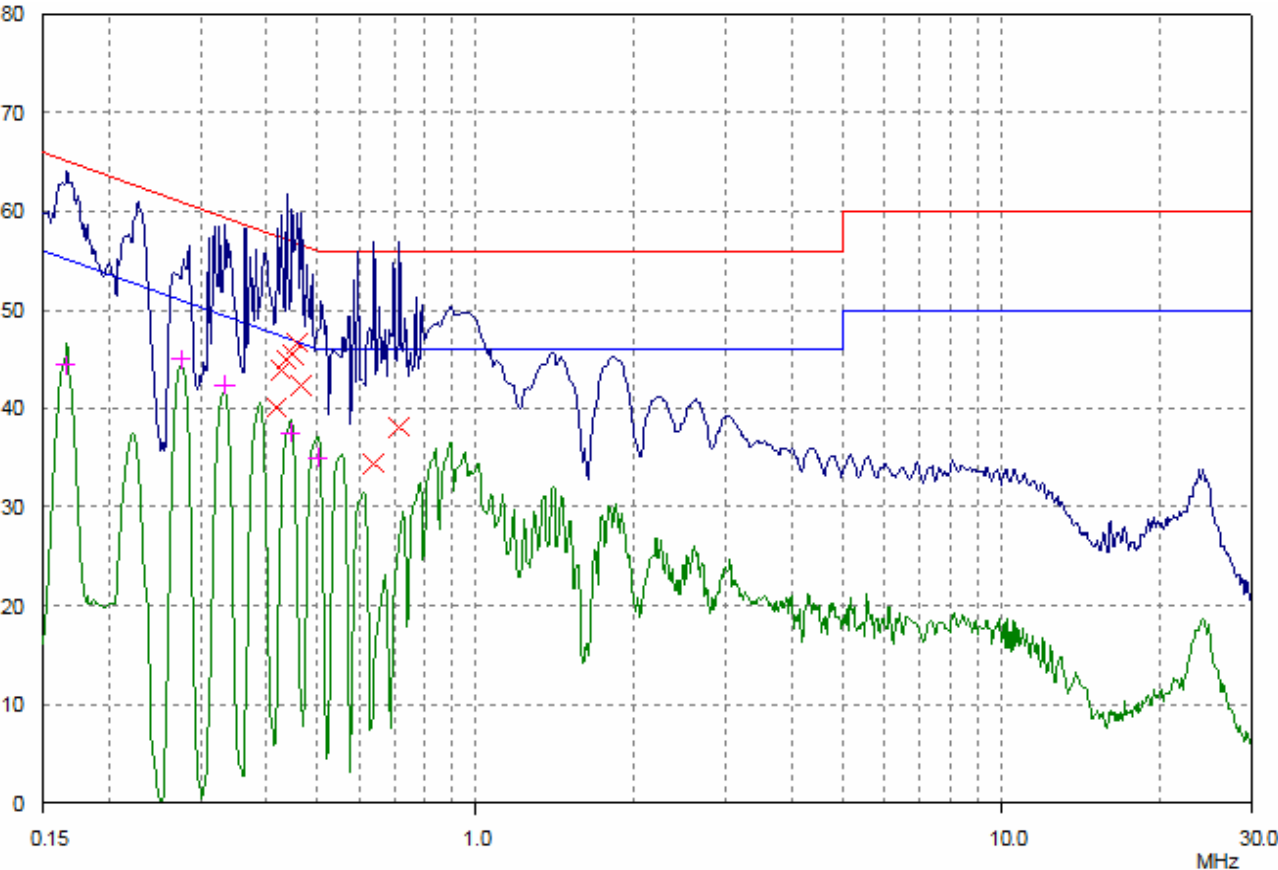

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.41927          | 40.12            | 57.46            | 17.34          |
| 0.42601          | 43.86            | 57.33            | 13.47          |
| 0.43631          | 44.91            | 57.13            | 12.22          |
| 0.44687          | 45.47            | 56.93            | 11.46          |
| 0.45768          | 46.61            | 56.73            | 10.12          |
| 0.46503          | 42.33            | 56.60            | 14.27          |
| 0.63959          | 34.40            | 56.00            | 21.60          |
| 0.71508          | 38.10            | 56.00            | 17.90          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.16637          | 44.44            | 55.14            | 10.70          |
| 0.27484          | 44.93            | 50.97            | 6.04           |
| 0.33277          | 42.36            | 49.38            | 7.02           |
| 0.44332          | 37.47            | 47.00            | 9.53           |
| 0.49961          | 35.07            | 46.01            | 10.94          |




SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 49 of 59

N Line:

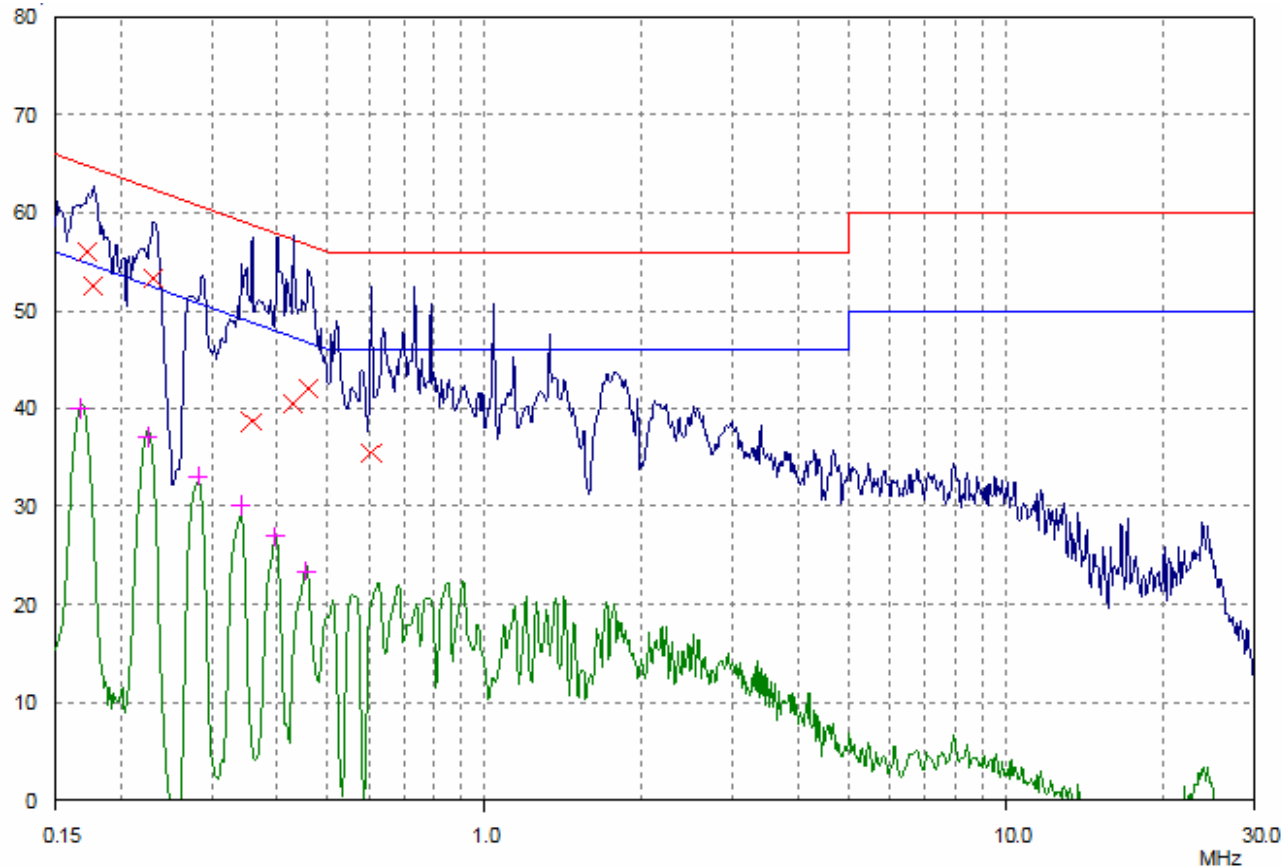

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.17313          | 56.00            | 64.81            | 8.81           |
| 0.17732          | 52.60            | 64.61            | 12.01          |
| 0.23065          | 53.25            | 62.43            | 9.18           |
| 0.35751          | 38.67            | 58.79            | 20.12          |
| 0.42941          | 40.55            | 57.26            | 16.71          |
| 0.45768          | 42.01            | 56.73            | 14.72          |
| 0.6049           | 35.44            | 56.00            | 20.56          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.1677           | 39.99            | 55.07            | 15.08          |
| 0.2252           | 37.09            | 52.62            | 15.53          |
| 0.28149          | 33.08            | 50.77            | 17.69          |
| 0.34082          | 30.02            | 49.18            | 19.16          |
| 0.39653          | 26.93            | 47.93            | 21.00          |
| 0.45405          | 23.36            | 46.80            | 23.44          |

SGS-CSTC Standards  
Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 50 of 59

PCS 1900 connected: (test Mobile with 3DS09371AAAA of Leader power adaptor and headset.)

L Line:

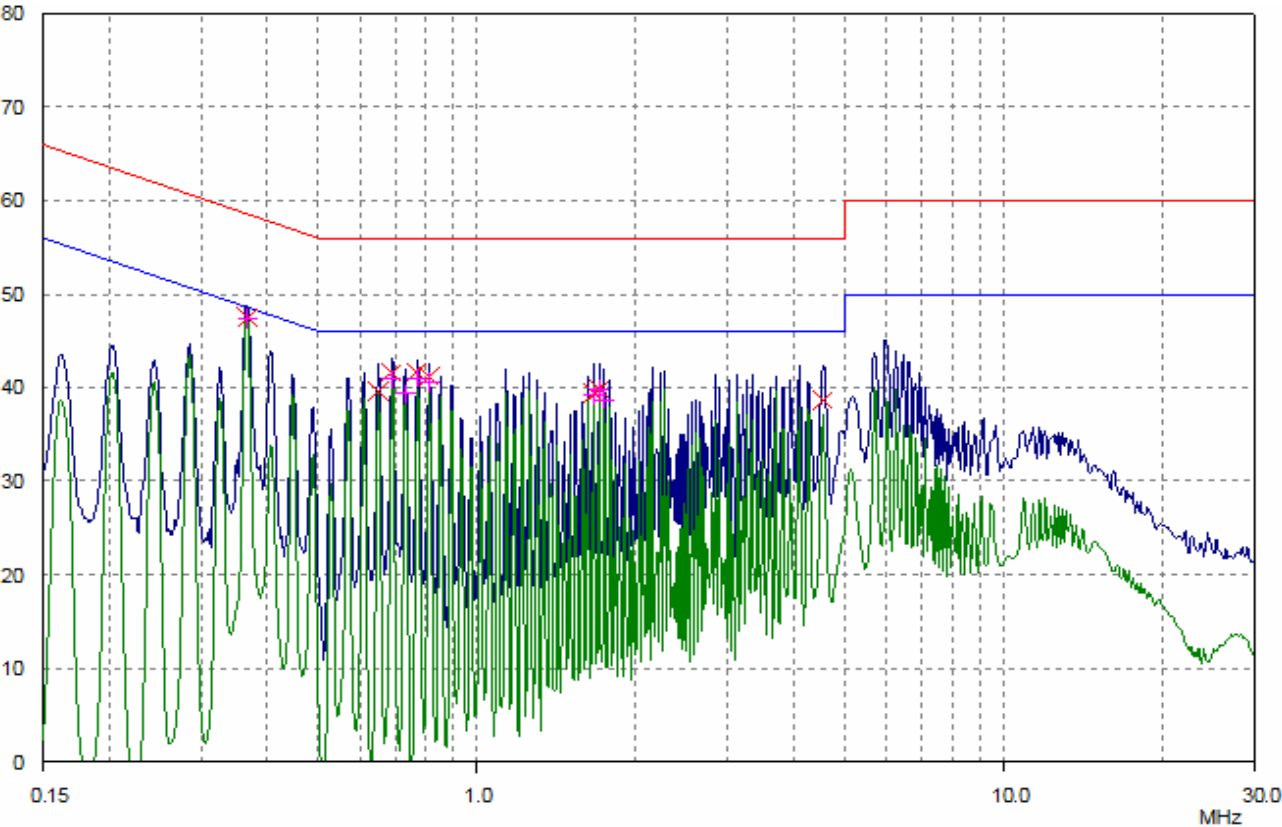

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.36615          | 47.53            | 58.59            | 11.06          |
| 0.64987          | 39.62            | 56.00            | 16.38          |
| 0.68715          | 41.62            | 56.00            | 14.38          |
| 0.76824          | 41.70            | 56.00            | 14.30          |
| 0.81231          | 41.19            | 56.00            | 14.81          |
| 1.66407          | 39.39            | 56.00            | 16.61          |
| 1.70432          | 39.79            | 56.00            | 16.21          |
| 4.54149          | 38.65            | 56.00            | 17.35          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.36615          | 47.35            | 48.59            | 1.24           |
| 0.68715          | 40.90            | 46.00            | 5.10           |
| 0.73238          | 39.35            | 46.00            | 6.65           |
| 0.76824          | 40.98            | 46.00            | 5.02           |
| 0.81231          | 40.51            | 46.00            | 5.49           |
| 1.66407          | 39.13            | 46.00            | 6.87           |
| 1.70432          | 39.85            | 46.00            | 6.15           |
| 1.74556          | 38.65            | 46.00            | 7.35           |


SGS-CSTC Standards  
Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 51 of 59

N Line:

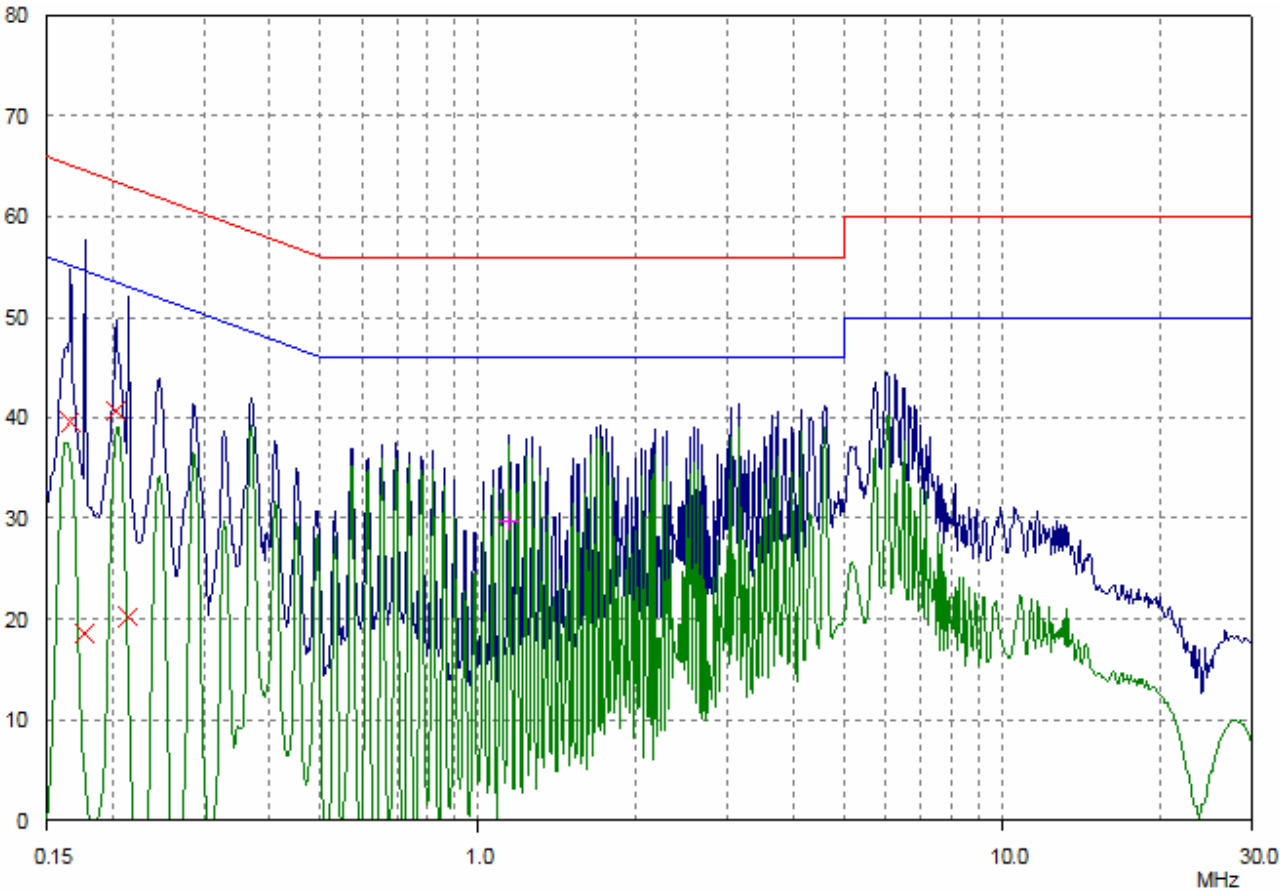

Final Measurement Results

| Frequency<br>MHz | QP Level<br>dBμV | QP Limit<br>dBμV | QP Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 0.16637          | 39.56            | 65.14            | 25.58          |
| 0.17732          | 18.55            | 64.61            | 46.06          |
| 0.20304          | 40.62            | 63.49            | 22.87          |
| 0.21469          | 20.23            | 63.02            | 42.79          |

| Frequency<br>MHz | AV Level<br>dBμV | AV Limit<br>dBμV | AV Delta<br>dB |
|------------------|------------------|------------------|----------------|
| 1.14426          | 29.67            | 46.00            | 16.33          |

# SGS-CSTC Standards Technical Services Co., Ltd.


1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 52 of 59

PCS 1900 connected: (test Mobile with 3DS07848AAAA of Primax power adaptor and headset.)

Negative:

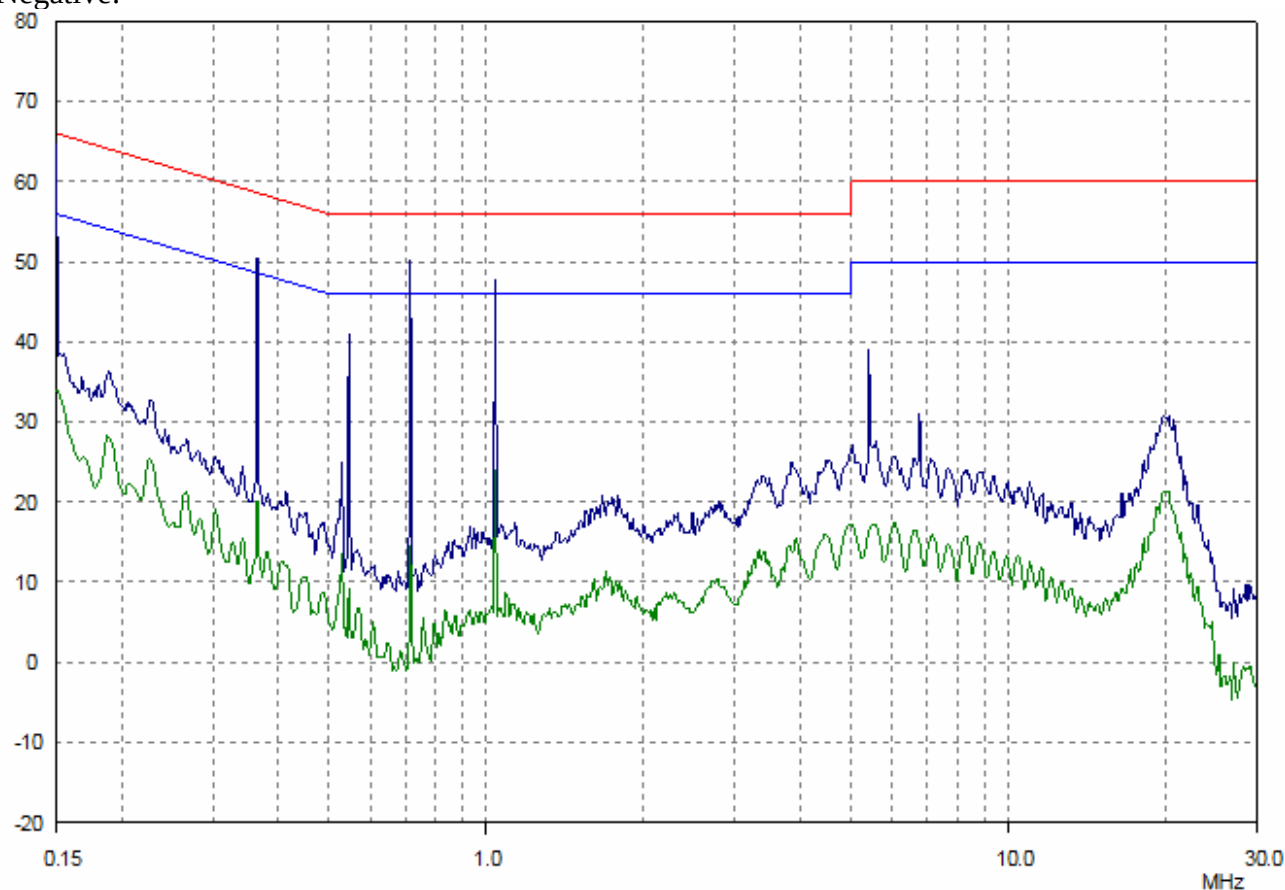

| Frequency<br>(MHz) | Receiver<br>QP<br>Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Receiver<br>AV<br>Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) |
|--------------------|-----------------------------------|-----------------|----------------|-----------------------------------|-----------------|----------------|
| 0.15               | *                                 | 66              | *              | *                                 | 56              | *              |
| 0.24               | *                                 | 63.43           | *              | *                                 | 53.44           | *              |
| 0.543              | *                                 | 56              | *              | *                                 | 46              | *              |
| 5.00               | *                                 | 56              | *              | *                                 | 46              | *              |
| 10.00              | *                                 | 60              | *              | *                                 | 50              | *              |
| 22.00              | *                                 | 60              | *              | *                                 | 50              | *              |
| 30.00              | *                                 | 60              | *              | *                                 | 50              | *              |

“\*” means the emission level is 6dB lower than the relevant limit.


# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 53 of 59

Positive:

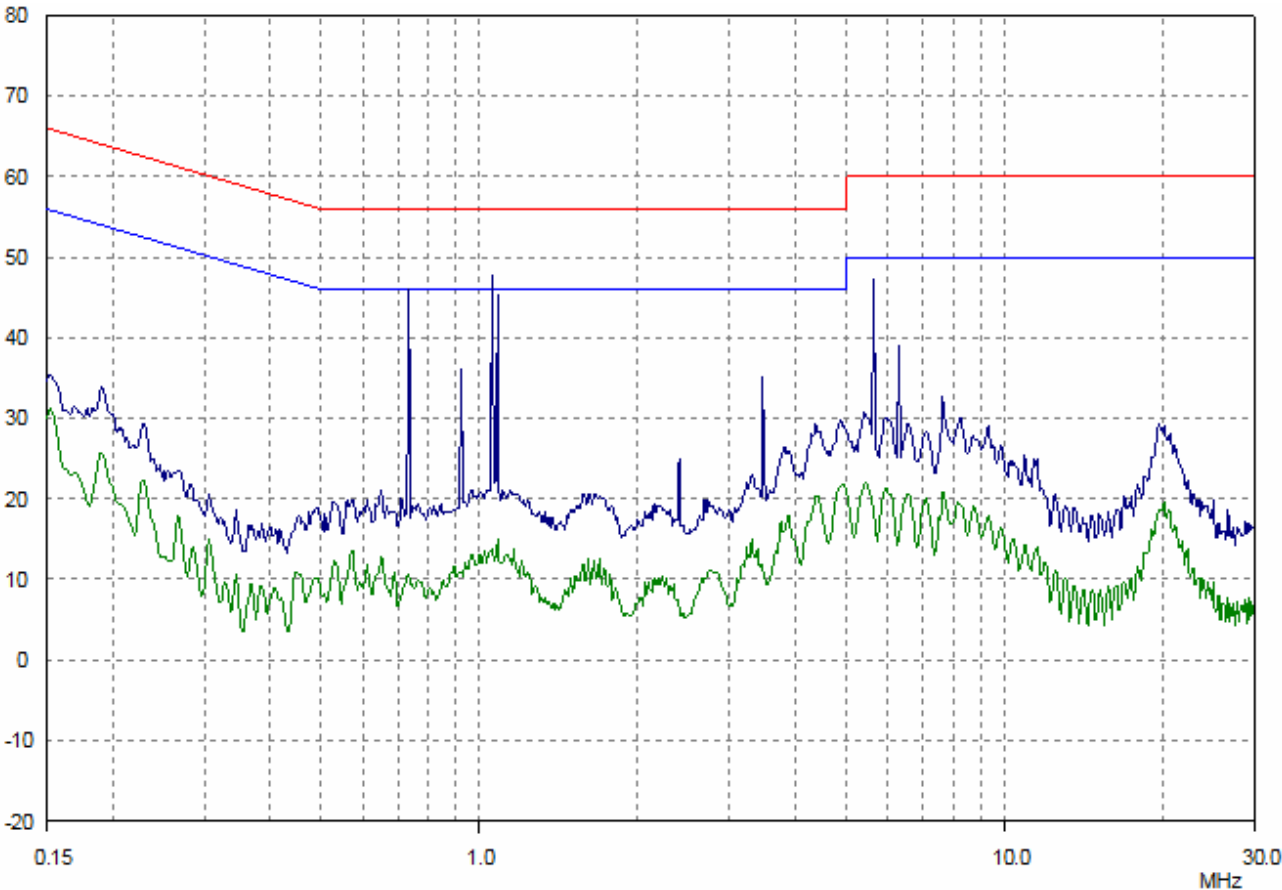

| Frequency<br>(MHz) | Receiver<br>QP<br>Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Receiver<br>AV<br>Level<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) |
|--------------------|-----------------------------------|-----------------|----------------|-----------------------------------|-----------------|----------------|
| 0.15               | *                                 | 66              | *              | *                                 | 56              | *              |
| 0.24               | *                                 | 63.43           | *              | *                                 | 53.44           | *              |
| 0.543              | *                                 | 56              | *              | *                                 | 46              | *              |
| 5.00               | *                                 | 56              | *              | *                                 | 46              | *              |
| 10.00              | *                                 | 60              | *              | *                                 | 50              | *              |
| 22.00              | *                                 | 60              | *              | *                                 | 50              | *              |
| 30.00              | *                                 | 60              | *              | *                                 | 50              | *              |

“\*” means the emission level is 6dB lower than the relevant limit.


**SGS-CSTC Standards  
Technical Services Co., Ltd.**

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 54 of 59

GSM 850 dedicated, charging with adaptor (Tenpao: 3DS10628AGAA ) and earphone.  
L Line:

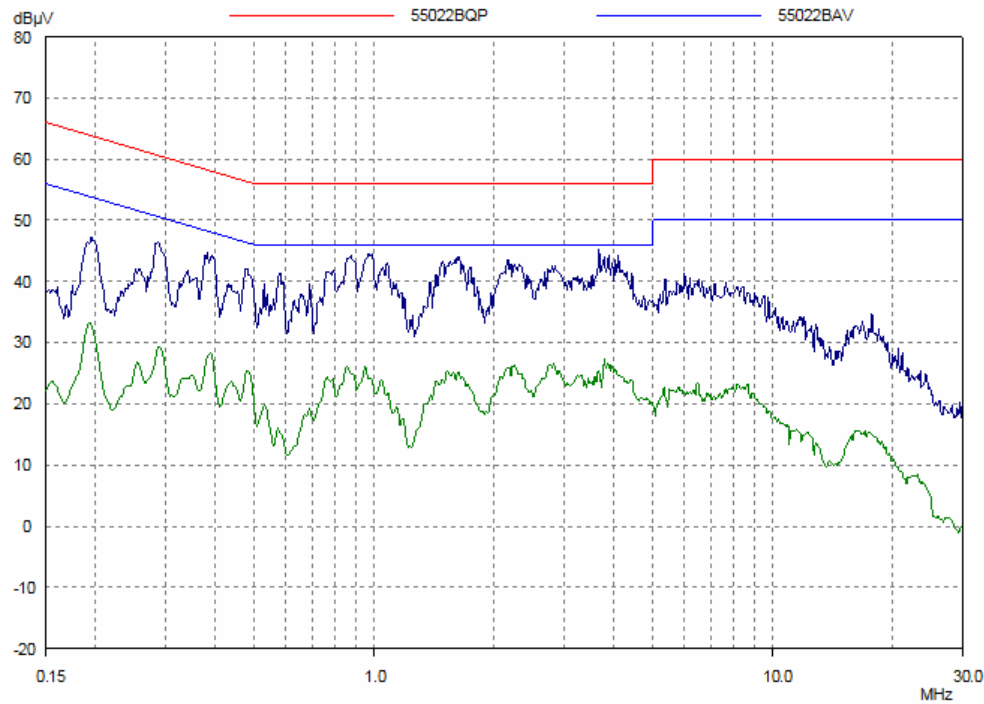

N Line:

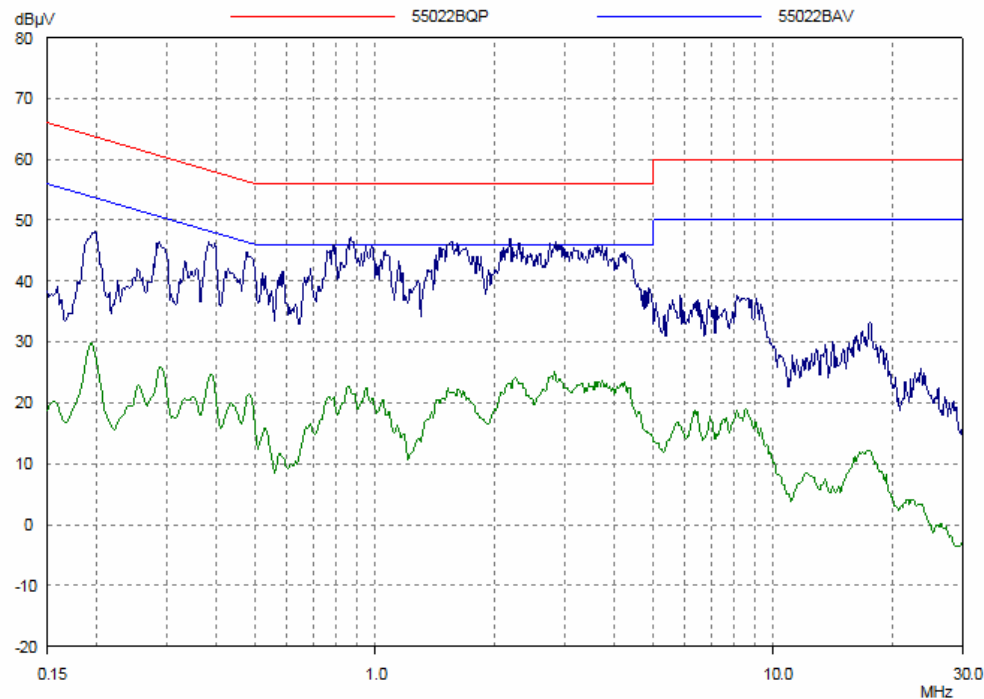


**SGS-CSTC Standards  
Technical Services Co., Ltd.**

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China


Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMA0060400274IT  
Page 55 of 59

PCS 1900 dedicated, charging with adaptor and earphone:  
L Line:

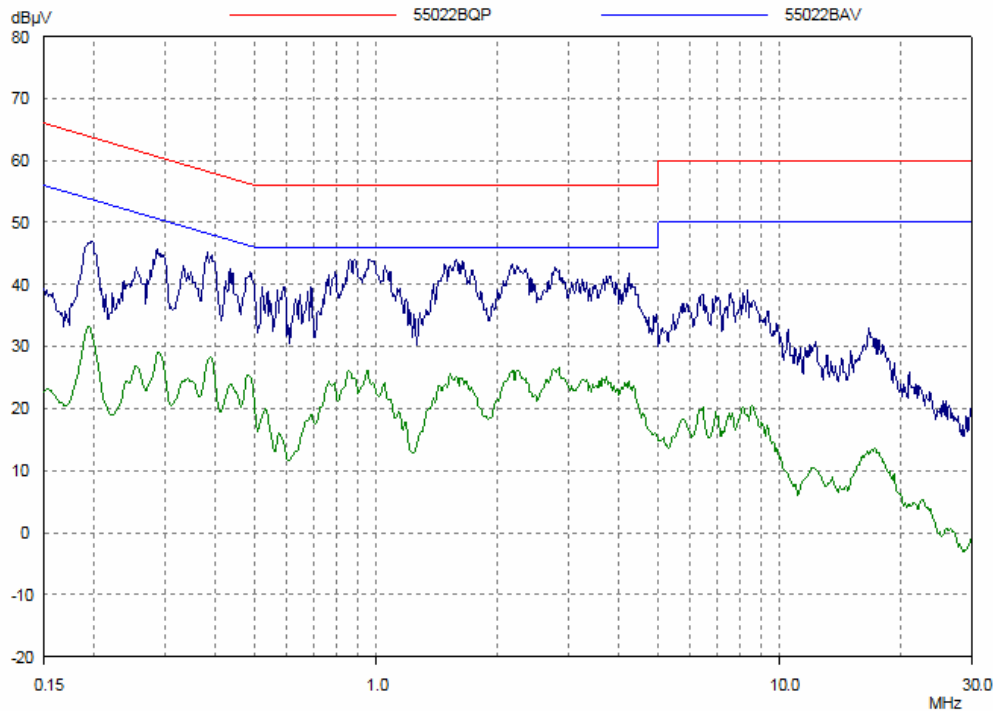

N Line:

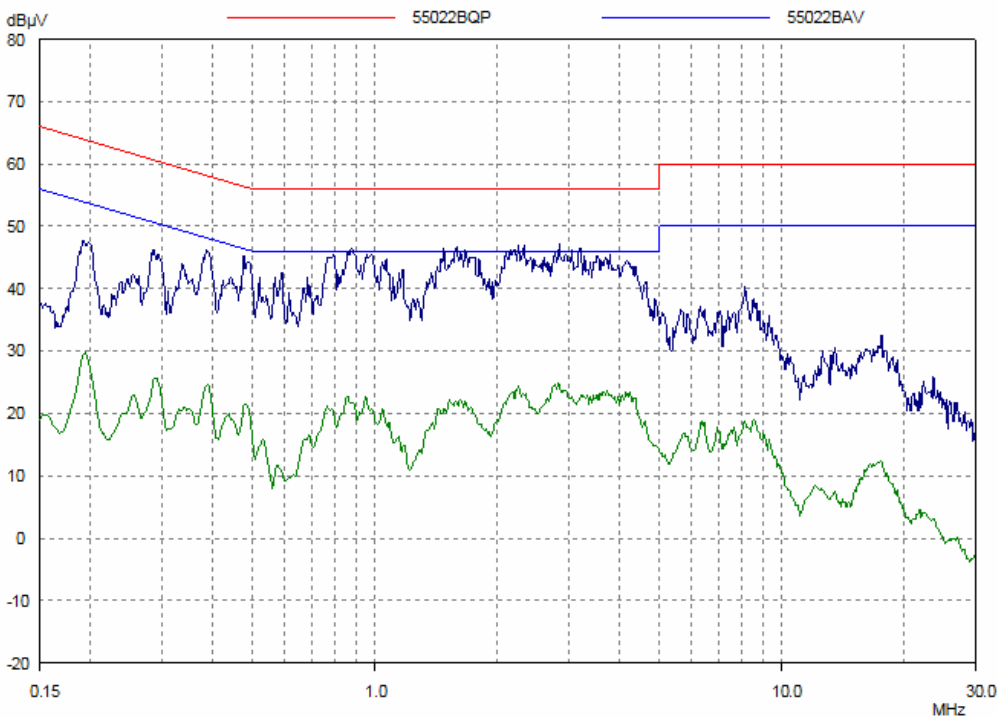

# SGS-CSTC Standards Technical Services Co., Ltd.



1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 56 of 59

## 7 Photographs

### 7.1 Radiated Emission Test Setup

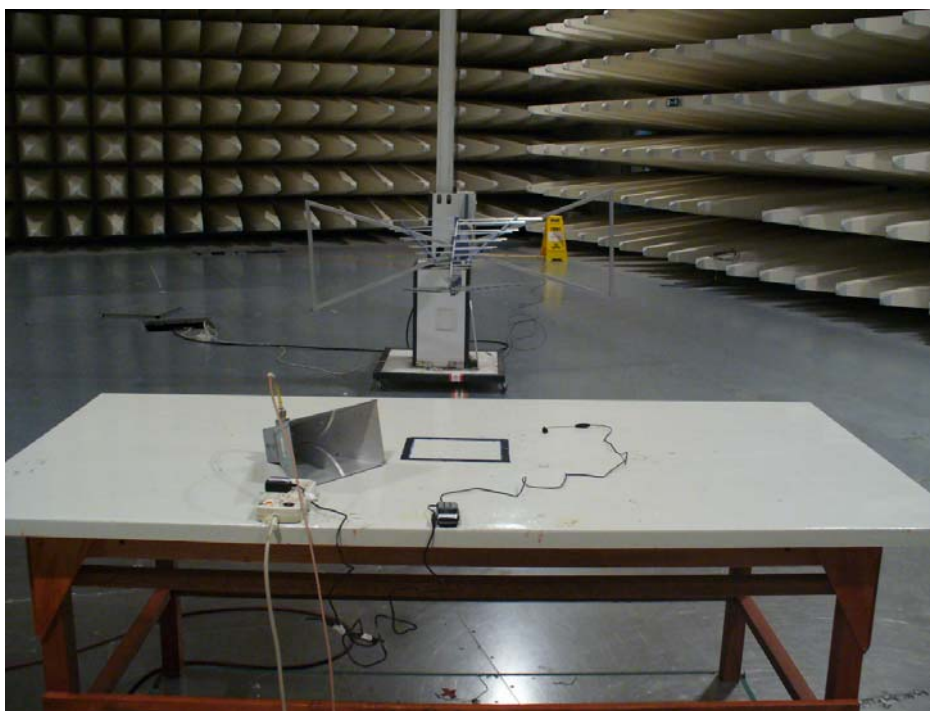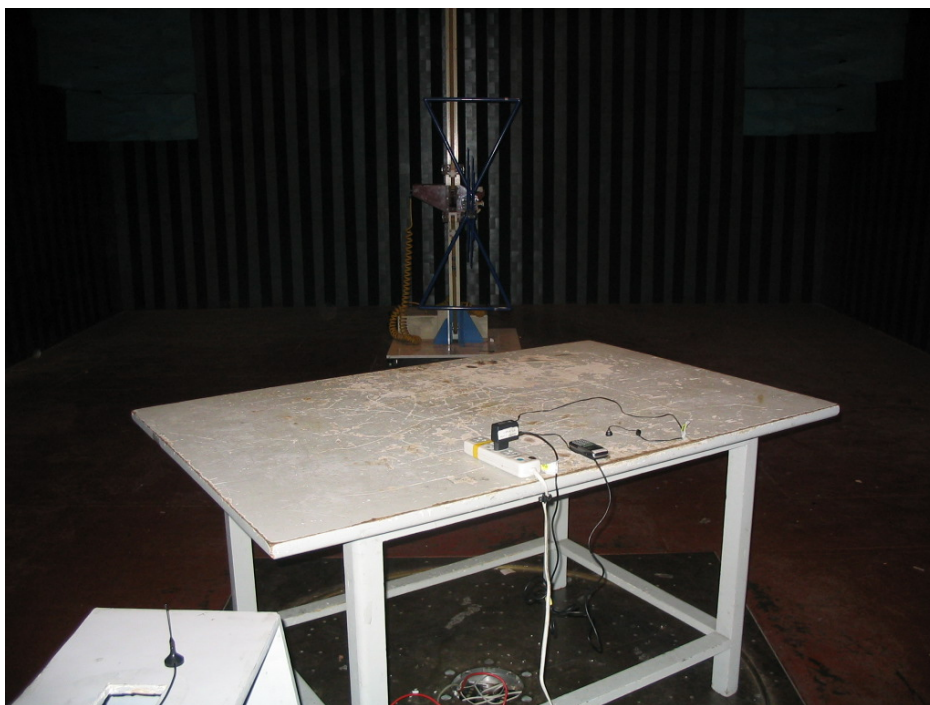




## SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 57 of 59

### 7.2 Conducted Emission Test Setup

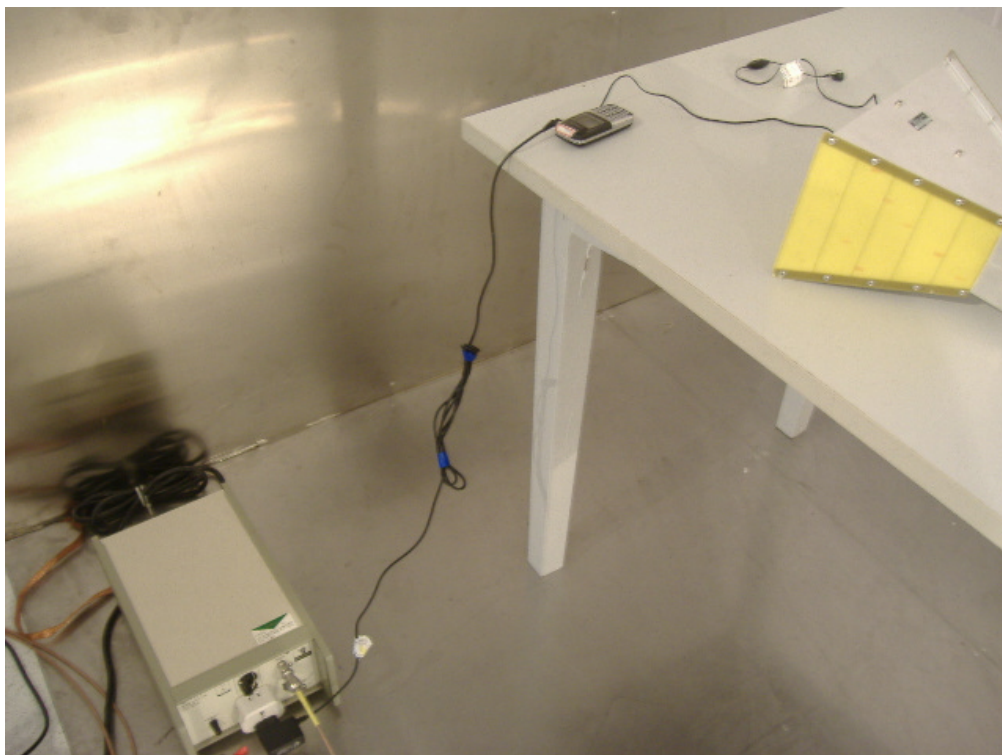

### 7.3 EUT Constructional Details



# SGS-CSTC Standards Technical Services Co., Ltd.

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 58 of 59

Adapter: 3DS10628AGAA(Tenpao)





**SGS-CSTC Standards  
Technical Services Co., Ltd.**

1/F, 7/F, 9/F, 10/F, the 3rd Building No. 889,  
Yishan Road, Xuhui District, Shanghai, China

Telephone: +86 (0) 21 6495 1616  
Fax: +86 (0) 21 5450 0954  
Tino\_Pan@sgs.com

Report No.: SHEMO060400274IT  
Page 59 of 59

Adapter: 3DS10628AHAA(Tenpao)



**THE END OF REPORT**