

SAR TEST REPORT

Equipment Under Test :	GSM 850/1900MHz mobile phone with BT
Model No. :	C7Ca
Market name:	OT-C701a
FCC ID :	RAD054
Applicant :	T&A Mobile phones
Address of Applicant :	4/F, No.2966, Jinke Rd, Zhangjiang High-Tech Park, Pudong Shanghai 201203. P. R. China
Date of Receipt :	2007.03.8
Date of Test :	2007.03.15 – 200.04.10
Date of Issue :	2007.04.12

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1, C95.3, IEEE 1528-2003**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.

Tested by :

Date :

2007.04.12

Approved by :

Date :

2007.04.12

Contents

1. General Information	6
1.1 Test Laboratory	6
1.2 Details of Applicant.....	6
1.3 Description of EUT(s)	6
1.4 Test Environment	7
1.5 Operation Configuration.....	7
1.6 The SAR Measurement System	7
1.7 SAR System Verification	9
1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHZ.....	10
1.9 Test Standards and Limits.....	11
2. Summary of Results.....	13
3. Instruments List	16
4. Measurements	17
4.1LeftHandSide-Cheek-GSM850-Middle	17
GSM850-LeftHandSide-Cheek-Middle	17
4.2LeftHandSide-Tilt-GSM850-Middle	18
GSM850-LeftHandSide-Tilt-Middle	18
4.3LeftHandSide-Cheek-GSM850-Low	20
GSM850-LeftHandSide-Cheek-Low	20
4.4LeftHandSide-Cheek-GSM850-High.....	22
GSM850-LeftHandSide-Cheek-High	22
4.5LeftHandSide-GSM850-Maximum Value-SD.....	24
GSM850-LeftHandSide-Cheek-High+SD	24
4.6LeftHandSide-GSM850-Maximum Value-BT.....	26
GSM850-LeftHandSide-Cheek-High+BT	26
4.7RightHandSide-Cheek-GSM850-Middle.....	28
GSM850-RightHandSide-Cheek-Middle	28
4.8RightHandSide-Tilt-GSM850-Middle	30
GSM850-RightHandSide-Tilt-Middle	30
4.9RightHandSide-Cheek-GSM850-Low.....	32
GSM850-RightHandSide-Cheek-Low.....	32
4.10RightHandSide-Cheek-GSM850-High	34
GSM850-RightHandSide-Cheek-High	34

4.11RightHandSide-GSM850-Maximum Value-SD	36
GSM850-RightHandSide-Cheek-High+SD.....	36
4.12RightHandSide-GSM850-Maximum Value-BT	38
GSM850-RightHandSide-Cheek-High+BT.....	38
4.13Body-Worn-GSM850-GPRS-Low	40
GSM850-Body-Worn-GPRS-Low-2.0cm.....	40
4.14Body-Worn-GSM850-GPRS-Middle.....	42
GSM850-Body-Worn-GPRS-Middle-2.0cm	42
4.15Body-Worn-GSM850-GPRS-High	44
GSM850-Body-Worn-GPRS-High-2.0cm	44
4.16Body-Worn-GSM850-Maximum Value-SD	46
GSM850-Body-Worn-GPRS-Middle-2.0cm+SD	46
4.17Body-Worn-GSM850-Maximum Value-BT.....	48
GSM850-Body-Worn-GPRS-Middle-2.0cm+BT	48
4.18LeftHandSide-Cheek-PCS1900-Middle	50
PCS1900-LeftHandSide-Cheek-Middle	50
4.19LeftHandSide-Tilt-PCS1900-Middle.....	52
PCS1900-LeftHandSide-Tilt-Middle	52
4.20LeftHandSide-Cheek-PCS1900-Low	54
PCS1900-LeftHandSide-Cheek-Low	54
4.21LeftHandSide-Cheek-PCS1900-High.....	56
PCS1900-LeftHandSide-Cheek-High.....	56
4.22LeftHandSide-PCS1900-Maximum Value-SD	58
PCS1900-LeftHandSide-Cheek-High+SD	58
4.23LeftHandSide-PCS1900-Maximum Value-BT	60
PCS1900-LeftHandSide-Cheek-High+BT	60
4.24RightHandSide-Cheek-PCS1900-Middle	62
PCS1900-RightHandSide-Cheek-Middle	62
4.25RightHandSide-Tilt-PCS1900-Middle	64
PCS1900-RightHandSide-Tilt-Middle.....	64
4.26RightHandSide-Cheek-PCS1900-Low.....	66
PCS1900-RightHandSide-Cheek-Low	66
4.27RightHandSide-Cheek-PCS1900-High	68
PCS1900-RightHandSide-Cheek-High.....	68
4.28RightHandSide-PCS1900-Maximum Value-SD	70

PCS1900-RightHandSide-Cheek-High+SD	70
4.29RightHandSide-PCS1900-Maximum Value-BT	72
PCS1900-RightHandSide-Cheek-High+BT	72
4.30Body-Worn-PCS1900-GPRS-Low.....	74
PCS1900-Body-Worn-GPRS-Low-2.0cm	74
4.31Body-Worn-PCS1900-GPRS-Middle	76
PCS1900-Body-Worn-GPRS-Middle-2.0cm.....	76
4.32Body-Worn-PCS1900-GPRS-High.....	78
PCS1900-Body-Worn-GPRS-High-2.0cm	78
4.33Body-Worn-PCS1900-Maximum Value-SD	80
PCS1900-Body-Worn-GPRS-Middle-2.0cm+SD.....	80
4.34Body-Worn-PCS1900-Maximum Value-BT	82
PCS1900-Body-Worn-GPRS-Middle-2.0cm+BT.....	82
Additional Testing for the Battery-T5000572AAAA-700mAh	84
4.35LeftHandSide-Cheek-GSM850-High+BT	84
GSM850-LeftHandSide-Cheek-High+BT(700mAh)	84
4.36RightHandSide-Cheek-GSM850-High	86
GSM850-RightHandSide-Cheek-High(700mAh)	86
4.37Body-Worn-GSM850-GPRS-Middle.....	88
GSM850-Body-Worn-GPRS-Middle-2.0cm(700mAh).....	88
4.38LeftHandSide-Cheek-PCS1900-High+SD	90
PCS1900-LeftHandSide-Cheek-High+SD(700mAh).....	90
4.39RightHandSide-Cheek-PCS1900-High	92
PCS1900-RightHandSide-Cheek-High(700mAh)	92
4.40Body-Worn-PCS1900-GPRS-Middle+SD	94
PCS1900-Body-Worn-GPRS-Middle-2.0cm+SD(700mAh).....	94
Appendix	97
1. Photographs of Test Setup	97
2. Photographs of the EUT	100
3. Photographs of the battery	100
4. Photograph of the charger.....	101
5. Probe Calibration certificate	102
6. DAE Calibration certification	111
7. Dipole Calibration certification	116
8. Uncertainty analysis.....	134

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 5 of 135

9. Phantom description..... 135

1. General Information

1.1 Test Laboratory

GSM Lab

SGS-CSTC Standards Technical Services Co.Ltd Shanghai Branch
9F,the 3rd Building, No.889, Yishan Rd, Xuhui District, Shanghai, China

Zip code: 200233

Telephone: +86 (0) 21 6495 1616

Fax: +86 (0) 21 5450 0149

Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name: T&A Mobile phones

Address: 4/F, No.2966, Jinke Rd, Zhangjiang High-Tech Park,
Pudong Shanghai 201203. P. R. China

1.3 Description of EUT(s)

Brand name	ALCATEL	
Model No.	C7Ca	
Market Name	OT-C701a	
Serial No.	IMEI: 011073000003040	
Sample Status	Production	
Battery Type	Lithium-Ion	T5001418AAAA - 750mAh T5000572AAAA - 700mAh
Antenna Type	Inner Antenna	
Operation Mode	GSM850/PCS1900	
Modulation Mode	GMSK	
Frequency range	GSM850	Tx: 824~849 MHz Rx: 869~894 MHz
		Tx: 1850~1910 MHz Rx: 1930~1990 MHz
Maximum RF Conducted Power	GSM850: 32.2dBm, PCS1900: 29.2dBm	
GPRS	Multi-Slot Class 10 uplink 2TS	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 45%~55%

1.5 Operation Configuration

Configuration 1: GSM 850, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 2: GSM 850, RightHandSide Cheek & 15 ° Tilt Position

Configuration 3: GSM 850, GPRS,BodyWorn (2.0 cm between EUT and phantom)

Configuration 4: PCS 1900, LeftHandSide Cheek & 15 ° Tilt Position

Configuration 5: PCS 1900, RightHandSide Cheek & 15 ° Tilt Position

Configuration 6: PCS 1900, GPRS,BodyWorn (2.0 cm between EUT and phantom)

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ES3DV3 3088 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

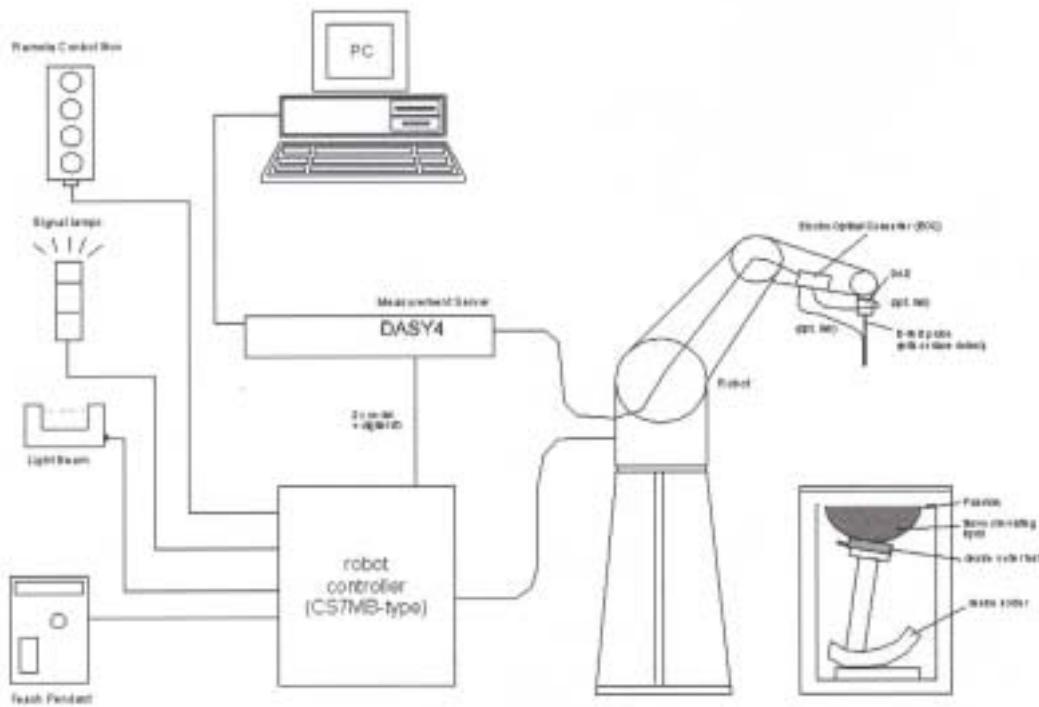


Fig. a SAR System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.

- Validation dipole kits allowing to validating the proper functioning of the system.

1.7 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 900MHz and 1900MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

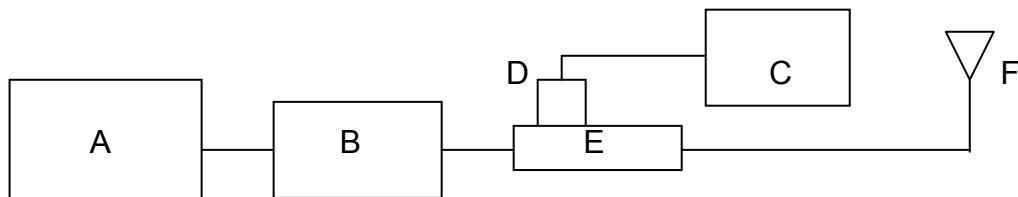


Fig. b the microwave circuit arrangement used for SAR system verification

- Agilent Model E4438C Signal Generator
- Mini-Circuit Model ZHL-42 Preamplifier
- Agilent Model E4416A Power Meter
- Agilent Model 8481H Power Sensor
- HT CP6100 20N Dual directional coupler
- Reference dipole antenna

Validation Kit	Frequency MHz	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
D900V2 SN184	900 Head	2.72	1.75	2.83	1.81	2007-03-23
D900V2 SN184	900 Head	2.72	1.75	2.81	1.79	2007-04-10
D900V2 SN184	900 Body	2.75	1.79	2.69	1.72	2007-03-16
D900V2 SN184	900 Body	2.75	1.79	2.71	1.74	2007-04-10
D1900V2 SN5d028	1900 Head	9.36	4.96	9.12	4.83	2007-03-22
				9.15	4.86	2007-03-27
D1900V2 SN5d028	1900 Head	9.36	4.96	9.22	4.85	2007-04-10
D1900V2 SN5d028	1900 Body	9.5	5.05	9.61	5.09	2007-03-19
D1900V2 SN5d028	1900 Body	9.5	5.05	9.64	5.11	2007-04-10

Table 1. Result System Validation

1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Simulated Tissue Temp (°C)
-----------------	-------------	----------------	-------------------------	---------------------------	----------------------------

850	Head	Recommended Limit	41.5±5%	0.90±5%	20-24
		Measured, 2007-03-23	41.8	0.87	22.5
		Measured, 2007-04-09	41.7	0.86	22.8
	Body	Recommended Limit	55.2±5%	0.97±5%	20-24
		Measured, 2007-03-16	56.2	0.939	22.5
		Measured, 2007-04-10	55.8	0.941	22.1
	Head	Recommended Limit	40.0±5%	1.40±5%	20-24
		Measured, 2007-03-22	39.15	1.445	22.3
		Measured, 2007-03-27	39.17	1.441	22.1
		Measured, 2007-04-09	39.18	1.438	22.4
	Body	Recommended Limit	53.3±5%	1.52±5%	20-24
		Measured, 2007-03-19	51.74	1.566	22.6
		Measured, 2007-04-09	52.68	1.557	21.7

Table 2. Dielectric parameters for the Frequency Band 850MHz&1900MHZ

1.9 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 mW/g (averaged over a mass of 1g)

Table 3. RF Exposure Limits

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 12 of 135

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

2. Summary of Results

GSM850 SAR (T5001418AAAA - 750mAh)

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/32.2	Middle/32.2	High/32.1		
GSM850	Left	Cheek	0.269	0.414	0.582	22	Pass
		Tilt	-	0.192	-	22	Pass
		Worst Case With SD	-	-	0.600	22	Pass
		Worst Case With BT	-	-	0.750	22	Pass
	Right	Cheek	0.449	0.588	0.780	22	Pass
		Tilt	-	0.237	-	22	Pass
		Worst Case With SD	-	-	0.759	22	Pass
		Worst Case With BT	-	-	0.747	22	Pass
	Body	GPRS	0.786	1.07	0.998	22	Pass
		Worst Case With SD	-	0.975	-	22	Pass
		Worst Case With BT	-	0.989	-	22	Pass

PCS1900 SAR(T5001418AAAA - 750mAh)

Mode	Test Configuration		SAR, Averaged over 1g(W/kg)			Temperature ()	Verdict
	Channel/Power(dBm)		Low/29.2	Middle/29.2	High/29.3		
PCS1900	Left	Cheek	0.595	0.758	0.807	22	Pass
		Tilt	-	0.208	-	22	Pass
		Worst Case With SD	-	-	0.825	22	Pass
		Worst Case With BT	-	-	0.748	22	Pass
	Right	Cheek	0.604	0.729	0.761	22	Pass
		Tilt	-	0.243	-	22	Pass

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 14 of 135

		Worst Case With SD	-	-	0.703	22	Pass
		Worst Case With BT	-	-	0.685	22	Pass
Body	GPRS	0.393	0.412	0.348	22	Pass	
		-	0.551	-	22	Pass	
	Worst Case With SD	-	0.408	-	22	Pass	
	Worst Case With BT	-	-	-	22	Pass	

Maximum Values (T5001418AAAA - 750mAh)

Frequency Band(MHz)	EUT position	Output Power (dBm)	1g Average (W/Kg)	Power Drift (dB)	Temperature ()	Verdict
GSM850	LeftHandSide,Cheek,High+BT	32.1	0.750	0.048	22	PASS
	RightHandSide,Cheek, High	32.1	0.780	-0.127	22	PASS
	GPRS,BodyWorn,Middle	32.2	1.07	-0.031	22	PASS
PCS1900	LeftHandSide,Cheek, High+SD	29.3	0.825	0.073	22	PASS
	RightHandSide,Cheek, High	29.3	0.761	-0.028	22	PASS
	GPRS,BodyWorn, Middle+SD	29.2	0.551	-0.246	22	PASS

Maximum Values With Battery-T5000572AAAA - 700mAh

Frequency Band(MHz)	EUT position	Output Power (dBm)	1g Average (W/Kg)	Power Drift (dB)	Temperature ()	Verdict
GSM850	LeftHandSide,Cheek,High+BT	32.1	0.678	-0.187	22	PASS
	RightHandSide,Cheek, High	32.1	0.772	-0.118	22	PASS
	GPRS,BodyWorn,Middle	32.2	0.979	-0.114	22	PASS
PCS1900	LeftHandSide,Cheek, High+SD	29.3	0.809	-0.233	22	PASS
	RightHandSide,Cheek, High	29.3	0.628	-0.123	22	PASS
	GPRS,BodyWorn, Middle+SD	29.2	0.427	-0.153	22	PASS

Note:

1. In GSM850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In PCS1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and

CH810/1909.8MHz separately.

3. The conducted output power is identical with both battery type T5000572AAAA - 700mAh and T5001418AAAA - 750mAh
4. For the Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values.
5. For the Bodyworn measurements, the distance from the sample to the phantom is 2.0 cm.
6. For all the tests, the maximum absolute value of the power drift which is under the GSM850-LeftHandSide-Cheek-High+SD configuration is 0.277dB.

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 16 of 135

3. Instruments List

Instrument	Model	Serial number	NO.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.7 build 44	N/A	GSM-SAR-001	N/A
Probe	ES3DV3	3088	GSM-SAR-034	2006.12.12
DAE	DAE3	569	GSM-SAR-023	2006.12.08
900MHz system validation dipole	D900V2	184	GSM-SAR-017	2006.12.06
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2006.12.12
Phantom	SAM 12	TP-1283	GSM-SAR-005	N/A
Robot	RX90L	F03/5V32A1/A01	GSM-SAR-028	N/A
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2006.12.19
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2006.12.19
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2006.12.19
Mini-Circuits preamplifier	ZHL-42	D041905	GSM-SAR-033	2006.04.19
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2006.12.19
Agilent power sensor	8481H	MY41091234	GSM-SAR-011	2006.12.19
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2006.12.19
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2006.12.19

4. Measurements

4.1 LeftHandSide-Cheek-GSM850-Middle

Date/Time: 2007-3-23 14:34:03

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Mid/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.452 mW/g


Cheek position - Mid/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.15 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.445 mW/g

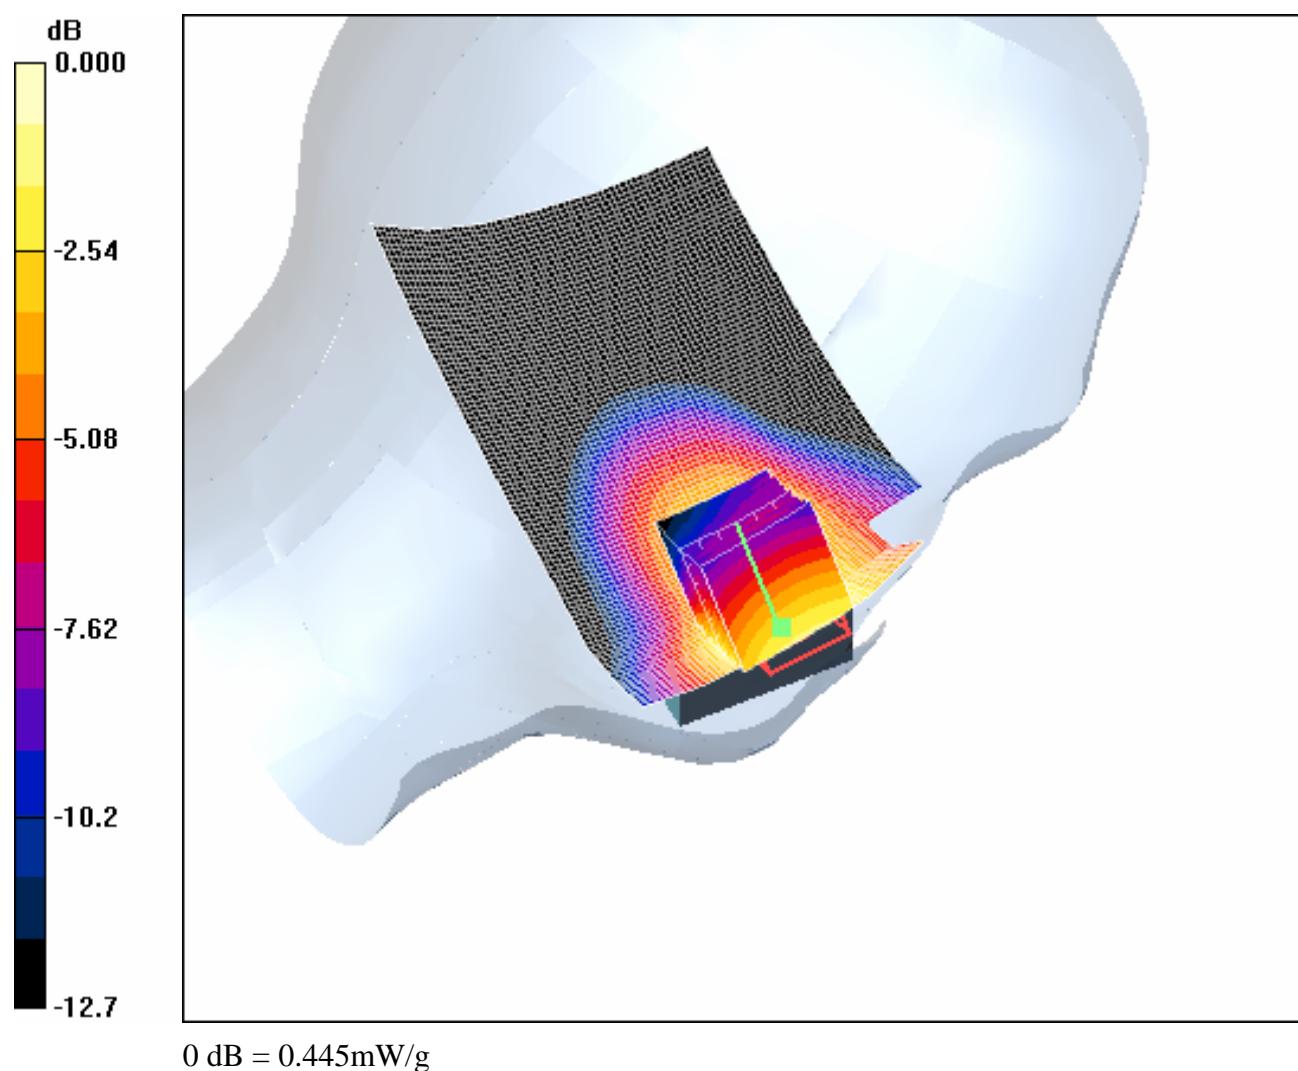

4.2 LeftHandSide-Tilt-GSM850-Middle

Date/Time: 2007-3-23 14:02:25

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Tilt-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 19 of 135

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Mid/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.206 mW/g


Tilt position - Mid/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.53 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

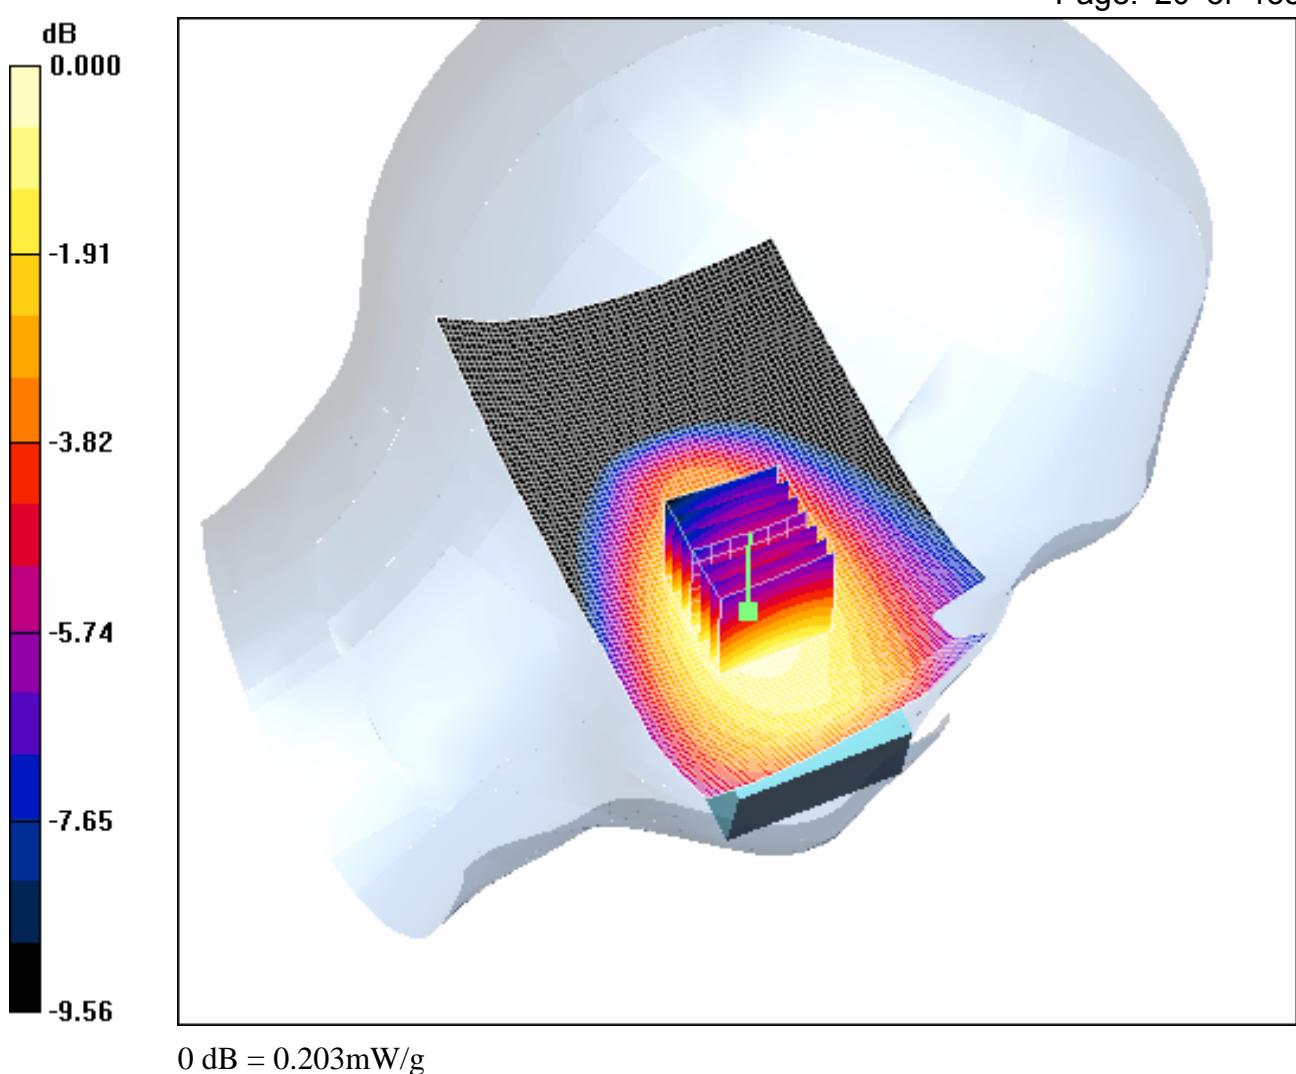

4.3 LeftHandSide-Cheek-GSM850-Low

Date/Time: 2007-3-23 15:00:48

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-Low

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 42.1$; $\mu_r = 1$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.298 mW/g


Cheek position - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.72 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.291 mW/g

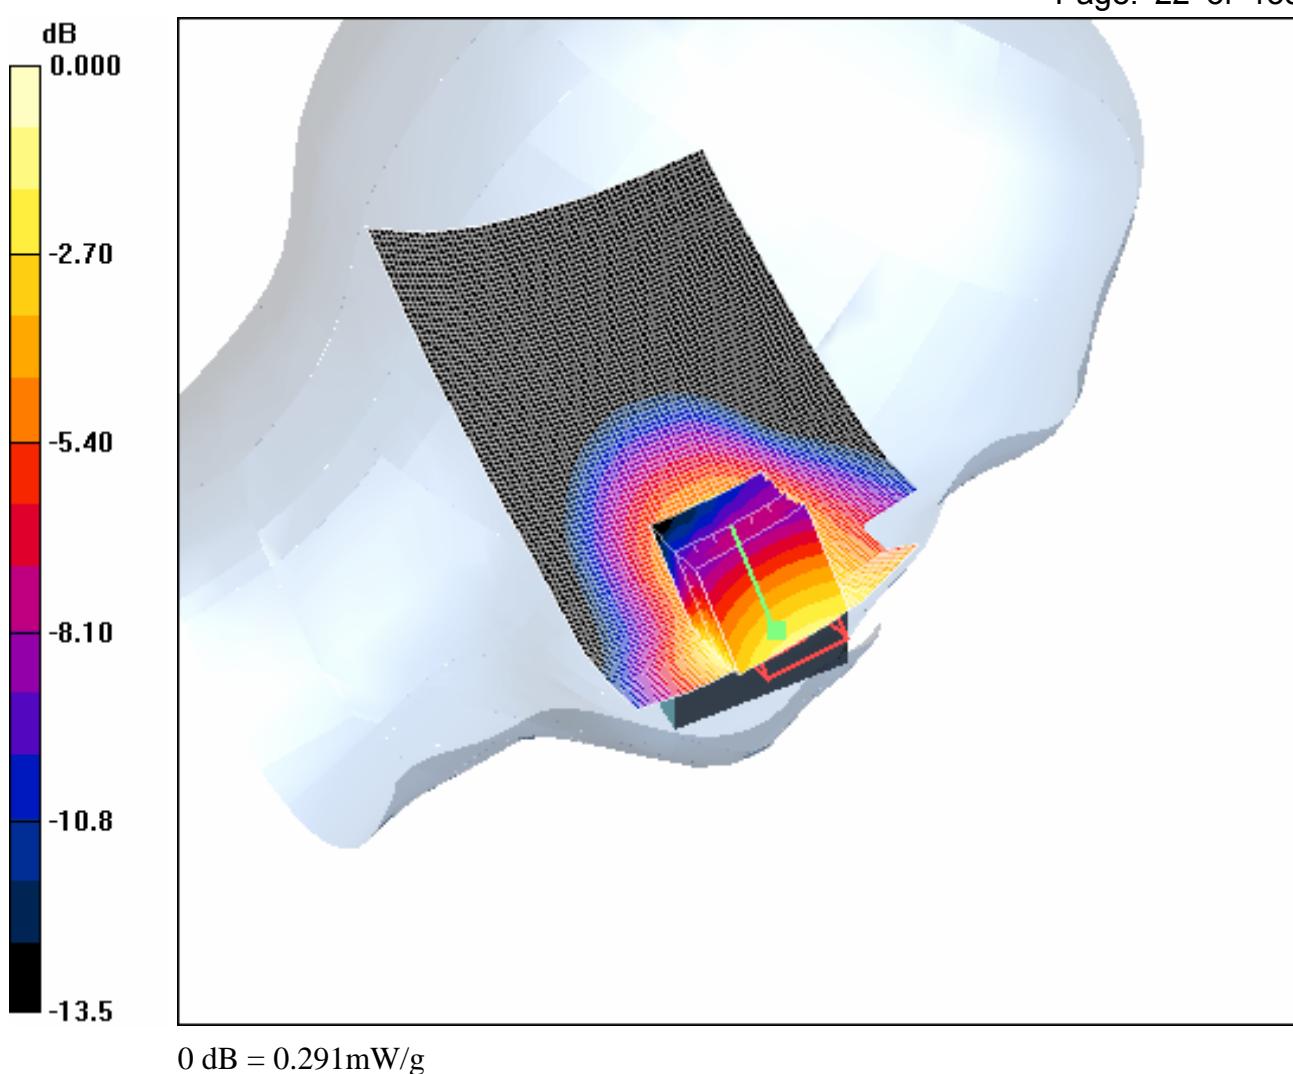

4.4 LeftHandSide-Cheek-GSM850-High

Date/Time: 2007-3-23 15:24:57

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.630 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.93 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

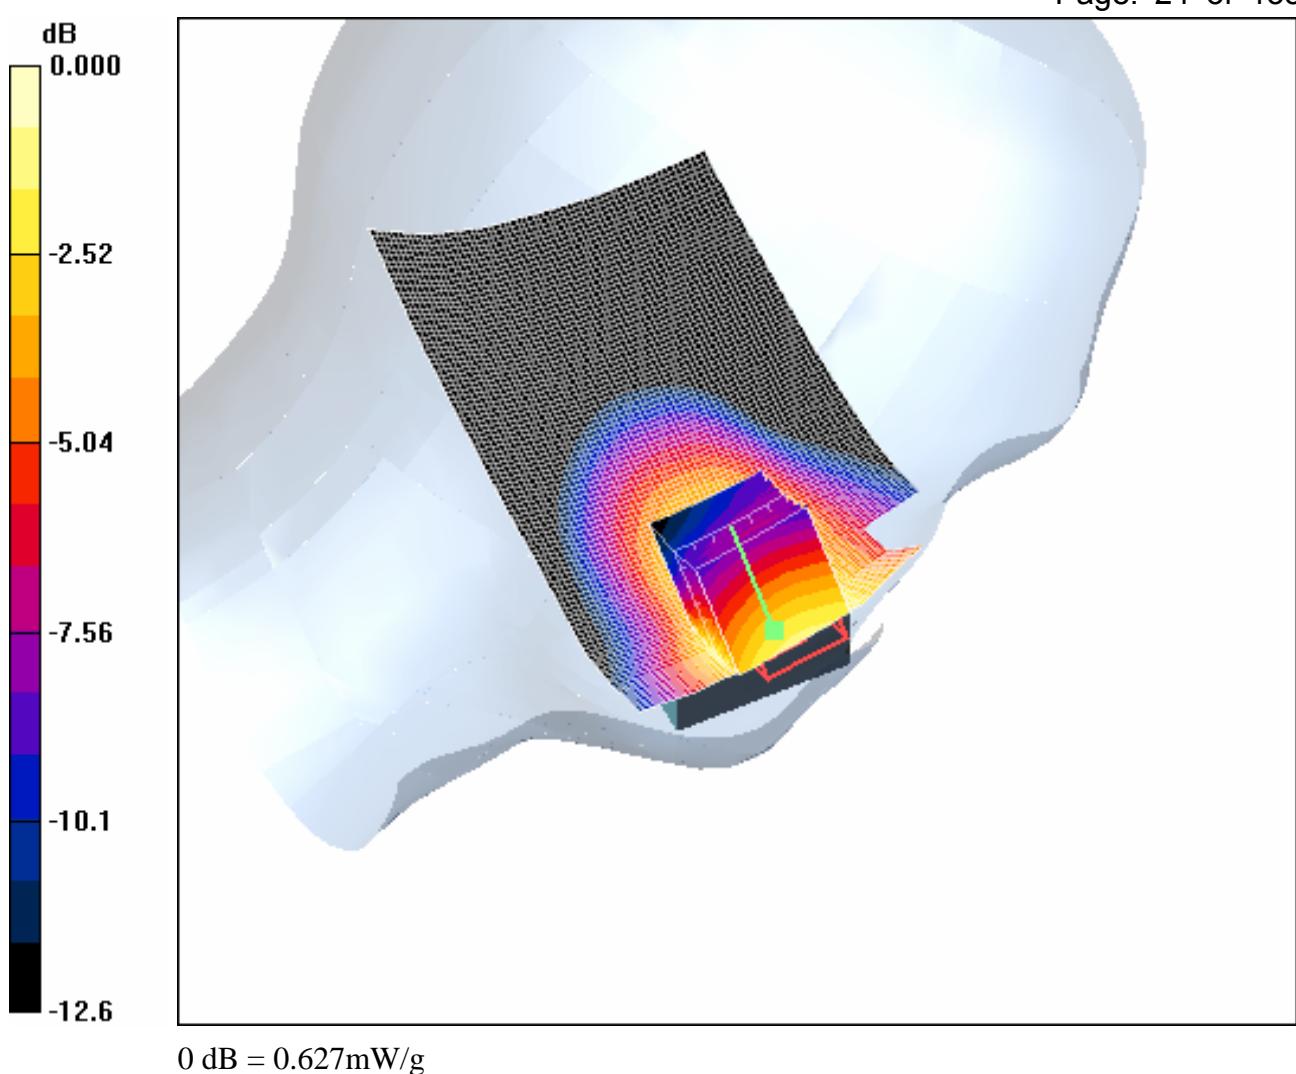

4.5 LeftHandSide-GSM850-Maximum Value-SD

Date/Time: 2007-3-23 16:02:25

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\mu_r = 1$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+SD/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.687 mW/g


Cheek position - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.48 V/m; Power Drift = 0.277 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.418 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

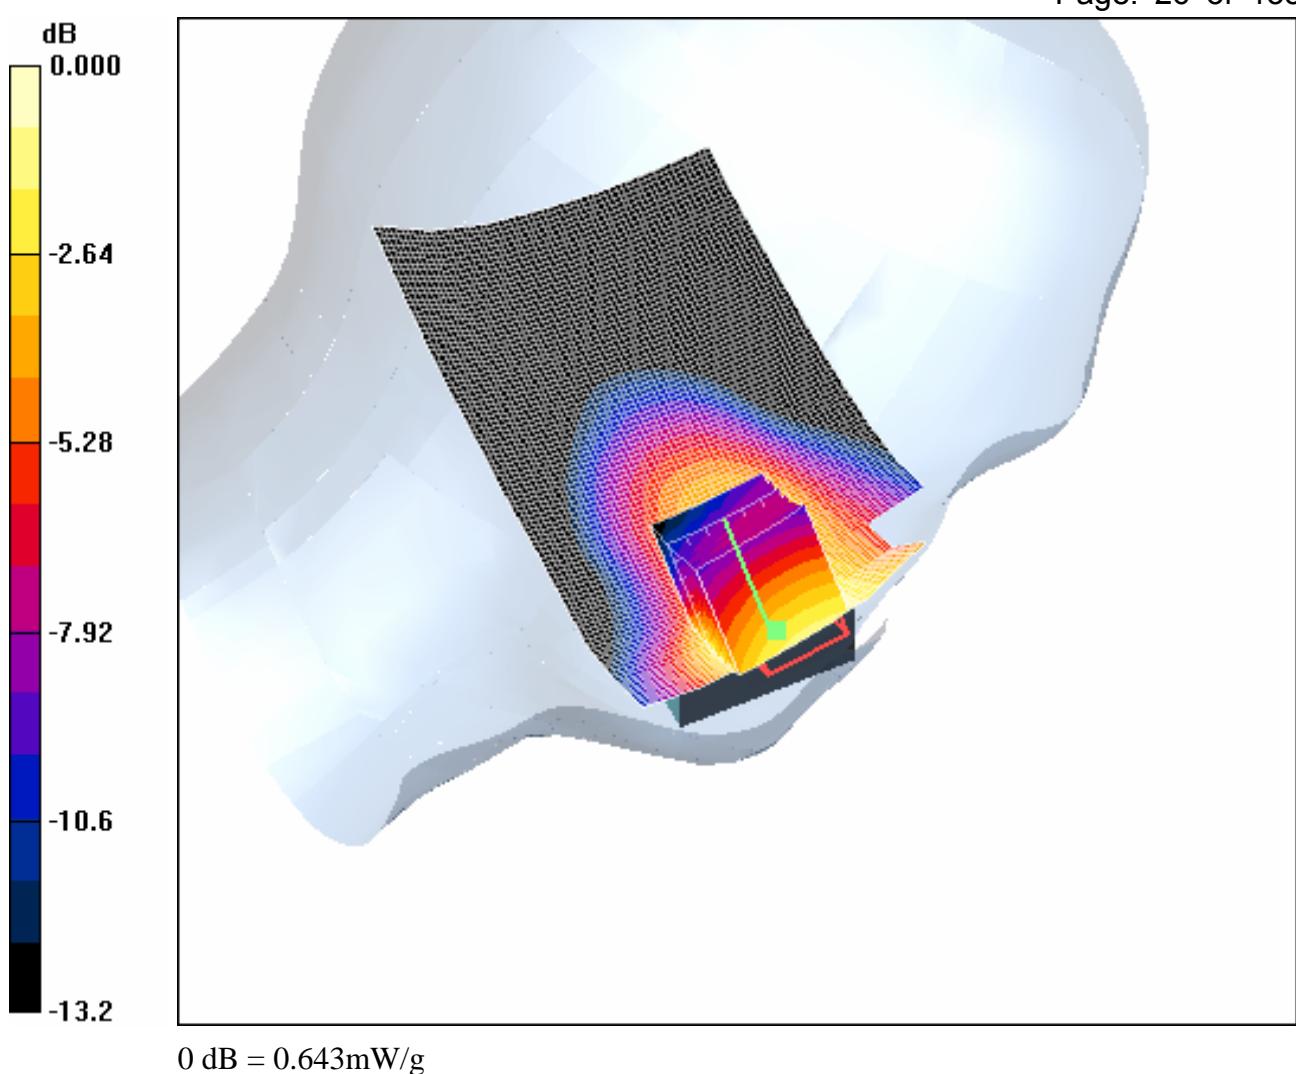

4.6 LeftHandSide-GSM850-Maximum Value-BT

Date/Time: 2007-4-11 15:38:55

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\mu_r = 1$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+BT/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.803 mW/g


Cheek position - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.526 mW/g

Maximum value of SAR (measured) = 0.858 mW/g

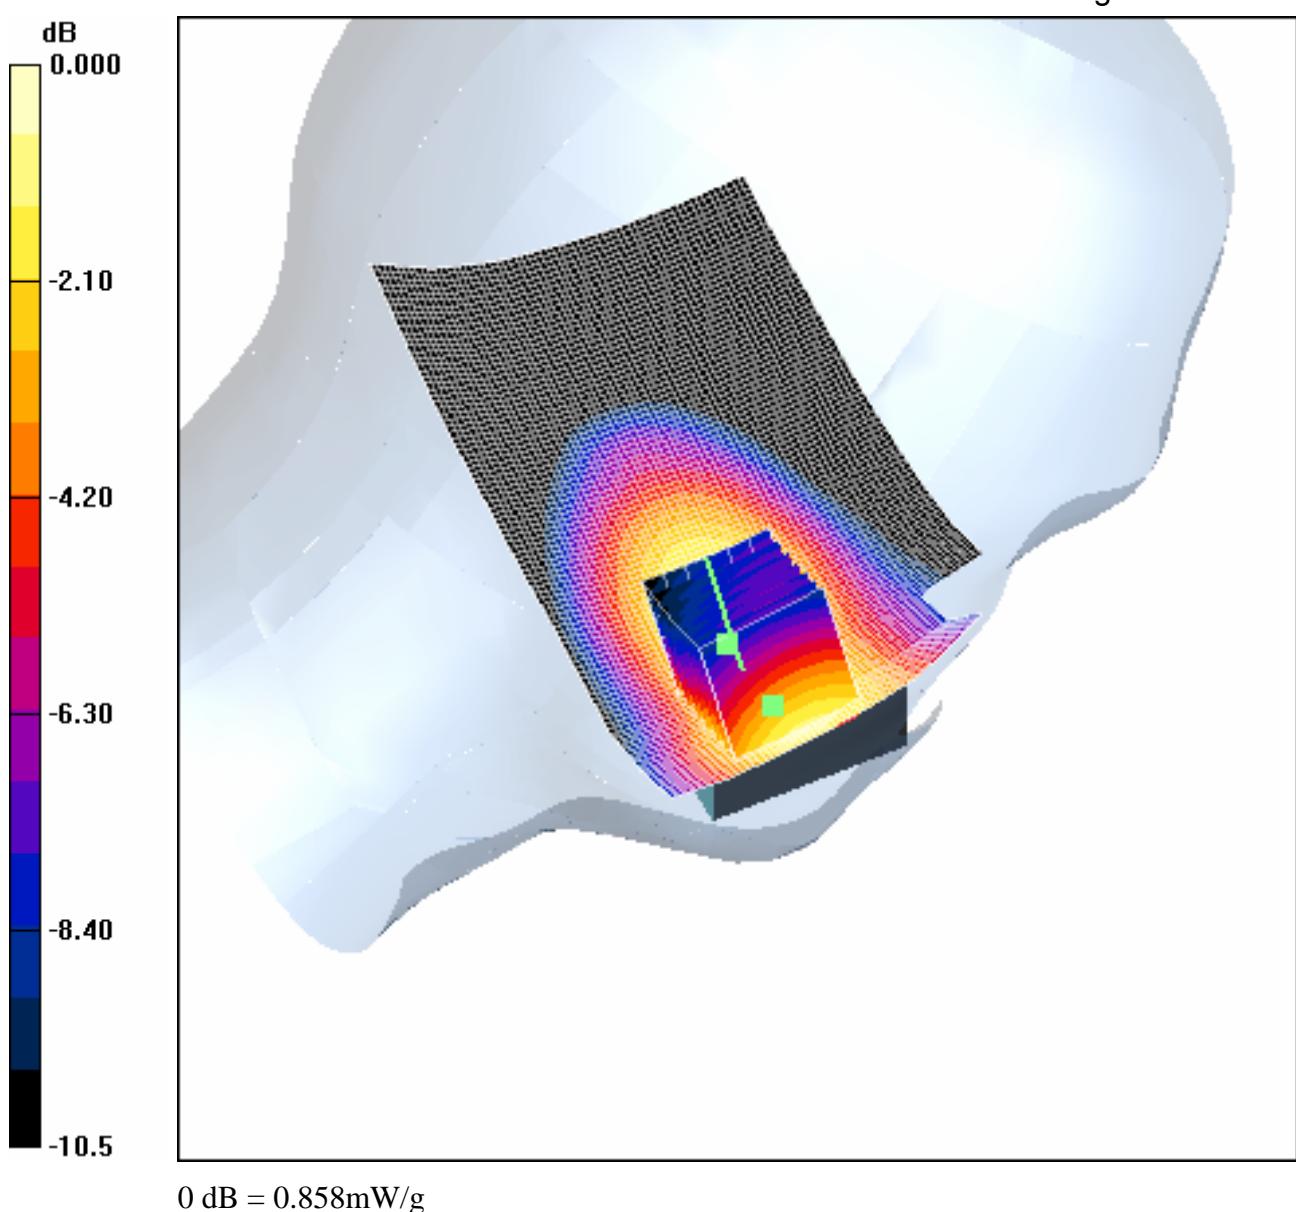

4.7 RightHandSide-Cheek-GSM850-Middle

Date/Time: 2007-3-23 17:33:51

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 29 of 135

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.883 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.638 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.31 V/m; Power Drift = -0.033 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.588 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.629 mW/g

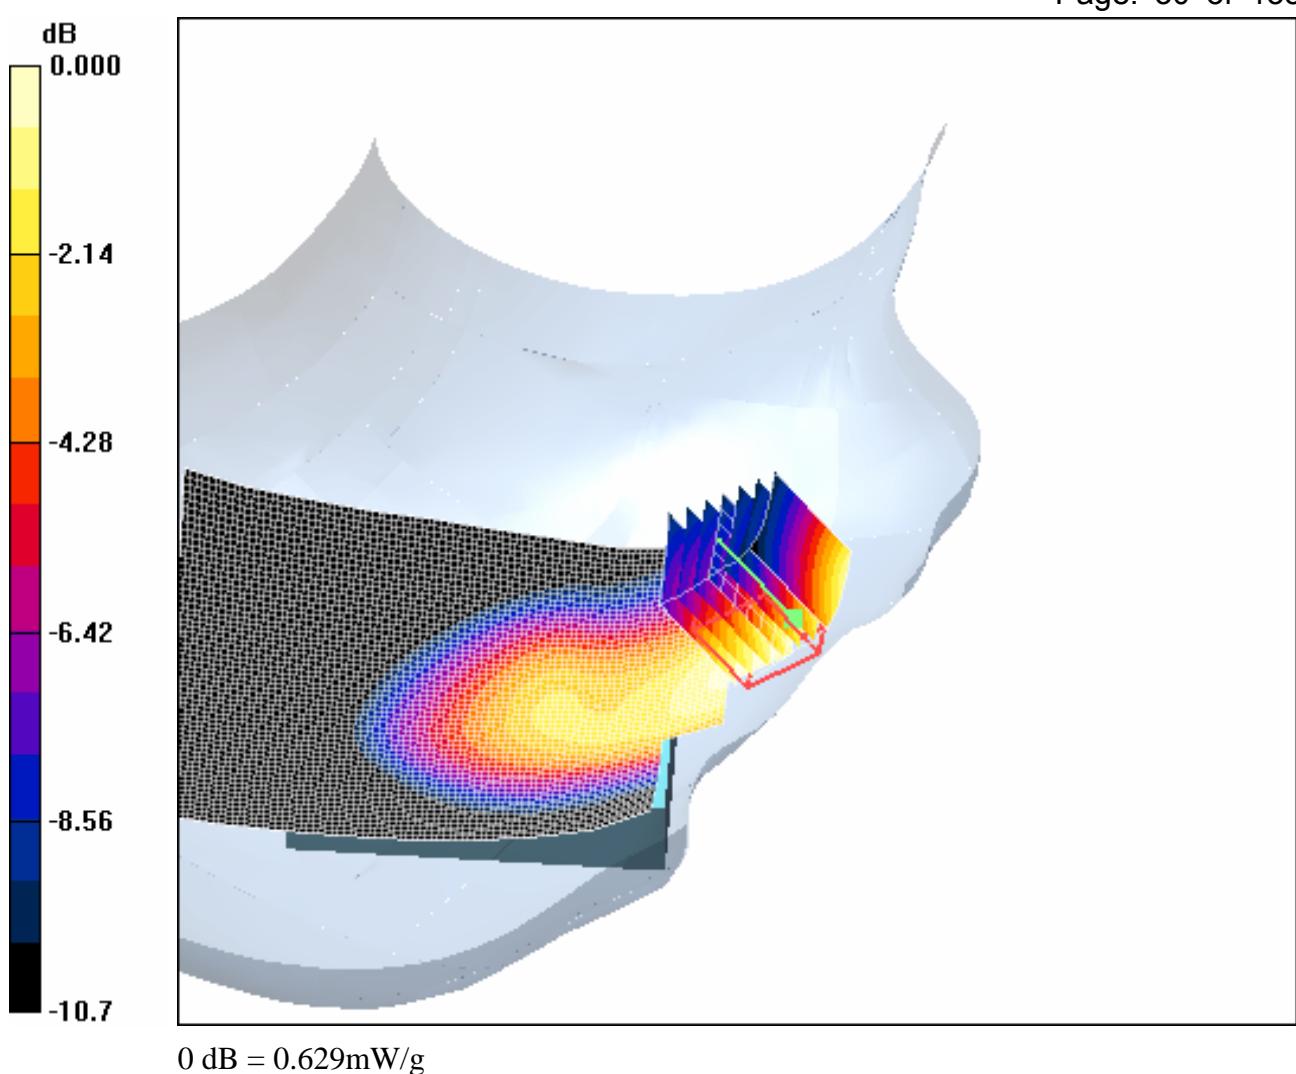

4.8 RightHandSide-Tilt-GSM850-Middle

Date/Time: 2007-3-23 17:03:07

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Tilt-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.9$; $\mu_r = 1$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.255 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.51 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.175 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

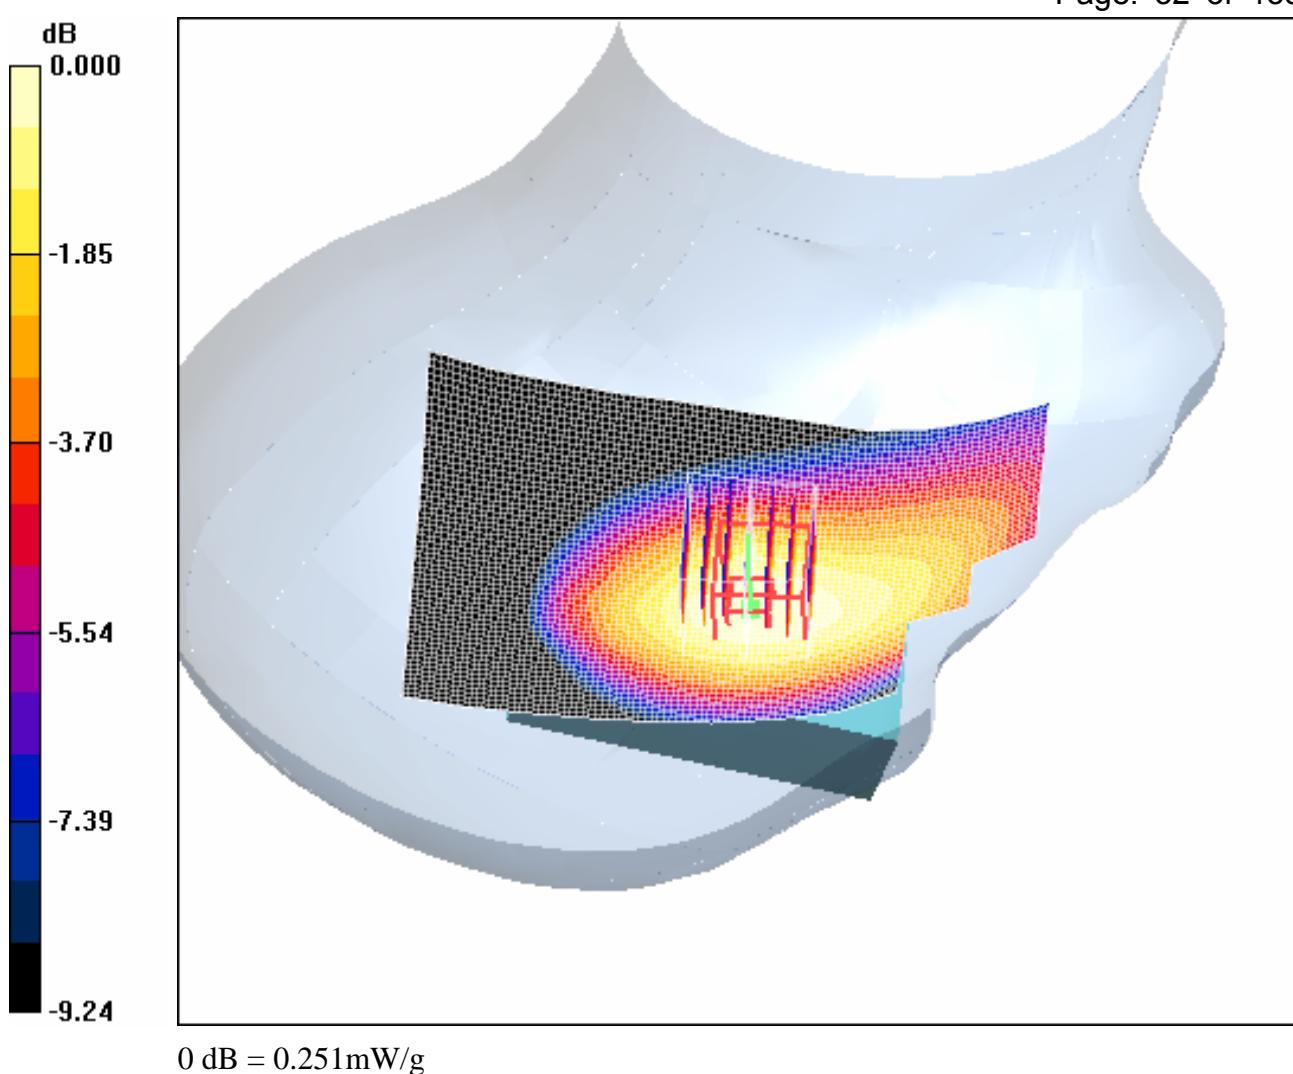

4.9 RightHandSide-Cheek-GSM850-Low

Date/Time: 2007-3-23 20:04:15

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-Low

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.864 \text{ mho/m}$; $\epsilon_r = 42.1$; $\mu_r = 1$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.488 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.29 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

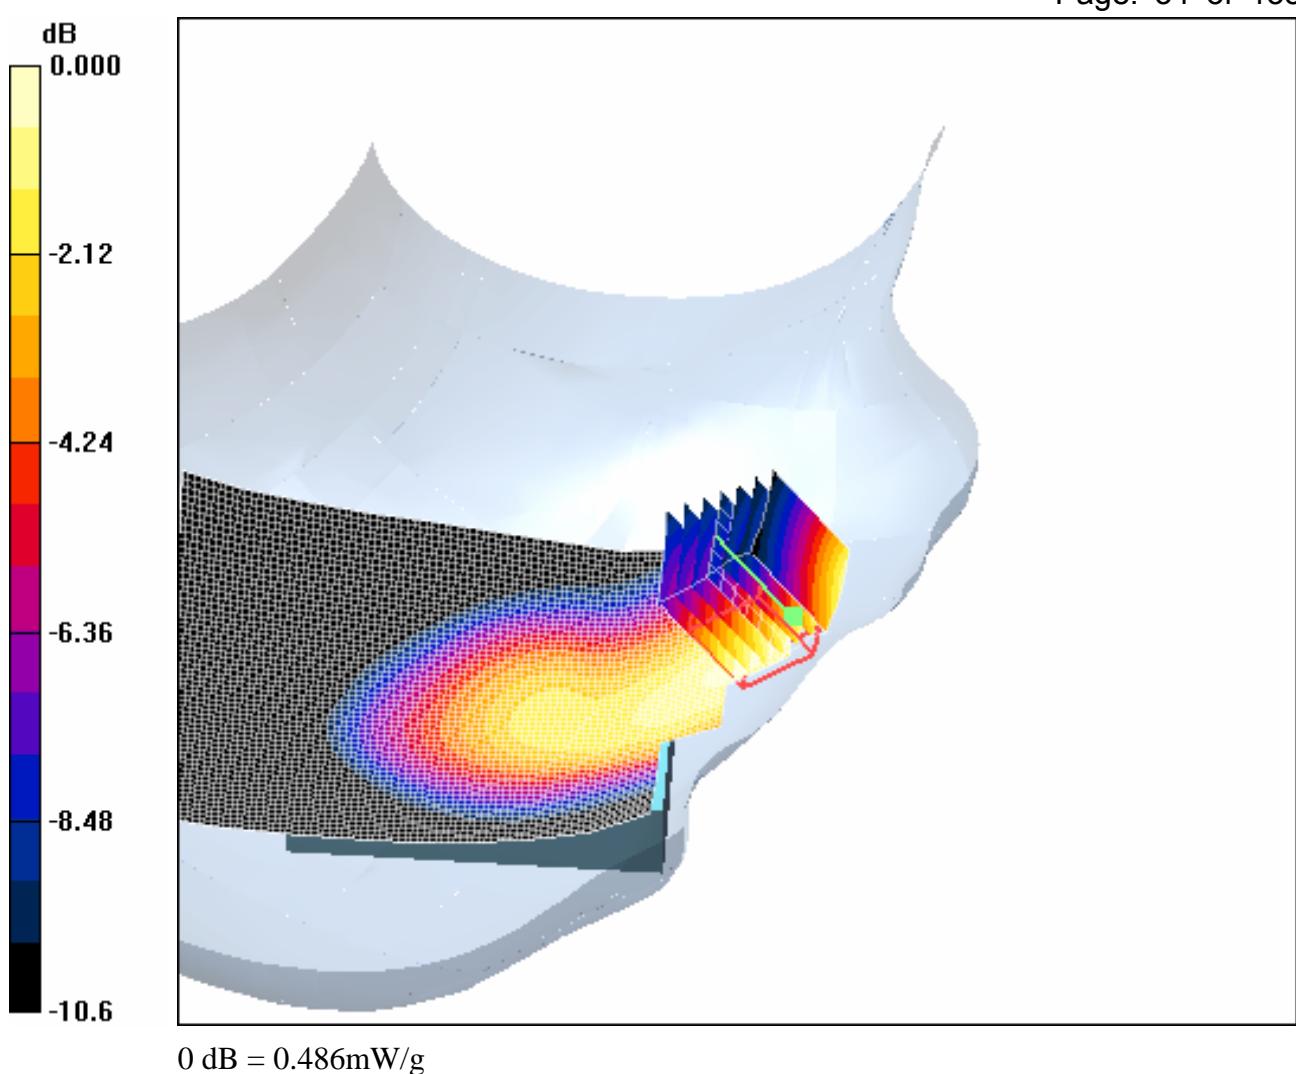

4.10 RightHandSide-Cheek-GSM850-High

Date/Time: 2007-3-23 18:47:28

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\mu_r = 1$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.855 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.780 mW/g; SAR(10 g) = 0.531 mW/g

Maximum value of SAR (measured) = 0.845 mW/g

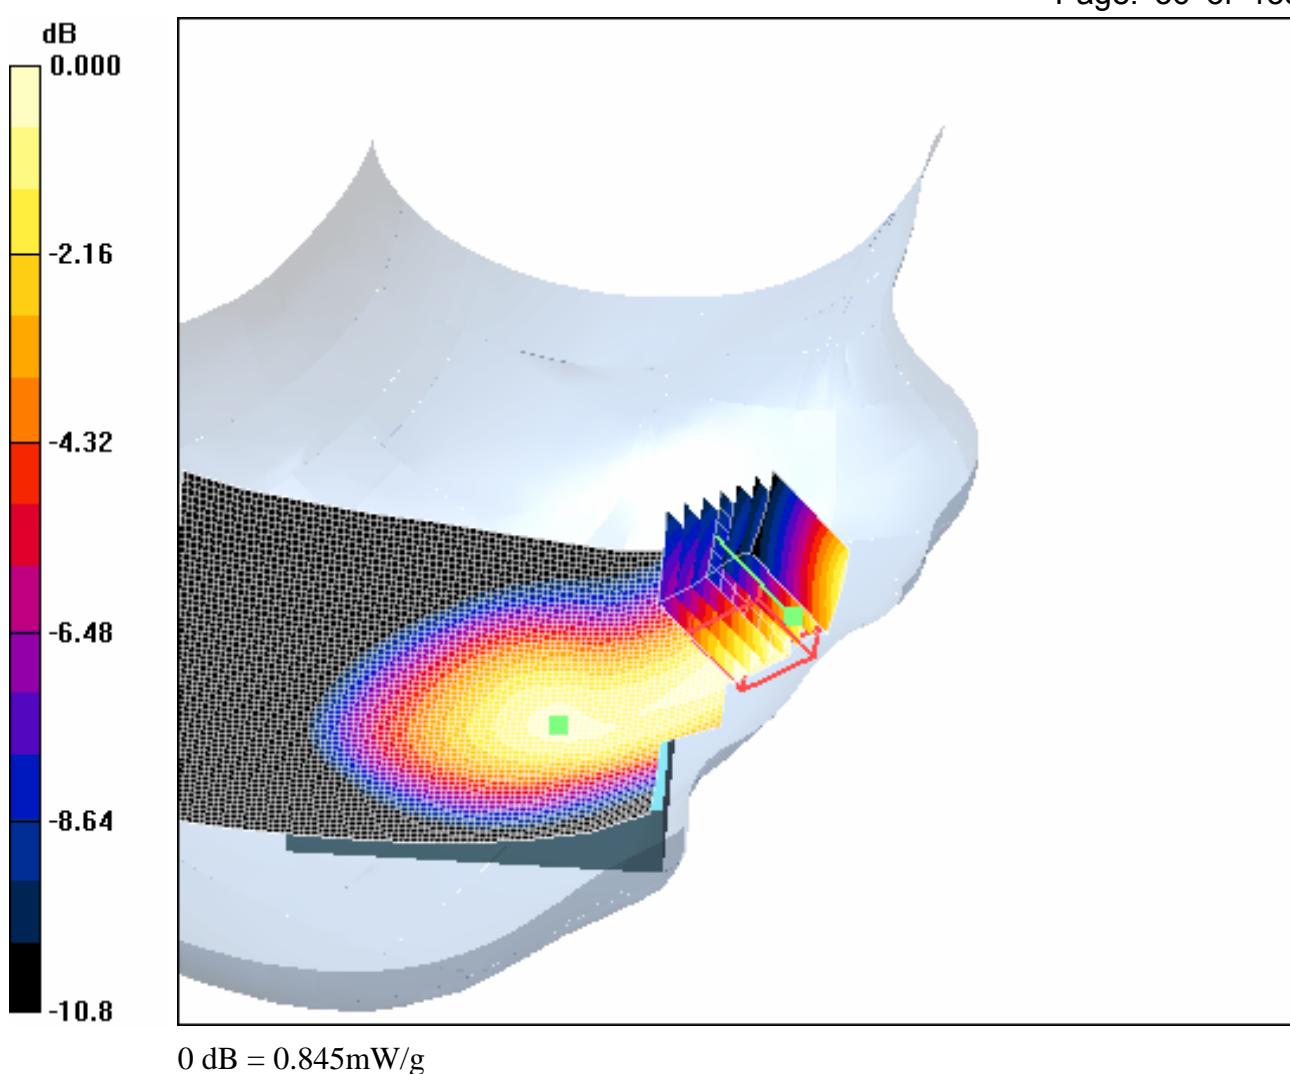

4.11 RightHandSide-GSM850-Maximum Value-SD

Date/Time: 2007-3-23 21:23:38

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\mu_r = 1$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High +SD 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.821 mW/g


Cheek position - High +SD 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.508 mW/g

Maximum value of SAR (measured) = 0.809 mW/g

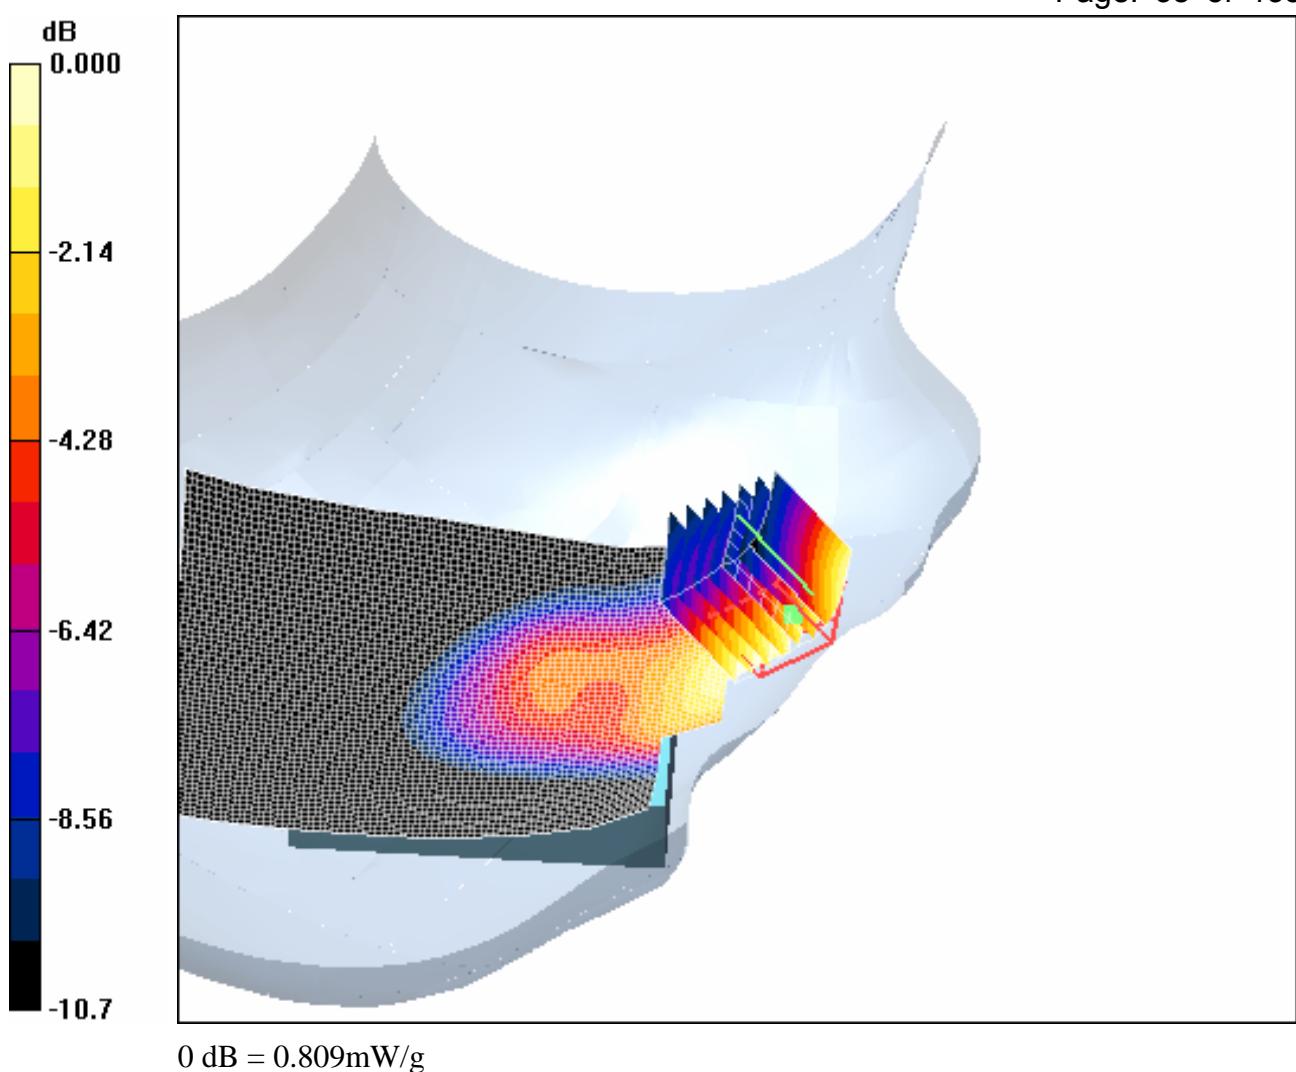

4.12 RightHandSide-GSM850-Maximum Value-BT

Date/Time: 2007-3-23 21:57:30

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.8$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High +BT/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.809 mW/g


Cheek position - High +BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.36 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.747 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.799 mW/g

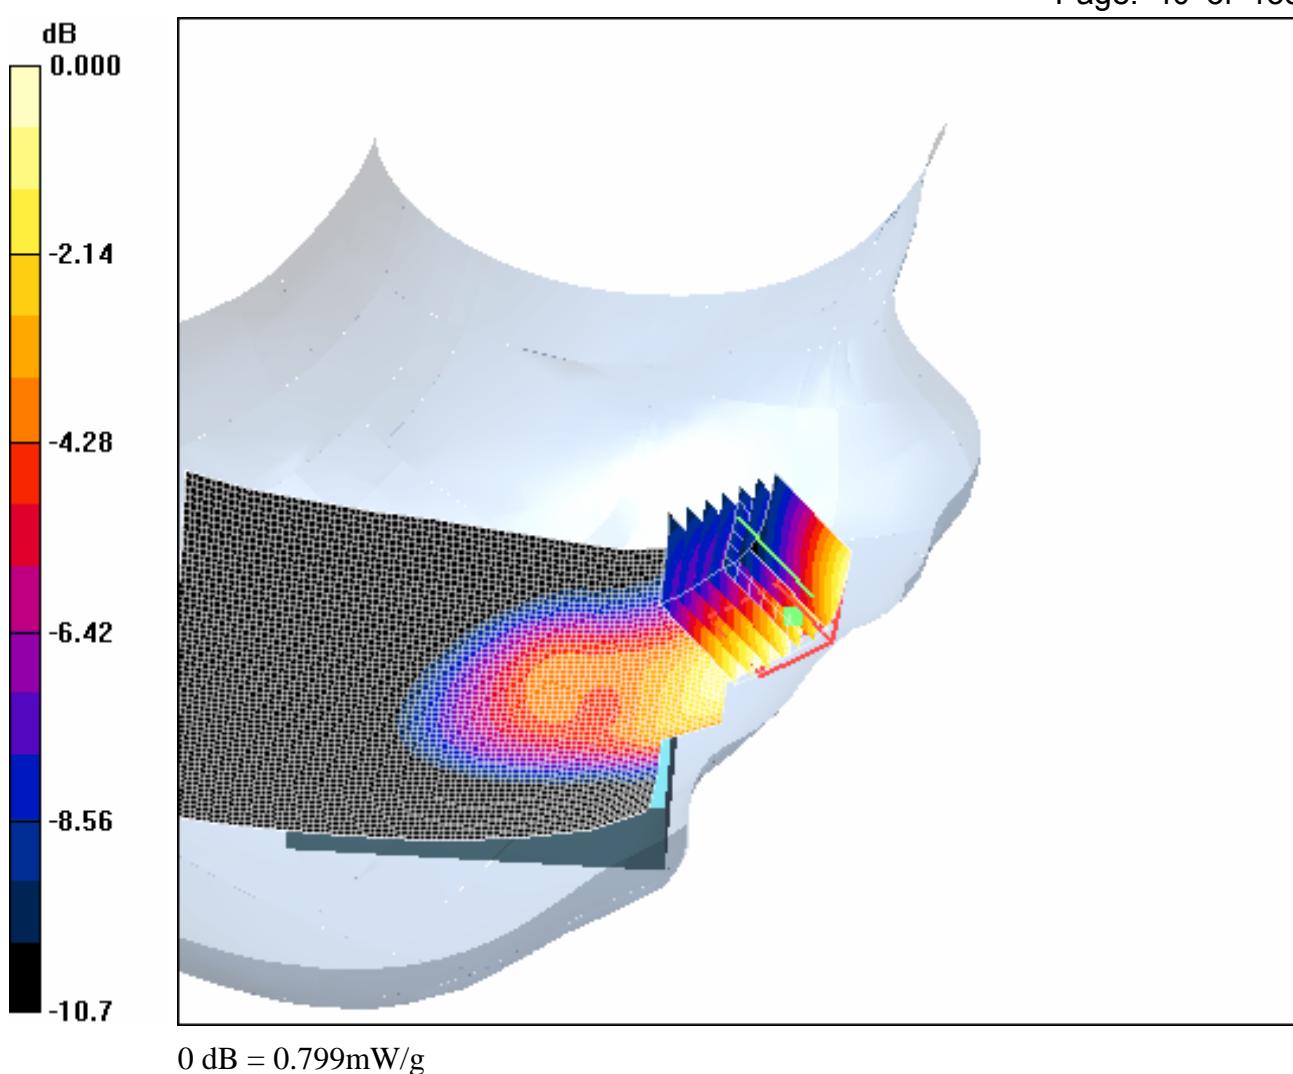

4.13 Body-Worn-GSM850-GPRS-Low

Date/Time: 2007-3-16 11:26:34

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Low-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.924 \text{ mho/m}$; $\epsilon_r = 56.2$; $\epsilon_i = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.893 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 0.876 mW/g

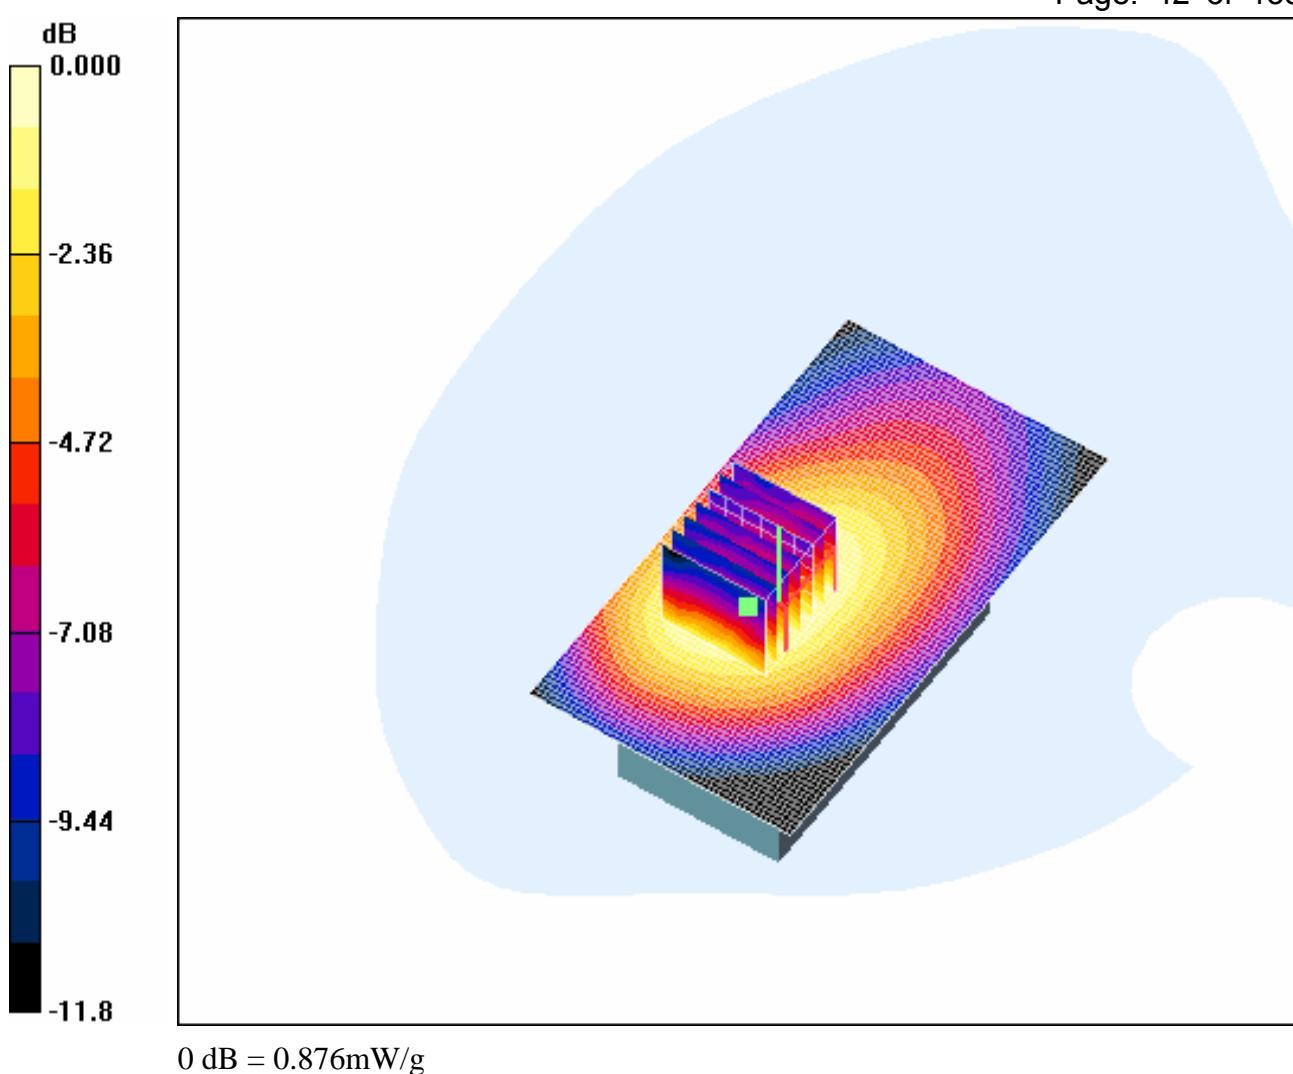

4.14 Body-Worn-GSM850-GPRS-Middle

Date/Time: 2007-4-10 17:08:24

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Middle-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.942 \text{ mho/m}$; $\epsilon_r = 56.2$; $\mu_r = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle 2/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g


Body Worn - Middle 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.752 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

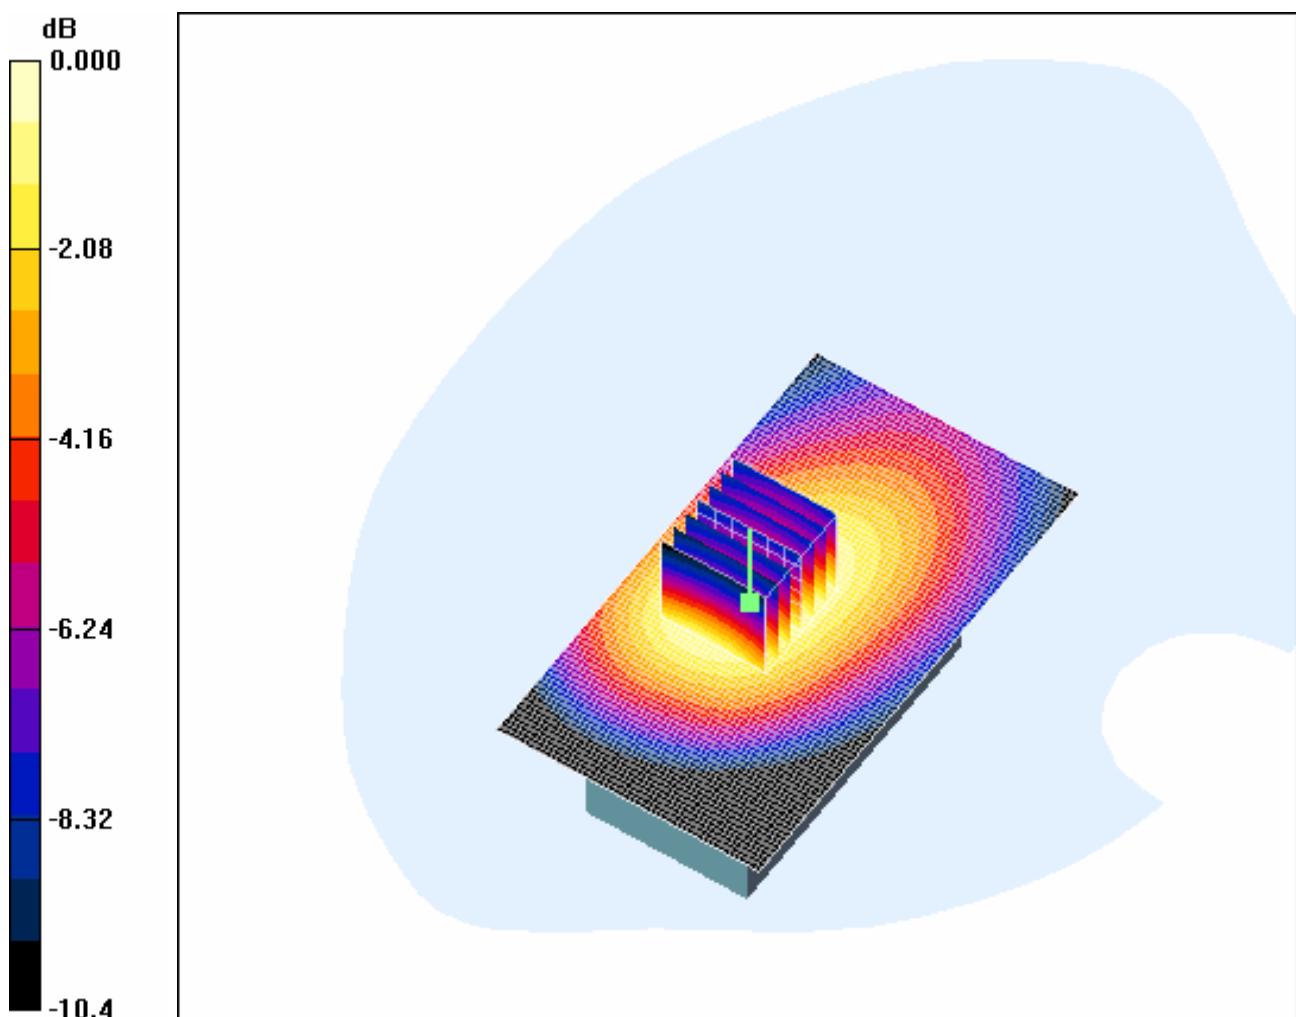

0 dB = 1.14mW/g

4.15 Body-Worn-GSM850-GPRS-High

Date/Time: 2007-3-16 14:17:03

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-High-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 45 of 135

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.955 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High 2/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g


Body Worn - High 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

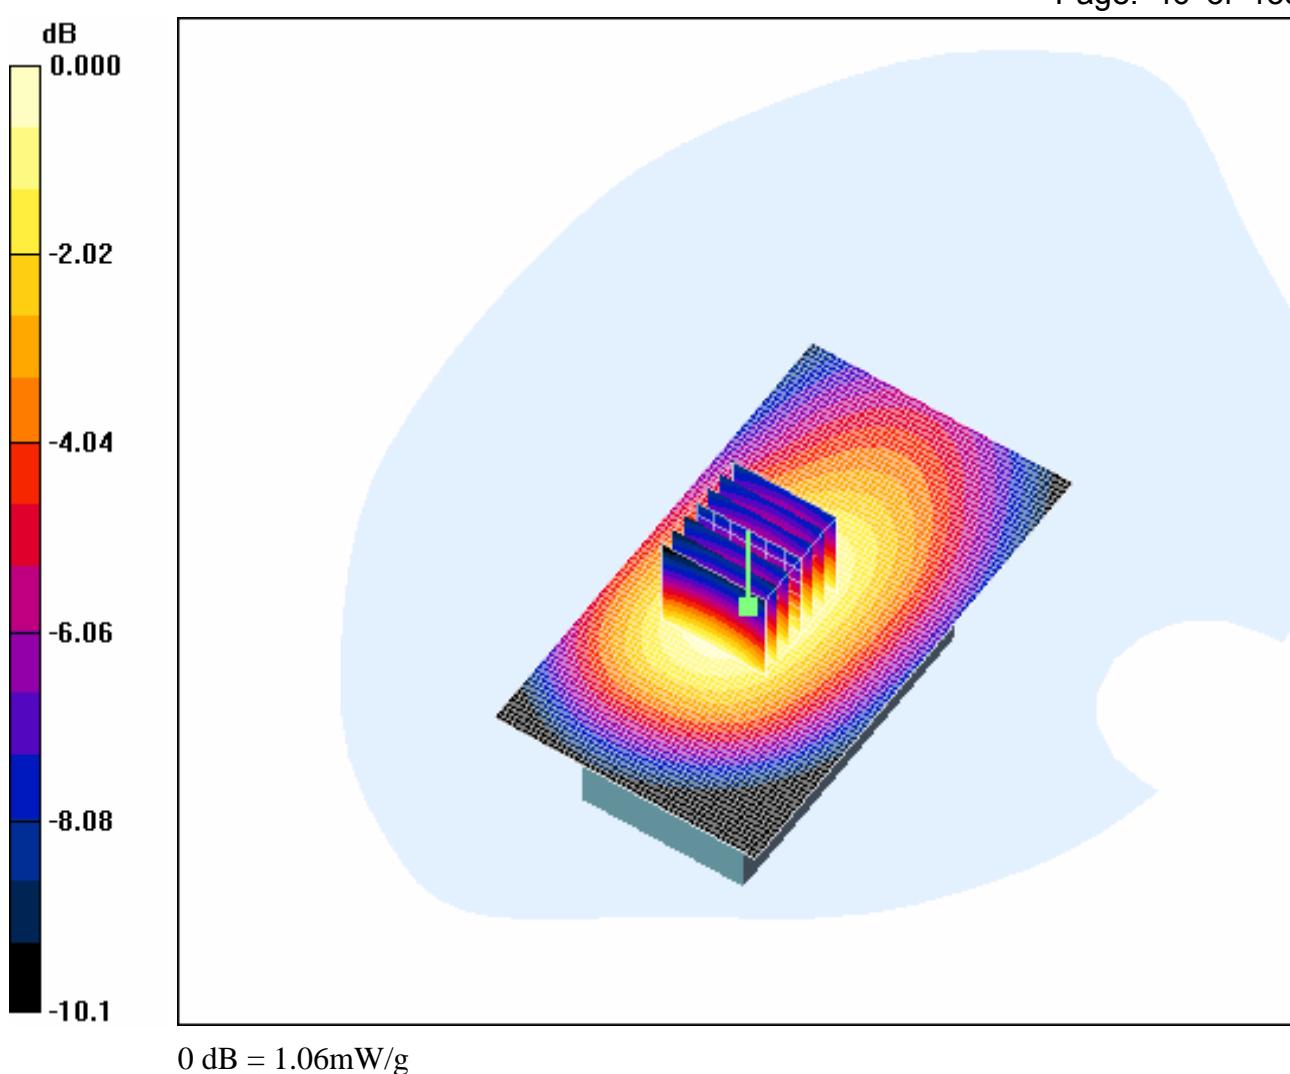

4.16 Body-Worn-GSM850-Maximum Value-SD

Date/Time: 2007-3-16 15:13:37

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Middle-2.0cm+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.942 \text{ mho/m}$; $\epsilon_r = 56.2$; $\mu_r = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle+SD/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 mW/g


Body Worn - Middle+SD/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.685 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

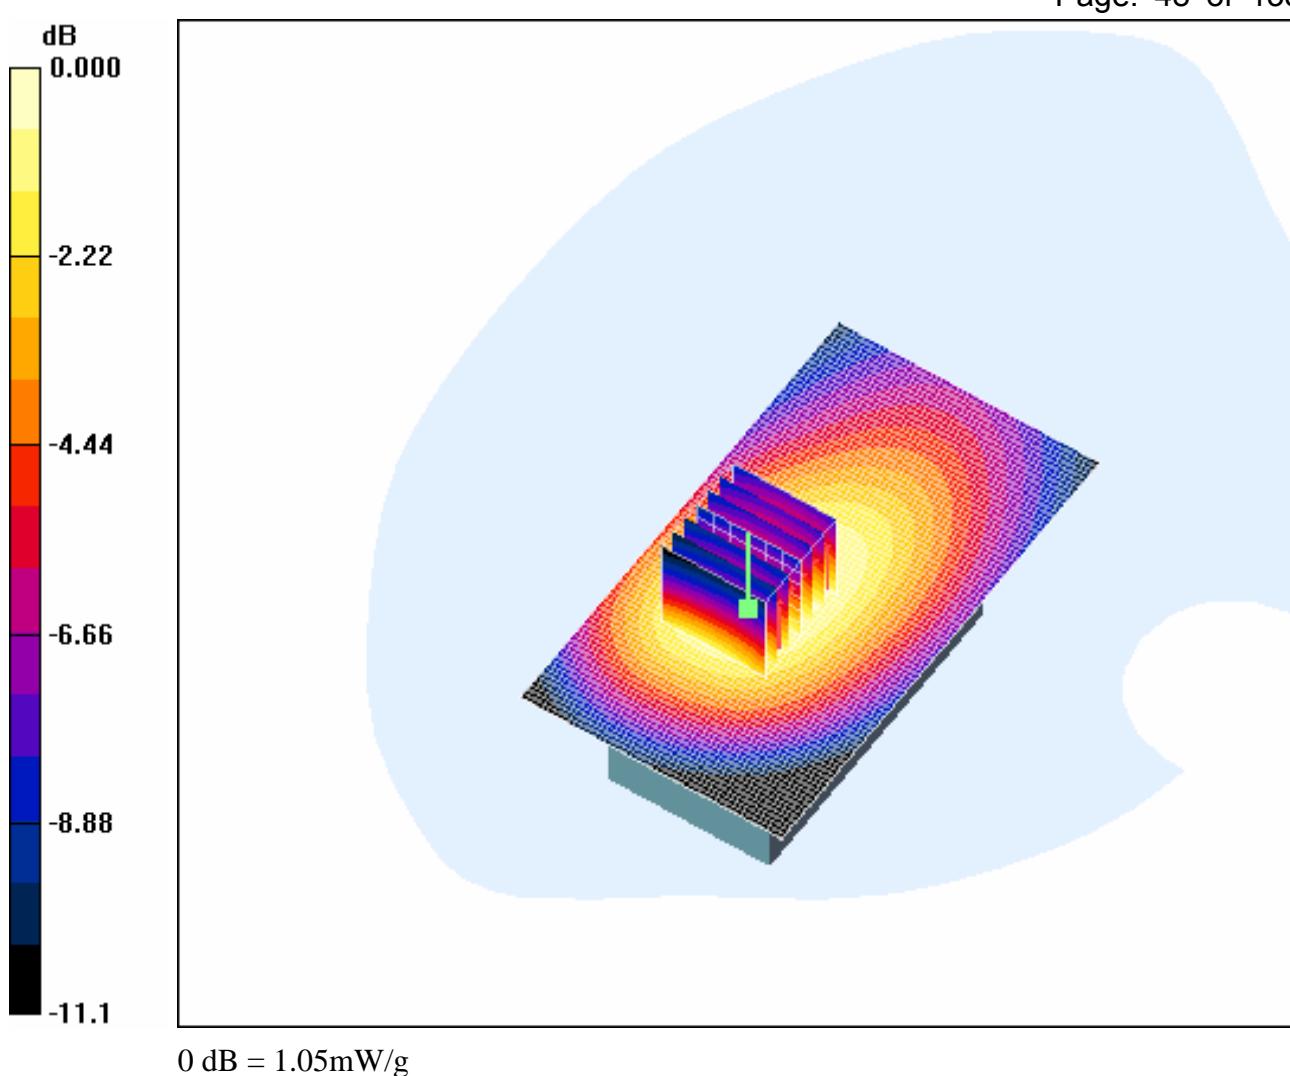

4.17 Body-Worn-GSM850-Maximum Value-BT

Date/Time: 2007-3-16 15:42:13

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Middle-2.0cm+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.942$ mho/m; $\epsilon_r = 56.2$; $\epsilon_i = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle+BT/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g


Body Worn - Middle+BT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.989 mW/g; SAR(10 g) = 0.695 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

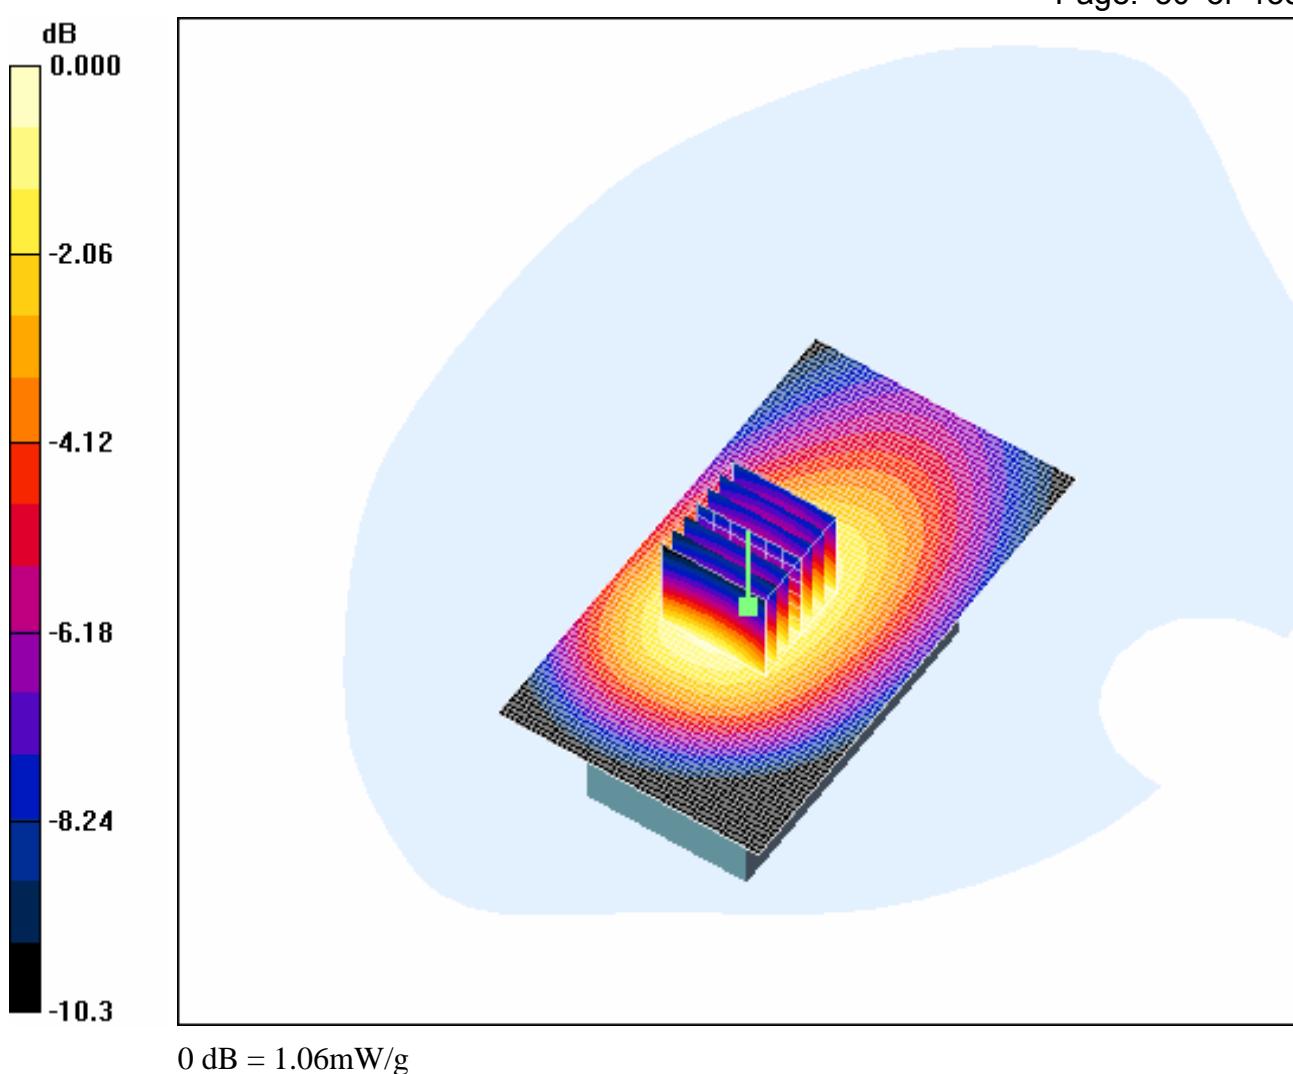

4.18 LeftHandSide-Cheek-PCS1900-Middle

Date/Time: 2007-3-22 14:40:06

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.2$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.865 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.96 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.456 mW/g

Maximum value of SAR (measured) = 0.819 mW/g

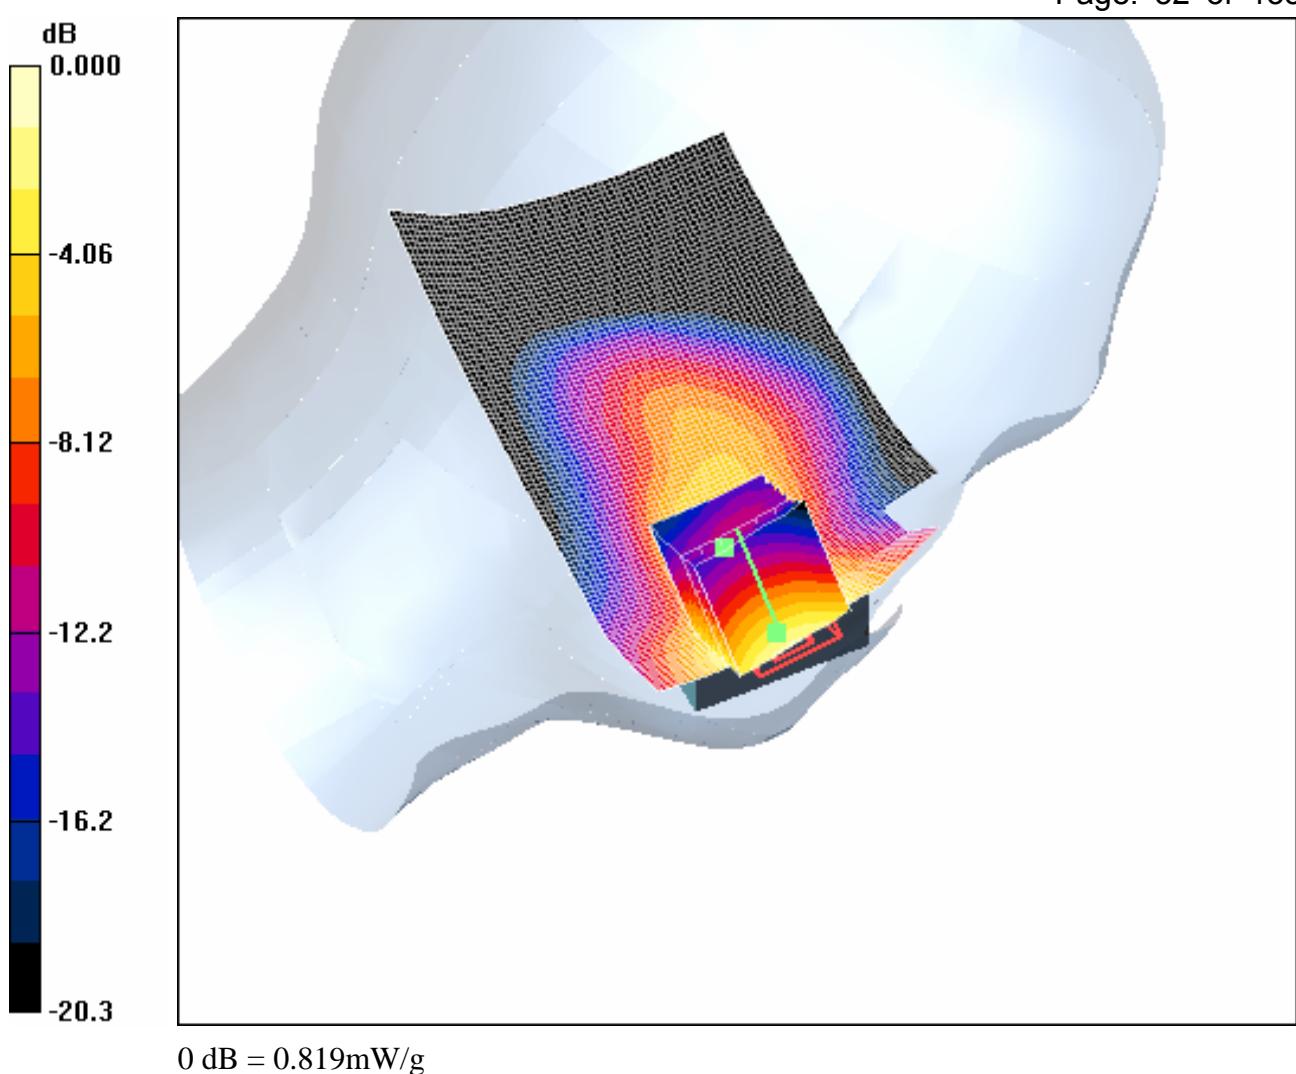

4.19 LeftHandSide-Tilt-PCS1900-Middle

Date/Time: 2007-3-22 14:09:36

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Tilt-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.2$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.237 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.79 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

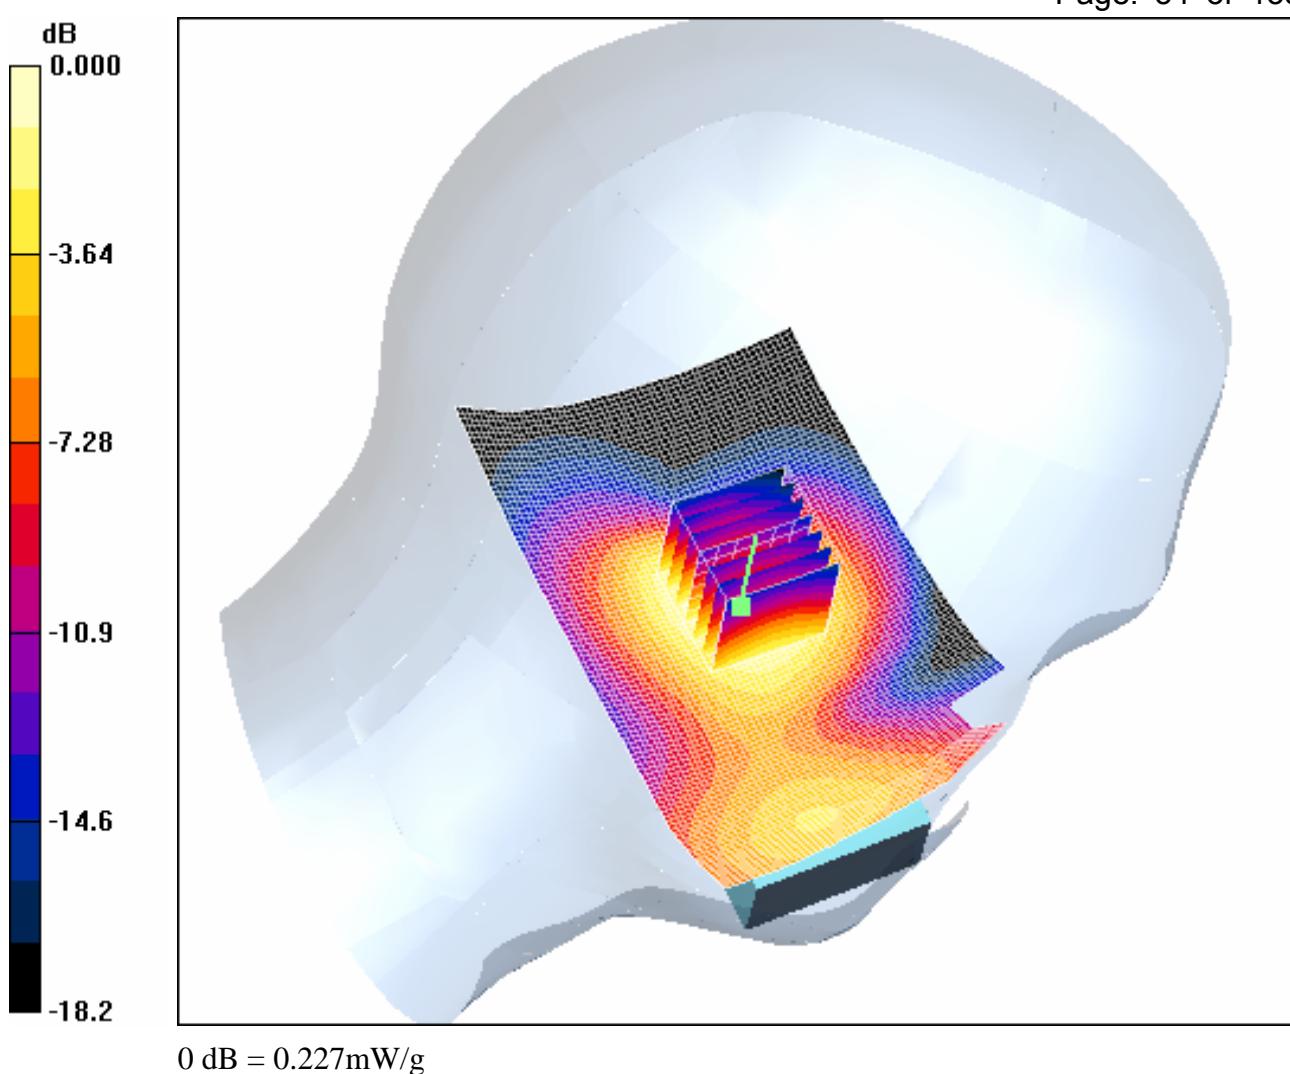

4.20 LeftHandSide-Cheek-PCS1900-Low

Date/Time: 2007-3-22 15:07:46

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-Low

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.3$; $\epsilon_i =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.665 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.57 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.642 mW/g

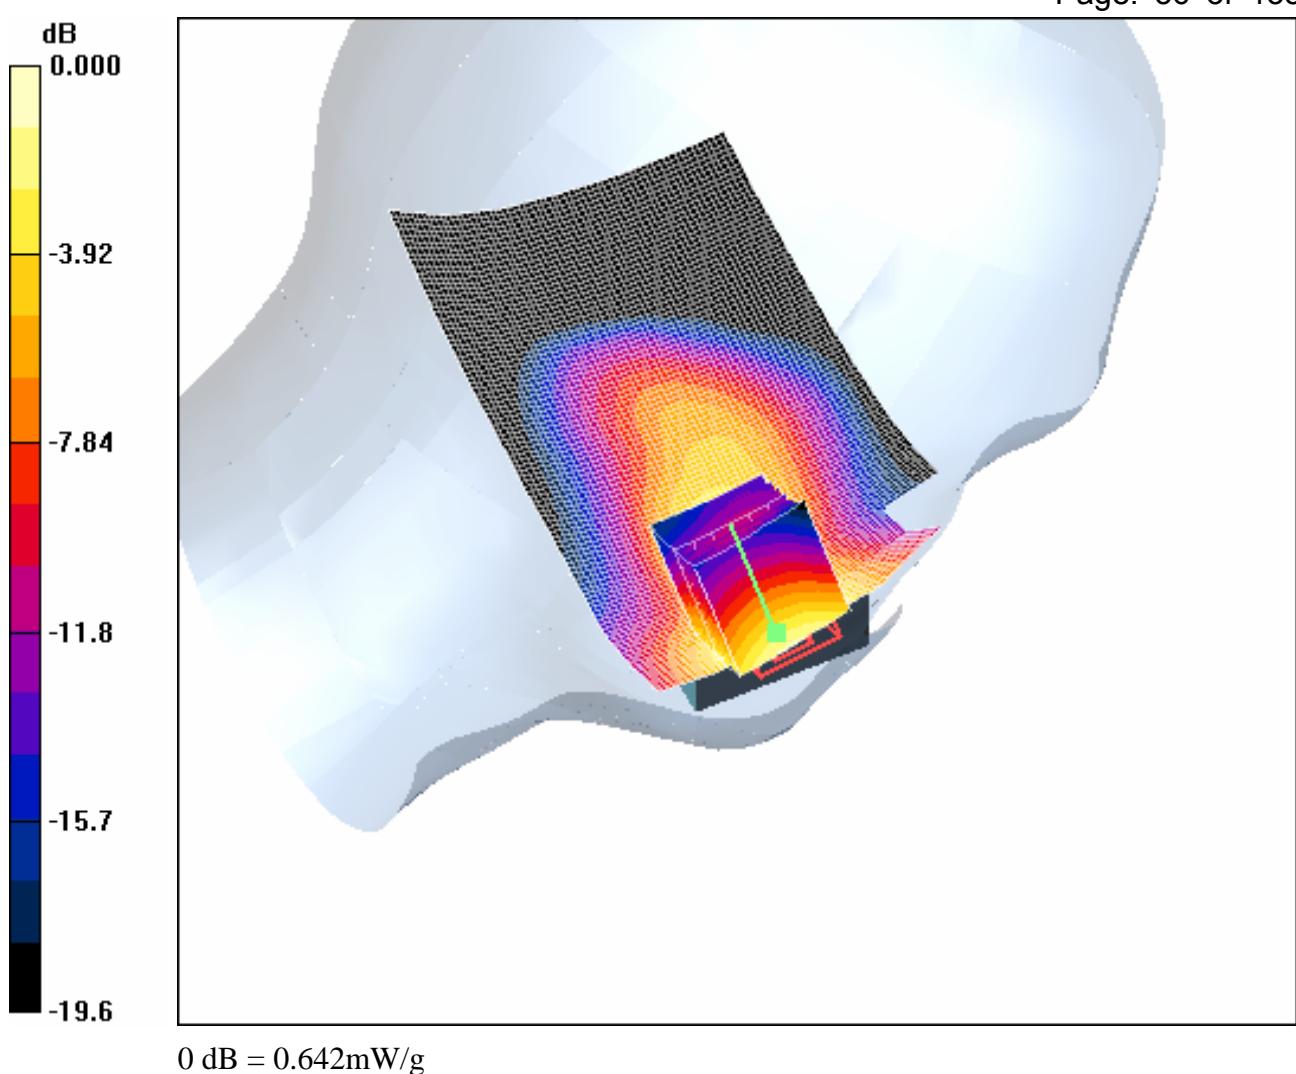

0 dB = 0.642mW/g

4.21 LeftHandSide-Cheek-PCS1900-High

Date/Time: 2007-3-22 15:36:09

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.923 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.49 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.481 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

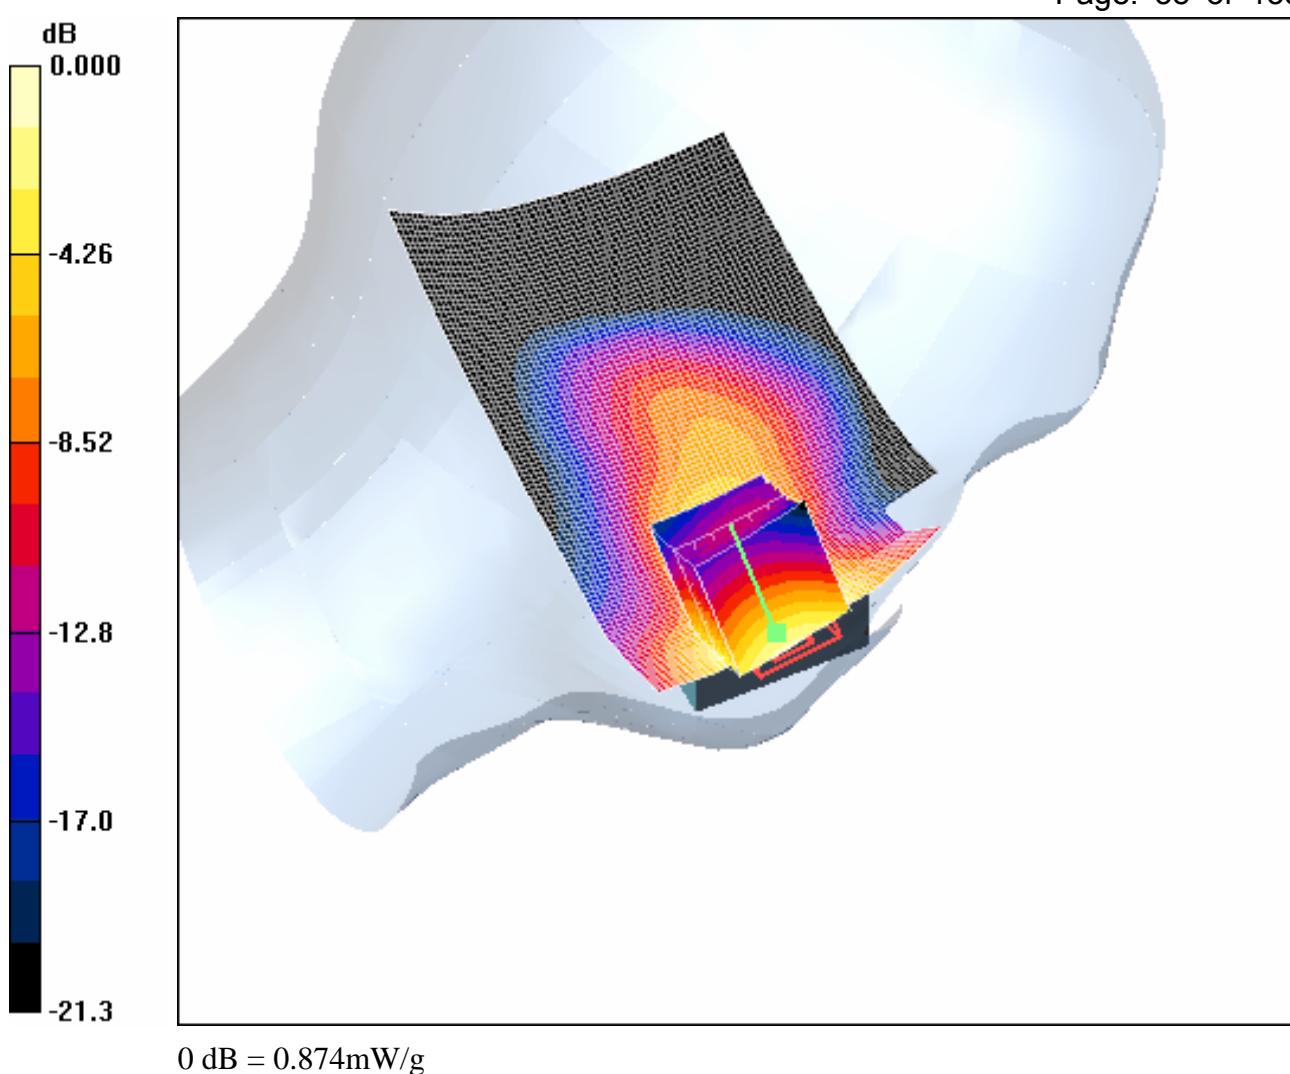

4.22 LeftHandSide-PCS1900-Maximum Value-SD

Date/Time: 2007-3-22 16:36:35

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\mu_r = 1$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+SD/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.959 mW/g


Cheek position - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.02 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

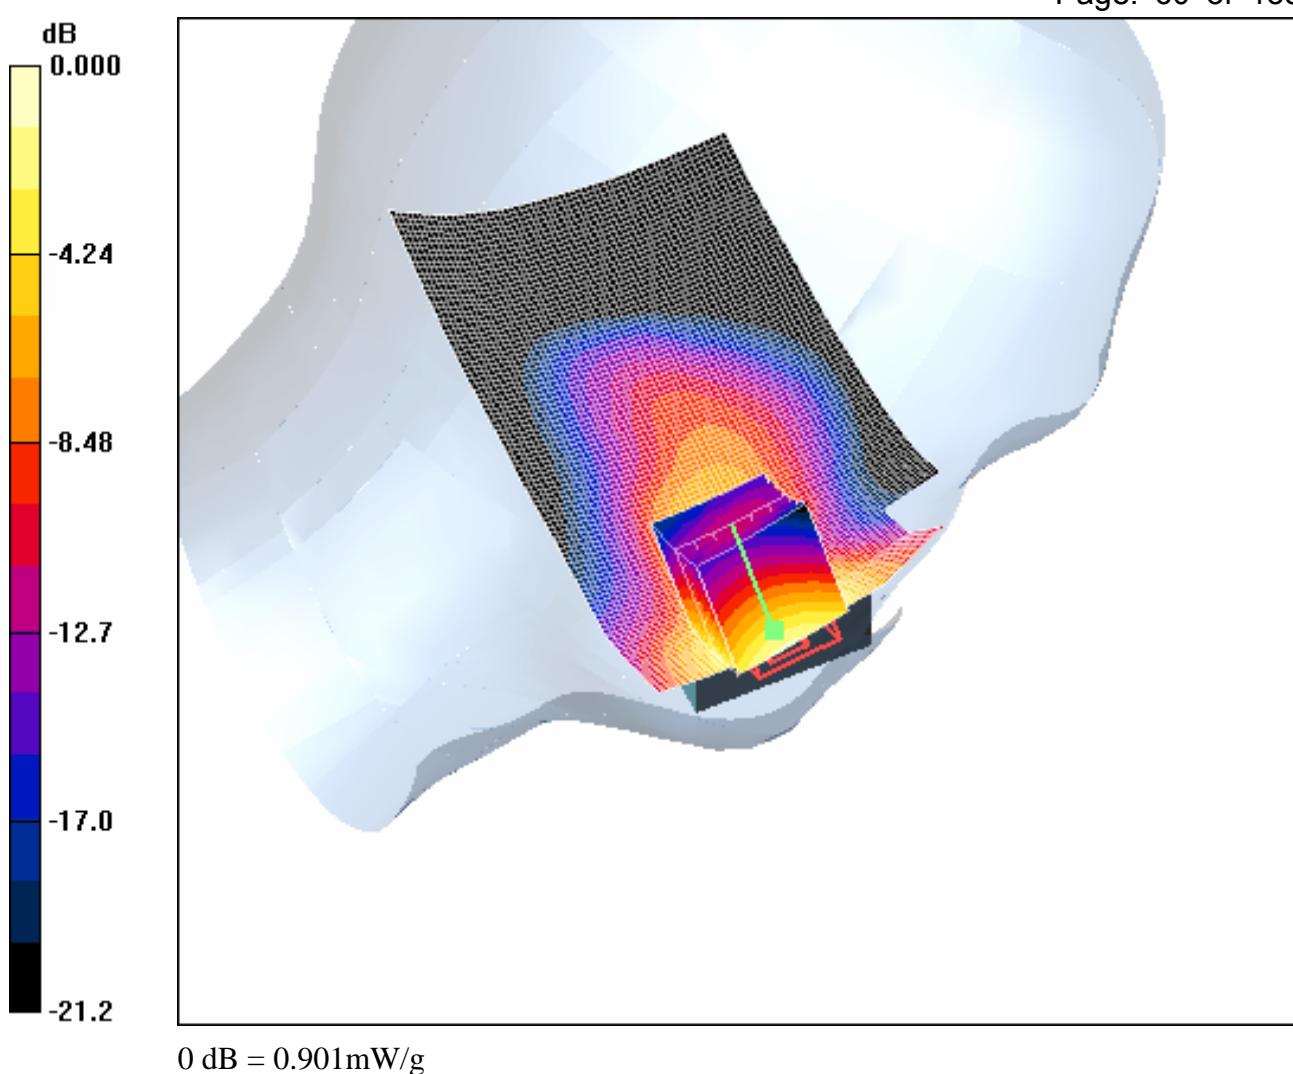

4.23 LeftHandSide-PCS1900-Maximum Value-BT

Date/Time: 2007-3-22 18:15:12

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+BT/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.843 mW/g


Cheek position - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.80 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.809 mW/g

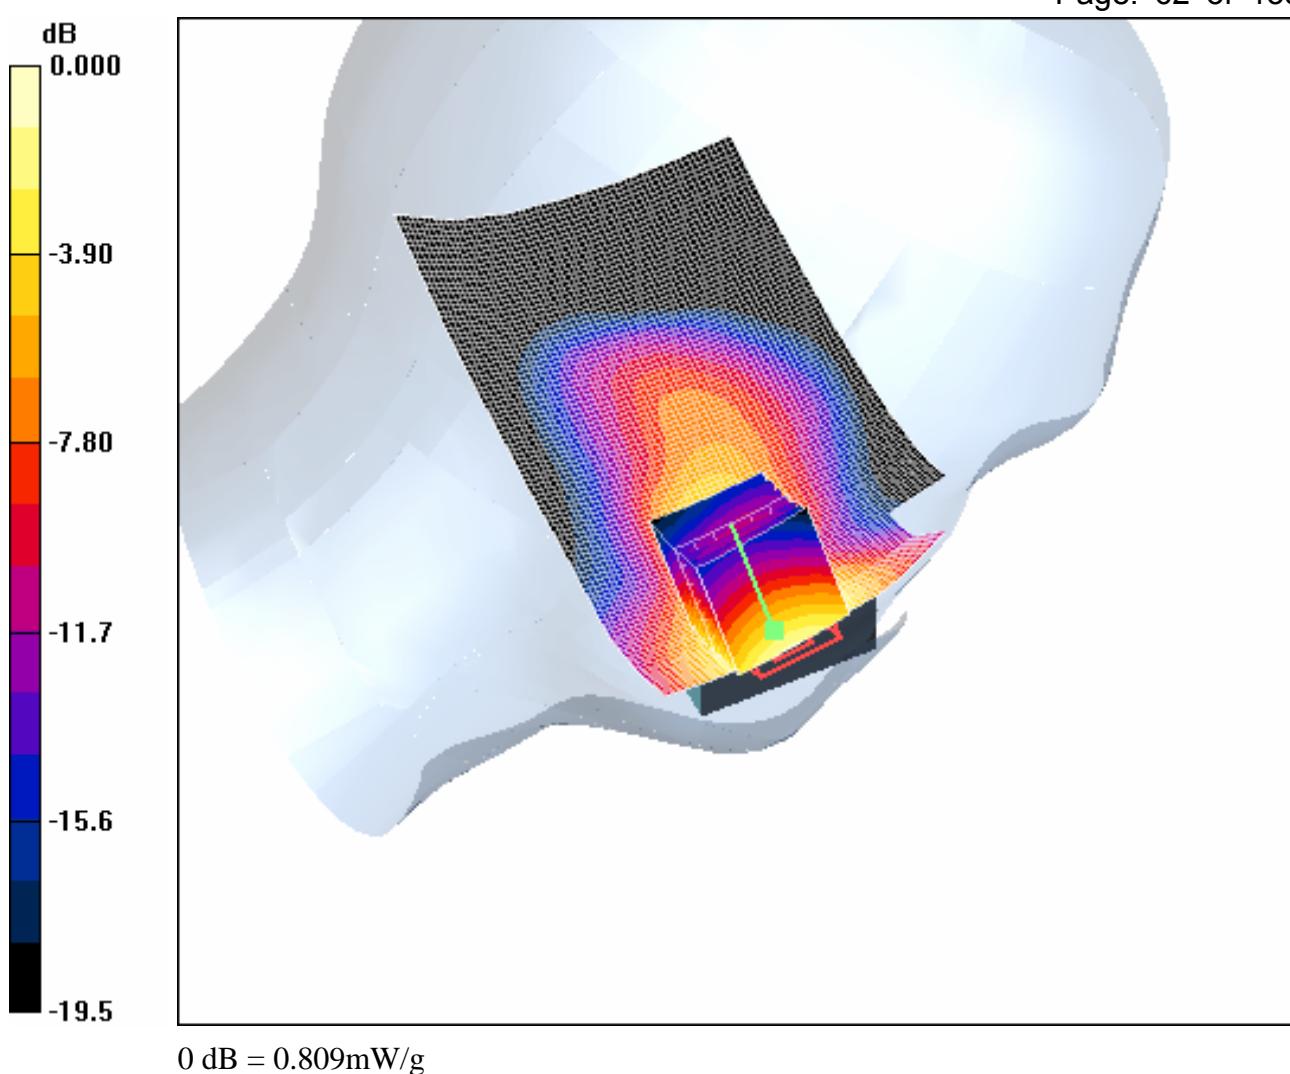

4.24RightHandSide-Cheek-PCS1900-Middle

Date/Time: 2007-3-27 9:52:06

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.2$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.794 mW/g


Cheek position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.03 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.453 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

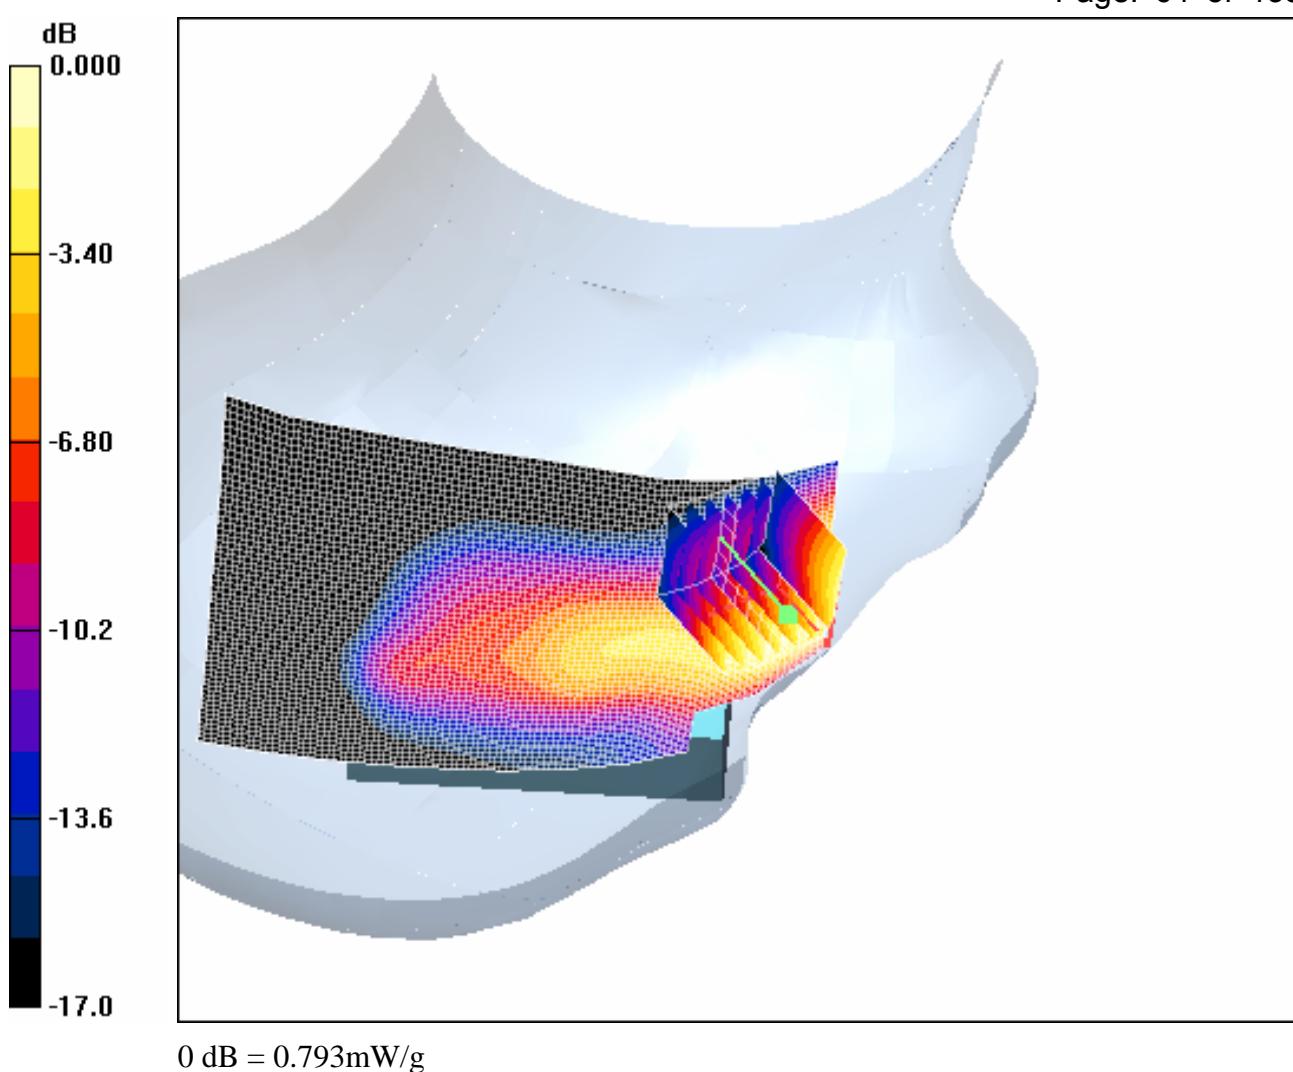

4.25 RightHandSide-Tilt-PCS1900-Middle

Date/Time: 2007-3-27 11:35:35

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Tilt-Middle

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.2$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Tilt position - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.290 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

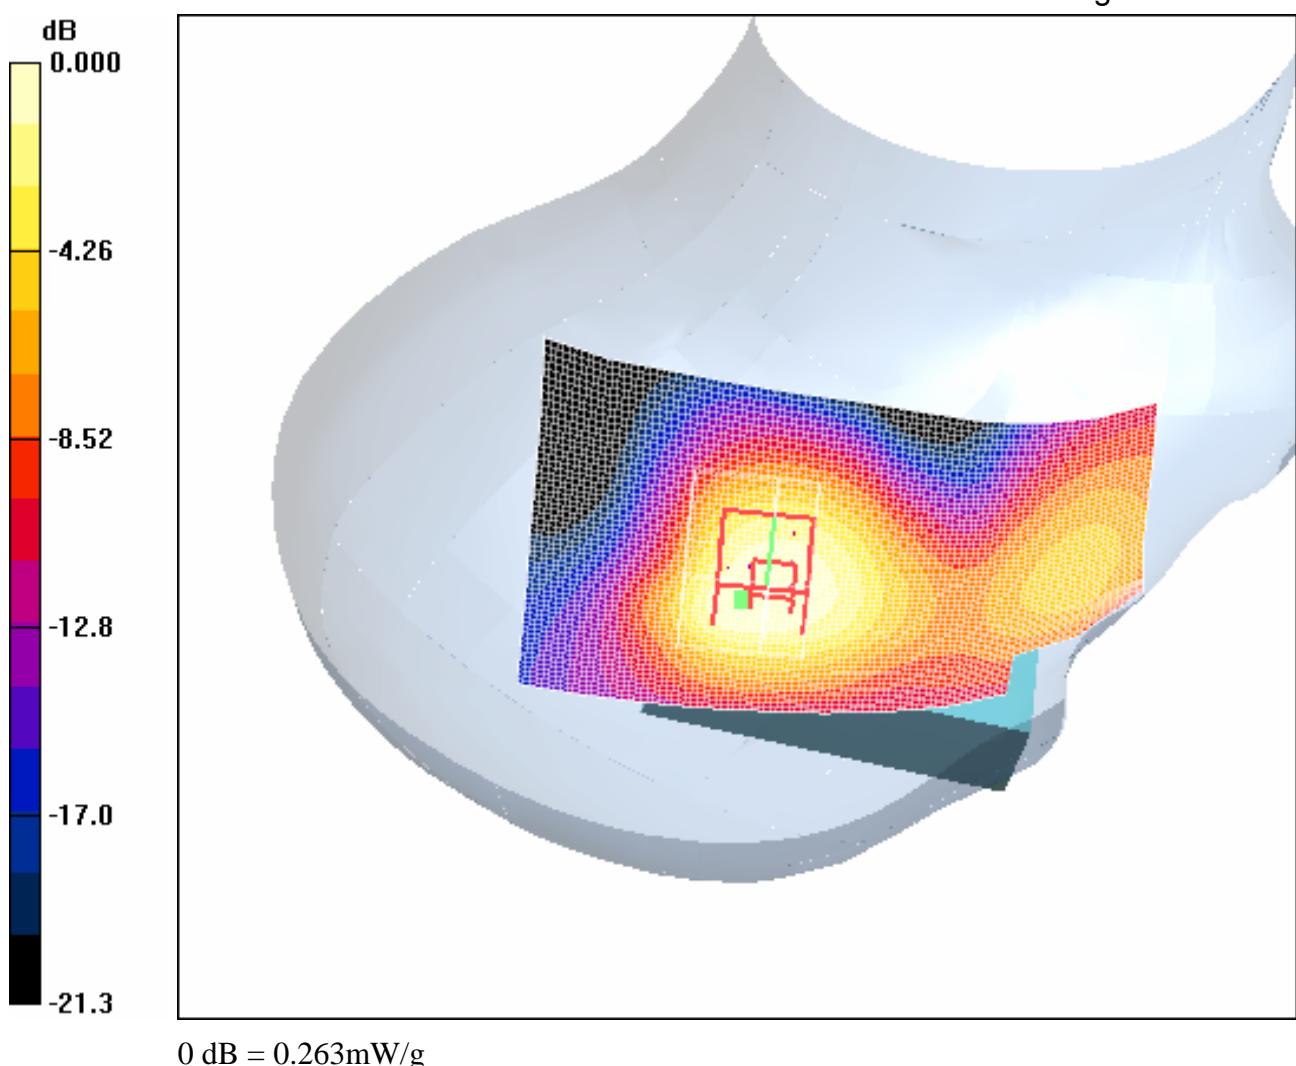

4.26 RightHandSide-Cheek-PCS1900-Low

Date/Time: 2007-3-27 10:19:33

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-Low

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.2$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - Low/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.652 mW/g


Cheek position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.74 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.657 mW/g

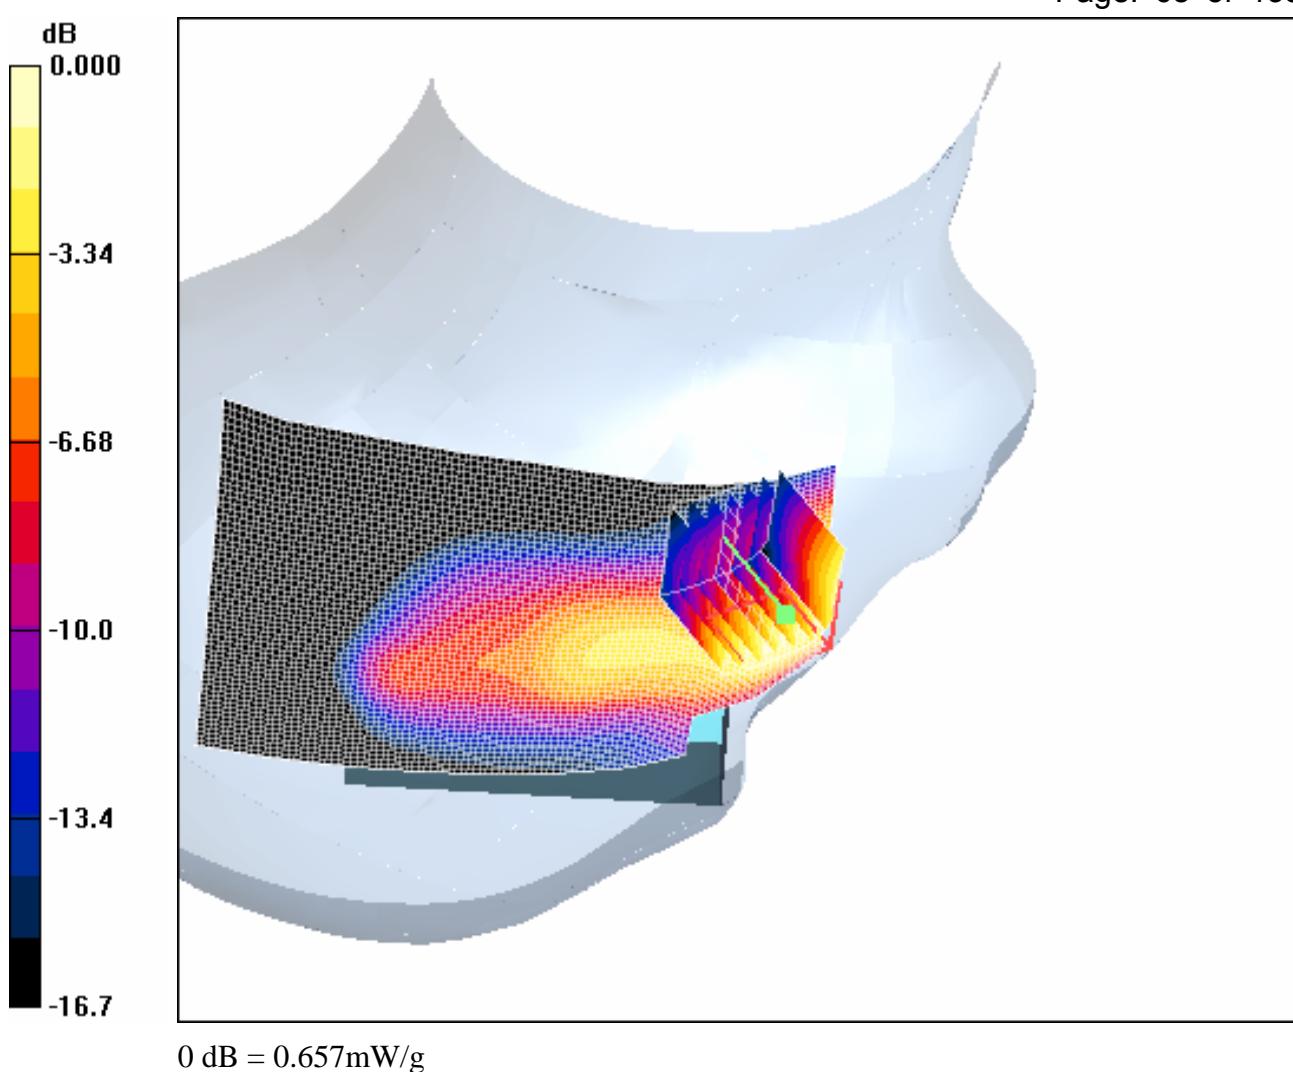

4.27 RightHandSide-Cheek-PCS1900-High

Date/Time: 2007-3-27 10:45:49

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.822 mW/g


Cheek position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.02 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.761 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.830 mW/g

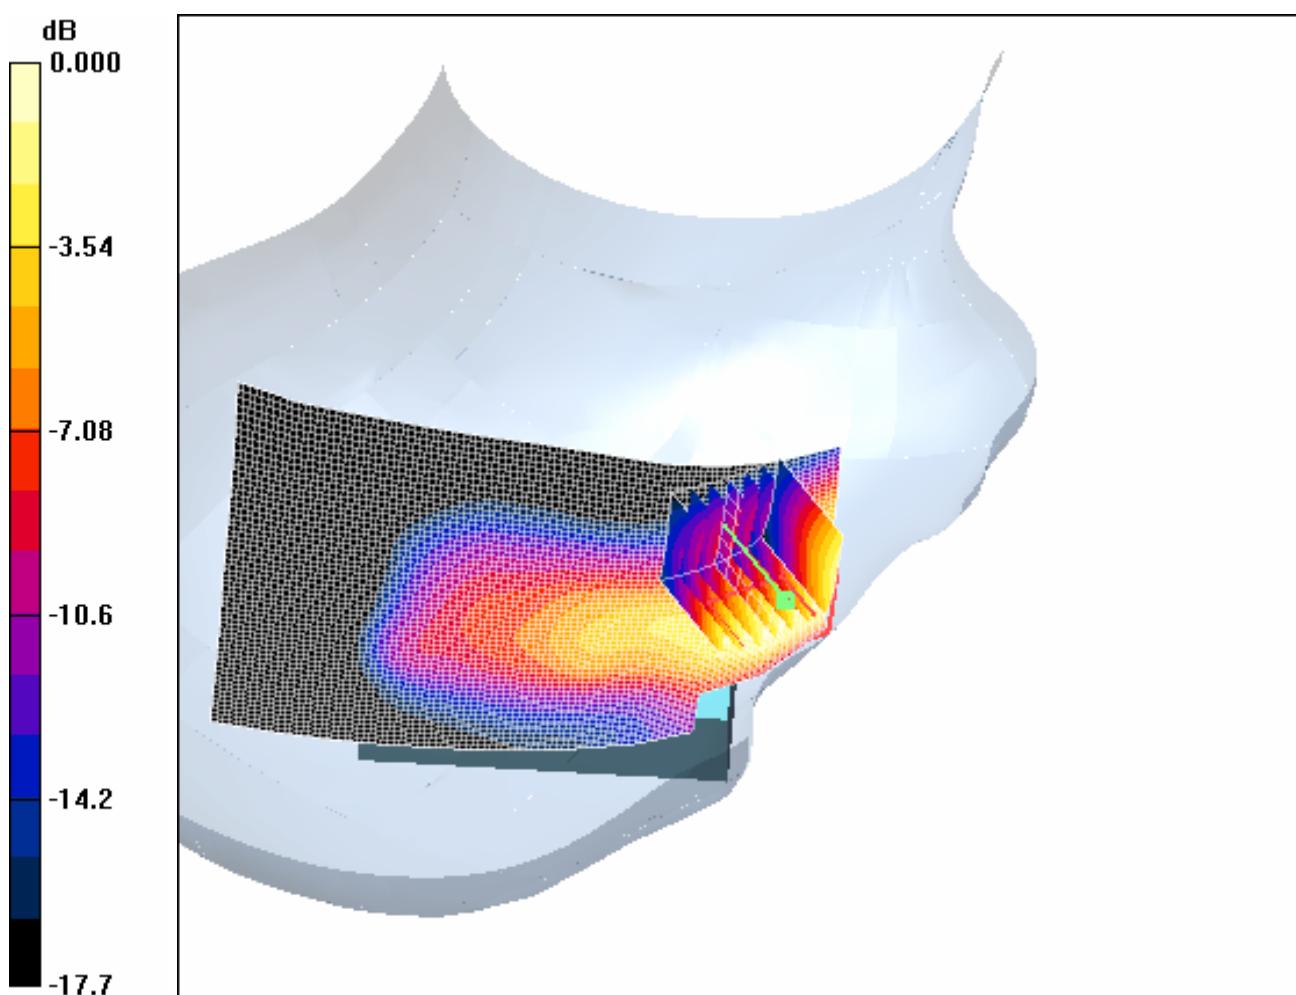

4.28RightHandSide-PCS1900-Maximum Value-SD

Date/Time: 2007-3-27 12:01:44

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\mu_r = 1$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+SD/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.758 mW/g


Cheek position - High+SD/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.18 V/m; Power Drift = -0.223 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.703 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

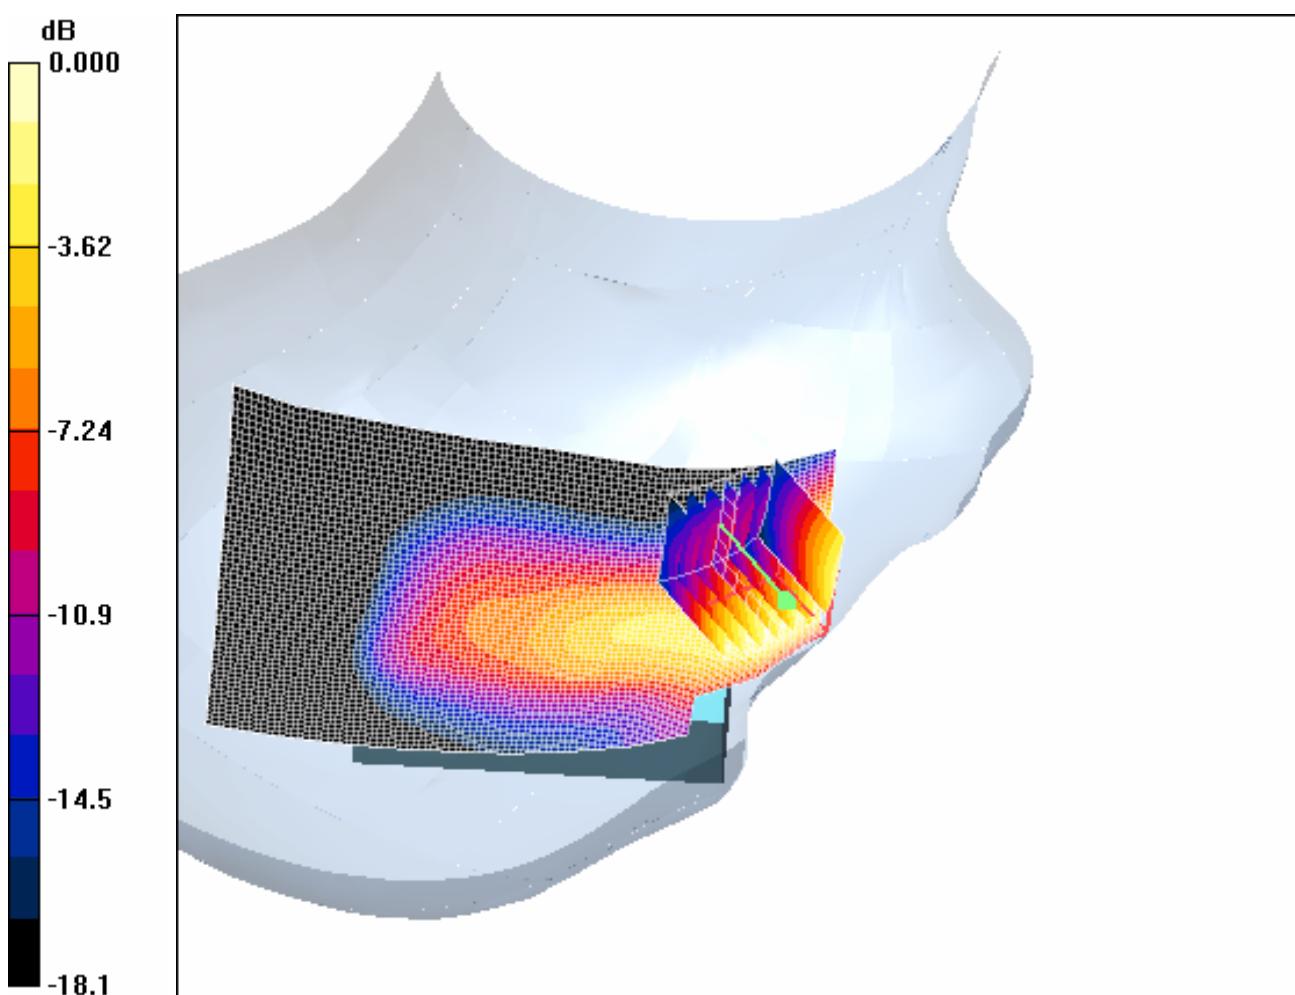

0 dB = 0.764mW/g

4.29 RightHandSide-PCS1900-Maximum Value-BT

Date/Time: 2007-3-27 12:30:09

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+BT/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.748 mW/g


Cheek position - High+BT/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.21 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.993 W/kg

SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.742 mW/g

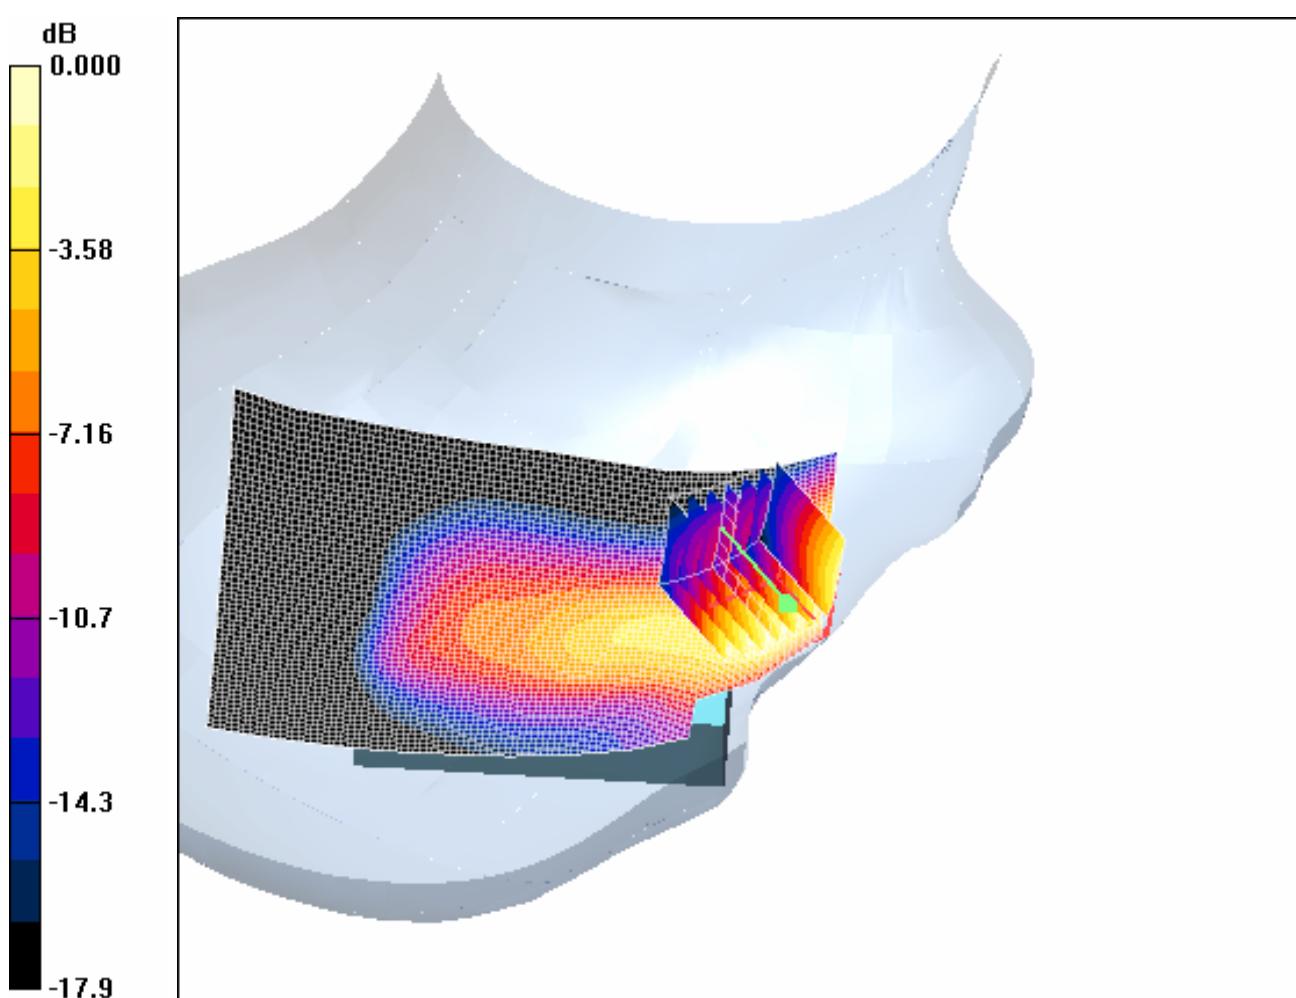

4.30 Body-Worn-PCS1900-GPRS-Low

Date/Time: 2007-3-19 20:22:56

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Low-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\tau = 50.9$; $\epsilon = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.419 mW/g


Body Worn - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

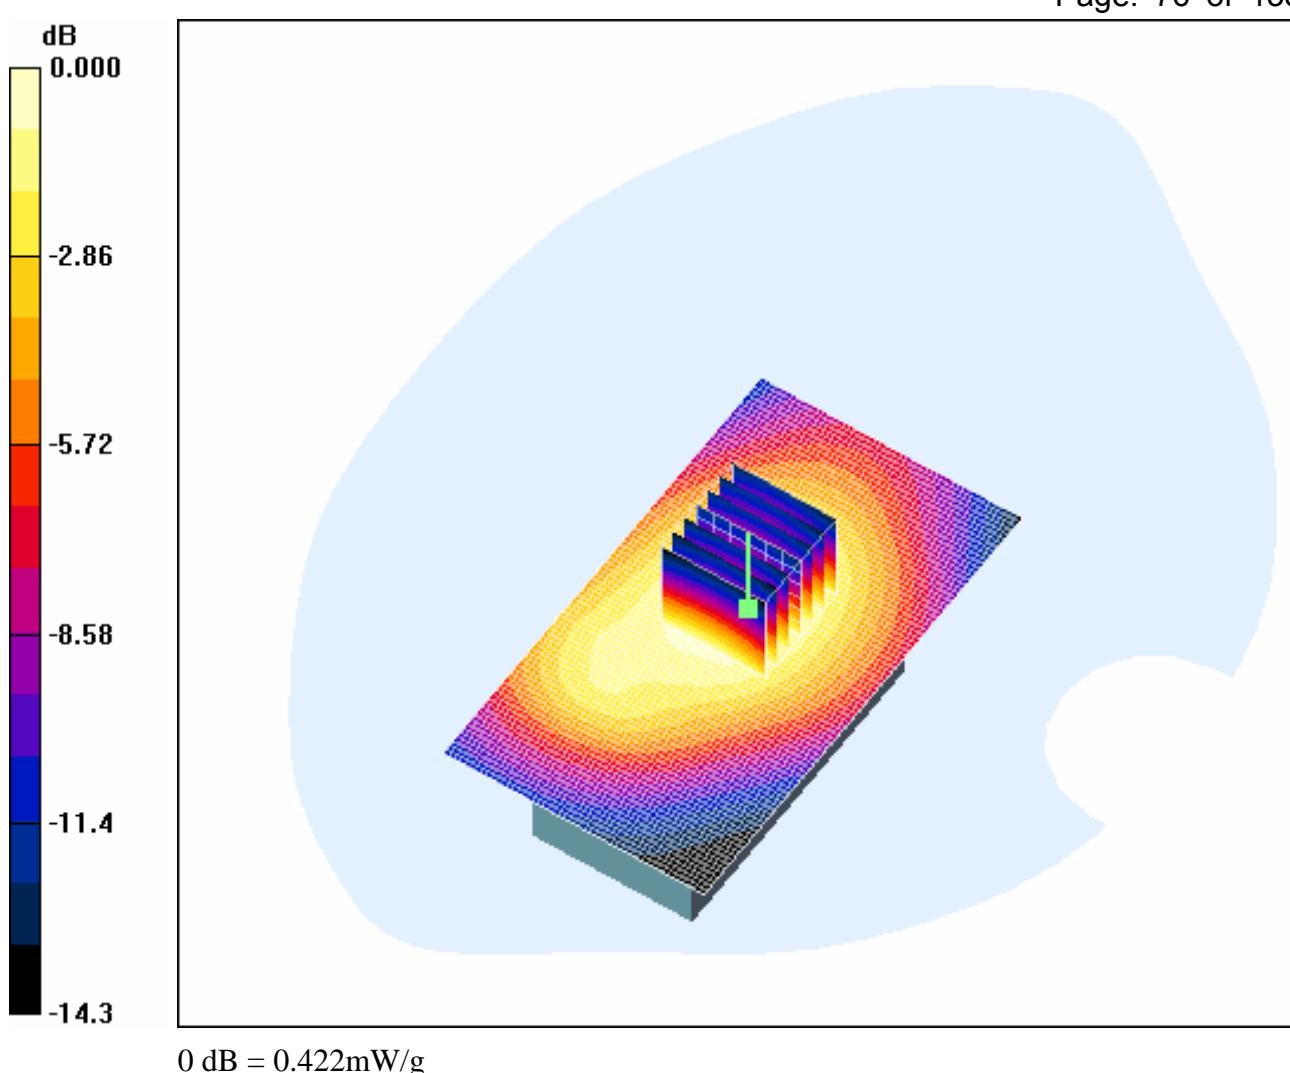

4.31 Body-Worn-PCS1900-GPRS-Middle

Date/Time: 2007-3-19 19:58:01

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Middle-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.8$; $\mu_r = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.214 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

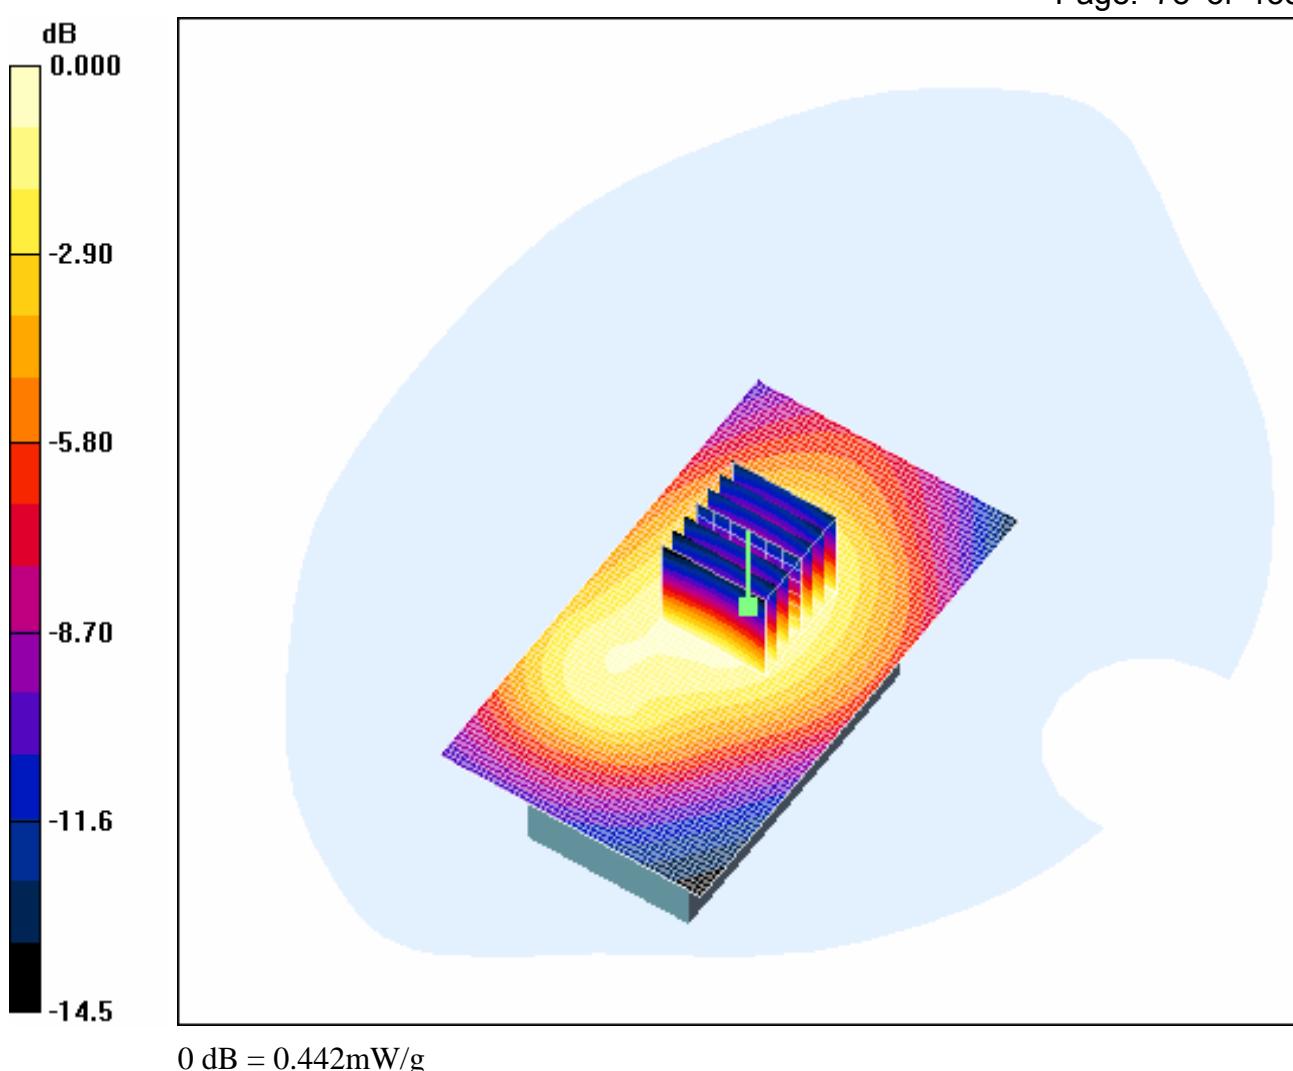

0 dB = 0.442mW/g

4.32 Body-Worn-PCS1900-GPRS-High

Date/Time: 2007-3-19 20:42:10

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-High-2.0cm

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GPRS Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.6 \text{ mho/m}$; $\epsilon_r = 50.7$; $\mu_r = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.384 mW/g


Body Worn - High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.378 mW/g

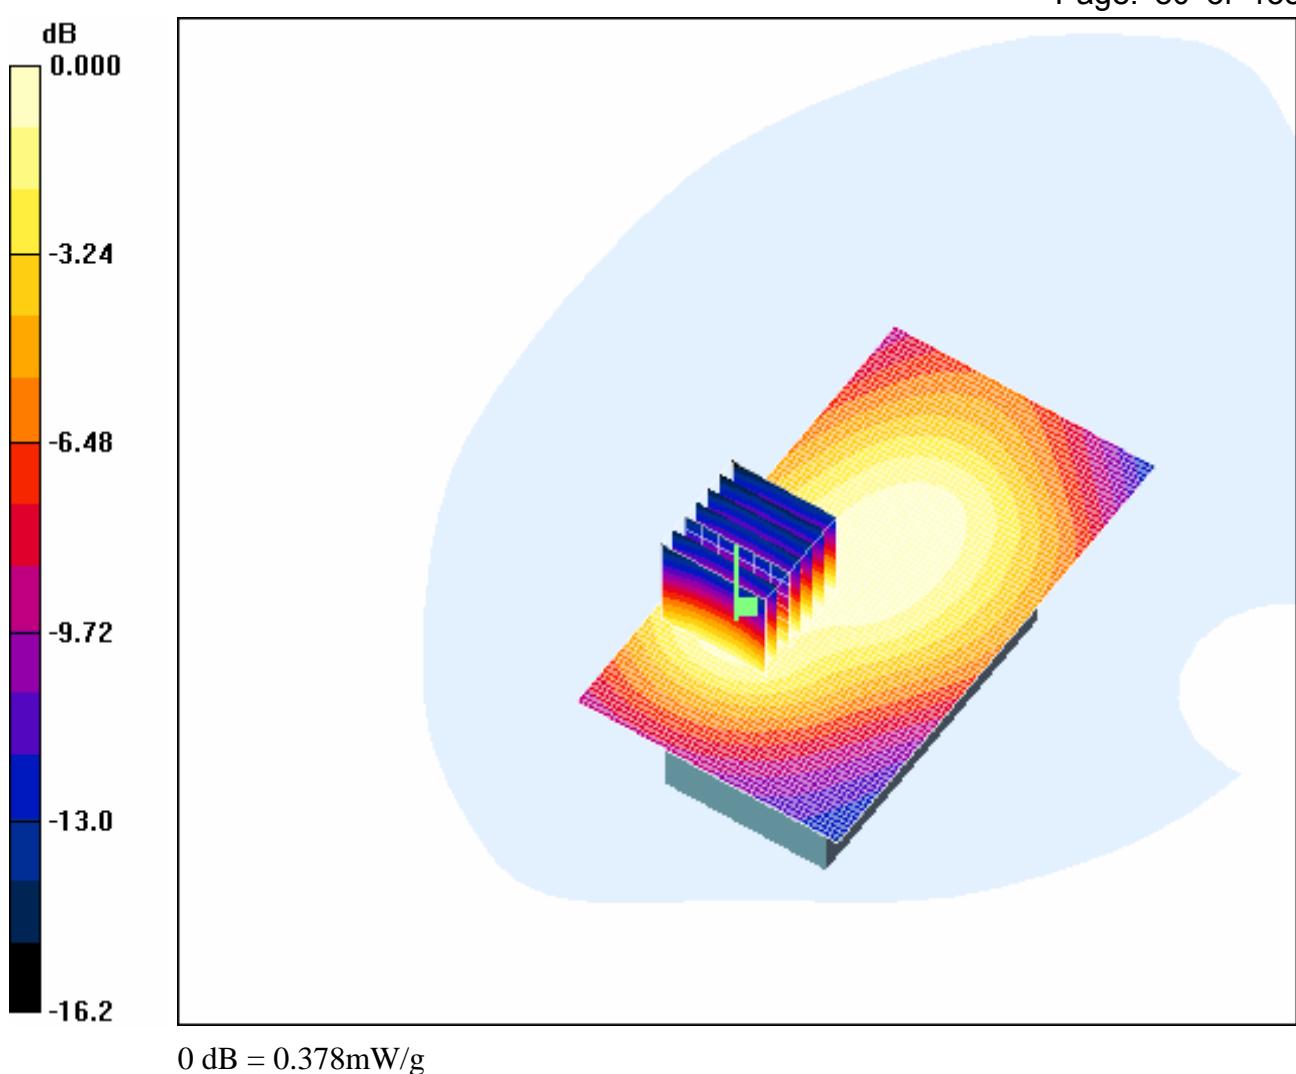

4.33 Body-Worn-PCS1900-Maximum Value-SD

Date/Time: 2007-4-10 13:37:56

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Middle-2.0cm+SD

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 50.8$; $\epsilon_i = 1000$

kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle+SD/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.631 mW/g


Body Worn - Middle+SD/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.246 dB

Peak SAR (extrapolated) = 0.940 W/kg

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.329 mW/g

Maximum value of SAR (measured) = 0.592 mW/g

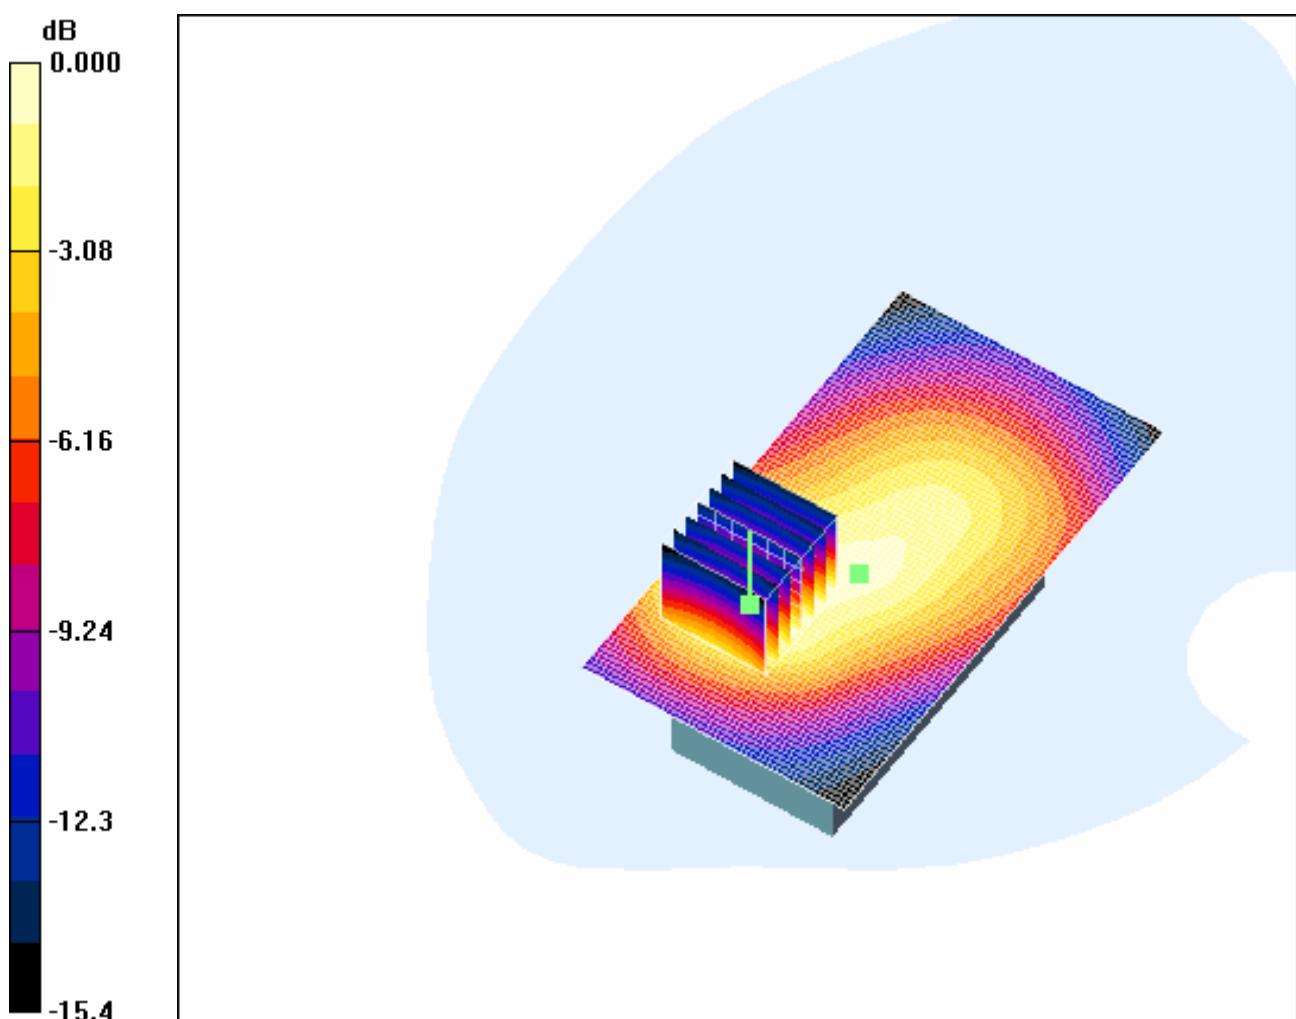

0 dB = 0.592mW/g

4.34 Body-Worn-PCS1900-Maximum Value-BT

Date/Time: 2007-3-19 21:48:37

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Middle-2.0cm+BT

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 83 of 135

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 50.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle+BT/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.435 mW/g


Body Worn - Middle+BT/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.7 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.437 mW/g

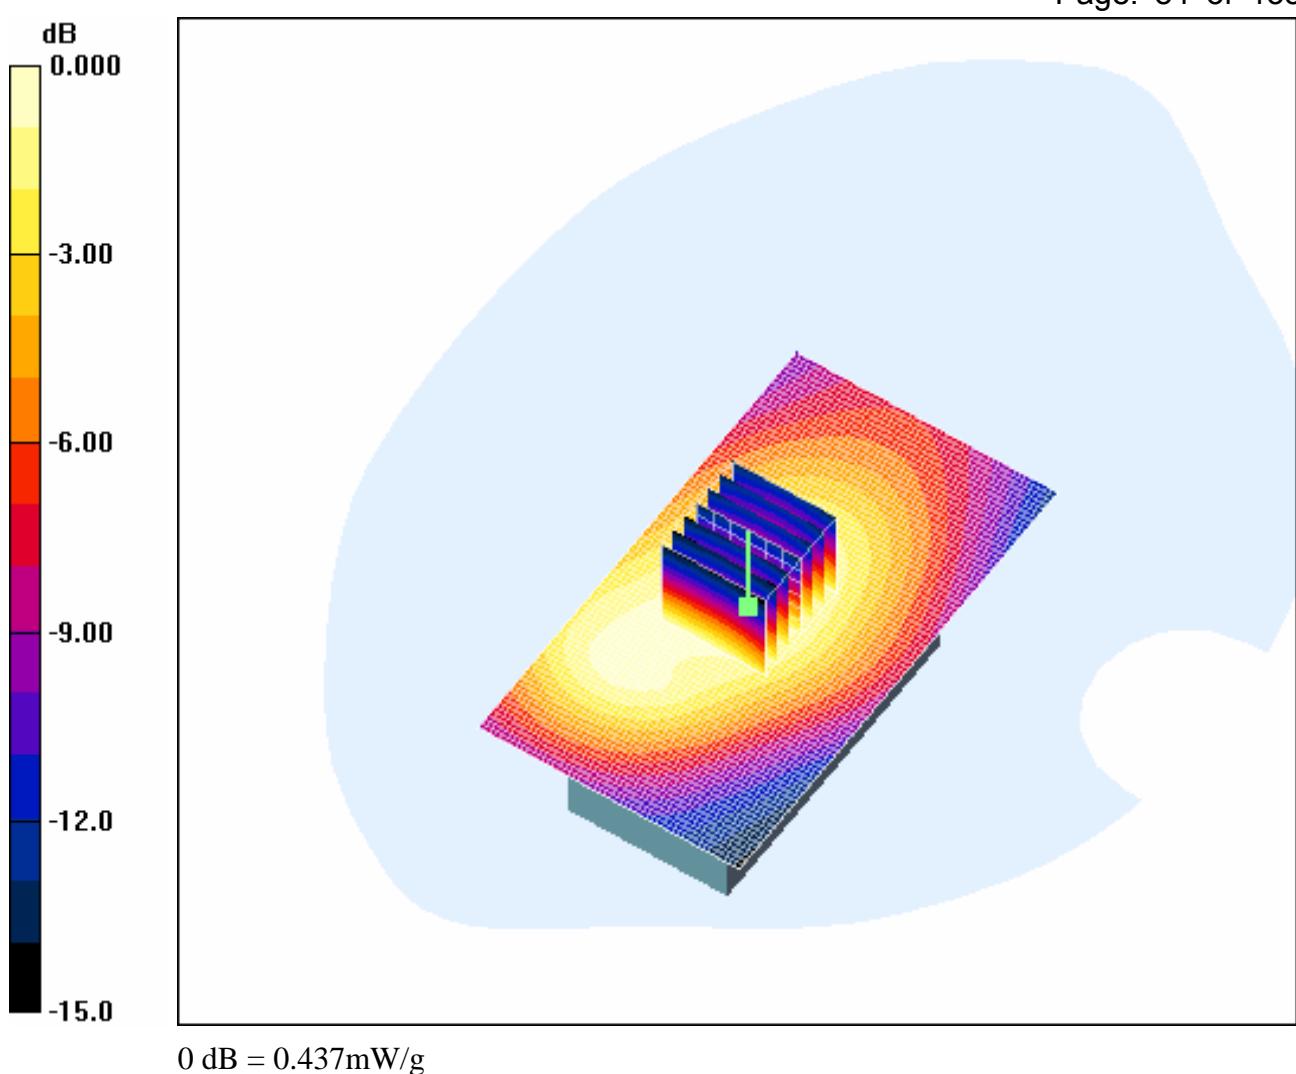

Additional Testing for the Battery-T5000572AAAA-700mAh

4.35LeftHandSide-Cheek-GSM850-High+BT

Date/Time: 2007-4-10 20:11:32

Test Laboratory: SGS-GSM

GSM850-LeftHandSide-Cheek-High+BT(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 85 of 135

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+BT(700mAh)/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.717 mW/g


Cheek position - High+BT(700mAh)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.13 V/m; Power Drift = -0.187 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.717 mW/g

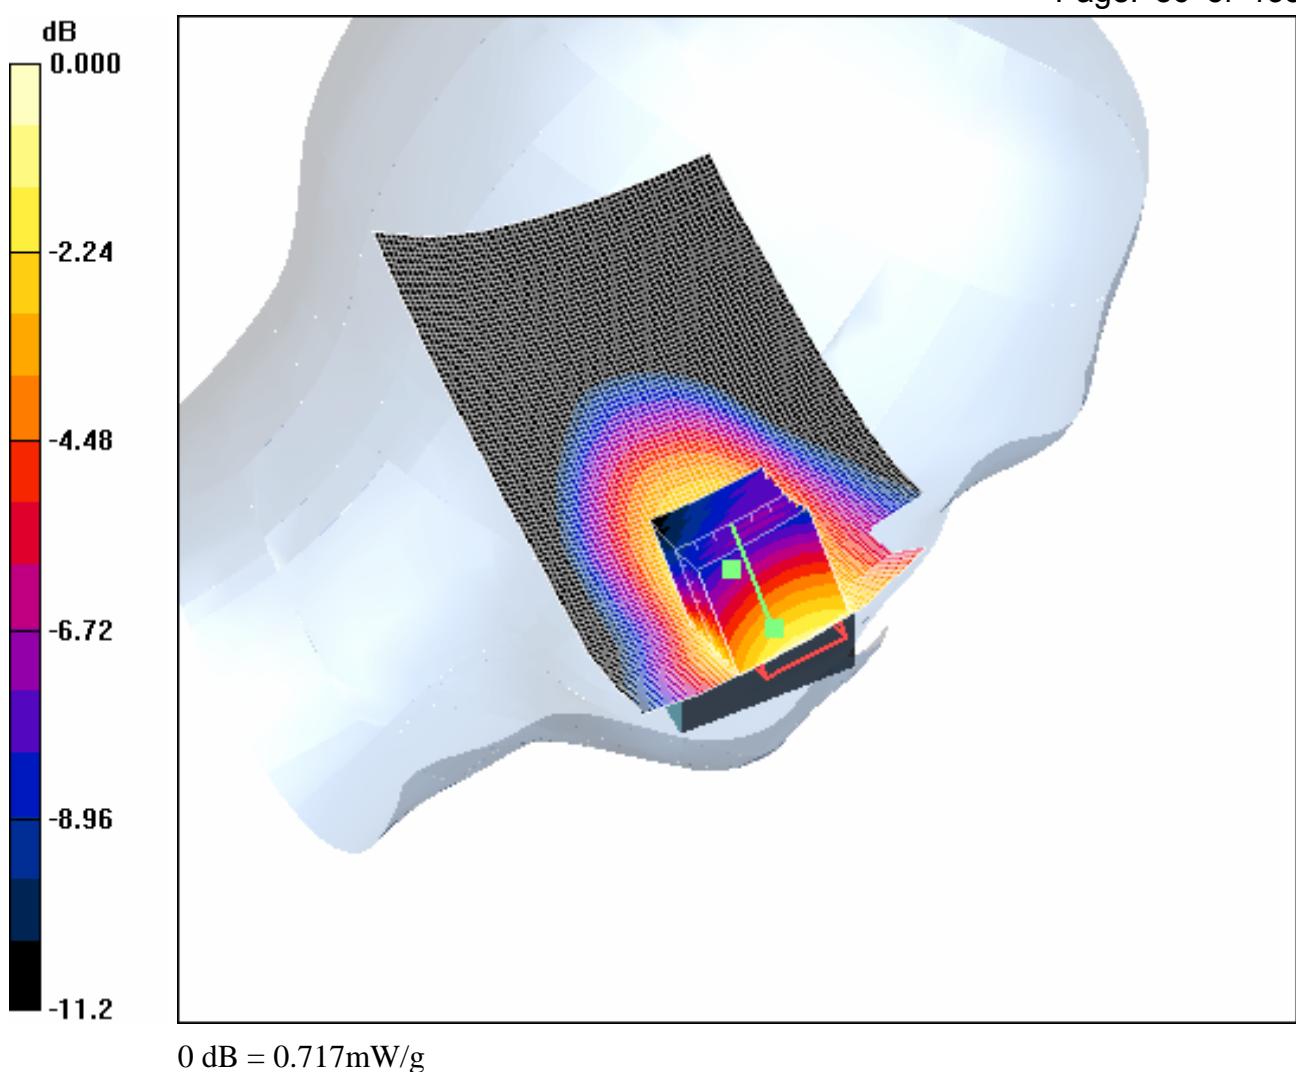

4.36 RightHandSide-Cheek-GSM850-High

Date/Time: 2007-4-10 18:53:27

Test Laboratory: SGS-GSM

GSM850-RightHandSide-Cheek-High(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.8$; $\eta =$

1000 kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(6, 6, 6); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position – High(700mAh)/Area Scan (61x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.887 mW/g


Cheek position – High(700mAh)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.91 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.772 mW/g; SAR(10 g) = 0.526 mW/g

Maximum value of SAR (measured) = 0.819 mW/g

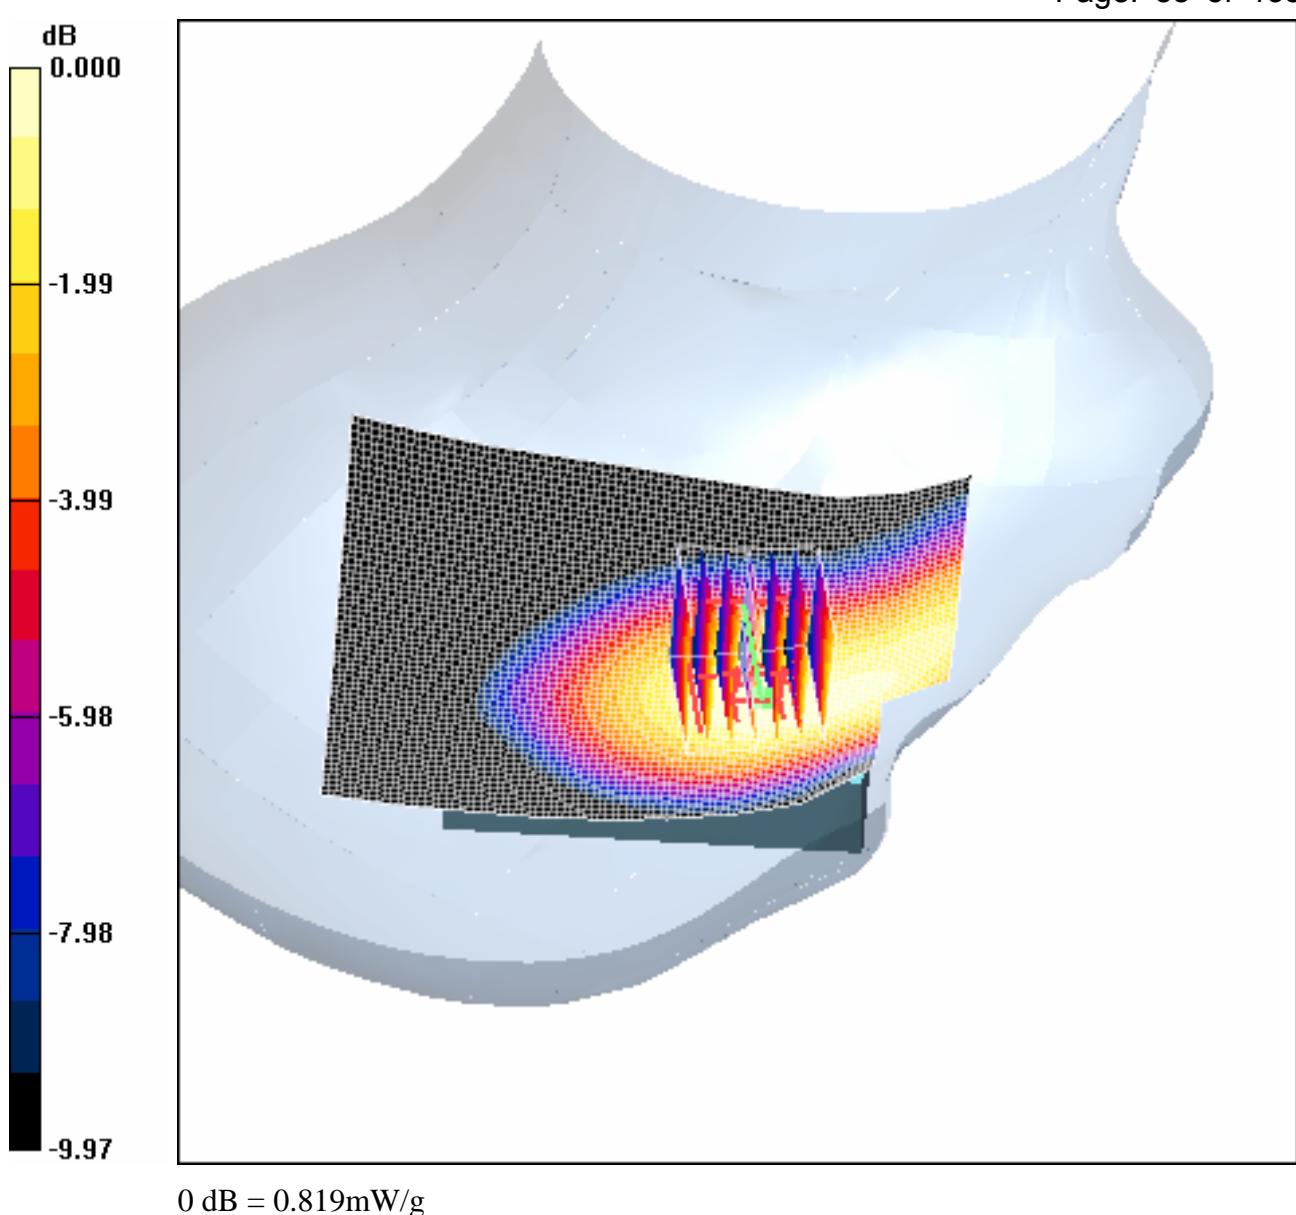

4.37 Body-Worn-GSM850-GPRS-Middle

Date/Time: 2007-4-10 17:08:24

Test Laboratory: SGS-GSM

GSM850-Body-Worn-GPRS-Middle-2.0cm(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 89 of 135

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: 850-Body Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.942 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.92, 5.92, 5.92); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle(700mAh)2/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.06 mW/g


Body Worn - Middle(700mAh)2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.979 mW/g; SAR(10 g) = 0.679 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

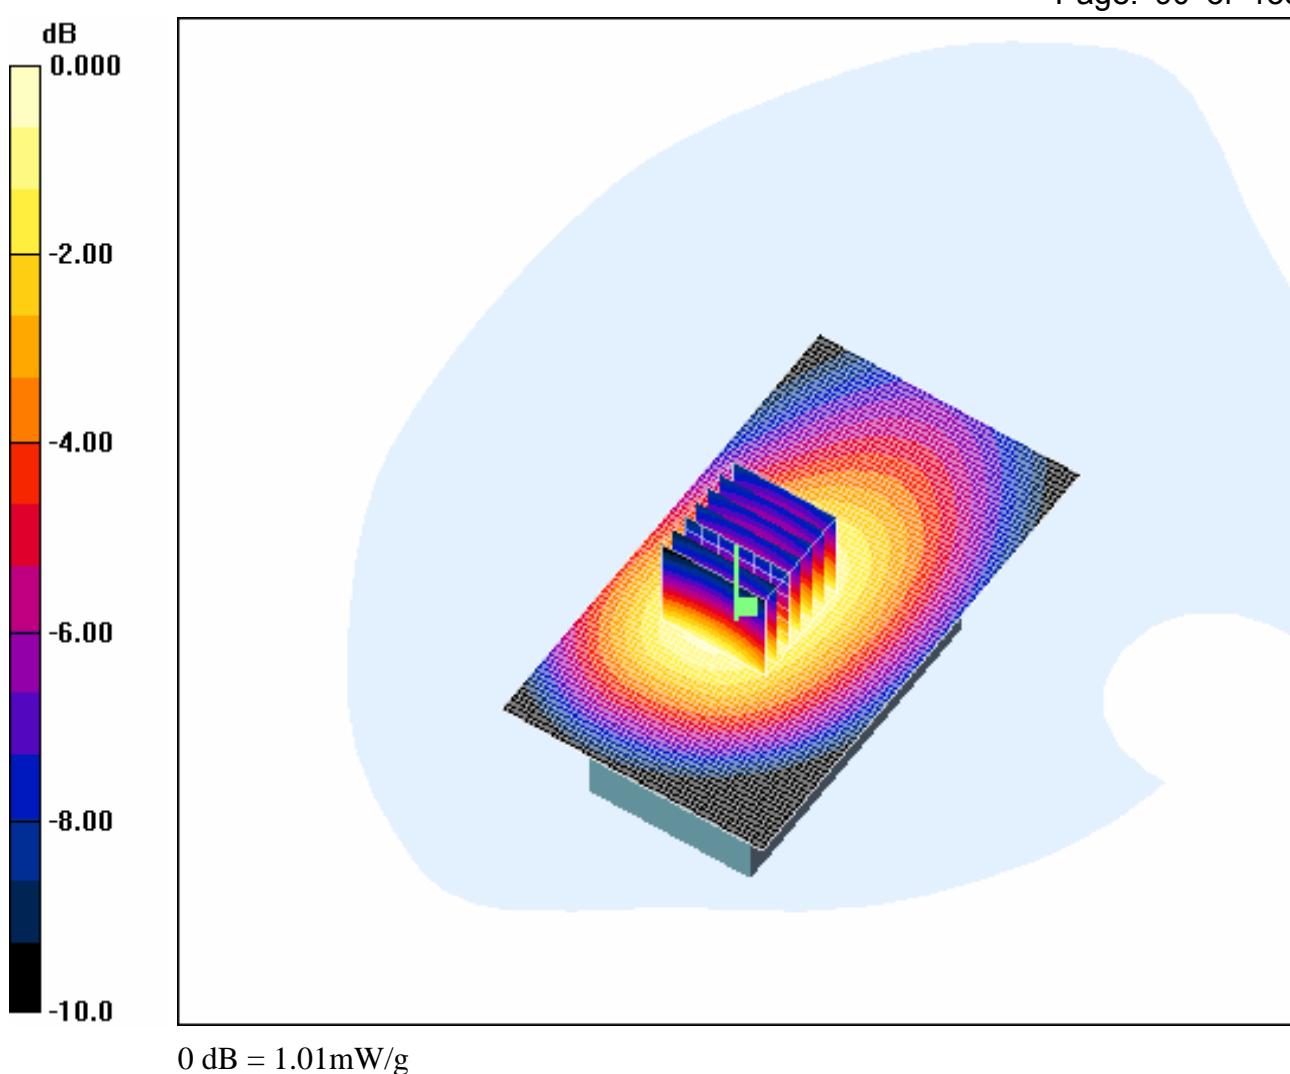

4.38 LeftHandSide-Cheek-PCS1900-High+SD

Date/Time: 2007-4-10 11:35:17

Test Laboratory: SGS-GSM

PCS1900-LeftHandSide-Cheek-High+SD(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\eta =$

1000 kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High+SD(700mAh)/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.909 mW/g


Cheek position - High+SD(700mAh)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.18 V/m; Power Drift = -0.233 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 0.885 mW/g

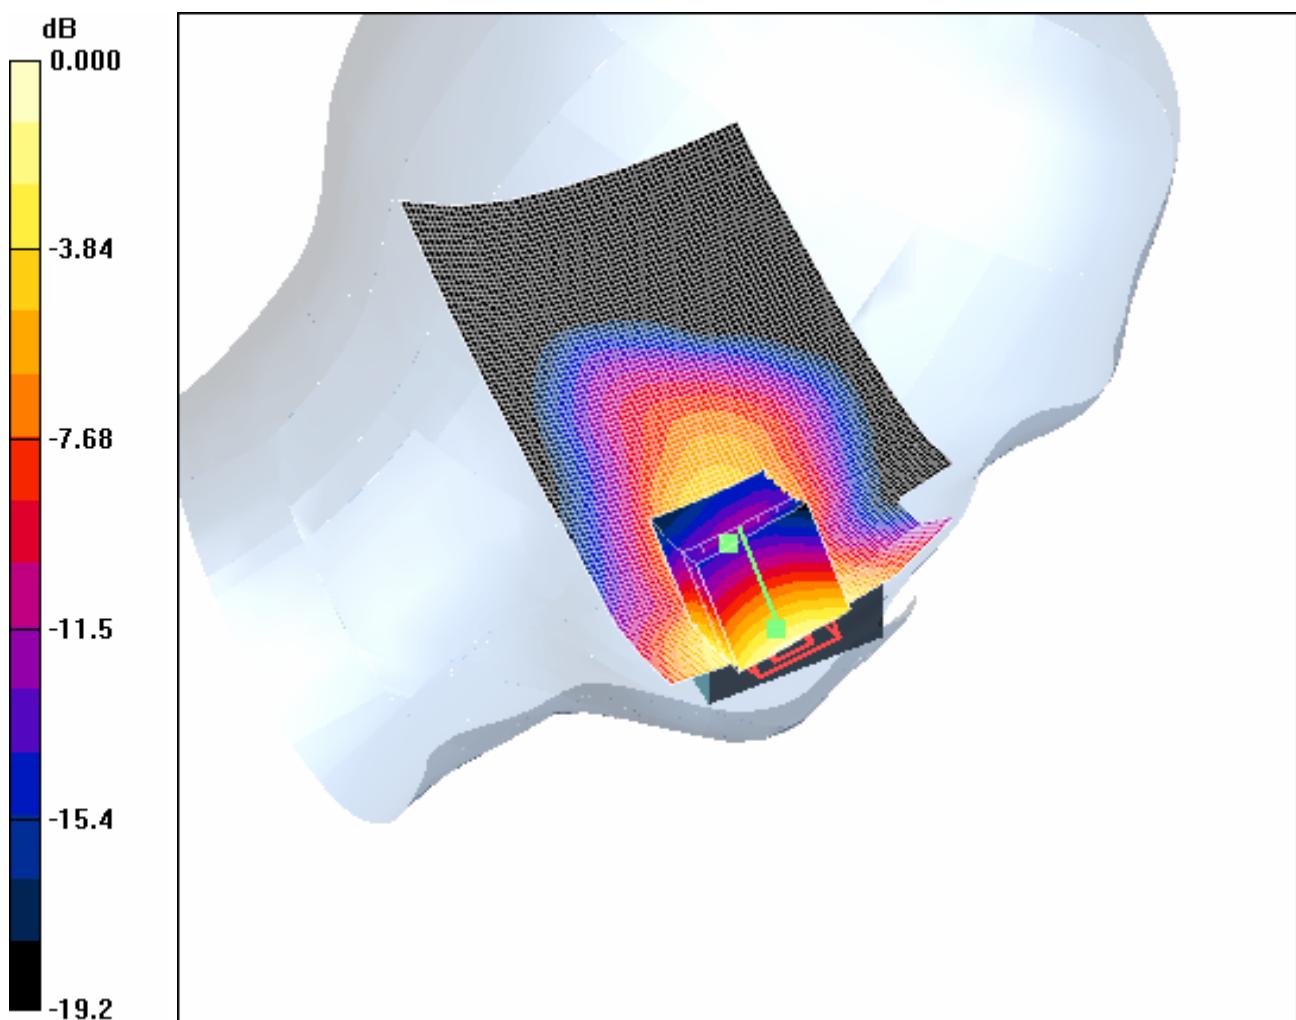

0 dB = 0.885mW/g

4.39RightHandSide-Cheek-PCS1900-High

Date/Time: 2007-4-10 11:03:47

Test Laboratory: SGS-GSM

PCS1900-RightHandSide-Cheek-High(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 93 of 135

Communication System: PCS1900-GSM Mode; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: PCS1900-Head Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.46 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.07, 5.07, 5.07); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek position - High (700mAh) 2/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.705 mW/g


Cheek position - High (700mAh) 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.23 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.628 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

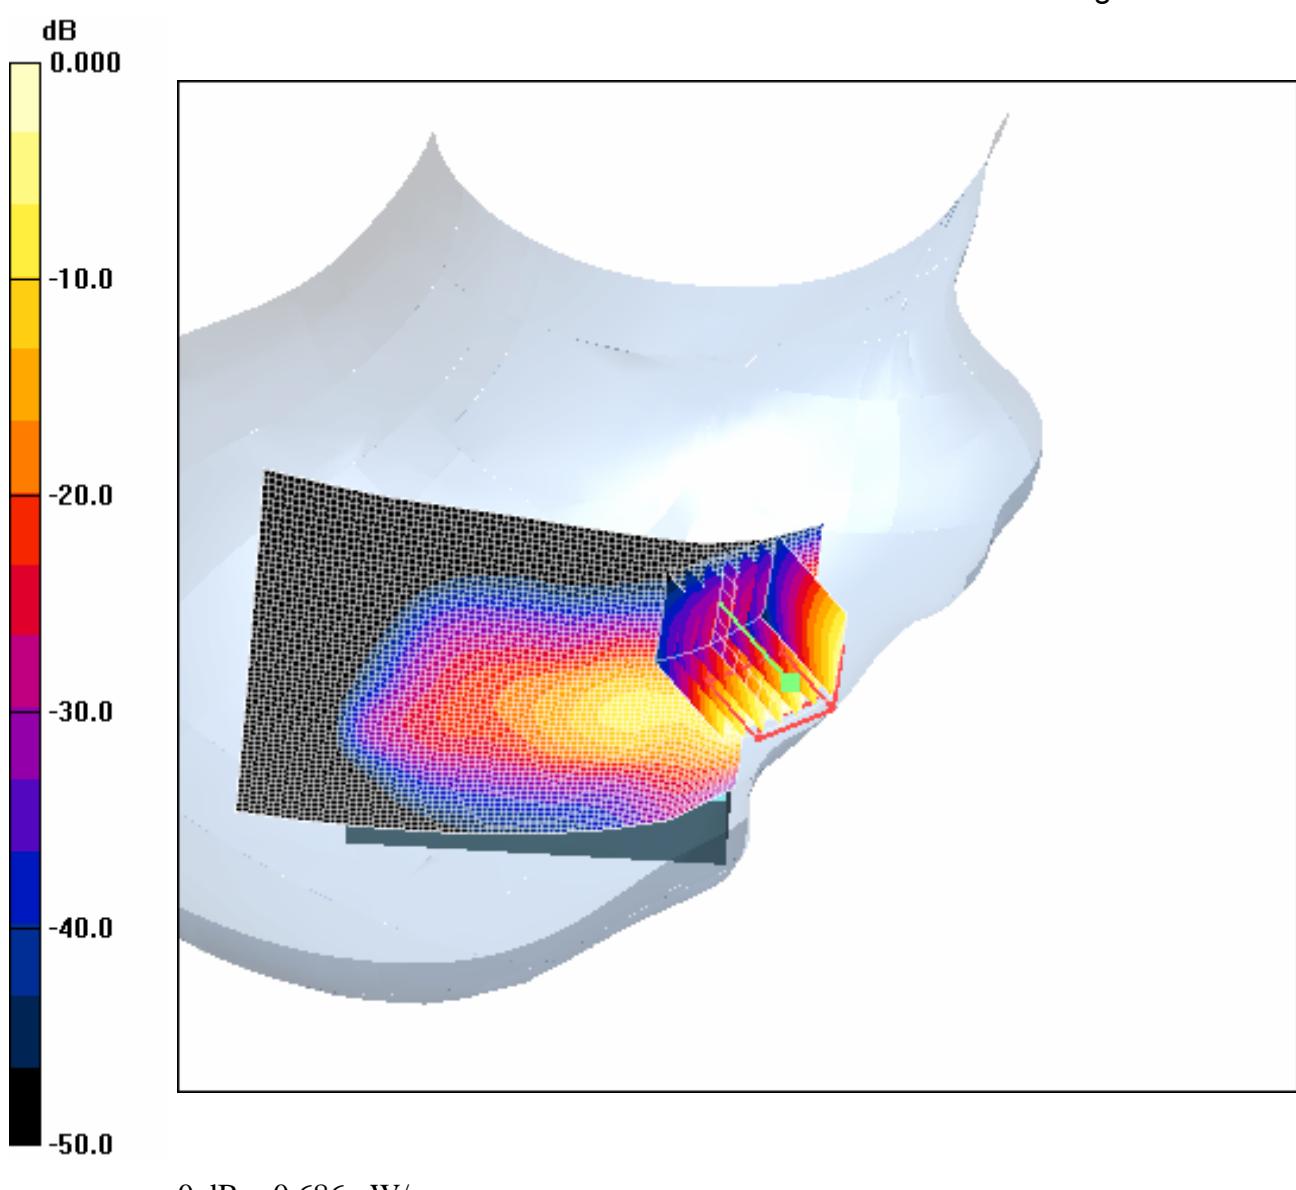

0 dB = 0.686mW/g

4.40Body-Worn-PCS1900-GPRS-Middle+SD

Date/Time: 2007-4-10 13:37:56

Test Laboratory: SGS-GSM

PCS1900-Body-Worn-GPRS-Middle-2.0cm+SD(700mAh)

DUT: GSM10212817-body; Type: body; Serial: 011073000003040

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 95 of 135

Communication System: PCS1900-GPRS Mode; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: 1900-Body Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\rho = 50.8$; $\epsilon = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(4.68, 4.68, 4.68); Calibrated: 2006-12-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2006-12-8
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body Worn - Middle+SD(700mAh)/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.551 mW/g


Body Worn - Middle+SD(700mAh)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.5 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

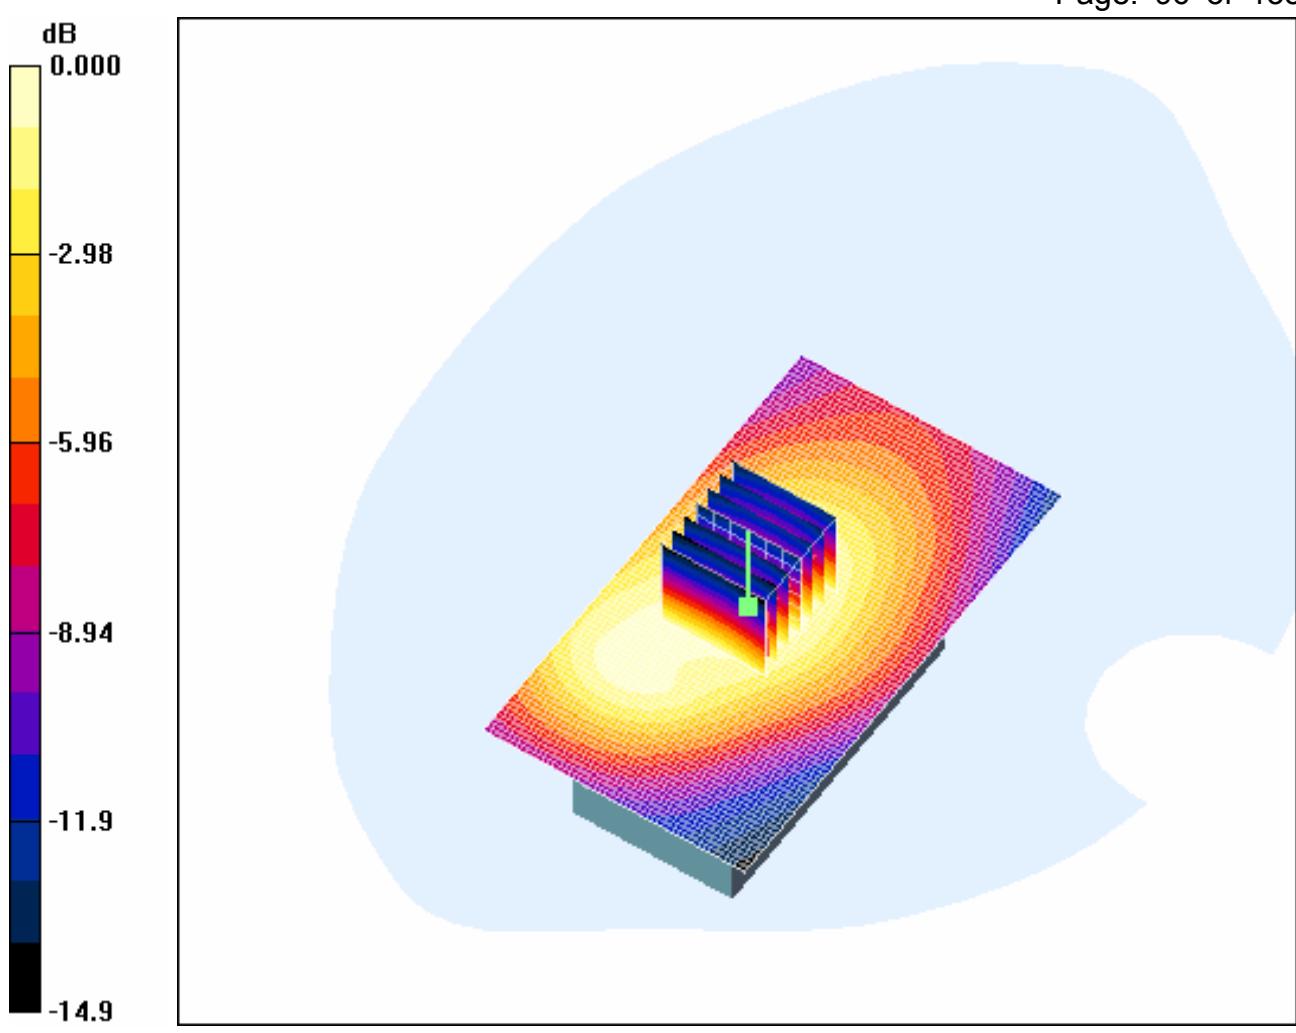

Appendix

1. Photographs of Test Setup

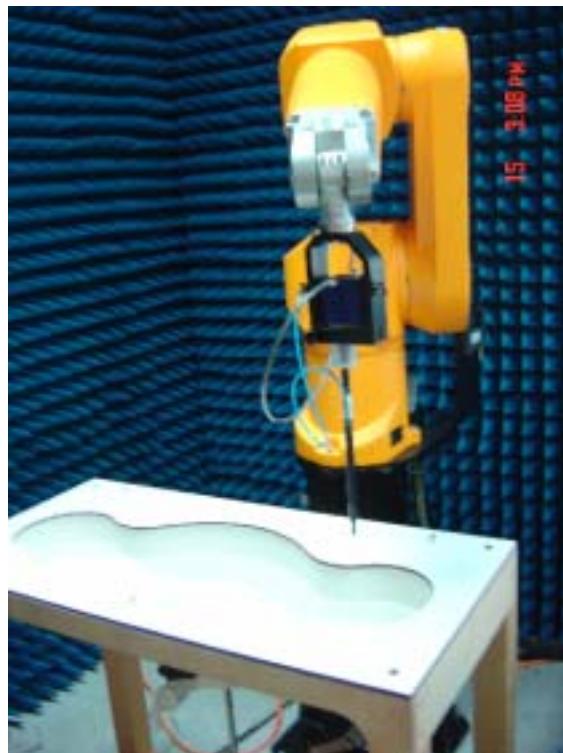


Fig.1 Photograph of the SAR measurement System

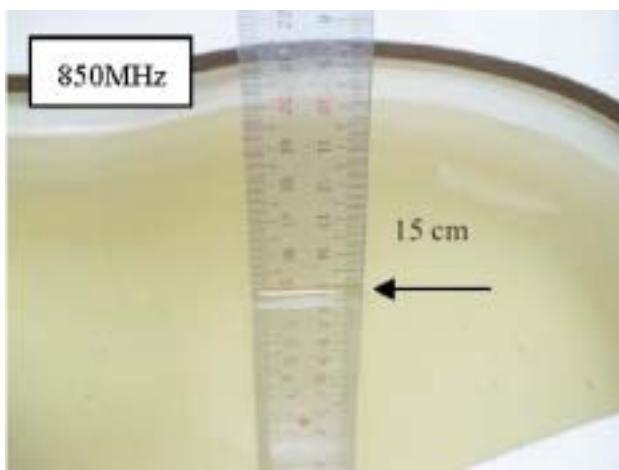


Fig.2 Photograph of the Tissue Simulant
Fluid Liquid depth 15cm for
Left-Head Side

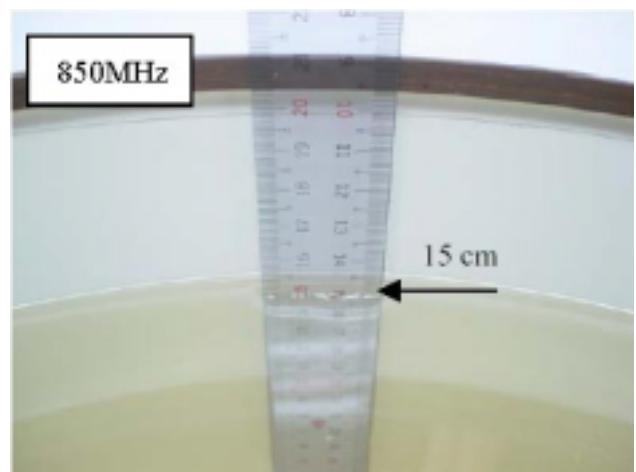


Fig.3 Photograph of the Tissue Simulant
Liquid depth 15cm for Body-Worn

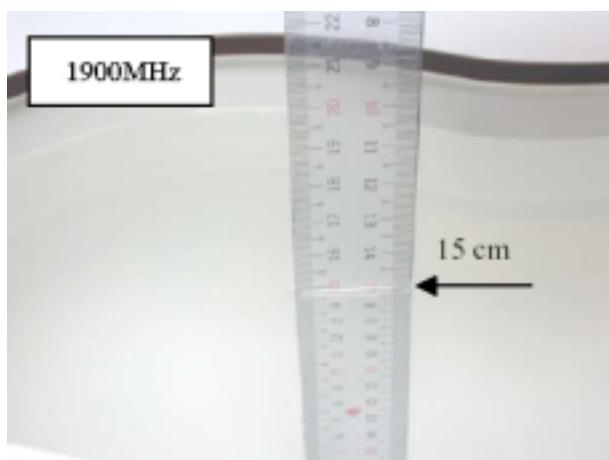


Fig.4 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Right-Head Side

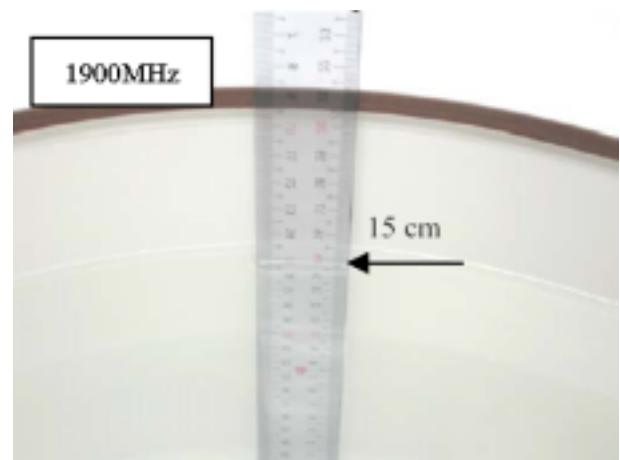


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn



Fig.6 Photograph of the Left Hand Side Cheek status



Fig.7 Photograph of the Left Hand Side Tilt status

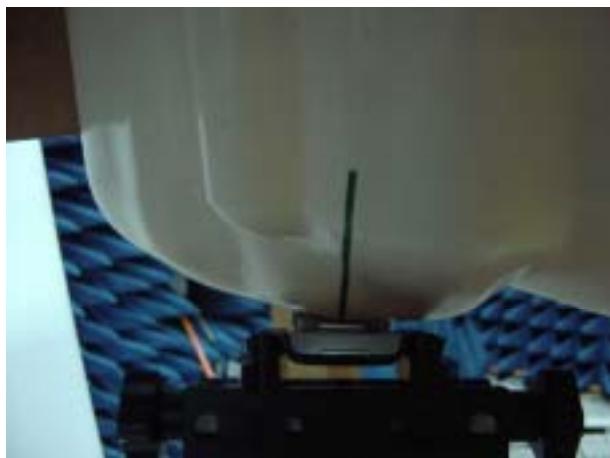


Fig.8 Photograph of the Right Hand Side Cheek status

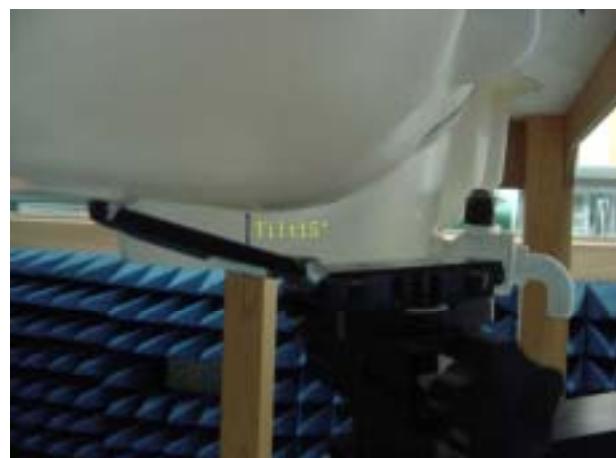


Fig.9 Photograph of the Right Hand Side Tilt status



Fig.10 Photograph of the BodyWorn status

2. Photographs of the EUT



Fig.11 Front View



Fig.12 Back View

3. Photographs of the battery



Fig.13 Battery T5001418AAAA-750mAh

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 101 of 135



Fig.14 Battery T5000572AAAA-700mAh

4. Photograph of the charger



Fig.15 Charger

5. Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zürcherstrasse 43, 8804 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SGS-CSTC (MTT)

Certificate No: ES3-3088_Dec06

CALIBRATION CERTIFICATE

Object ES3DV3 - SN:3088

Calibration procedure(s)
QA.CAL-01.v5
Calibration procedure for dosimetric E-field probes

Calibration date December 12, 2006

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00657)	Apr-07
Power sensor E4412A	MY41495087	5-Apr-06 (METAS, No. 251-00657)	Apr-07
Reference 3 dB Attenuator	SN: S5584 (3c)	10-Aug-06 (METAS, No. 217-00992)	Aug-07
Reference 20 dB Attenuator	SN: S5586 (20a)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30a)	10-Aug-06 (METAS, No. 217-00993)	Aug-07
Reference Probe EB3DV2	SN: 3013	2-Jan-06 (SPEAG, No. EB3-3013_Jan06)	Jan-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8848C	US36425301700	4-Aug-06 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Calibrated by:	Name: Katica Pokovic	Function: Technical Manager	Signature:
Approved by:	Name: Natalia Kusler	Function: Quality Manager	Signature:

Issued: December 13, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8804 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM x,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORM x,y,z
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization β	β rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001

Methods Applied and Interpretation of Parameters:

- NORM x,y,z : Assessed for E-field polarization $\beta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM x,y,z are only intermediate values, i.e., the uncertainties of NORM x,y,z does not effect the E 2 -field uncertainty inside TSL (see below ConvF).
- NORM(f) x,y,z = NORM x,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPr x,y,z : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM x,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 104 of 135

ES3DV3 SN:3088

December 12, 2006

Probe ES3DV3

SN:3088

Manufactured:

July 20, 2005

Last calibrated:

September 13, 2005

Recalibrated:

December 12, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3088

December 12, 2006

DASY - Parameters of Probe: ES3DV3 SN:3088**Sensitivity in Free Space^A**

NormX	$1.31 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	$1.23 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	$1.27 \pm 10.1\%$	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	94 mV
DCP Y	94 mV
DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

		3.0 mm	4.0 mm
Sensor Center to Phantom Surface Distance			
SAR _{tx} [%]	Without Correction Algorithm	2.4	0.6
SAR _{tx} [%]	With Correction Algorithm	1.0	0.0

TSL 1810 MHz Typical SAR gradient: 10 % per mm

		3.0 mm	4.0 mm
Sensor Center to Phantom Surface Distance			
SAR _{tx} [%]	Without Correction Algorithm	7.6	4.5
SAR _{tx} [%]	With Correction Algorithm	0.1	0.2

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3088

December 12, 2006



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

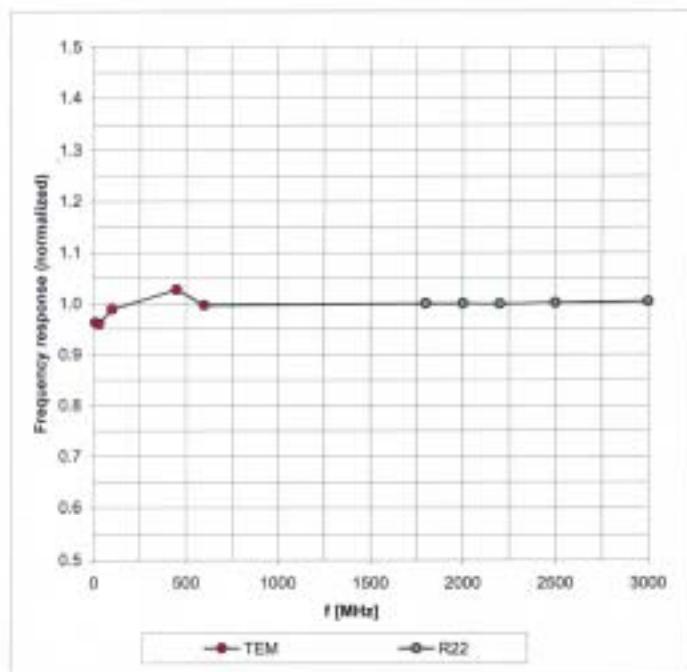Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3088

December 12, 2006

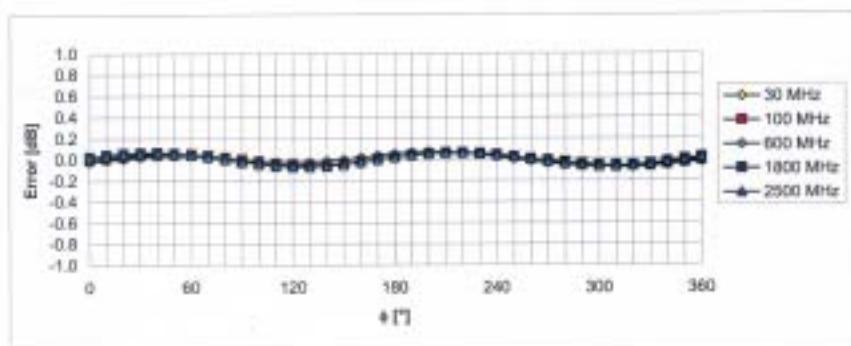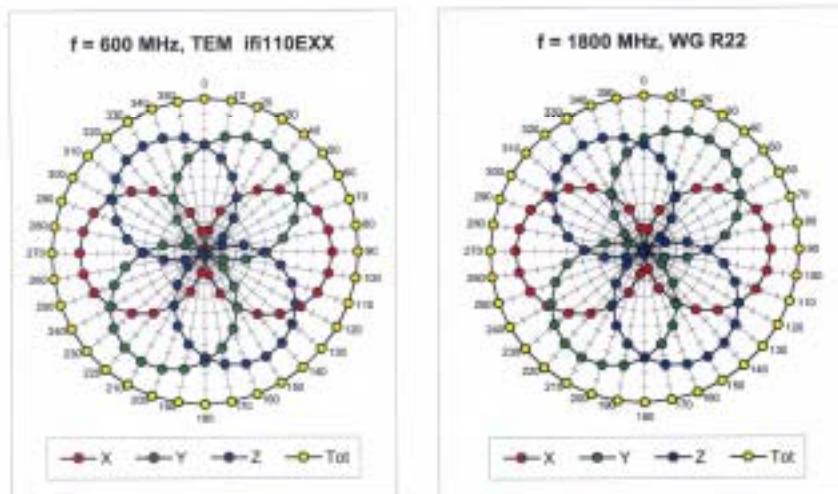
Receiving Pattern (ϕ), $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN:3088

December 12, 2006

Dynamic Range f(SAR_{head})


(Waveguide R22, f = 1800 MHz)

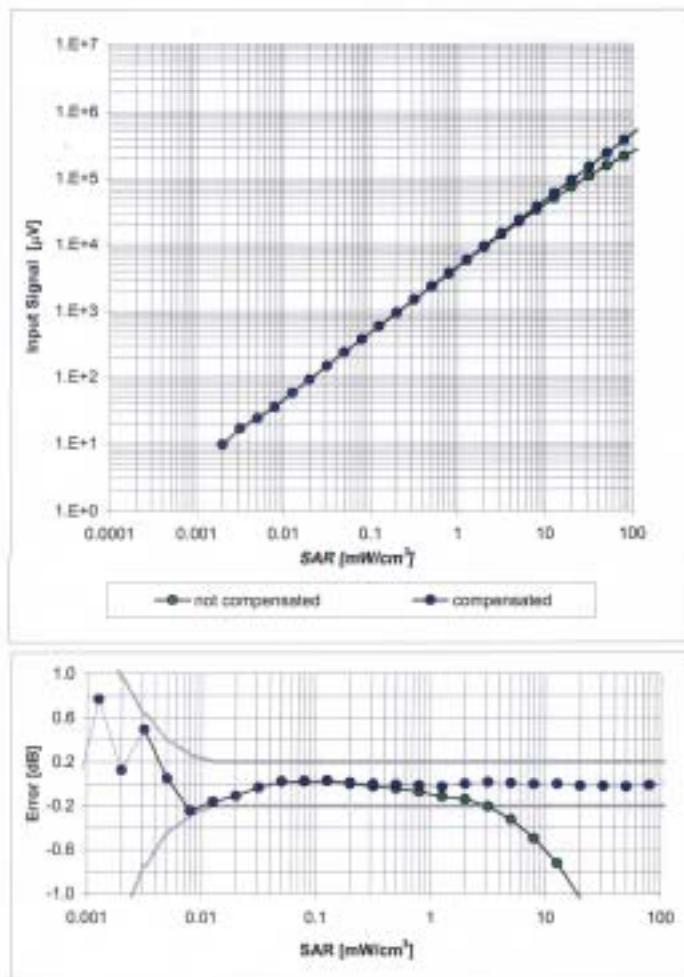Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3088

December 12, 2006

Conversion Factor Assessment

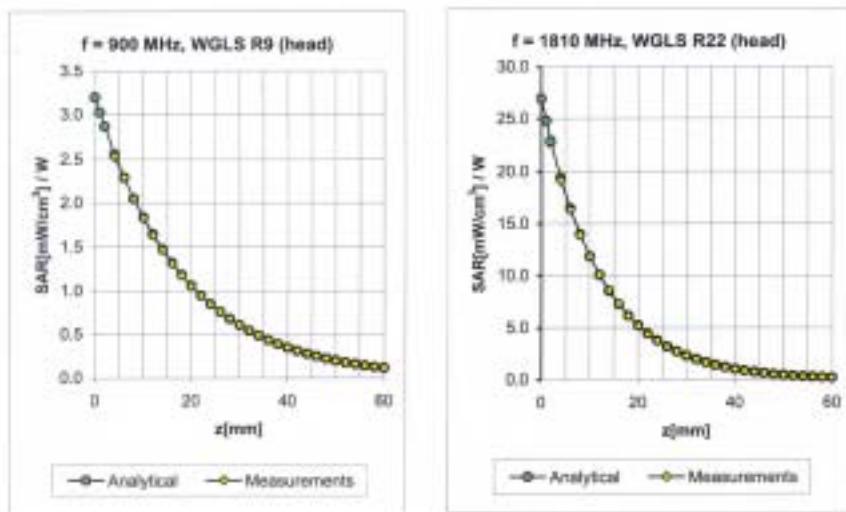


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ComF	Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.00	1.18	6.00	± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.73	1.39	5.07	± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.73	1.38	4.97	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.74	1.36	4.69	± 11.0% (k=2)

900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	1.00	1.17	5.92	± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	1.00	1.18	4.68	± 11.0% (k=2)
2000	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.89	1.27	4.51	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	1.12	4.33	± 11.0% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ComF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3088

December 12, 2006

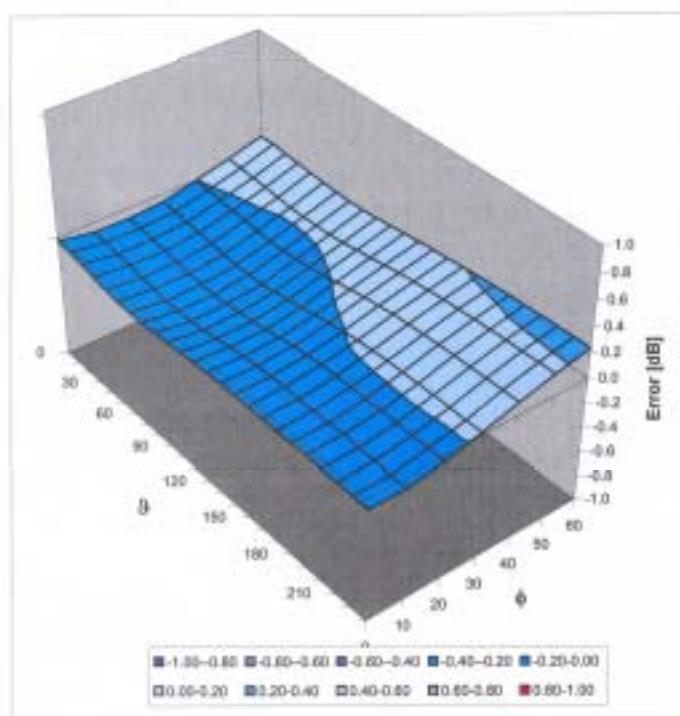Deviation from Isotropy in HSLError (ϕ, θ), f = 900 MHzUncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

6. DAE Calibration certification

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS – CSTC (MTT)**Certificate No: **DAE3-569_Dec06****CALIBRATION CERTIFICATE**Object **DAE3 - SD 000 D03 AA - SN: 569**Calibration procedure(s) **QA CAL-06.v12**
Calibration procedure for the data acquisition electronics (DAE)Calibration date: **December 8, 2006**Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6296003	13-Oct-06 (Elcal AG, No: 5492)	Oct-07
Kathley Multimeter Type 2301	SN: 0810278	03-Oct-06 (Elcal AG, No: 5478)	Oct-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMB 006 AB 1002	15-Jun-06 (SPEAG, in house check)	In house check Jun-07

Calibrated by:	Name Stefano Giannotta	Function Technician	Signature
Approved by:	Rin Bonhoff	R&D Director	

Issued: December 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 41, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters contain technical information as a result from the performance test and require no uncertainty.
- **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
- **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
- **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
- **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
- **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
- **Input resistance:** DAE input resistance at the connector, during internal auto-zeroing and during measurement.
- **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
- **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal:

High Range: 1LSB = $6.1\mu V$, full range = $-100...+300 mV$ Low Range: 1LSB = $61nV$, full range = $-1.....+3mV$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec.

Calibration Factors	X	Y	Z
High Range	$404.742 \pm 0.1\% (k=2)$	$404.327 \pm 0.1\% (k=2)$	$404.103 \pm 0.1\% (k=2)$
Low Range	$3.93547 \pm 0.7\% (k=2)$	$3.93513 \pm 0.7\% (k=2)$	$3.93385 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$80^\circ \pm 1^\circ$
---	------------------------

Appendix**1. DC Voltage Linearity**

High Range	Input (μ V)	Reading (μ V)	Error (%)
Channel X + Input	200000	199999.9	0.00
Channel X + Input	20000	20002.27	0.01
Channel X - Input	20000	-19998.87	-0.01
Channel Y + Input	200000	200000.1	0.00
Channel Y + Input	20000	19999.20	0.00
Channel Y - Input	20000	-20003.47	0.02
Channel Z + Input	200000	200000.0	0.00
Channel Z + Input	20000	20001.01	0.01
Channel Z - Input	20000	-20001.46	0.01

Low Range	Input (μ V)	Reading (μ V)	Error (%)
Channel X + Input	2000	1999.9	0.00
Channel X + Input	200	199.91	-0.05
Channel X - Input	200	-200.86	0.43
Channel Y + Input	2000	1999.9	0.00
Channel Y + Input	200	199.35	-0.32
Channel Y - Input	200	-200.57	0.28
Channel Z + Input	2000	2000.1	0.00
Channel Z + Input	200	200.37	0.19
Channel Z - Input	200	-201.04	0.52

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μ V)	Low Range Average Reading (μ V)
Channel X	200	-6.08	-11.00
	-200	8.46	12.92
Channel Y	200	6.85	6.78
	-200	-8.07	-8.07
Channel Z	200	-5.10	-5.59
	-200	4.40	3.64

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μ V)	Channel Y (μ V)	Channel Z (μ V)
Channel X	200	-	0.47	0.37
Channel Y	200	1.04	-	3.88
Channel Z	200	-1.66	0.07	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16395	15608
Channel Y	15744	16385
Channel Z	16312	16061

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MQ

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.16	-0.70	1.24	0.30
Channel Y	-1.80	-2.48	-0.86	0.32
Channel Z	-0.29	-1.19	0.92	0.39

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25nA

7. Input Resistance

	Zeroing (M Ω)	Measuring (M Ω)
Channel X	200.2	0.2001
Channel Y	204.0	0.2001
Channel Z	205.8	0.2000

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9

7. Dipole Calibration certification

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zauggaustrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SGS-CSTC (MTT)

Certificate No: D900V2-184_Dec06

CALIBRATION CERTIFICATE

Object D900V2 - SN: 184

Calibration procedure(s)
QA CAL-05.v6
Calibration procedure for dipole validation kits

Calibration date: December 6, 2006

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	0837480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	US37292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5066 (20g)	10-Aug-06 (METAS, No. 217-00501)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10)	10-Aug-06 (METAS, No. 217-00501)	Aug-07
Reference Probe ET3DV6 (HF)	SN 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
DAE4	SN 601	15-Dec-05 (SPEAG, No. DAE4-601_Dec05)	Dec-06

Secondary Standards	ID #	Check Date (In house)	Scheduled Check
Power sensor HP 8481A	MY41082317	18-Oct-02 (SPEAG, In house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000875	11-May-05 (SPEAG, In house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585 84206	18-Oct-01 (SPEAG, In house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Claudio Lautkar	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: December 8, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz = 5 \text{ mm}$	
Frequency	$900 \text{ MHz} \pm 1 \text{ MHz}$	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	$22.0 \text{ }^{\circ}\text{C}$	41.5	0.97 mho/m
Measured Head TSL parameters	$(22.0 \pm 0.2) \text{ }^{\circ}\text{C}$	$40.8 \pm 6 \text{ %}$	$0.97 \text{ mho/m} \pm 6 \text{ %}$
Head TSL temperature during test	$(21.7 \pm 0.2) \text{ }^{\circ}\text{C}$	—	—

SAR result with Head TSL

SAR averaged over 1 cm^2 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.72 mW/g
SAR normalized	normalized to 1W	10.9 mW/g
SAR for nominal Head TSL parameters ¹	normalized to 1W	$10.8 \text{ mW/g} \pm 17.0 \text{ % (k=2)}$
SAR averaged over 10 cm^2 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.75 mW/g
SAR normalized	normalized to 1W	7.00 mW/g
SAR for nominal Head TSL parameters ¹	normalized to 1W	$6.95 \text{ mW/g} \pm 16.5 \text{ % (k=2)}$

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters:

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.4 ± 6 %	1.05 mho/m ± 6 %
Body TSL temperature during test	(21.6 ± 0.2) °C	—	—

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	250 mW input power	2.75 mW / g
SAR normalized	normalized to 1W	11.0 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	10.8 mW/g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.79 mW / g
SAR normalized	normalized to 1W	7.16 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	7.05 mW /g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	50.8 Ω - 6.2 jΩ
Return Loss	- 24.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 8.3 jΩ
Return Loss	- 20.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.411 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 01, 2003

DASY4 Validation Report for Head TSL

Date/Time: 05.12.2006 17:14:04

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.01, 6.01, 6.01); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY4, V4.7 Build 46; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.4 V/m; Power Drift = -0.013 dB


Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.75 mW/g

Maximum value of SAR (measured) = 2.96 mW/g

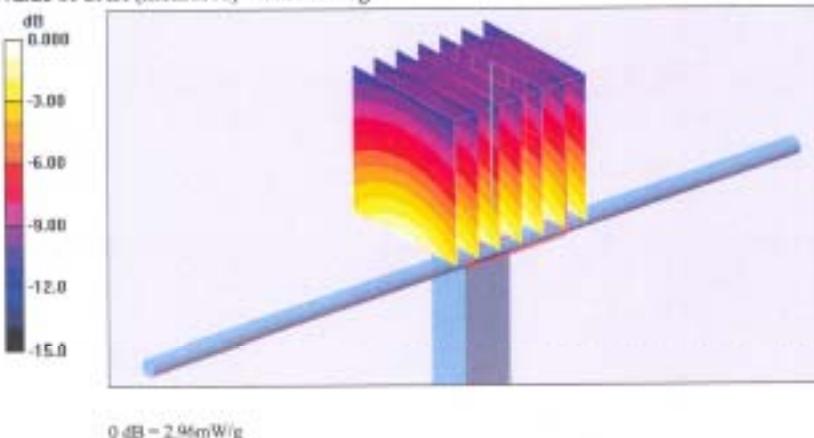

Impedance Measurement Plot for Head TSL

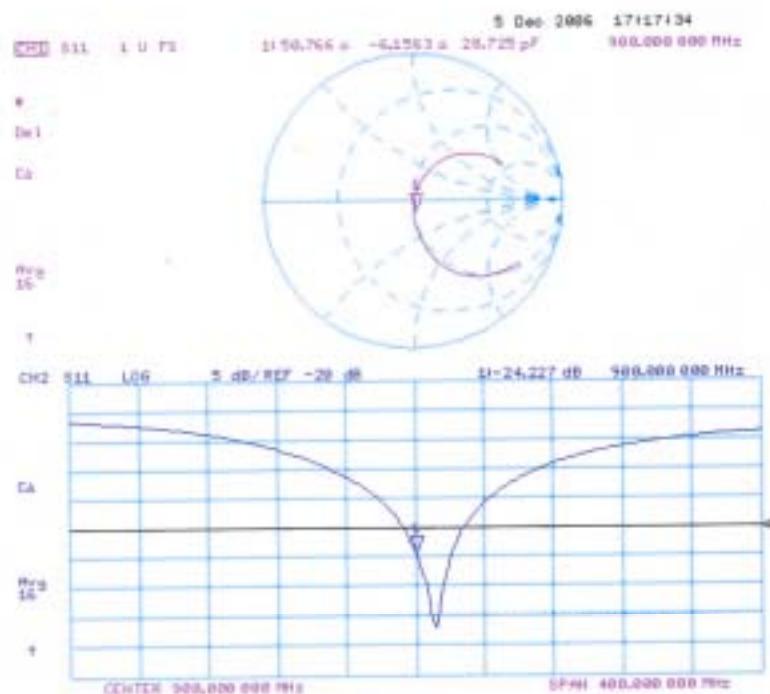

DASY4 Validation Report for Body TSL

Date/Time: 06.12.2006 15:53:38

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:184

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: MSL900;

Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.05 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF[5.8, 5.8, 5.8]; Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Srb01; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY4, V4.7 Build 46; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 3.89 W/kg


SAR(1 g) = 2.75 mW/g; SAR(10 g) = 1.79 mW/g

Maximum value of SAR (measured) = 3.00 mW/g

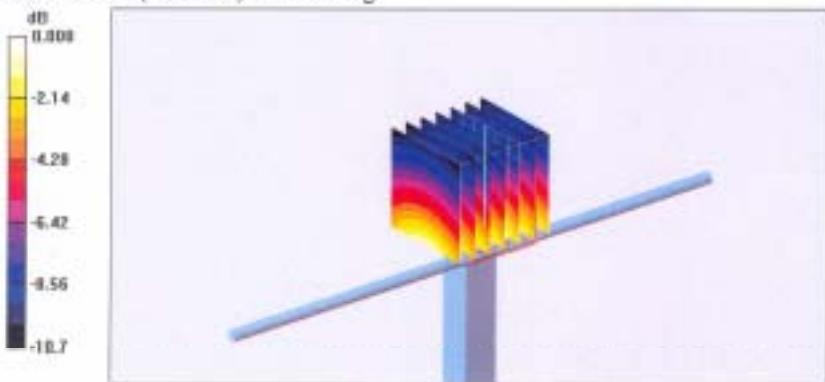

0 dB = 3.00 mW/g

Impedance Measurement Plot for Body TSL

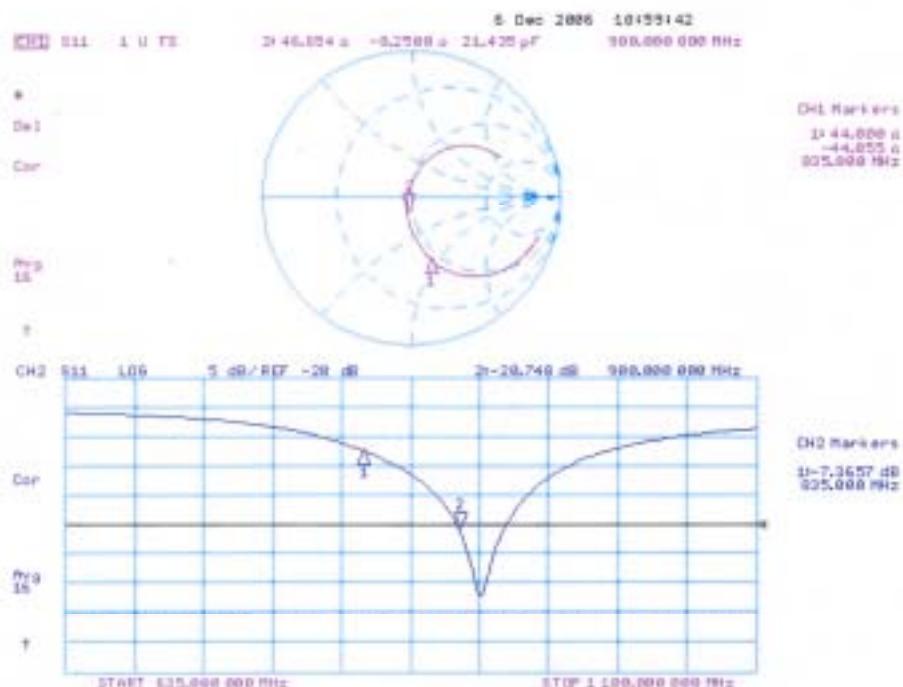

Order No: GSM10212817-2
Date: Apr. 12, 2007
Page: 125 of 135

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client SGS-CSTC (MTT)

Certificate No: D1900V2-5d028_Doc06

CALIBRATION CERTIFICATE

Object D1900V2 - SN: 5d028

Calibration procedure(s) QA CAL-05.v6
Calibration procedure for dipole validation kits

Calibration date: December 12, 2006

Condition of the calibrated item In Tolerance.

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ($(22 \pm 3)^\circ\text{C}$) and humidity $< 70\%$.

Calibration Equipment used (N&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	0837480704	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Power sensor HP 8481A	U537292783	03-Oct-06 (METAS, No. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-06 (METAS, No 217-00501)	Aug-07
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-06 (METAS, No 217-00501)	Aug-07
Reference Probe ET3DV6	SN: 1507	19-Oct-06 (SPEAG, No. ET3-1507_Oct06)	Oct-07
Reference Probe ES3DV3	SN: 3025	19-Oct-06 (SPEAG, No. ES3-3025_Oct06)	Oct-07
DAE4	SN: 601	15-Dec-06 (SPEAG, No. DAE4-601_Dec06)	Dec-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-06 (SPEAG, in house check Oct-06)	In house check: Oct-07
RF generator Agilent E4421B	MY41000675	11-May-05 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	U537300585 84208	18-Oct-06 (SPEAG, in house check Oct-06)	In house check: Oct-07

Calibrated by:	Name	Function	Signature
	Mike Mall	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: December 14, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di tam tam
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation.
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- **SAR measured:** SAR measured at the stated antenna input power.
- **SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1800 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.4 ± 6 %	1.40 mho/m ± 6 %
Head TSL temperature during test	(21.2 ± 0.2) °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.36 mW / g
SAR normalized	normalized to 1W	37.4 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	36.6 mW / g ± 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	4.96 mW / g
SAR normalized	normalized to 1W	19.8 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	19.5 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.8 ± 6 %	1.54 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.60 mW / g
SAR normalized	normalized to 1W	38.0 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	37.0 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.05 mW / g
SAR normalized	normalized to 1W	20.2 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	19.8 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	54.8 Ω + 4.5 jΩ
Return Loss	-24.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.2 Ω + 6.6 jΩ
Return Loss	-23.6 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.197 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2002

DASY4 Validation Report for Head TSL

Date/Time: 11.12.2006 18:50:48

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.97, 4.97, 4.97); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sm601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Area Scan (101x101x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 10.6 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.6 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 15.9 W/kg


SAR(1 g) = 9.36 mW/g; SAR(10 g) = 4.96 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

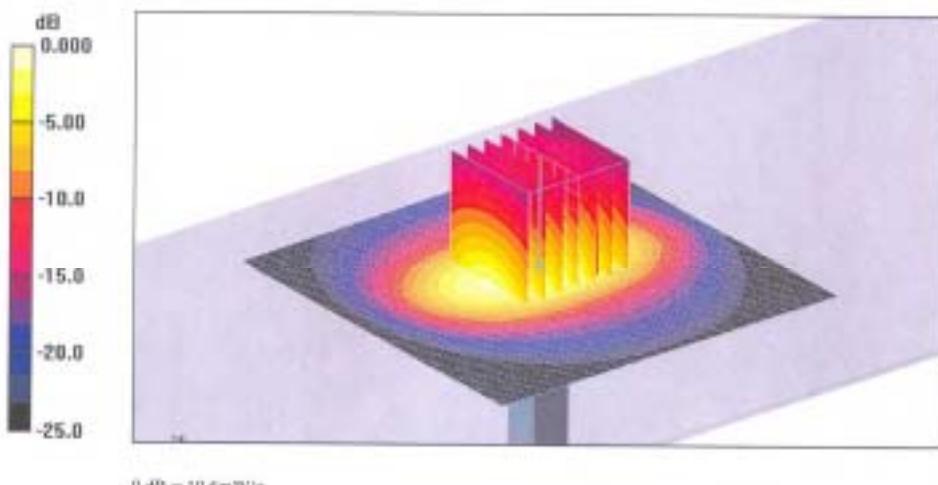

0 dB = 10.6mW/g

Impedance Measurement Plot for Head TSL

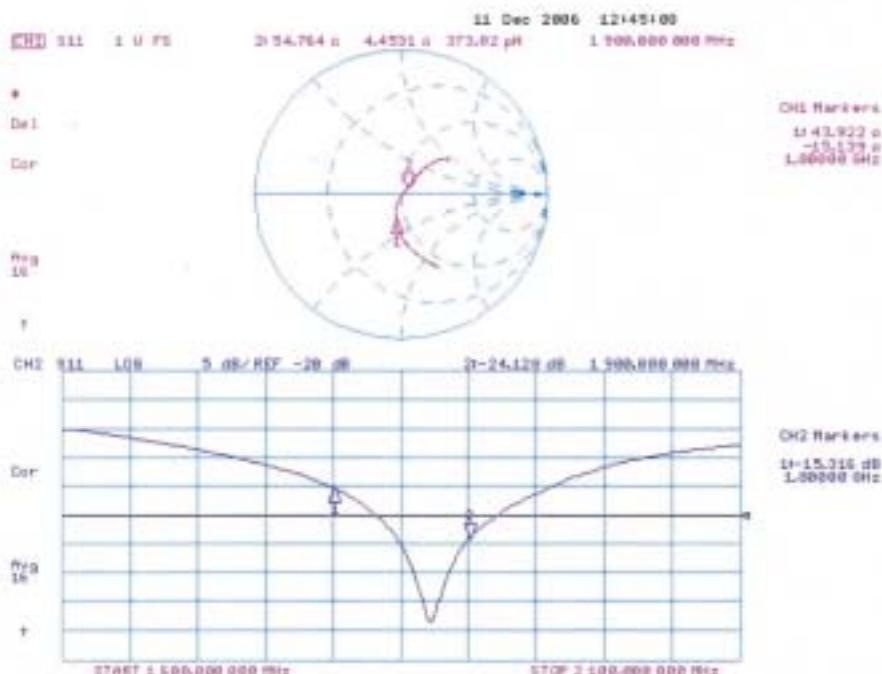

DASY4 Validation Report for Body TSL

Date/Time: 12.12.2006 16:43:40

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d028

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); CovxF(4.43, 4.43, 4.43); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sa601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.1 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 9.5 mW/g; SAR(10 g) = 5.05 mW/g

Maximum value of SAR (measured) = 10.4 mW/g

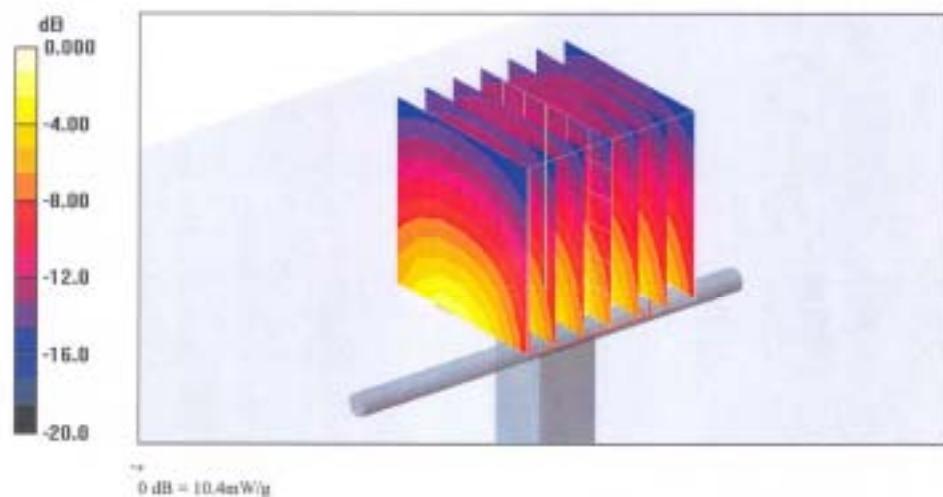


0 dB = 10.4mW/g

Order No: GSM10212817-2

Date: Apr. 12, 2007

Page: 133 of 135

Impedance Measurement Plot for Body TSL

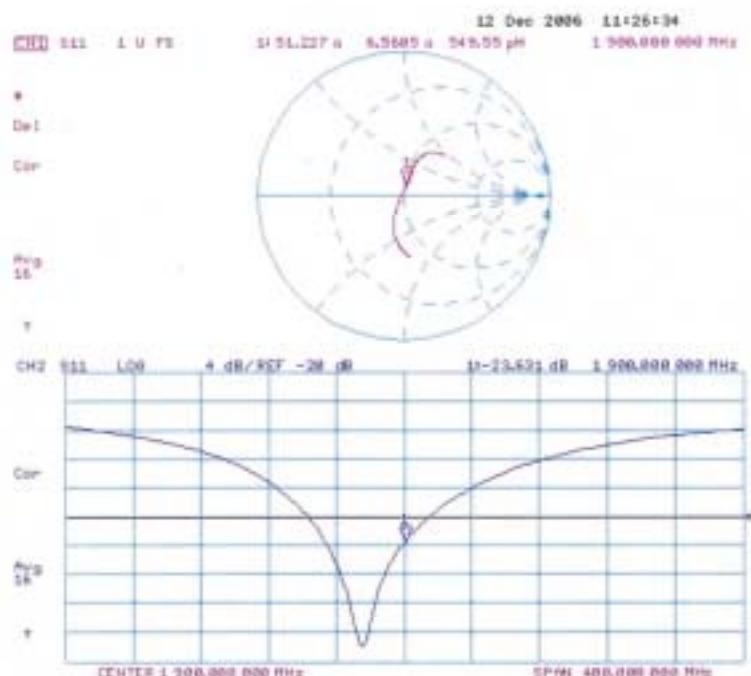

8. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(c_i) (1g)	(c_i) (10g)	Std. unc. (± %) (1g)	(v_i)
Measurement System							
Probe Calibration	4.8	N	1	1	1	4.8	4.8
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	0	R	$\sqrt{3}$	1	1	0	0
Boundary Effects	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
System Detection Limit	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	N	1	1	1	1.0	1.0
Response Time	0	R	$\sqrt{3}$	1	1	0	0
Integration Time	0	R	$\sqrt{3}$	1	1	0	0
RF Ambient Conditions	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
Probe Positioning	2.9	R	$\sqrt{3}$	1	1	1.7	1.7
Algorithms for Max. SAR Eval.	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Dipole							
Dipole Axis to Liquid Distance	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Input power and SAR drift meas.	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Phantom and Tissue Param.							
Phantom Uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid Conductivity (target)	5.0	R.	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined Stdandard Uncertainty						8.4	8.1
Coverage Factor for 95%	kp=2						
Expanded Uncertainty						16.8	16.2

Dasy4 Uncertainty Budget

9. Phantom description

Schmid & Partner Engineering AG

Zauggassestrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No.	QD 000 P40 CA
Series No.	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptsitz: 69 CH-8550 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1008. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 0.5
- [3] IEC PT 62209 draft 0.9
- (*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

F. Bonnelli

Schmid & Partner
Engineering AG

Zauggassestrasse 43, CH-8004 Zurich

Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Johann Rega

Page 10

End of Report