



TEST REPORT

No. 2008TAR078

for

TCT Mobile Suzhou Limited

OT-V570A

Type: ClaireA

with

Hardware Version: PIO2

Software Version: sw723

Issued Date: Dec 19th, 2008



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	6
6. SUMMARY OF TEST RESULTS.....	7
7. TEST EQUIPMENTS UTILIZED.....	7
ANNEX A: EUT PHOTOGRAPH.....	8
ANNEX B: MEASUREMENT RESULTS.....	16
ANNEX C: TEST LAYOUT.....	23

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: 00861062303288
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: July 15th, 2008
Testing End Date: Dec 12th, 2008

1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460884
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460884
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/GPRS 850/1900 dual-band mobile phone
Marketing name	OT-V570A
Model name	ClaireA
Brand name	ALCATEL
FCC ID	RAD084
Hardware status	PIO2
Software status	sw723
Power supply	Battery or Charger (AC Adaptor)

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	011552000002938	PIO2	sw723
EUT2	011552000342979	PIO2	sw723

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	B061860047A
AE2	Travel Adapter	/
AE3	Travel Adapter	/
AE1		
Model	CAB3010010C1	
Manufacturer	BYD	
Capacitance	750mAh	
Nominal Voltage	3.7V	
AE2		
Model	T5002684AGAA	
Manufacturer	Tenpao	
Length of DC line	120cm	
AE3		
Model	3DS11022AGAA	
Manufacturer	TENPAO	
Length of DC line	120cm	

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	V 10.1.07
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURER	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2009-10-30
2	Test Receiver	ESI40	831564/002	R&S	2009-2-11
3	BiLog Antenna	3142B	9908-1403	EMCO	2009-1-16
4	BiLog Antenna	VUL9163	9163 175	Schwarzbeck	2009-9-19
5	Signal Generator	SMT06	831285/005	R&S	2008-12-26
6	Signal Generator	SMP04	100070	R&S	2009-4-20
7	LISN	ESH2-Z5	829991/012	R&S	2009-9-13
8	Spectrum Analyzer	FSU26	200030	R&S	2009-6-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2009-8-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2009-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2009-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2009-3
13	Climatic chamber	SH-241	92003546	ESPEC	2009-5-15

ANNEX A: EUT photograph


External Photo



Mobile Phone




Mobile Phone

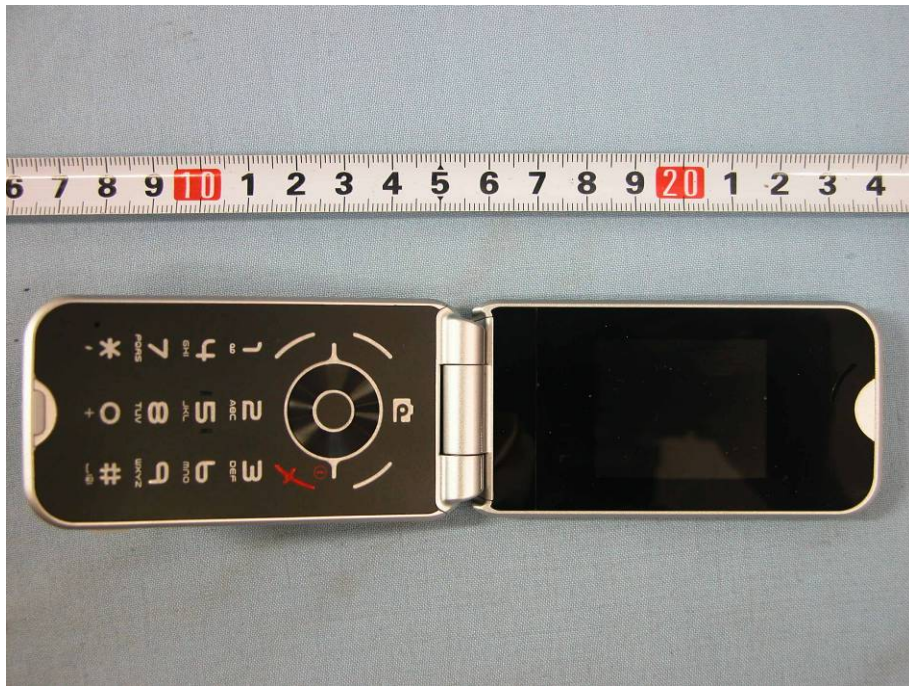

Mobile Phone



Charger (AC/DC Adapter) AE2

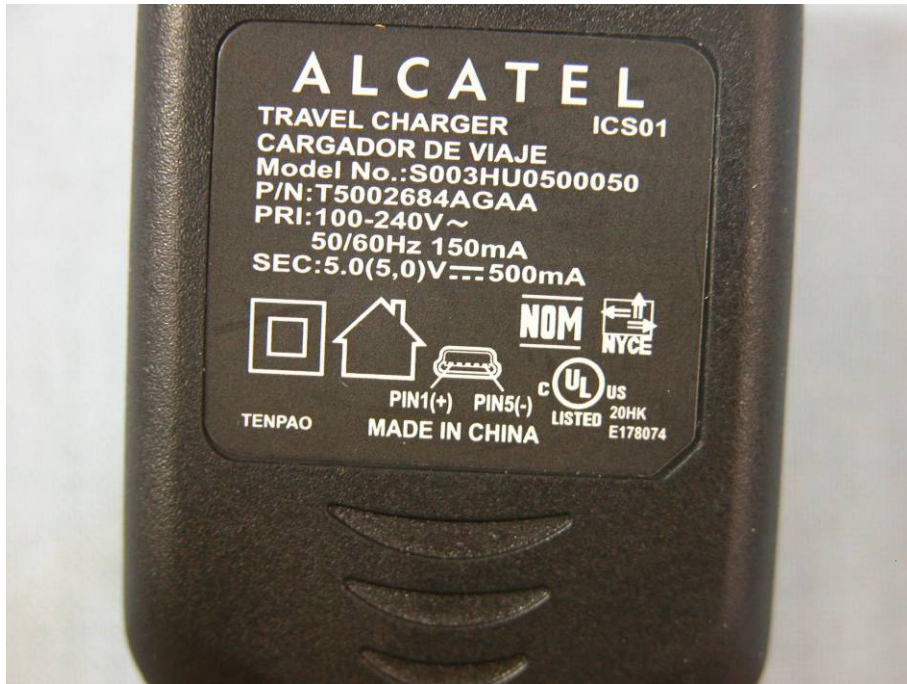

Label of Charger (AC/DC Adapter) AE2




Charger (AC/DC Adapter) AE3



Label of Charger (AC/DC Adapter) AE3



Battery AE1

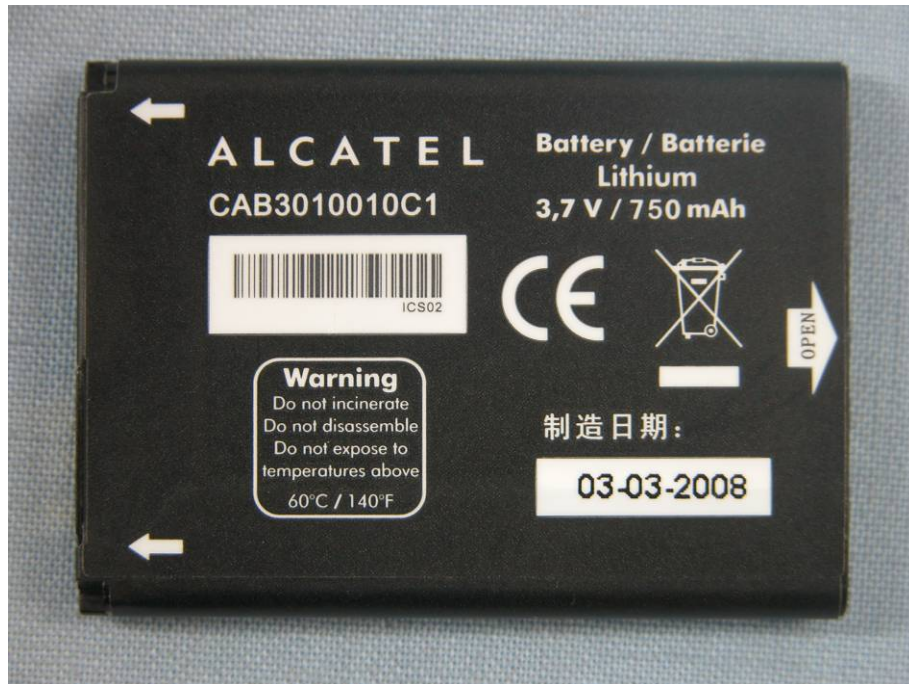

Battery AE1


Internal Photo




Mobile phone Disassembly




Mobile phone Disassembly

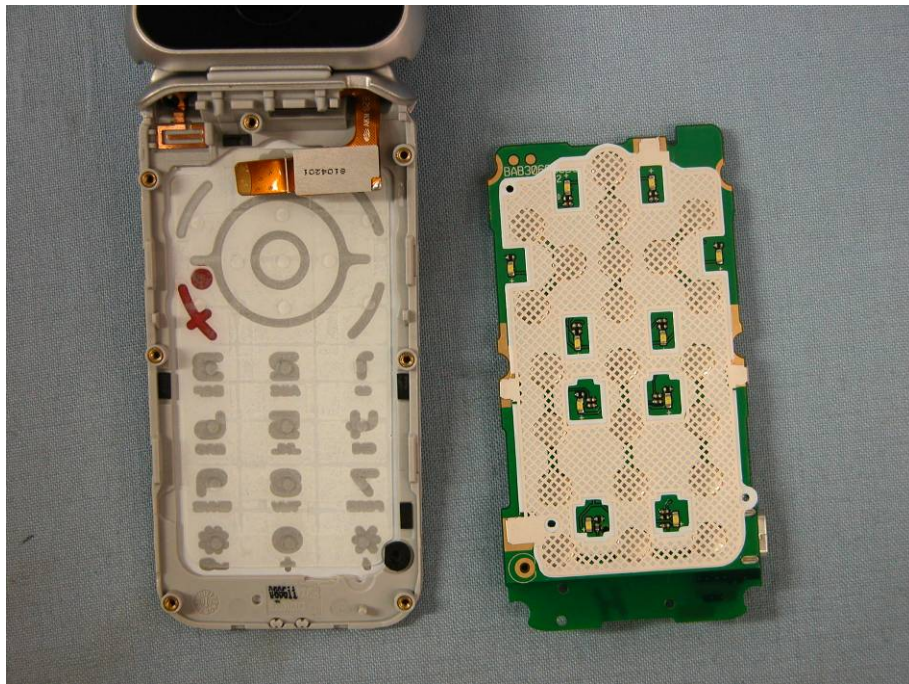


Mobile phone Disassembly

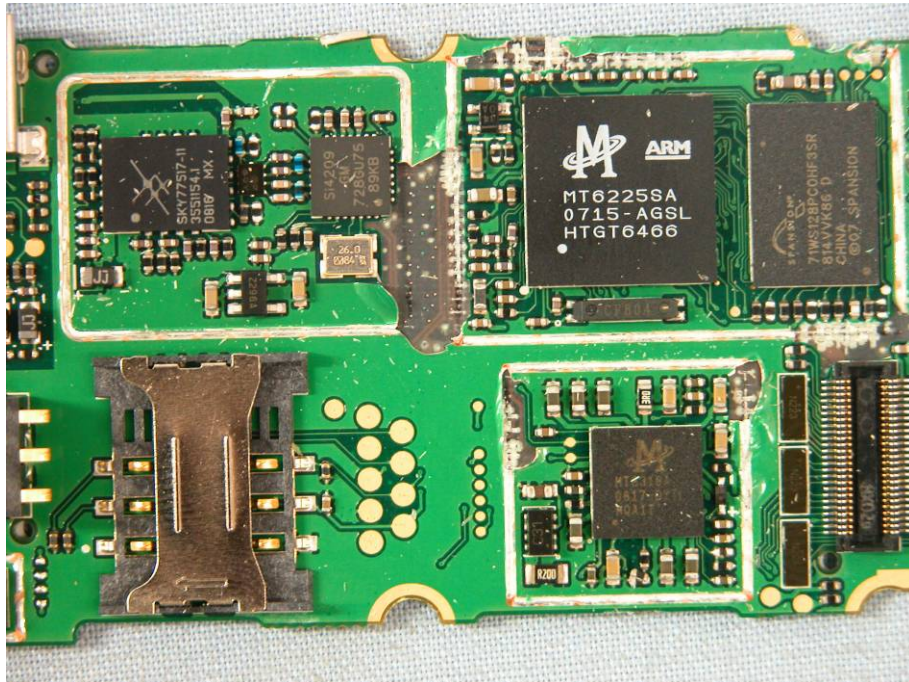

Mobile phone Disassembly

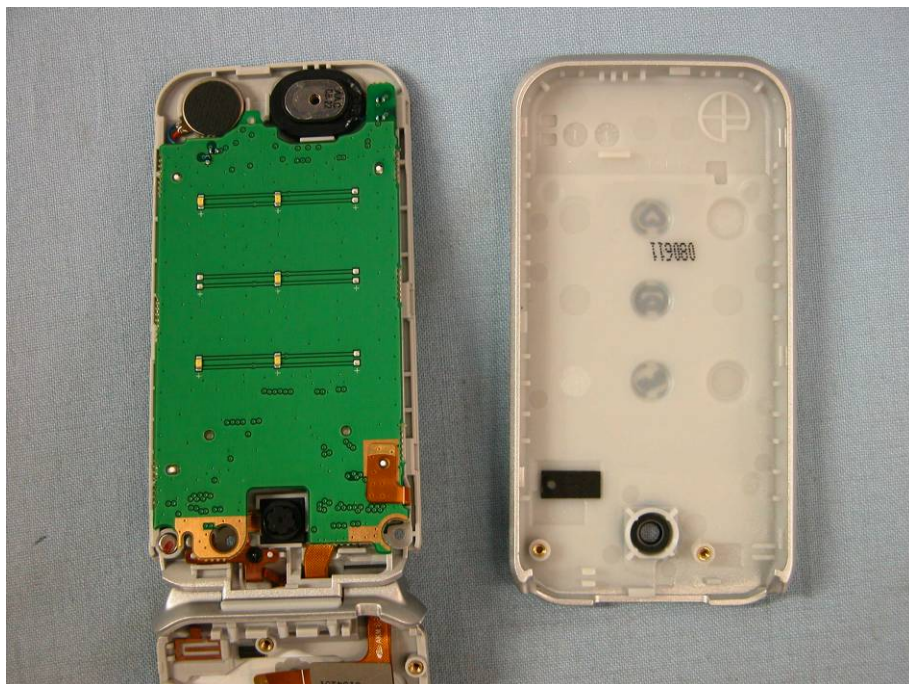

Mobile phone Disassembly

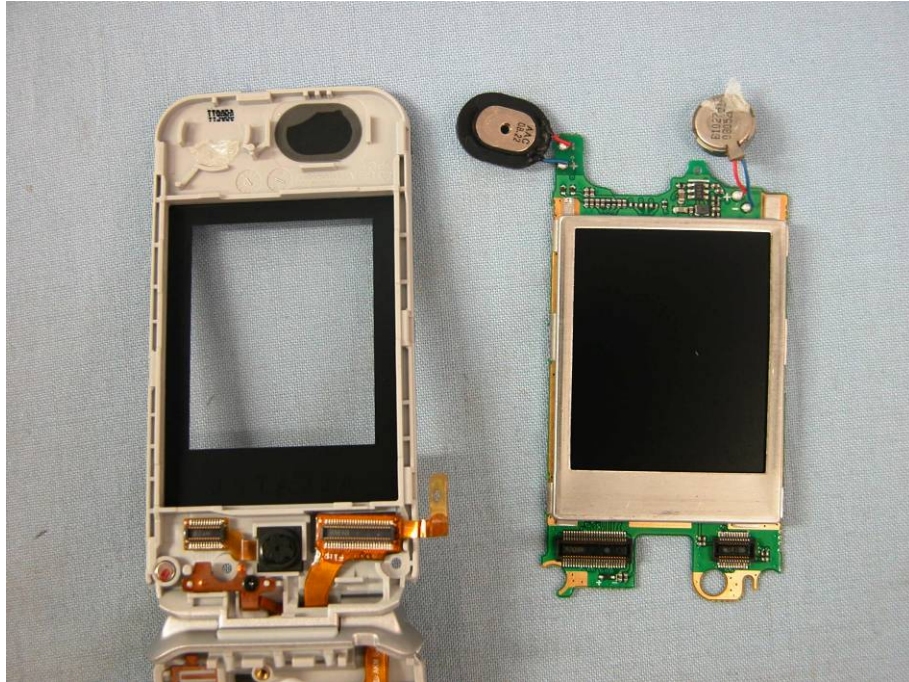

Mobile phone Disassembly

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission (§15.109(a))

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 8.3. The test set-up please refers to Annex C.1.

B.1.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

B.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

**B.1.4 Measurement Results
With Laptop**

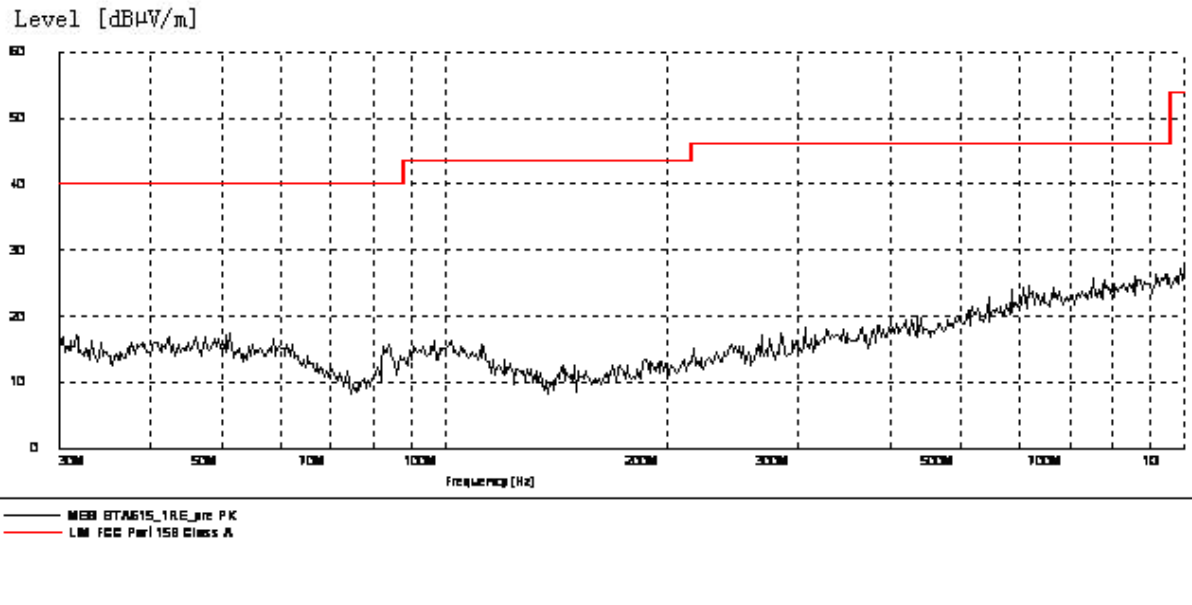


Figure B.1 Radiated Emission from 30MHz to 1GHz

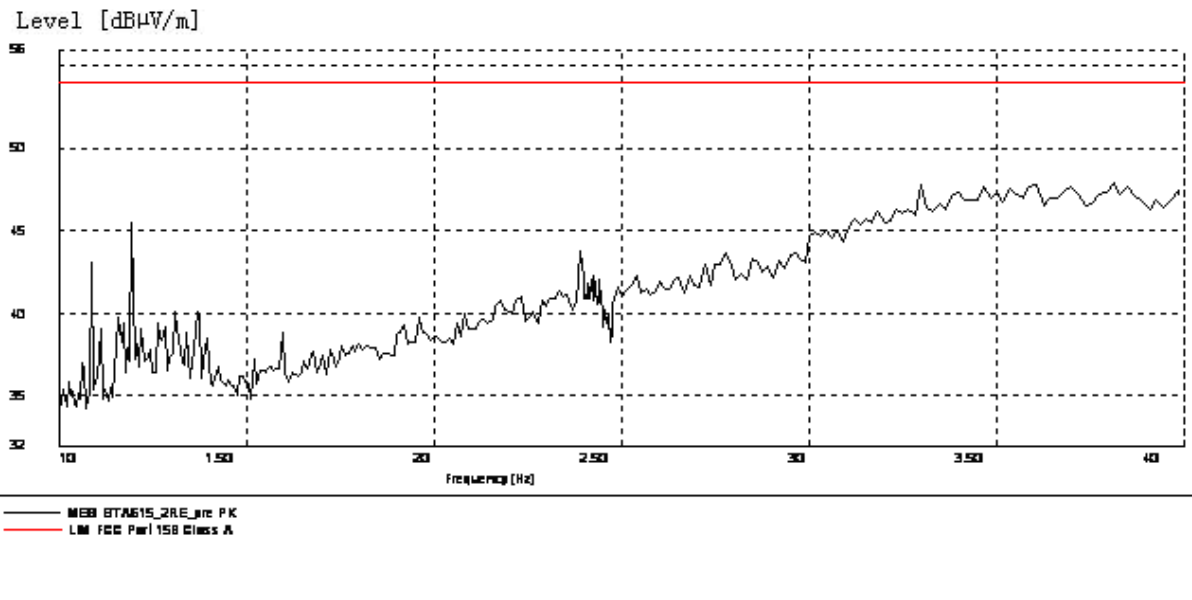


Figure B.2 Radiated Emission from 1GHz to 4GHz

Charger AE3 (charging Mode)

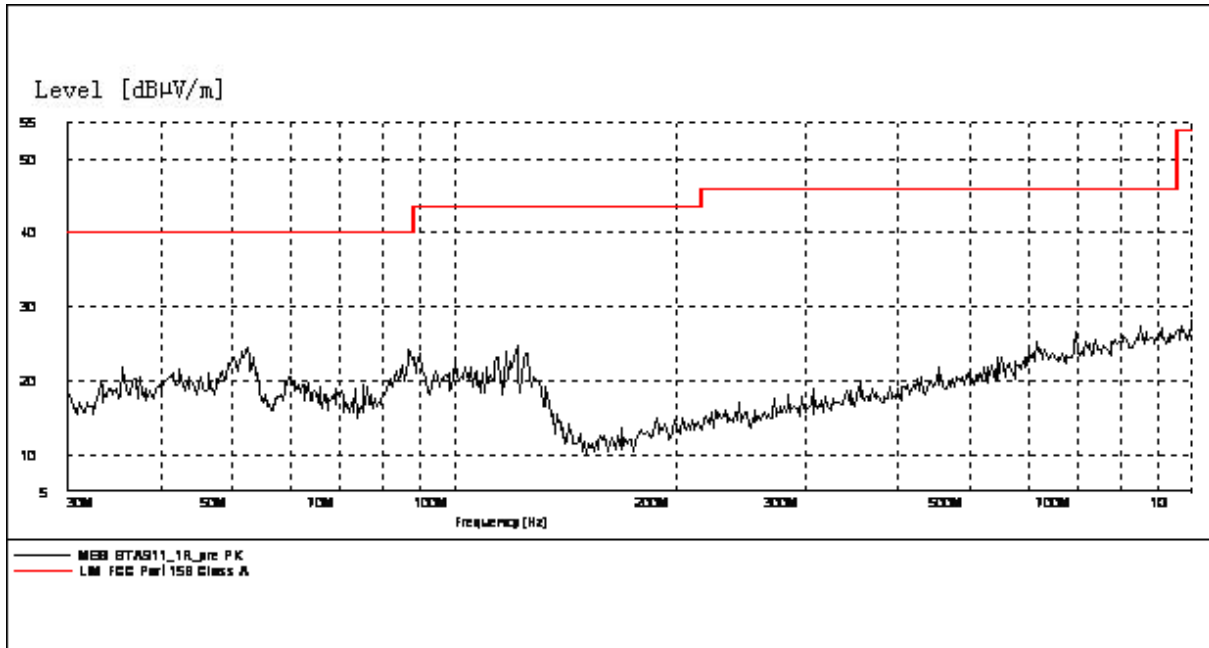


Figure B.3 Radiated Emission from 30MHz to 1GHz

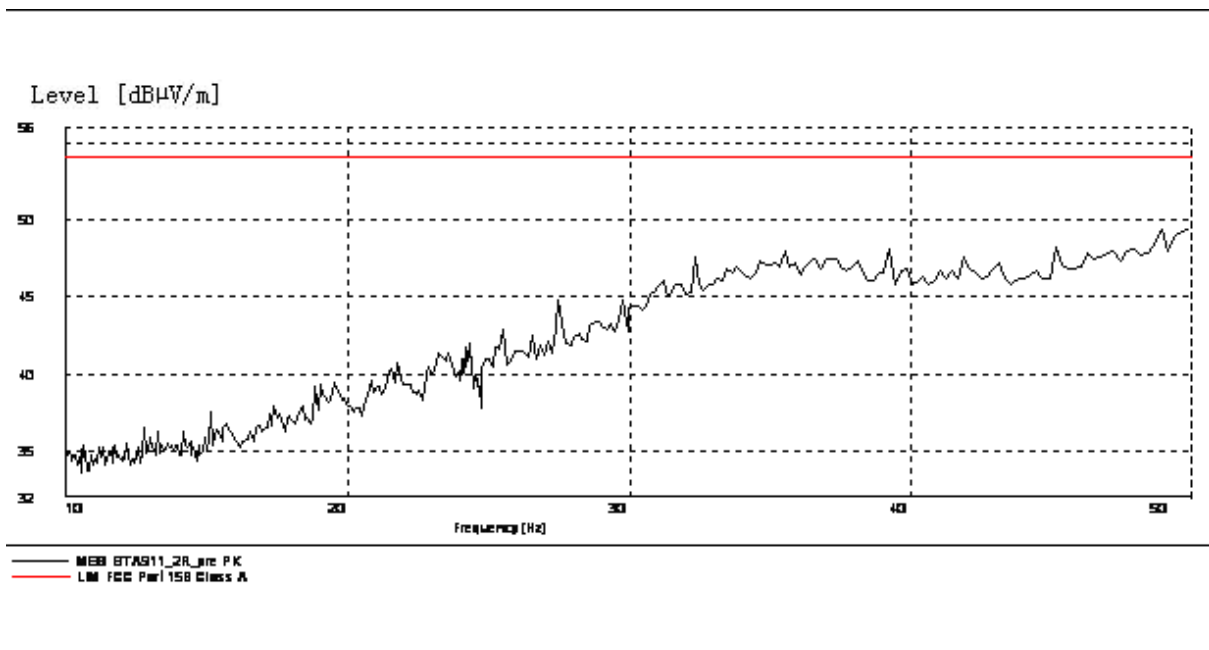


Figure B.4 Radiated Emission from 1GHz to 5GHz

B.2 Conducted Emission (§15.107(a))

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 7.2. The test set-up please refers to Annex C.2.

B.2.2 EUT Operating Mode:

The MS is operating in the USB mode and the charging mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished. During the charging mode, Conducted Emission is measured with travel charger.

B.2.3 Measurement Limit


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

B.2.4 Test Condition

Voltage (V)	Frequency (Hz)
110	60

**B.2.4 Measurement Results
With Laptop**

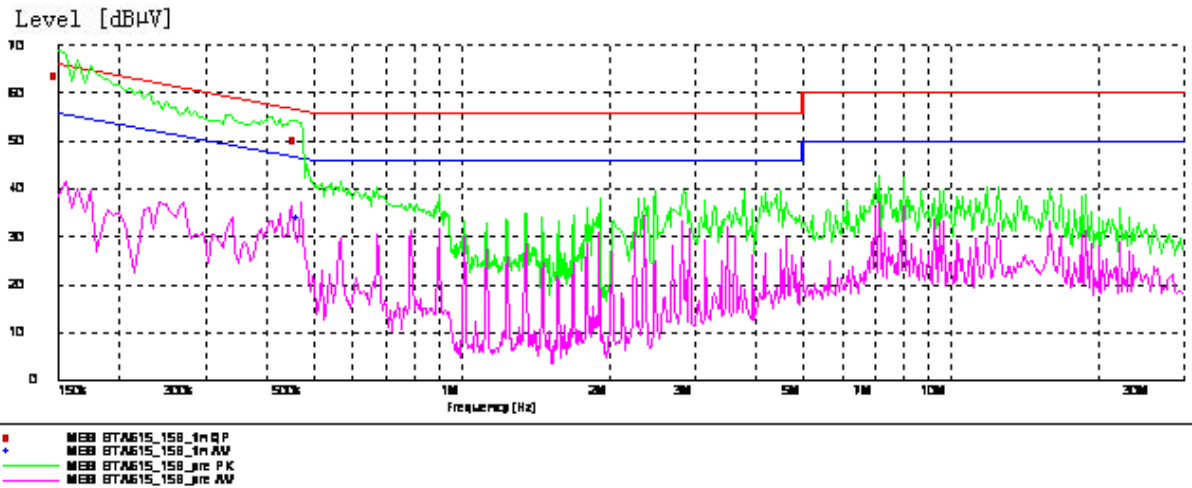


MEASUREMENT RESULT: "8TA302_15B_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	63.50	10.1	66	2.5	N	FLO
0.460000	50.00	10.1	57	6.7	L1	FLO

MEASUREMENT RESULT: "8TA302_15B_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.470000	33.70	10.1	47	12.8	L1	FLO

With charger AE2 (Charging Mode)

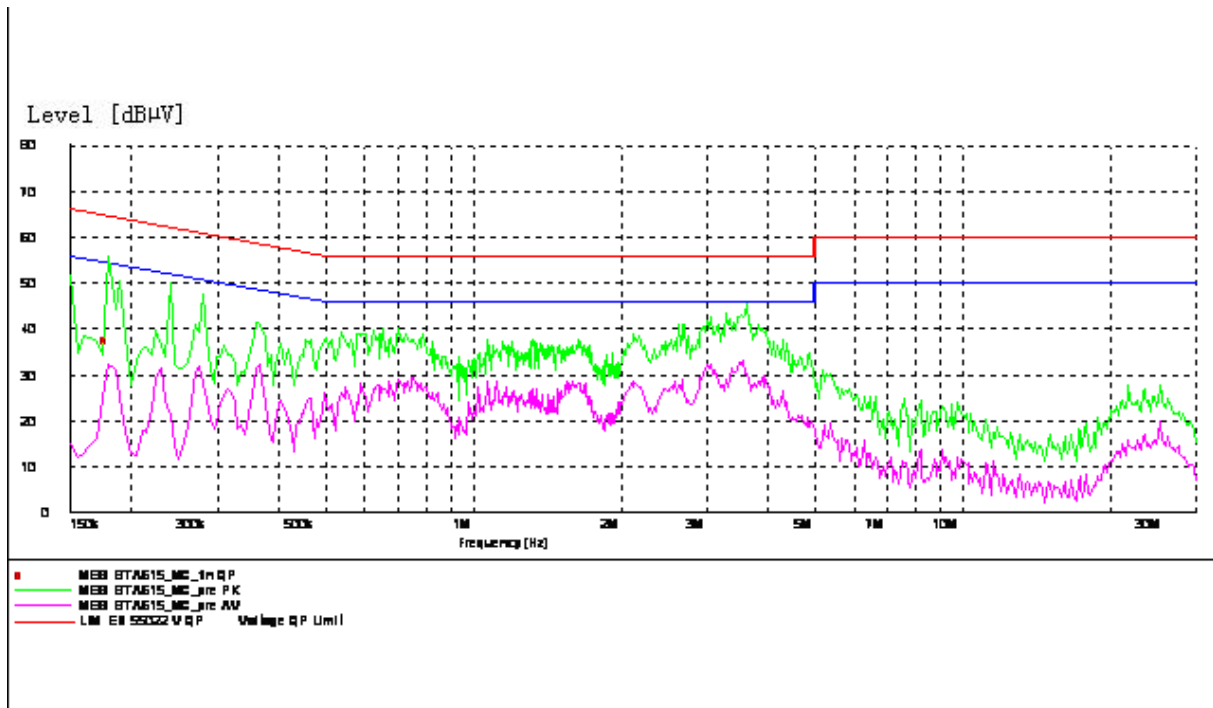

MEASUREMENT RESULT: "8TA615_MC_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.180000	37.70	10.1	65	26.7	N	FLO

With charger AE3 (Charging Mode)

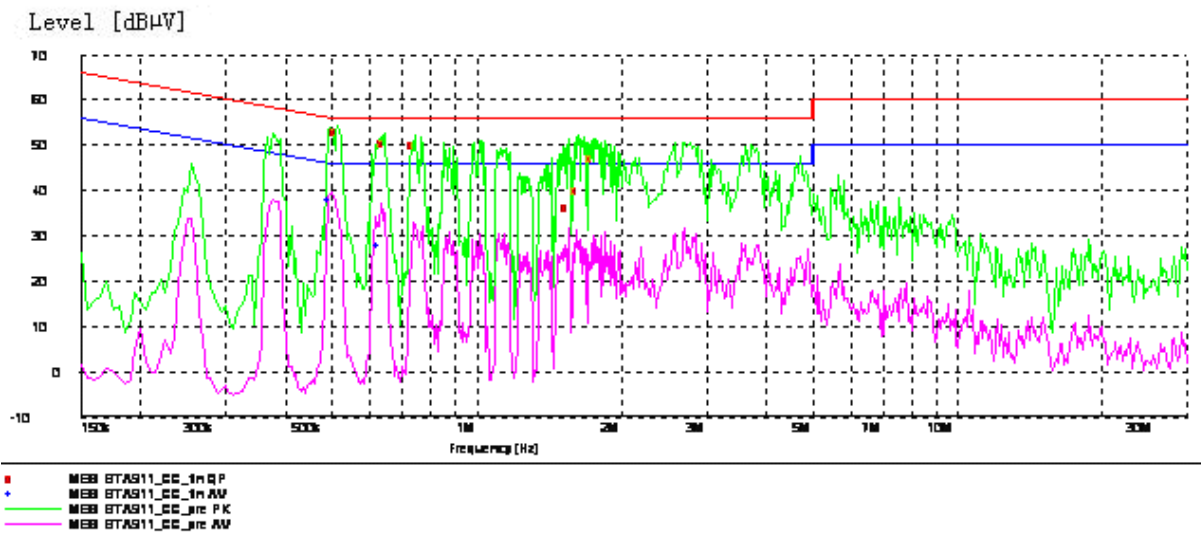


Figure B.3 Conducted Emission from 150KHz to 30MHz

MEASUREMENT RESULT: "8TA911_CC_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.515000	53.00	10.1	56	3.0	L1	GND
0.645000	50.40	10.1	56	5.6	L1	GND
0.745000	50.00	10.1	56	6.0	L1	FLO
1.555000	36.40	10.1	56	19.6	N	FLO
1.620000	40.20	10.1	56	15.8	N	FLO
1.745000	47.10	10.1	56	8.9	L1	GND


MEASUREMENT RESULT: "8TA911_CC_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.500000	38.10	10.1	46	8.0	L1	FLO
0.630000	27.90	10.1	46	18.1	L1	GND

ANNEX C: TEST LAYOUT



Pic C-1 Conducted Emission (with laptop)

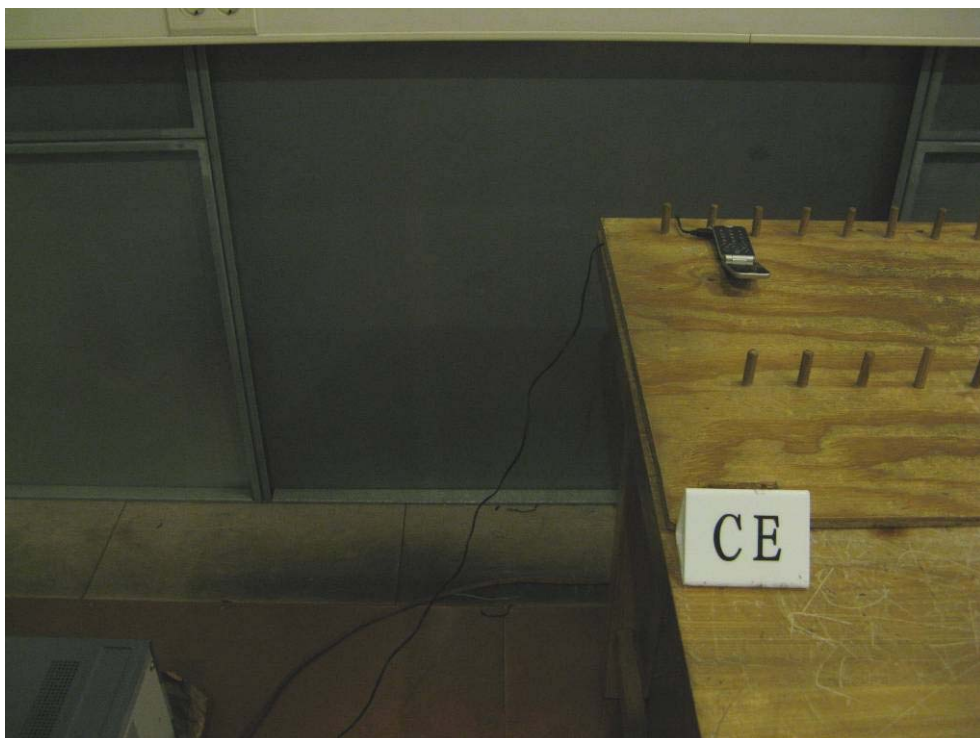

Pic C-2 Conducted Emission (with Charger)



Pic C-3 Radiated Spurious Emission

*****END OF REPORT*****