

SAR TEST REPORT

No. 2008SAR00046

For

TCT Mobile Suzhou Limited

OT-S626A

B85A

With

Hardware Version: PIO

Software Version: V53A

FCCID: RAD089

Issued Date: 2008-08-14



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry




No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcomed@emcite.com. www.emcite.com

TABLE OF CONTENT

1 TEST LABORATORY	4
1.1 TESTING LOCATION	4
1.2 TESTING ENVIRONMENT.....	4
1.3 PROJECT DATA	4
2 CLIENT INFORMATION	4
2.1 APPLICANT INFORMATION	4
2.2 MANUFACTURER INFORMATION	4
3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1 ABOUT EUT	5
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4 OPERATIONAL CONDITIONS DURING TEST	6
4.1 SCHEMATIC TEST CONFIGURATION.....	6
4.2 SAR MEASUREMENT SET-UP.....	6
4.3 DASY4 E-FIELD PROBE SYSTEM.....	7
4.4 E-FIELD PROBE CALIBRATION	7
4.5 OTHER TEST EQUIPMENT	9
4.6 EQUIVALENT TISSUES	9
4.7 SYSTEM SPECIFICATIONS	10
5 CHARACTERISTICS OF THE TEST	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	11
6 LABORATORY ENVIRONMENT	11
7 CONDUCTED OUTPUT POWER MEASUREMENT.....	11
7.1 SUMMARY	11
7.2 CONDUCTED POWER	12
8 TEST RESULTS	12
8.1 DIELECTRIC PERFORMANCE	12
8.2 SYSTEM VALIDATION.....	13
8.3 SUMMARY OF MEASUREMENT RESULTS (850MHz)	13
8.4 SUMMARY OF MEASUREMENT RESULTS (1900MHz)	14
8.5 SUMMARY OF MEASUREMENT RESULTS (WITH BLUETOOTH FUNCTION)	15
8.6 CONCLUSION	16
9 MEASUREMENT UNCERTAINTY	16
10 MAIN TEST INSTRUMENTS	17
ANNEX A: MEASUREMENT PROCESS.....	19
ANNEX B TEST LAYOUT	20
ANNEX C: GRAPH RESULTS	24
ANNEX D SYSTEM VALIDATION RESULTS	106
ANNEX E PROBE CALIBRATION CERTIFICATE.....	108
ANNEX F DIPOLE CALIBRATION CERTIFICATE	117

SAR TEST REPORT

Test report No.	2008SAR00046	Date of report	August 14 th , 2008
Test laboratory	TMC Beijing, Telecommunication Metrology Center of MII	Client	TCT Mobile Suzhou Limited
Test device	Product name: OT-S626A Model type: B85A Series number: 011653000002488		
Test reference documents	<p>EN 50360–2006: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p>EN 62209-1-2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures -- Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)</p> <p>ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p>IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1:Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)</p> <p>IEC 62209-2 (Draft): Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR)in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the Body.</p>		
Test conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: Pass</p>		
Signature	 Lu Bingsong Deputy Director of the laboratory (Approved for this report)	 Sun Qian SAR Project Leader (Reviewed for this report)	 Lin Hao SAR Test Engineer (Prepared for this report)

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: +86-10-62303288
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: Min. = 15 °C, Max. = 30 °C
Relative humidity: Min. = 30%, Max. = 70%
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

1.3 Project Data

Project Leader: Sun Qian
Test Engineer: Lin Hao
Testing Start Date: August 1, 2008
Testing End Date: August 4, 2008

2 Client Information

2.1 Applicant Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4/F, South Building,No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R. China
City: Shanghai
Postal Code: 201203
Country: P.R. China
Telephone: +86-21-61460884
Fax: +86-21-61460602

2.2 Manufacturer Information

Company Name: TCT Mobile Suzhou Limited
Address /Post: 4/F, South Building,No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R. China
City: Shanghai
Postal Code: 201203
Country: P.R. China
Telephone: +86-21-61460884
Fax: +86-21-61460602

3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

Description: OT-S626A
Model: B85A
Frequency Band: GSM/GPRS 850/1900
GPRS Class: 10



Picture 1: Constituents of the sample

3.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	011653000002488	PIO	V53A

*EUT ID: is used to identify the test sample in the lab internally.

3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Travel Adapter	T5002684AGAA	\	Tenpao
AE2	Battery	CAB3010010C1	\	BYD
AE3	Headset	CCA30B4000C0	\	Shunda/Quancheng

*AE ID: is used to identify the test sample in the lab internally

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration


During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

4.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

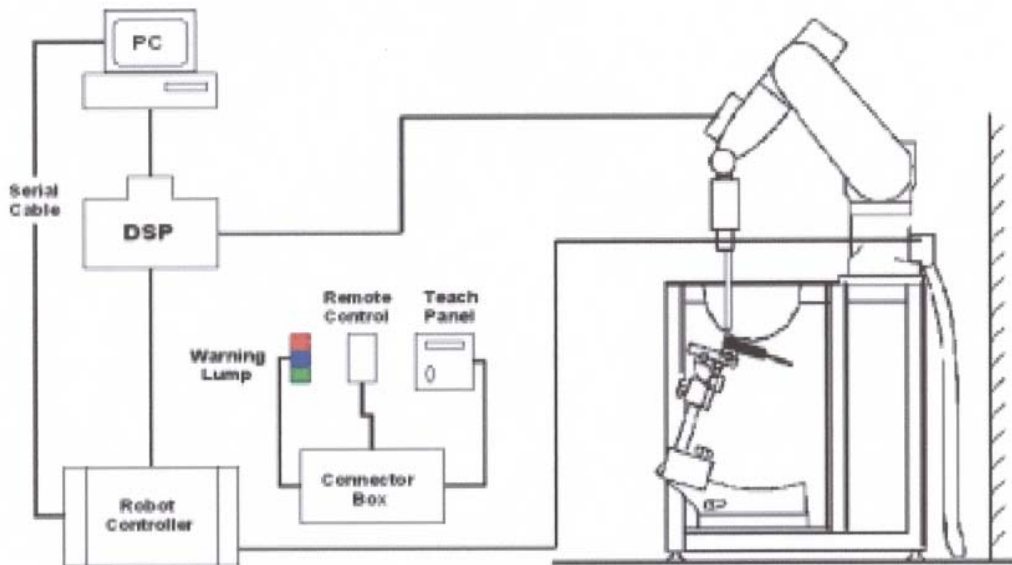

Picture 2: SAR Lab Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

4.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ES3DV3 Probe Specification

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1810 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2 \text{ dB}$ (30 MHz to 4 GHz)
Directivity	$\pm 0.2 \text{ dB}$ in HSL (rotation around probe axis) $\pm 0.3 \text{ dB}$ in tissue material (rotation normal to probe axis)



Picture 3: ES3DV3 E-field Probe

Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: \pm 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones



Picture4:ES3DV3 E-field probe

4.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than \pm 10%. The spherical isotropy was evaluated and found to be better than \pm 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).



Picture 5: Device Holder

4.5 Other Test Equipment

4.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

4.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



4.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000

MHz consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 4 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Picture 6: Generic Twin Phantom

Table 1. Composition of the Head Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz		
Water	41.45		
Sugar	56.0		
Salt	1.45		
Preventol	0.1		
Cellulose	1.0		
Dielectric Parameters Target Value	f=850MHz	ε=41.5	σ=0.90
MIXTURE %	FREQUENCY 1900MHz		
Water	55.242		
Glycol monobutyl	44.452		
Salt	0.306		
Dielectric Parameters Target Value	f=1900MHz	ε=40.0	σ=1.40

Table 2. Composition of the Body Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz
Water	52.5
Sugar	45.0
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE %	FREQUENCY 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

4.7 System Specifications

4.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

5 CHARACTERISTICS OF THE TEST

5.1 Applicable Limit Regulations

EN 50360–2006: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for

portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

EN 62209-1–2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEC 62209-2 (Draft): Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the Body.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

6 LABORATORY ENVIRONMENT

Table 3: The Ambient Conditions during EMF Test

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surround objects is minimized and in compliance with requirement of standards.	

7 CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

7.2 Conducted Power

7.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at low, middle and high channels.

7.2.2 Measurement result

Table 4: Conducted Power Measurement Results

850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
Before SAR Test	32.17	32.04	32.25
After SAR Test	32.16	32.02	32.23
1900MHZ	Conducted Power (dBm)		
	Channel 810 (1909.8MHz)	Channel 661 (1880MHz)	Channel 512 (1850.2MHz)
Before SAR Test	29.15	29.34	29.75
After SAR Test	29.14	29.35	29.74

7.2.3 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 8 to Table 13 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

8 TEST RESULTS

8.1 Dielectric Performance

Table 5: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	41.5	0.90
	1900 MHz	40.0	1.40
Measurement value (Average of 10 tests)	850 MHz	40.3	0.91
	1900 MHz	40.9	1.38

Table 6: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	55.2	0.97
	1900 MHz	53.3	1.52
Measurement value (Average of 10 tests)	850 MHz	53.7	1.01
	1900 MHz	52.1	1.49

8.2 System Validation

Table 7: System Validation

Measurement is made at temperature 23.3 °C, relative humidity 49%, input power 250 mW. Liquid temperature during the test: 22.5°C							
Liquid parameters		Frequency		Permittivity ϵ		Conductivity σ (S/m)	
		835 MHz		43.5		0.91	
		1900 MHz		40.9		1.38	
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	1.60	2.48	1.62	2.50	1.25%	0.81%
	1900 MHz	5.09	9.73	5.27	9.91	3.3%	1.9%

Note: Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

8.3 Summary of Measurement Results (850MHz)

Table 8: SAR Values (850MHz-Head)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency(See Fig.1)	0.312	0.439	-0.133
Left hand, Touch cheek, Mid frequency(See Fig.3)	0.363	0.511	-0.168
Left hand, Touch cheek, Bottom frequency(See Fig.5)	0.321	0.448	-0.099
Left hand, Tilt 15 Degree, Top frequency(See Fig.7)	0.164	0.224	0.056
Left hand, Tilt 15 Degree, Mid frequency(See Fig.9)	0.174	0.241	-0.075
Left hand, Tilt 15 Degree, Bottom frequency(See Fig.11)	0.168	0.228	-0.049
Right hand, Touch cheek, Top frequency(See Fig.13)	0.527	0.752	0.053
Right hand, Touch cheek, Mid frequency(See Fig.15)	0.616	0.875	-0.062
Right hand, Touch cheek, Bottom frequency(See Fig.17)	0.530	0.748	-0.015
Right hand, Tilt 15 Degree, Top frequency(See Fig.19)	0.260	0.359	0.006
Right hand, Tilt 15 Degree, Mid frequency(See Fig.21)	0.270	0.372	-0.006
Right hand, Tilt 15 Degree, Bottom frequency(See Fig.23)	0.243	0.334	-0.038

Table 9: SAR Values (850MHz-Body)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS(See Fig.25)	0.592	0.839	-0.099
Body, Towards Ground, Mid frequency with GPRS (See Fig.27)	0.777	1.1	-0.027
Body, Towards Ground, Bottom frequency with GPRS (See Fig.29)	0.800	1.13	-0.013
Body, Towards Phantom, Top frequency with GPRS (See Fig.31)	0.564	0.783	-0.098
Body, Towards Phantom, Mid frequency with GPRS (See Fig.33)	0.723	1	0.022
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.35)	0.702	0.972	-0.096
Body, Towards Ground, Bottom frequency with Headset (See Fig.37)	0.379	0.535	-0.126

Note: During the test of "GSM 850 GPRS Body", the power reduction was applied; the maximum output power was reduced 2dB with 2 timeslots in uplink.

8.4 Summary of Measurement Results (1900MHz)

Table 10: SAR Values (1900MHz-Head)


Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency(See Fig.39)	0.502	0.963	-0.029
Left hand, Touch cheek, Mid frequency(See Fig.41)	0.471	0.900	0.018
Left hand, Touch cheek, Bottom frequency(See Fig.43)	0.322	0.614	-0.038
Left hand, Tilt 15 Degree, Top frequency(See Fig.45)	0.104	0.184	-0.040
Left hand, Tilt 15 Degree, Mid frequency(See Fig.47)	0.095	0.166	-0.048
Left hand, Tilt 15 Degree, Bottom frequency(See Fig.49)	0.061	0.104	0.131
Right hand, Touch cheek, Top frequency(See Fig.51)	0.522	1.03	0.146
Right hand, Touch cheek, Mid frequency(See Fig.53)	0.504	1	0.036
Right hand, Touch cheek, Bottom frequency(See Fig.55)	0.361	0.711	0.167
Right hand, Tilt 15 Degree, Top frequency(See Fig.57)	0.092	0.156	0.006
Right hand, Tilt 15 Degree, Mid frequency(See Fig.59)	0.084	0.138	0.001
Right hand, Tilt 15 Degree, Bottom frequency(See Fig.61)	0.073	0.118	-0.042

Table 11: SAR Values (1900MHz-Body)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS(See Fig.63)	0.328	0.596	-0.200
Body, Towards Ground, Mid frequency with GPRS (See Fig.65)	0.286	0.522	-0.087
Body, Towards Ground, Bottom frequency with GPRS (See Fig.67)	0.195	0.358	0.002
Body, Towards Phantom, Top frequency with GPRS (See Fig.69)	0.237	0.421	-0.090
Body, Towards Phantom, Mid frequency with GPRS (See Fig.71)	0.244	0.397	-0.046
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.73)	0.160	0.282	-0.076
Body, Towards Ground, Top frequency with Headset (See Fig.75)	0.163	0.295	-0.049

8.5 Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is >5cm. The location of the antennas inside mobile phone is shown below:

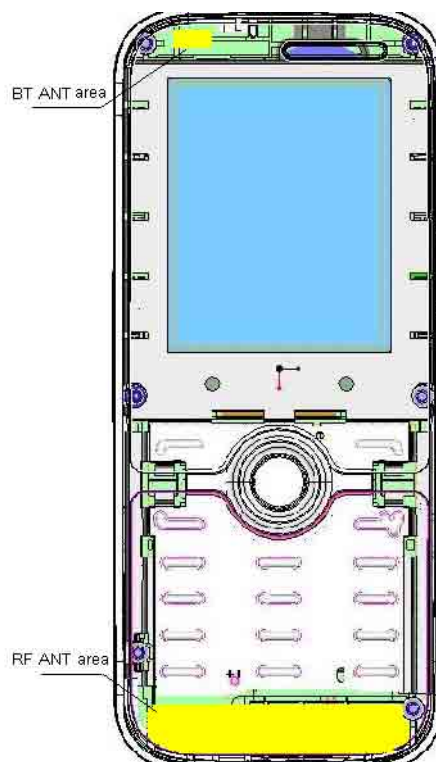

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	-0.66	0.06	0.04

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR is not required for BT transmitter, because the output power of BT transmitter is $\leq 2P_{Ref}$ and its antenna is $\geq 5\text{cm}$ from other antenna

So, because of the power and the distance, we didn't perform the standalone BT SAR tests, and just did the BT and GSM simultaneously SAR test with the request of the client.

Table 12: SAR Values (850MHz with Bluetooth)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Bottom frequency(See Fig.77)	0.503	0.712	-0.077

Table 13: SAR Values (PCS 1900 MHz Band-Body with Bluetooth)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency(See Fig.79)	0.181	0.333	0.045

8.6 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

9 Measurement Uncertainty

SN	a	Type	c	d	e = f(d,k)	f	h = c x f / e	k
	Uncertainty Component		Tol. (± %)	Prob. Dist.	Div.	c _i (1 g)	1 g u _i (±%)	v _i
1	System repetivity	A	0.5	N	1	1	0.5	9

Measurement System								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial Isotropy	B	4.7	R	$\sqrt{3}$	$\frac{(1-c_p)^{1/2}}{2}$	4.3	∞
4	Hemispherical Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{c_p}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty (shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity - measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity - measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty					RSS		11.25	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)					K=2		22.5	

10 MAIN TEST INSTRUMENTS

Table 14: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 31,2007	One year
02	Power meter	NRVD	101253	June 20, 2008	One year
03	Power sensor	NRV-Z5	100333		

04	Power sensor	NRV-Z6	100011	September 3, 2007	One year
05	Signal Generator	E4433B	US37230472	September 5, 2007	One Year
06	Amplifier	VTL5400	0505	No Calibration Requested	
07	BTS	CMU 200	105948	August 16, 2007	One year
08	E-field Probe	SPEAG ES3DV3	3142	September 7, 2007	One year
09	DAE	SPEAG DAE4	777	September 7, 2007	One year
10	Dipole Validation Kit	SPEAG D835V2	443	February 19, 2007	Two years
11	Dipole Validation Kit	SPEAG D1900V2	541	February 20, 2007	Two years

END OF REPORT BODY

ANNEX A: MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.


c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

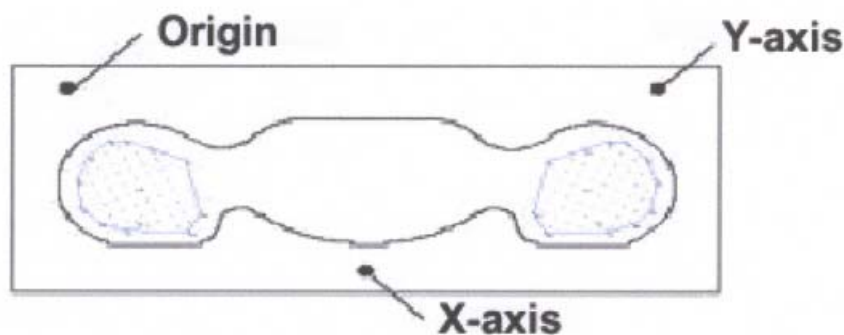


Picture A: SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT

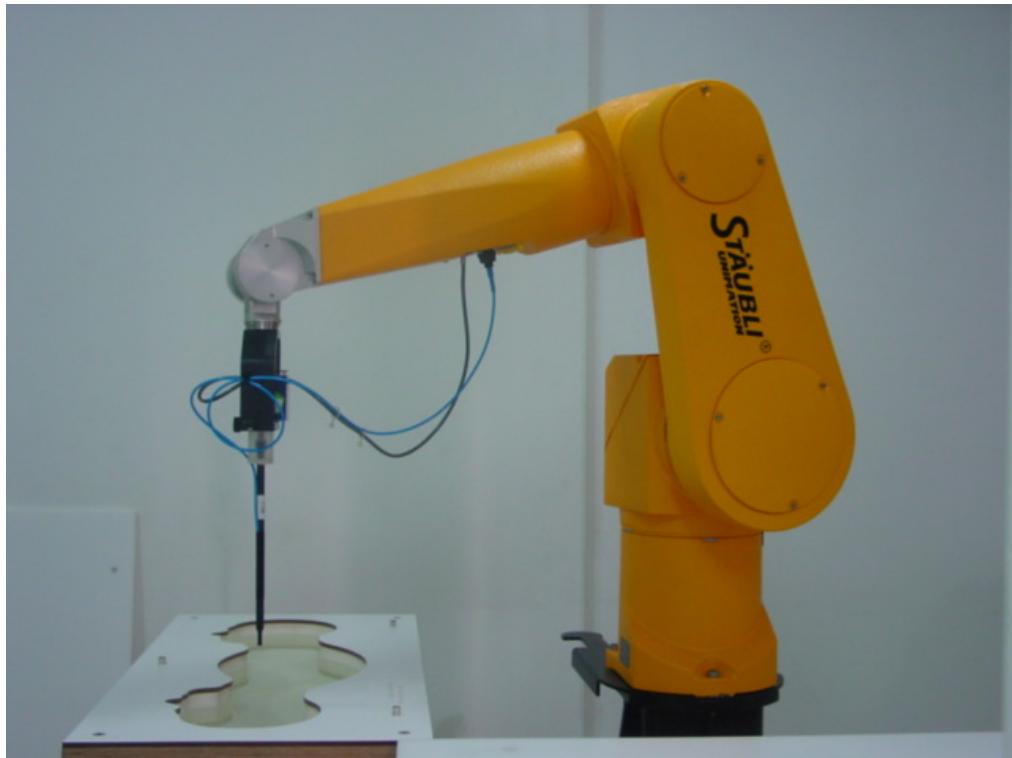

Picture B1: Specific Absorption Rate Test Layout

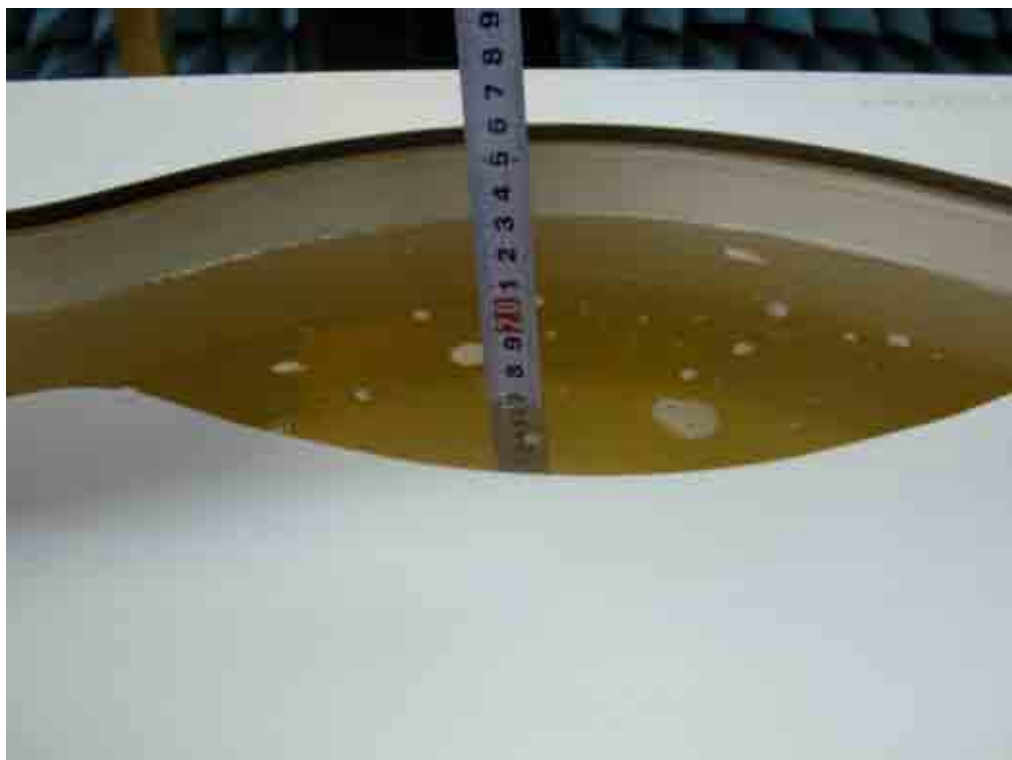

Picture B2: Liquid depth in the Flat Phantom (850 MHz)



Picture B3 Liquid depth in the Flat Phantom (1900MHz)



Picture B4: Left Hand Touch Cheek Position




Picture B5: Left Hand Tilt 15° Position




Picture B6: Right Hand Touch Cheek Position



Picture B7: Right Hand Tilt 15° Position

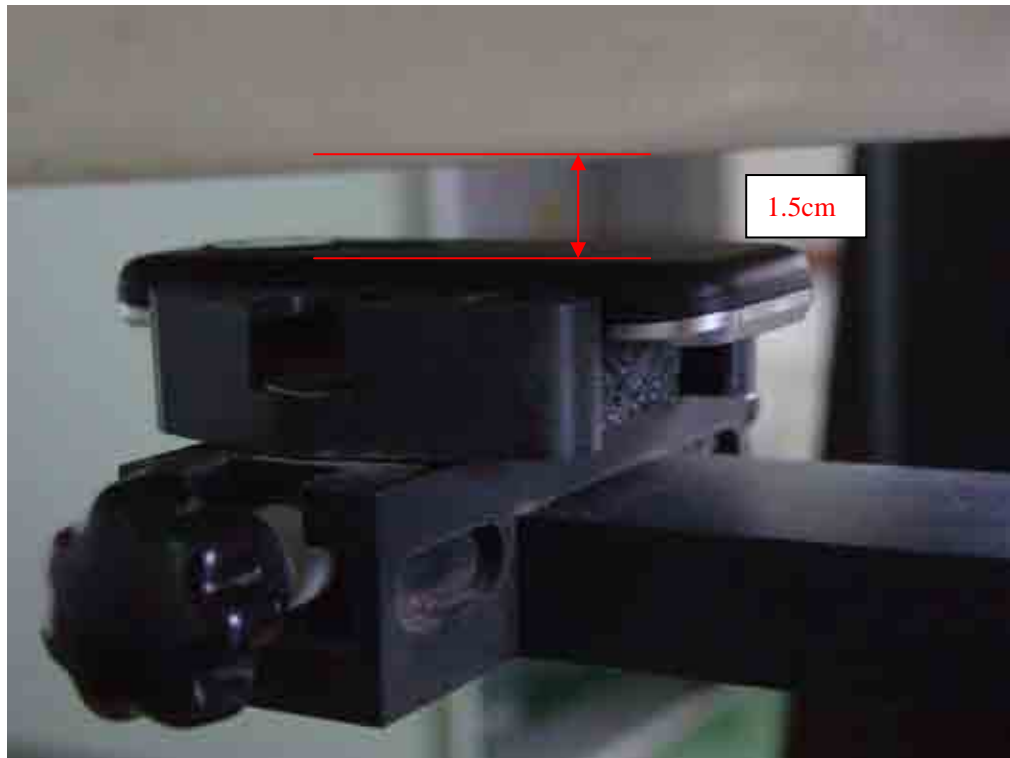

Picture B8: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

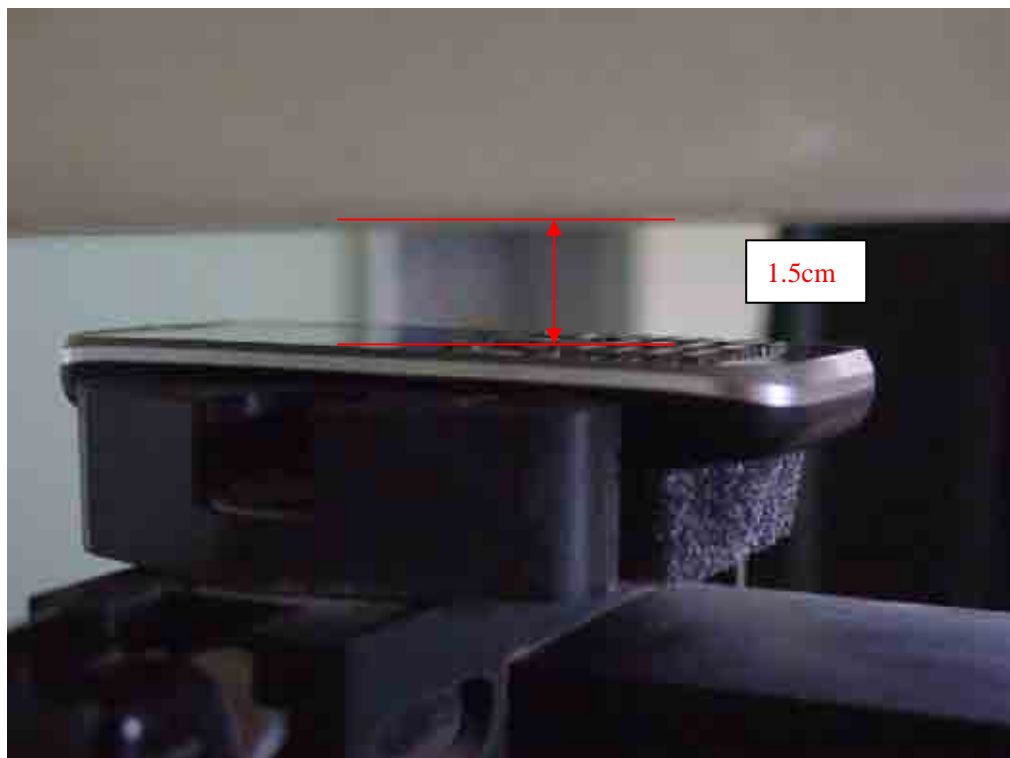

Picture B9: Body-worn Position (towards phantom, the distance from handset to the bottom of the Phantom is 1.5cm)



Picture B10: Body-worn Position with Headset (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

ANNEX C: GRAPH RESULTS

850 Left Cheek High

Date/Time: 2008-8-1 8:03:02

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.479 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.19 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.477 mW/g

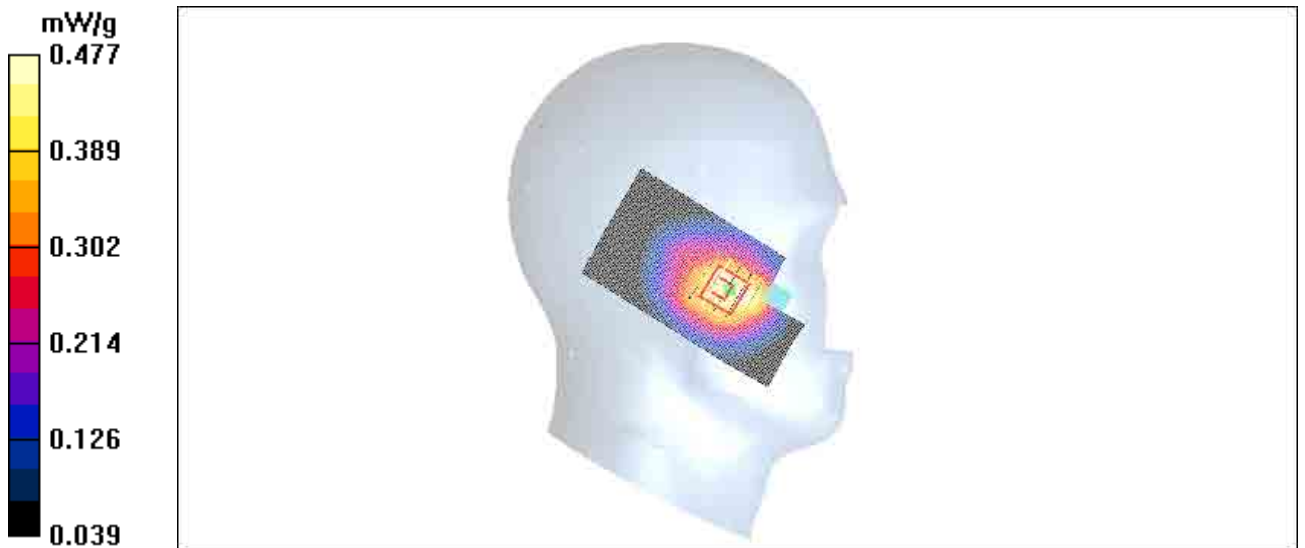

0 dB = 0.477mW/g

Fig. 1 850MHz CH251

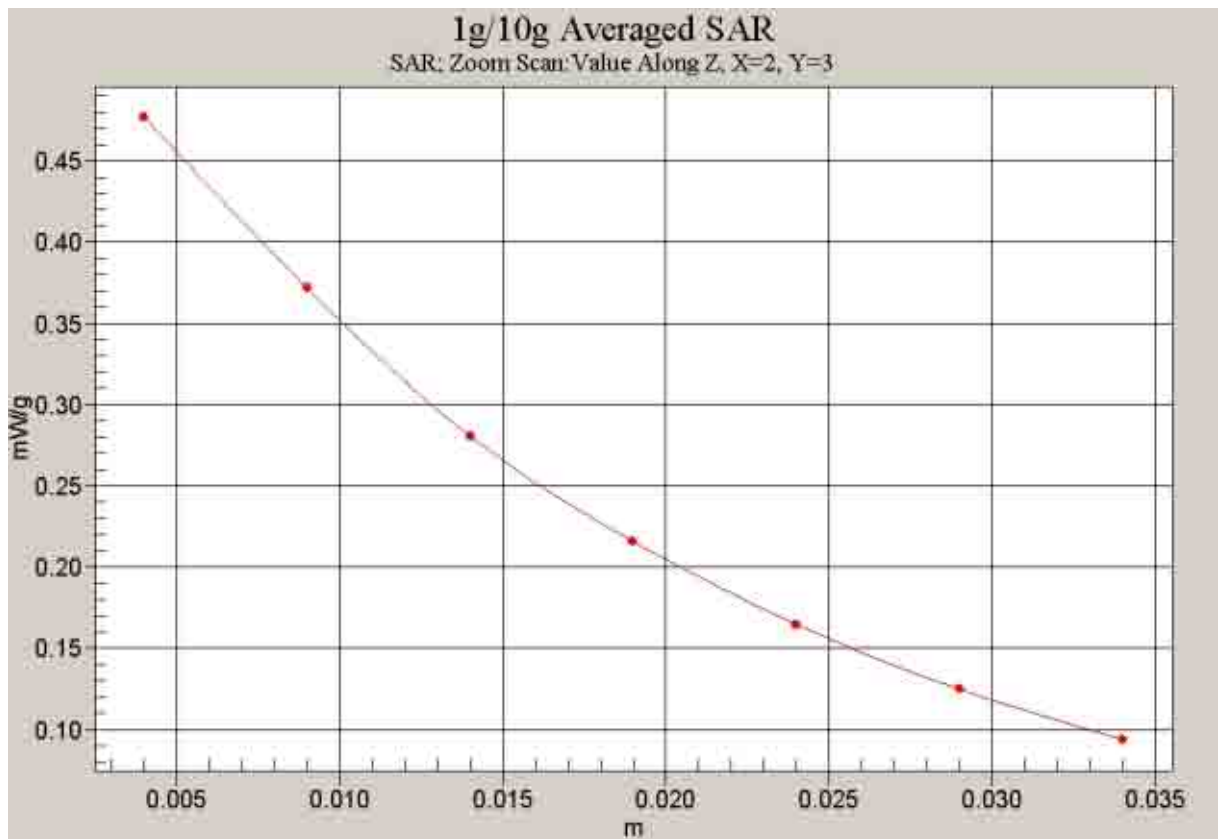


Fig. 2 Z-Scan at power reference point (850 MHz CH251)

850 Left Cheek Middle

Date/Time: 2008-8-1 8:17:06

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.552 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

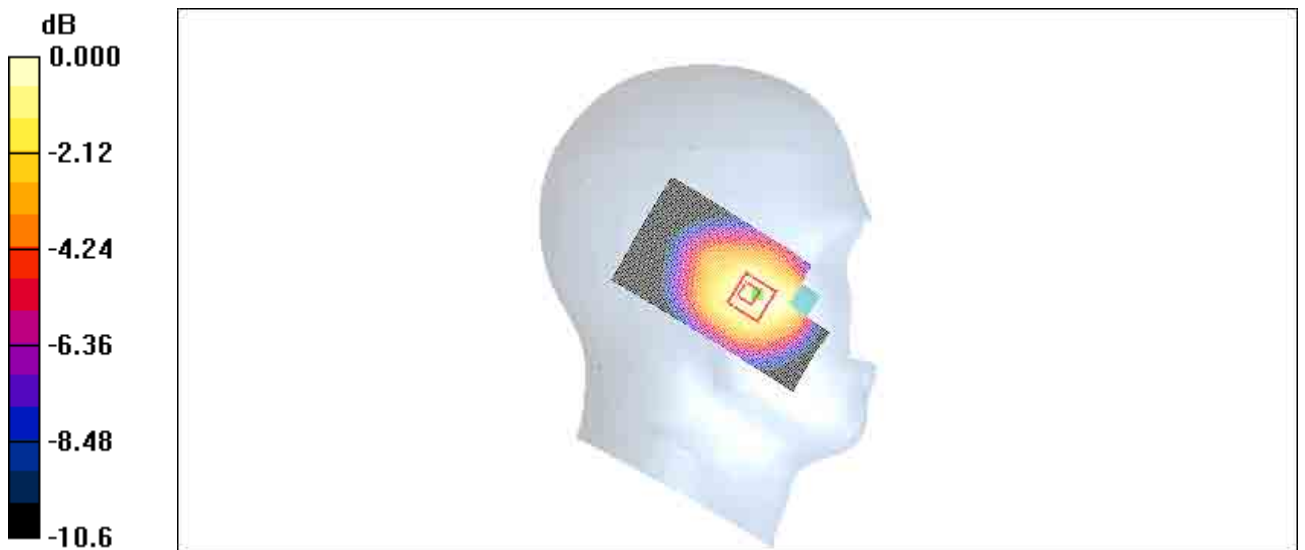

0 dB = 0.553mW/g

Fig. 3 850 MHz CH190

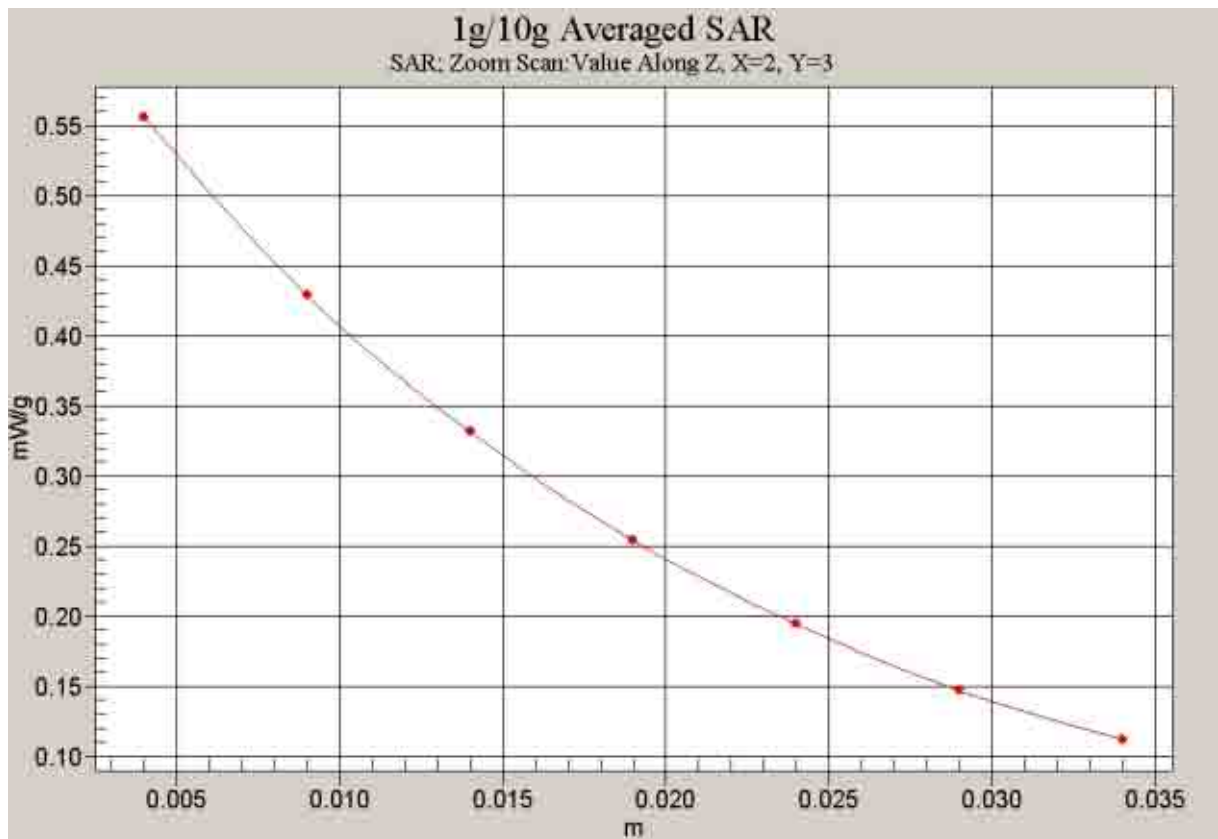


Fig. 4 Z-Scan at power reference point (850 MHz CH190)

850 Left Cheek Low

Date/Time: 2008-8-1 8:30:45

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.504 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.60 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

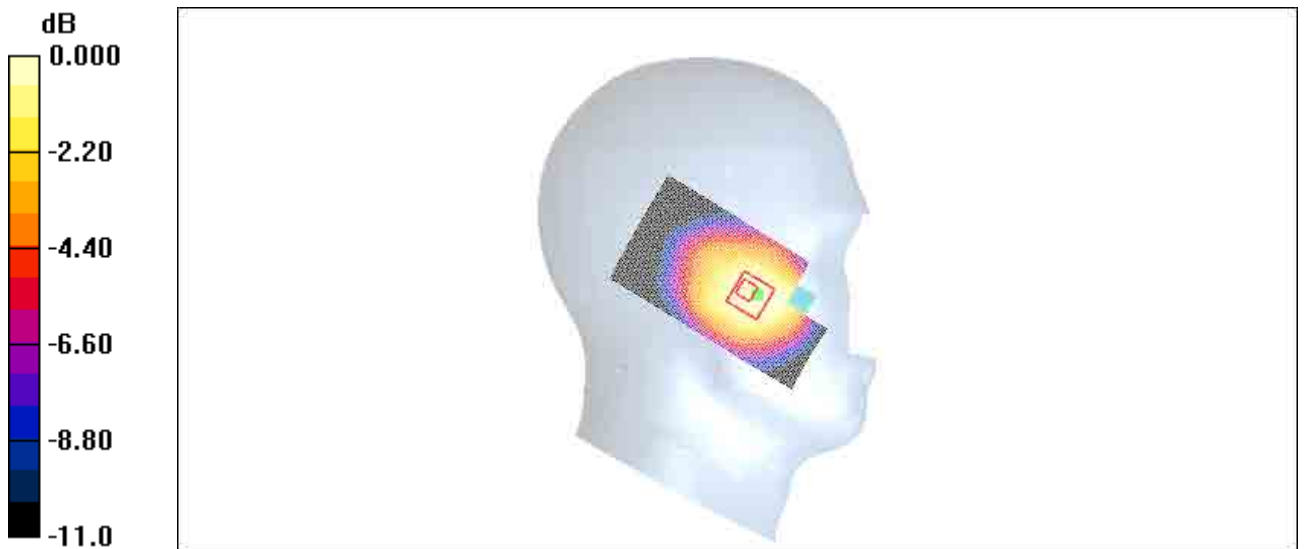

0 dB = 0.493mW/g

Fig. 5 850 MHz CH128

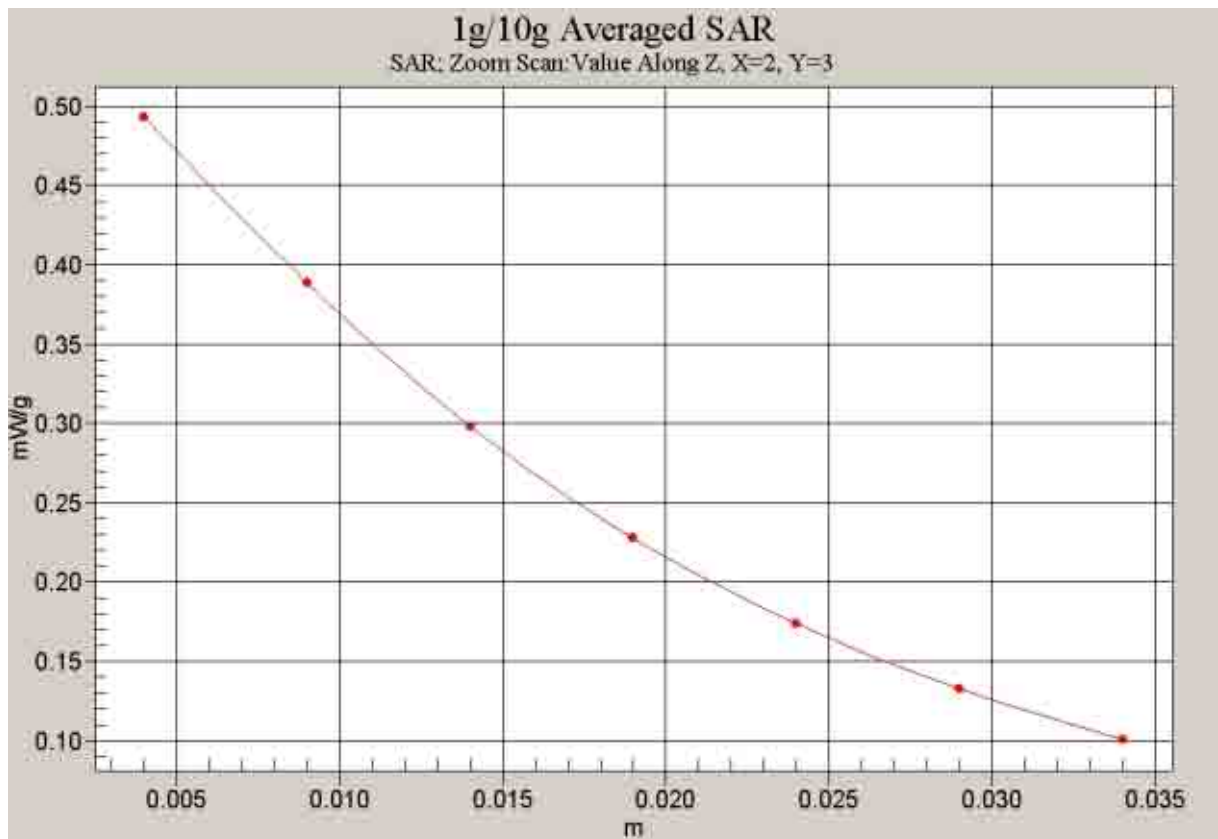


Fig. 6 Z-Scan at power reference point (850 MHz CH190)

850 Left Tilt High

Date/Time: 2008-8-1 9:12:52

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.236 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

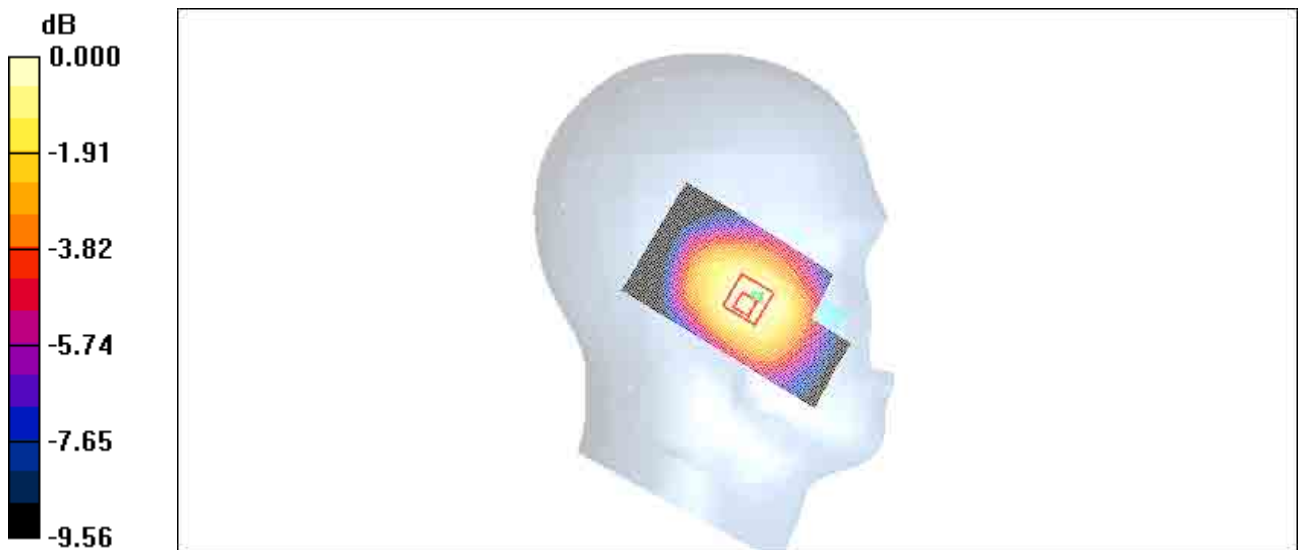

0 dB = 0.244mW/g

Fig.7 850 MHz CH251

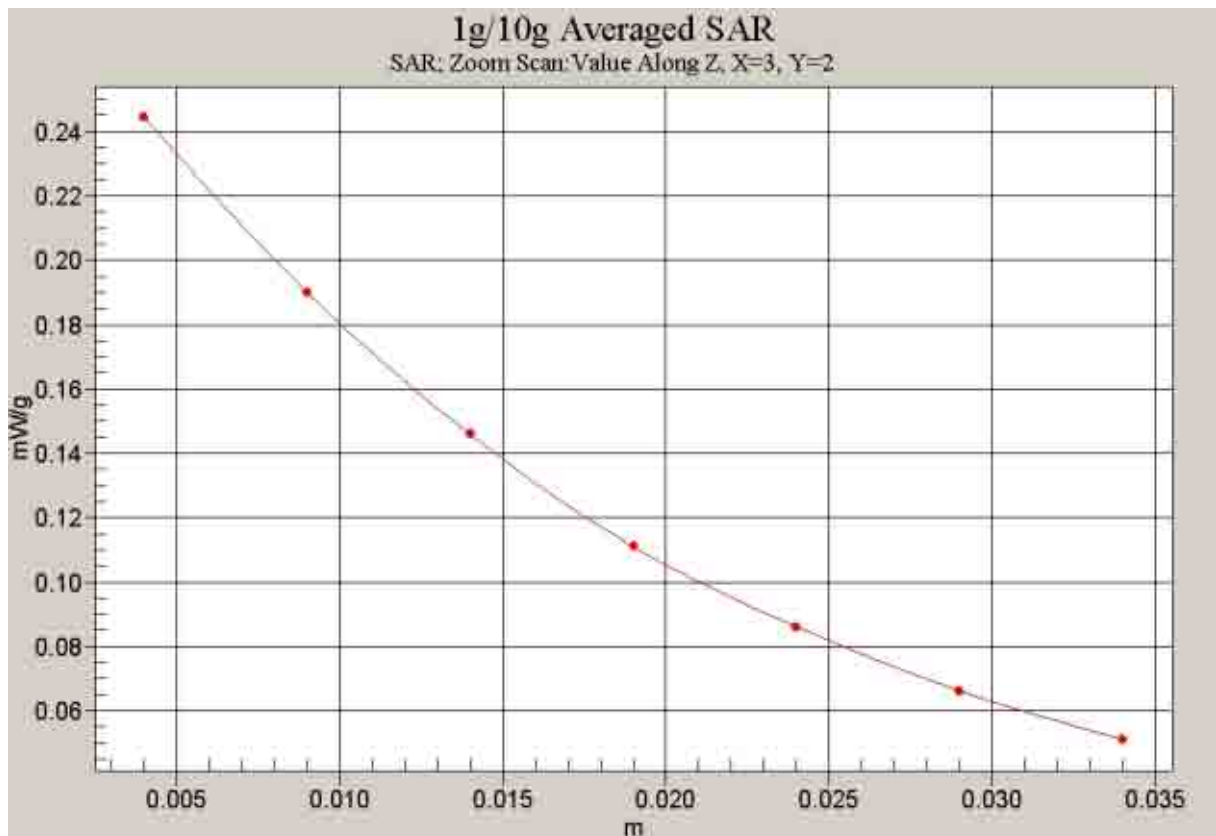


Fig. 8 Z-Scan at power reference point (850 MHz CH251)

850 Left Tilt Middle

Date/Time: 2008-8-1 8:59:31

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.253 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

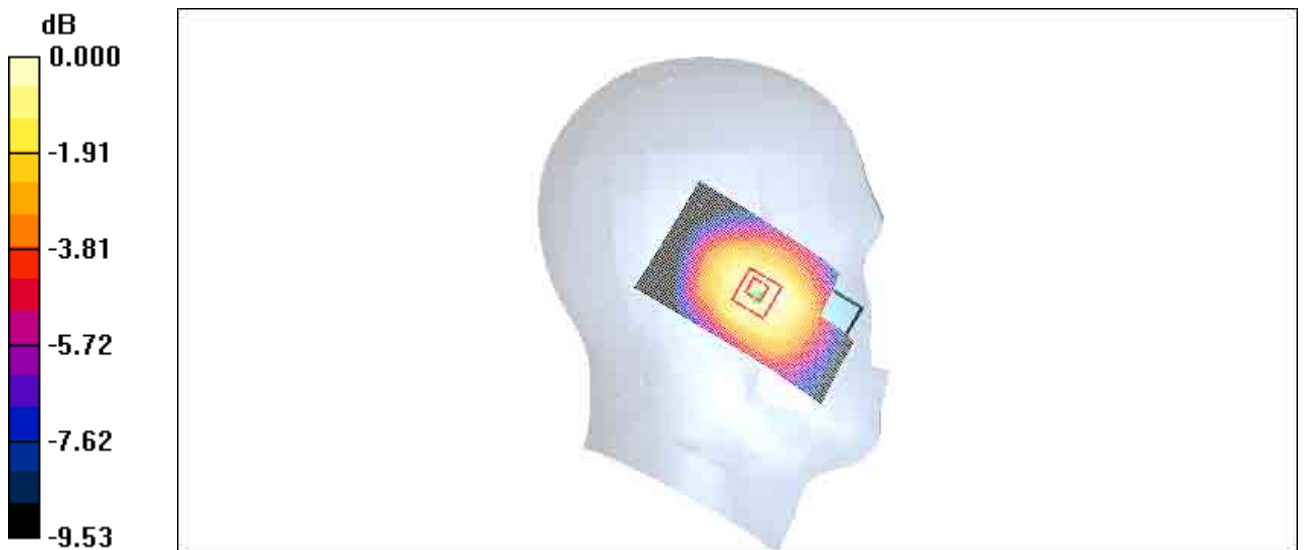

0 dB = 0.263mW/g

Fig.9 850 MHz CH190

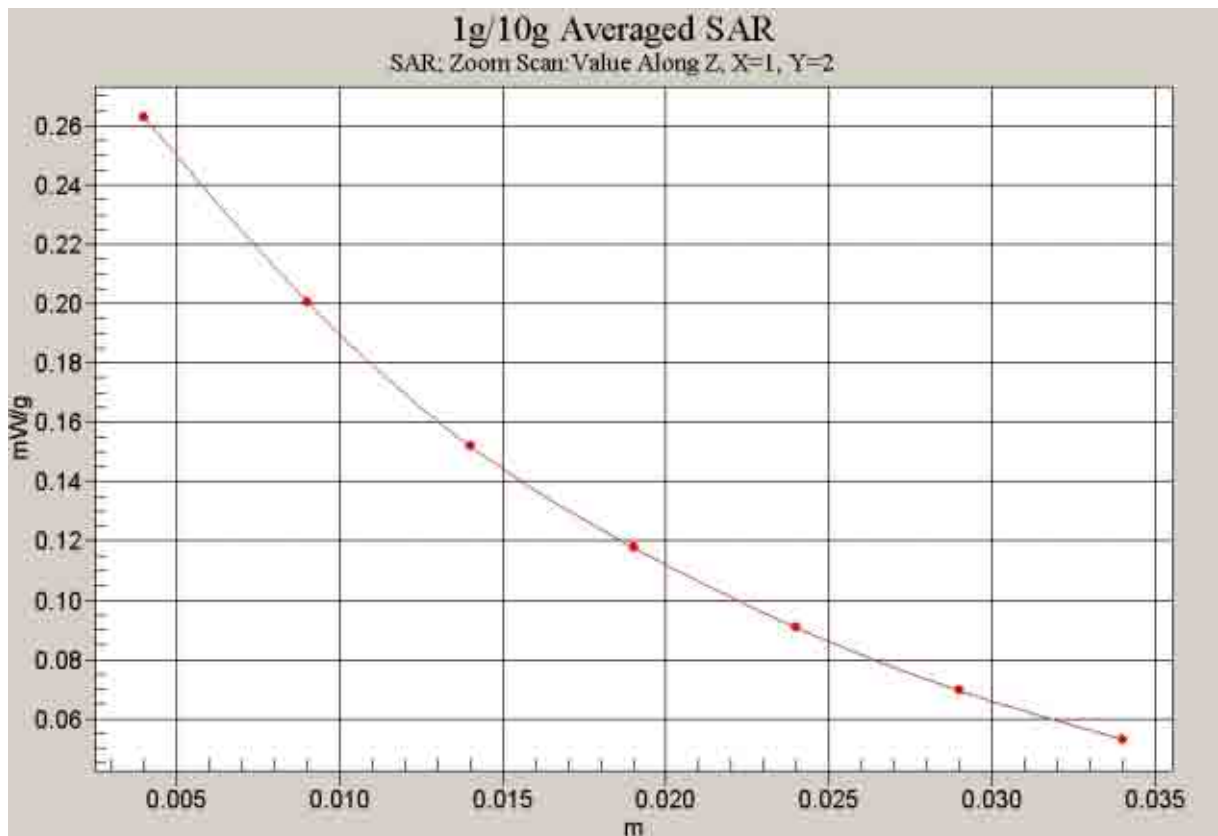


Fig. 10 Z-Scan at power reference point (850 MHz CH190)

850 Left Tilt Low

Date/Time: 2008-8-1 8:44:14

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.241 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.247 mW/g

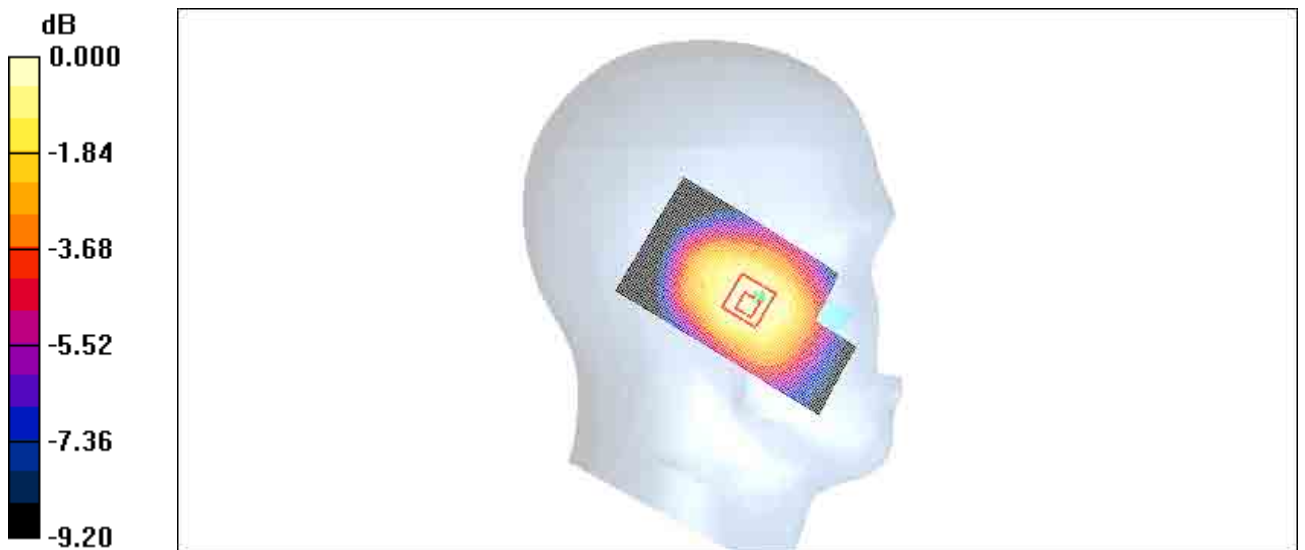

0 dB = 0.247mW/g

Fig. 11 850 MHz CH128

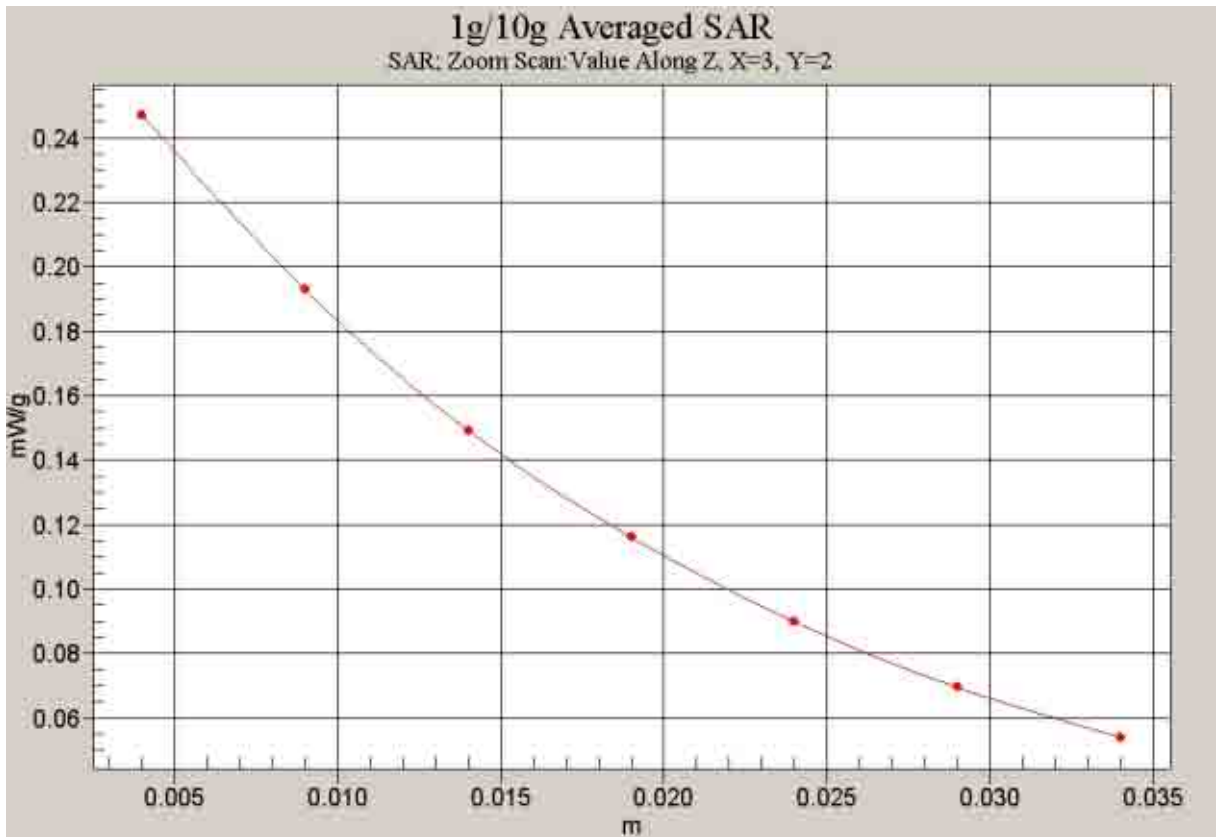


Fig. 12 Z-Scan at power reference point (850 MHz CH128)

850 Right Cheek High

Date/Time: 2008-8-1 9:30:18

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.792 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

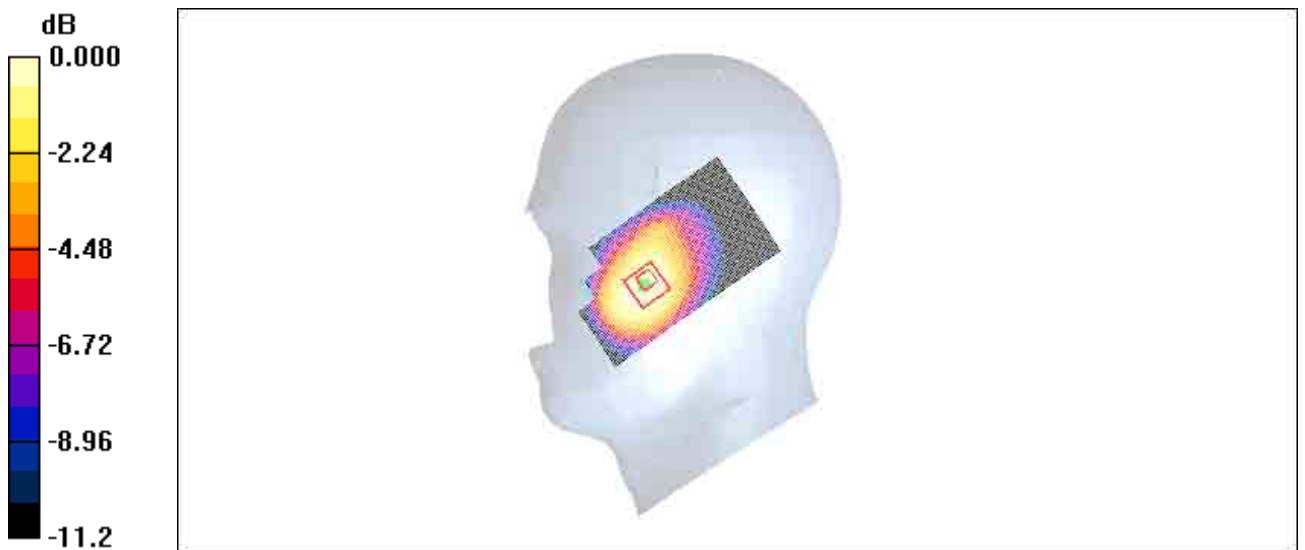

0 dB = 0.793mW/g

Fig. 13 850 MHz CH251

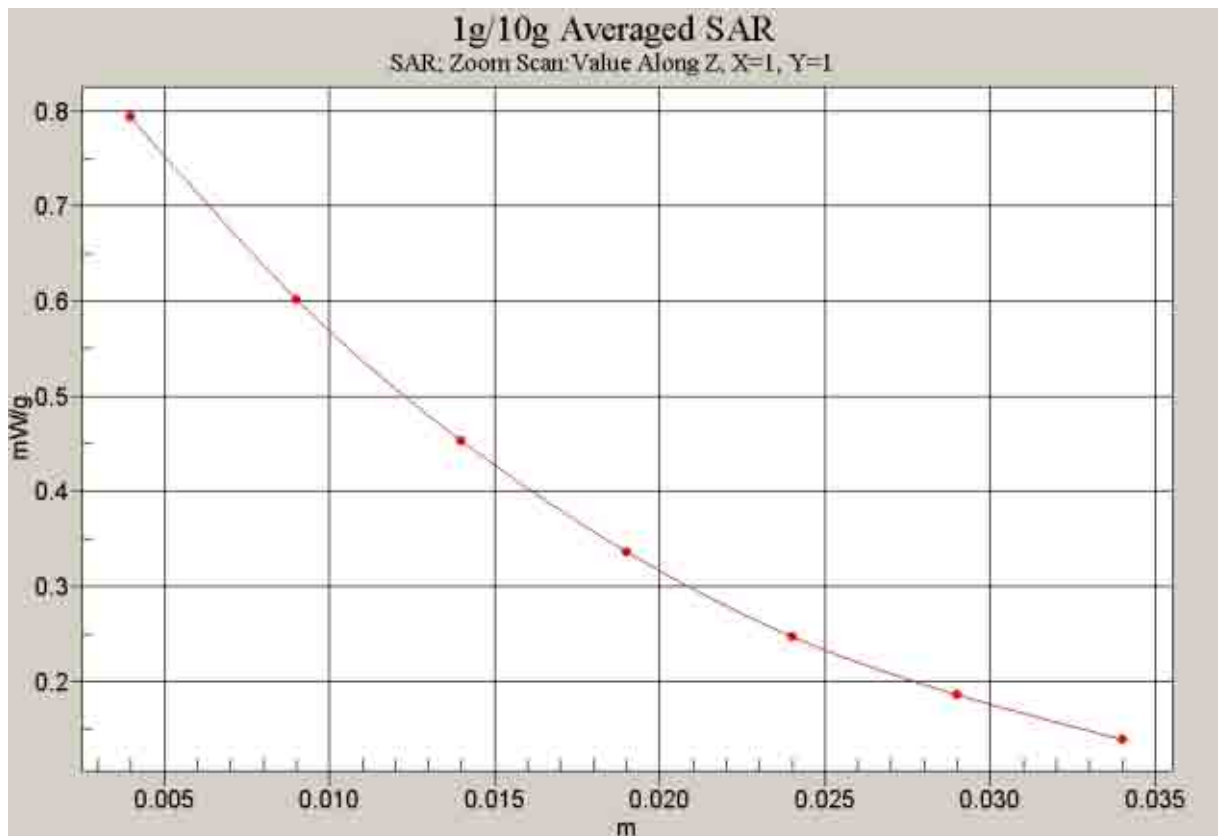


Fig. 14 Z-Scan at power reference point (850 MHz CH251)

850 Right Cheek Middle

Date/Time: 2008-8-1 9:44:12

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.928 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.616 mW/g

Maximum value of SAR (measured) = 0.933 mW/g

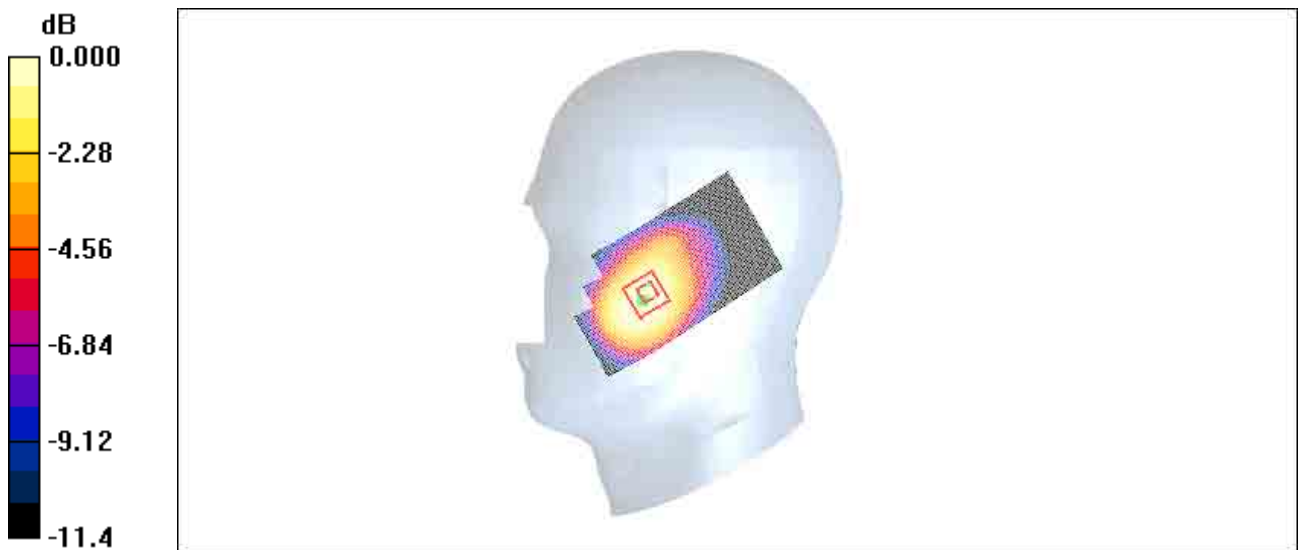

0 dB = 0.933mW/g

Fig. 15 850 MHz CH190

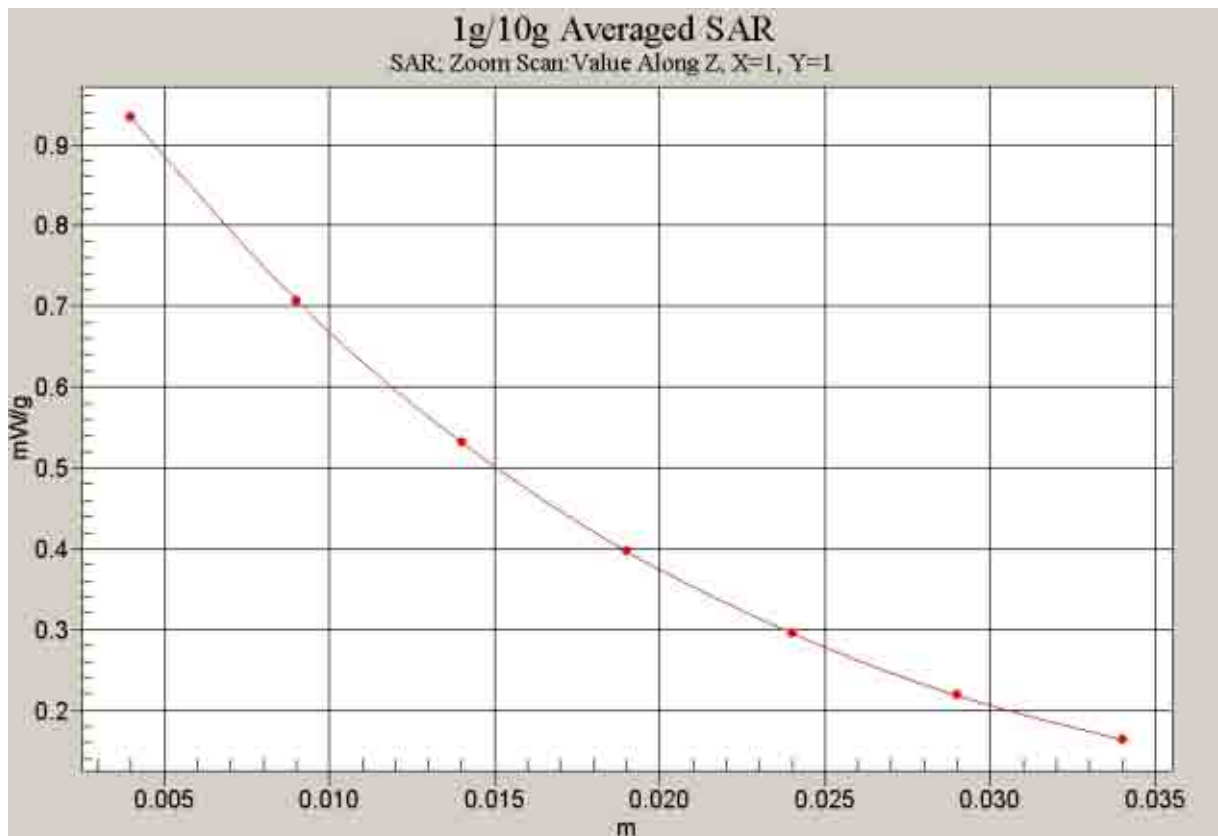


Fig. 16 Z-Scan at power reference point (850 MHz CH190)

850 Right Cheek Low

Date/Time: 2008-8-1 9:48:23

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.802 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.530 mW/g

Maximum value of SAR (measured) = 0.795 mW/g

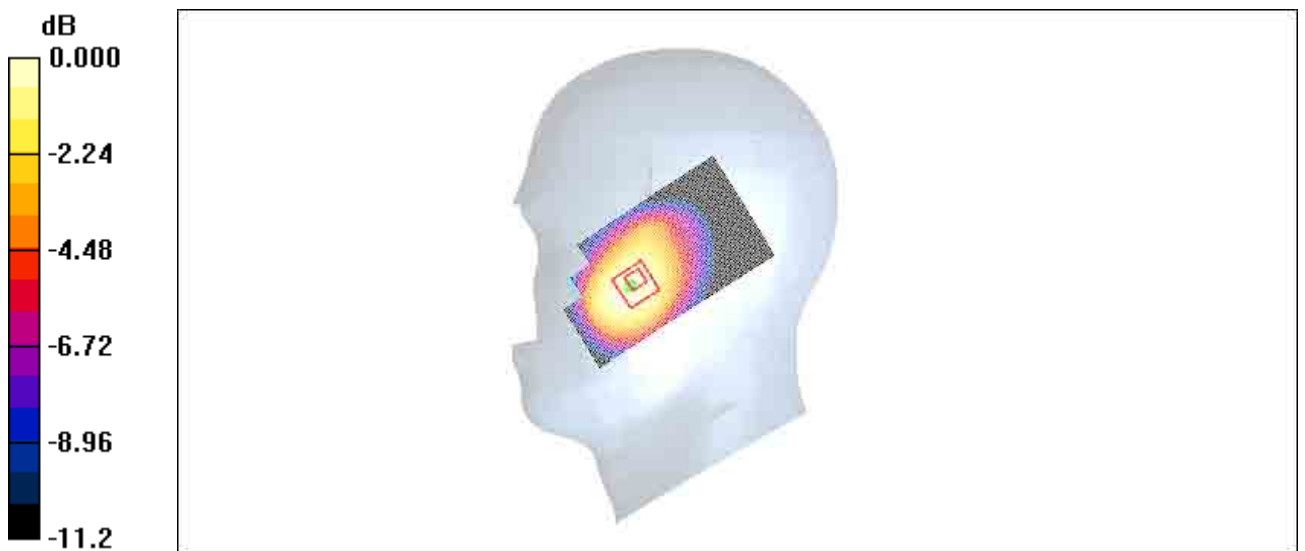

0 dB = 0.795mW/g

Fig. 17 850 MHz CH128

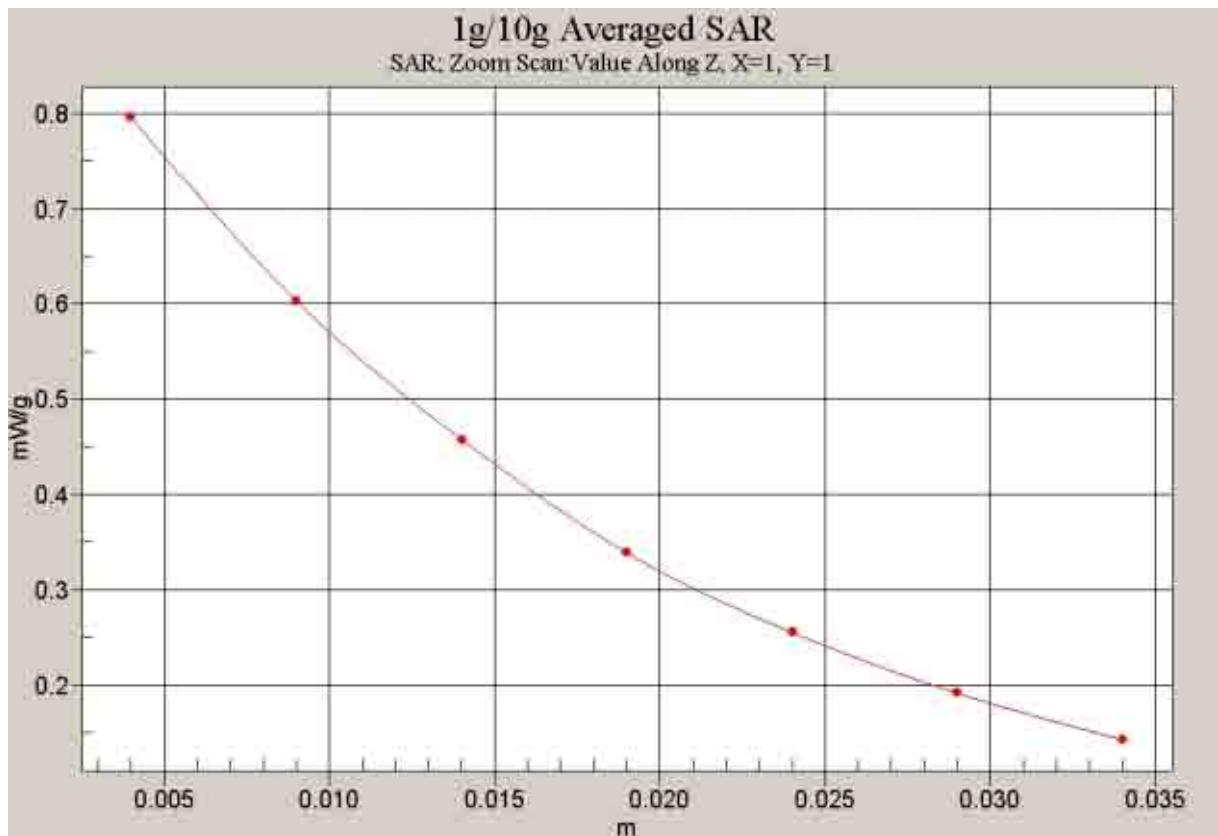


Fig. 18 Z-Scan at power reference point (850 MHz CH128)

850 Right Tilt High

Date/Time: 2008-8-1 10:33:02

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.384 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.260 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

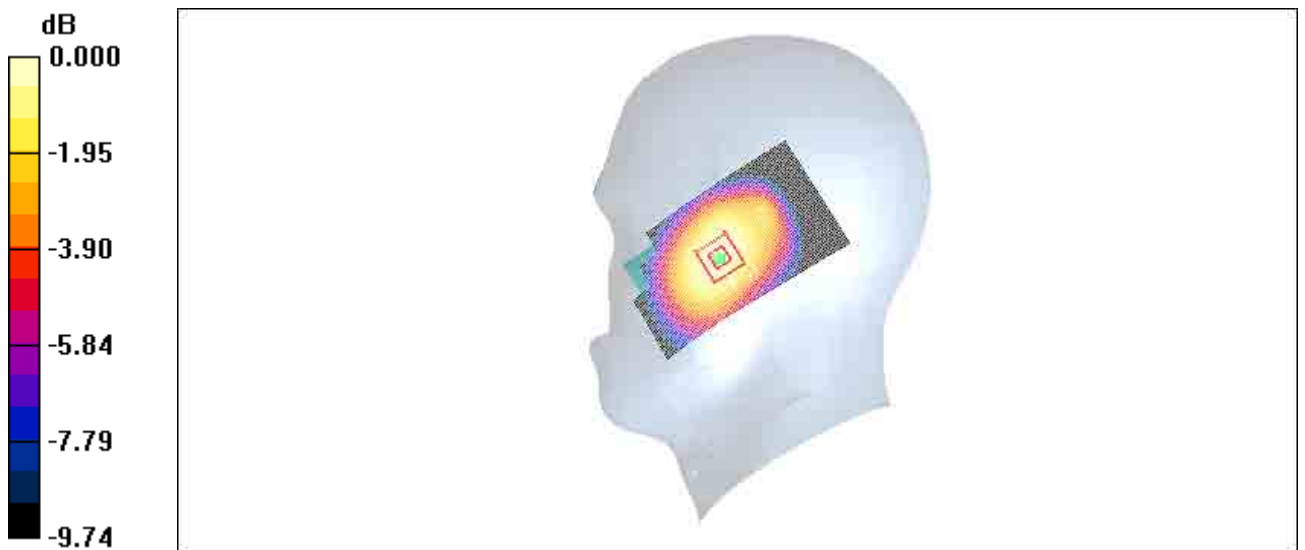

0 dB = 0.381mW/g

Fig.19 850 MHz CH251

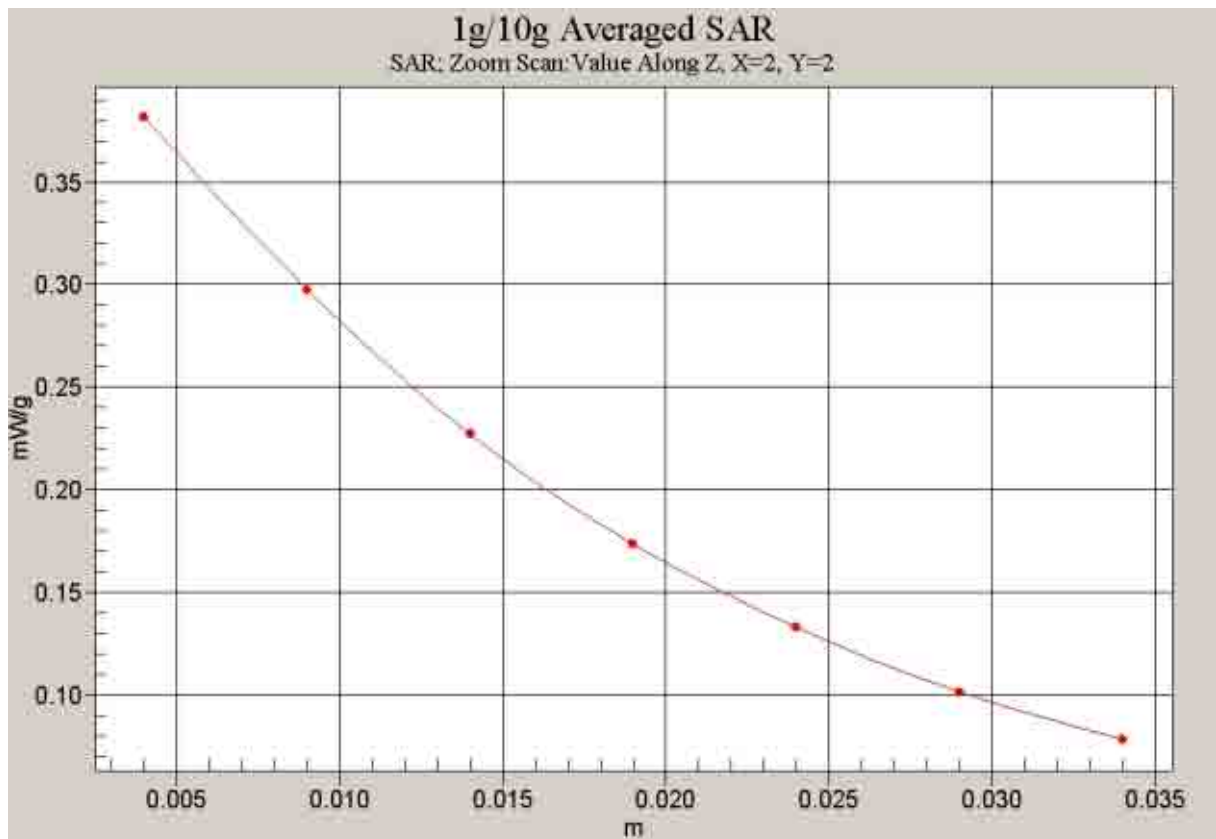


Fig. 20 Z-Scan at power reference point (850 MHz CH251)

850 Right Tilt Middle

Date/Time: 2008-8-1 10:17:28

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.396 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.397 mW/g

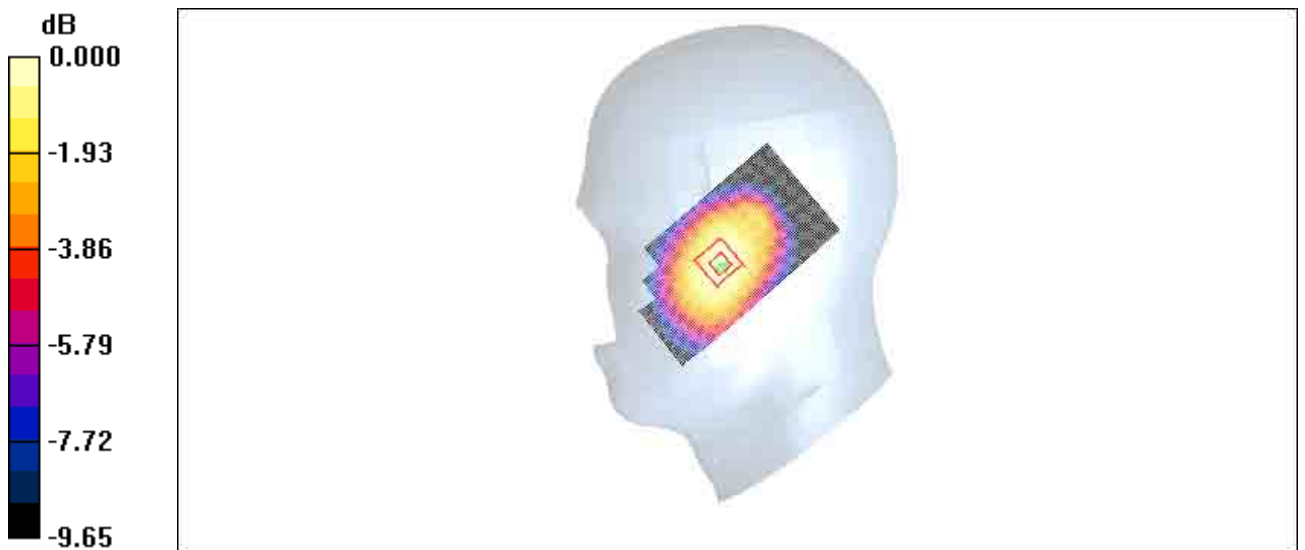

0 dB = 0.397mW/g

Fig.21 850 MHz CH190

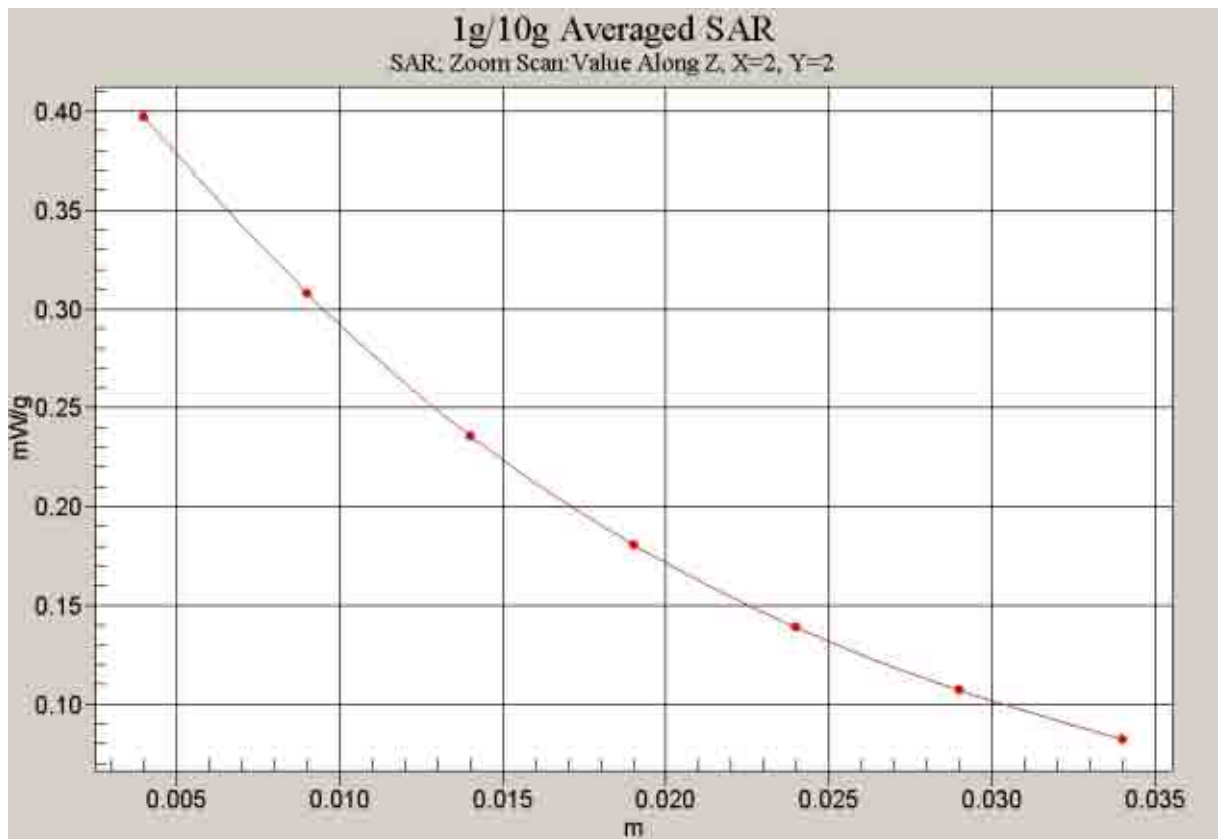


Fig. 22 Z-Scan at power reference point (850 MHz CH190)

850 Right Tilt Low

Date/Time: 2008-8-1 10:02:21

Electronics: DAE4 Sn777

Medium: Head GSM850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.97, 5.97, 5.97)

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.360 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

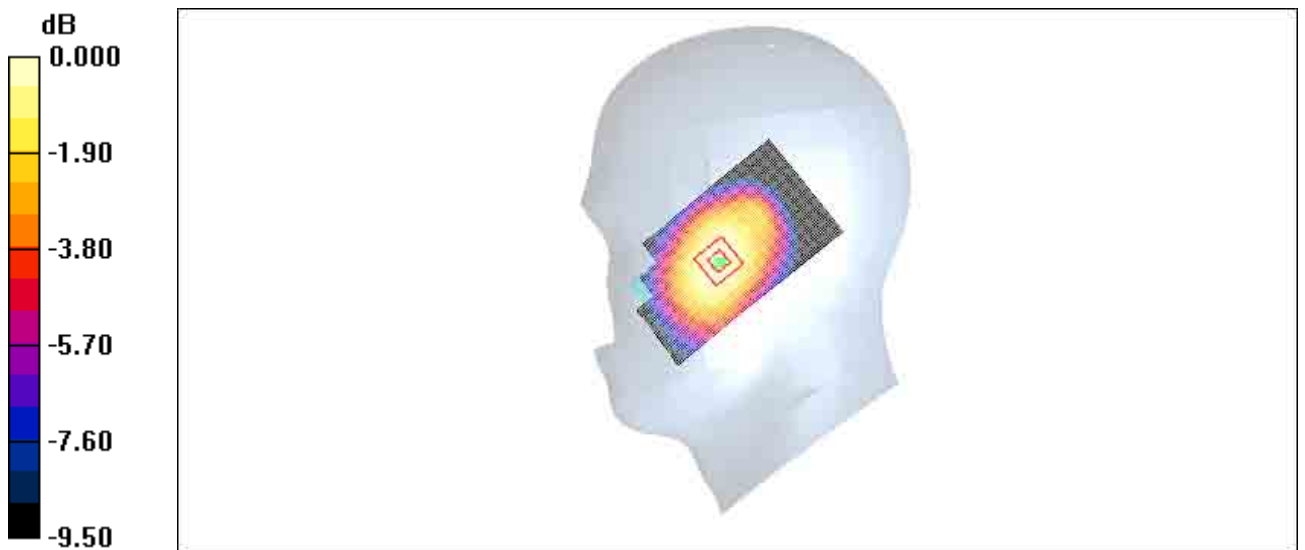

0 dB = 0.356mW/g

Fig. 23 850 MHz CH128

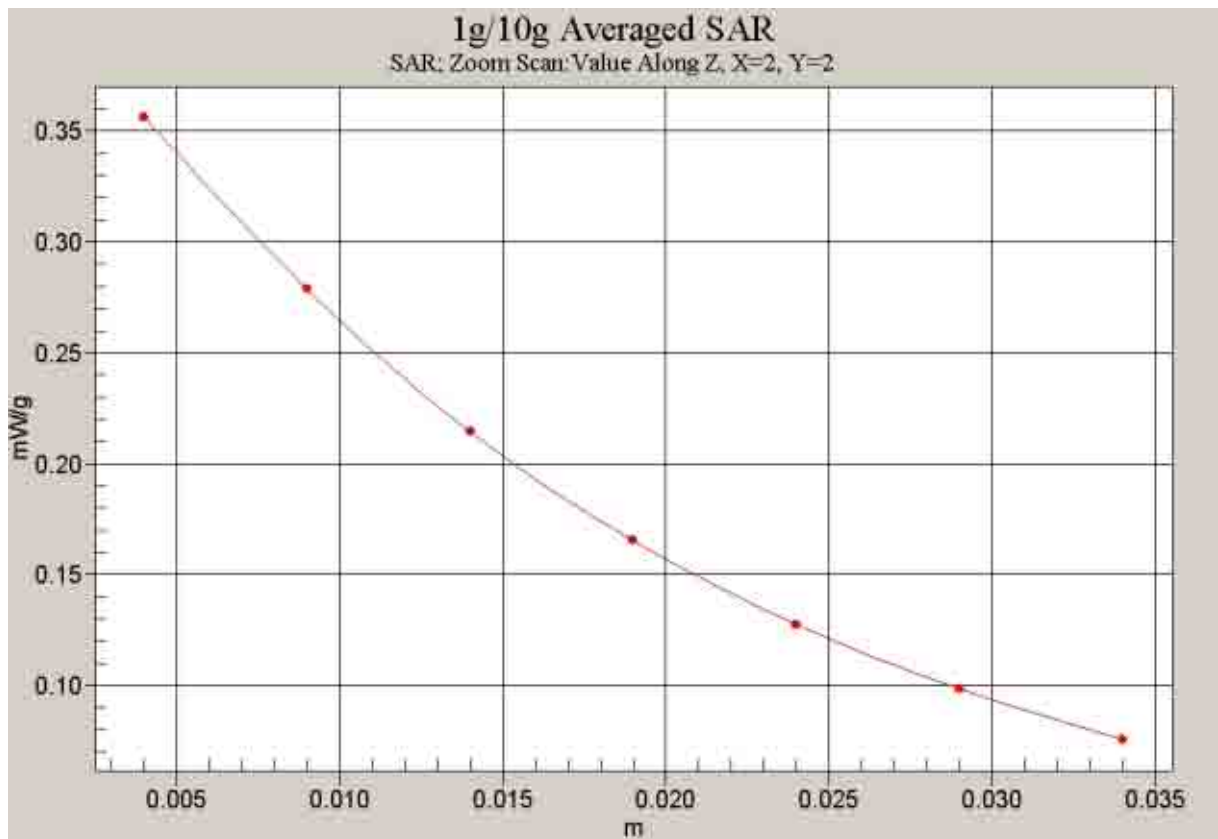


Fig. 24 Z-Scan at power reference point (850 MHz CH128)

850 Body Towards Ground High with GPRS

Date/Time: 2008-8-1 13:22:11

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Ground High /Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.900 mW/g


Toward Ground High /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.839 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 0.895 mW/g

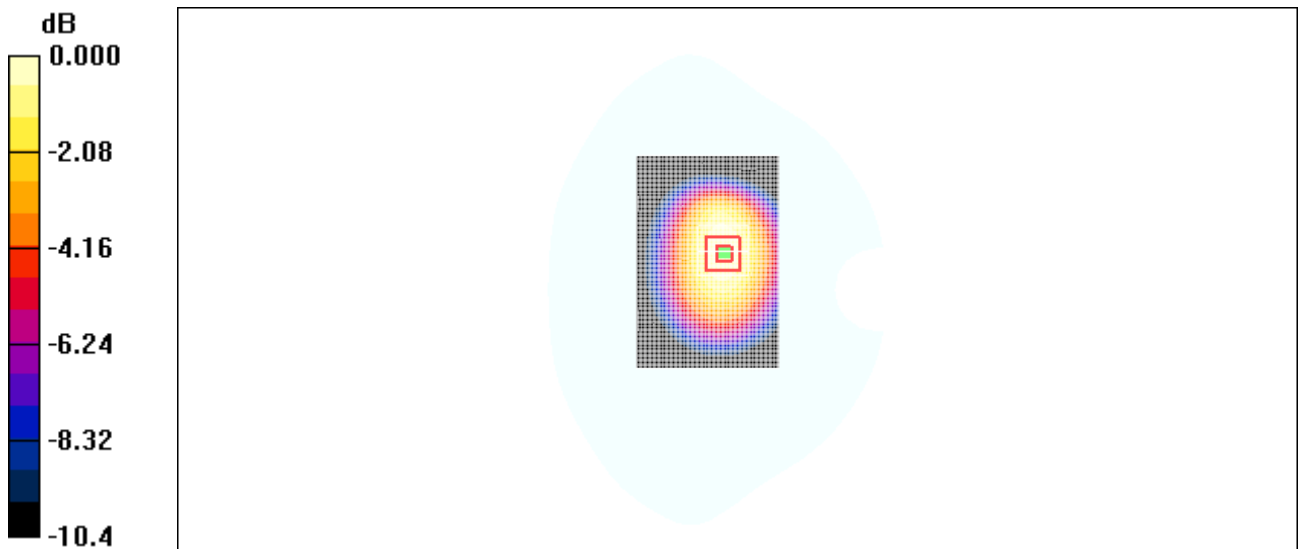

0 dB = 0.895mW/g

Fig. 25 850 MHz CH251

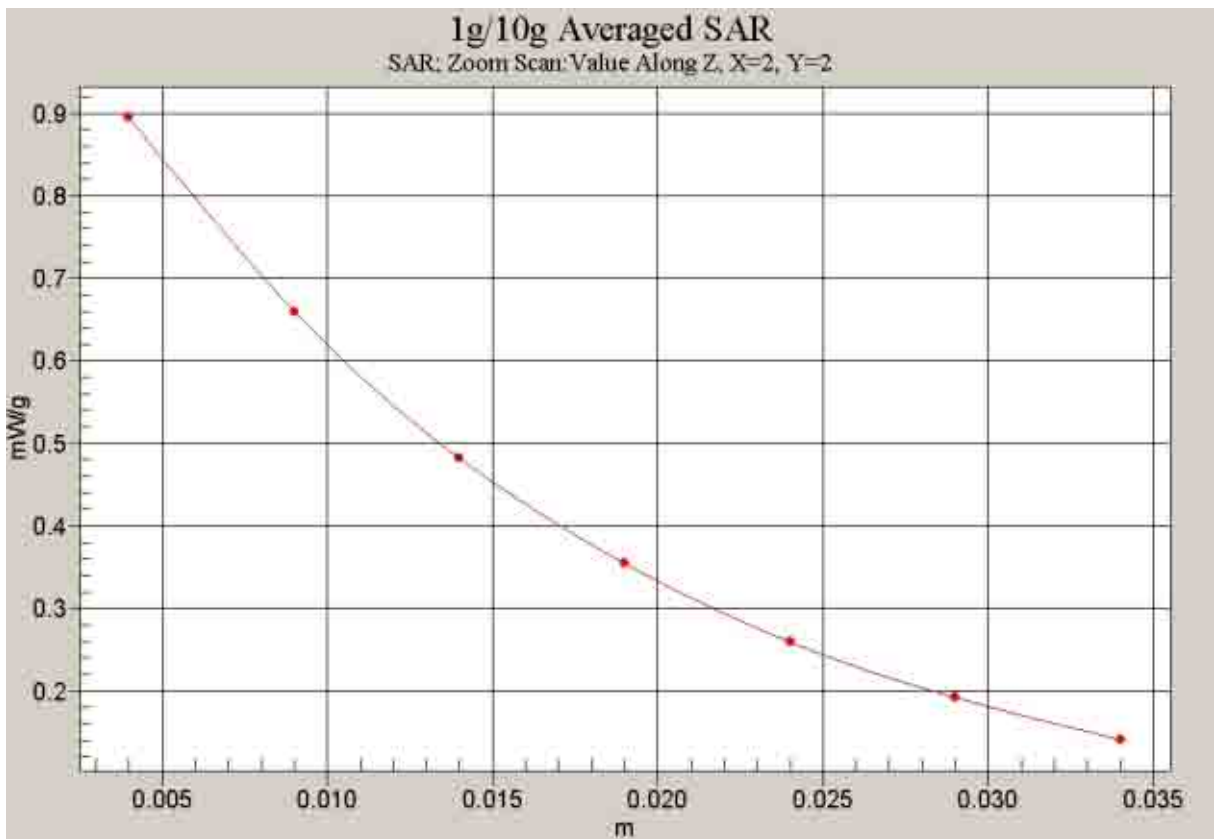


Fig. 26 Z-Scan at power reference point (850 MHz CH251)

850 Body Towards Ground Middle with GPRS

Date/Time: 2008-8-1 13:40:53

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Ground Middle /Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g


Toward Ground Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.777 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

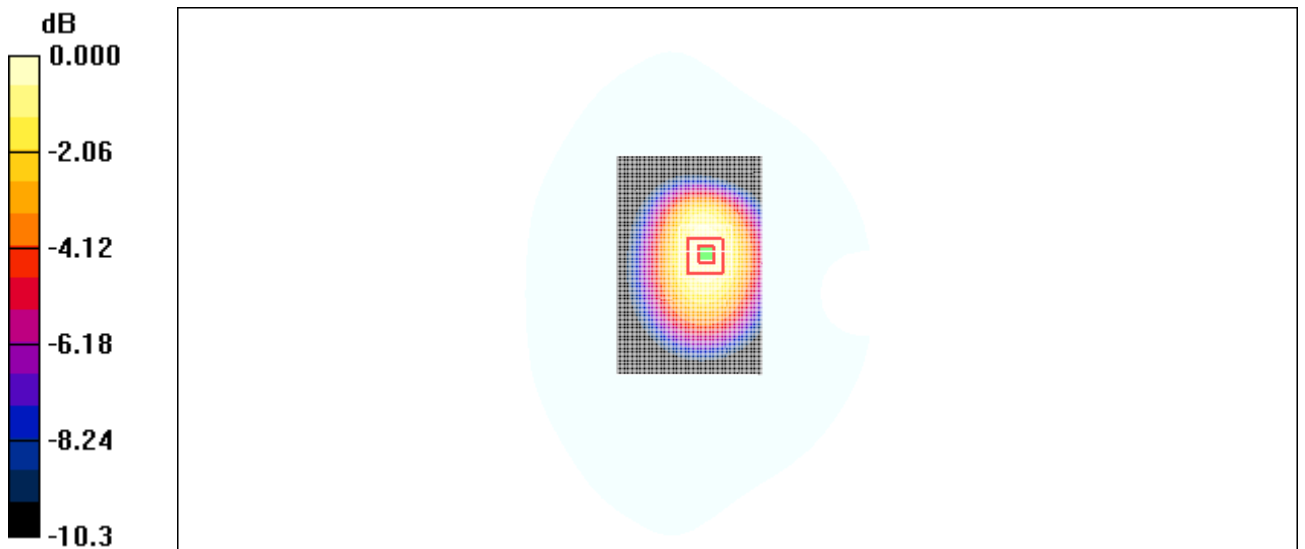

0 dB = 1.17mW/g

Fig. 27 850 MHz CH190

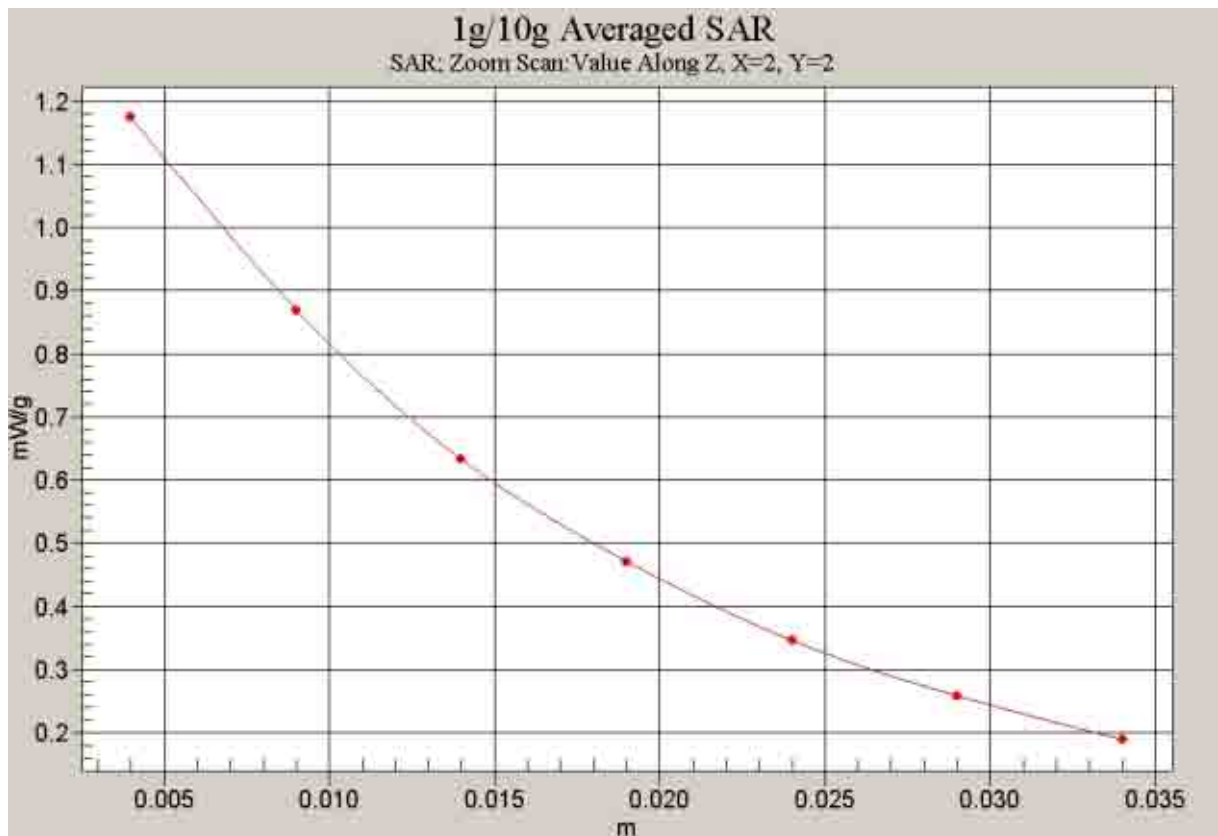


Fig. 28 Z-Scan at power reference point (850 MHz CH190)

850 Body Towards Ground Low with GPRS

Date/Time: 2008-8-1 13:56:24

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.21 mW/g


Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.9 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.800 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

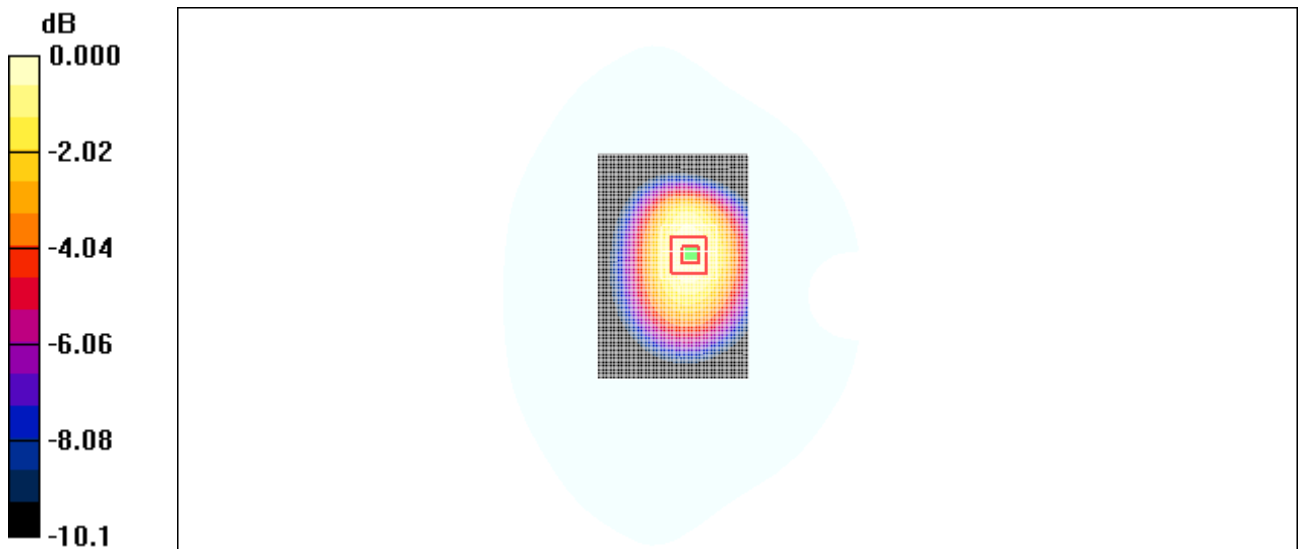

0 dB = 1.20mW/g

Fig. 29 850 MHz CH128

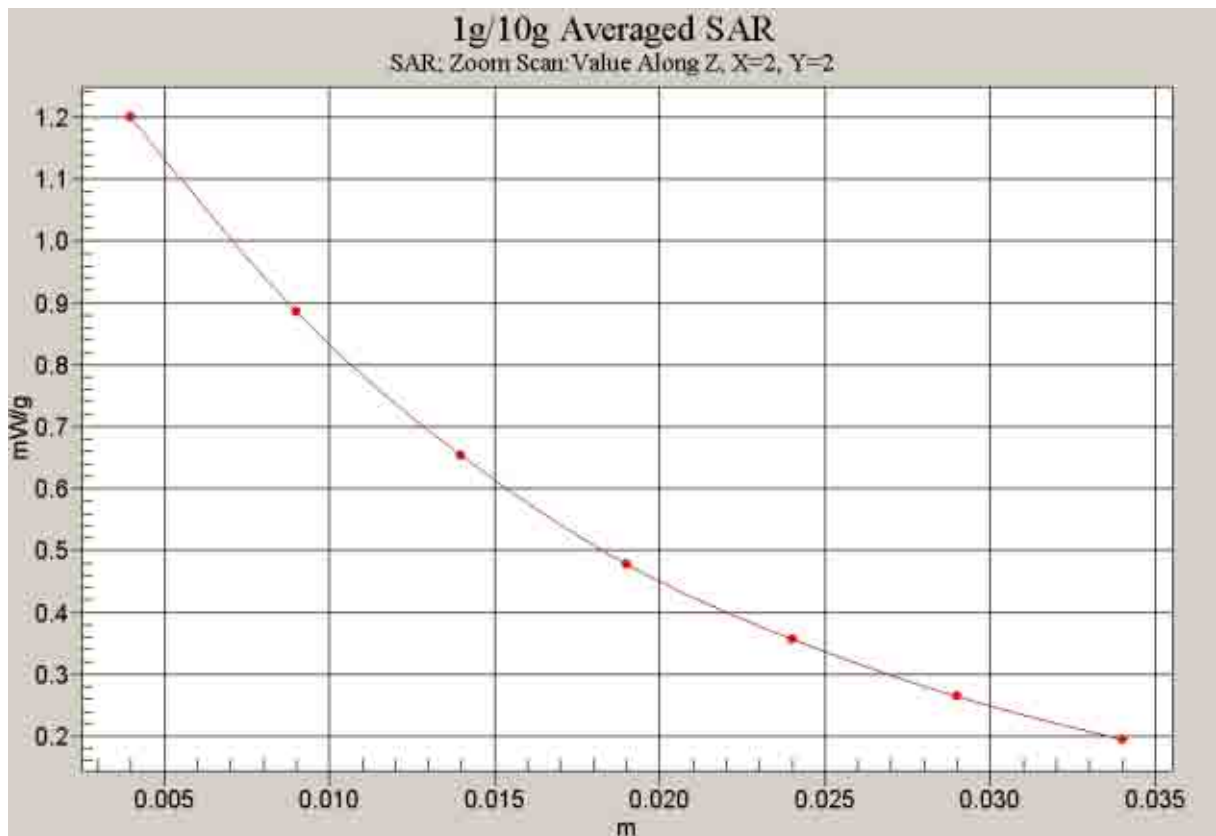


Fig. 30 Z-Scan at power reference point (850 MHz CH128)

850 Body Towards Phantom High with GPRS

Date/Time: 2008-8-1 14:42:15

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.832 mW/g


Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.564 mW/g

Maximum value of SAR (measured) = 0.827 mW/g

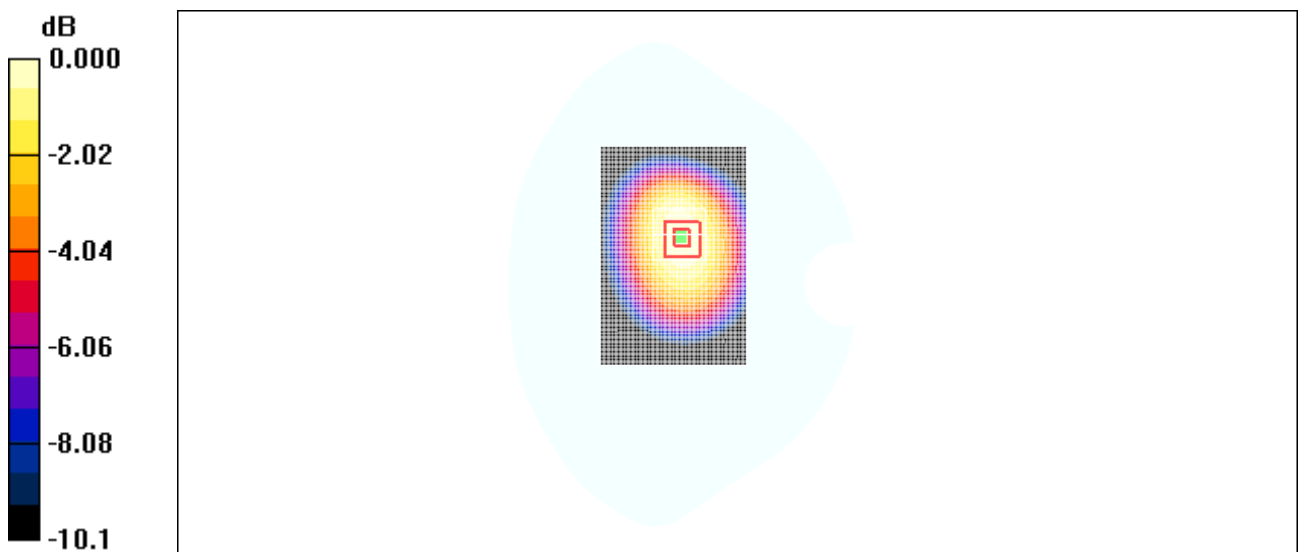

0 dB = 0.827mW/g

Fig. 31 850 MHz CH251

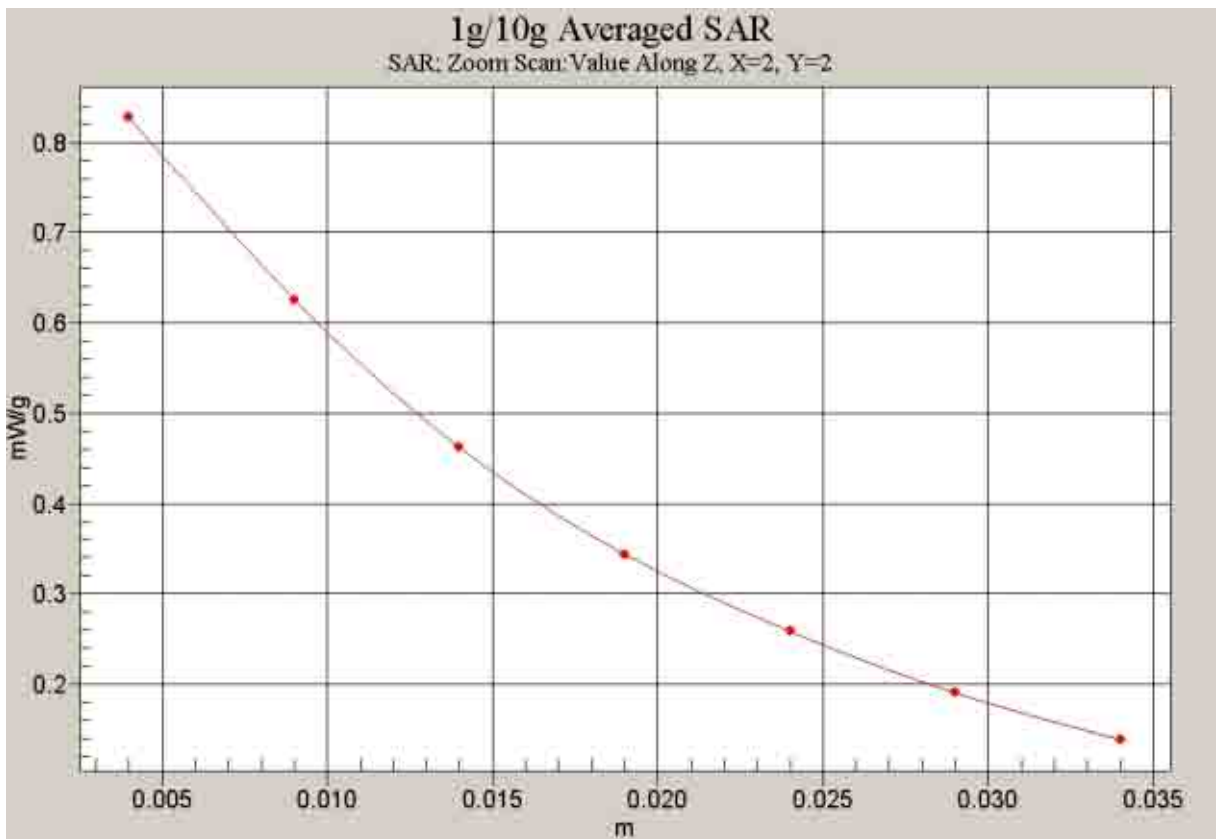


Fig. 32 Z-Scan at power reference point (850 MHz CH251)

850 Body Towards Phantom Middle with GPRS

Date/Time: 2008-8-1 14:28:30

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.07 mW/g


Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.723 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

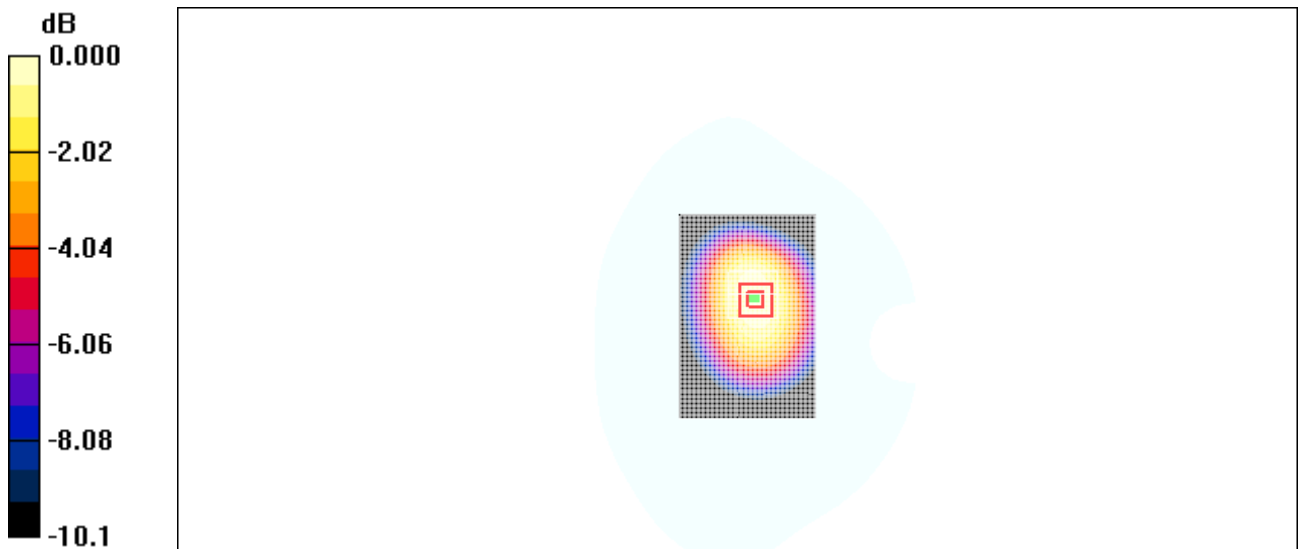

0 dB = 1.05mW/g

Fig. 33 850 MHz CH190

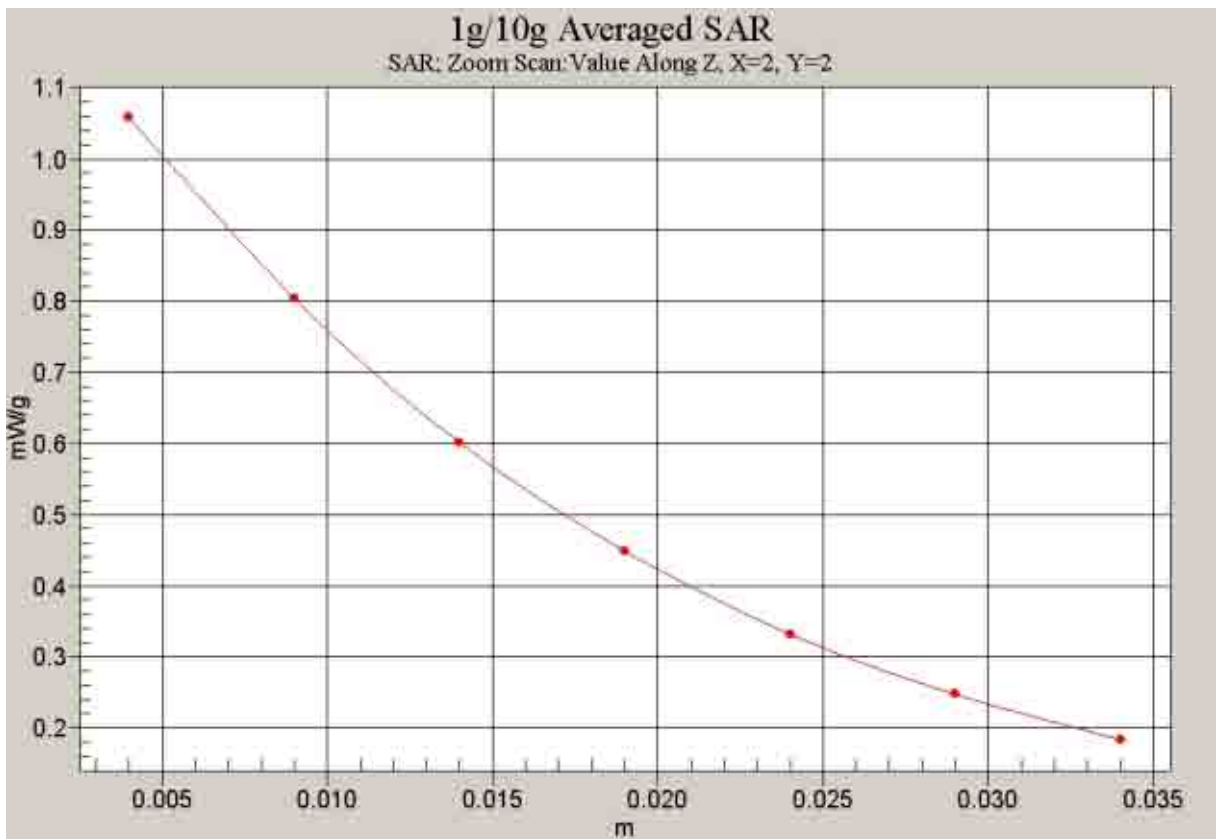


Fig. 34 Z-Scan at power reference point (850 MHz CH190)

850 Body Towards Phantom Low with GPRS

Date/Time: 2008-8-1 14:12:39

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g


Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.972 mW/g; SAR(10 g) = 0.702 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

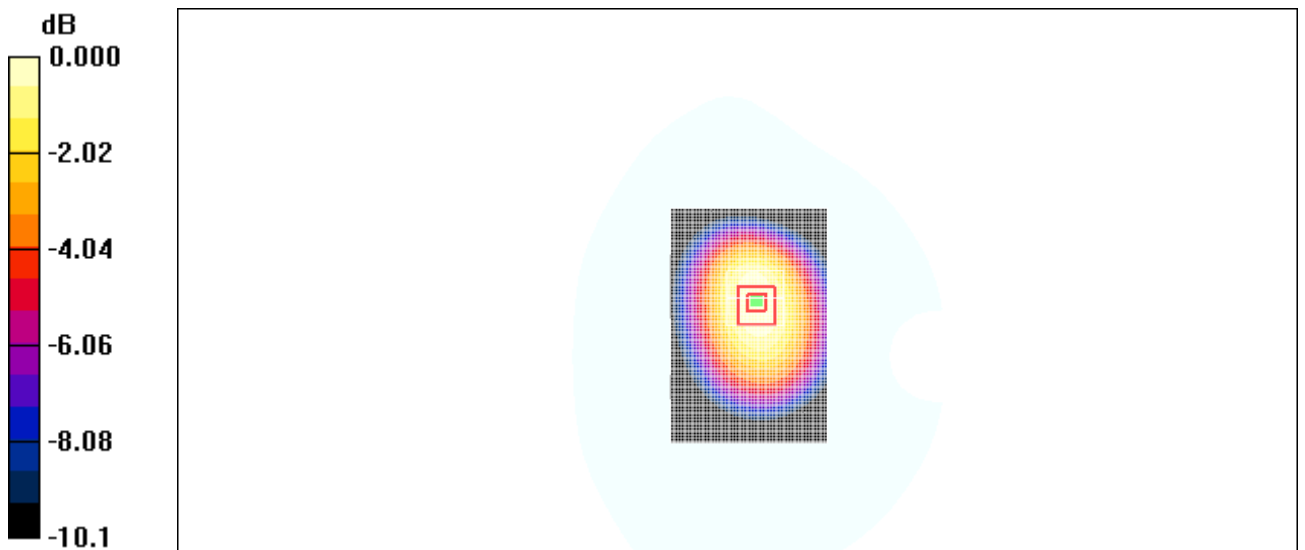

0 dB = 1.03mW/g

Fig. 35 850 MHz CH128

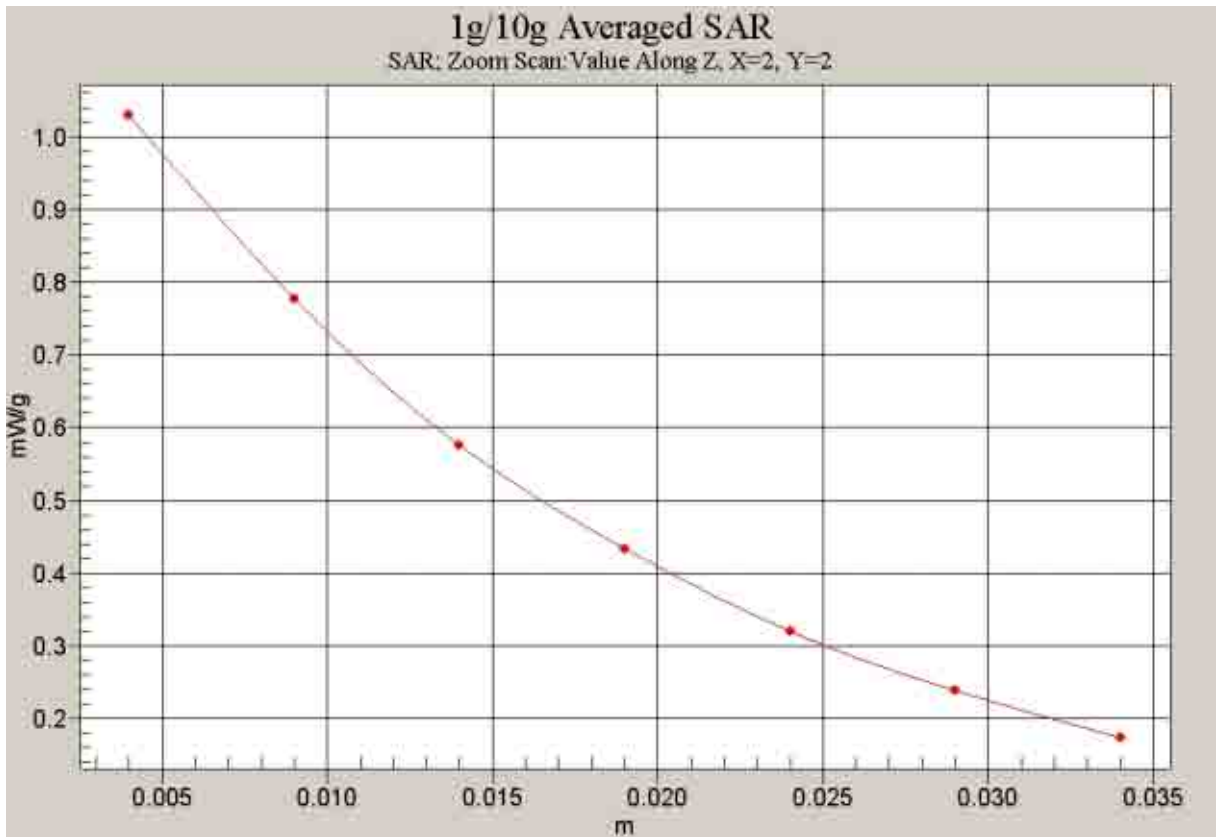


Fig. 36 Z-Scan at power reference point (850 MHz CH128)

850 Body Towards Ground Low with Headset

Date/Time: 2008-8-1 15:11:24

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Ground Low With Earphone/Area Scan (61x91x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.578 mW/g

Toward Ground Low With Earphone/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.535 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

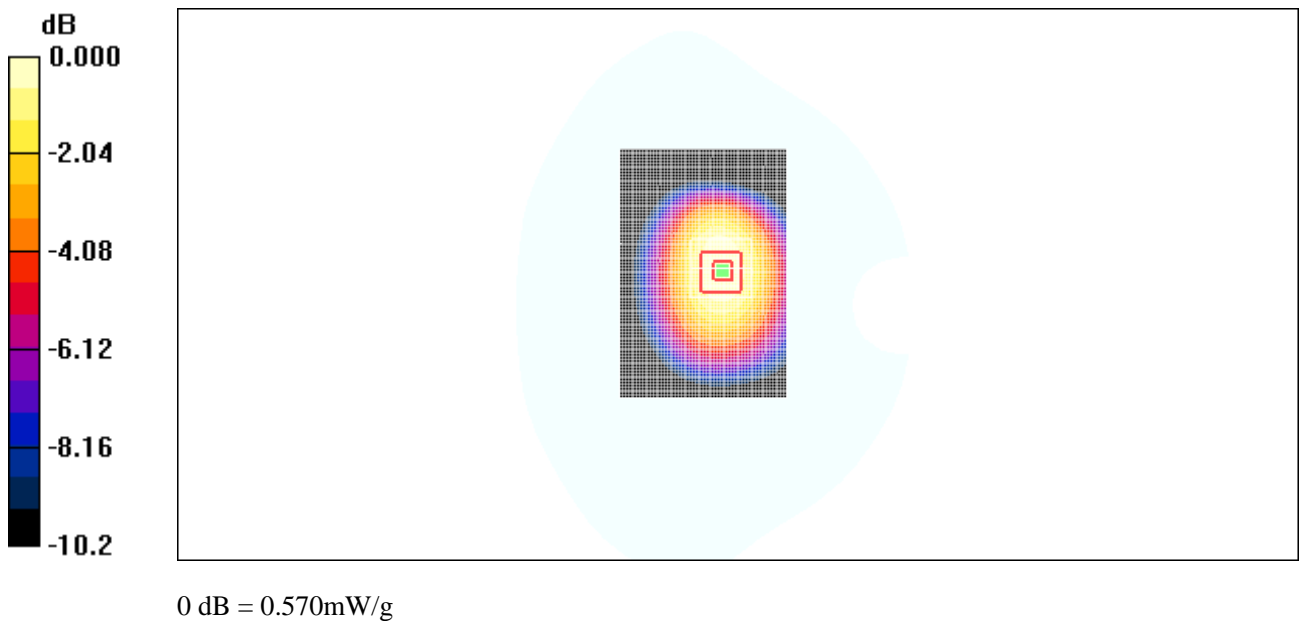


Fig. 37 850 MHz CH128

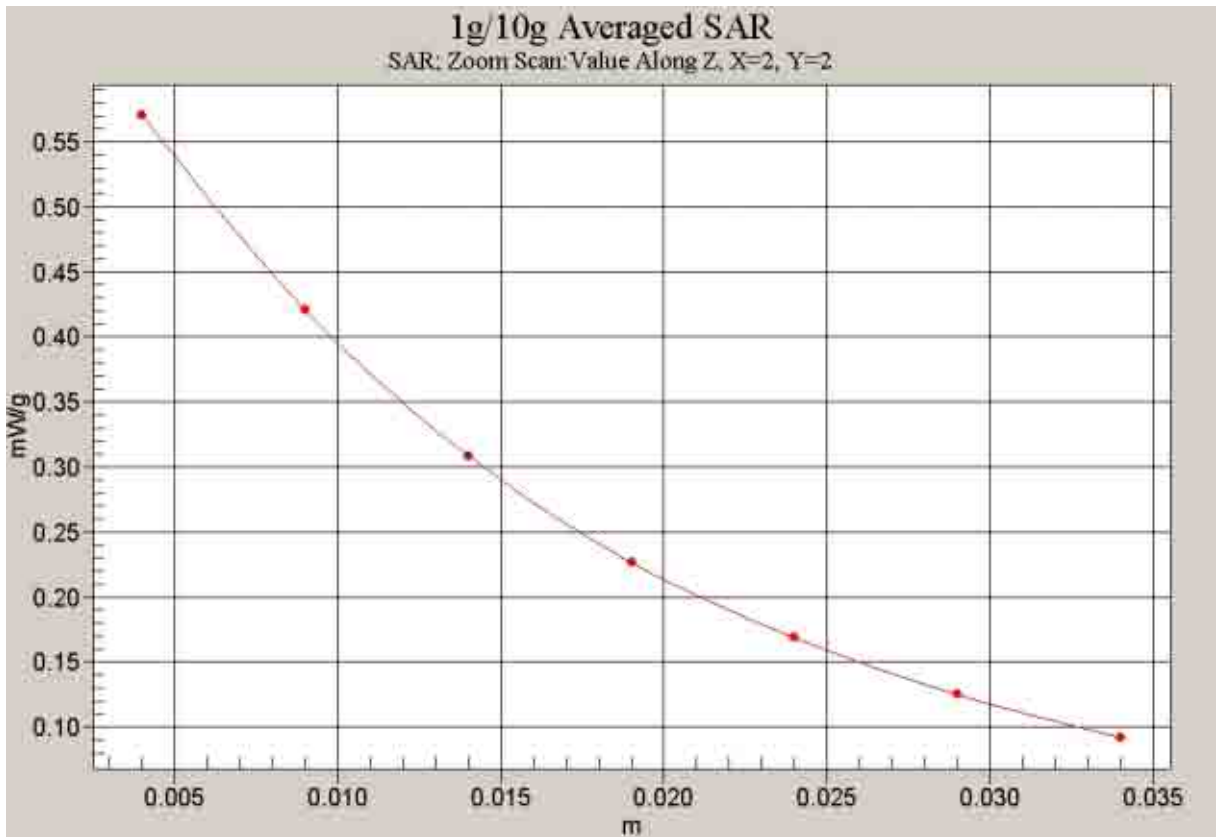


Fig. 38 Z-Scan at power reference point (850 MHz CH128)

1900 Left Cheek High

Date/Time: 2008-8-4 9:13:21

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.985 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.15 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.502 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

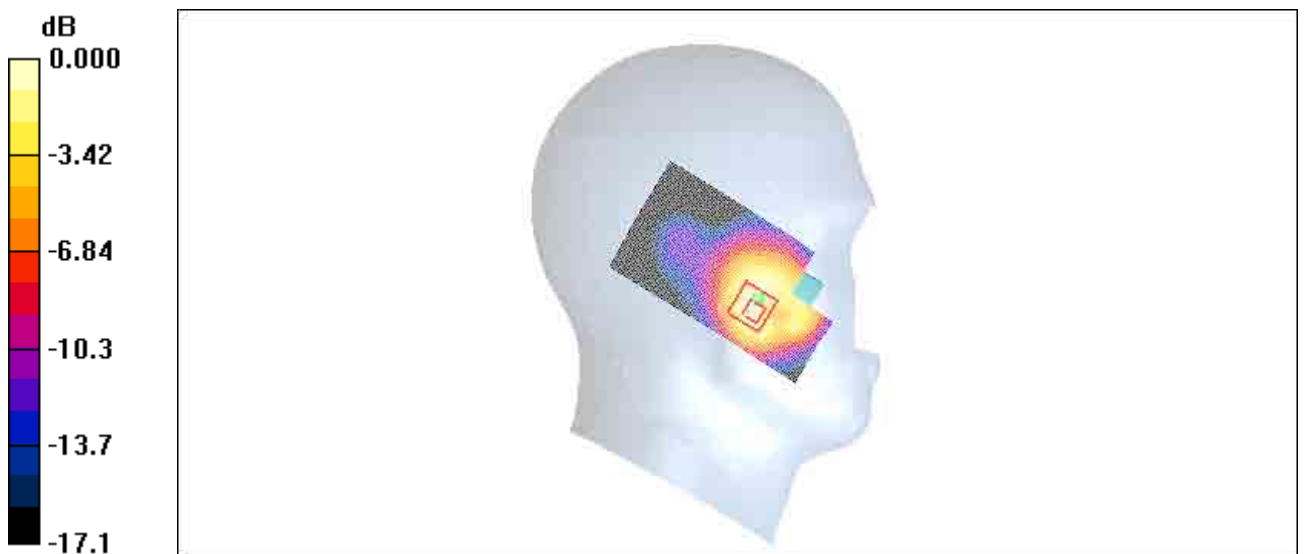

0 dB = 1.01mW/g

Fig. 39 1900 MHz CH810

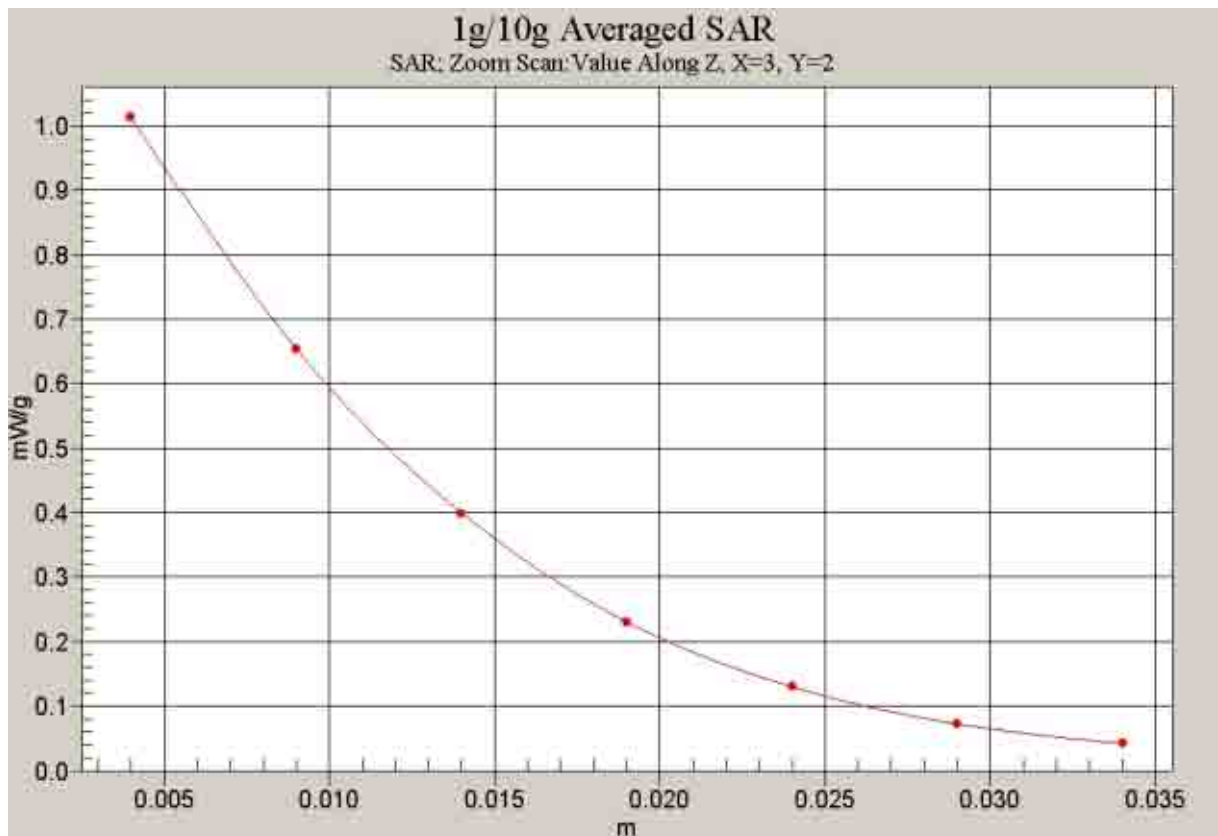


Fig. 40 Z-Scan at power reference point (1900 MHz CH810)

1900 Left Cheek Middle

Date/Time: 2008-8-4 9:25:17

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.907 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.84 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.900 mW/g; SAR(10 g) = 0.471 mW/g

Maximum value of SAR (measured) = 0.944 mW/g

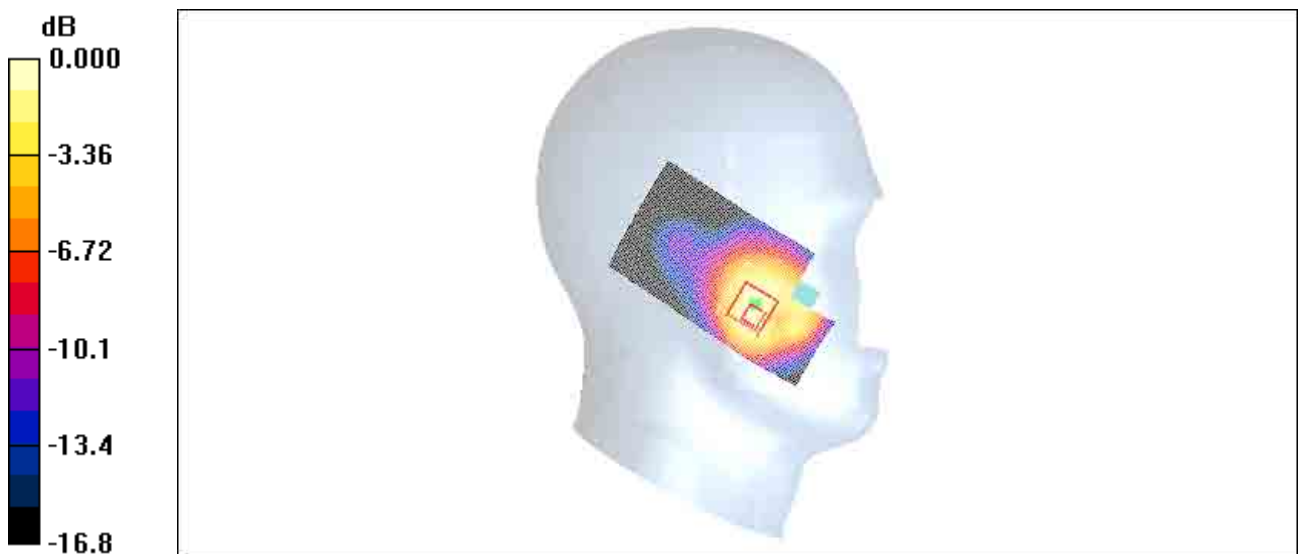

0 dB = 0.944mW/g

Fig. 41 1900 MHz CH661

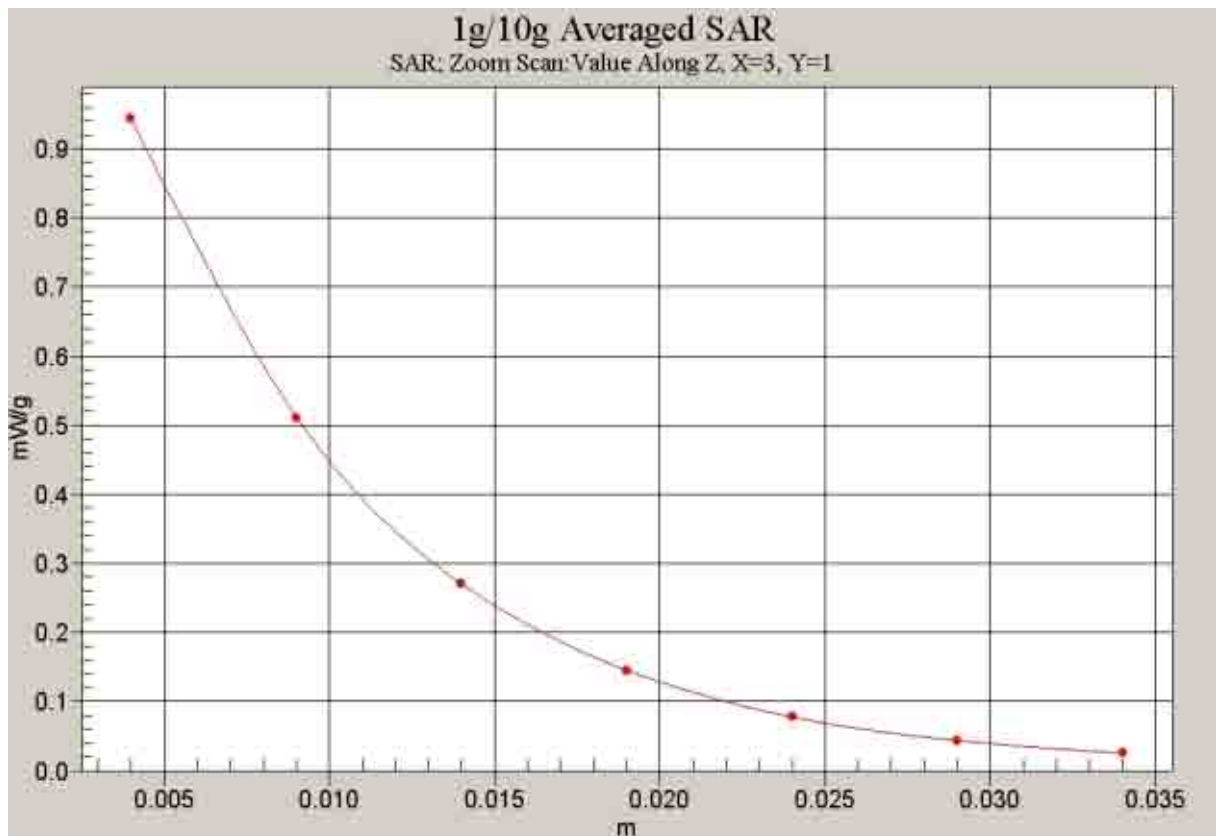


Fig. 42 Z-Scan at power reference point (1900 MHz CH661)

1900 Left Cheek Low

Date/Time: 2008-8-4 9:38:54

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.625 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.51 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.614 mW/g; SAR(10 g) = 0.322 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

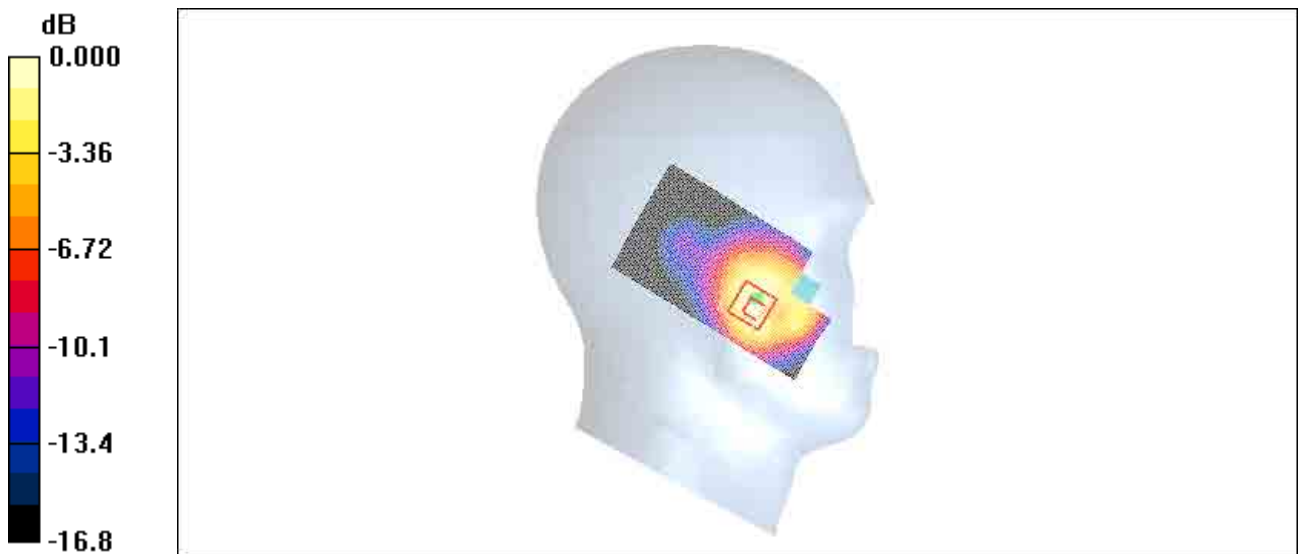

0 dB = 0.643mW/g

Fig. 43 1900 MHz CH512

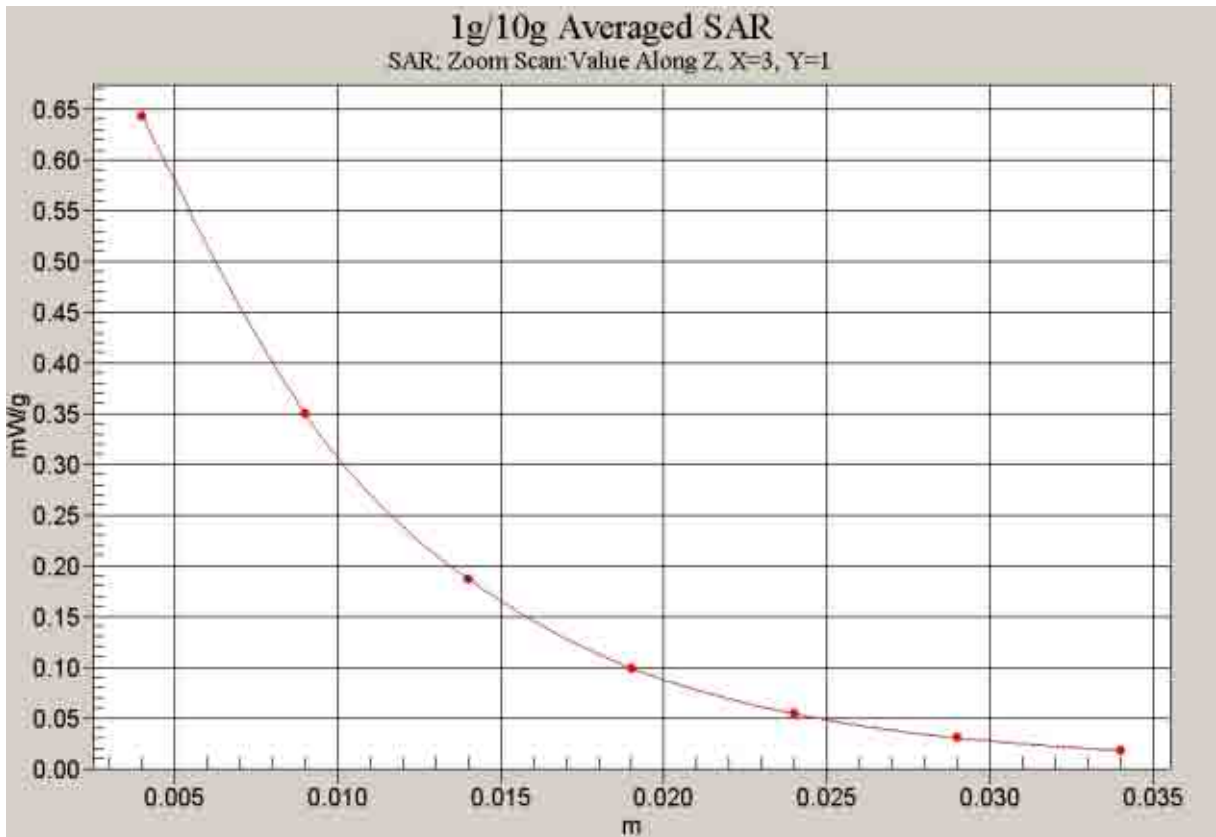


Fig. 44 Z-Scan at power reference point (1900 MHz CH512)

1900 Left Tilt High

Date/Time: 2008-8-4 9:50:13

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.215 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

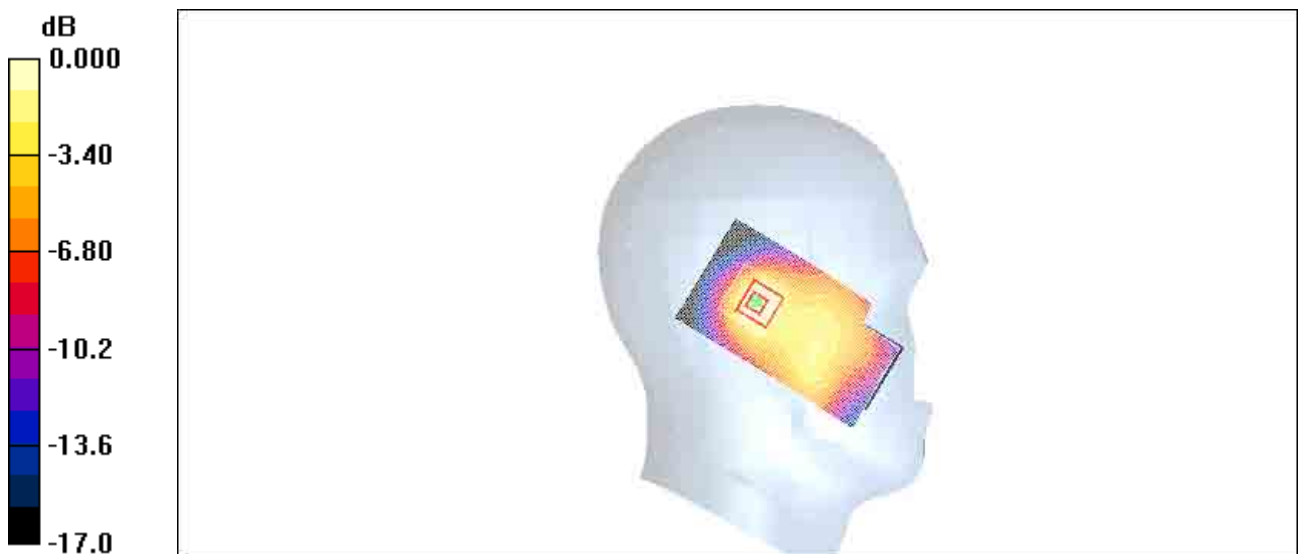

0 dB = 0.202mW/g

Fig.45 1900 MHz CH810

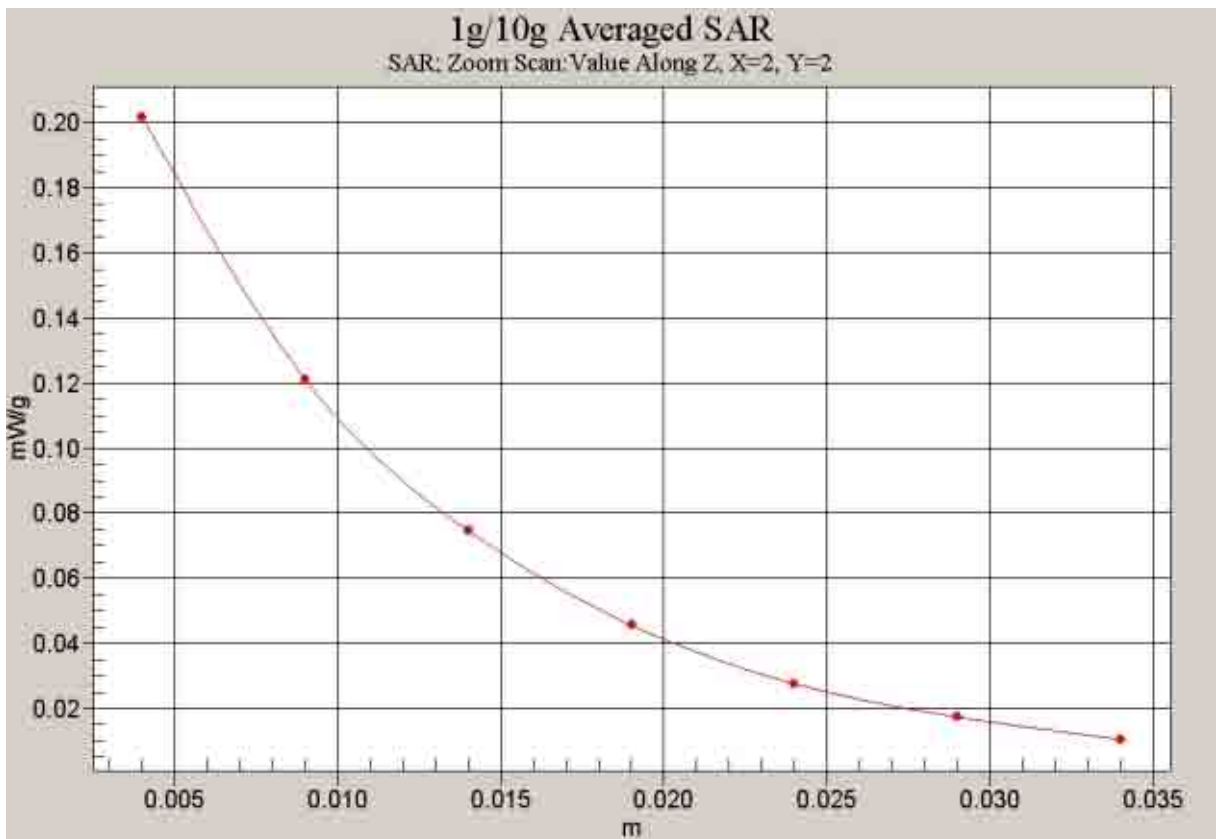


Fig. 46 Z-Scan at power reference point (1900 MHz CH810)

1900 Left Tilt Middle

Date/Time: 2008-8-4 10:04:24

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.189 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.186 mW/g

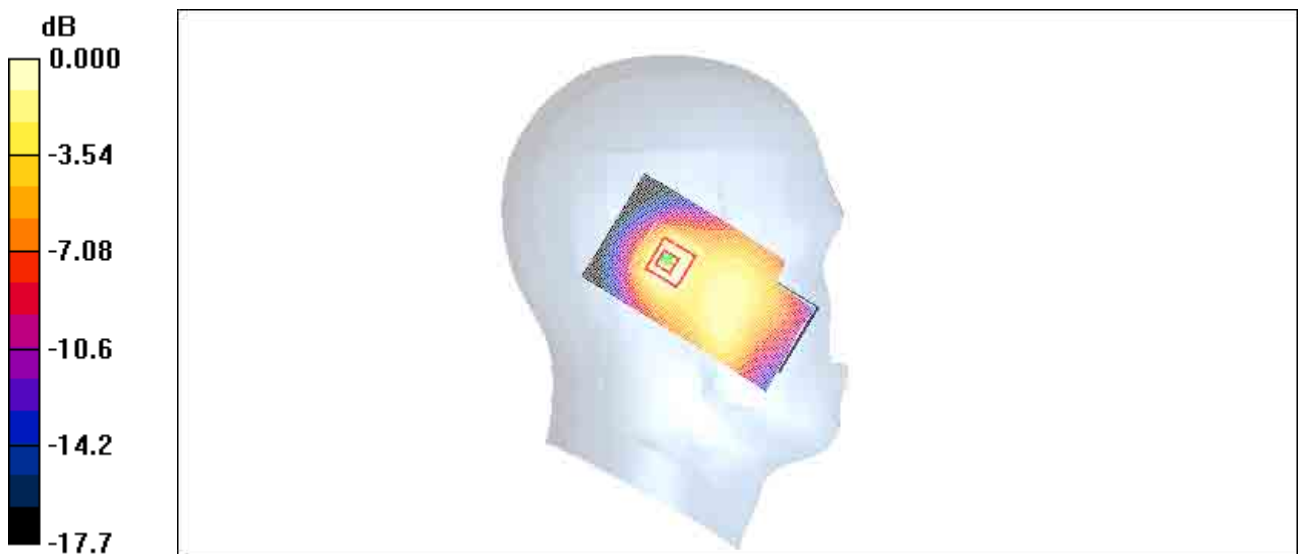

0 dB = 0.186mW/g

Fig. 47 1900 MHz CH661

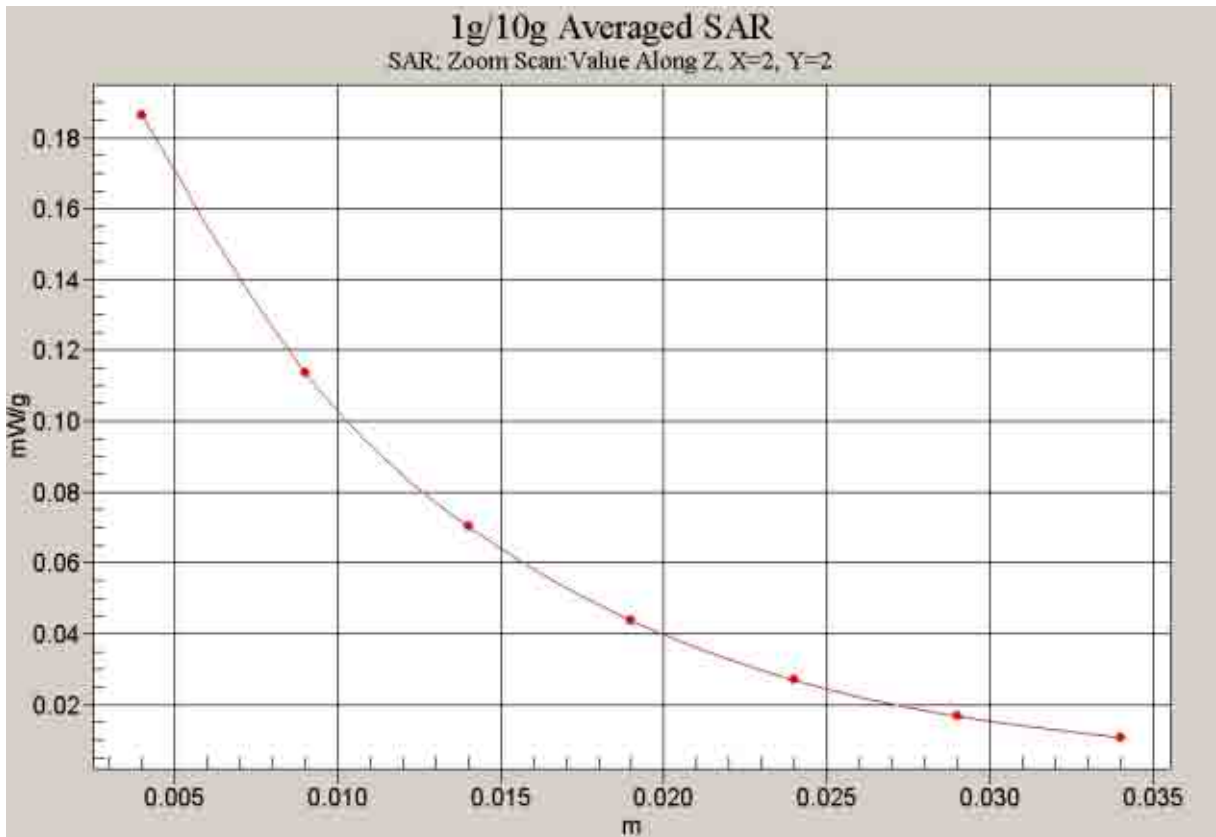


Fig. 48 Z-Scan at power reference point (1900 MHz CH661)

1900 Left Tilt Low

Date/Time: 2008-8-4 10:19:18

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.119 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.88 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.115 mW/g

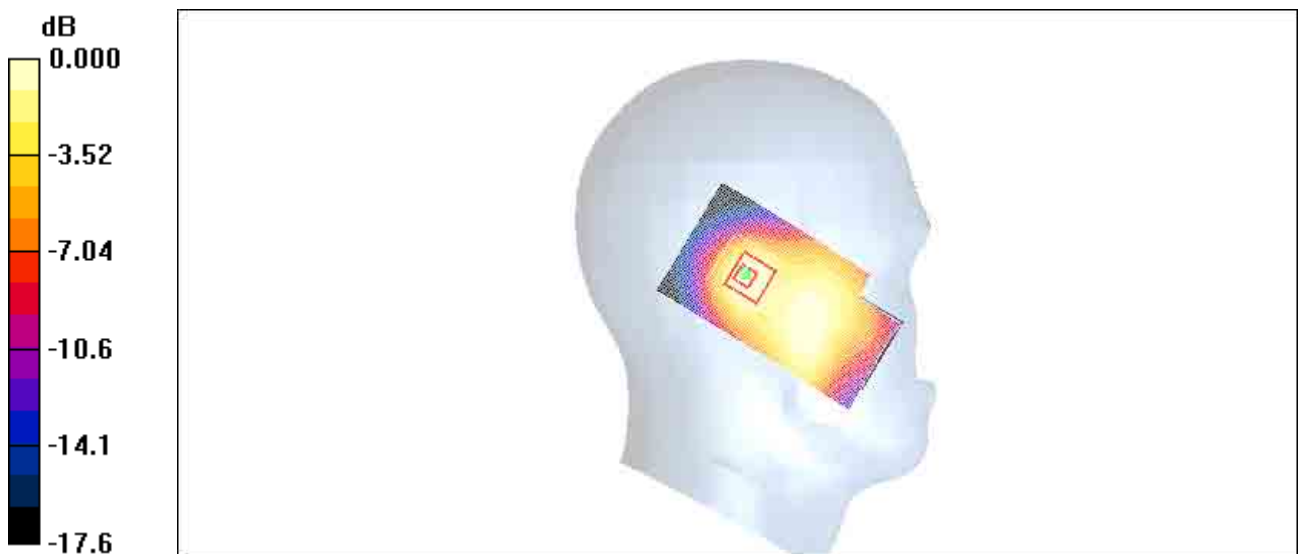

0 dB = 0.115mW/g

Fig. 49 1900 MHz CH512

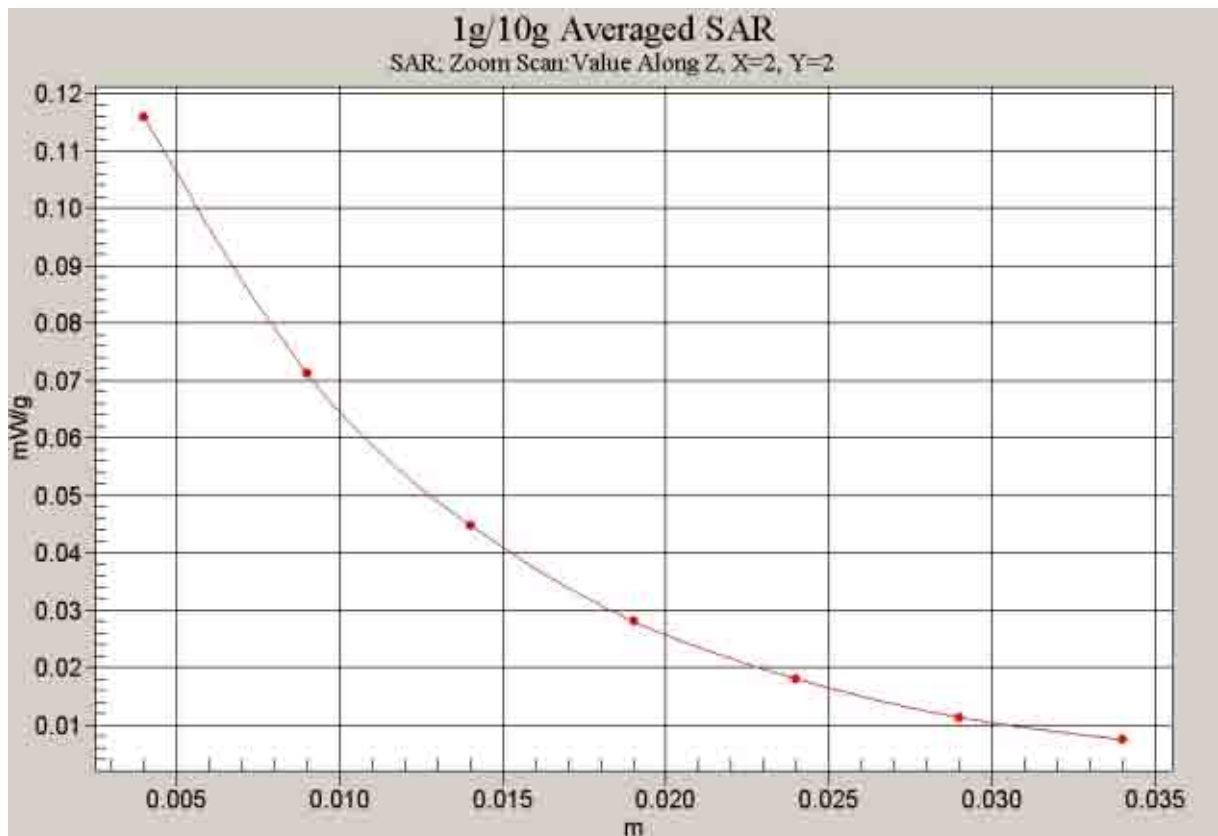


Fig. 50 Z-Scan at power reference point (1900 MHz CH512)

1900 Right Cheek High

Date/Time: 2008-8-4 10:33:32

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

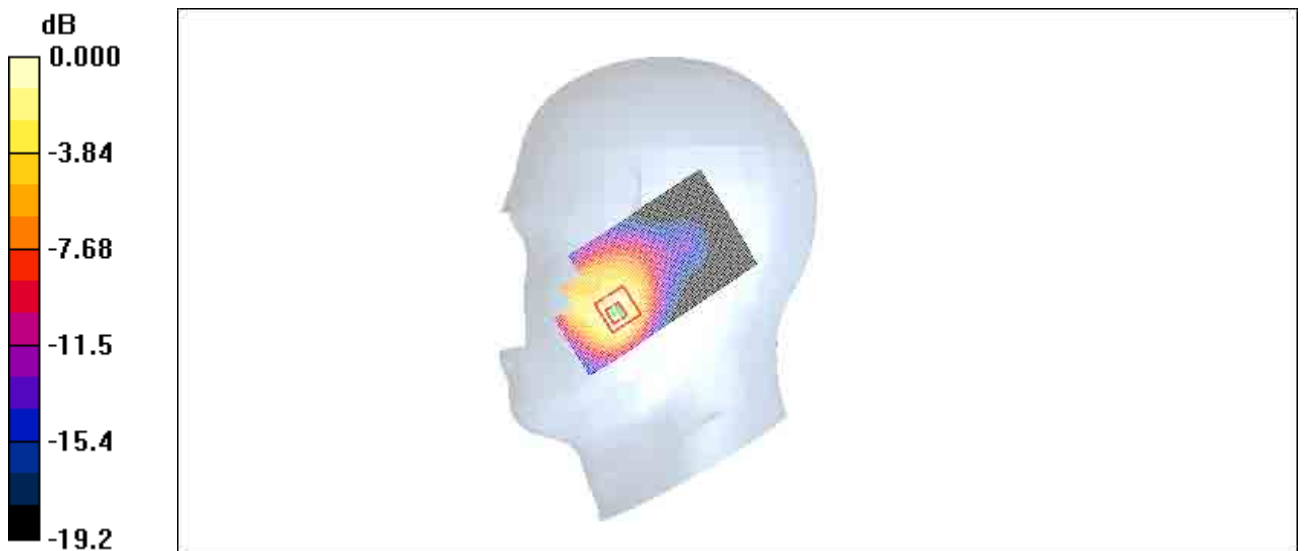

0 dB = 1.16mW/g

Fig. 51 1900 MHz CH810

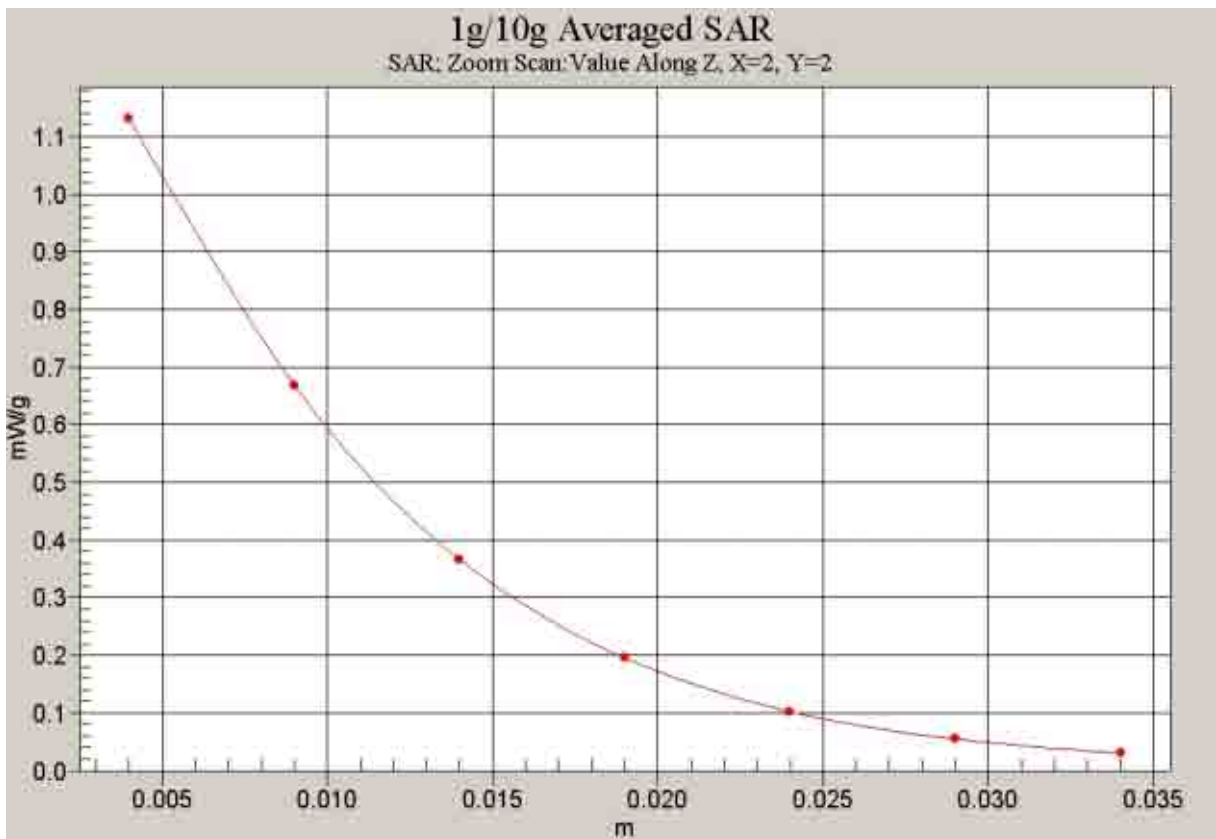


Fig. 52 Z-Scan at power reference point (1900 MHz CH810)

1900 Right Cheek Middle

Date/Time: 2008-8-4 10:47:09

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.972 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.70 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

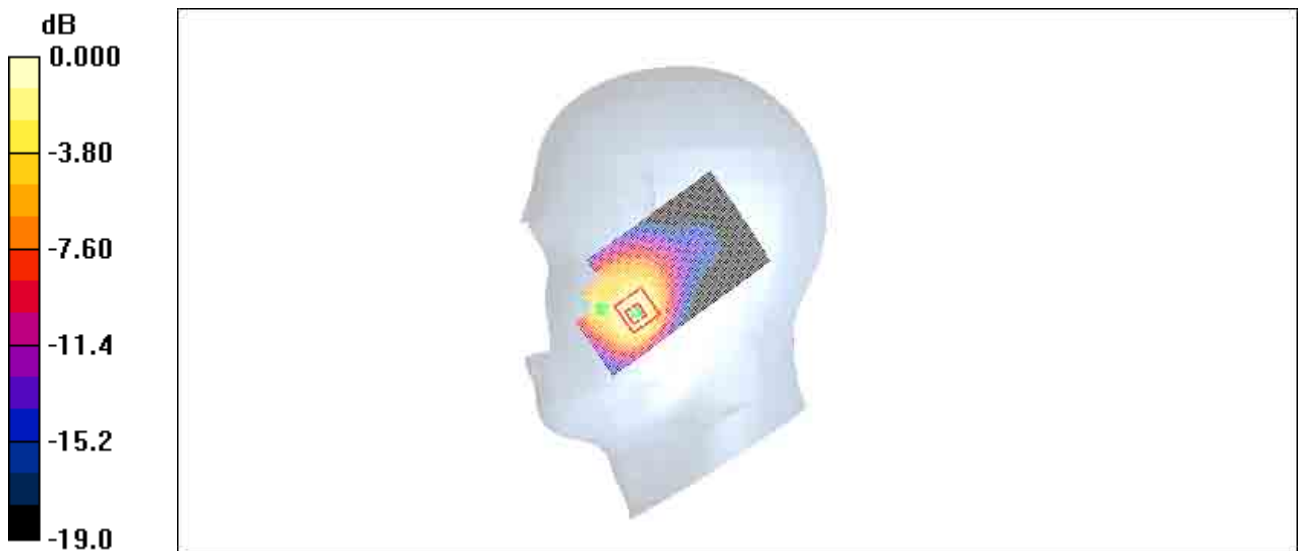

0 dB = 1.13mW/g

Fig. 53 1900 MHz CH661

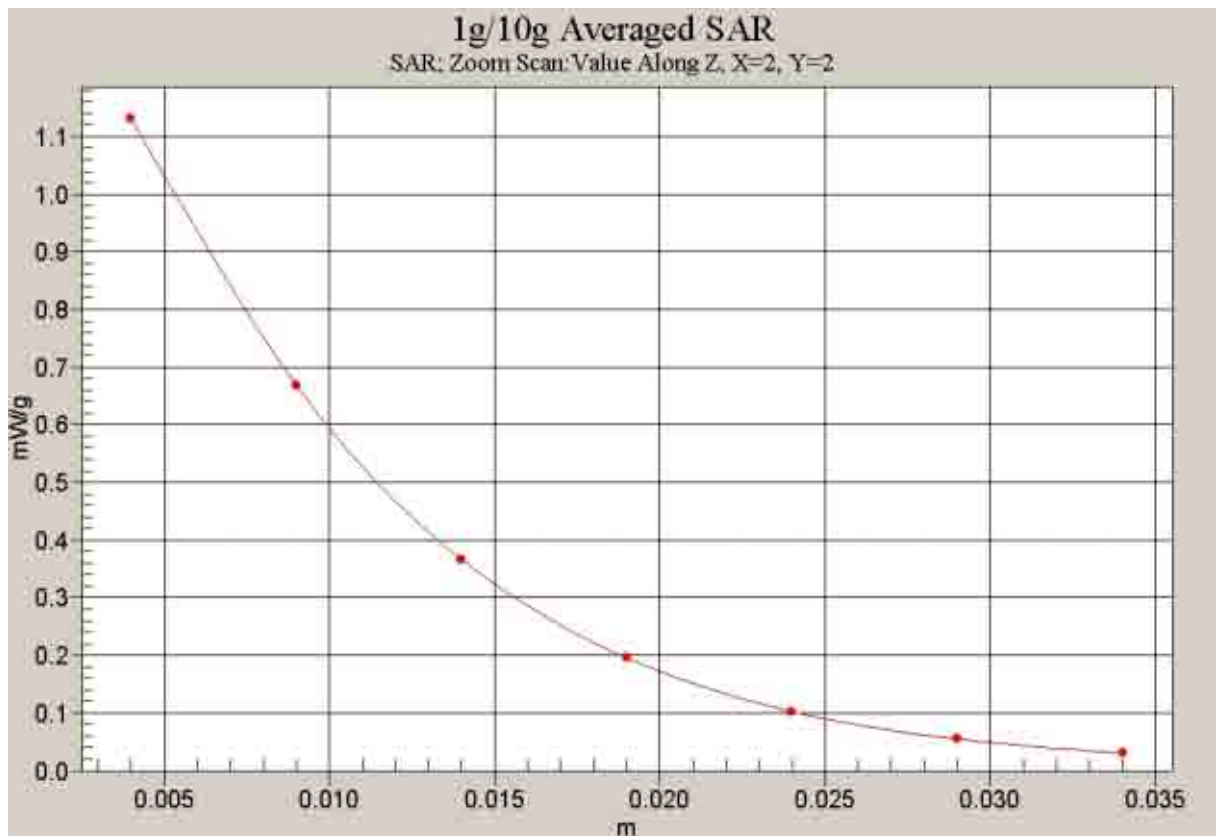


Fig. 54 Z-Scan at power reference point (1900 MHz CH661)

1900 Right Cheek Low

Date/Time: 2008-8-4 11:01:21

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Cheek Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.698 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.62 V/m; Power Drift = 0.167 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.799 mW/g

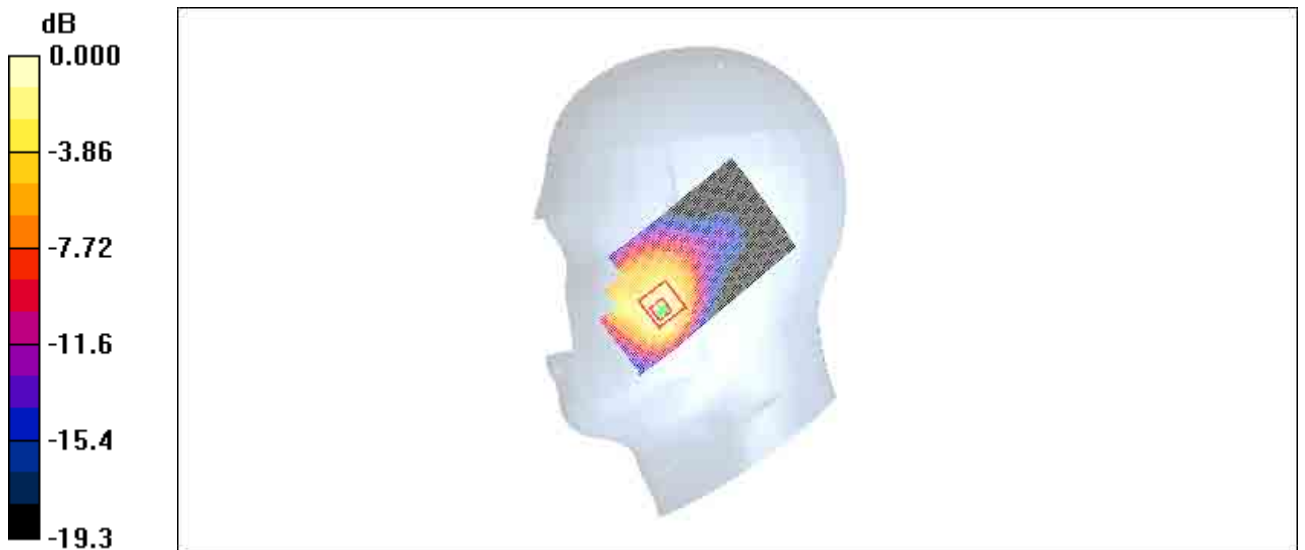


Fig. 55 1900 MHz CH512

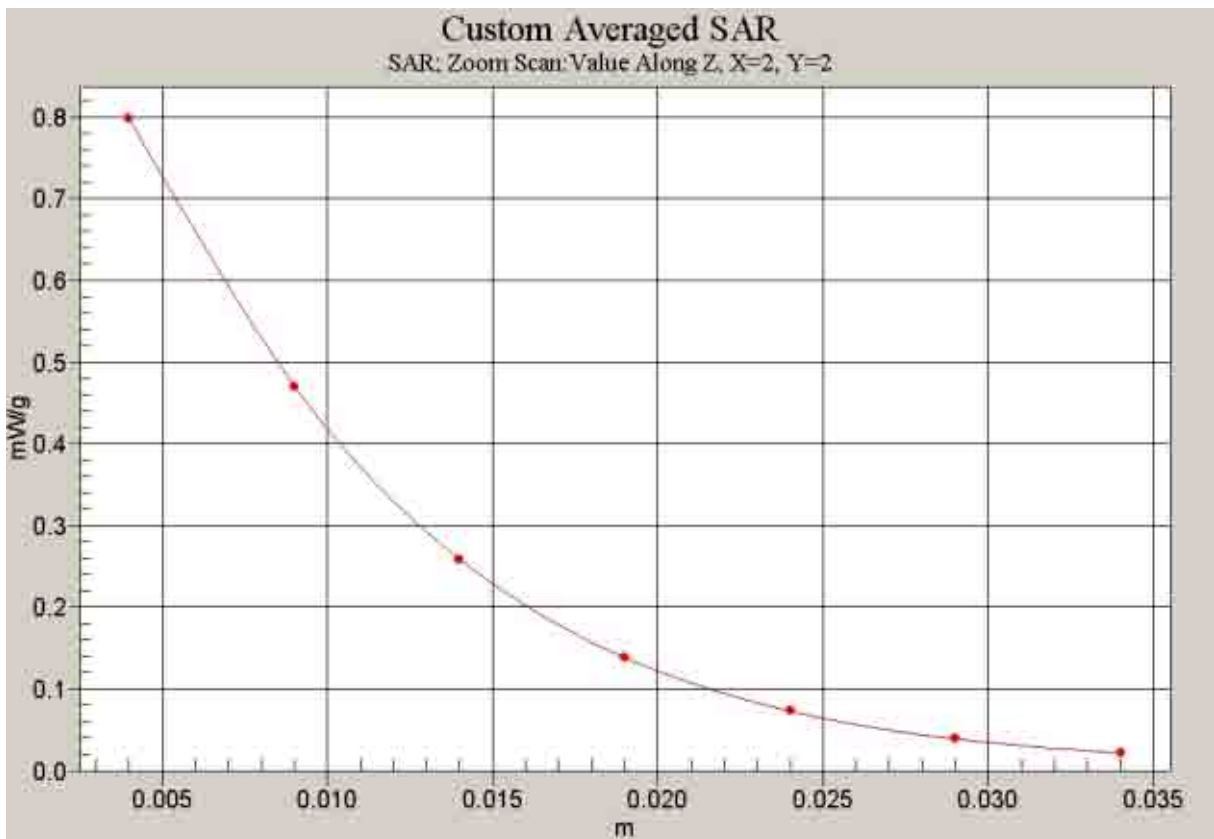


Fig. 56 Z-Scan at power reference point (1900 MHz CH512)

1900 Right Tilt High

Date/Time: 2008-8-4 11:14:26

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.191 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.156 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.172 mW/g

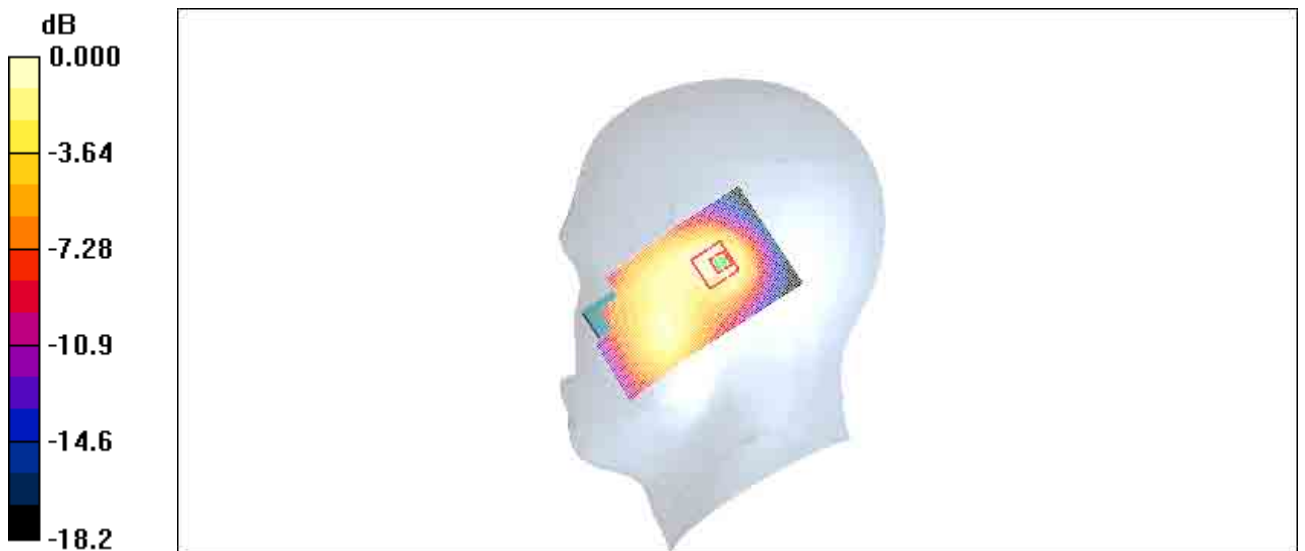

0 dB = 0.172mW/g

Fig. 57 1900 MHz CH810

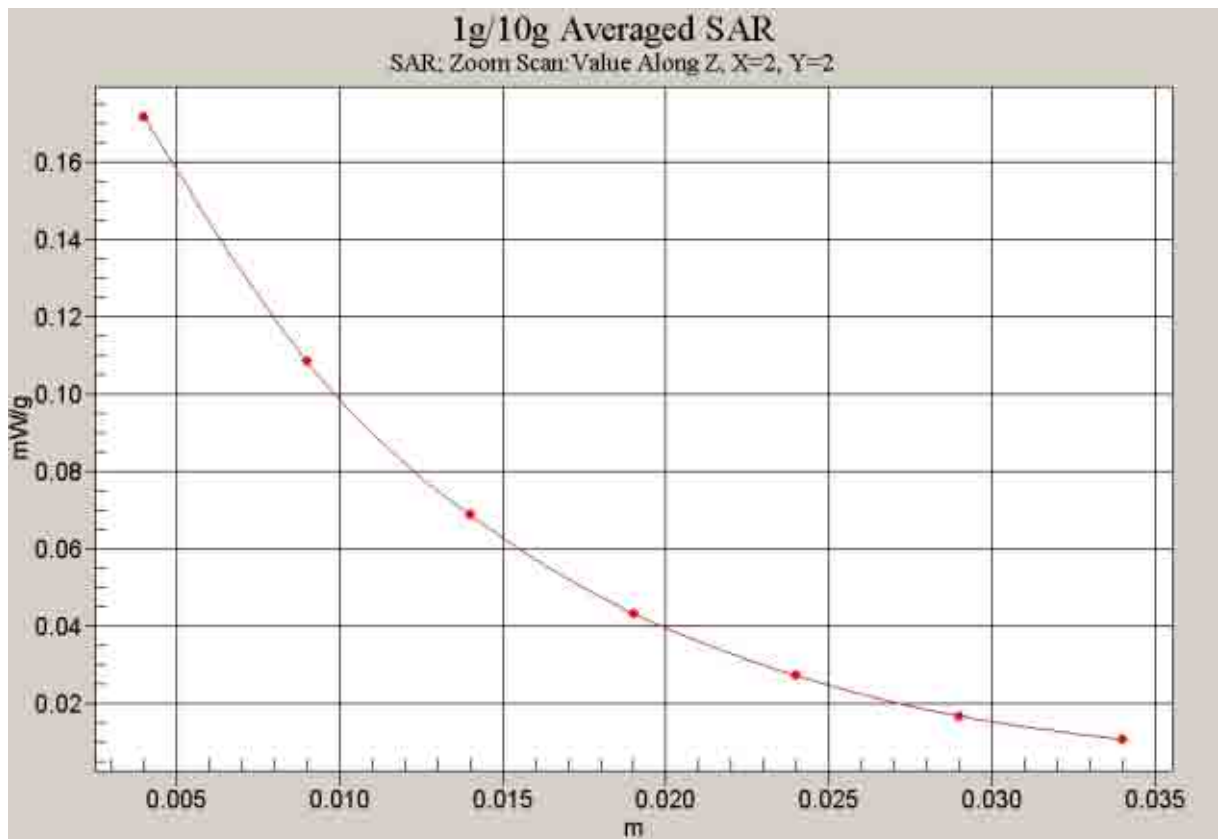


Fig. 58 Z-Scan at power reference point (1900 MHz CH810)

1900 Right Tilt Middle

Date/Time: 2008-8-4 11:26:39

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.168 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.77 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

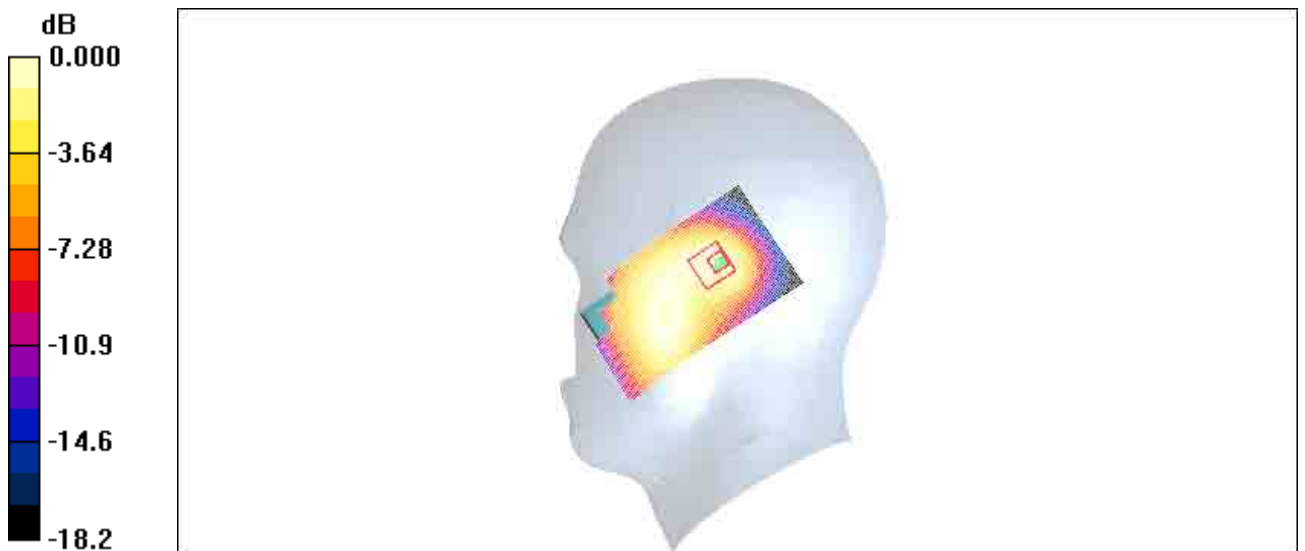

0 dB = 0.151mW/g

Fig.59 1900 MHz CH661

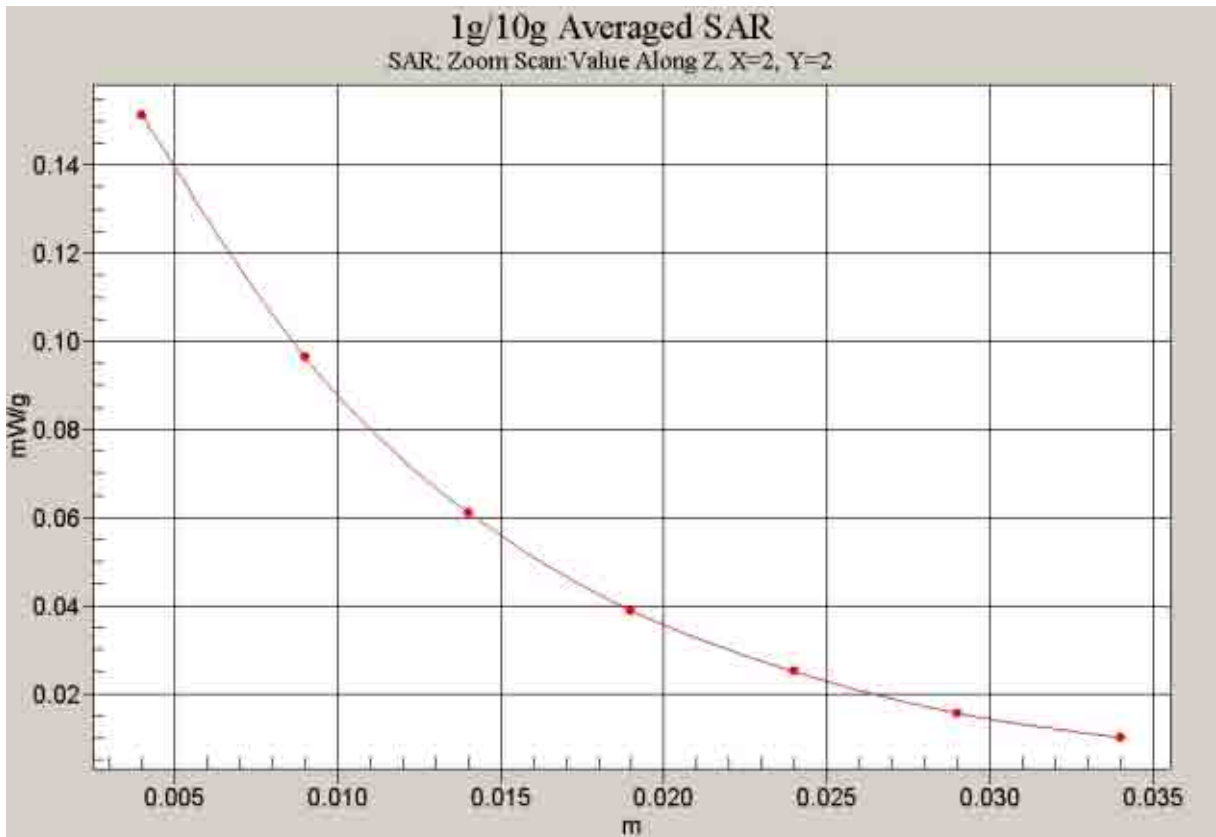


Fig. 60 Z-Scan at power reference point (1900 MHz CH661)

1900 Right Tilt Low

Date/Time: 2008-8-4 11:40:37

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.87, 4.87, 4.87)

Tilt Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.129 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

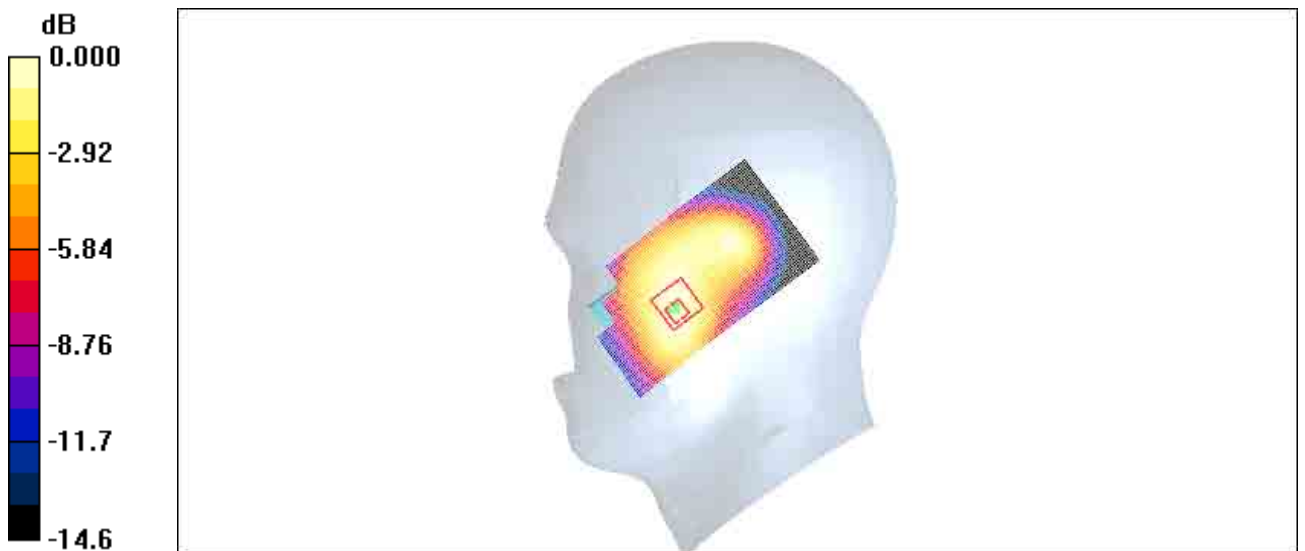

0 dB = 0.125mW/g

Fig.61 1900 MHz CH512

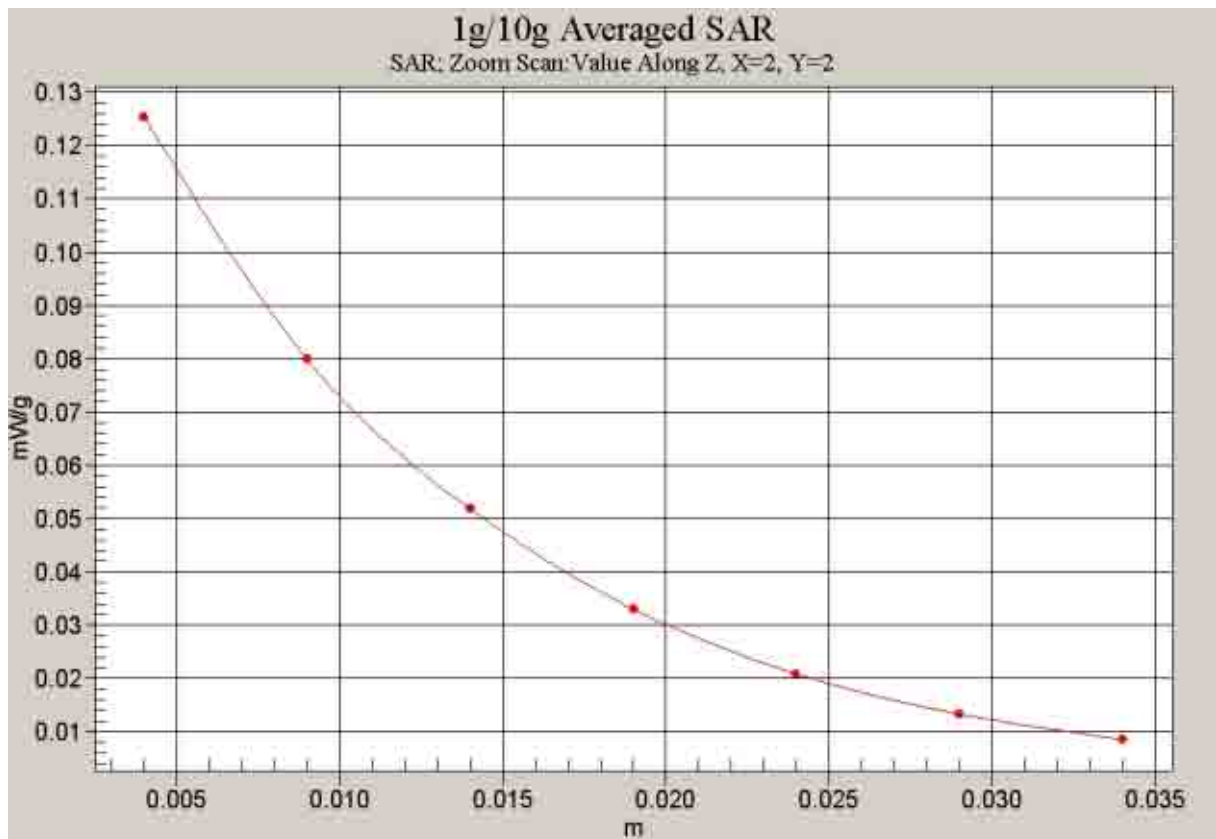


Fig. 62 Z-Scan at power reference point (1900 MHz CH512)

1900 Body Towards Ground High with GPRS

Date/Time: 2008-8-4 13:26:05

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Ground High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.655 mW/g


Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.55 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.651 mW/g

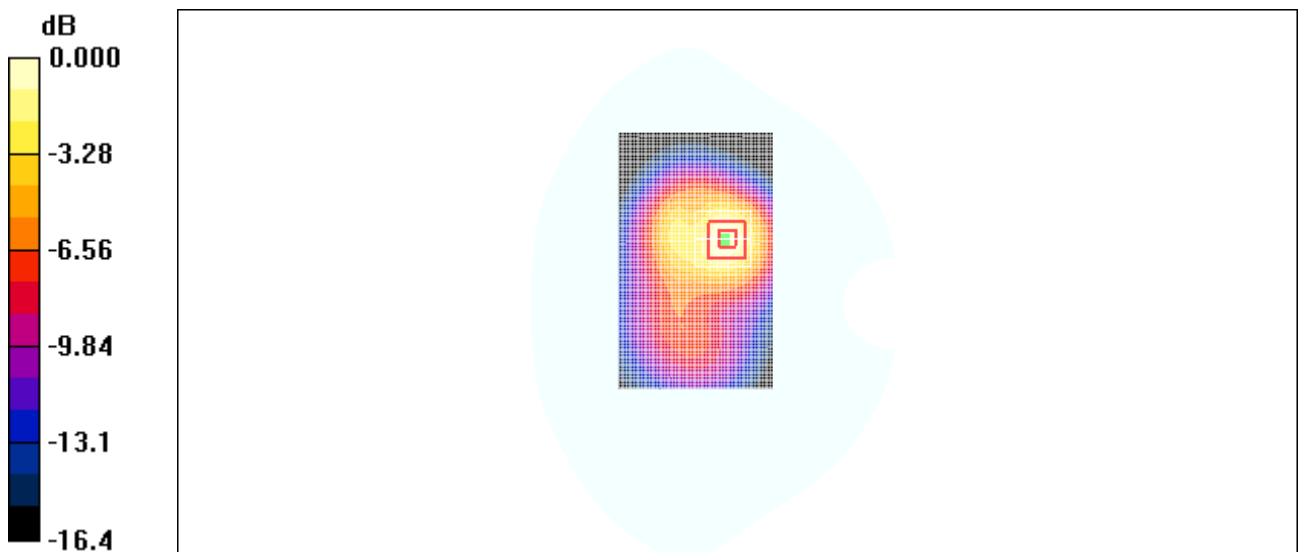

0 dB = 0.651mW/g

Fig. 63 1900 MHz CH810

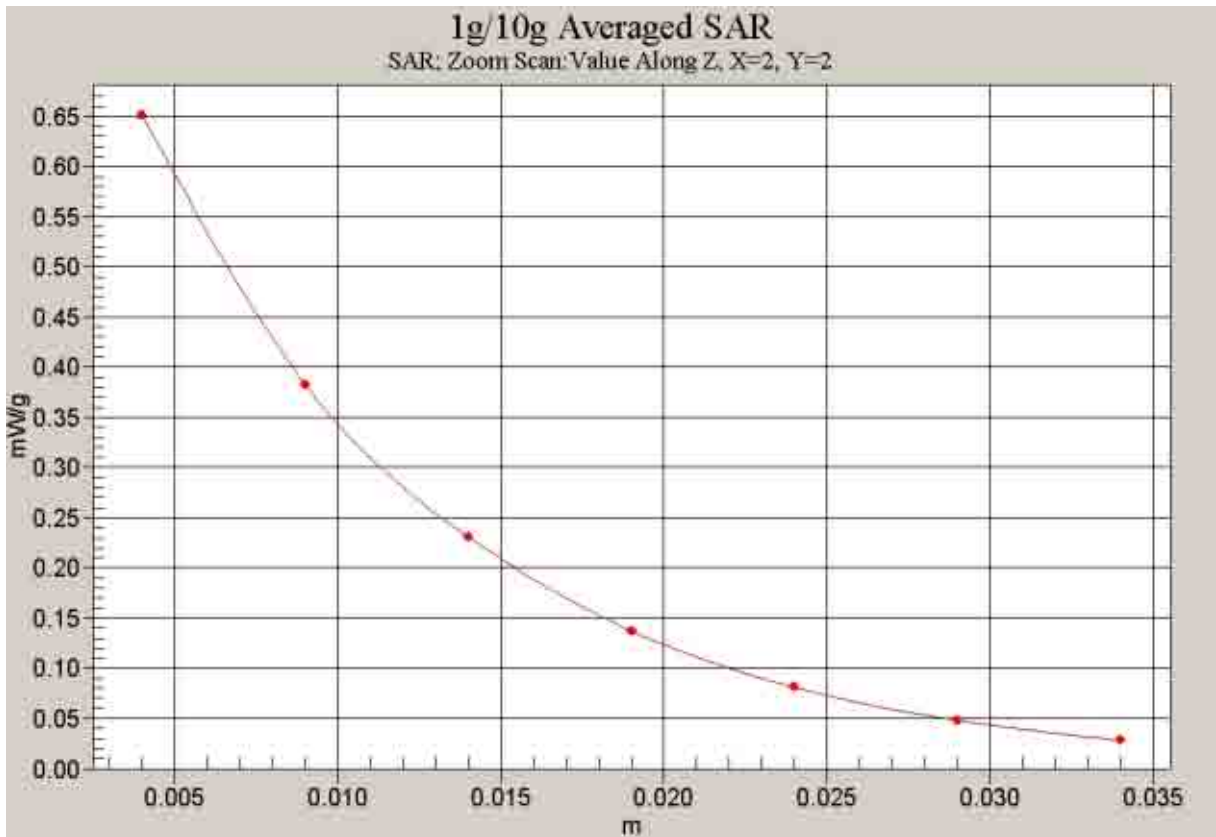


Fig. 64 Z-Scan at power reference point (1900 MHz CH810)

1900 Body Towards Ground Middle with GPRS

Date/Time: 2008-8-4 13:41:50

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Ground Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.562 mW/g


Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.08 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.286 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

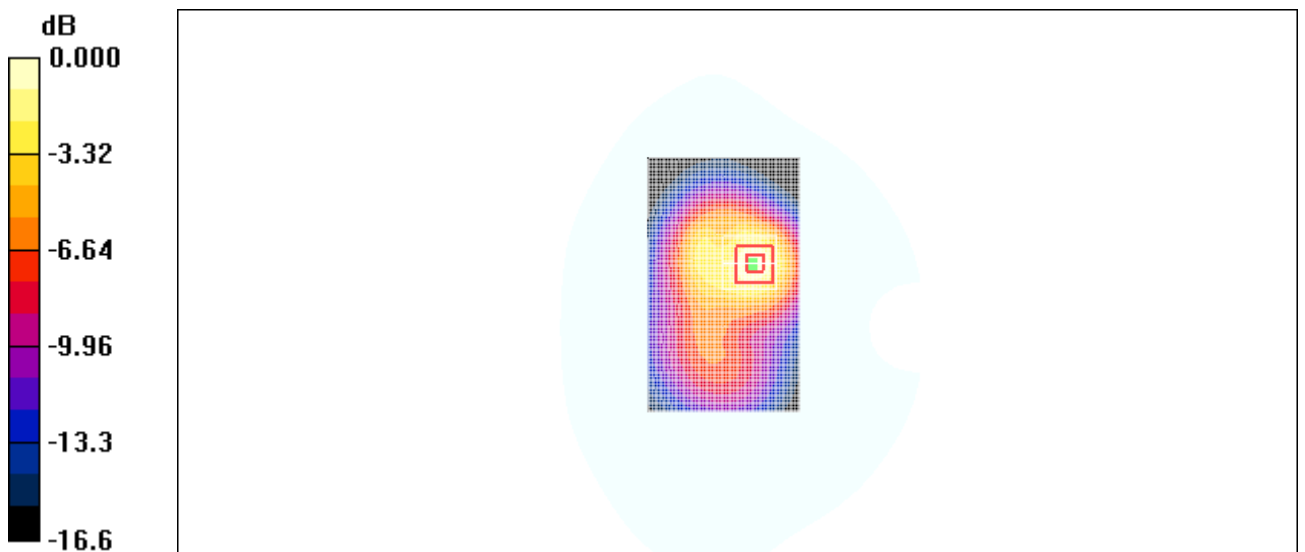

0 dB = 0.562mW/g

Fig. 65 1900 MHz CH661

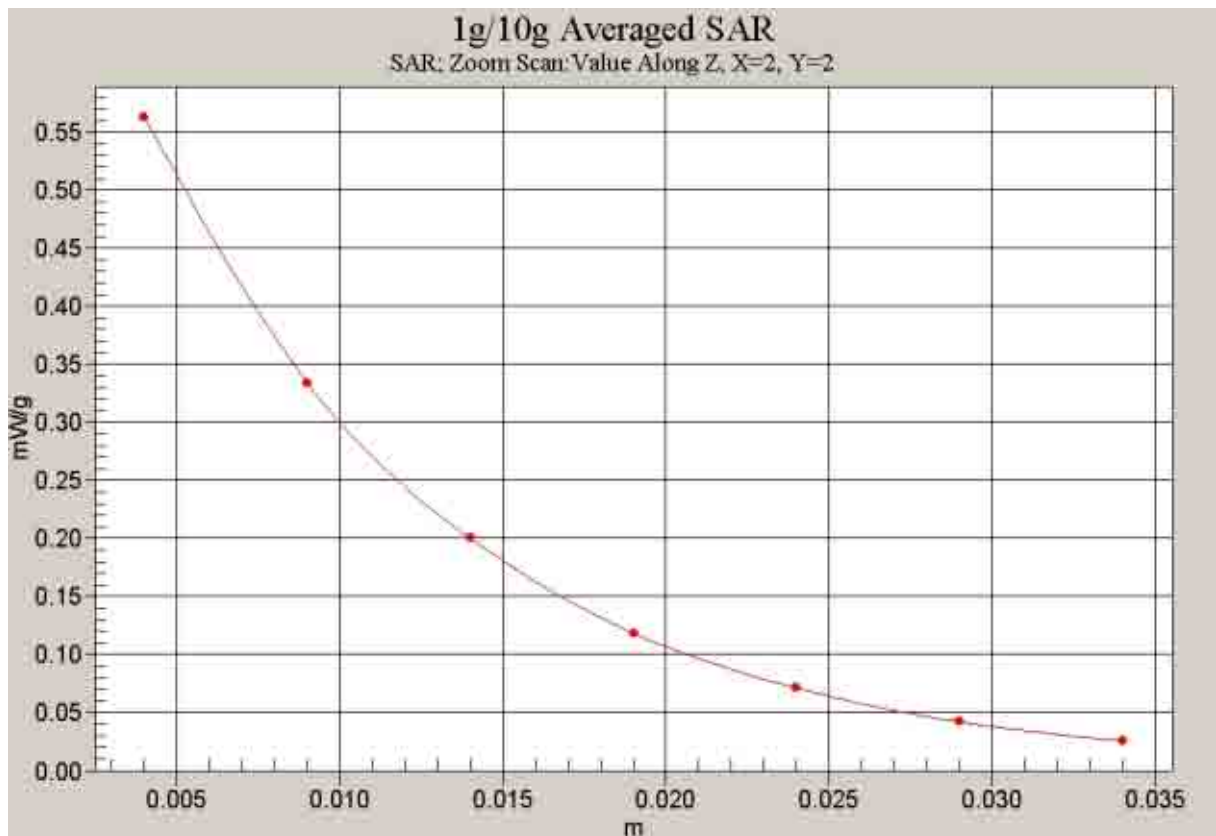


Fig. 66 Z-Scan at power reference point (1900 MHz CH661)

1900 Body Towards Ground Low with GPRS

Date/Time: 2008-8-4 13:56:04

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Ground Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.382 mW/g


Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.01 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

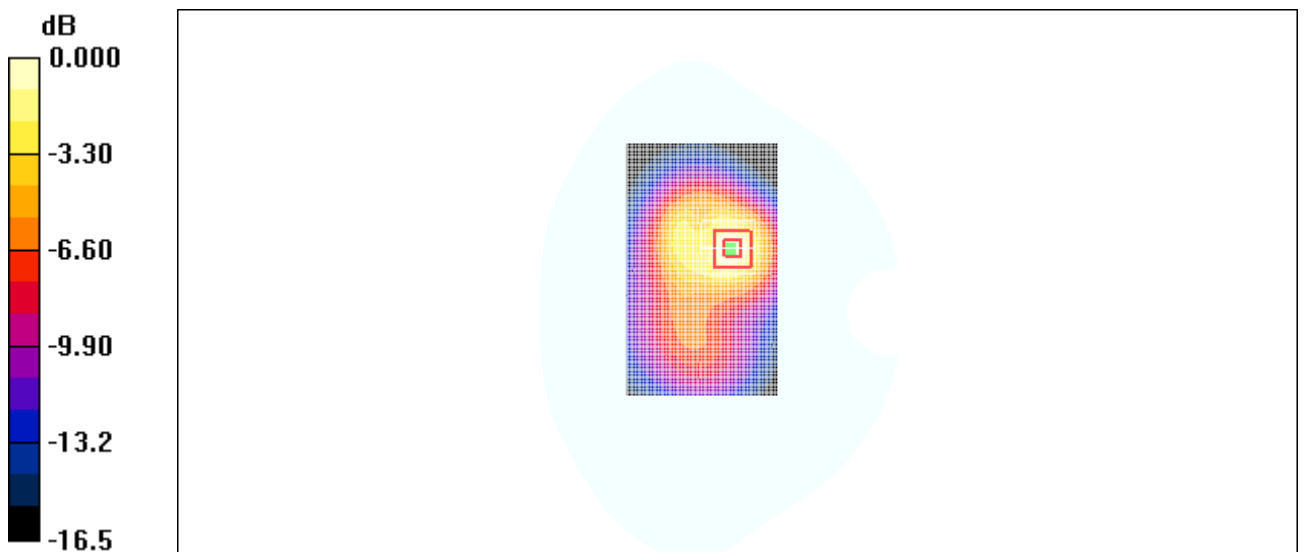

0 dB = 0.388mW/g

Fig. 67 1900 MHz CH512

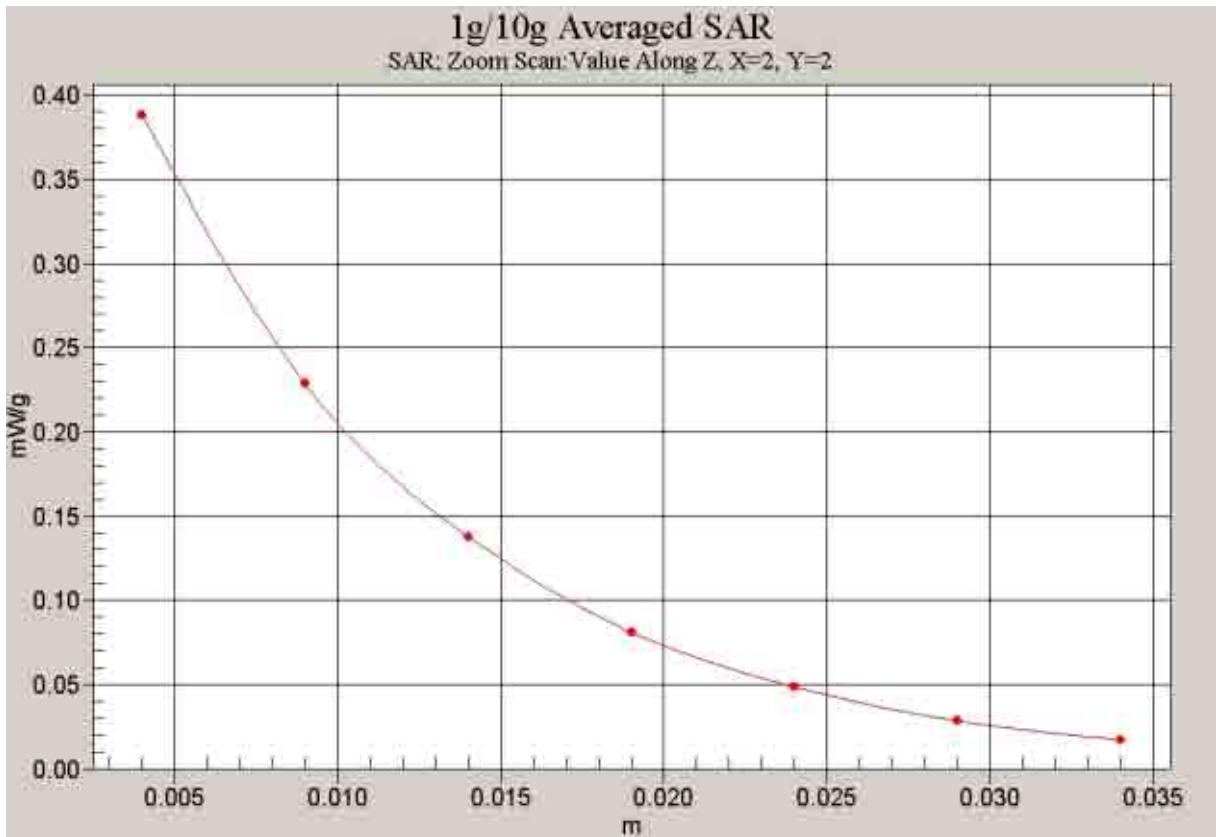


Fig. 68 Z-Scan at power reference point (1900 MHz CH512)

1900 Body Towards Phantom High with GPRS

Date/Time: 2008-8-4 14:26:05

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Phantom High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.437 mW/g


Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.77 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.447 mW/g

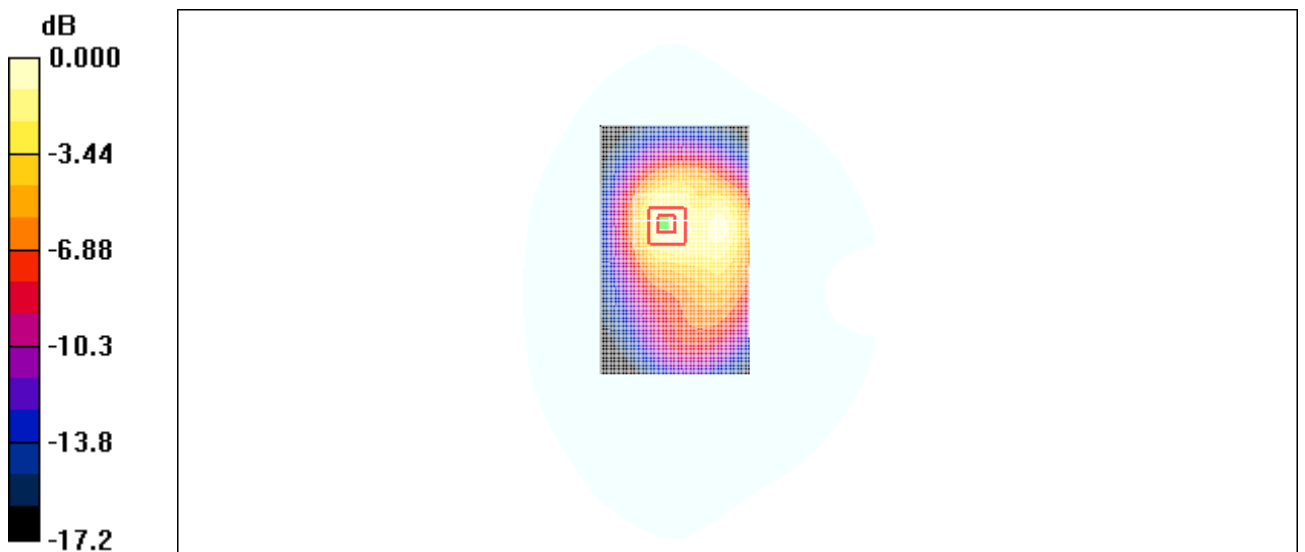

0 dB = 0.447mW/g

Fig. 69 1900 MHz CH810

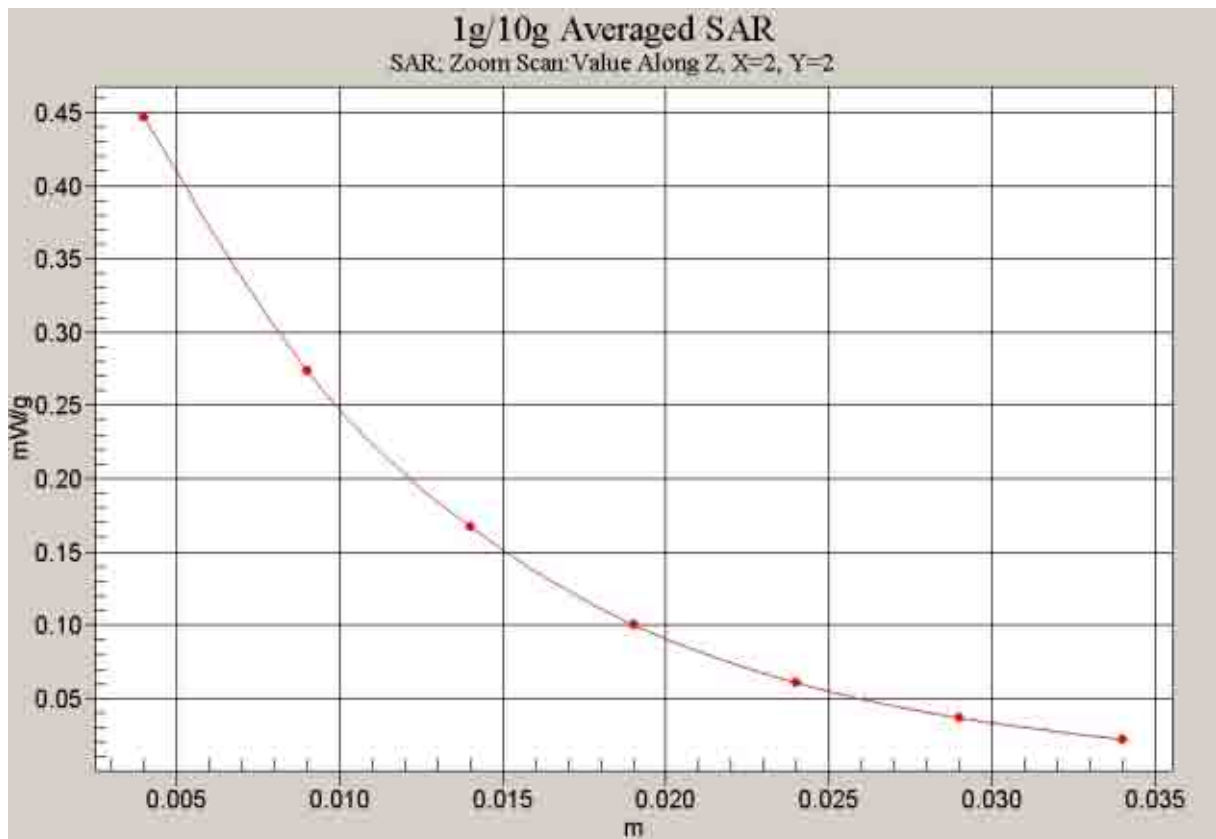


Fig. 70 Z-Scan at power reference point (1900 MHz CH810)

1900 Body Towards Phantom Middle with GPRS

Date/Time: 2008-8-4 14:41:50

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Phantom Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.418 mW/g


Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.52 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

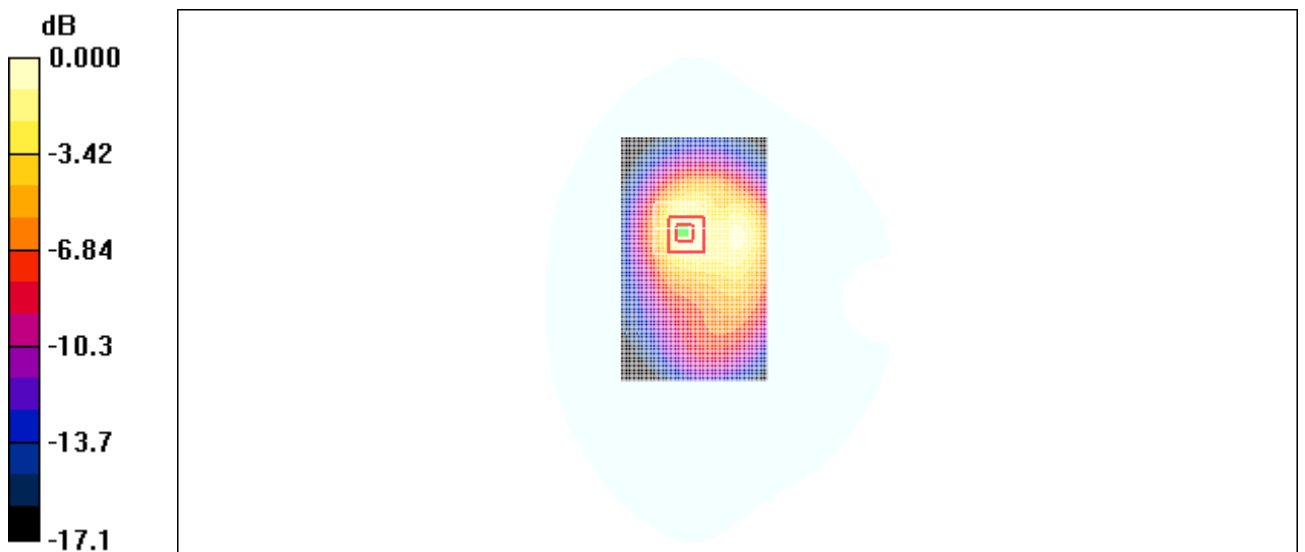

0 dB = 0.426mW/g

Fig. 71 1900 MHz CH661

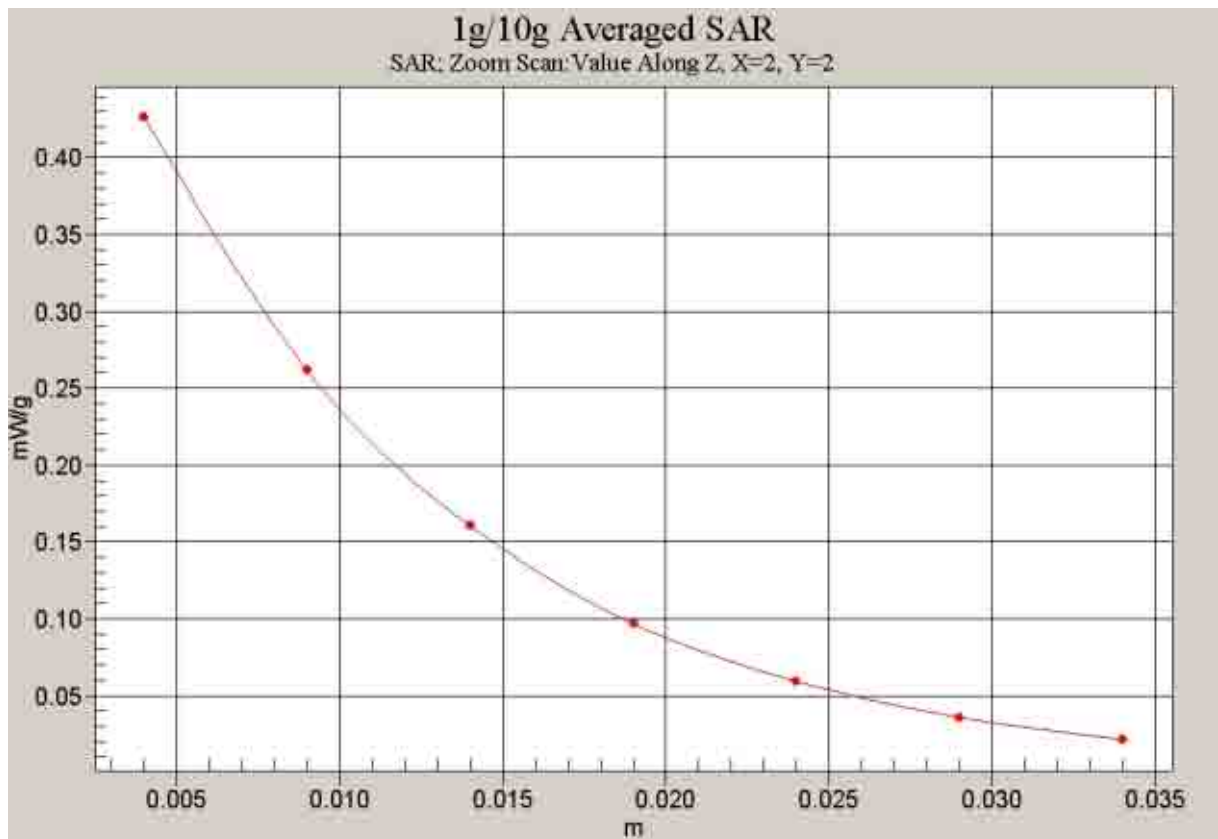


Fig. 72 Z-Scan at power reference point (1900 MHz CH661)

1900 Body Towards Phantom Low with GPRS

Date/Time: 2008-8-4 14:56:04

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:4

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Phantom Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.313 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.27 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.308 mW/g



0 dB = 0.308mW/g

Fig. 73 1900 MHz CH512

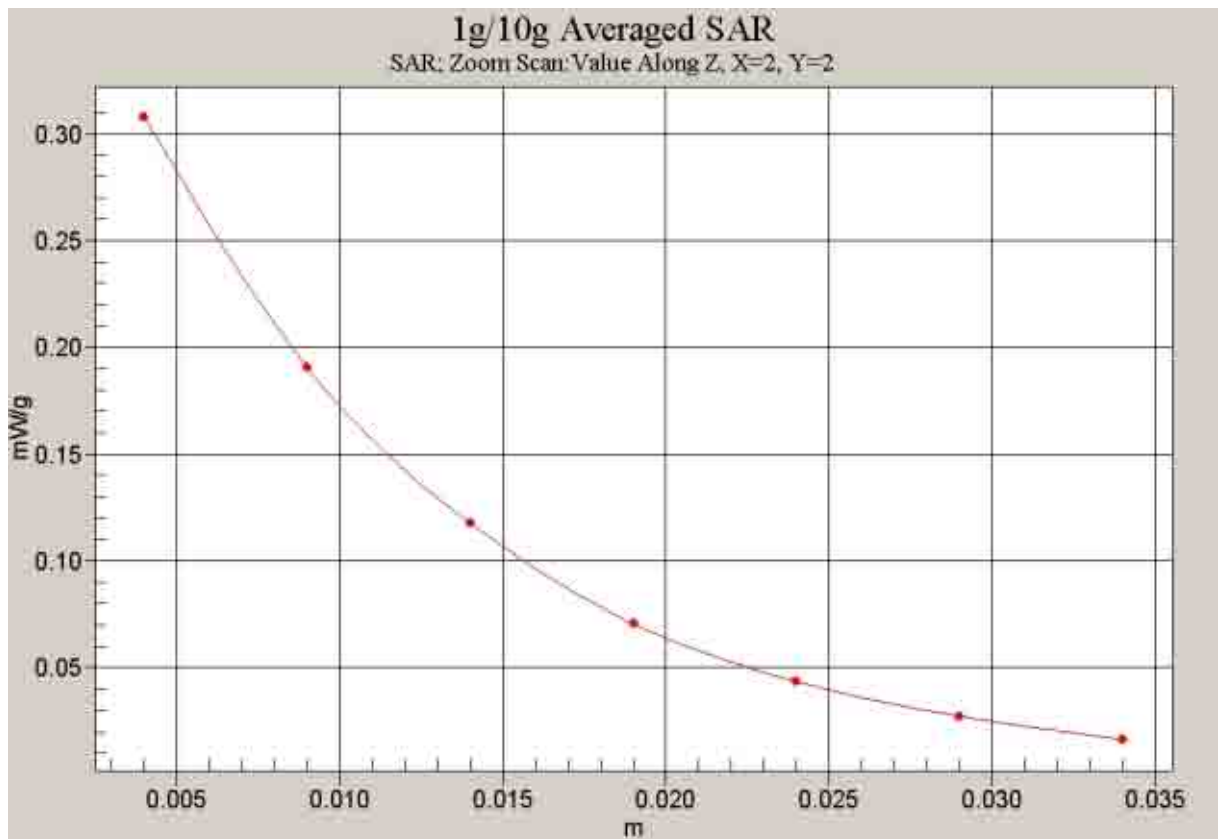


Fig. 74 Z-Scan at power reference point (1900 MHz CH512)

1900 Body Towards Ground High with Headset

Date/Time: 2008-8-4 15:08:46

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Ground High With Earphone/Area Scan (61x101x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.313 mW/g

Toward Ground High With Earphone/Zoom Scan (7x7x7)/Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.59 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.513 W/kg

SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.329 mW/g

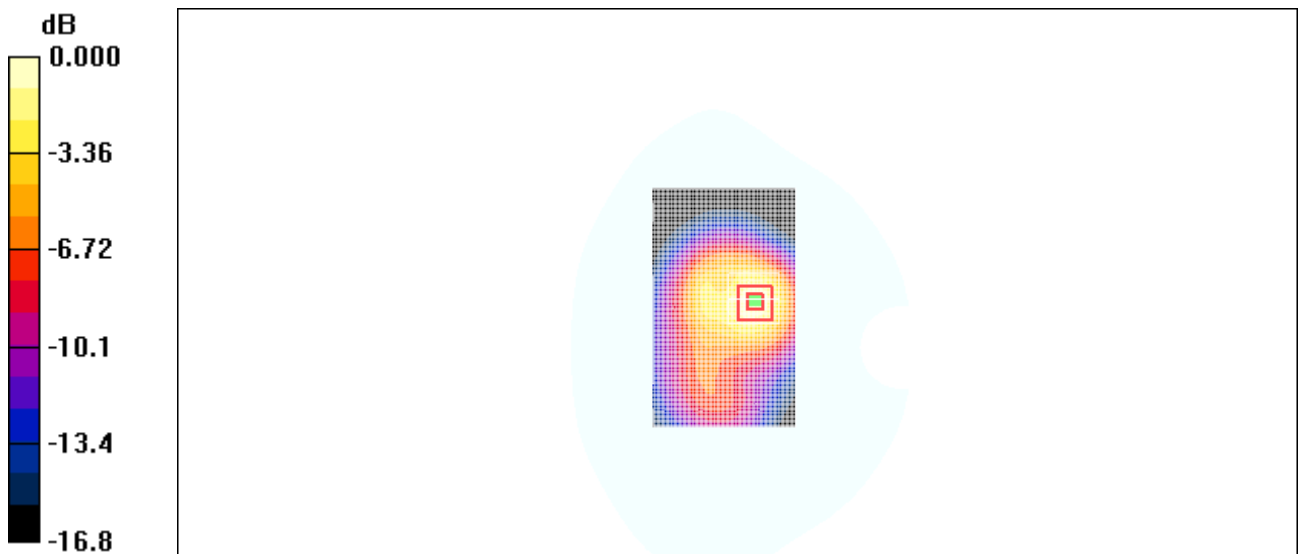

0 dB = 0.329mW/g

Fig. 75 1900 MHz CH810

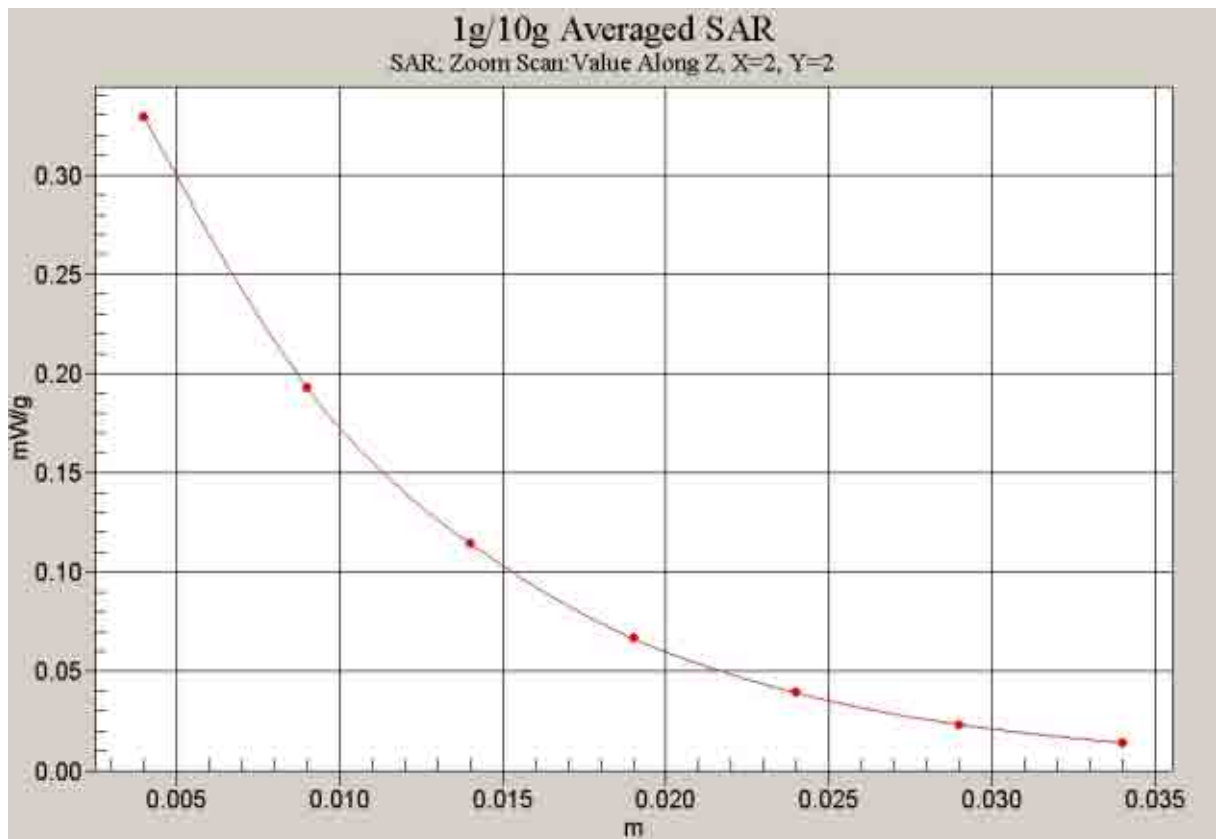


Fig. 76 Z-Scan at power reference point (1900 MHz CH810)

850 Body Toward Ground Low with Bluetooth function

Date/Time: 2008-8-1 15:39:45

Electronics: DAE4 Sn777

Medium: 850 Body

Medium parameters used (interpolated): $f = 825$ MHz; $\sigma = 0.993$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(5.66, 5.66, 5.66)

Toward Ground Low With Bluetooth/Area Scan (61x91x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.766 mW/g

Toward Ground Low With Bluetooth/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.712 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.759 mW/g

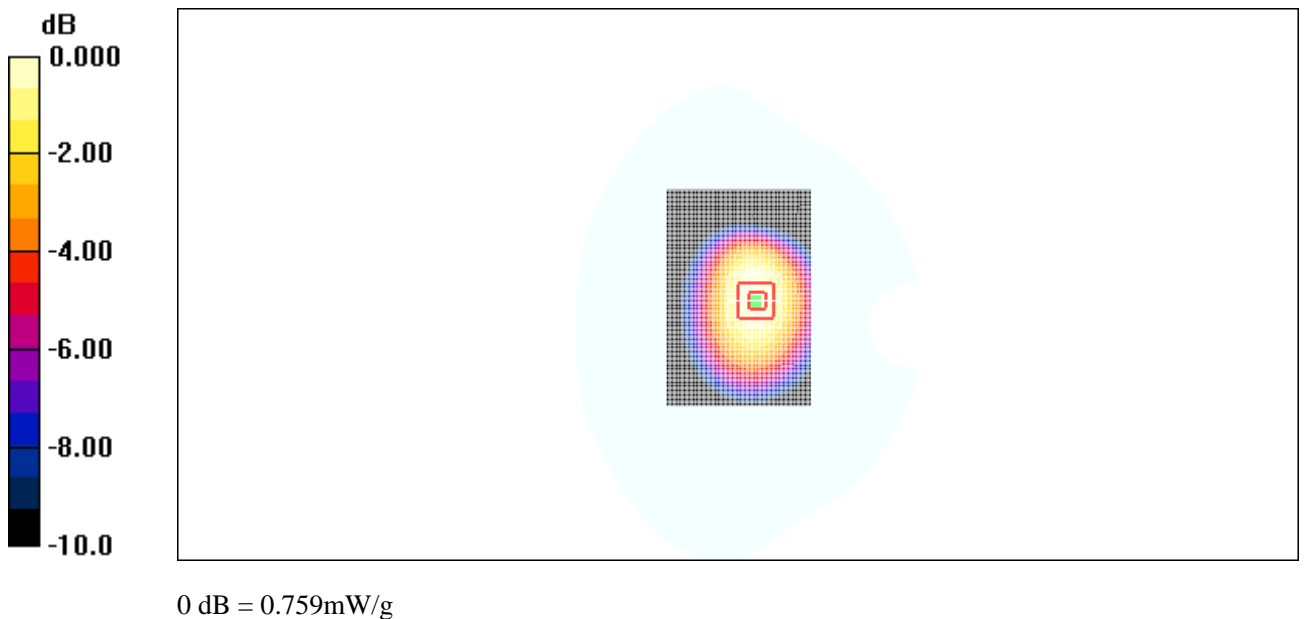


Fig. 77 850 MHz CH128 with Bluetooth function

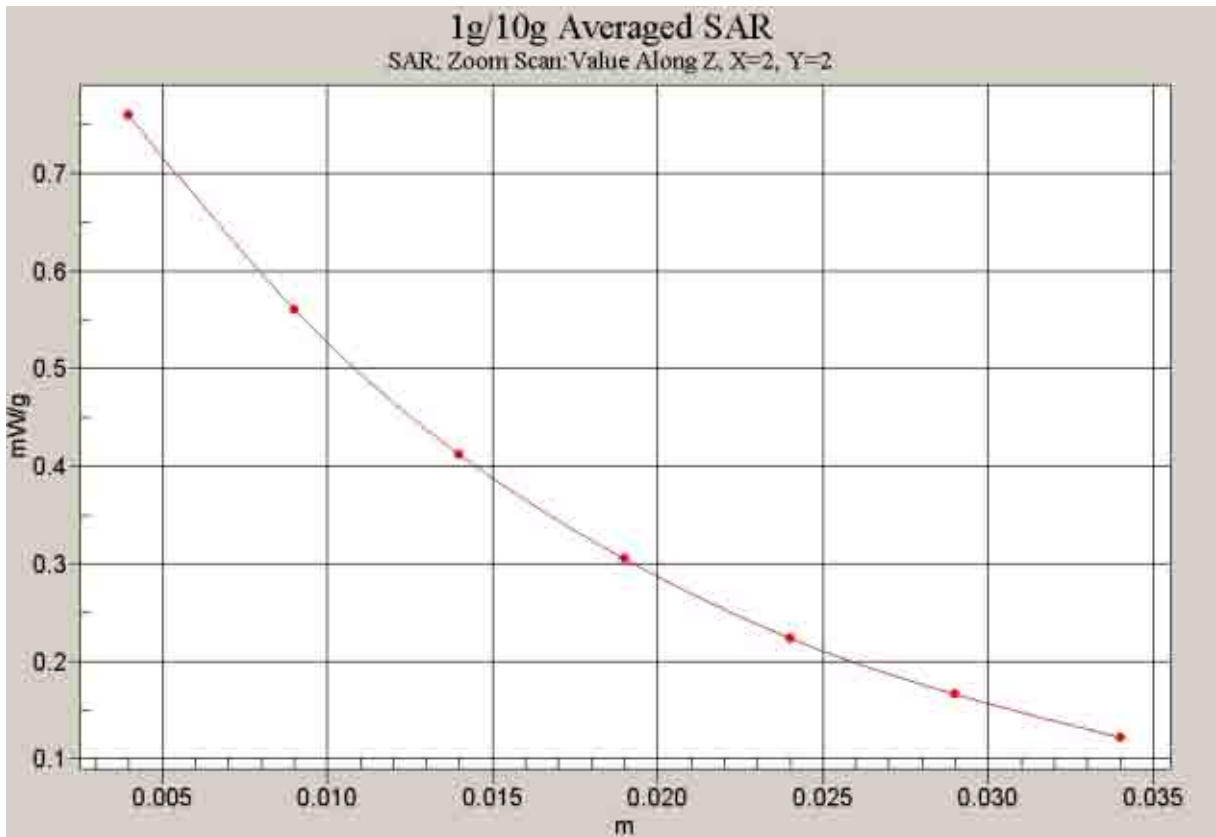


Fig. 78 Z-Scan at power reference point (850 MHz CH128)

1900 Body Towards Ground High with Bluetooth function

Date/Time: 2008-8-4 17:52:07

Electronics: DAE4 Sn777

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3142 ConvF(4.61, 4.61, 4.61)

Toward Ground High With Bluetooth/Area Scan (61x101x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.363 mW/g

Toward Ground High With Bluetooth/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.08 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.352 mW/g

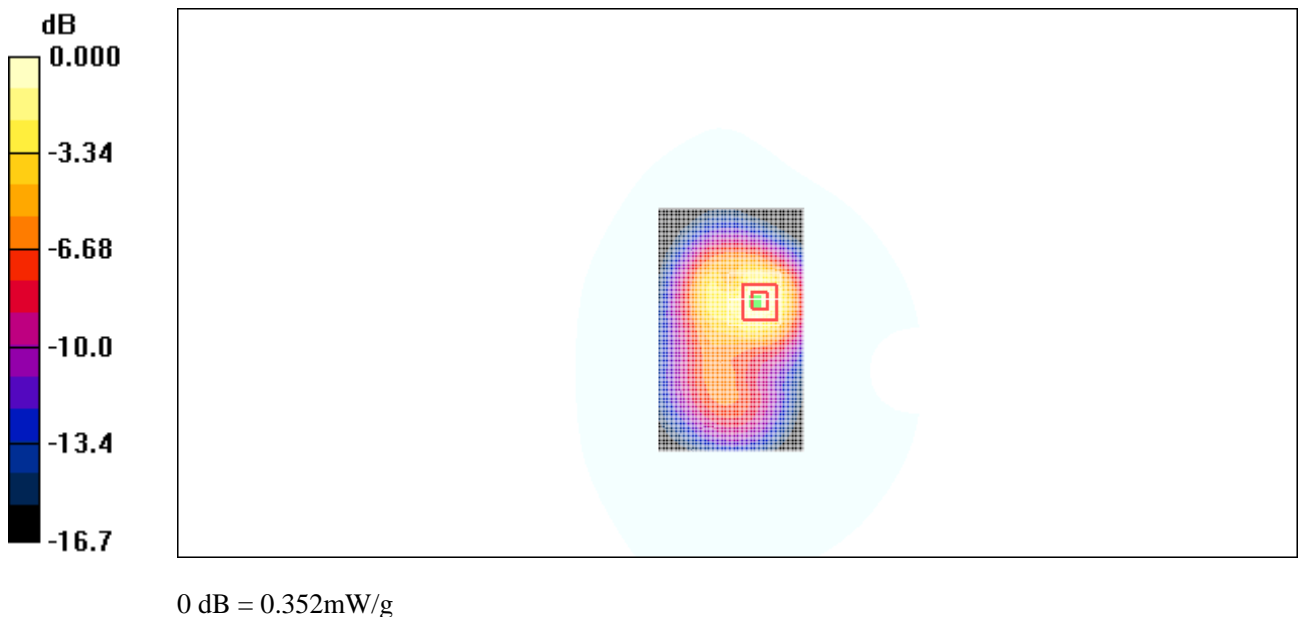


Fig. 79 1900 MHz CH810 with Bluetooth function

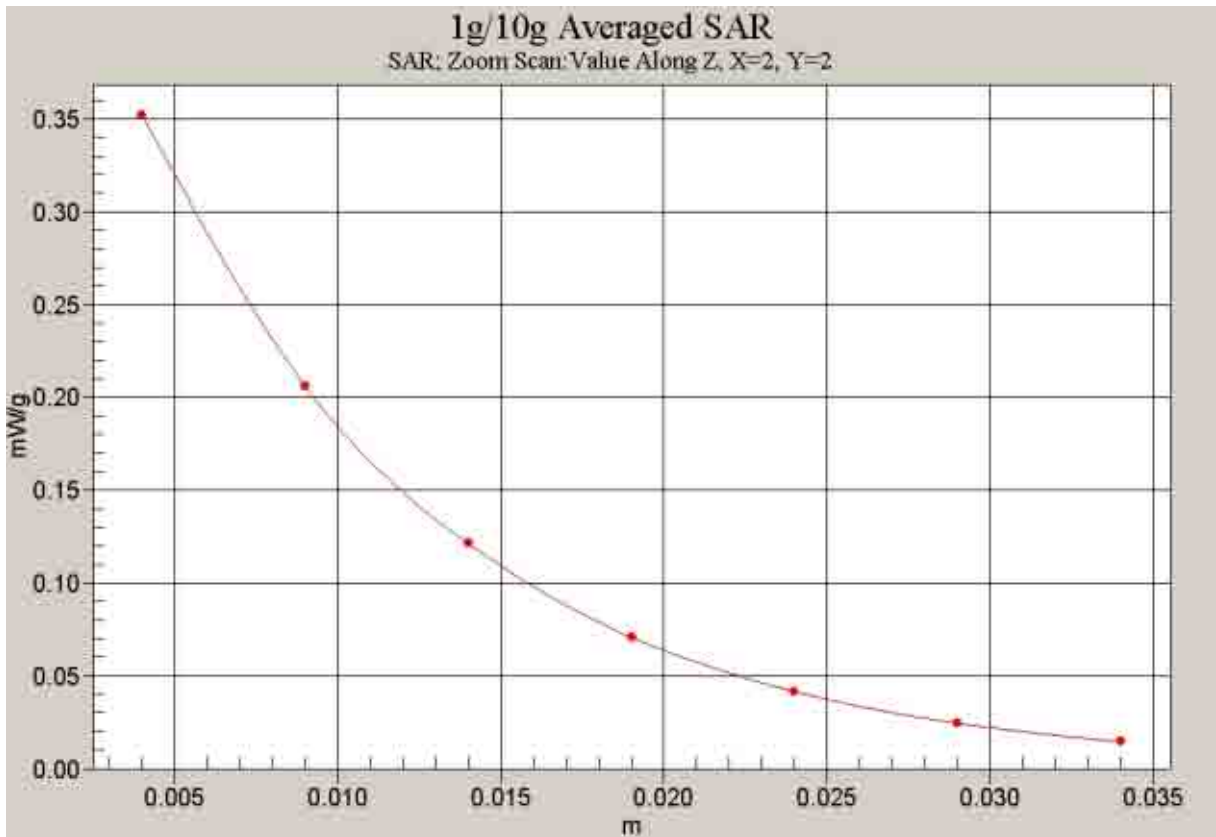


Fig. 80 Z-Scan at power reference point (1900 MHz CH810)

ANNEX D SYSTEM VALIDATION RESULTS

835MHzDAE777Probe3142

Date/Time: 2008-8-1 7:39:22

Electronics: DAE4 Sn777

Medium: 835 Head

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3142 ConvF(5.97, 5.97, 5.97)

835MHz/Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.68 mW/g


835MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.8 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.50 mW/g; SAR(10 g) = 1.62 mW/g

Maximum value of SAR (measured) = 2.69 mW/g

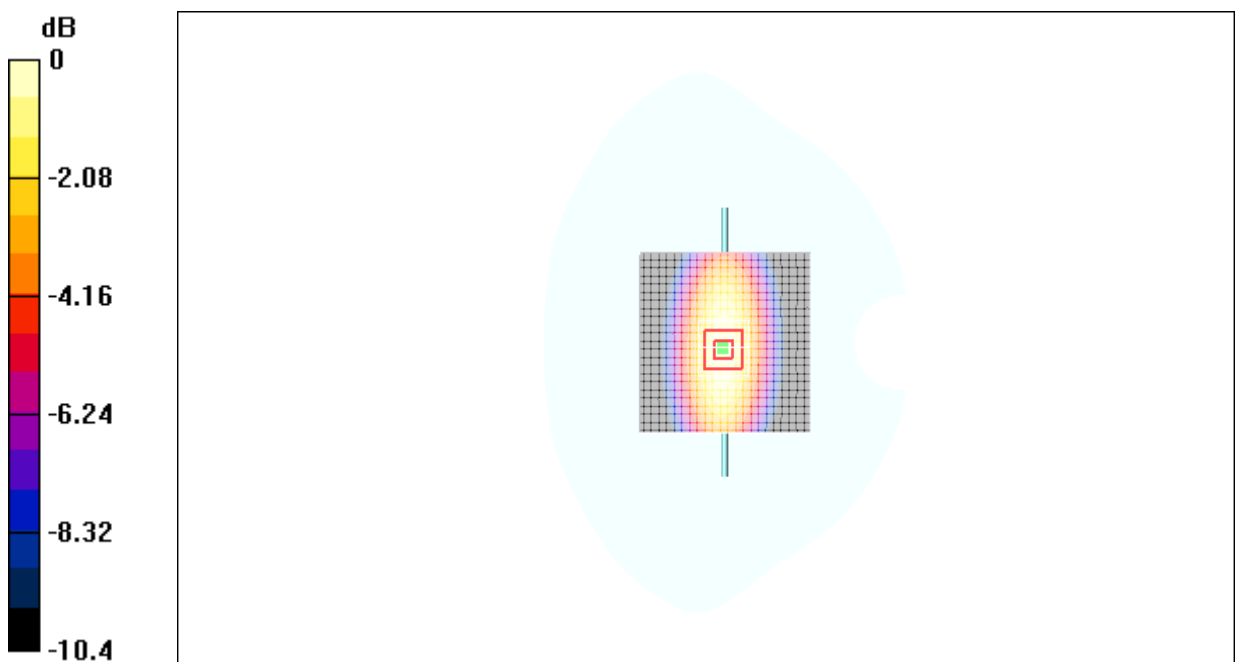

0 dB = 2.69mW/g

Fig.81 validation 835MHz 250mW

1900MHz DAE777Probe3142

Date/Time: 2008-8-4 7:49:11

Electronics: DAE4 Sn777

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 – SN3142 ConvF(5.66, 5.66, 5.66)

System Validation/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.2 mW/g

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.1 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.27 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

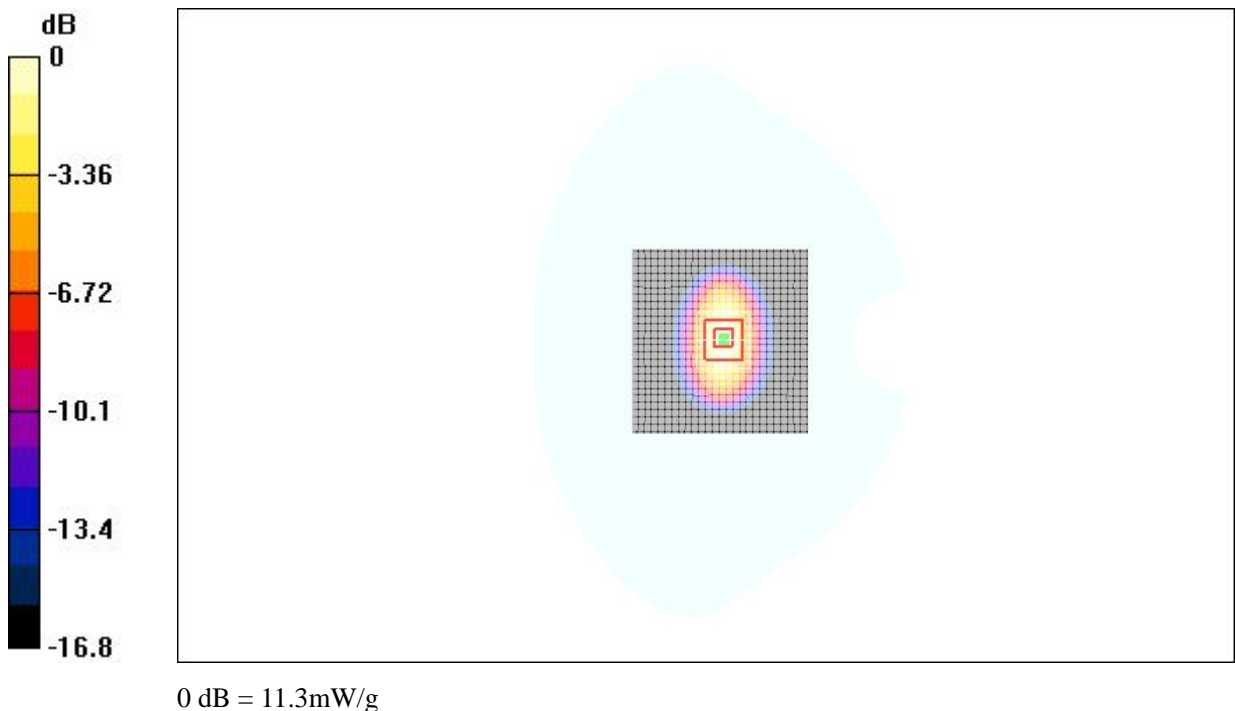


Fig.82 validation 1900MHz 250mW

ANNEX E PROBE CALIBRATION CERTIFICATE

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client: TMC Beijing

Certificate No.: ES3-3142_Sep07

CALIBRATION CERTIFICATE																																																			
Object	ES3DV3 - SN:3142																																																		
Calibration procedure(s)	QA CAL-01.v6 and QA CAL-12.v6 Calibration procedure for dosimetric E-field probes																																																		
Calibration date:	September 7, 2007																																																		
Condition of the calibrated item	In Tolerance																																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>28-Mar-07 (METAS, No. 217-00670)</td> <td>Mar-08</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>29-May-07 (METAS, No. 217-00670)</td> <td>Mar-08</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>28-Mar-07 (METAS, No. 217-00670)</td> <td>Mar-08</td> </tr> <tr> <td>Reference 5 dB Attenuator</td> <td>SN: S5054 (30)</td> <td>8-Aug-07 (METAS, No. 217-00719)</td> <td>Aug-08</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5088 (200)</td> <td>28-Mar-07 (METAS, No. 217-00671)</td> <td>Mar-08</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (300)</td> <td>8-Aug-07 (METAS, No. 217-00720)</td> <td>Aug-08</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>4-Jan-07 (SPEAG, No. ES3-3013_Jan07)</td> <td>Jan-08</td> </tr> <tr> <td>DAEA</td> <td>Str: 654</td> <td>20-Apr-07 (SPEAG, No. DAEA-654_Apr07)</td> <td>Apr-08</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Nov-05)</td> <td>In house check: Nov-07</td> </tr> <tr> <td>Network Analyzer HP 8733E</td> <td>US37390585</td> <td>18-Oct-01 (SPEAG, in house check Oct-06)</td> <td>In house check: Oct-07</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	28-Mar-07 (METAS, No. 217-00670)	Mar-08	Power sensor E4412A	MY41495277	29-May-07 (METAS, No. 217-00670)	Mar-08	Power sensor E4412A	MY41498087	28-Mar-07 (METAS, No. 217-00670)	Mar-08	Reference 5 dB Attenuator	SN: S5054 (30)	8-Aug-07 (METAS, No. 217-00719)	Aug-08	Reference 20 dB Attenuator	SN: S5088 (200)	28-Mar-07 (METAS, No. 217-00671)	Mar-08	Reference 30 dB Attenuator	SN: S5129 (300)	8-Aug-07 (METAS, No. 217-00720)	Aug-08	Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08	DAEA	Str: 654	20-Apr-07 (SPEAG, No. DAEA-654_Apr07)	Apr-08	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07	Network Analyzer HP 8733E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	28-Mar-07 (METAS, No. 217-00670)	Mar-08																																																
Power sensor E4412A	MY41495277	29-May-07 (METAS, No. 217-00670)	Mar-08																																																
Power sensor E4412A	MY41498087	28-Mar-07 (METAS, No. 217-00670)	Mar-08																																																
Reference 5 dB Attenuator	SN: S5054 (30)	8-Aug-07 (METAS, No. 217-00719)	Aug-08																																																
Reference 20 dB Attenuator	SN: S5088 (200)	28-Mar-07 (METAS, No. 217-00671)	Mar-08																																																
Reference 30 dB Attenuator	SN: S5129 (300)	8-Aug-07 (METAS, No. 217-00720)	Aug-08																																																
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08																																																
DAEA	Str: 654	20-Apr-07 (SPEAG, No. DAEA-654_Apr07)	Apr-08																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07																																																
Network Analyzer HP 8733E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07																																																
Calibrated by:	Name: Kees Pokovic	Function: Technical Manager	Signature:																																																
Approved by:	Name: Hans Kuntz	Function: Quality Manager	Signature:																																																
			Issued: September 10, 2007																																																
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f < 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3142

September 7, 2007

Probe ES3DV3

SN:3142

Manufactured:	March 13, 2007
Calibrated:	September 7, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3142

September 7, 2007

DASY - Parameters of Probe: ES3DV3 SN:3142

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.21 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	96 mV
NormY	1.28 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	95 mV
NormZ	1.15 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	96 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{iso} [%]	Without Correction Algorithm	2.6	0.8
SAR _{iso} [%]	With Correction Algorithm	0.0	0.4

TSL 1810 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR _{iso} [%]	Without Correction Algorithm	7.6	4.5
SAR _{iso} [%]	With Correction Algorithm	0.2	0.1

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3142

September 7, 2007

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)



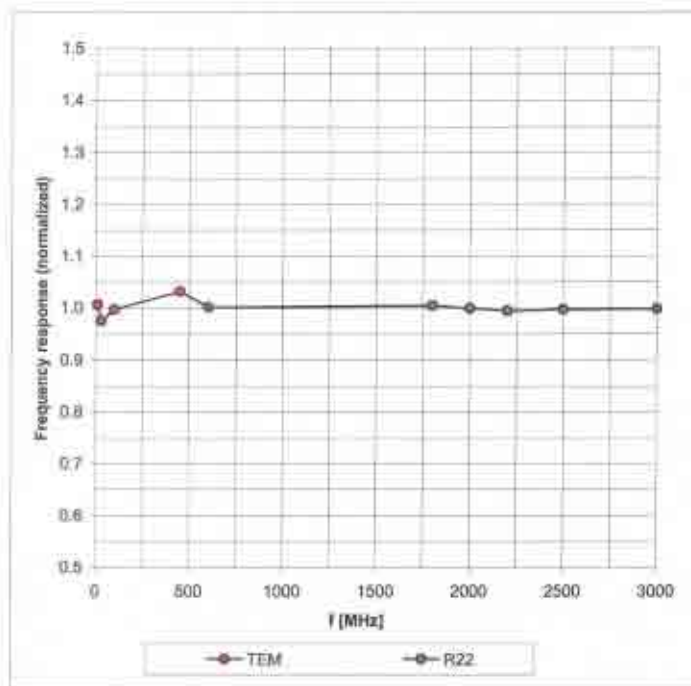


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

ES3DV3 SN:3142

September 7, 2007

Receiving Pattern (ϕ), $\theta = 0^\circ$

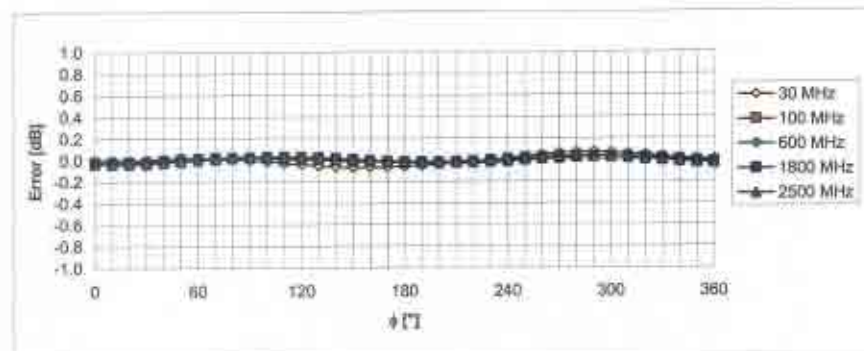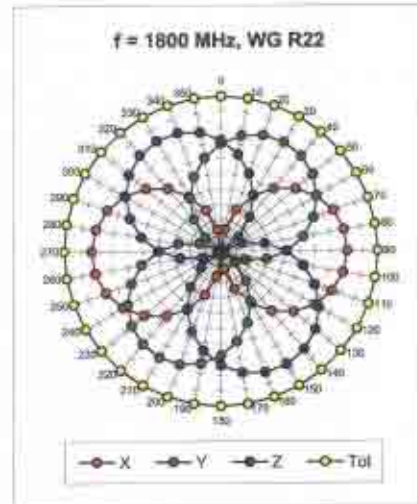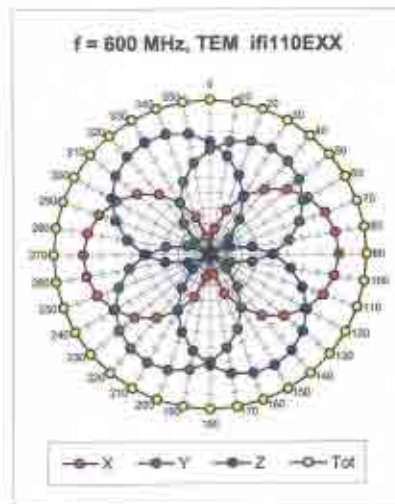


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ES3DV3 SN:3142

September 7, 2007

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800$ MHz)


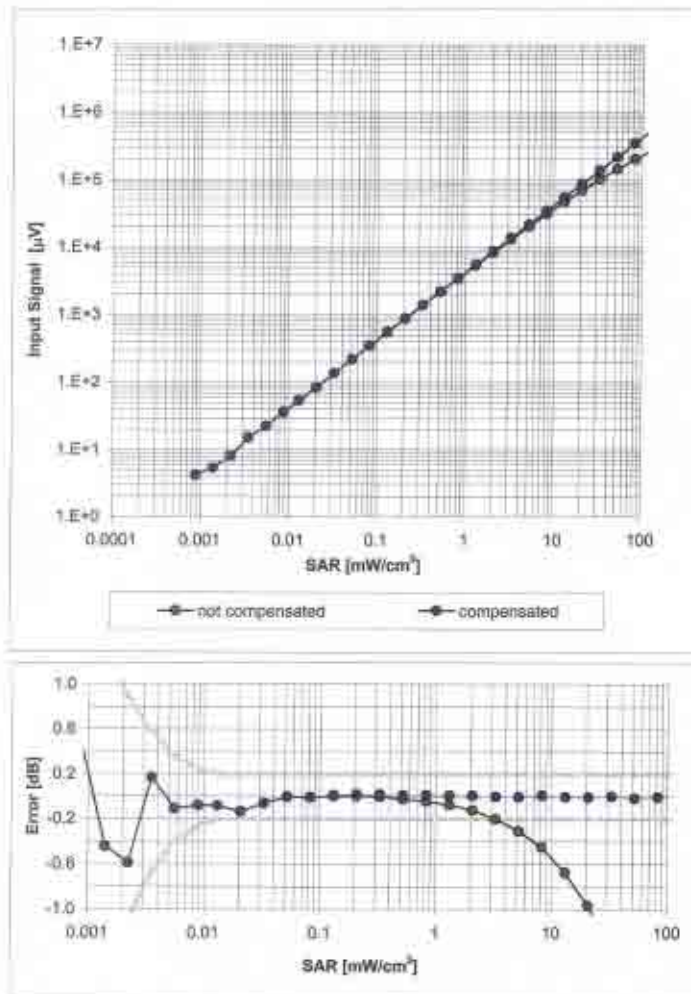


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ES3DV3 SN:3142

September 7, 2007

Conversion Factor Assessment

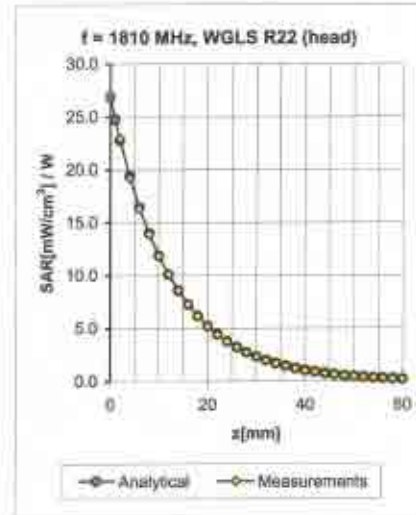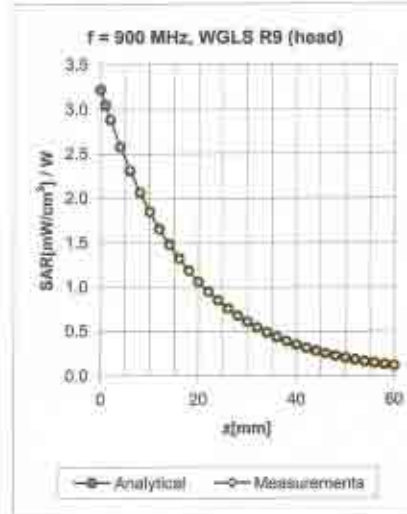

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.32	1.29	6.16 ± 13.3% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.87 ± 5%	1.00	1.09	5.97 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.60	1.41	4.87 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.24	1.24	6.68 ± 13.3% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.94	1.16	5.66 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.73	1.33	4.81 ± 11.0% (k=2)


^c The validity of ± 100 MHz only applies for DASV v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3142

September 7, 2007

Deviation from Isotropy in HSL

Error (ϕ, θ), $f = 900$ MHz

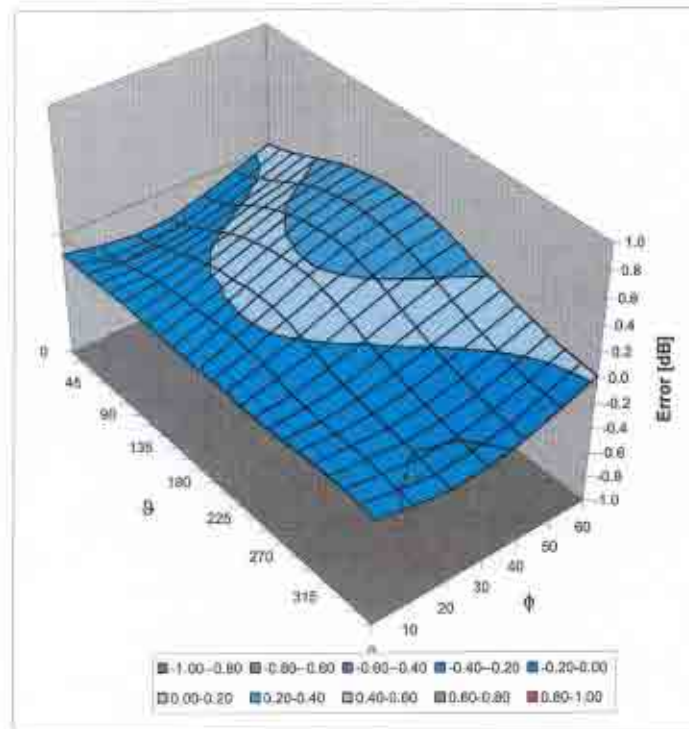

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

ANNEX F DIPOLE CALIBRATION CERTIFICATE

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates
Client: TMC China

Accreditation No.: SCS 108

Certificate No: D835V2-443_Feb07

CALIBRATION CERTIFICATE																																															
Object	D835V2-SN: 443																																														
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits																																														
Calibration date:	February 19, 2007																																														
Condition of the calibrated item	In Tolerance																																														
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted at an environment temperature (22±3)°C and humidity<70%</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID#</th> <th>Cal Data (Calibrated by, Certification NO.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM-442A</td> <td>GB37480704</td> <td>03-Oct-06 (METAS, NO. 217-00608)</td> <td>Oct-07</td> </tr> <tr> <td>Power sensor 8481A</td> <td>US37292783</td> <td>03-Oct-06 (METAS, NO. 217-00608)</td> <td>Oct-07</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN:5086 (20g)</td> <td>10-Aug-06 (METAS, NO. 217-00591)</td> <td>Aug-07</td> </tr> <tr> <td>Reference 10 dB Attenuator</td> <td>SN:5047_2 (10r)</td> <td>10-Aug-06 (METAS, NO. 217-00591)</td> <td>Aug-07</td> </tr> <tr> <td>DAE4</td> <td>SN:601</td> <td>30-Jan-07 (SPEAG, NO.DAE4-601_Jan07)</td> <td>Jan-08</td> </tr> <tr> <td>Reference Probe ET3DV6 (HF)</td> <td>SN: 1507</td> <td>19-Oct-06 (SPEAG, NO. ET3-1507_Oct06)</td> <td>Oct-07</td> </tr> <tr> <th>Secondary Standards</th> <th>ID#</th> <th>Check Data (in house)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092317</td> <td>18-Oct-02(SPEAG, in house check Oct-05)</td> <td>In house check: Oct-07</td> </tr> <tr> <td>RF generator Agilent E4421B</td> <td>MY41000675</td> <td>11-May-05(SPEAG, in house check Nov-05)</td> <td>In house check: Nov -07</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585S4206</td> <td>18-Oct-01(SPEAG, in house check Oct-06)</td> <td>In house check: Oct -07</td> </tr> </tbody> </table>				Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration	Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, NO. 217-00608)	Oct-07	Power sensor 8481A	US37292783	03-Oct-06 (METAS, NO. 217-00608)	Oct-07	Reference 20 dB Attenuator	SN:5086 (20g)	10-Aug-06 (METAS, NO. 217-00591)	Aug-07	Reference 10 dB Attenuator	SN:5047_2 (10r)	10-Aug-06 (METAS, NO. 217-00591)	Aug-07	DAE4	SN:601	30-Jan-07 (SPEAG, NO.DAE4-601_Jan07)	Jan-08	Reference Probe ET3DV6 (HF)	SN: 1507	19-Oct-06 (SPEAG, NO. ET3-1507_Oct06)	Oct-07	Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration	Power sensor HP 8481A	MY41092317	18-Oct-02(SPEAG, in house check Oct-05)	In house check: Oct-07	RF generator Agilent E4421B	MY41000675	11-May-05(SPEAG, in house check Nov-05)	In house check: Nov -07	Network Analyzer HP 8753E	US37390585S4206	18-Oct-01(SPEAG, in house check Oct-06)	In house check: Oct -07
Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration																																												
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, NO. 217-00608)	Oct-07																																												
Power sensor 8481A	US37292783	03-Oct-06 (METAS, NO. 217-00608)	Oct-07																																												
Reference 20 dB Attenuator	SN:5086 (20g)	10-Aug-06 (METAS, NO. 217-00591)	Aug-07																																												
Reference 10 dB Attenuator	SN:5047_2 (10r)	10-Aug-06 (METAS, NO. 217-00591)	Aug-07																																												
DAE4	SN:601	30-Jan-07 (SPEAG, NO.DAE4-601_Jan07)	Jan-08																																												
Reference Probe ET3DV6 (HF)	SN: 1507	19-Oct-06 (SPEAG, NO. ET3-1507_Oct06)	Oct-07																																												
Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration																																												
Power sensor HP 8481A	MY41092317	18-Oct-02(SPEAG, in house check Oct-05)	In house check: Oct-07																																												
RF generator Agilent E4421B	MY41000675	11-May-05(SPEAG, in house check Nov-05)	In house check: Nov -07																																												
Network Analyzer HP 8753E	US37390585S4206	18-Oct-01(SPEAG, in house check Oct-06)	In house check: Oct -07																																												
Calibrated by:	Name Marcel Fehr	Function Laboratory Technician	Signature 																																												
Approved by:	Katja Pokovic	Technical Director																																													
Issued: February 21, 2007																																															
This calibration certificate shall not be reported except in full without written approval of the laboratory.																																															

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.9 \pm 6 %	0.88 mho/m \pm 6 %
Head TSL temperature during test	(21.2 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.48 mW / g
SAR normalized	normalized to 1W	9.90 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.70 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.60 mW / g
SAR normalized	normalized to 1W	6.40 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.31 mW / g \pm 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.5 Ω - 6.8 $\mu\Omega$
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.402 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 3, 2001

DASY4 Validation Report for Head TSL

Date/Time: 19.02.2007 10:04:15

Test laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; serial: D835V2-SN: 443

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f=835$ MHz; $\sigma=0.88$ mho/m; $\epsilon_r=39.9$; $\rho=1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6-SN1507(HF); ConvF(6.01,6.01,6.01); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.1_2007
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172


$P_{in} = 250$ mW; $d = 15$ mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 56.6 V/m; Power Drift = 0.010 dB


Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.60 mW/g

Maximum value of SAR (measured) = 2.70 mW/g

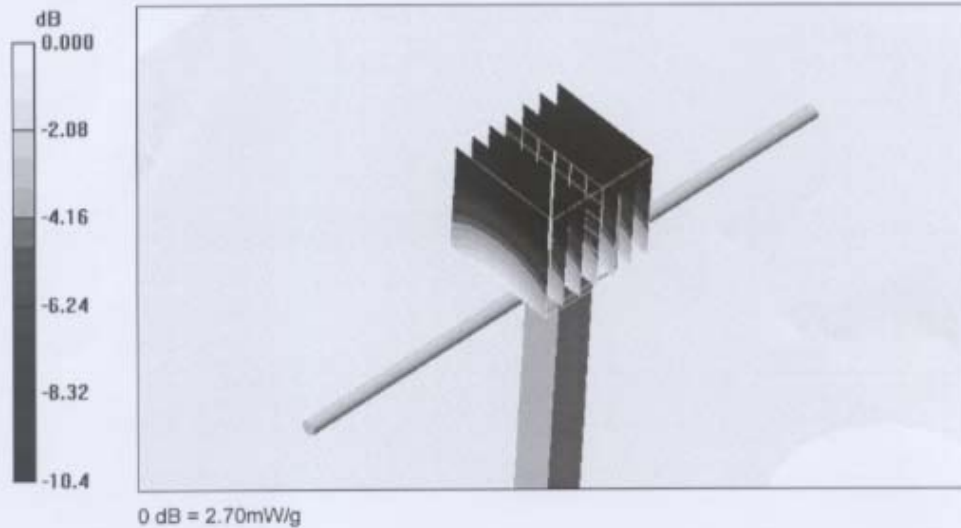

Impedance measurement Plot for Head TSL

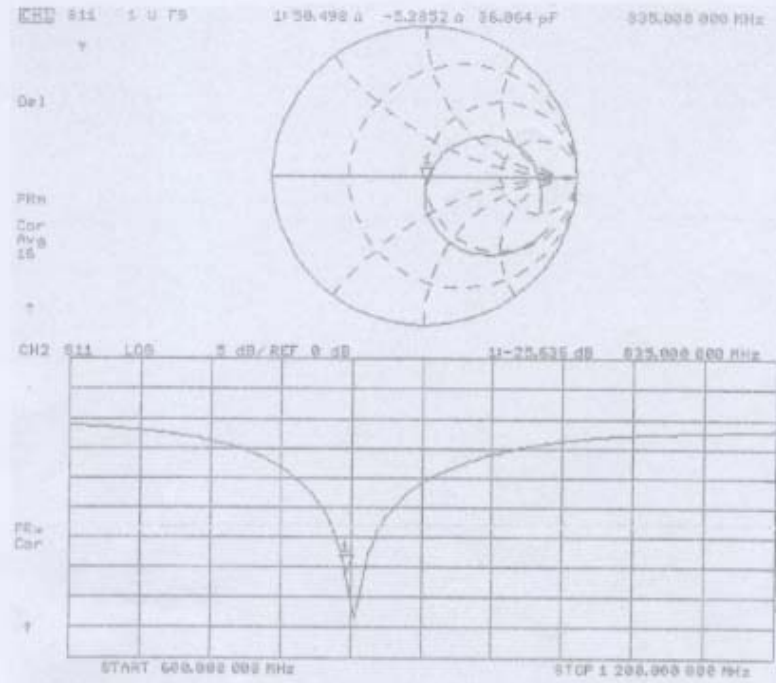

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di tarature
S Swiss Calibration Service

Accredited by the Swiss Federal Office of metrology and accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client TMC China

Certificate No: D1900V2-541_Feb07

CALIBRATION CERTIFICATE

Object	D1900V2-SN: 541
Calibration procedure(s)	QA CAL-05.v6 Calibration procedure for dipole validation kits
Calibration date:	February 20, 2007
Condition of the calibrated item	In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements(SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted at an environment temperature (22±3)°C and humidity<70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	03-Oct-06 (METAS, NO. 217-00608)	Oct-07
Power sensor 8481A	US37282783	03-Oct-06 (METAS, NO. 217-00608)	Oct-07
Reference 20 dB Attenuator	SN:5086 (20g)	10-Aug-05 (METAS, NO. 217-00591)	Aug-07
Reference 10 dB Attenuator	SN:5047_2 (10r)	10-Aug-05 (METAS, NO. 217-00591)	Aug-07
DAE4	SN:901	30-Jan-07 (SPEAG, NO DAE4-501_Jan07)	Jan-08
Reference Probe ET3DV6 (HF)	SN: 1507	19-Oct-06 (SPEAG, NO. ET3-1507_Oct06)	Oct-07
Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration
Power sensor HP 8481A	MY41082317	18-Oct-02(SPEAG, in house check Oct-05)	In house check: Oct-07
RF generator Agilent E4421B	MY41000676	11-May-05(SPEAG, in house check Nov-05)	In house check: Nov -07
Network Analyzer HP 8753E	US37390585S4206	18-Oct-01(SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Marcel Fehr	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Director	

Issued: February 21, 2007

This calibration certificate shall not be reported except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.9 ± 6 %	1.38 mho/m ± 6 %
Head TSL temperature during test	(22.1 ± 0.2) °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	9.73 mW /g
SAR normalized	normalized to 1W	38.9 mW /g
SAR for nominal Head TSL parameters ¹	normalized to 1W	38.6 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.09 mW /g
SAR normalized	normalized to 1W	20.4 mW /g
SAR for nominal Head TSL parameters ¹	normalized to 1W	20.2 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.4 Ω - 8.9 j Ω
Return Loss	- 26.4 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.214 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 4 , 2001

DASY4 Validation Report for Head TSL

Date/Time: 20.02.2007 09:25:37

Test laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; serial: D1900V2-SN: 541

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f=1900$ MHz; $\sigma=1.38$ mho/m; $\epsilon_r=38.9$; $\rho=1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6-SN1507(HF); ConvF(5.03, 5.03, 5.03); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.1_2007
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA;
- Measurement SW: DASY, V4.7 Build 53; Post processing SW: SEMCAD, V1.8 Build 172


$P_{in} = 250$ mW; $d = 15$ mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 92.1 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.09 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

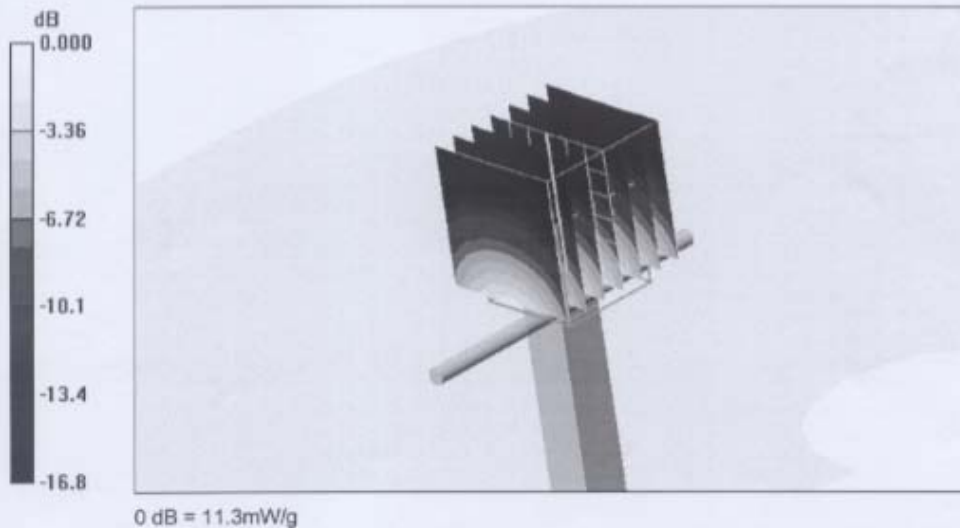

Impedance measurement Plot for Head TSL

