



SAR TEST REPORT

No. 2009SAR00042

For

TCT Mobile Limited

GSM/GPRS/EDGE 850/1800/1900 Tri-band mobile phone

Jade A

OT-800A

With

Hardware Version: PIO

Software Version: V125

FCCID: RAD106

Issued Date: 2009-07-01



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcom@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

TABLE OF CONTENT

| | |
|--|-----------|
| 1 TEST LABORATORY | 3 |
| 1.1 TESTING LOCATION | 3 |
| 1.2 TESTING ENVIRONMENT..... | 3 |
| 1.3 PROJECT DATA | 3 |
| 1.4 SIGNATURE..... | 3 |
| 2 CLIENT INFORMATION | 4 |
| 2.1 APPLICANT INFORMATION | 4 |
| 2.2 MANUFACTURER INFORMATION | 4 |
| 3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 5 |
| 3.1 ABOUT EUT | 5 |
| 3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 5 |
| 3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 5 |
| 4 CHARACTERISTICS OF THE TEST | 5 |
| 4.1 APPLICABLE LIMIT REGULATIONS | 5 |
| 4.2 APPLICABLE MEASUREMENT STANDARDS..... | 5 |
| 5 OPERATIONAL CONDITIONS DURING TEST | 6 |
| 5.1 SCHEMATIC TEST CONFIGURATION..... | 6 |
| 5.2 SAR MEASUREMENT SET-UP..... | 6 |
| 5.3 DASY4 E-FIELD PROBE SYSTEM..... | 7 |
| 5.4 E-FIELD PROBE CALIBRATION | 8 |
| 5.5 OTHER TEST EQUIPMENT | 9 |
| 5.6 EQUIVALENT TISSUES..... | 10 |
| 5.7 SYSTEM SPECIFICATIONS..... | 10 |
| 6 LABORATORY ENVIRONMENT | 11 |
| 7 CONDUCTED OUTPUT POWER MEASUREMENT..... | 11 |
| 7.1 SUMMARY | 11 |
| 7.2 CONDUCTED POWER | 11 |
| 8 TEST RESULTS | 12 |
| 8.1 DIELECTRIC PERFORMANCE | 12 |
| 8.2 SYSTEM VALIDATION..... | 12 |
| 8.3 SUMMARY OF MEASUREMENT RESULTS (850MHz) | 13 |
| 8.4 SUMMARY OF MEASUREMENT RESULTS (1900MHz) | 14 |
| 8.5 SUMMARY OF MEASUREMENT RESULTS (BLUETOOTH FUNCTION) | 15 |
| 8.6 CONCLUSION..... | 15 |
| 9 MEASUREMENT UNCERTAINTY | 16 |
| 10 MAIN TEST INSTRUMENTS | 17 |
| ANNEX A MEASUREMENT PROCESS..... | 18 |
| ANNEX B TEST LAYOUT | 19 |
| ANNEX C GRAPH RESULTS..... | 24 |
| ANNEX D SYSTEM VALIDATION RESULTS | 66 |
| ANNEX E PROBE CALIBRATION CERTIFICATE..... | 70 |
| ANNEX F DIPOLE CALIBRATION CERTIFICATE | 79 |

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: +86-10-62303288
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

1.3 Project Data

Project Leader: Sun Qian
Test Engineer: Lin Xiaojun
Testing Start Date: May 13, 2009
Testing End Date: May 14, 2009


1.4 Signature



Lin Xiaojun
(Prepared this test report)



Sun Qian
(Reviewed this test report)

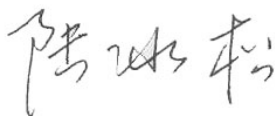

Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Client Information

2.1 Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 4/F, South Building, No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-61460876
Fax: 0086 21 6146 0602

2.2 Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 4/F, South Building, No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-61460876
Fax: 0086 21 6146 0602

3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

| | |
|---------------------|---|
| EUT Description: | GSM/GPRS/EDGE 850/1800/1900 Tri-band mobile phone |
| Model Name: | Jade A |
| Marketing Name: | OT-800A |
| GSM Frequency Band: | GSM 850/GSM 1900 |

3.2 Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version |
|---------|-----------------|------------|------------|
| EUT1 | 011851000001902 | PIO | V125 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3 Internal Identification of AE used during the test

| AE ID* | Description | Model | SN | Manufacturer |
|--------|----------------|--------------|-------------|------------------|
| AE1 | Travel Charger | T5002684AGAC | \ | BYD |
| AE2 | Travel Charger | T5002684AGAA | \ | Tenpao |
| AE3 | Battery | CAB30P0000C1 | B0499601B6A | BYD |
| AE4 | Headset | T5003308AAAA | \ | Shunda/Quancheng |

*AE ID: is used to identify the test sample in the lab internally.

4 CHARACTERISTICS OF THE TEST

4.1 Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

4.2 Applicable Measurement Standards

EN 50361–2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEC 62209-2 (Draft): Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the Body.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

5 OPERATIONAL CONDITIONS DURING TEST

5.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.


The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

5.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for

measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

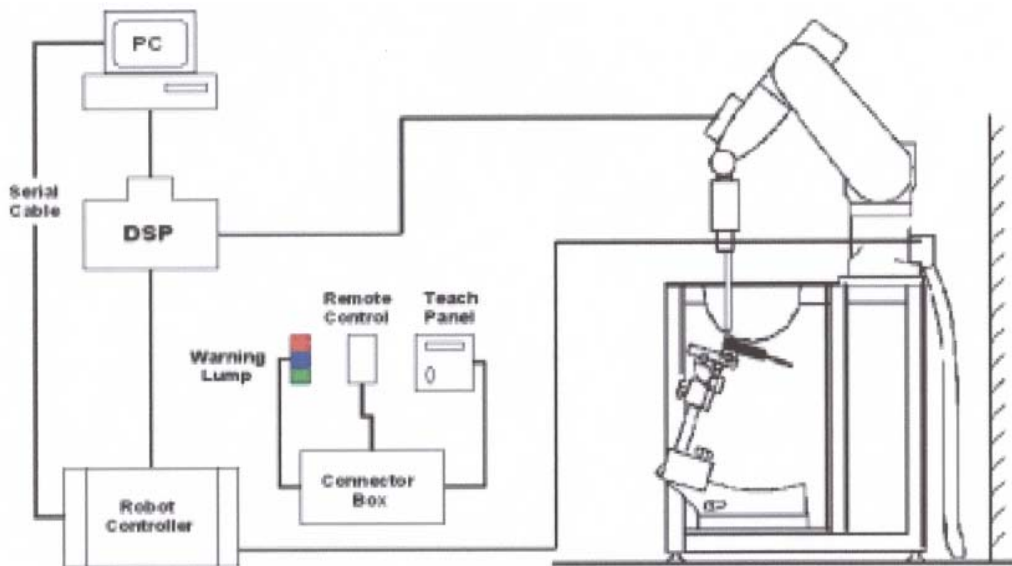

Picture 2: SAR Lab Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ES3DV3 Probe Specification

| | |
|--------------|---|
| Construction | Symmetrical design with triangular core |
| | Interleaved sensors |

Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration Basic Broad Band Calibration in air
Conversion Factors (CF) for HSL 900 and HSL 1810

Additional CF for other liquids and frequencies upon request



Picture 3: ES3DV3 E-field

Frequency 10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)

Directivity ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.3 dB in tissue material (rotation normal to probe axis)

Dynamic Range 5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB

Dimensions Overall length: 330 mm (Tip: 20 mm)
Tip diameter: 3.9 mm (Body: 12 mm)
Distance from probe tip to dipole centers: 2.0 mm

Application General dosimetry up to 4 GHz
Dosimetry in strong gradient fields
Compliance tests of mobile phones



Picture4:ES3DV3 E-field probe

5.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).



Picture 5: Device Holder

5.5 Other Test Equipment

5.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

5.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

| | |
|-----------------|---------------------------------|
| Shell Thickness | 2±0.1 mm |
| Filling Volume | Approx. 20 liters |
| Dimensions | 810 x 1000 x 500 mm (H x L x W) |
| Available | Special |



Picture 6: Generic Twin Phantom

5.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 1 and 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Table 1. Composition of the Head Tissue Equivalent Matter

| MIXTURE % | FREQUENCY 850MHz |
|------------------------------------|---|
| Water | 41.45 |
| Sugar | 56.0 |
| Salt | 1.45 |
| Preventol | 0.1 |
| Cellulose | 1.0 |
| Dielectric Parameters Target Value | f=850MHz $\epsilon=41.5$ $\sigma=0.90$ |
| MIXTURE % | FREQUENCY 1900MHz |
| Water | 55.242 |
| Glycol monobutyl | 44.452 |
| Salt | 0.306 |
| Dielectric Parameters Target Value | f=1900MHz $\epsilon=40.0$ $\sigma=1.40$ |

Table 2. Composition of the Body Tissue Equivalent Matter

| MIXTURE % | FREQUENCY 850MHz |
|------------------------------------|---|
| Water | 52.5 |
| Sugar | 45.0 |
| Salt | 1.4 |
| Preventol | 0.1 |
| Cellulose | 1.0 |
| Dielectric Parameters Target Value | f=850MHz $\epsilon=55.2$ $\sigma=0.97$ |
| MIXTURE % | FREQUENCY 1900MHz |
| Water | 69.91 |
| Glycol monobutyl | 29.96 |
| Salt | 0.13 |
| Dielectric Parameters Target Value | f=1900MHz $\epsilon=53.3$ $\sigma=1.52$ |

5.7 System Specifications

5.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features:Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.
Optical uplink for commands and clock

6 LABORATORY ENVIRONMENT

Table 3: The Ambient Conditions during EMF Test

| | |
|---|----------------------------|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 30%, Max. = 70% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surround objects is minimized and in compliance with requirement of standards. | |

7 CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

7.2 Conducted Power

7.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at low, middle and high channels.

7.2.2 Measurement result

Table 4: Conducted Power Measurement Results

| GSM 850MHZ | Conducted Power (dBm) | | |
|----------------|------------------------|-----------------------|------------------------|
| | Channel 251(848.8MHz) | Channel 190(836.6MHz) | Channel 128(824.2MHz) |
| | 32.31 | 32.36 | 32.35 |
| GSM 1900MHZ | Conducted Power (dBm) | | |
| | Channel 810(1909.8MHz) | Channel 661(1880MHz) | Channel 512(1850.2MHz) |
| | 29.43 | 29.52 | 29.70 |

7.2.3 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 8 to Table 11 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

8 TEST RESULTS

8.1 Dielectric Performance

Table 5: Dielectric Performance of Head Tissue Simulating Liquid

| Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz May 13,2009 1900 MHz May 14,2009 | | | |
|--|-----------|-------------------------|-----------------------------|
| / | Frequency | Permittivity ϵ | Conductivity σ (S/m) |
| Target value | 850 MHz | 41.5 | 0.90 |
| | 1900 MHz | 40.0 | 1.40 |
| Measurement value (Average of 10 tests) | 850 MHz | 40.3 | 0.92 |
| | 1900 MHz | 39.2 | 1.42 |

Table 6: Dielectric Performance of Body Tissue Simulating Liquid

| Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz May 13,2009 1900 MHz May 14,2009 | | | |
|--|-----------|-------------------------|-----------------------------|
| / | Frequency | Permittivity ϵ | Conductivity σ (S/m) |
| Target value | 850 MHz | 55.2 | 0.97 |
| | 1900 MHz | 53.3 | 1.52 |
| Measurement value (Average of 10 tests) | 850 MHz | 53.7 | 1.01 |
| | 1900 MHz | 52.3 | 1.56 |

8.2 System Validation

Table 7: System Validation

| | | | | | | | | |
|--|---------------------------------|-----------|--------------|-------------------------|--------------|-----------------------------|--------------|-------------|
| Measurement is made at temperature 23.3 °C and relative humidity 49%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz May 13,2009 1900 MHz May 14,2009 | | | | | | | | |
| Liquid parameters | Dipole calibration Target value | Frequency | | Permittivity ϵ | | Conductivity σ (S/m) | | |
| | | 835 MHz | 1900 MHz | 39.9 | 38.9 | 0.88 | 1.38 | |
| | Actual Measurement value | 835 MHz | 1900 MHz | 40.4 | 39.2 | 0.90 | 1.42 | |
| | | Frequency | | Target value (W/kg) | | Measured value (W/kg) | | Deviation |
| | Verification results | | 10 g Average | 1 g Average | 10 g Average | 1 g Average | 10 g Average | 1 g Average |
| 835 MHz | | 1.60 | 2.48 | 1.62 | 2.50 | 1.25% | 0.81% | |
| 1900 MHz | | 5.09 | 9.73 | 5.27 | 9.91 | 3.54% | 1.85% | |

Note: Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

8.3 Summary of Measurement Results (850MHz)

Table 8: SAR Values (850MHz-Head)

| Limit of SAR (W/kg) | 10 g Average | 1 g Average | Power Drift (dB) |
|--|------------------------------|----------------|------------------------|
| | 2.0 | 1.6 | |
| Test Case | Measurement Result (W/kg) | | |
| | 10 g Average | 1 g Average | |
| Left hand, Touch cheek, Top frequency(See Fig.1) | 0.746 | 1.03 | -0.061 |
| Left hand, Touch cheek, Mid frequency(See Fig.3) | 0.641 | 0.882 | -0.025 |
| Left hand, Touch cheek, Bottom frequency(See Fig.4) | 0.374 | 0.513 | -0.017 |
| Left hand, Tilt 15 Degree, Top frequency(See Fig.5) | 0.411 | 0.565 | 0.021 |
| Left hand, Tilt 15 Degree, Mid frequency(See Fig.6) | 0.364 | 0.501 | -0.057 |
| Left hand, Tilt 15 Degree, Bottom frequency(See Fig.7) | 0.210 | 0.289 | 0.058 |
| Right hand, Touch cheek, Top frequency(See Fig.8) | 0.700 | 0.965 | -0.097 |
| Right hand, Touch cheek, Mid frequency(See Fig.9) | 0.607 | 0.832 | 0.015 |
| Right hand, Touch cheek, Bottom frequency(See Fig.10) | 0.350 | 0.481 | 0.029 |
| Right hand, Tilt 15 Degree, Top frequency(See Fig.11) | 0.383 | 0.642 | -0.025 |
| Right hand, Tilt 15 Degree, Mid frequency(See Fig.12) | 0.320 | 0.510 | 0.012 |
| Right hand, Tilt 15 Degree, Bottom frequency(See Fig.13) | 0.232 | 0.321 | -0.037 |

Table 9: SAR Values (850MHz-Body)

| Limit of SAR (W/kg) | 10 g Average | 1g Average | Power Drift (dB) |
|---|------------------------------|----------------|------------------------|
| | 2.0 | 1.6 | |
| Test Case | Measurement Result (W/kg) | | |
| | 10 g Average | 1 g Average | |
| Body, Towards Ground, Top frequency with GPRS(See Fig.14) | 0.800 | 1.1 | -0.021 |
| Body, Towards Ground, Mid frequency with GPRS (See Fig.15) | 0.881 | 1.21 | -0.035 |
| Body, Towards Ground, Bottom frequency with GPRS(See Fig.16) | 0.935 | 1.26 | -0.102 |
| Body, Towards Phantom, Top frequency with GPRS(See Fig.18) | 0.423 | 0.568 | 0.007 |
| Body, Towards Phantom, Mid frequency with GPRS (See Fig.19) | 0.466 | 0.629 | -0.019 |
| Body, Towards Phantom, Bottom frequency with GPRS(See Fig.20) | 0.486 | 0.656 | -0.007 |
| Body, Towards Ground, Bottom frequency with EGPRS(See Fig.21) | 0.477 | 0.655 | -0.011 |
| Body, Towards Ground, Bottom frequency with Headset(See Fig.22) | 0.733 | 1.01 | 0.031 |

8.4 Summary of Measurement Results (1900MHz)

Table 10: SAR Values (1900MHz-Head)


| Limit of SAR (W/kg) | 10 g Average | 1 g Average | Power Drift (dB) |
|--|---------------------------|-------------|------------------|
| | 2.0 | 1.6 | |
| Test Case | Measurement Result (W/kg) | | Power Drift (dB) |
| | 10 g Average | 1 g Average | |
| Left hand, Touch cheek, Top frequency(See Fig.23) | 0.299 | 0.496 | -0.066 |
| Left hand, Touch cheek, Mid frequency(See Fig.24) | 0.426 | 0.715 | -0.057 |
| Left hand, Touch cheek, Bottom frequency(See Fig.25) | 0.469 | 0.788 | -0.150 |
| Left hand, Tilt 15 Degree, Top frequency(See Fig.26) | 0.389 | 0.686 | -0.020 |
| Left hand, Tilt 15 Degree, Mid frequency(See Fig.27) | 0.575 | 1.02 | -0.003 |
| Left hand, Tilt 15 Degree, Bottom frequency(See Fig.28) | 02.655 | 1.16 | 0.012 |
| Right hand, Touch cheek, Top frequency(See Fig.29) | 0.300 | 0.520 | 0.040 |
| Right hand, Touch cheek, Mid frequency(See Fig.30) | 0.455 | 0.796 | 0.124 |
| Right hand, Touch cheek, Bottom frequency(See Fig.31) | 0.500 | 0.885 | 0.030 |
| Right hand, Tilt 15 Degree, Top frequency(See Fig.32) | 0.368 | 0.654 | -0.027 |
| Right hand, Tilt 15 Degree, Mid frequency(See Fig.33) | 0.573 | 1.04 | 0.040 |
| Right hand, Tilt 15 Degree, Bottom frequency(See Fig.34) | 0.647 | 1.17 | 0.040 |

Table 11: SAR Values (1900MHz-Body)

| Limit of SAR (W/kg) | 10 g Average | 1g Average | Power Drift (dB) |
|---|---------------------------|-------------|------------------|
| | 2.0 | 1.6 | |
| Test Case | Measurement Result (W/kg) | | Power Drift (dB) |
| | 10 g Average | 1 g Average | |
| Body, Towards Ground, Top frequency with GPRS(See Fig.36) | 0.249 | 0.427 | -0.037 |
| Body, Towards Ground, Mid frequency with GPRS (See Fig.37) | 0.369 | 0.642 | 0.015 |
| Body, Towards Ground, Bottom frequency with GPRS(See Fig.38) | 0.518 | 0.908 | 0.050 |
| Body, Towards Phantom, Top frequency with GPRS(See Fig.40) | 0.077 | 0.125 | 0.191 |
| Body, Towards Phantom, Mid frequency with GPRS (See Fig.41) | 0.112 | 0.180 | 0.153 |
| Body, Towards Phantom, Bottom frequency with GPRS(See Fig.42) | 0.164 | 0.264 | 0.029 |
| Body, Towards Ground, Bottom frequency with EGPRS(See Fig.43) | 0.309 | 0.543 | 0.055 |
| Body, Towards Ground, Bottom frequency with Headset(See Fig.44) | 0.371 | 0.645 | 0.044 |

8.5 Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is $>5\text{cm}$. The location of the antennas inside mobile phone is shown below:

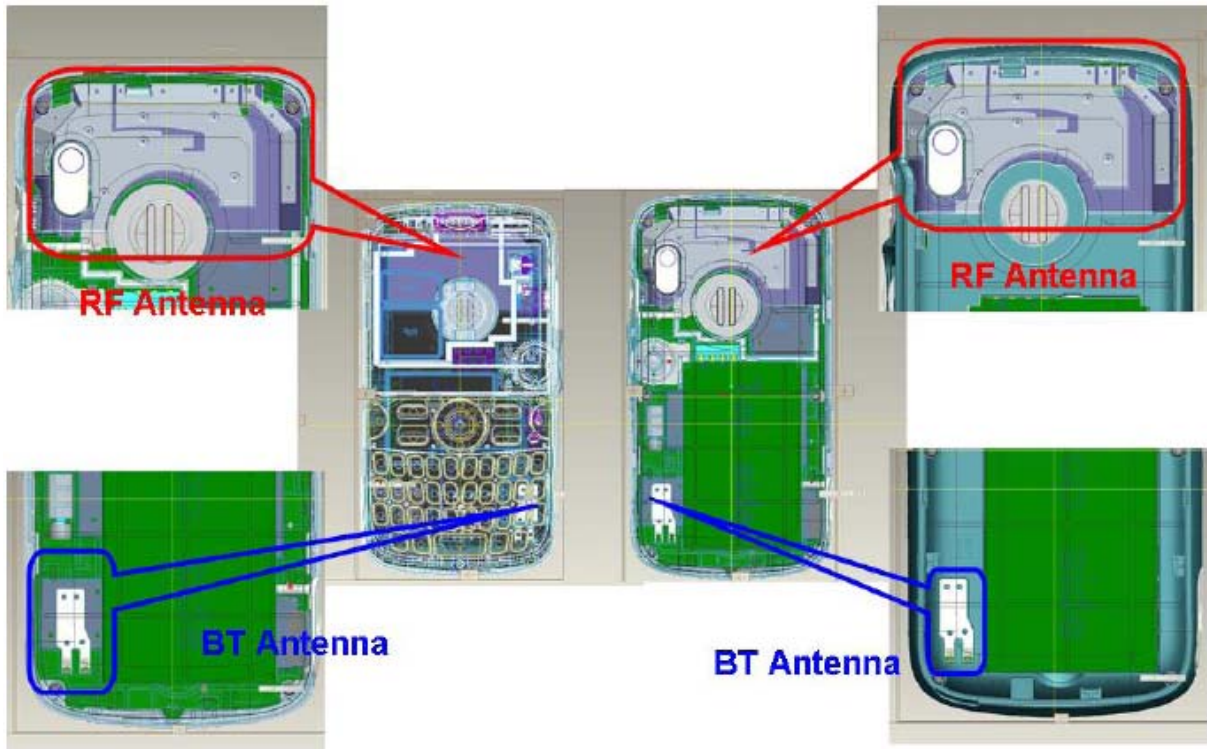

The output power of BT antenna is as following:

| Channel | Ch 0 2402 MHz | Ch 39 2441 Mhz | Ch 78 2480 MHz |
|----------------------------------|------------------|-------------------|-------------------|
| Peak Conducted Output Power(dBm) | 1.94 | 1.97 | 3.25 |

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR are not required for BT transmitter, because the output power of BT transmitter is $\leq 2P_{\text{Ref}}$ and its antenna is $>5\text{cm}$ from other antenna

8.6 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 4.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 4.1 of this test report.

9 Measurement Uncertainty

| SN | a | Type | c | d | $e = f(d,k)$ | f | $h = c \times f / e$ | k |
|-------------------------------|---|------|-----------------|-------------|--------------|------------------------|----------------------|----------|
| | Uncertainty Component | | Tol. (\pm %) | Prob. Dist. | Div. | c_i (1 g) | $1 g u_i$ (\pm %) | v_i |
| 1 | System repeitivity | A | 0.5 | N | 1 | 1 | 0.5 | 9 |
| Measurement System | | | | | | | | |
| 2 | Probe Calibration | B | 5 | N | 2 | 1 | 2.5 | ∞ |
| 3 | Axial Isotropy | B | 4.7 | R | $\sqrt{3}$ | $\frac{(1-c_p)^{1/2}}$ | 4.3 | ∞ |
| 4 | Hemispherical Isotropy | B | 9.4 | R | $\sqrt{3}$ | $\sqrt{c_p}$ | | ∞ |
| 5 | Boundary Effect | B | 0.4 | R | $\sqrt{3}$ | 1 | 0.23 | ∞ |
| 6 | Linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| 7 | System Detection Limits | B | 1.0 | R | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| 8 | Readout Electronics | B | 1.0 | N | 1 | 1 | 1.0 | ∞ |
| 9 | RF Ambient Conditions | B | 3.0 | R | $\sqrt{3}$ | 1 | 1.73 | ∞ |
| 10 | Probe Positioner Mechanical Tolerance | B | 0.4 | R | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| 11 | Probe Positioning with respect to Phantom Shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| 12 | Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | B | 3.9 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Test sample Related | | | | | | | | |
| 13 | Test Sample Positioning | A | 4.9 | N | 1 | 1 | 4.9 | N-1 |
| 14 | Device Holder Uncertainty | A | 6.1 | N | 1 | 1 | 6.1 | N-1 |
| 15 | Output Power Variation - SAR drift measurement | B | 5.0 | R | $\sqrt{3}$ | 1 | 2.9 | ∞ |
| Phantom and Tissue Parameters | | | | | | | | |
| 16 | Phantom Uncertainty (shape and thickness tolerances) | B | 1.0 | R | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| 17 | Liquid Conductivity - deviation from target values | B | 5.0 | R | $\sqrt{3}$ | 0.64 | 1.7 | ∞ |
| 18 | Liquid Conductivity - measurement uncertainty | B | 5.0 | N | 1 | 0.64 | 1.7 | M |
| 19 | Liquid Permittivity - deviation from target values | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| 20 | Liquid Permittivity - measurement uncertainty | B | 5.0 | N | 1 | 0.6 | 1.7 | M |
| | Combined Standard Uncertainty | | | RSS | | | 11.25 | |

| | | | | | | | | |
|--|---|--|--|-----|--|--|------|--|
| | Expanded Uncertainty (95% CONFIDENCE INTERVAL) | | | K=2 | | | 22.5 | |
|--|---|--|--|-----|--|--|------|--|

10 MAIN TEST INSTRUMENTS

Table 12: List of Main Instruments

| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|---------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | HP 8753E | US38433212 | August 30,2008 | One year |
| 02 | Power meter | NRVD | 101253 | June 20, 2008 | One year |
| 03 | Power sensor | NRV-Z5 | 100333 | | |
| 04 | Power sensor | NRV-Z6 | 100011 | September 2, 2008 | One year |
| 05 | Signal Generator | E4433B | US37230472 | September 4, 2008 | One Year |
| 06 | Amplifier | VTL5400 | 0505 | No Calibration Requested | |
| 07 | BTS | CMU 200 | 105948 | August 15, 2008 | One year |
| 08 | E-field Probe | SPEAG ES3DV3 | 3149 | October 1, 2008 | One year |
| 09 | DAE | SPEAG DAE4 | 771 | November 20, 2008 | One year |
| 10 | Dipole Validation Kit | SPEAG D835V2 | 443 | February 18, 2009 | Two years |
| 11 | Dipole Validation Kit | SPEAG D1900V2 | 541 | February 19, 2009 | Two years |

END OF REPORT BODY

ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.


c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

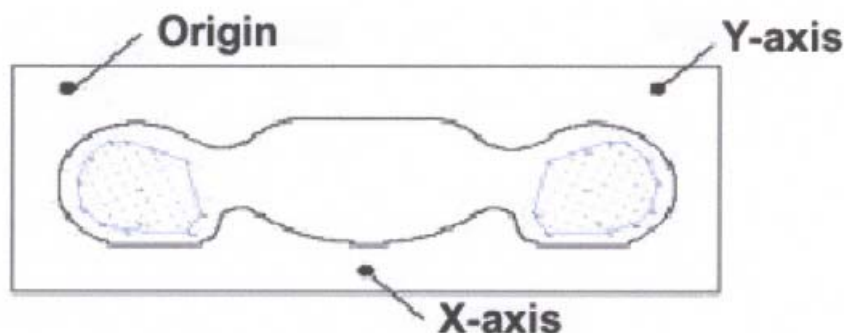


Picture A: SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT

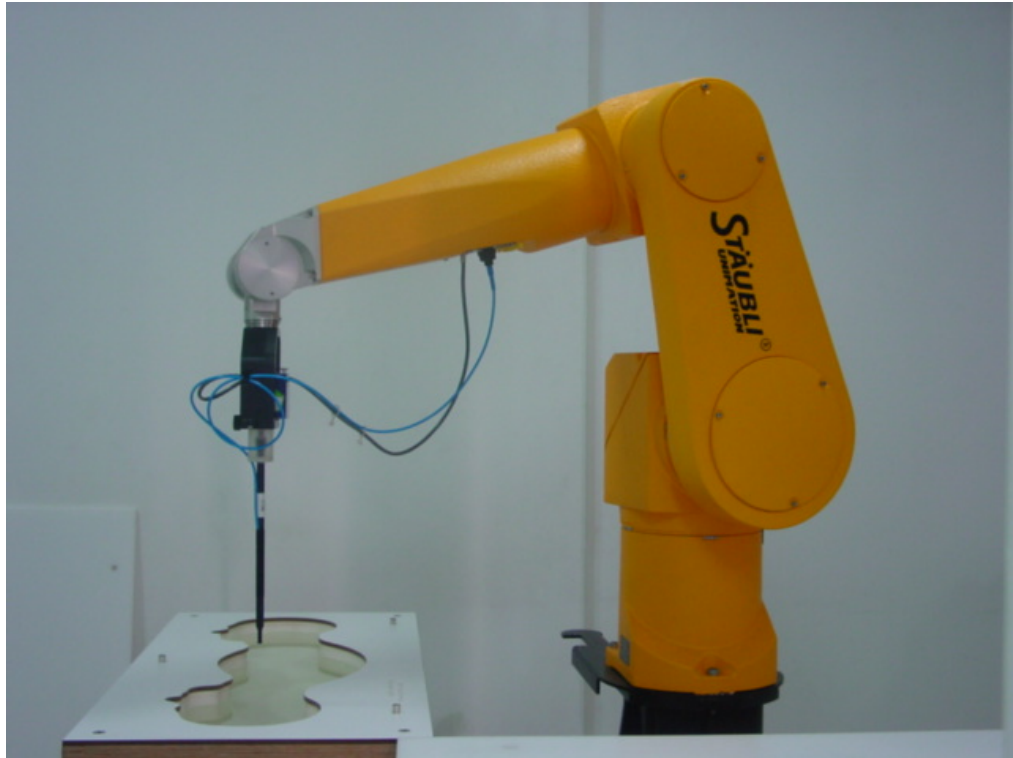

Picture B1: Specific Absorption Rate Test Layout

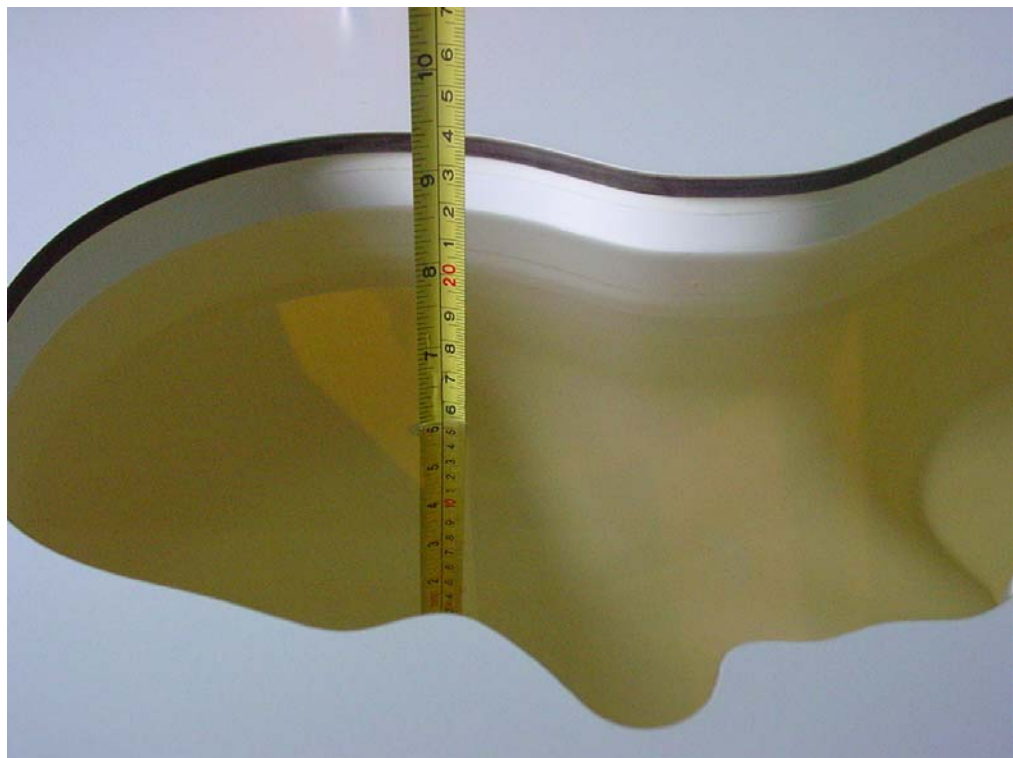

Picture B2: Liquid depth in the Flat Phantom (850 MHz)




Picture B3 Liquid depth in the Flat Phantom (1900MHz)




Picture B4: Left Hand Touch Cheek Position




Picture B5: Left Hand Tilt 15° Position

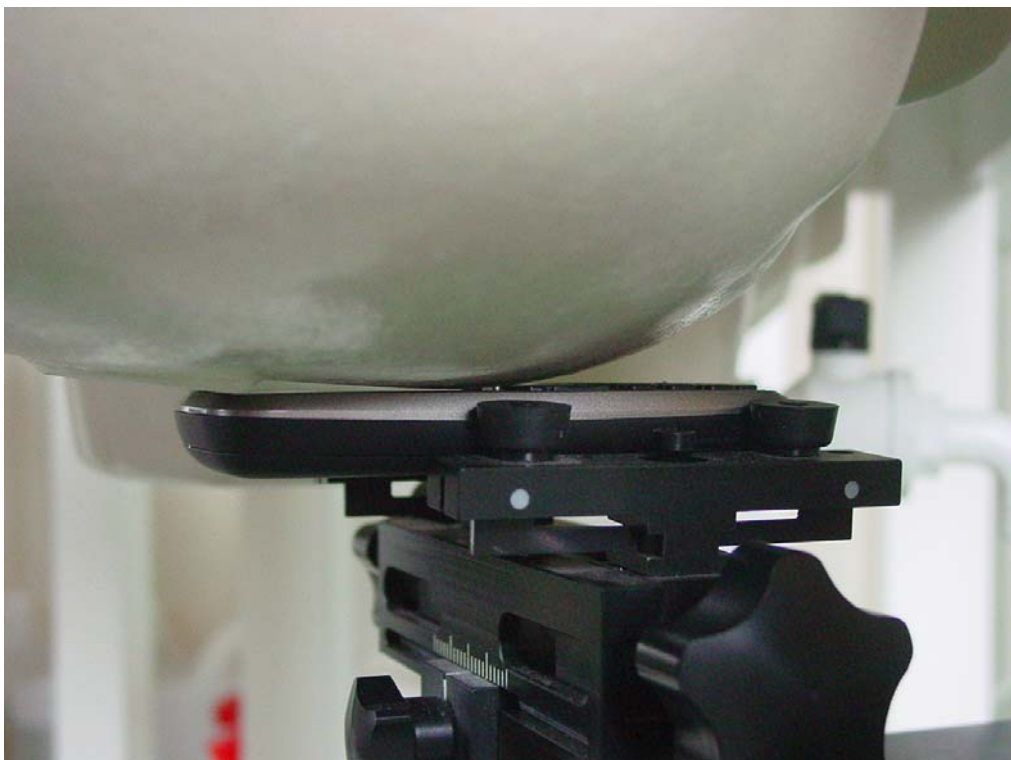


Picture B6: Right Hand Touch Cheek Position

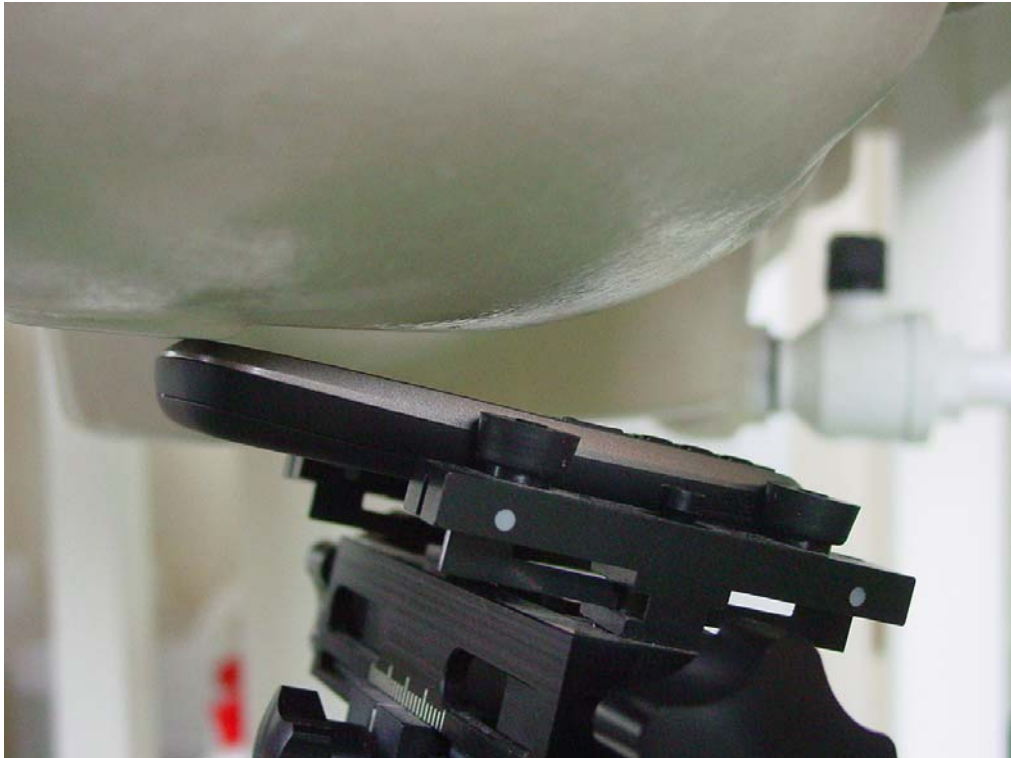


Picture B7: Right Hand Tilt 15° Position

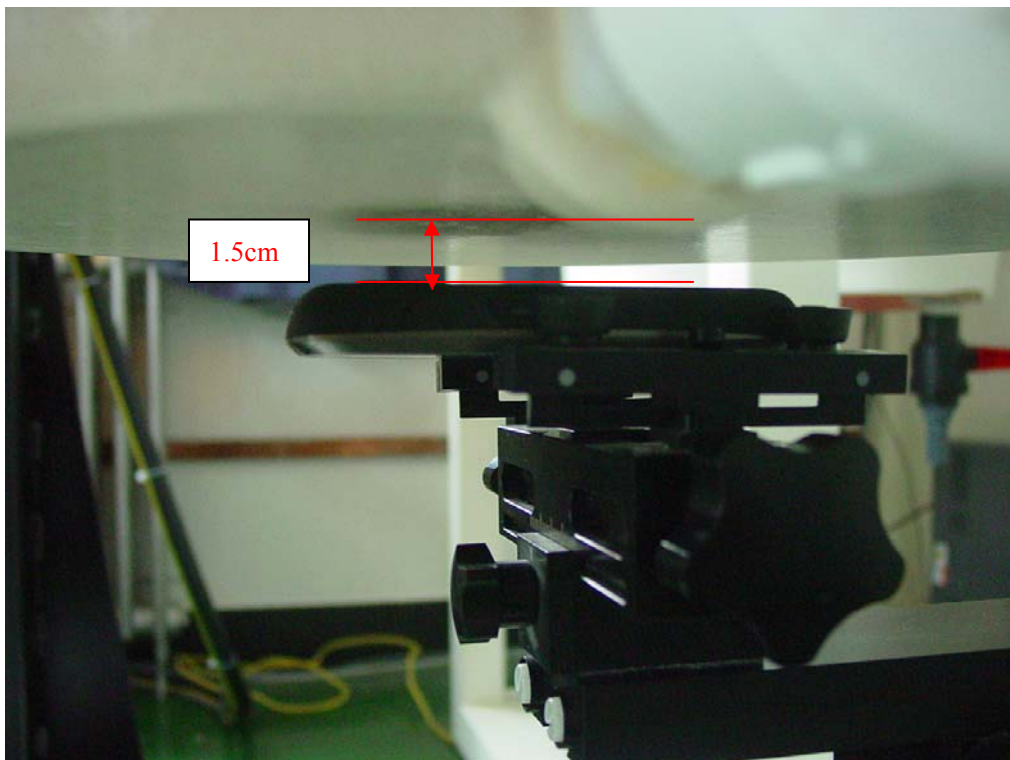

Picture B8: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

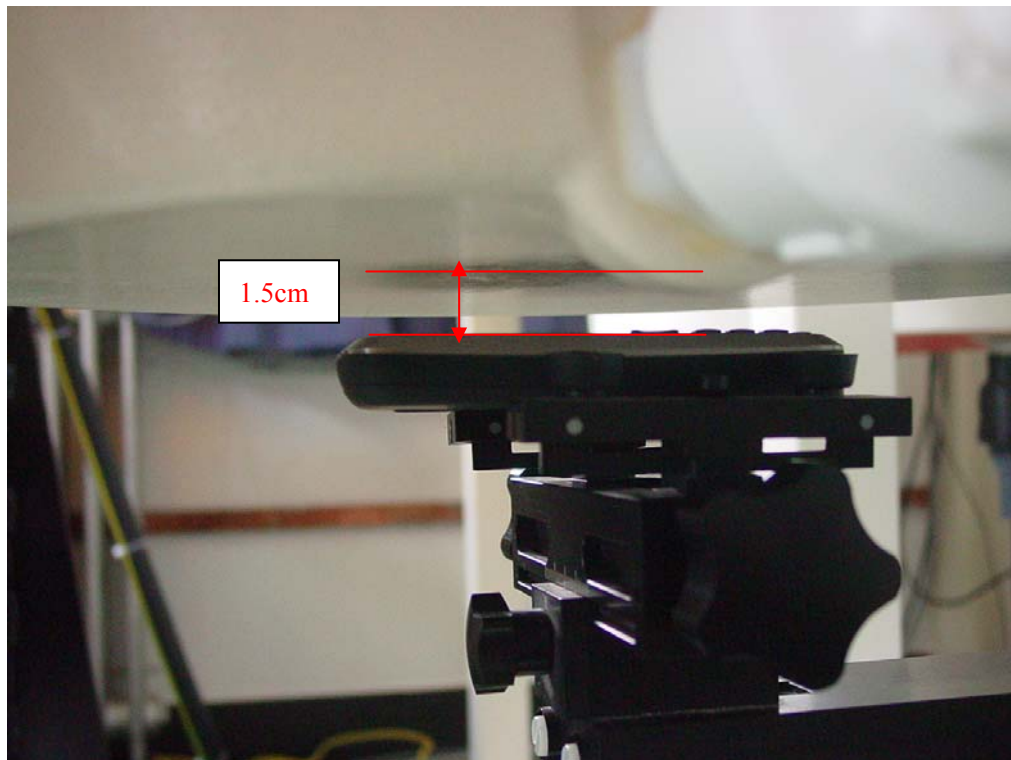

Picture B9: Body-worn Position (towards Phantom, the distance from handset to the bottom of the Phantom is 1.5cm)

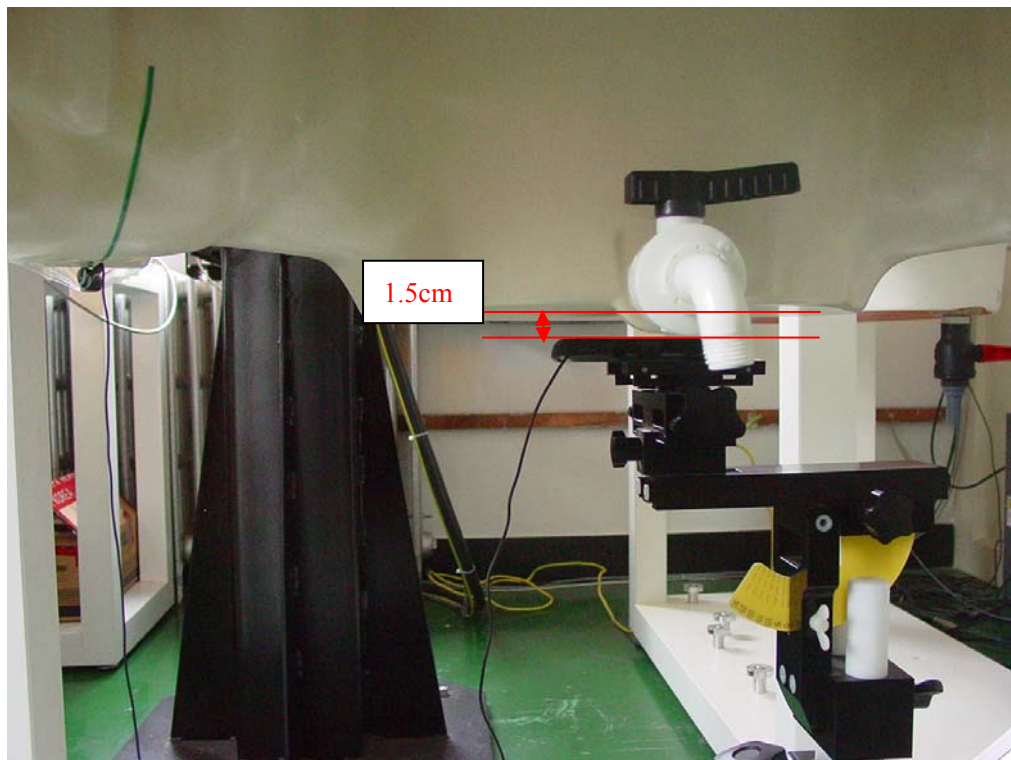

Picture B10: Body-worn Position with Headset (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

ANNEX C GRAPH RESULTS

850 Left Cheek High

Date/Time: 2009-5-13 7:50:36

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.12 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.6 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.746 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

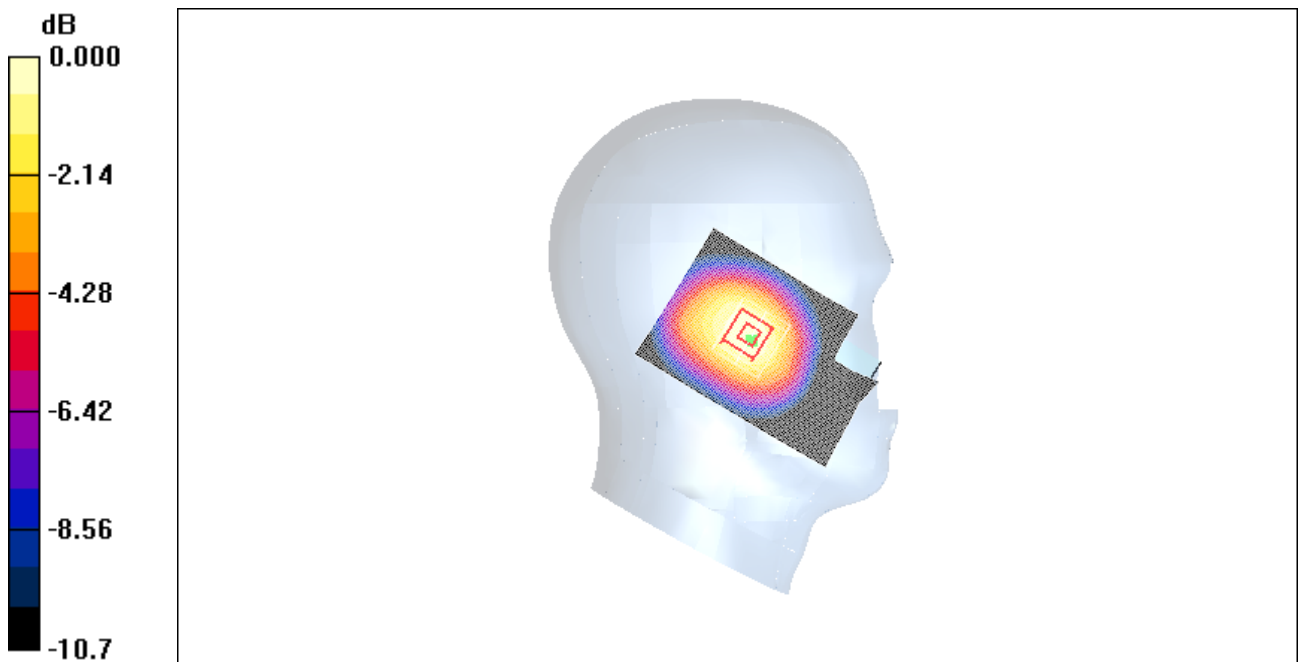

0 dB = 1.08mW/g

Fig. 1 850MHz CH251

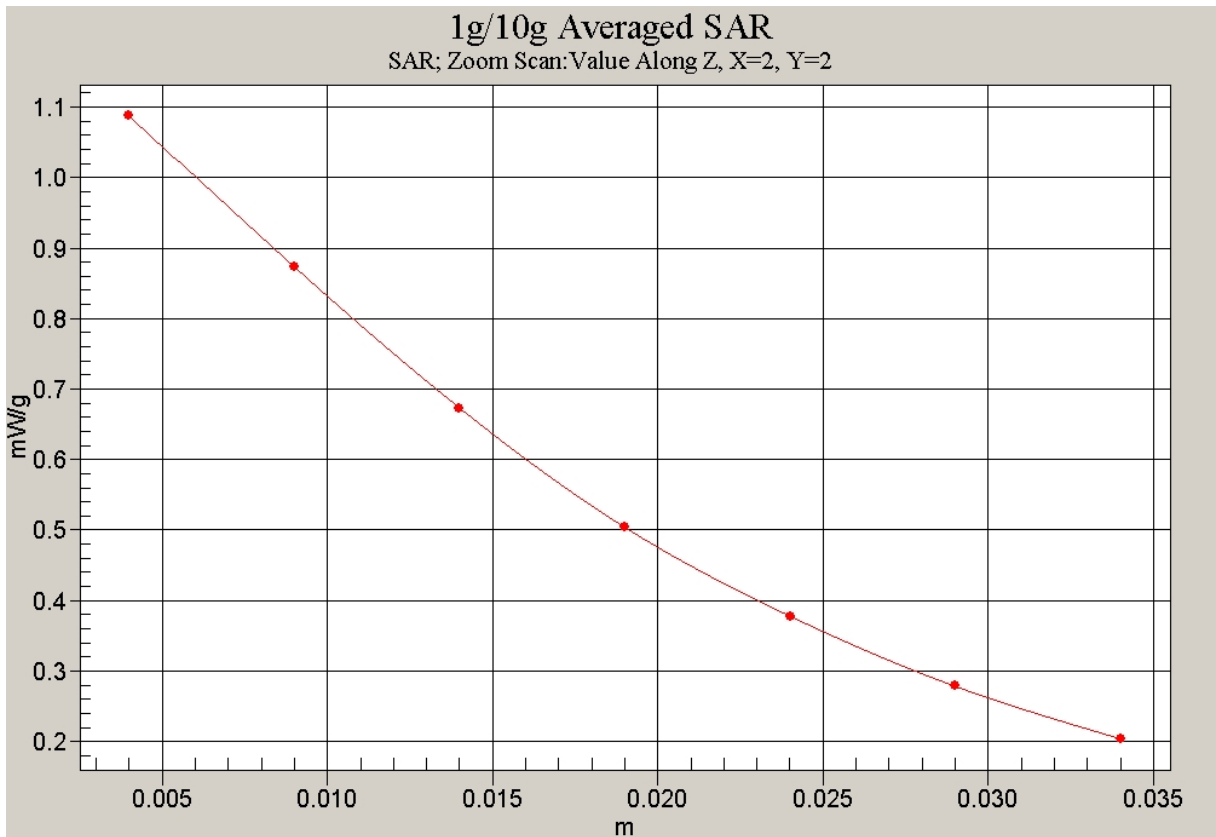


Fig. 2 Z-Scan at power reference point (850 MHz CH251)

850 Left Cheek Middle

Date/Time: 2009-5-13 8:04:23

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.961 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.882 mW/g; SAR(10 g) = 0.641 mW/g

Maximum value of SAR (measured) = 0.923 mW/g

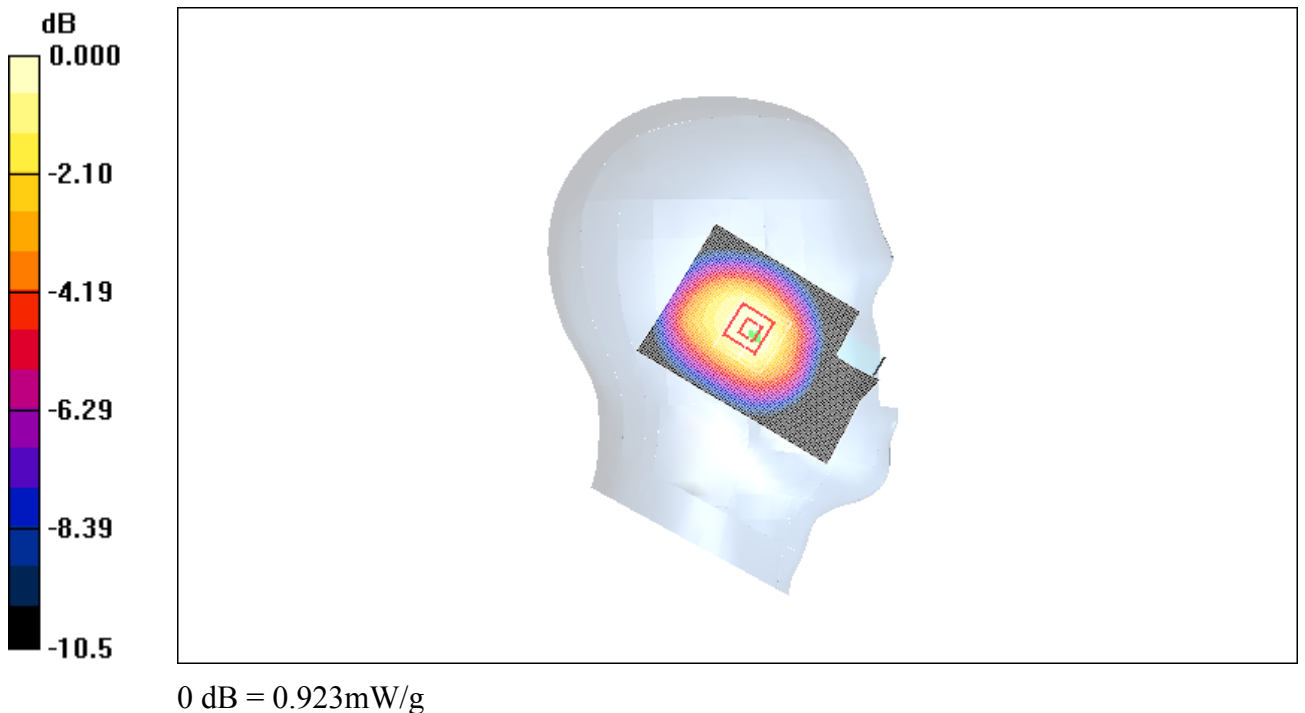


Fig. 3 850 MHz CH190

850 Left Cheek Low

Date/Time: 2009-5-13 8:18:41

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.552 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

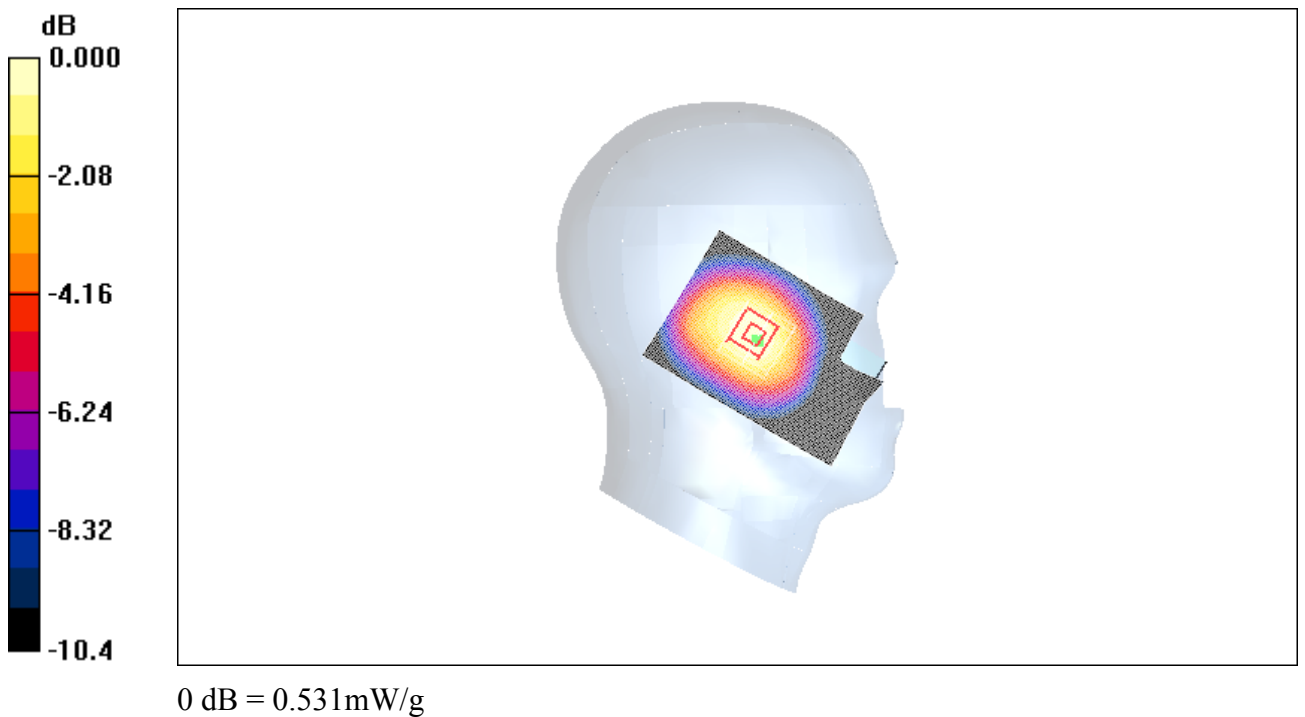


Fig. 4 850 MHz CH128

850 Left Tilt High

Date/Time: 2009-5-13 8:32:48

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.605 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.7 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.594 mW/g

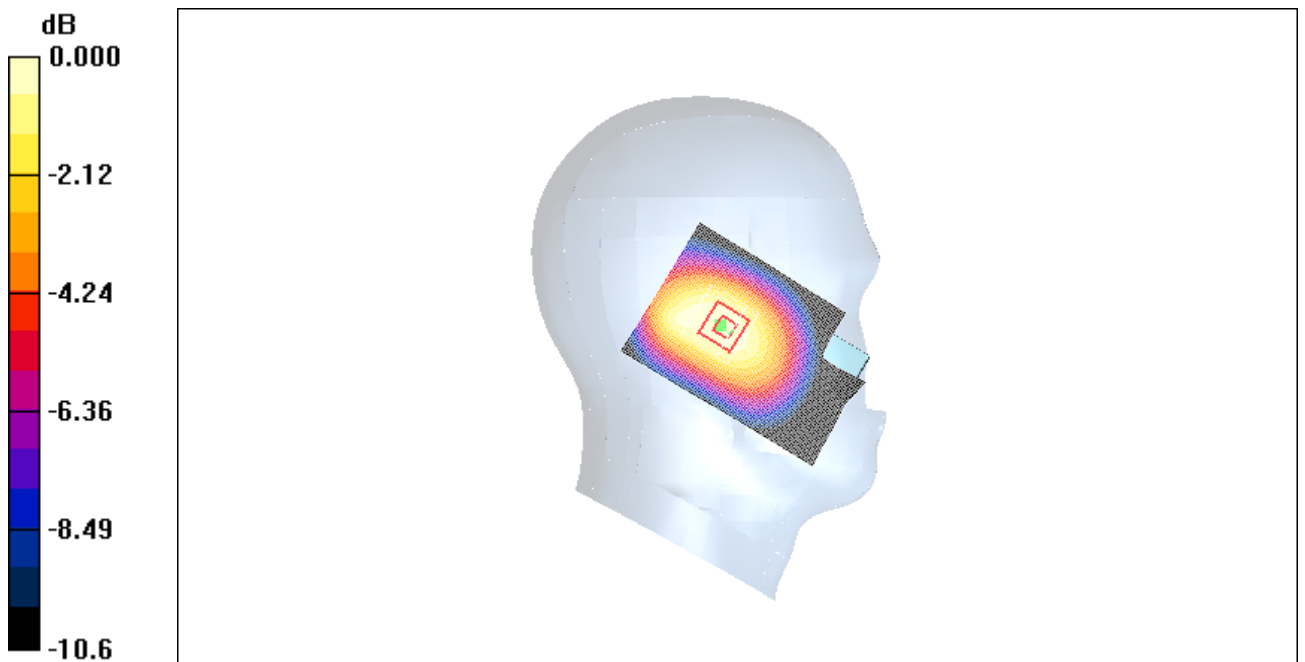

0 dB = 0.594mW/g

Fig.5 850 MHz CH251

850 Left Tilt Middle

Date/Time: 2009-5-13 8:46:55

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.534 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.7 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.631 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

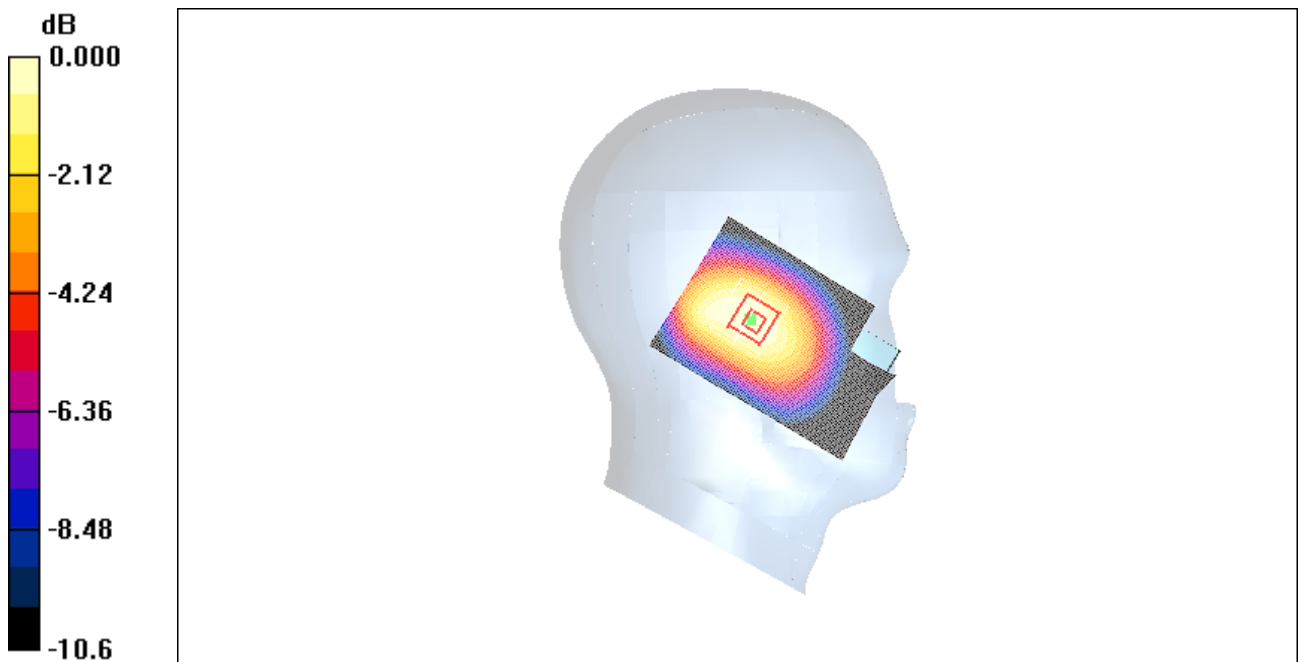

0 dB = 0.528mW/g

Fig.6 850 MHz CH190

850 Left Tilt Low

Date/Time: 2009-5-13 9:00:25

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.896 \text{ mho/m}$; $\epsilon_r = 40.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.308 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.3 V/m ; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.289 mW/g ; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.303 mW/g

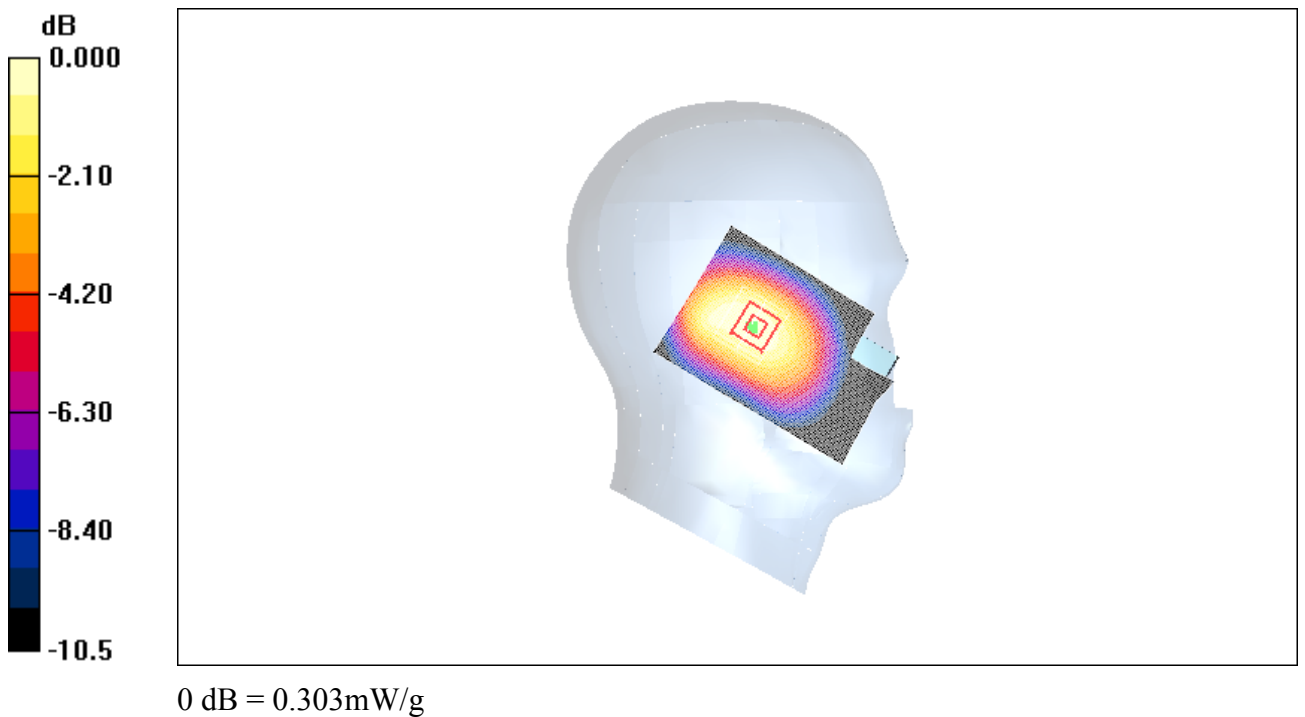


Fig. 7 850 MHz CH128

850 Right Cheek High

Date/Time: 2009-5-13 9:15:37

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.700 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

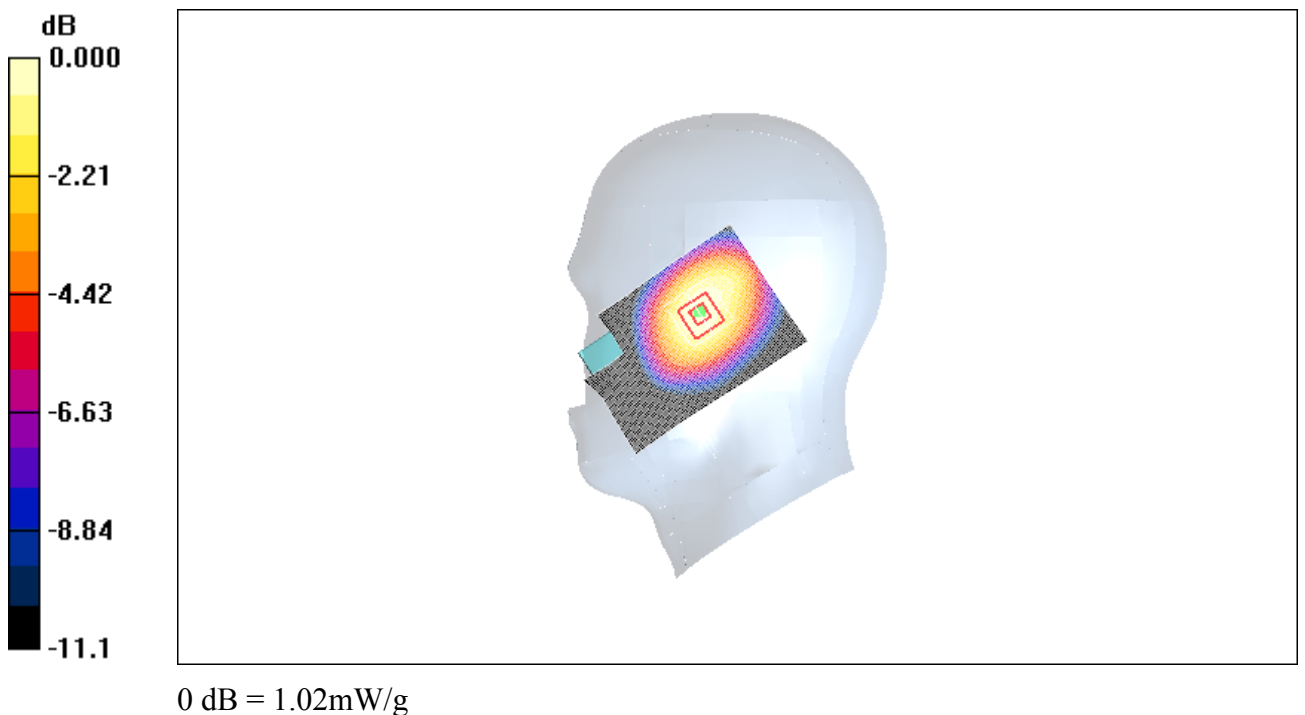


Fig. 8 850 MHz CH251

850 Right Cheek Middle

Date/Time: 2009-5-13 9:29:04

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.902 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.607 mW/g

Maximum value of SAR (measured) = 0.875 mW/g

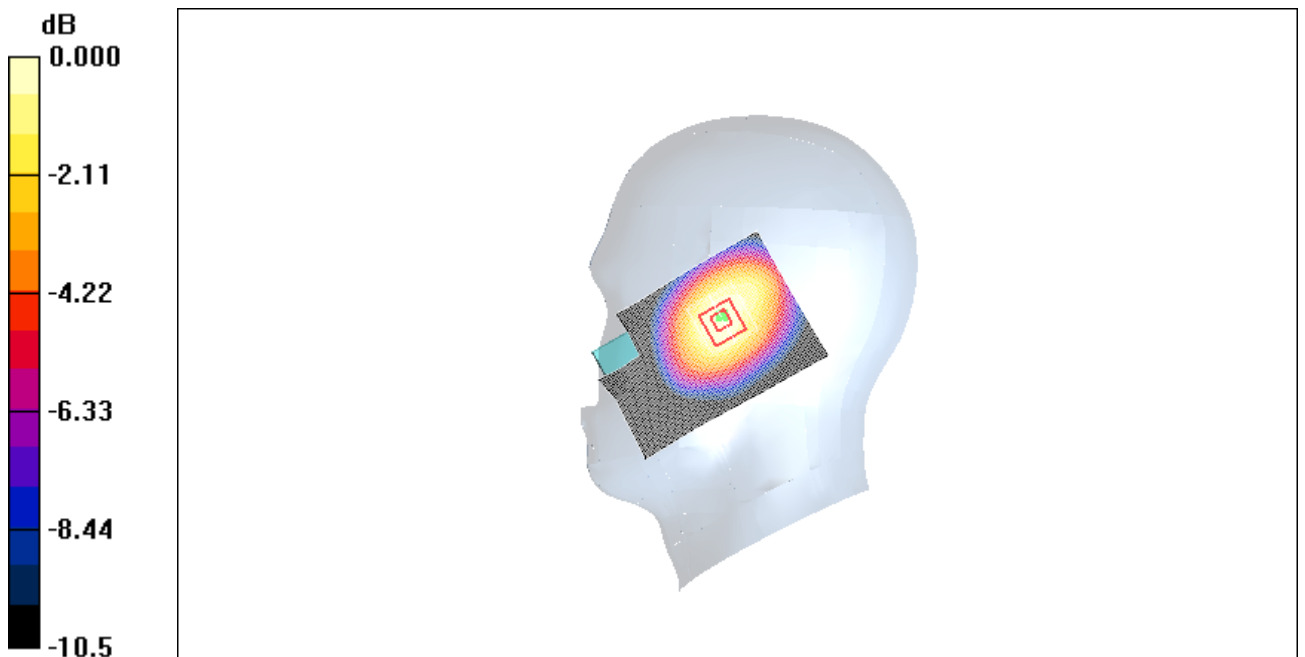

0 dB = 0.875mW/g

Fig. 9 850 MHz CH128

850 Right Cheek Low

Date/Time: 2009-5-13 9:43:18

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.517 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.509 mW/g

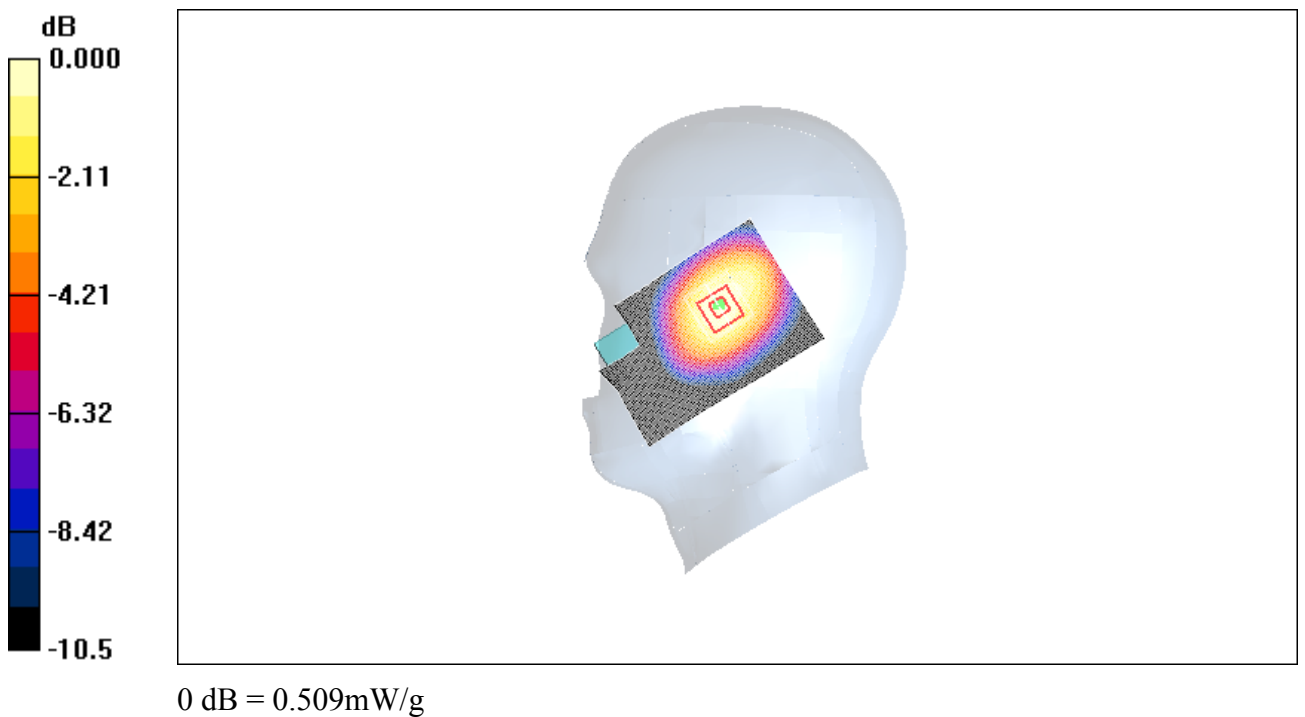


Fig. 10 850 MHz CH128

850 Right Tilt High

Date/Time: 2009-5-13 9:57:29

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt High/Area Scan (91x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.670 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.681 mW/g

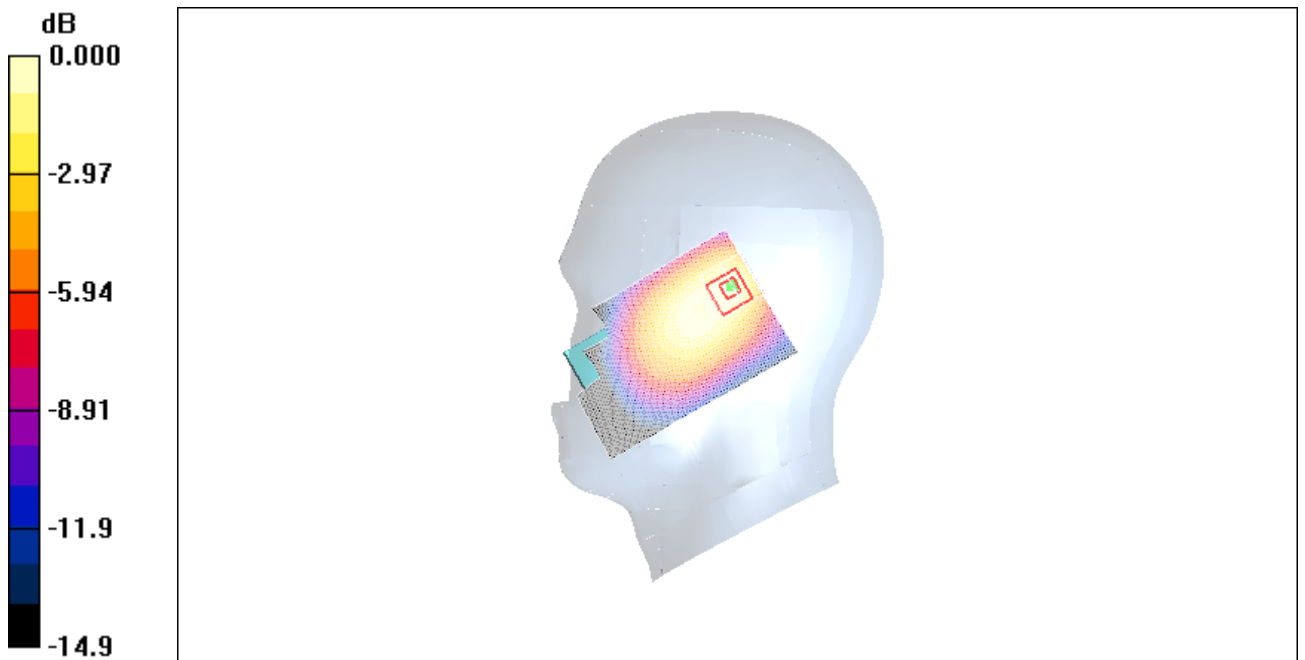

0 dB = 0.681mW/g

Fig.11 850 MHz CH251

850 Right Tilt Middle

Date/Time: 2009-5-13 10:11:30

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.908$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (91x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.544 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.960 W/kg

SAR(1 g) = 0.510 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.559 mW/g

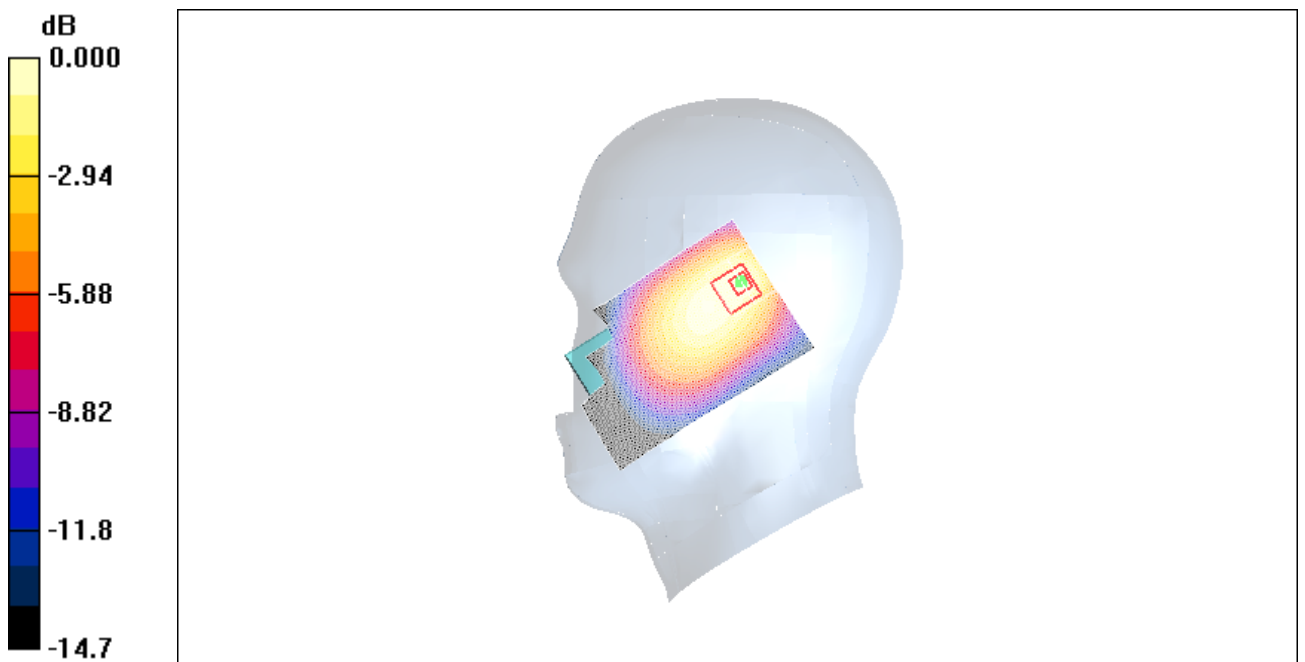

0 dB = 0.559mW/g

Fig.12 850 MHz CH190

850 Right Tilt Low

Date/Time: 2009-5-13 10:25:43

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Low/Area Scan (91x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.335 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

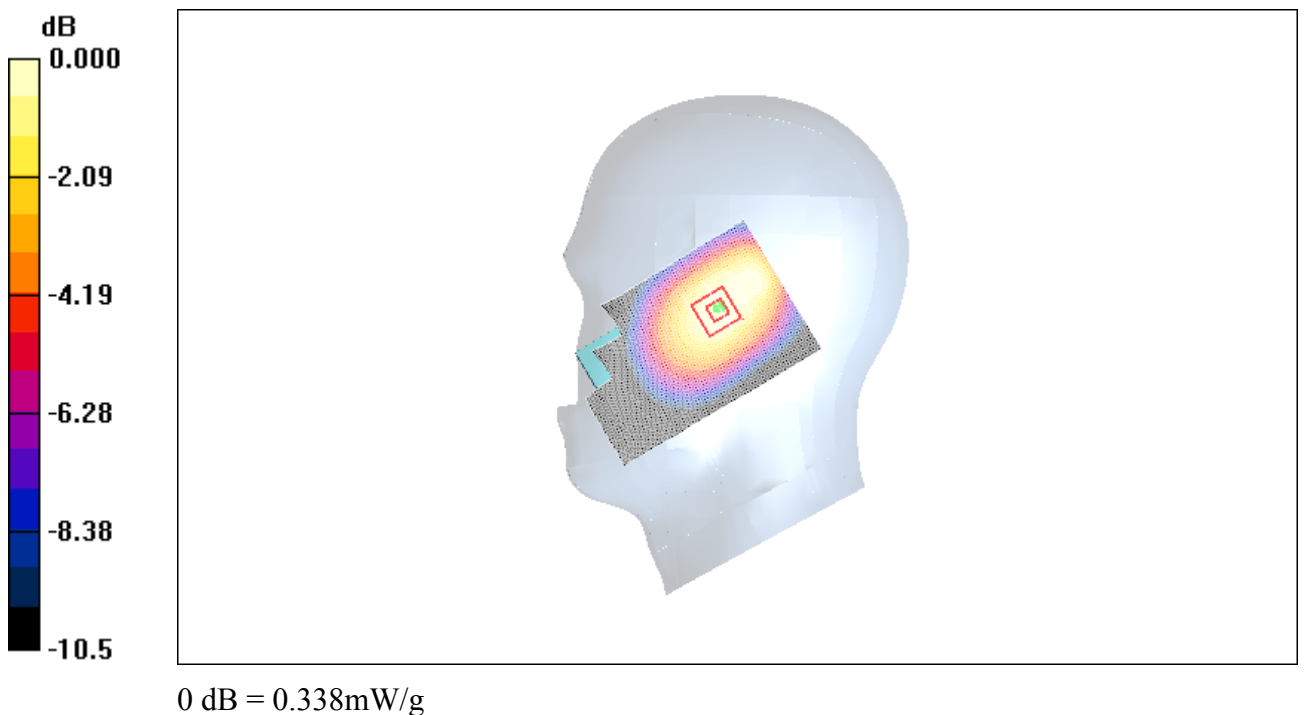


Fig. 13 850 MHz CH128

850 Body Towards Ground High With GPRS

Date/Time: 2009-5-13 10:47:09

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.16 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.3 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.800 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

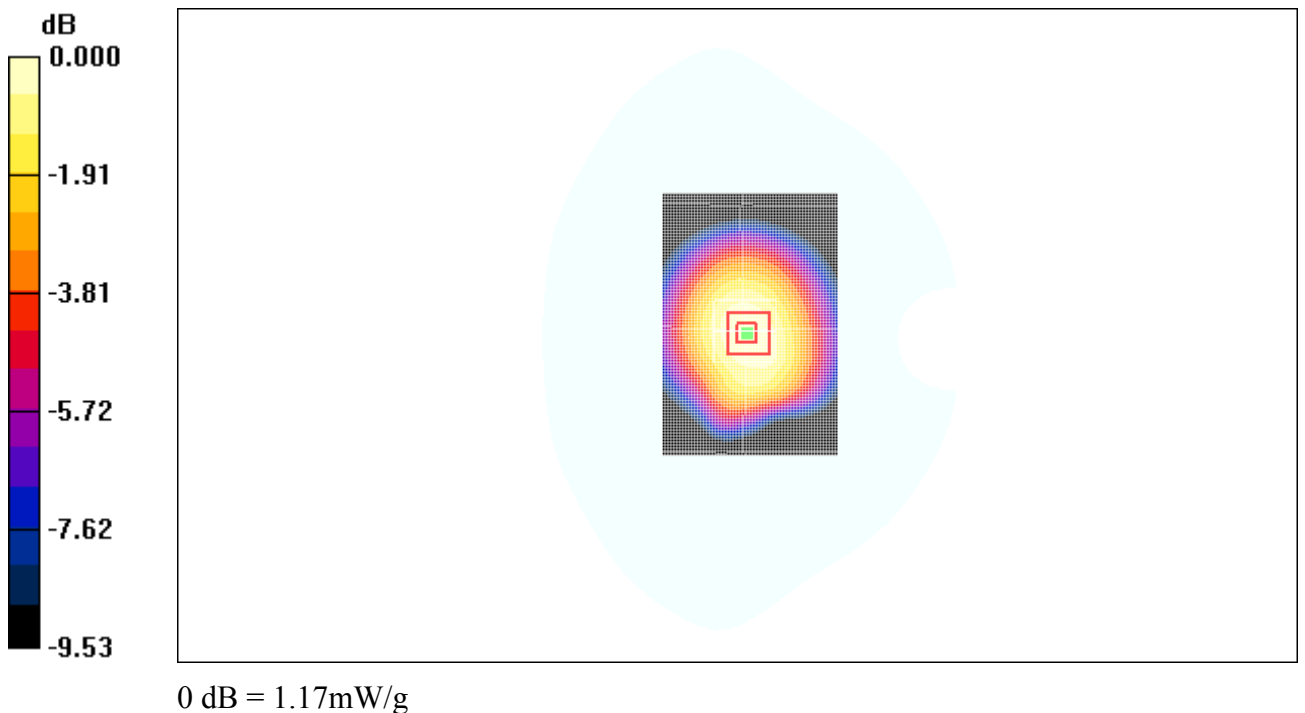


Fig. 14 850 MHz CH251

850 Body Towards Ground Middle With GPRS

Date/Time: 2009-5-13 11:01:24

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.27 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.3 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.881 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

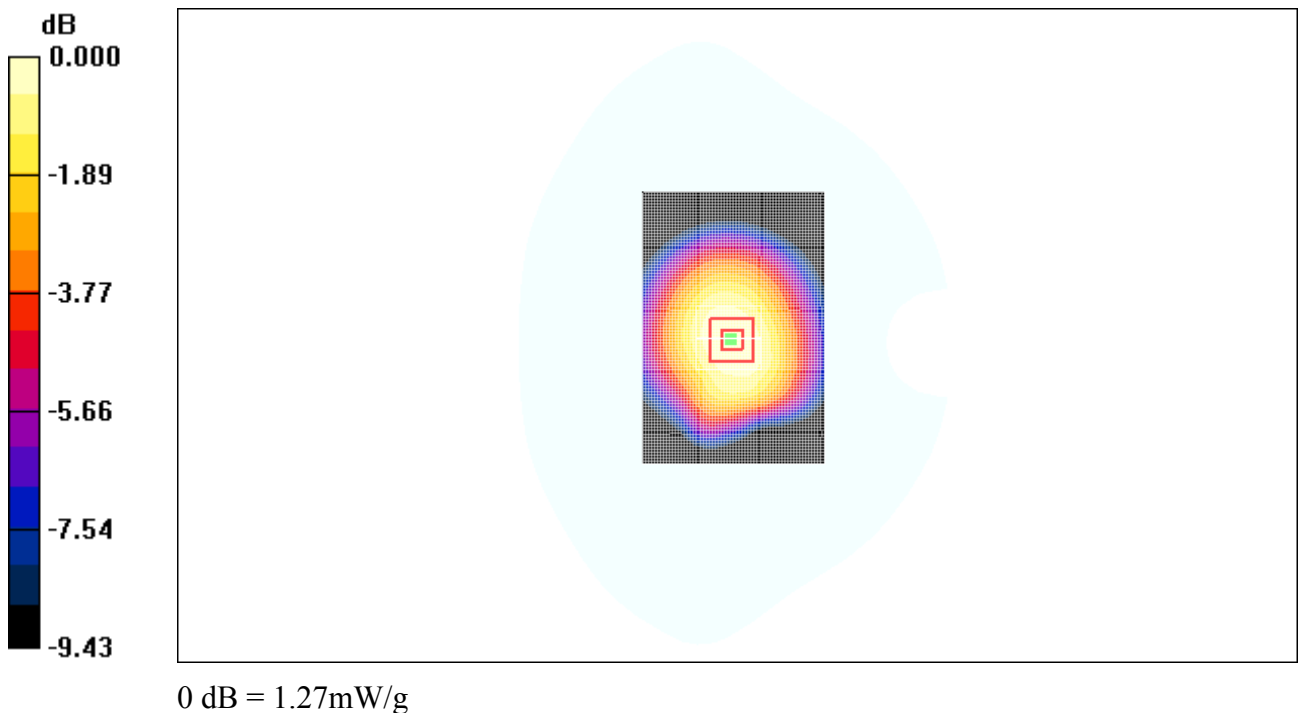


Fig. 15 850 MHz CH190

850 Body Towards Ground Low With GPRS

Date/Time: 2009-5-13 11:15:33

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.35 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.9 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.935 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

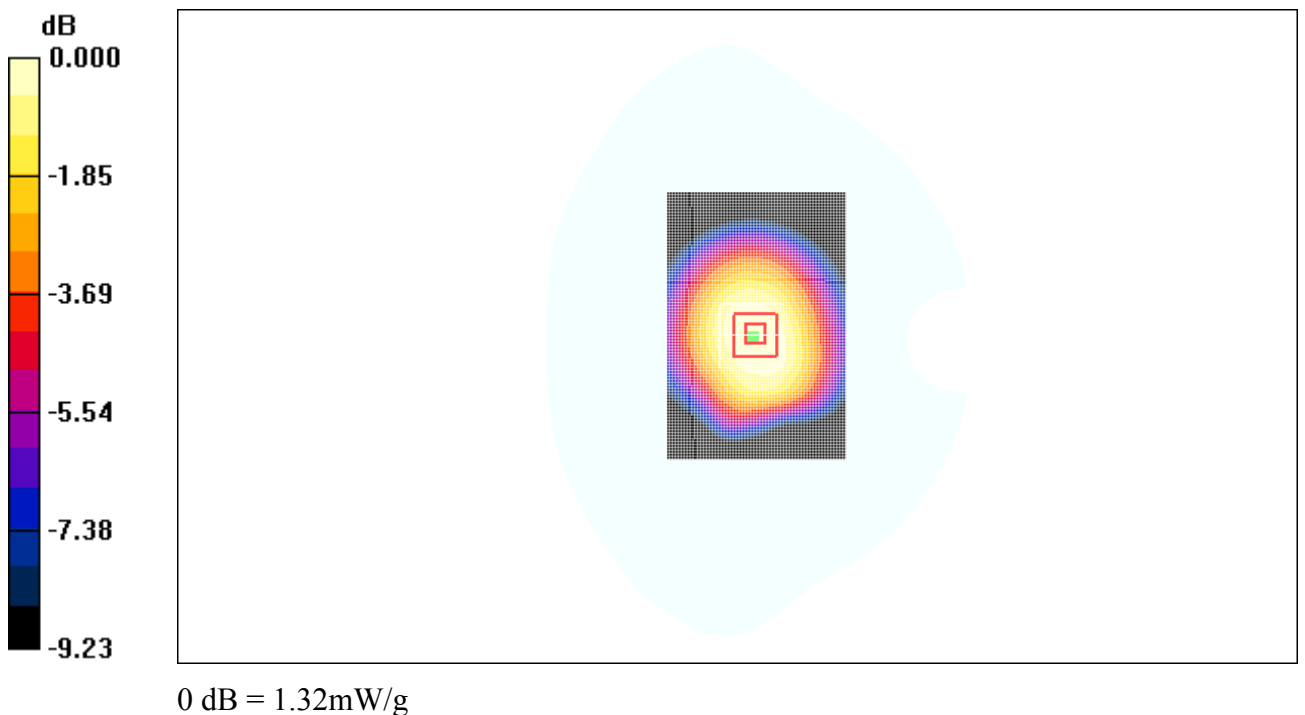


Fig. 16 850 MHz CH128

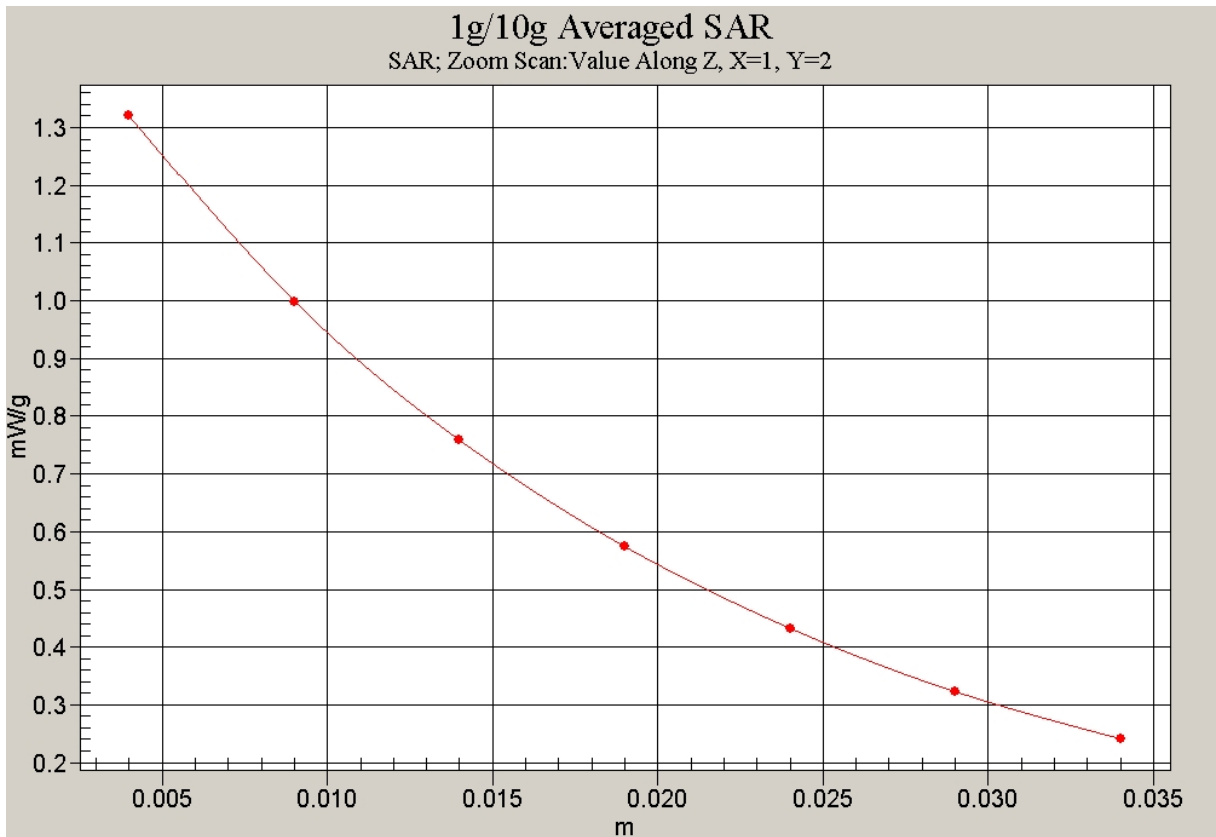


Fig. 17 Z-Scan at power reference point (850 MHz CH128)

850 Body Towards Phantom High With GPRS

Date/Time: 2009-5-13 11:30:41

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.600 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 0.596 mW/g

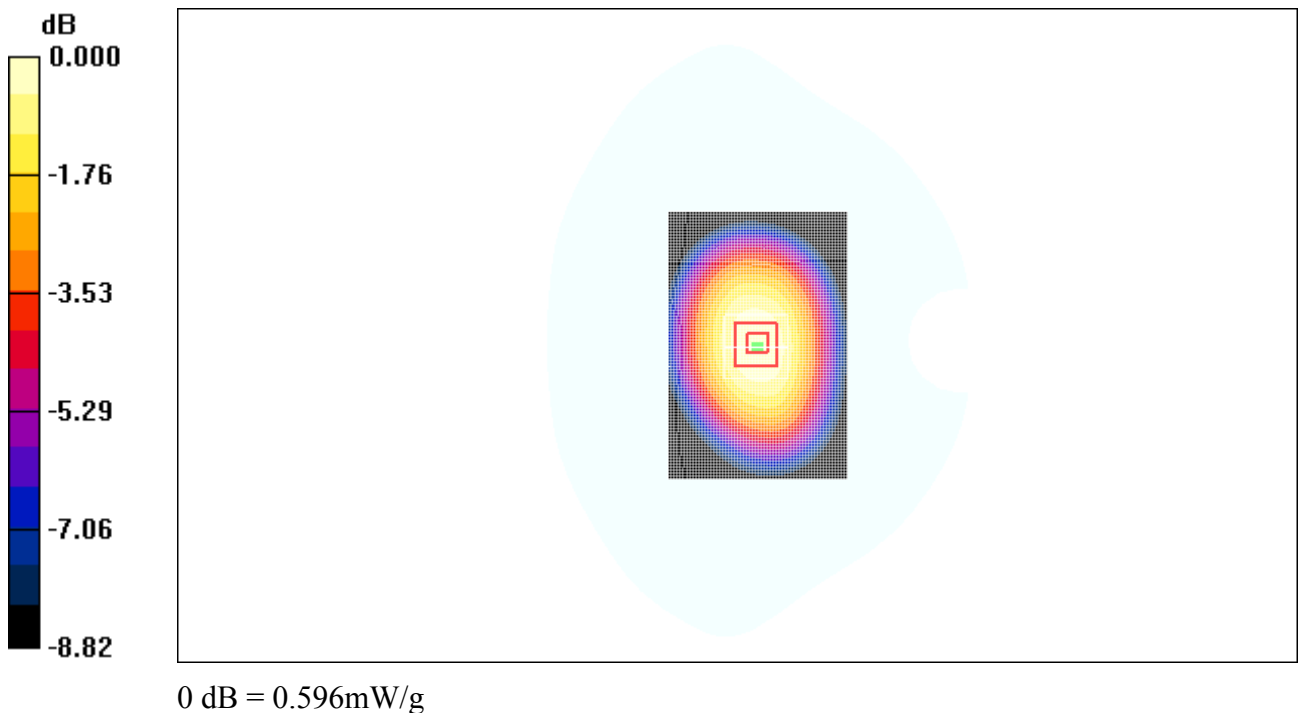


Fig. 18 850 MHz CH251

850 Body Towards Phantom Middle With GPRS

Date/Time: 2009-5-13 11:44:10

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.661 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.629 mW/g; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.659 mW/g

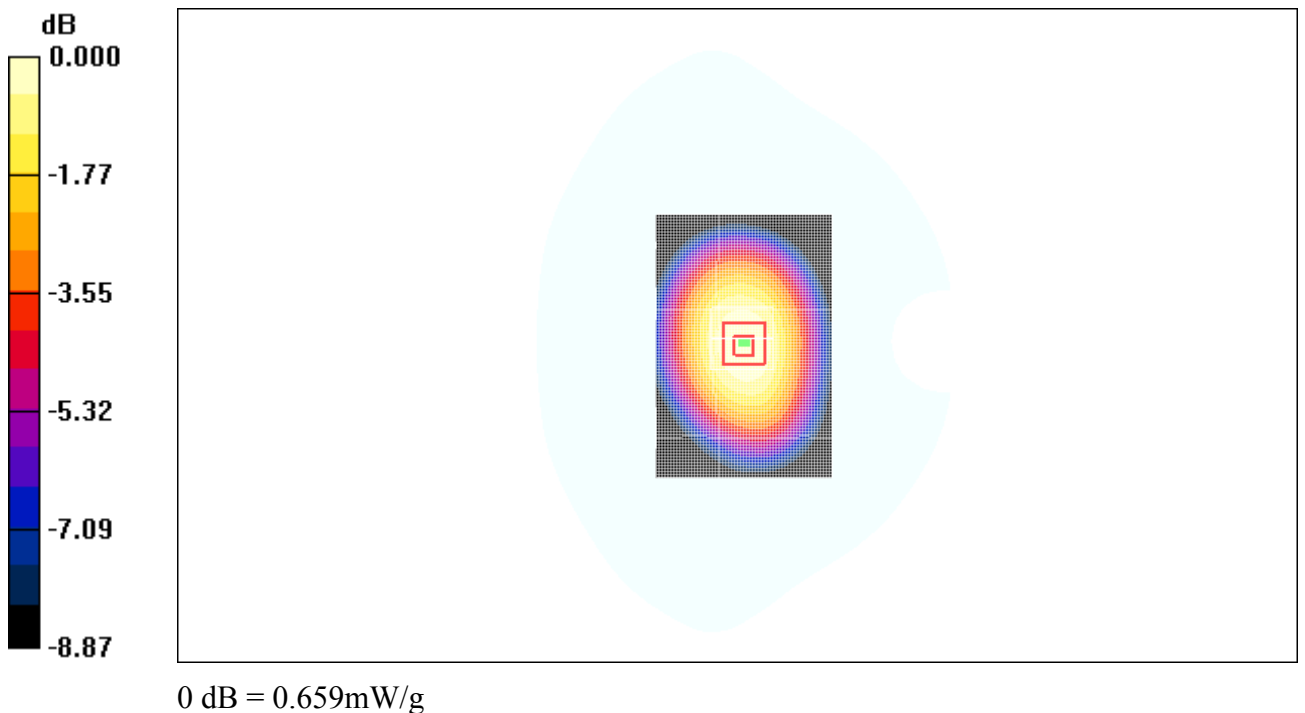


Fig. 19 850 MHz CH190

850 Body Towards Phantom Low With GPRS

Date/Time: 2009-5-13 11:58:26

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.983 \text{ mho/m}$; $\epsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.689 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.6 V/m ; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.656 mW/g ; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 0.692 mW/g

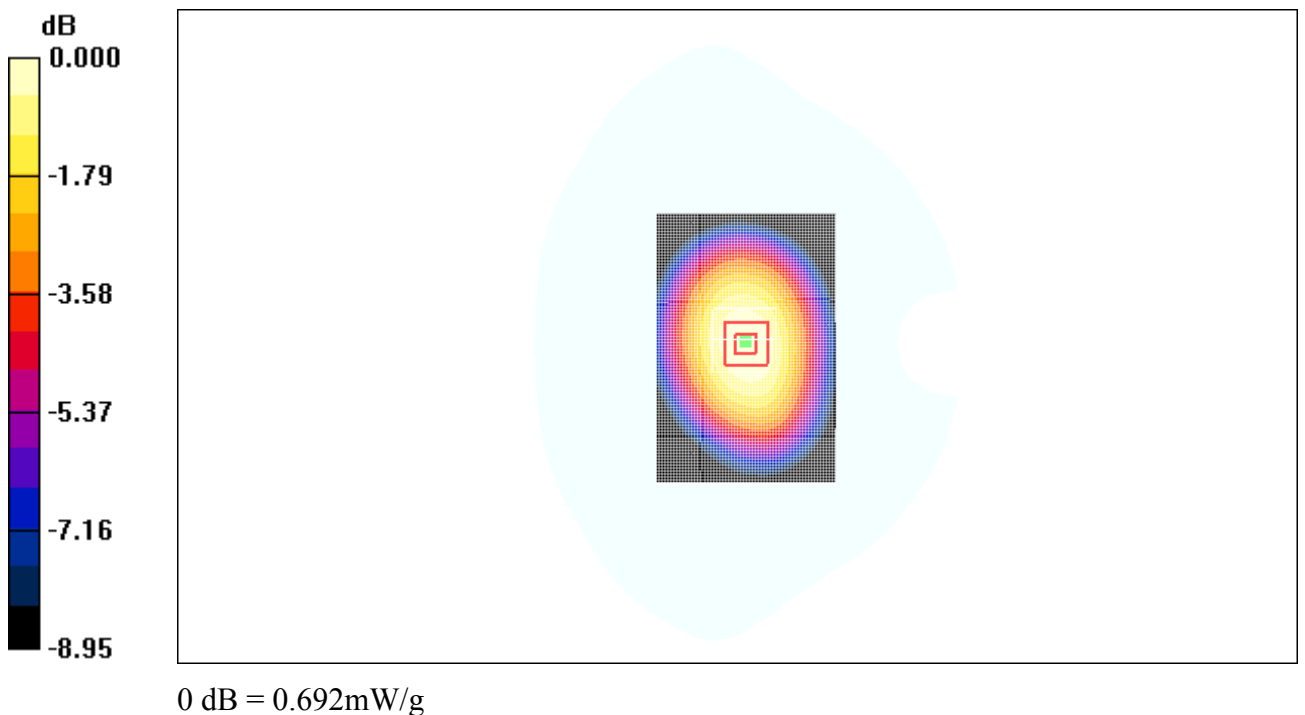


Fig. 20 850 MHz CH128

850 Body Towards Ground Low With EGPRS

Date/Time: 2009-5-13 12:14:07

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.687 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.7 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 0.694 mW/g

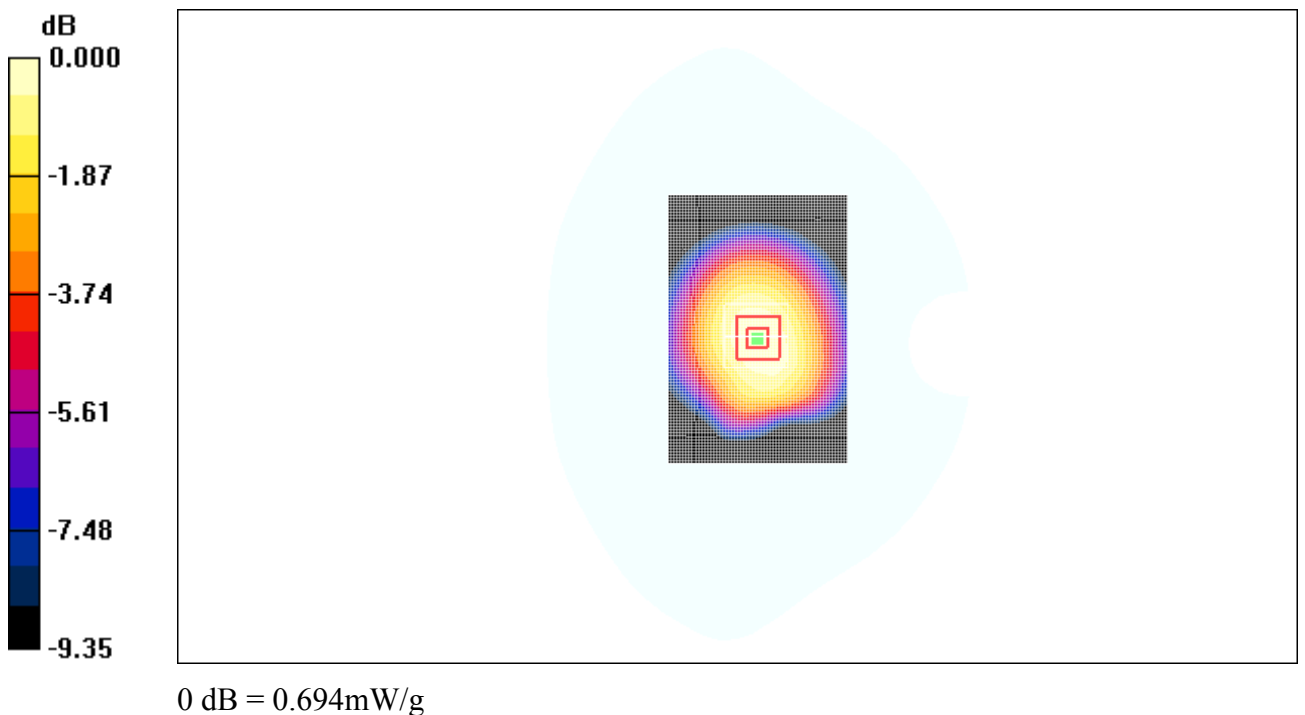


Fig. 21 850 MHz CH128

850 Body Towards Ground Low With Headset

Date/Time: 2009-5-13 12:29:46

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825$ MHz; $\sigma = 0.983$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.733 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

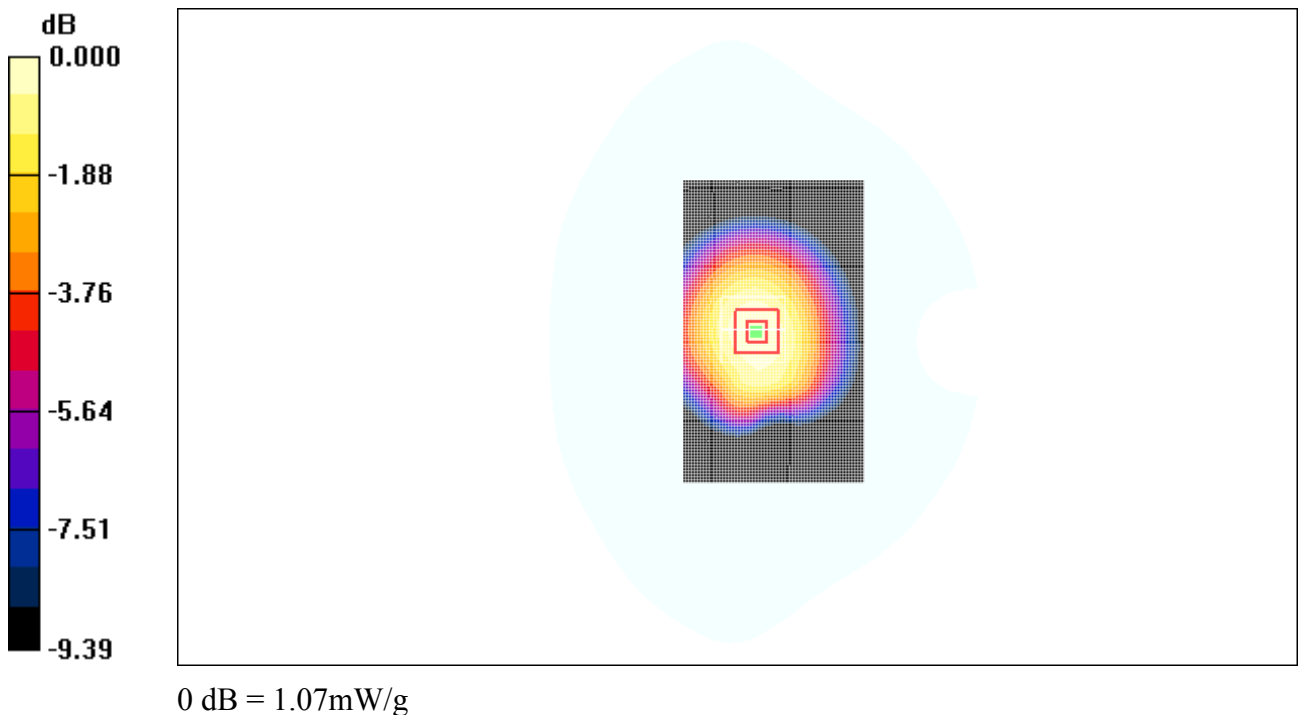


Fig. 22 850 MHz CH128

1900 Left Cheek High

Date/Time: 2009-5-14 8:02:32

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.551 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.5 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

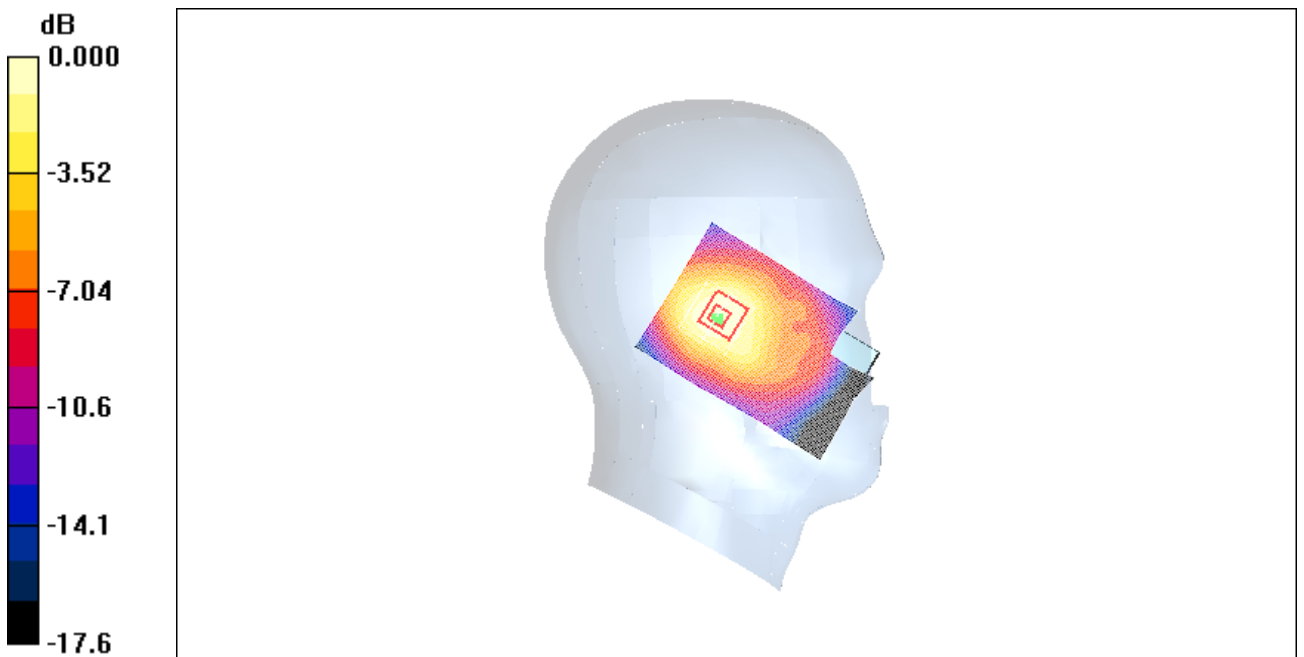

0 dB = 0.536mW/g

Fig. 23 1900 MHz CH810

1900 Left Cheek Middle

Date/Time: 2009-5-14 8:16:45

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.793 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.6 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.426 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

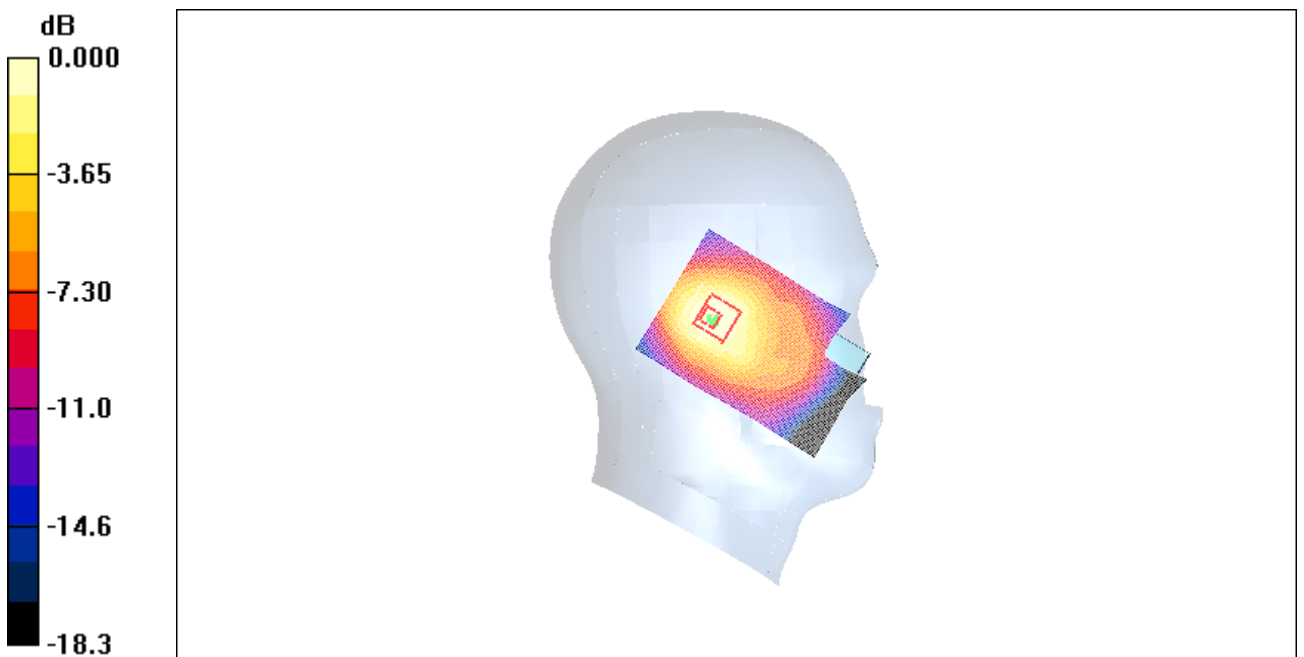

0 dB = 0.777mW/g

Fig. 24 1900 MHz CH661

1900 Left Cheek Low

Date/Time: 2009-5-14 8:30:50

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.863 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.150 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.788 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.859 mW/g

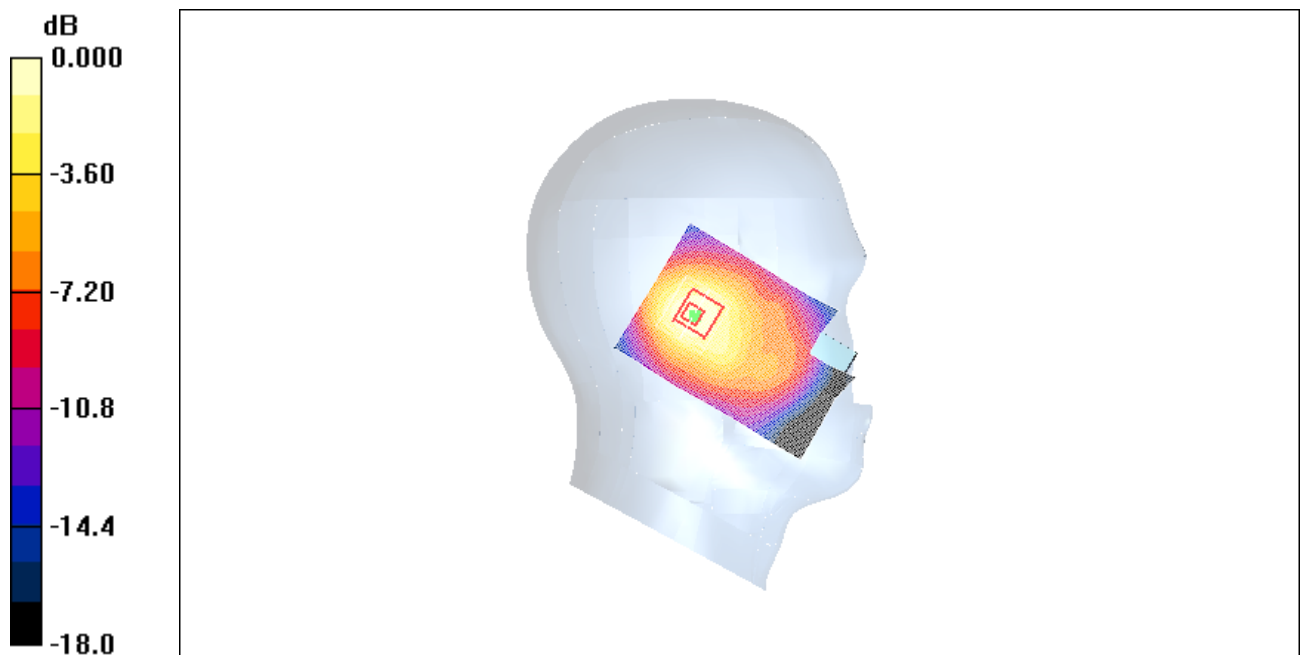

0 dB = 0.859mW/g

Fig. 25 1900 MHz CH512

1900 Left Tilt High

Date/Time: 2009-5-14 8:44:39

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.793 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.739 mW/g

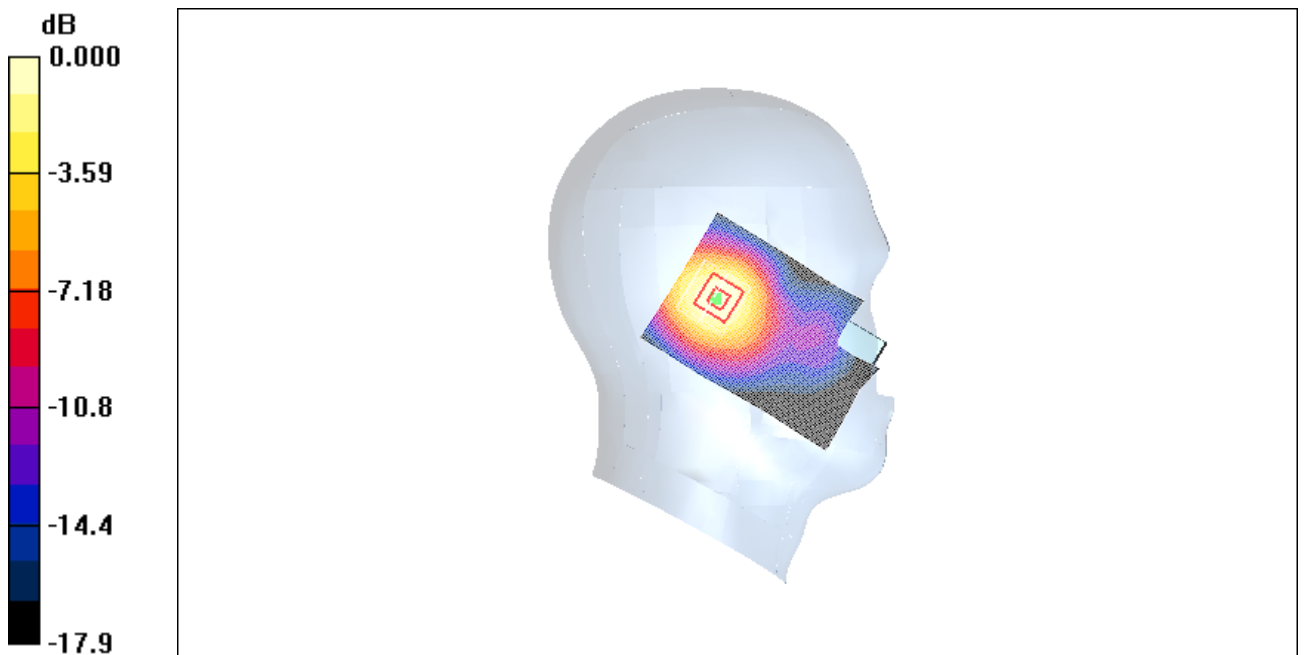

0 dB = 0.739mW/g

Fig.26 1900 MHz CH810

1900 Left Tilt Middle

Date/Time: 2009-5-14 8:58:31

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.575 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

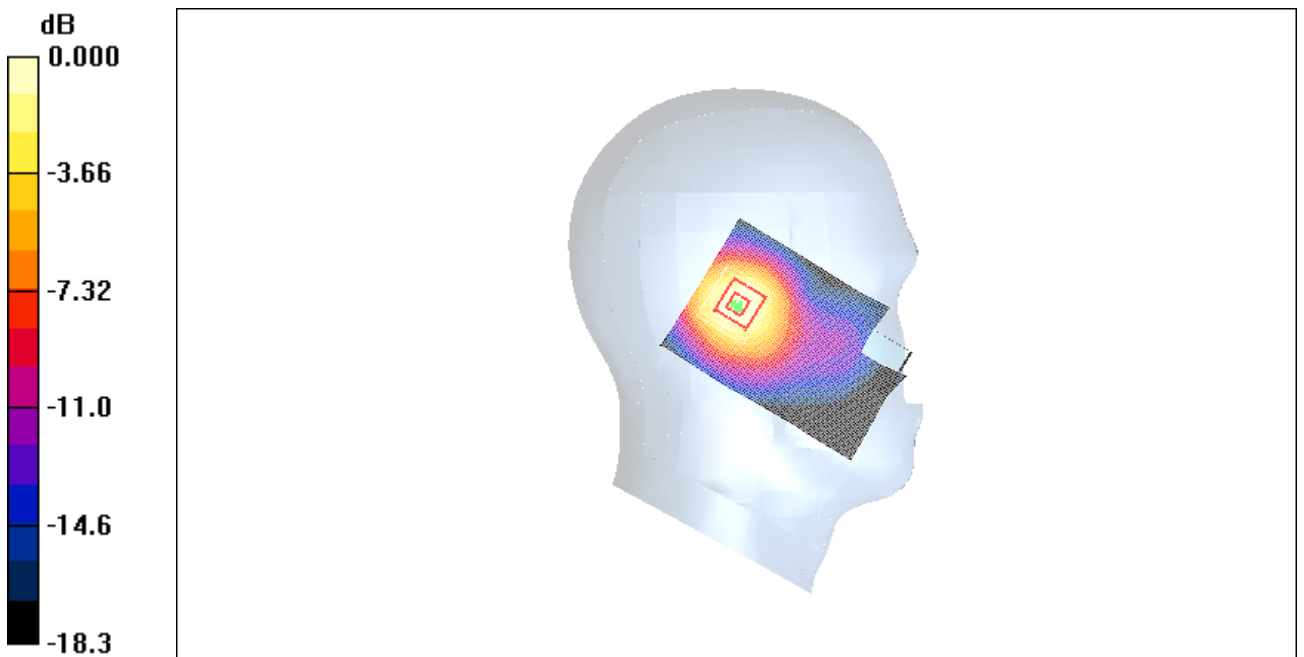


Fig. 27 1900 MHz CH661

1900 Left Tilt Low

Date/Time: 2009-5-14 9:12:05

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.33 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.8 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.655 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

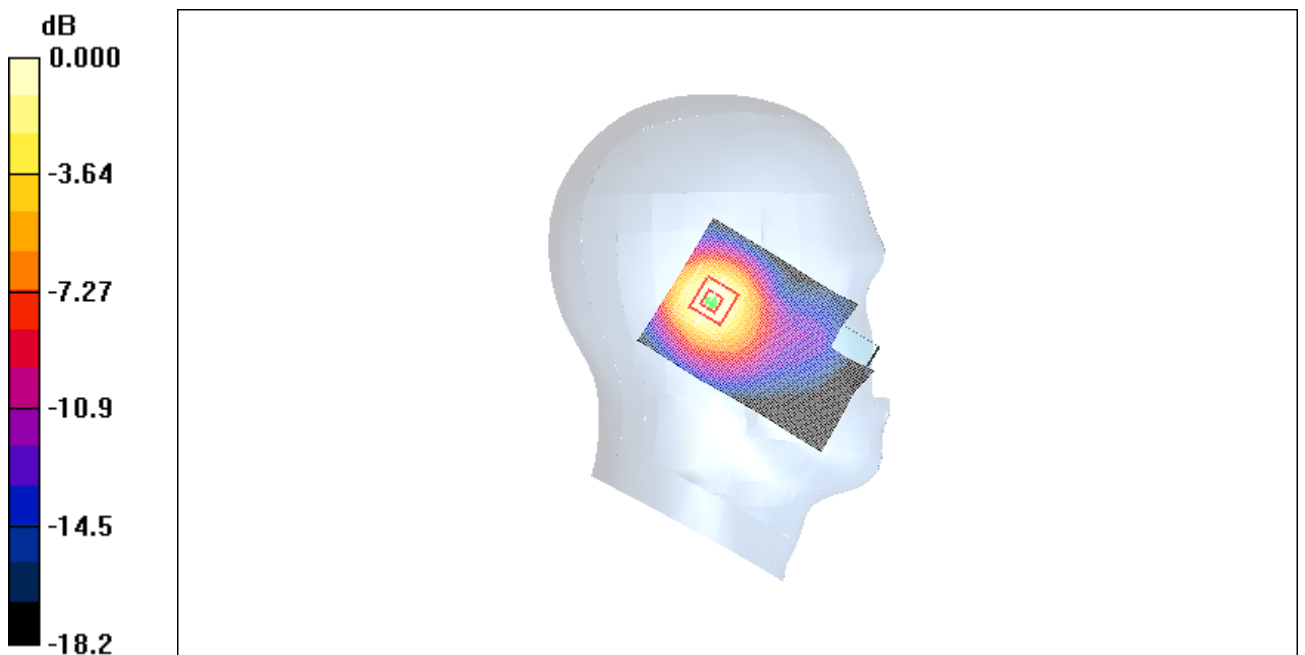

0 dB = 1.27mW/g

Fig. 28 1900 MHz CH512

1900 Right Cheek High

Date/Time: 2009-5-14 9:26:57

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.591 mW/g


Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.6 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.934 W/kg

SAR(1 g) = 0.520 mW/g; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

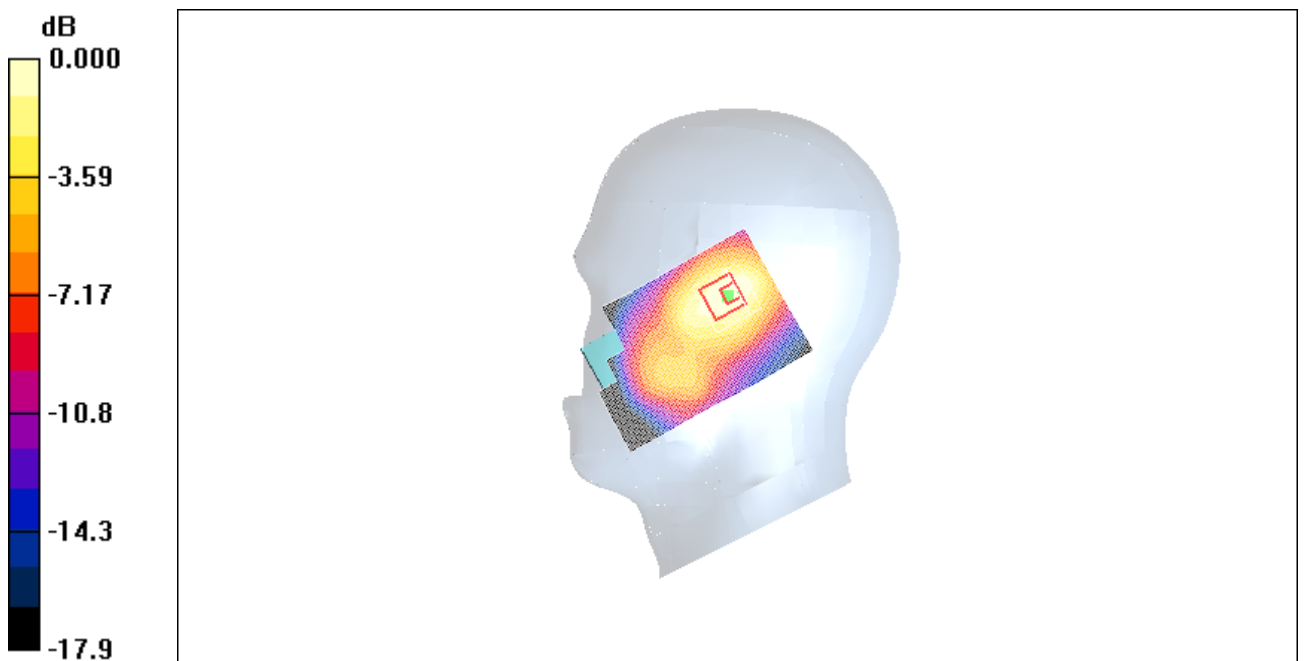

0 dB = 0.562mW/g

Fig. 29 1900 MHz CH810

1900 Right Cheek Middle

Date/Time: 2009-5-14 9:40:52

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.884 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.2 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

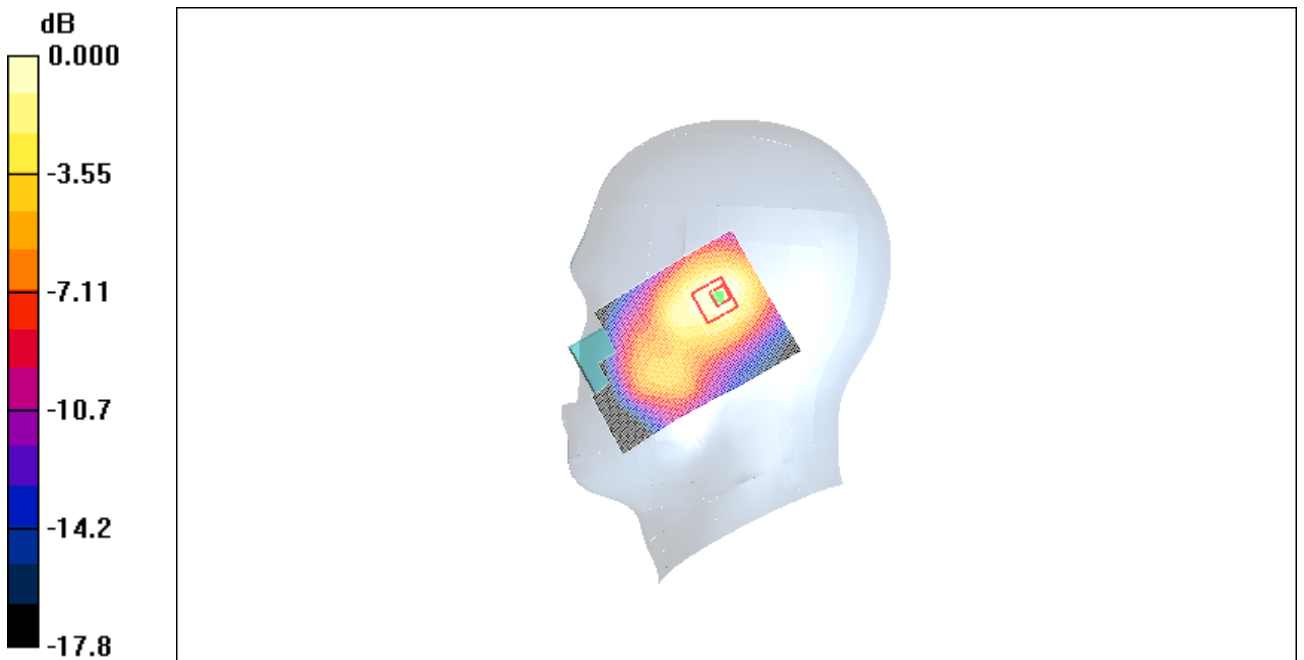

0 dB = 0.852mW/g

Fig. 30 1900 MHz CH661

1900 Right Cheek Low

Date/Time: 2009-5-14 9:54:36

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.963 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.3 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.885 mW/g; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 0.951 mW/g

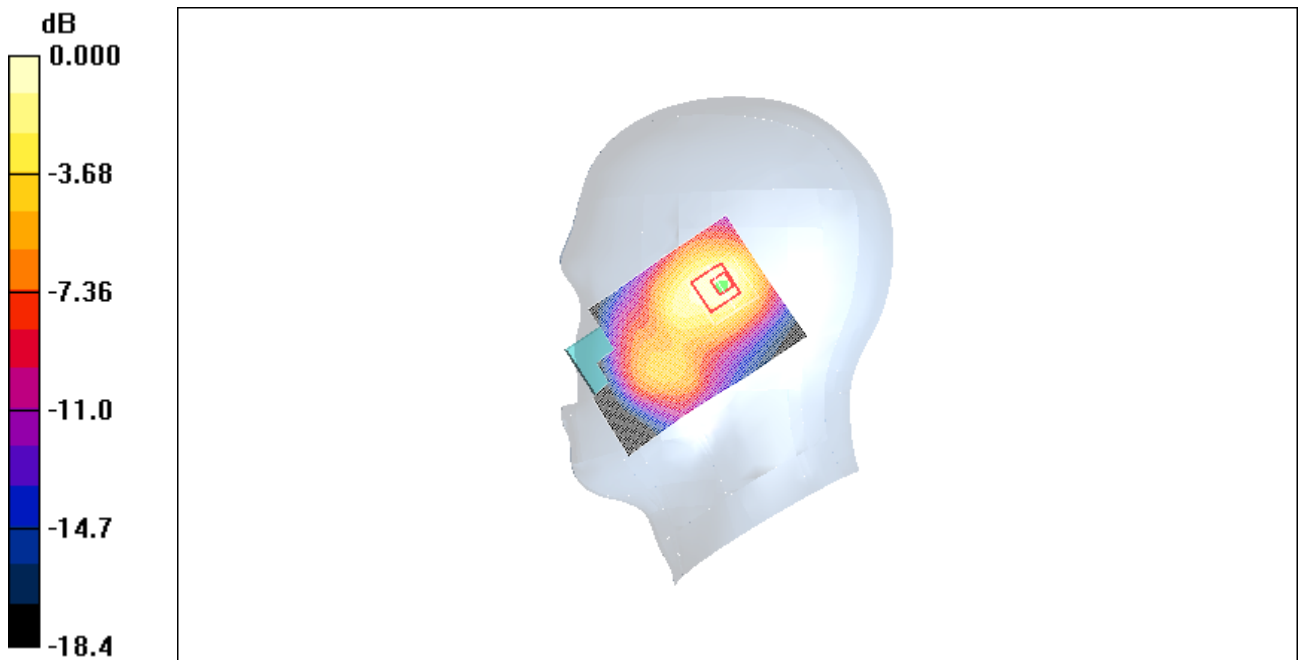


Fig. 31 1900 MHz CH512

1900 Right Tilt High

Date/Time: 2009-5-14 10:08:24

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt High/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.765 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.8 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 0.706 mW/g

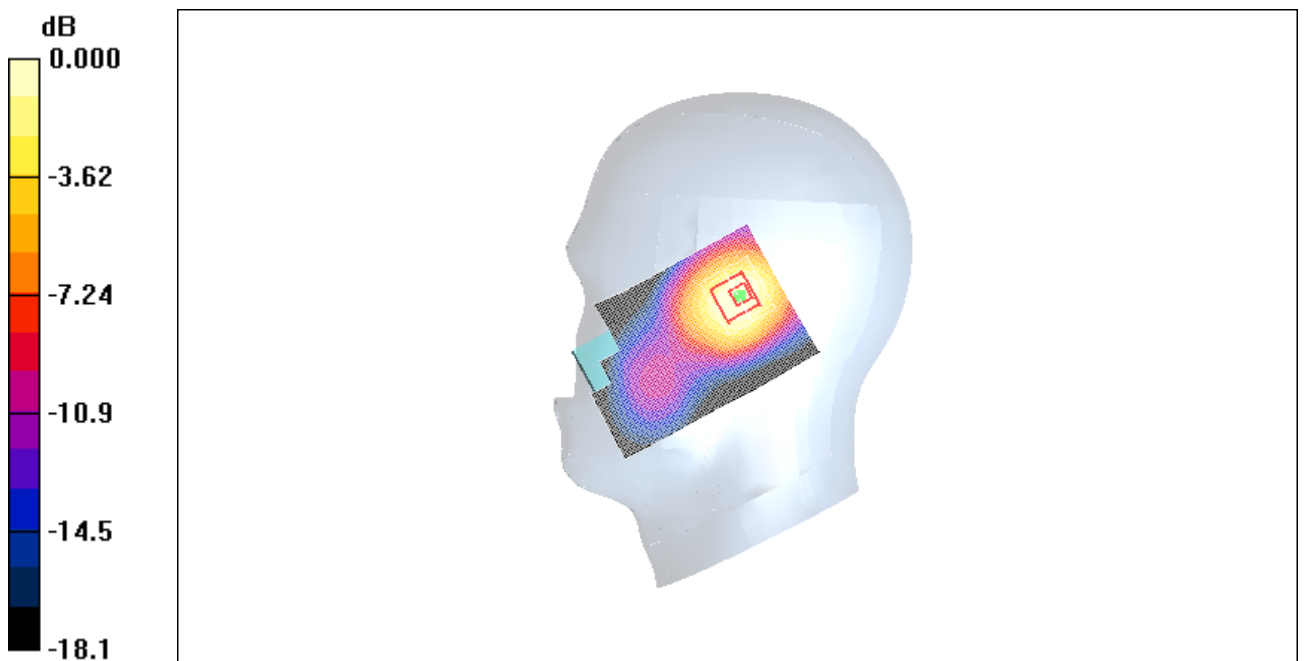

0 dB = 0.706mW/g

Fig. 32 1900 MHz CH810

1900 Right Tilt Middle

Date/Time: 2009-5-14 10:22:17

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.18 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.573 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

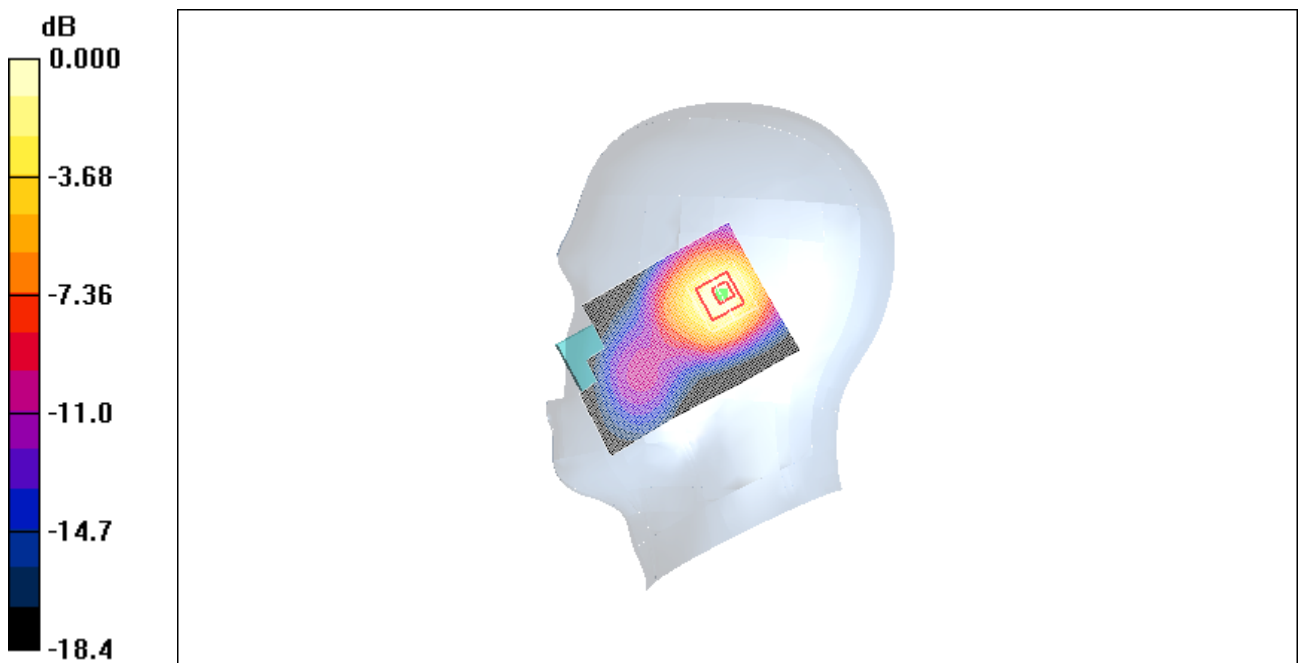

0 dB = 1.11mW/g

Fig.33 1900 MHz CH661

1900 Right Tilt Low

Date/Time: 2009-5-14 10:36:25

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.34 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.647 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

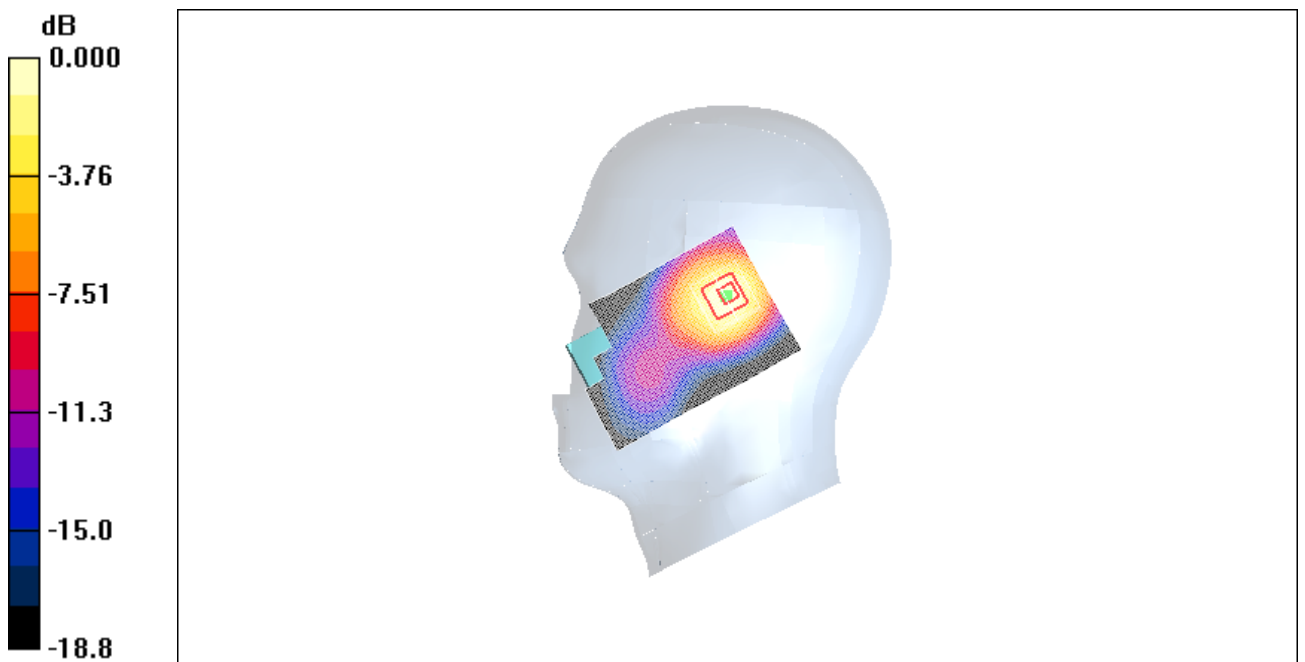

0 dB = 1.27mW/g

Fig.34 1900 MHz CH512

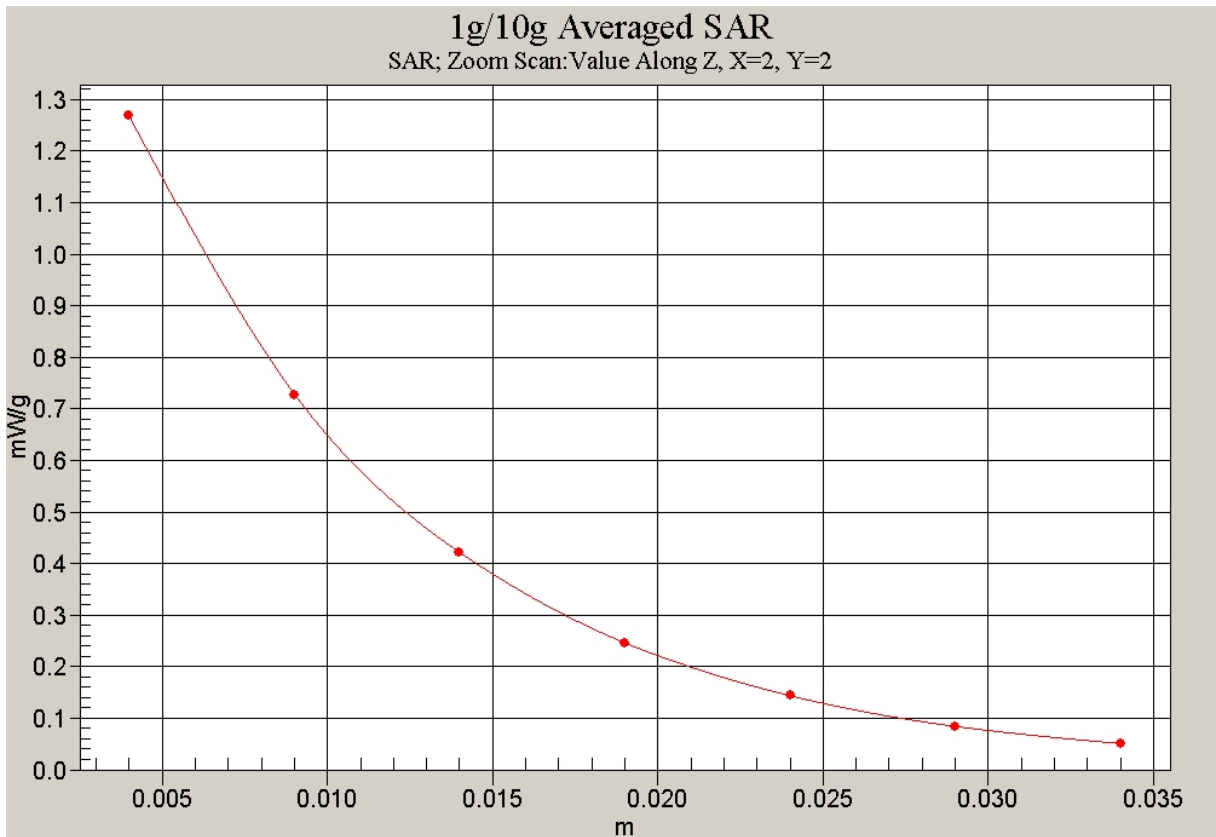


Fig. 35 Z-Scan at power reference point (1900 MHz CH512)

1900 Body Towards Ground High With GPRS

Date/Time: 2009-5-14 10:54:30

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.472 mW/g


Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

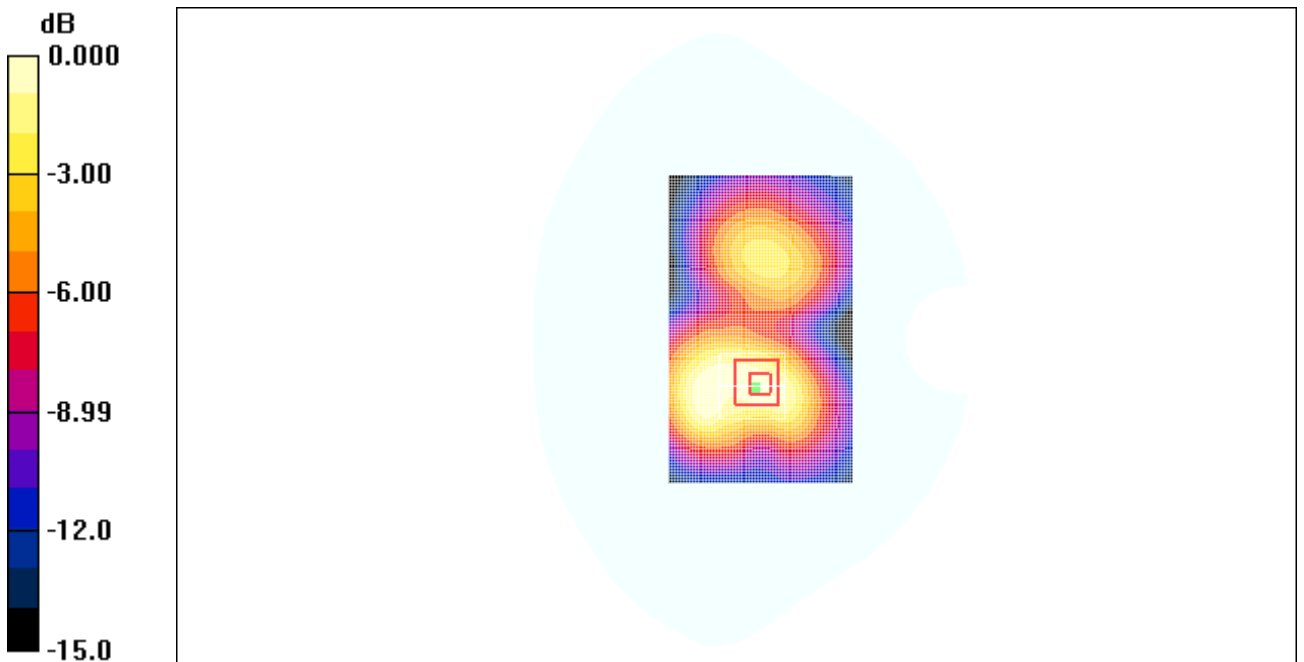

0 dB = 0.462mW/g

Fig. 36 1900 MHz CH810

1900 Body Towards Ground Middle With GPRS

Date/Time: 2009-5-14 11:08:49

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Middle/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.735 mW/g


Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.369 mW/g

Maximum value of SAR (measured) = 0.709 mW/g

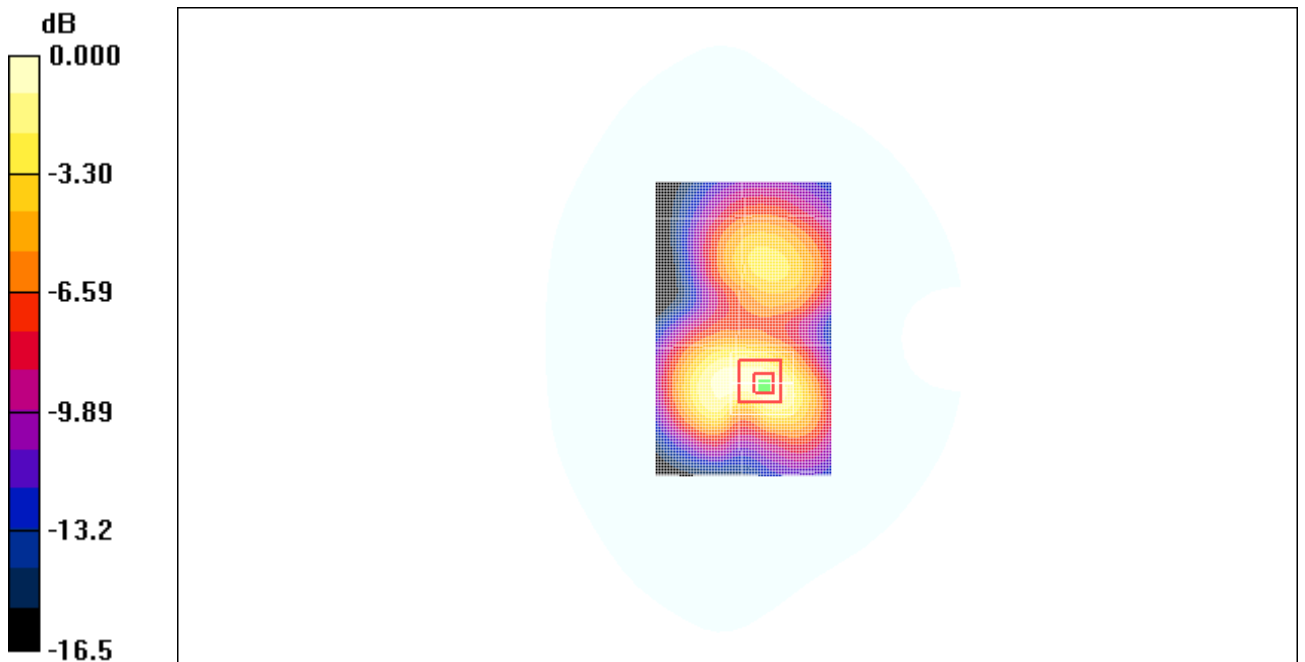

0 dB = 0.709mW/g

Fig. 37 1900 MHz CH661