



SAR TEST REPORT

No. 2010SAR00020

For

TCT Mobile Limited

GSM/GPRS/EDGE 850/1800/1900 Tri-band mobile phone

Yippee A/Yippee Yahoo A

OT-802A/OT-802YA

With

Hardware Version: Lot0

Software Version: V825/V524

FCCID: RAD133

Issued Date: 2010-03-23



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304793 Email:welcme@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

TABLE OF CONTENT

1 TEST LABORATORY	3
1.1 TESTING LOCATION	3
1.2 TESTING ENVIRONMENT.....	3
1.3 PROJECT DATA	3
1.4 SIGNATURE.....	3
2 CLIENT INFORMATION	4
2.1 APPLICANT INFORMATION	4
2.2 MANUFACTURER INFORMATION	4
3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1 ABOUT EUT	5
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4 CHARACTERISTICS OF THE TEST	5
4.1 APPLICABLE LIMIT REGULATIONS	5
4.2 APPLICABLE MEASUREMENT STANDARDS.....	5
5 OPERATIONAL CONDITIONS DURING TEST	6
5.1 SCHEMATIC TEST CONFIGURATION.....	6
5.2 SAR MEASUREMENT SET-UP.....	6
5.3 DASY4 E-FIELD PROBE SYSTEM.....	7
5.4 E-FIELD PROBE CALIBRATION	8
5.5 OTHER TEST EQUIPMENT	9
5.6 EQUIVALENT TISSUES.....	10
5.7 SYSTEM SPECIFICATIONS.....	10
6 LABORATORY ENVIRONMENT	11
7 CONDUCTED OUTPUT POWER MEASUREMENT.....	11
7.1 SUMMARY	11
7.2 CONDUCTED POWER	11
8 TEST RESULTS	12
8.1 DIELECTRIC PERFORMANCE	12
8.2 SYSTEM VALIDATION.....	13
8.3 SUMMARY OF MEASUREMENT RESULTS	14
8.4 SUMMARY OF MEASUREMENT RESULTS (BLUETOOTH FUNCTION)	16
8.5 CONCLUSION	16
9 MEASUREMENT UNCERTAINTY	17
10 MAIN TEST INSTRUMENTS	18
ANNEX A MEASUREMENT PROCESS.....	19
ANNEX B TEST LAYOUT	20
ANNEX C GRAPH RESULTS.....	25
ANNEX D SYSTEM VALIDATION RESULTS	71
ANNEX E PROBE CALIBRATION CERTIFICATE.....	75
ANNEX F DIPOLE CALIBRATION CERTIFICATE	84

1 Test Laboratory

1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100191
Telephone: +86-10-62304633
Fax: +86-10-62304793

1.2 Testing Environment

Temperature: 18°C~25 °C,
Relative humidity: 30%~ 70%
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

1.3 Project Data

Project Leader: Sun Qian
Test Engineer: Lin Xiaojun
Testing Start Date: March 20, 2010
Testing End Date: March 21, 2010


1.4 Signature



Lin Xiaojun
(Prepared this test report)



Sun Qian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Client Information

2.1 Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 4/F, South Building, No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2 Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 4/F, South Building, No.2966, Jinke Road, Zhangjiang High-Tech Park,
Pudong, Shanghai, 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P. R. China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1 About EUT

EUT Description:	GSM/GPRS/EDGE 850/1800/1900 Tri-band mobile phone
Model Name:	Yippee A/Yippee Yahoo A
Marketing Name:	OT-802A/OT-802YA
GSM Frequency Band:	GSM 850 / PCS 1900

3.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	012219000032666	Lot0	V825/V524

*EUT ID: is used to identify the test sample in the lab internally.

3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Travel Adapter	CBA30Y0AG0C1	\	BYD
AE2	Travel Adapter	CBA30Y0AG0C2	\	Tenbao
AE3	Battery	CAB30P0000C1	B0499601F2A	BYD
AE4	Headset	CCA30B4000C0	\	Shunda/Juwei
AE5	Headset	T5003308AAAA	\	Shunda/Juwei

*AE ID: is used to identify the test sample in the lab internally.

4 CHARACTERISTICS OF THE TEST

4.1 Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

4.2 Applicable Measurement Standards

EN 62209-1–2006: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

IEC 62209-1: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEC 62209-2 (Draft): Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30MHz to 6GHz Handheld and Body-Mounted Devices used in close proximity to the Body.

KDB648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05: SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

5 OPERATIONAL CONDITIONS DURING TEST

5.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.


The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

5.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a

Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

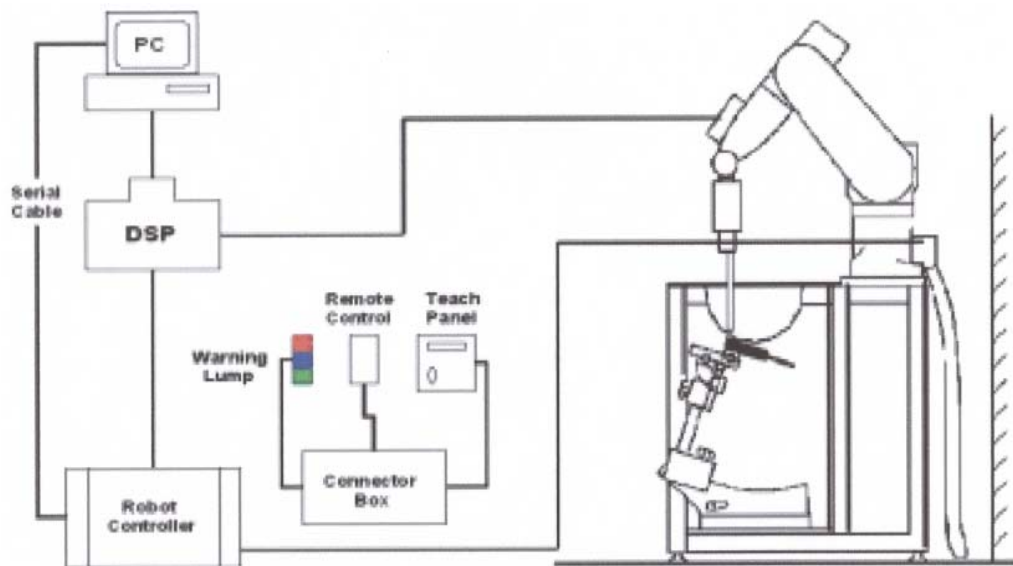

Picture 2: SAR Lab Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ES3DV3 Probe Specification

- Construction Symmetrical design with triangular core
- Interleaved sensors
- Built-in shielding against static charges

	PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1810
	Additional CF for other liquids and frequencies upon request



Picture 3: ES3DV3 E-field

Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones



Picture4:ES3DV3 E-field probe

5.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).



Picture 5: Device Holder

5.5 Other Test Equipment

5.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

5.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Picture 6: Generic Twin Phantom

5.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 1 and 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Table 1. Composition of the Head Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz
Water	41.45
Sugar	56.0
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=41.5$ $\sigma=0.90$
MIXTURE %	FREQUENCY 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

Table 2. Composition of the Body Tissue Equivalent Matter

MIXTURE %	FREQUENCY 850MHz
Water	52.5
Sugar	45.0
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE %	FREQUENCY 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

5.7 System Specifications

5.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features:Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

6 LABORATORY ENVIRONMENT

Table 3: The Ambient Conditions during EMF Test

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surround objects is minimized and in compliance with requirement of standards.	

7 CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

7.2 Conducted Power

7.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at low, middle and high channels.

7.2.2 Measurement result

The conducted power for GSM 850/1900 is as following:

GSM	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
850MHZ	32.31	32.36	32.35
GSM	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
1900MHZ	29.43	29.52	29.70
GPRS	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
850MHZ	32.32	32.36	32.37

GPRS 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	29.34	29.43	29.59
EGPRS 850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	25.33	25.45	24.33
EGPRS 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	24.67	24.41	23.96

7.2.3 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 8 to Table 11 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

8 TEST RESULTS

8.1 Dielectric Performance

Table 4: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 23.0 °C and relative humidity 38%.			
Liquid temperature during the test: 22.5°C			
Measurement Date : 850 MHz <u>March 20, 2010</u> 1900 MHz <u>March 21, 2010</u>			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	41.5	0.90
	1900 MHz	40.0	1.40
Measurement value (Average of 10 tests)	850 MHz	40.2	0.89
	1900 MHz	39.1	1.41

Table 5: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 23.0 °C and relative humidity 38%.			
Liquid temperature during the test: 22.5°C			
Measurement Date : 850 MHz <u>March 20, 2010</u> 1900 MHz <u>March 21, 2010</u>			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	850 MHz	55.2	0.97
	1900 MHz	53.3	1.52
Measurement value (Average of 10 tests)	850 MHz	53.9	0.95
	1900 MHz	52.3	1.55

8.2 System Validation

Table 6: System Validation of Head

Measurement is made at temperature 23.0 °C and relative humidity 38%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz March 20, 2010 1900 MHz March 21, 2010							
Liquid parameters	Dipole calibration Target value	Frequency		Permittivity ϵ		Conductivity σ (S/m)	
		835 MHz		41.6		0.92	
	Actural Measurement value	1900 MHz		39.6		1.40	
		835 MHz		40.3		0.87	
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	1.54	2.38	1.58	2.32	2.60%	-2.52%
	1900 MHz	5.05	9.91	4.91	9.80	-2.77%	-1.11%

Note: Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

Table 7: System Validation of Body

Measurement is made at temperature 23.0 °C and relative humidity 38%. Liquid temperature during the test: 22.5°C Measurement Date : 850 MHz March 20, 2010 1900 MHz March 21, 2010							
Liquid parameters	Dipole calibration Target value	Frequency		Permittivity ϵ		Conductivity σ (S/m)	
		835 MHz		54.5		0.97	
	Actural Measurement value	1900 MHz		52.5		1.51	
		835 MHz		54.0		0.93	
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	1.57	2.41	1.51	2.42	-3.82%	0.41%
	1900 MHz	5.24	10.4	5.35	10.3	2.10%	-0.96%

Note: Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

8.3 Summary of Measurement Results

Table 8: SAR Values (850MHz-Head)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency (See Fig.1)	0.345	0.476	0.046
Left hand, Touch cheek, Mid frequency (See Fig.2)	0.336	0.466	0.001
Left hand, Touch cheek, Bottom frequency (See Fig.3)	0.298	0.431	-0.020
Left hand, Tilt 15 Degree, Top frequency (See Fig.4)	0.242	0.362	-0.004
Left hand, Tilt 15 Degree, Mid frequency (See Fig.5)	0.250	0.374	-0.091
Left hand, Tilt 15 Degree, Bottom frequency (See Fig.6)	0.237	0.355	-0.034
Right hand, Touch cheek, Top frequency (See Fig.7)	0.319	0.463	-0.011
Right hand, Touch cheek, Mid frequency (See Fig.8)	0.307	0.460	-0.062
Right hand, Touch cheek, Bottom frequency (See Fig.9)	0.245	0.372	-0.146
Right hand, Tilt 15 Degree, Top frequency (See Fig.10)	0.255	0.427	-0.062
Right hand, Tilt 15 Degree, Mid frequency (See Fig.11)	0.257	0.432	-0.029
Right hand, Tilt 15 Degree, Bottom frequency (See Fig.12)	0.234	0.358	-0.089

Table 9: SAR Values (1900MHz-Head)

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency (See Fig.13)	0.127	0.203	-0.111
Left hand, Touch cheek, Mid frequency (See Fig.14)	0.114	0.183	-0.052
Left hand, Touch cheek, Bottom frequency (See Fig.15)	0.118	0.188	0.002
Left hand, Tilt 15 Degree, Top frequency (See Fig.16)	0.172	0.293	-0.002
Left hand, Tilt 15 Degree, Mid frequency (See Fig.17)	0.151	0.255	-0.001
Left hand, Tilt 15 Degree, Bottom frequency (See Fig.18)	0.157	0.263	-0.059
Right hand, Touch cheek, Top frequency (See Fig.19)	0.190	0.328	-0.104
Right hand, Touch cheek, Mid frequency (See Fig.20)	0.163	0.283	-0.008
Right hand, Touch cheek, Bottom frequency (See Fig.21)	0.164	0.283	0.040
Right hand, Tilt 15 Degree, Top frequency (See Fig.22)	0.221	0.397	-0.003
Right hand, Tilt 15 Degree, Mid frequency (See Fig.23)	0.189	0.333	0.064
Right hand, Tilt 15 Degree, Bottom frequency(See Fig.24)	0.192	0.338	-0.066

Table 10: SAR Values (850MHz-Body)


Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS (See Fig.25)	0.469	0.656	-0.041
Body, Towards Ground, Mid frequency with GPRS (See Fig.26)	0.517	0.720	0.033
Body, Towards Ground, Bottom frequency with GPRS (See Fig.27)	0.569	0.786	0.048
Body, Towards Phantom, Top frequency with GPRS (See Fig.28)	0.232	0.312	-0.015
Body, Towards Phantom, Mid frequency with GPRS (See Fig.29)	0.262	0.353	0.008
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.30)	0.336	0.458	0.007
Body, Towards Ground, Bottom frequency with EGPRS (See Fig.31)	0.550	0.761	-0.055
Body, Towards Ground, Bottom frequency with Headset_CCA30B4000C0 (See Fig.32)	0.455	0.632	0.066
Body, Towards Ground, Bottom frequency with Headset_T5003308AAAA (See Fig.33)	0.465	0.645	-0.040

Table 11: SAR Values (1900MHz-Body)

Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS (See Fig.34)	0.677	1.22	-0.025
Body, Towards Ground, Mid frequency with GPRS (See Fig.35)	0.466	0.829	0.056
Body, Towards Ground, Bottom frequency with GPRS (See Fig.36)	0.425	0.750	0.017
Body, Towards Phantom, Top frequency with GPRS (See Fig.37)	0.140	0.224	0.076
Body, Towards Phantom, Mid frequency with GPRS (See Fig.38)	0.111	0.175	0.135
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.39)	0.098	0.155	-0.005
Body, Towards Ground, Top frequency with EGPRS (See Fig.40)	0.430	0.775	0.098
Body, Towards Ground, Top frequency with Headset_CCA30B4000C0 (See Fig.41)	0.517	0.934	-0.169
Body, Towards Ground, Top frequency with Headset_T5003308AAAA (See Fig.42)	0.531	0.956	-0.109

8.4 Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is $>5\text{cm}$. The location of the antennas inside mobile phone is shown below:

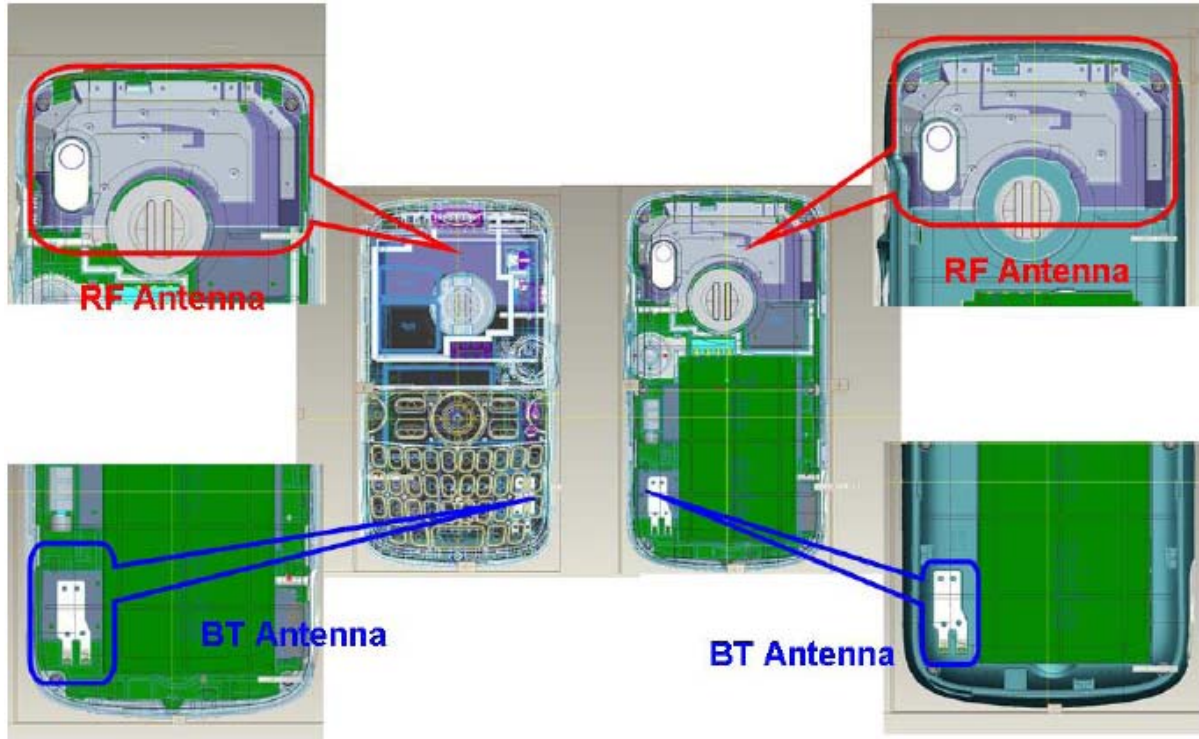

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	1.94	1.97	3.25

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR are not required for BT transmitter, because the output power of BT transmitter is $\leq 2P_{\text{Ref}}$ and its antenna is $>5\text{cm}$ from other antenna

8.5 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 4.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 4.1 of this test report.

9 Measurement Uncertainty

No.	Error source	Type	Uncertainty Value (%)	Probability Distribution	k	c _i	Standard Uncertainty (%) u _i (%)	Degree of freedom V _{eff} or v _i
1	System repeatability	A	0.5	N	1	1	0.5	9
Measurement system								
2	– probe calibration	B	7	N	2	1	3.5	∞
3	– axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	0.5	4.3	∞
4	– hemisphere isotropy of the probe	B	9.4	R	$\sqrt{3}$			
5	– space resolution	B	0	R	$\sqrt{3}$	1	0	∞
6	– boundary effect	B	11.0	R	$\sqrt{3}$	1	6.4	∞
7	– probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
8	– detection limit	B	1.0	R	$\sqrt{3}$	1	0.6	∞
9	– readout electronics	B	1.0	N	1	1	1.0	∞
10	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
11	– Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
12	– Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
13	– Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
14	– Test Sample Positioning	A	4.9	N	1	1	4.9	5
15	– Device Holder	A	6.1	N	1	1	6.1	5

16	– Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
17	– Phantom Uncertainty (shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
18	– liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
19	– liquid conductivity (measurement error)	A	0.23	N	1	1	0.23	9
20	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
21	– liquid permittivity (measurement error)	A	0.46	N	1	1	0.46	9
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$		/		12.2		88.7
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.4	/

10 MAIN TEST INSTRUMENTS

Table 12: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 29,2009	One year
02	Power meter	NRVD	101253	September 4, 2009	One year
03	Power sensor	NRV-Z5	100333		
04	Signal Generator	E4433B	US37230472	September 3, 2009	One Year
05	Amplifier	VTL5400	0505	No Calibration Requested	
06	BTS	CMU 200	113312	August 10, 2009	One year
07	E-field Probe	SPEAG ES3DV3	3149	September 25, 2009	One year
08	DAE	SPEAG DAE4	771	November 19, 2009	One year
09	Dipole Validation Kit	SPEAG D835V2	443	February 26, 2010	Two years
10	Dipole Validation Kit	SPEAG D1900V2	541	February 26, 2010	Two years

END OF REPORT BODY

ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.


c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

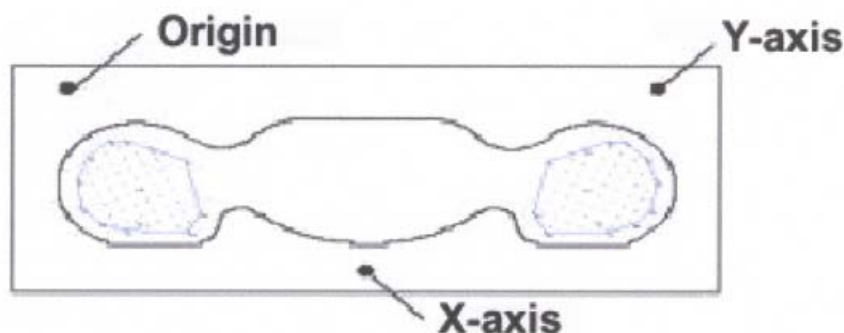


Picture A: SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT

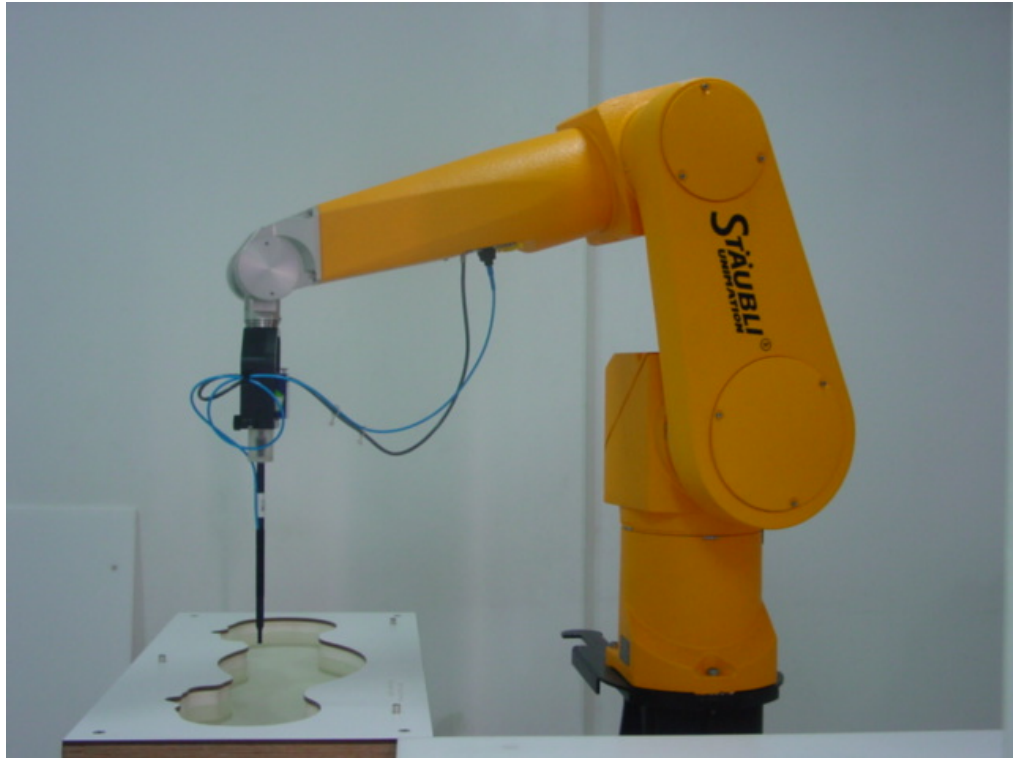

Picture B1: Specific Absorption Rate Test Layout

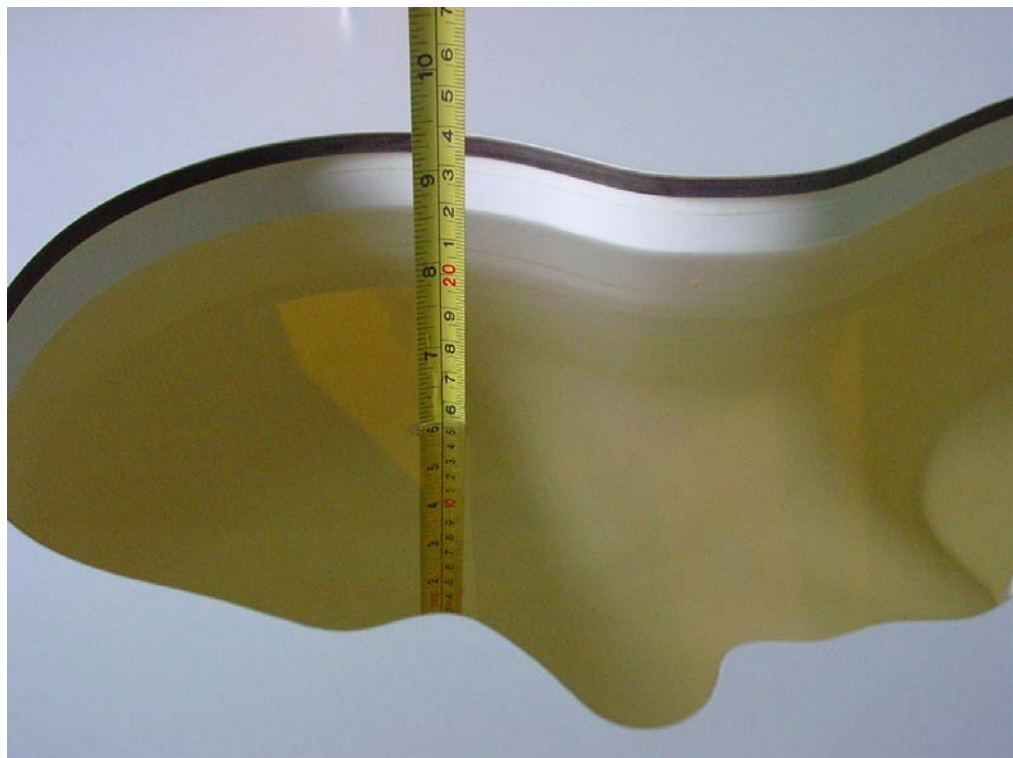

Picture B2: Liquid depth in the Flat Phantom (850 MHz)



Picture B3 Liquid depth in the Flat Phantom (1900MHz)



Picture B4: Left Hand Touch Cheek Position




Picture B5: Left Hand Tilt 15° Position




Picture B6: Right Hand Touch Cheek Position




Picture B7: Right Hand Tilt 15° Position

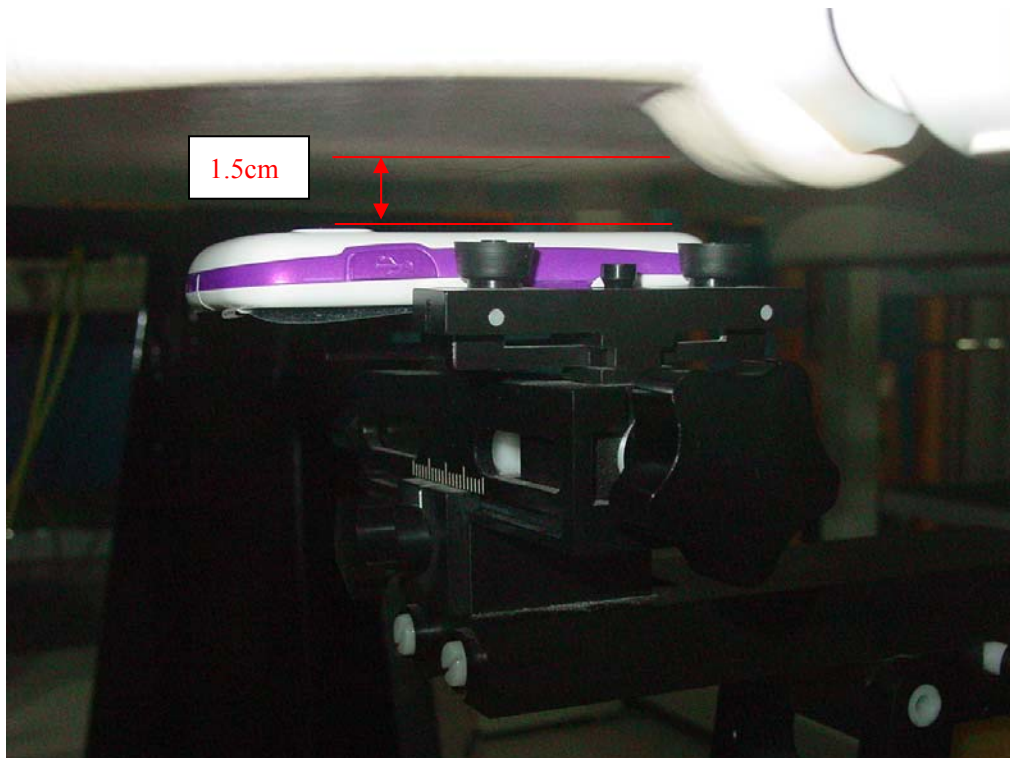

Picture B8: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

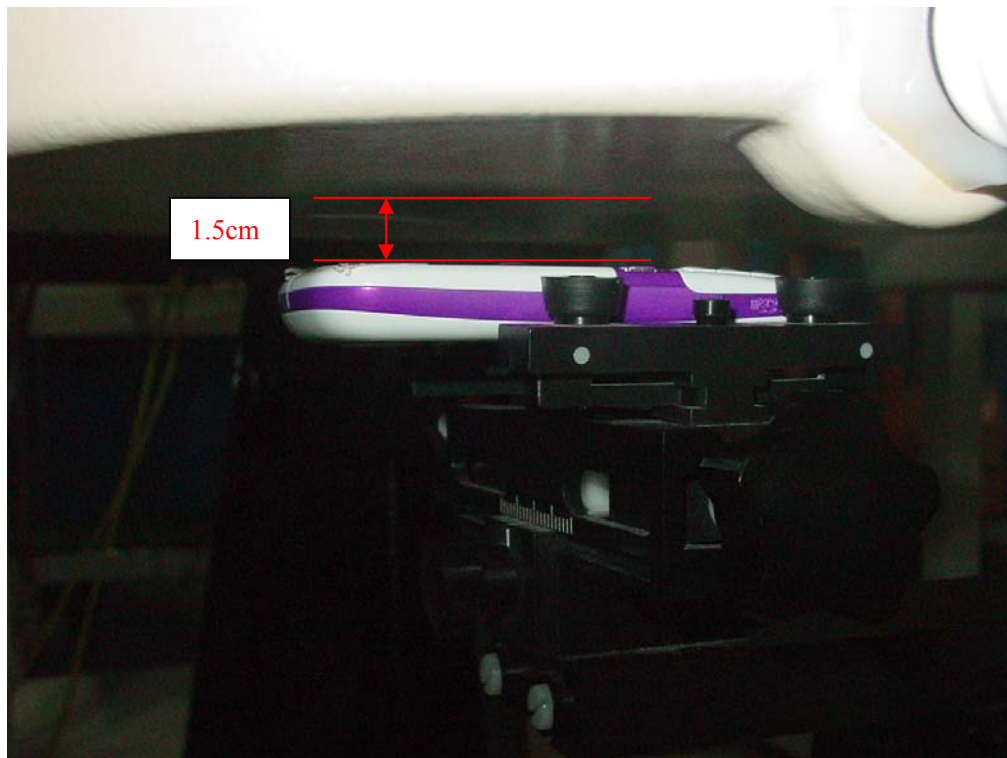

Picture B9: Body-worn Position (towards Phantom, the distance from handset to the bottom of the Phantom is 1.5cm)

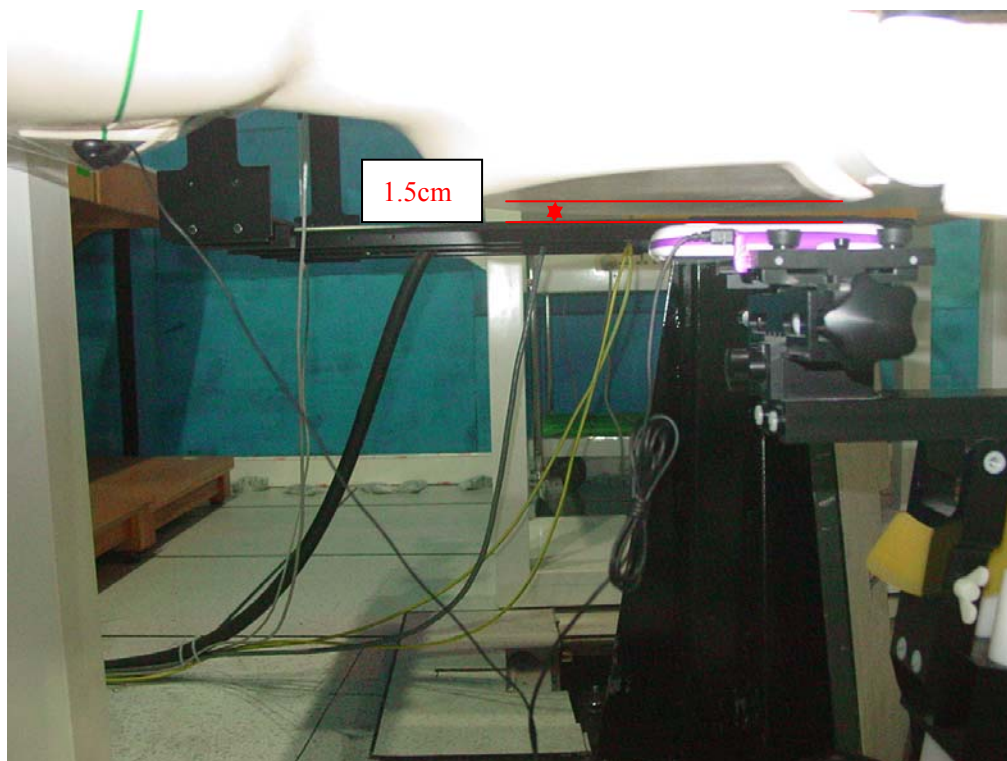

Picture B10: Body-worn Position with Headset (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)

ANNEX C GRAPH RESULTS

850 Left Cheek High

Date/Time: 2010-3-20 8:19:25

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.515 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.0 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.505 mW/g

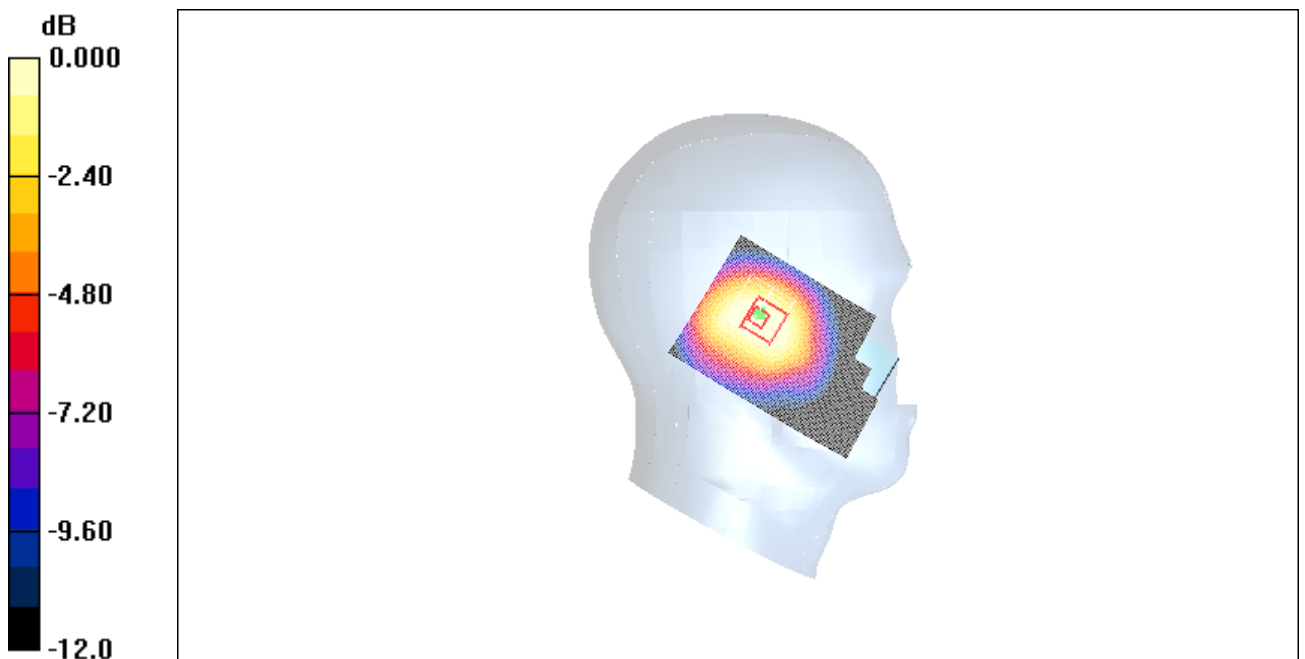


Fig. 1 850MHz CH251

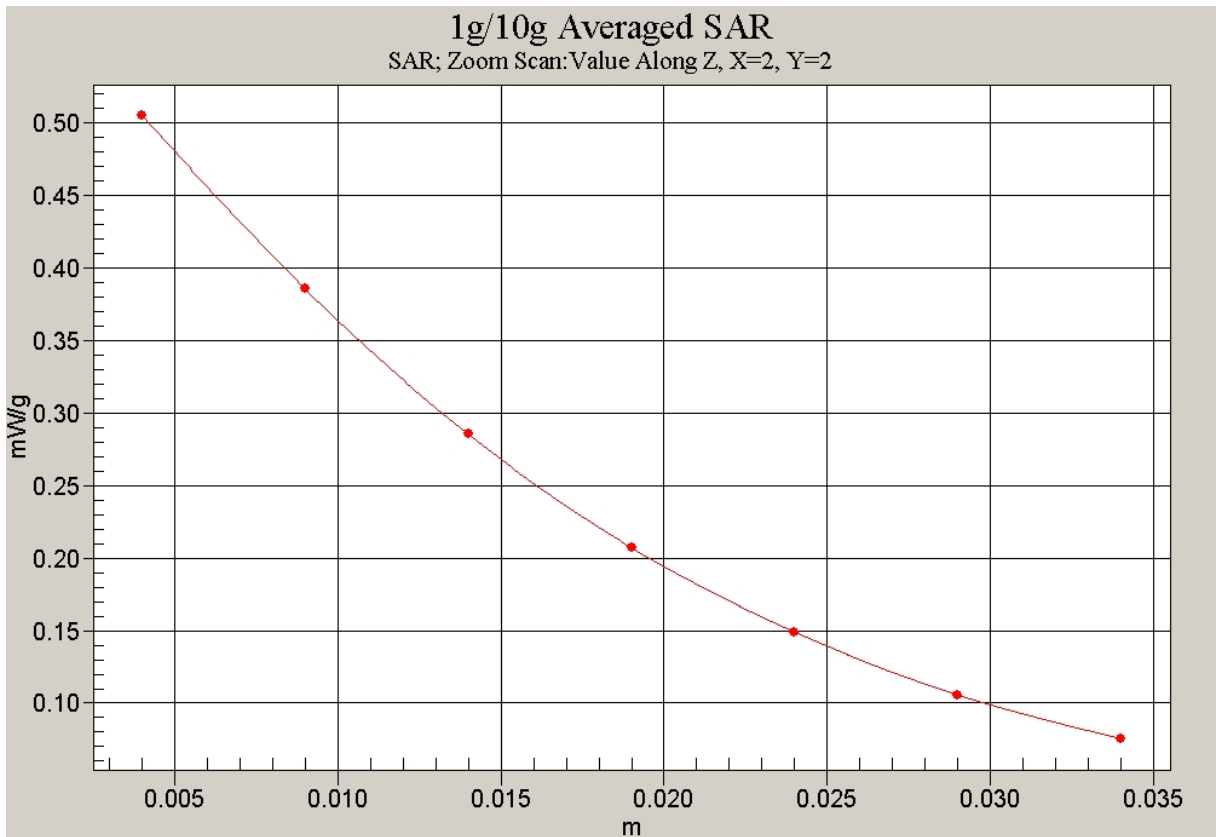


Fig. 1-1 Z-Scan at power reference point (850 MHz CH251)

850 Left Cheek Middle

Date/Time: 2010-3-20 8:33:40

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.506 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.494 mW/g

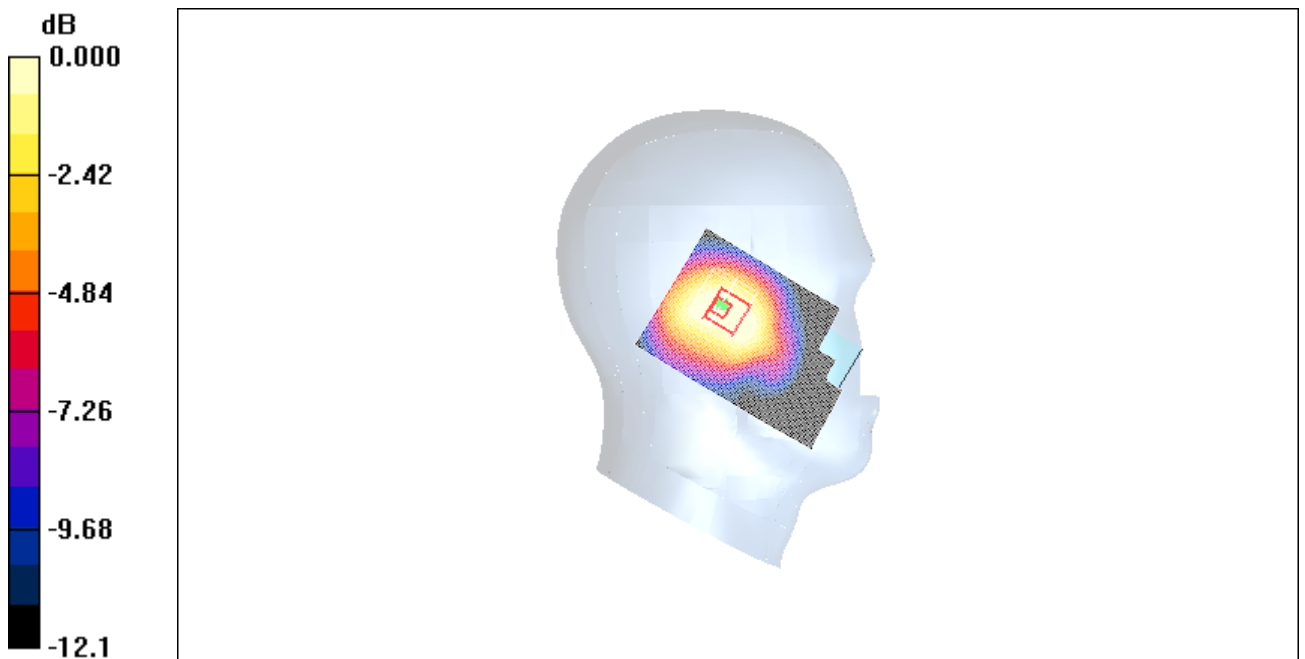


Fig. 2 850 MHz CH190

850 Left Cheek Low

Date/Time: 2010-3-20 8:47:56

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.484 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.4 V/m ; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.431 mW/g ; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

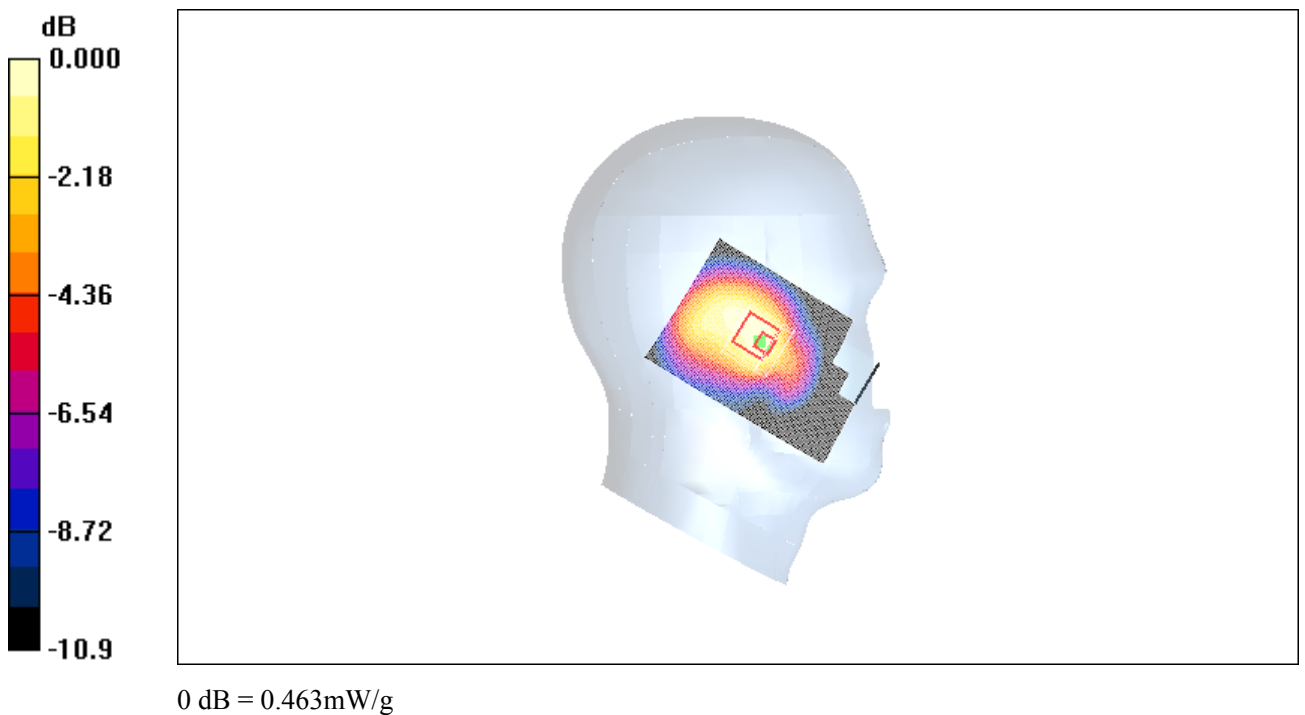


Fig. 3 850 MHz CH128

850 Left Tilt High

Date/Time: 2010-3-20 9:02:11

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.391 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.395 mW/g

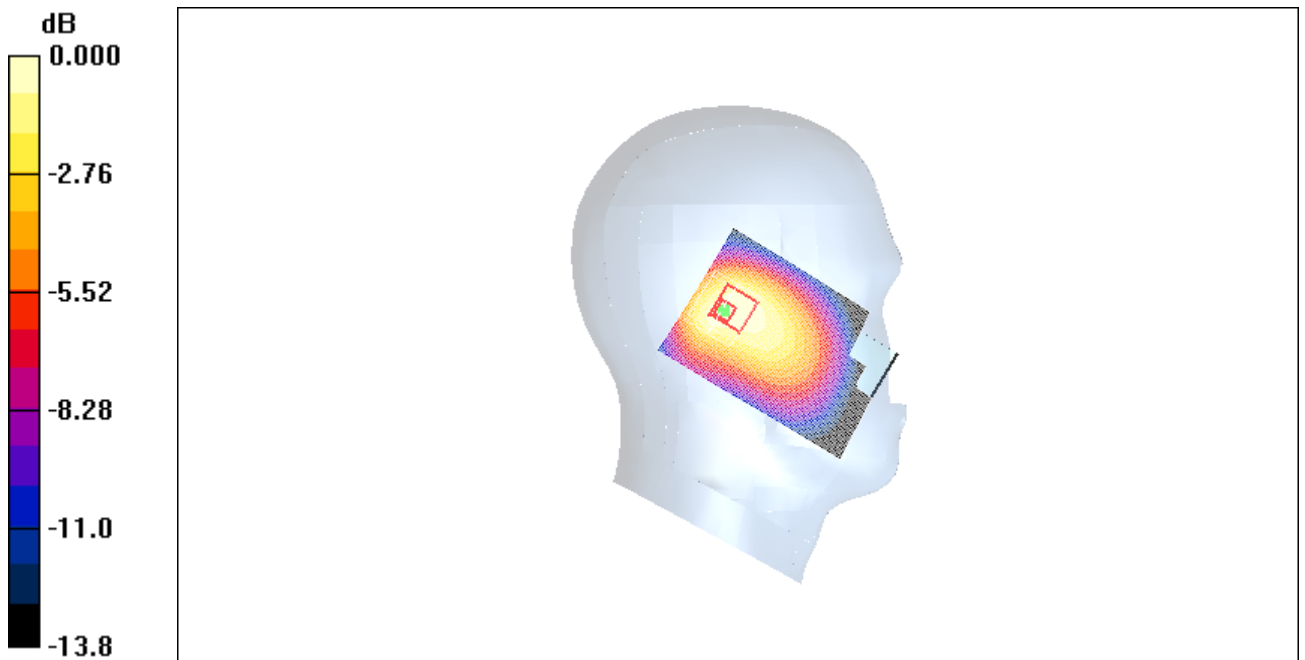

0 dB = 0.395mW/g

Fig.4 850 MHz CH251

850 Left Tilt Middle

Date/Time: 2010-3-20 9:16:28

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.402 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

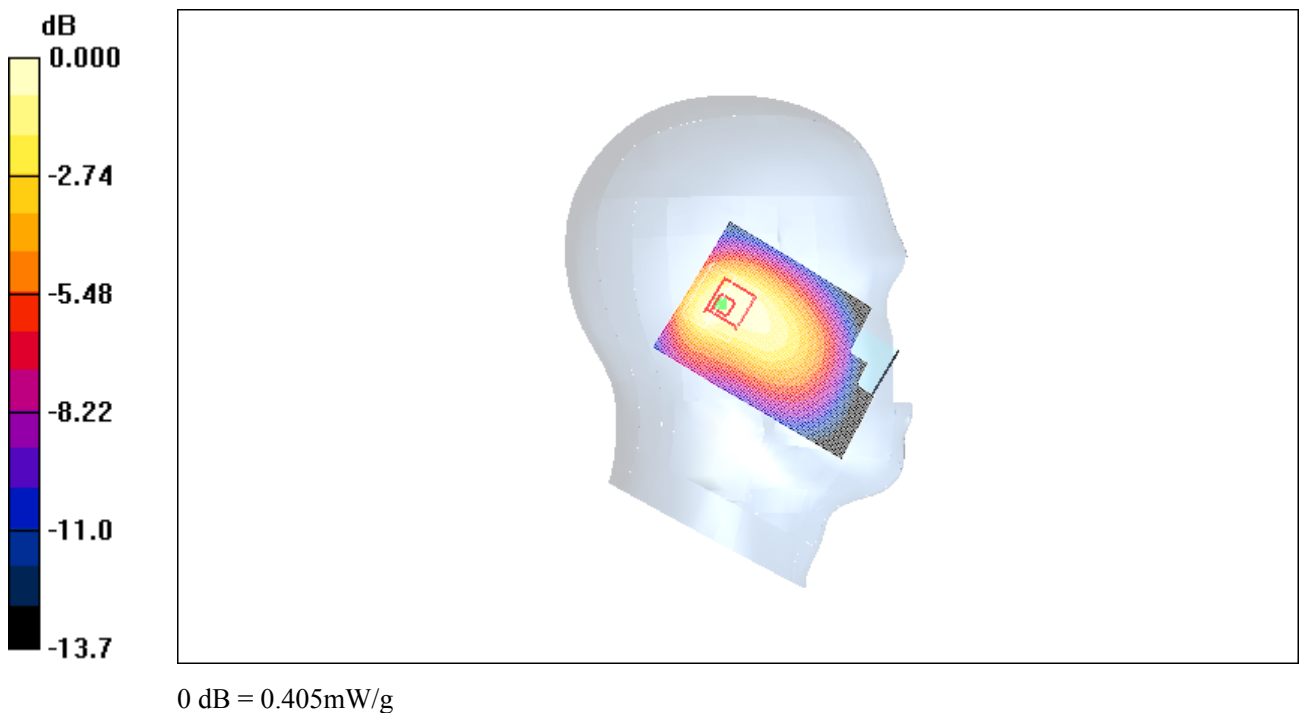


Fig.5 850 MHz CH190

850 Left Tilt Low

Date/Time: 2010-3-20 9:30:41

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.376 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.7 V/m ; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.355 mW/g ; SAR(10 g) = 0.237 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

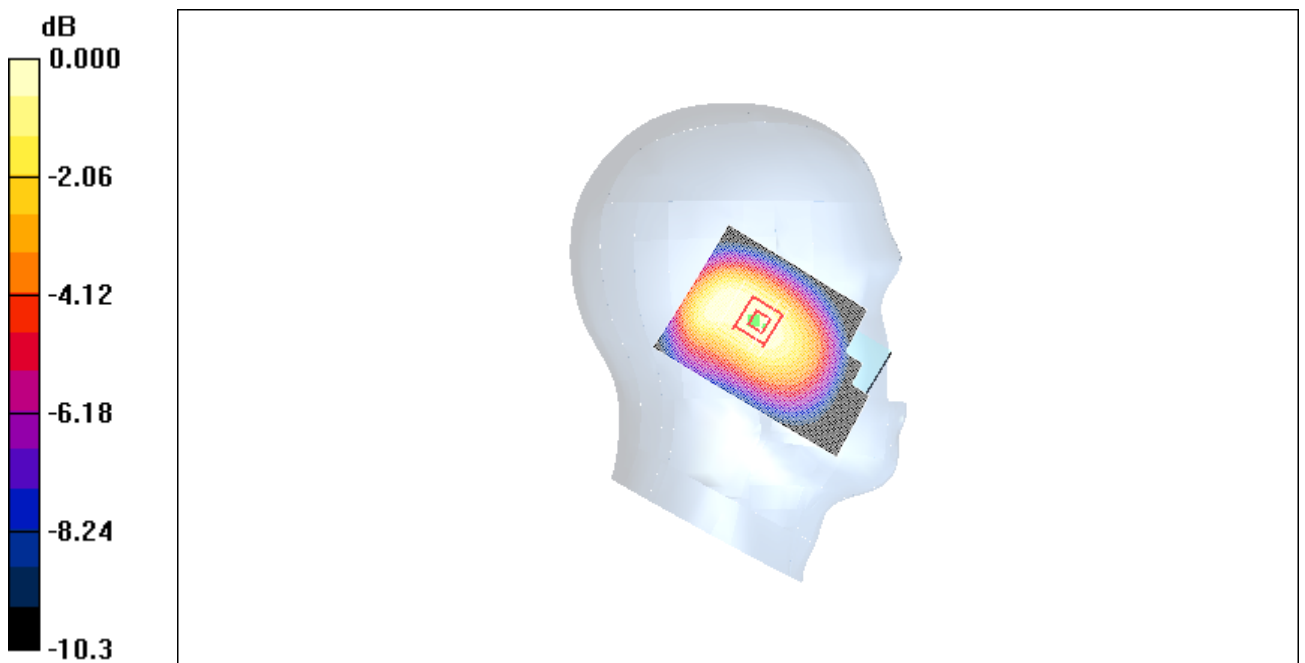

0 dB = 0.374mW/g

Fig. 6 850 MHz CH128

850 Right Cheek High

Date/Time: 2010-3-20 9:45:02

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.528 mW/g


Cheek High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.0 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.491 mW/g

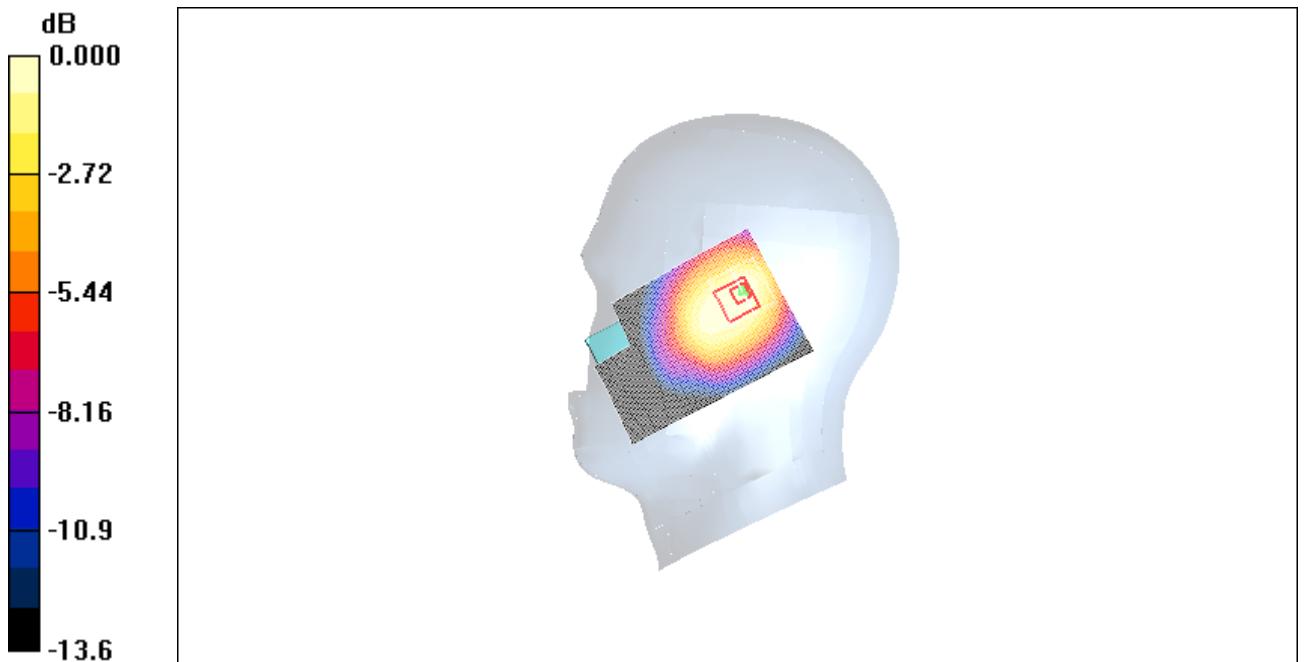

0 dB = 0.491mW/g

Fig. 7 850 MHz CH251

850 Right Cheek Middle

Date/Time: 2010-3-20 9:59:13

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.534 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.490 mW/g

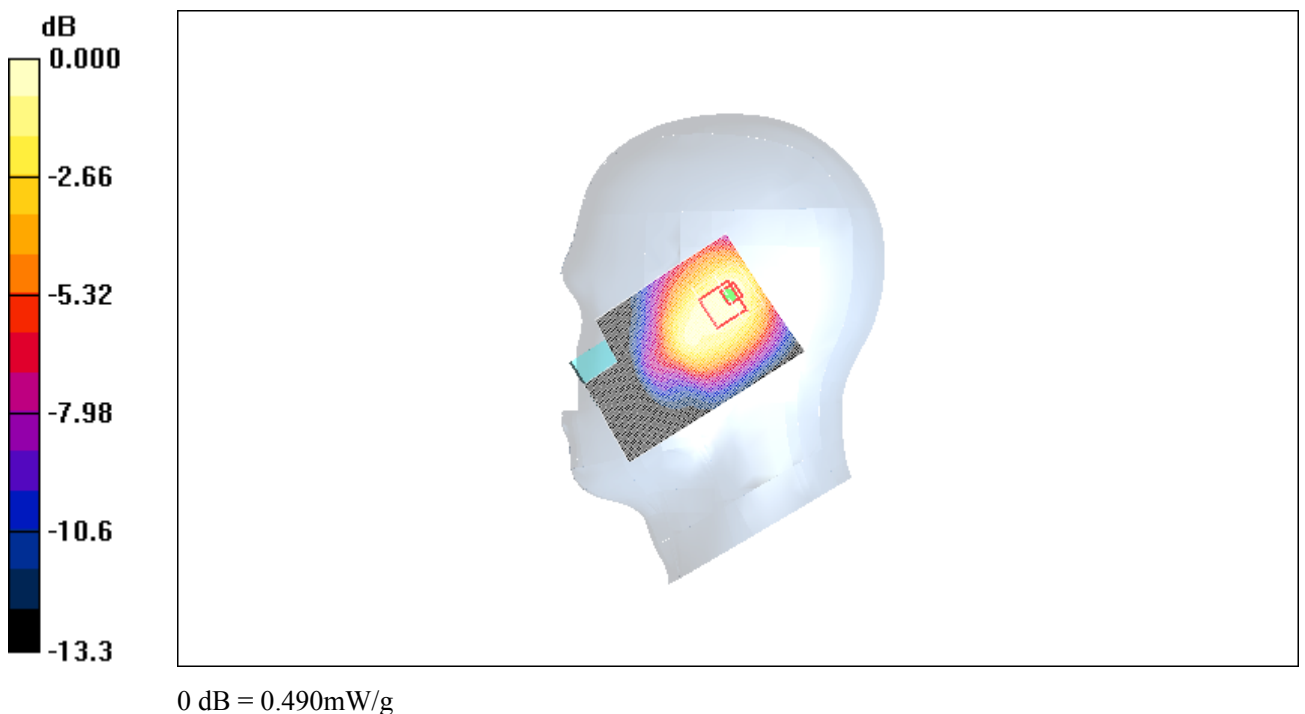


Fig. 8 850 MHz CH190

850 Right Cheek Low

Date/Time: 2010-3-20 10:13:30

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Cheek Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.428 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.2 V/m ; Power Drift = -0.146 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.372 mW/g ; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.404 mW/g

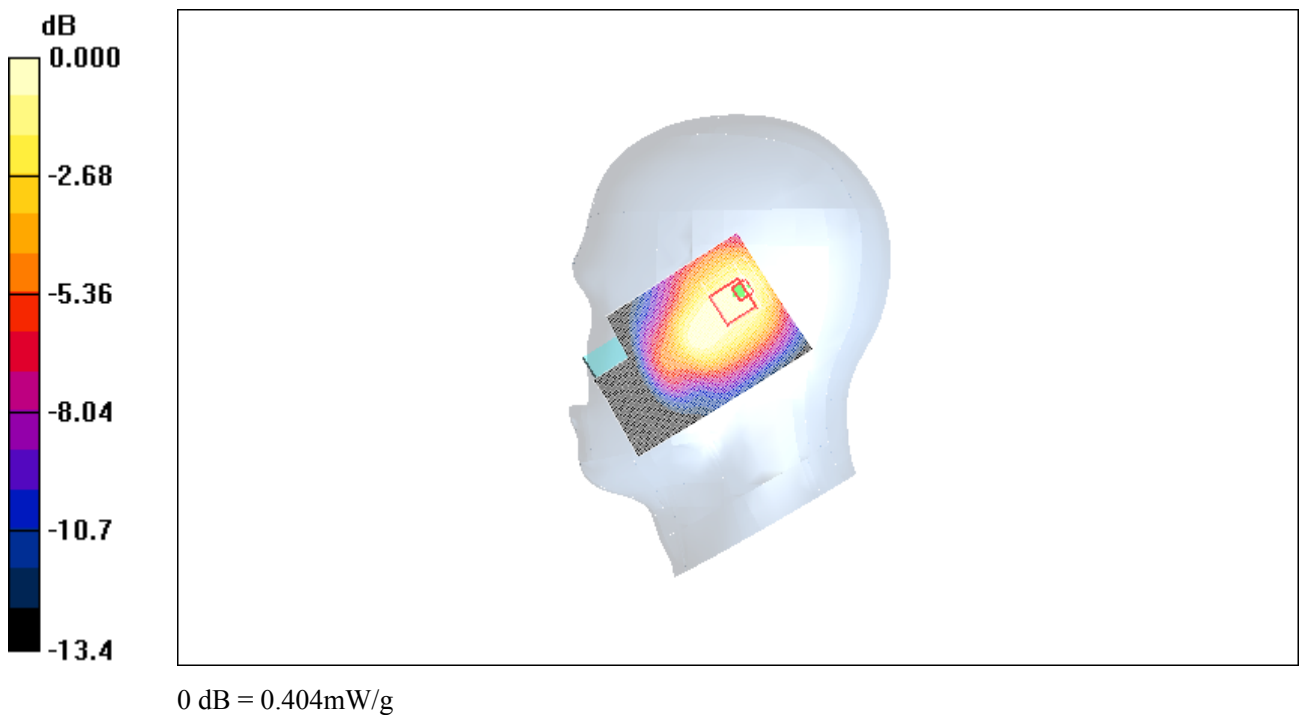


Fig. 9 850 MHz CH128

850 Right Tilt High

Date/Time: 2010-3-20 10:27:52

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.485 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

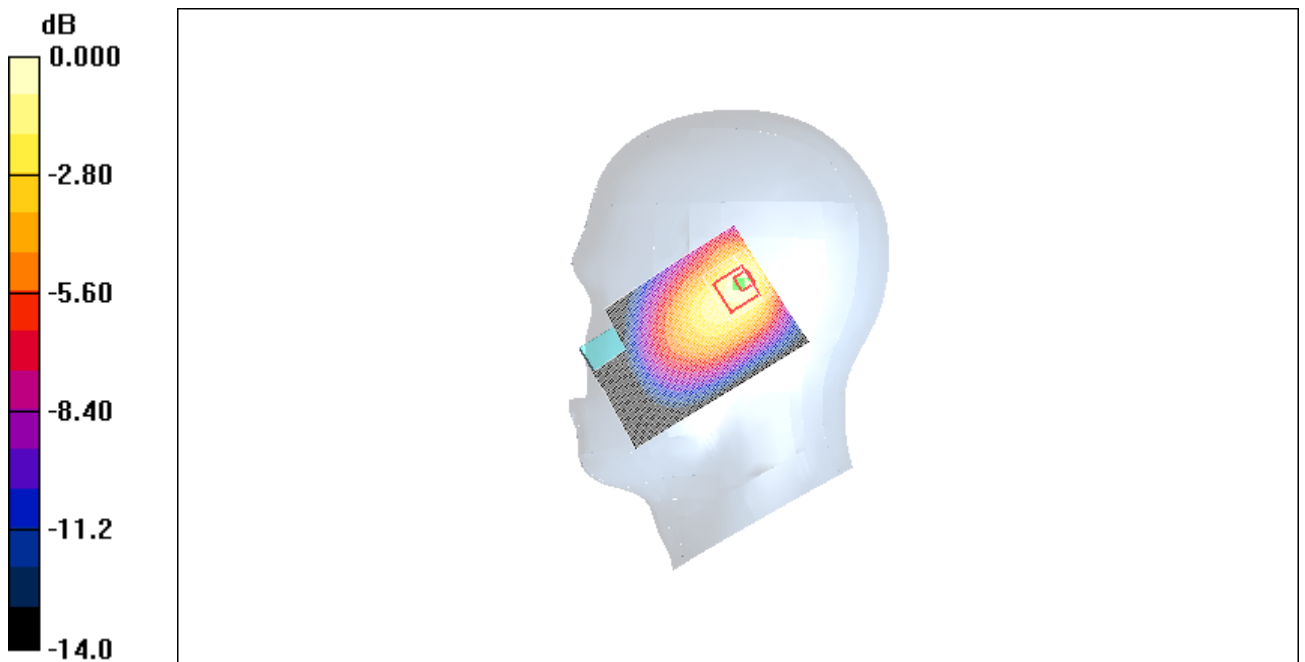

0 dB = 0.471mW/g

Fig.10 850 MHz CH251

850 Right Tilt Middle

Date/Time: 2010-3-20 10:42:09

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.484 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

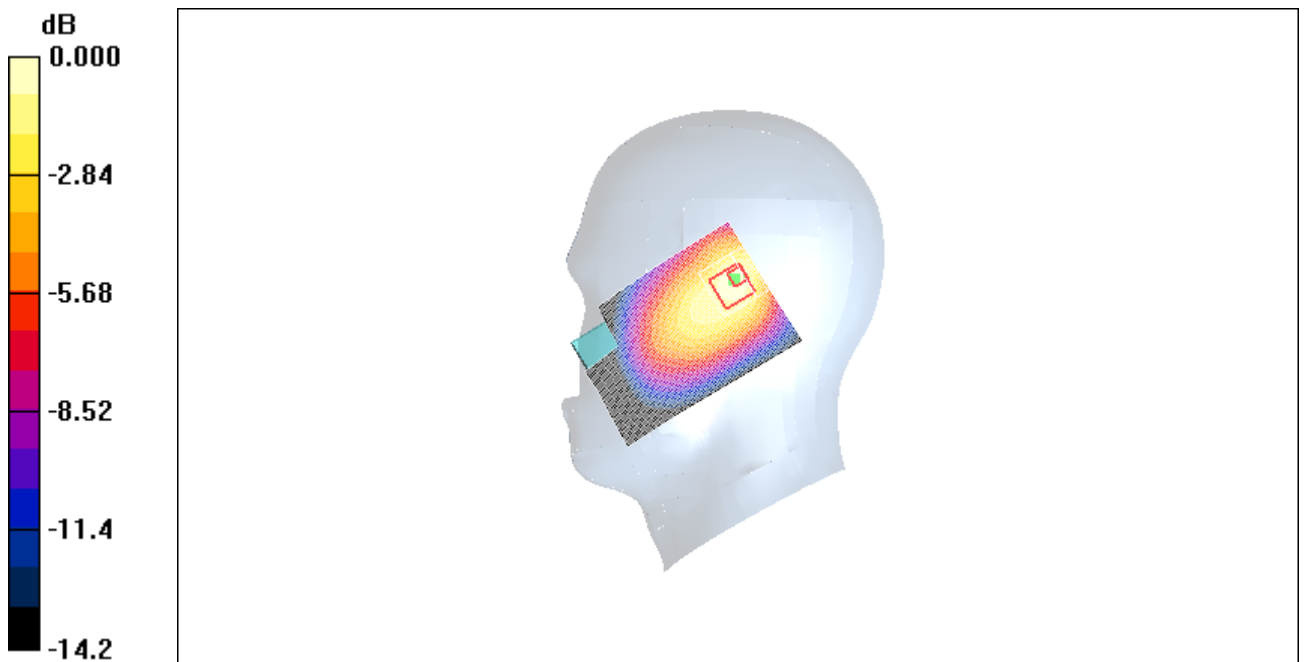

0 dB = 0.462mW/g

Fig.11 850 MHz CH190

850 Right Tilt Low

Date/Time: 2010-3-20 10:56:21

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.866 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

Tilt Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.411 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.9 V/m ; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.691 W/kg

SAR(1 g) = 0.358 mW/g ; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

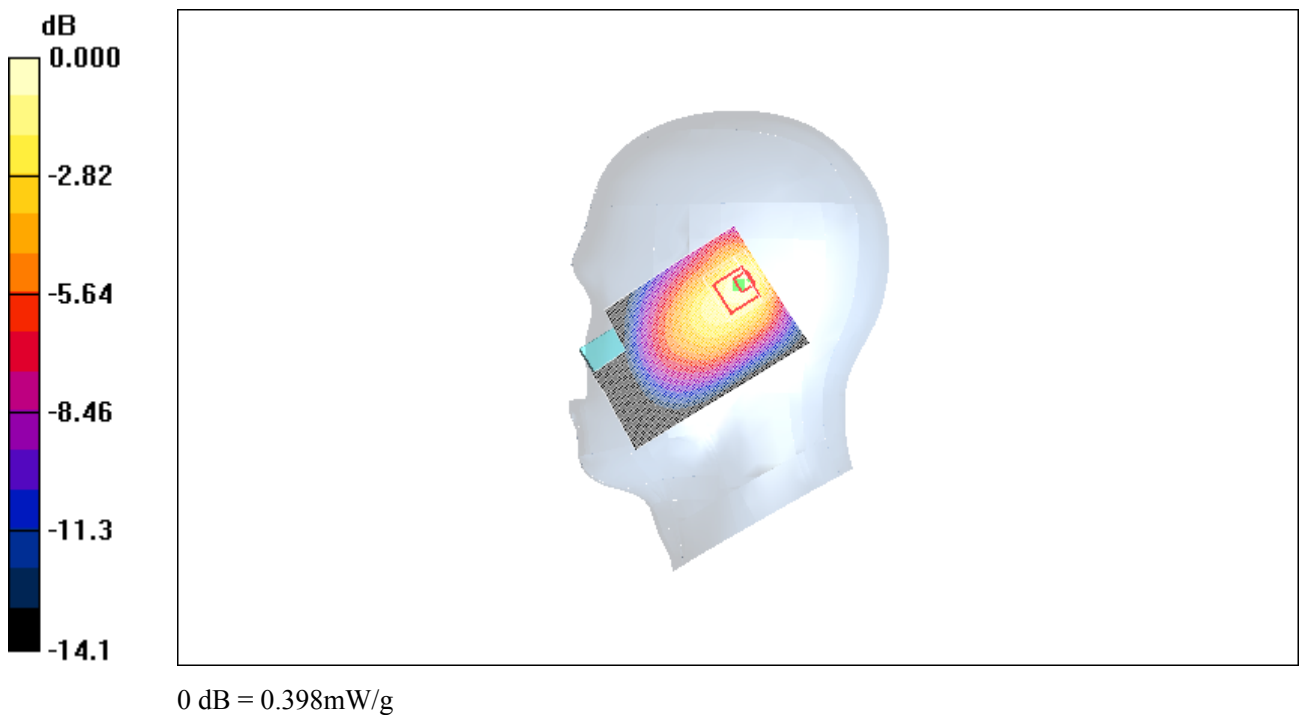


Fig. 12 850 MHz CH128

1900 Left Cheek High

Date/Time: 2010-3-21 8:13:40

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.0$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.210 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.7 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

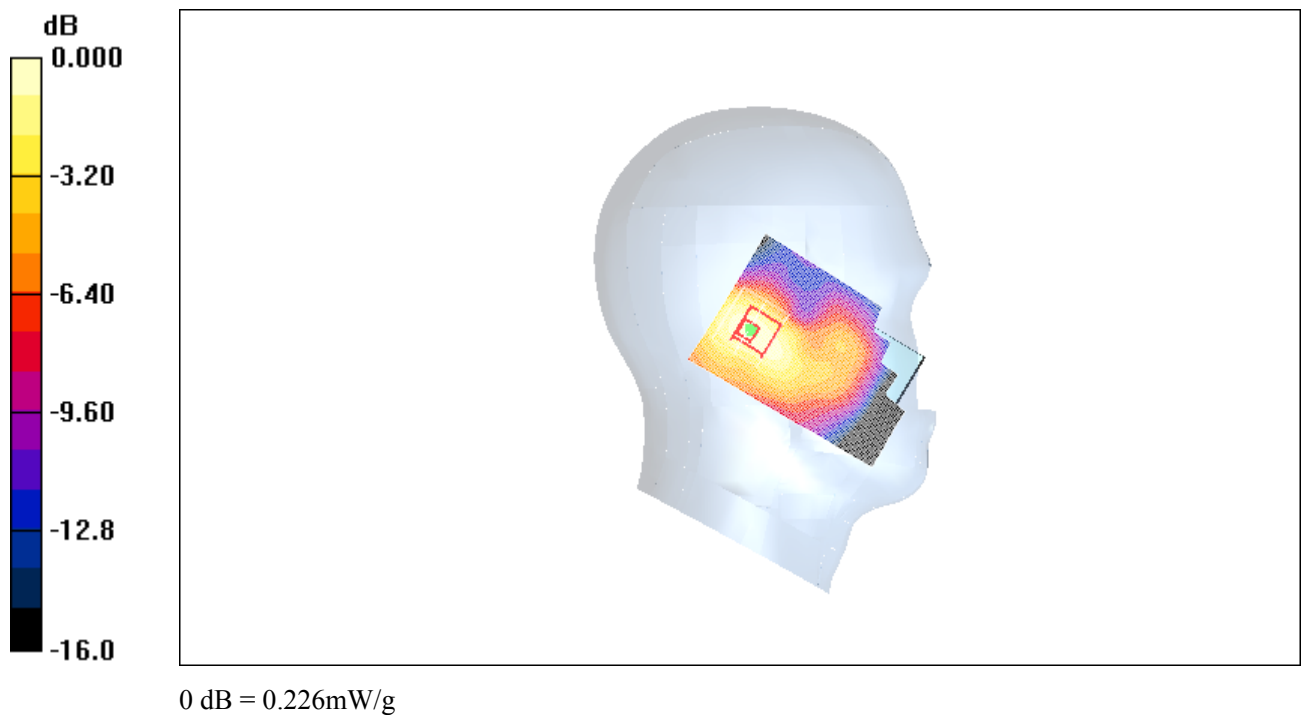


Fig. 13 1900 MHz CH810

1900 Left Cheek Middle

Date/Time: 2010-3-21 8:27:58

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.193 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

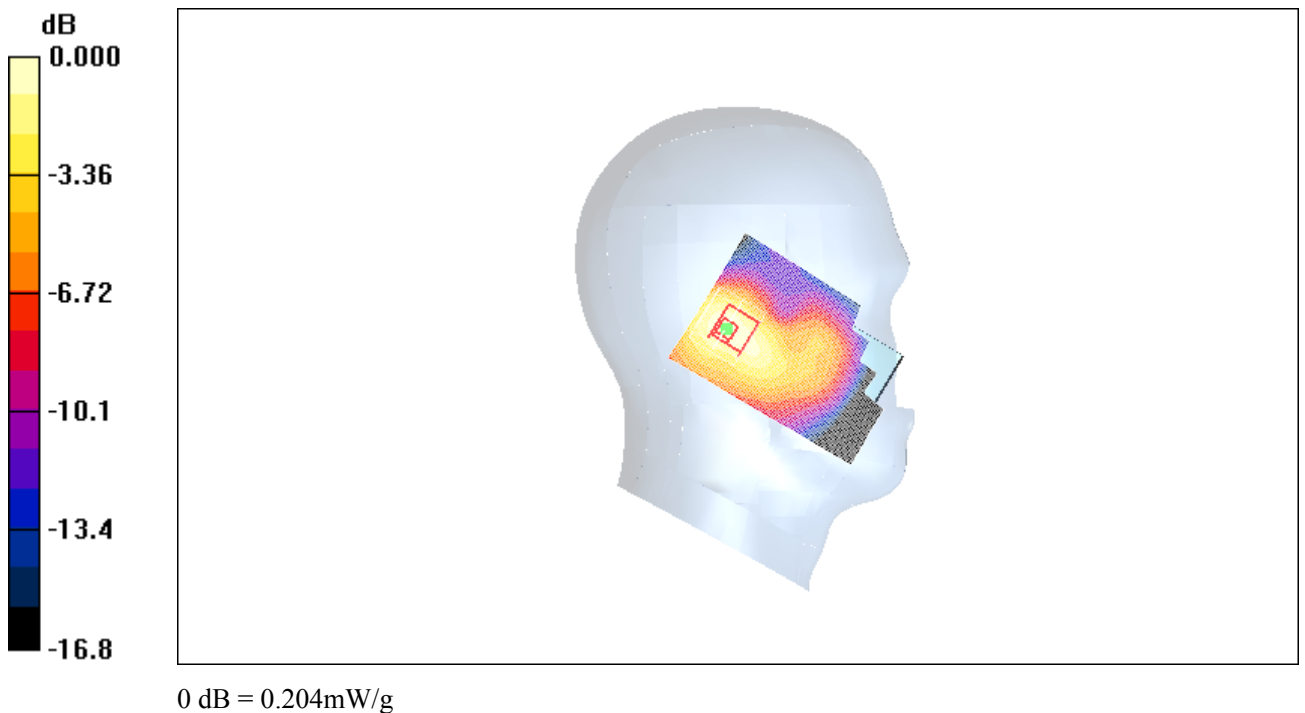


Fig. 14 1900 MHz CH661

1900 Left Cheek Low

Date/Time: 2010-3-21 8:42:11

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.207 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.207 mW/g

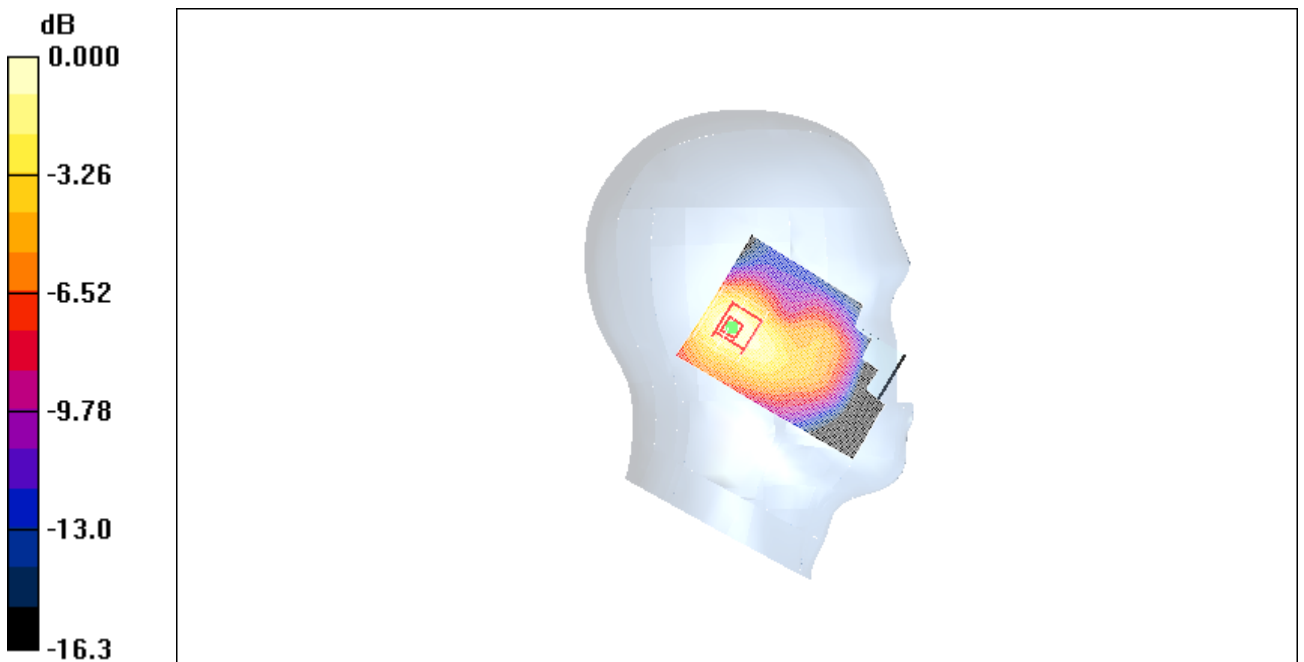

0 dB = 0.207mW/g

Fig. 15 1900 MHz CH512

1900 Left Tilt High

Date/Time: 2010-3-21 8:56:39

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.0$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt High/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.317 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.5 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.293 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

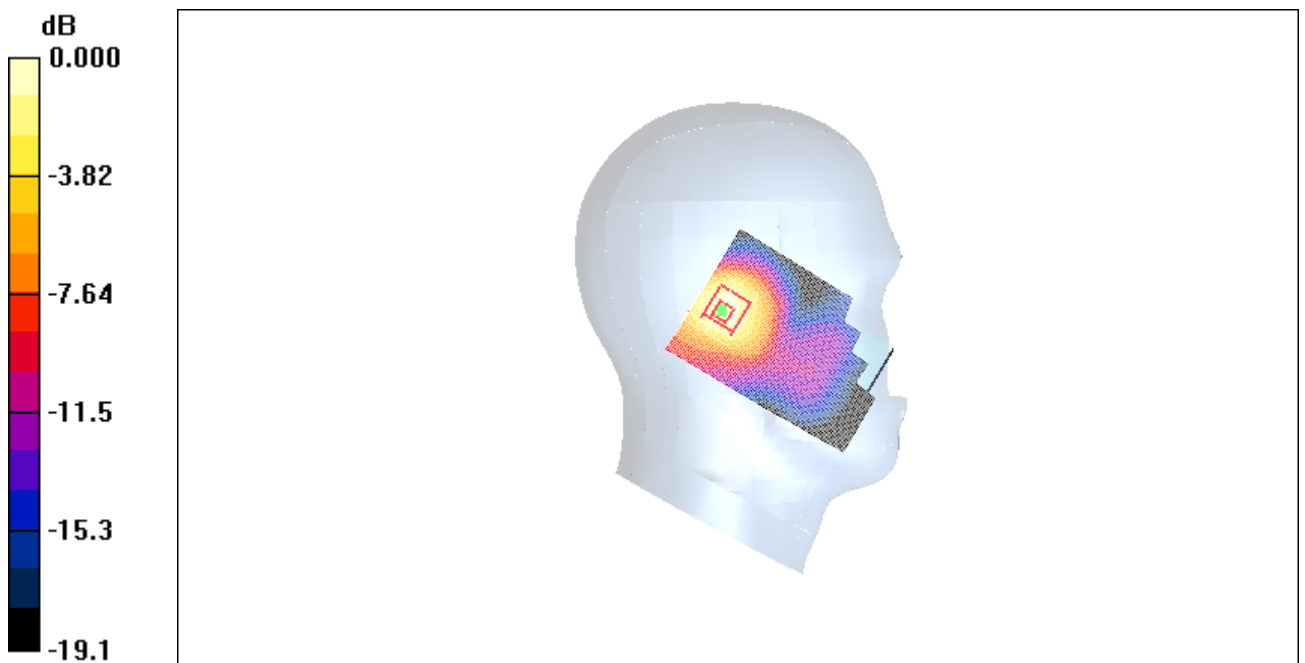

0 dB = 0.322mW/g

Fig.16 1900 MHz CH810

1900 Left Tilt Middle

Date/Time: 2010-3-21 9:10:55

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.283 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

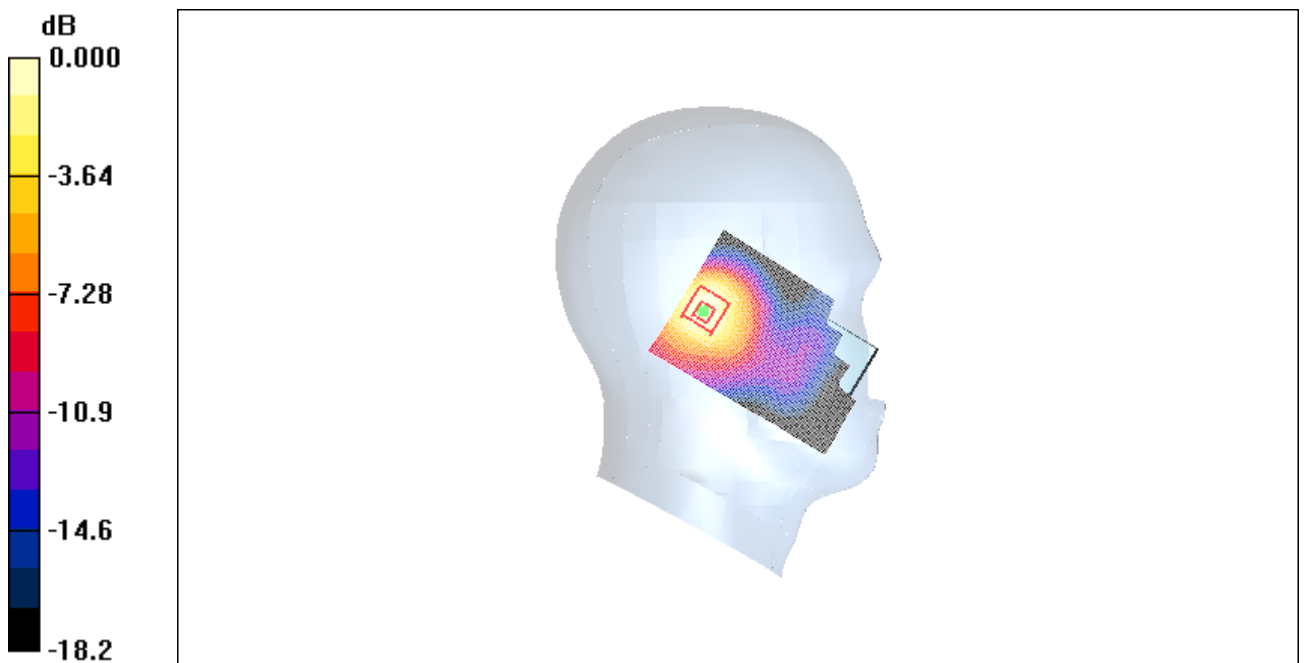

0 dB = 0.277mW/g

Fig. 17 1900 MHz CH661

1900 Left Tilt Low

Date/Time: 2010-3-21 9:25:08

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.296 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

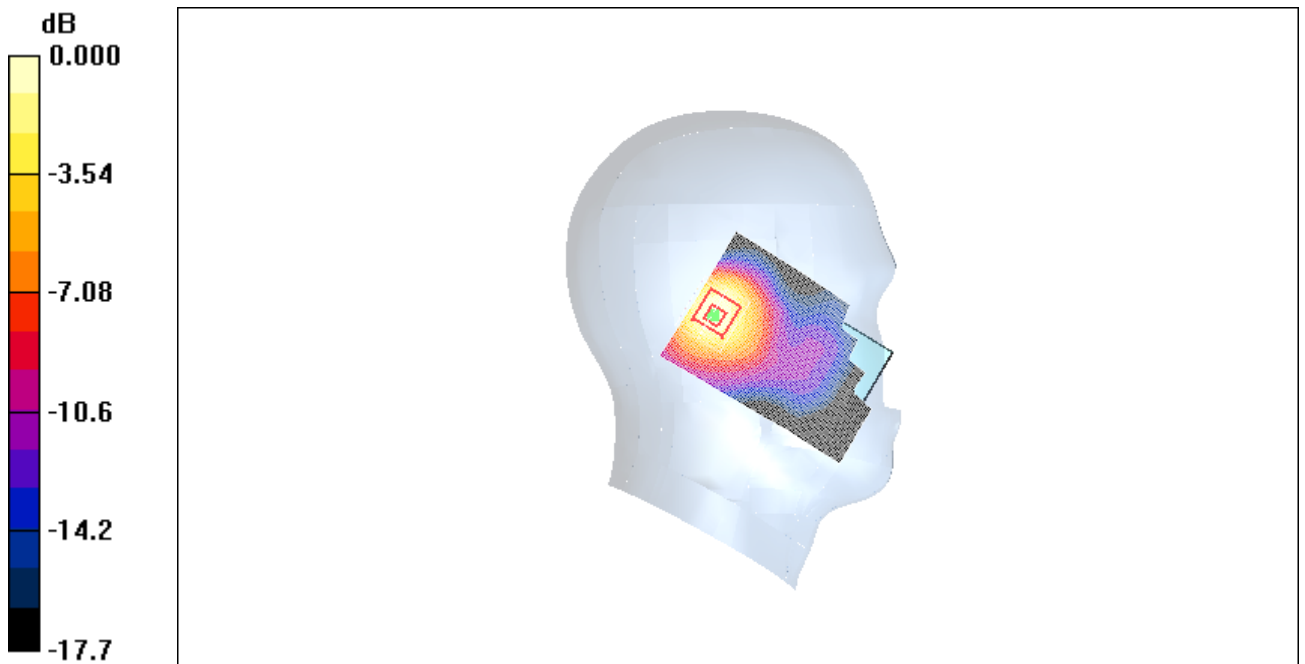

0 dB = 0.288mW/g

Fig. 18 1900 MHz CH512

1900 Right Cheek High

Date/Time: 2010-3-21 9:40:32

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.0$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.365 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

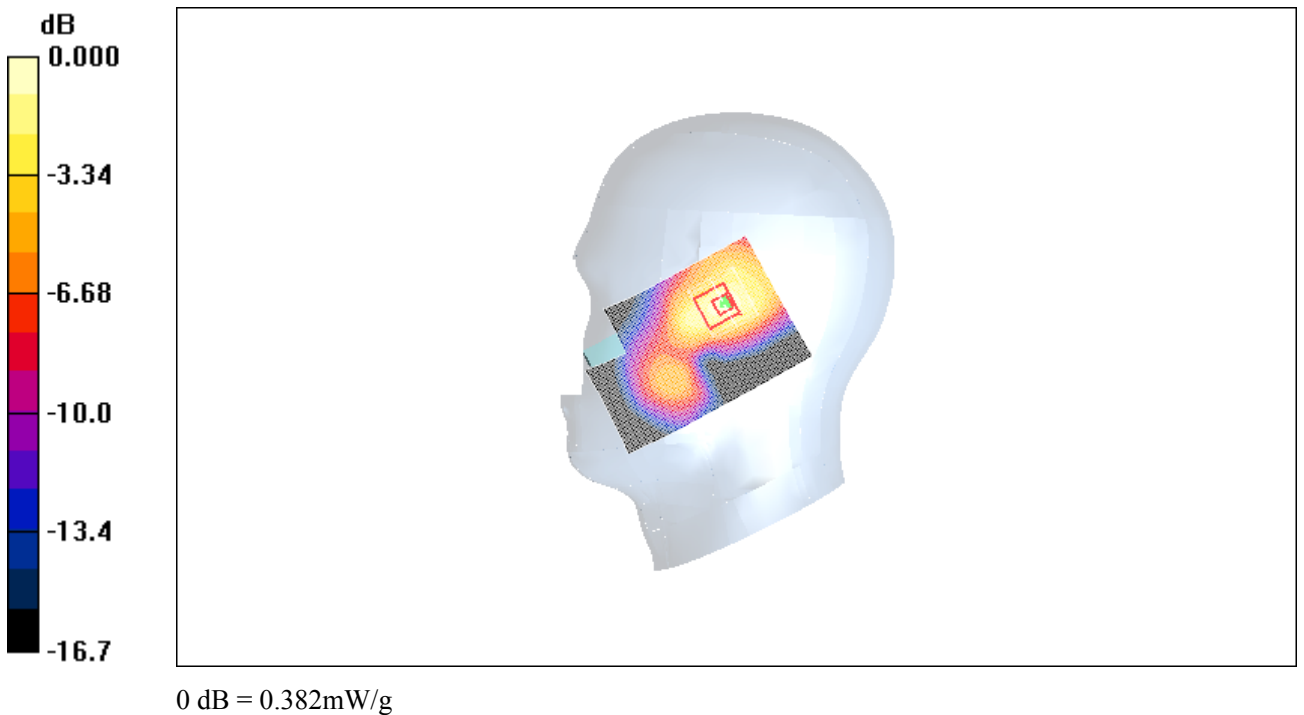


Fig. 19 1900 MHz CH810

1900 Right Cheek Middle

Date/Time: 2010-3-21 9:54:47

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.40 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Middle/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.322 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.8 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.328 mW/g

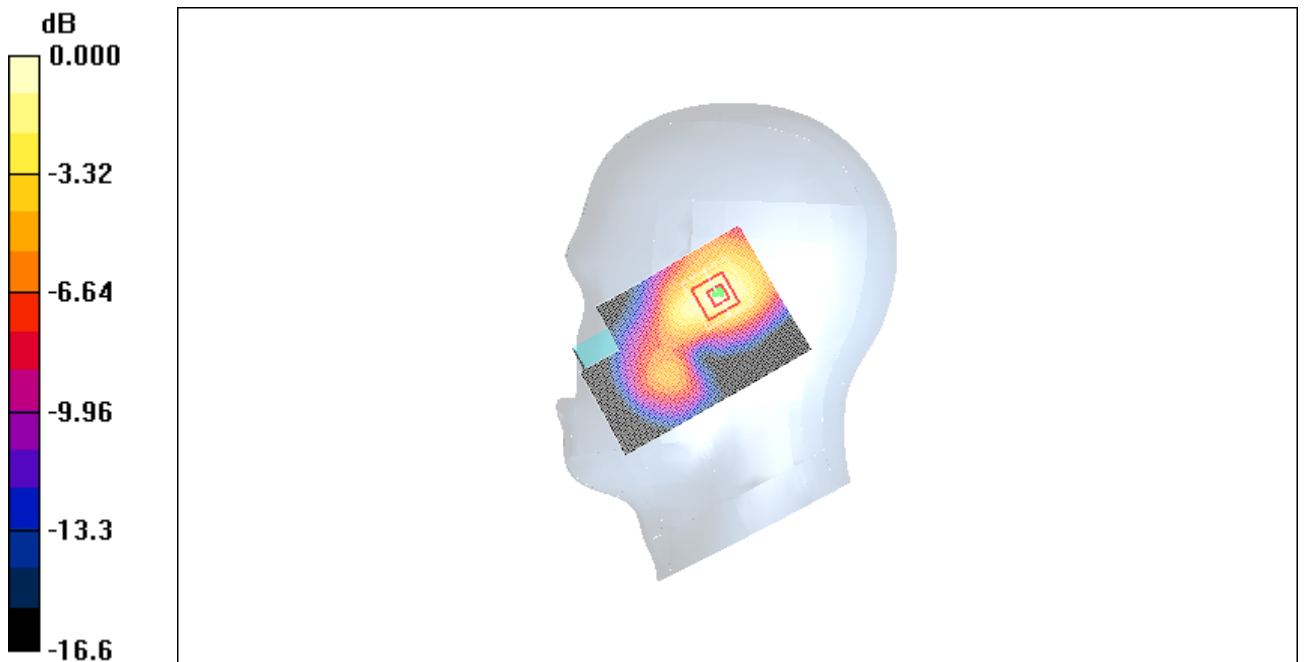

0 dB = 0.328mW/g

Fig. 20 1900 MHz CH661

1900 Right Cheek Low

Date/Time: 2010-3-21 10:09:05

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Cheek Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.328 mW/g


Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

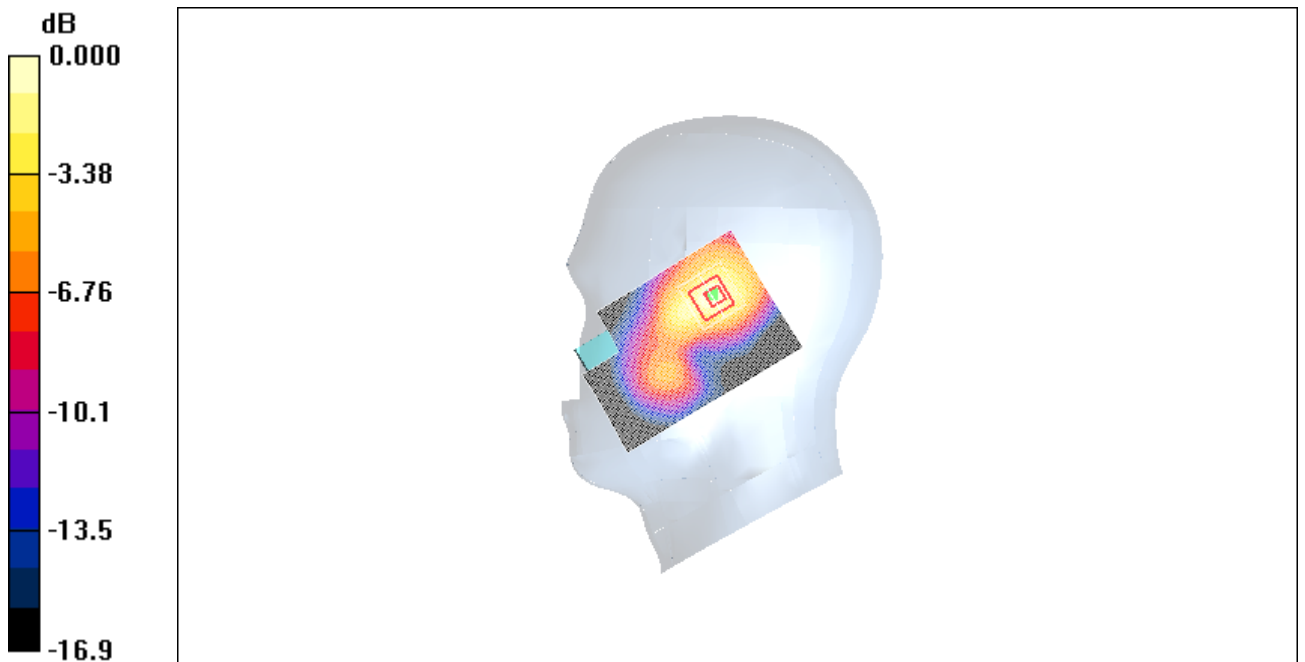

0 dB = 0.324mW/g

Fig. 21 1900 MHz CH512

1900 Right Tilt High

Date/Time: 2010-3-21 10:23:20

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.0$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.450 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.458 mW/g



0 dB = 0.458mW/g

Fig. 22 1900 MHz CH810

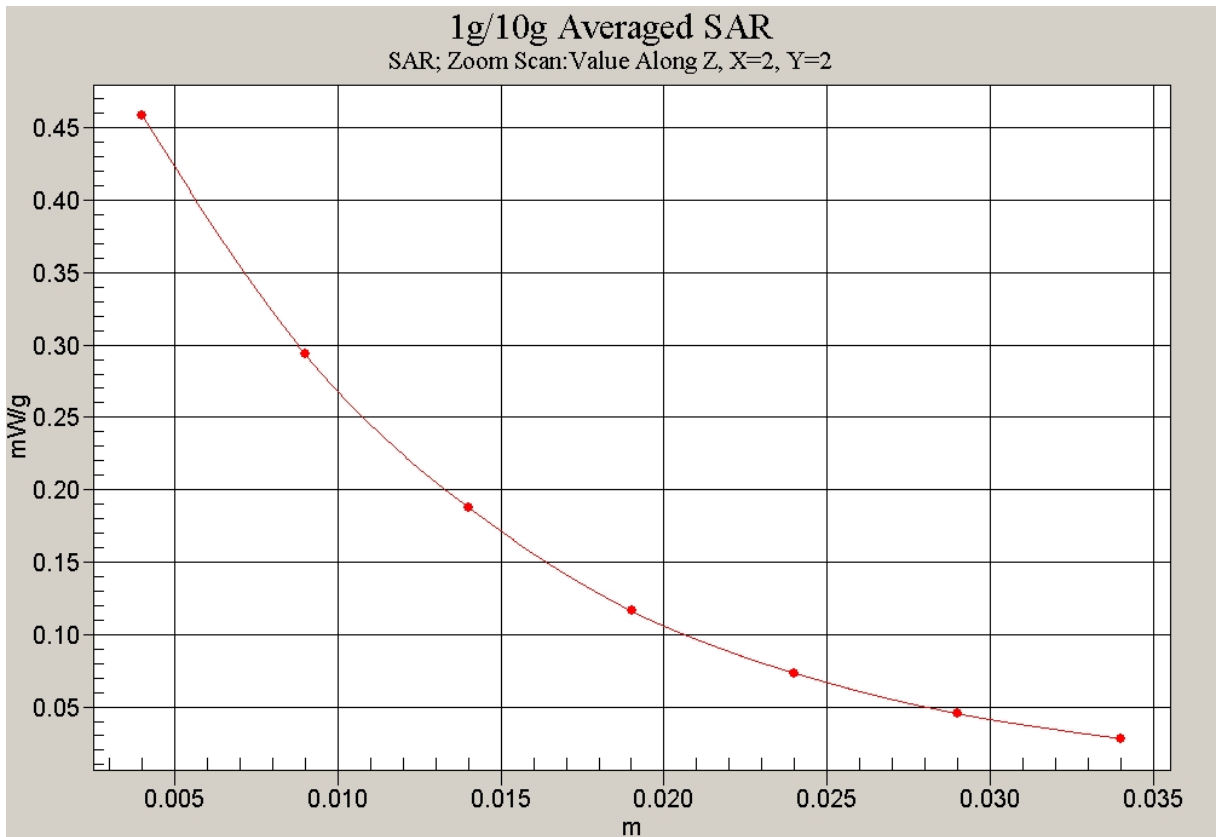


Fig. 22-1 Z-Scan at power reference point (1900 MHz CH810)

1900 Right Tilt Middle

Date/Time: 2010-3-21 10:37:41

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.40$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.383 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.379 mW/g

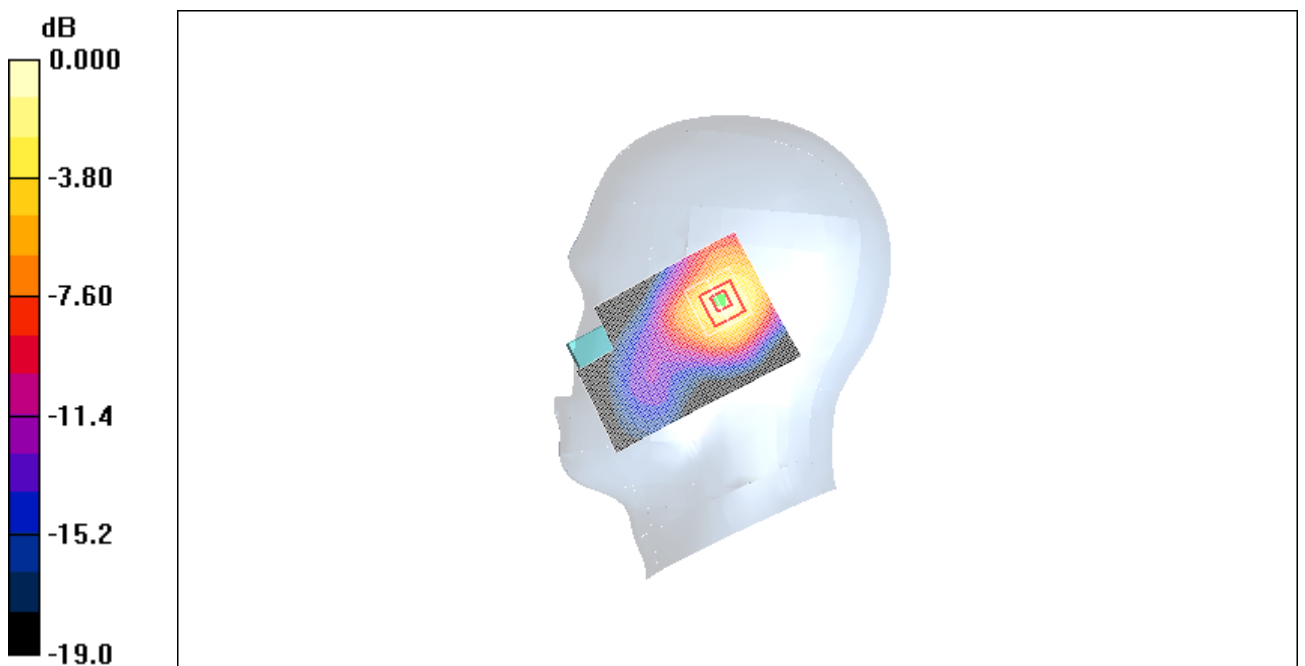

0 dB = 0.379mW/g

Fig.23 1900 MHz CH661

1900 Right Tilt Low

Date/Time: 2010-3-21 10:52:08

Electronics: DAE4 Sn771

Medium: 1900 Head

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

Tilt Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.387 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.373 mW/g

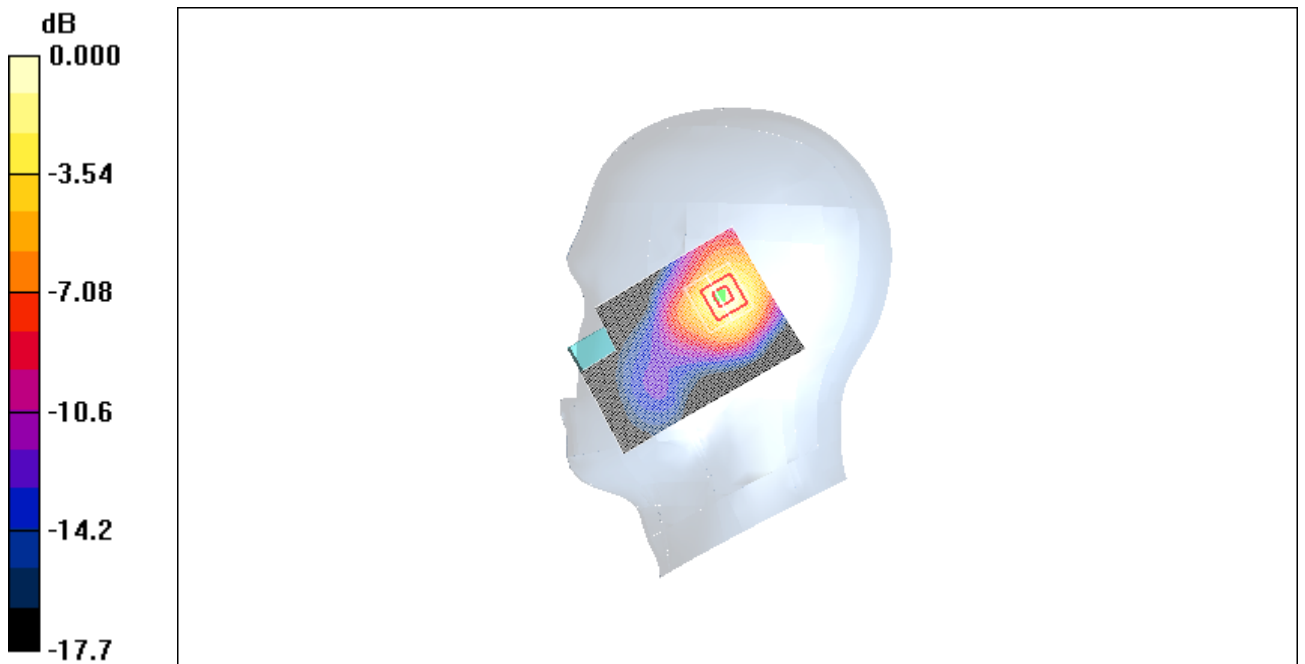

0 dB = 0.373mW/g

Fig.24 1900 MHz CH512

850 Body Towards Ground High with GPRS

Date/Time: 2010-3-20 13:39:07

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.703 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.680 mW/g

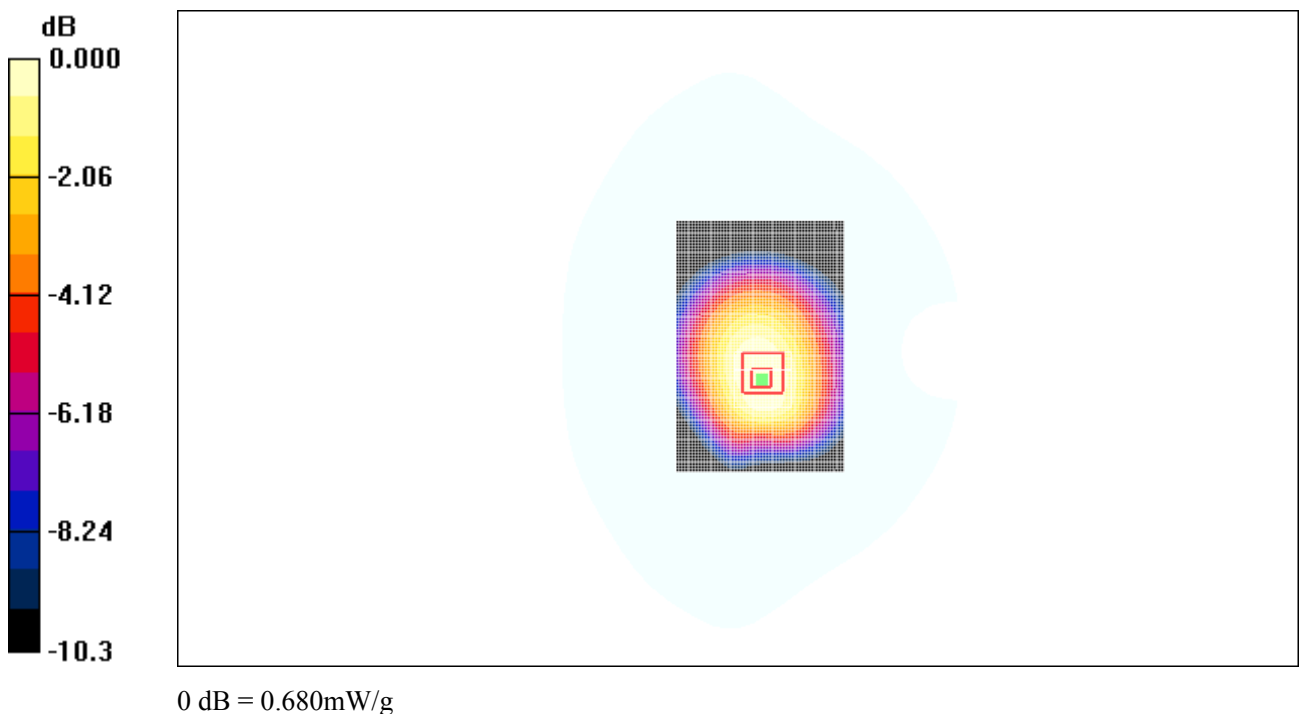


Fig. 25 850 MHz CH251

850 Body Towards Ground Middle with GPRS

Date/Time: 2010-3-20 13:54:23

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 54.0$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.760 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.720 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.742 mW/g

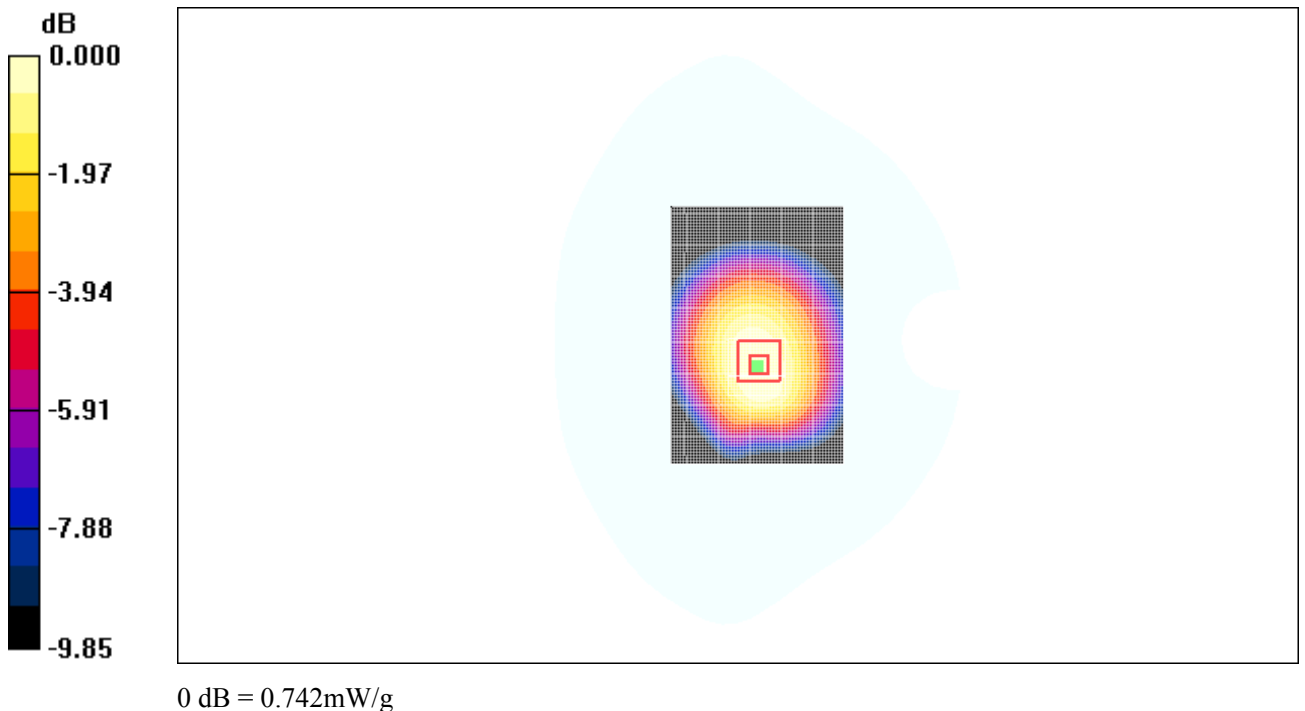


Fig. 26 850 MHz CH190

850 Body Towards Ground Low with GPRS

Date/Time: 2010-3-20 14:09:43

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.836 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.4 V/m ; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.786 mW/g ; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 0.814 mW/g

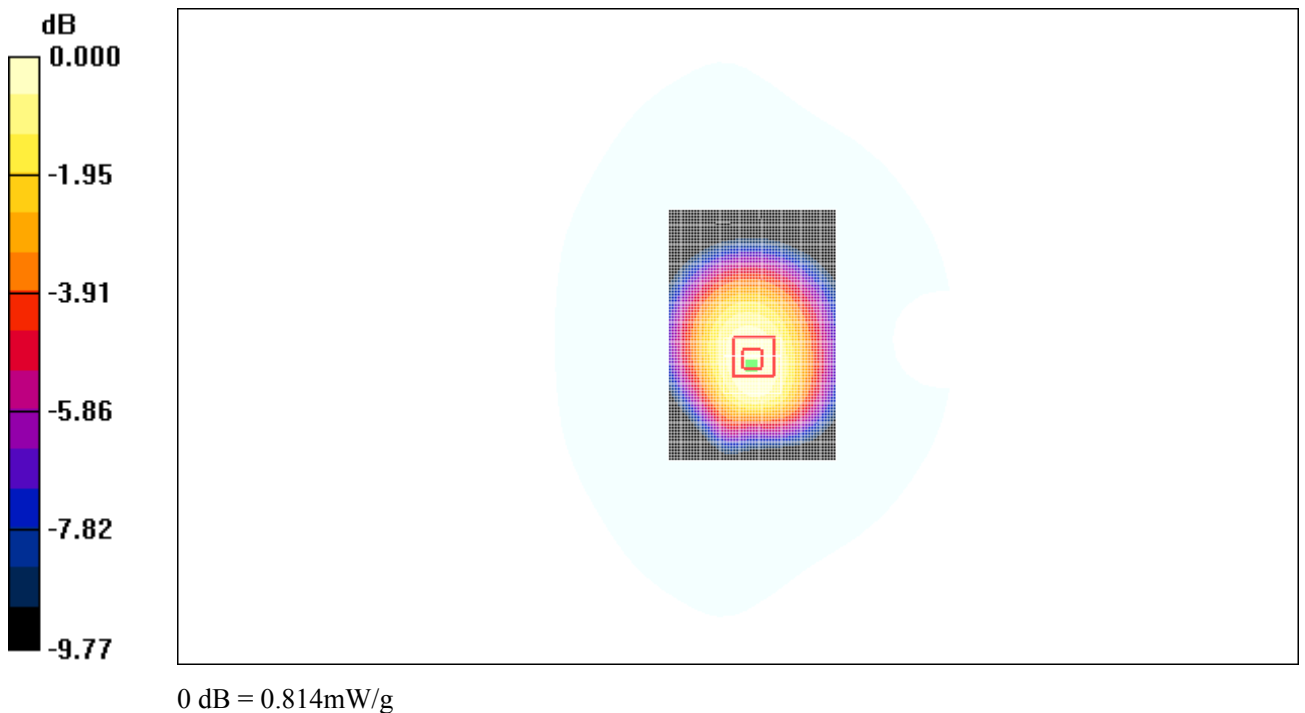


Fig. 27 850 MHz CH128

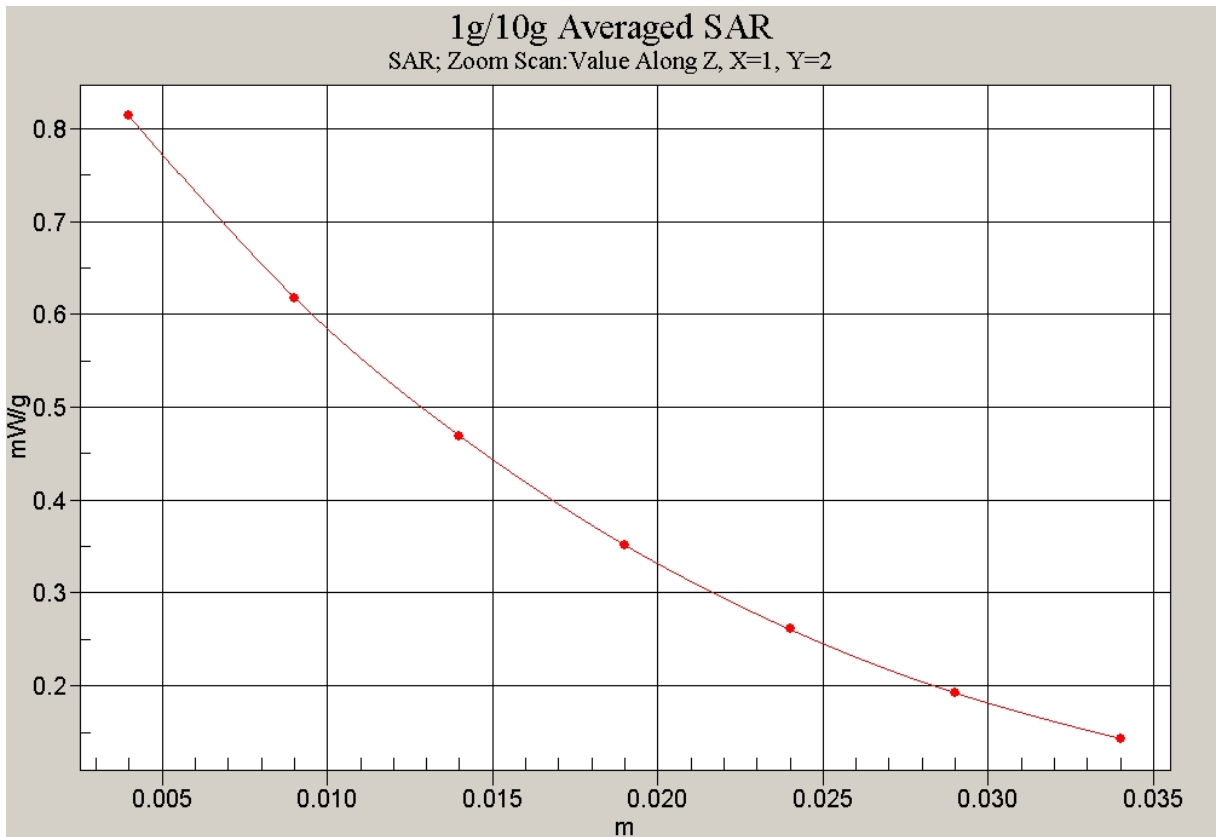


Fig. 27-1 Z-Scan at power reference point (850 MHz CH128)

850 Body Towards Phantom High with GPRS

Date/Time: 2010-3-20 14:26:00

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.330 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

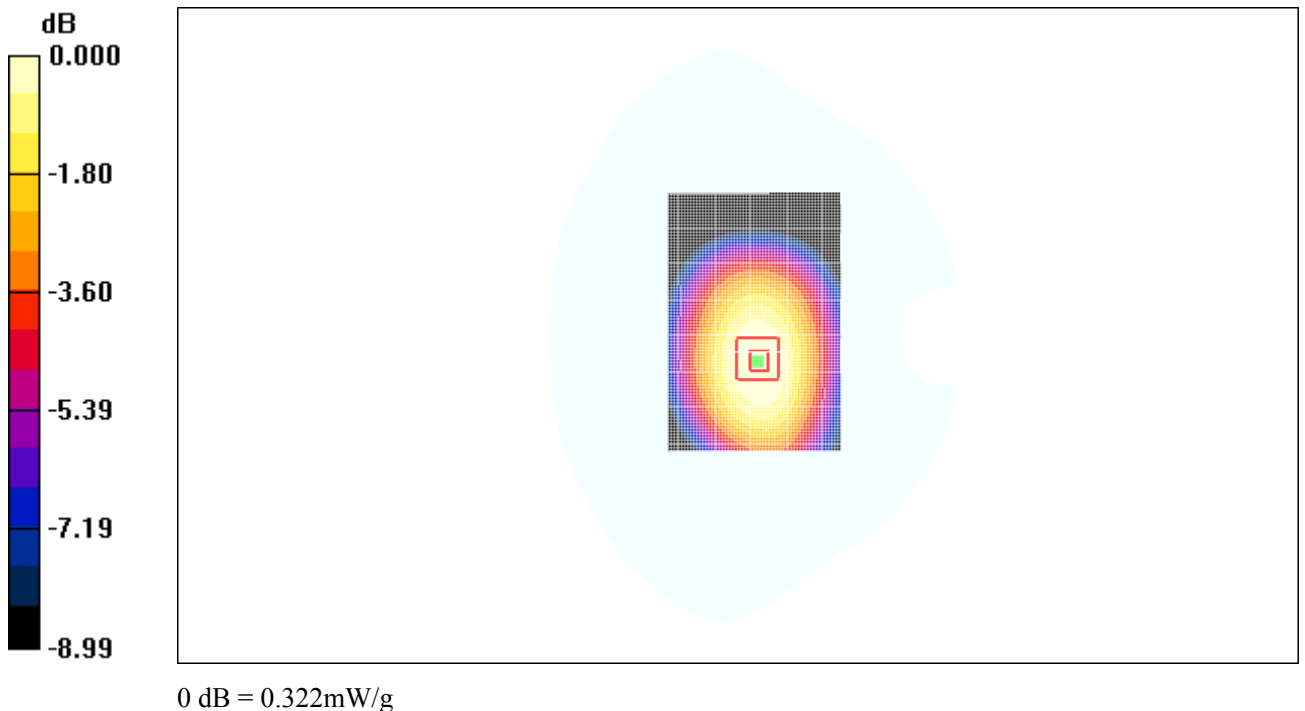


Fig. 28 850 MHz CH251

850 Body Towards Phantom Middle with GPRS

Date/Time: 2010-3-20 14:41:16

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 54.0$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.374 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

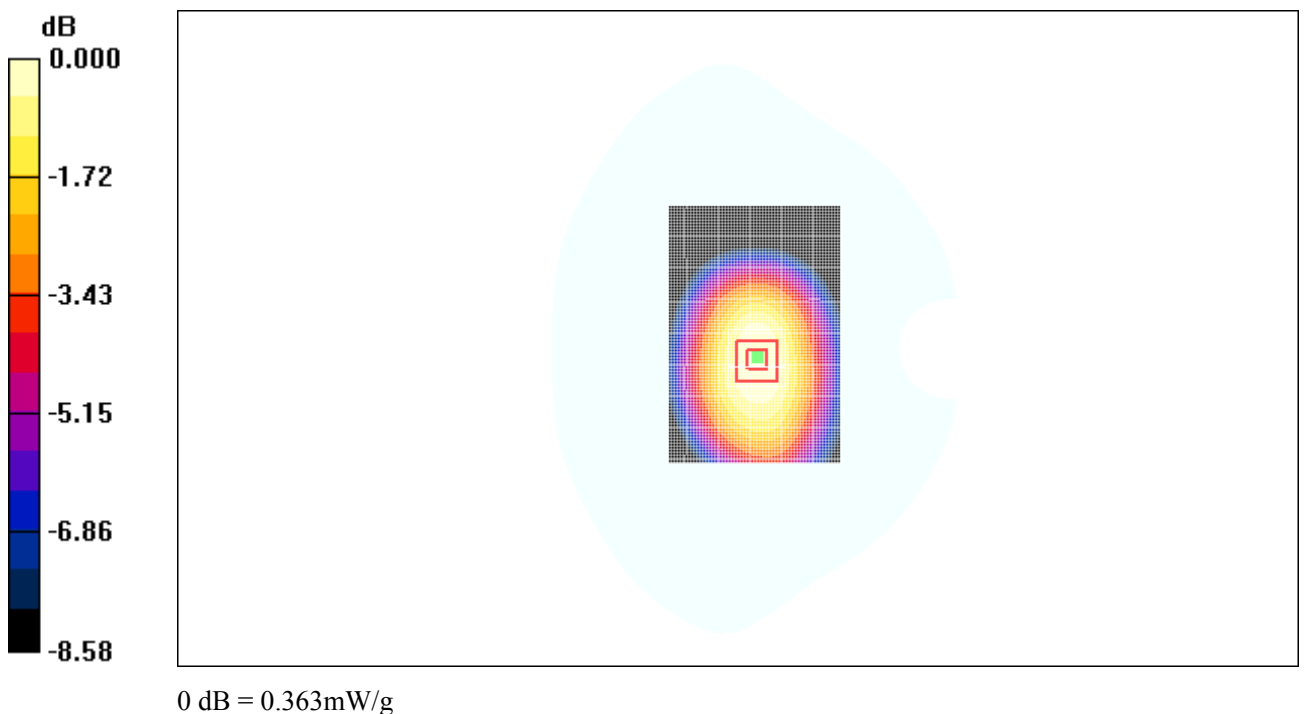


Fig. 29 850 MHz CH190

850 Body Towards Phantom Low with GPRS

Date/Time: 2010-3-20 14:56:33

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.485 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.4 V/m ; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.458 mW/g ; SAR(10 g) = 0.336 mW/g

Maximum value of SAR (measured) = 0.471 mW/g

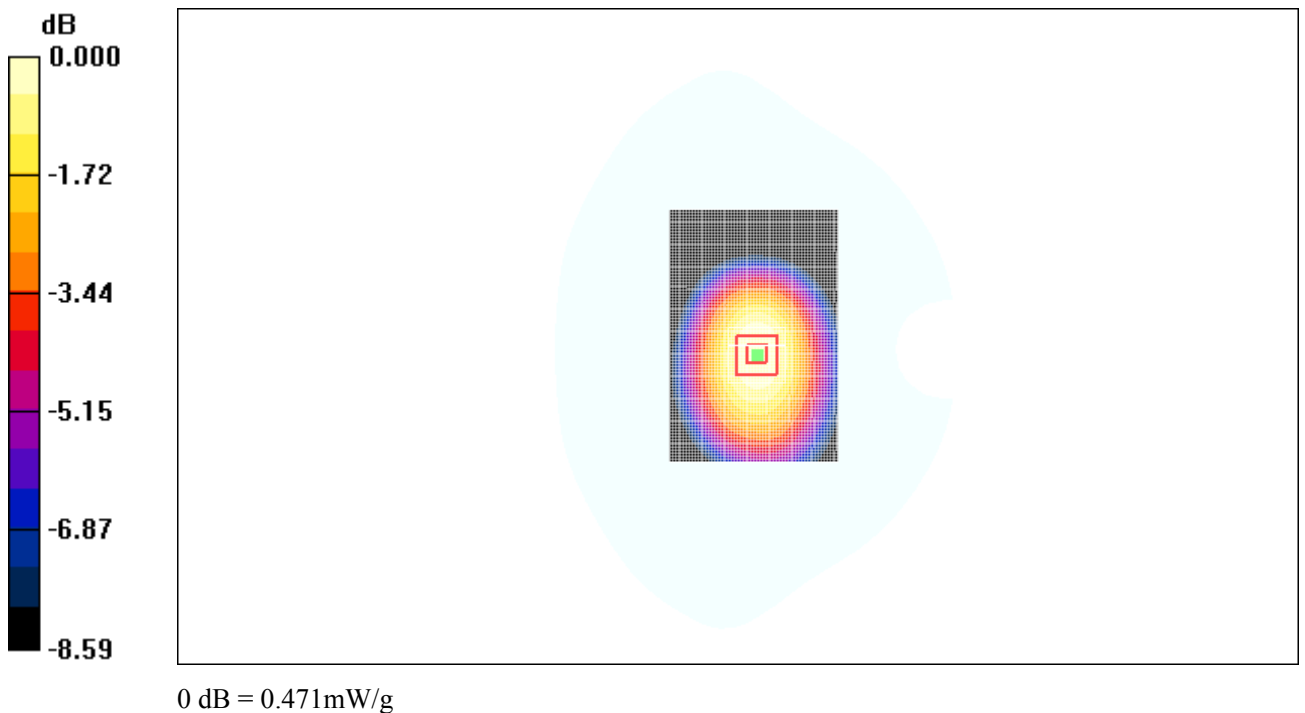


Fig. 30 850 MHz CH128

850 Body Towards Ground Low with EGPRS

Date/Time: 2010-3-20 15:14:29

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 824.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.815 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.9 V/m ; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.761 mW/g ; SAR(10 g) = 0.550 mW/g

Maximum value of SAR (measured) = 0.784 mW/g

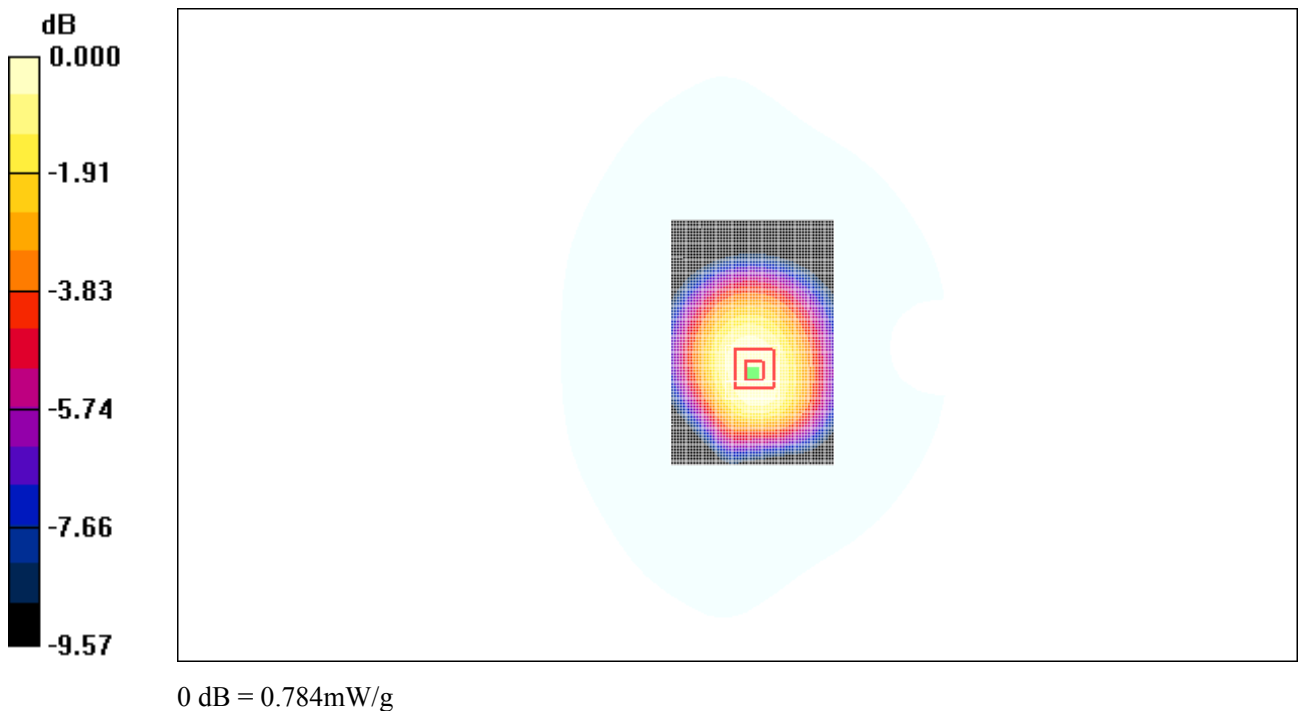


Fig. 31 850 MHz CH128

850 Body Towards Ground Low with Headset__CCA30B4000C0

Date/Time: 2010-3-20 15:31:44

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.674 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.6 V/m ; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.632 mW/g ; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.661 mW/g

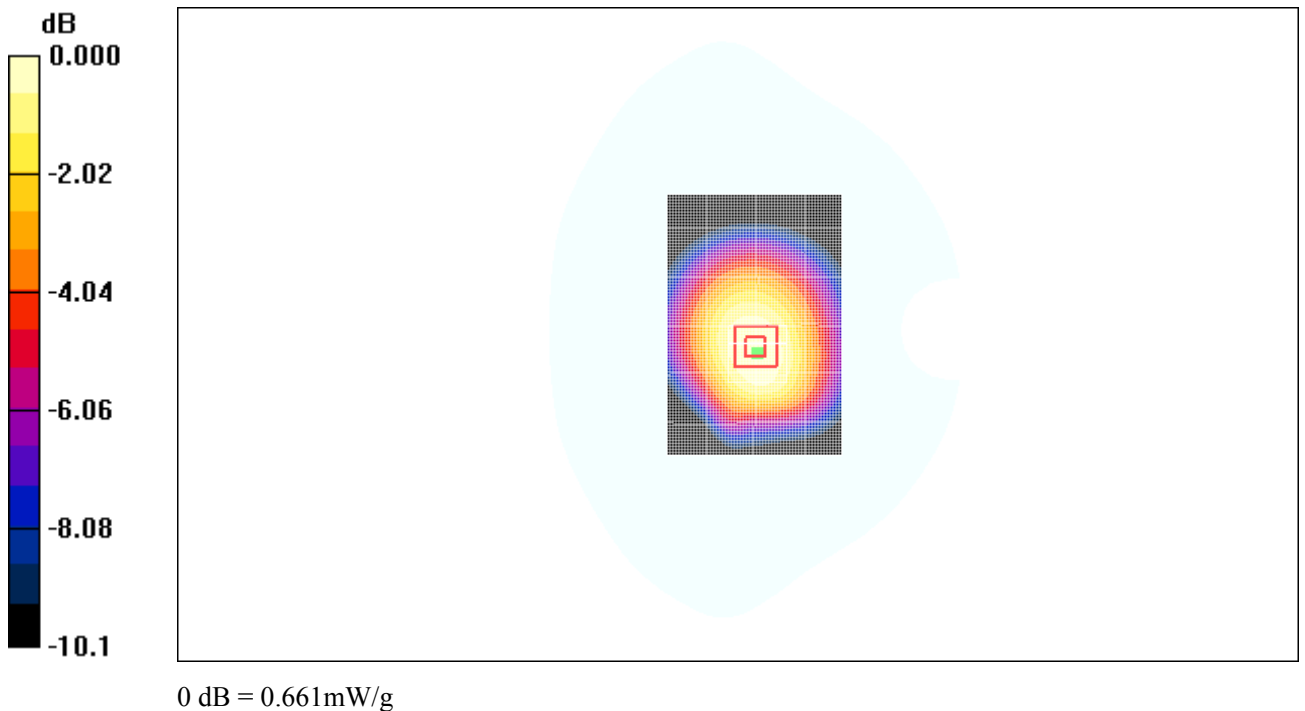


Fig. 32 850 MHz CH128

850 Body Towards Ground Low with Headset__T5003308AAAA

Date/Time: 2010-3-20 15:48:36

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.923 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.686 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.2 V/m ; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.841 W/kg

SAR(1 g) = 0.645 mW/g ; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.669 mW/g

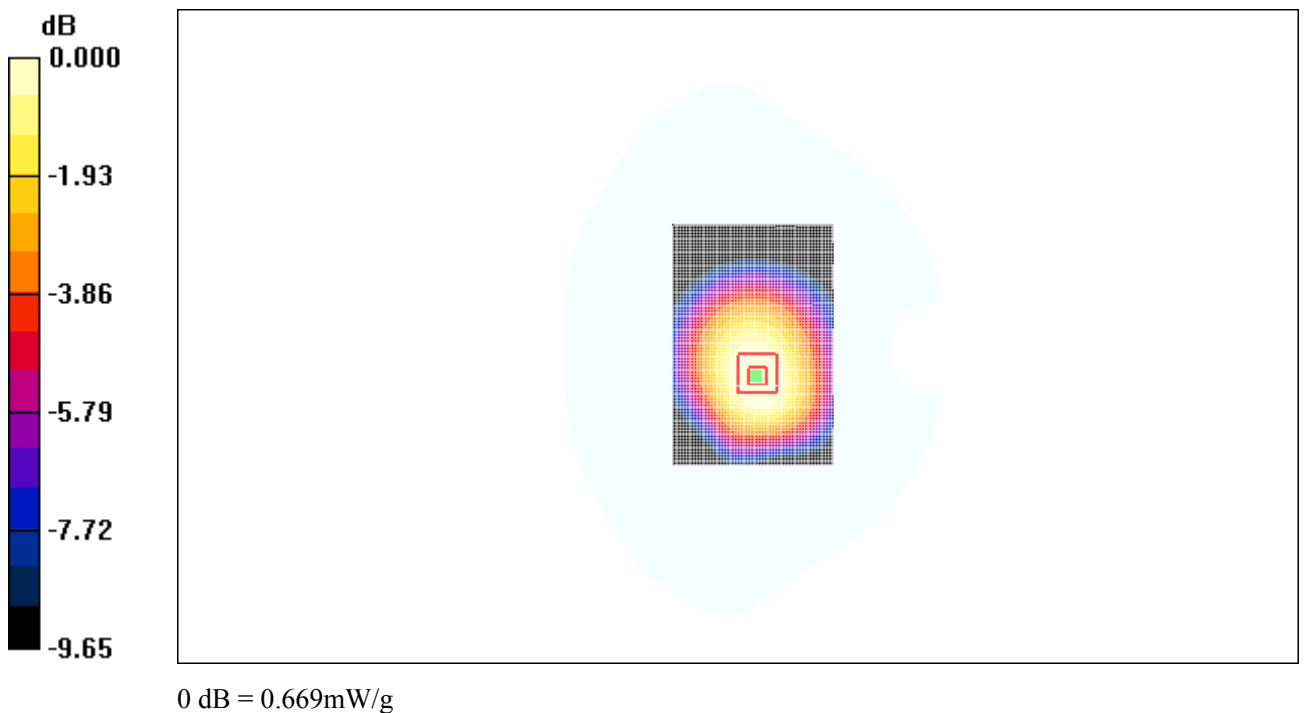


Fig. 33 850 MHz CH128

1900 Body Towards Ground High with GPRS

Date/Time: 2010-3-21 13:41:12

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.37 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.48 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.677 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

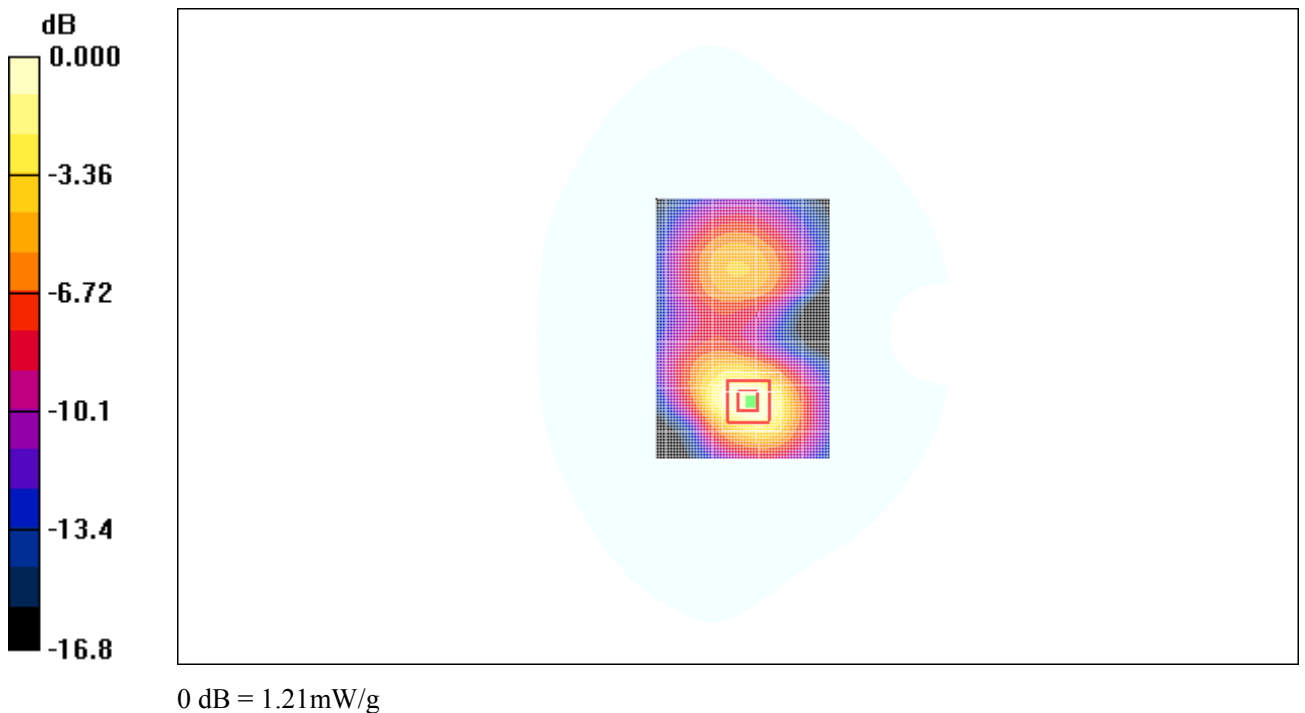


Fig. 34 1900 MHz CH810

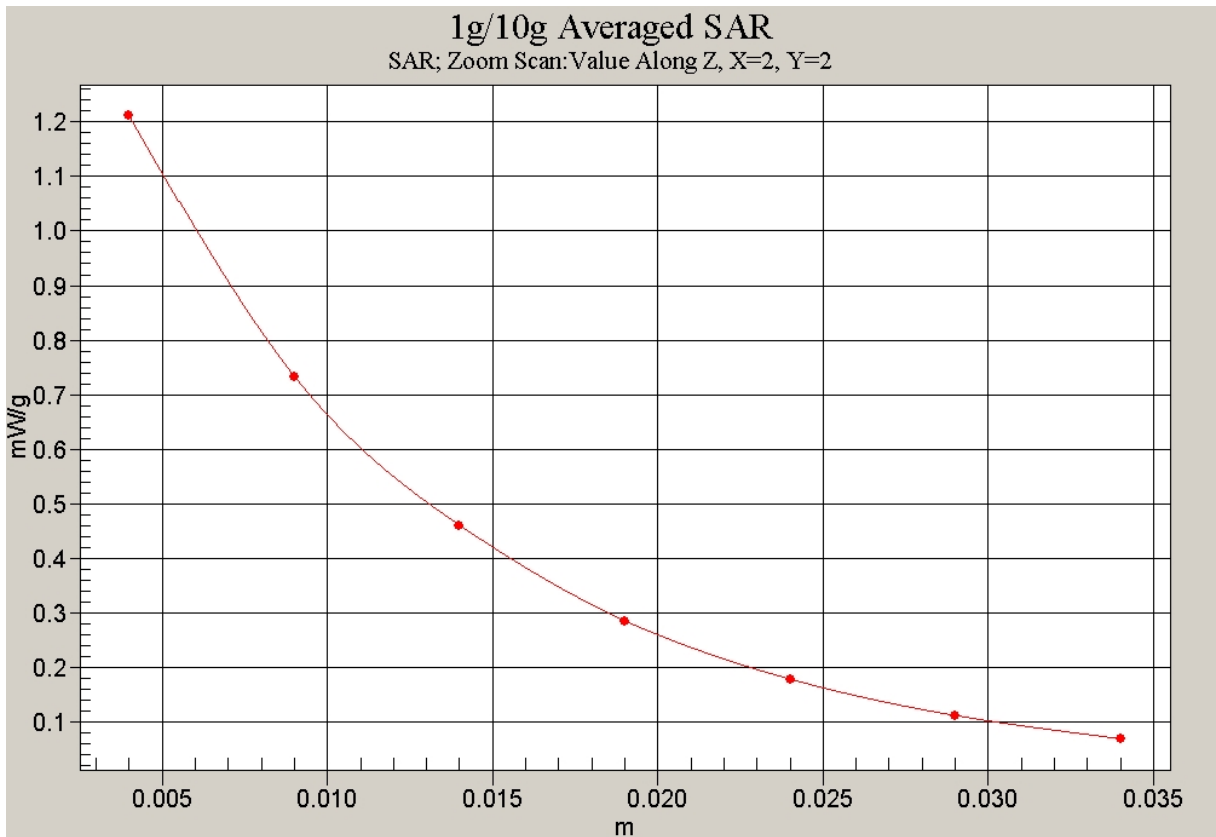


Fig. 34-1 Z-Scan at power reference point (1900 MHz CH810)

1900 Body Towards Ground Middle with GPRS

Date/Time: 2010-3-21 13:56:27

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.931 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.32 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.853 mW/g

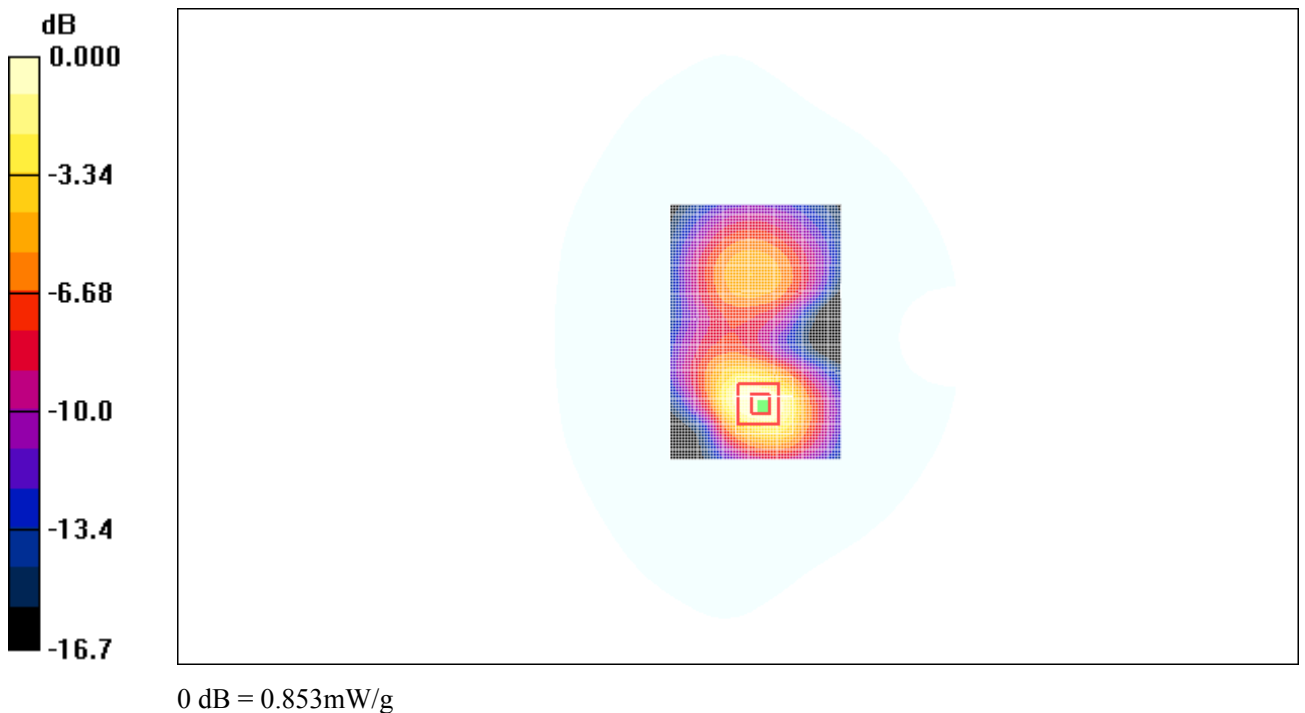


Fig. 35 1900 MHz CH661

1900 Body Towards Ground Low with GPRS

Date/Time: 2010-3-21 14:11:45

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.838 mW/g


Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.06 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.776 mW/g

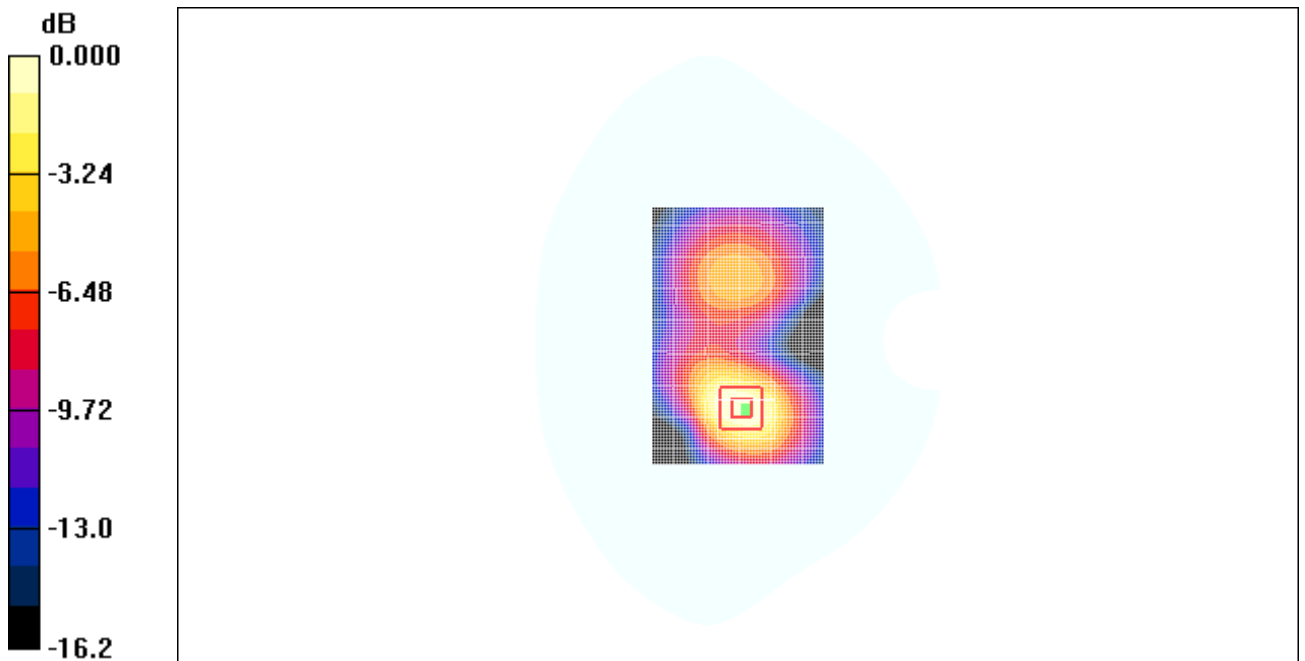

0 dB = 0.776mW/g

Fig. 36 1900 MHz CH512

1900 Body Towards Phantom High with GPRS

Date/Time: 2010-3-21 14:27:10

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.247 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.91 V/m; Power Drift = 0.076 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

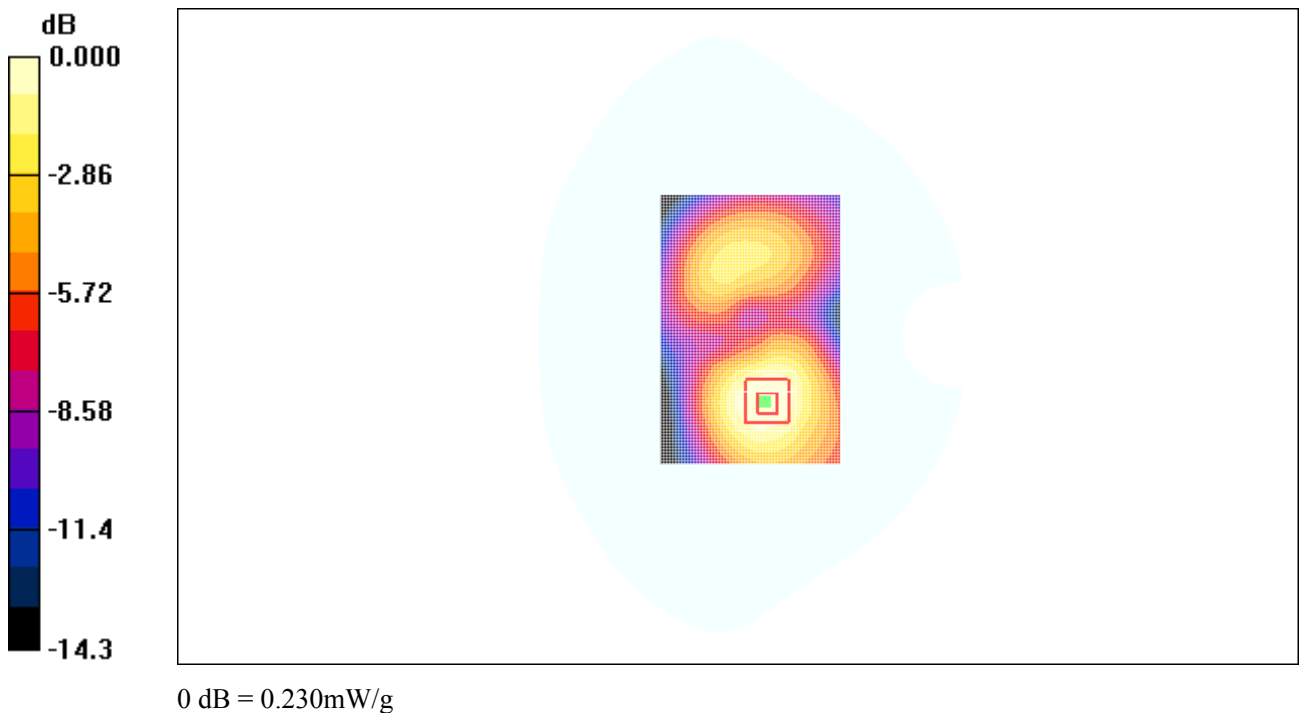


Fig. 37 1900 MHz CH810

1900 Body Towards Phantom Middle with GPRS

Date/Time: 2010-3-21 14:42:28

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1880 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Middle/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.190 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.44 V/m; Power Drift = 0.135 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

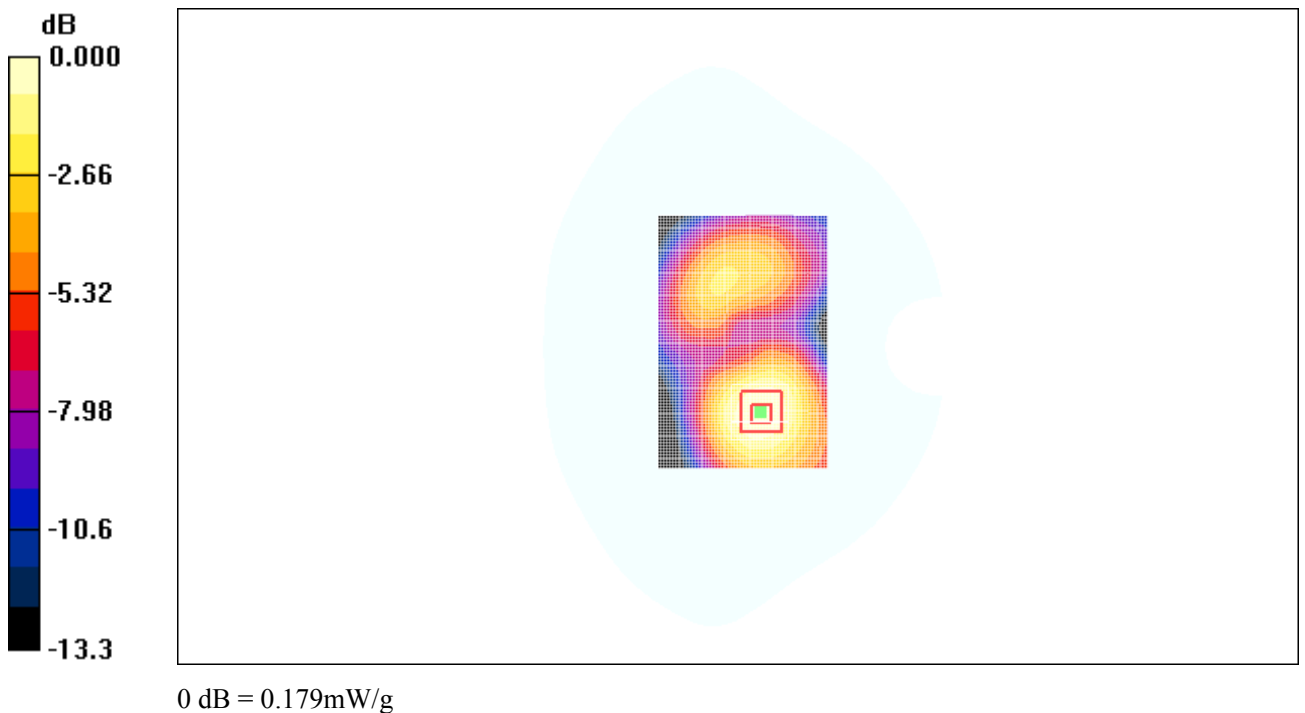


Fig. 38 1900 MHz CH661

1900 Body Towards Phantom Low with GPRS

Date/Time: 2010-3-21 14:57:47

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Phantom Low/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.170 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.17 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

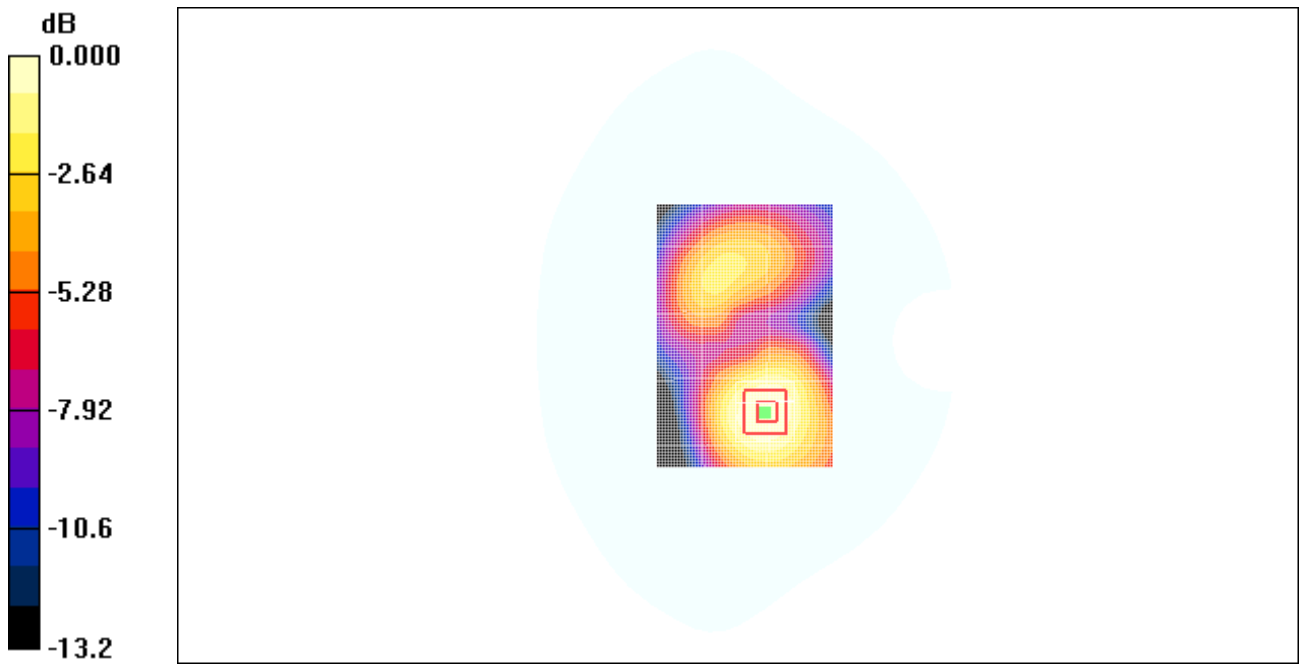


Fig. 39 1900 MHz CH512

1900 Body Towards Ground High with EGPRS

Date/Time: 2010-3-21 15:05:11

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1909.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.856 mW/g


Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.44 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.779 mW/g

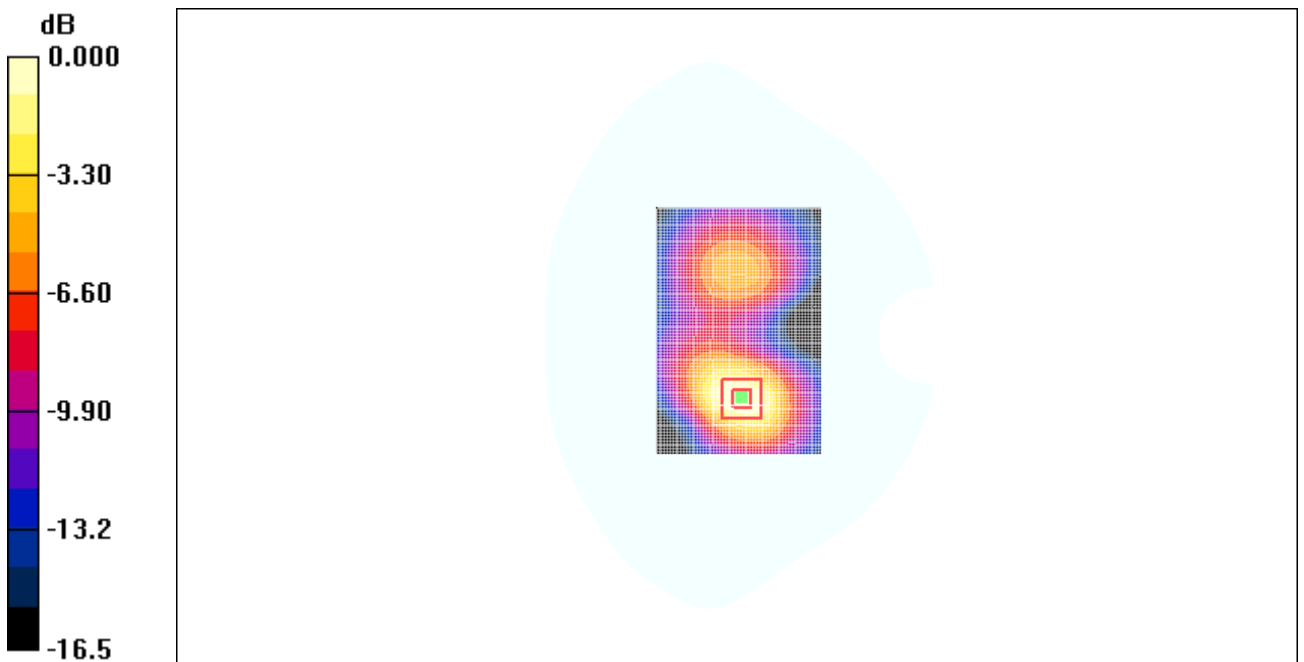

0 dB = 0.779mW/g

Fig. 40 1900 MHz CH810

1900 Body Towards Ground High with Headset__CCA30B4000C0

Date/Time: 2010-3-21 15:22:34

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.14 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.936 mW/g

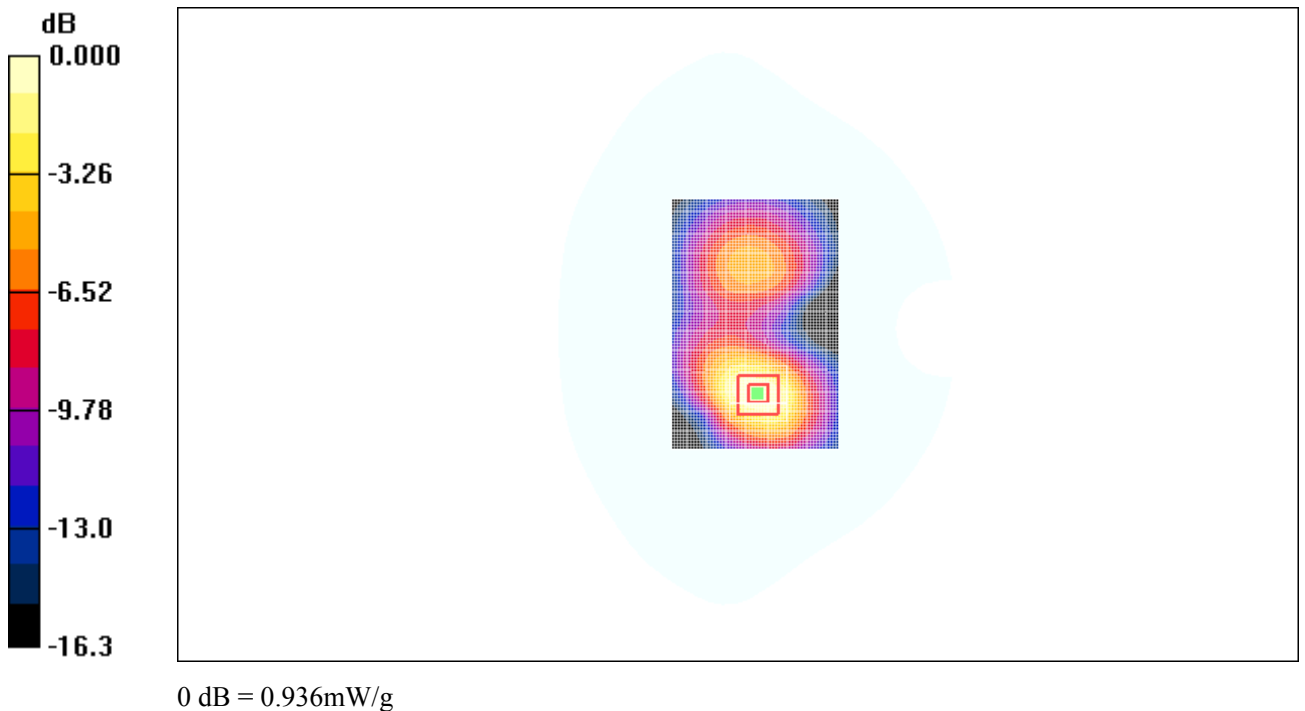


Fig. 41 1900 MHz CH810

1900 Body Towards Ground High with Headset__T5003308AAAA

Date/Time: 2010-3-21 15:39:02

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

Toward Ground High/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.86 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.531 mW/g

Maximum value of SAR (measured) = 0.985 mW/g

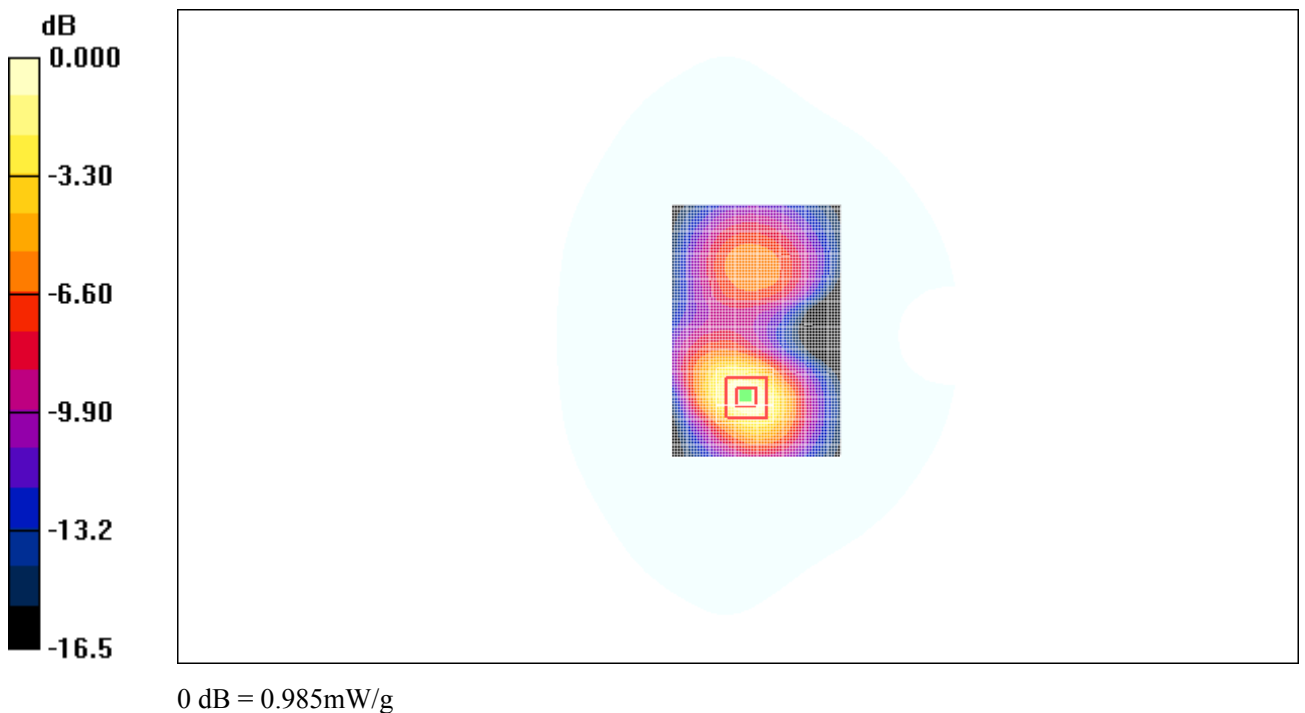


Fig. 42 1900 MHz CH810

ANNEX D SYSTEM VALIDATION RESULTS

835MHz

Date/Time: 2010-3-20 7:23:07

Electronics: DAE4 Sn771

Medium: Head 850

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

System Validation /Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 2.52 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.0 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.47 mW/g

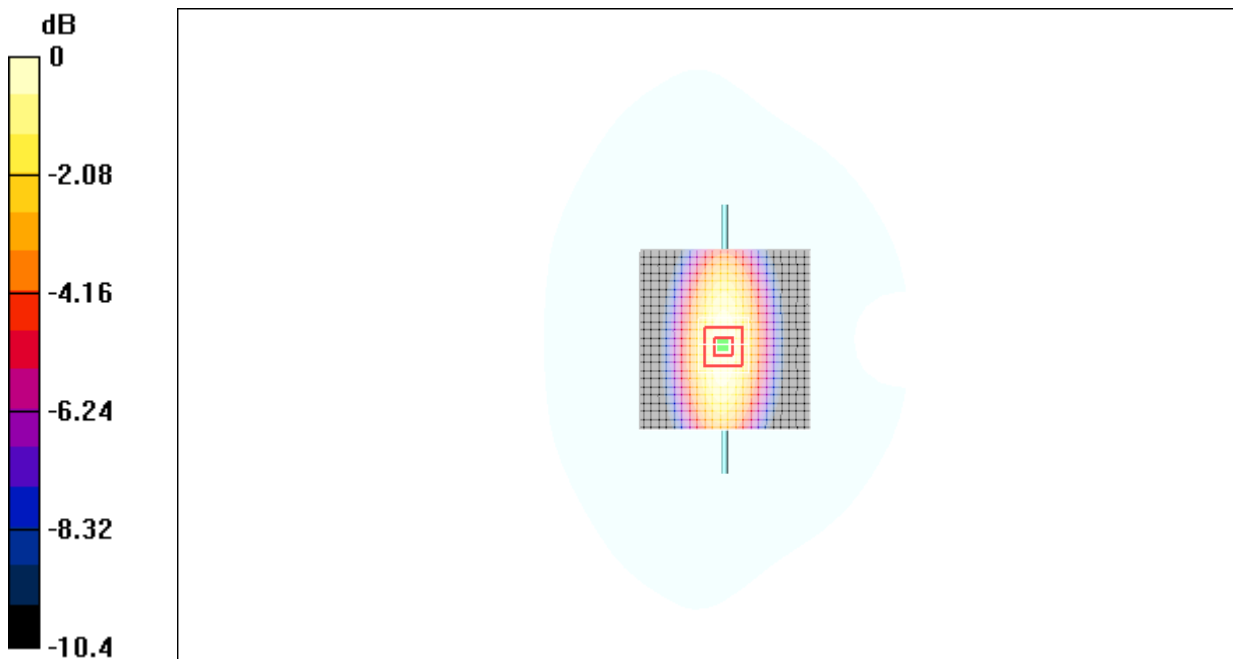

0 dB = 2.47mW/g

Fig.43 validation 835MHz 250mW

835MHz

Date/Time: 2010-3-20 13:11:34

Electronics: DAE4 Sn771

Medium: 850 Body

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 54.0$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

System Validation /Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 2.61 mW/g


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.2 V/m; Power Drift = 0.087 dB

Peak SAR (extrapolated) = 3.43 W/kg

SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.49 mW/g

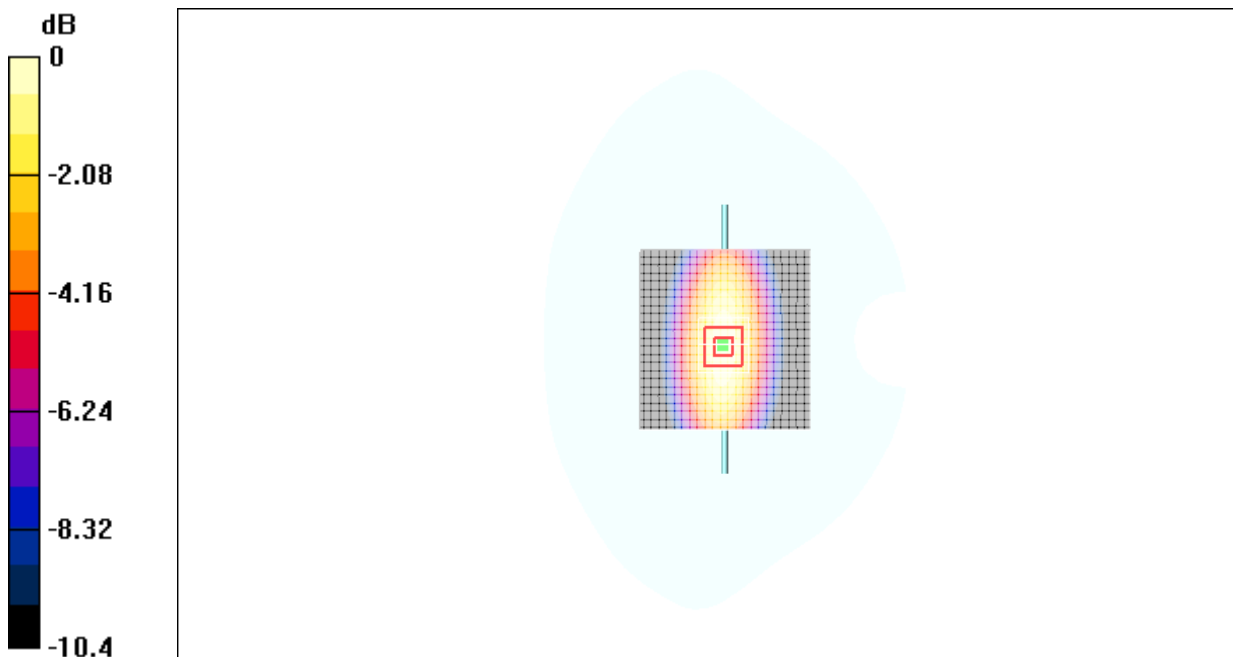

0 dB = 2.49mW/g

Fig.44 validation 835MHz 250mW

1900MHz

Date/Time: 2010-3-21 7:25:18

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

System Validation/Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 11.4 mW/g

System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 91.1 V/m ; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 16.0 W/kg

SAR(1 g) = 9.80 mW/g ; SAR(10 g) = 4.91 mW/g

Maximum value of SAR (measured) = 10.6 mW/g

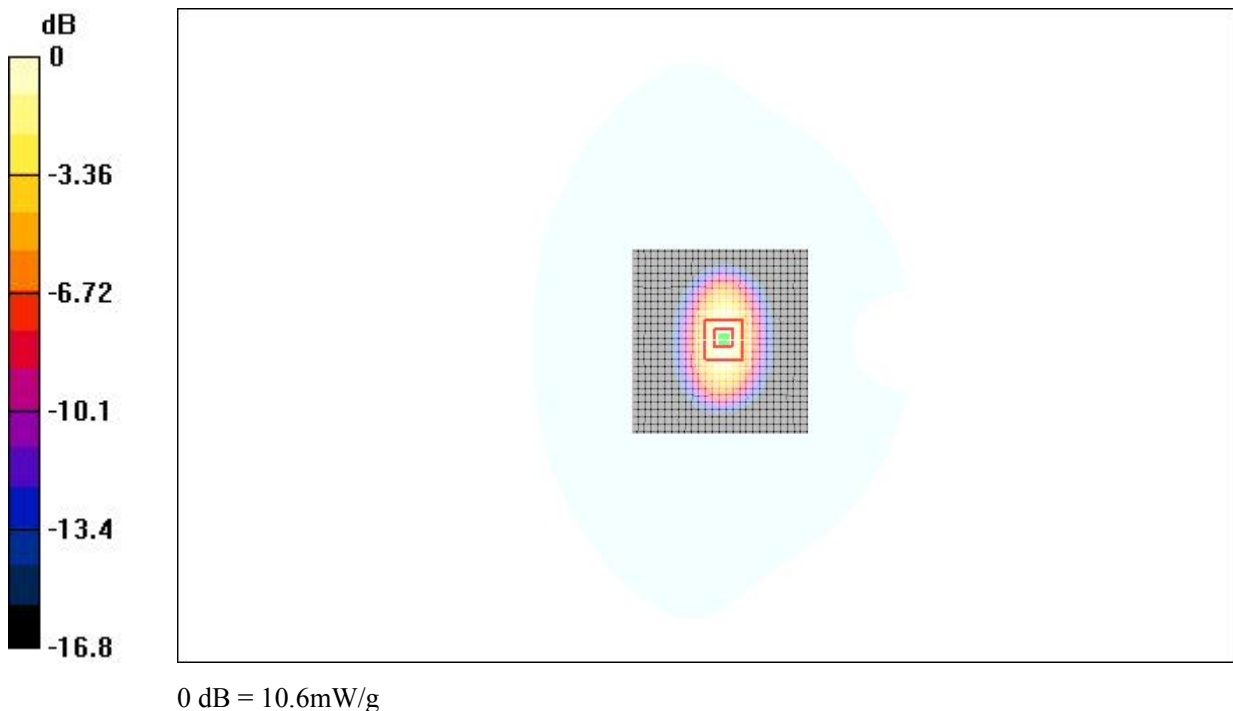


Fig.45 validation 1900MHz 250mW

1900MHz

Date/Time: 2010-3-21 13:17:26

Electronics: DAE4 Sn771

Medium: Body 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.0°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: ES3DV3 - SN3149 ConvF(4.68, 4.68, 4.68)

System Validation/Area Scan (101x101x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 11.6 mW/g


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.7 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.35 mW/g

Maximum value of SAR (measured) = 11.1 mW/g

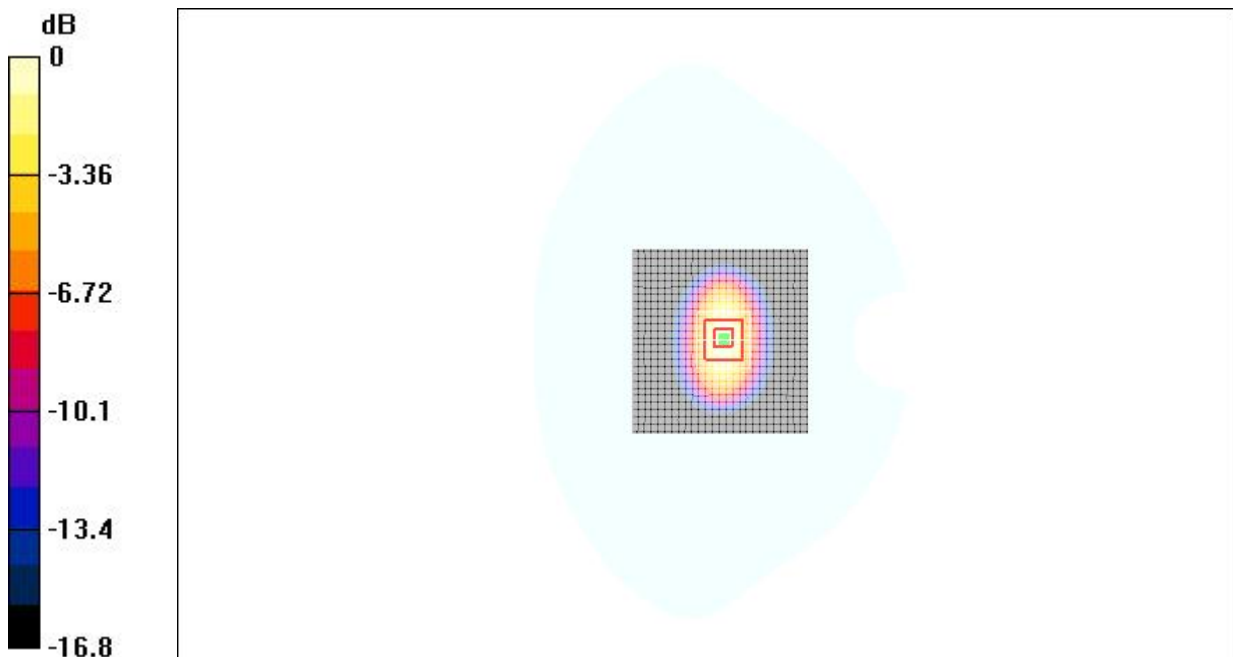

0 dB = 11.1mW/g

Fig.46 validation 1900MHz 250mW

ANNEX E PROBE CALIBRATION CERTIFICATE

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TMC China**

Certificate No: **ES3DV3-3149_Sep09**

CALIBRATION CERTIFICATE


Object	ES3DV3-SN: 3149
Calibration procedure(s)	QA CAL-01.v6 Calibration procedure for dosimetric E-field probes
Calibration date:	September 25, 2009
Condition of the calibrated item	In Tolerance


This calibration certify documents the traceability to national standards, which realize the physical units of measurements(SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted at an environment temperature (22±3)°C and humidity<70%

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Data (Calibrated by, Certification NO.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-09 (METAS, NO. 251-00388)	May-10
Power sensor E4412A	MY41495277	5-May-09 (METAS, NO. 251-00388)	May-10
Reference 3 dB Attenuator	SN:S5054 (3c)	10-Aug-09 (METAS, NO. 251-00403)	Aug-10
Reference 20 dB Attenuator	SN:S5086 (20b)	3-May-09 (METAS, NO. 251-00389)	May-10
Reference 30 dB Attenuator	SN:S5129 (30b)	10-Aug-09 (METAS, NO. 251-00404)	Aug-10
DAE4	SN:617	10-Jun-09 (SPEAG, NO.DAE4-907_Jun09)	Jun-10
Reference Probe ES3DV2	SN: 3013	12-Jan-09 (SPEAG, NO. ES3-3013_Jan09)	Jan-10

Secondary Standards	ID#	Check Data (in house)	Scheduled Calibration
RF generator HP8648C	US3642U01700	4-Aug-99(SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01(SPEAG, in house check Nov-07)	In house check: Nov-09

Name	Function	Signature
Calibrated by: Katja Pokovic	Technical Manager	

Approved by: Niels Kuster	Quality Manager	
---------------------------	-----------------	--

Issued: **September 25, 2009**

This calibration certificate shall not be reported except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- **NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to **NORM_{x,y,z} * ConvF** whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN: 3149

September 25, 2009

Probe ES3DV3

SN: 3149

Manufactured: June 12, 2007

Calibrated: September 25, 2009

Calibrated for DASY4 System

ES3DV3 SN: 3149

September 25, 2009

DASY – Parameters of Probe: ES3DV3 SN:3149

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.14±10.1%	$\mu V/(V/m)^2$	DCP X	94mV
NormY	1.23±10.1%	$\mu V/(V/m)^2$	DCP Y	95mV
NormZ	1.29±10.1%	$\mu V/(V/m)^2$	DCP Z	91mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8

Boundary Effect

TSL 900MHz Typical SAR gradient: 5% per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SARbe[%]	Without Correction Algorithm	3.8	1.6
SARbe[%]	With Correction Algorithm	0.8	0.7

TSL 1810MHz Typical SAR gradient: 10% per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SARbe[%]	Without Correction Algorithm	6.8	3.6
SARbe[%]	With Correction Algorithm	0.4	0.2

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN: 3149

September 25, 2009

Frequency Response of E-Field


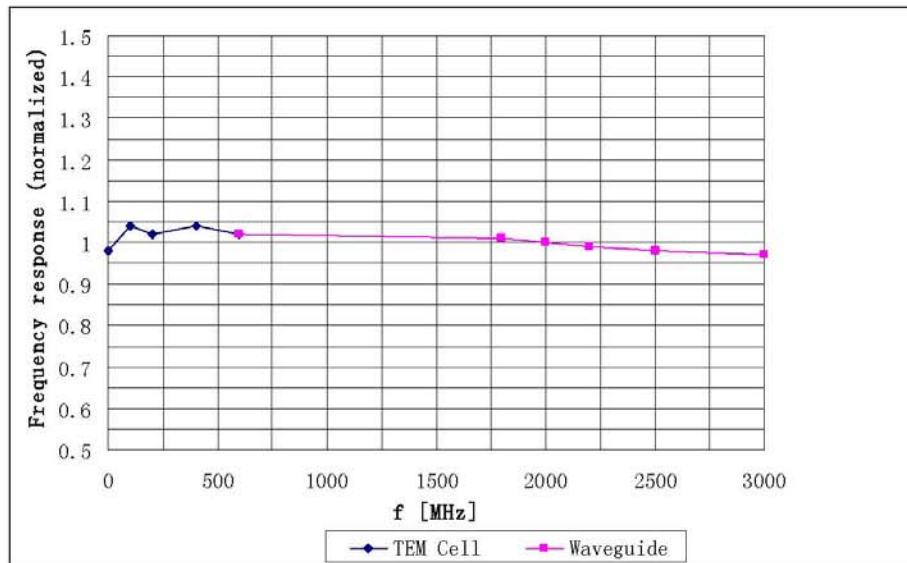


Uncertainty of Frequency Response of E-field: $\pm 5.0\%$ (k=2)

ES3DV3 SN: 3149

September 25, 2009

Receiving Pattern (ϕ), $\theta = 0^\circ$

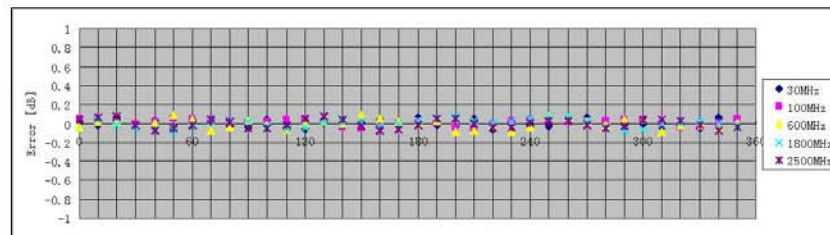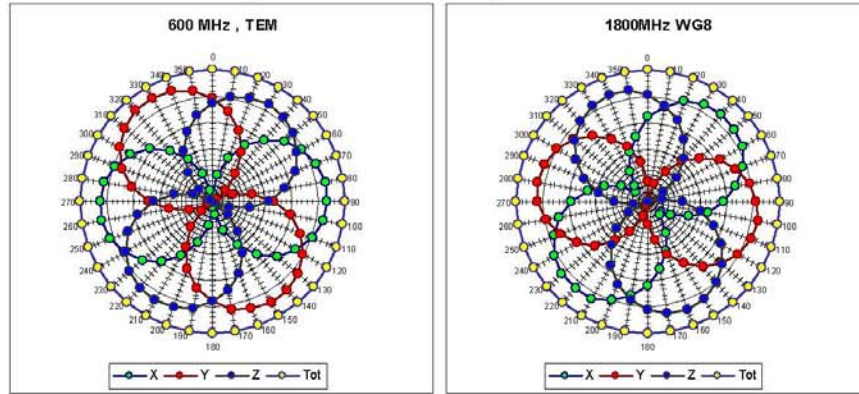

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)