



TEST REPORT

No. 2010TAR375

for

TCT Mobile Limited

GSM/GPRS/EDGE dual band mobile phone

Model Name: Jade Lite A

Marketing Name: OT-799A

FCC ID: RAD152

with

Hardware Version: PROTO

Software Version: SW221

Issued Date: Sep 9th, 2010

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633 Email:welcme@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Sep 6,2010
Testing End Date: Sep 7,2010


1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P.R.China
Telephone: 0086 21 61460883
Fax: 0086 2161460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 4F, South Building, No.2966, JinKe Road, Zhangjiang High-Tech Park
Shanghai 201203, P.R.China
City: Shanghai
Postal Code: 201203
Country: P.R.China
Telephone: 0086 2161460890
Fax: 0086 2161460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/GPRS/EDGE dual band mobile phone
Model Name	Jade Lite A
Marketing Name	OT-799A
FCC ID	RAD152
Frequency	GSM 850MHz; PCS 1900MHz
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N11	012454000010632	PROTO	SW221

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Charger	/
AE3	Charger	/
AE4	Headset	/
AE5	Headset	/

AE1

Model	CAB30P0000C1
Manufacturer	BYD
Capacitance	850mAh
Nominal Voltage	3.7V

AE2

Model	CBA30Y0AG0C1
Manufacturer	BYD
Length of DC line	120cm

AE3

Model	CBA30Y0AG0C2
Manufacturer	TENPAO
Length of DC line	120cm

AE4

Model	CCA30B4000C0
Manufacturer	Juwei
Length of DC line	160cm

AE5

Model	CCA30B4000C2
Manufacturer	SHUNDA
Length of DC line	160cm

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTUR E	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2010-10-30
2	Test Receiver	ESI40	831564/002	R&S	2011-2-10
3	BiLog Antenna	3142B	9908-1403	EMCO	2011-1-15
4	BiLog Antenna	VUL9163	9163 175	Schwarzbeck	2010-9-19
5	Signal Generator	SMT06	831285/005	R&S	2010-12-26
6	Signal Generator	SMP04	100070	R&S	2011-4-21
7	LISN	ESH2-Z5	829991/012	R&S	2010-9-13
8	Spectrum Analyzer	FSU26	200030	R&S	2011-6-16
9	Universal Radio Communication Tester	CMU200	100680	R&S	2011-8-21
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2011-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2011-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-3
13	Climatic chamber	SH-241	92003546	ESPEC	2011-5-14
14	PC	OPTIPLEX 755	3908243625	DELL	N/A
15	Monitor	E178FPc	CN-OWR979-641 80-7AJ-D2MS	DELL	N/A
16	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
17	Keyboard	L100	CN0RH65965890 7ATOI40	DELL	N/A
18	Mouse	VR-301	6927225500198	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.4 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

Charging Mode(AE2)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3503.006	50.54	13.7	36.84	VERTICAL
3831.663	49.64	13.9	35.74	HORIZONTAL
3817.635	49.55	13.9	35.65	VERTICAL
3879.76	49.5	13.8	35.7	VERTICAL
3843.687	49.49	13.9	35.59	VERTICAL
3723.447	49.41	13.8	35.61	VERTICAL

Charging Mode(AE3)


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3527.054	49.8	13.8	36	VERTICAL
3699.399	49.6	13.9	35.7	VERTICAL
3801.603	49.55	13.9	35.65	HORIZONTAL
3519.038	49.54	13.8	35.74	HORIZONTAL
3865.731	49.54	13.8	35.74	HORIZONTAL
3897.796	49.51	13.6	35.91	HORIZONTAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1496.994	50.3	2.9	47.4	HORIZONTAL
3811.623	50.06	13.9	36.16	VERTICAL
1492.986	49.98	2.9	47.08	VERTICAL
3527.054	49.9	13.8	36.1	VERTICAL
3817.635	49.8	13.9	35.9	VERTICAL
3769.539	49.45	13.8	35.65	VERTICAL

Charging Mode(AE2)


Level [dB μ V/m]

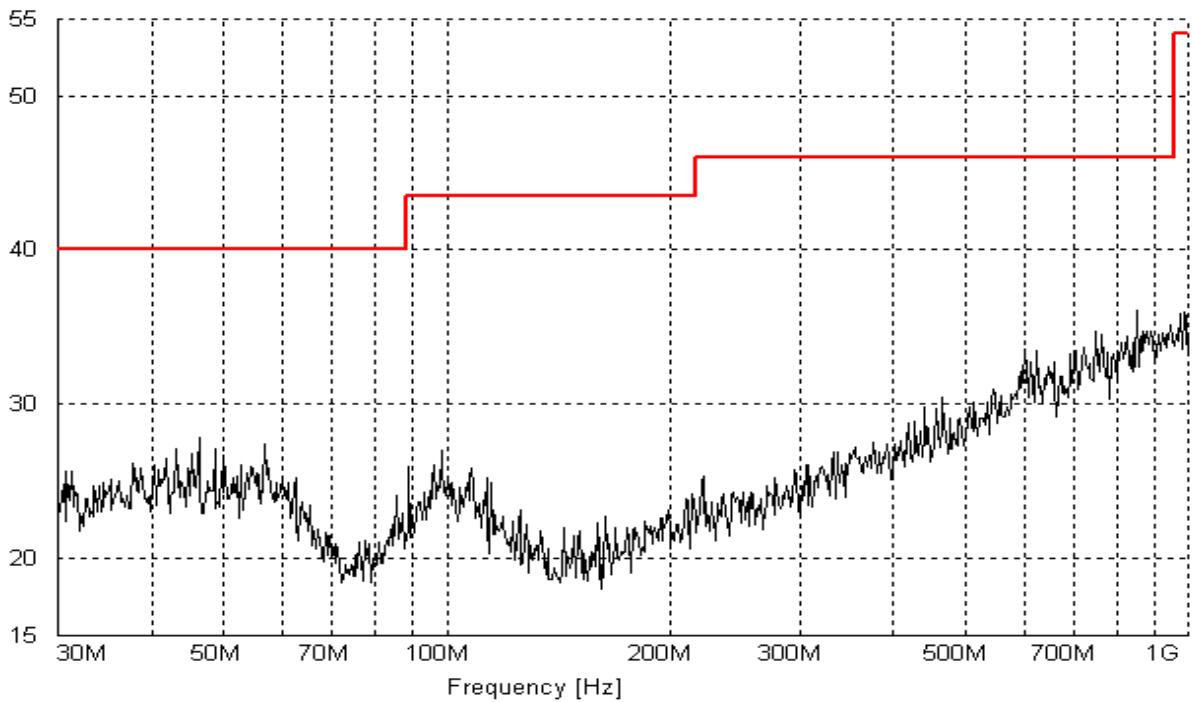

— MES_10TA781_1C1R_pre PK
— LIM FCC Part 15B Class A

Figure A.1 Radiated Emission from 30MHz to 1GHz

Level [dB μ V/m]

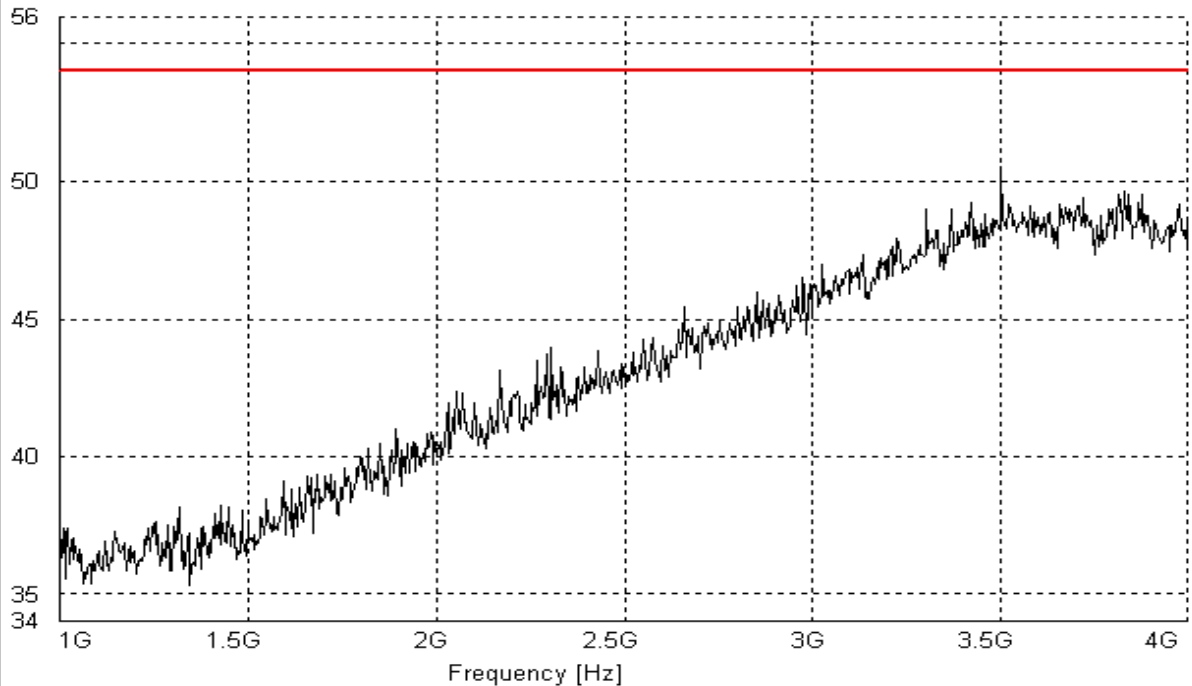

— MES_10TA781_2C1R_pre PK
— LIM FCC Part 15B Class A

Figure A.2 Radiated Emission from 1GHz to 4GHz

Charging Mode(AE3)

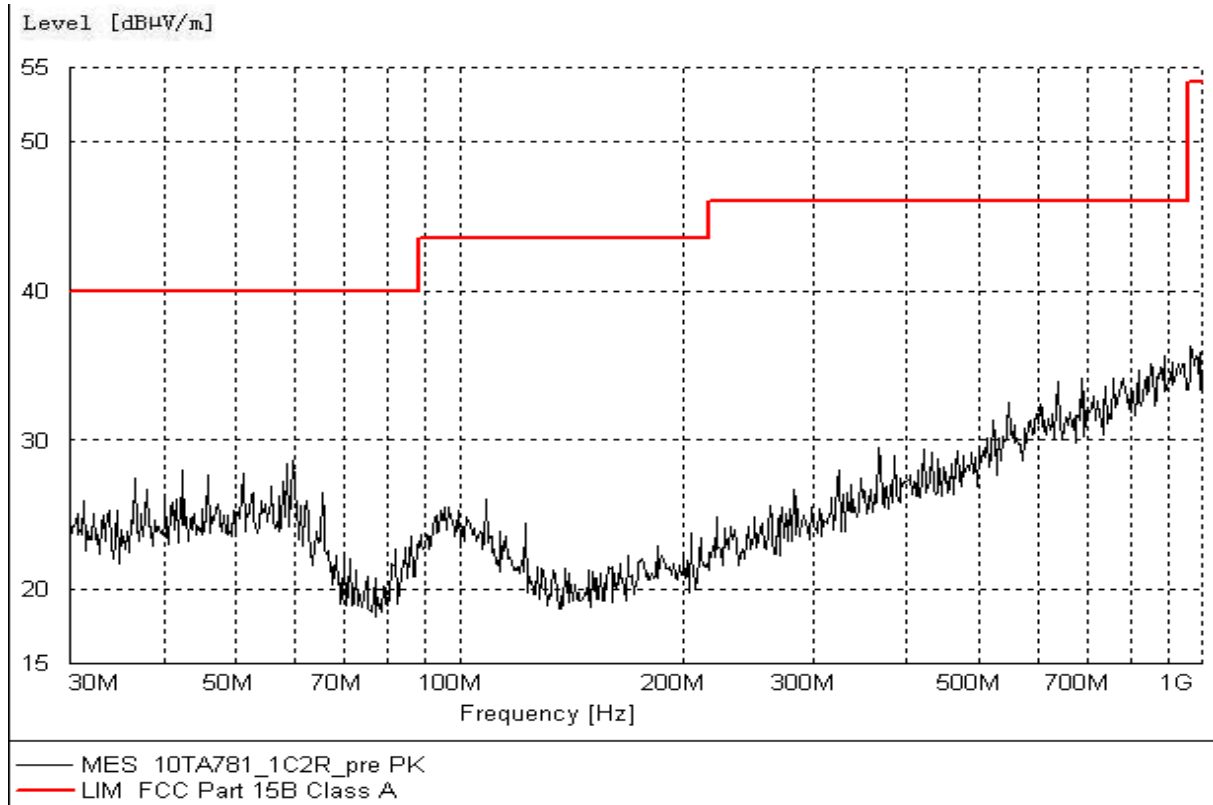


Figure A.3 Radiated Emission from 30MHz to 1GHz

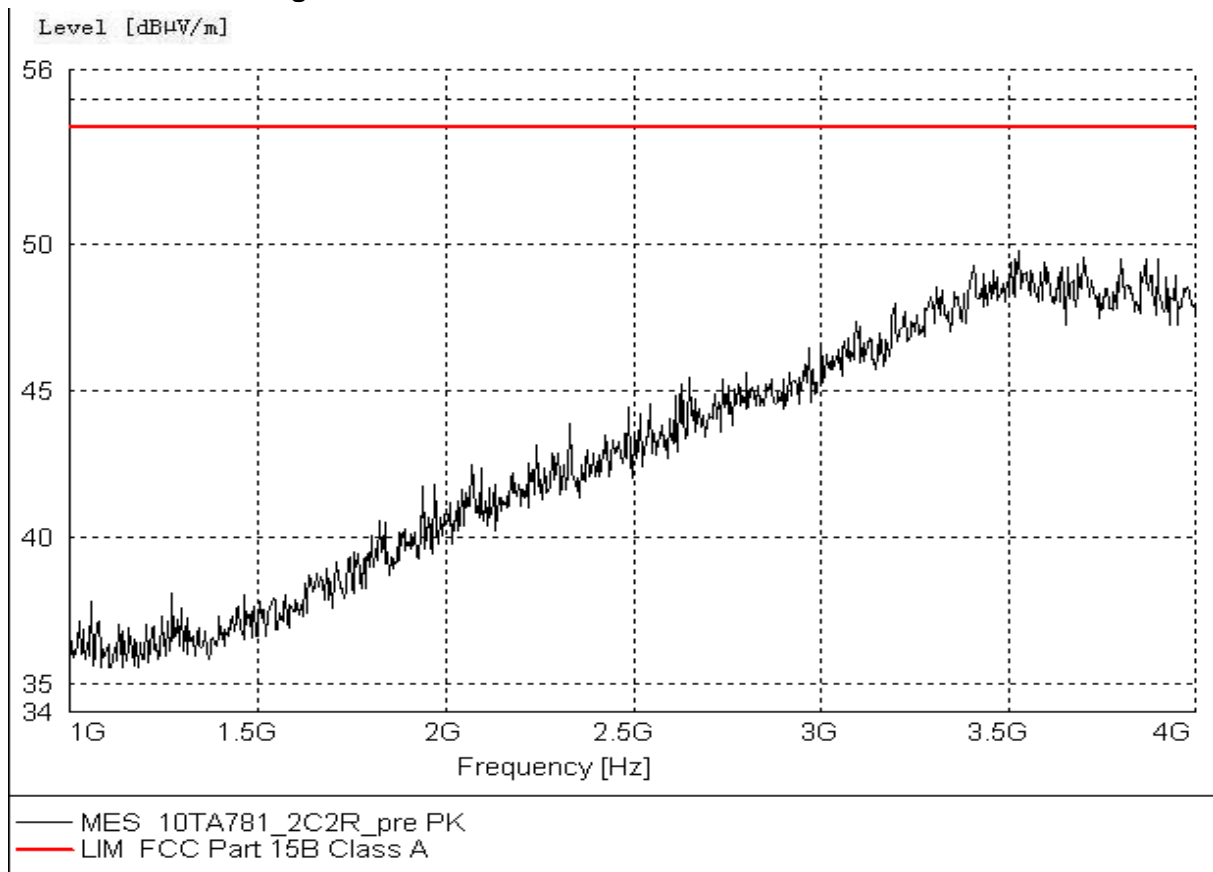


Figure A.4 Radiated Emission from 1GHz to 4GHz

USB Mode

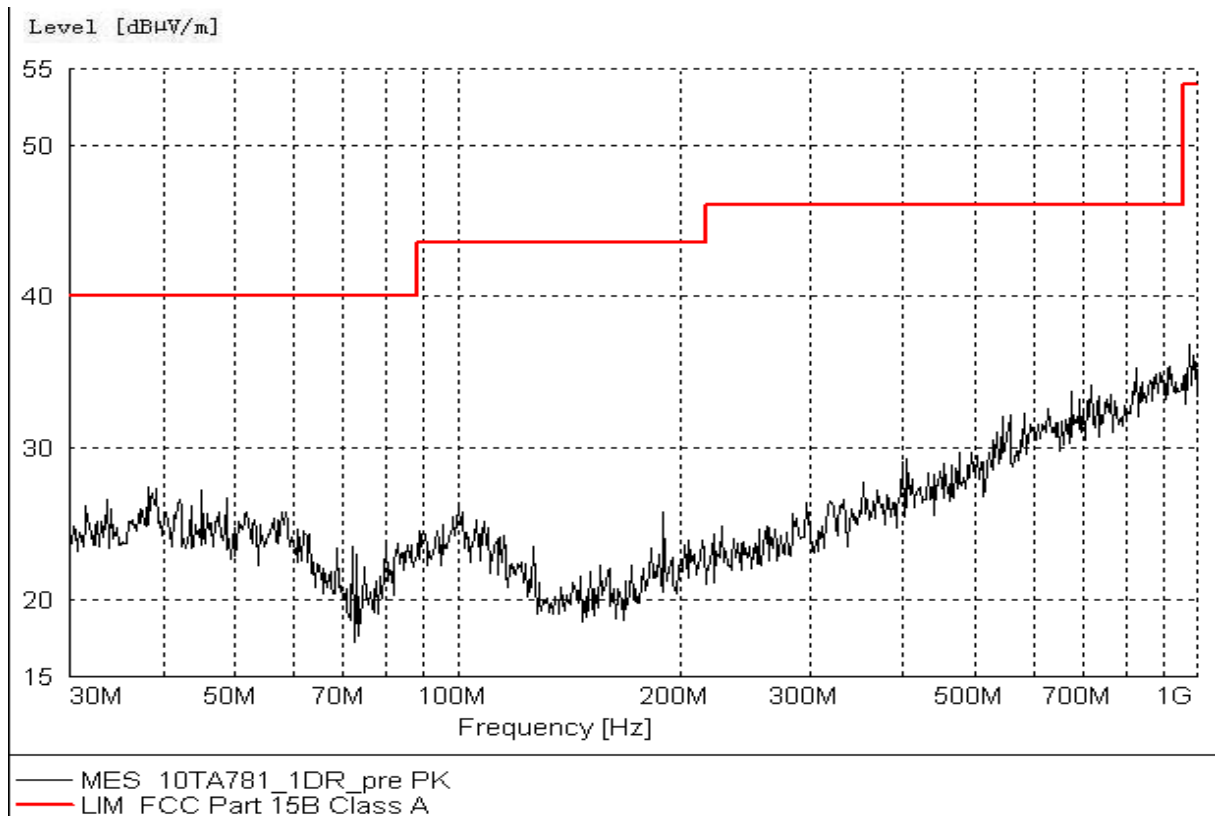


Figure A.5 Radiated Emission from 30MHz to 1GHz

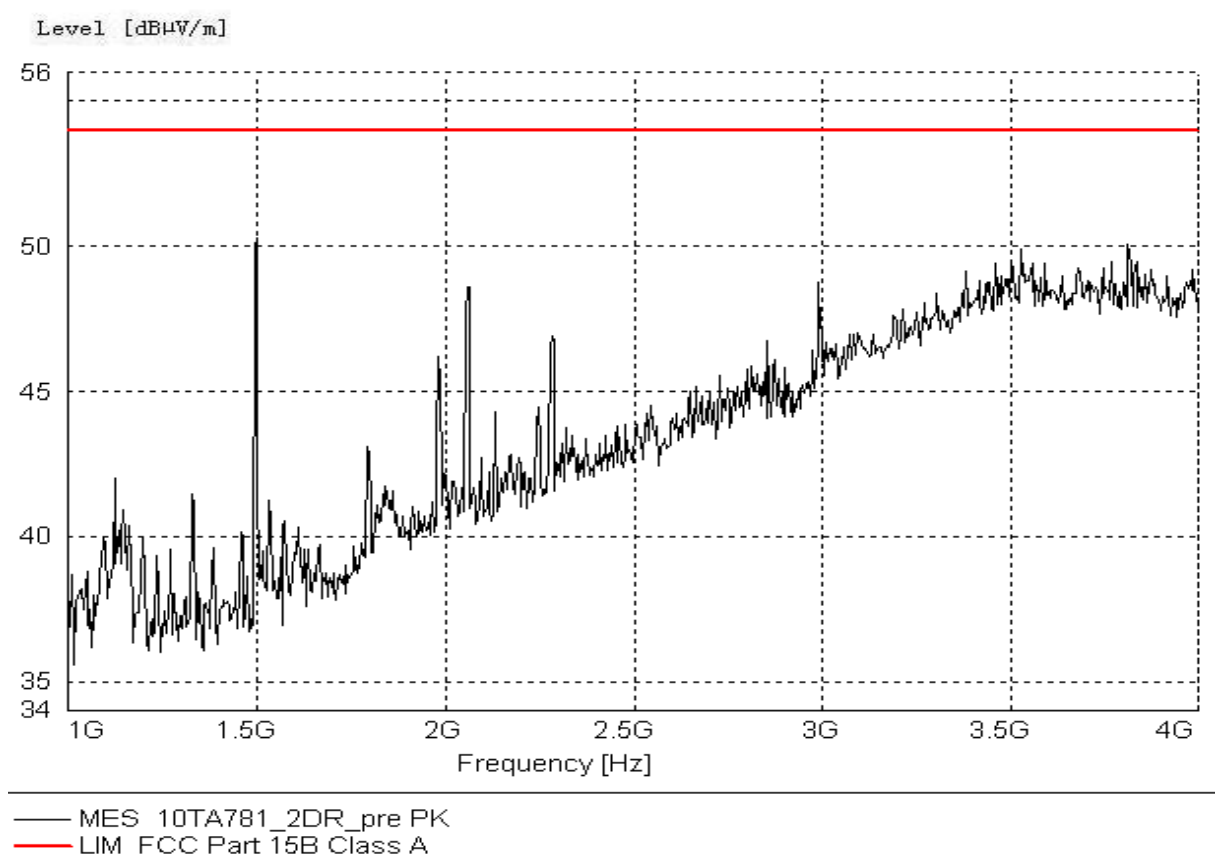


Figure A.6 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
110	60

A.2.4 Measurement Results

Charging Mode (AE2)

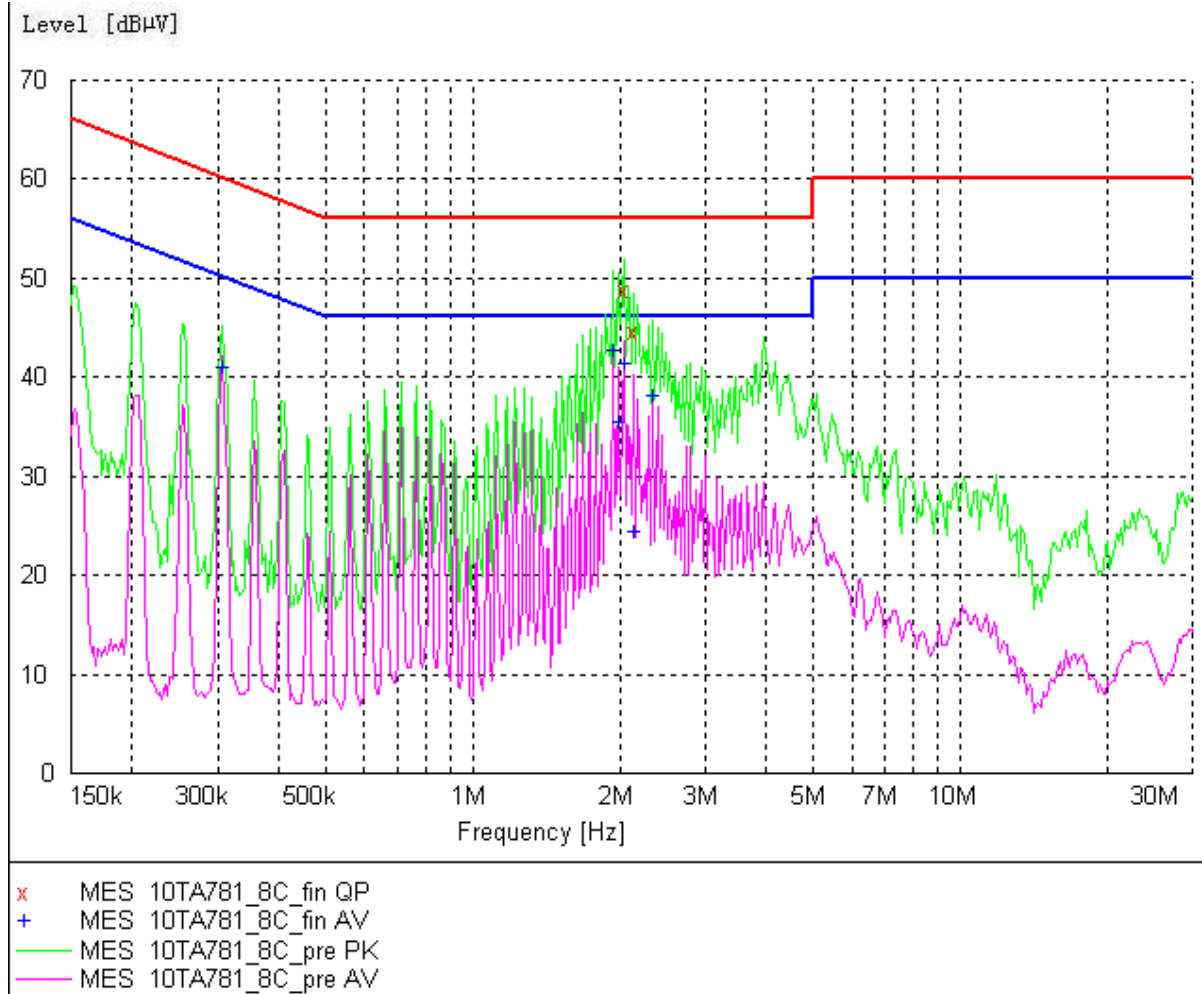


Figure A.7 Conducted Emission

MEASUREMENT RESULT: "10TA781_8C_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
2.040200	48.80	10.1	56	7.2	L1	GND
2.144271	44.70	10.1	56	11.3	L1	FLO

MEASUREMENT RESULT: "10TA781_8C_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.307065	41.00	10.1	50	9.1	N	GND
1.935015	42.80	10.1	46	3.2	L1	FLO
1.993648	35.50	10.1	46	10.5	L1	GND
2.040200	41.50	10.1	46	4.5	L1	GND
2.144271	24.50	10.1	46	21.5	L1	GND
2.345157	38.10	10.1	46	7.9	L1	GND

Charging Mode (AE3)

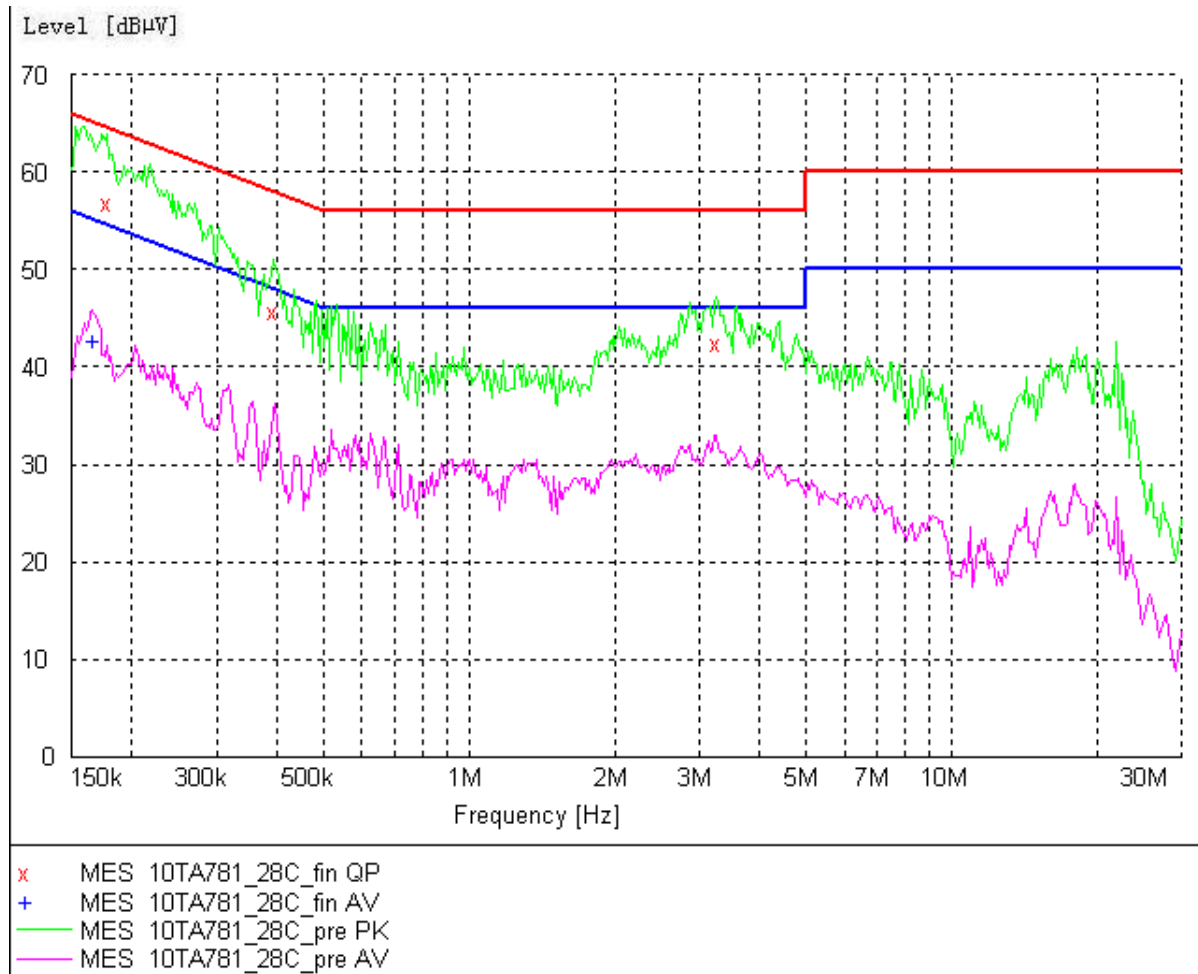


Figure A.8 Conducted Emission

MEASUREMENT RESULT: "10TA781_28C_fin QP"


Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.177646	57.00	10.1	65	7.6	L1	FLO
0.393790	45.70	10.1	58	12.3	L1	GND
3.256697	42.50	10.1	56	13.5	L1	FLO

MEASUREMENT RESULT: "10TA781_28C_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.165693	42.70	10.1	55	12.5	N	GND

USB Mode

Level [dB μ V]

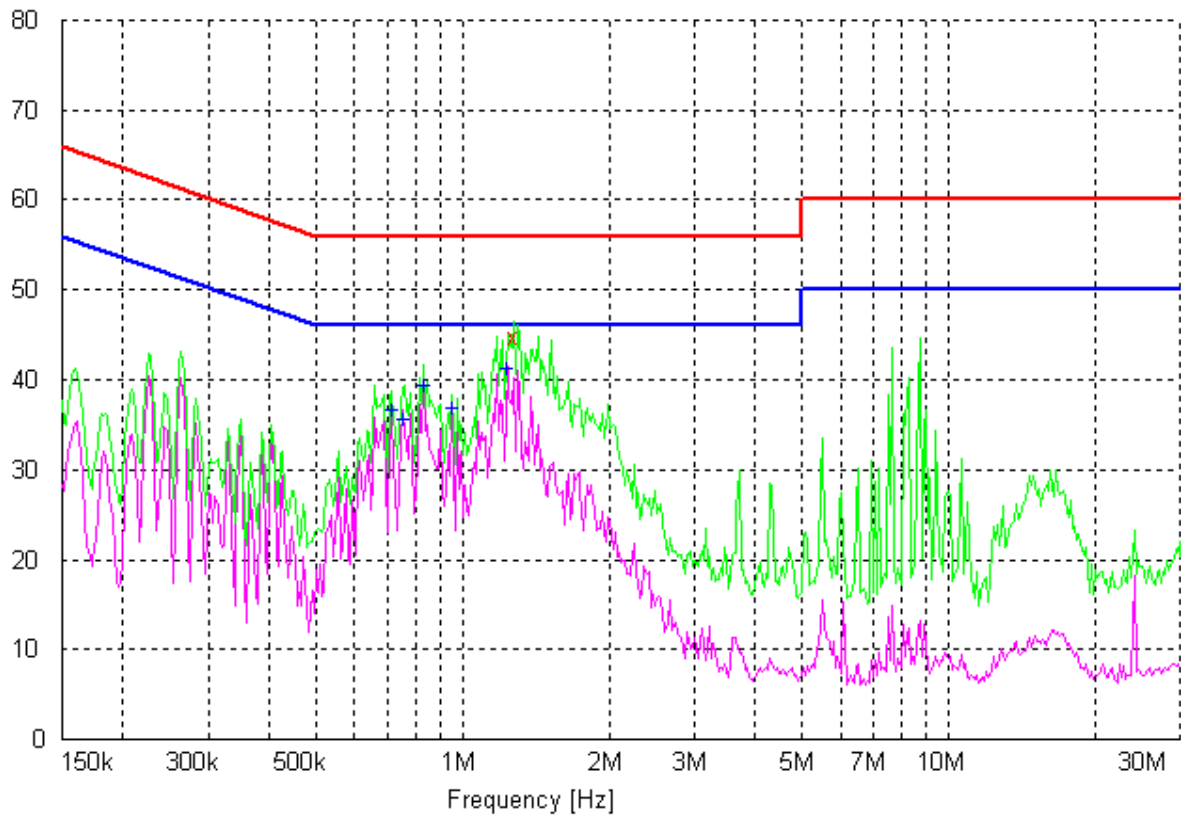

- x MES 10TA781_15B_fin QP
- + MES 10TA781_15B_fin AV
- MES 10TA781_15B_pre PK
- MES 10TA781_15B_pre AV

Figure A.9 Conducted Emission

MEASUREMENT RESULT: "10TA781_15B_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dB μ V	dB	dB	dB μ V	dB	
1.274050	44.80	10.1	56	11.2	N	FLO

MEASUREMENT RESULT: "10TA781_15B_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dB μ V	dB	dB	dB μ V	dB	
0.715397	36.60	10.1	46	9.4	L1	GND
0.751889	35.70	10.1	46	10.3	L1	GND
0.830553	39.40	10.1	46	6.6	L1	FLO
0.954700	36.80	10.1	46	9.2	L1	GND
1.236581	41.30	10.1	46	4.7	N	GND

*****END OF REPORT*****