



# SAR TEST REPORT

No. 2011SAR00025

For

**TCT Mobile Limited**

**GSM/GPRS Dual bands mobile phone**

**B11 US**

**one touch 506A**

With

**Hardware Version: PIO**

**Software Version: 616**

**FCCID: RAD160**

**Issued Date: 2011-04-11**



**No. DGA-PL-114/01-02**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304793 Email:welcom@emcite.com. [www.emcite.com](http://www.emcite.com)

©Copyright. All rights reserved by TMC Beijing.

## TABLE OF CONTENT

<b>1 TEST LABORATORY</b> .....	<b>3</b>
1.1 TESTING LOCATION .....	3
1.2 TESTING ENVIRONMENT.....	3
1.3 PROJECT DATA .....	3
1.4 SIGNATURE.....	3
<b>2 CLIENT INFORMATION</b> .....	<b>4</b>
2.1 APPLICANT INFORMATION .....	4
2.2 MANUFACTURER INFORMATION .....	4
<b>3 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1 ABOUT EUT .....	5
3.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	5
3.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
<b>4 CHARACTERISTICS OF THE TEST .....</b>	<b>5</b>
4.1 APPLICABLE LIMIT REGULATIONS .....	5
4.2 APPLICABLE MEASUREMENT STANDARDS.....	6
<b>5 OPERATIONAL CONDITIONS DURING TEST .....</b>	<b>6</b>
5.1 SCHEMATIC TEST CONFIGURATION.....	6
5.2 SAR MEASUREMENT SET-UP.....	6
5.3 DASY4 E-FIELD PROBE SYSTEM.....	7
5.4 E-FIELD PROBE CALIBRATION .....	8
5.5 OTHER TEST EQUIPMENT .....	9
5.6 EQUIVALENT TISSUES.....	10
5.7 SYSTEM SPECIFICATIONS.....	10
<b>6 CONDUCTED OUTPUT POWER MEASUREMENT.....</b>	<b>11</b>
6.1 SUMMARY .....	11
6.2 CONDUCTED POWER .....	11
<b>7 TEST RESULTS .....</b>	<b>12</b>
7.1 DIELECTRIC PERFORMANCE .....	12
7.2 SYSTEM VALIDATION.....	13
7.3 EVALUATION OF MULTI-BATTERIES.....	14
7.4 SUMMARY OF MEASUREMENT RESULTS .....	14
7.5 SUMMARY OF MEASUREMENT RESULTS (BLUETOOTH FUNCTION) .....	17
7.6 CONCLUSION.....	18
<b>8 MEASUREMENT UNCERTAINTY .....</b>	<b>18</b>
<b>9 MAIN TEST INSTRUMENTS .....</b>	<b>19</b>
<b>ANNEX A MEASUREMENT PROCESS.....</b>	<b>20</b>
<b>ANNEX B TEST LAYOUT .....</b>	<b>21</b>
<b>ANNEX C GRAPH RESULTS.....</b>	<b>26</b>
<b>ANNEX D SYSTEM VALIDATION RESULTS .....</b>	<b>74</b>
<b>ANNEX E PROBE CALIBRATION CERTIFICATE.....</b>	<b>78</b>
<b>ANNEX F DIPOLE CALIBRATION CERTIFICATE .....</b>	<b>87</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China  
Postal Code: 100191  
Telephone: +86-10-62304633  
Fax: +86-10-62304793

### 1.2 Testing Environment

Temperature: 18°C~25 °C,  
Relative humidity: 30%~ 70%  
Ground system resistance: < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.  
Reflection of surrounding objects is minimized and in compliance with requirement of standards.

### 1.3 Project Data


Project Leader: Qi Dianyuan  
Test Engineer: Lin Xiaojun  
Testing Start Date: March 18, 2011  
Testing End Date: March 19, 2011

### 1.4 Signature



---

Lin Xiaojun  
(Prepared this test report)



---

Qi Dianyuan  
(Reviewed this test report)



---

Xiao Li  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Client Information

### 2.1 Applicant Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P. R. China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 2.2 Manufacturer Information

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P. R. China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 3 Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1 About EUT

EUT Description:	GSM/GPRS Dual bands mobile phone
Model Name:	B11 US
Marketing Name:	one touch 506A
Frequency Band:	GSM 850 / PCS 1900
GPRS Multislot Class:	12

#### 3.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	012580000020377	PIO	616

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	CAB22D0000C1	/	BYD
AE2	Battery	CAB22B0000C1	/	BYD
AE3	Battery	CAB22B0010C1	/	BYD
AE4	Headset	CCB3160A10C0	/	Juwei
AE5	Headset	CCB3160A10C2	/	Shunda

\*AE ID: is used to identify the test sample in the lab internally.

## 4 CHARACTERISTICS OF THE TEST

### 4.1 Applicable Limit Regulations

**EN 50360–2001:** Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

## 4.2 Applicable Measurement Standards

**EN 62209-1-2006:** Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).

**IEEE 1528-2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**IEC 62209-1:** Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

**KDB648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05:** SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.

## 5 OPERATIONAL CONDITIONS DURING TEST

### 5.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.


The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

### 5.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than  $\pm 0.02\text{mm}$ . Special E- and H-field probes have been developed for

measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

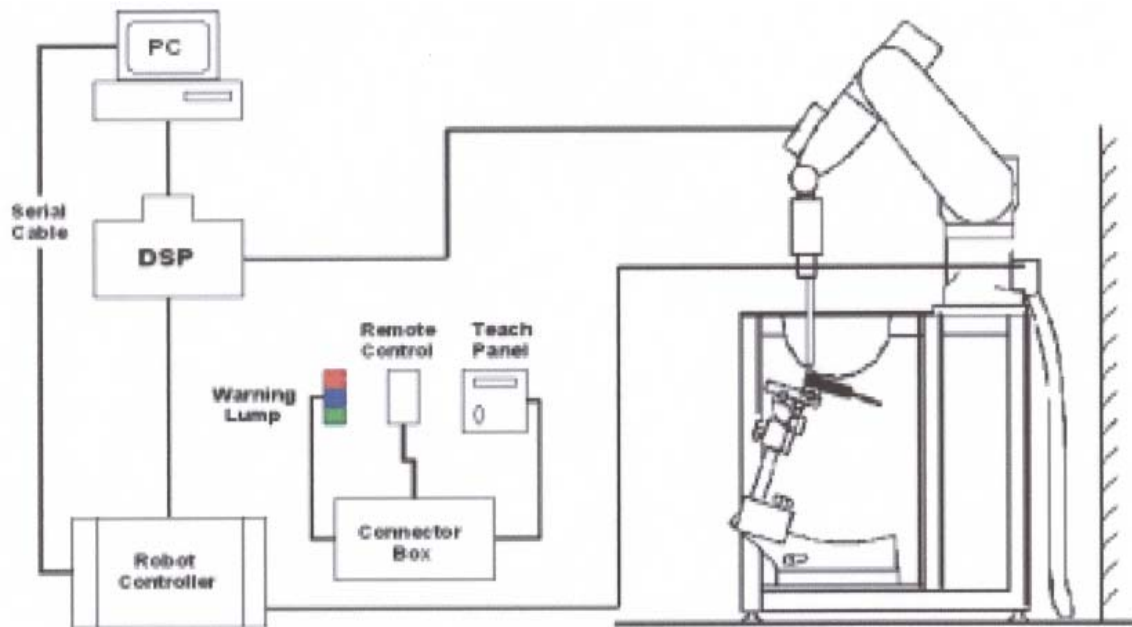

**Picture 2: SAR Lab Test Measurement Set-up**

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

### 5.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

### ES3DV3 Probe Specification

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1810 Additional CF for other liquids and frequencies upon request



**Picture 3: ES3DV3 E-field**

Frequency 10 MHz to 4 GHz; Linearity:  $\pm 0.2$  dB (30 MHz to 4 GHz)

Directivity  $\pm 0.2$  dB in HSL (rotation around probe axis)  
 $\pm 0.3$  dB in tissue material (rotation normal to probe axis)

Dynamic Range 5  $\mu$ W/g to > 100 mW/g; Linearity:  $\pm 0.2$  dB

Dimensions Overall length: 330 mm (Tip: 20 mm)  
Tip diameter: 3.9 mm (Body: 12 mm)  
Distance from probe tip to dipole centers: 2.0 mm

Application General dosimetry up to 4 GHz  
Dosimetry in strong gradient fields  
Compliance tests of mobile phones



**Picture4:ES3DV3 E-field probe**

### 5.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25$ dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.



$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
 $C$  = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density ( $\text{kg}/\text{m}^3$ ).



**Picture 5: Device Holder**

## 5.5 Other Test Equipment

### 5.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

### 5.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



**Picture 6: Generic Twin Phantom**

## 5.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 1 and 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

**Table 1. Composition of the Head Tissue Equivalent Matter**

MIXTURE %	FREQUENCY 850MHz
Water	41.45
Sugar	56.0
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=41.5$ $\sigma=0.90$
MIXTURE %	FREQUENCY 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

**Table 2. Composition of the Body Tissue Equivalent Matter**

MIXTURE %	FREQUENCY 850MHz
Water	52.5
Sugar	45.0
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=850MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE %	FREQUENCY 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

## 5.7 System Specifications

### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: RX90L

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** Pentium III

**Clock Speed:** 800 MHz

**Operating System:** Windows 2000

#### Data Converter

**Features:**Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY4 software

**Connecting Lines:** Optical downlink for data and status info.  
Optical uplink for commands and clock

## 6 CONDUCTED OUTPUT POWER MEASUREMENT

### 6.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured output power should be greater and within 5% than EMI measurement.

### 6.2 Conducted Power

#### 6.2.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured with Agilent Spectrum Analyzer E4440A. These measurements were done at low, middle and high channels.

#### 6.2.2 Measurement result

The conducted power for GSM 850/1900 is as following:

GSM 850MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	33.16	33.12	33.07
GSM 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	31.23	31.29	31.42

The conducted power for GPRS 850/1900 is as following:

GSM 850 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	33.19	33.16	33.15	-9.03dB	24.13	24.09	24.04
2 Txslots	31.31	31.26	31.31	-6.02dB	25.29	25.24	25.29
3Txslots	30.15	30.11	30.15	-4.26dB	25.89	25.85	25.89
<b>4 Txslots</b>	29.38	29.36	29.42	-3.01dB	<b>26.37</b>	<b>26.35</b>	<b>26.41</b>
PCS1900 GPRS	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	31.09	31.13	31.20	-9.03dB	22.06	22.10	22.17
2 Txslots	29.27	29.26	29.27	-6.02dB	23.25	23.24	23.25
3Txslots	28.07	28.02	28.00	-4.26dB	23.81	23.76	23.74
<b>4 Txslots</b>	27.11	27.10	27.04	-3.01dB	<b>24.10</b>	<b>24.09</b>	<b>24.03</b>

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

**According to the conducted power as above, the body measurements are performed with 4 Txslots for GSM850 and PCS1900.**

**6.2.3 Power Drift**

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 9 to Table 16 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

**7 TEST RESULTS**

**7.1 Dielectric Performance**

**Table 3: Dielectric Performance of Head Tissue Simulating Liquid**

Measurement is made at temperature 23.0 °C and relative humidity 39%.			
Liquid temperature during the test: 22.5°C			
Measurement Date : 850 MHz <b>March 18, 2011</b> 1900 MHz <b>March 19, 2011</b>			
/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
<b>Target value</b>	835 MHz	41.5	0.90
	1900 MHz	40.0	1.40
<b>Measurement value (Average of 10 tests)</b>	835 MHz	40.5	0.89
	1900 MHz	39.3	1.41

**Table 4: Dielectric Performance of Body Tissue Simulating Liquid**

Measurement is made at temperature 23.0 °C and relative humidity 39%.			
Liquid temperature during the test: 22.5°C			
Measurement Date : 850 MHz <b>March 18, 2011</b> 1900 MHz <b>March 19, 2011</b>			
/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
<b>Target value</b>	835 MHz	55.2	0.97
	1900 MHz	53.3	1.52
<b>Measurement value (Average of 10 tests)</b>	835 MHz	56.7	0.97
	1900 MHz	51.8	1.50

## 7.2 System Validation

**Table 5: System Validation of Head**

Measurement is made at temperature 23.0 °C and relative humidity 39%.							
Liquid temperature during the test: 22.5°C							
Measurement Date : 850 MHz <u>March 18, 2011</u> 1900 MHz <u>March 19, 2011</u>							
<b>Liquid parameters</b>	Dipole calibration Target value	<b>Frequency</b>		<b>Permittivity <math>\epsilon</math></b>		<b>Conductivity <math>\sigma</math> (S/m)</b>	
		835 MHz		41.6		0.92	
	Actural Measurement value	1900 MHz		39.6		1.40	
		835 MHz		40.5		0.89	
<b>Verification results</b>	<b>Frequency</b>	<b>Target value (W/kg)</b>		<b>Measured value (W/kg)</b>		<b>Deviation</b>	
		<b>10 g Average</b>	<b>1 g Average</b>	<b>10 g Average</b>	<b>1 g Average</b>	<b>10 g Average</b>	<b>1 g Average</b>
	835 MHz	6.12	9.41	5.88	9.52	-3.92%	1.17%
	1900 MHz	20.1	39.4	19.6	38.96	-2.49%	-1.12%

Note: The forward power is 250mW. Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

**Table 6: System Validation of Body**

Measurement is made at temperature 23.0 °C and relative humidity 39%.							
Liquid temperature during the test: 22.5°C							
Measurement Date : 850 MHz <u>March 18, 2011</u> 1900 MHz <u>March 19, 2011</u>							
<b>Liquid parameters</b>	Dipole calibration Target value	<b>Frequency</b>		<b>Permittivity <math>\epsilon</math></b>		<b>Conductivity <math>\sigma</math> (S/m)</b>	
		835 MHz		54.5		0.97	
	Actural Measurement value	1900 MHz		52.5		1.51	
		835 MHz		56.7		0.97	
<b>Verification results</b>	<b>Frequency</b>	<b>Target value (W/kg)</b>		<b>Measured value (W/kg)</b>		<b>Deviation</b>	
		<b>10 g Average</b>	<b>1 g Average</b>	<b>10 g Average</b>	<b>1 g Average</b>	<b>10 g Average</b>	<b>1 g Average</b>
	835 MHz	6.24	9.57	6.20	9.68	-0.64%	1.15%
	1900 MHz	20.9	41.4	20.84	41.2	-0.29%	-0.48%

Note: The forward power is 250mW. Target values are the data of the dipole validation results, please check Annex F for the Dipole Calibration Certificate.

### 7.3 Evaluation of Multi-Batteries

**Table 7: Pretest SAR Values (PCS 1900 MHz Band)**

Limit of SAR (W/kg)	10 g Average	1 g Average
	2.0	1.6
Test Case	Measurement Result (W/kg)	
	10 g Average	1 g Average
Right hand, Touch cheek, Top frequency (CAB22D0000C1)	0.518	0.919
Right hand, Touch cheek, Top frequency (CAB22B0000C1)	0.577	0.991
Right hand, Touch cheek, Top frequency (CAB22B0010C1)	0.594	1.02

**Note:** According to the values in the above table, the battery, CAB22B0010C1, is the normal battery. We'll perform the head measurement with this battery and retest on highest value point with others.

**Table 8: Pretest SAR Values (GSM 850 MHz Band-Body)**

Limit of SAR (W/kg)	10 g Average	1 g Average
	2.0	1.6
Test Case	Measurement Result (W/kg)	
	10 g Average	1 g Average
Body, Towards Ground, Bottom frequency (CAB22D0000C1)	0.672	0.95
Body, Towards Ground, Bottom frequency (CAB22B0000C1)	0.698	0.984
Body, Towards Ground, Bottom frequency (CAB22B0010C1)	0.700	0.997

**Note:** According to the values in the above table, the battery, CAB22B0010C1, is the normal battery. We'll perform the body measurement with this battery and retest on highest value point with others.

### 7.4 Summary of Measurement Results

**Table 9: SAR Values (850MHz-Head) - with battery CAB22B0010C1**

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency (See Fig.1)	0.624	0.879	-0.177
Left hand, Touch cheek, Mid frequency (See Fig.2)	0.666	0.930	-0.063
Left hand, Touch cheek, Bottom frequency (See Fig.3)	0.695	0.963	-0.099
Left hand, Tilt 15 Degree, Top frequency (See Fig.4)	0.282	0.389	-0.084
Left hand, Tilt 15 Degree, Mid frequency (See Fig.5)	0.307	0.422	-0.000203
Left hand, Tilt 15 Degree, Bottom frequency (See Fig.6)	0.326	0.446	-0.037
Right hand, Touch cheek, Top frequency (See Fig.7)	0.580	0.813	-0.170
Right hand, Touch cheek, Mid frequency (See Fig.8)	0.628	0.874	-0.036

Right hand, Touch cheek, Bottom frequency (See Fig.9)	0.662	0.921	-0.041
Right hand, Tilt 15 Degree, Top frequency (See Fig.10)	0.281	0.390	-0.024
Right hand, Tilt 15 Degree, Mid frequency (See Fig.11)	0.321	0.443	-0.046
Right hand, Tilt 15 Degree, Bottom frequency (See Fig.12)	0.344	0.474	-0.053

**Table 10: SAR Values (1900MHz-Head) - with battery CAB22B0010C1**

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency (See Fig.13)	0.537	0.850	-0.181
Left hand, Touch cheek, Mid frequency (See Fig.14)	0.532	0.846	-0.007
Left hand, Touch cheek, Bottom frequency (See Fig.15)	0.517	0.826	0.082
Left hand, Tilt 15 Degree, Top frequency (See Fig.16)	0.140	0.224	0.003
Left hand, Tilt 15 Degree, Mid frequency (See Fig.17)	0.124	0.189	0.040
Left hand, Tilt 15 Degree, Bottom frequency (See Fig.18)	0.107	0.159	-0.081
Right hand, Touch cheek, Top frequency (See Fig.19)	0.594	1.02	0.001
Right hand, Touch cheek, Mid frequency (See Fig.20)	0.580	0.988	0.063
Right hand, Touch cheek, Bottom frequency (See Fig.21)	0.572	0.965	0.026
Right hand, Tilt 15 Degree, Top frequency (See Fig.22)	0.164	0.265	-0.003
Right hand, Tilt 15 Degree, Mid frequency (See Fig.23)	0.135	0.218	0.047
Right hand, Tilt 15 Degree, Bottom frequency(See Fig.24)	0.116	0.188	0.033

**Table 11: SAR Values (1900MHz-Head) - with battery CAB22B0000C1**

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Right hand, Touch cheek, Top frequency (See Fig.25)	0.577	0.991	0.027

**Table 12: SAR Values (1900MHz-Head) - with battery CAB22D0000C1**

Limit of SAR (W/kg)	10 g Average	1 g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Right hand, Touch cheek, Top frequency (See Fig.26)	0.518	0.919	0.044



**Table 13: SAR Values (850MHz-Body) - with battery CAB22B0010C1**

Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS (See Fig.27)	0.646	0.925	0.047
Body, Towards Ground, Mid frequency with GPRS (See Fig.28)	0.680	0.971	0.053
Body, Towards Ground, Bottom frequency with GPRS (See Fig.29)	0.700	0.997	-0.022
Body, Towards Phantom, Top frequency with GPRS (See Fig.30)	0.615	0.861	-0.094
Body, Towards Phantom, Mid frequency with GPRS (See Fig.31)	0.634	0.881	-0.079
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.32)	0.649	0.904	-0.016
Body, Towards Ground, Bottom frequency with Headset_CCB3160A10C0 (See Fig.33)	0.297	0.425	-0.024
Body, Towards Ground, Bottom frequency with Headset_CCB3160A10C2 (See Fig.34)	0.377	0.536	0.126

**Table 14: SAR Values (1900MHz-Body) - with battery CAB22B0010C1**

Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Top frequency with GPRS (See Fig.35)	0.415	0.714	0.065
Body, Towards Ground, Mid frequency with GPRS (See Fig.36)	0.393	0.673	-0.046
Body, Towards Ground, Bottom frequency with GPRS (See Fig.37)	0.400	0.680	0.016
Body, Towards Phantom, Top frequency with GPRS (See Fig.38)	0.335	0.564	-0.015
Body, Towards Phantom, Mid frequency with GPRS (See Fig.39)	0.312	0.523	0.005
Body, Towards Phantom, Bottom frequency with GPRS (See Fig.40)	0.300	0.499	-0.016
Body, Towards Ground, Top frequency with Headset_CCB3160A10C0 (See Fig.41)	0.216	0.369	-0.030
Body, Towards Ground, Top frequency with Headset_CCB3160A10C2 (See Fig.42)	0.217	0.374	-0.132



**Table 15: SAR Values (850MHz-Body) - with battery CAB22B0000C1**


Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Bottom frequency with GPRS (See Fig.43)	0.698	0.984	-0.190

**Table 16: SAR Values (850MHz-Body) - with battery CAB22D0010C1**

Limit of SAR (W/kg)	10 g Average	1g Average	Power Drift (dB)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		Power Drift (dB)
	10 g Average	1 g Average	
Body, Towards Ground, Bottom frequency with GPRS (See Fig.44)	0.672	0.950	-0.083

### 7.5 Summary of Measurement Results (Bluetooth function)

The distance between BT antenna and GSM antenna is >5cm. The location of the antennas inside mobile phone is shown below:

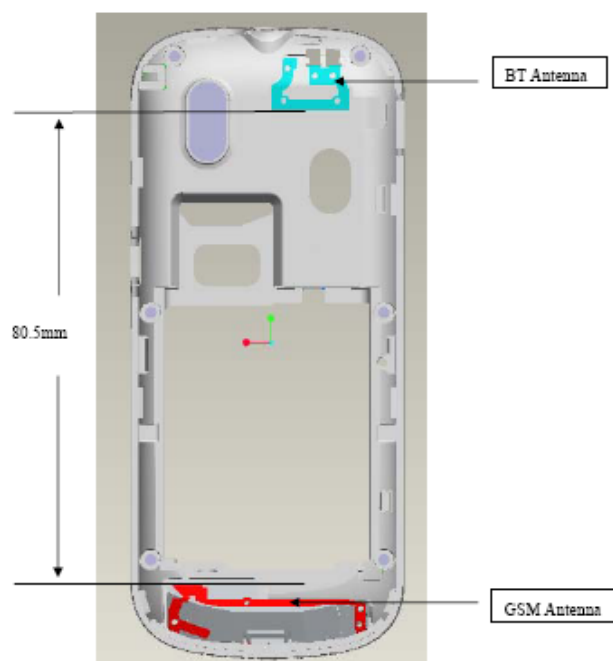

The output power of BT antenna is as following:

Channel	Ch 0 (2402 MHz)	Ch 39 (2441 MHz)	Ch 78 (2480 MHz)
Peak Conducted Output Power(dBm)	8.16	8.49	8.29

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR and simultaneous transmission SAR are not required for BT transmitter, because the output power of BT transmitter is  $\leq 2P_{Ref}$  and its antenna is  $>5\text{cm}$  from other antenna

**Note:** Power thresholds ( $P_{Ref}$ ) is derived from multiples of  $0.5 \times 60/f_{(GHz)}$ , that is 12mW (10.79dBm) for BT frequency.

## 7.6 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 4.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 4.1 of this test report.

The maximum SAR values are obtained at the case of **GSM 1900 Head, Right hand, Touch cheek, Top frequency (Table 10)**, and the value are: **0.594(10g), 1.02(1g)**.

## 8 Measurement Uncertainty

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	5.5	N	1	1	1	5.5	5.5	$\infty$
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	$\infty$
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	$\infty$
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	$\infty$
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	$\infty$
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	$\infty$
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	$\infty$
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	$\infty$
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	$\infty$
12	Probe positioning with respect to	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	$\infty$

	phantom shell									
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	$\infty$
<b>Test sample related</b>										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	$\infty$
<b>Phantom and set-up</b>										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	$\infty$
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	$\infty$
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	$\infty$
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
	Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						9.25	9.12	257
	Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$						18.5	18.2	

## 9 MAIN TEST INSTRUMENTS

Table 17: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 4,2010	One year
02	Power meter	NRVD	102083	September 11, 2010	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49070393	November 13, 2010	One Year
05	Amplifier	VTL5400	0505	No Calibration Requested	
06	BTS	8960	MY48365192	November 18, 2010	One year
07	E-field Probe	SPEAG ES3DV3	3149	September 25, 2010	One year
08	DAE	SPEAG DAE4	771	November 21, 2010	One year
09	Dipole Validation Kit	SPEAG D835V2	443	February 26, 2010	Two years
10	Dipole Validation Kit	SPEAG D1900V2	541	February 26, 2010	Two years

\*\*\*END OF REPORT BODY\*\*\*

## ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.


Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.


c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

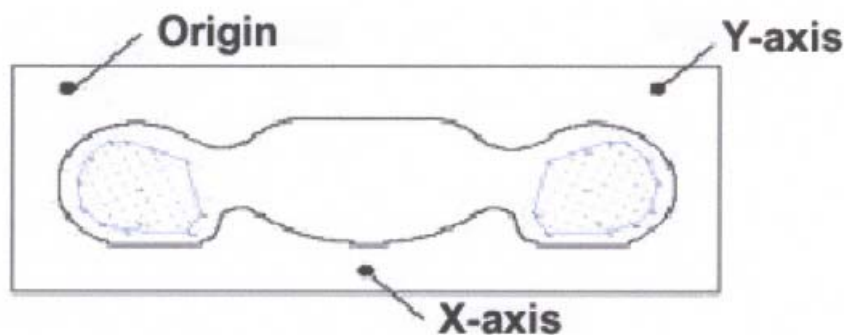


Picture A: SAR Measurement Points in Area Scan

**ANNEX B TEST LAYOUT**

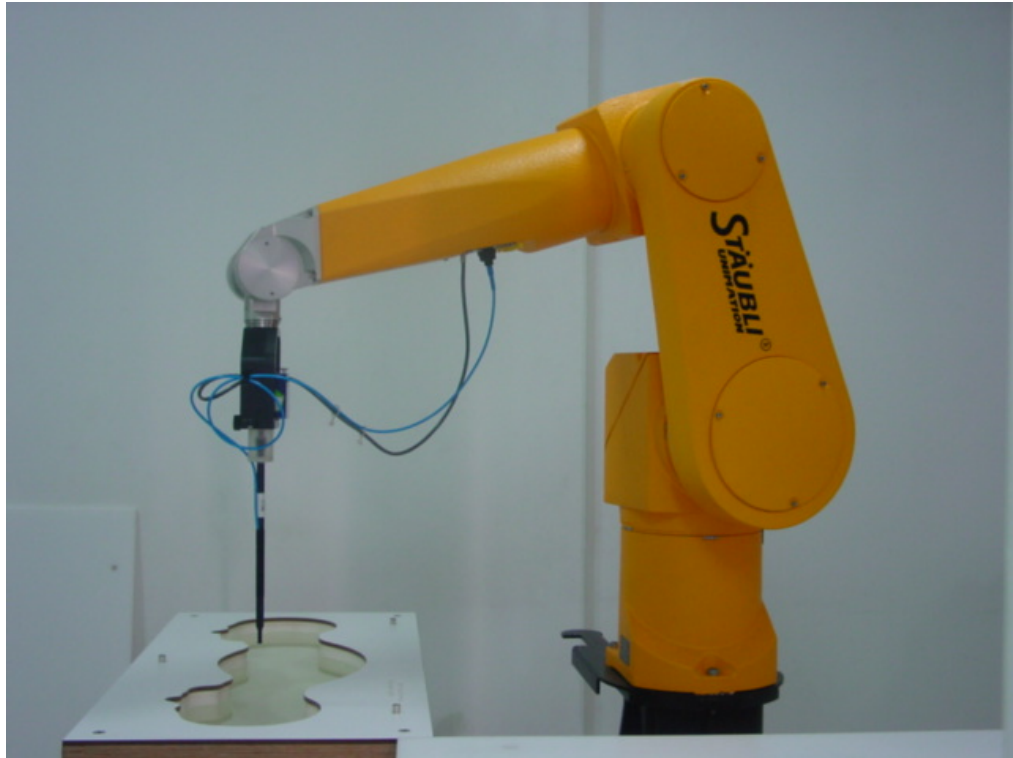


**Picture B1: Specific Absorption Rate Test Layout**

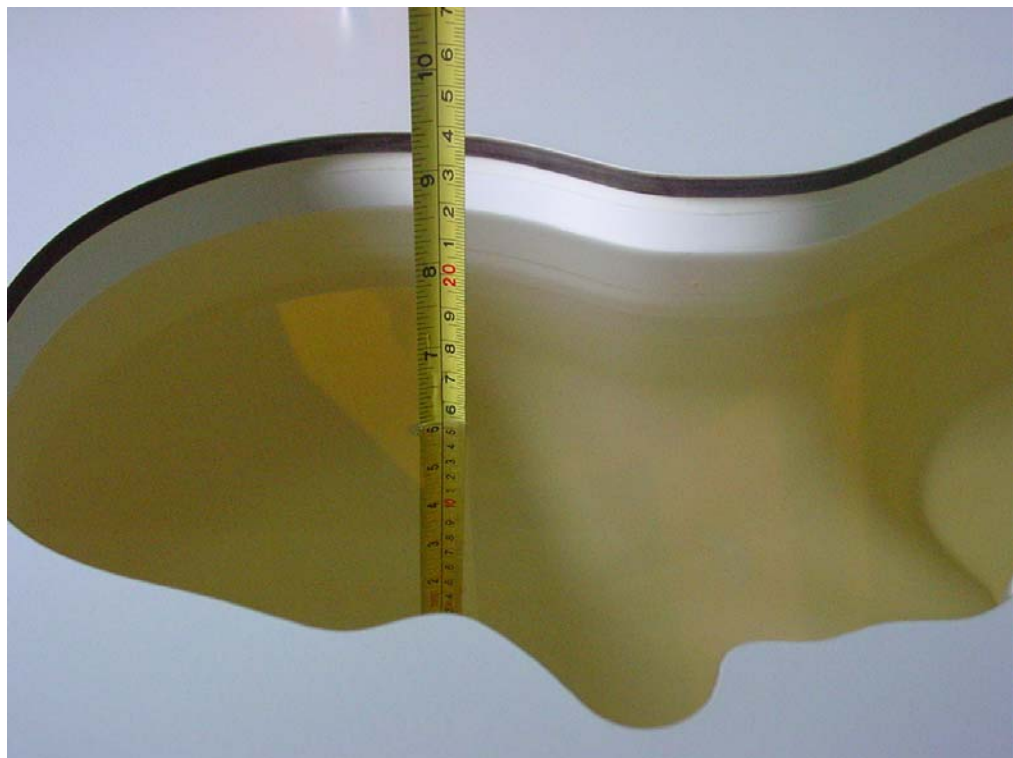

**Picture B2: Liquid depth in the Flat Phantom (850 MHz)**



**Picture B3 Liquid depth in the Flat Phantom (1900MHz)**

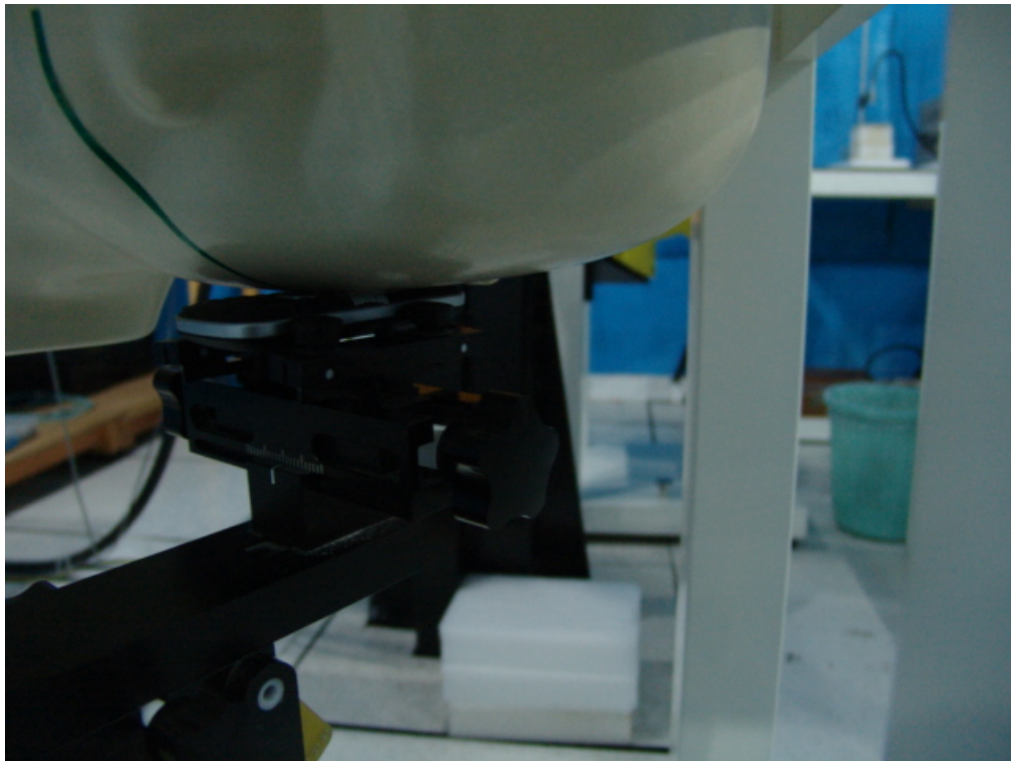


**Picture B4: Left Hand Touch Cheek Position**







**Picture B5: Left Hand Tilt 15° Position**

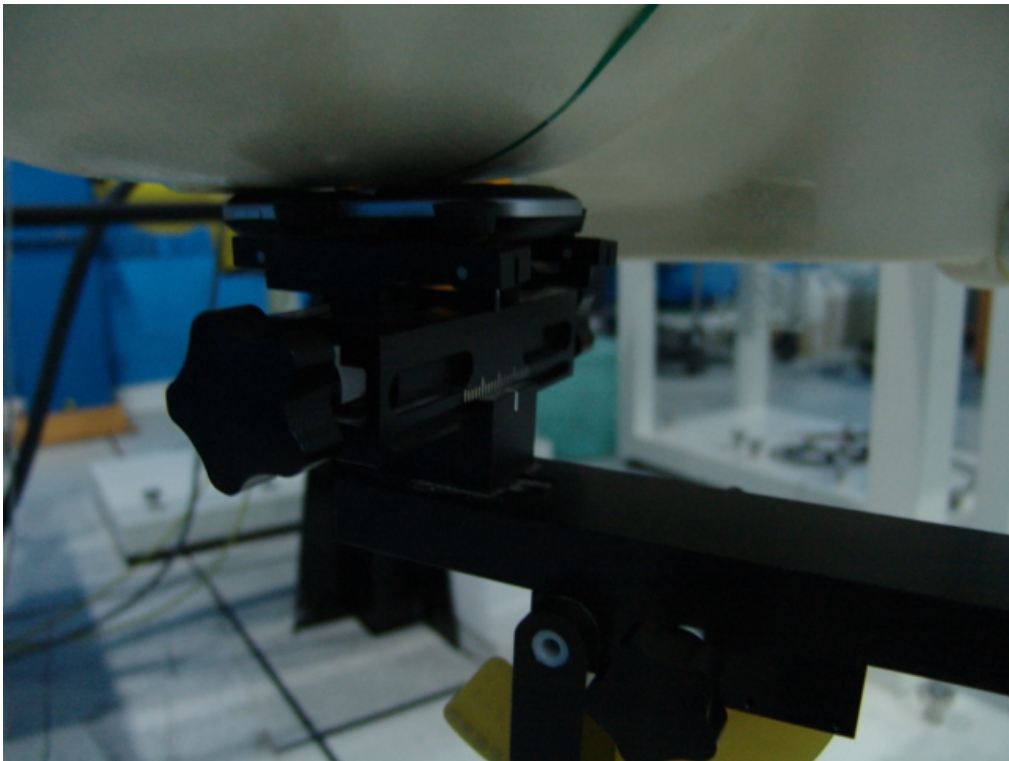

**Picture B6: Right Hand Touch Cheek Position**

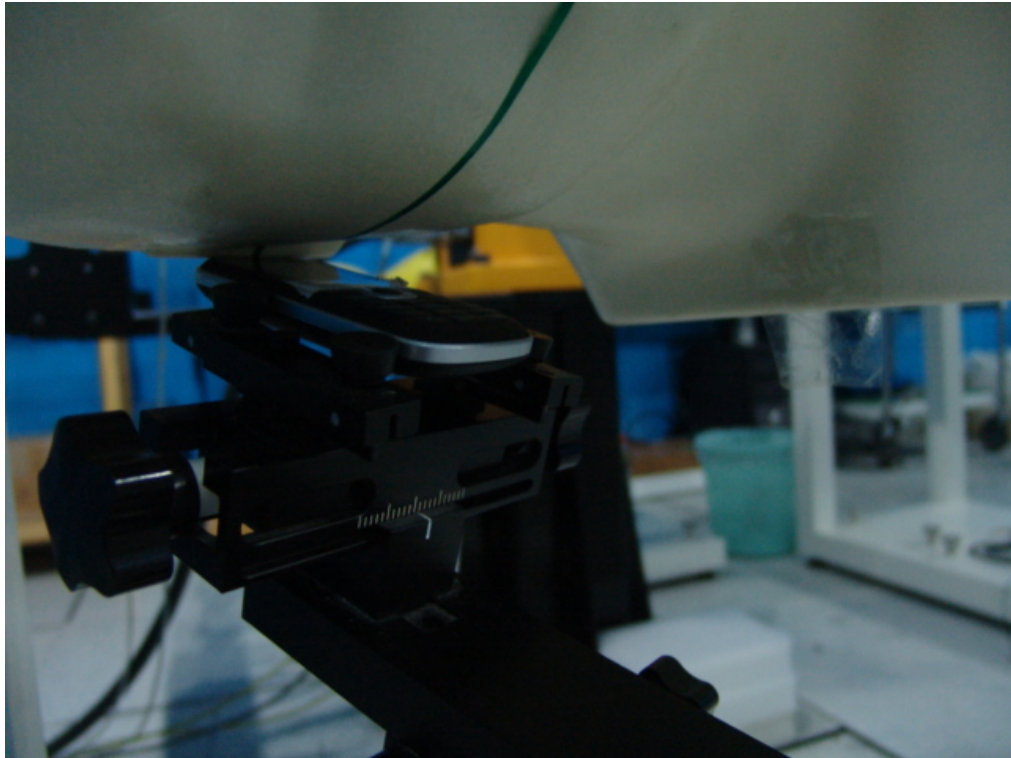


**Picture B7: Right Hand Tilt 15° Position**

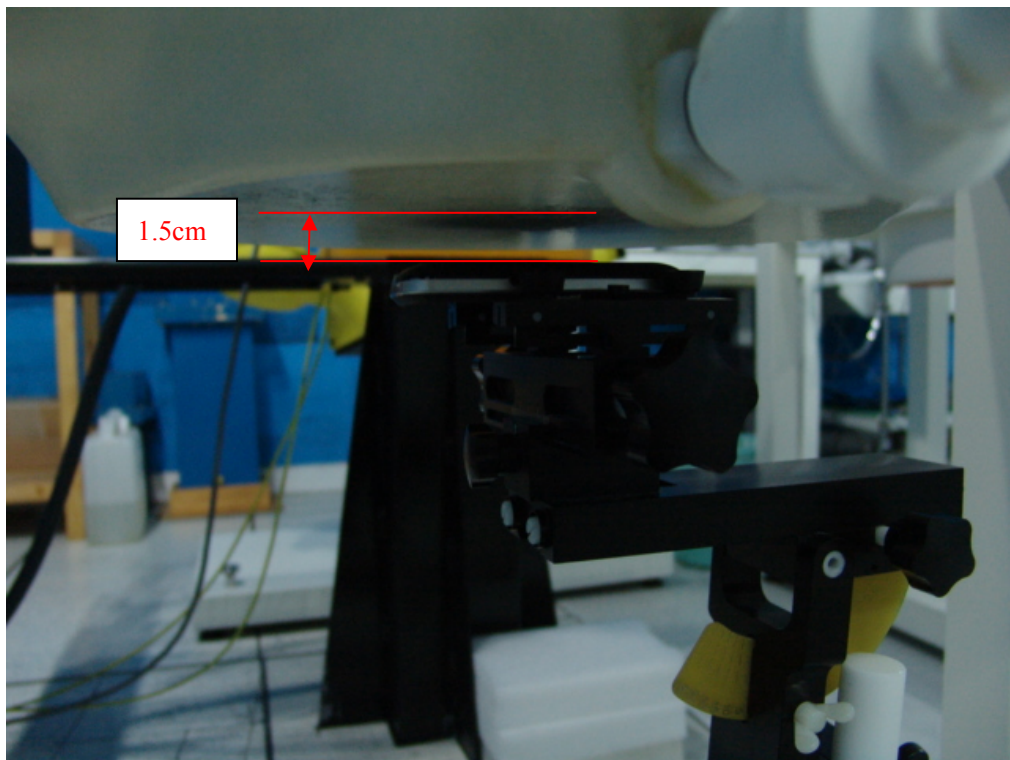


**Picture B8: Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)**



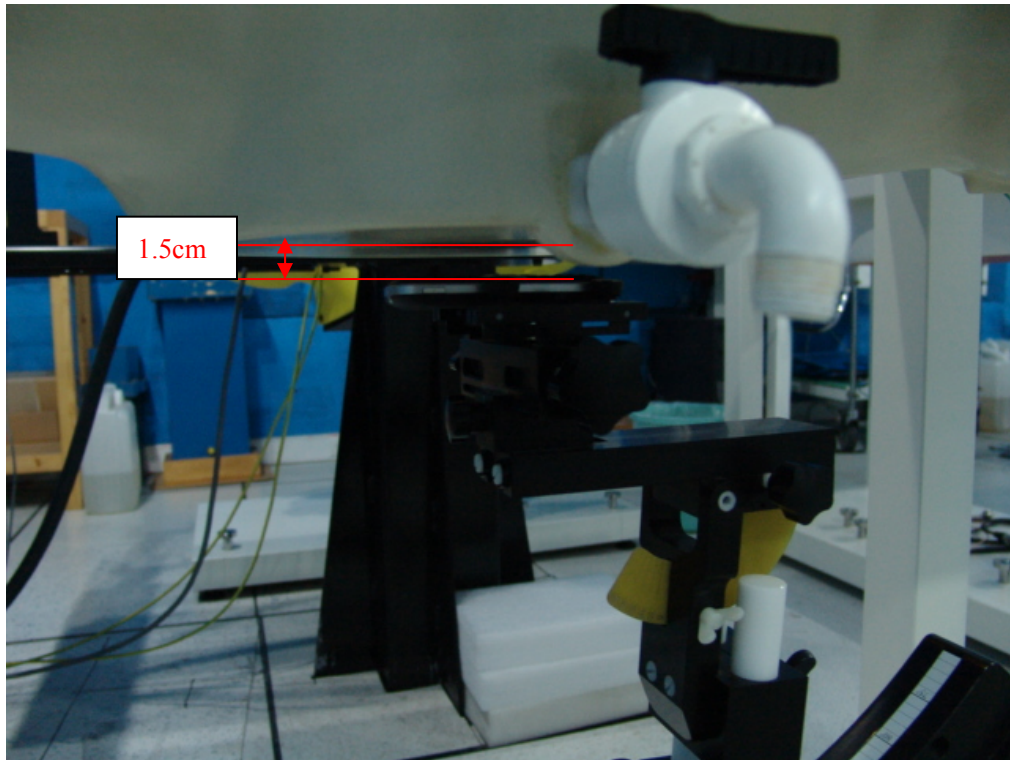

**Picture B9: Body-worn Position (towards phantom, the distance from handset to the bottom of the Phantom is 1.5cm)**

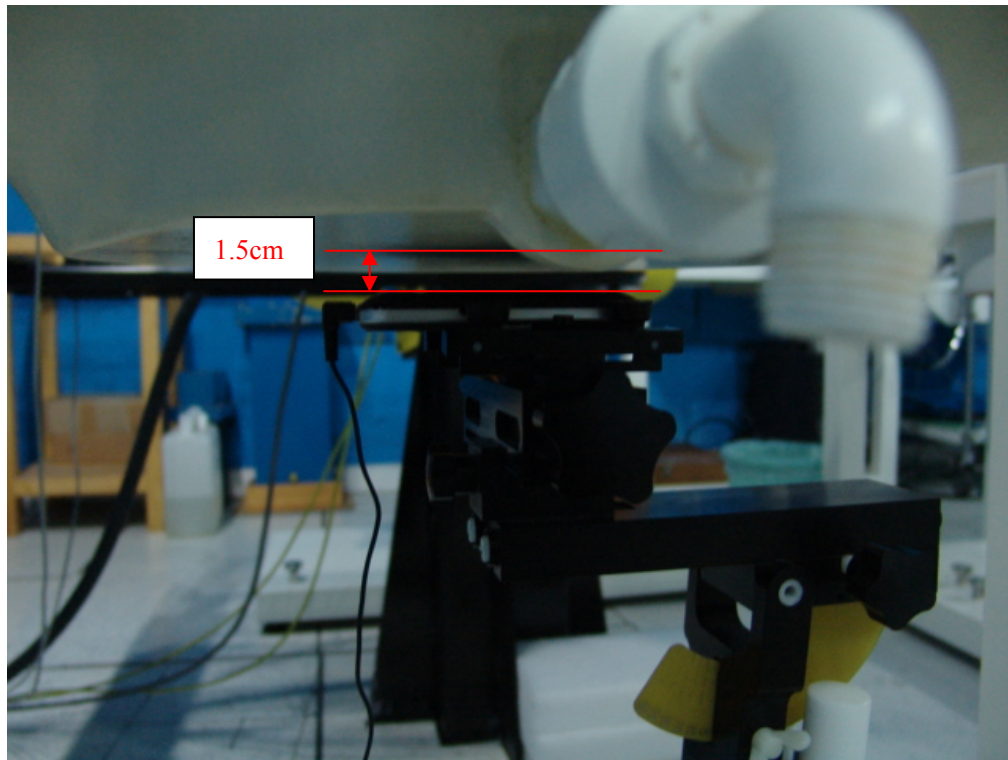

**Picture B10: Body-worn Position with Headset (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)**

## ANNEX C GRAPH RESULTS

### 850 Left Cheek High

Date/Time: 2011-3-18 8:10:17

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.950 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.177 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.624 mW/g**

Maximum value of SAR (measured) = 0.936 mW/g

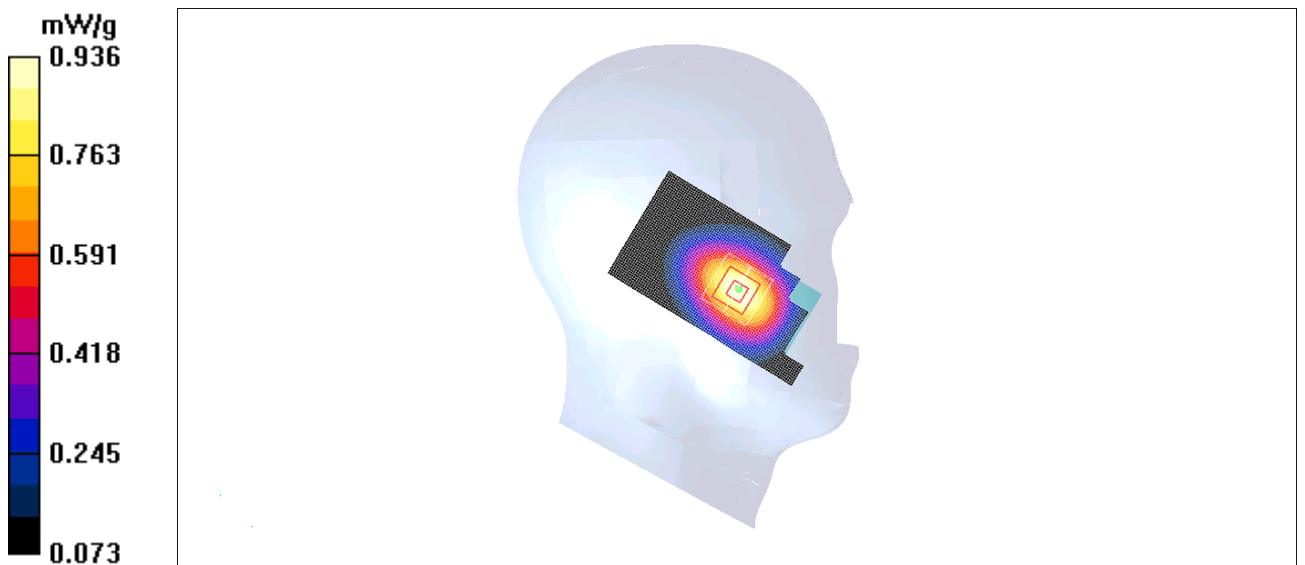


Fig. 1 850MHz CH251

### 850 Left Cheek Middle

Date/Time: 2011-3-18 8:24:35

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.898$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.000 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.930 mW/g; SAR(10 g) = 0.666 mW/g**

Maximum value of SAR (measured) = 0.985 mW/g

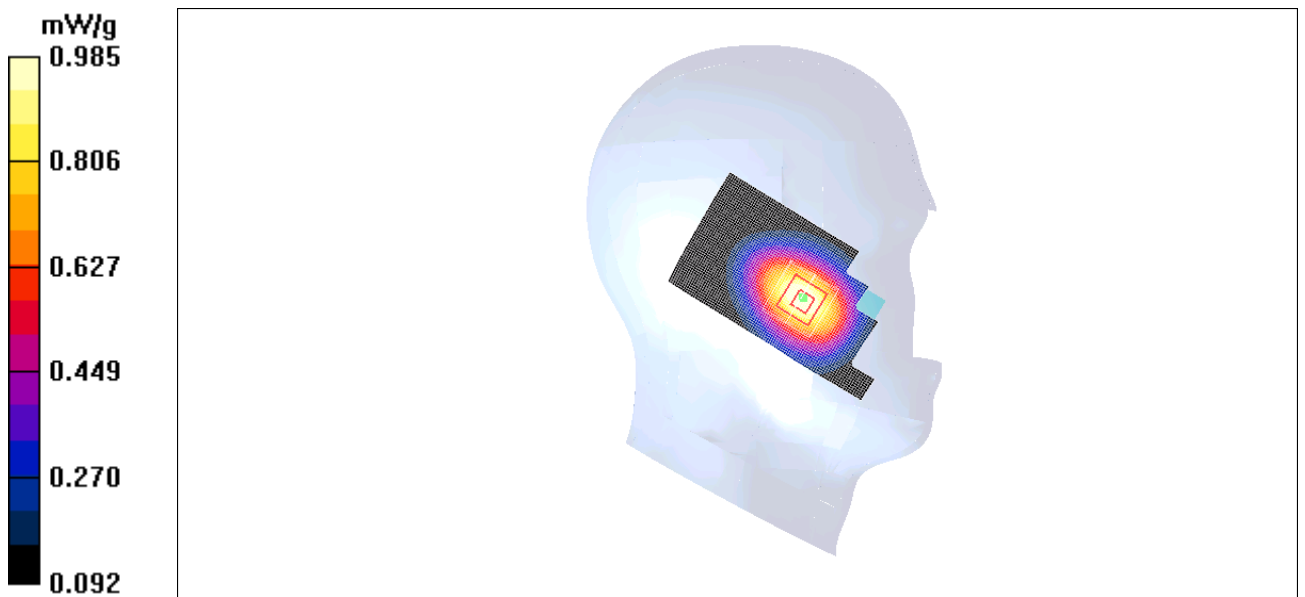


Fig. 2 850 MHz CH190

**850 Left Cheek Low**

Date/Time: 2011-3-18 8:38:56

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.05 mW/g


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.695 mW/g**

Maximum value of SAR (measured) = 1.02 mW/g

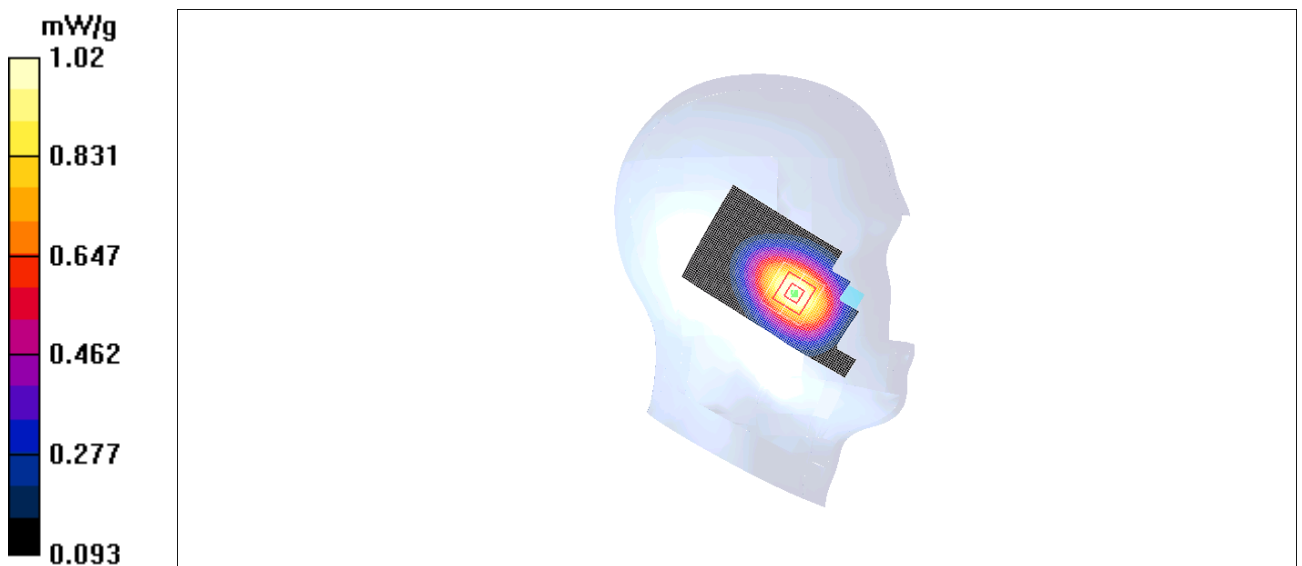

**Fig. 3 850 MHz CH128**

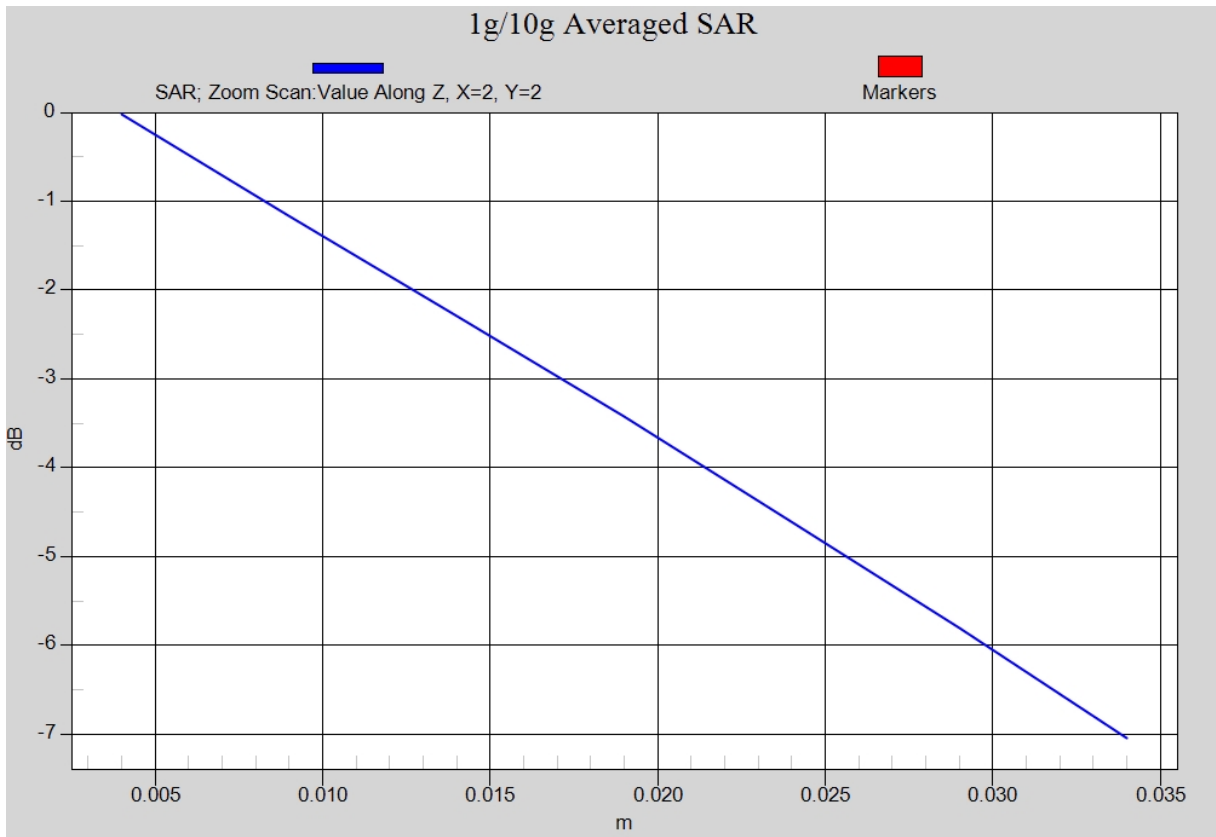


Fig. 3-1 Z-Scan at power reference point (850 MHz CH128)

### 850 Left Tilt High

Date/Time: 2011-3-18 8:53:28

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.416 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 0.505 W/kg

**SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.282 mW/g**

Maximum value of SAR (measured) = 0.414 mW/g

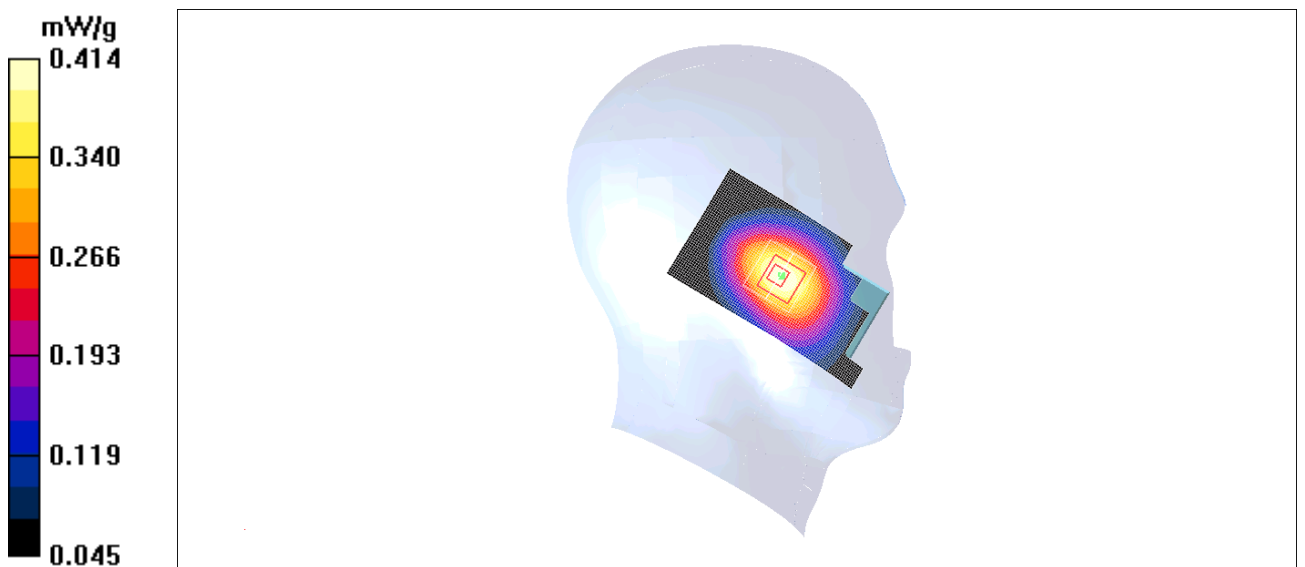


Fig.4 850 MHz CH251

### 850 Left Tilt Middle

Date/Time: 2011-3-18 9:07:44

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.898$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.446 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.9 V/m; Power Drift = -0.000203 dB

Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.307 mW/g**

Maximum value of SAR (measured) = 0.448 mW/g



Fig.5 850 MHz CH190

**850 Left Tilt Low**

Date/Time: 2011-3-18 9:22:03

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.469 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.575 W/kg

**SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.326 mW/g**

Maximum value of SAR (measured) = 0.471 mW/g

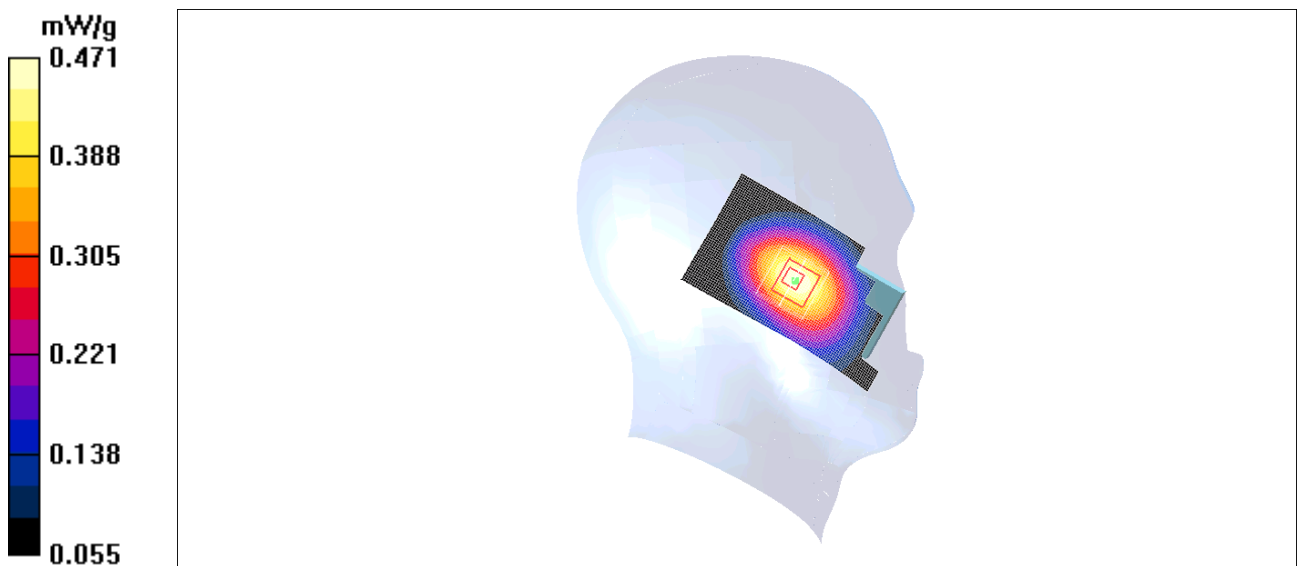


Fig. 6 850 MHz CH128



### 850 Right Cheek High

Date/Time: 2011-3-18 9:37:01

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.880 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.580 mW/g**

Maximum value of SAR (measured) = 0.858 mW/g

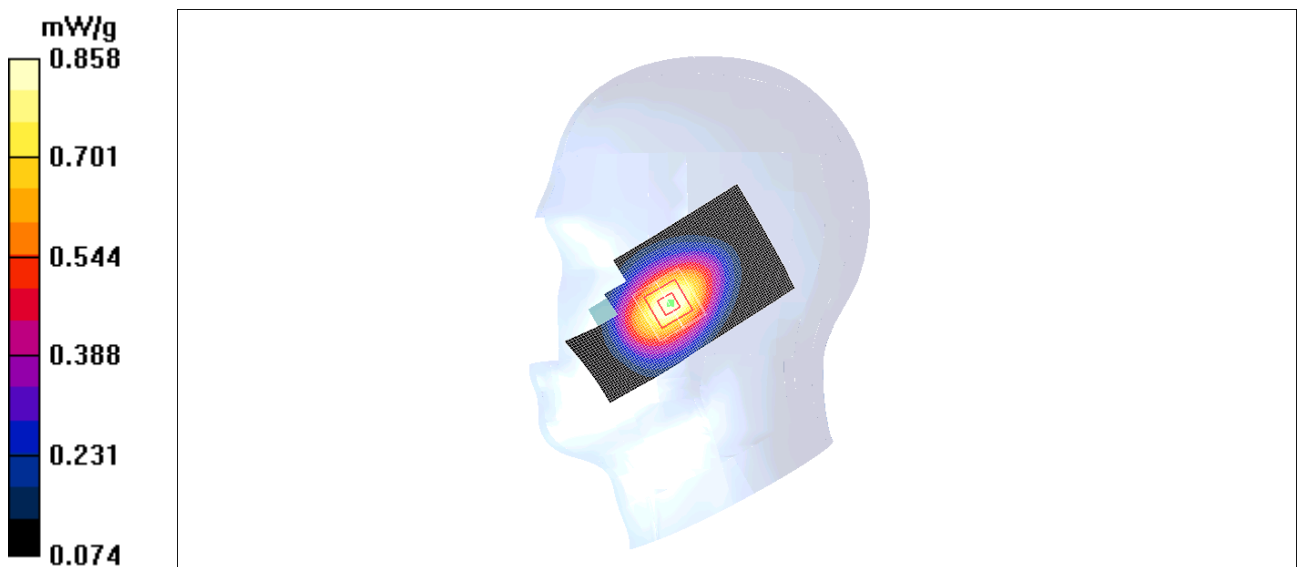


Fig. 7 850 MHz CH251

### 850 Right Cheek Middle

Date/Time: 2011-3-18 9:51:20

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.898$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.946 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.874 mW/g; SAR(10 g) = 0.628 mW/g**

Maximum value of SAR (measured) = 0.921 mW/g

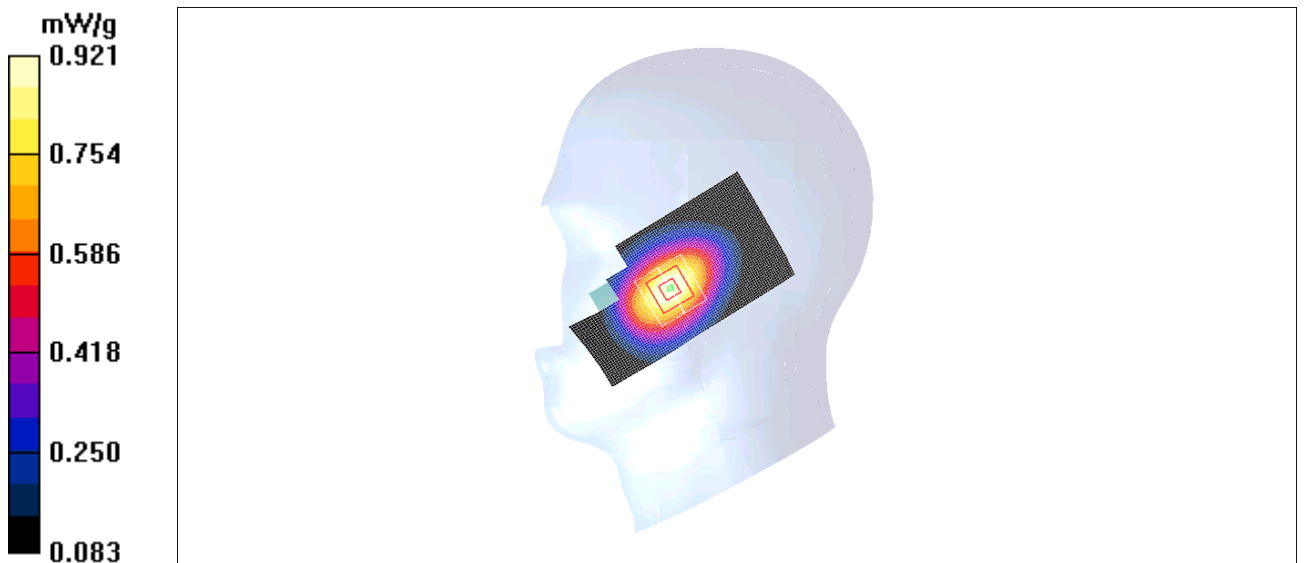


Fig. 8 850 MHz CH190

**850 Right Cheek Low**

Date/Time: 2011-3-18 10:05:39

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.886 \text{ mho/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $23.0^\circ\text{C}$       Liquid Temperature:  $22.5^\circ\text{C}$

Communication System: GSM 850 Frequency:  $824.2 \text{ MHz}$  Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Cheek Low/Area Scan (51x91x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) =  $0.997 \text{ mW/g}$


**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.4 \text{ V/m}$ ; Power Drift =  $-0.041 \text{ dB}$

Peak SAR (extrapolated) =  $1.19 \text{ W/kg}$

**SAR(1 g) =  $0.921 \text{ mW/g}$ ; SAR(10 g) =  $0.662 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.973 \text{ mW/g}$

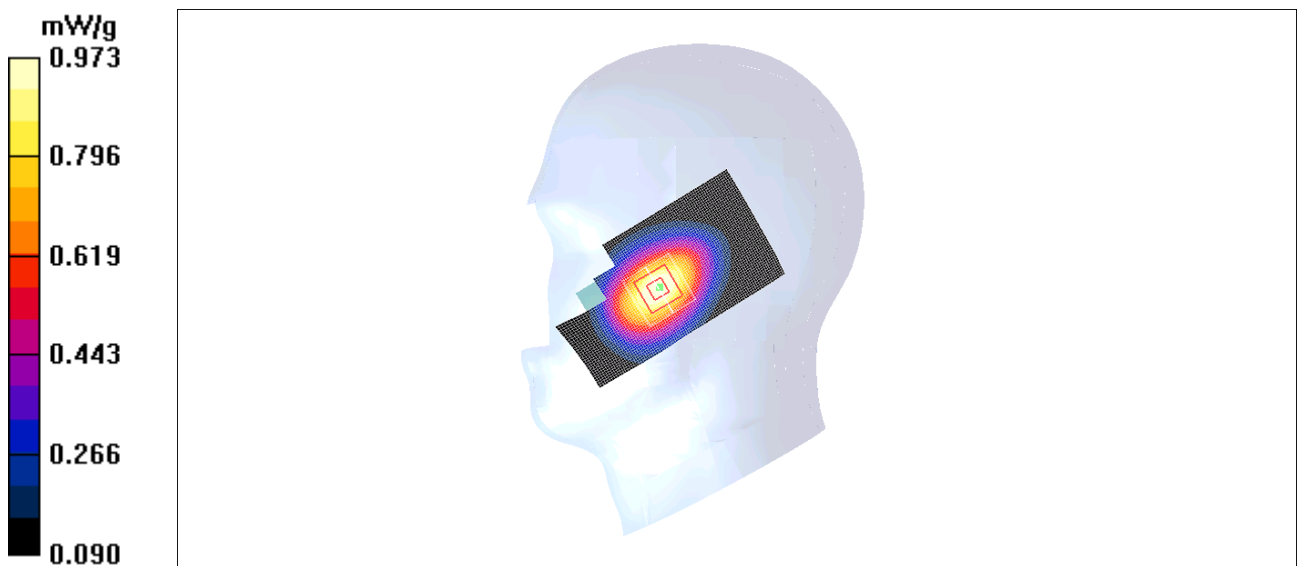

**Fig. 9    850 MHz CH128**

### 850 Right Tilt High

Date/Time: 2011-3-18 10:20:08

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.412 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.512 W/kg

**SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.281 mW/g**

Maximum value of SAR (measured) = 0.411 mW/g

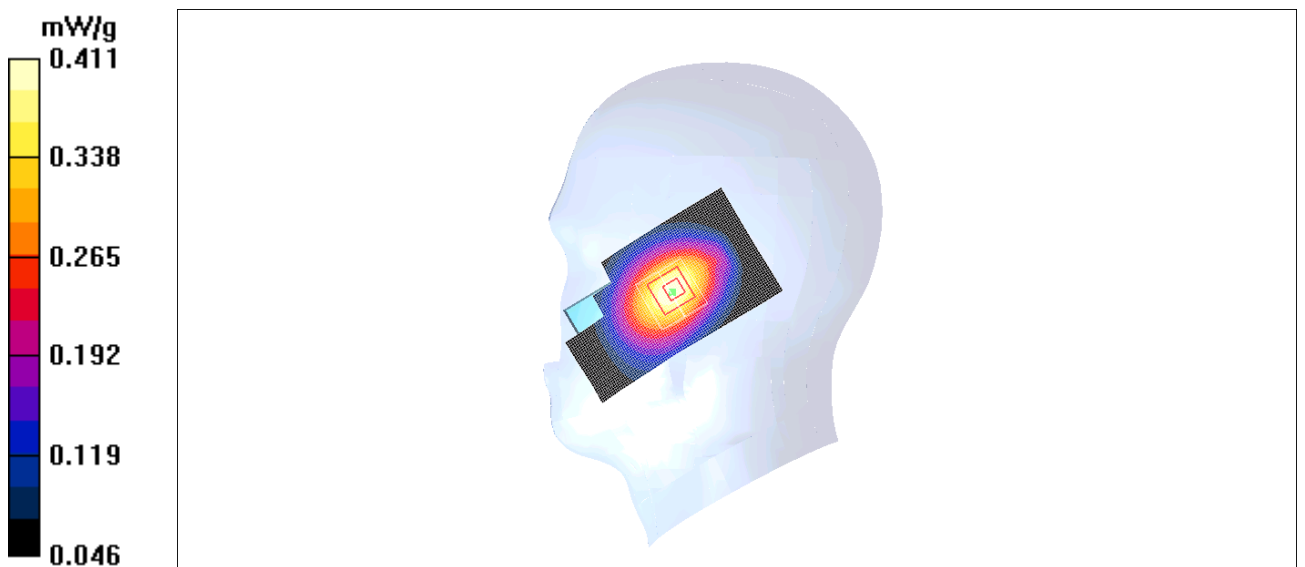


Fig.10 850 MHz CH251

### 850 Right Tilt Middle

Date/Time: 2011-3-18 10:34:31

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.898$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.472 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.577 W/kg

**SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.321 mW/g**

Maximum value of SAR (measured) = 0.469 mW/g

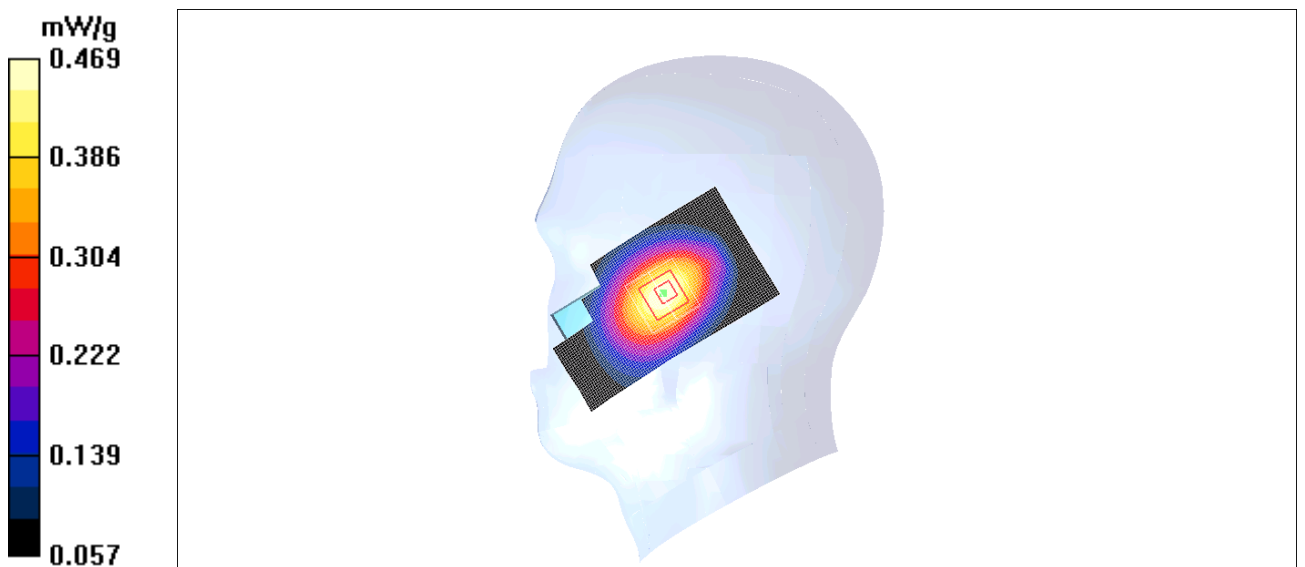


Fig.11 850 MHz CH190

**850 Right Tilt Low**

Date/Time: 2011-3-18 10:48:55

Electronics: DAE4 Sn771

Medium: Head 850 MHz

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.886$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(6.56, 6.56, 6.56)

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.504 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.614 W/kg

**SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.344 mW/g**

Maximum value of SAR (measured) = 0.497 mW/g



Fig. 12 850 MHz CH128

**1900 Left Cheek High**

Date/Time: 2011-3-19 8:12:35

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.998 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.47 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.850 mW/g; SAR(10 g) = 0.537 mW/g**

Maximum value of SAR (measured) = 0.900 mW/g

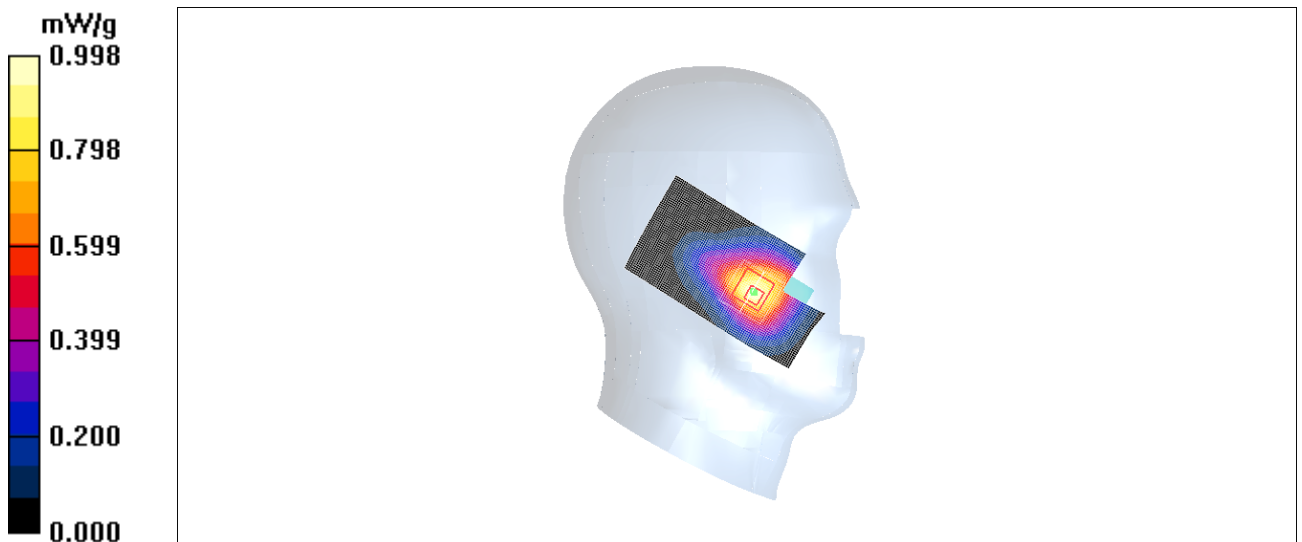


Fig. 13 1900 MHz CH810

**1900 Left Cheek Middle**

Date/Time: 2011-3-19 8:26:57

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.961 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.34 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.532 mW/g**

Maximum value of SAR (measured) = 0.901 mW/g

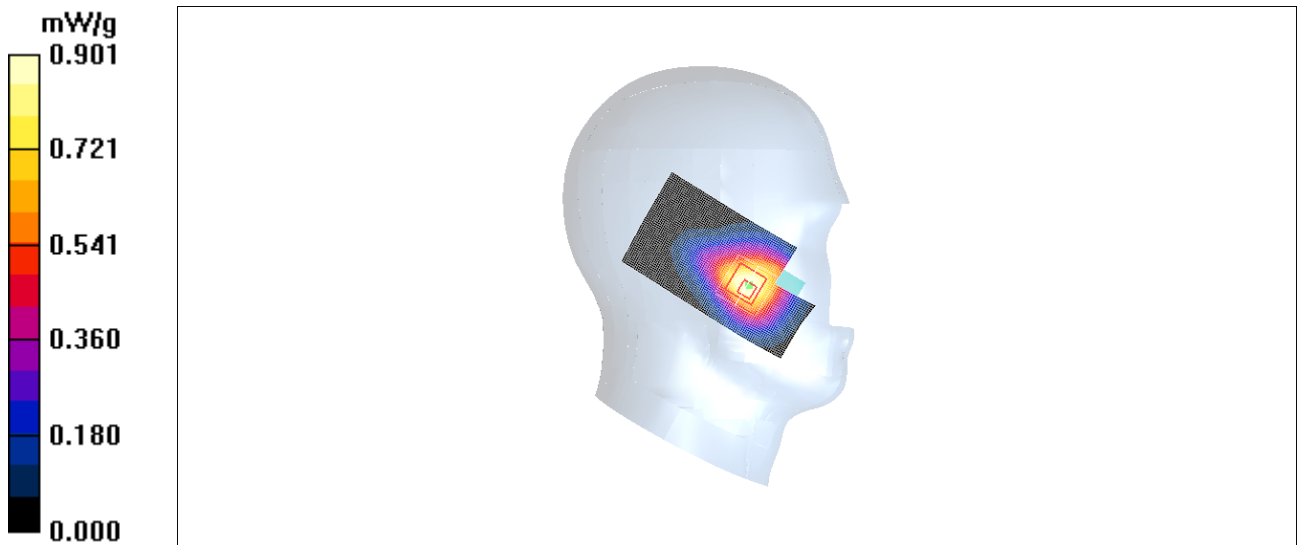

**Fig. 14 1900 MHz CH661**



**1900 Left Cheek Low**

Date/Time: 2011-3-19 8:41:23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.933 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.87 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.826 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 0.880 mW/g

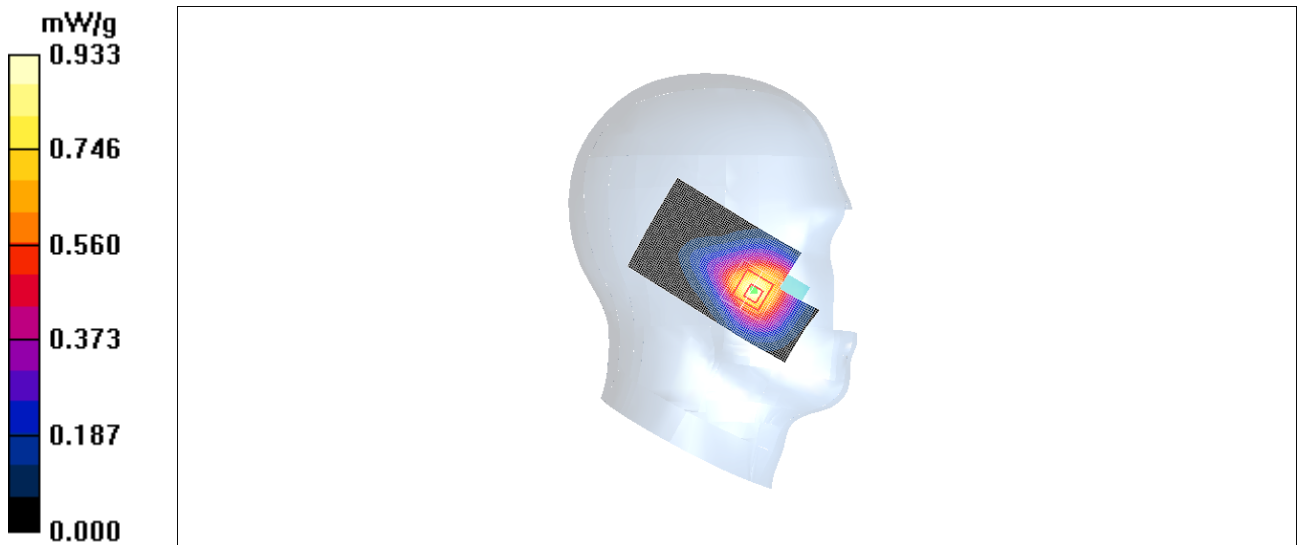


Fig. 15 1900 MHz CH512

**1900 Left Tilt High**

Date/Time: 2011-3-19 8:46:07

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.250 mW/g


**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.82 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.343 W/kg

**SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.140 mW/g**

Maximum value of SAR (measured) = 0.240 mW/g

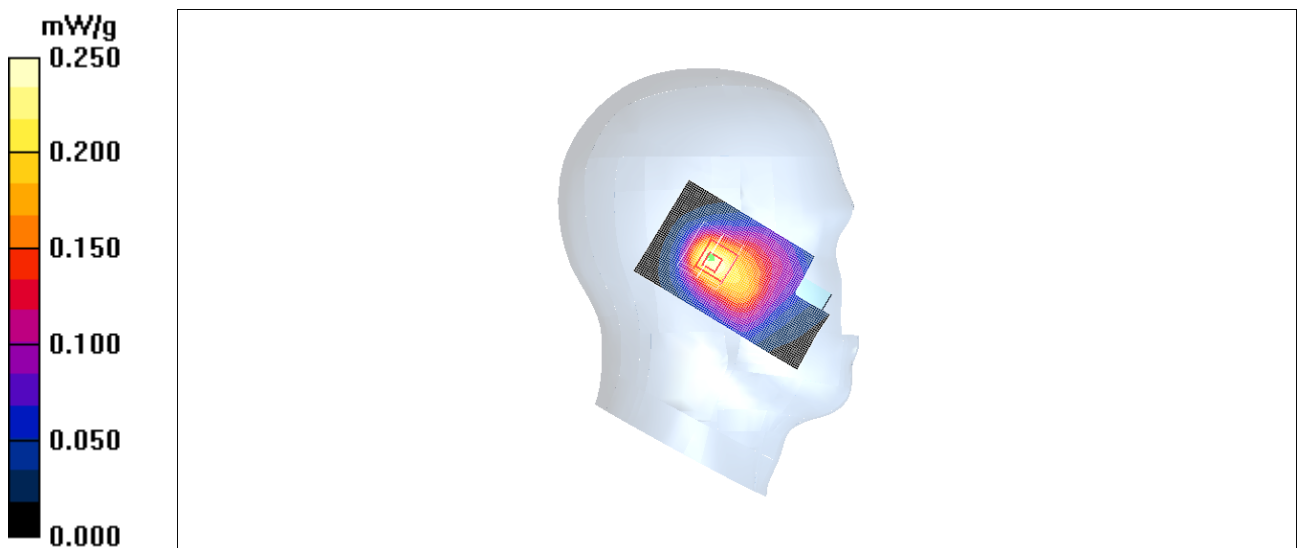

**Fig.16 1900 MHz CH810**

**1900 Left Tilt Middle**

Date/Time: 2011-3-19 9:00:27

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.214 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.78 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.124 mW/g**

Maximum value of SAR (measured) = 0.202 mW/g

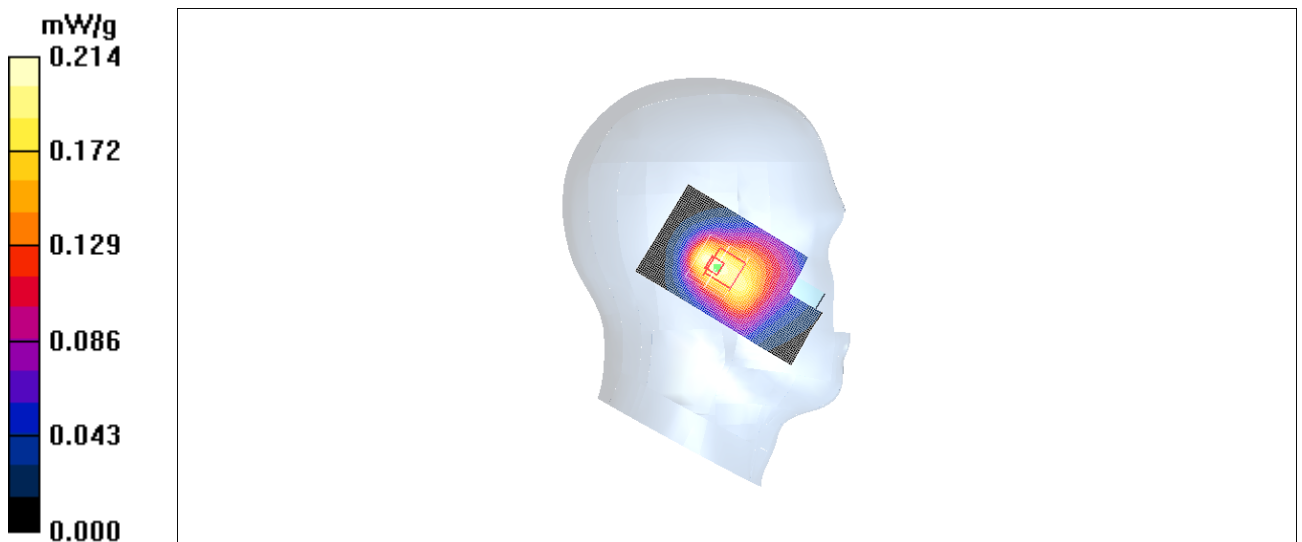

**Fig. 17 1900 MHz CH661**

**1900 Left Tilt Low**

Date/Time: 2011-3-19 9:14:51

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.174 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.14 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.107 mW/g**

Maximum value of SAR (measured) = 0.169 mW/g


**Tilt Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.14 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.093 mW/g**

Maximum value of SAR (measured) = 0.163 mW/g

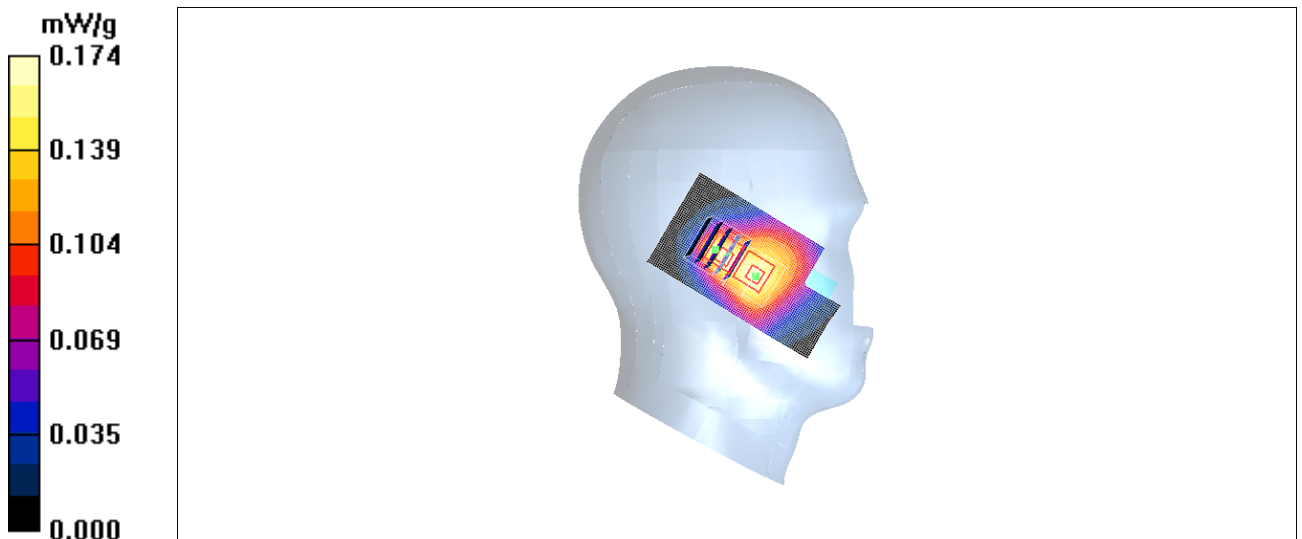

**Fig. 18 1900 MHz CH512**

### 1900 Right Cheek High

Date/Time: 2011-3-19 9:29:41

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.06 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.33 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.594 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g


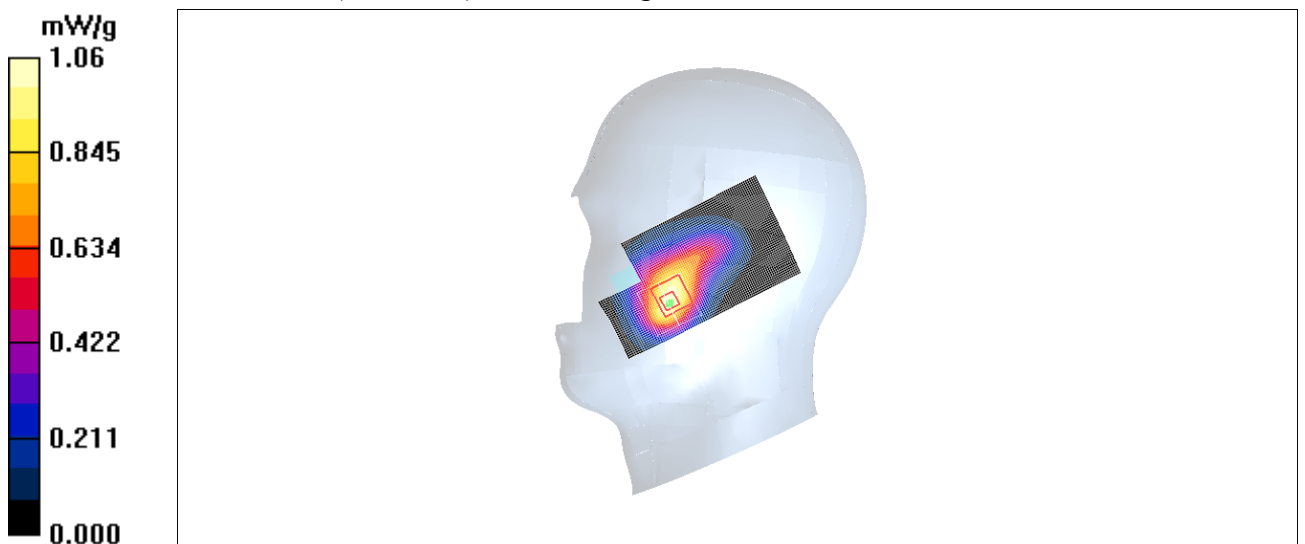


Fig. 19 1900 MHz CH810

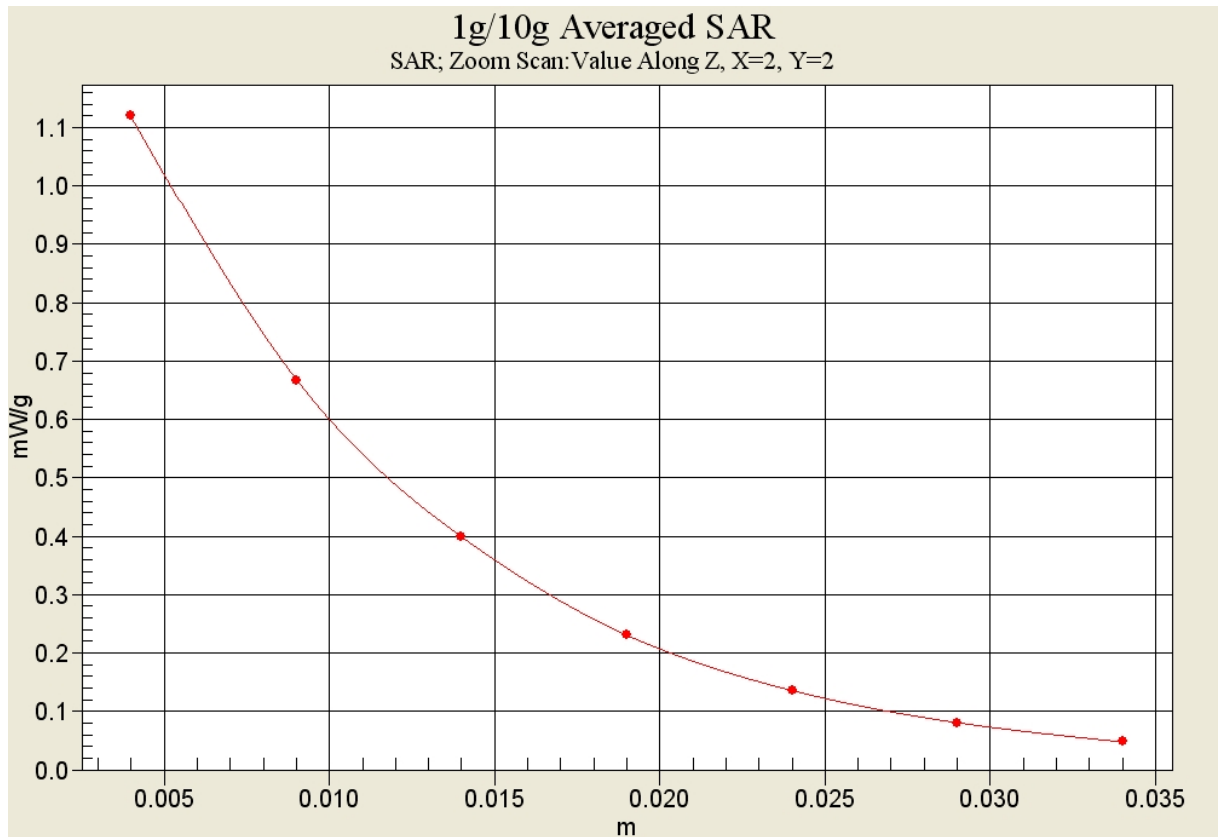

**Fig. 19-1 Z-Scan at power reference point (1900 MHz CH810)**

**1900 Right Cheek Middle**

Date/Time: 2011-3-19 9:44:02

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.03 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.44 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.580 mW/g**

Maximum value of SAR (measured) = 1.09 mW/g

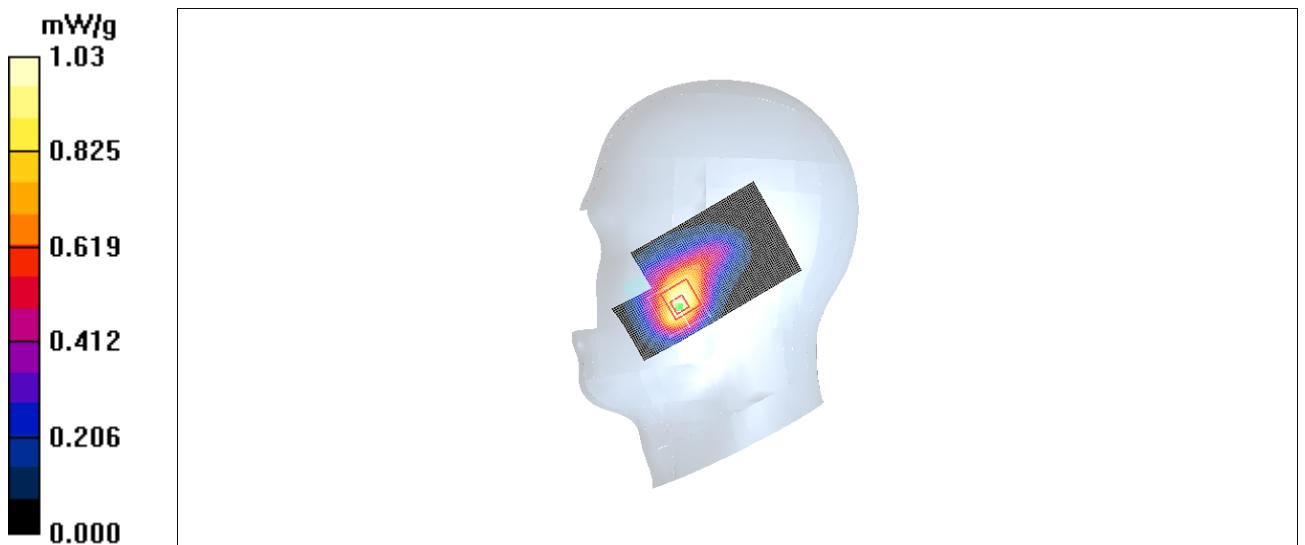

**Fig. 20 1900 MHz CH661**

**1900 Right Cheek Low**

Date/Time: 2011-3-19 9:58:23

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.36 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.572 mW/g**

Maximum value of SAR (measured) = 1.06 mW/g

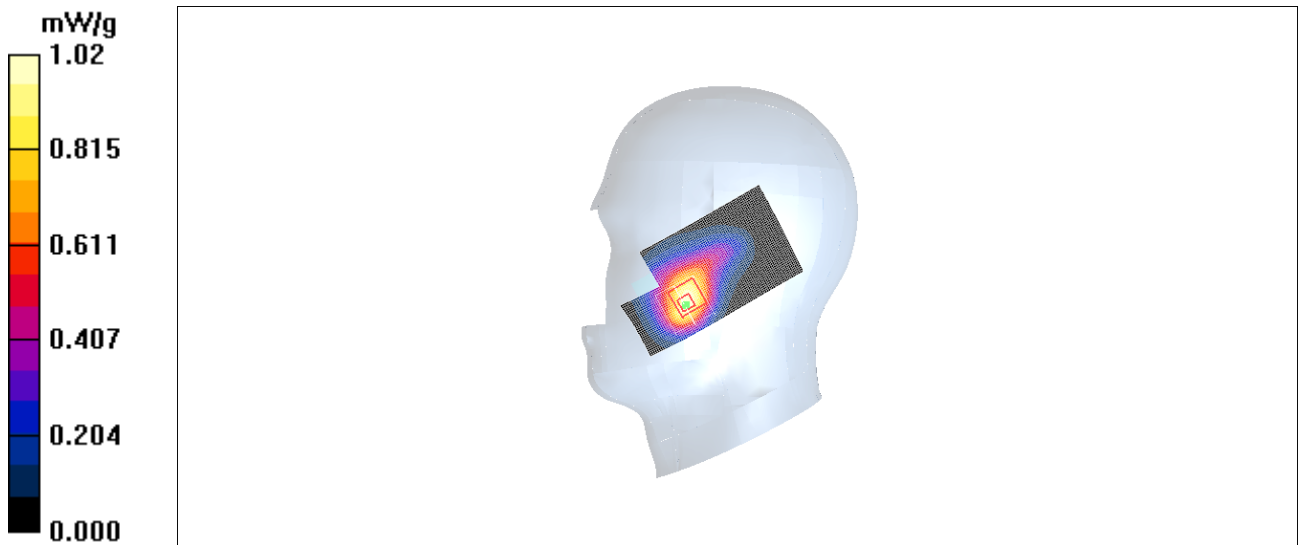


Fig. 21 1900 MHz CH512



### 1900 Right Tilt High

Date/Time: 2011-3-19 10:12:59

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.310 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.400 W/kg

**SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.164 mW/g**

Maximum value of SAR (measured) = 0.274 mW/g

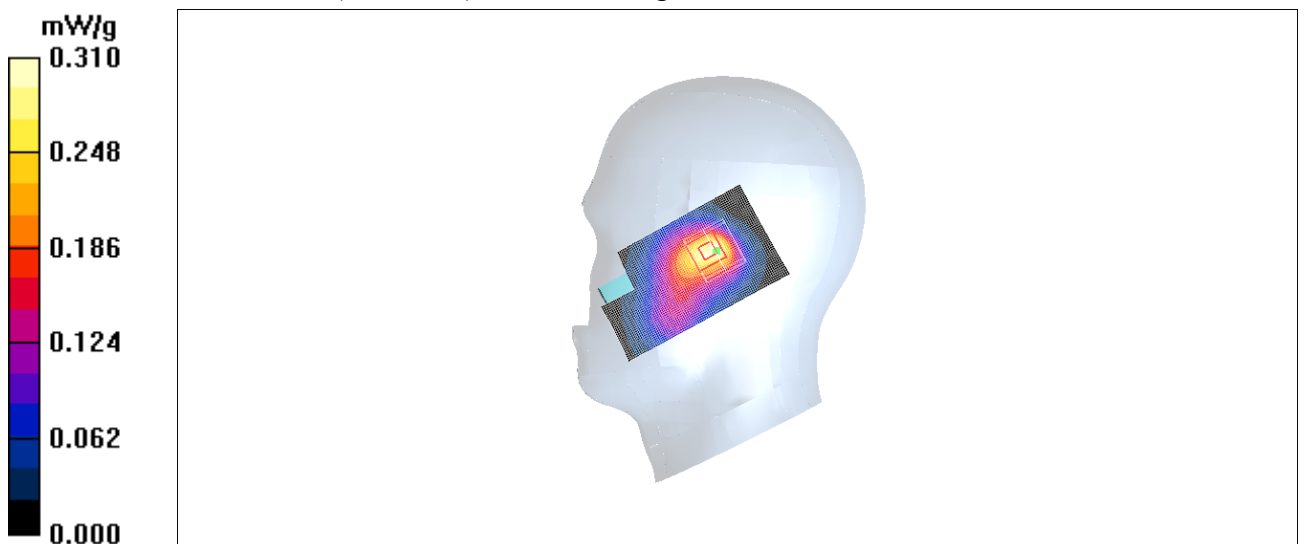


Fig. 22 1900 MHz CH810

**1900 Right Tilt Middle**

Date/Time: 2011-3-19 10:27:25

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.41$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.251 mW/g


**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.47 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 0.329 W/kg

**SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.230 mW/g

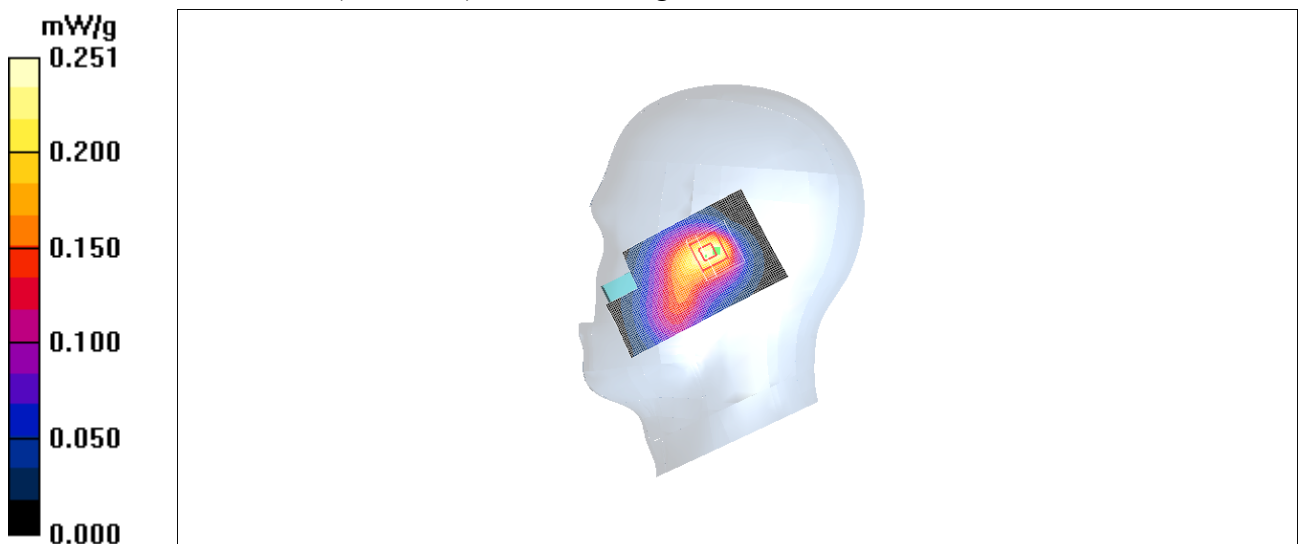

**Fig.23 1900 MHz CH661**

### 1900 Right Tilt Low

Date/Time: 2011-3-19 10:41:50

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.226 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.07 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.287 W/kg

**SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.116 mW/g**

Maximum value of SAR (measured) = 0.200 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.07 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.162 mW/g

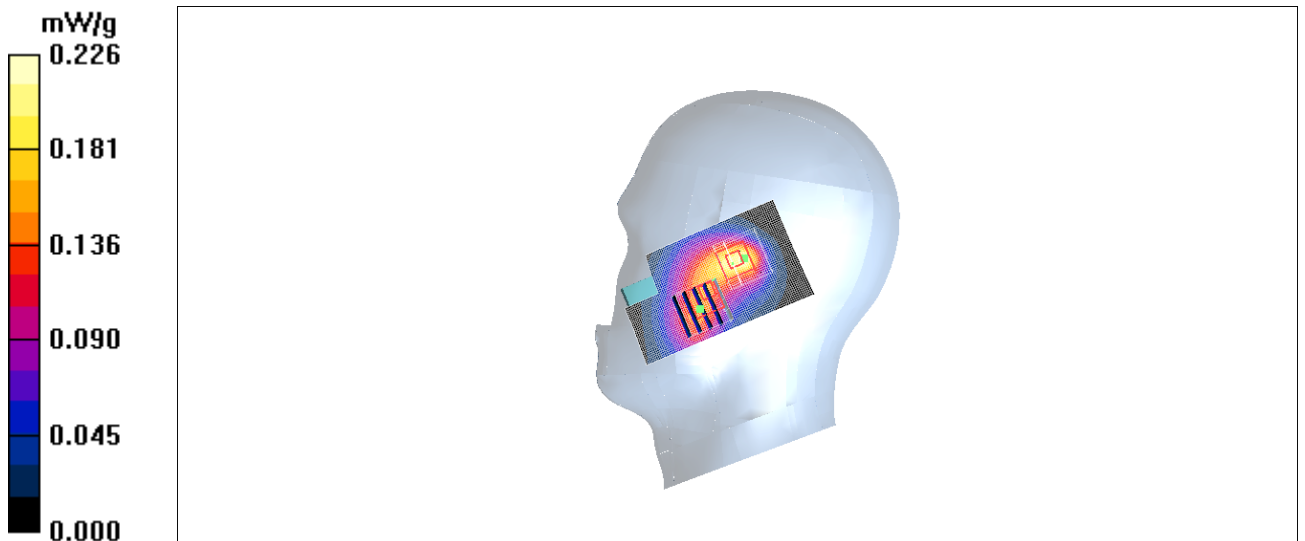


Fig.24 1900 MHz CH512

**1900 Right Cheek High with battery CAB22B0000C1**

Date/Time: 2011-3-19 10:58:32

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.01 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.11 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.577 mW/g**

Maximum value of SAR (measured) = 1.10 mW/g

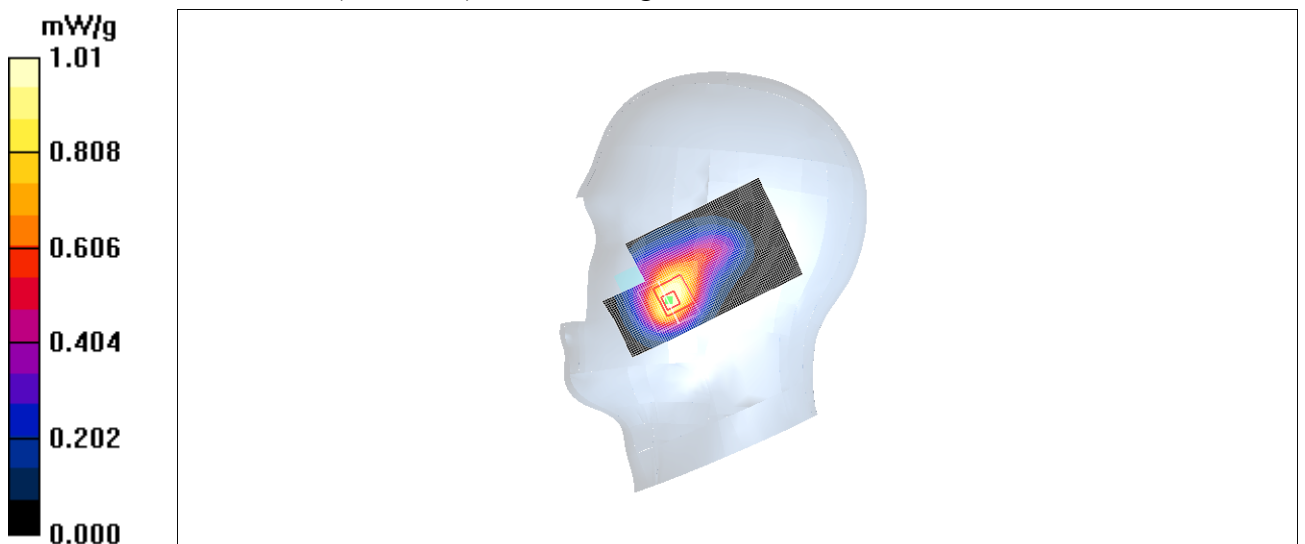

**Fig. 25 1900 MHz CH810**

**1900 Right Cheek High with battery CAB22D0000C1**

Date/Time: 2011-3-19 11:15:24

Electronics: DAE4 Sn771

Medium: Head 1900 MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3149 ConvF(5.03, 5.03, 5.03)

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.949 mW/g


**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.78 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 0.919 mW/g; SAR(10 g) = 0.518 mW/g**

Maximum value of SAR (measured) = 1.02 mW/g

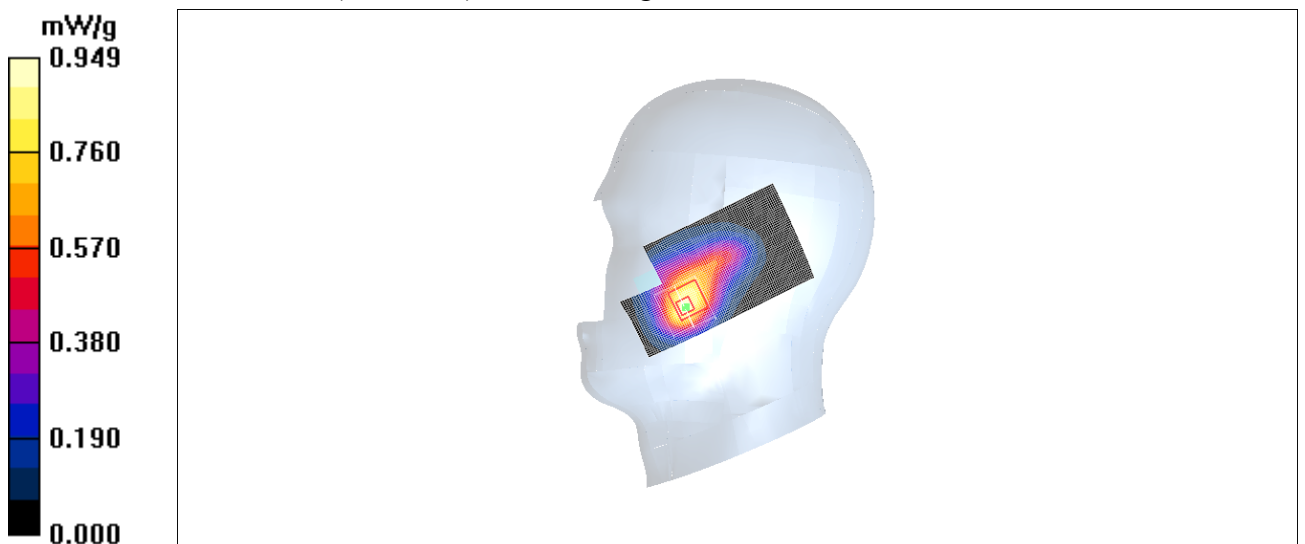

**Fig. 26 1900 MHz CH810**

### 850 Body Towards Ground High with GPRS

Date/Time: 2011-3-18 13:50:12

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 56.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

**Toward Ground High/Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.983 mW/g

**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.0 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.646 mW/g**

Maximum value of SAR (measured) = 0.951 mW/g

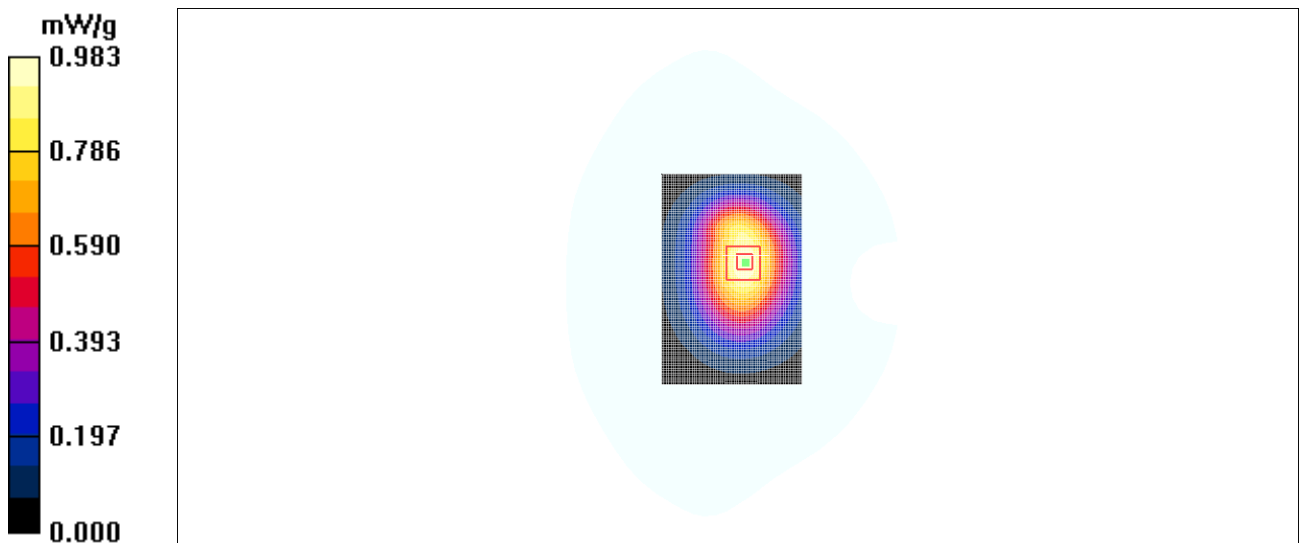


Fig. 27 850 MHz CH251

### 850 Body Towards Ground Middle with GPRS

Date/Time: 2011-3-18 14:05:43

Electronics: DAE4 Sn771

Medium: Body 850 MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 56.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.0°C      Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 836.6 MHz Duty Cycle: 1:2

Probe: ES3DV3 - SN3149 ConvF(6.22, 6.22, 6.22)

**Toward Ground Middle/Area Scan (61x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g

**Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.6 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.680 mW/g**

Maximum value of SAR (measured) = 0.995 mW/g

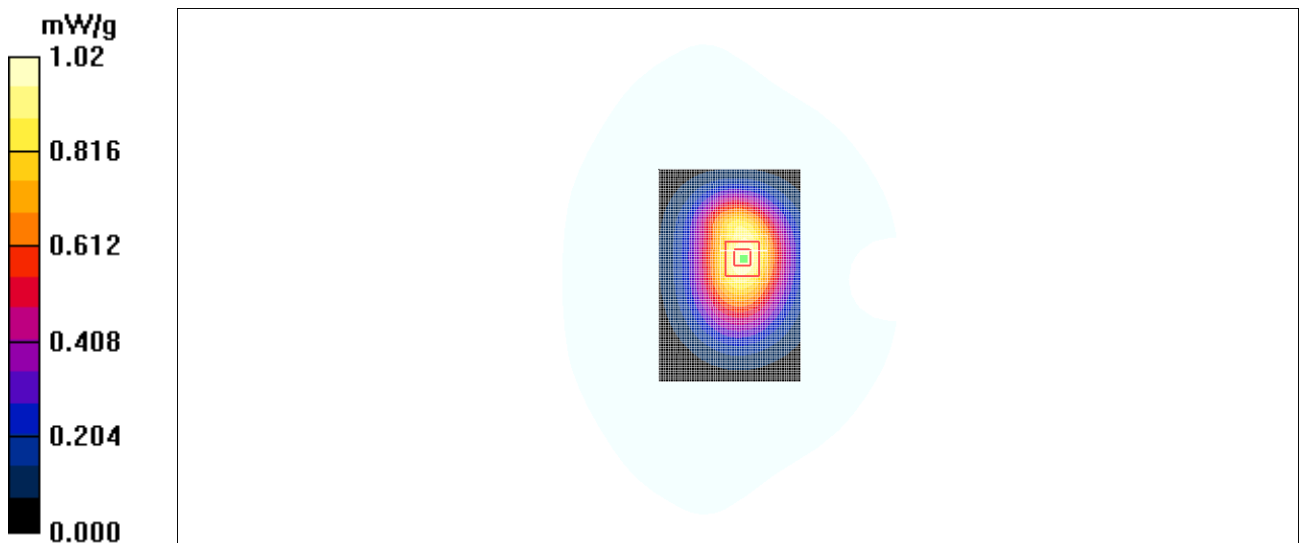


Fig. 28 850 MHz CH190