



# TEST REPORT

No. 2011TAR439

for

**TCT Mobile Limited**

**HSDPA/UMTS dual band / GSM four bands mobile phone**

**Model Name: Brandy Lite A**

**Marketing Name: one touch 908A**

**FCC ID: RAD169**

with

**Hardware Version: Lot0**

**Software Version: V63A**

**Issued Date: Aug 03, 2011**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China,100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: [www.emcite.com](http://www.emcite.com)

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE .....</b>	<b>3</b>
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT .....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>5</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>6</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>6</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>9</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>10</b>
<b>A.1 OUTPUT POWER (§22.913(A)/§24.232(B)).....</b>	<b>10</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai  
Dian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304793


### **1.2. Testing Environment**

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: Aug 03, 2011  
Testing End Date: Aug 03, 2011

### **1.4. Signature**



---

**Zi Xiaogang**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### **2.2. Manufacturer Information**

Company Name: TCT Mobile Limited  
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,  
Pudong Area Shanghai, P.R. China. 201203  
City: Shanghai  
Country: China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	HSDPA/UMTS dual band / GSM four bands mobile phone
Model Name	Brandy Lite A
Marketing Name	one touch 908A
FCC ID	RAD169
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA Band II; WCDMA Band V
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Output power	31.42 dBm maximum ERP measured for GSM850
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N01	012633000042980	Lot0	V63A

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/

AE1

Model	CAB31P0000C1
Manufacturer	BYD
Capacitance	1300mAh
Nominal Voltage	3.7V

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4. General Description

The Equipment Under Test (EUT) is a model of HSDPA/UMTS dual band / GSM four bands mobile phone with integrated antenna. It consists of normal options: lithium battery, charger Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**6. SUMMARY OF TEST RESULTS**

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(b)	P



## 7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESCI	100766	R&S	2011-12-06
2	Test Receiver	ESI40	831564/002	R&S	2012-07-12
3	BiLog Antenna	VULB9163	9163-175	Schwarzbeck	2012-07-05
4	BiLog Antenna	VULB9163	9163-302	Schwarzbeck	2012-07-10
5	Signal Generator	SMB100A	102063	R&S	2012-07-05
7	LISN	ESH2-Z5	829991/012	R&S	2012-07-20
8	Spectrum Analyzer	FSU26	200030	R&S	2011-12-18
9	Spectrum Analyzer	FSU46	100054	R&S	2011-10-14
10	Universal Radio Communication Tester	CMU200	100680	R&S	2011-12-23
11	Universal Radio Communication Tester	CMU200	109914	R&S	2012-07-21
12	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS	2012-08-31
13	Dual-Ridge Waveguide Horn Antenna	3117	00119021	ETS	2013-07-09
14	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2012-07-01
15	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2012-07-01
16	Climatic chamber	PL-2G	343074	ESPEC	2011-12-15

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER** (§22.913(a)/§24.232(b))

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band;824.4MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

##### **A.1.2.2 Test Condition**

RBW	VBW	Sweep Time	Span
1MHz	1MHz	300ms	10MHz

#### **GSM850**

##### **Limit**

	Power step	Nominal Peak output power (dBm)	Target (dB)
GSM	5	33dBm(2W)	32±1
GPRS	3	33dBm(2W)	32±1
EGPRS	6	27dBm(0.5W)	28±1

#### **Measurement result**

##### **GSM (GMSK)**

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	5	32.67
836.6	5	32.76
848.8	5	32.72

# PCS1900

## Limit

	Power step	Nominal Peak output power (dBm)	Target (dB)
GSM	0	30dBm(1W)	29±1
GPRS	3	30dBm(1W)	29±1
EGPRS	5	26dBm(0.4W)	28±1

## Measurement result

### GSM (GMSK)

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	0	28.67
1880.0	0	28.98
1909.8	0	28.28

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

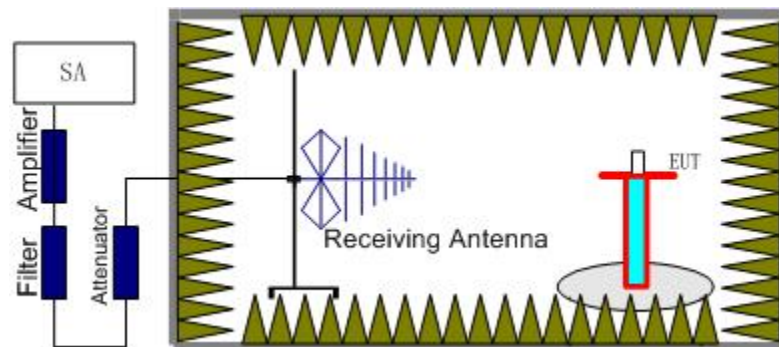

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

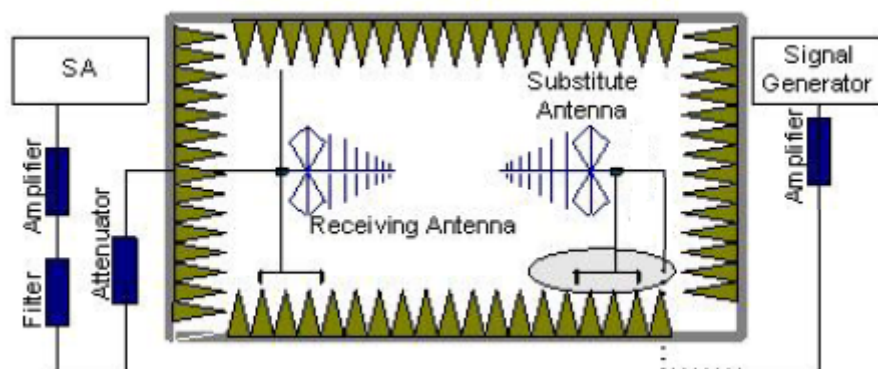

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} + P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

**GSM 850-ERP 22.913(a)**
**Limits**

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

**Measurement result**
**GSM**

Frequency(MHz)	Peak ERP(dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	Correction (dBm)	P <sub>Mea</sub> (dBm)	Polarization
824.2	30.47	-2.73	-53.00	0.84	2.27	-17.27	H
836.6	31.42	-2.75	-53.00	0.90	2.26	-16.27	H
848.8	30.55	-2.75	-53.00	0.95	2.32	-17.03	H

Frequency: 836.6MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-15.81dBm)- P<sub>cl</sub>(-2.75dB)- P<sub>Ag</sub>(-53dB)-G<sub>a</sub> (-0.90dB)-2.15dBm=31.42dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**
**PCS1900-EIRP 24.232(b)**
**Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

**Measurement result**
**GSM**

Frequency(MHz)	Peak EIRP(dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Mea</sub> (dBm)	Polarization
1850.2	30.05	3.92	-50.00	-4.56	-20.59	V
1880	29.84	3.64	-50.00	-4.43	-20.95	H
1909.8	29.41	3.61	-50.00	-4.30	-21.28	H

Frequency: 1850.2MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-20.49dBm)- P<sub>cl</sub>(-3.92dB)- P<sub>Ag</sub>(-50dB)-G<sub>a</sub> (-4.56dB) =30.15dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

\*\*\*END OF REPORT\*\*\*