



---

# TEST REPORT

---

Report No.: SRTC2011-H024-E0037

Product Name: GSM/GPRS/EDGE/WCDMA

Digital Mobile Phone with Bluetooth

Marketing Name: one touch 900A

Product Model: yippee 3G\_A2

Applicant: TCT Mobile Limited

Manufacture: TCT Mobile Limited

Specification: FCC Part 24E, Part 22H, Part 2

(October 1, 2009 edition)

FCC ID: RAD197

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

## CONTENTS

1. General information .....	3
1.1 Notes of the test report .....	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details .....	3
1.4 Manufacturer's details.....	3
1.5 Application details .....	4
1.6 Reference specification.....	4
1.7 Information of EUT .....	4
1.7.1 General information.....	4
1.7.2 EUT details .....	5
1.7.3 Auxiliary equipment details.....	5
2. Test information .....	7
2.1 Summary of the test results.....	7
2.2 Test result.....	8
2.2.1 WCDMA Band II.....	8
2.2.1.1 RF Power Output-FCC Part 24.232(b).....	8
2.2.1.2 Effective Radiated Power-FCC Part 24.232(b).....	9
2.2.1.3 Occupied Bandwidth-FCC Part2.1049(h)(i) .....	11
2.2.1.4 Emission Bandwidth-FCC Part Part 24.238(b) .....	14
2.2.1.5 Conducted Spurious Emissions-FCC Part 2.1057/Part 24.238 .....	17
2.2.1.6 Band Edges Compliance-FCC Part 24.238(b) .....	20
2.2.1.7 Frequency Stability-FCC Part2.1055.....	22
2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/Part 24.238.....	24
2.2.2 WCDMA Band V .....	28
2.2.2.1 RF Power Output-FCC Part 22.913(a).....	28
2.2.2.2 Effective Radiated Power-FCC Part 22.913(a).....	29
2.2.2.3 Occupied Bandwidth-FCC Part2.1049(h)(i) .....	31
2.2.2.4 Emission Bandwidth-FCC Part 22.917(b).....	34
2.2.2.5 Conducted Spurious Emissions-FCC Part 2.1057/Part 22.917 .....	37
2.2.2.6 Band Edges Compliance-FCC Part 22.917(b) .....	40
2.2.2.7 Frequency Stability-FCC Part2.1055.....	42
2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/Part 22.917.....	44
2.3. List of test equipments .....	48
Appendix .....	49

## 1. General information

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company: The State Radio\_monitoring\_center Testing Center (SRTC)  
Address: No.80 Beilishi Road, Xicheng District, Beijing China  
City: Beijing  
Country or Region: China  
Contacted person: Wang Junfeng  
Tel: +86 10 68009181 +86 10 68009202  
Fax: +86 10 68009195 +86 10 68009205  
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

### 1.3 Applicant's details

Company: TCT Mobile Limited  
Address: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area  
City: Shanghai  
Country or Region: P.R.China  
Grantee Code: RAD  
Contacted person: Gong Zhizhou  
Tel: +86-21-61460890  
Fax: +86-21-61460602  
Email: zhizhou.gong@jrdcom.com

### 1.4 Manufacturer's details

Company: TCT Mobile Limited  
Address: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area  
City: Shanghai  
Country or Region: P.R.China  
Contacted person: Gong Zhizhou  
Tel: +86-21-61460890  
Fax: +86-21-61460602  
Email: zhizhou.gong@jrdcom.com

## 1.5 Application details

Date of reception of test sample: 8<sup>th</sup> Mar 2011

Date of test: 9<sup>th</sup> Mar 2011 to 12<sup>th</sup> Apr 2011

## 1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (October 1, 2009 edition)

## 1.7 Information of EUT

### 1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/WCDMA Digital Mobile Phone with Bluetooth
FCC ID	RAD197
Frequency range	WCDMA Band II: Tx:1850~1910MHz      Rx:1930~1990MHz WCDMA Band V: Tx:824~849MHz      Rx:869~894MHz
Rated output power	WCDMA Band II:24.0dBm WCDMA Band V:24.0dBm
Modulation type	QPSK
Emission Designator	4M50F9W
Duplex mode	FDD
Duplex spacing	WCDMA Band II:80MHz WCDMA Band V:45MHz
Antenna type	Integral
Power Supply	Battery or charger
Rated Power Supply Voltage	3.8V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V
HW Version	LOT1
SW Version	sw53K

### 1.7.2 EUT details

Product Name	Marketing Name	Product Model	IMEI
GSM/GPRS/EDGE/WCDMA Digital Mobile Phone with Bluetooth	one touch 900A	yippee 3G_A2	012787000001042

### 1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	Ten Pao International Ltd.
Model Number	CBA3120AG0C2
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3001AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	BYD LITHIUM BATTERY CO., LTD
Model Number	CAB31L0000C1
Capacity	1000mAh
Rated Voltage	3.7V d.c.

Equipment	Battery
Manufacturer	SHENZHEN BAK BATTERY CO., LTD
Model Number	CAB31L0000C2
Capacity	1000mAh
Rated Voltage	3.7V d.c.

Equipment	Data Cable
Manufacturer	Shen Zhen Ju Wei Electronic Co.,LTD
Model Number	CDA3122001C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co.,Ltd
Model Number	CDA3122001C2




Note: As the information described above, there are two different models of charger manufactured by two different companies, and two different models of battery manufactured by two different companies.

The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of battery and one model of charger) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger CBA3120AG0C2 and the battery CAB31L0000C1.

## 2. Test information

### 2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	RF Power Output	22.913(a)/24.232(b)	Pass
2	Effective Radiated Power and Equivalent Isotropically Radiated Power	22.913(a)/24.232(b)	Pass
3	Occupied Bandwidth	2.1049(h)(i)	Pass
4	Emission Bandwidth	22.917(b)/24.238(b)	Pass
5	Spurious Emissions at antenna terminals	2.1057/22.917/24.238	Pass
6	Band Edges Compliance	22.917(b)/24.238(b)	Pass
7	Frequency Stability	2.1055	Pass
8	Radiated Spurious Emissions	2.1051/22.917/24.238	Pass

<p>This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab</p> 	<p>Checked by: Mr. Wang Junfeng Deputy director of the test lab</p> 
<p>Tested by: Mr. Li Boyu Test engineer</p> 	<p>Issued date:</p> <p><b>2011.06.08</b></p>

## 2.2 Test result


### 2.2.1 WCDMA Band II

#### 2.2.1.1 RF Power Output-FCC Part 24.232(b)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

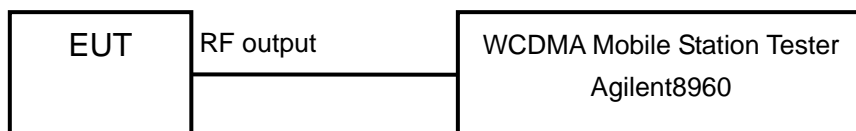

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits	$\leq 24\text{dBm}$
--------	---------------------

Test result:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.4
1880.0	9400	22.5
1907.6	9538	22.4




### 2.2.1.2 Effective Radiated Power-FCC Part 24.232(b)


Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test setup:

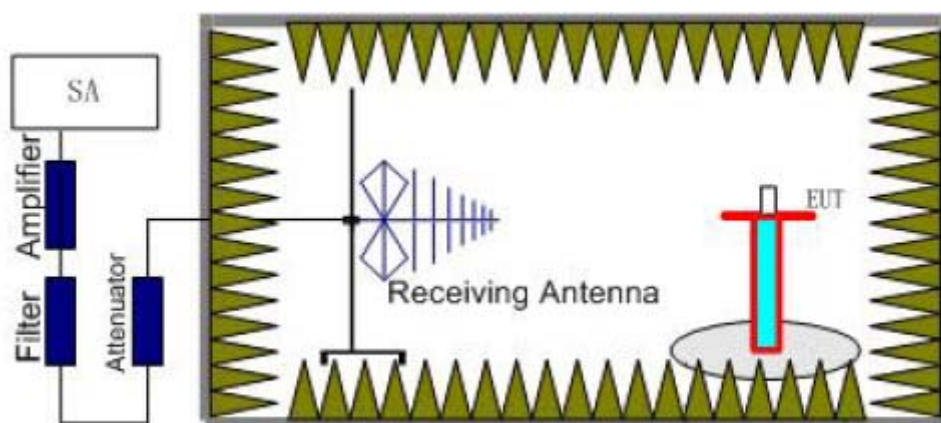

Step 1

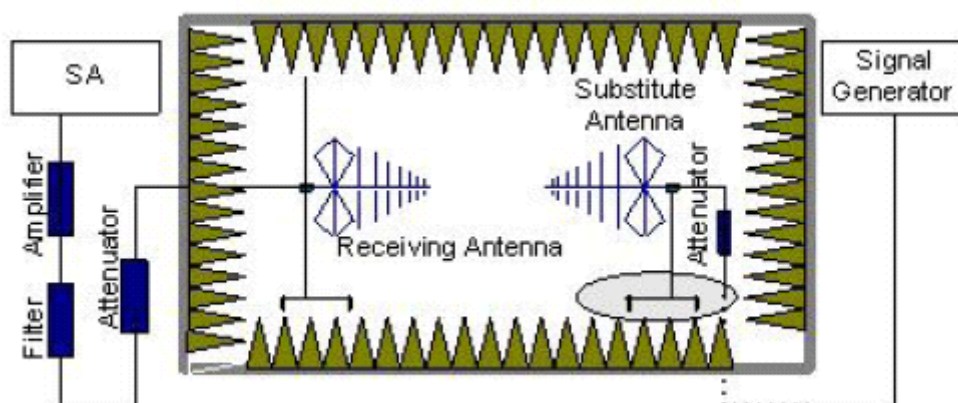

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be

established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

**Step 2:**

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

The measurement will be done at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

Limits	$\leq 33\text{dBm}$
--------	---------------------

**Test result:**

Frequency (MHz)	Peak EIRP(dBm)	Pca Cable loss	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1852.4	23.3	-4.8	8.6	19.5	Vertical
1880.0	23.8	-4.8	8.6	20.0	Vertical
1907.6	23.4	-4.8	8.6	19.6	Vertical

Frequency: 1880.0MHz


$$\text{Peak ERP (dBm)} = P_{mea} (20.0\text{dBm}) + P_{ca} (-4.8\text{dBm}) + G_a (8.6\text{dB}) = 23.8\text{dBm}$$

### 2.2.1.3 Occupied Bandwidth-FCC Part2.1049(h)(i)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

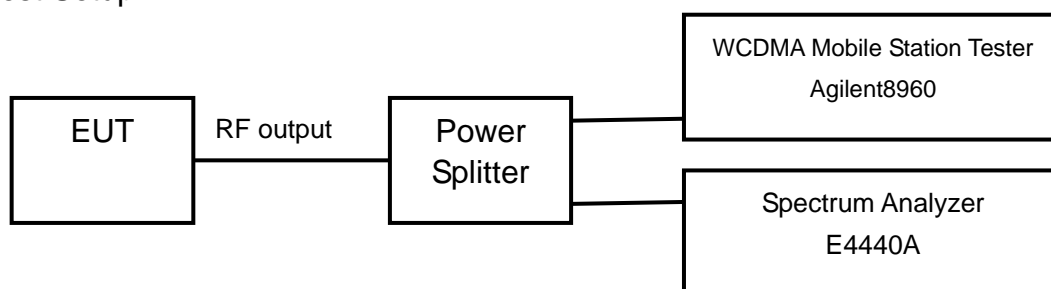


Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


Carrier frequency (MHz)	Channel No.	Bandwidth of99%Power(MHz)
1852.4	9262	4.1417
1880.0	9400	4.0599
1907.6	9538	4.1102

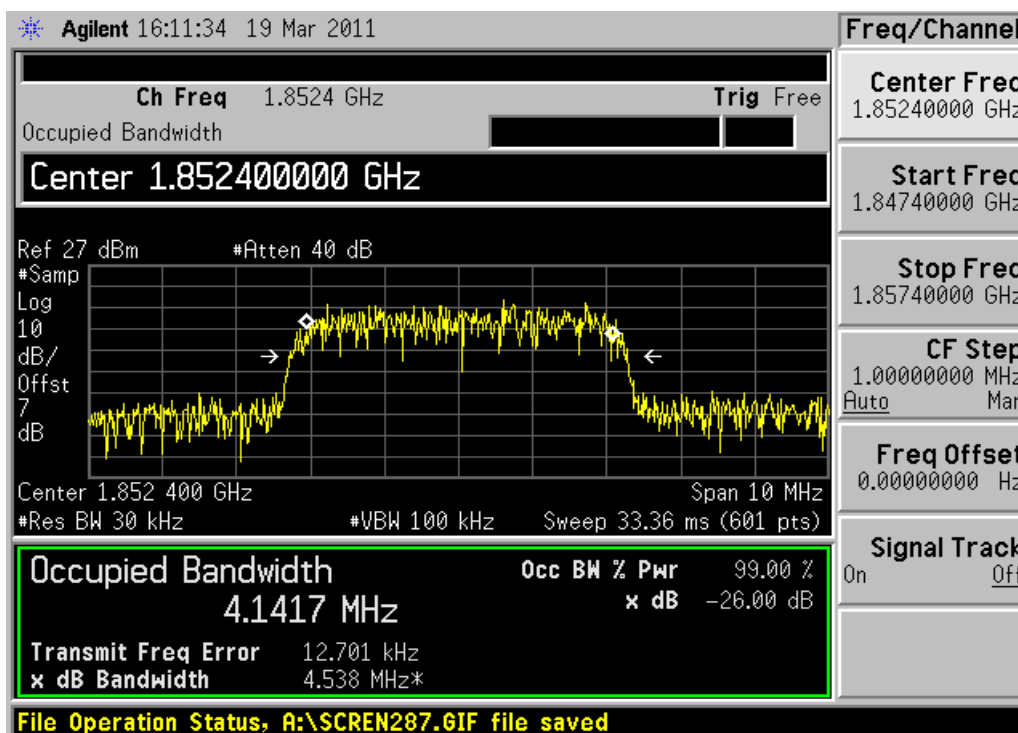

Channel 9262

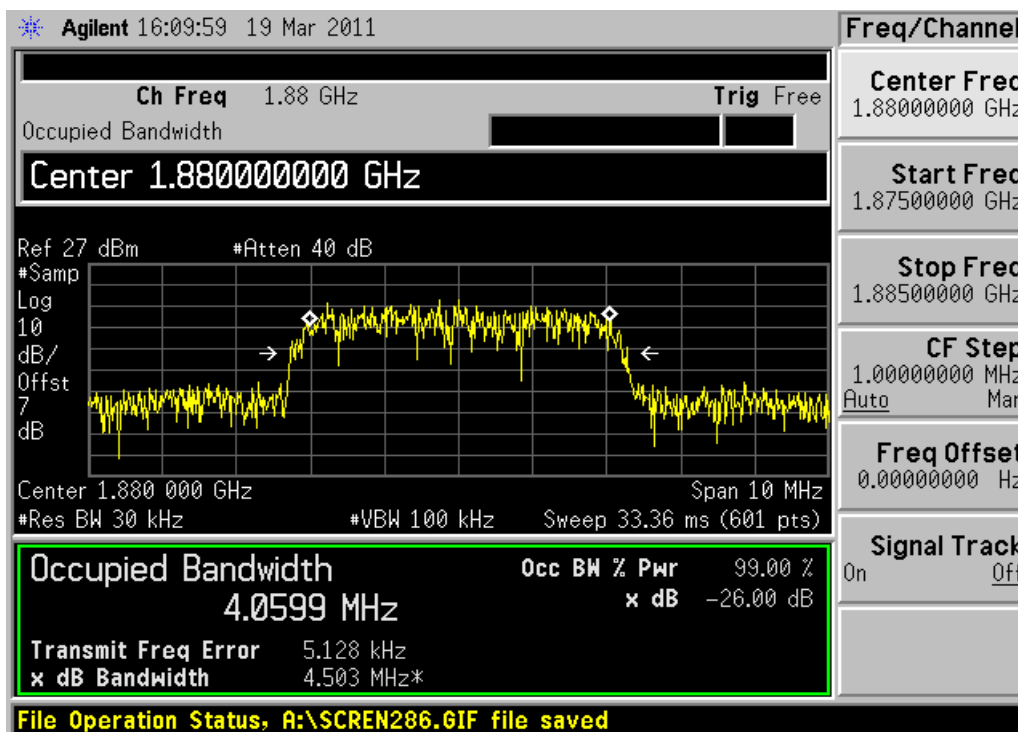

Channel 9400

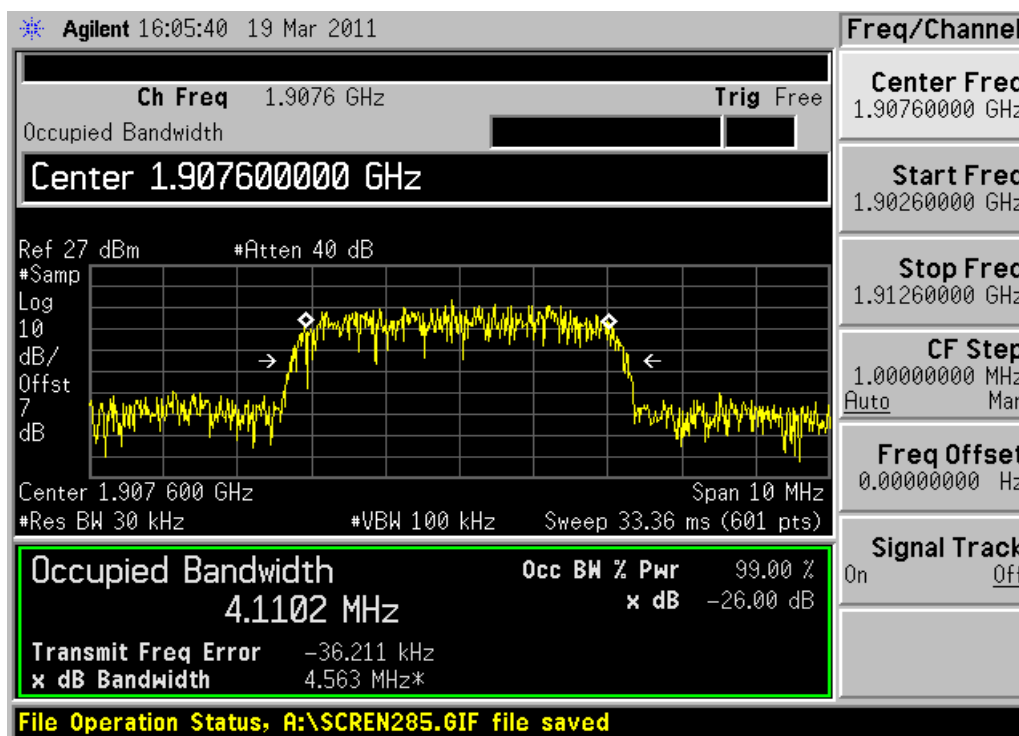


Channel 9538

### 2.2.1.4 Emission Bandwidth-FCC Part Part 24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

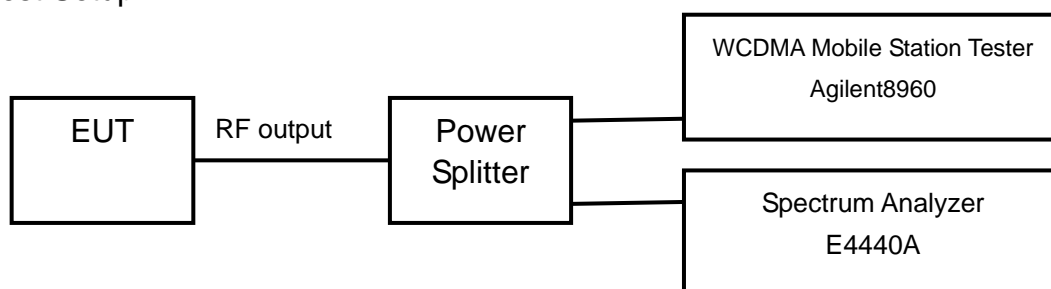


Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)


Limits: No specific occupied bandwidth requirements in part24.238

Test result:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
1852.4	9262	4.538
1880.0	9400	4.503
1907.6	9538	4.563

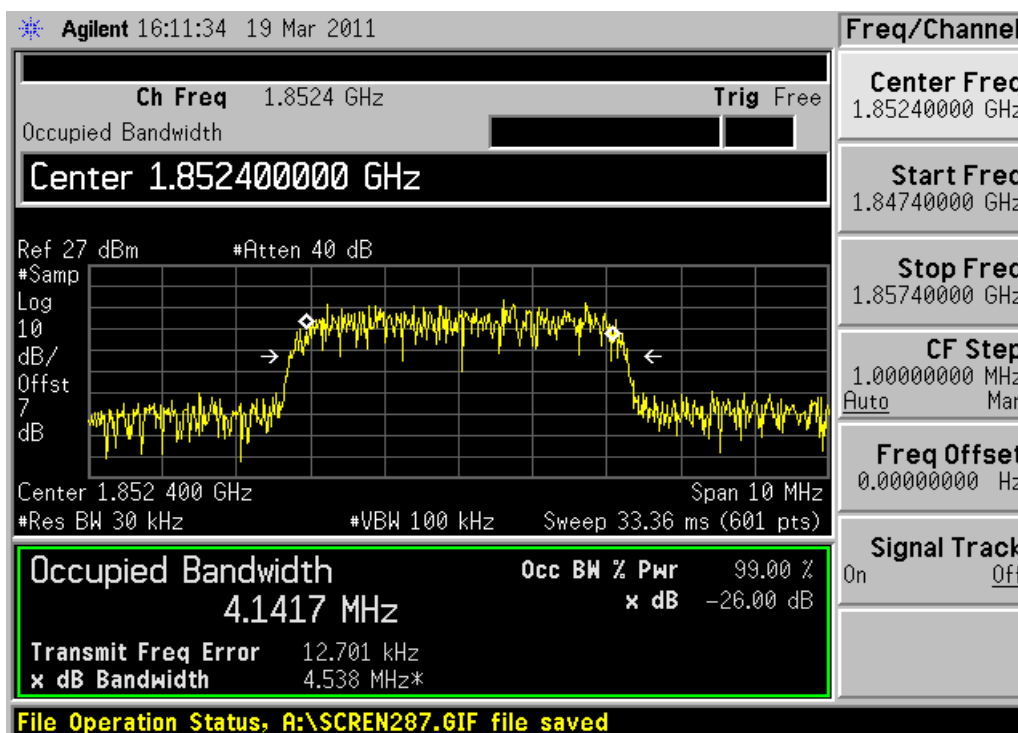

Channel 9262

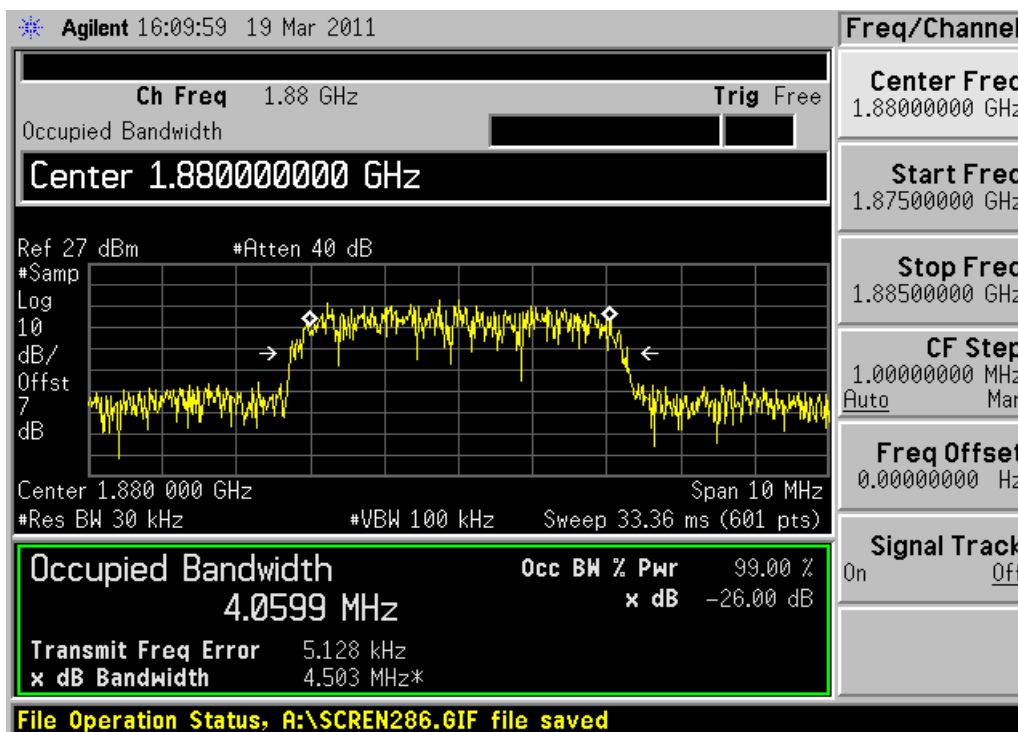

Channel 9400

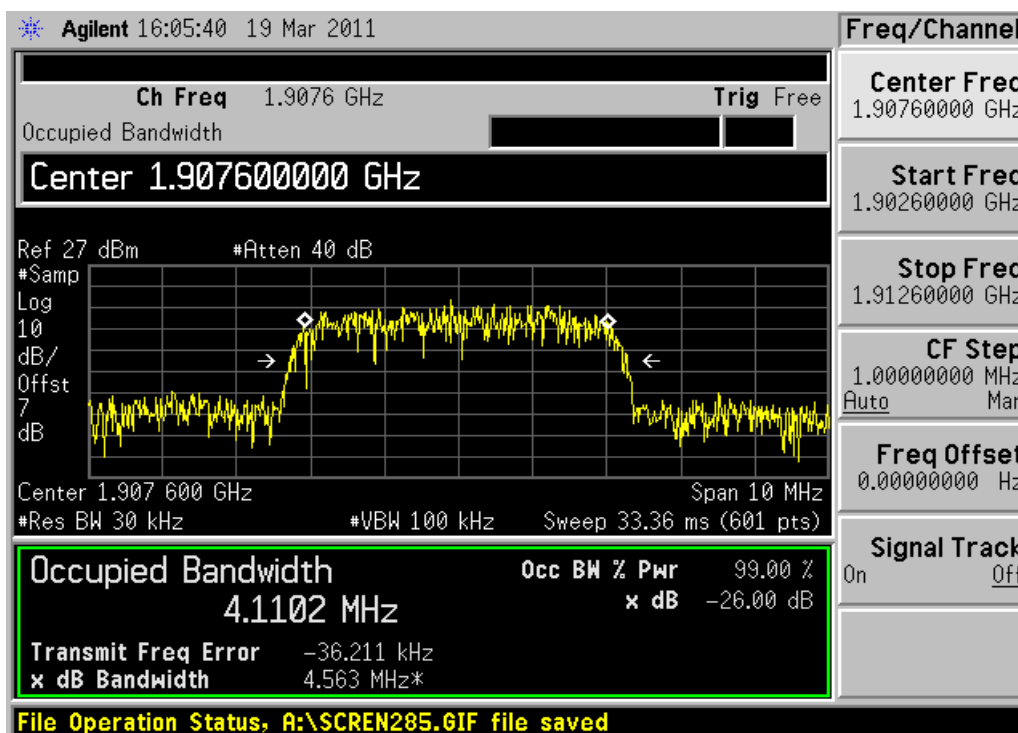

Channel 9538




### 2.2.1.5 Conducted Spurious Emissions-FCC Part 2.1057/Part 24.238

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

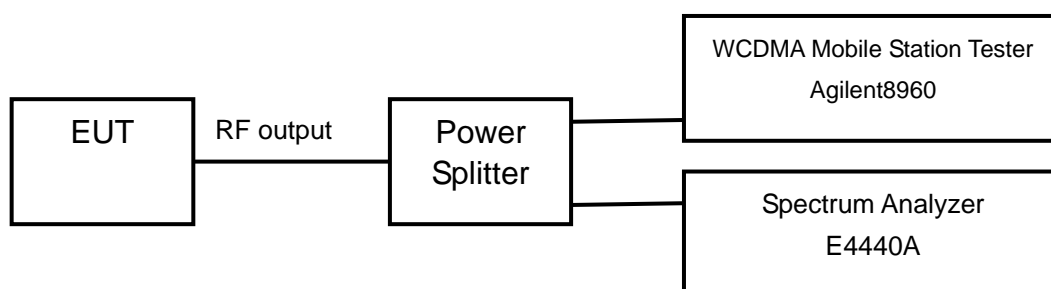

Test procedure:


After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.

The measurement will be conducted at one channel No 9400 (middle channel of WCDMA band II)


Limits	≤ -13dBm
--------	----------

Test result:

Refer to the following figures.

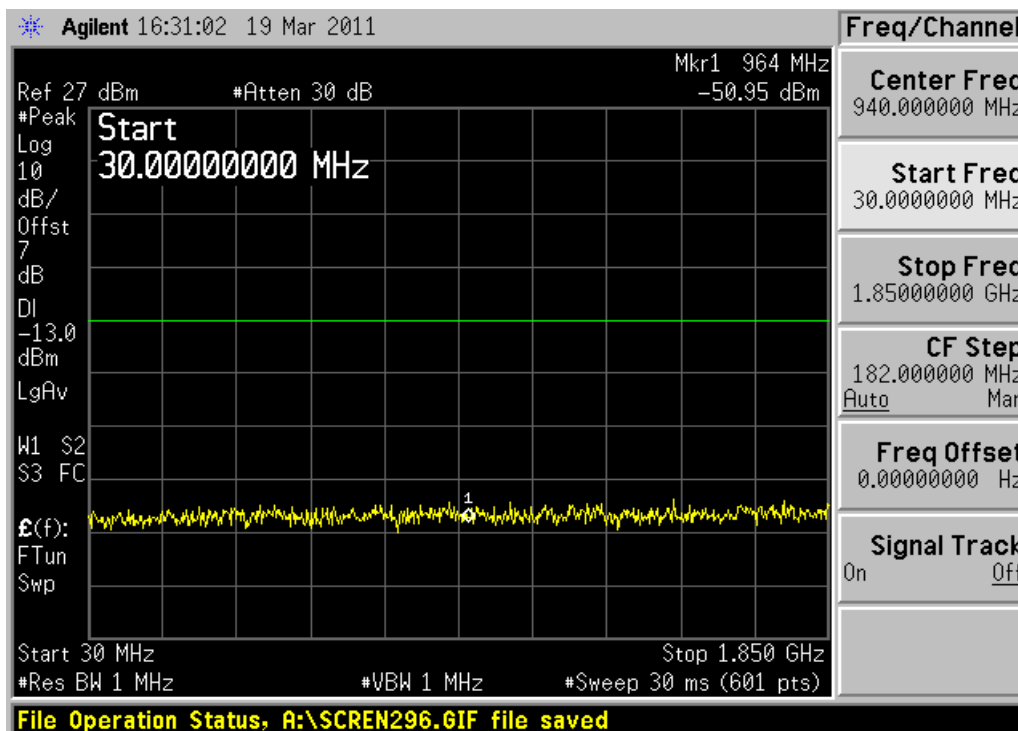


Channel 9400, 30MHz~1850MHz

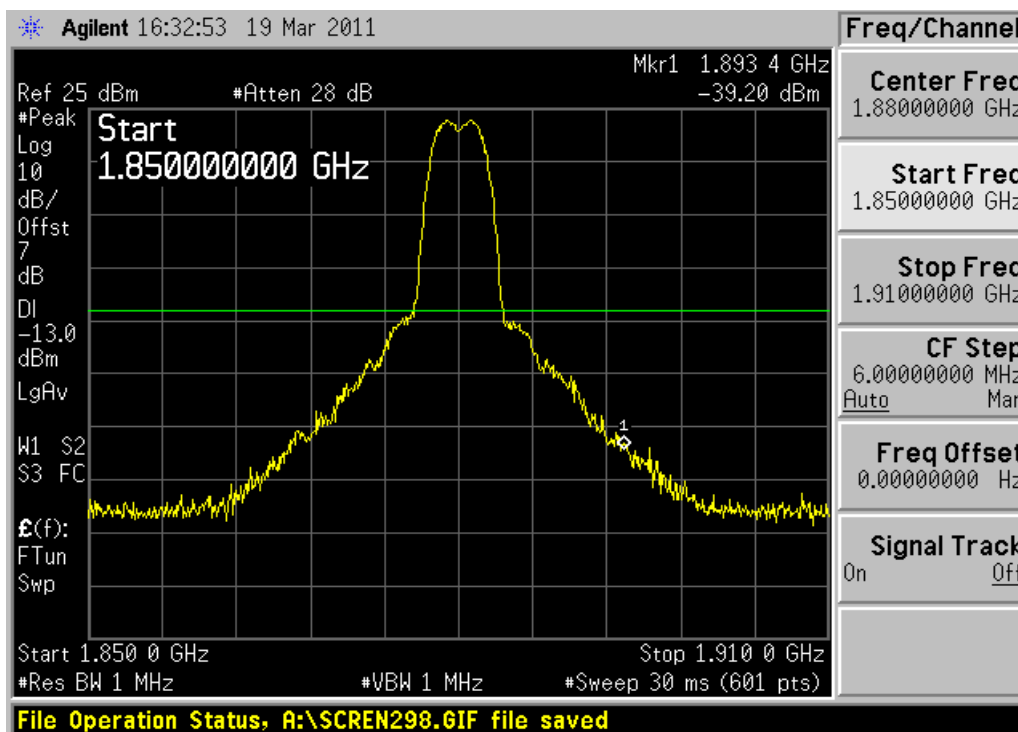

Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

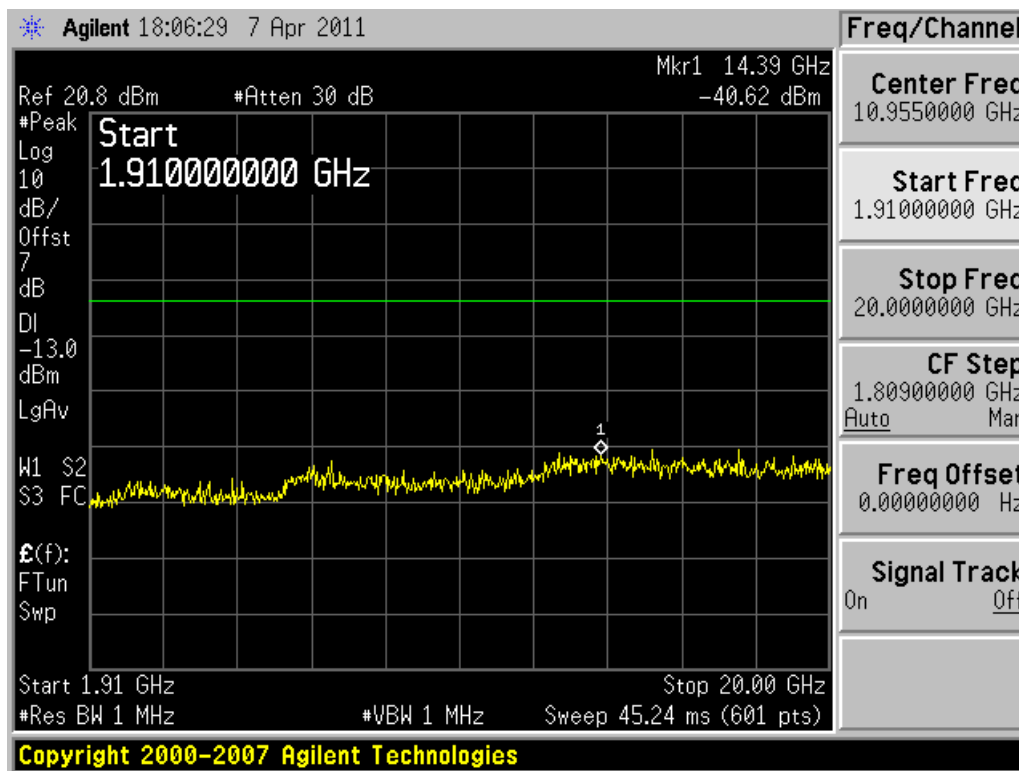


Channel 9400, 1910MHz~20GHz

### 2.2.1.6 Band Edges Compliance-FCC Part 24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

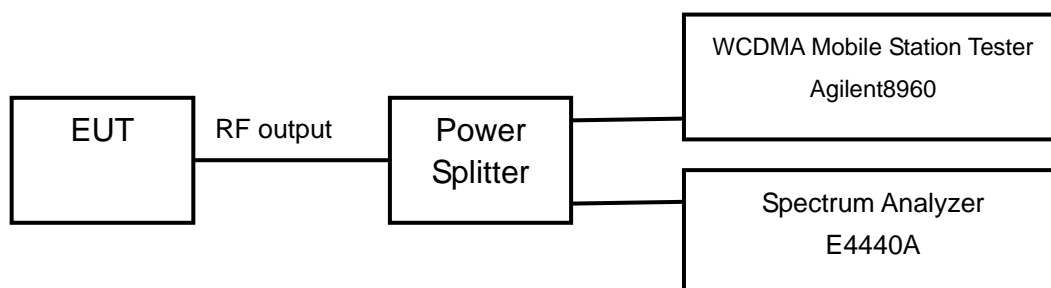

Test procedure:


After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 30KHz on spectrum analyzer.

The measurement will be conducted at two channels No9262 and No9538 (Bottom and top channels of WCDMA band II)


Limits	≤ -13dBm
--------	----------

Test result:

Refer to the following figures.

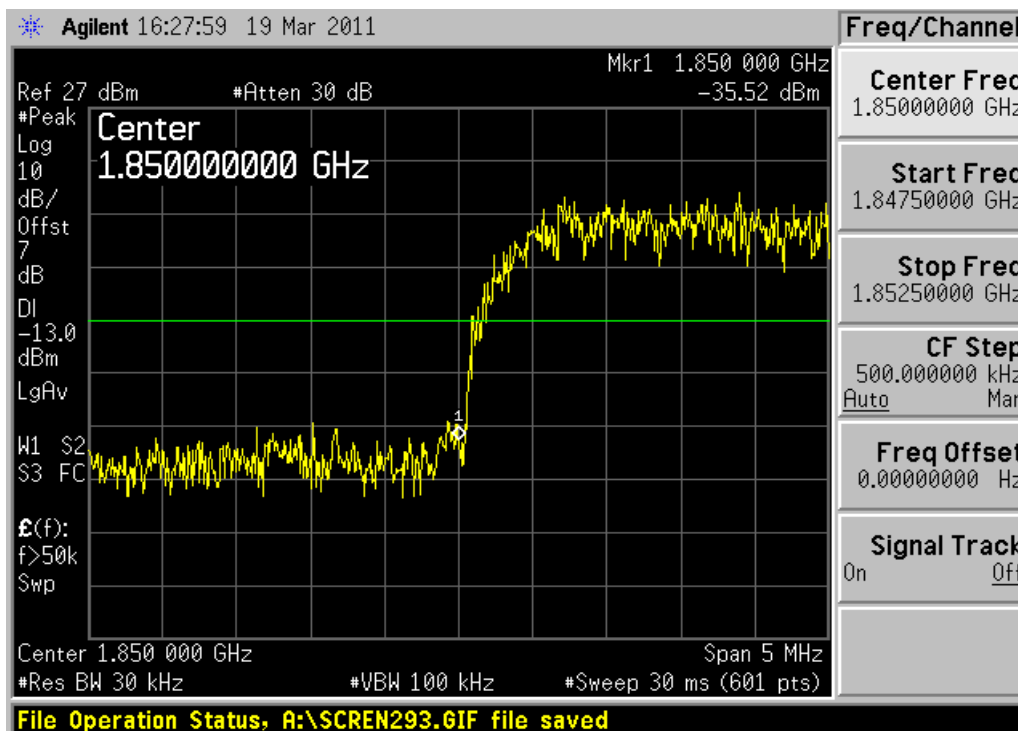

Channel 9262

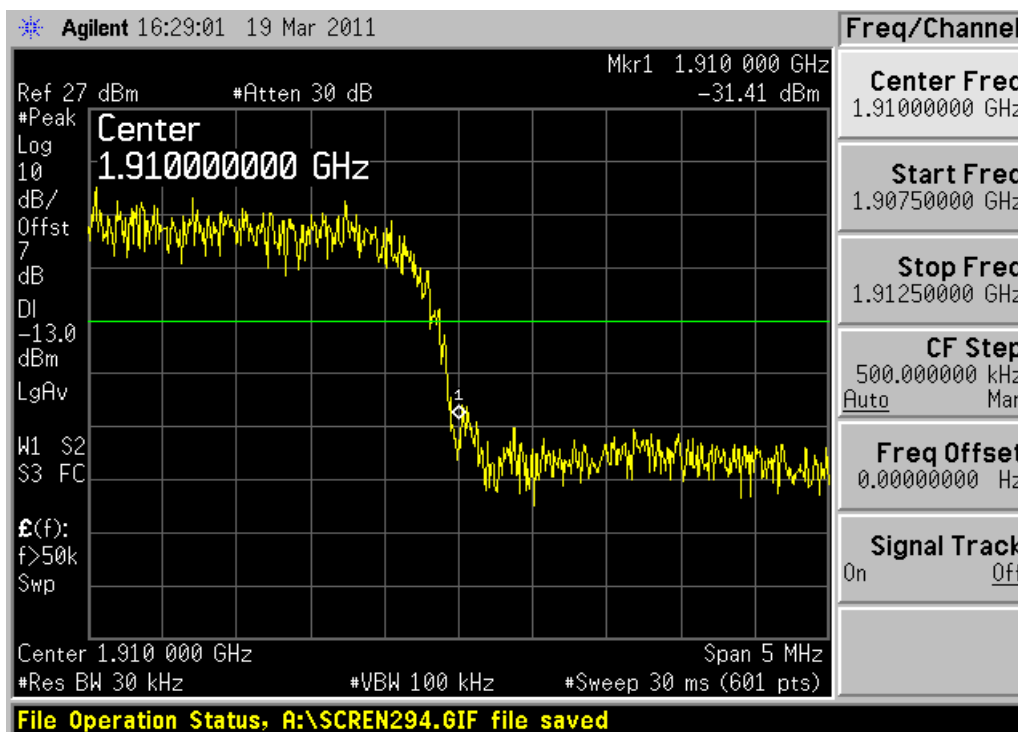


Channel 9538

### 2.2.1.7 Frequency Stability-FCC Part2.1055

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test setup:

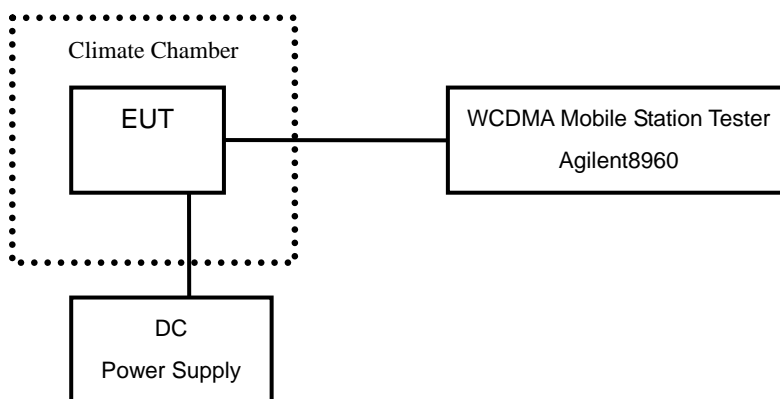

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2 V. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

Limits: No specific frequency stability requirements in part 2.1055

Test result:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 9262	Channel 9400	Channel 9538
-30	0.002	0.002	0.002
-20	0.001	0.001	0.000
-10	0.001	0.002	0.000
0	0.002	0.001	0.002
+10	0.001	0.001	0.002
+20	0.001	0.001	0.000
+30	0.001	0.001	0.002
+40	0.001	0.000	0.001
+50	0.002	0.001	0.001


Voltage (V)	Test Result (ppm)@20°C		
	Channel 9262	Channel 9400	Channel 9538
3.5	0.001	0.001	0.001
4.2	0.001	0.001	0.001

### 2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/Part 24.238


Ambient condition

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

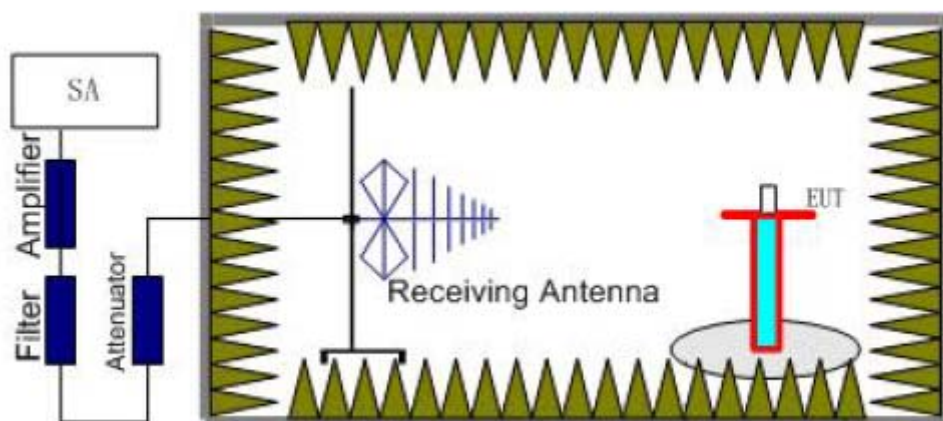

Step 1

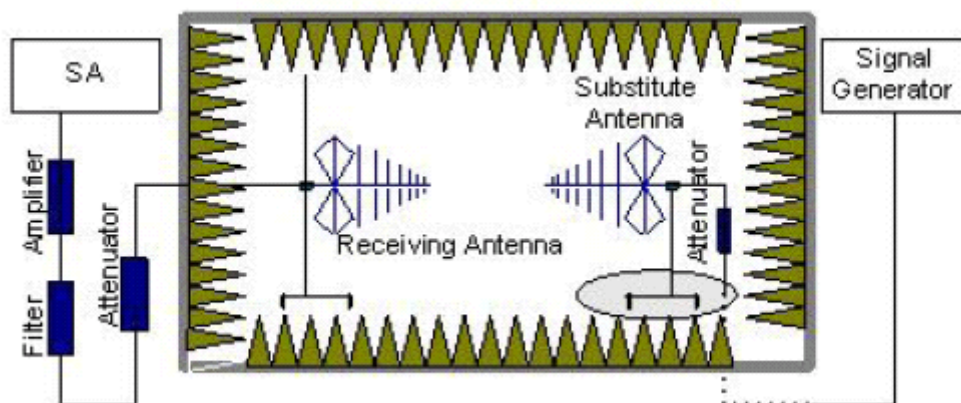

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was



placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 9262), middle (Channel 9400) and top (Channel 9538) channels of WCDMA band II.

Test result:

#### Channel 9262

Frequency (MHz)	Power (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2464.90	-43.4	-5.6	8.6	-46.4	-13	Vertical
2801.30	-41.3	-5.8	8.9	-44.4	-13	Vertical
3749.24	-43.9	-6.9	9.1	-46.1	-13	Horizontal
6671.93	-42.6	-8.9	11.2	-44.9	-13	Vertical
9959.62	-38.5	-13.7	13.8	-38.6	-13	Vertical
17848.08	-31.4	-15.9	12.4	-27.9	-13	Vertical

#### Channel 9400

Frequency (MHz)	Power (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2477.36	-43.2	-5.6	8.6	-46.2	-13	Vertical
2789.22	-41.1	-5.8	8.9	-44.2	-13	Vertical
3767.54	-43.7	-6.9	9.1	-45.9	-13	Vertical
6678.53	-42.5	-8.9	11.2	-44.8	-13	Vertical
9956.27	-38.7	-13.7	13.8	-38.8	-13	Vertical
17832.46	-31.7	-15.9	12.4	-28.2	-13	Horizontal

Channel 9538

Frequency (MHz)	Power (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2489.46	-42.7	-5.6	8.6	-45.7	-13	Vertical
2806.39	-41.0	-5.8	8.9	-44.1	-13	Vertical
3775.27	-43.8	-6.9	9.1	-46.0	-13	Vertical
6662.30	-42.1	-8.9	11.2	-44.4	-13	Vertical
9975.76	-38.4	-13.7	13.8	-38.5	-13	Horizontal
17825.28	-32.0	-15.9	12.4	-28.5	-13	Vertical


## 2.2.2 WCDMA Band V

### 2.2.2.1 RF Power Output-FCC Part 22.913(a)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

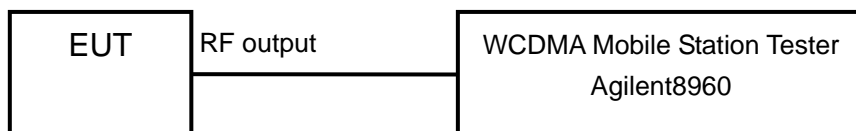

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	$\leq 24\text{dBm}$
--------	---------------------

Test result:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.6
836.6	4183	22.7
846.6	4233	22.7

## 2.2.2.2 Effective Radiated Power-FCC Part 22.913(a)


Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test setup:

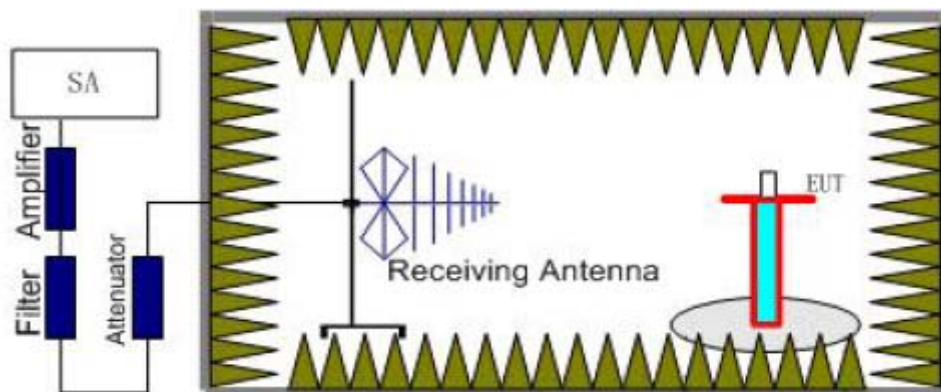

Step 1

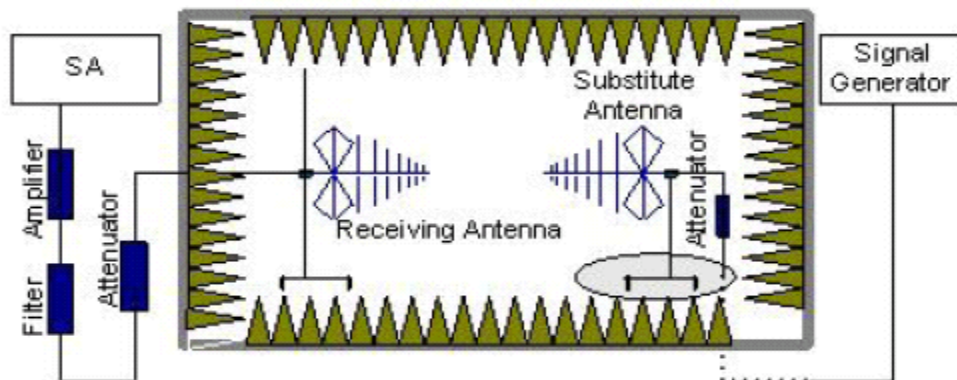

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and

RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

**Step 2:**

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).

The measurement will be done at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	≤ 38.5dBm
--------	-----------

**Test result:**

Frequency (MHz)	Peak ERP (dBm)	P <sub>ca</sub> Cable loss (dB)	G <sub>a</sub> Antenna Gain (dB)	Correction (dB)	P <sub>mea</sub> (dBm)	Polarization
826.4	23.4	-3.8	8.6	2.15	20.75	Vertical
836.6	23.6	-3.8	8.6	2.15	20.95	Vertical
846.6	23.5	-3.8	8.6	2.15	20.85	Vertical

Frequency: 836.6MHz


$$\text{Peak ERP (dBm)} = P_{mea} (20.95\text{dBm}) + P_{ca} (-3.8\text{dB}) + G_a (8.6\text{dB}) - 2.15\text{dB} = 23.6\text{dBm}$$

### 2.2.2.3 Occupied Bandwidth-FCC Part2.1049(h)(i)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

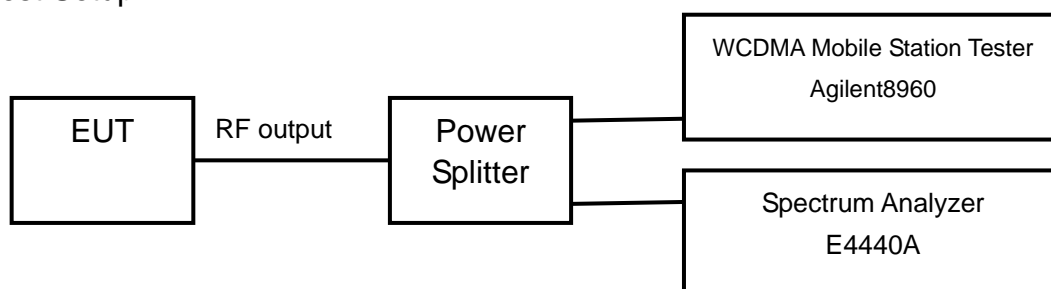


Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.1612
836.6	4183	4.1326
846.6	4233	4.1582

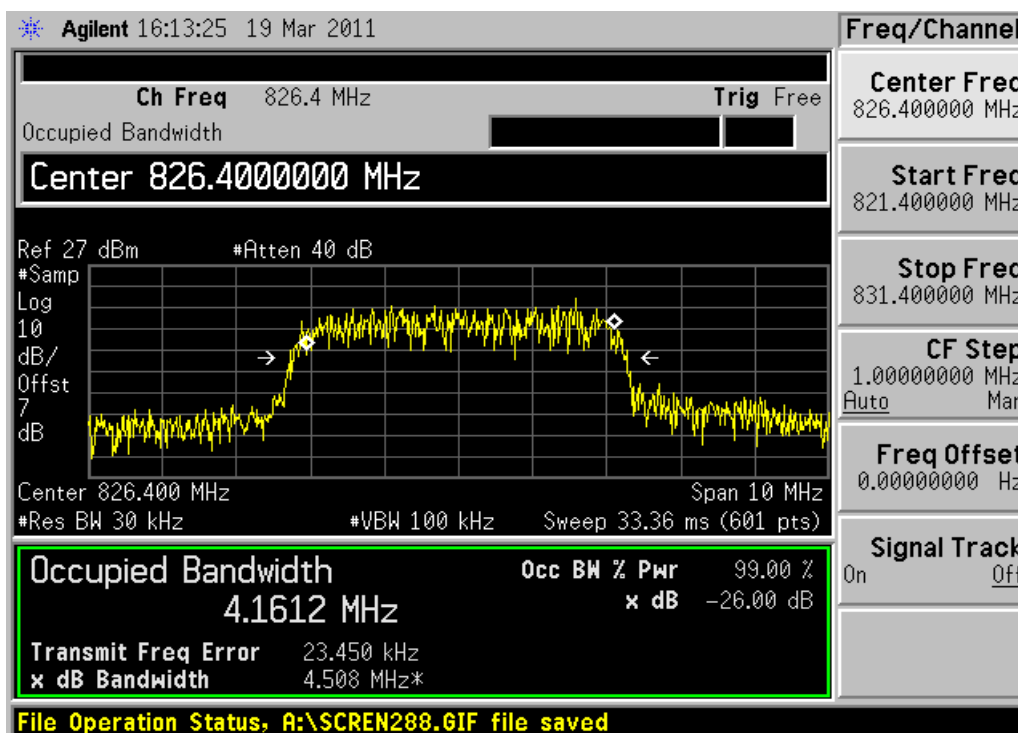


Channel 4132

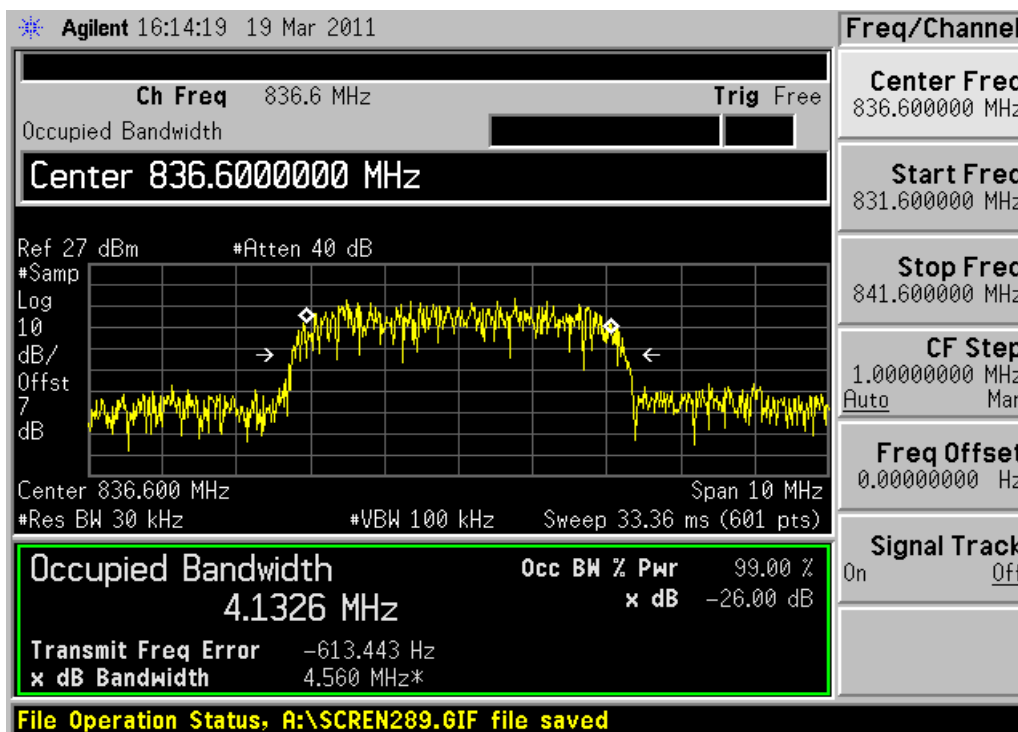

Channel 4183



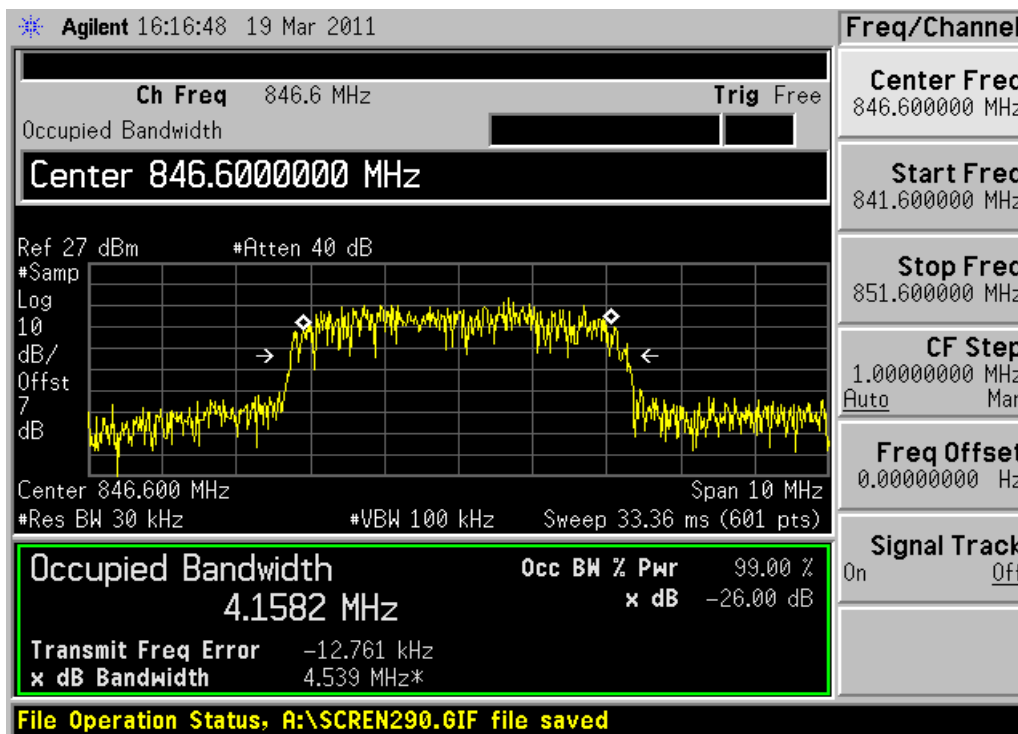


Channel 4233

### 2.2.2.4 Emission Bandwidth-FCC Part 22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

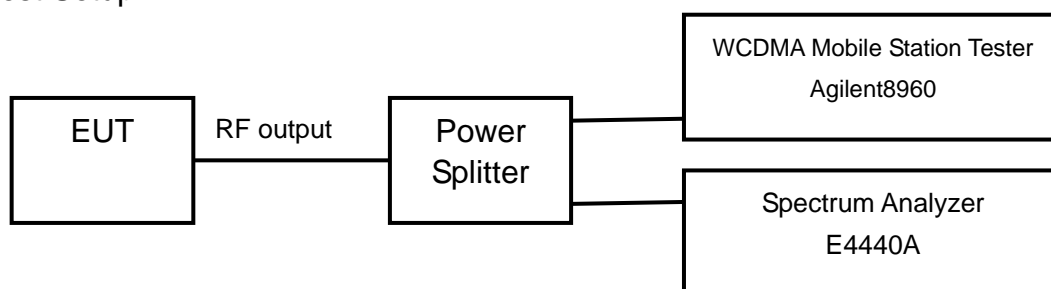


Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band V)


Limits: No specific occupied bandwidth requirements in part 22.917

Test result:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
826.4	4132	4.508
836.6	4183	4.560
846.6	4233	4.539

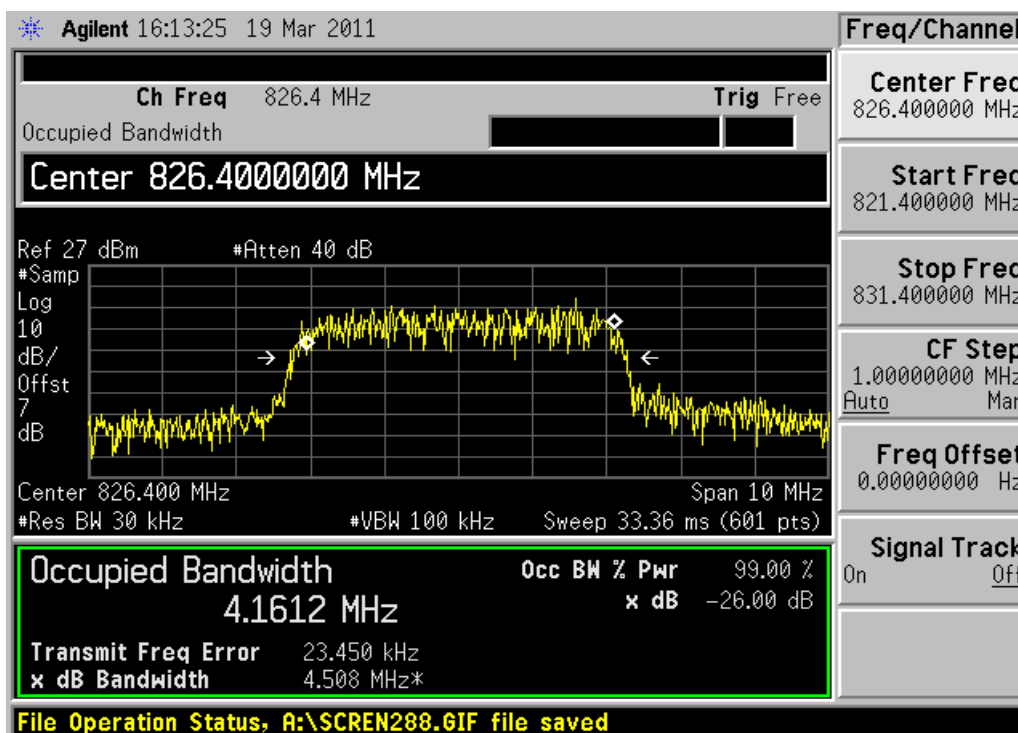

Channel 4132

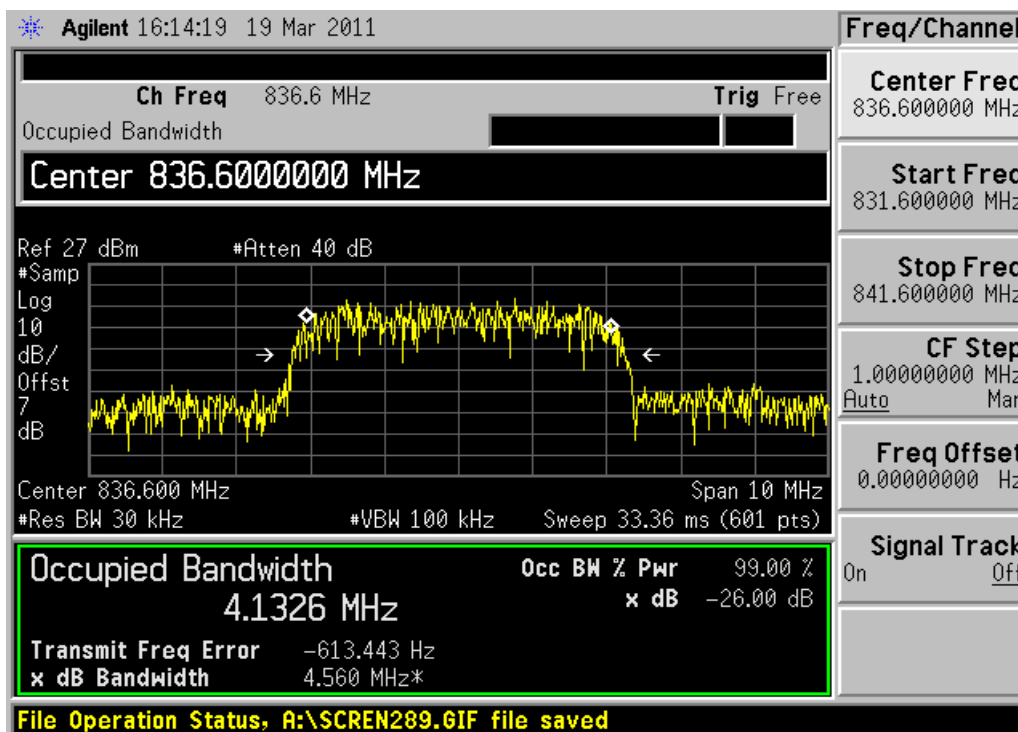

Channel 4183

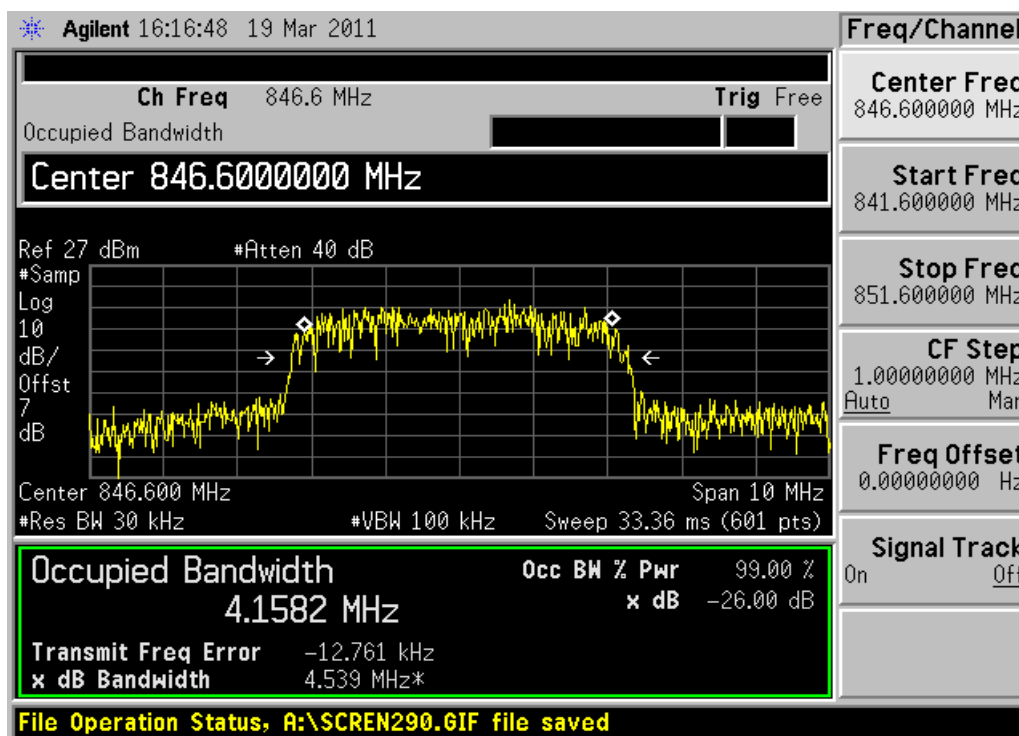


Channel 4233

### 2.2.2.5 Conducted Spurious Emissions-FCC Part 2.1057/Part 22.917

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

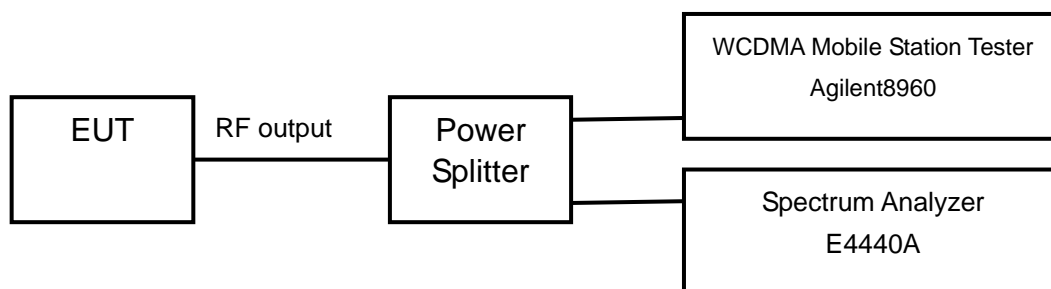

Test procedure:


After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.

The measurement will be conducted at one channel No 4183 (middle channel of WCDMA band V)


Limits	≤ -13dBm
--------	----------

Test result:

Refer to the following figures.

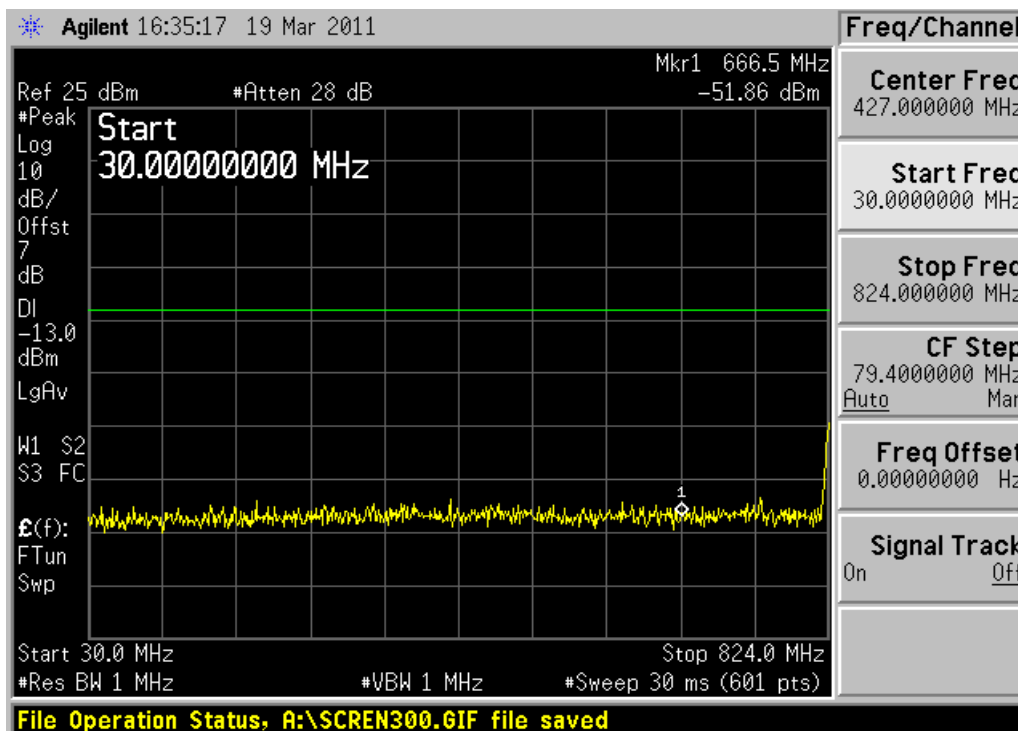


Channel 4183, 30MHz~824MHz

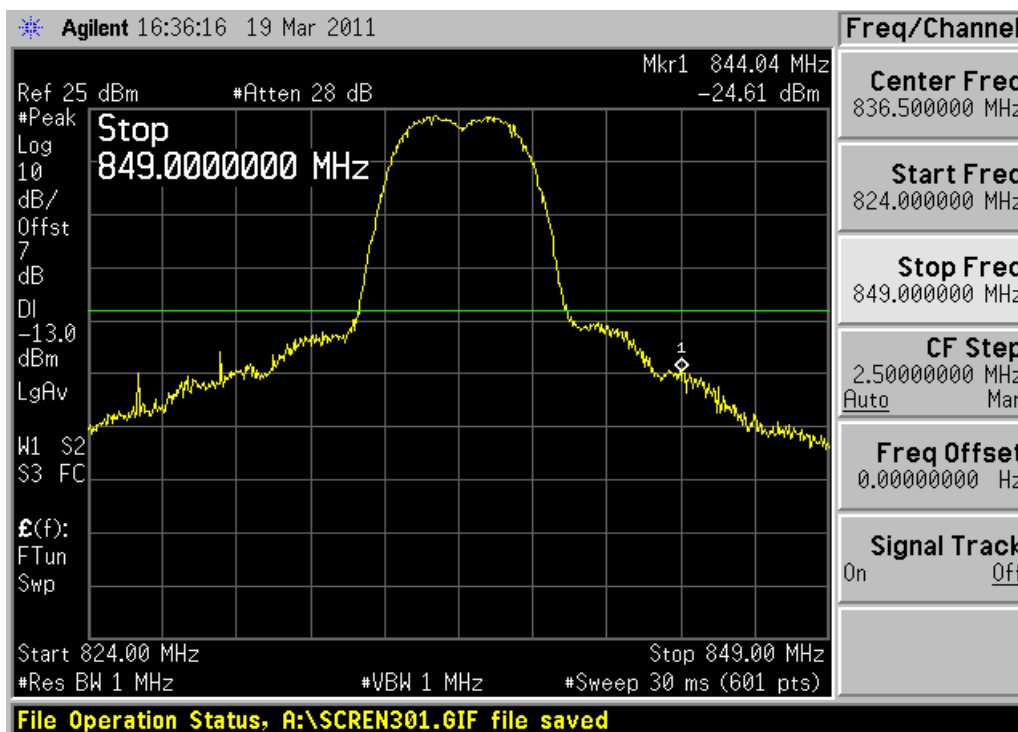

Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

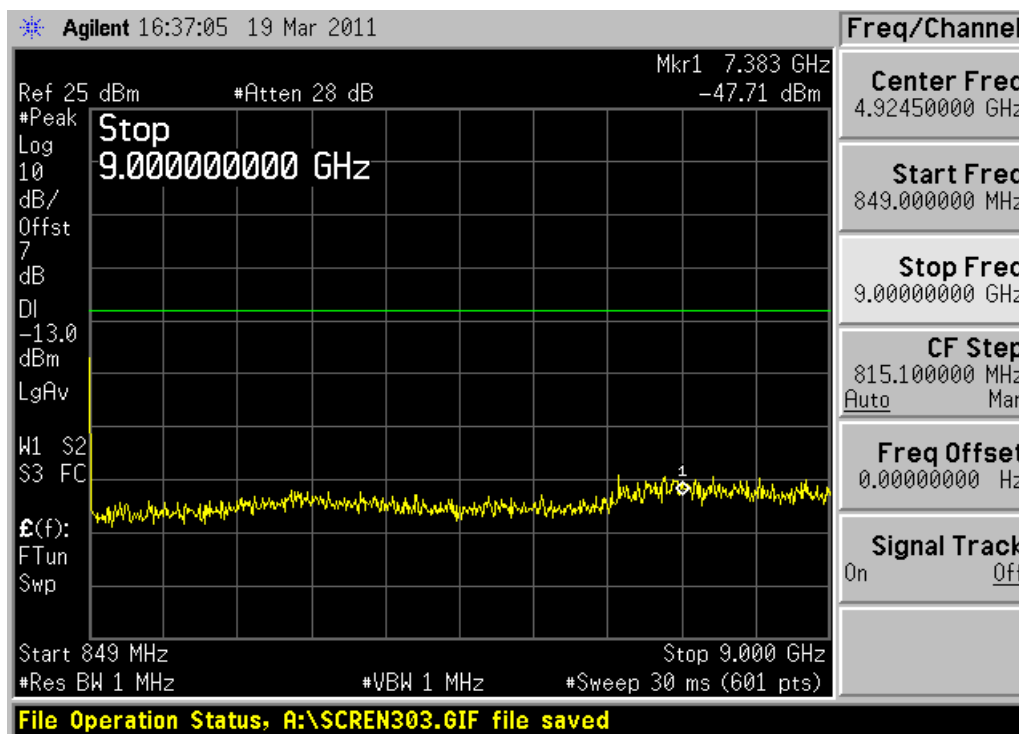


Channel 4183, 849MHz~9GHz

### 2.2.2.6 Band Edges Compliance-FCC Part 22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

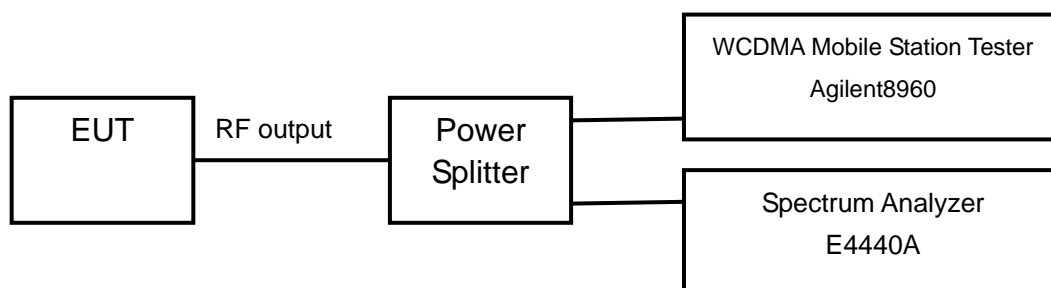

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 30KHz on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233 (Bottom and top channels of WCDMA band V)

Limits	$\leq -13\text{dBm}$
--------	----------------------


Test result:

Refer to the following figures.



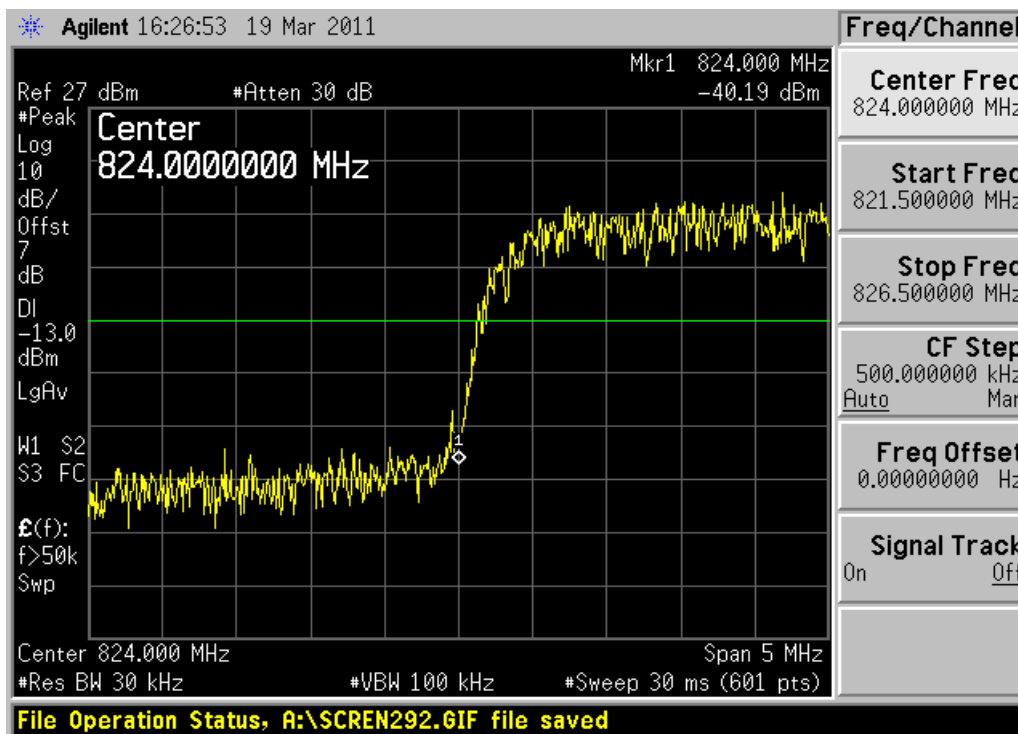

Channel 4132

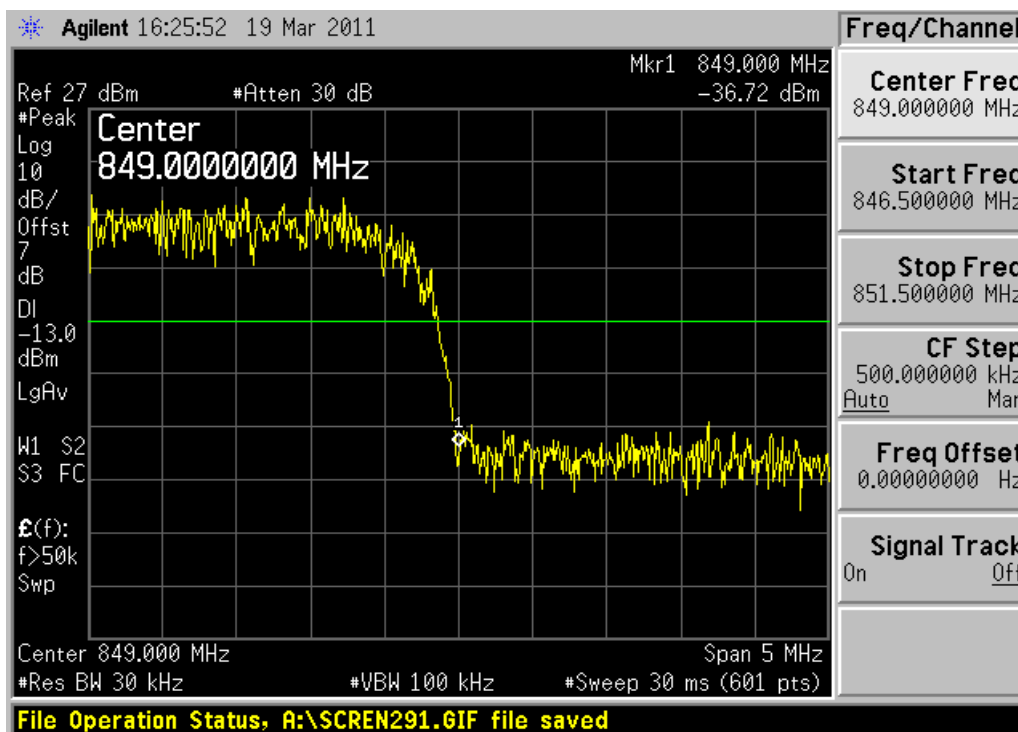


Channel 4233

### 2.2.2.7 Frequency Stability-FCC Part2.1055

Ambient condition:

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test setup:

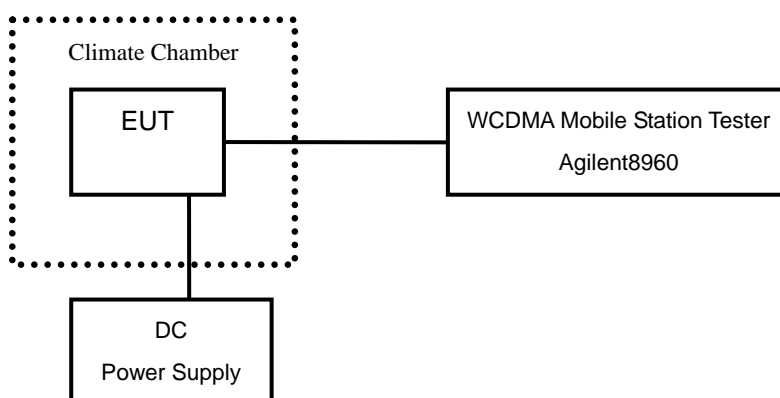

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2 V. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V).

Limits: No specific frequency stability requirements in part 2.1055

Test result:

Temperature(°C)	Test Result (ppm)@3.8V		
	Channel 4132	Channel 4183	Channel 4233
-30	0.002	0.003	0.005
-20	0.000	0.003	0.002
-10	0.004	0.002	0.001
0	0.003	0.001	0.002
+10	0.001	0.002	0.001
+20	0.002	0.002	0.003
+30	0.003	0.001	0.002
+40	0.002	0.003	0.002
+50	0.002	0.001	0.001


Voltage (V)	Test Result (ppm)@20°C		
	Channel 4132	Channel 4183	Channel 4233
3.5	0.002	0.003	0.002
4.2	0.002	0.004	0.003

### 2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/Part 22.917


Ambient condition

Temperature	Relative humidity	Pressure
21°C	44%	101.5kPa

Test Setup:

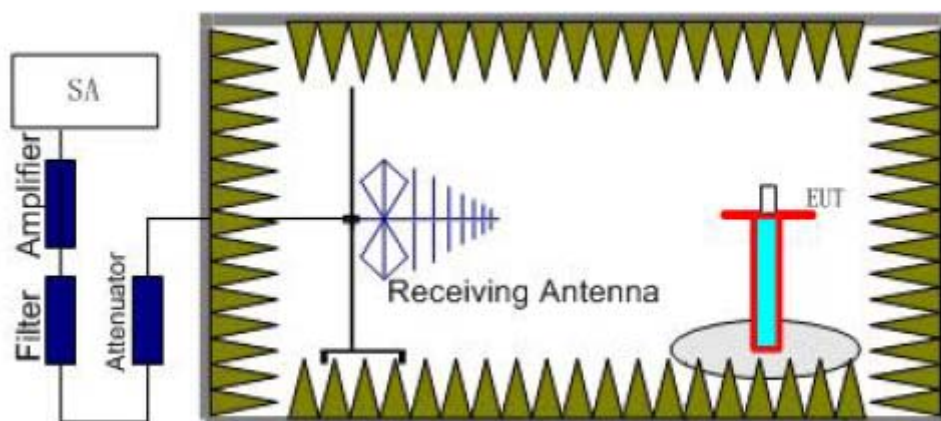

Step 1

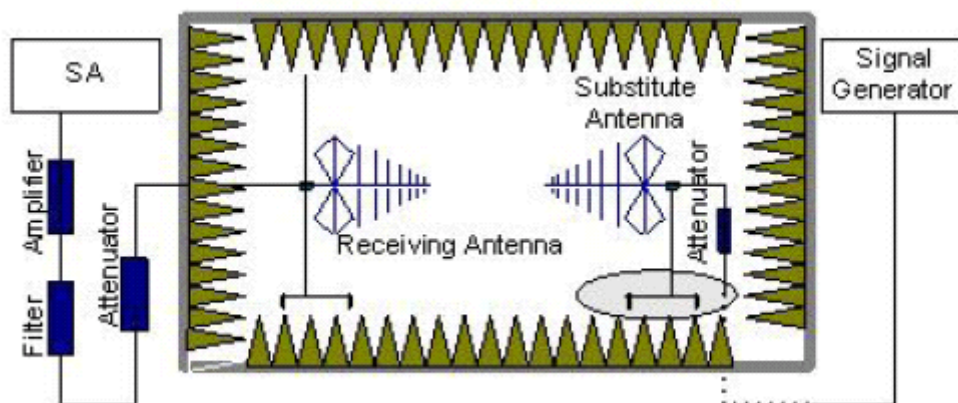

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was

placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{mea}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna ( $P_{ca}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 4132), middle (Channel 4183) and top (Channel 4233) channels of WCDMA band V.

Test result:

#### Channel 4132

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1637.04	-51.5	-4.6	8.3	-55.2	-13	Vertical
1683.57	-52.4	-4.8	8.3	-55.9	-13	Vertical
2537.35	-43.5	-5.7	8.9	-46.7	-13	Vertical
2572.70	-46.0	-5.9	8.9	-49.0	-13	Vertical
8929.59	-44.7	-10.8	12.7	-46.6	-13	Horizontal
9949.99	-36.6	-11.8	13.8	-38.6	-13	Vertical

#### Channel 4183

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1656.59	-51.34	-4.6	8.3	-55.04	-13	Vertical
1669.42	-52.42	-4.8	8.3	-55.92	-13	Vertical
2542.52	-43.98	-5.7	8.9	-47.18	-13	Vertical
2552.85	-45.83	-5.9	8.9	-48.83	-13	Horizontal
8942.79	-44.92	-10.8	12.70	-46.82	-13	Vertical
9962.46	-36.21	-11.8	13.80	-38.21	-13	Vertical

Channel 4233

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1661.16	-51.0	-4.6	8.3	-54.7	-13	Vertical
1677.64	-52.9	-4.8	8.3	-56.4	-13	Horizontal
2531.37	-44.0	-5.7	8.9	-47.2	-13	Vertical
2533.00	-46.1	-5.9	8.9	-49.1	-13	Vertical
8939.96	-44.6	-10.8	12.7	-46.5	-13	Vertical
9967.17	-35.9	-11.8	13.8	-37.9	-13	Vertical

### 2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	GB44050904	19 <sup>th</sup> Aug. 2011
2	PSA E4440A Spectrum Analyzer	Agilent	MY41000183	19 <sup>th</sup> Aug. 2011
3	66309B DC Power Supply	Agilent	MY43000461	19 <sup>th</sup> Aug. 2011
4	1506A Power Splitter	Weinschel	MN154	19 <sup>th</sup> Aug. 2011
5	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	19 <sup>th</sup> Aug. 2011
6	ESI 40 EMI test receiver	R&S	100015	19 <sup>th</sup> Aug. 2011
7	SMR 20 Signal generator	R&S	100086	19 <sup>th</sup> Aug. 2011
8	CMU 200 Radio tester	R&S	100313	19 <sup>th</sup> Aug. 2011
9	12.65m*8.03m*7.50m Fully-Anechoic Chamber	FRANKONIA	-----	19 <sup>th</sup> Aug. 2011
10	HL562 Ultra log test antenna	R&S	100016	19 <sup>th</sup> Aug. 2011
11	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	-----	19 <sup>th</sup> Aug. 2011
12	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	19 <sup>th</sup> Aug. 2011
13	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	19 <sup>th</sup> Aug. 2011
14	PS2000 Turn Table	FRANKONIA	-----	19 <sup>th</sup> Aug. 2011
15	MA260 Antenna Master	FRANKONIA	-----	19 <sup>th</sup> Aug. 2011
16	SH-241 Climatic Chamber	ESPEC	92000389	19 <sup>th</sup> Aug. 2011
17	ES-K1 EMI test software	R&S	-----	19 <sup>th</sup> Aug. 2011
18	HL562 Receive antenna	R&S	100167	19 <sup>th</sup> Aug. 2011



## Appendix

### Appendix1 Test Setup