



TEST REPORT

Report No.: SRTC2012-H024-E0030

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: ONE TOUCH 902S

Applicant: TCT Mobile Limited

Manufacturer: TCT Mobile Limited

Specification: FCC Part 24E, Part 22H, Part 2

(October 1, 2009 edition)

IC RSS-132 (Issue 2, September 2005)

IC RSS-133 (Issue 5, February 2009)

IC RSS-Gen (Issue 3, December 2010)

FCC ID: RAD244

IC: 9238A-0010

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information	7
2.1 Summary of the test results.....	7
2.2 Test result.....	8
2.2.1 GSM850	8
2.2.1.1 RF Power Output-FCC Part2.1046/IC RSS-132§4.4	8
2.2.1.2 Effective Radiated Power-FCC Part22.913(a)/IC RSS-132§4.4	9
2.2.1.3 Occupied Bandwidth-FCC Part2.1049/IC RSS-Gen§4.6.1	12
2.2.1.4 Conducted Spurious Emissions-FCC Part2.1051/22.917(a)/IC RSS-132§4.5.....	16
2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917(a)/IC RSS-132§4.5.....	20
2.2.1.6 Frequency Stability-FCC Part2.1055/22.355/IC RSS-132§4.3	23
2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)/IC RSS-132§4.5.....	25
2.2.1.8 Receiver Spurious Emissions-IC RSS-132§4.6	30
2.2.2 PCS1900.....	32
2.2.2.1 RF Power Output-FCC Part2.1046/IC RSS-133§6.4	32
2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c)/IC RSS-133§6.4	33
2.2.2.3 Occupied Bandwidth-FCC Part2.1049/IC RSS-Gen§4.6.1.....	36
2.2.2.4 Conducted Spurious Emissions-FCC Part2.1051/24.238(a)/IC RSS-133§6.5.....	40
2.2.2.5 Band Edges Compliance-FCC Part2.1051/24.238(a)/IC RSS-133§6.5	44
2.2.2.6 Frequency Stability-FCC Part2.1055/24.235/IC RSS-133§6.3	47
2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238(a)/IC RSS-133§6.5.....	49
2.2.2.8 Receiver Spurious Emissions-IC RSS-133§6.6	54
2.3 List of test equipments	56
Appendix	57

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Grantee Code: RAD
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@jrdcom.com

1.4 Manufacturer's details

Company: TCT Mobile Limited
Address: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area
City: Shanghai
Country or Region: P.R.China
Contacted person: Gong Zhizhou
Tel: +86-21-61460890
Fax: +86-21-61460602
Email: zhizhou.gong@jrdcom.com

1.5 Application details

Date of reception of test sample: 6th Mar 2012

Date of test: 9th Mar 2012 to 29th April 2012

1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (October 1, 2009 edition)

IC RSS-132 (Issue 2, September 2005)

IC RSS-133 (Issue 5, February 2009)

IC RSS-Gen (Issue 3, December 2010)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	RAD244
IC	9238A-0010
Frequency range	GSM850: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz
Rated output power	GSM850:33.0dBm PCS1900:30.0dBm
Modulation type	GSM/GPRS:GMSK EDGE: GMSK(Uplink direction) 8PSK(Downlink direction)
Emission Designator	300KGXW
Duplex mode	FDD
Duplex spacing	GSM850:45MHz PCS1900:80MHz
Antenna type	Fixed Internal
Power Supply	Battery or charger
Rated Power Supply Voltage	3.7V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V
HW Version	PIO01
SW Version	SW134

1.7.2 EUT details

Product Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	ONE TOUCH 902S	013023000020161

1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3002AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3001AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	HUIZHOU BYD ELECTRONIC CO., LTD.
Model Number	CBA3001AG0C2
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Charger
Manufacturer	Ten Pao International Ltd.
Model Number	CBA3000AG0C1
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	SHENZHEN BAK BATTERY CO., LTD
Model Number	CAB31L0000C2
Capacity	1000mAh
Rated Voltage	3.7V d.c.

Equipment	Data Cable
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CDA3122002C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd
Model Number	CDA3122002C2

Equipment	Data Cable
Manufacturer	Shen Zhen Ju Wei Electronic Co., LTD
Model Number	CDA3122005C1

Equipment	Data Cable
Manufacturer	Huizhou Shenghua Industry Co., Ltd
Model Number	CDA3122005C2




Note: As the information described above, there are four different models of charger manufactured by two different companies, and four different models of data cable manufactured by two different companies.

The relevant tests have been performed in order to verify in which combination case (EUT exercised by only one model of charger and one model of data cable) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the charger CBA3000AG0C1 and the data cable CDA3122005C2.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC and IC reference	Verdict
1	RF Power Output	FCC Part2.1046 IC RSS-132 § 4.4 IC RSS-133 § 6.4	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	FCC Part22.913(a)/24.232(c) IC RSS-132 § 4.4 IC RSS-133 § 6.4	Pass
3	Occupied Bandwidth	FCC Part2.1049 IC RSS-Gen § 4.6.1	Pass
4	Spurious Emissions at antenna terminal	FCC Part2.1051/22.917(a)/24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Pass
5	Band Edges Compliance	FCC Part2.1051/22.917(a)/24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Pass
6	Frequency Stability	FCC Part2.1055/22.355/24.235 IC RSS-132 § 4.3 IC RSS-133 § 6.3	Pass
7	Radiated Spurious Emissions	FCC Part2.1053/22.917(a)/24.238(a) IC RSS-132 § 4.5 IC RSS-133 § 6.5	Pass
8	Receiver Spurious Emissions	IC RSS-132 § 4.6 IC RSS-133 § 6.6	Pass

<p>This Test Report Is Issued by: Mr. Song Qizhu Director of the test lab</p> 	<p>Checked by: Mr. Wang Junfeng Deputy director of the test lab</p> 
<p>Tested by: Mr. Li Boyu Test engineer</p> 	<p>Issued date: 2012.06.29</p>

2.2 Test result


2.2.1 GSM850

2.2.1.1 RF Power Output-FCC Part2.1046/IC RSS-132 § 4.4

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits	$\leq 33\text{dBm}$
--------	---------------------

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.5
836.4	189	32.4
848.8	251	32.4

EDGE (GMSK, 1Slot) MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.8
836.4	189	32.7
848.8	251	32.6

2.2.1.2 Effective Radiated Power-FCC Part22.913(a)/IC RSS-132 § 4.4


Ambient condition:

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test setup:

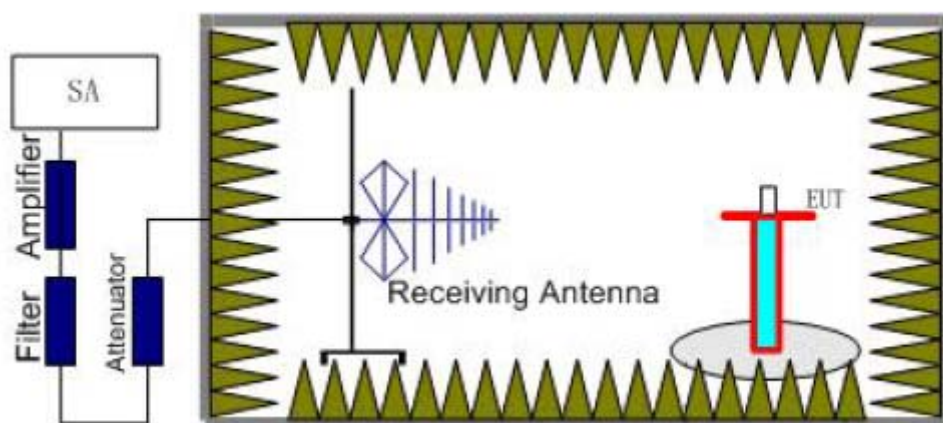

Step 1

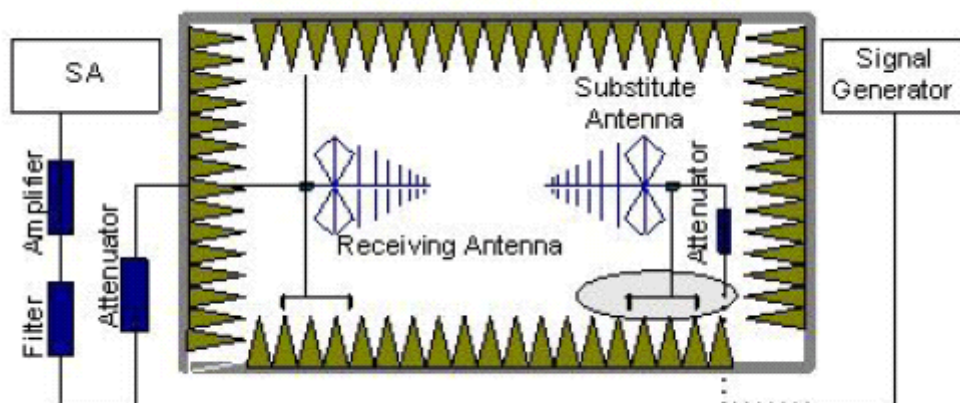

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna

most 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).

The measurement will be done at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits:

Operation Mode	Power Step	E.R.P. (dBm)
GSM	5	≤38.45
GPRS	3	≤38.45
EDGE	6	≤38.45

Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	5	30.24	-3.8	8.6	2.15	27.59	Vertical
836.4	5	31.30	-3.8	8.6	2.15	28.65	Vertical
848.8	5	30.79	-3.8	8.6	2.15	28.14	Vertical

EDGE (GMSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak ERP (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Correction (dB)	Pmea (dBm)	Polarization
824.2	6	30.58	-3.8	8.6	2.15	27.93	Vertical
836.4	6	30.94	-3.8	8.6	2.15	28.29	Vertical
848.8	6	30.12	-3.8	8.6	2.15	27.47	Vertical

Frequency: 836.4MHz


Peak ERP(dBm) = Pmea(28.65dBm)+Pca(-3.8dB)+Ga(8.6dB)-2.15dB = 31.30dBm

2.2.1.3 Occupied Bandwidth-FCC Part2.1049/IC RSS-Gen § 4.6.1

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

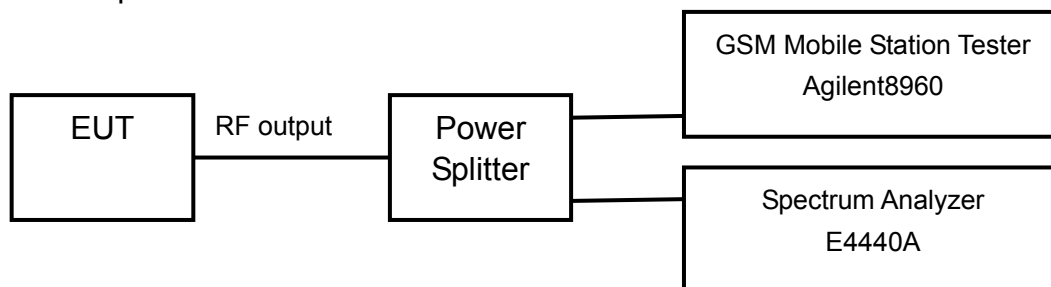

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band)

Limits: No specific occupied bandwidth requirements in FCC part 2.1049 and IC RSS-Gen § 4.6.1

Test result:


GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	247.01
836.4	189	245.30
848.8	251	248.43


EDGE(GMSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	244.60
836.4	189	245.85
848.8	251	245.98


GSM/GPRS MODE:

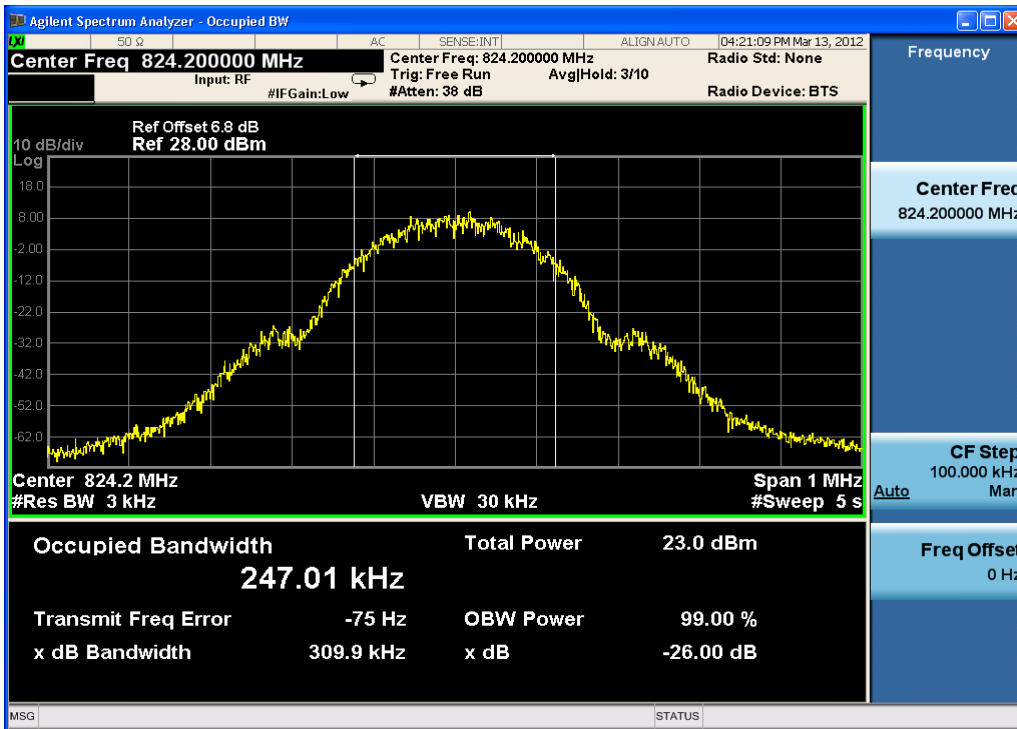

Channel 128

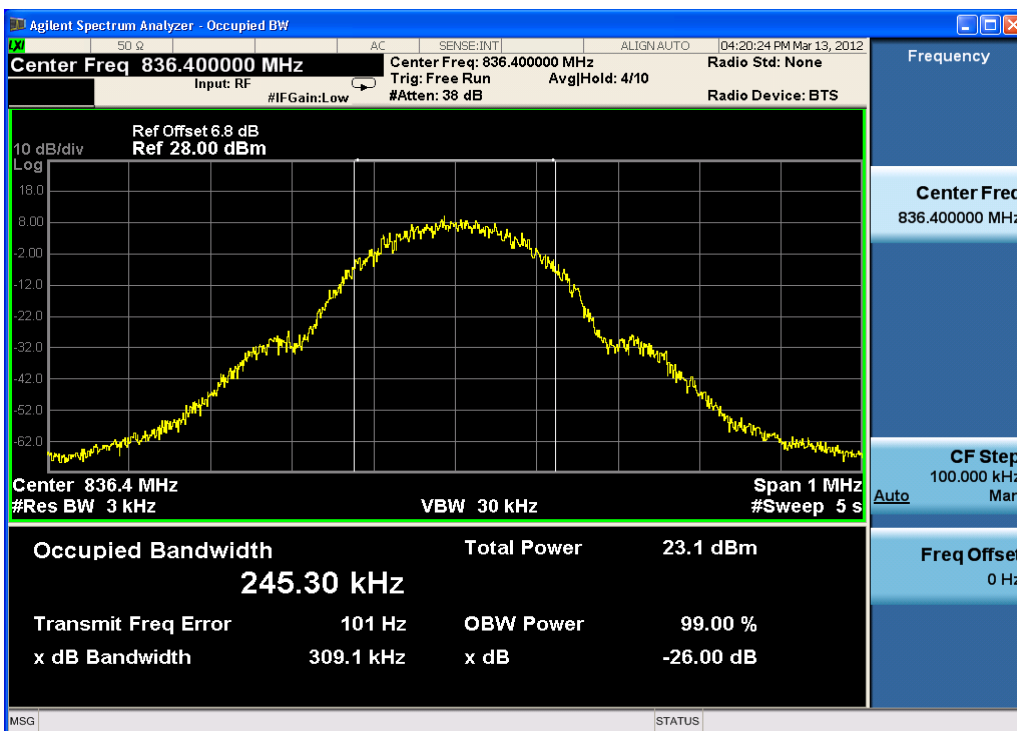


Channel 189

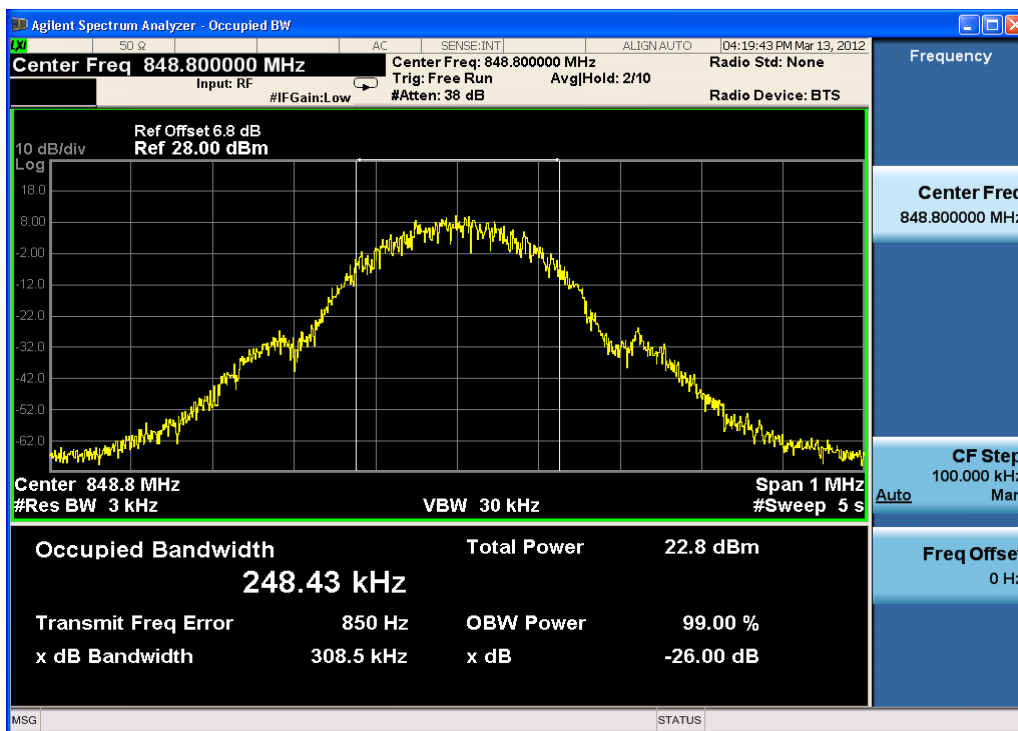


Channel 251


EDGE(GMSK) MODE:

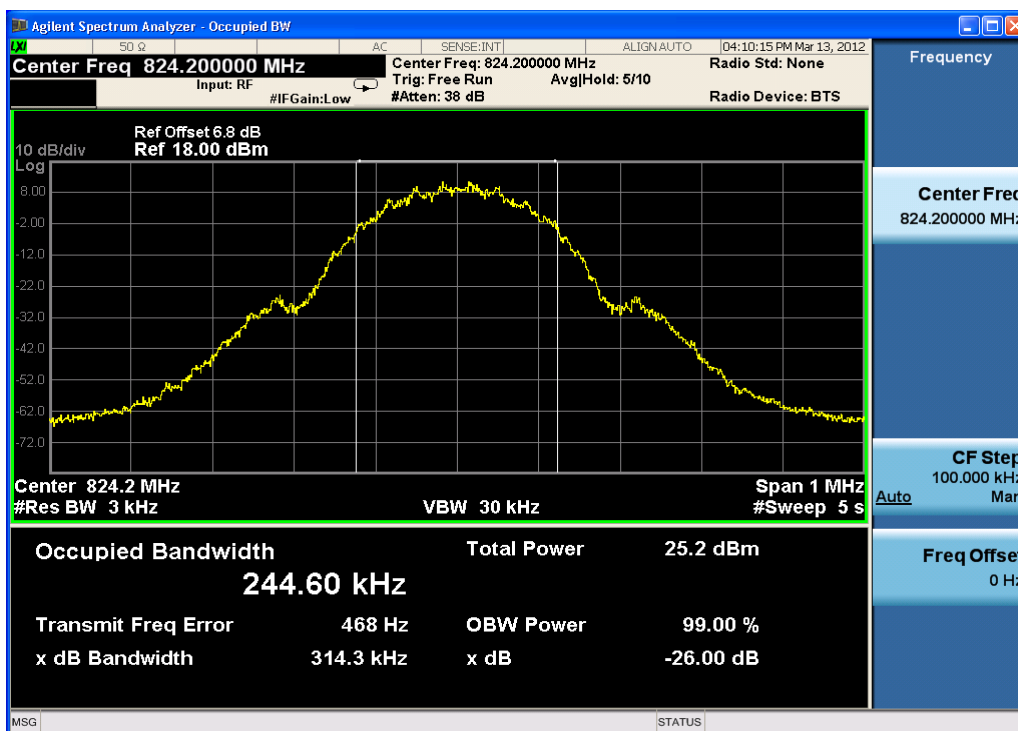

Channel 128

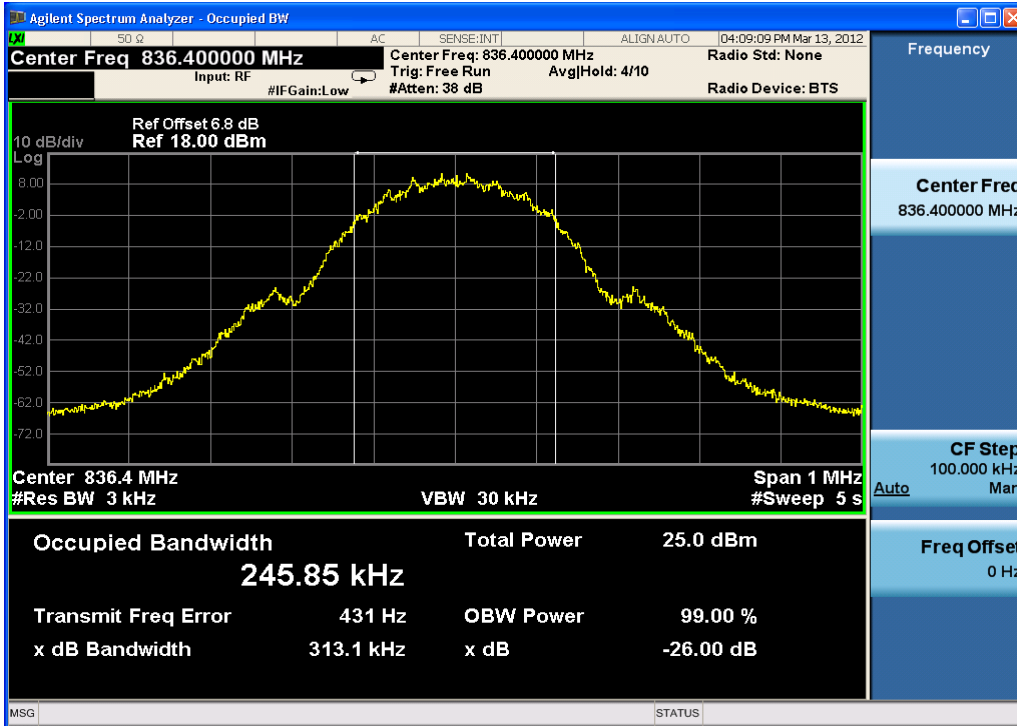

Channel 189

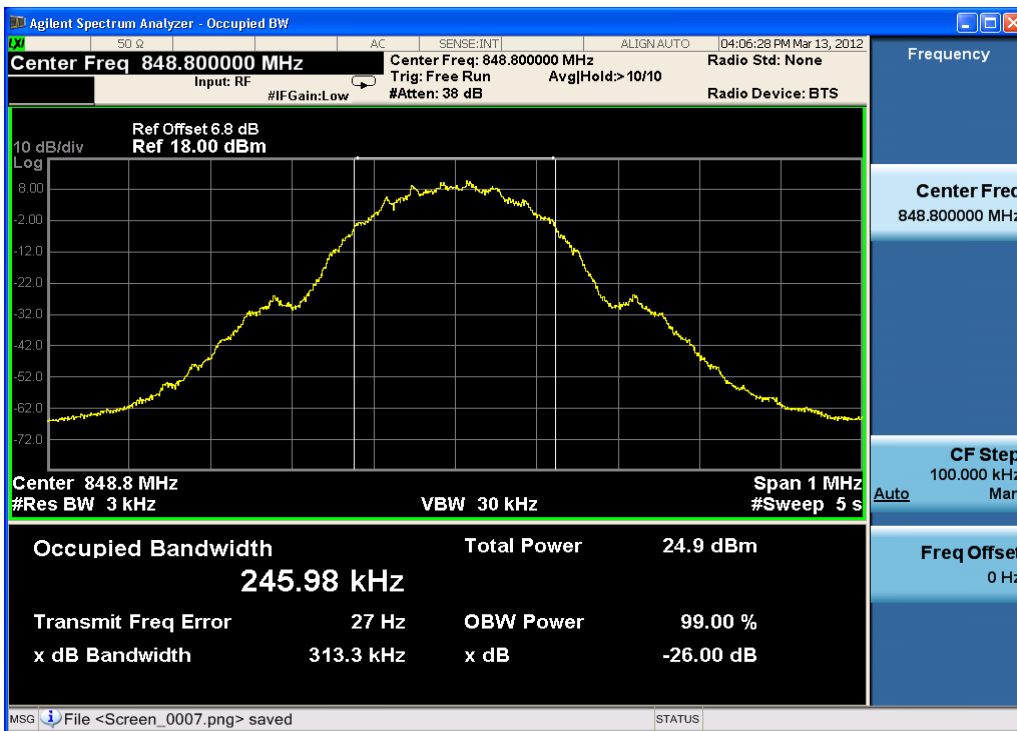


Channel 251

2.2.1.4 Conducted Spurious Emissions-FCC Part2.1051/22.917(a)IC RSS-132 § 4.5

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

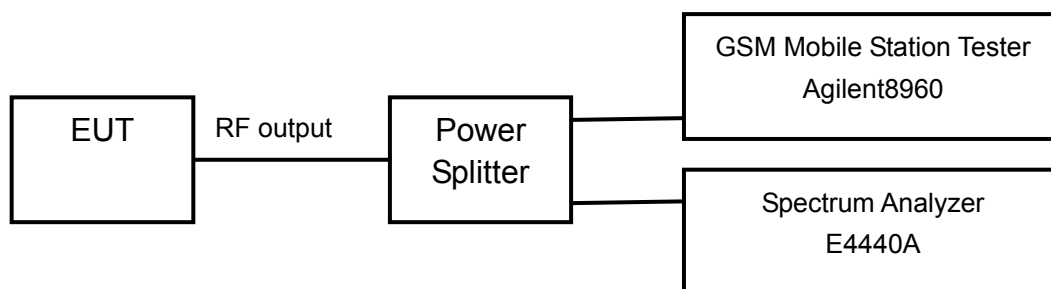

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No189 (middle channel of GSM850 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

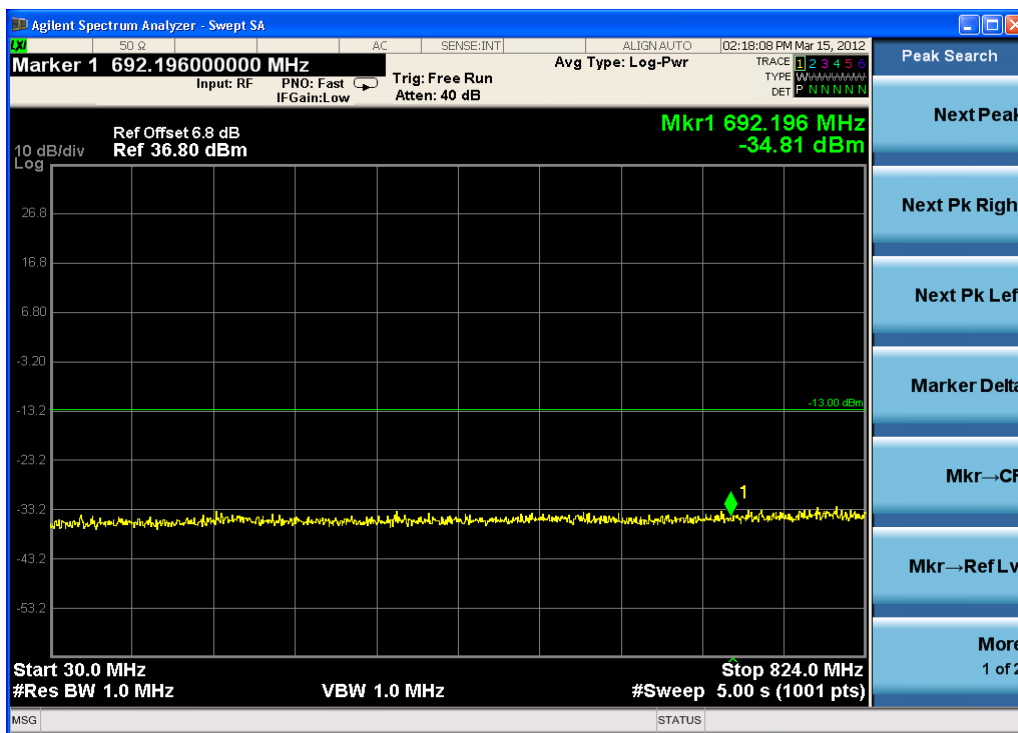


Channel 189, 30MHz~824MHz

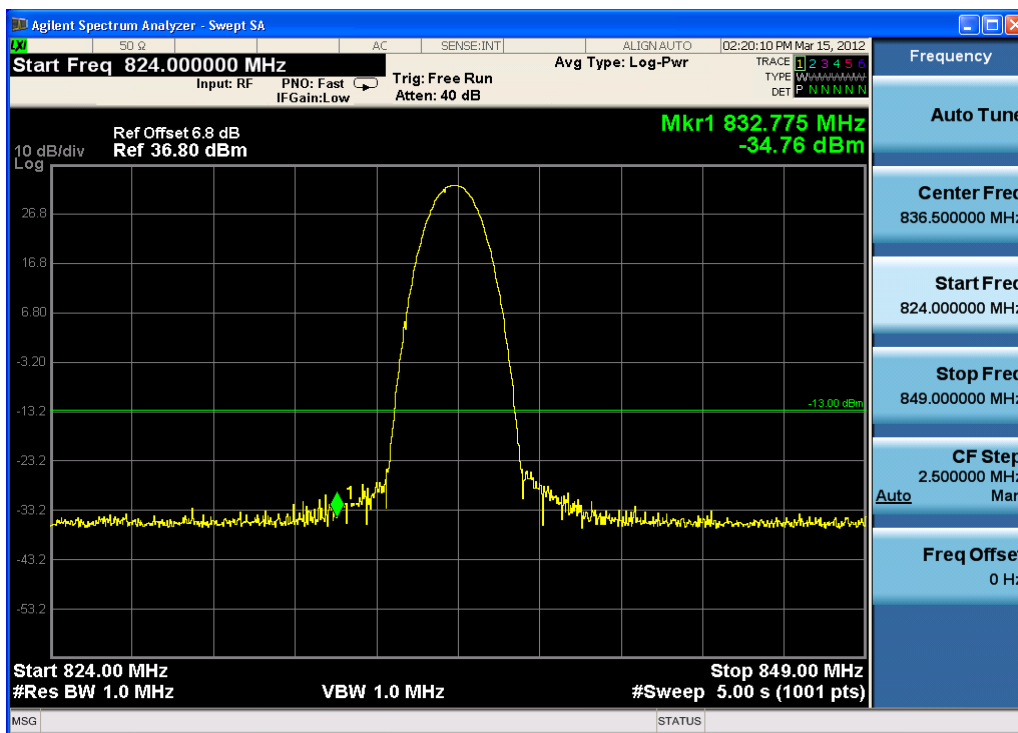


Channel 189, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

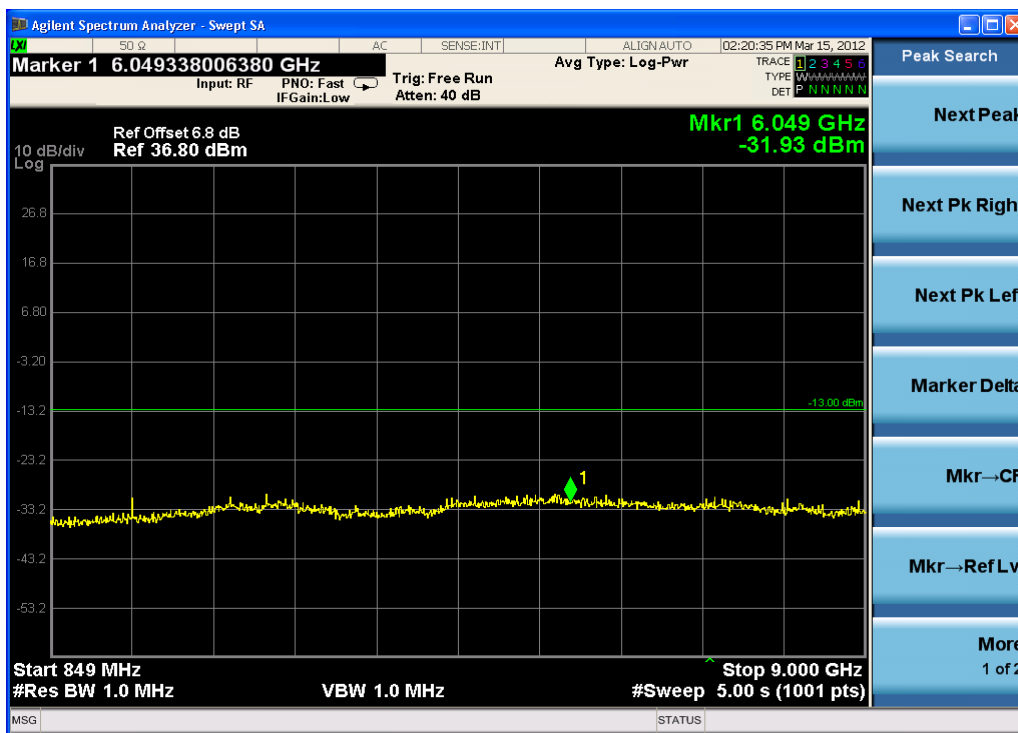


Channel 189, 849MHz~9GHz

EDGE(GMSK) MODE:

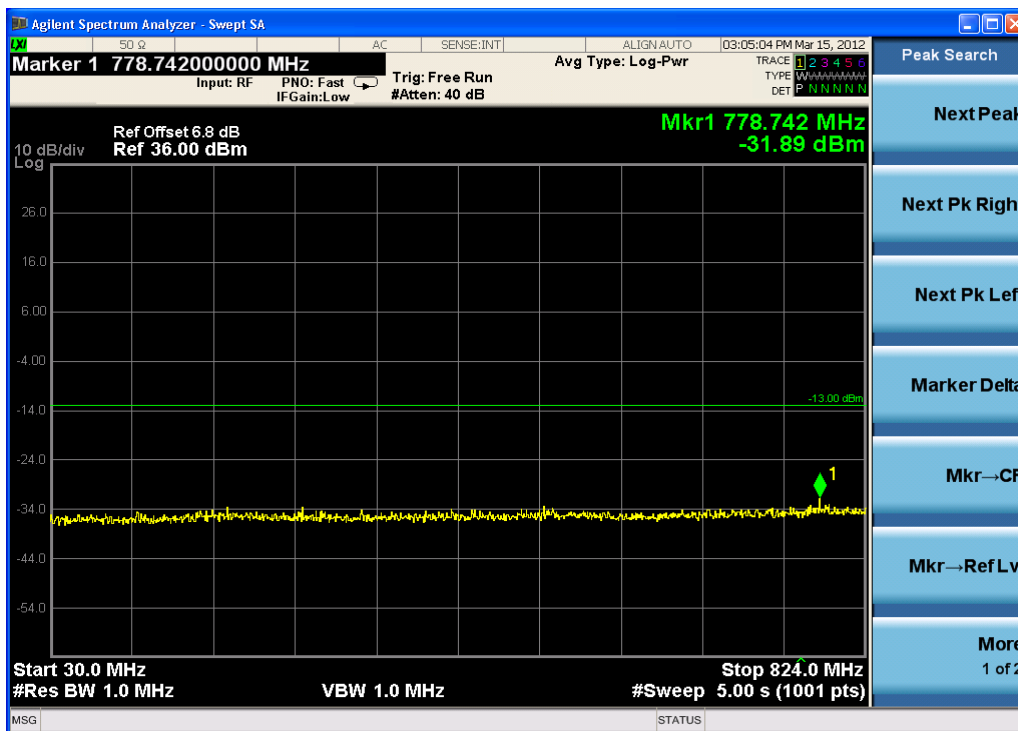


Channel 189, 30MHz~824MHz

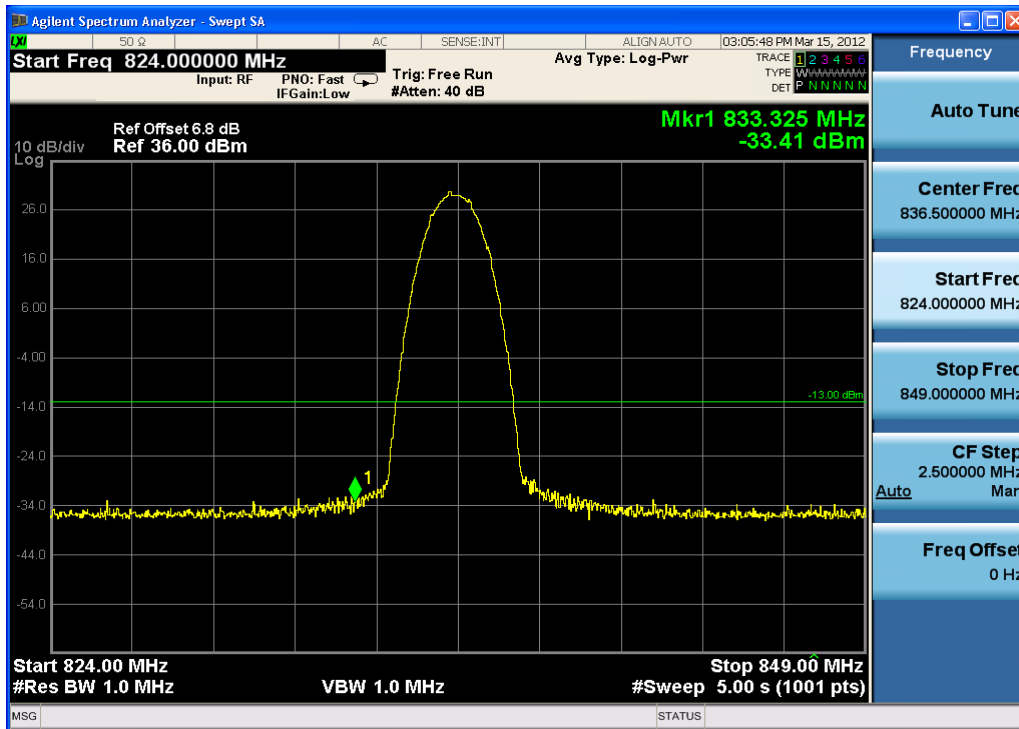

Channel 189, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

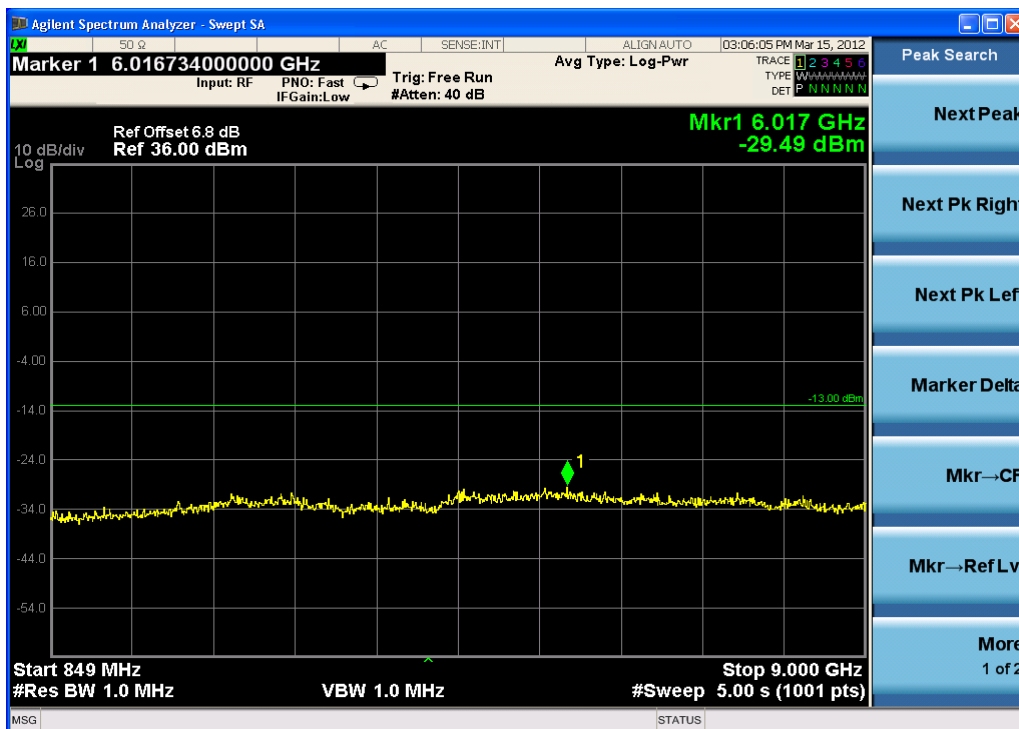


Channel 189, 849MHz~9GHz

2.2.1.5 Band Edges Compliance-FCC Part2.1051/22.917(a)/IC RSS-132 § 4.5

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

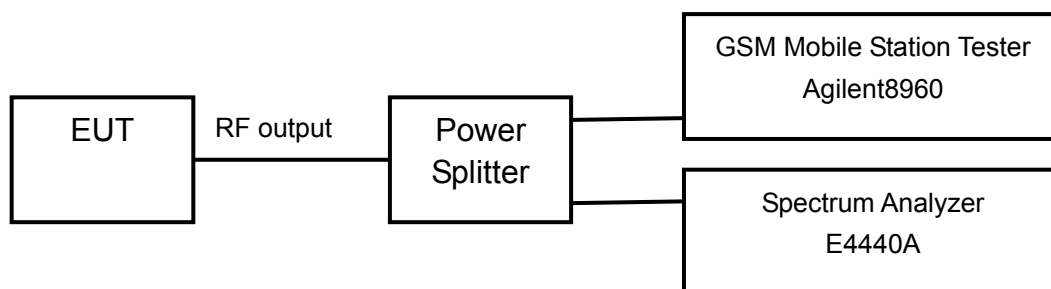

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No128 and No251 (Bottom and top channels of GSM850 band)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

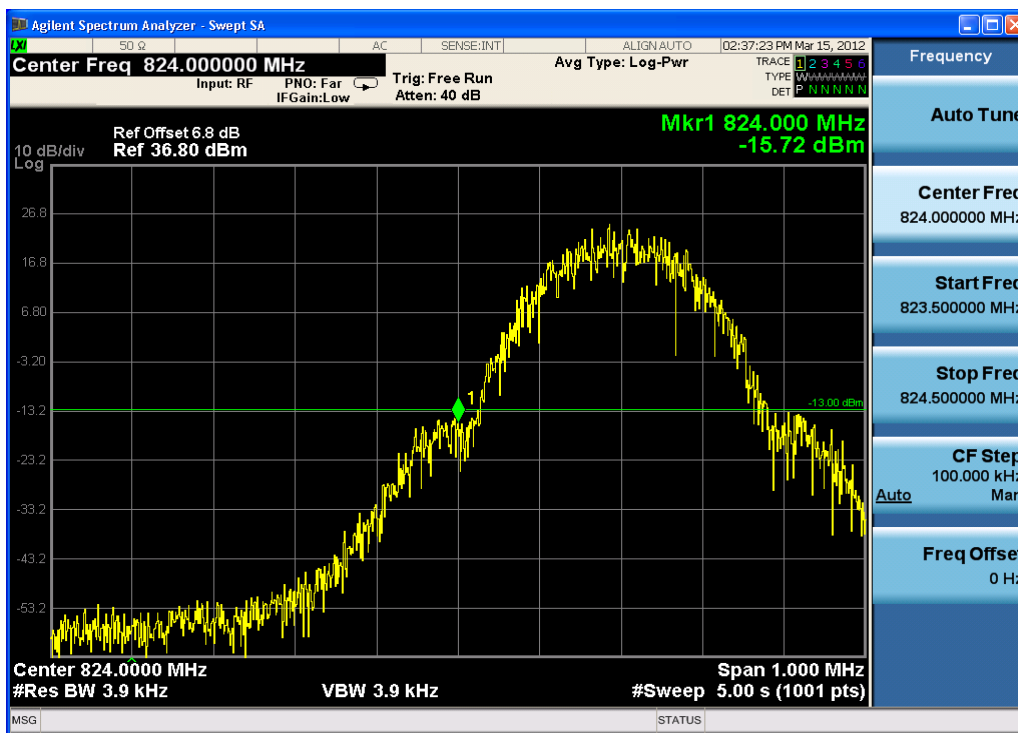


Channel 128

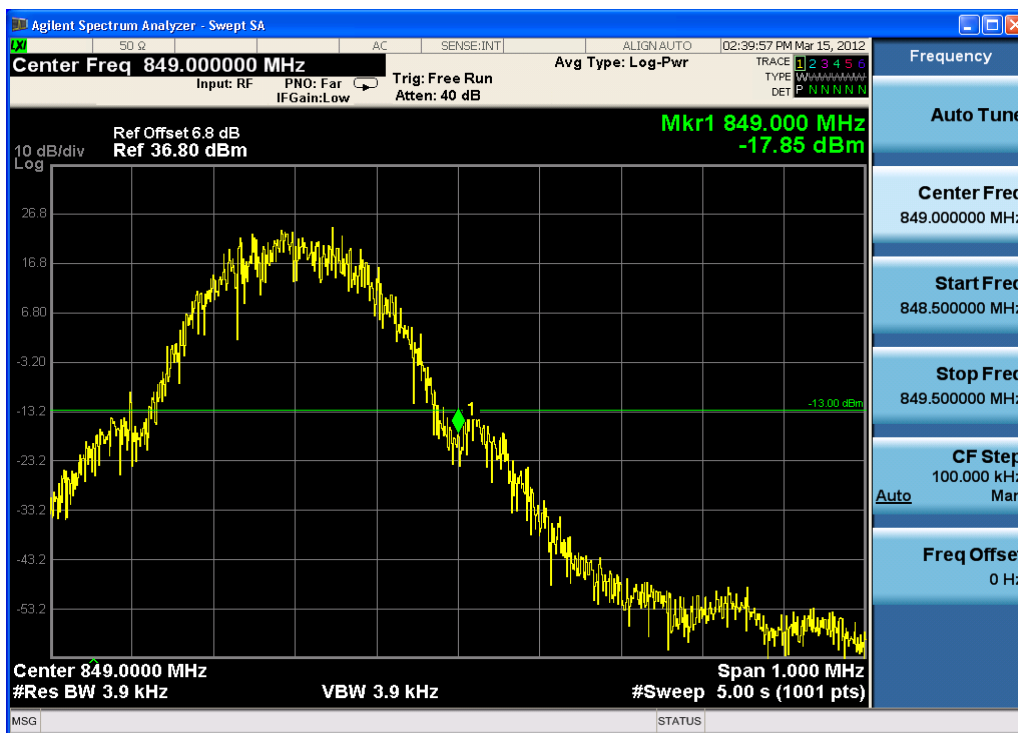


Channel 251

EDGE(GMSK) MODE:

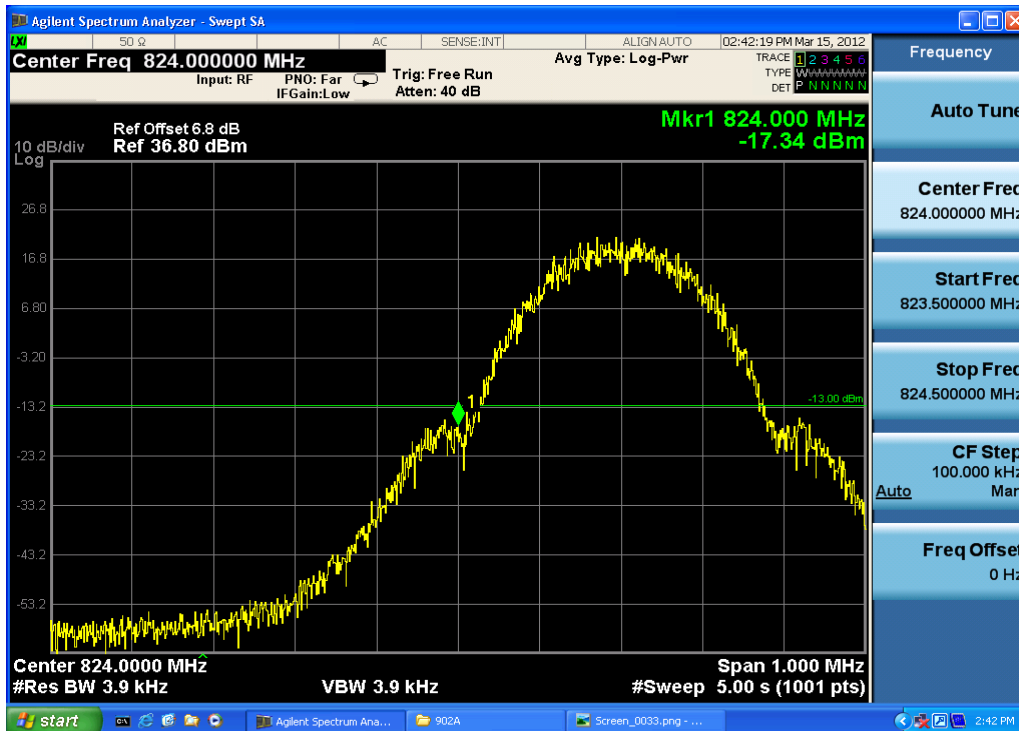

Channel 128

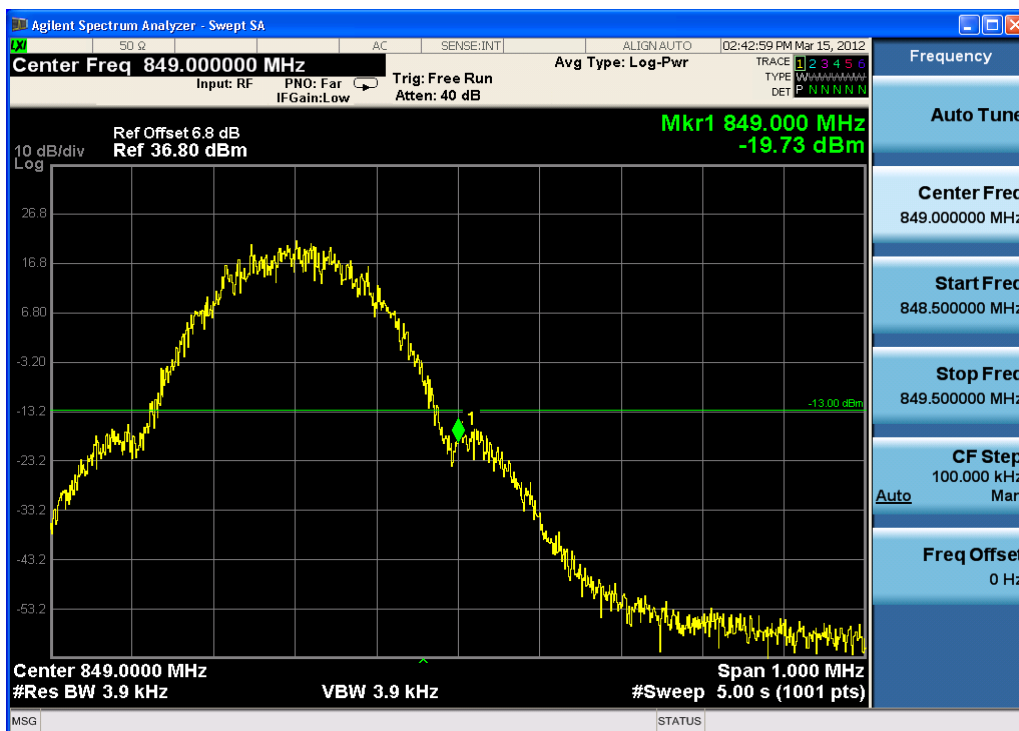


Channel 251

2.2.1.6 Frequency Stability-FCC Part2.1055/22.355/IC RSS-132 § 4.3

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

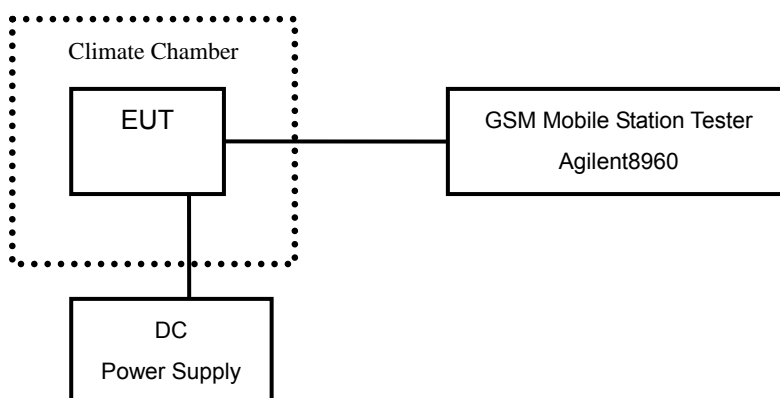

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2 V. The measurement will be conducted at three channels No128, No189 and No251 (Bottom, middle and top channels of GSM850 band).

Limits:

No specific frequency stability requirements in FCC part 2.1055 and part 22.355. According to the standard of IC RSS-132 § 4.3, the carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

Test result:

GSM/GPRS MODE:

Temperature(° C)	Test Result (ppm)@3.7V		
	Channel 128	Channel 189	Channel 251
-30	0.006	0.003	0.011
-20	0.007	0.006	0.010
-10	0.008	0.005	0.004
0	0.011	0.004	0.007
+10	0.001	0.007	0.010
+20	0.003	0.011	0.007
+30	0.005	0.010	0.011
+40	0.007	0.012	0.013
+50	0.011	0.010	0.009

Voltage (V)	Test Result (ppm)@20°C		
	Channel 128	Channel 189	Channel 251
3.5	0.006	0.007	0.011
4.2	0.004	0.006	0.009

EDGE(GMSK) MODE:

Temperature(° C)	Test Result (ppm)@3.7V		
	Channel 128	Channel 189	Channel 251
-30	0.011	0.009	0.011
-20	0.009	0.006	0.011
-10	0.006	0.012	0.003
0	0.004	0.007	0.012
+10	0.005	0.013	0.003
+20	0.003	0.007	0.005
+30	0.006	0.008	0.003
+40	0.007	0.012	0.005
+50	0.006	0.010	0.009


Voltage (V)	Test Result (ppm)@20°C		
	Channel 128	Channel 189	Channel 251
3.5	0.008	0.012	0.003
4.2	0.007	0.011	0.006

2.2.1.7 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)/IC RSS-132 § 4.5


Ambient condition

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test Setup:

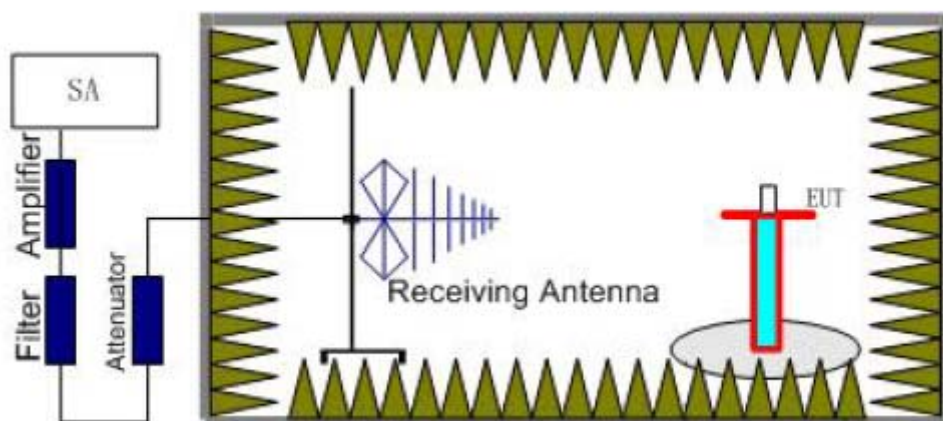

Step 1

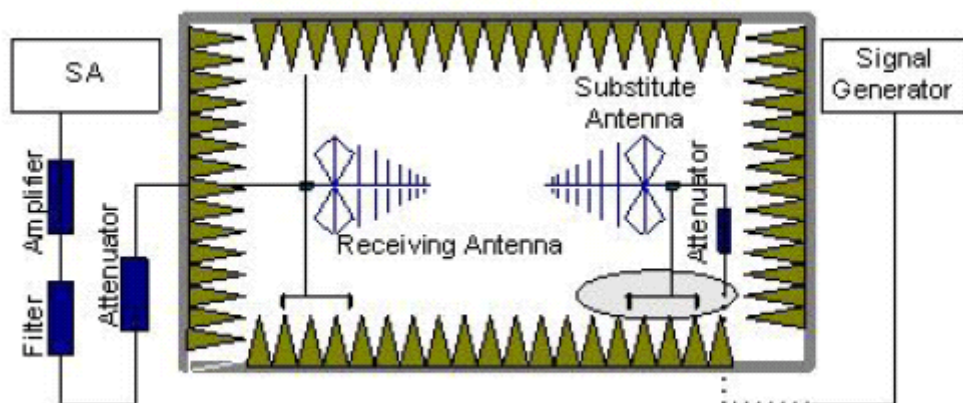

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was

placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 128), middle (Channel 189) and top (Channel 251) channels of the GSM 850 band.

Test result

GSM/GPRS MODE Channel 128:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.55	-37.46	-4.6	8.6	-37.66	-13	Vertical
2774.74	-41.19	-5.8	8.9	-40.49	-13	Vertical
2828.91	-43.69	-5.8	8.9	-42.99	-13	Horizontal
6665.82	-43.50	-8.6	11.2	-46.10	-13	Vertical
6995.75	-43.40	-8.6	12.7	-47.50	-13	Vertical
6977.19	-44.88	-8.6	12.7	-48.98	-13	Horizontal

EDGE(GMSK) MODE Channel 128:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.59	-37.65	-4.6	8.6	-37.85	-13	Vertical
2775.83	-42.54	-5.8	8.9	-41.84	-13	Vertical
2816.34	-41.11	-5.8	8.9	-40.41	-13	Vertical
6682.57	-44.33	-8.6	11.2	-46.93	-13	Vertical
6993.61	-42.80	-8.6	12.7	-46.90	-13	Horizontal
6995.45	-43.50	-8.6	12.7	-47.60	-13	Horizontal

GSM/GPRS MODE Channel 189:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.67	-40.89	-4.6	8.6	-41.09	-13	Vertical
2550.77	-50.81	-5.9	9.3	-50.41	-13	Vertical
2556.74	-43.76	-5.7	8.6	-42.86	-13	Horizontal
2774.34	-36.76	-5.8	8.9	-39.86	-13	Vertical
6995.52	-42.81	-8.6	12.7	-46.91	-13	Vertical
7073.48	-45.07	-10.8	12.0	-46.27	-13	Vertical

EDGE(GMSK) MODE Channel 189:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.35	-44.72	-4.6	8.6	-44.92	-13	Vertical
1760.67	-48.75	-4.8	8.9	-49.05	-13	Horizontal
2533.82	-50.04	-5.9	9.3	-49.64	-13	Vertical
2535.79	-49.16	-5.9	9.3	-52.56	-13	Vertical
6977.37	-43.94	-8.6	12.7	-48.04	-13	Horizontal
7063.71	-45.35	-10.8	12.0	-46.55	-13	Vertical

GSM/GPRS MODE Channel 251:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.75	-38.96	-4.6	8.6	-39.16	-13	Vertical
2552.34	-43.72	-5.7	8.6	-42.82	-13	Horizontal
2556.42	-43.41	-5.7	8.6	-42.51	-13	Vertical
2763.24	-37.03	-5.8	8.9	-40.13	-13	Vertical
2775.68	-35.85	-5.8	8.9	-38.95	-13	Vertical
6993.36	-43.81	-8.6	12.7	-47.91	-13	Horizontal

EDGE(GMSK) MODE Channel 251:


Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.72	-36.66	-4.6	8.6	-36.86	-13	Vertical
1697.41	-43.50	-4.7	8.6	-43.60	-13	Vertical
1772.58	-47.59	-4.9	8.9	-47.79	-13	Vertical
2515.24	-44.35	-5.7	9.3	-47.95	-13	Vertical
2495.31	-43.31	-5.9	9.3	-46.71	-13	Horizontal
7070.42	-46.81	-10.8	12.0	-48.01	-13	Vertical

2.2.1.8 Receiver Spurious Emissions-IC RSS-132 § 4.6

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	54%	101.5kPa

Test Setup:

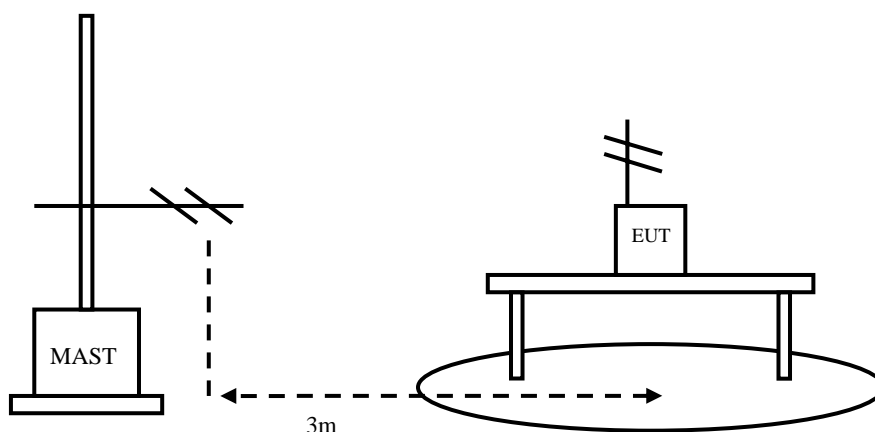

Test Procedure:

The EUT should be placed on a non-metallic table 80cm above the ground plane. The receive antennas shall be moved from 1 to 4 meters. The distance between EUT and receive antenna should be 3 meters.

The EUT should work in idle mode. The accessories of the EUT are connected with the EUT such as headset etc.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.


During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The EUT is laid in two modes as follow: 1. put the EUT in horizontal direction; 2. put the EUT in vertical direction.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Limit:

Spurious Frequency (MHz)	Field Strength at 3 metres		
	Detector	Unit (microvolts/m)	Unit (dB μ V/m)
30~88	Quasi-peak	100	40
88~216	Quasi-peak	150	43.5
216~960	Quasi-peak	200	46
960~1000	Quasi-peak	500	54
Above 1000	Average	500	54

Test result:

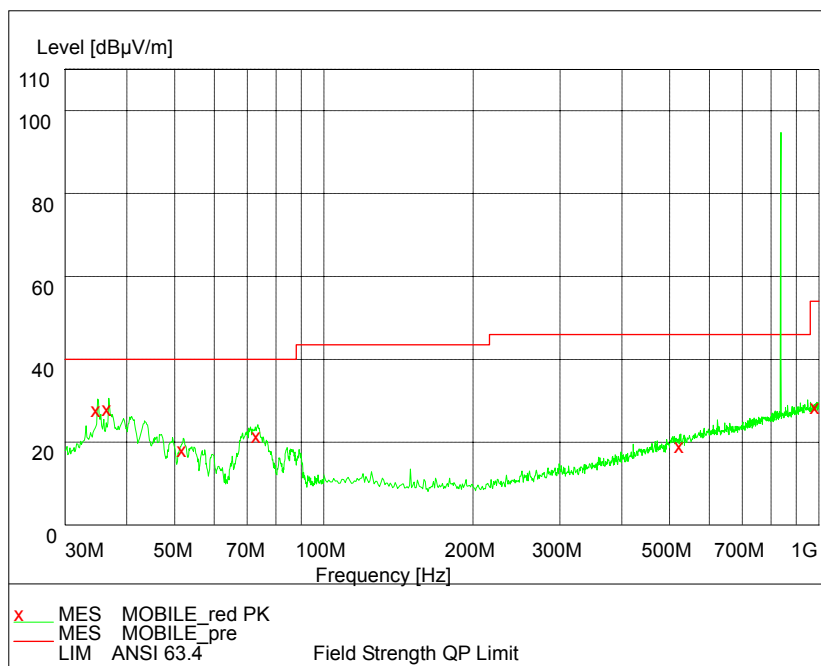

Note: The signal beyond the limit is the base station simulator carrier.
For measurement above 1GHz, all emissions level measured were more than 10dB below the limit.


2.2.2 PCS1900

2.2.2.1 RF Power Output-FCC Part2.1046/IC RSS-133 § 6.4

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits	≤ 30dBm

Test result:

GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.0
1880.0	661	29.2
1909.8	810	29.0

EDGE (GMSK, 1Slot) MODE:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.7
1880.0	661	29.4
1909.8	810	28.9

2.2.2.2 Effective Isotropic Radiated Power-FCC Part24.232(c)/IC RSS-133 § 6.4


Ambient condition:

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test setup:

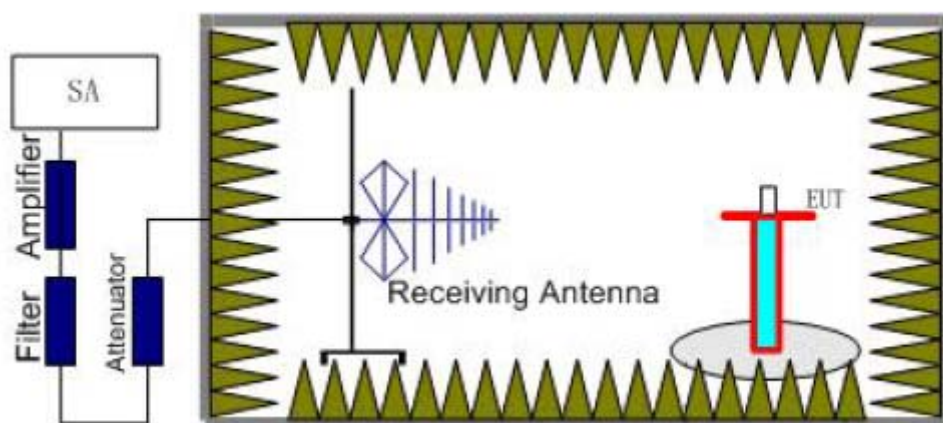

Step 1

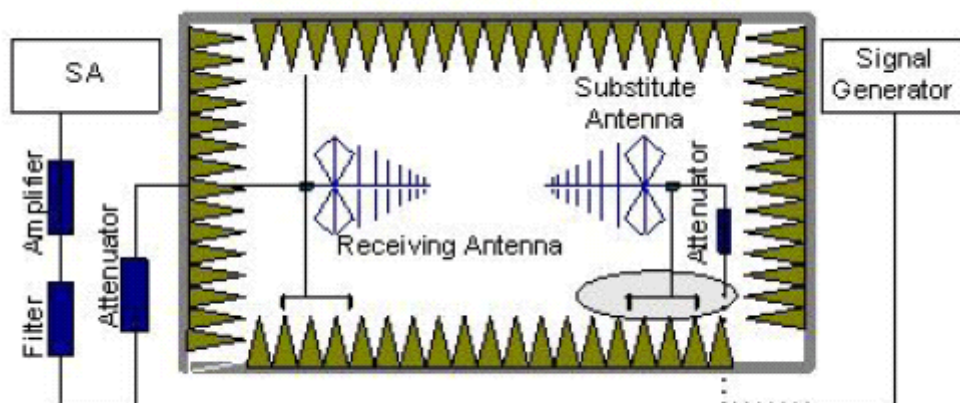

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna

must 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{mea} + P_{ca} + G_a$$

The measurement will be done at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits:

Operation Mode	Power Step	E.I.R.P. (dBm)
GSM	0	≤33
GPRS	3	≤33
EDGE	5	≤33

Test result:

GSM/GPRS MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	0	30.13	-4.8	8.6	26.33	Vertical
1880.0	0	30.63	-4.8	8.6	26.83	Vertical
1909.8	0	30.93	-4.8	8.6	27.13	Vertical

EDGE(GMSK, 1Slot) MODE:

Frequency (MHz)	Power step	Peak EIRP(dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1850.2	5	29.00	-4.8	8.6	25.20	Vertical
1880.0	5	29.20	-4.8	8.6	25.40	Vertical
1909.8	5	28.40	-4.8	8.6	24.60	Vertical

Frequency: 1909.8MHz


Peak EIRP(dBm) = Pmea(27.13dBm)+Pca(-4.8dB)+Ga(8.6dB) = 30.93dBm

2.2.2.3 Occupied Bandwidth-FCC Part2.1049/IC RSS-Gen § 4.6.1

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

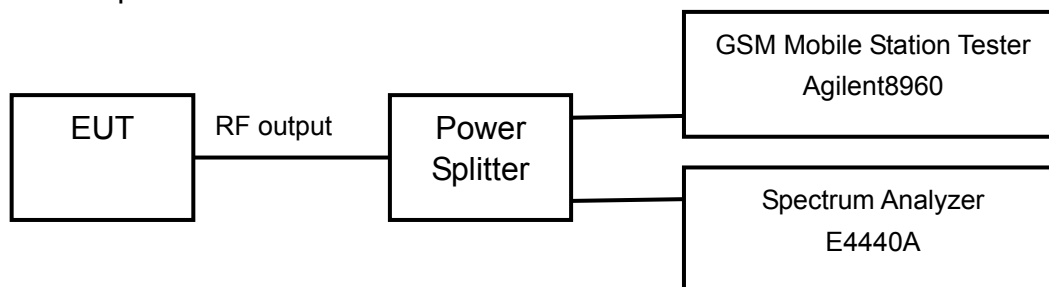

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band)

Limits: No specific occupied bandwidth requirements in FCC part 2.1049 and IC RSS-Gen § 4.6.1

Test result:


GSM/GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	247.91
1880.0	661	250.57
1909.8	810	246.41


EDGE(GMSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	245.56
1880.0	661	247.39
1909.8	810	246.82


GSM/GPRS MODE:

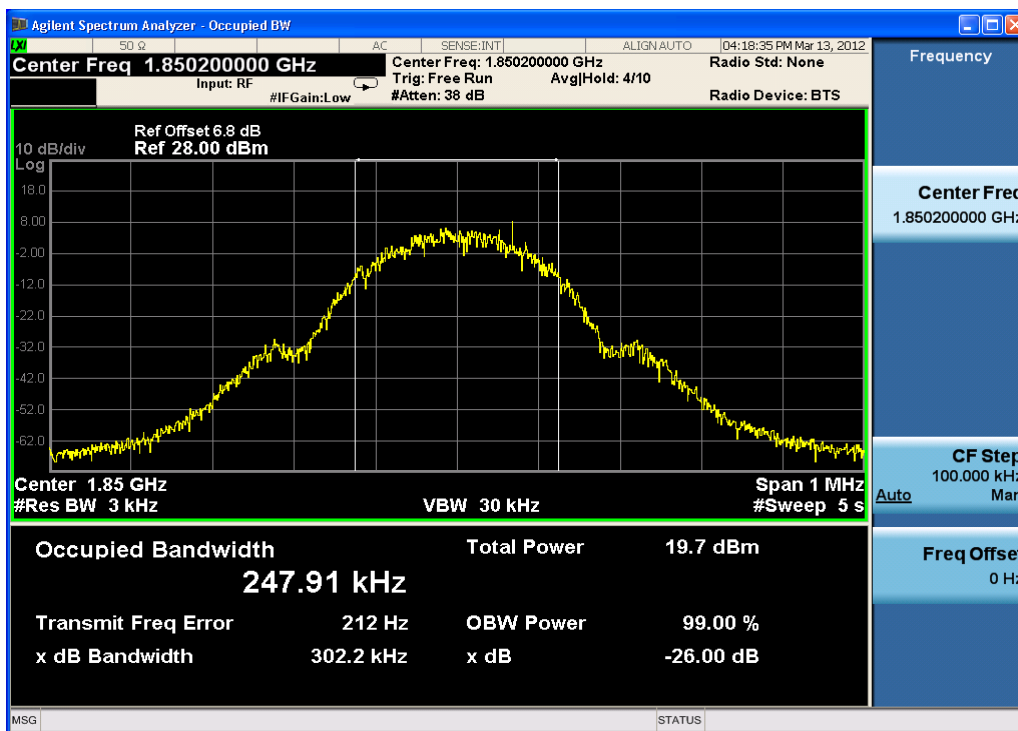

Channel 512

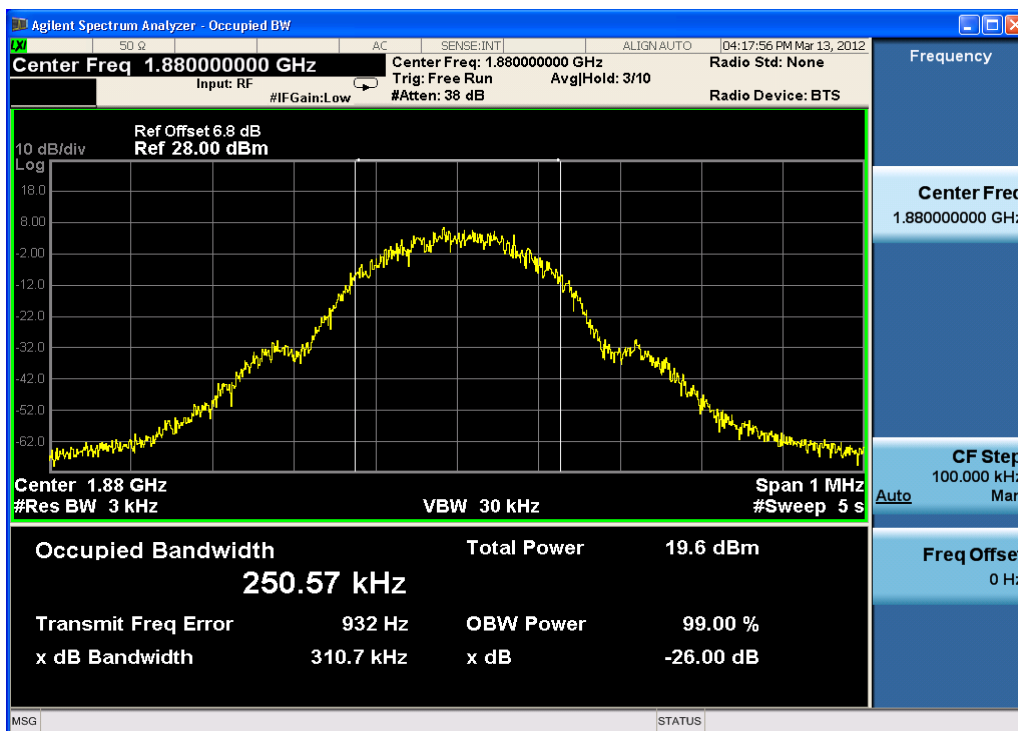


Channel 661

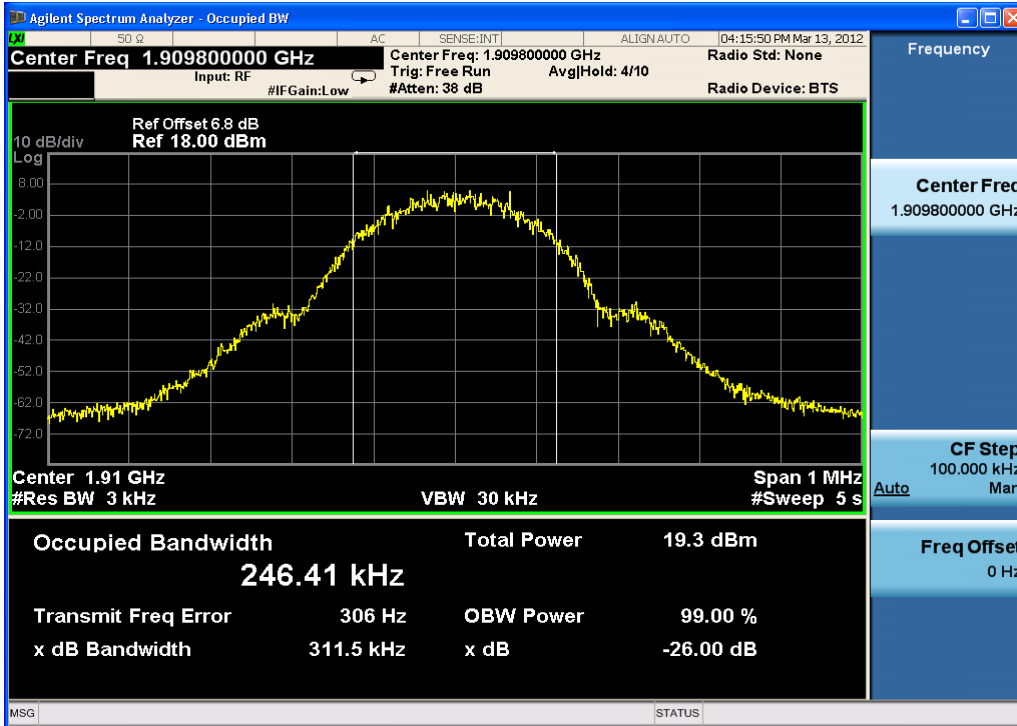


Channel 810


EDGE(GMSK) MODE:

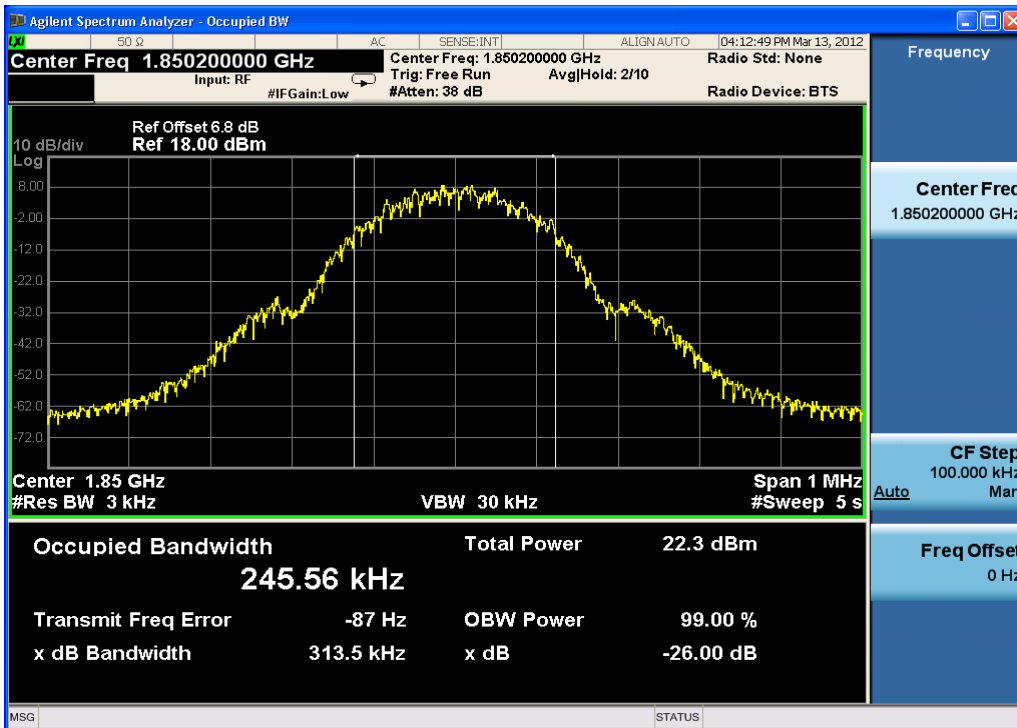

Channel 512

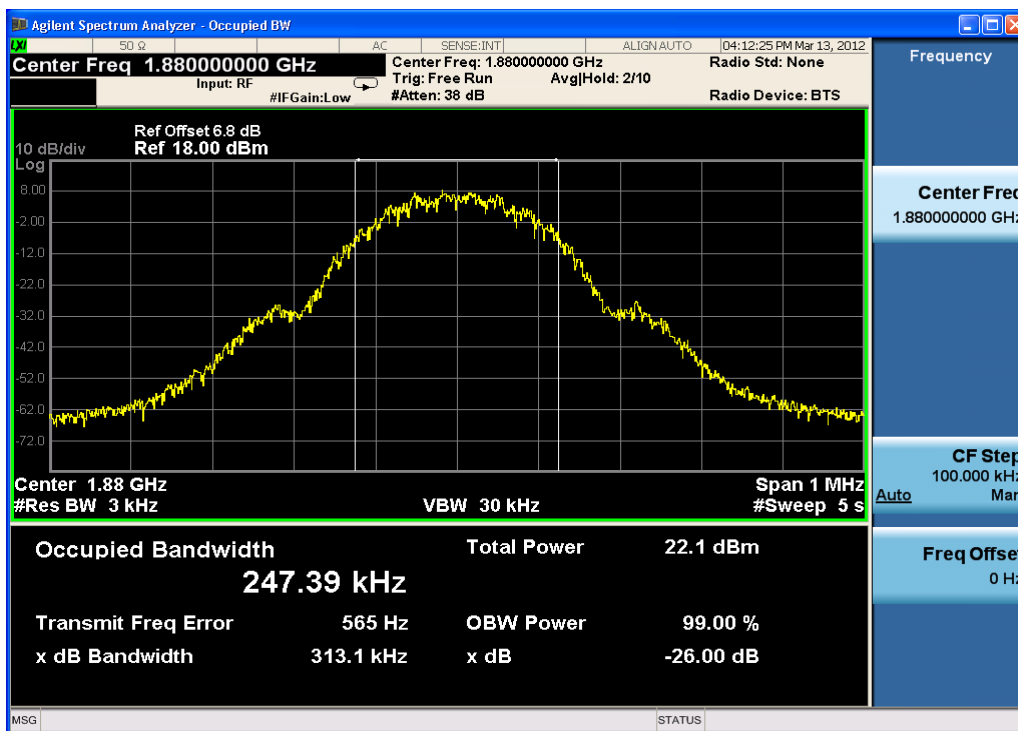

Channel 661

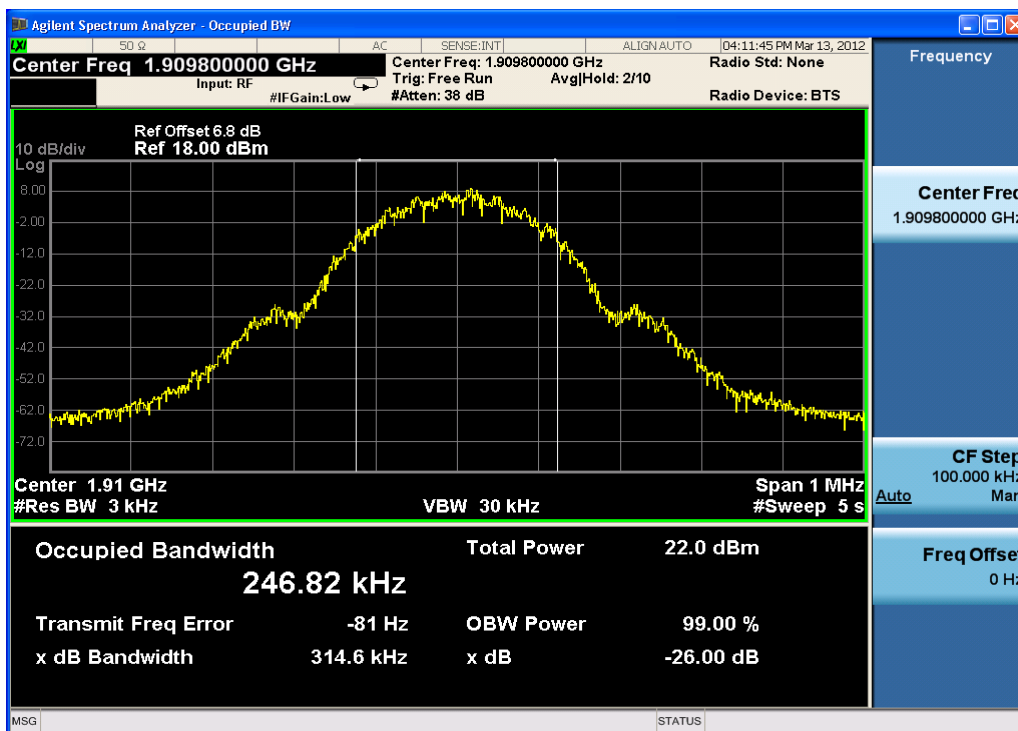


Channel 810

2.2.2.4 Conducted Spurious Emissions-FCC Part2.1051/24.238(a)IC RSS-133 § 6.5

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

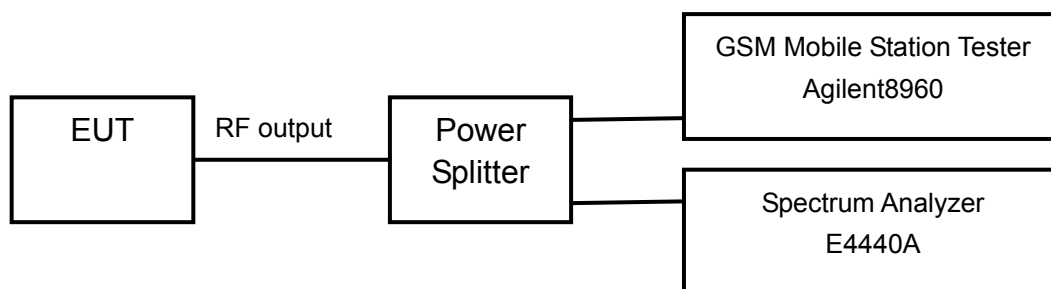

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No661 (middle channel of PCS1900 band)

Limits	≤ -13dBm
--------	----------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

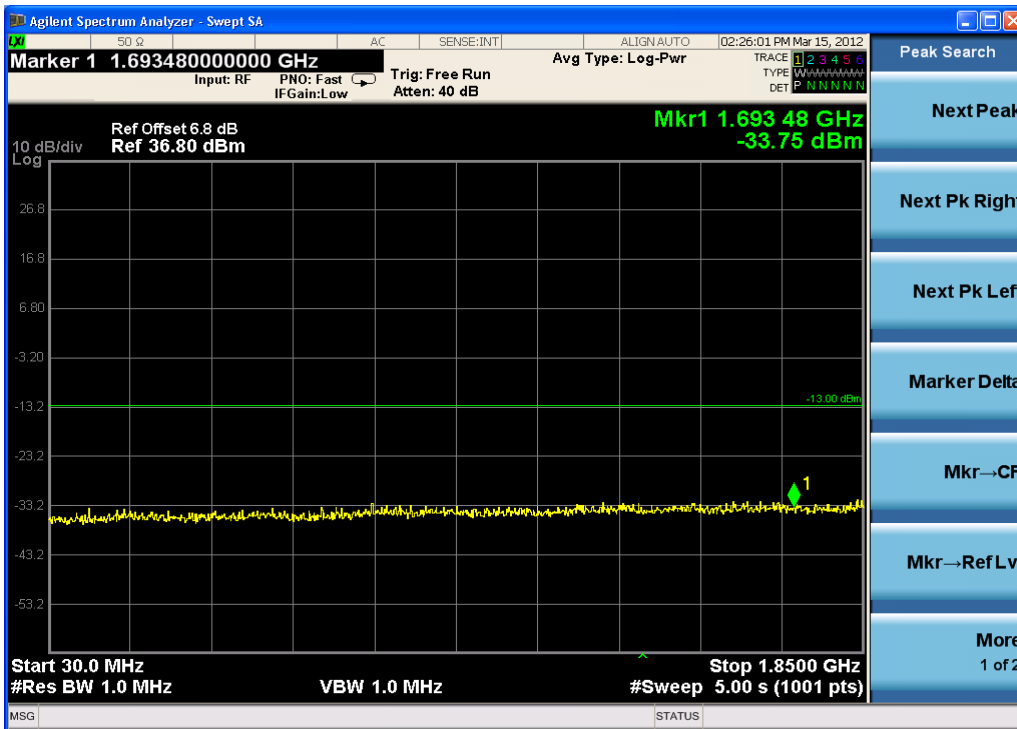


Channel 661, 30MHz~1850MHz

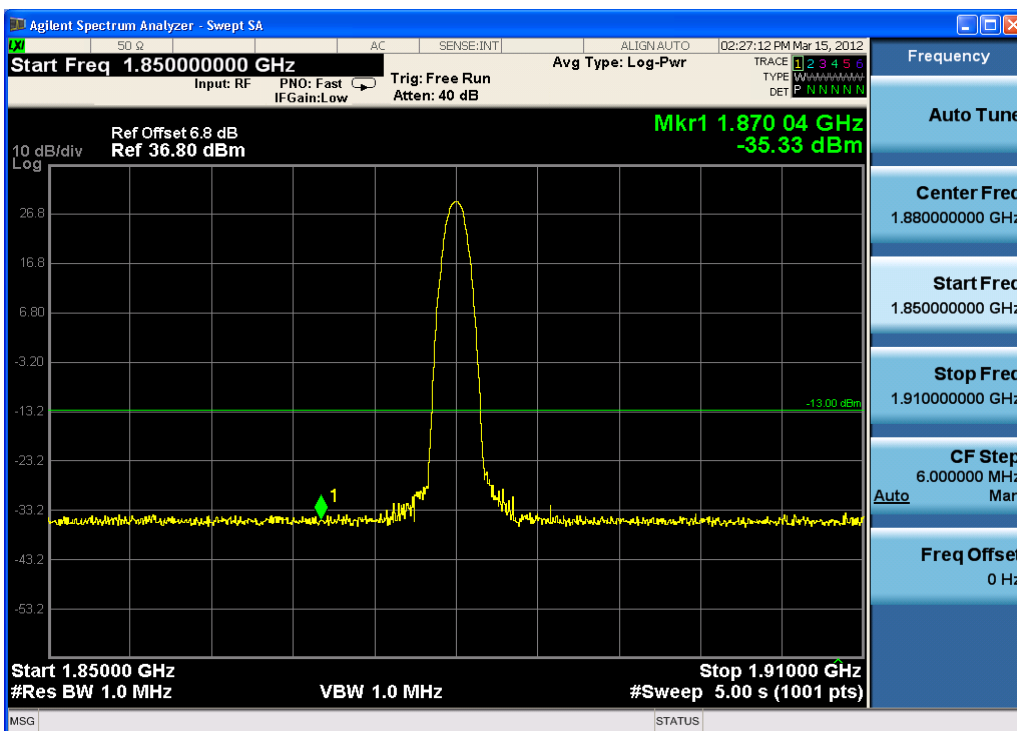


Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

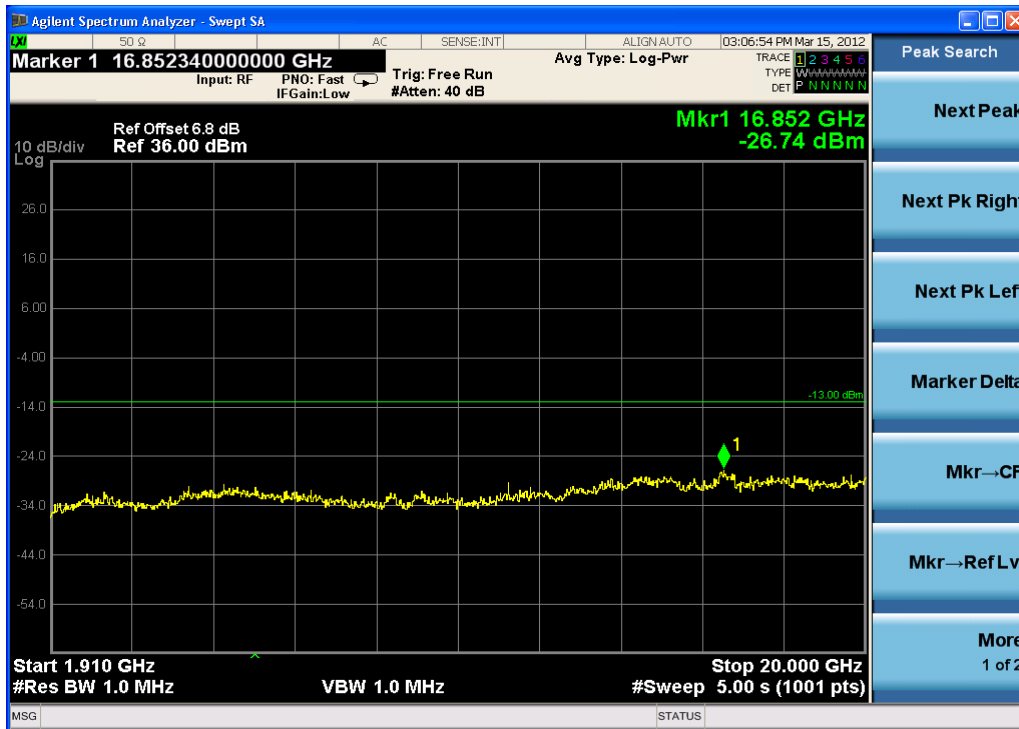


Channel 661, 1910MHz~20GHz

EDGE(GMSK) MODE:

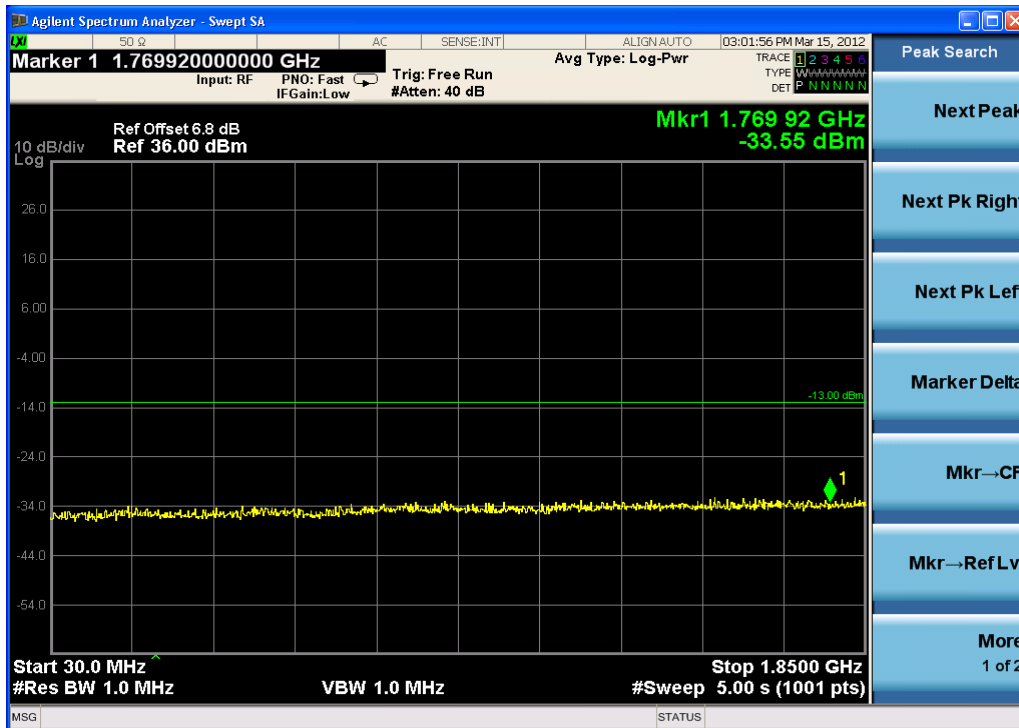


Channel 661, 30MHz~1850MHz

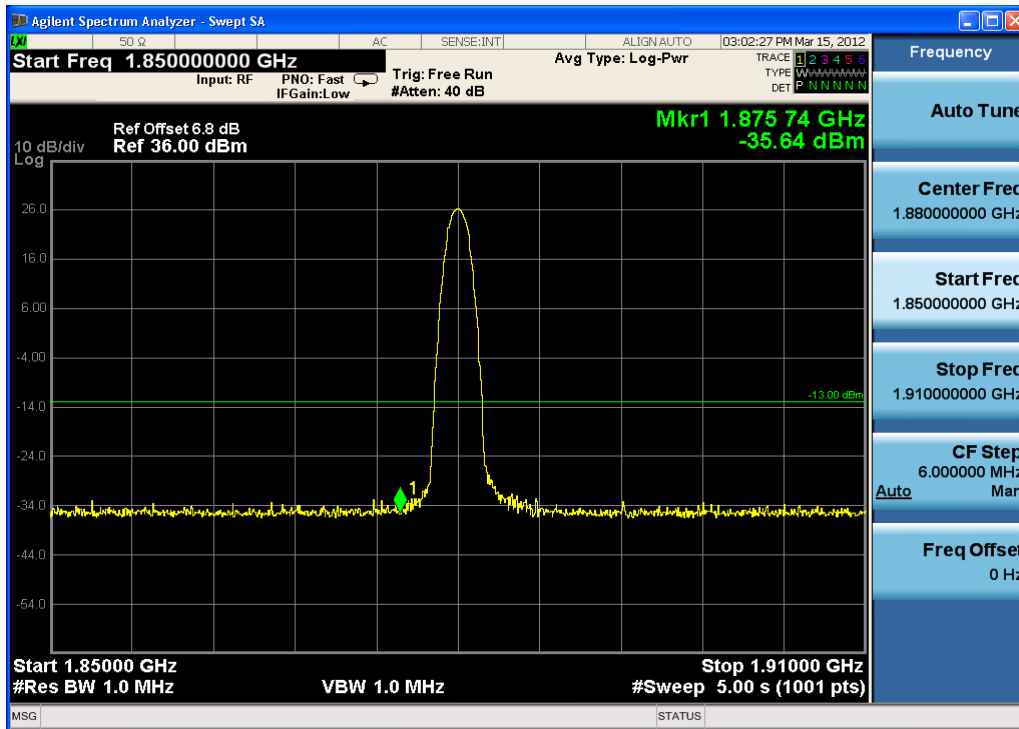

Channel 661, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

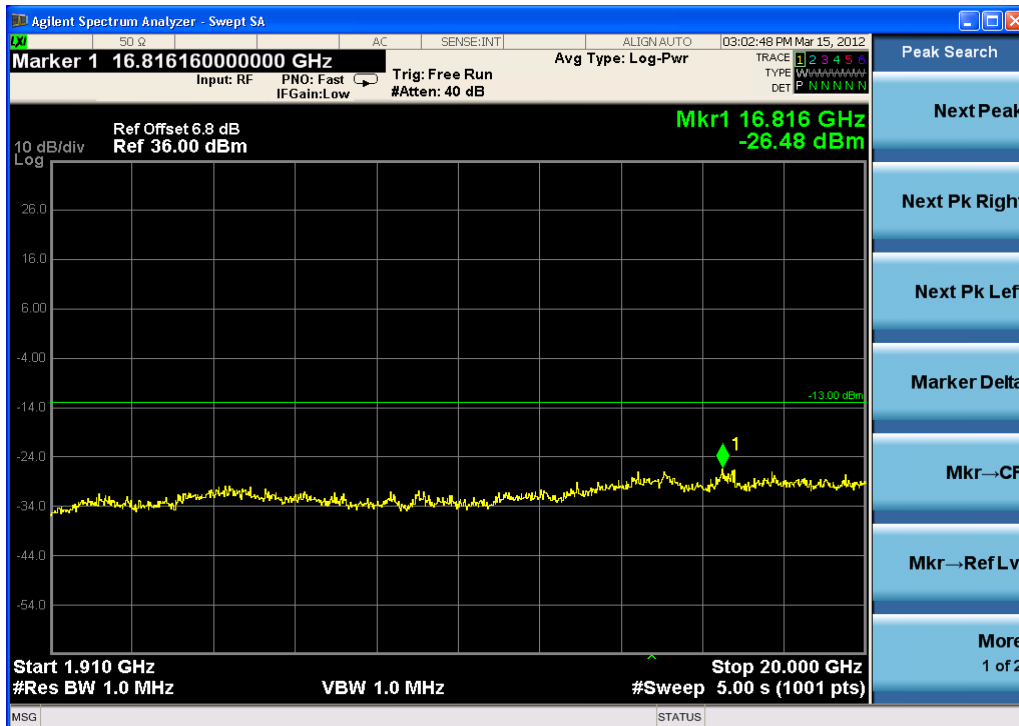


Channel 661, 1910MHz~20GHz

2.2.2.5 Band Edges Compliance-FCC Part2.1051/24.238(a)/IC RSS-133 § 6.5

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

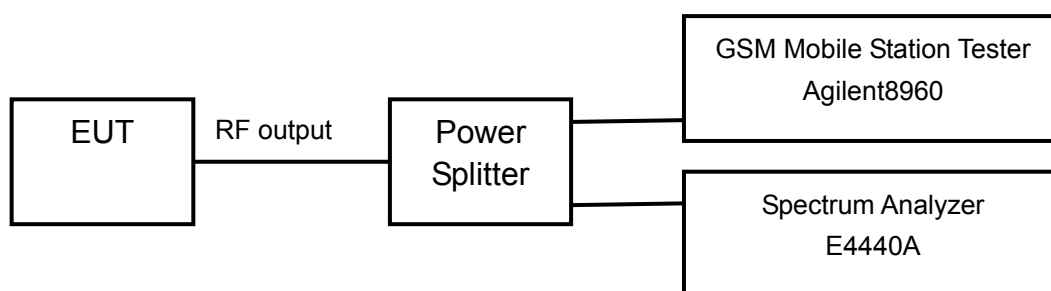

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No512 and No810 (Bottom and top channels of PCS1900 band)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

GSM/GPRS MODE:

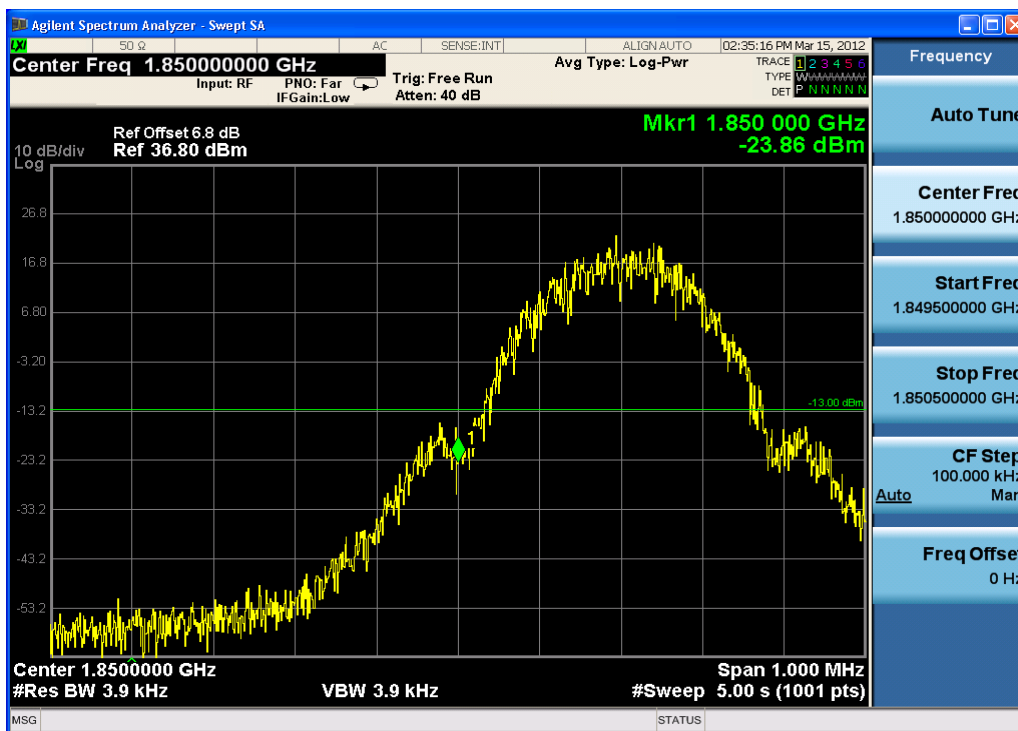


Channel 512

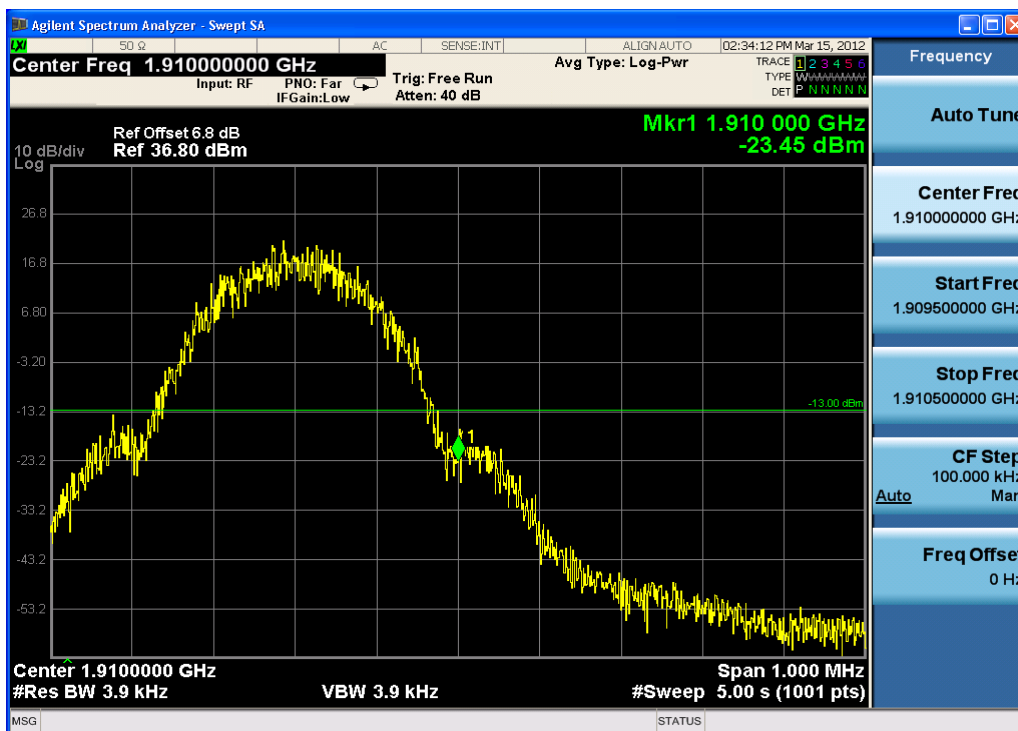


Channel 810

EDGE(GMSK) MODE:

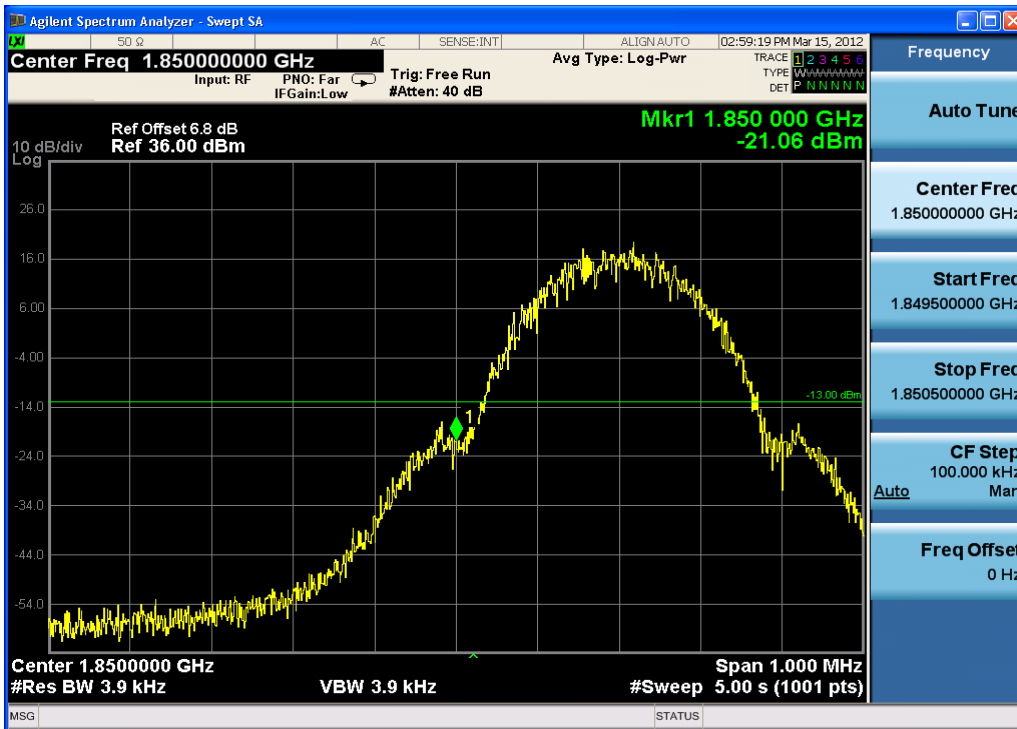

Channel 512

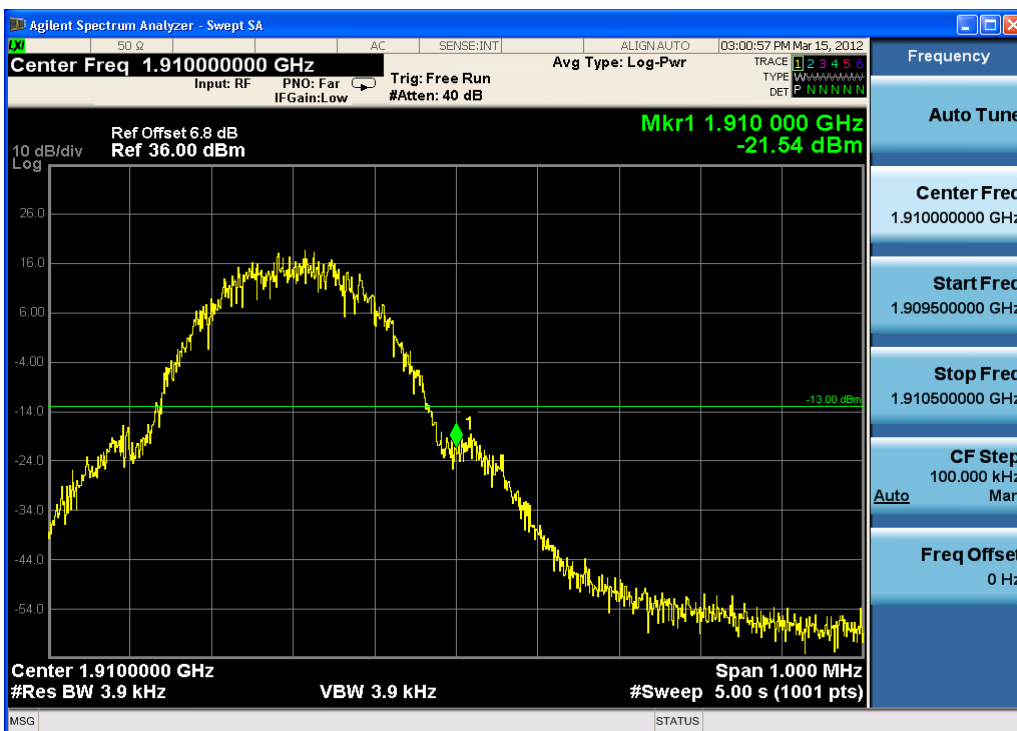


Channel 810

2.2.2.6 Frequency Stability-FCC Part2.1055/24.235/IC RSS-133 § 6.3

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

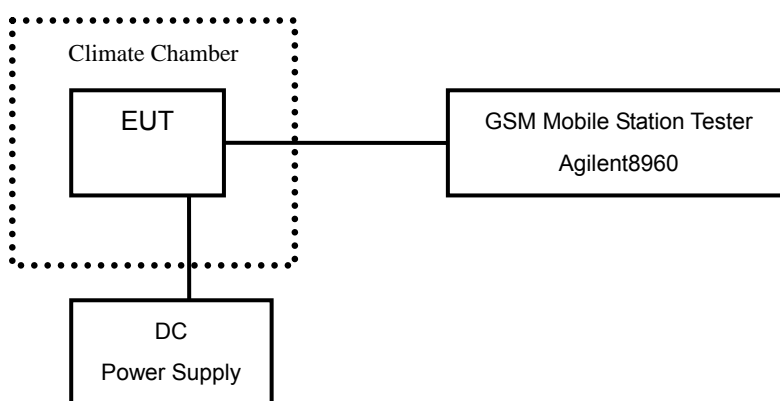

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.5 to 4.2V. The measurement will be conducted at three channels No512, No661 and No810 (Bottom, middle and top channels of PCS1900 band).

Limits:

No specific frequency stability requirements in FCC part 2.1055 and part 24.235. According to the standard of RSS-133 § 6.3, the carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm for mobile stations.

Test result:

GSM/GPRS MODE:

Temperature(° C)	Test Result (ppm)@3.7V		
	Channel 512	Channel 661	Channel 810
-30	0.005	0.006	0.004
-20	0.007	0.004	0.006
-10	0.003	0.003	0.002
0	0.006	0.003	0.005
+10	0.007	0.007	0.005
+20	0.004	0.002	0.006
+30	0.005	0.008	0.005
+40	0.003	0.004	0.002
+50	0.007	0.006	0.009

Voltage (V)	Test Result (ppm)@20° C		
	Channel 512	Channel 661	Channel 810
3.5	0.002	0.003	0.003
4.2	0.005	0.007	0.004

EDGE(GMSK) MODE:

Temperature(° C)	Test Result (ppm)@3.7V		
	Channel 512	Channel 661	Channel 810
-30	0.003	0.003	0.005
-20	0.002	0.008	0.005
-10	0.002	0.004	0.003
0	0.003	0.007	0.004
+10	0.001	0.006	0.003
+20	0.007	0.004	0.007
+30	0.003	0.009	0.004
+40	0.004	0.006	0.006
+50	0.002	0.003	0.003


Voltage (V)	Test Result (ppm)@20° C		
	Channel 512	Channel 661	Channel 810
3.5	0.005	0.004	0.004
4.2	0.006	0.007	0.003

2.2.2.7 Radiated Spurious Emissions-FCC Part2.1053/24.238(a)/IC RSS-133 § 6.5


Ambient condition

Temperature	Relative humidity	Pressure
26°C	43%	101.3kPa

Test Setup:

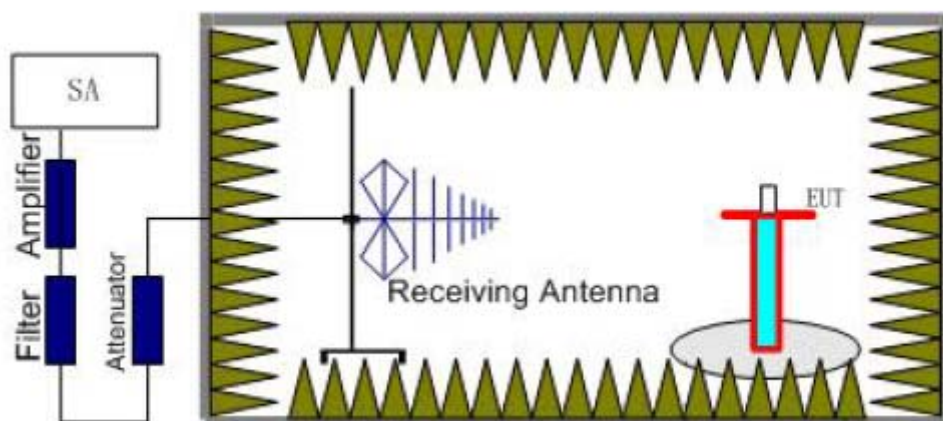

Step 1

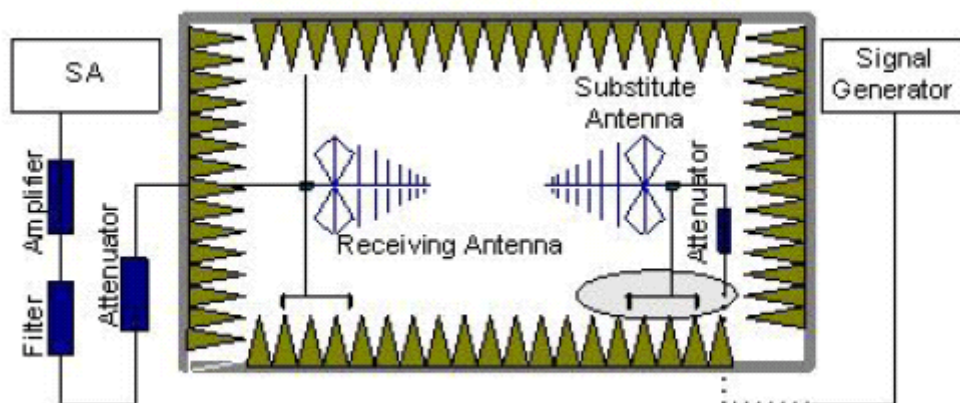

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was

placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 512), middle (Channel 661) and top (Channel 810) channels of PCS 1900 band.

Test result:

GSM/GPRS MODE Channel 512:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1648.26	-45.02	-4.6	8.6	-45.22	-13	Vertical
1742.36	-49.31	-4.8	8.9	-49.61	-13	Horizontal
2534.14	-49.79	-5.9	9.3	-49.39	-13	Horizontal
2550.52	-49.06	-5.9	9.3	-52.46	-13	Vertical
7073.37	-45.31	-10.8	12.0	-46.51	-13	Vertical
10023.48	-41.05	-11.8	13.6	-42.85	-13	Horizontal

EDGE(GMSK) MODE Channel 512:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1648.25	-45.77	-4.6	8.6	-45.97	-13	Vertical
1742.24	-48.71	-4.8	8.9	-49.01	-13	Horizontal
2534.58	-50.75	-5.9	9.3	-50.35	-13	Horizontal
2550.38	-48.77	-5.9	9.3	-52.17	-13	Vertical
7073.41	-45.11	-10.8	12.0	-46.31	-13	Vertical
9987.56	-40.10	-13.7	13.8	-40.20	-13	Vertical

GSM/GPRS MODE Channel 661:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.25	-43.82	-4.6	8.6	-44.02	-13	Horizontal
1760.54	-48.73	-4.8	8.9	-49.03	-13	Vertical
2533.35	-50.04	-5.9	9.3	-49.64	-13	Horizontal
2534.21	-48.85	-5.9	9.3	-52.25	-13	Vertical
7061.59	-44.15	-10.8	12.0	-45.35	-13	Vertical
9962.27	-40.41	-11.8	13.8	-42.41	-13	Horizontal

EDGE(GMSK) MODE Channel 661:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
2068.37	-43.19	-5.6	8.6	-42.39	-13	Horizontal
2552.34	-43.35	-5.7	8.6	-42.45	-13	Horizontal
2775.28	-38.80	-5.8	8.9	-38.10	-13	Vertical
6993.37	-44.16	-8.6	12.7	-48.26	-13	Horizontal
10005.7	-41.37	-11.8	13.6	-43.17	-13	Vertical
17863.5	-35.10	-13.9	12.3	-33.50	-13	Horizontal

GSM/GPRS MODE Channel 810:

Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1673.35	-45.39	-4.6	8.6	-45.59	-13	Horizontal
1760.54	-48.78	-4.8	8.9	-49.08	-13	Vertical
2533.27	-50.01	-5.9	9.3	-49.61	-13	Vertical
2535.77	-49.41	-5.9	9.3	-52.81	-13	Horizontal
7063.74	-45.26	-10.8	12.0	-46.46	-13	Horizontal
9963.63	-39.95	-11.8	13.8	-41.95	-13	Vertical

EDGE(GMSK) MODE Channel 810:


Frequency (MHz)	Power (dBm)	Pca Cable loss(dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Limited (dBm)	Polarization
1697.58	-45.92	-4.7	8.6	-46.02	-13	Horizontal
1772.28	-47.43	-4.9	8.9	-47.63	-13	Vertical
2515.52	-47.88	-5.7	9.3	-47.68	-13	Vertical
2495.27	-43.34	-5.9	9.3	-46.74	-13	Horizontal
7070.49	-45.84	-10.8	12.0	-47.04	-13	Horizontal
9950.24	-40.73	-11.8	13.8	-42.73	-13	Vertical

2.2.2.8 Receiver Spurious Emissions-IC RSS-133 § 6.6

Ambient condition:

Temperature	Relative humidity	Pressure
25°C	54%	101.5kPa

Test Setup:

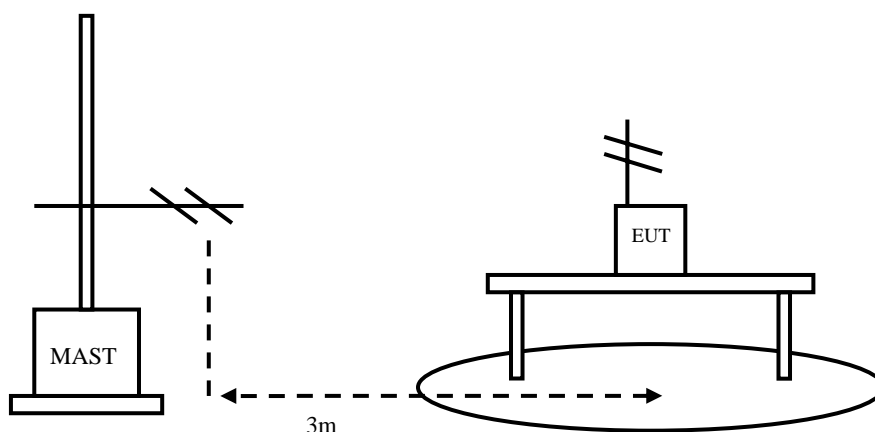

Test Procedure:

The EUT should be placed on a non-metallic table 80cm above the ground plane. The receive antennas shall be moved from 1 to 4 meters. The distance between EUT and receive antenna should be 3 meters.

The EUT should work in idle mode. The accessories of the EUT are connected with the EUT such as headset etc.

Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.


During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The EUT is laid in two modes as follow: 1. put the EUT in horizontal direction; 2. put the EUT in vertical direction.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Limit:

Spurious Frequency (MHz)	Field Strength at 3 metres		
	Detector	Unit (microvolts/m)	Unit (dB μ V/m)
30~88	Quasi-peak	100	40
88~216	Quasi-peak	150	43.5
216~960	Quasi-peak	200	46
960~1000	Quasi-peak	500	54
Above 1000	Average	500	54

Test result:

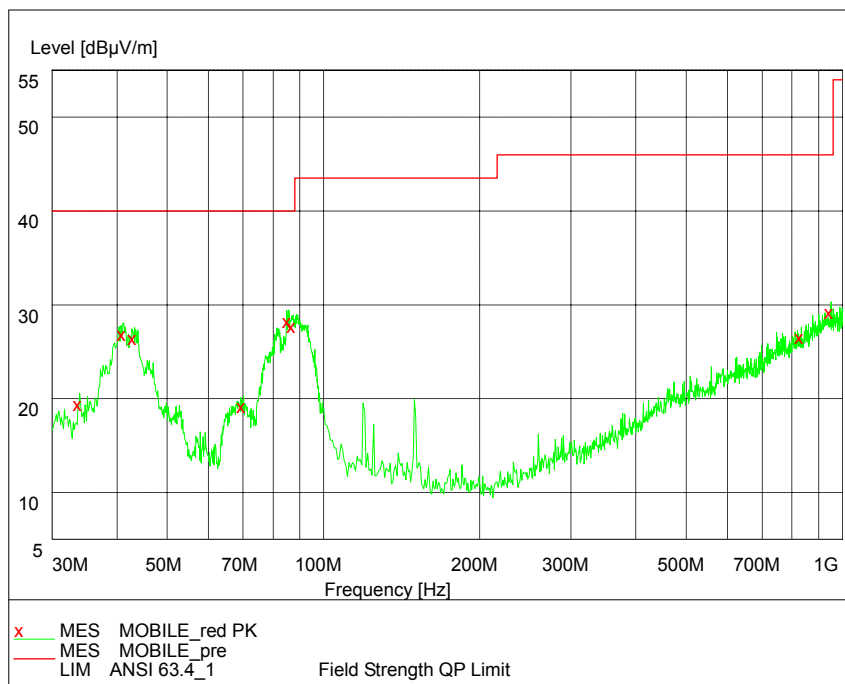

PCS 1900

Note: For measurement above 1GHz, all emissions level measured were more than 10dB below the limit.

2.3 List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	MY48367401	2012.8
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2012.8
3	DC Power Supply E3645A	Agilent	MY40000740	2012.8
4	Power Splitter 11850C	Agilent	026057	2012.8
5	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	----	----
6	Turn table Diameter: 1m	HD	----	----
7	Antenna master FAC(MA4.0)	MATURO	----	----
8	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2012.8
9	HL562 Ultra log antenna	R&S	100016	2012.8
10	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2012.8
11	ESI 40 EMI test receiver	R&S	100015	2012.8
12	CMU 200 Radio tester	R&S	114667	2012.8
13	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	----	2012.8
14	SH-241 Climatic Chamber	ESPEC	92000390	2012.8

Appendix

Appendix1 Test Setup