



# ANSI C63.19

## TEST REPORT

|                |                                          |
|----------------|------------------------------------------|
| Product Name   | UMTS TriBand / GSM Quadband mobile phone |
| Model Name     | Highway US                               |
| Marketing Name | one touch 870A                           |
| FCC ID         | RAD245                                   |
| Client         | TCT Mobile Limited                       |

TA Technology (Shanghai) Co., Ltd.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 2 of 122

**GENERAL SUMMARY**

|                              |                                                                                                                                                                                                                                  |               |            |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------|
| <b>Product Name</b>          | UMTS TriBand / GSM Quadband mobile phone                                                                                                                                                                                         | <b>Model</b>  | Highway US |
| <b>Report No.</b>            | RXA1204-0049HAC02                                                                                                                                                                                                                | <b>FCC ID</b> | RAD245     |
| <b>Client</b>                | TCT Mobile Limited                                                                                                                                                                                                               |               |            |
| <b>Manufacturer</b>          | TCT Mobile Limited                                                                                                                                                                                                               |               |            |
| <b>Reference Standard(s)</b> | <b>ANSI C63.19-2007:</b> American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.                                                                            |               |            |
| <b>Conclusion</b>            | <p>This portable wireless equipment has been measured in all cases requested by the relevant standards.</p> <p>General Judgment: T3</p> <p style="text-align: right;">(Stamp)<br/>Date of issue: April 16<sup>th</sup>, 2012</p> |               |            |
| <b>Comment</b>               | The test result only responds to the measured sample.                                                                                                                                                                            |               |            |

Approved by 杨伟中  
Director

Revised by 凌敏宝  
SAR Manager

Performed by 许红梅  
SAR Engineer

## TABLE OF CONTENT

|                                                                |     |
|----------------------------------------------------------------|-----|
| 1. General Information .....                                   | 4   |
| 1.1. Notes of the Test Report.....                             | 4   |
| 1.2. Testing Laboratory .....                                  | 4   |
| 1.3. Applicant Information .....                               | 5   |
| 1.4. Manufacturer Information .....                            | 5   |
| 1.5. Information of EUT .....                                  | 6   |
| 1.6. The Ambient Conditions during Test.....                   | 8   |
| 1.7. T-Coil signal quality categories of each tested Mode..... | 8   |
| 1.8. Test Date .....                                           | 8   |
| 2. Test Information .....                                      | 9   |
| 2.1. Operational Conditions during Test.....                   | 9   |
| 2.1.1. General Description of Test Procedures .....            | 9   |
| 2.1.2. GSM Test Configuration .....                            | 9   |
| 2.1.3. WCDMA Test Configuration.....                           | 9   |
| 2.2. T-Coil Measurements System Configuration.....             | 10  |
| 2.2.1. T-coil Measurement Set-up.....                          | 10  |
| 2.2.2. AM1D Probe .....                                        | 12  |
| 2.2.3. Audio Magnetic Measurement Instrument (AMMI).....       | 13  |
| 2.2.4. Helmholtz Calibration Coil (AMCC).....                  | 14  |
| 2.2.5. Test Arch Phantom & Phone Positioner .....              | 14  |
| 2.3. T-Coil measurement points and reference plane .....       | 16  |
| 2.4. T-Coil Test Procedures.....                               | 17  |
| 3. T-Coil Performance Requirements .....                       | 18  |
| 3.1. T-Coil coupling field intensity .....                     | 18  |
| 3.2. Frequency response .....                                  | 18  |
| 3.3. Signal quality.....                                       | 19  |
| 4. Summary Test Results .....                                  | 20  |
| 4.1. GSM 850.....                                              | 20  |
| 4.2. GSM 1900.....                                             | 22  |
| 4.3. WCDMA Band II.....                                        | 24  |
| 4.4. WCDMA Band V .....                                        | 26  |
| 5. Measurement Uncertainty .....                               | 28  |
| 6. Main Test Instruments .....                                 | 30  |
| ANNEX A: Test Layout .....                                     | 31  |
| ANNEX B: Graph Results.....                                    | 32  |
| ANNEX C: Probe Calibration Certificate .....                   | 112 |
| ANNEX D: DAE4 Calibration Certificate.....                     | 115 |
| ANNEX E: The EUT Appearances and Test Configuration.....       | 120 |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 4 of 122

---

## 1. General Information

### 1.1. Notes of the Test Report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

### 1.2. Testing Laboratory

|            |                                                                                |
|------------|--------------------------------------------------------------------------------|
| Company:   | TA Technology (Shanghai) Co., Ltd.                                             |
| Address:   | No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China             |
| City:      | Shanghai                                                                       |
| Post code: | 201201                                                                         |
| Country:   | P. R. China                                                                    |
| Contact:   | Yang Weizhong                                                                  |
| Telephone: | +86-021-50791141/2/3                                                           |
| Fax:       | +86-021-50791141/2/3-8000                                                      |
| Website:   | <a href="http://www.ta-shanghai.com">http://www.ta-shanghai.com</a>            |
| E-mail:    | <a href="mailto:yangweizhong@ta-shanghai.com">yangweizhong@ta-shanghai.com</a> |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 5 of 122

---

### 1.3. Applicant Information

Company: TCT Mobile Limited  
Address: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area  
Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P.R. China  
Contact: Gong Zhizhou  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

### 1.4. Manufacturer Information

Company: TCT Mobile Limited  
Address: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area  
Shanghai, P.R. China. 201203  
City: Shanghai  
Postal Code: 201203  
Country: P.R. China  
Telephone: 0086-21-61460890  
Fax: 0086-21-61460602

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 6 of 122

### 1.5. Information of EUT

#### General Information

|                                  |                                                         |                 |                 |
|----------------------------------|---------------------------------------------------------|-----------------|-----------------|
| Device Type:                     | Portable Device                                         |                 |                 |
| Product Name:                    | UMTS TriBand / GSM Quadband mobile phone                |                 |                 |
| IMEI:                            | 013083000002460                                         |                 |                 |
| Hardware Version:                | PIO2                                                    |                 |                 |
| Software Version:                | sw622                                                   |                 |                 |
| Antenna Type:                    | Internal Antenna                                        |                 |                 |
| Device Operating Configurations: |                                                         |                 |                 |
| Supporting Mode(s):              | GSM 850/GSM 1900; (tested)                              |                 |                 |
|                                  | WCDMA Band II/WCDMA Band V; (tested)                    |                 |                 |
|                                  | GSM900/GSM1800/ WCDMA Band I; (untested)                |                 |                 |
|                                  | Bluetooth; (untested)                                   |                 |                 |
| Test Modulation:                 | (GSM)GMSK; (WCDMA) QPSK                                 |                 |                 |
| Device Class:                    | B                                                       |                 |                 |
| HSDPA UE Category:               | 8                                                       |                 |                 |
| HSUPA UE Category:               | 6                                                       |                 |                 |
| GPRS Multislot Class(12):        | Max Number of Timeslots in Uplink                       |                 | 4               |
|                                  | Max Number of Timeslots in Downlink                     |                 | 4               |
|                                  | Max Total Timeslot                                      |                 | 5               |
| EGPRS Multislot Class(12):       | Max Number of Timeslots in Uplink                       |                 | 4               |
|                                  | Max Number of Timeslots in Downlink                     |                 | 4               |
|                                  | Max Total Timeslot                                      |                 | 5               |
| Operating Frequency Range(s):    | Mode                                                    | Tx (MHz)        | Rx (MHz)        |
|                                  | GSM 850                                                 | 824.2 ~ 848.8   | 869.2 ~ 893.8   |
|                                  | GSM 1900                                                | 1850.2 ~ 1909.8 | 1930.2 ~ 1989.8 |
|                                  | WCDMA Band II                                           | 1852.4 ~ 1907.6 | 1932.4 ~ 1987.6 |
|                                  | WCDMA Band V                                            | 826.4 ~ 846.6   | 871.4 ~ 891.6   |
| Test Channel(Middle):            | 190 (GSM 850) (tested)                                  |                 |                 |
|                                  | 661 (GSM 1900) (tested)                                 |                 |                 |
|                                  | 9400 (WCDMA Band II) (tested)                           |                 |                 |
|                                  | 4182 (WCDMA Band V) (tested)                            |                 |                 |
| Power Class:                     | GSM 850: 4, tested with power level 5                   |                 |                 |
|                                  | GSM 1900: 1, tested with power level 0                  |                 |                 |
|                                  | WCDMA Band II: 3, tested with power control all up bits |                 |                 |
|                                  | WCDMA Band V: 3, tested with power control all up bits  |                 |                 |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 7 of 122

---

### Auxiliary Equipment Details

#### AE1:Battery

Model: CAB3120000C3  
Manufacturer: BAK  
SN: BAK2011110800337

#### AE2:Battery

Model: CAB3120000C1  
Manufacturer: BYD  
SN: B08606451BA

Equipment Under Test (EUT) is a UMTS TriBand / GSM Quadband mobile phone. The detail about EUT and Lithium Battery is in chapter 1.5 in this report. The device has an internal antenna for GSM/WCDMA Tx/Rx, and the other is BT antenna that is used for Tx/Rx. T-Coil is tested for GSM 850, GSM 1900, WCDMA II and WCDMA Band V. Bluetooth mode doesn't have voice capability, and does not operate in the held to ear mode for providing handset service.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 8 of 122

**1.6. The Ambient Conditions during Test**

|                                                                                                                                                                                                 |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Temperature                                                                                                                                                                                     | Min. = 18°C, Max. = 28 °C |
| Relative humidity                                                                                                                                                                               | Min. = 0%, Max. = 80%     |
| Ground system resistance                                                                                                                                                                        | < 0.5 $\Omega$            |
| Ambient noise is checked and found very low and in compliance with requirement of standards.<br>Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                           |

**1.7. T-Coil signal quality categories of each tested Mode**

| Mode          | Category |
|---------------|----------|
| GSM 850       | T3       |
| GSM 1900      | T4       |
| WCDMA Band II | T4       |
| WCDMA Band V  | T4       |

**1.8. Test Date**

The test performed on April 16, 2012.

## **2. Test Information**

### **2.1. Operational Conditions during Test**

#### **2.1.1. General Description of Test Procedures**

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete. EUT holder on the yellow base plate of the Test Arch phantom. During the test, the EUT is selected on T-Coil mode, the LCD backlight is turn off and volume is adjusted to maximum level.

#### **2.1.2. GSM Test Configuration**

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 190 respectively in the case of GSM 850, allocated to 661 respectively in the case of GSM 1900. T-Coil configurations is measured in Speechcod/Hendset Low using System Simulator (SS) of CMU200 , at the same time the EUT shall be operated at its maximum RF output power setting.


#### **2.1.3. WCDMA Test Configuration**

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) are allocated to 9400 respectively in the case of WCDMA Band II, allocated to 4182 respectively in the case of WCDMA Band V. T-Coil configurations is measured in voice mode with 12.2kps RMC using System Simulator (SS) of CMU200, at the same time the EUT shall be operated at its maximum RF output power setting.

## 2.2. T-Coil Measurements System Configuration

### 2.2.1. T-coil Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

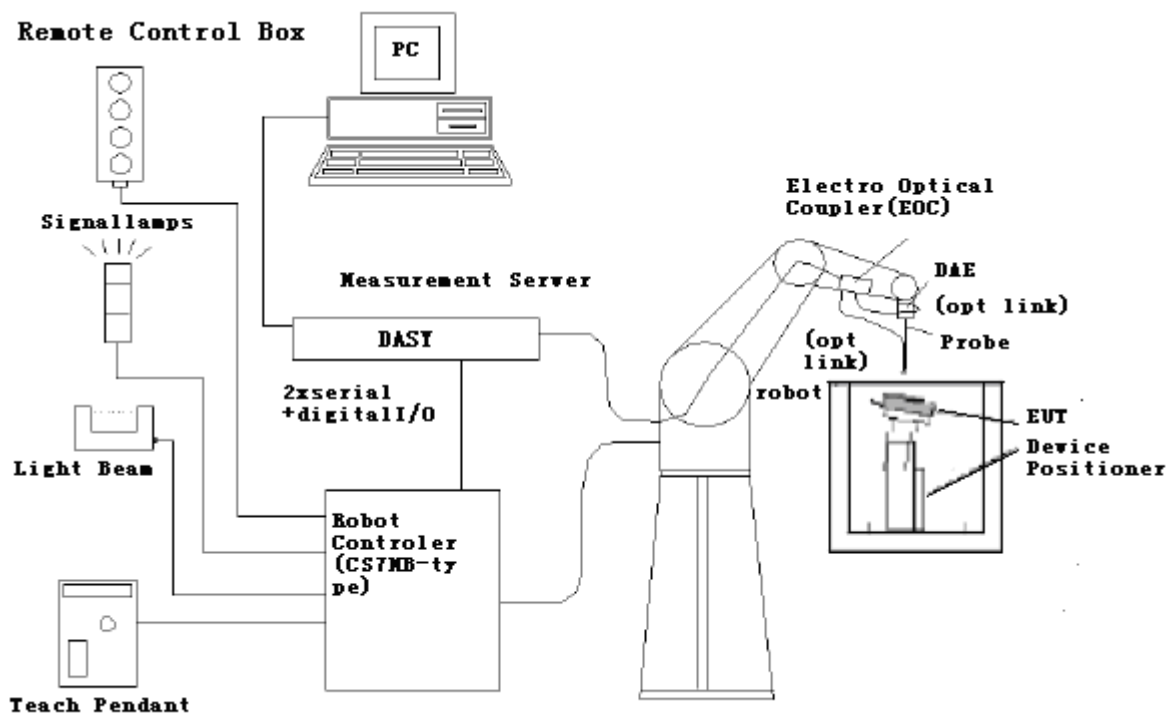

**Figure 1 T-Coil Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

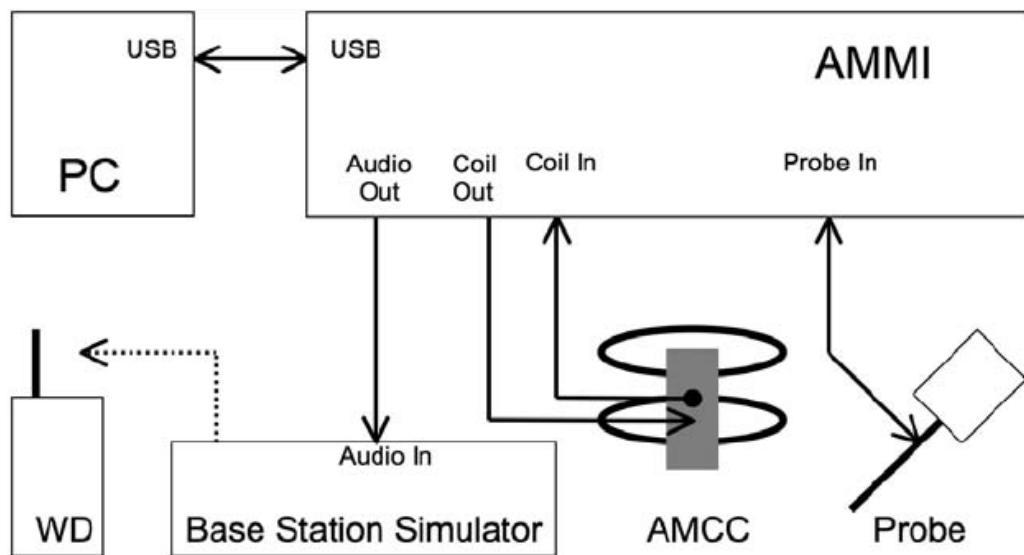


Figure 2 T-Coil Test Measurement Set-up

### 2.2.2. AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

Specification

|                 |                                                                    |
|-----------------|--------------------------------------------------------------------|
| frequency range | 0.1 - 20 kHz (RF sensitivity <-100 dB, fully RF shielded)          |
| sensitivity     | <-50 dB A/m @ 1 kHz                                                |
| pre-amplifier   | 40 dB, symmetric                                                   |
| dimensions      | tip diameter / length: 6 / 290 mm, sensor according to ANSI-C63.19 |



**Figure 3 AM1D Probe**

### 2.2.3. Audio Magnetic Measurement Instrument (AMMI)

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.



**Figure 4 AMMI front panel**

Port description:

|                  |                                                                              |
|------------------|------------------------------------------------------------------------------|
| <b>Audio Out</b> | BNC, audio signal to the base station simulator, for >500Ohm load            |
| <b>Coil Out</b>  | BNC, test and calibration signal to the AMCC (top connector), for 50Ohm load |
| <b>Coil In</b>   | XLR, monitor signal from the AMCC BNO connector, 600 Ohm                     |
| <b>Probe In</b>  | XLR, probe signal and phantom supply to the probe Lemo connector             |




**Figure 5 AMMI rear side**

|                               |                                                                           |
|-------------------------------|---------------------------------------------------------------------------|
| <b>Sampling rate</b>          | 48 kHz / 24 bit                                                           |
| <b>Dynamic range</b>          | 85 dB                                                                     |
| <b>Test signal generation</b> | User selectable and predefined (vis PC)                                   |
| <b>Calibration</b>            | Auto-calibration / full system calibration using AMCC with monitor output |
| <b>Dimensions</b>             | 482 x 65 x 270 mm                                                         |

#### 2.2.4. Helmholtz Calibration Coil (AMCC)

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 10Ohm permits monitoring the current with a scale of 1:10

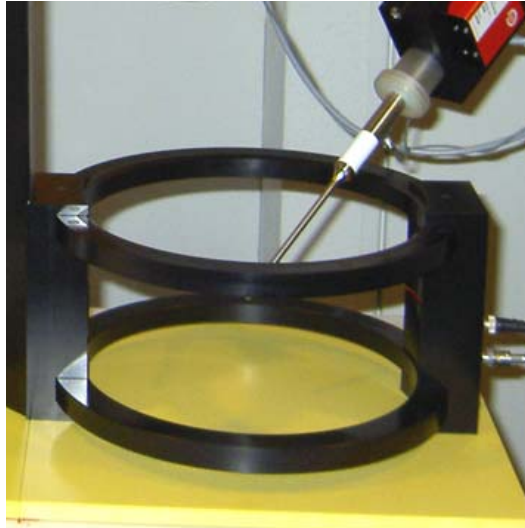

**Figure 6 AMCC**

Port description:

| Signal       | Connector | Resistance                                    |
|--------------|-----------|-----------------------------------------------|
| Coil In      | BNC       | Typically 50Ohm                               |
| Coil Monitor | BNO       | 10Ohm $\pm$ 1% (100mV corresponding to 1 A/m) |

Specification:

|                   |                                              |
|-------------------|----------------------------------------------|
| <b>Dimensions</b> | 370 x 370 x 196 mm, according to ANSI-C63.19 |
|-------------------|----------------------------------------------|

#### 2.2.5. Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verification of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $\leq \pm 0.5$  dB.



**Figure 7 T-coil Phantom & Device Holder**

### 2.3. T-Coil measurement points and reference plane

The following figure illustrates the three standard probe orientations. Position 1 is the axial orientation of the probe coil; orientation 2 and orientation 3 are radial orientations. The space between the measurement positions is not fixed. It is recommended that a scan of the EUT be done for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.


2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.

3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.

4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.

6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis. The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

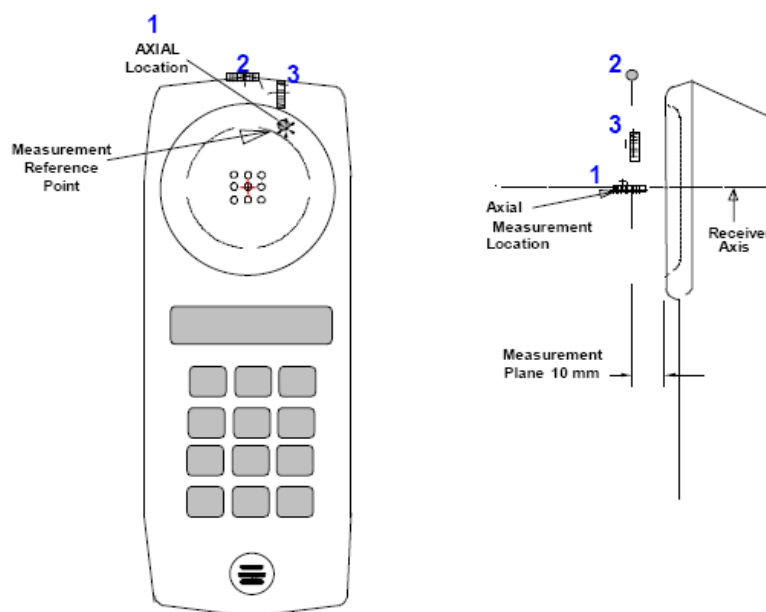

**Figure 8 Axis and planes for EUT audio frequency magnetic field measurements**

## **2.4. T-Coil Test Procedures**

**The following illustrate a typical test scan over a wireless communications device:**

- 1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
- 2) Set the reference drive level of signal voice defined in C63.19 per 6.3.2.1.
- 3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 7.3.2.
- 4) The DUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 5) The DUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The DUT audio output was positioned tangent (as physically possible) to the measurement plane.
- 6) The DUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
- 7) Determined the optimal measurement locations for the DUT by following the three steps, coarse resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 6.3.4.4. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.
- 8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of there samples.
- 9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial,radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.
- 10) Corrected for the frequency response after the DUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.
- 11) In SEMCAD postprocessing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

### 3. T-Coil Performance Requirements


In order to be rated for T-Coil use, a EUT shall meet the requirements for signal level and signal quality contained in this part.

#### 3.1. T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.


#### 3.2. Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. The following figures provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

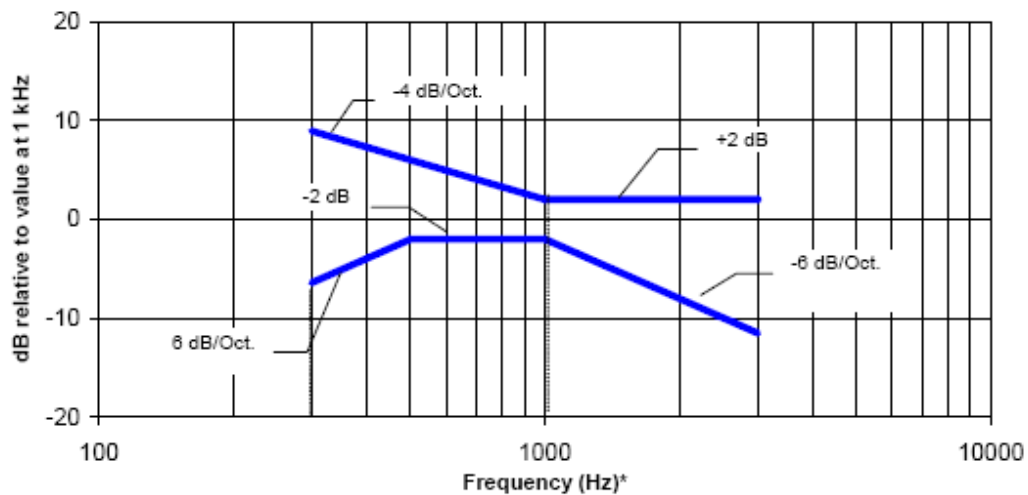

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 9 Magnetic field frequency response for EUTs with a field  $\leq -15$  dB (A/m) at 1 kHz**

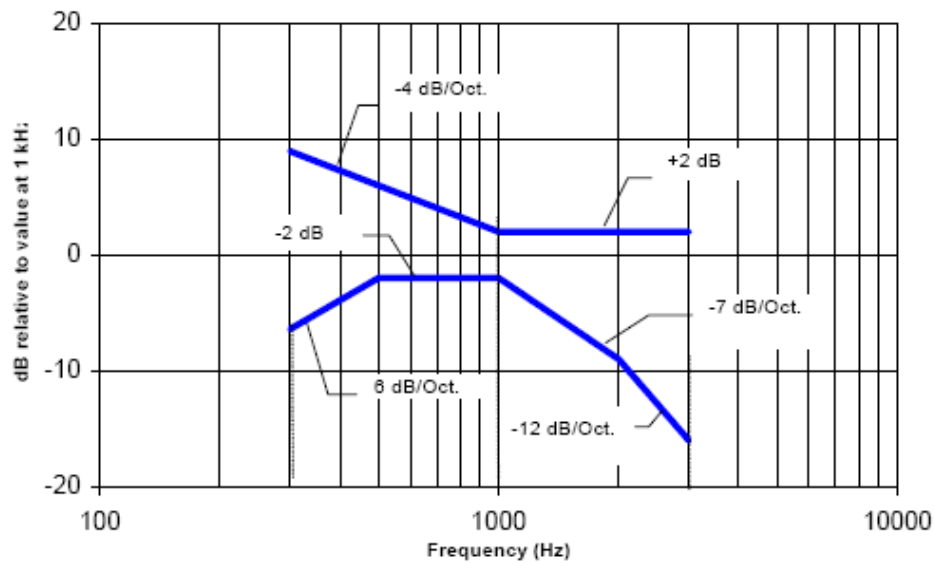

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 10 Magnetic field frequency response for EUTs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 3.3. Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a EUT. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the three T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1

**Table 1: T-Coil signal quality categories**

| Category    | Telephone parameters<br>WD signal quality<br>[(signal + noise) – to – noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                                  |
| Category T2 | 10 dB to 20 dB                                                                                 |
| Category T3 | 20 dB to 30 dB                                                                                 |
| Category T4 | > 30 dB                                                                                        |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02


Page 20 of 122

### 4. Summary Test Results

#### 4.1. GSM 850

Battery (SN: BAK2011110800337)

| Band-Channel  | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|---------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| GSM 850-CH190 | x (Radial):       | (-1.2,-11.3)                   | 6.44                            | 40.9               | /                  | T4       |
|               | y (Radial):       | (-1.2,-11.3)                   | 11.3                            | 49.5               |                    | T4       |
|               | z (Axial):        | (-6.2,-8.3)                    | 12.4                            | 36.9               | Pass               | T4       |

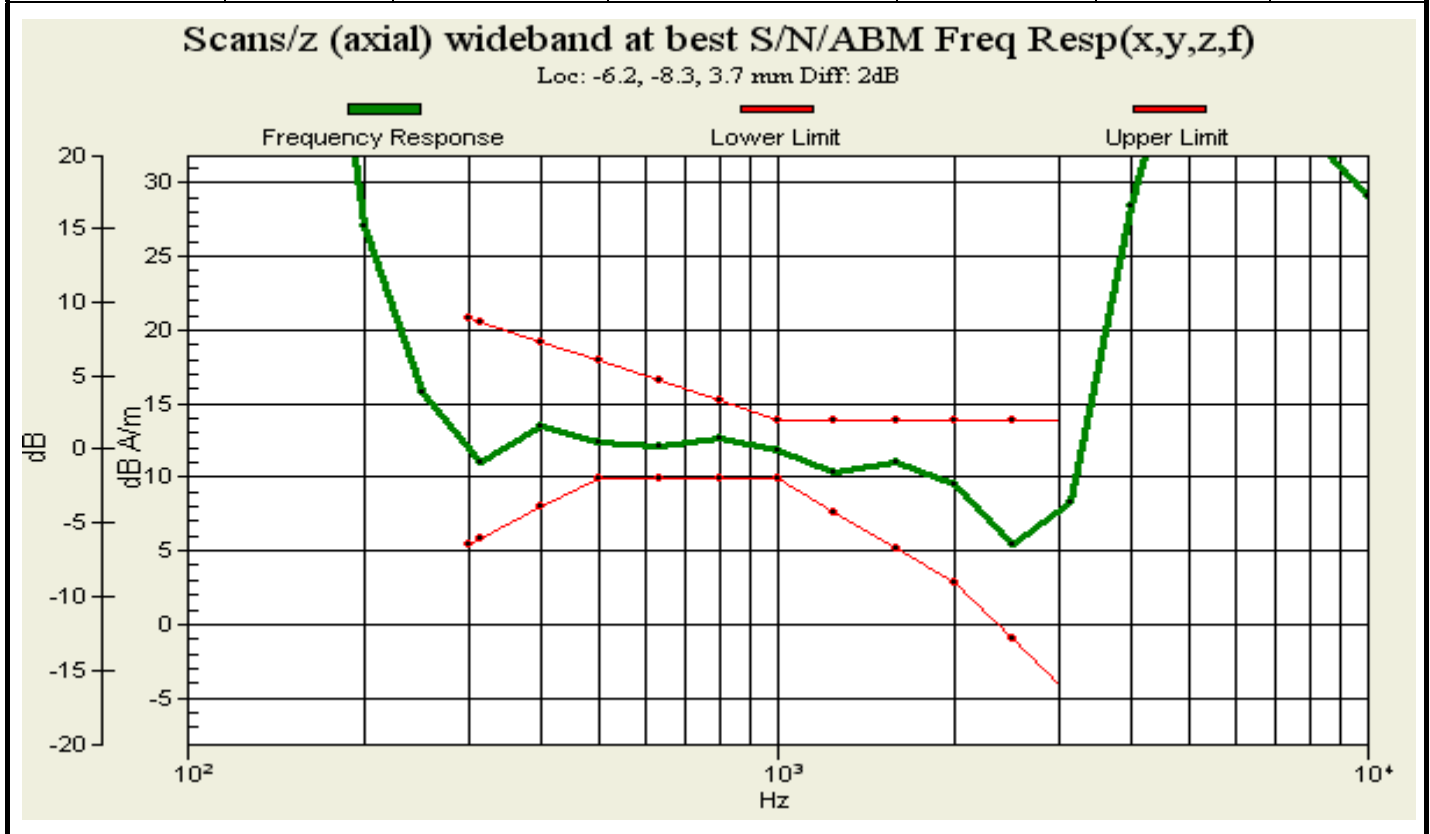

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02


Page 21 of 122

### Battery (SN: B08606451BA)

| Band-Channel  | Probe Orientation | Measurement Position (x,y)[mm] | ABM1≥ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|---------------|-------------------|--------------------------------|---------------------------|--------------------|--------------------|----------|
| GSM 850-CH190 | x (Radial):       | (-1.2,-11.3)                   | 6.24                      | 26.8               | /                  | T3       |
|               | y (Radial):       | (-4.2,0.7)                     | -2.51                     | 44.6               |                    | T4       |
|               | z (Axial):        | (-6.2,-8.3)                    | 12                        | 45.5               | Pass               | T4       |

### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -6.2, -8.3, 3.7 mm Diff: 2dB

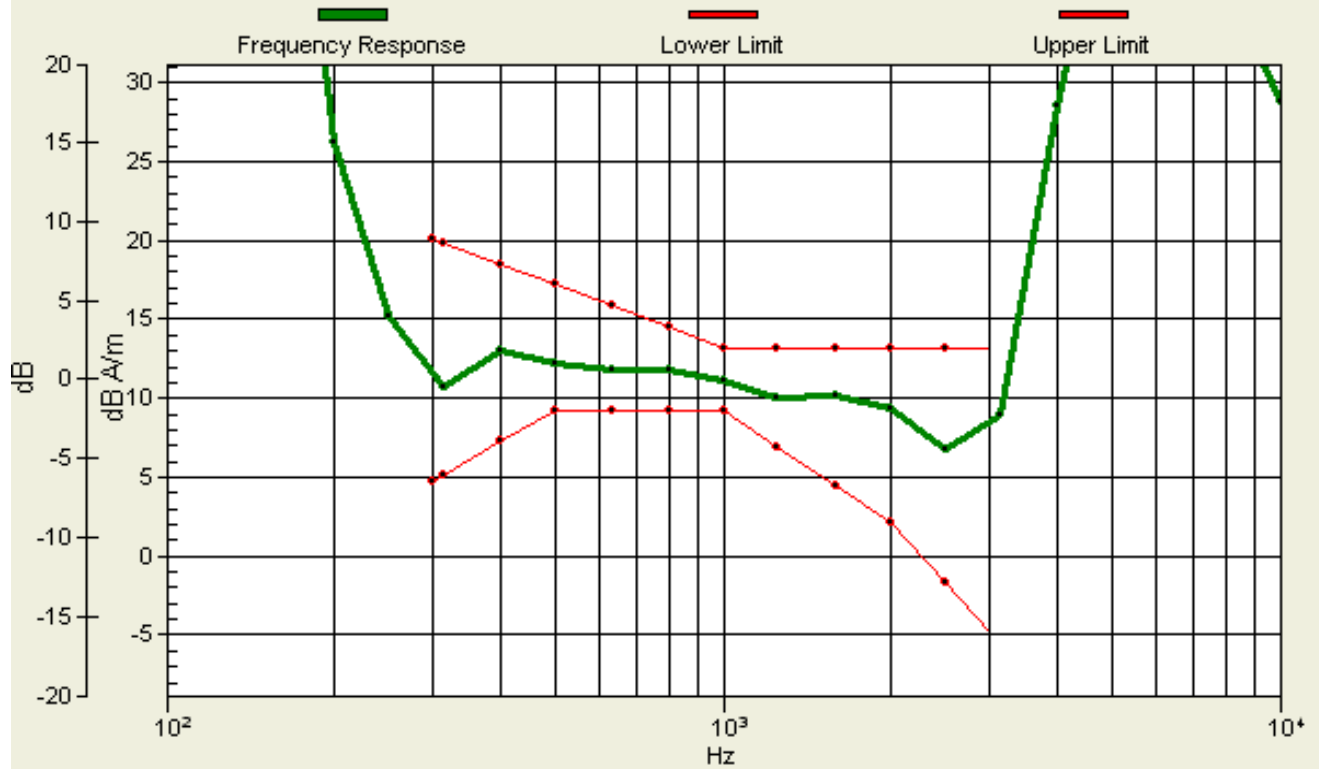

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 22 of 122


### 4.2. GSM 1900

Battery (SN: BAK2011110800337)

| Band-Channel   | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|----------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| GSM 1900-CH661 | x (Radial):       | (1.8,-11.3)                    | 7.67                            | 42.7               | /                  | T4       |
|                | y (Radial):       | (-1.2,-14.3)                   | 11.6                            | 53.3               |                    | T4       |
|                | z (Axial):        | (-6.2,-8.3)                    | 12.2                            | 40.3               | Pass               | T4       |

#### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -6.2, -8.3, 3.7 mm Diff: 2dB

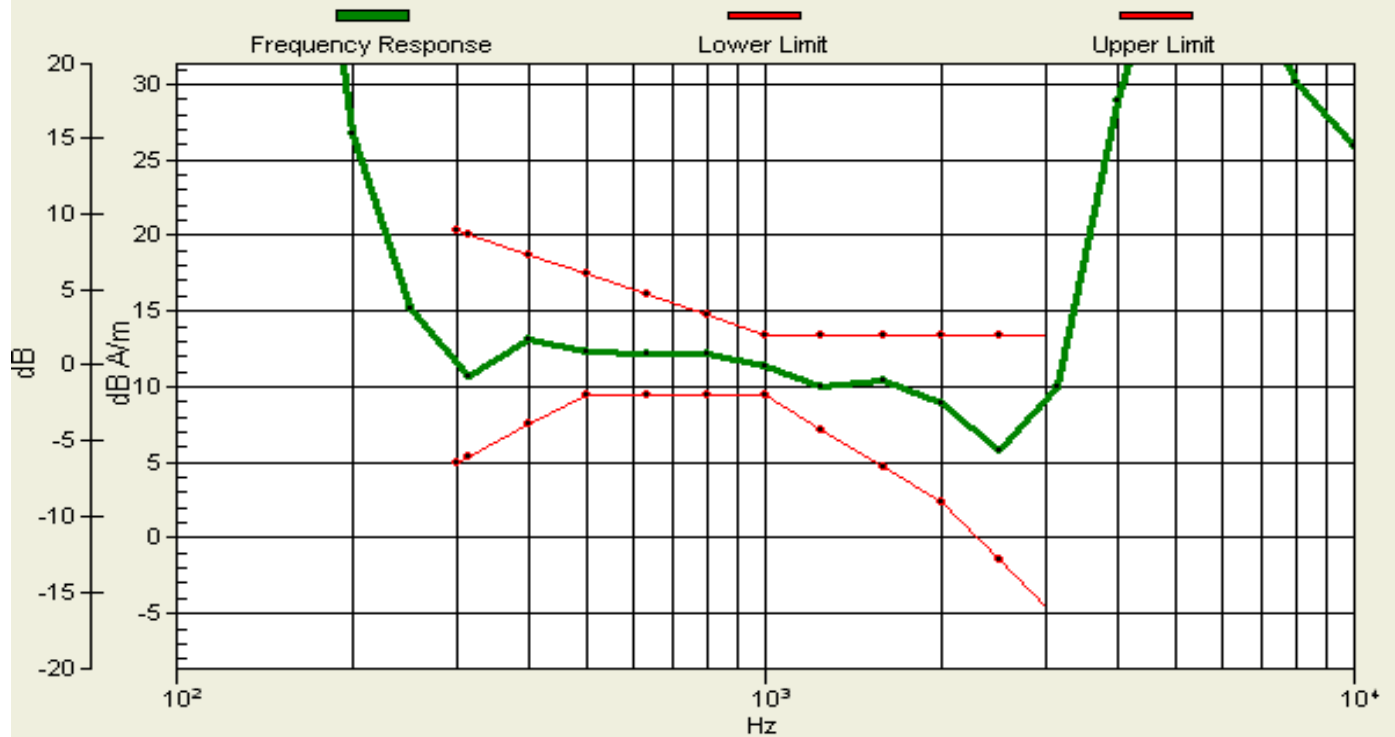

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 23 of 122

### Battery (SN: B08606451BA)

| Band-Channel   | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|----------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| GSM 1900-CH661 | x (Radial):       | (1.8,-11.3)                    | 7.62                            | 30.3               | /                  | T4       |
|                | y (Radial):       | (-4.2,-11.3)                   | 9.99                            | 46.3               |                    | T4       |
|                | z (Axial):        | (-4.2,-8.3)                    | 13.1                            | 47.3               | Pass               | T4       |

### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, -8.3, 3.7 mm Diff: 2dB



# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 24 of 122


### 4.3. WCDMA Band II

Battery (SN: BAK2011110800337)

| Band-Channel         | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|----------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band II-CH9400 | x (Radial):       | (1.8,-11.3)                    | 7.48                            | 44.6               | /                  | T4       |
|                      | y (Radial):       | (-1.2,-14.3)                   | 11.7                            | 64.8               |                    | T4       |
|                      | z (Axial):        | (-4.2,-8.3)                    | 13                              | 49.8               | Pass               | T4       |

#### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, -8.3, 3.7 mm Diff: 2dB

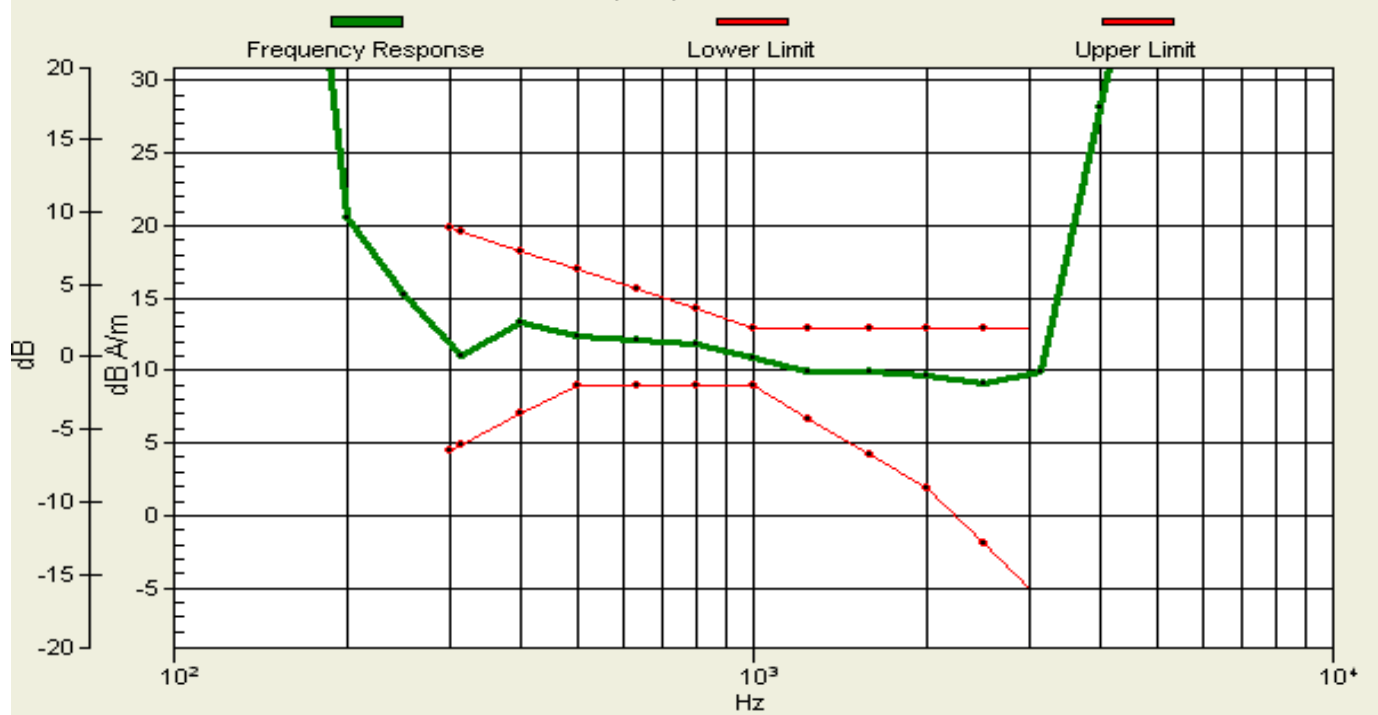

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02


Page 25 of 122

### Battery (SN: B08606451BA)

| Band-Channel         | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|----------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band II-CH9400 | x (Radial):       | (1.8,-11.3)                    | 7.05                            | 48.1               | /                  | T4       |
|                      | y (Radial):       | (-4.2,-14.3)                   | 10.6                            | 57.5               |                    | T4       |
|                      | z (Axial):        | (-4.2,-8.3)                    | 12.5                            | 48.5               | Pass               | T4       |

### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, -8.3, 3.7 mm Diff: 2dB

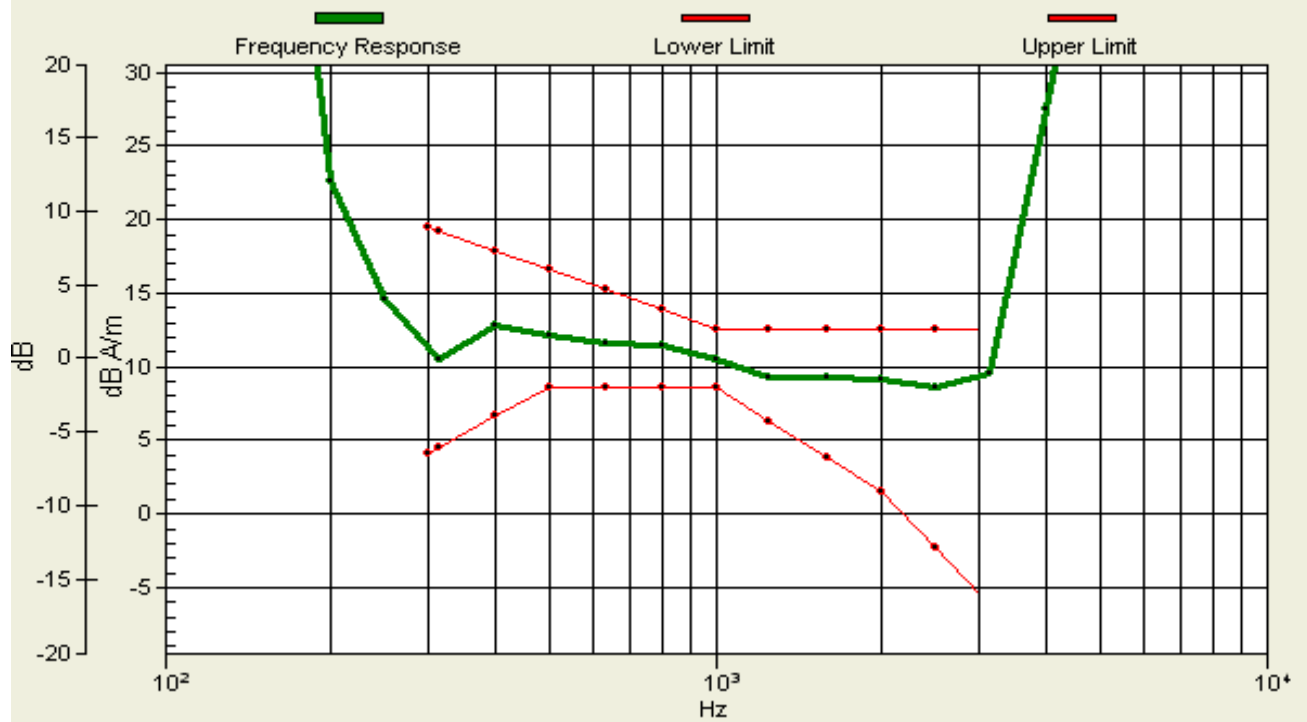

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 26 of 122


### 4.4. WCDMA Band V

Battery (SN: BAK2011110800337)

| Band-Channel        | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|---------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band V-CH4182 | x (Radial):       | (1.8,-11.3)                    | 7.28                            | 44                 | /                  | T4       |
|                     | y (Radial):       | (-1.2,-14.3)                   | 11.3                            | 58.3               |                    | T4       |
|                     | z (Axial):        | (-4.2,-6.3)                    | 12.7                            | 49.3               | Pass               | T4       |

#### Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -4.2, -6.3, 3.7 mm Diff: 2dB

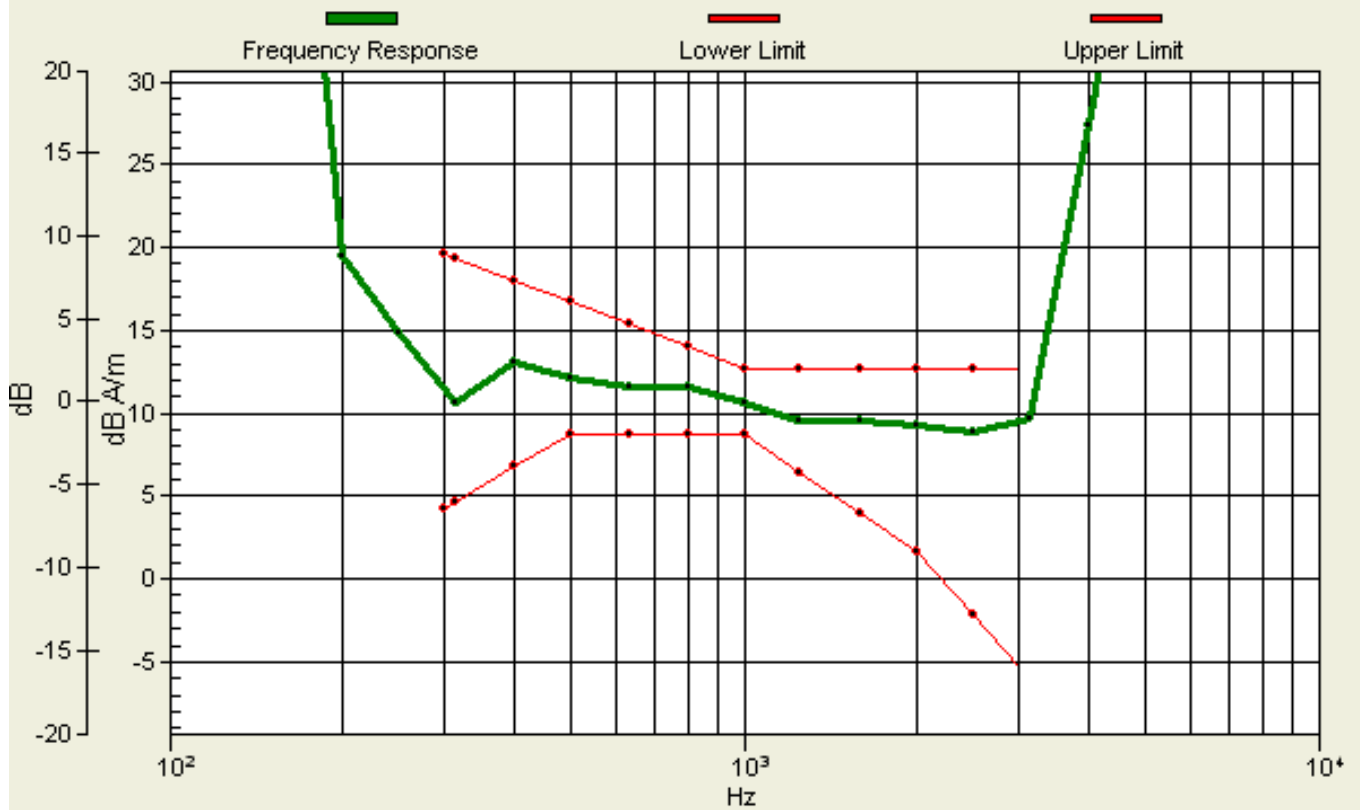

# TA Technology (Shanghai) Co., Ltd.


## Test Report

Report No. RXA1204-0049HAC02

Page 27 of 122

### Battery (SN: B08606451BA )

| Band-Channel        | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|---------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band V-CH4182 | x (Radial):       | (1.8,-11.3)                    | 7.56                            | 44.5               | /                  | T4       |
|                     | y (Radial):       | (-1.2,-11.3)                   | 11.2                            | 57.1               |                    | T4       |
|                     | z (Axial):        | (-4.2,-8.3)                    | 12.9                            | 51.6               | Pass               | T4       |

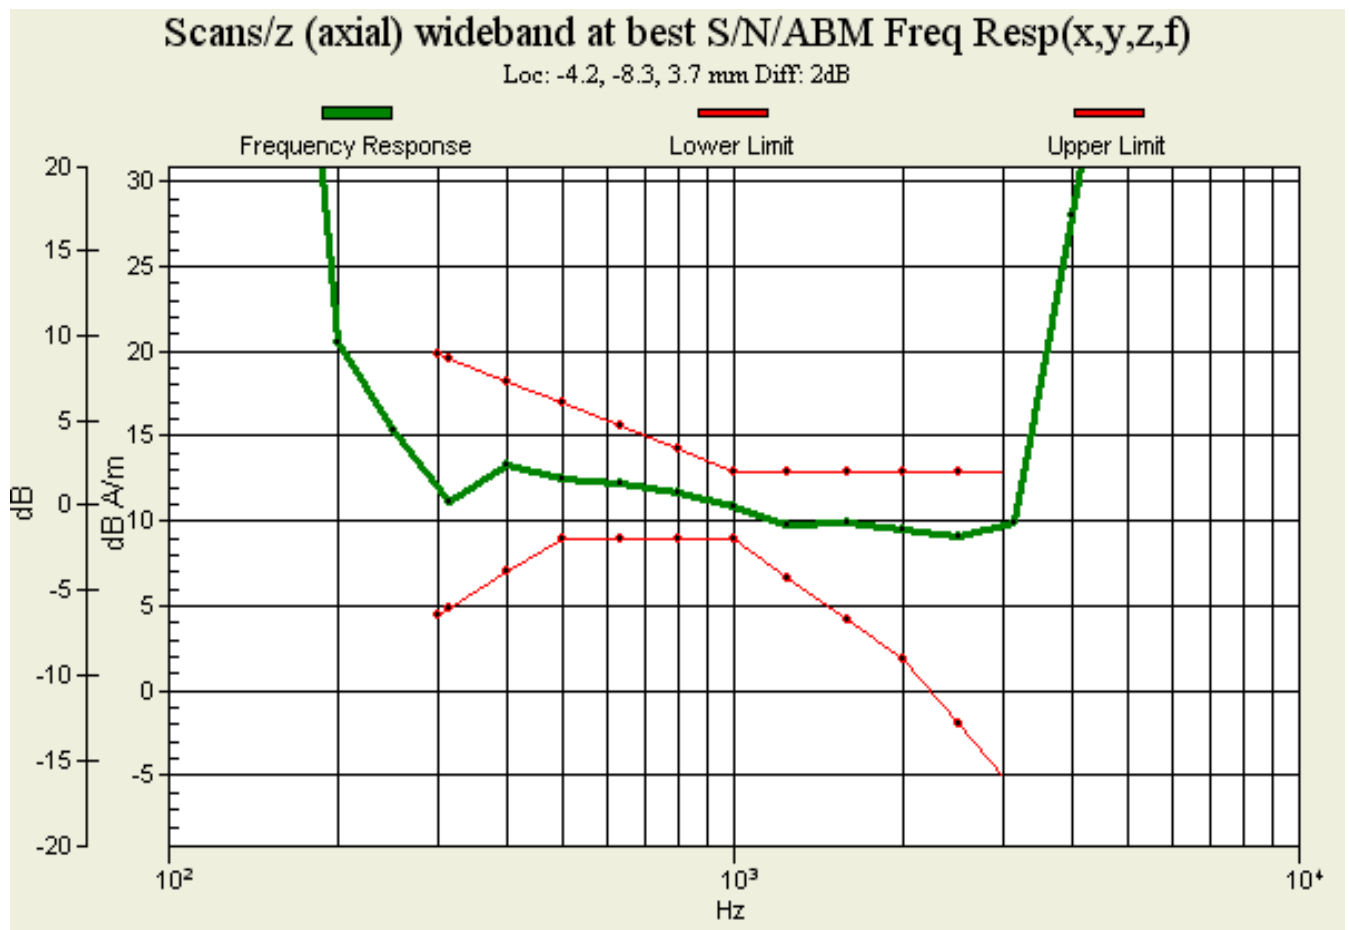

#### Note:

1. The LCD backlight is turn off and volume is adjusted to maximum level during T-Coil testing.
2. Signal strength measurement scan plots are presented in Annex B.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 28 of 122

### 5. Measurement Uncertainty

| No.                      | Error source                         | Type | Uncertainty Value $u_i$ (%) | Prob. Dist. | k          | ABM 1 $c_i$ | ABM2 $c_i$ | Std. Unc. ABM1 $u_i'$ (%) | Std. Unc. ABM2 $u_i'$ (%) | Degree of freedom $V_{eff}$ or $V_i$ |
|--------------------------|--------------------------------------|------|-----------------------------|-------------|------------|-------------|------------|---------------------------|---------------------------|--------------------------------------|
| 1                        | System Repeatability                 | A    | 0.016                       | N           | 1          | 1           | 1          | 0.016                     | 0.016                     | 9                                    |
| <b>Probe Sensitivity</b> |                                      |      |                             |             |            |             |            |                           |                           |                                      |
| 2                        | Reference Level                      | B    | 3.0                         | R           | $\sqrt{3}$ | 1           | 1          | 3.0                       | 3.0                       | $\infty$                             |
| 3                        | AMCC Geometry                        | B    | 0.4                         | R           | $\sqrt{3}$ | 1           | 1          | 0.2                       | 0.2                       | $\infty$                             |
| 4                        | AMCC Current                         | B    | 0.6                         | R           | $\sqrt{3}$ | 1           | 1          | 0.4                       | 0.4                       | $\infty$                             |
| 5                        | Probe Positioning during Calibration | B    | 0.1                         | R           | $\sqrt{3}$ | 1           | 1          | 0.1                       | 0.1                       | $\infty$                             |
| 6                        | Noise Contribution                   | B    | 0.7                         | R           | $\sqrt{3}$ | 0.014<br>3  | 1          | 0.0                       | 0.4                       | $\infty$                             |
| 7                        | Frequency Slope                      | B    | 5.9                         | R           | $\sqrt{3}$ | 0.1         | 1          | 0.3                       | 3.5                       | $\infty$                             |
| <b>Probe System</b>      |                                      |      |                             |             |            |             |            |                           |                           |                                      |
| 8                        | Repeatability / Drift                | B    | 1.0                         | R           | $\sqrt{3}$ | 1           | 1          | 0.6                       | 0.6                       | $\infty$                             |
| 9                        | Linearity / Dynamic Range            | B    | 0.6                         | N           | 1          | 1           | 1          | 0.4                       | 0.4                       | $\infty$                             |
| 10                       | Acoustic Noise                       | B    | 1.0                         | R           | $\sqrt{3}$ | 0.1         | 1          | 0.1                       | 0.6                       | $\infty$                             |
| 11                       | Probe Angle                          | B    | 2.3                         | R           | $\sqrt{3}$ | 1           | 1          | 1.4                       | 1.4                       | $\infty$                             |
| 12                       | Spectral Processing                  | B    | 0.9                         | R           | $\sqrt{3}$ | 1           | 1          | 0.5                       | 0.5                       | $\infty$                             |
| 13                       | Integration Time                     | B    | 0.6                         | N           | 1          | 1           | 5          | 0.6                       | 3.0                       | $\infty$                             |
| 14                       | Field Distribution                   | B    | 0.2                         | R           | $\sqrt{3}$ | 1           | 1          | 0.1                       | 0.1                       | $\infty$                             |
| <b>Test Signal</b>       |                                      |      |                             |             |            |             |            |                           |                           |                                      |
| 15                       | Ref.Signal Spectral Response         | B    | 0.6                         | R           | $\sqrt{3}$ | 0           | 1          | 0.0                       | 0.4                       | $\infty$                             |
| <b>Positioning</b>       |                                      |      |                             |             |            |             |            |                           |                           |                                      |
| 16                       | Probe Positioning                    | B    | 1.9                         | R           | $\sqrt{3}$ | 1           | 1          | 1.1                       | 1.1                       | $\infty$                             |
| 17                       | Phantom Thickness                    | B    | 0.9                         | R           | $\sqrt{3}$ | 1           | 1          | 0.5                       | 0.5                       | $\infty$                             |

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 29 of 122

|                                          |                       |                                             |     |   |            |   |     |     |      |          |
|------------------------------------------|-----------------------|---------------------------------------------|-----|---|------------|---|-----|-----|------|----------|
| 18                                       | DUT Positioning       | B                                           | 1.9 | R | $\sqrt{3}$ | 1 | 1   | 1.1 | 1.1  | $\infty$ |
| External Contributions                   |                       |                                             |     |   |            |   |     |     |      |          |
| 19                                       | RF Interference       | B                                           | 0.0 | R | $\sqrt{3}$ | 1 | 0.3 | 0.0 | 0.0  | $\infty$ |
| 20                                       | Test Signal Variation | B                                           | 2.0 | R | $\sqrt{3}$ | 1 | 1   | 1.2 | 1.2  | $\infty$ |
| Combined Std. Uncertainty<br>(ABM Field) |                       | $u_c' = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$ |     |   |            |   |     | 4.1 | 6.1  |          |
| Expanded Std. Uncertainty                |                       | $u_e = 2u_c$                                |     | N | $k = 2$    |   |     | 8.2 | 12.2 |          |

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 30 of 122

## 6. Main Test Instruments

| No. | Name                                 | Type                           | Serial Number | Calibration Date  | Valid Period |
|-----|--------------------------------------|--------------------------------|---------------|-------------------|--------------|
| 01  | Audio Magnetic 1D Field Probe        | AM1DV3                         | 3082          | February 17, 2012 | One years    |
| 02  | Audio Magnetic Calibration Coil      | SD HAC P02A                    | 1112          | N/A               | N/A          |
| 03  | Audio Measuring Instrument           | AMMI                           | 1101          | N/A               | N/A          |
| 04  | DAE                                  | DAE4                           | 871           | November 22, 2011 | One year     |
| 05  | Software                             | DASY5, V5.0 Build 120          | N/A           | N/A               | N/A          |
| 06  | Software                             | SEMCAD X Version 13.4 Build 45 | N/A           | N/A               | N/A          |
| 07  | Universal Radio Communication Tester | CMU 200                        | 118133        | May 26, 2011      | One year     |
| 08  | TMFS                                 | TMFS                           | 1018          | December 6, 2010  | Two years    |

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*

## **ANNEX A: Test Layout**



**Picture 1: HAC T-Coil System Layout**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 32 of 122

## **ANNEX B: Graph Results**

### **T-Coil GSM 850 X longitudinal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 1:05:10 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

### **One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| <b>Category</b> | <b>Telephone parameters WD signal quality<br/>[(signal+noise)-to-noise ratio in decibels]</b> |
|-----------------|-----------------------------------------------------------------------------------------------|
| Category T1     | 0 dB to 10 dB                                                                                 |
| Category T2     | 10 dB to 20 dB                                                                                |
| Category T3     | 20 dB to 30 dB                                                                                |
| Category T4     | > 30 dB                                                                                       |

#### **Cursor:**

ABM1 comp = 7.63 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

### **One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal) fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 33 of 122

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.81 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 40.9 dB

ABM1 comp = 6.44 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -11.3, 3.7 mm

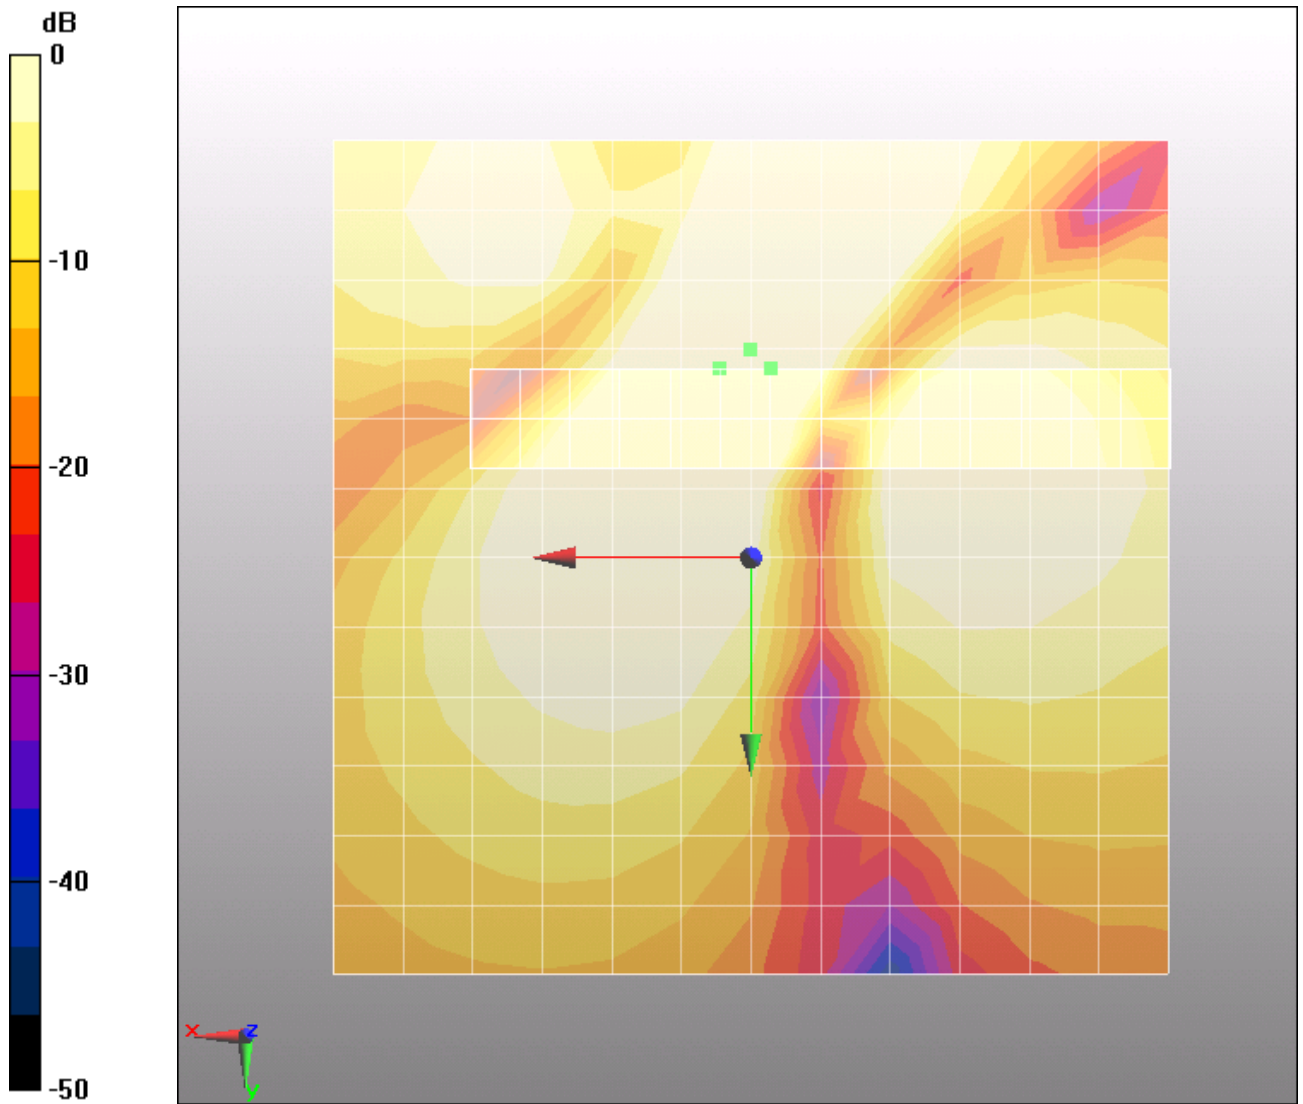


Figure 11 T-Coil GSM 850 X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 35 of 122

**T-Coil GSM 850 Y transversal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 1:15:40 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 36 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 49.5 dB

ABM1 comp = 11.3 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -11.3, 3.7 mm

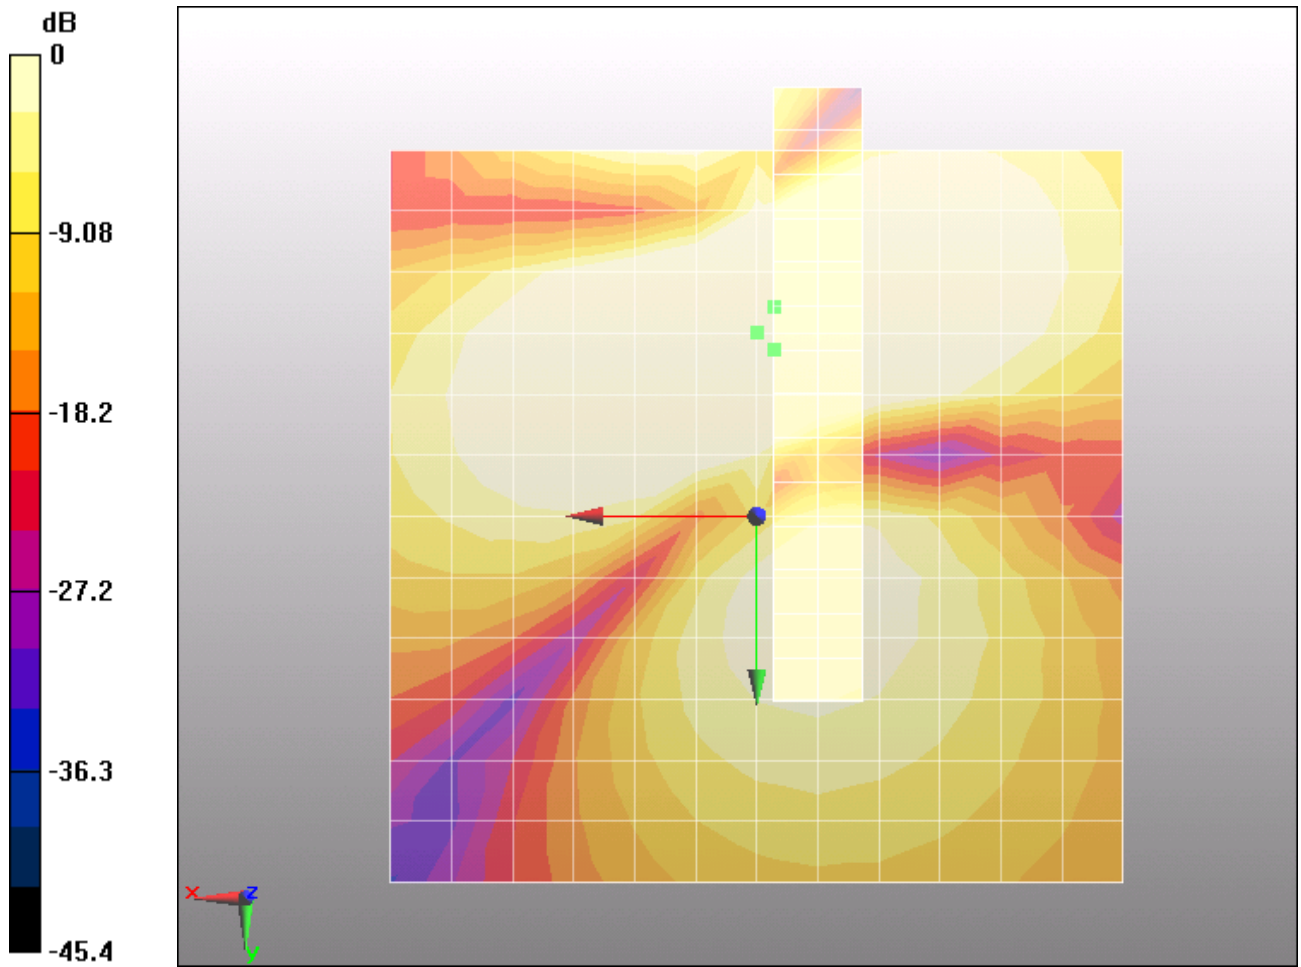


Figure 12 T-Coil GSM 850 Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 38 of 122

**T-Coil GSM 850 Z Axial (SN: BAK2011110800337)**

Date/Time: 4/16/2012 12:53:19 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.3 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 39 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.3 dB A/m

BWC Factor = 0.163995 dB

Location: -2.2, -6.3, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 36.9 dB

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.163995 dB

Location: -6.2, -8.3, 3.7 mm

**One touch 870A With Battery C3 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband  
at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 40 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -6.2, -8.3, 3.7 mm

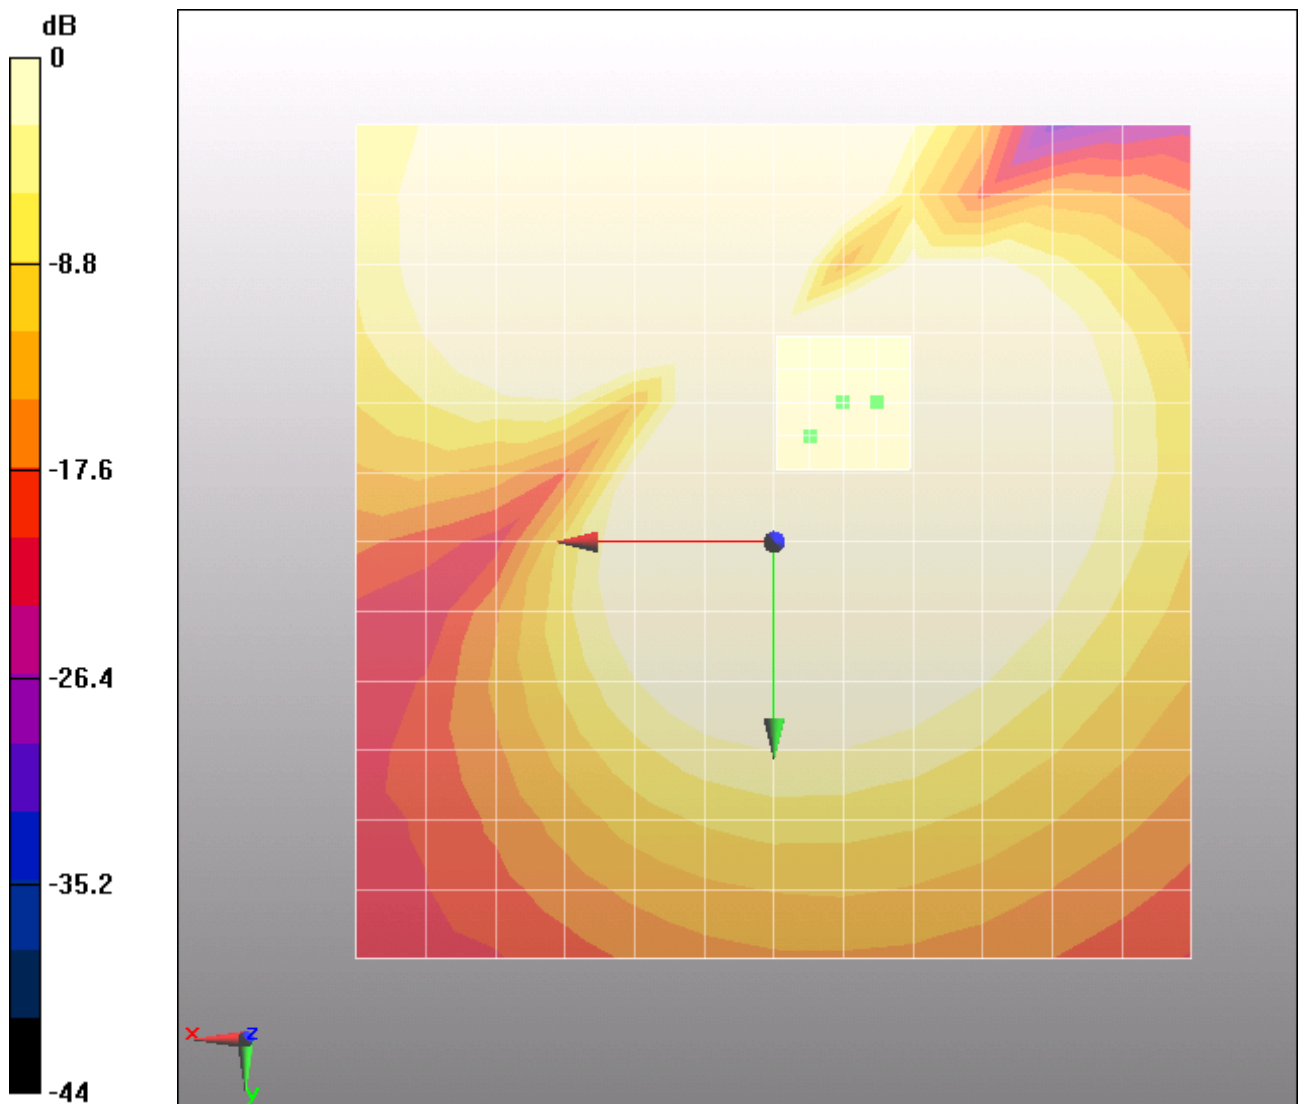

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 41 of 122

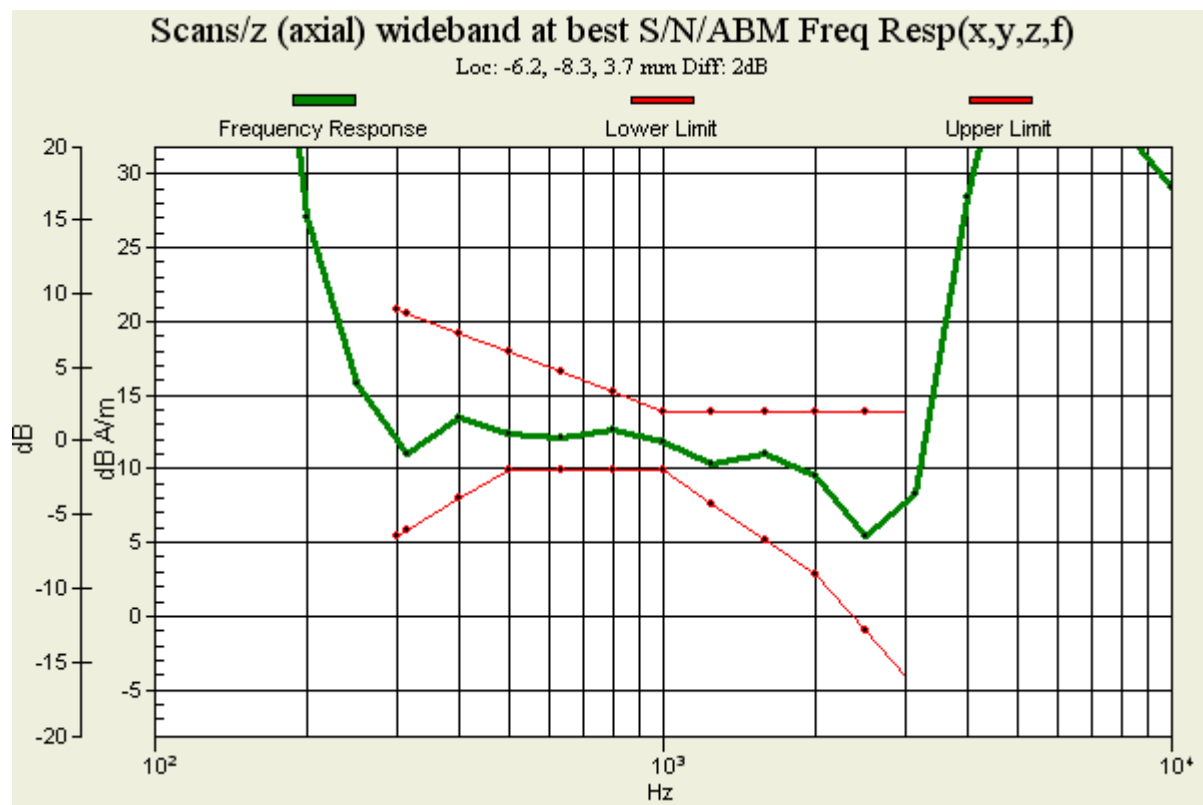


Figure 13 T-Coil GSM 1900 Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 42 of 122

**T-Coil GSM 850 X longitudinal (SN: B08606451BA)**

Date/Time: 4/16/2012 3:10:54 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.47 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 43 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.28 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 26.8 dB

ABM1 comp = 6.24 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -11.3, 3.7 mm

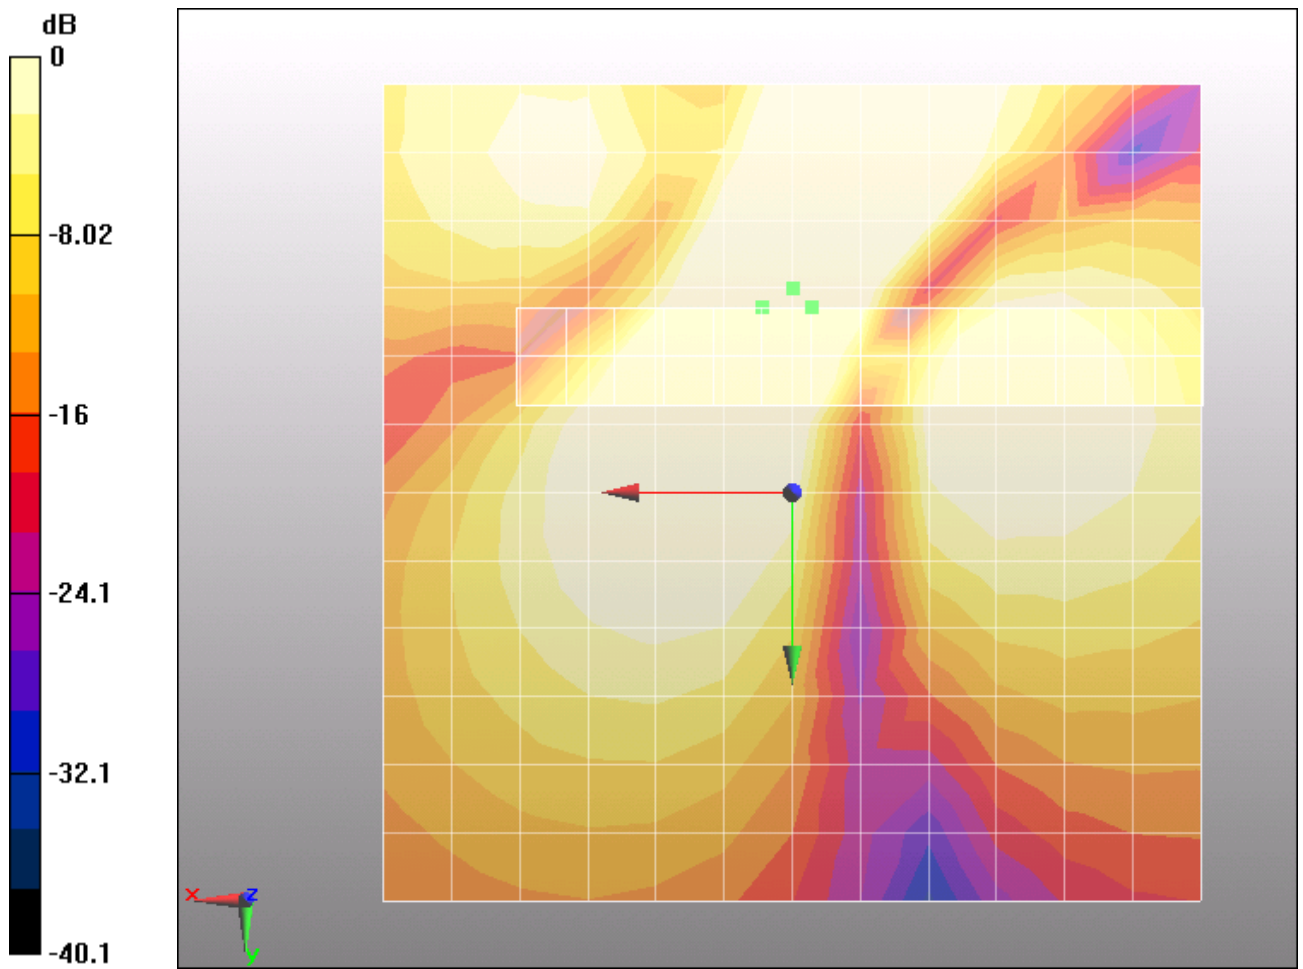


Figure 14 T-Coil GSM 850 X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 45 of 122

**T-Coil GSM 850 Y transversal (SN: B08606451BA)**

Date/Time: 4/16/2012 3:18:15 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.8 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 46 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.4 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 44.6 dB

ABM1 comp = -2.51 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, 0.7, 3.7 mm

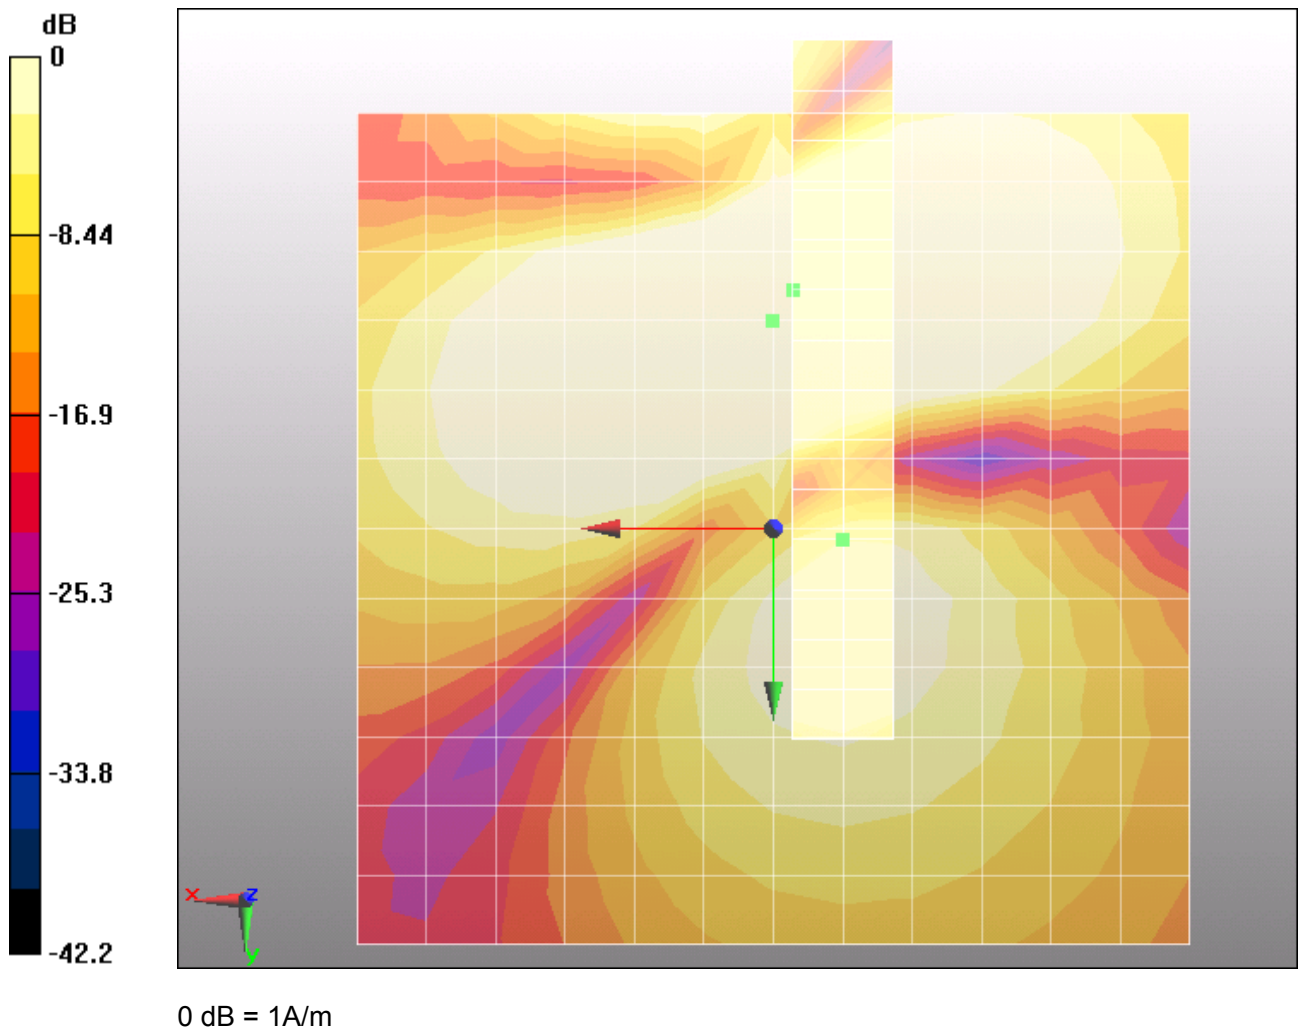


Figure 15 T-Coil GSM 850 Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 48 of 122

**T-Coil GSM 850 Z Axial (SN: B08606451BA)**

Date/Time: 4/16/2012 3:03:31 AM

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 49 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 45.5 dB

ABM1 comp = 12 dB A/m

BWC Factor = 0.163995 dB

Location: -6.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 850 HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband  
at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 50 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -6.2, -8.3, 3.7 mm

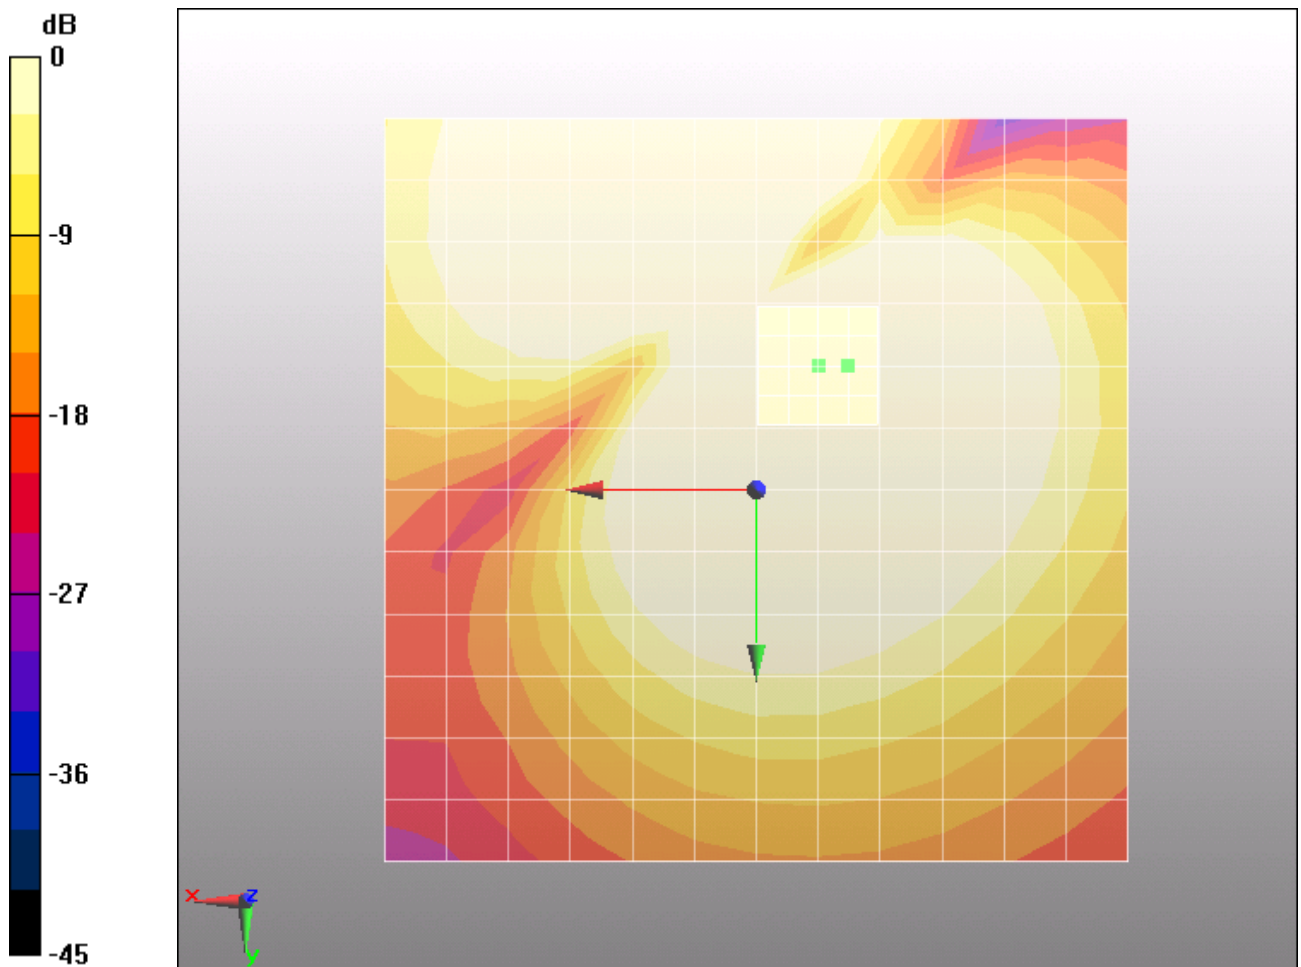

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 51 of 122

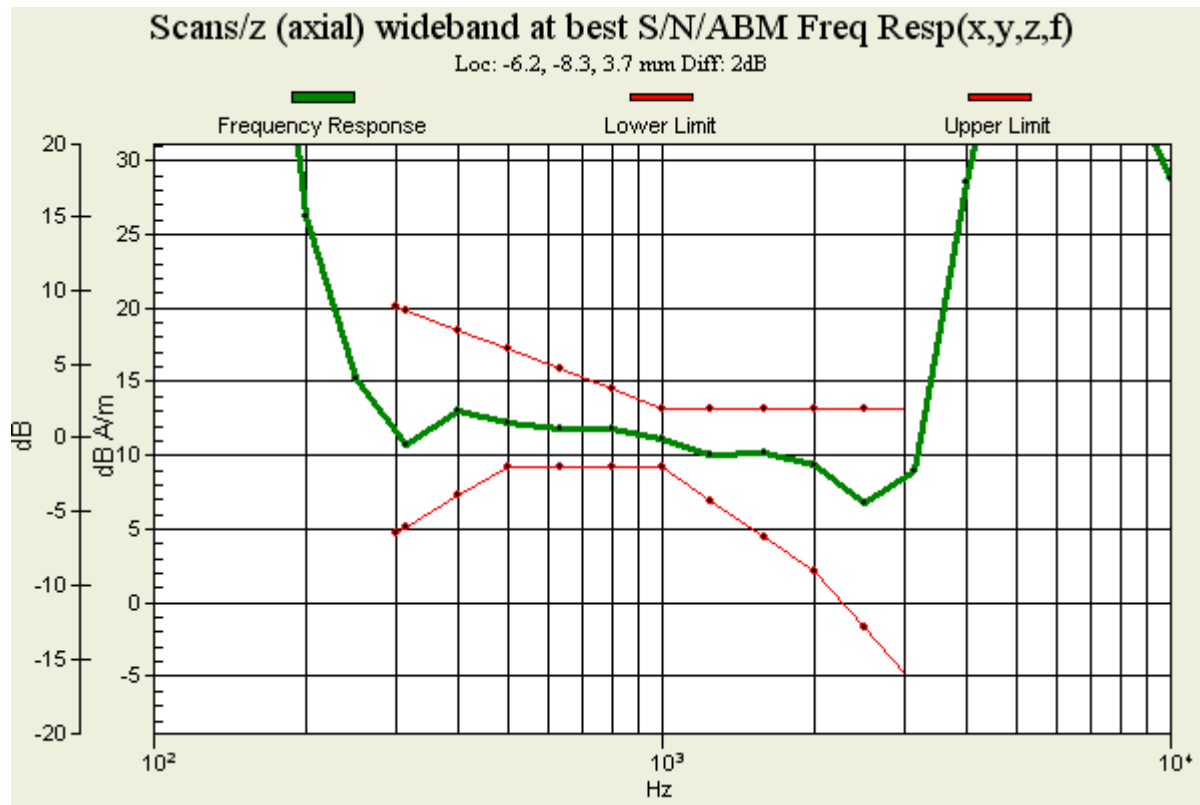


Figure 16 T-Coil GSM 1900 Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 52 of 122

**T-Coil GSM 1900 X longitudinal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 1:42:06 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.43 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 53 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.67 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 42.7 dB

ABM1 comp = 7.67 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

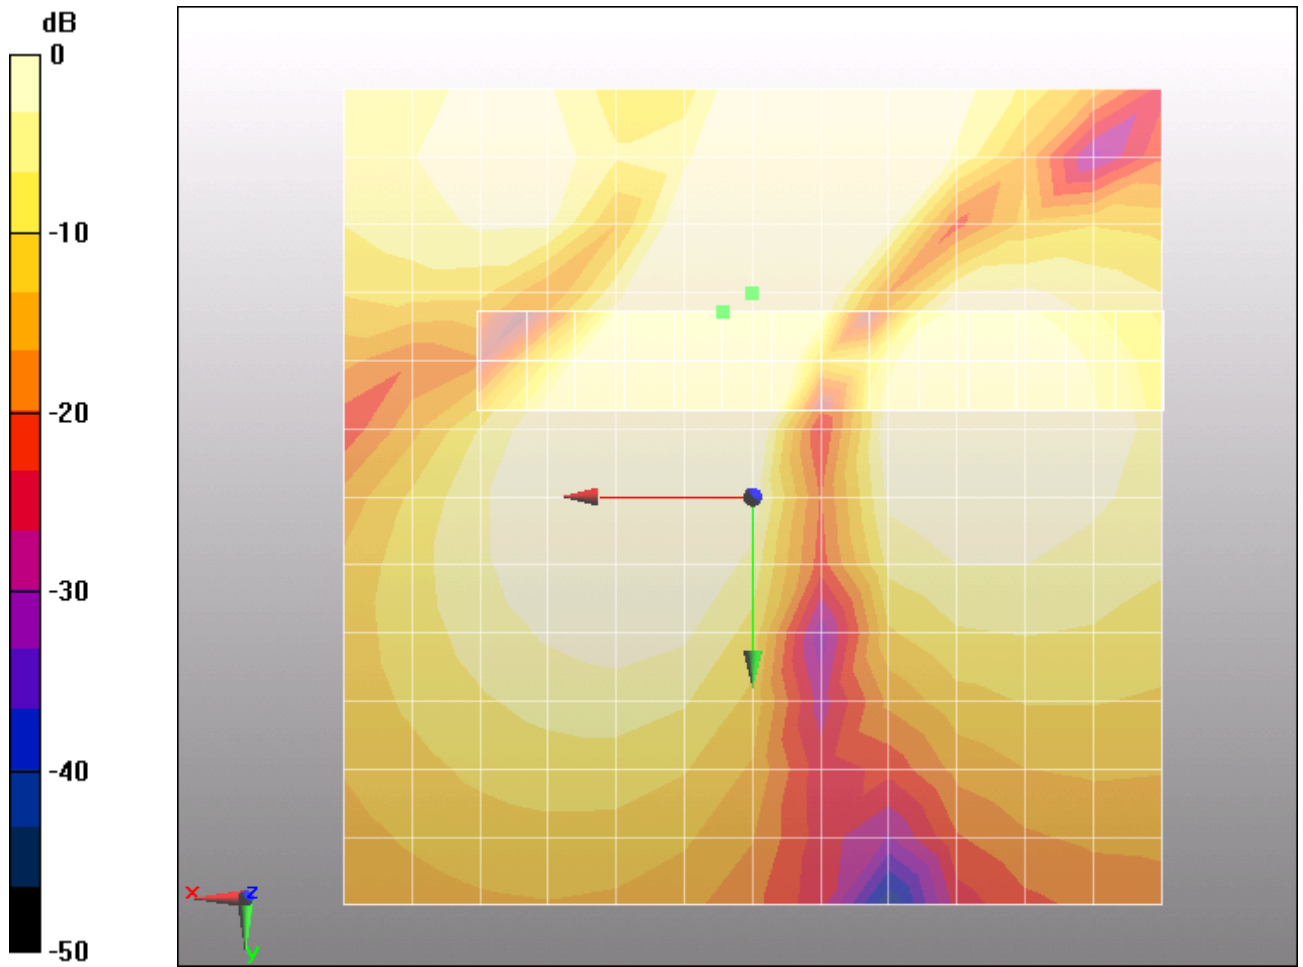

0 dB = 1A/m

Figure 17 T-Coil GSM 1900 X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 55 of 122

**T-Coil GSM 1900 Y transversal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 1:53:52 AM,

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.9 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 56 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 53.3 dB

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

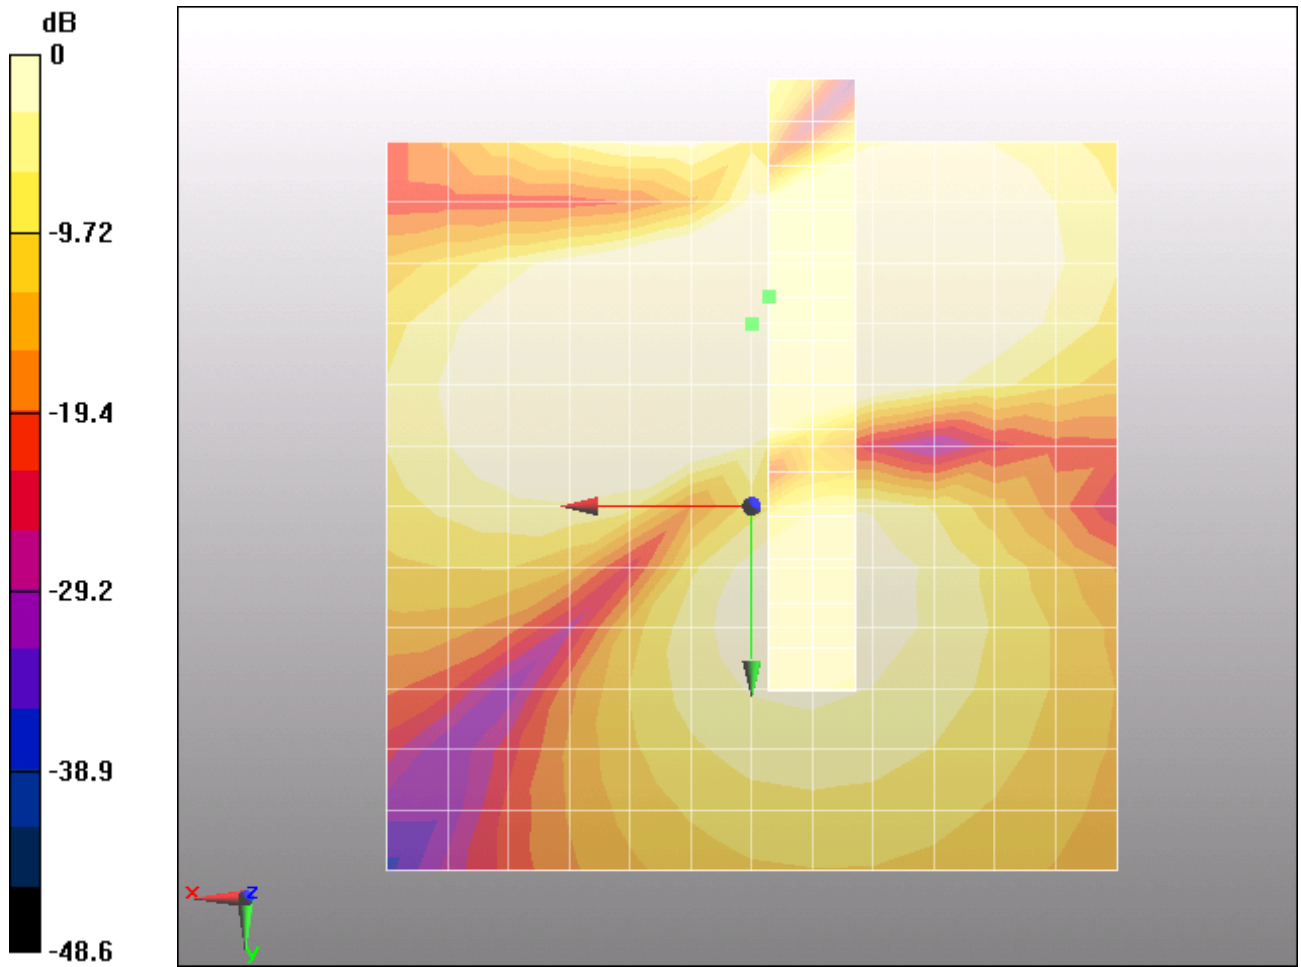


Figure 18 T-Coil GSM 1900 Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 58 of 122

**T-Coil GSM 1900 Z Axial (SN: BAK2011110800337)**

Date/Time: 4/16/2012 1:31:30 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 59 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -2.2, -8.3, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 40.3 dB

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.163995 dB

Location: -6.2, -8.3, 3.7 mm

**One touch 870A With Battery C3 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 60 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -6.2, -8.3, 3.7 mm

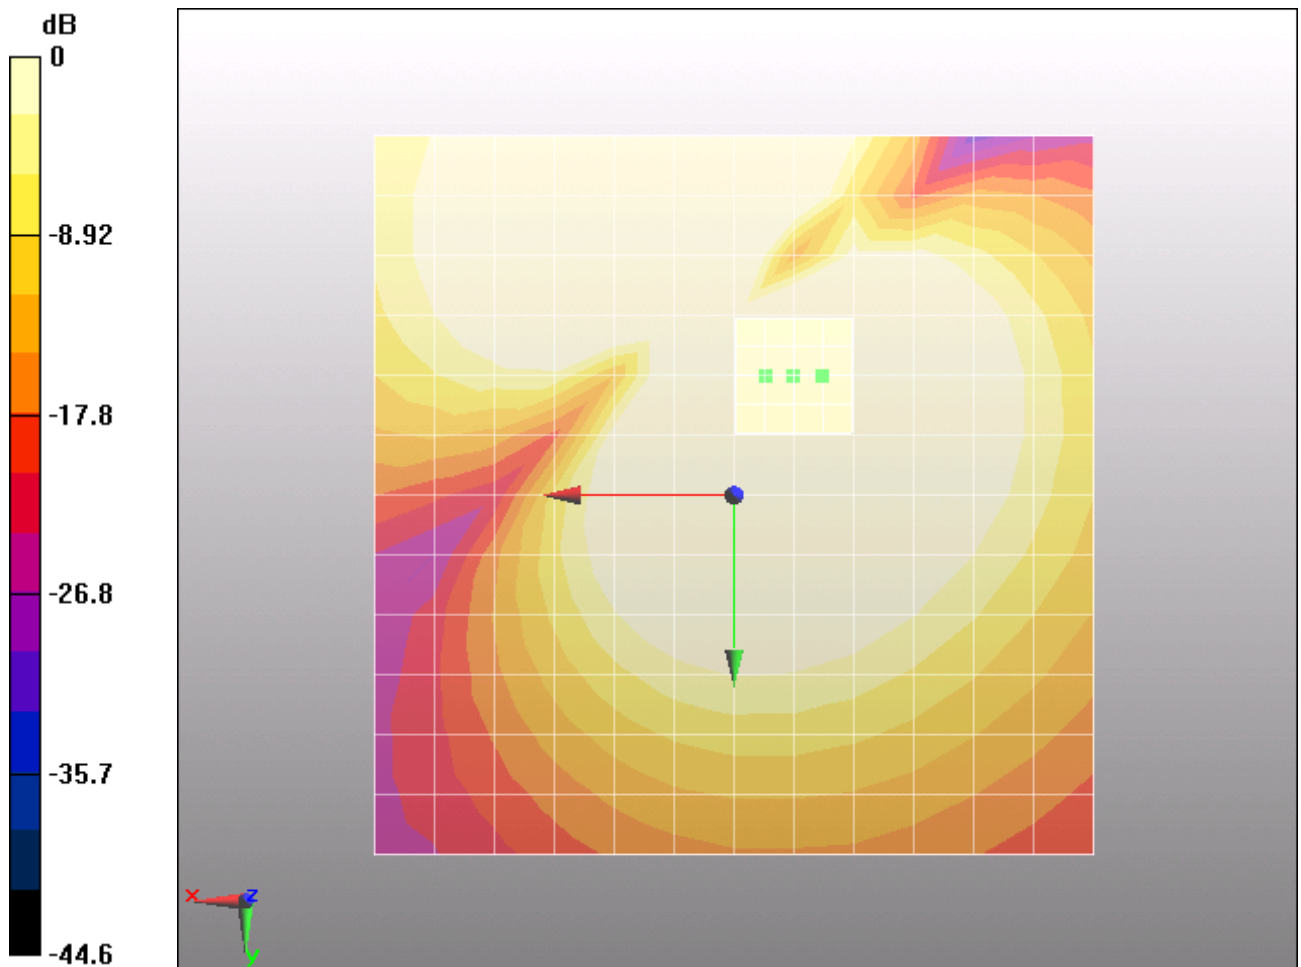

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 61 of 122

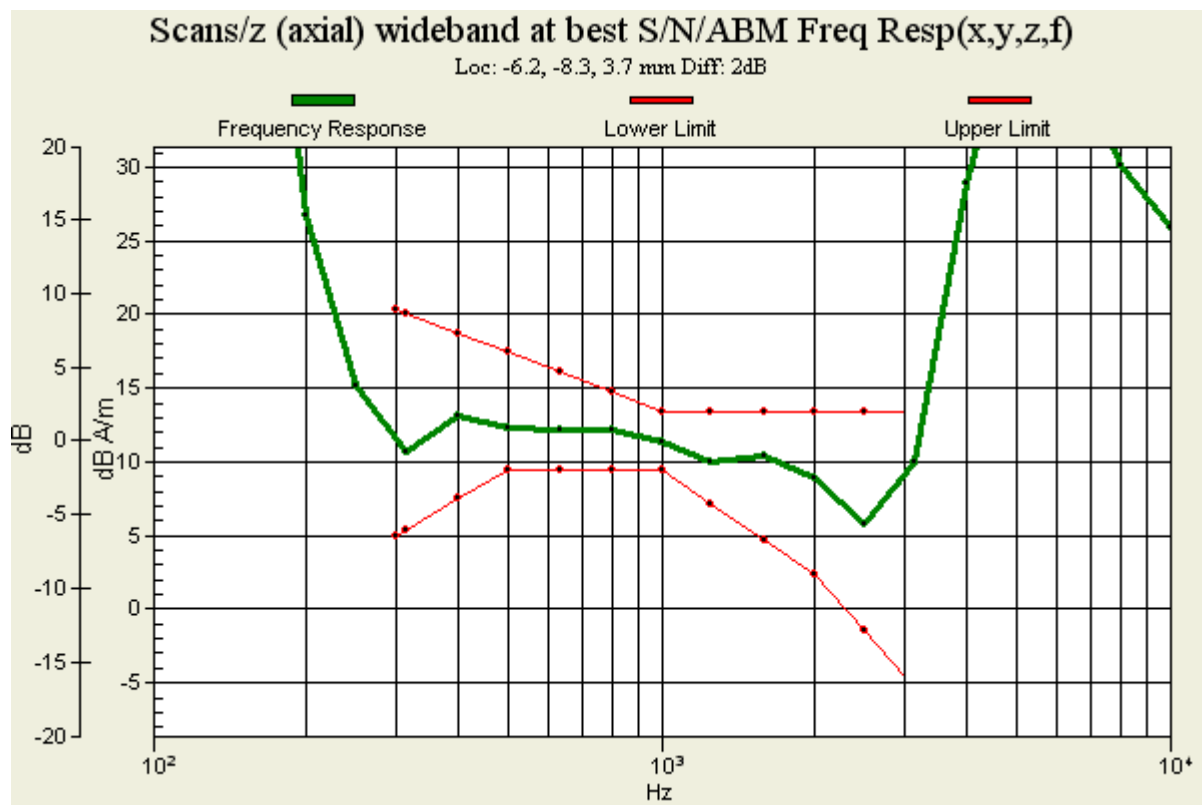


Figure 19 T-Coil GSM 1900 Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 62 of 122

**T-Coil GSM 1900 X longitudinal (SN: B08606451BA)**

Date/Time: 4/16/2012 2:34:20 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.61 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 63 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.62 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 30.3 dB

ABM1 comp = 7.62 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

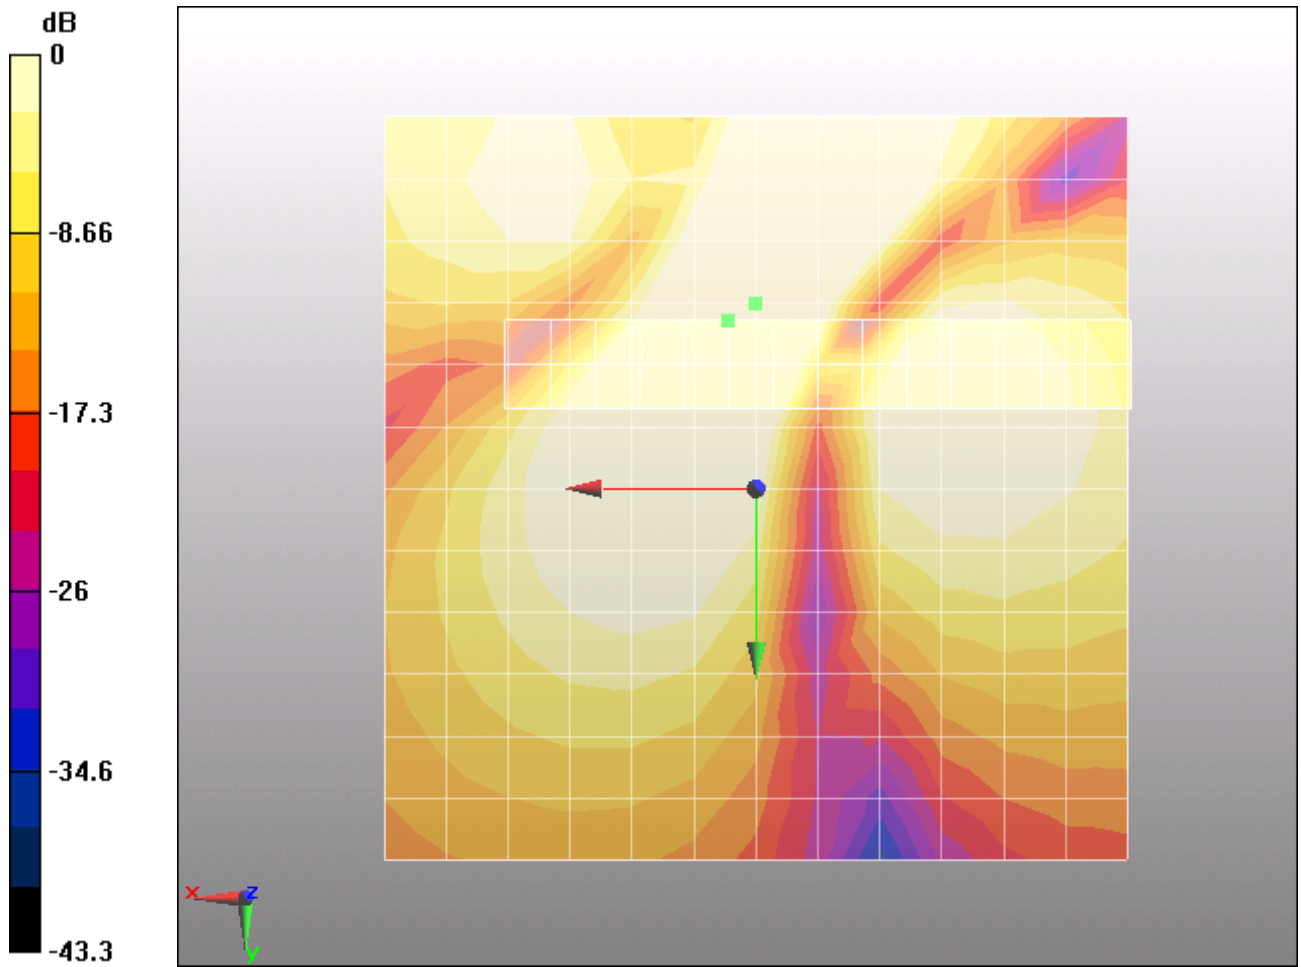

0 dB = 1A/m

Figure 20 T-Coil GSM 1900 X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 65 of 122

**T-Coil GSM 1900 Y transversal (SN: B08606451BA)**

Date/Time: 4/16/2012 2:46:10 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.9 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 66 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.7 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 46.3 dB

ABM1 comp = 9.99 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -11.3, 3.7 mm

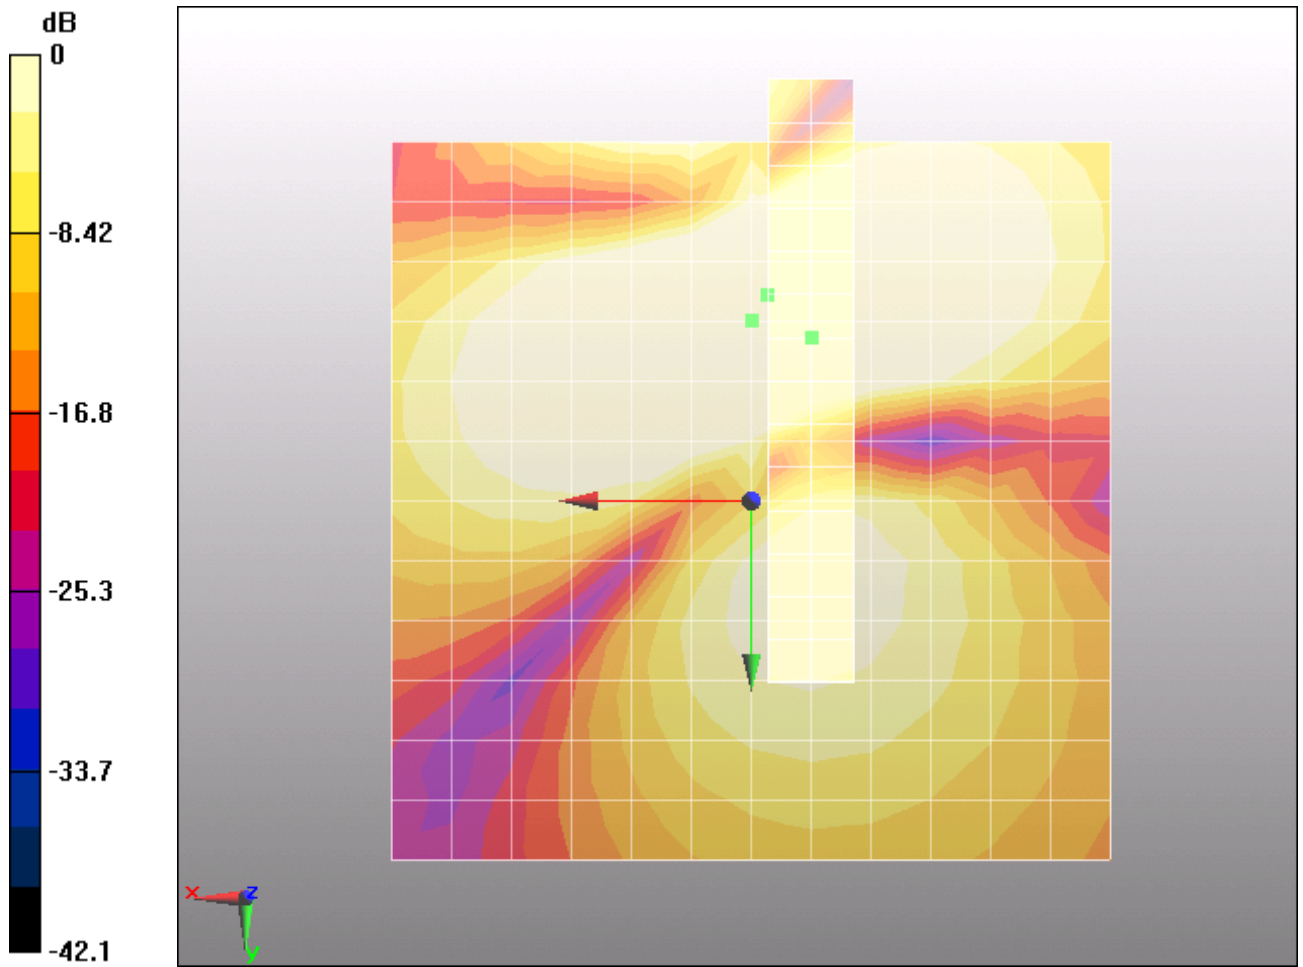


Figure 21 T-Coil GSM 1900 Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 68 of 122

**T-Coil GSM 1900 Z Axial (SN: B08606451BA)**

Date/Time: 4/16/2012 2:23:54 AM

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.3 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 69 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.1 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 47.3 dB

ABM1 comp = 13.1 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**One touch 870A With Battery C1 GSM 1900 HAC\_TCoil\_WD\_Emission/Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 70 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4.2, -8.3, 3.7 mm

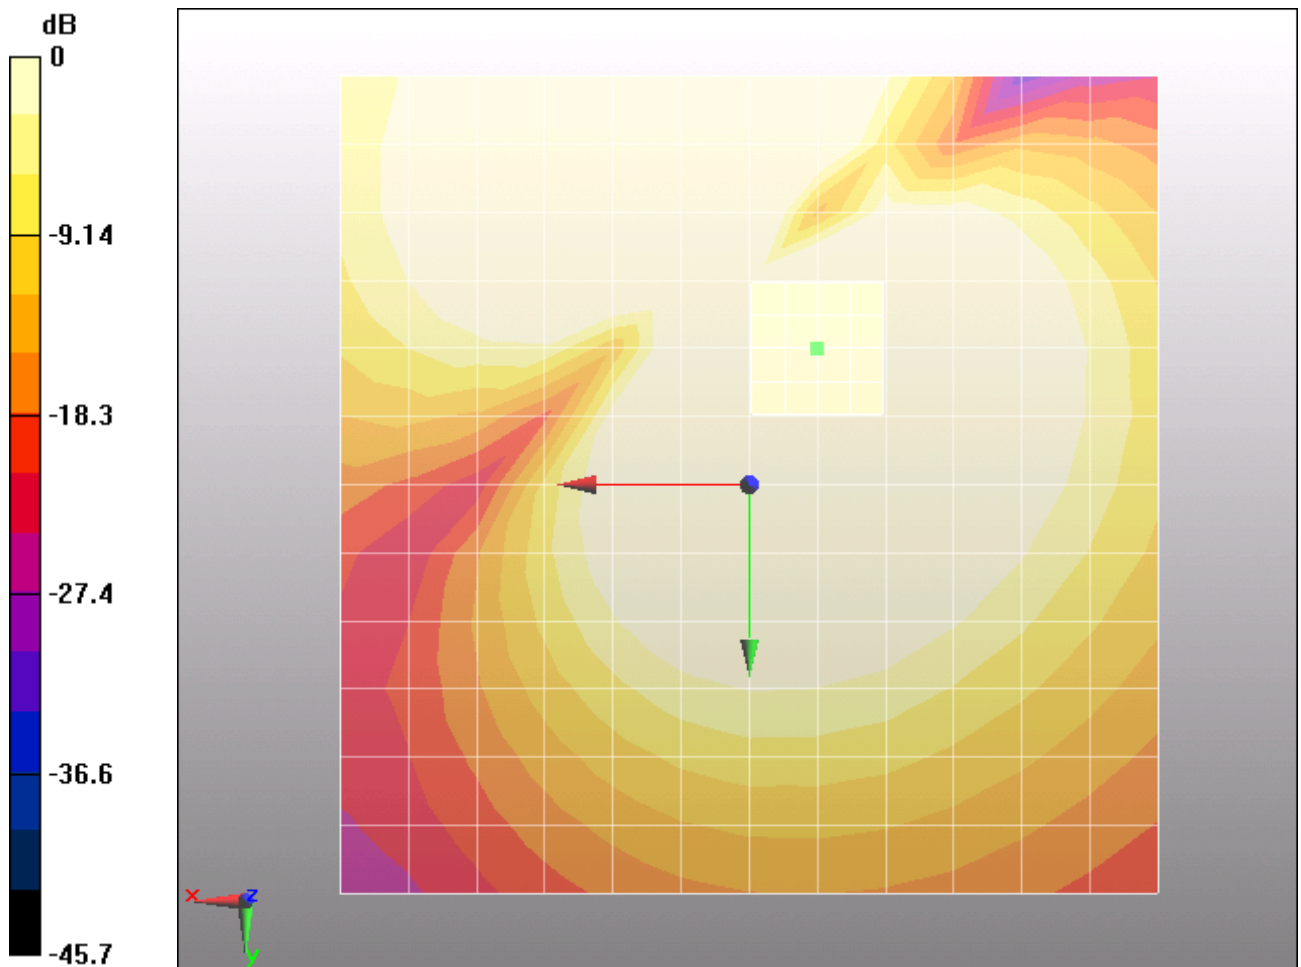

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 71 of 122

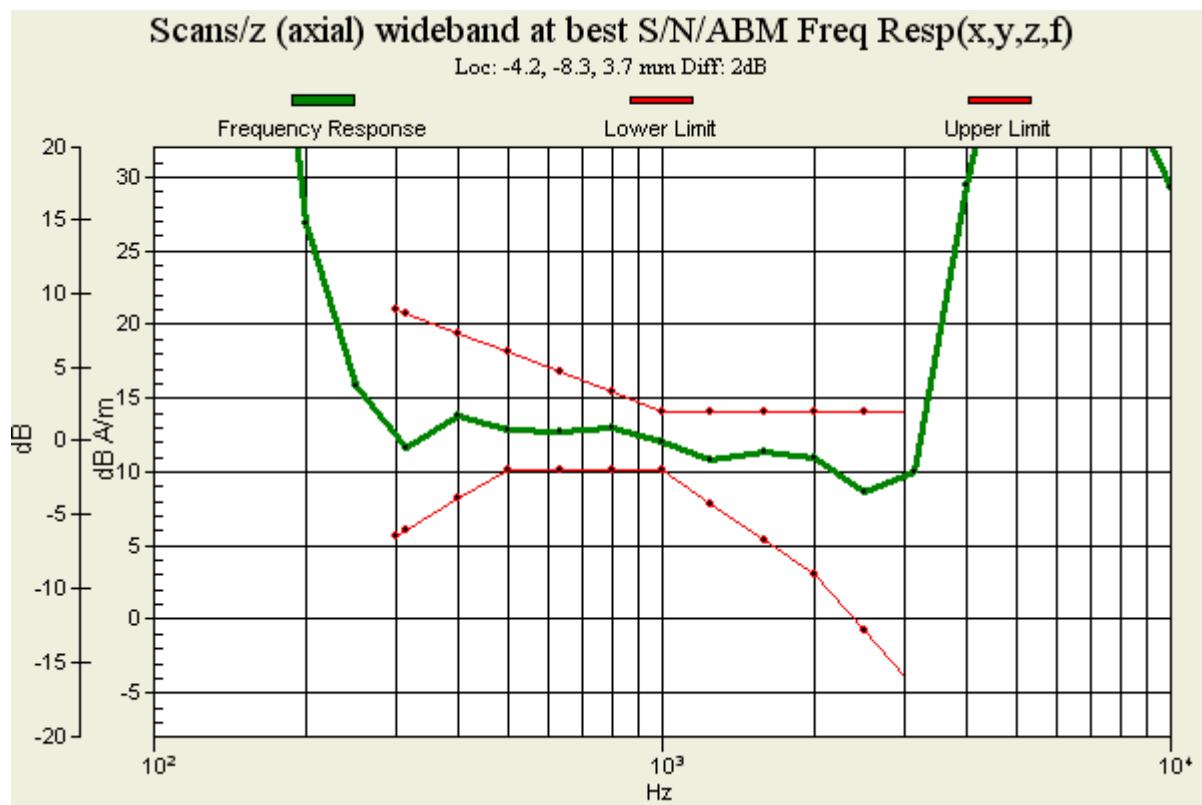


Figure 22 T-Coil GSM 1900 Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 72 of 122

**T-Coil WCDMA Band II X longitudinal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 3:59:56 AM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.63 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 73 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.48 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 44.6 dB

ABM1 comp = 7.48 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

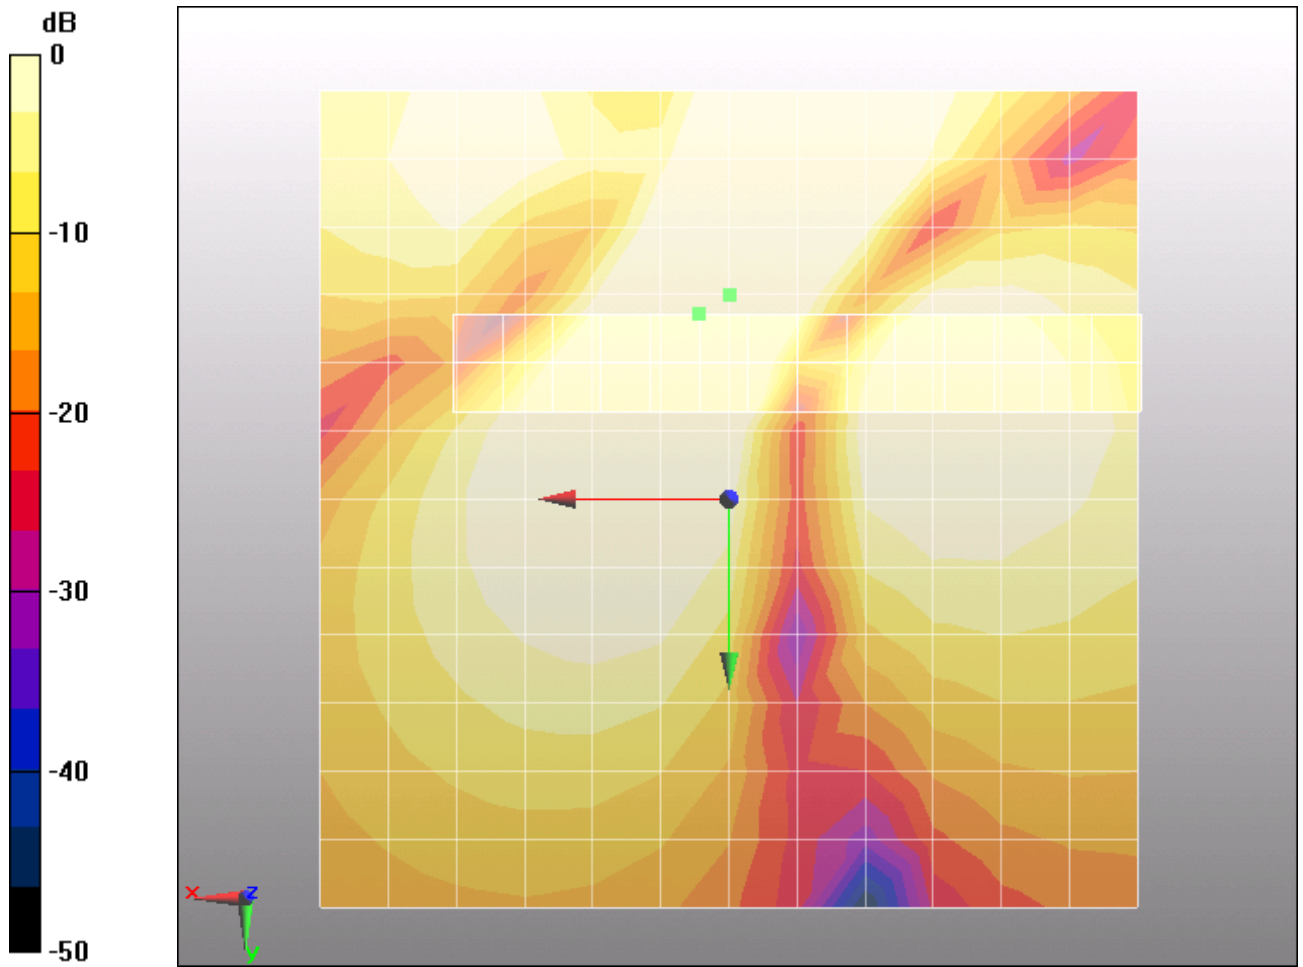

0 dB = 1A/m

Figure 23 T-Coil WCDMA Band II X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 75 of 122

**T-Coil WCDMA Band II Y transversal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 4:07:18 AM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**  
**fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 76 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.7 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 64.8 dB

ABM1 comp = 11.7 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

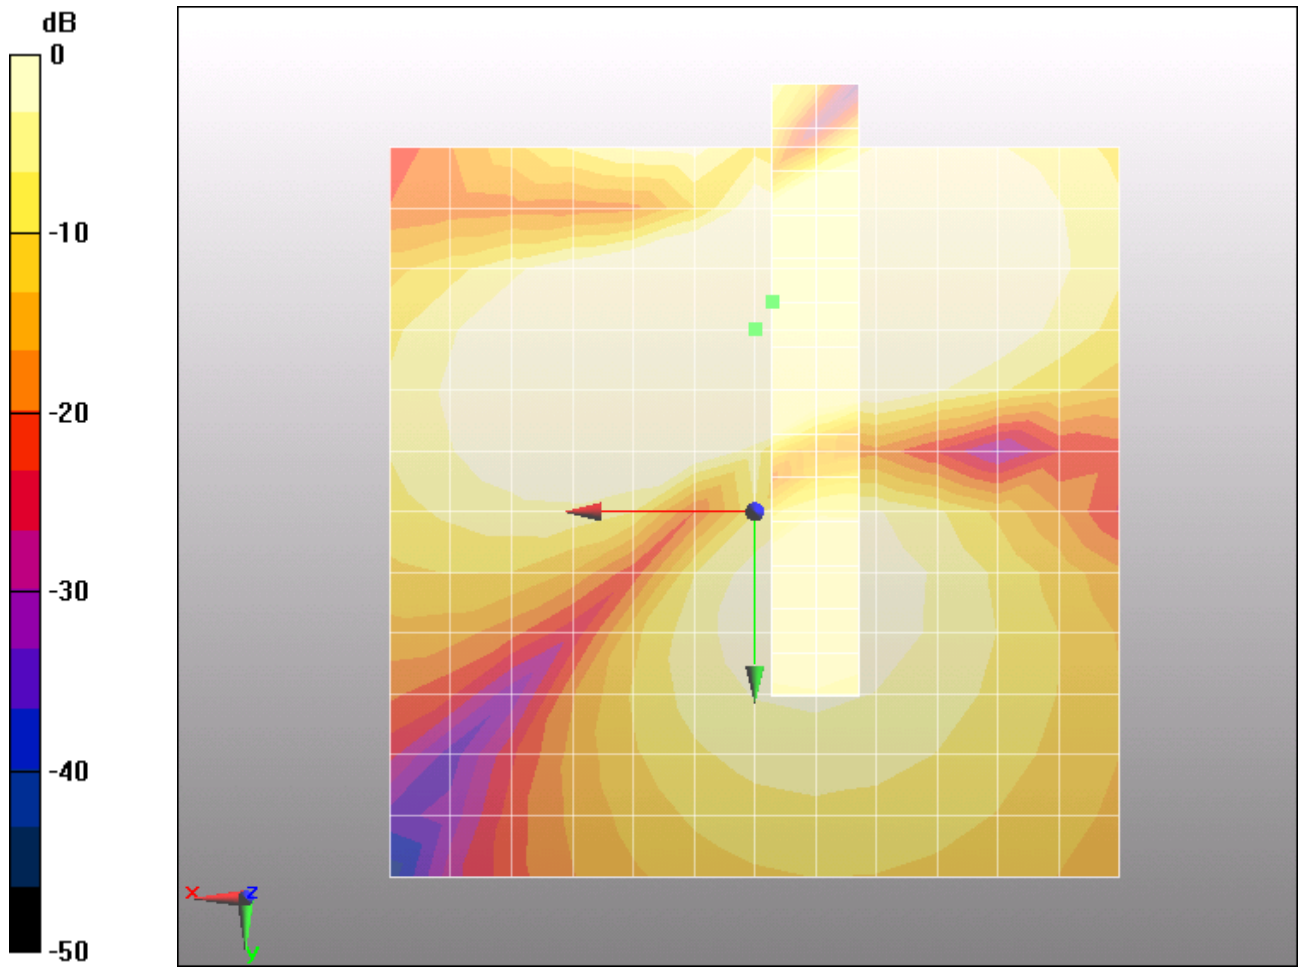

0 dB = 1A/m

Figure 24 T-Coil WCDMA Band II Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 78 of 122

**T-Coil WCDMA Band II Z Axial (SN: BAK2011110800337)**

Date/Time: 4/16/2012 3:52:32 AM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.5 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 79 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 49.8 dB

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial)  
wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 80 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4.2, -8.3, 3.7 mm

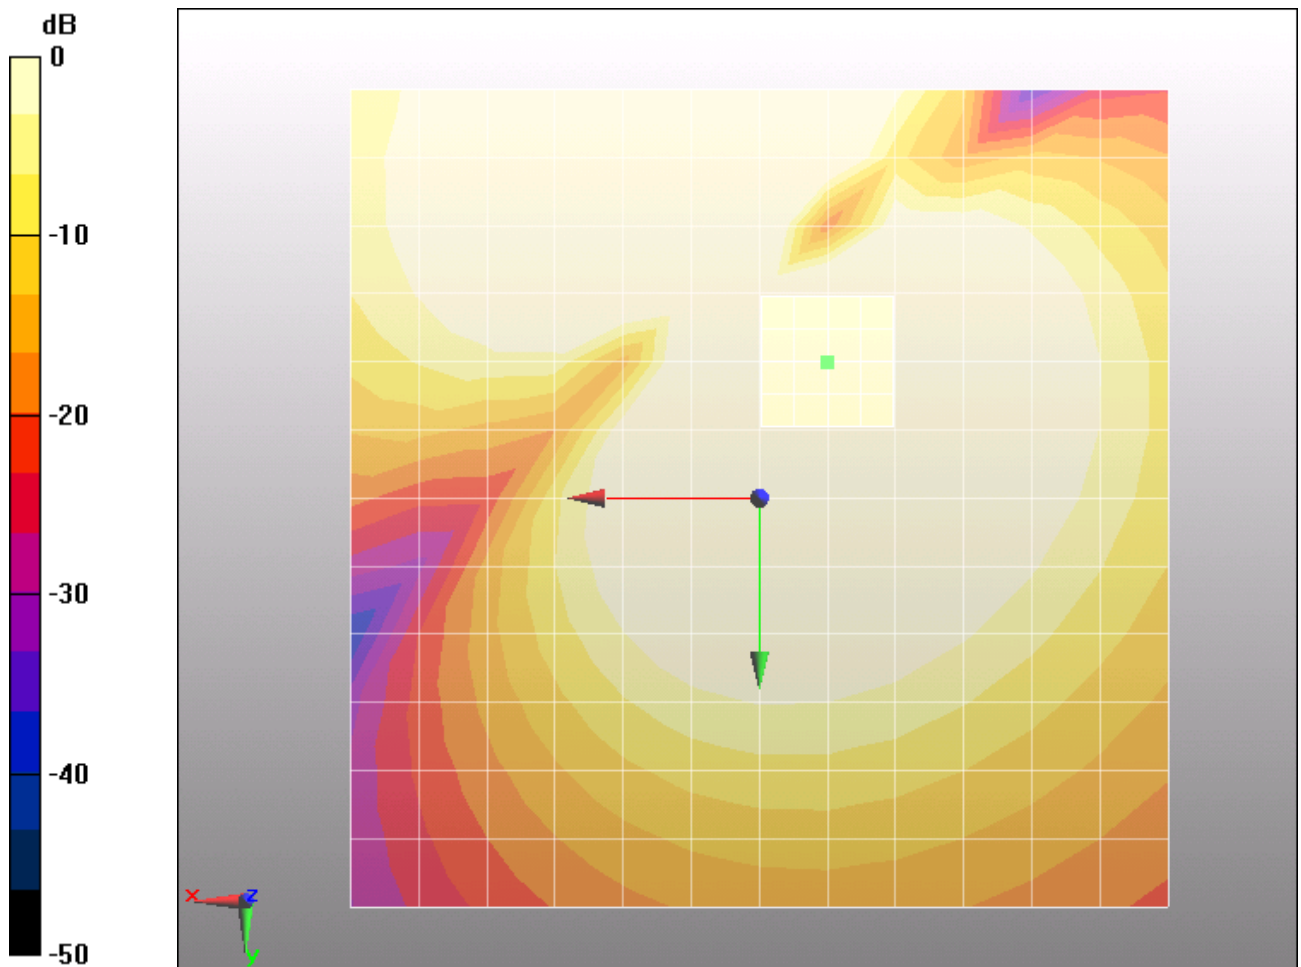

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 81 of 122

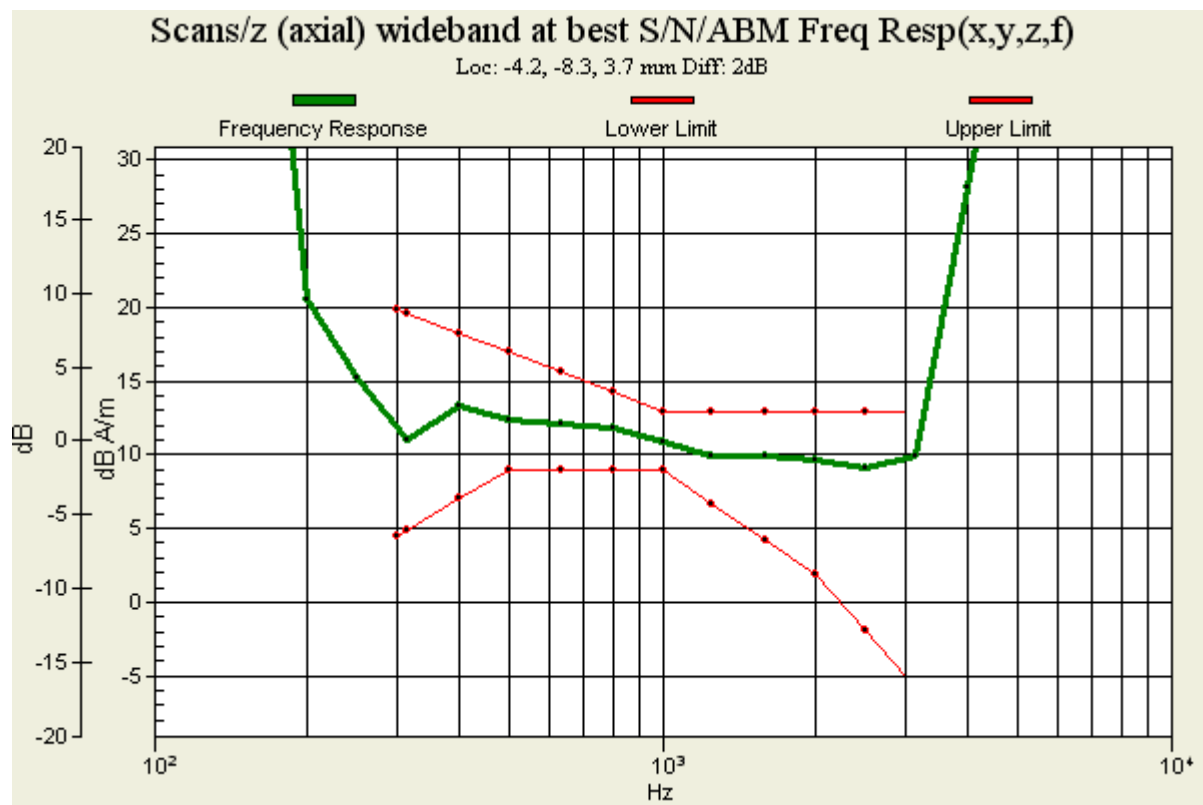


Figure 25 T-Coil WCDMA Band II Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 82 of 122

**T-Coil WCDMA Band II X longitudinal (SN: B08606451BA)**

Date/Time: 4/16/2012 5:10:40 AM,

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.23 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 83 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.05 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 48.1 dB

ABM1 comp = 7.05 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

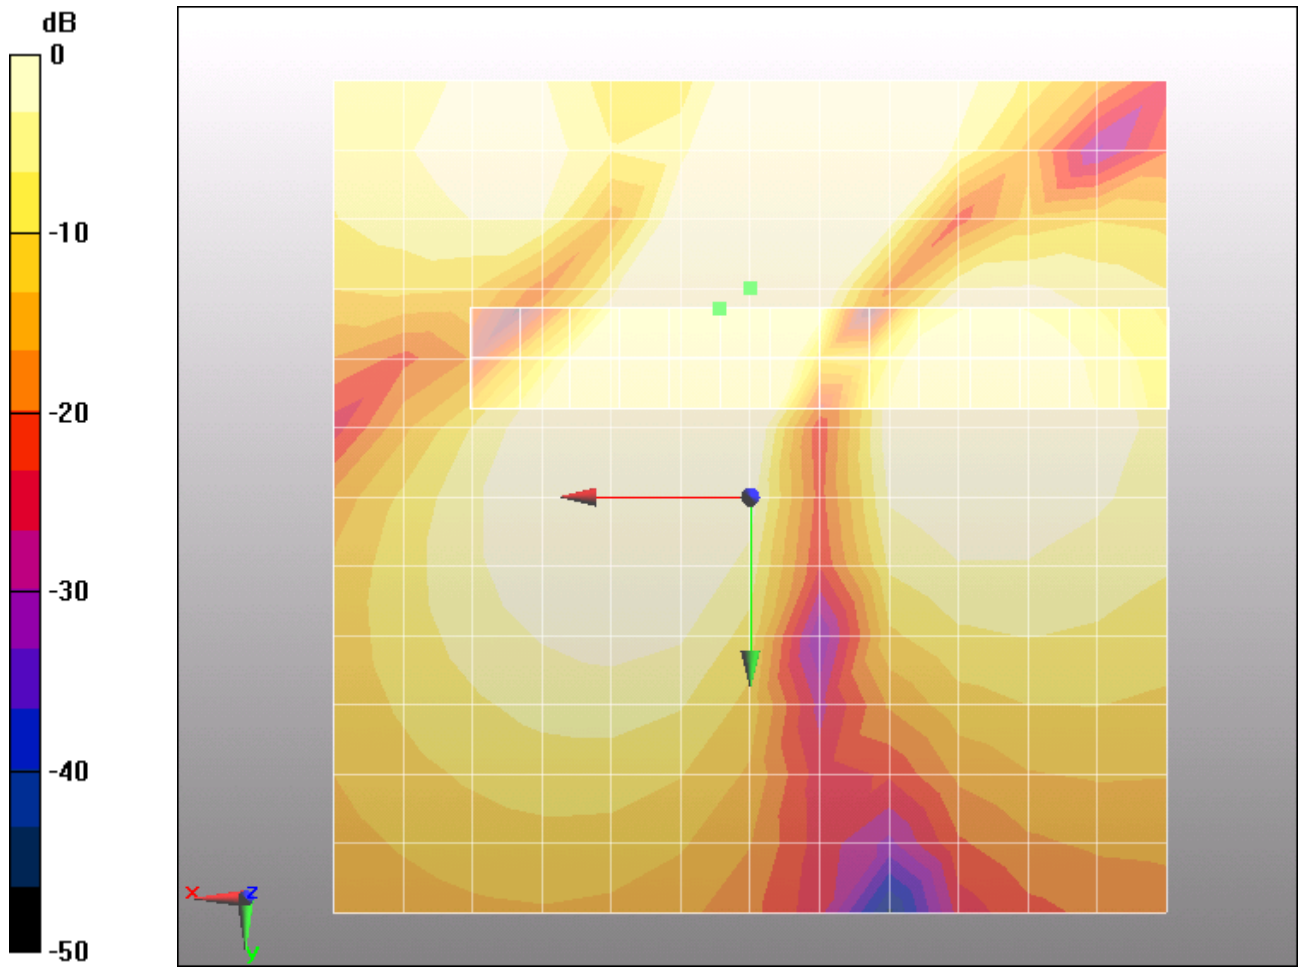

0 dB = 1A/m

Figure 26 T-Coil WCDMA Band II X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 85 of 122

**T-Coil WCDMA Band II Y transversal (SN: B08606451BA)**

Date/Time: 4/16/2012 5:18:01 AM

Communication System: WCDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 86 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.1 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 57.5 dB

ABM1 comp = 10.6 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -14.3, 3.7 mm

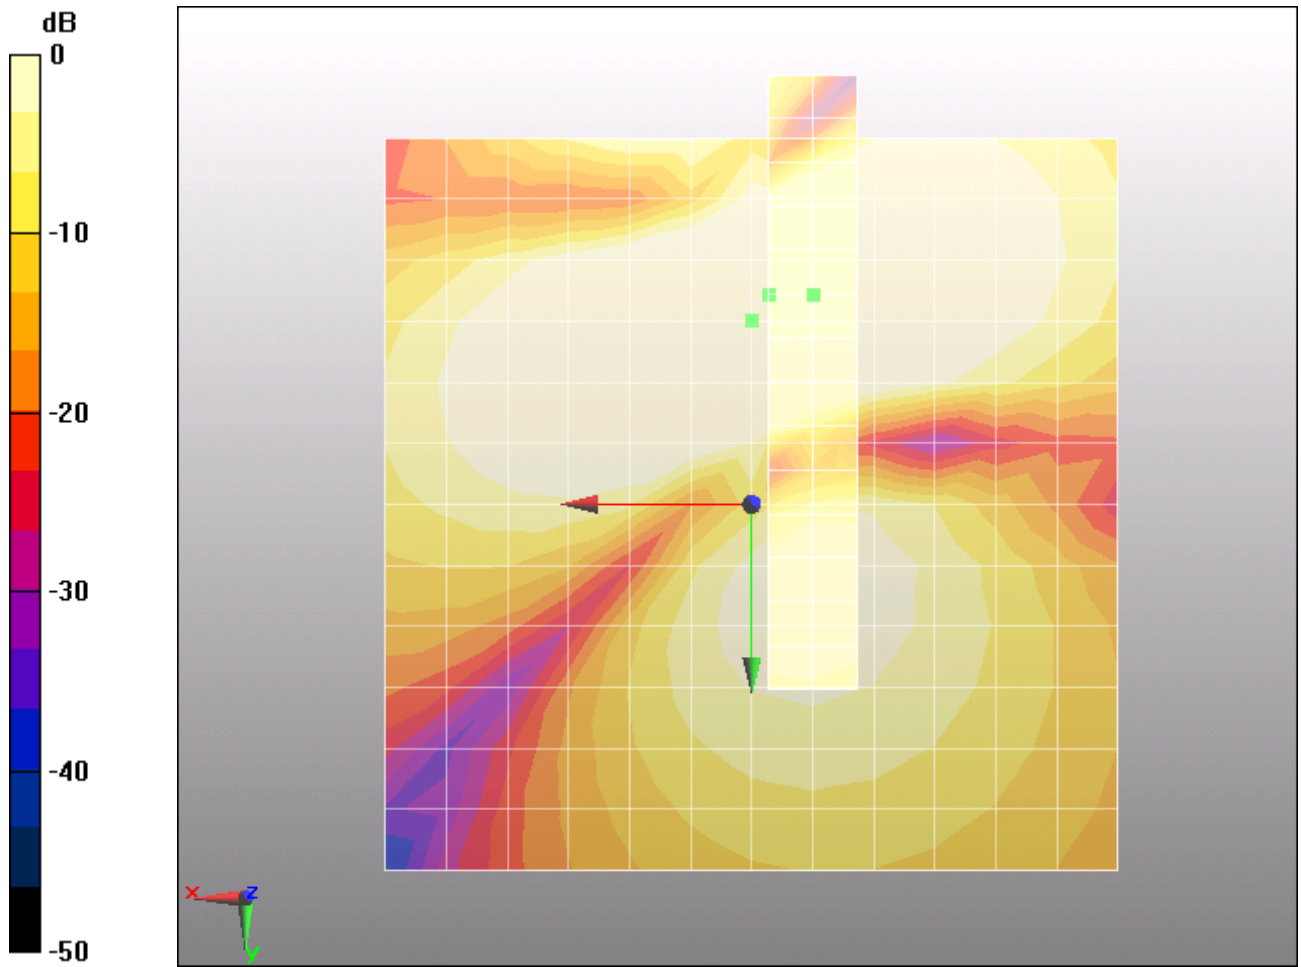

0 dB = 1A/m

Figure 27 T-Coil WCDMA Band II Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 88 of 122

**T-Coil WCDMA Band II Z Axial (SN: B08606451BA)**

Date/Time: 4/16/2012 5:03:16 AM

Communication System: WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.9 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 89 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine 2mm  
8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 48.5 dB

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA II HAC\_TCoil\_WD\_Emission/Scans/z (axial)  
wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 90 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4.2, -8.3, 3.7 mm

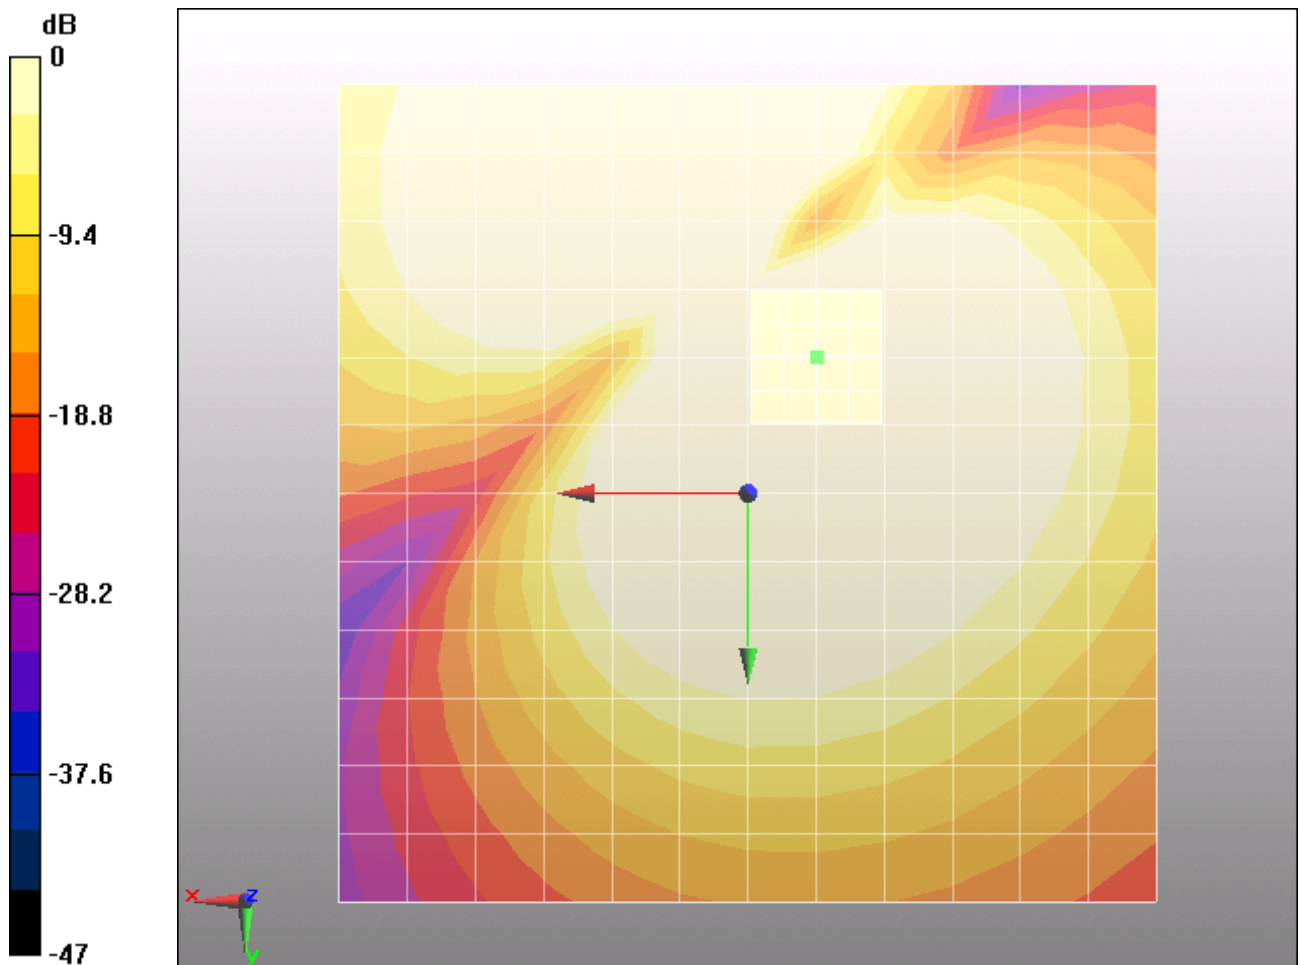

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 91 of 122

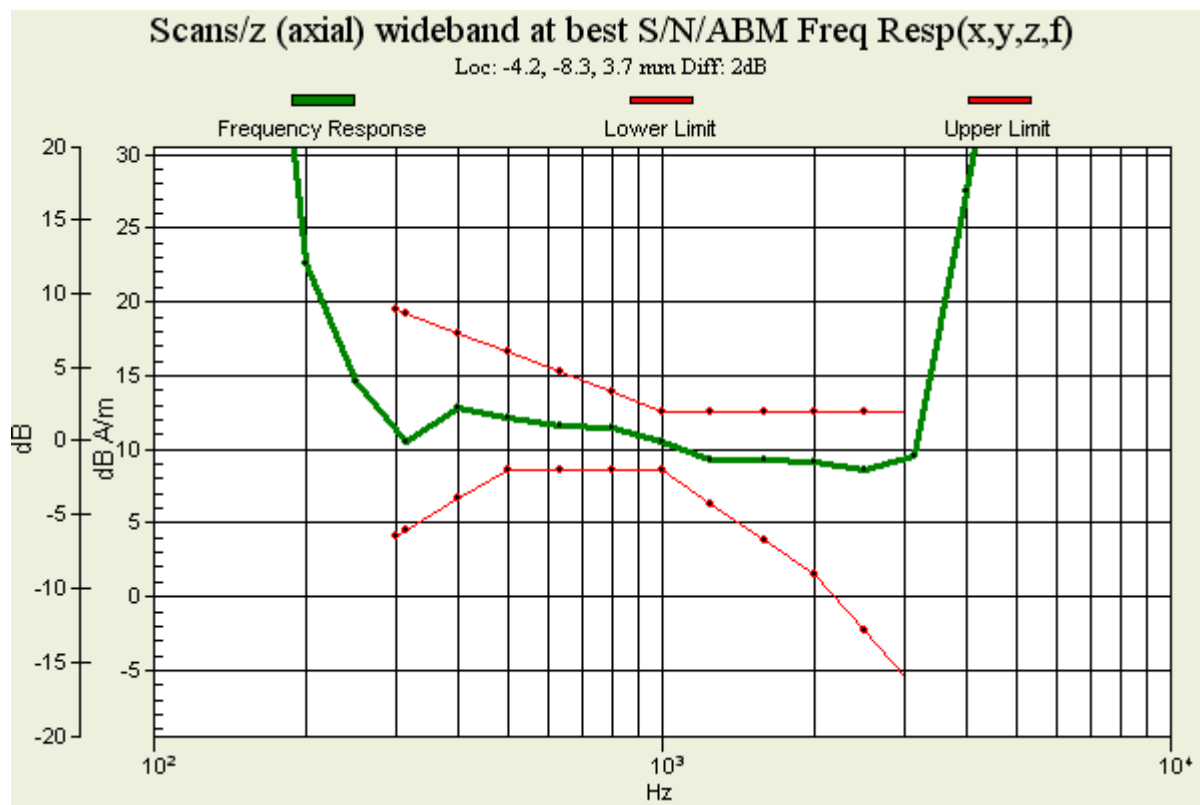


Figure 28 T-Coil WCDMA Band II Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 92 of 122

**T-Coil WCDMA Band V X longitudinal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 5:48:34 AM

Communication System: WCDMA ; Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.47 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 93 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.28 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 44 dB

ABM1 comp = 7.28 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

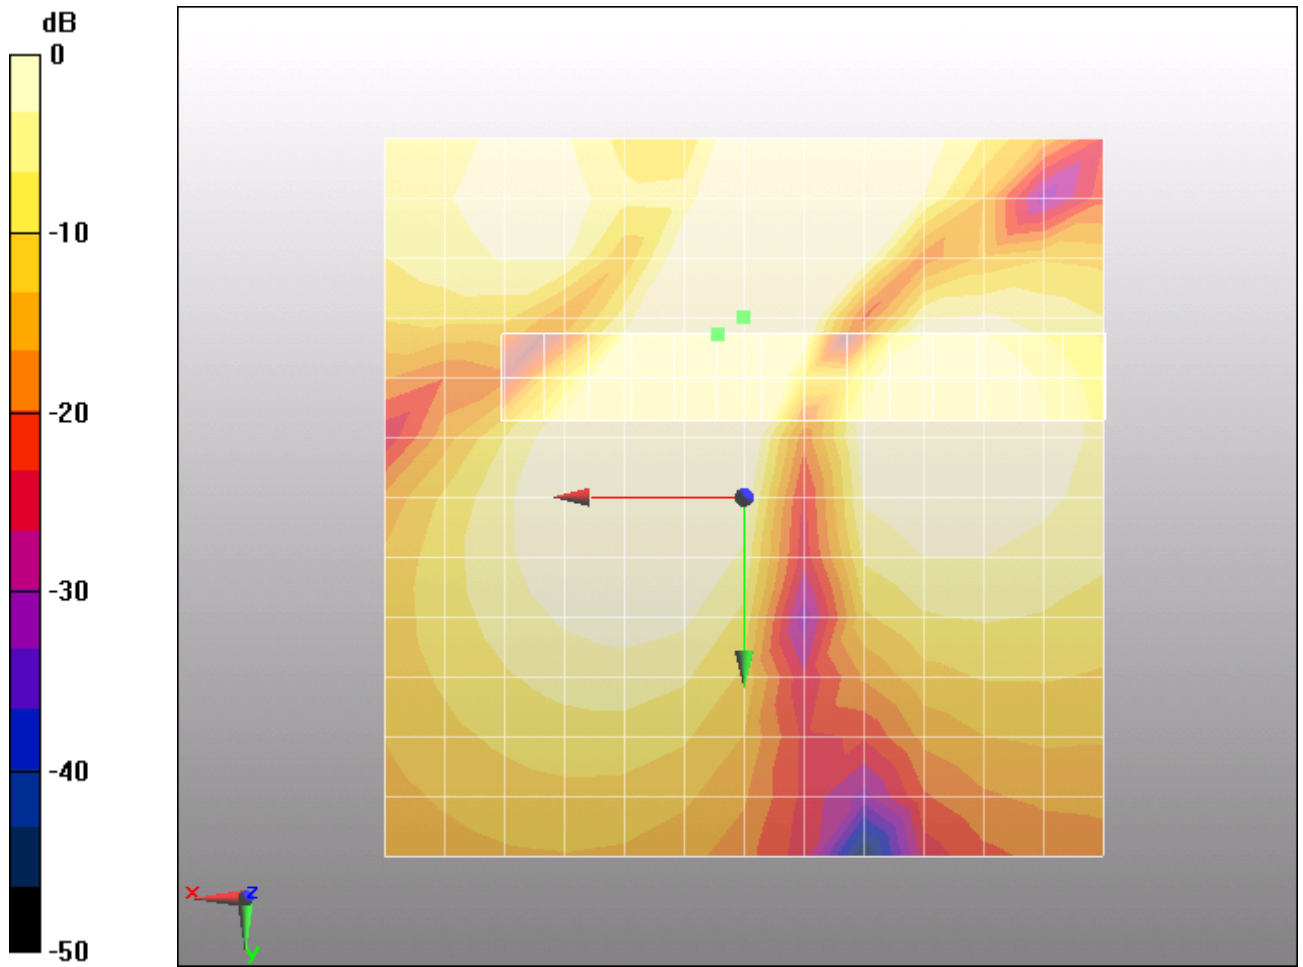

0 dB = 1A/m

Figure 29 T-Coil WCDMA Band V X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 95 of 122

**T-Coil WCDMA Band V Y transversal (SN: BAK2011110800337)**

Date/Time: 4/16/2012 5:55:55 AM

Communication System: WCDMA ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.9 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 96 of 122

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.3 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 58.3 dB

ABM1 comp = 11.3 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

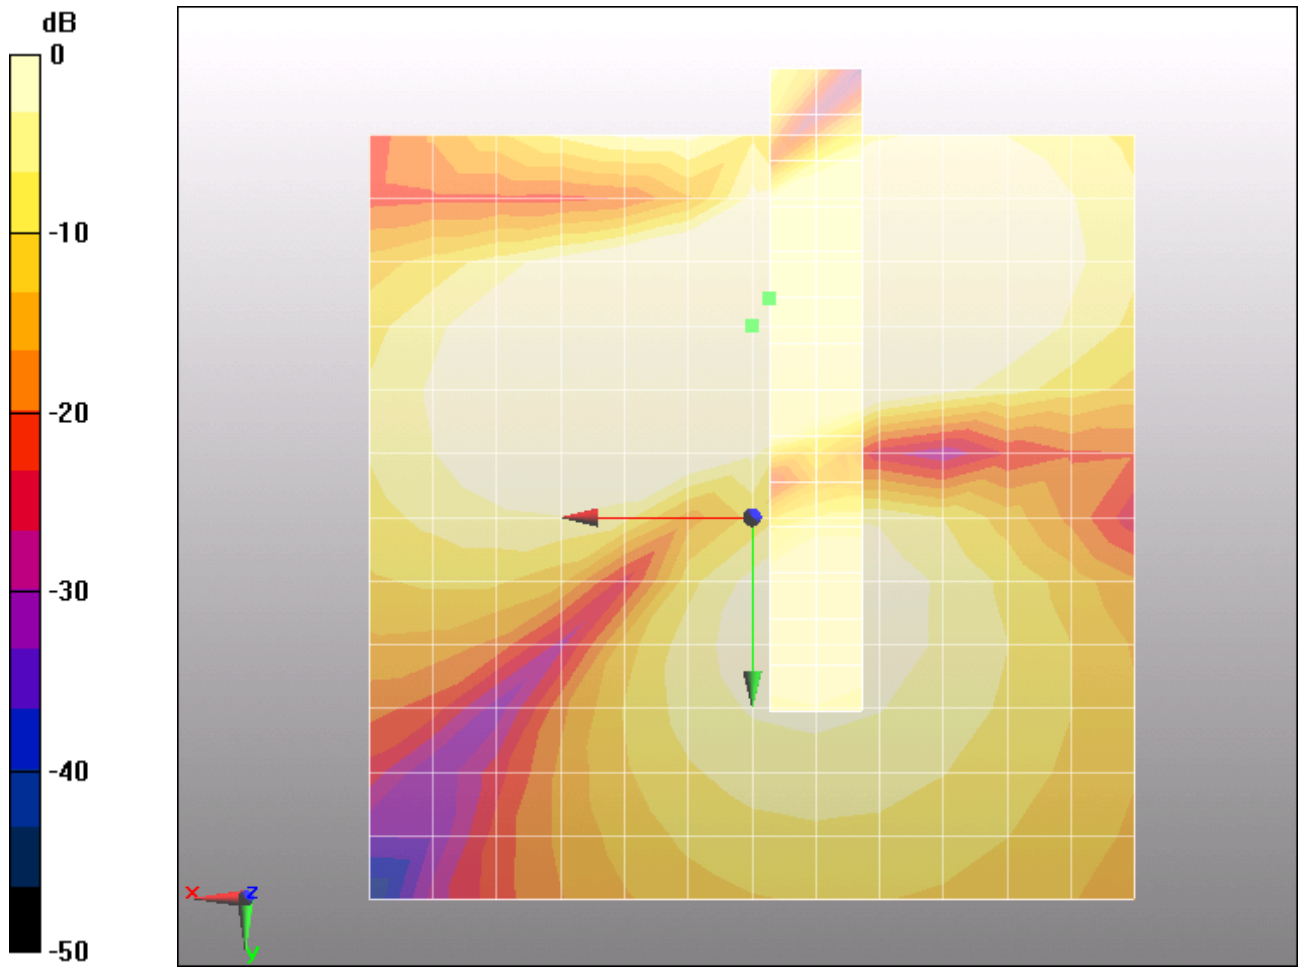

0 dB = 1A/m

Figure 30 T-Coil WCDMA Band V Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 98 of 122

**T-Coil WCDMA Band V Z Axial (SN: BAK2011110800337)**

Date/Time: 4/16/2012 5:41:10 AM

Communication System: WCDMA ; Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 99 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -6.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 49.3 dB

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -6.3, 3.7 mm

**one touch 870A With Battery C3 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial)  
wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 100 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4.2, -6.3, 3.7 mm

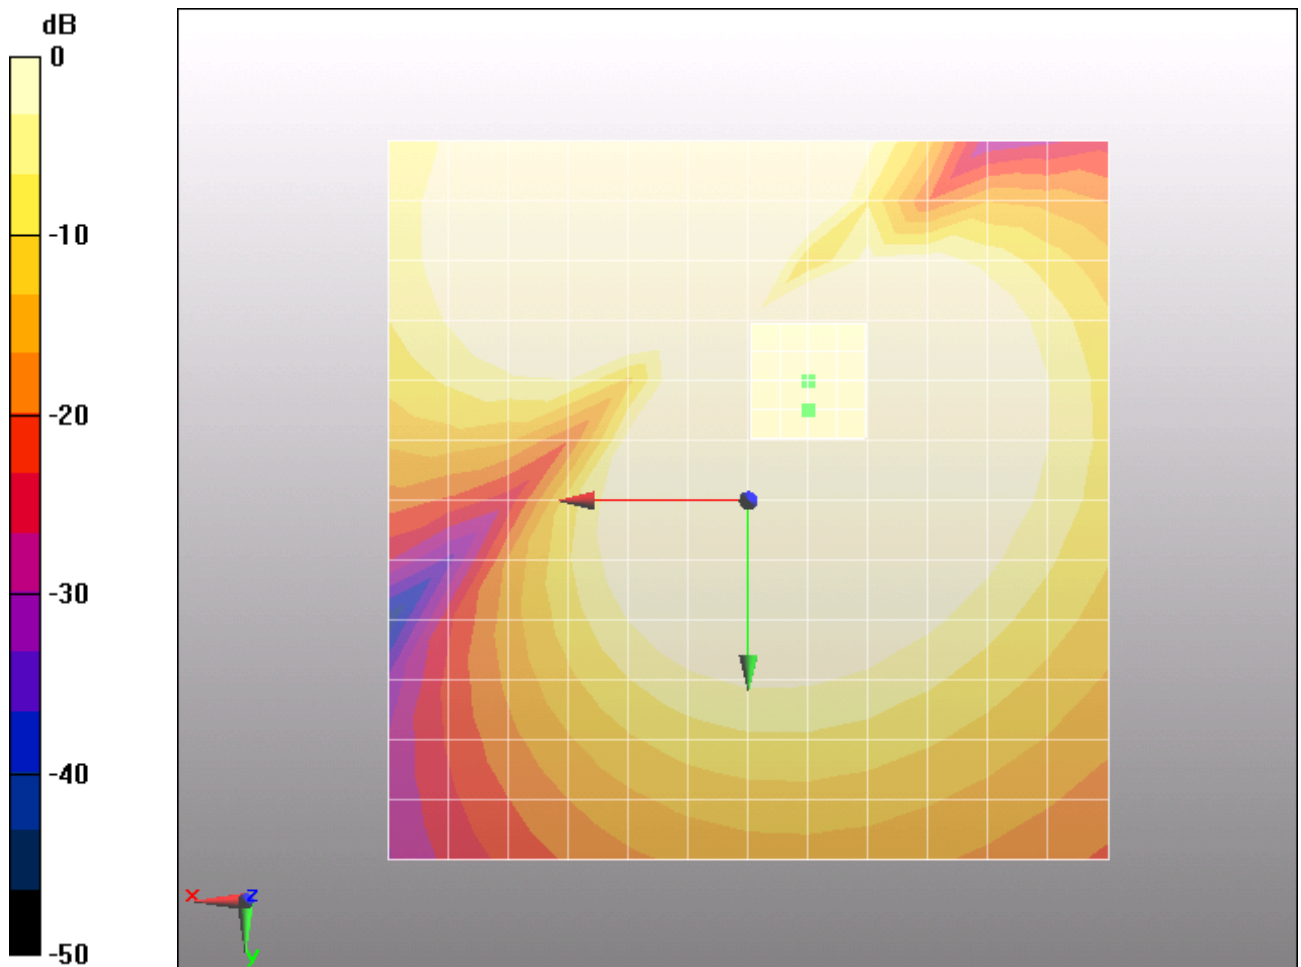

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 101 of 122

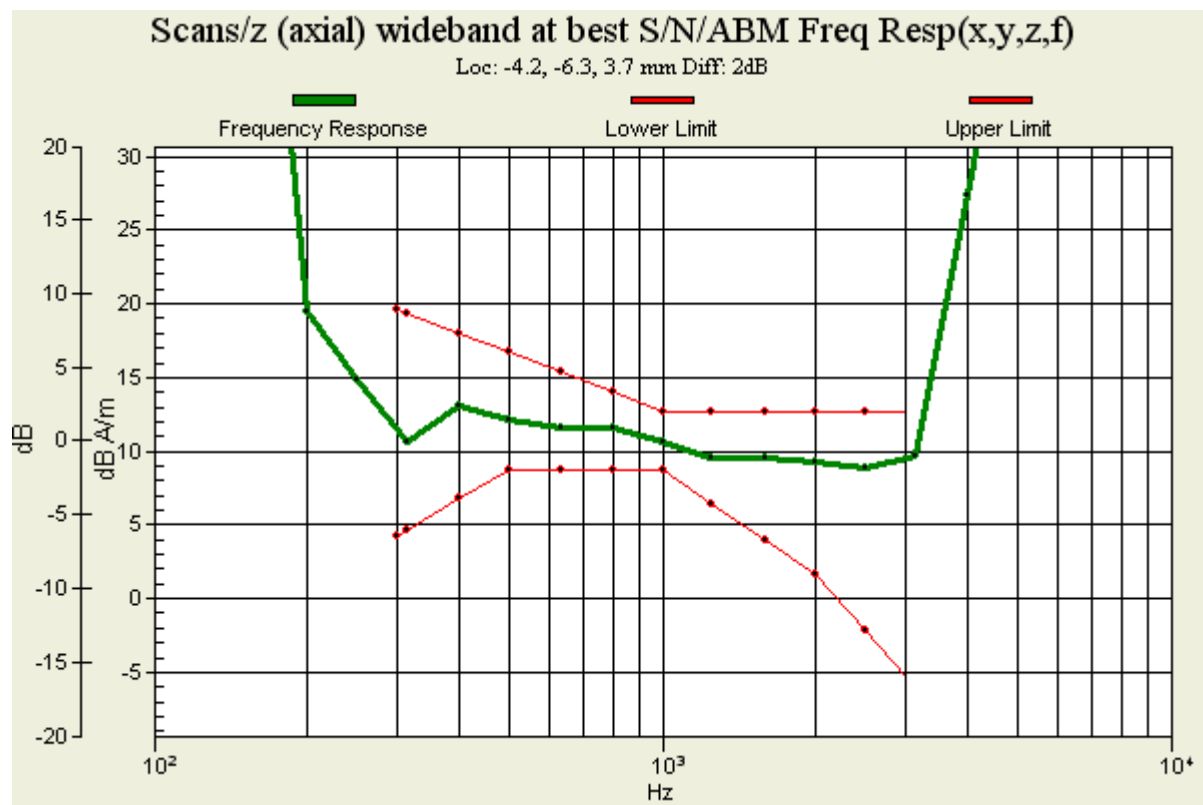


Figure 31 T-Coil WCDMA Band V Z Axial

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 102 of 122

**T-Coil WCDMA Band V X longitudinal (SN: B08606451BA)**

Date/Time: 4/16/2012 6:32:14 AM

Communication System: WCDMA ; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.68 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)**  
**fine 3mm 42 x 6/ABM Signal(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 103 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.56 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/x (longitudinal)  
fine 3mm 42 x 6/ABM SNR(x,y,z) (15x3x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 44.5 dB

ABM1 comp = 7.56 dB A/m

BWC Factor = 0.163995 dB

Location: 1.8, -11.3, 3.7 mm

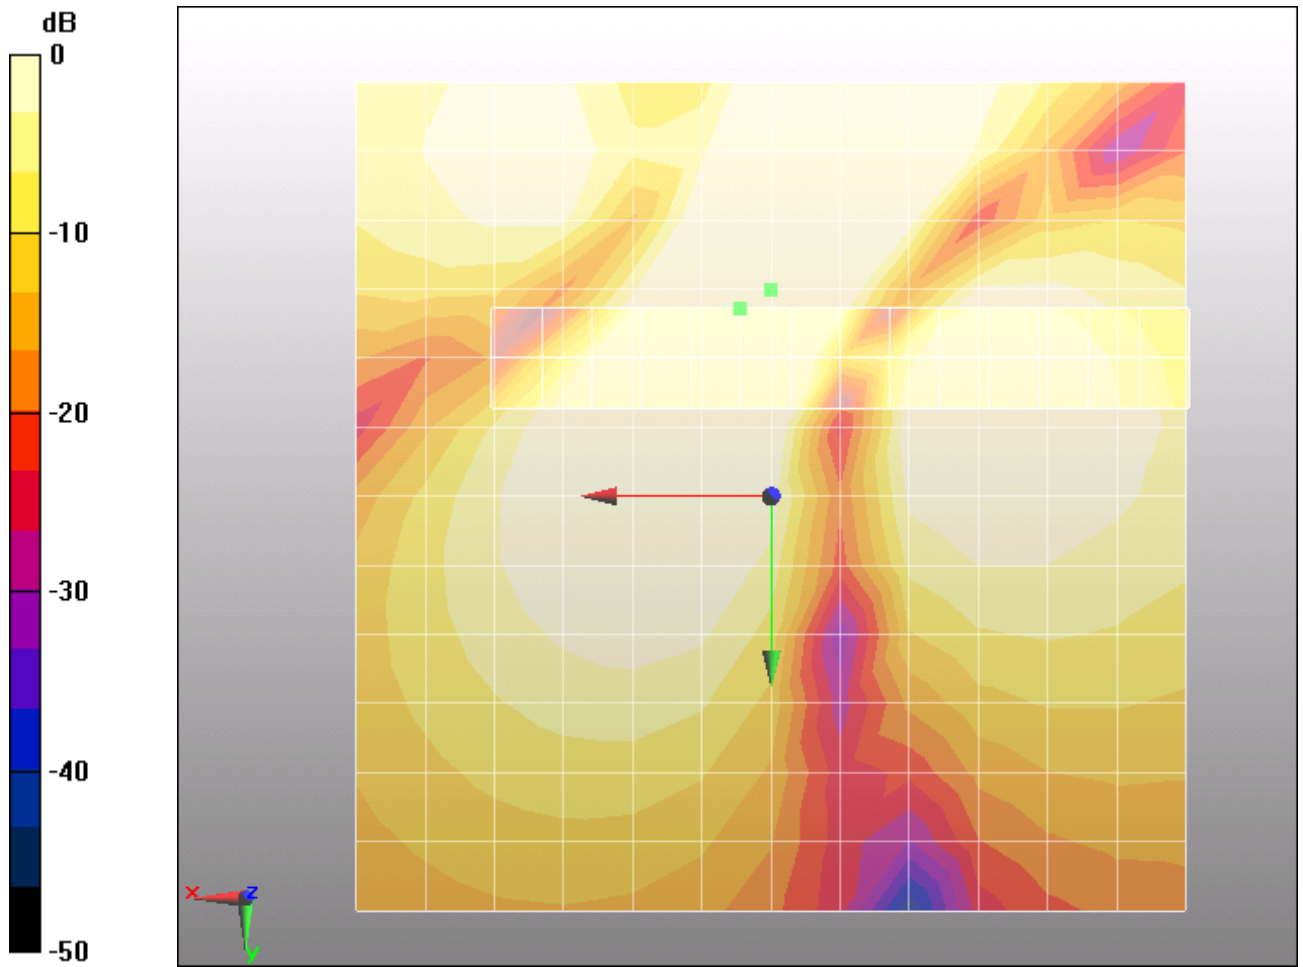

0 dB = 1A/m

Figure 32 T-Coil WCDMA Band V X longitudinal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 105 of 122

**T-Coil WCDMA Band V Y transversal (SN: B08606451BA)**

Date/Time: 4/16/2012 6:39:35 AM,

Communication System: WCDMA ; Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**  
**4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.1 dB A/m

BWC Factor = 0.163995 dB

Location: 0, -12.5, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)**  
**fine 3mm 6 x 42/ABM Signal(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 106 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 11.7 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -14.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/y (transversal)  
fine 3mm 6 x 42/ABM SNR(x,y,z) (3x15x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 57.1 dB

ABM1 comp = 11.2 dB A/m

BWC Factor = 0.163995 dB

Location: -1.2, -11.3, 3.7 mm

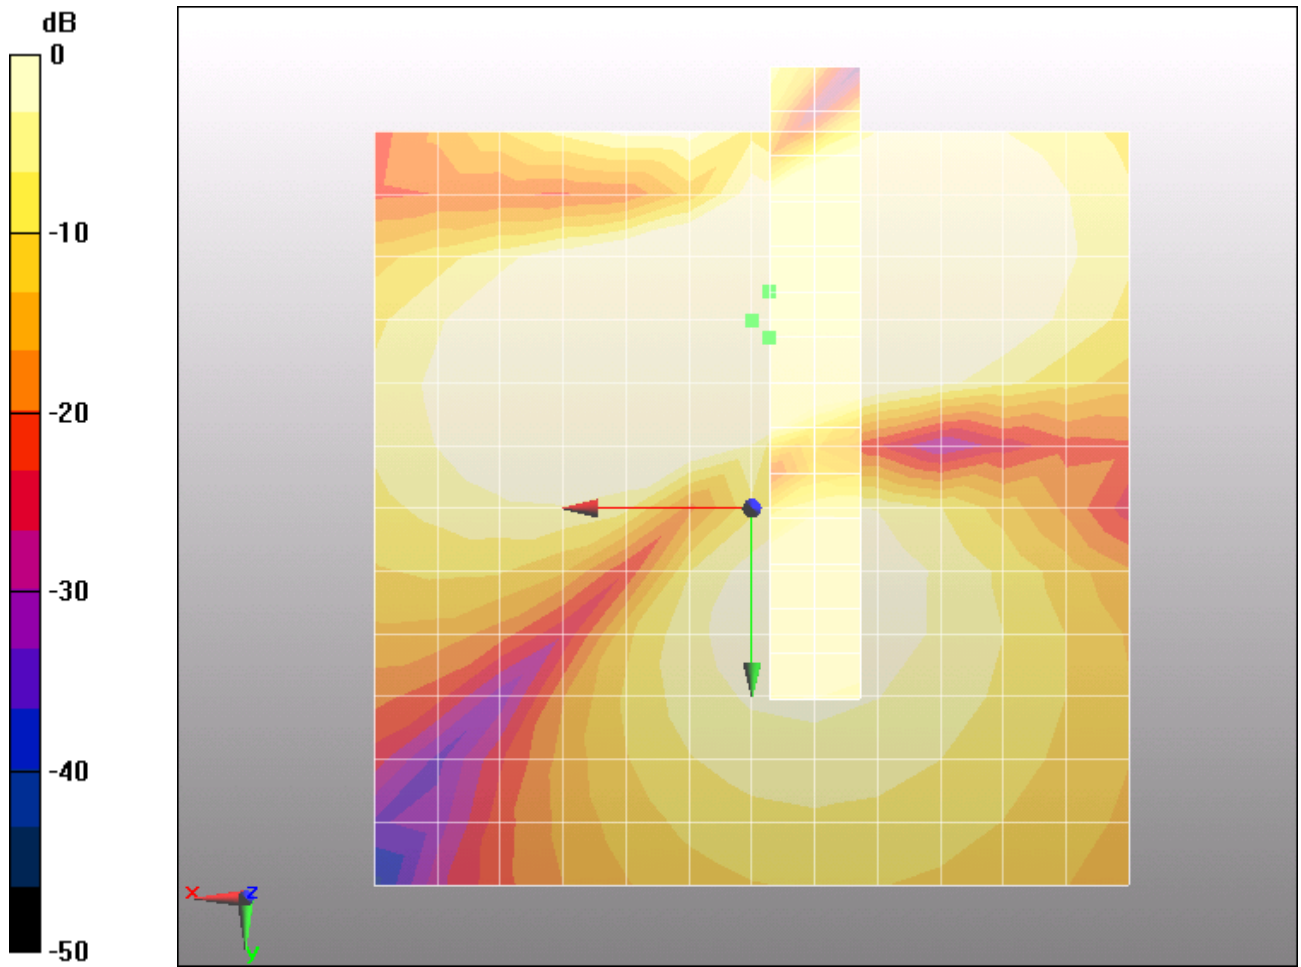

0 dB = 1A/m

Figure 33 T-Coil WCDMA Band V Y transversal

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 108 of 122

**T-Coil WCDMA Band V Z Axial (SN: B08606451BA)**

Date/Time: 4/16/2012 6:24:52 AM

Communication System: WCDMA ; Frequency: 836.4 MHz;Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature:22.3 °C

Phantom section: TCoil Section

DASY5 Configuration:

Probe: AM1DV3 - 3082; ; Calibrated: 2/17/2012

Electronics: DAE4 Sn871; Calibrated: 11/22/2011

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 59

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) 4.2mm  
50 x 50/ABM Signal(x,y,z) (13x13x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 13.3 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM Signal(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 109 of 122

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 12.9 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial) fine  
2mm 8 x 8/ABM SNR(x,y,z) (5x5x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.163995 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 51.6 dB

ABM1 comp = 12.9 dB A/m

BWC Factor = 0.163995 dB

Location: -4.2, -8.3, 3.7 mm

**one touch 870A With Battery C1 WCDMA V HAC\_TCoil\_WD\_Emission/Scans/z (axial)  
wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 0ms

Measure Window Length: 2000ms

BWC applied: 10.8 dB

Device Reference Point: 0, 0, -6.3 mm

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 110 of 122


| Category    | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                      |
| Category T2 | 10 dB to 20 dB                                                                     |
| Category T3 | 20 dB to 30 dB                                                                     |
| Category T4 | > 30 dB                                                                            |

### Cursor:

Diff = 2 dB

BWC Factor = 10.8 dB

Location: -4.2, -8.3, 3.7 mm

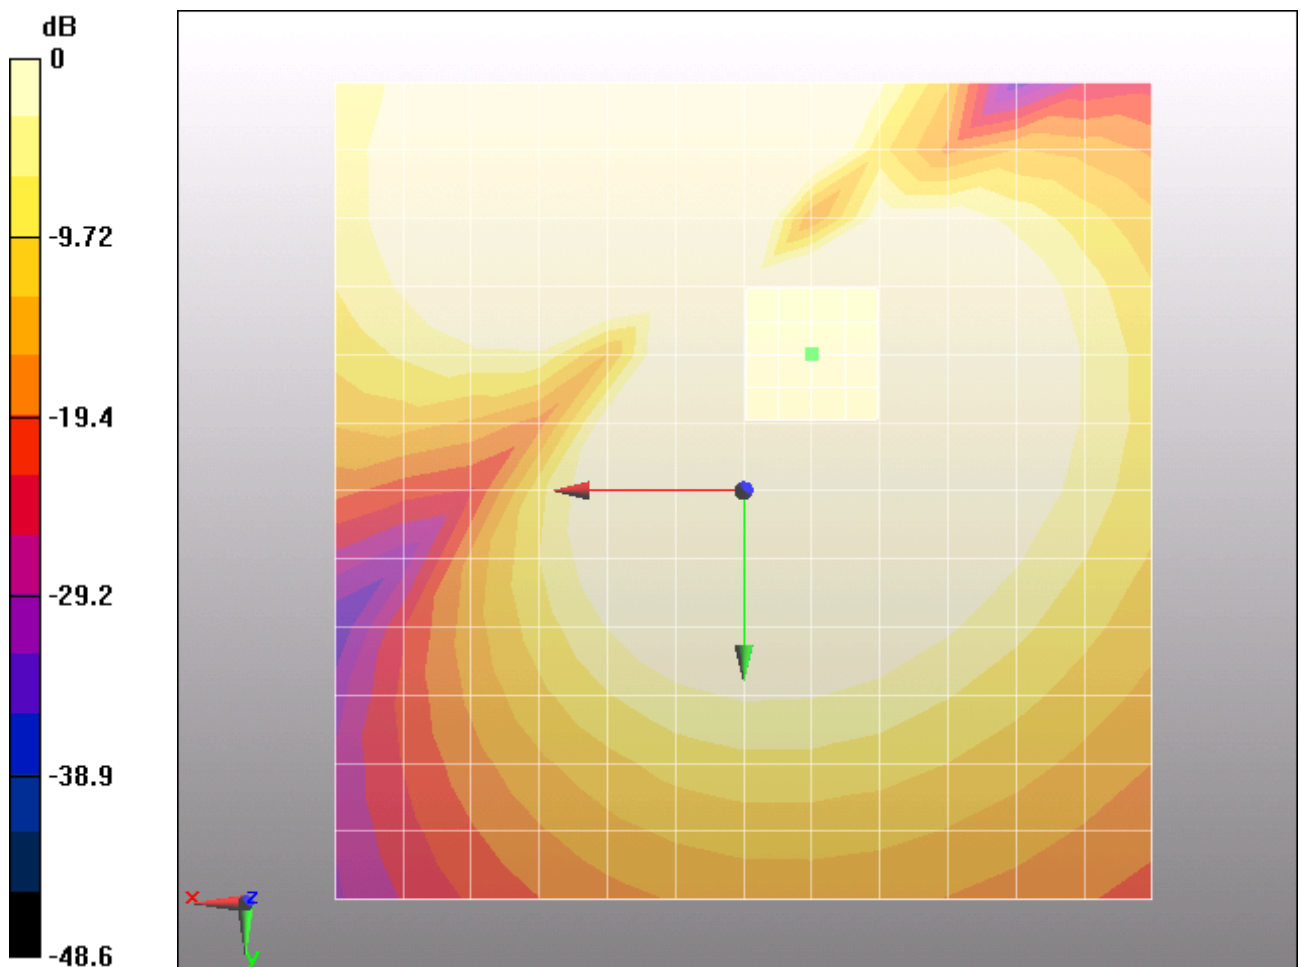

0 dB = 1A/m

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 111 of 122

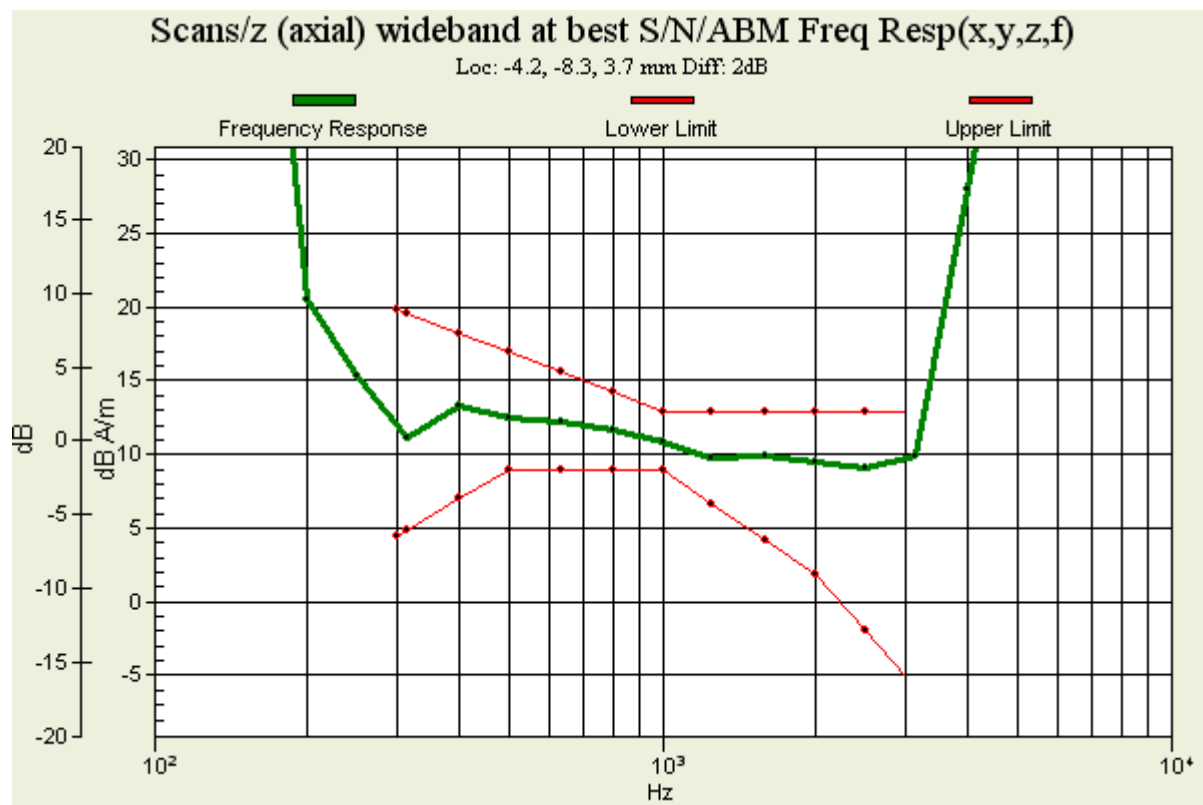


Figure 34 T-Coil WCDMA Band V Z Axial

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 112 of 122

### ANNEX C: Probe Calibration Certificate

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Shanghai (Auden)**

Certificate No: **AM1DV3-3082\_Feb12**

#### CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3082**

Calibration procedure(s) **QA CAL-24.v3**  
**Calibration procedure for AM1D magnetic field probes and TMFS in the**  
**audio range**

Calibration date: **February 17, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #        | Cal Date (Certificate No.)        | Scheduled Calibration |
|-------------------------------|-------------|-----------------------------------|-----------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 28-Sep-11 (No: 11450)             | Sep-12                |
| Reference Probe AM1DV3        | SN: 3000    | 17-Aug-11 (No: AM1D-3000_Aug11)   | Aug-12                |
| DAE4                          | SN: 781     | 20-Apr-11 (No: DAE4-781_Apr11)    | Apr-12                |
| Secondary Standards           | ID #        | Check Date (in house)             | Scheduled Check       |
| AMCC                          | 1050        | 12-Oct-11 (in house check Oct-11) | Oct-13                |

|                |                                |                                          |               |
|----------------|--------------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Claudio Leubler</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Fin Bornholt</b>            | <b>R&amp;D Director</b>                  |               |

Issued: February 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

#### References

- [1] ANSI C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

#### Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

#### Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

#### Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [2], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level  
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.  
Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 114 of 122

**AM1D probe identification and configuration data**

|           |                                             |
|-----------|---------------------------------------------|
| Item      | <b>AM1DV3</b> Audio Magnetic 1D Field Probe |
| Type No   | SP AM1 001 BA                               |
| Serial No | <b>3082</b>                                 |

|                    |                                    |
|--------------------|------------------------------------|
| Overall length     | 296 mm                             |
| Tip diameter       | 6.0 mm (at the tip)                |
| Sensor offset      | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB                              |

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zürich, Switzerland |
| Manufacturing date    | May 28, 2010                                         |
| Last calibration date | November 29, 2010                                    |

**Calibration data**

|                          |                  |                          |                 |
|--------------------------|------------------|--------------------------|-----------------|
| Connector rotation angle | (in DASY system) | <b>5.0 °</b>             | +/- 3.6 ° (k=2) |
| Sensor angle             | (in DASY system) | <b>0.62 °</b>            | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz     | (in DASY system) | <b>0.00739 V / (A/m)</b> | +/- 2.2 % (k=2) |

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 115 of 122

ANNEX D: DAE4 Calibration Certificate

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client TA-SH (Auden)

Certificate No: DAE4-871\_Nov11

CALIBRATION CERTIFICATE

Object DAE4 - SD 000 D04 BJ - SN: 871

Calibration procedure(s) QA CAL-06.v23  
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: November 22, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 28-Sep-11 (No:11450)       | Sep-12                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Calibrator Box V1.1           | SE UMS 006 AB 1004 | 08-Jun-11 (in house check) | In house check: Jun-12 |

|                |              |              |           |
|----------------|--------------|--------------|-----------|
| Calibrated by: | Name         | Function     | Signature |
|                | Andrea Gunti | Technician   |           |
| Approved by:   | Name         | Function     | Signature |
|                | Fin Bontholt | R&D Director |           |

Issued: November 22, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 116 of 122

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 117 of 122

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                        | Y                        | Z                        |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range          | 404.749 $\pm$ 0.1% (k=2) | 404.733 $\pm$ 0.1% (k=2) | 405.174 $\pm$ 0.1% (k=2) |
| Low Range           | 3.98175 $\pm$ 0.7% (k=2) | 3.93601 $\pm$ 0.7% (k=2) | 3.96830 $\pm$ 0.7% (k=2) |

### Connector Angle

|                                           |                                    |
|-------------------------------------------|------------------------------------|
| Connector Angle to be used in DASY system | 90.0 $^{\circ}$ $\pm$ 1 $^{\circ}$ |
|-------------------------------------------|------------------------------------|

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 118 of 122

### Appendix

#### 1. DC Voltage Linearity

| High Range        | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 199991.9                  | -0.91                        | -0.00     |
| Channel X + Input | 20000.28                  | 0.48                         | 0.00      |
| Channel X - Input | -19998.51                 | 0.59                         | -0.00     |
| Channel Y + Input | 200003.0                  | 1.24                         | 0.00      |
| Channel Y + Input | 19999.67                  | 0.17                         | 0.00      |
| Channel Y - Input | -20000.04                 | -0.34                        | 0.00      |
| Channel Z + Input | 200010.1                  | -0.11                        | -0.00     |
| Channel Z + Input | 19999.33                  | -0.07                        | -0.00     |
| Channel Z - Input | -20001.45                 | -0.85                        | 0.00      |

| Low Range         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2000.0                    | 0.05                         | 0.00      |
| Channel X + Input | 199.81                    | -0.09                        | -0.04     |
| Channel X - Input | -199.63                   | 0.37                         | -0.19     |
| Channel Y + Input | 1999.9                    | -0.22                        | -0.01     |
| Channel Y + Input | 198.81                    | -1.19                        | -0.59     |
| Channel Y - Input | -201.62                   | -1.72                        | 0.86      |
| Channel Z + Input | 2000.4                    | 0.48                         | 0.02      |
| Channel Z + Input | 199.30                    | -0.70                        | -0.35     |
| Channel Z - Input | -200.86                   | -1.06                        | 0.53      |

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200                            | 14.43                                        | 13.13                                       |
|           | - 200                          | -12.22                                       | -13.72                                      |
| Channel Y | 200                            | -10.07                                       | -9.78                                       |
|           | - 200                          | 9.61                                         | 8.66                                        |
| Channel Z | 200                            | -0.56                                        | -0.83                                       |
|           | - 200                          | -0.01                                        | 0.11                                        |

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 3.08                        | 0.09                        |
| Channel Y | 200                | 3.19                        | -                           | 4.59                        |
| Channel Z | 200                | 0.90                        | -0.06                       | -                           |

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RXA1204-0049HAC02

Page 119 of 122

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15920            | 15519           |
| Channel Y | 16179            | 17567           |
| Channel Z | 15791            | 15270           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.03               | -1.16                  | 2.66                   | 0.46                      |
| Channel Y | -0.63              | -3.22                  | 0.29                   | 0.46                      |
| Channel Z | -0.87              | -2.03                  | 0.28                   | 0.46                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |

## ANNEX E: The EUT Appearances and Test Configuration



a: EUT



b: Battery SN: BAK2011110800337

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RXA1204-0049HAC02

Page 121 of 122



c: Battery SN: B08606451BA

Picture 2: Constituents of EUT

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RXA1204-0049HAC02

Page 122 of 122



**Picture 3: Test Setup**