



TEST REPORT

No. 2012TAR261

for

TCT Mobile Limited

HSUPA/HSDPA/UMTS triband / GSM quadband mobile phone

Model Name: ONE TOUCH 991S

FCC ID: RAD256

IC: 9238A-0011

with

Hardware Version: PIO02

Software Version: vF1J_AWS

Issued Date: May 10, 2012

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DAT-P-114/01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633-2678, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS.....	11
A.1 OUTPUT POWER (§22.913(A)/§27.50(D)(2))	11
A.2 EMISSION LIMIT (§2.1051/§22.917§27.53(G))	15
A.3 CONDUCTED EMISSION (§15.107§15.207)	21
A.4 FREQUENCY STABILITY (§2.1055/§27.54)	32
A.5 OCCUPIED BANDWIDTH	34
A.6 EMISSION BANDWIDTH	42
A.7 BAND EDGE COMPLIANCE.....	46
A.8 CONDUCTED SPURIOUS EMISSION	48
A.9 RECEIVER RADIATION EMISSION.....	70

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,
Beijing, P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: Apr 01, 2012
Testing End Date: May 10, 2012


1.4. Signature



Zi Xiaogang
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	HSUPA/HSDPA/UMTS triband / GSM quadband mobile phone
Model Name	ONE TOUCH 991S
FCC ID	RAD256
IC	9238A-0011
Frequency	GSM 850MHz; PCS 1900MHz; WCDMA BAND V; WCDMA BAND IV
Antenna	Internal
Output power	25.89 dBm maximum ERP measured for WCDMA BAND V
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N05	013112000020568	PIO02	vF1J_AWS
N06	013112000020584	PIO02	vF1J_AWS

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	
AE2	Battery	
AE3	Charger	
AE4	Charger	
AE5	Charger	
AE6	Charger	

AE1

Model	CAB32A0000C2
Manufacturer	SCUD
Capacitance	1500mAh
Nominal Voltage	3.7V

AE2

Model	CAB32A0000C1
Manufacturer	BYD
Capacitance	1500mAh
Nominal Voltage	3.7V

AE3

Model	CBA3002AG0C1
Manufacturer	BYD
Length of DC line	120cm

AE4

Model	CBA3001AG0C1
Manufacturer	BYD
Length of DC line	120cm

AE5

Model	CBA3001AG0C2
Manufacturer	Tenpao
Length of DC line	120cm

AE6

Model	CBA3000AG0C1
Manufacturer	Tenpao
Length of DC line	120cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS triband / GSM quadband mobile phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	V 10.1.09
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

6. SUMMARY OF TEST RESULTS

WCDMA Band IV

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS- 133	Section in this report	Verdict
1	Output Power	27.50(d)(2)	6.4	A.1	P
2	Emission Limit	27.53(g) 2.1051	6.5	A.2	P
3	CONDUCTED EMISSION	15.107/15.207	/	/	P
4	Frequency Stability	27.54, 2.1055	6.3	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	6.1/6.6	A.5	P
6	Emission Bandwidth	27.53(g)	4.6.1	A.6	P
7	Band Edge Compliance	27.53(g)	6.5	A.7	P
8	Conducted Spurious Emission	27.53(g), 2.1057	6.5	A.8	P

WCDMA Band V

Items	Test Name	Clause in FCC rules	Clause in IC rules RSS-Gen and RSS-132	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	4.4	A.1	P
2	Emission Limit	22.917, 2.1051	4.5	A.2	P
3	CONDUCTED EMISSION	15.107/15.207	/	/	P
4	Frequency Stability	22.235, 2.1055	4.3	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	4.1/4.6	A.5	P
6	Emission Bandwidth	22.917(b)	4.6.1	A.6	P
7	Band Edge Compliance	22.917(b)	4.5	A.7	P
8	Conducted Spurious Emission	22.917, 2.1057	4.5	A.8	P

Receiver Radiated Emission

Items	Test Name	Clause in FCC rules	Clause in IC rules		Section in this report	Verdict
			RSS-132	RSS-133		
1	Receiver Radiated Emissions	15.109 2.1053	4.6	6.6	A.9	P

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1	Test Receiver	ESCI	100766	R&S	2012-06-06
2	Test Receiver	ESI40	831564/002	R&S	2012-07-12
3	BiLog Antenna	VULB9163	9163-175	Schwarzbeck	2012-07-05
4	BiLog Antenna	VULB9163	9163-302	Schwarzbeck	2012-07-10
5	Signal Generator	SMB100A	102063	R&S	2012-07-05
7	LISN	ESH2-Z5	829991/012	R&S	2012-07-20
8	Spectrum Analyzer	FSU26	200030	R&S	2012-03-18
9	Spectrum Analyzer	FSU46	100054	R&S	2012-09-14
10	Universal Radio Communication Tester	CMU200	100680	R&S	2012-02-23
11	Universal Radio Communication Tester	CMU200	109914	R&S	2012-07-21
12	Dual-Ridge Waveguide Horn Antenna	3117	00119024	ETS	2012-08-31
13	Dual-Ridge Waveguide Horn Antenna	3117	00119021	ETS	2013-07-09
14	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2012-07-01
15	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2012-07-01
16	Climatic chamber	PL-2G	343074	ESPEC	2012-02-15

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER (§22.913(a)/§27.50(d)(2))

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak) These measurements were done at 3 frequencies, 1712.4MHz, 1740MHz, and 1752.6MHz for WCDMA Band IV; 826.4MHz, 836.6MHz and 846.6MHz for WCDMA Band V. (bottom, middle and top of operational frequency range).

Limit

According to FCC§2.1046.

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
10MHz	10MHz	800ms	50MHz

WCDMA Band IV

Measurement result

WCDMA (Band IV)	CH	Frequency(MHz)	output power(dBm)
	1312	1712.4	22.69
	1450	1740	22.40
	1513	1752.6	22.42

WCDMA Band V

Measurement result

WCDMA (Band V)	CH	Frequency(MHz)	output power(dBm)
	4132	826.4	23.44
	4183	836.6	23.30
	4233	846.6	23.38

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

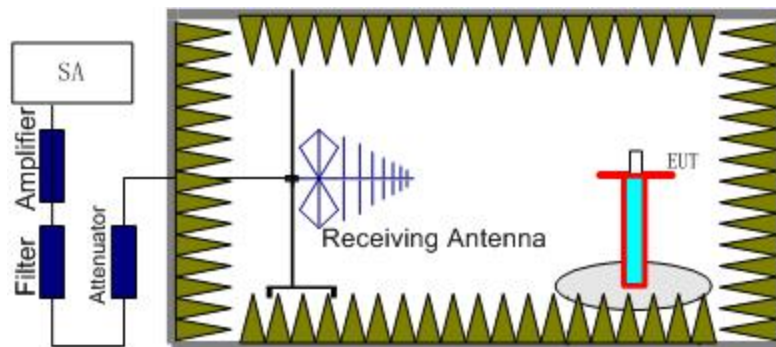

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

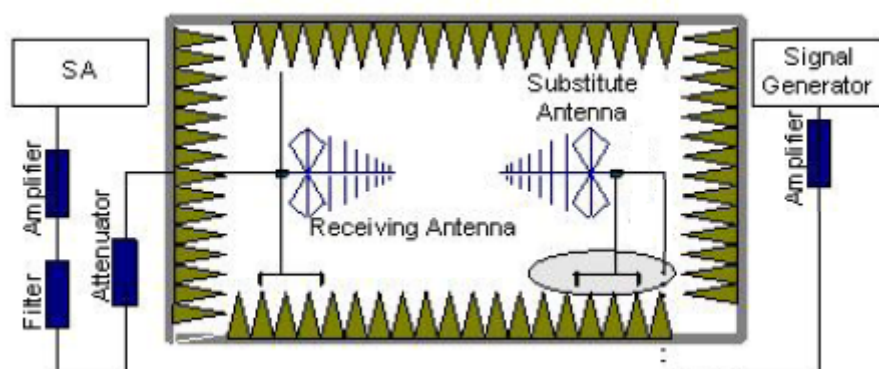

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.
The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{Ag} + P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

WCDMA Band IV-EIRP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band IV	30dBm (2W)

Measurement result

Frequency(MHz)	Peak EIRP(dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	P _{Mea} (dBm)	Polarization
1712.4	-26.65	3.66	-50.00	-5.17	24.86	H
1740.0	-26.71	4.36	-50.00	-5.04	23.97	H
1752.6	-28.19	3.85	-50.00	-4.99	22.95	H

Frequency: 1712.4 MHz

Peak EIRP(dBm)= P_{Mea}(-26.65dBm)+ P_{cl}(3.66dB)+ P_{Ag}(-50.00dB)+G_a (-5.17dB) =24.86dBm

ANALYZER SETTINGS: RBW = VBW = 3 MHz

WCDMA Band V-ERP

Limits

	Burst Peak EIRP (dBm)
WCDMA Band V	≤38.45dBm

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dBm)	Peak ERP(dBm)	Polarization
826.4	-22.47	2.25	-53.00	0.85	2.15	25.28	H
836.6	-21.80	2.26	-53.00	0.90	2.15	25.89	V
846.6	-23.07	2.26	-53.00	0.94	2.15	24.58	V

Frequency: 836.6MHz

Peak ERP(dBm)= P_{Mea}(-21.80dBm) - P_{cl}(2.26dB) - P_{Ag}(-53.00dB) - G_a (0.90dB)-2.15dBm
=25.89dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT (§2.1051/§22.917§27.53(g))


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 22.917 and Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the WCDMA Band V and WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

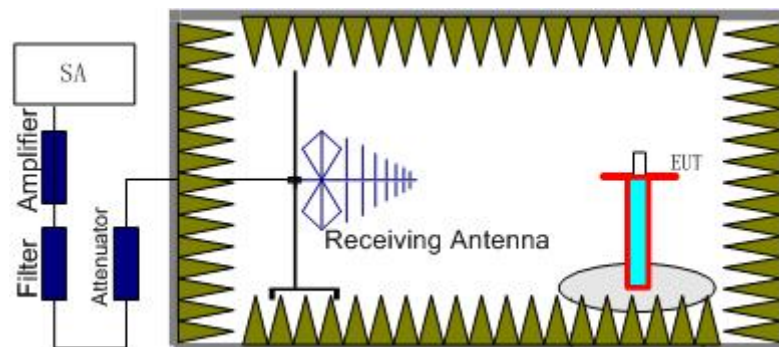

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

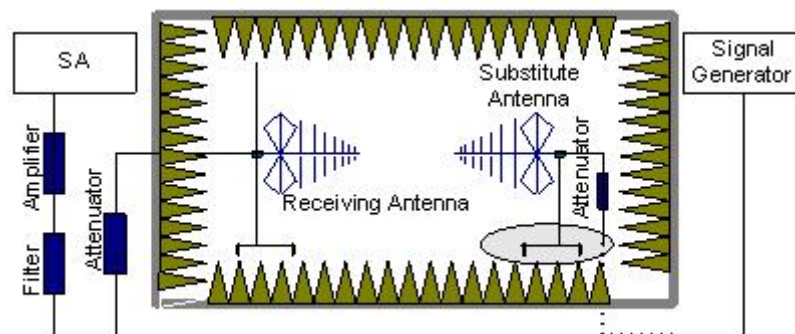

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1740MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band IV	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3422.60	-58.70	4.96	-7.71	-55.95	-13.00	H
5133.32	-71.98	6.97	-9.78	-69.17	-13.00	V
6605.32	-66.25	7.50	-10.71	-63.04	-13.00	H
10095.92	-60.95	8.45	-12.42	-56.98	-13.00	H
13236.49	-64.13	10.36	-13.54	-60.95	-13.00	V
17589.14	-61.76	11.95	-13.35	-60.36	-13.00	V

WCDMA BAND IV Mode Channel 1450/1740MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
2140.08	-35.41	4.94	-4.32	-36.03	-13.00	H
3481.45	-58.47	5.27	-7.86	-55.88	-13.00	H
5110.90	-67.83	7.33	-9.77	-65.39	-13.00	V
8252.09	-70.41	7.62	-12.05	-65.98	-13.00	H
10156.50	-64.25	8.52	-12.43	-60.34	-13.00	H
12637.92	-62.85	9.91	-12.87	-59.89	-13.00	H

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency(MHz)	Peak EIRP(dBm)	Path Loss	Antenna Gain	P _{Mea} (dBm)	Limit (dBm)	Polarization
3503.56	-59.81	5.15	-7.90	-57.06	-13.00	V
5021.87	-66.61	6.77	-9.71	-63.67	-13.00	V
7459.59	-66.73	8.36	-11.38	-63.71	-13.00	V
9143.07	-64.86	8.10	-12.60	-60.36	-13.00	V
10472.25	-64.78	8.82	-12.49	-61.11	-13.00	H
13715.22	-64.46	11.33	-13.89	-61.90	-13.00	V

WCDMA BAND V Mode Channel 4132/826.4MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction	Peak ERP(dBm)	Limit (dBm)	Polarization
				(dBm)			
1397.35	-67.20	3.01	-5.14	2.15	-67.22	-13.00	V
1655.05	-52.03	3.50	-5.42	2.15	-52.26	-13.00	H
3309.73	-59.96	5.02	-7.44	2.15	-59.69	-13.00	V
4455.06	-67.38	6.28	-8.77	2.15	-67.04	-13.00	H
5025.65	-67.71	6.77	-9.72	2.15	-66.91	-13.00	V
6426.54	-67.44	8.03	-10.54	2.15	-67.08	-13.00	H

WCDMA BAND V Mode Channel 4183/836.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction	Peak ERP(dBm)	Limit (dBm)	Polarization
				(dBm)			
1670.65	-57.39	3.39	-5.35	2.15	-57.58	-13.00	H
3456.80	-69.16	5.49	-7.80	2.15	-69.00	-13.00	V
4379.05	-65.47	6.46	-8.73	2.15	-65.35	-13.00	H
5139.46	-66.90	7.06	-9.78	2.15	-66.33	-13.00	H
5734.84	-64.94	10.17	-10.09	2.15	-67.17	-13.00	V
7053.91	-67.77	8.27	-11.13	2.15	-67.06	-13.00	H

WCDMA BAND V Mode Channel 4233/846.6MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction	Peak ERP(dBm)	Limit (dBm)	Polarization
				(dBm)			
1690.66	-47.98	3.60	-5.26	2.15	-48.47	-13.00	H
3383.79	-68.21	5.04	-7.62	2.15	-67.78	-13.00	V
4343.06	-67.84	6.25	-8.71	2.15	-67.53	-13.00	H
5089.10	-66.37	7.50	-9.75	2.15	-66.27	-13.00	H
6169.25	-66.45	10.81	-10.34	2.15	-69.07	-13.00	H
7137.29	-65.77	8.57	-11.18	2.15	-65.31	-13.00	H

A.3 CONDUCTED EMISSION (§15.107§15.207)

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

A.3.2 Measurement result WCDMA Band IV-AE3

ESH3-Z5 Scan

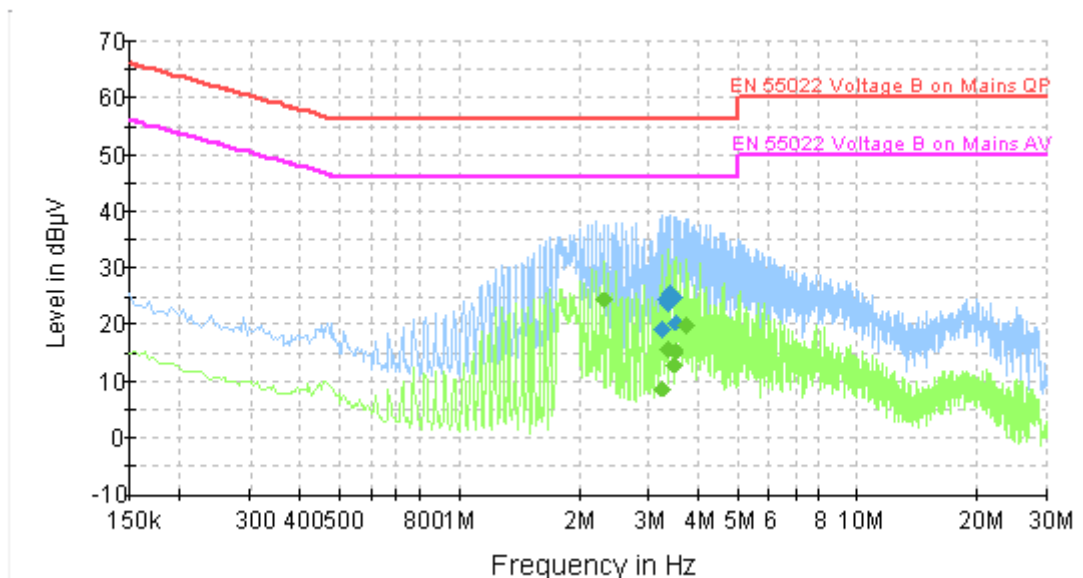

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
3.256522	19.3	GND	N	9.8	36.7	56.0
3.302388	24.7	GND	L1	9.8	31.3	56.0
3.355598	23.8	GND	L1	9.8	32.2	56.0
3.402859	25.6	GND	L1	9.8	30.4	56.0
3.457687	24.8	GND	L1	9.8	31.2	56.0
3.506386	20.3	GND	N	9.8	35.7	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
2.318683	24.2	GND	L1	9.8	21.8	46.0
3.256522	8.8	GND	L1	9.8	37.2	46.0
3.355598	15.5	GND	L1	9.8	30.5	46.0
3.457687	12.9	GND	L1	9.8	33.1	46.0
3.506386	15.2	GND	L1	9.8	30.8	46.0
3.715555	19.7	GND	L1	9.8	26.3	46.0

WCDMA Band IV-AE4

ESH3-Z5 Scan

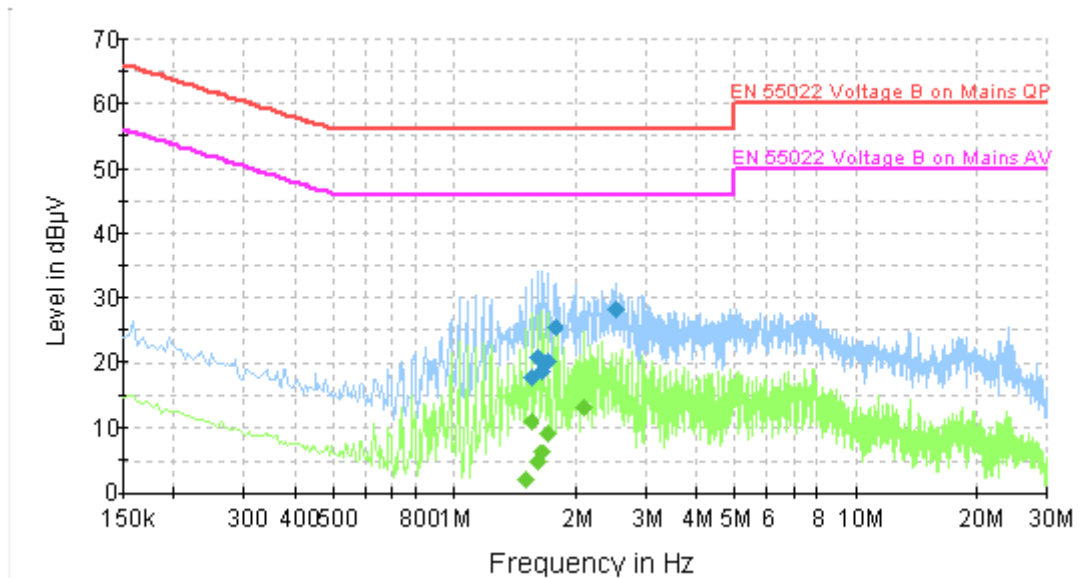

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.558500	17.9	GND	L1	9.8	38.1	56.0
1.612500	20.7	GND	L1	9.8	35.3	56.0
1.662000	18.5	GND	L1	9.8	37.5	56.0
1.711500	20.3	GND	L1	9.8	35.7	56.0
1.774500	25.7	GND	L1	9.8	30.3	56.0
2.526699	28.3	GND	L1	9.8	27.7	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.509000	2.0	GND	N	9.8	44.0	46.0
1.558500	11.0	GND	L1	9.8	35.0	46.0
1.612500	4.6	GND	N	9.8	41.4	46.0
1.662000	6.2	GND	N	9.8	39.8	46.0
1.711500	9.3	GND	L1	9.8	36.7	46.0
2.098241	13.2	GND	L1	9.8	32.8	46.0

WCDMA Band IV-AE5

ESH3-Z5 Scan

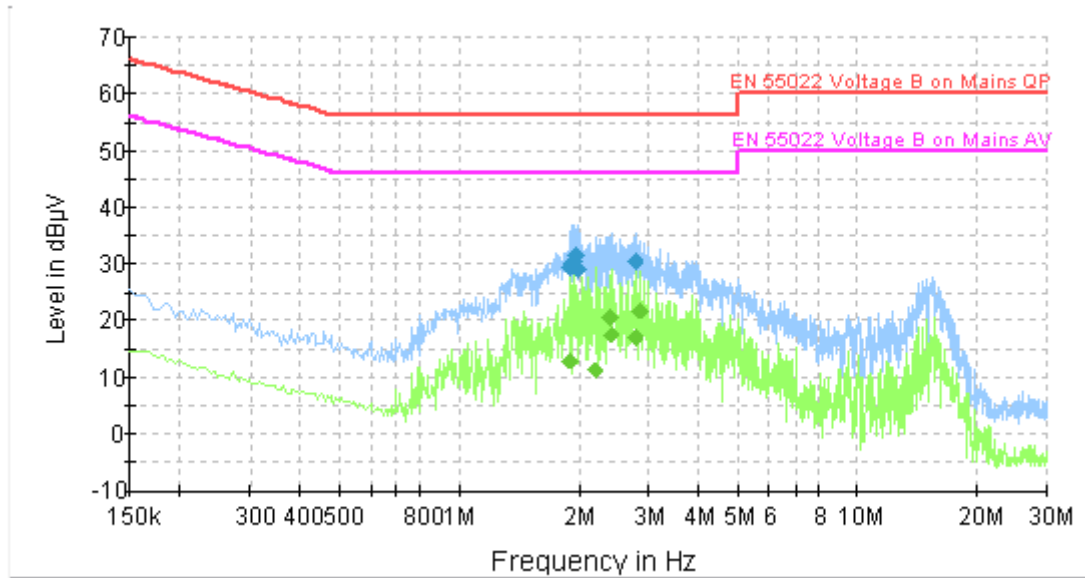


Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.896000	29.5	GND	L1	9.8	26.5	56.0
1.918500	30.0	GND	L1	9.8	26.0	56.0
1.950000	30.2	GND	L1	9.8	25.8	56.0
1.968000	31.3	GND	L1	9.8	24.7	56.0
1.995000	29.1	GND	L1	9.8	26.9	56.0
2.775469	30.5	GND	L1	9.8	25.5	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
1.896000	12.8	GND	N	9.8	33.2	46.0
2.205710	11.3	GND	N	9.8	34.8	46.0
2.389226	20.7	GND	L1	9.8	25.3	46.0
2.413214	17.6	GND	L1	9.8	28.4	46.0
2.764400	17.0	GND	L1	9.8	29.0	46.0
2.848503	21.9	GND	L1	9.8	24.1	46.0

WCDMA Band IV-AE6

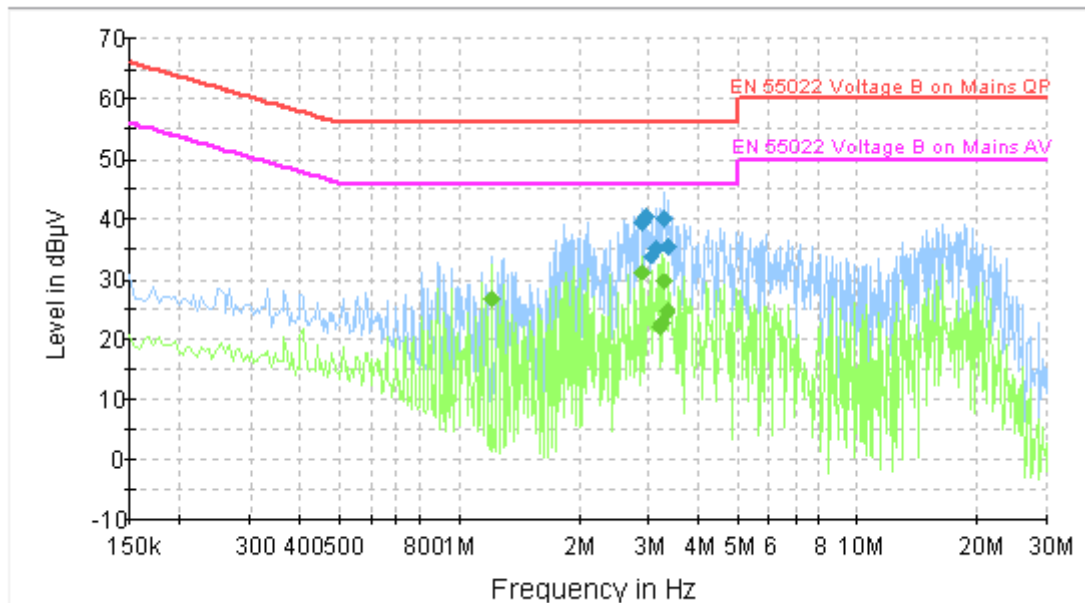


Final Result 1

Frequency (MHz)	QuasiPeak (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
2.878409	39.5	GND	N	9.8	16.5	56.0
2.951093	40.6	GND	N	9.8	15.4	56.0
3.040739	33.9	GND	N	9.8	22.1	56.0
3.117522	35.2	GND	L1	9.8	20.8	56.0
3.293337	40.1	GND	L1	9.8	15.9	56.0
3.376498	35.4	GND	N	9.8	20.6	56.0

Final Result 2

Frequency (MHz)	Average (dB μV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
1.216500	26.7	GND	N	9.8	19.3	46.0
2.878409	31.2	GND	N	9.8	14.8	46.0
3.196243	22.1	GND	N	9.8	23.9	46.0
3.244427	22.7	GND	N	9.8	23.3	46.0
3.276952	29.7	GND	N	9.8	16.3	46.0
3.342985	24.9	GND	L1	9.8	21.2	46.0

WCDMA Band V-AE3

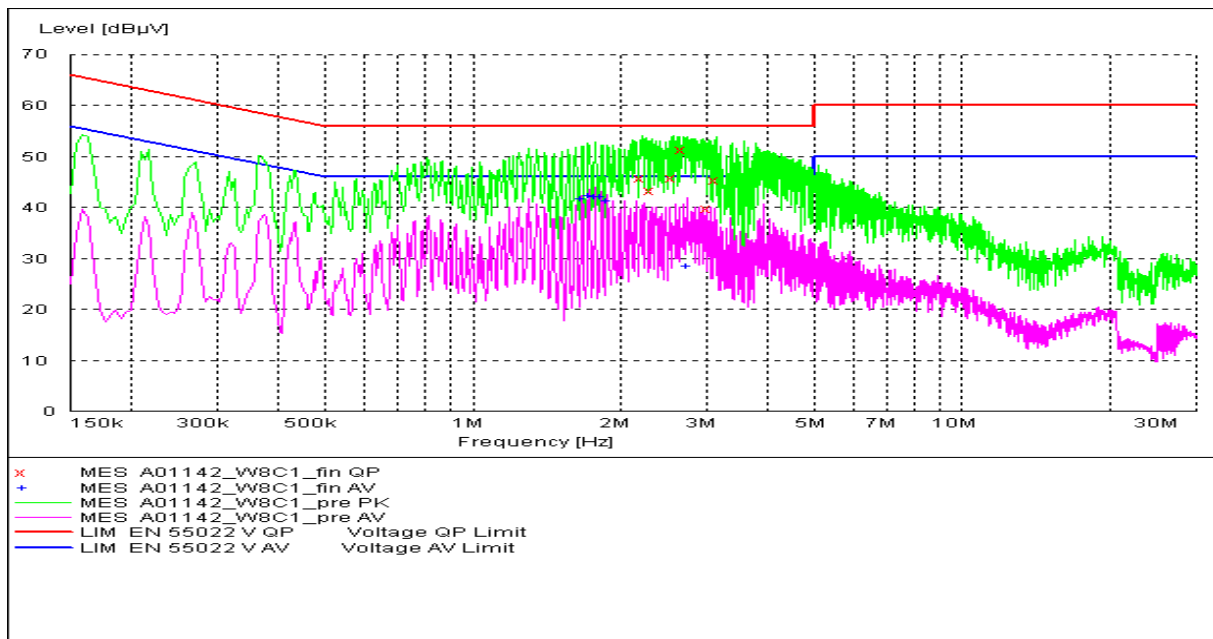


MEASUREMENT RESULT: "A01142_W8C1_fin QP"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line dB	PE
2.218970	45.80	10.1	56	10.2	N	GND
2.314055	43.40	10.1	56	12.6	N	GND
2.562285	45.70	10.1	56	10.3	L1	GND
2.688146	51.30	10.1	56	4.7	L1	GND
3.042647	39.80	10.1	56	16.2	L1	GND
3.141486	45.30	10.1	56	10.7	L1	GND

MEASUREMENT RESULT: "A01142_W8C1_fin AV"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
1.671000	41.60	10.1	46	4.4	L1	GND
1.725000	42.30	10.1	46	3.7	L1	GND
1.779000	42.20	10.1	46	3.8	L1	GND
1.833000	42.00	10.1	46	4.0	L1	GND
1.887000	41.20	10.1	46	4.8	L1	GND
2.747880	28.50	10.1	46	17.5	L1	GND

WCDMA Band V-AE4

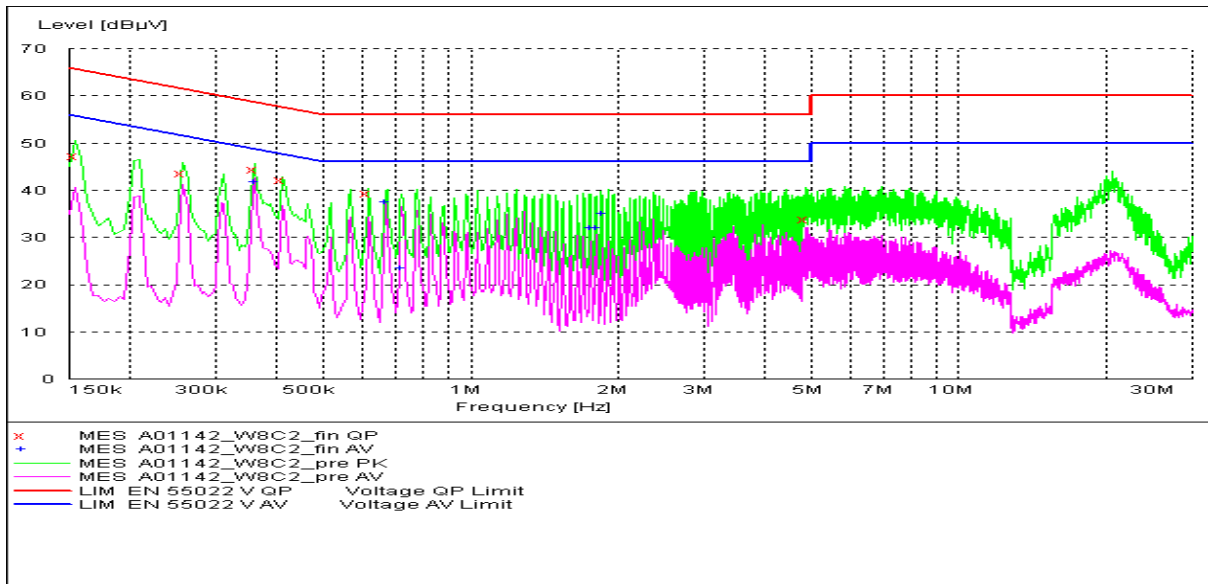


MEASUREMENT RESULT: "A01142_W8C2_fin QP"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
0.154500	47.30	10.1	66	18.4	L1	GND
0.258000	43.70	10.1	62	17.8	L1	GND
0.361500	44.40	10.1	59	14.3	L1	GND
0.411000	42.20	10.1	58	15.4	L1	GND
0.618000	39.40	10.1	56	16.6	L1	GND
4.846527	33.80	10.2	56	22.2	L1	GND

MEASUREMENT RESULT: "A01142_W8C2_fin AV"

Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
0.361500	41.90	10.1	49	6.8	L1	GND
0.667500	37.60	10.1	46	8.4	L1	GND
0.721500	23.60	10.1	46	22.4	N	GND
1.756500	32.10	10.1	46	13.9	N	GND
1.806000	32.10	10.1	46	13.9	N	GND
1.855500	35.10	10.1	46	10.9	L1	GND

WCDMA Band V-AE5

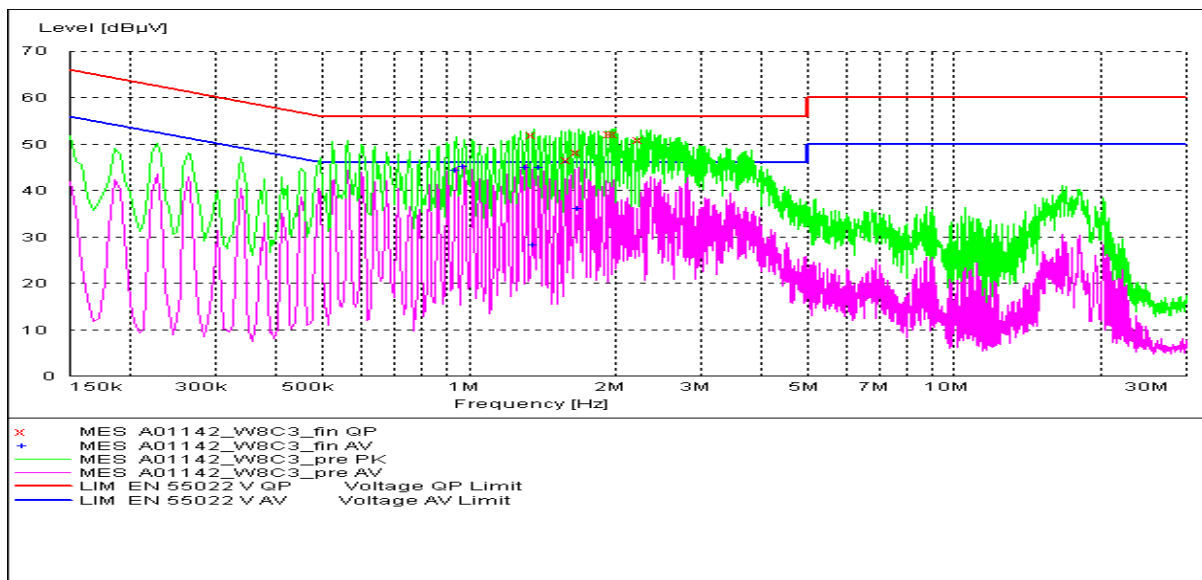

MEASUREMENT RESULT: "A01142_W8C3_fin QP"


Frequency MHz	Level dBμV	Transd	Limit dB	Margin dBμV	Line	PE
1.356000	52.00	10.1	56	4.0	L1	GND
1.612500	46.60	10.1	56	9.4	N	GND
1.680000	48.20	10.1	56	7.8	L1	GND
1.959000	52.10	10.1	56	3.9	L1	GND
1.995000	52.10	10.1	56	3.9	L1	GND
2.259233	51.00	10.1	56	5.0	L1	GND

MEASUREMENT RESULT: "A01142_W8C3_fin AV"

Frequency MHz	Level dB μ V	Transd	Limit dB	Margin dB μ V	Line dB	PE
0.942000	44.30	10.1	46	1.7	L1	GND
0.978000	45.20	10.1	46	0.8	L1	GND
1.315500	45.00	10.1	46	1.0	L1	GND
1.356000	28.30	10.1	46	17.7	L1	GND
1.392000	44.90	10.1	46	1.1	L1	GND
1.684500	36.20	10.1	46	9.8	L1	GND

WCDMA Band V-AE6

ESH3-Z5 Scan

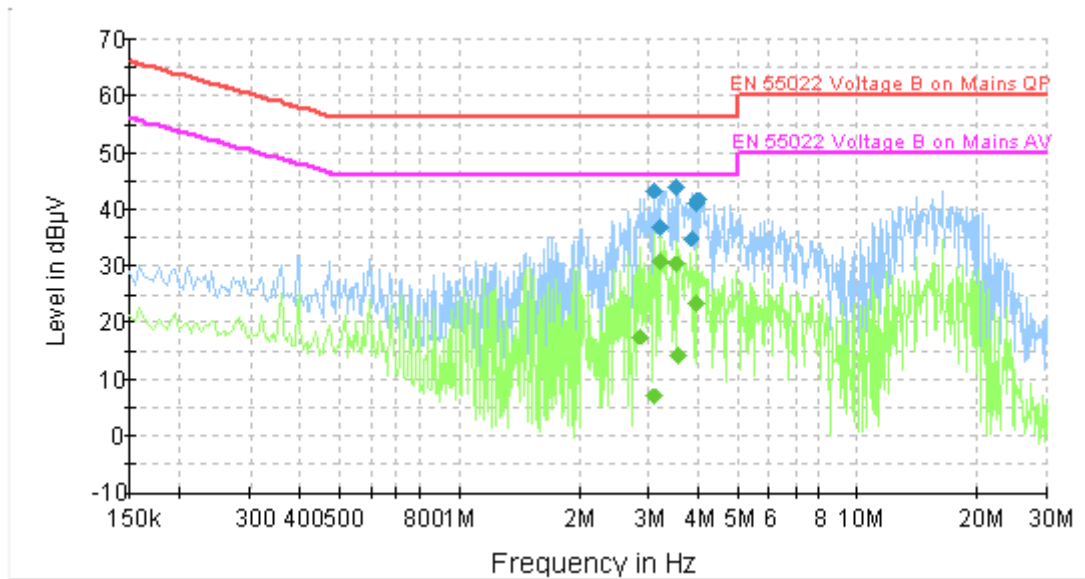

Final Result 1


Frequency	QuasiPeak	PE	Line	Corr.	Margin	Limit
3.102012	43.2	GND	L1	9.8	12.8	56.0
3.228286	36.9	GND	L1	9.8	19.1	56.0
3.531515	43.9	GND	L1	9.8	12.1	56.0
3.824882	34.7	GND	L1	9.8	21.3	56.0
3.960778	41.2	GND	L1	9.8	14.8	56.0
4.000485	41.8	GND	L1	9.8	14.2	56.0

Final Result 2

Frequency	Average	PE	Line	Corr.	Margin	Limit
2.864089	17.4	GND	N	9.8	28.6	46.0
3.102012	7.0	GND	L1	9.8	39.0	46.0
3.212224	30.7	GND	L1	9.8	15.3	46.0
3.531515	30.3	GND	N	9.8	15.7	46.0
3.566918	14.1	GND	L1	9.8	31.9	46.0
3.960778	23.4	GND	N	9.8	22.6	46.0

MP3

ESH3-Z5 Scan

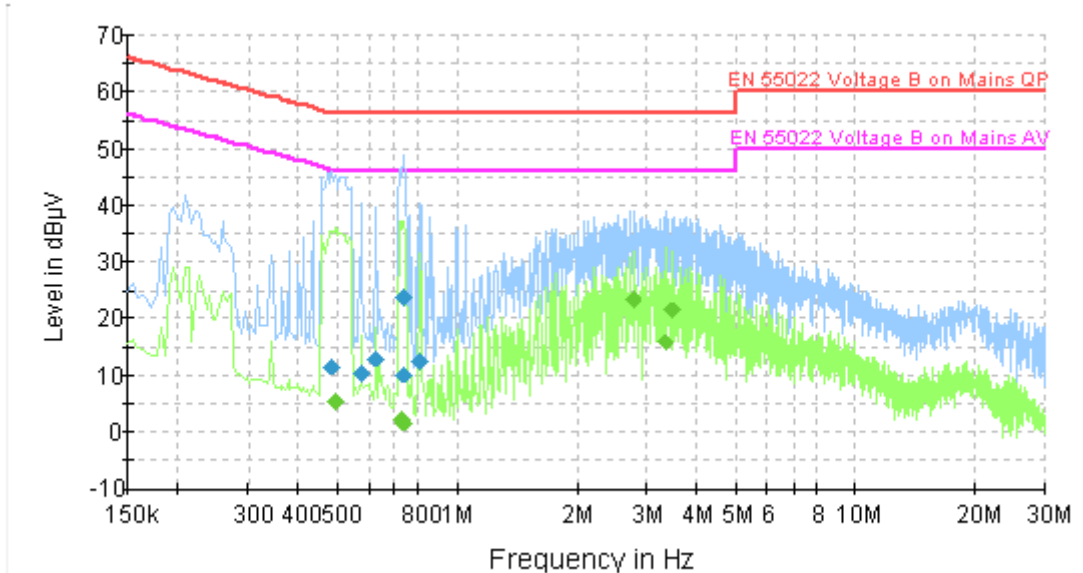

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.487500	11.7	GND	N	9.7	44.5	56.2
0.577500	10.5	GND	N	9.9	45.5	56.0
0.627000	12.9	GND	L1	9.9	43.1	56.0
0.735000	23.7	GND	L1	9.8	32.3	56.0
0.739500	10.3	GND	L1	9.8	45.7	56.0
0.811500	12.5	GND	L1	9.8	43.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.496500	5.3	GND	L1	9.7	40.7	46.1
0.730500	2.3	GND	L1	9.8	43.7	46.0
0.739500	1.6	GND	L1	9.8	44.4	46.0
2.775469	23.6	GND	L1	9.8	22.4	46.0
3.348900	15.7	GND	L1	9.8	30.3	46.0
3.450786	21.5	GND	L1	9.8	24.5	46.0

CAMERA

ESH3-Z5 Scan

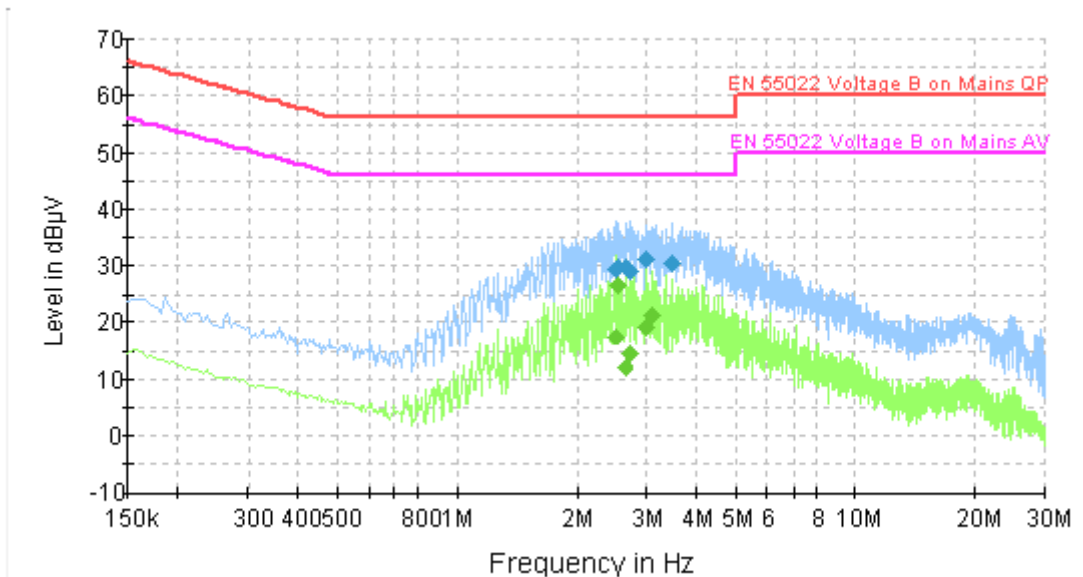

Final Result 1

Frequency (MHz)	QuasiPeak (dB µ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
2.506586	29.5	GND	L1	9.8	26.5	56.0
2.557171	29.6	GND	L1	9.8	26.4	56.0
2.661425	29.6	GND	L1	9.8	26.4	56.0
2.715135	29.1	GND	L1	9.8	26.9	56.0
3.000388	31.1	GND	L1	9.8	24.9	56.0
3.478475	30.5	GND	L1	9.8	25.5	56.0

Final Result 2

Frequency (MHz)	Average (dB µ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
2.506586	17.5	GND	L1	9.8	28.5	46.0
2.557171	26.6	GND	L1	9.8	19.4	46.0
2.661425	12.0	GND	N	9.8	34.0	46.0
2.715135	14.8	GND	L1	9.8	31.2	46.0
3.000388	19.3	GND	L1	9.8	26.7	46.0
3.091671	21.2	GND	L1	9.8	24.8	46.0

A.4 FREQUENCY STABILITY (§2.1055/§27.54)

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of WCDMA Band II and WCDMA Band V, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the

fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

WCDMA Band IV

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	9	0.040
3.8	7	0.031
4.2	10	0.044

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	10	0.044
-20	9	0.040
-10	9	0.040
0	7	0.031
10	7	0.031
20	7	0.031
30	9	0.040
40	9	0.040
50	10	0.044

WCDMA Band V

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	10	0.034
3.8	8	0.027
4.2	12	0.041

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	12	0.041
-20	10	0.034
-10	10	0.034
0	8	0.027
10	8	0.027
20	8	0.027
30	10	0.034
40	10	0.034
50	12	0.041

A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band IV and WCDMA Band V. The table below lists the measured -20dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band IV(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	4.182
1740	4.182
1752.6	4.166


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-20dBc BW)

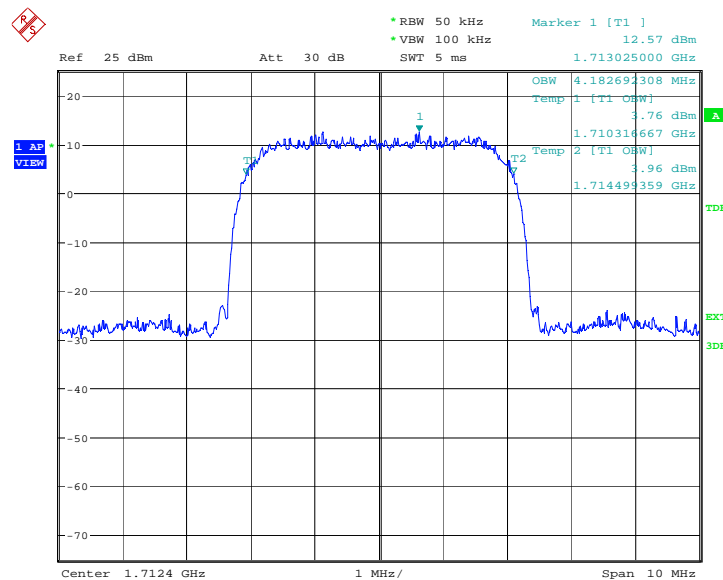


Date: 9.MAY.2012 07:47:53

Channel 1450-Occupied Bandwidth (-20dBc BW)

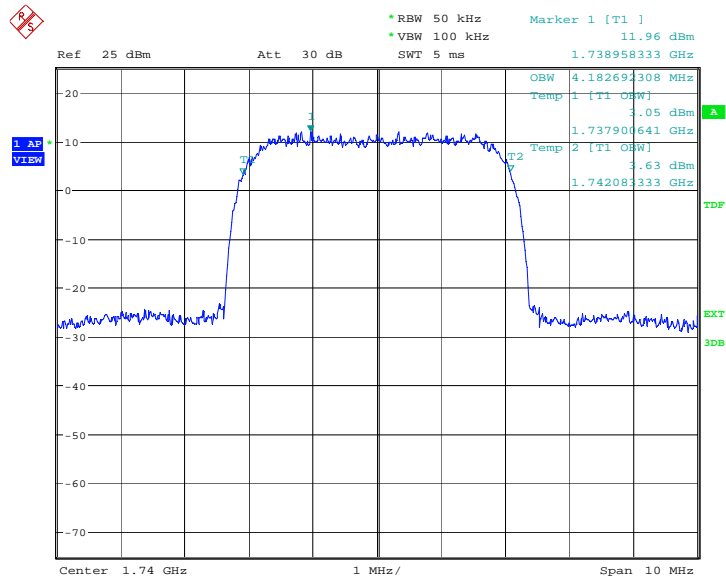

Date: 9.MAY.2012 07:48:27

Channel 1513-Occupied Bandwidth (-20dBc BW)

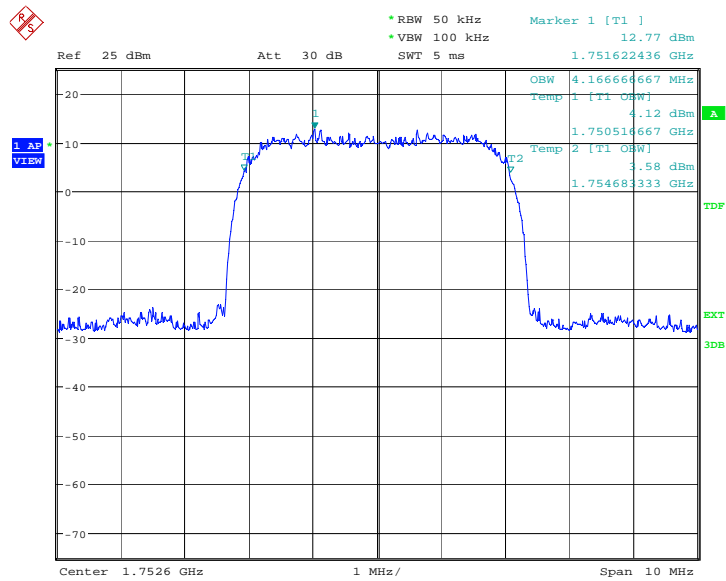


Date: 9.MAY.2012 07:49:02

WCDMA Band IV(-20dBc)-IC


Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
1712.4	4.198
1740	4.182
1752.6	4.182

Channel 1312-Occupied Bandwidth (-20dBc BW)

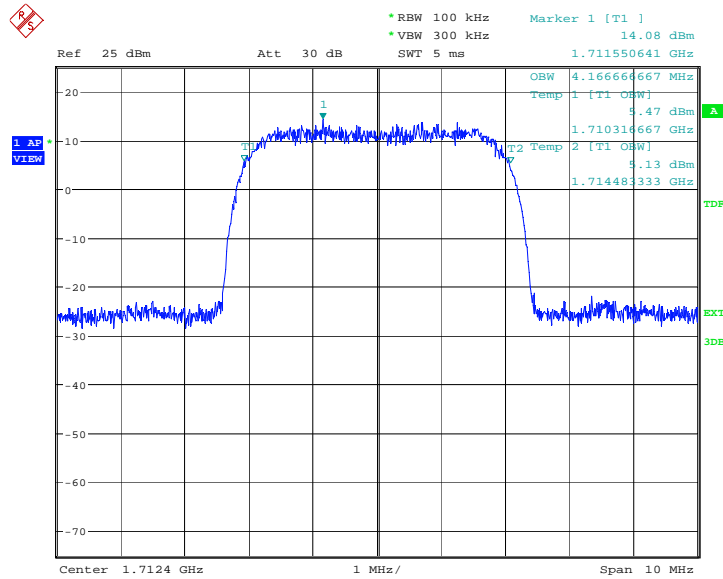


Date: 9.MAY.2012 08:06:11

Channel 1450-Occupied Bandwidth (-20dBc BW)

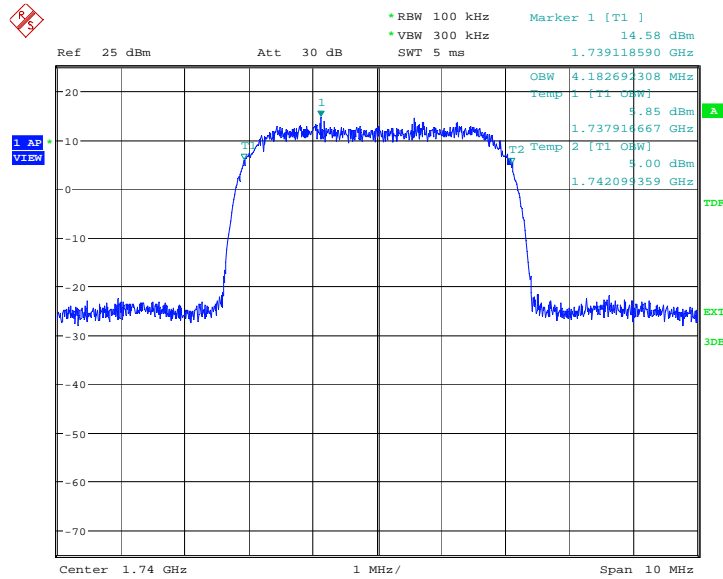

Date: 9.MAY.2012 08:06:46

Channel 1513-Occupied Bandwidth (-20dBc BW)

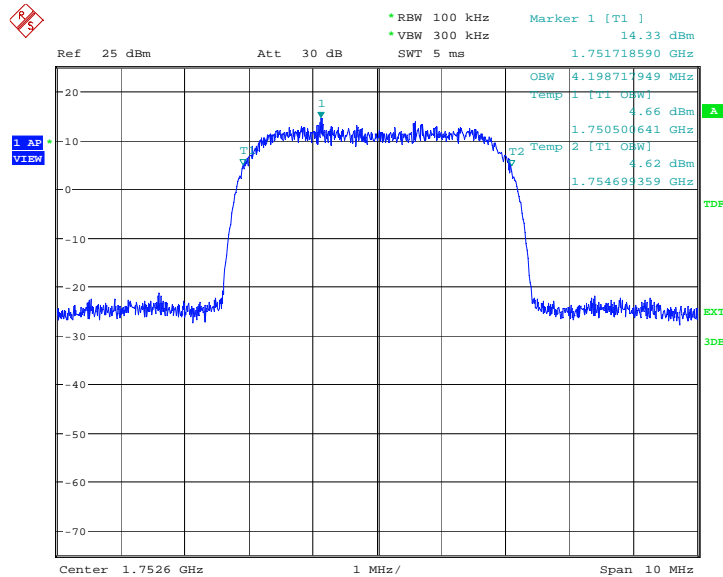


Date: 9.MAY.2012 08:07:21

WCDMA Band V(-20dBc)

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
826.4	4.182
836.6	4.182
846.6	4.182


WCDMA Band V

Channel 4132-Occupied Bandwidth (-20dBc BW)

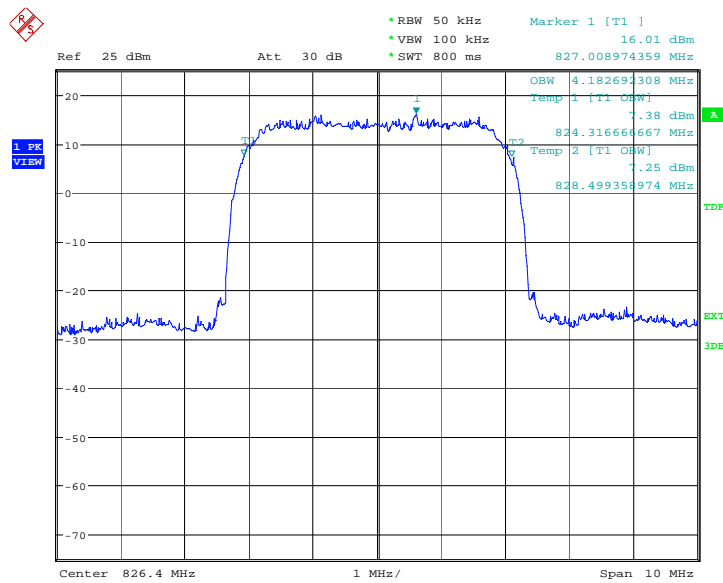


Date: 29.FEB.2012 08:53:41

Channel 4183-Occupied Bandwidth (-20dBc BW)

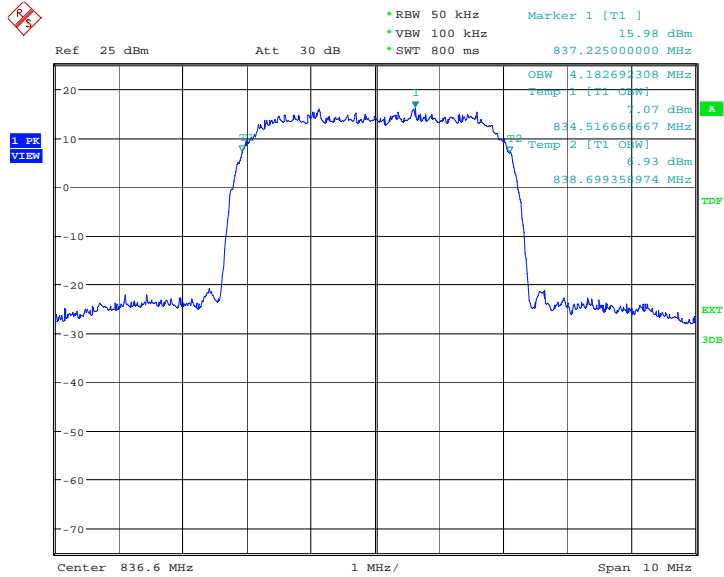

Date: 29.FEB.2012 08:54:16

Channel 4233-Occupied Bandwidth (-20dBc BW)

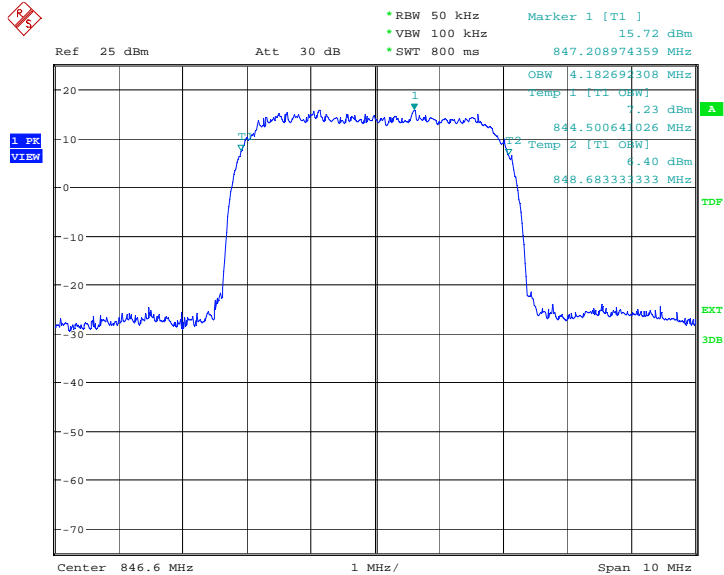


Date: 29.FEB.2012 08:54:50

WCDMA Band V(-20dBc)-IC

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)(MHz)
826.4	4.198
836.6	4.182
846.6	4.182


WCDMA Band V

Channel 4132-Occupied Bandwidth (-20dBc BW)

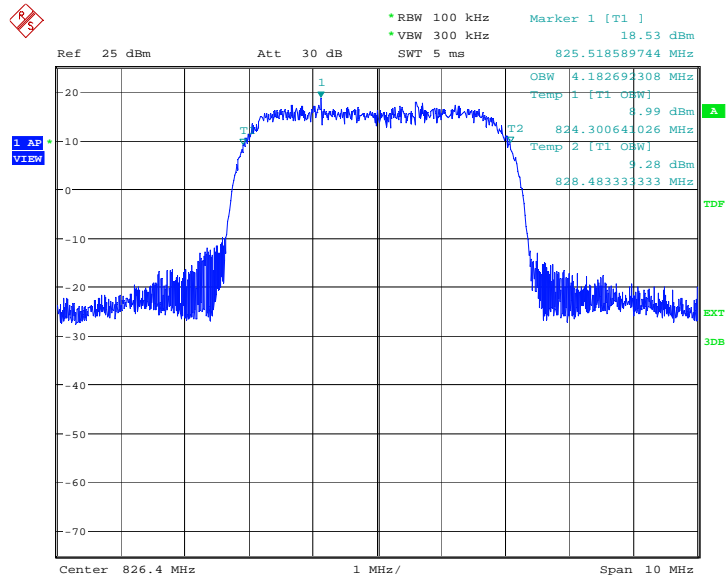


Date: 9.MAY.2012 08:13:25

Channel 4183-Occupied Bandwidth (-20dBc BW)

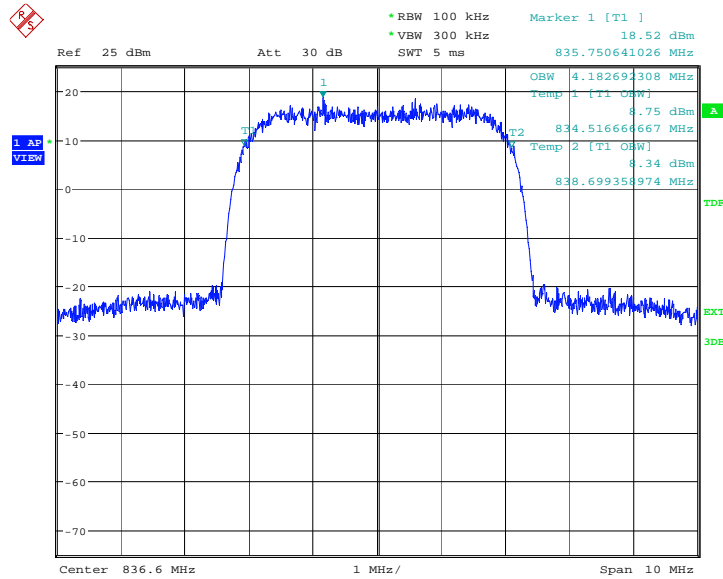

Date: 9.MAY.2012 08:14:00

Channel 4233-Occupied Bandwidth (-20dBc BW)

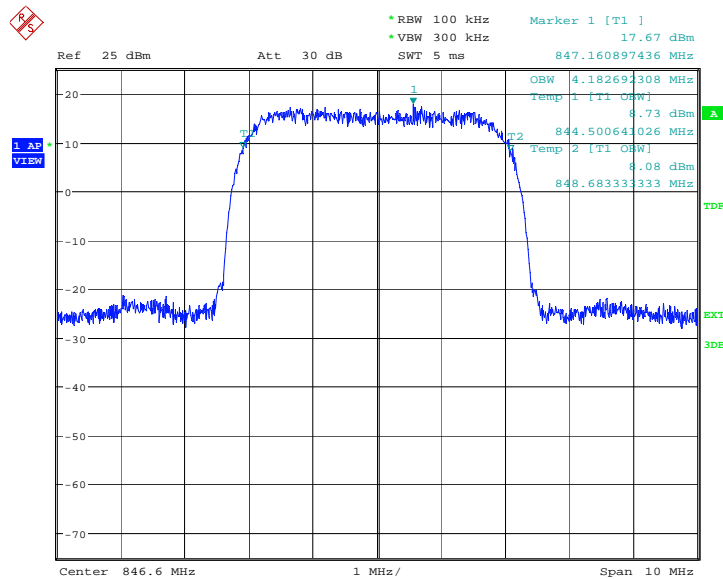

Date: 9.MAY.2012 08:14:34

A.6 EMISSION BANDWIDTH

A.6.1 Emission Bandwidth Results


Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of WCDMA Band IV and WCDMA Band V. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

WCDMA Band IV(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
1712.4	4.503
1740	4.503
1752.6	4.503


WCDMA Band IV

Channel 1312-Occupied Bandwidth (-26dBc BW)

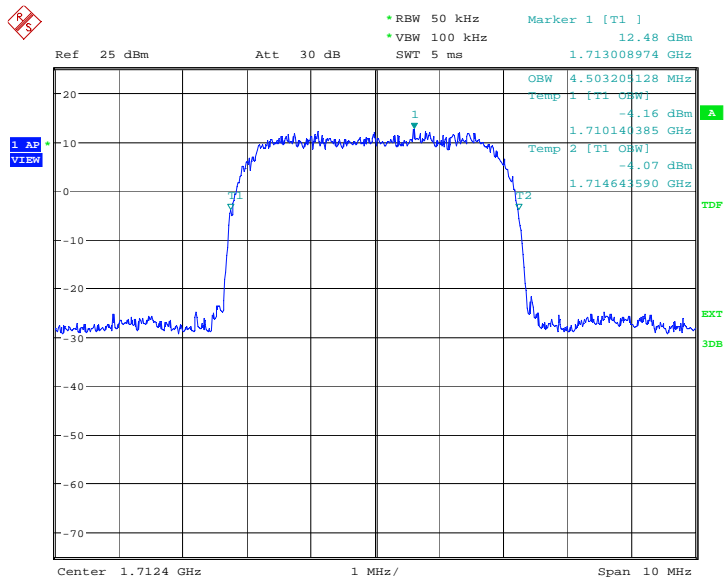


Date: 9.MAY.2012 07:49:38

Channel 1450-Occupied Bandwidth (-26dBc BW)

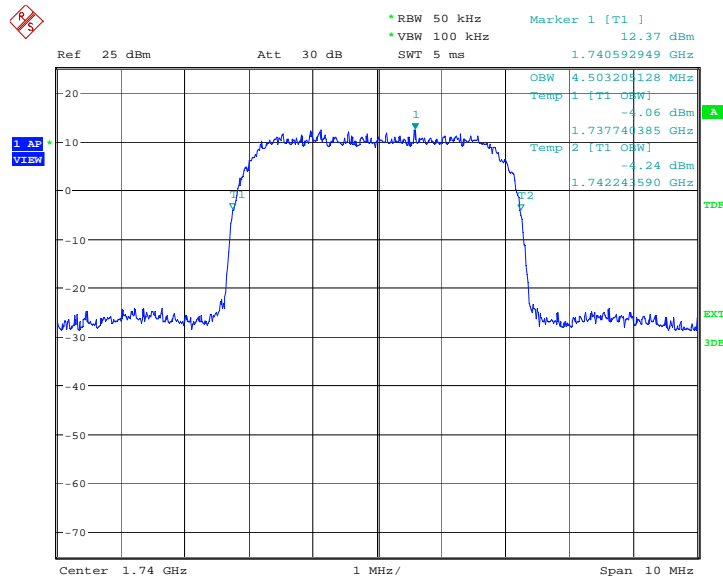

Date: 9.MAY.2012 07:50:13

Channel 1513-Occupied Bandwidth (-26dBc BW)

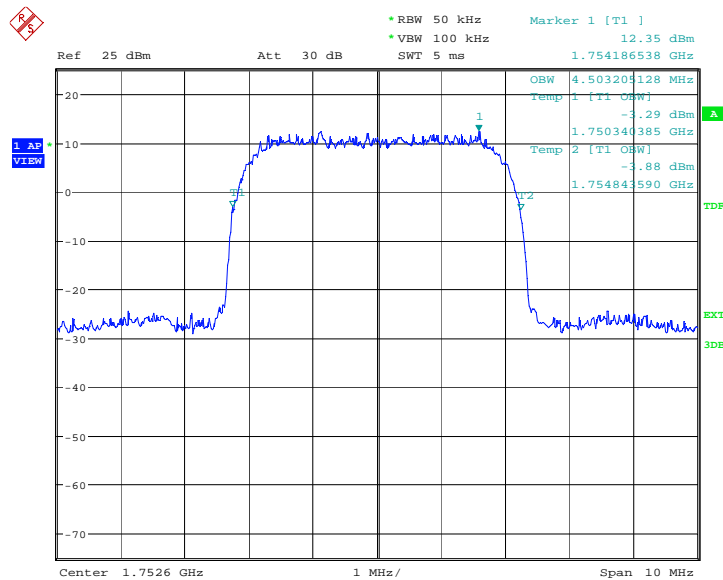


Date: 9.MAY.2012 07:50:47

WCDMA Band V(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(MHz)
826.40	4.487
836.60	4.487
846.60	4.471


WCDMA Band V

Channel 4132-Occupied Bandwidth (-26dBc BW)

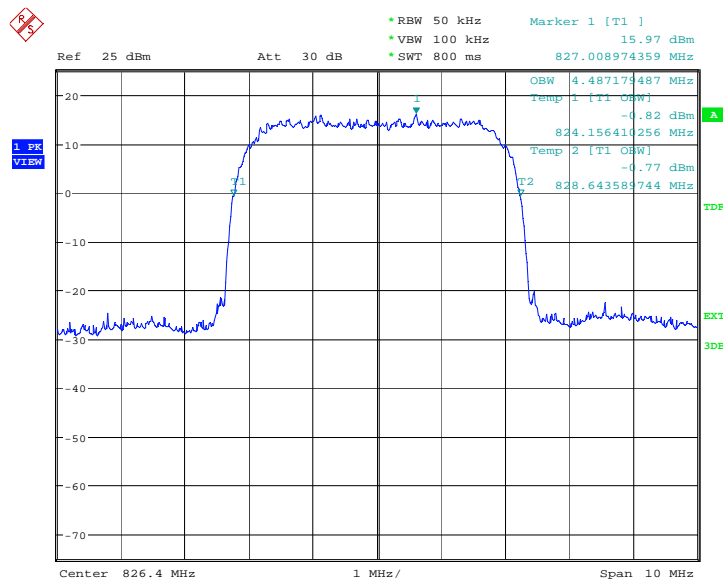


Date: 29.FEB.2012 08:55:26

Channel 4183-Occupied Bandwidth (-26dBc BW)

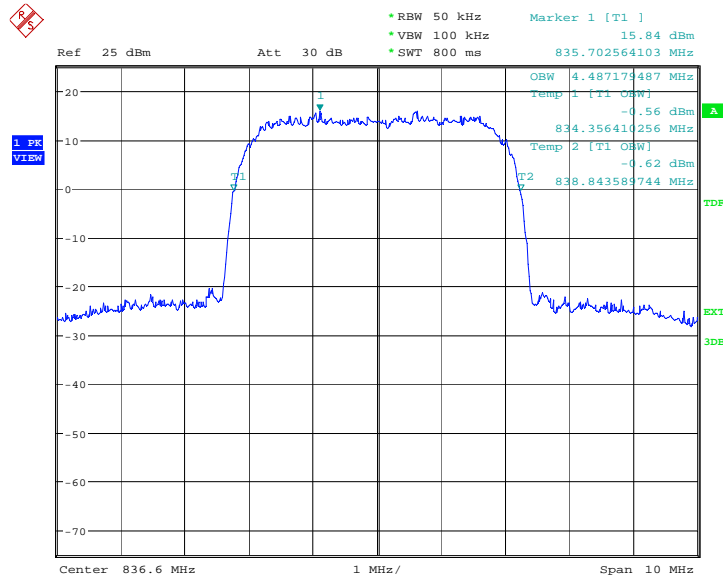

Date: 29.FEB.2012 08:56:01

Channel 4233-Occupied Bandwidth (-26dBc BW)

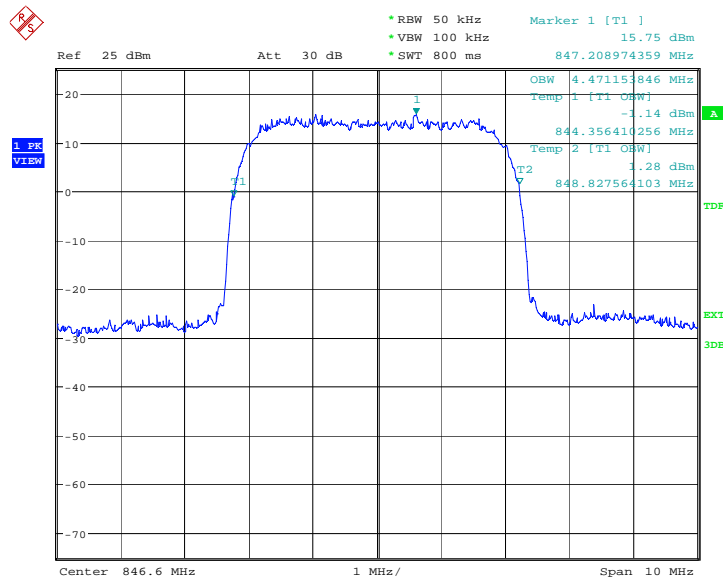


Date: 29.FEB.2012 08:56:35

A.7 BAND EDGE COMPLIANCE


WCDMA Band IV

LOW BAND EDGE BLOCK-A (WCDMA Band IV)-Channel 1312

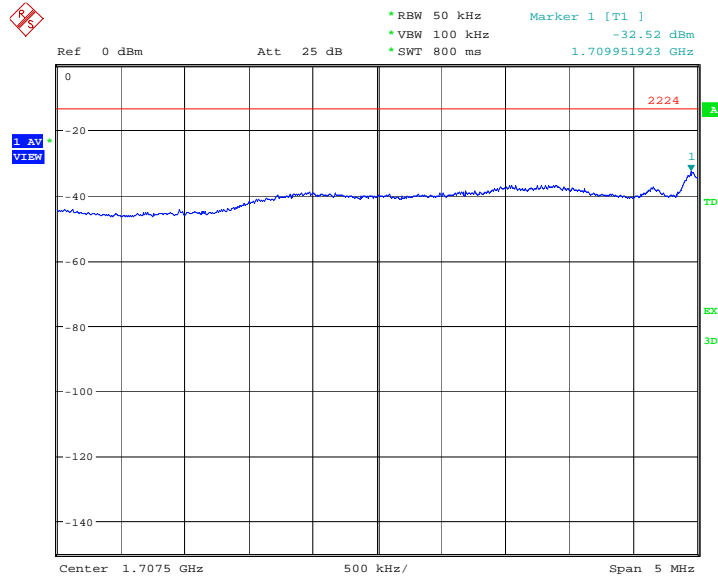


Date: 9.MAY.2012 07:50:59

HIGH BAND EDGE BLOCK-C (WCDMA Band IV) -Channel 1513

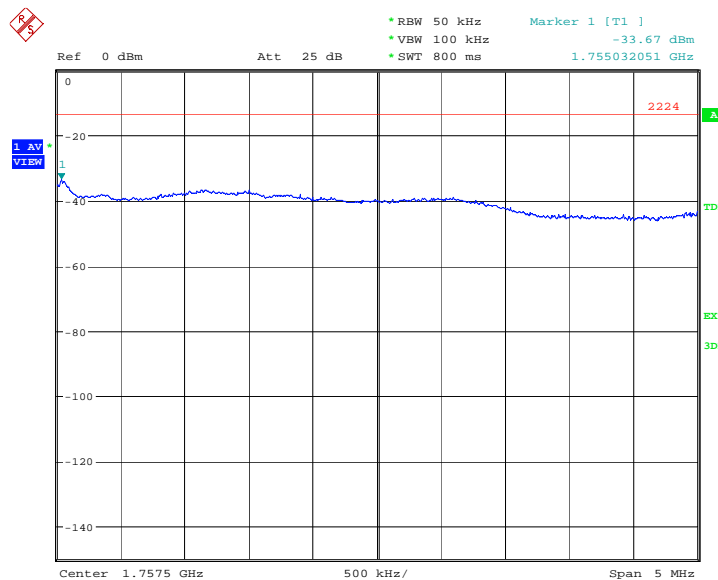


Date: 9.MAY.2012 07:51:10

WCDMA Band V
LOW BAND EDGE BLOCK-A (WCDMA Band V)-Channel 4132

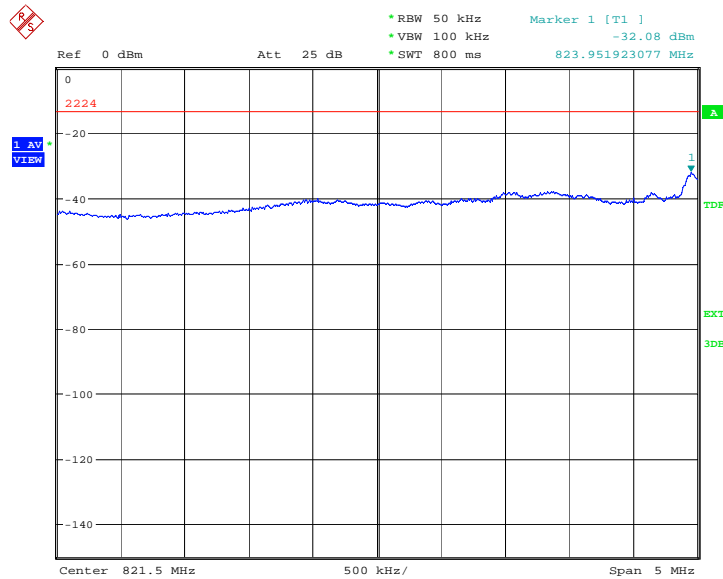

Date: 29.FEB.2012 08:56:46

HIGH BAND EDGE BLOCK-C (WCDMA Band V) -Channel 4233

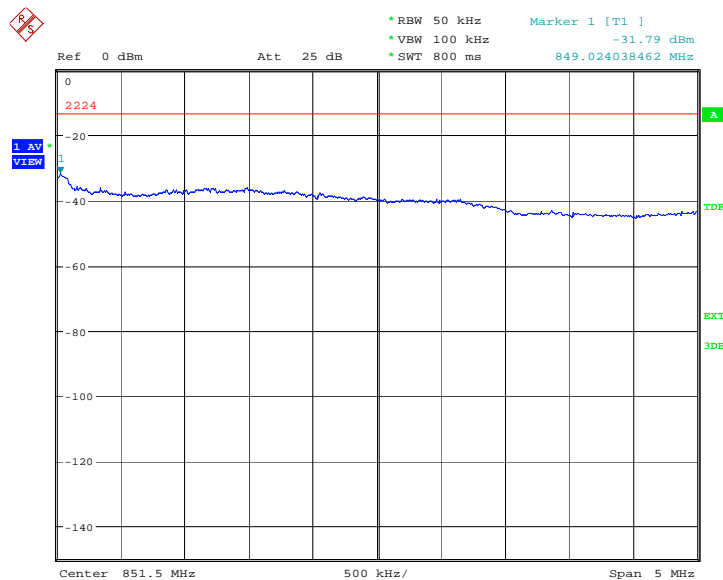

Date: 29.FEB.2012 08:56:57

A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of WCDMA Band IV, data taken from 30 MHz to 20 GHz. For the equipment of WCDMA Band V, data taken from 30 MHz to 10 GHz
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

WCDMA Band IV Transmitter

Channel	Frequency (MHz)
1312	1712.40
1450	1740.00
1513	1752.60

WCDMA Band V Transmitter

Channel	Frequency (MHz)
4132	826.40
4183	836.60
4233	846.60

A. 8.2 Measurement Limit

Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the


specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3 Measurement result

WCDMA Band IV

A. 8.3.1 Channel 1312: 30MHz –1GHz

Spurious emission limit –13dBm.

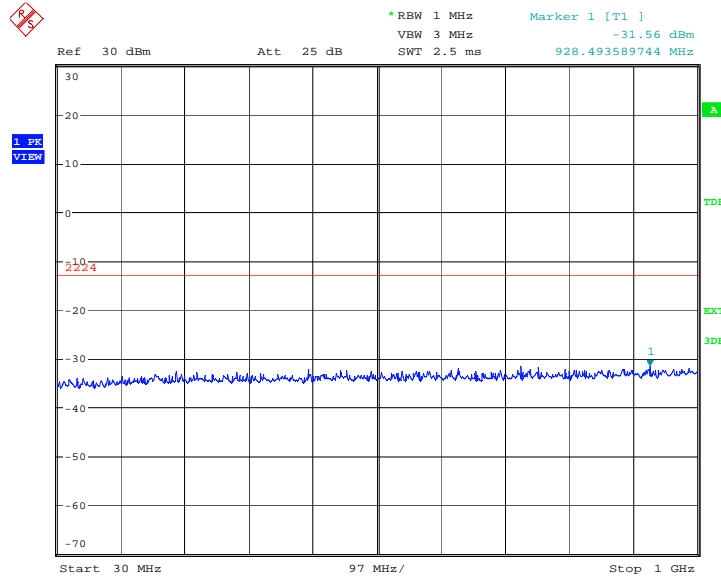


Date: 9.MAY.2012 07:51:41

A. 8.3.2 Channel 1312: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

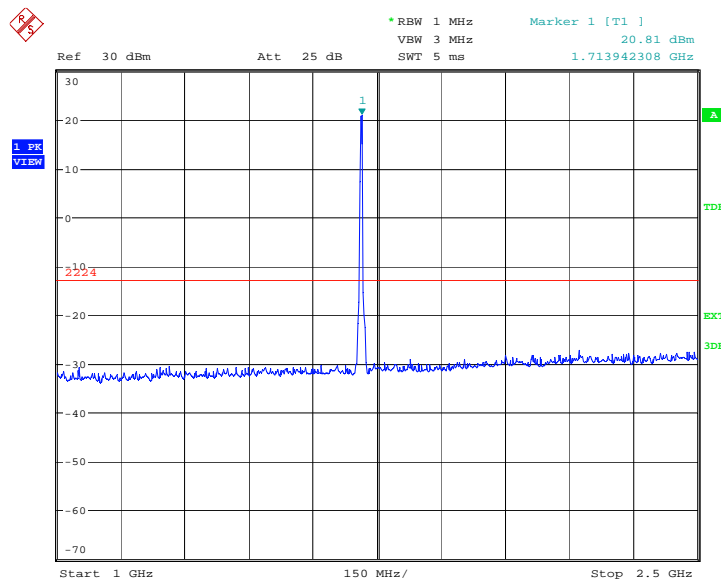


Date: 9.MAY.2012 07:52:10

A. 8.3.3 Channel 1312: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

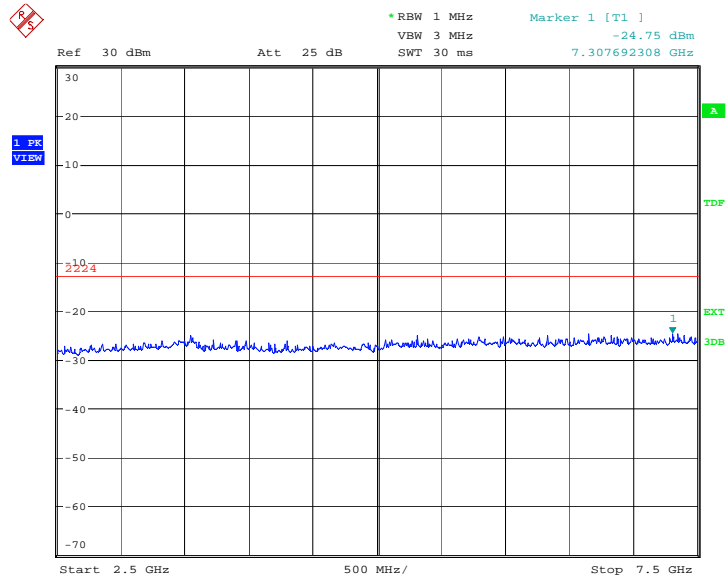


Date: 9.MAY.2012 07:52:38

A. 8.3.4 Channel 1312: 7.5GHz –10GHz
Spurious emission limit –13dBm.

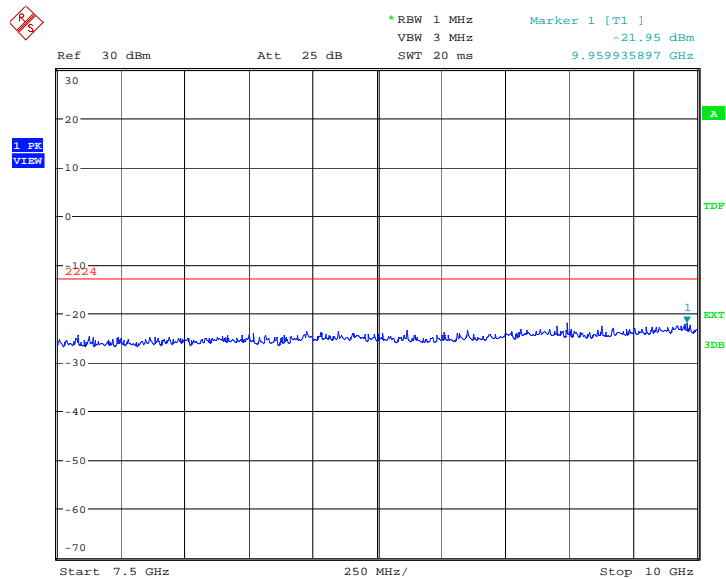


Date: 9.MAY.2012 07:53:07

A. 8.3.5 Channel 1312: 10GHz –15GHz
Spurious emission limit –13dBm.

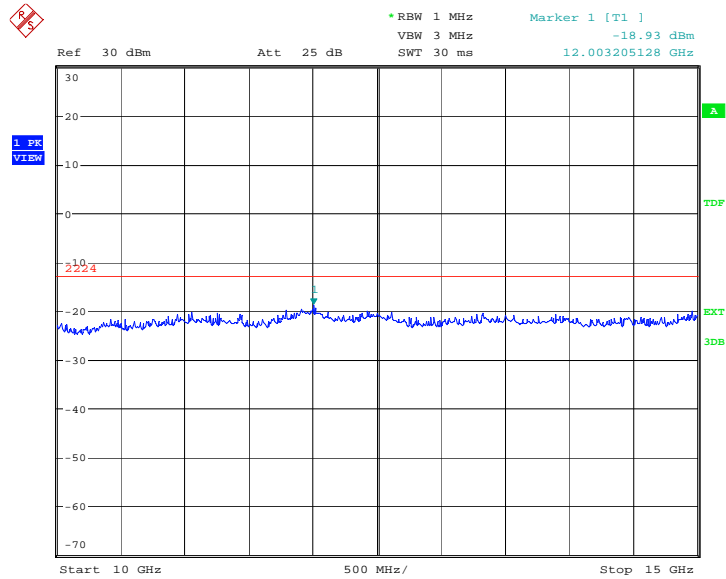


Date: 9.MAY.2012 07:53:36

A. 8.3.6 Channel 1312: 15GHz –20GHz
Spurious emission limit –13dBm.

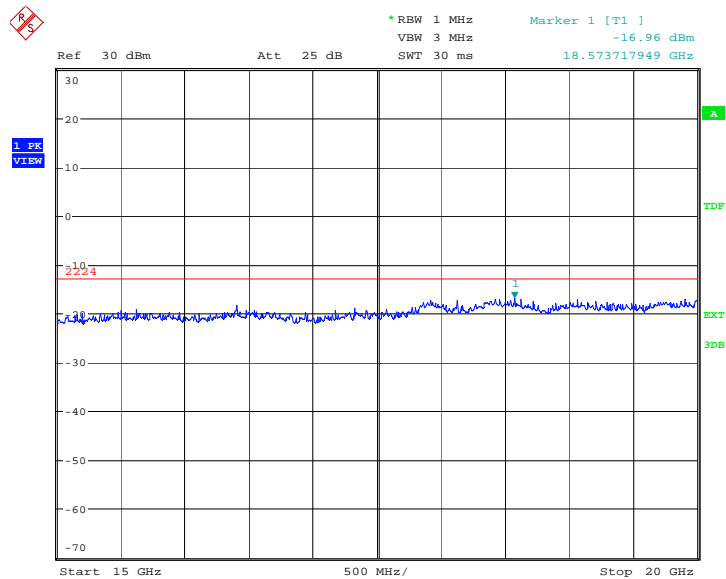

Date: 9.MAY.2012 07:54:04


A. 8.3.7 Channel 1450: 30MHz –1GHz
Spurious emission limit –13dBm.

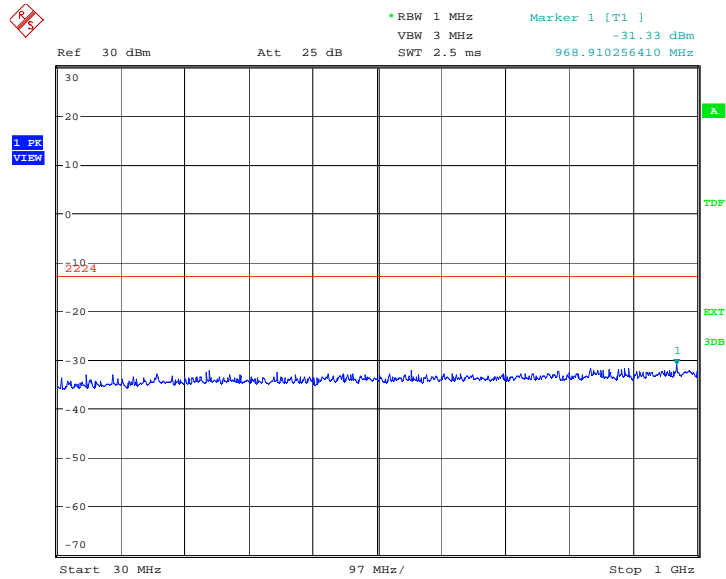

Date: 9.MAY.2012 07:54:36


A. 8.3.8 Channel 1450: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

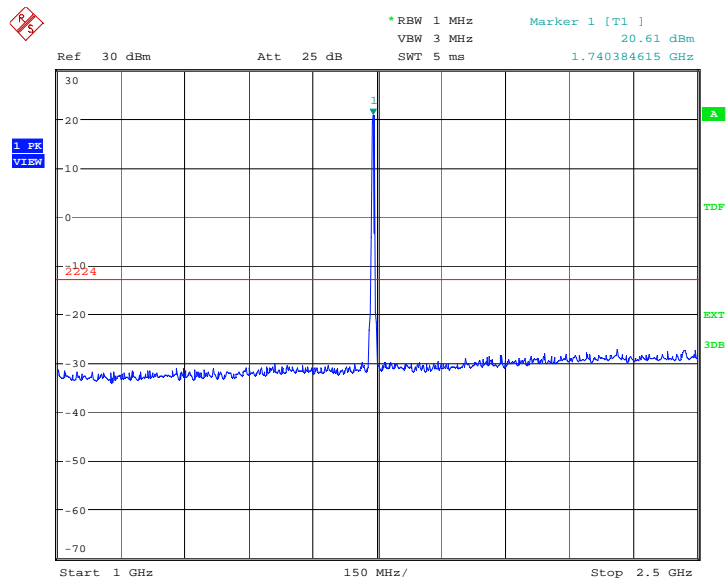


Date: 9.MAY.2012 07:55:04

A. 8.3.9 Channel 1450: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

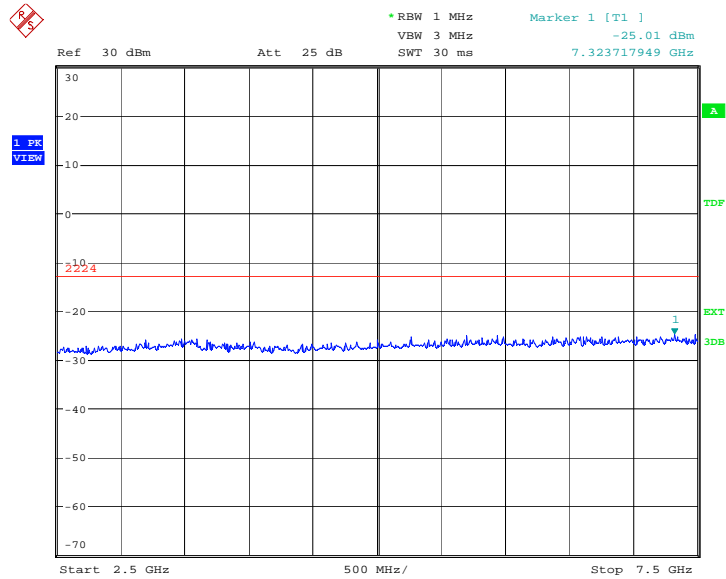


Date: 9.MAY.2012 07:55:32

A. 8.3.10 Channel 1450: 7.5GHz –10GHz
Spurious emission limit –13dBm.

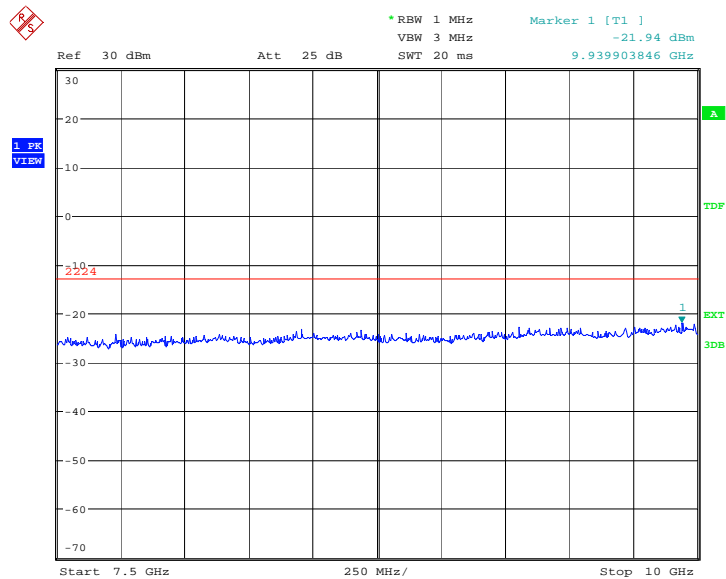


Date: 9.MAY.2012 07:56:01

A. 8.3.11 Channel 1450: 10GHz –15GHz
Spurious emission limit –13dBm.

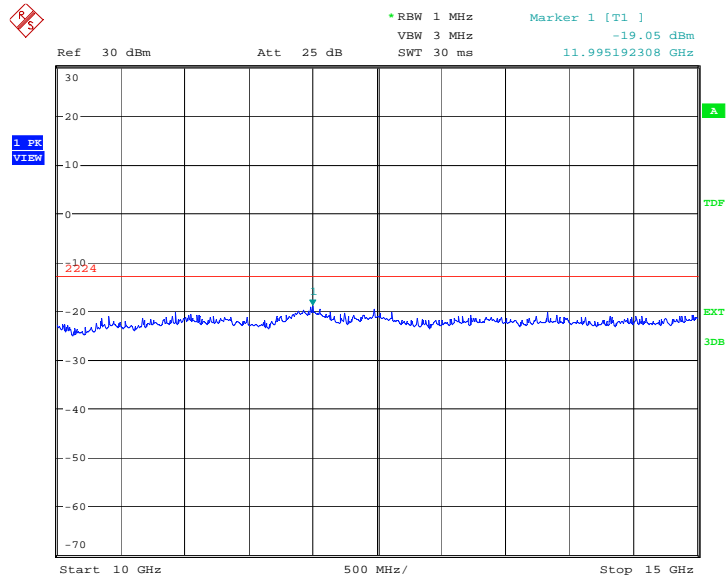


Date: 9.MAY.2012 07:56:29

A. 8.3.12 Channel 1450: 15GHz –20GHz
Spurious emission limit –13dBm.

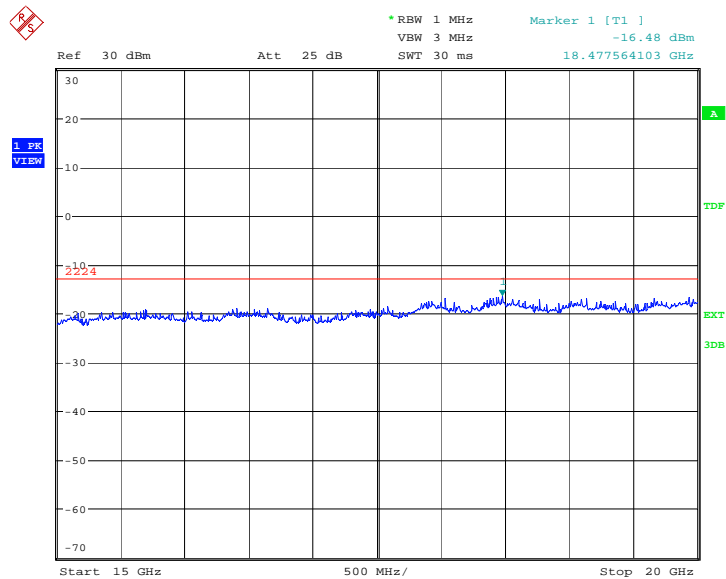

Date: 9.MAY.2012 07:56:58


A. 8.3.13 Channel 1513: 30MHz –1GHz
Spurious emission limit –13dBm.

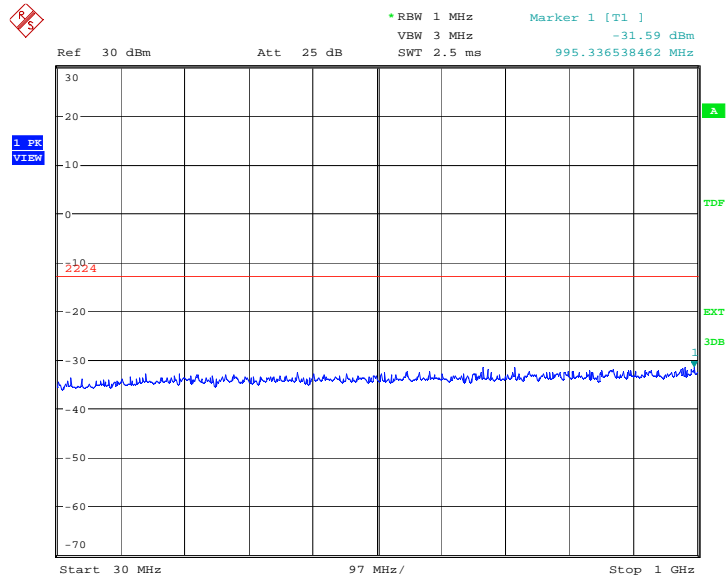

Date: 9.MAY.2012 07:57:29


A. 8.3.14 Channel 1513: 1GHz –2.5GHz
Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

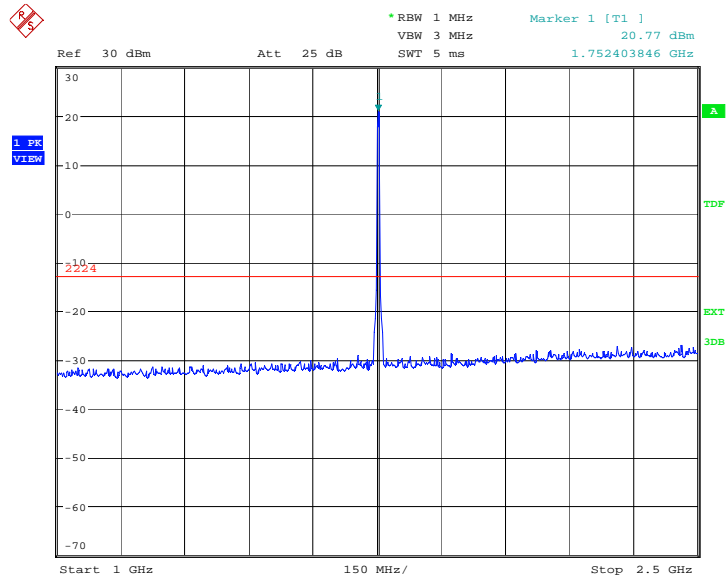


Date: 9.MAY.2012 07:57:58

A. 8.3.15 Channel 1513: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

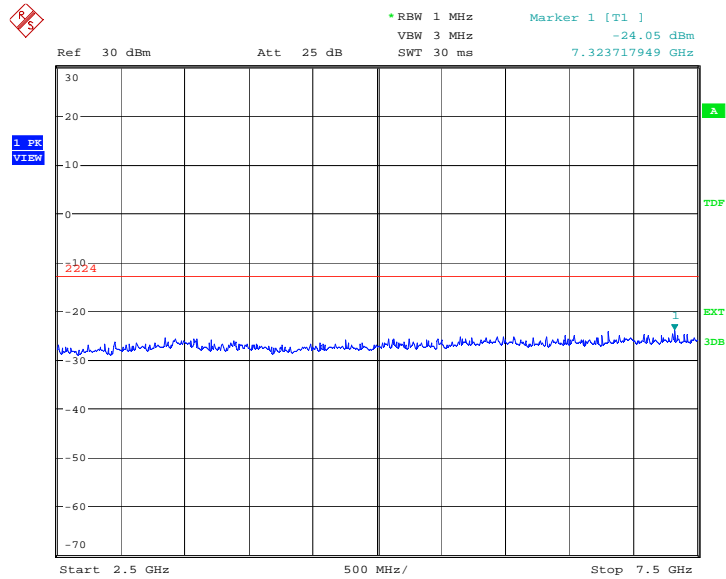


Date: 9.MAY.2012 07:58:26

A. 8.3.16 Channel 1513: 7.5GHz –10GHz
Spurious emission limit –13dBm.

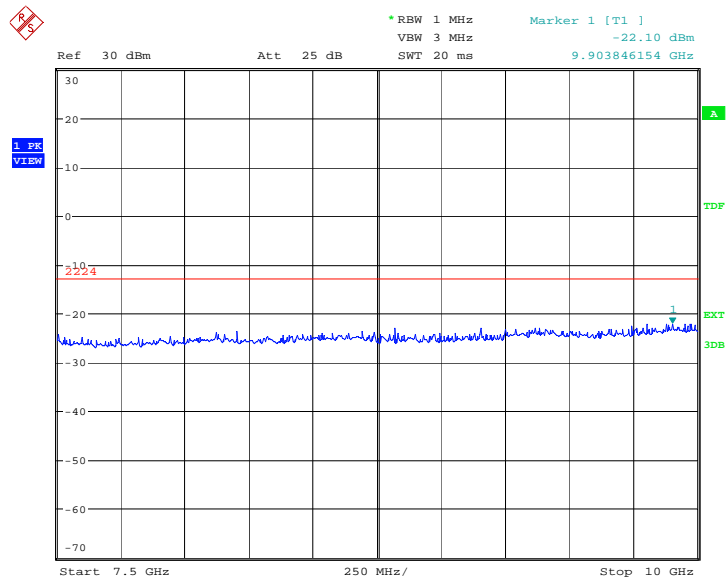


Date: 9.MAY.2012 07:58:54

A. 8.3.17 Channel 1513: 10GHz –15GHz
Spurious emission limit –13dBm.

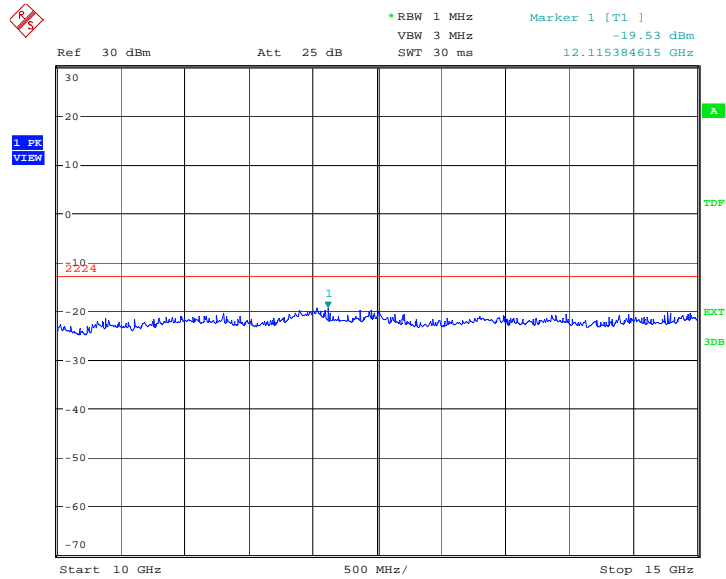


Date: 9.MAY.2012 07:59:23

A. 8.3.18 Channel 1513: 15GHz –20GHz
Spurious emission limit –13dBm.

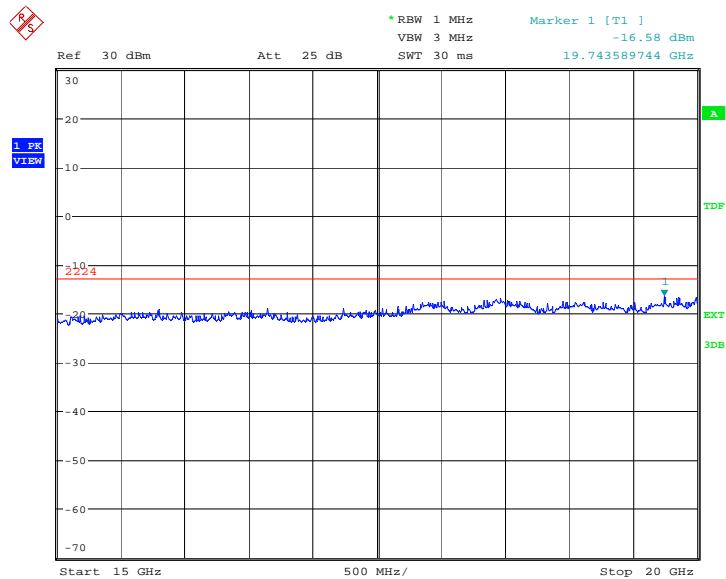


Date: 9.MAY.2012 07:59:51

A.8.3.21 Idle mode: 2.5GHz –7.5GHz
Spurious emission limit –13dBm.

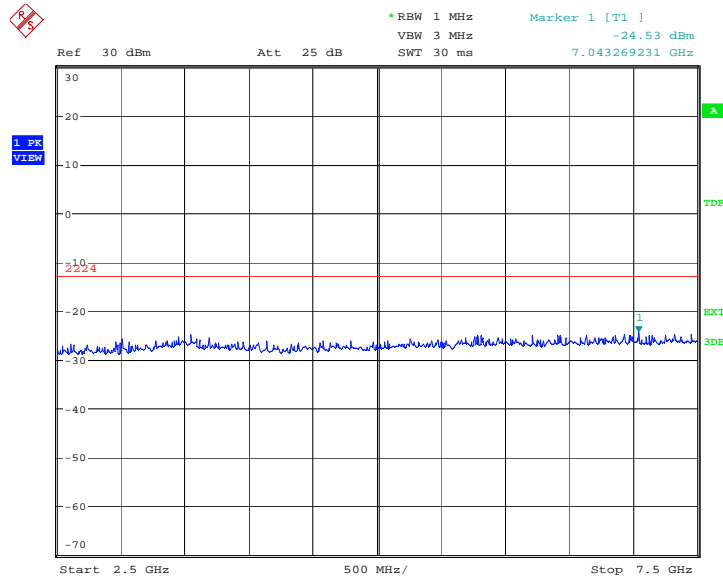


Date: 9.MAY.2012 08:01:18

A.8.3.22 Idle mode: 7.5GHz –10GHz
Spurious emission limit –13dBm.

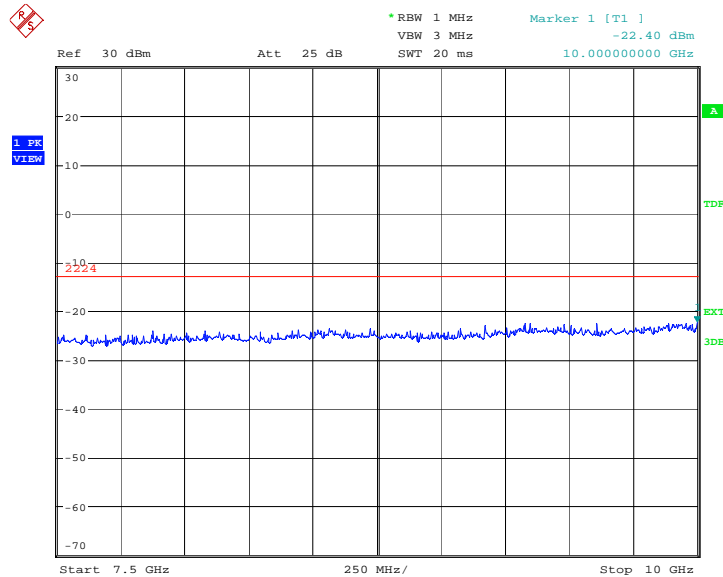


Date: 9.MAY.2012 08:01:46

A.8.3.23 Idle mode: 10GHz –15GHz
Spurious emission limit –13dBm.

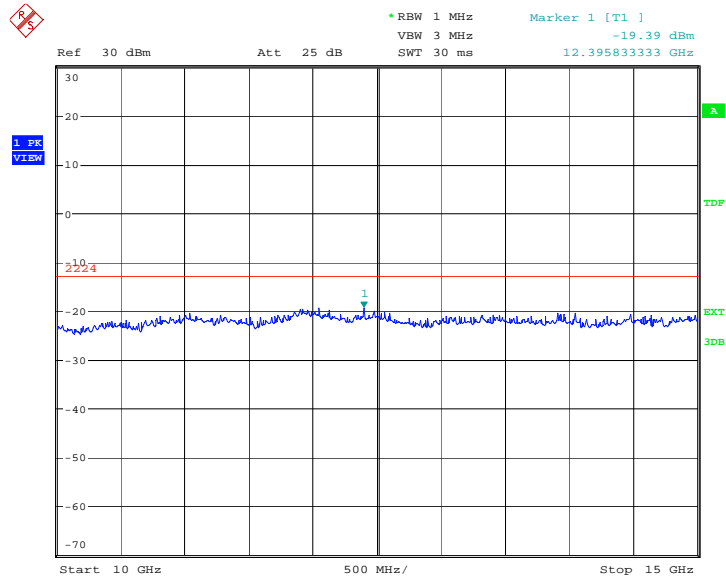

Date: 9.MAY.2012 08:02:14

A.8.3.24 Idle mode: 15GHz –20GHz
Spurious emission limit –13dBm.

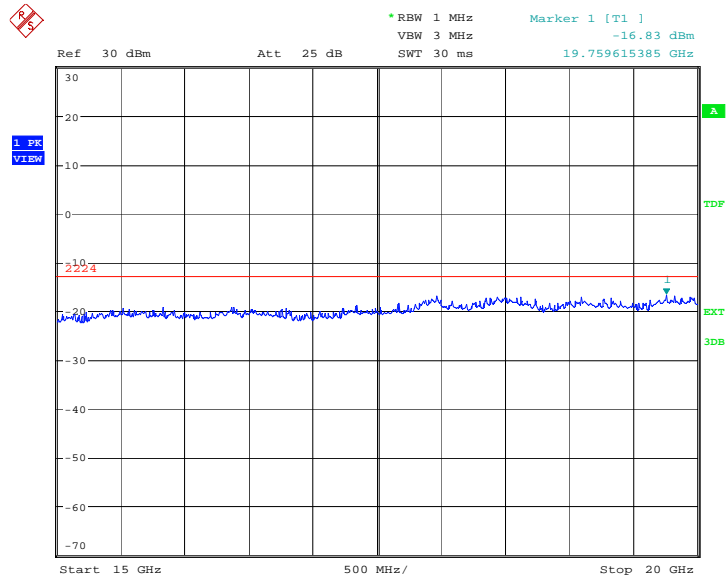


Date: 9.MAY.2012 08:02:43

WCDMA Band V

A. 8.3.25 Channel 4132: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

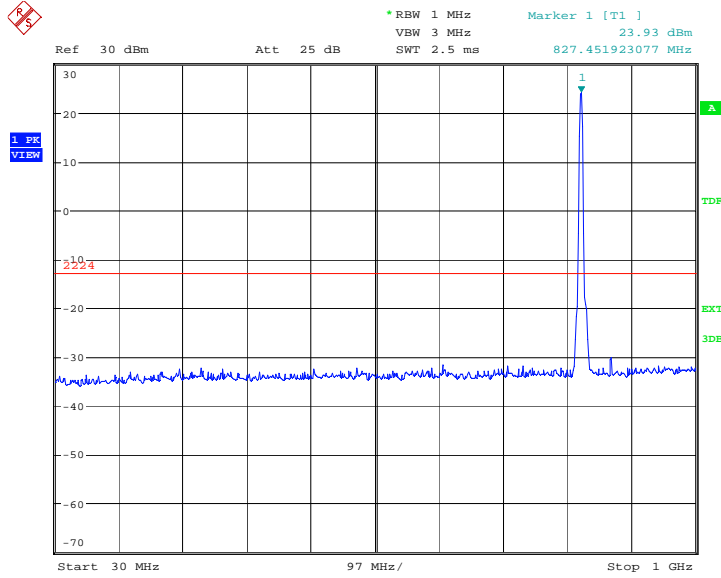

Date: 29.FEB.2012 08:57:28

A. 8.3.26 Channel 4132: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

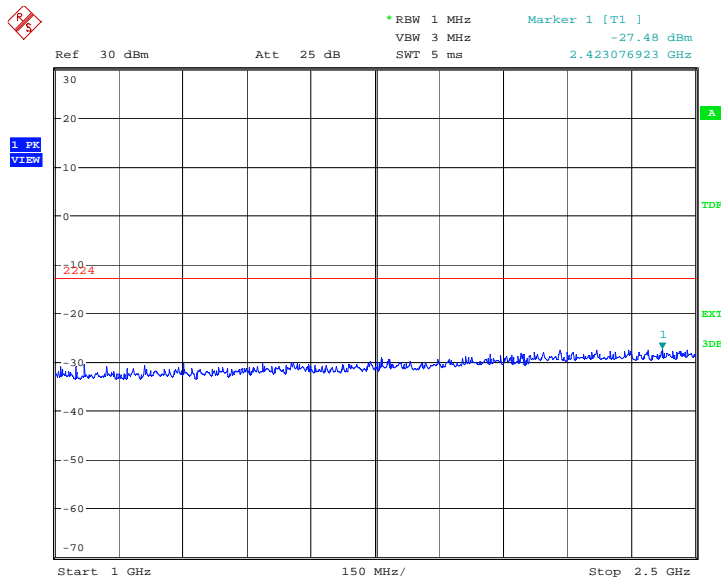


Date: 29.FEB.2012 08:57:56

A. 8.3.27 Channel 4132: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

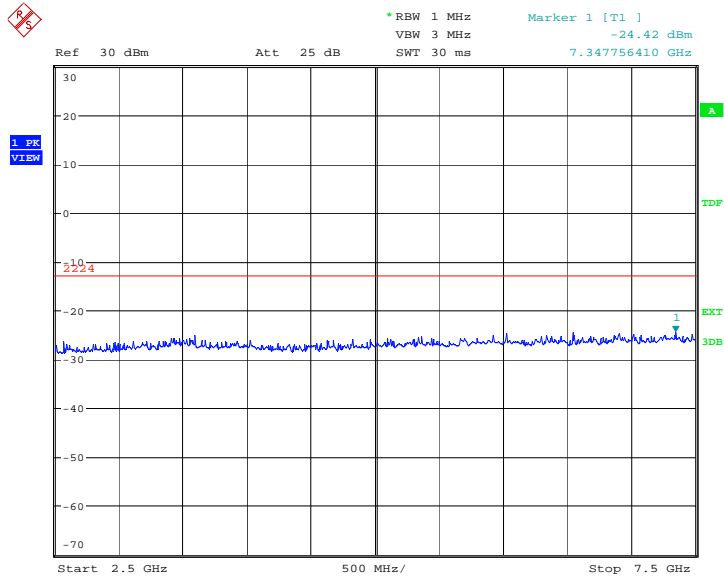

Date: 29.FEB.2012 08:58:25

A. 8.3.28 Channel 4132: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

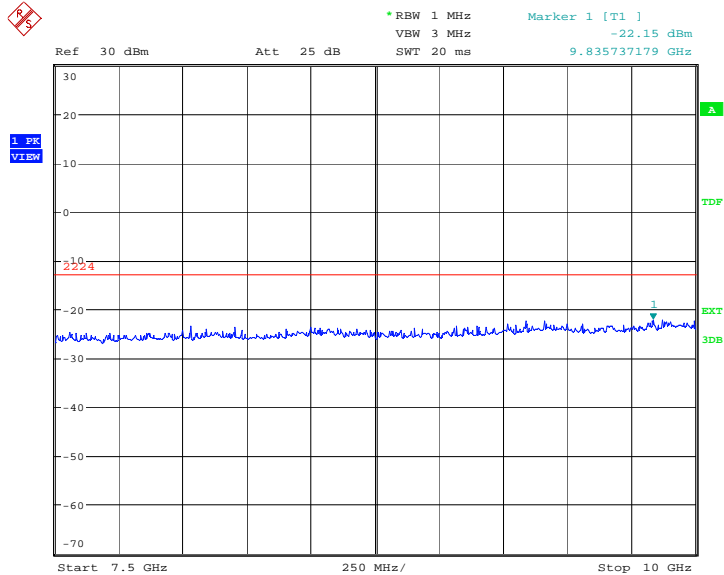


Date: 29.FEB.2012 08:58:53

A. 8.3.29 Channel 4183: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

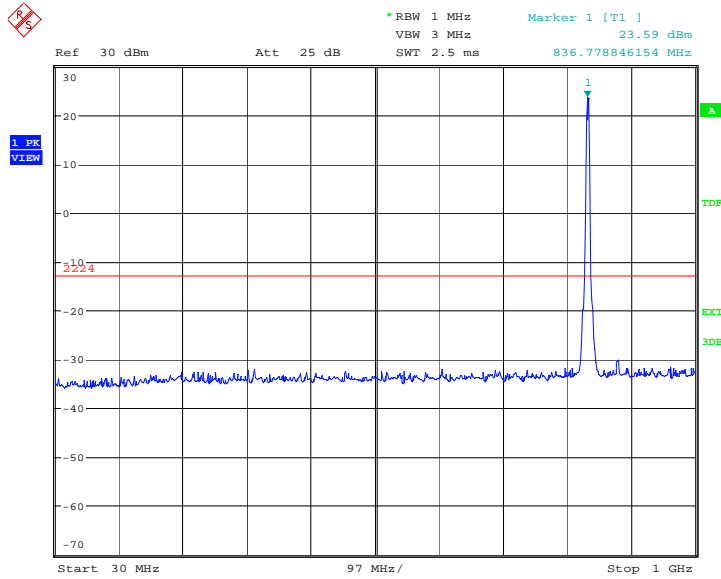

Date: 29.FEB.2012 08:59:24

A.8.3.30 Channel 4183: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

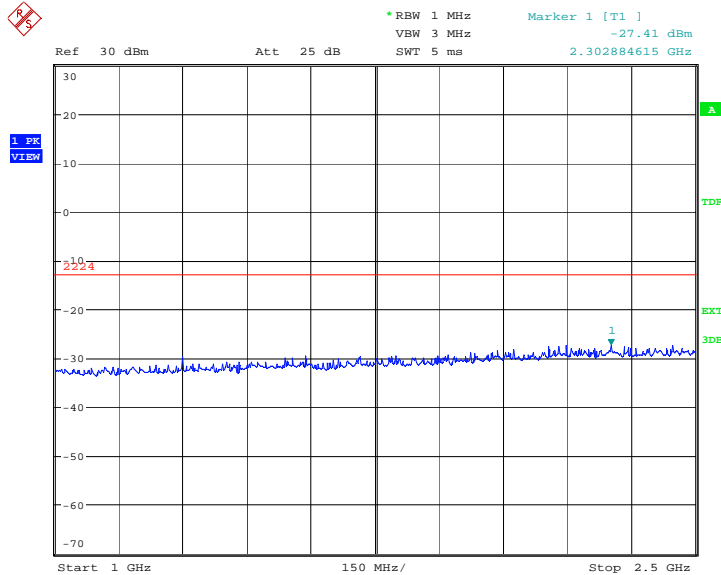


Date: 29.FEB.2012 08:59:52

A. 8.3.31 Channel 4183: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

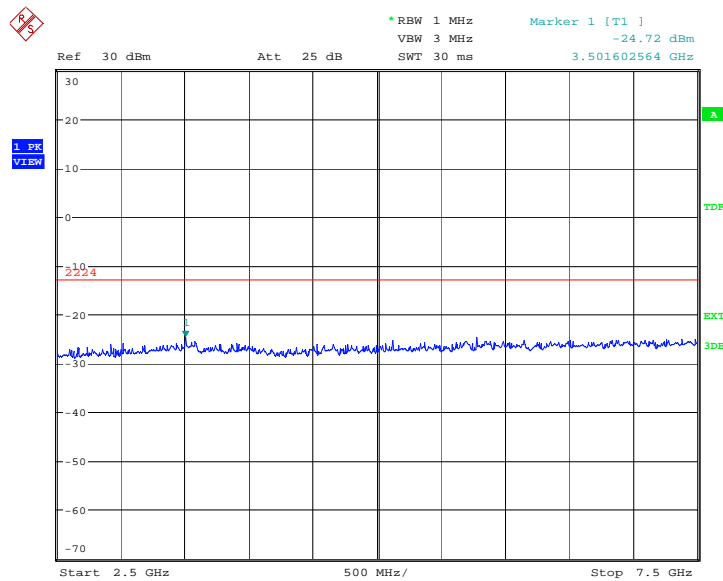

Date: 29.FEB.2012 09:00:20

A. 8.3.32 Channel 4183: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

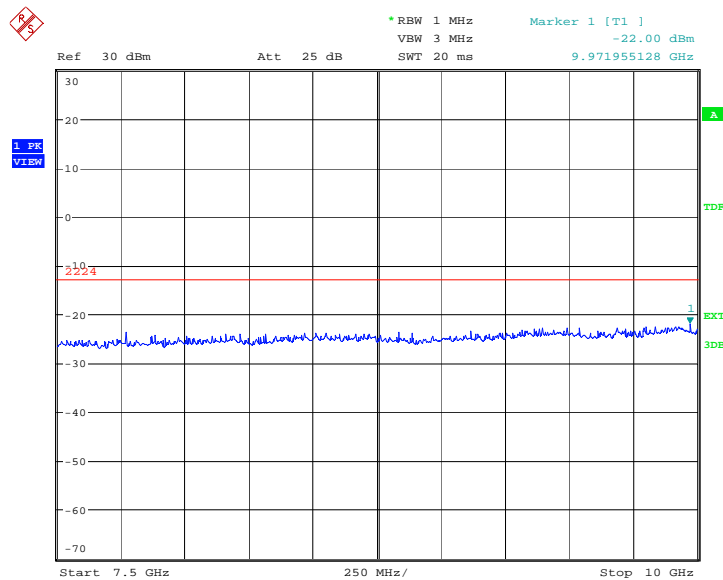


Date: 29.FEB.2012 09:00:48

A. 8.3.33 Channel 4233: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

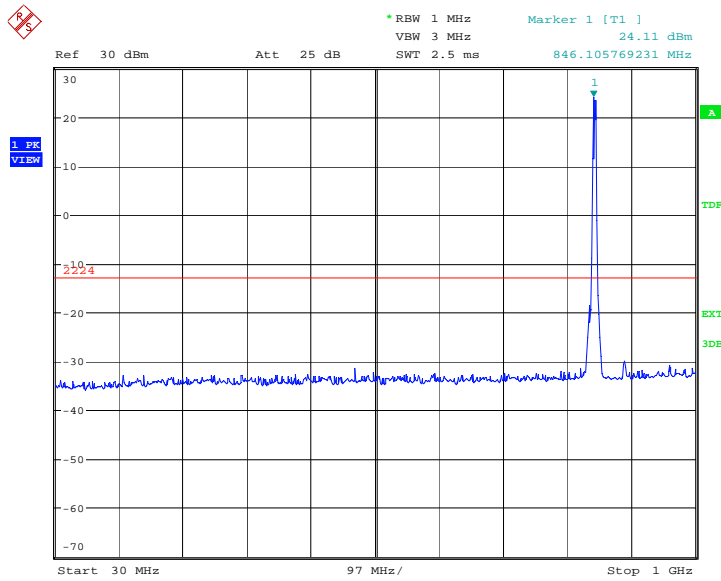

Date: 29.FEB.2012 09:01:19

A. 8.3.34 Channel 4233: 1GHz – 2.5GHz

Spurious emission limit –13dBm.

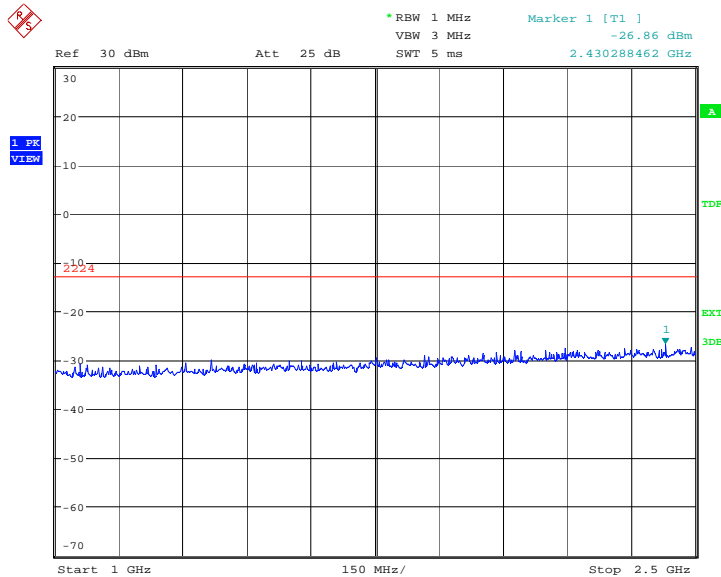


Date: 29.FEB.2012 09:01:48

A. 8.3.35 Channel 4233: 2.5GHz –7.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

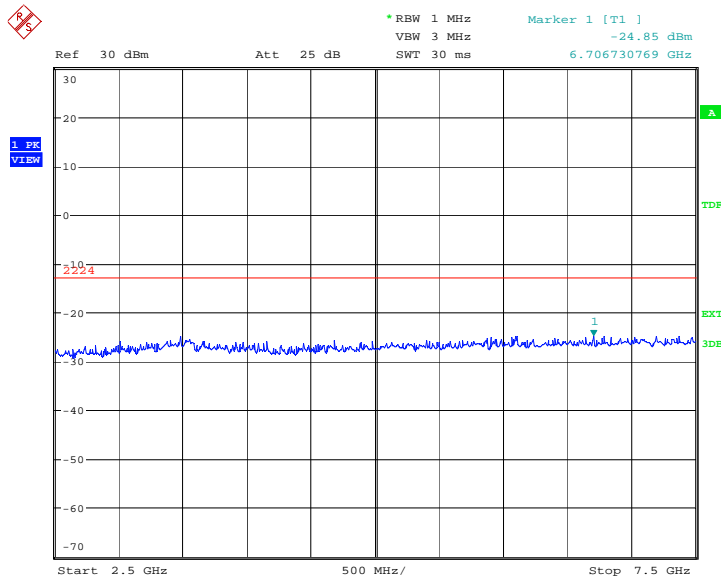

Date: 29.FEB.2012 09:02:16


A. 8.3.36 Channel 4233: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

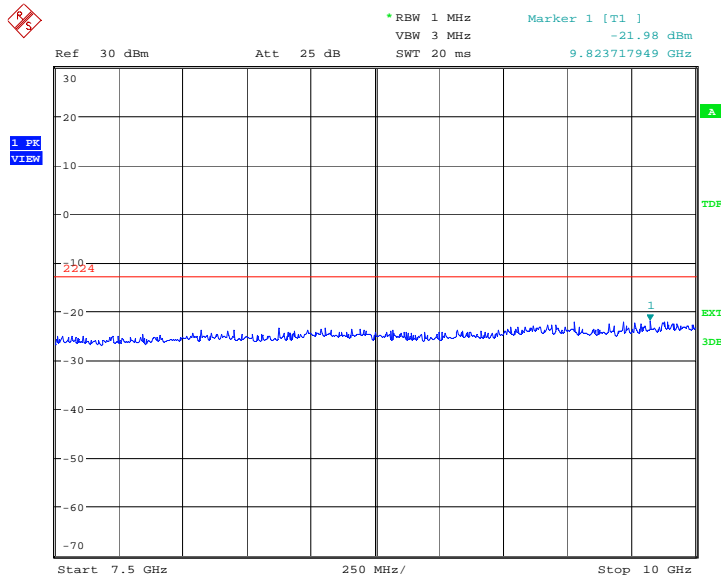


Date: 29.FEB.2012 09:02:44

A. 8.3.37 Idle mode: 30MHz – 1GHz
Spurious emission limit -13dBm.

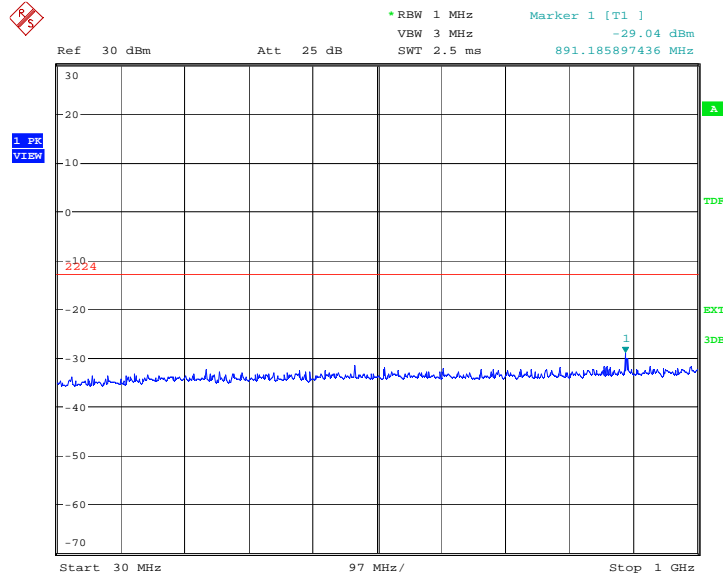


Date: 29.FEB.2012 09:03:13

A.8.3.38 Idle mode: 1GHz – 2.5GHz
Spurious emission limit -13dBm.

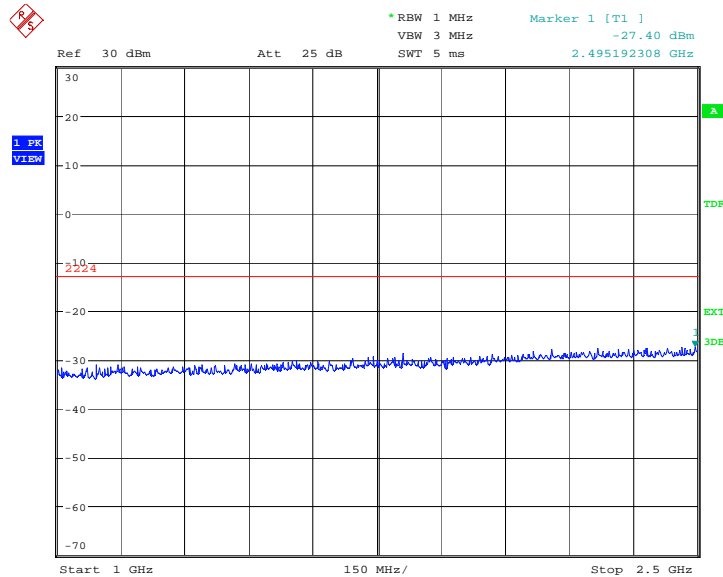


Date: 29.FEB.2012 09:03:41

A.8.3.39 Idle mode: 2.5GHz – 7.5GHz
Spurious emission limit -13dBm.

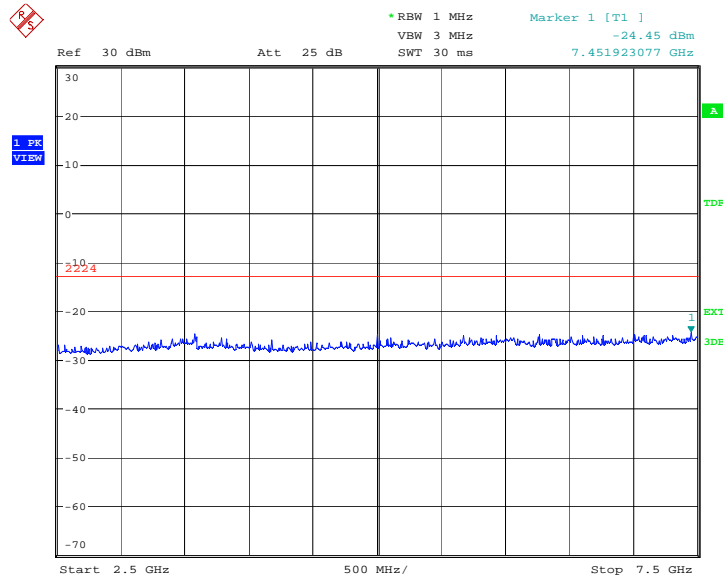

Date: 29.FEB.2012 09:04:09

A.8.3.40 Idle mode: 7.5GHz – 10GHz
Spurious emission limit -13dBm.

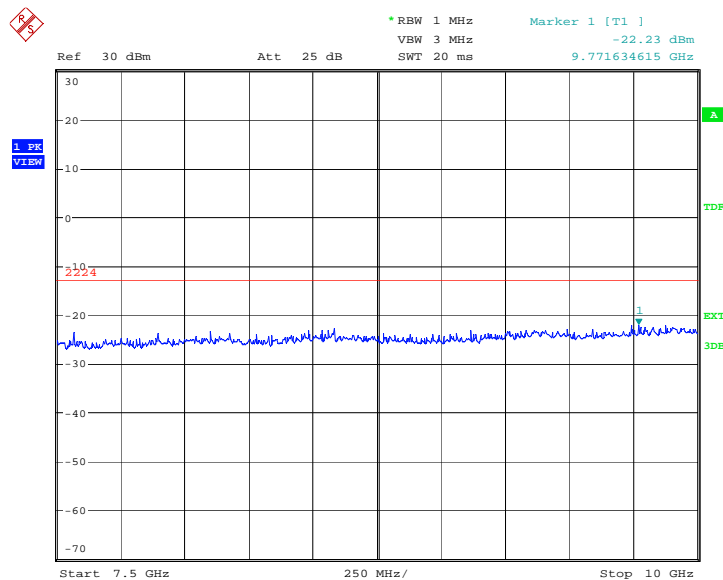

Date: 29.FEB.2012 09:04:38

A.9 RECEIVER RADIATION EMISSION

Reference

FCC: CFR Part 15.109, 2.1053

IC: RSS 132, Issue 2, Section 4.6. RSS 133, Issue 5, Section 6.6

A.9.1 Method of Measurement


The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.9.2 Method of Measurement


Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 9.3 Measurement results

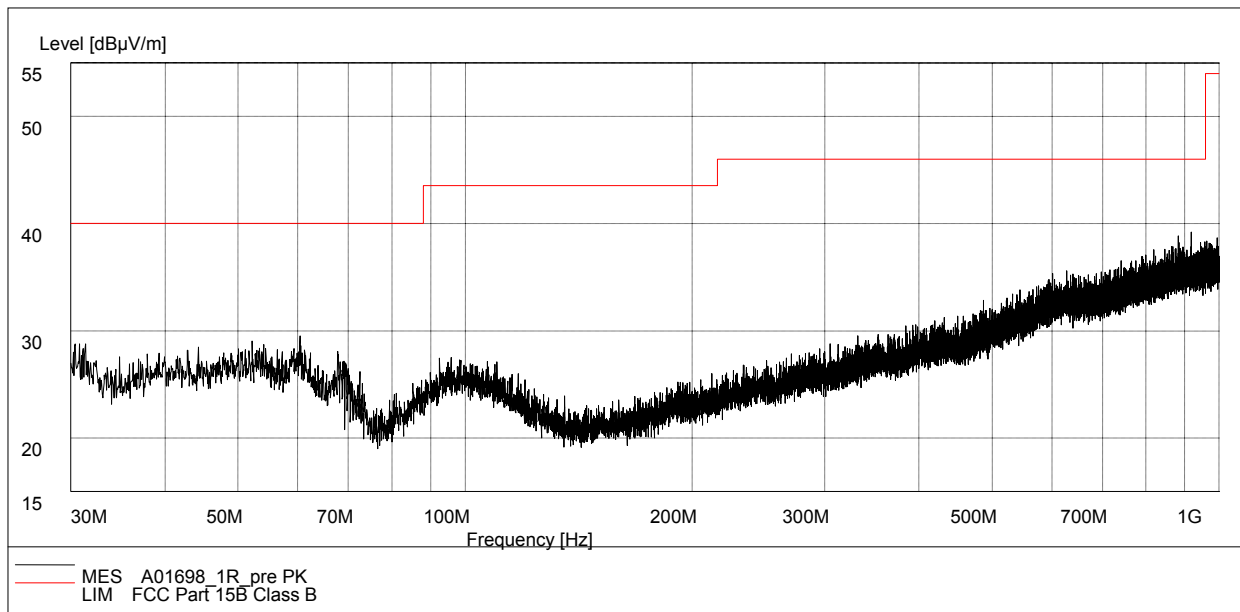

IF bandwidth: 120 kHz


Idle Mode: 30MHz-1GHz

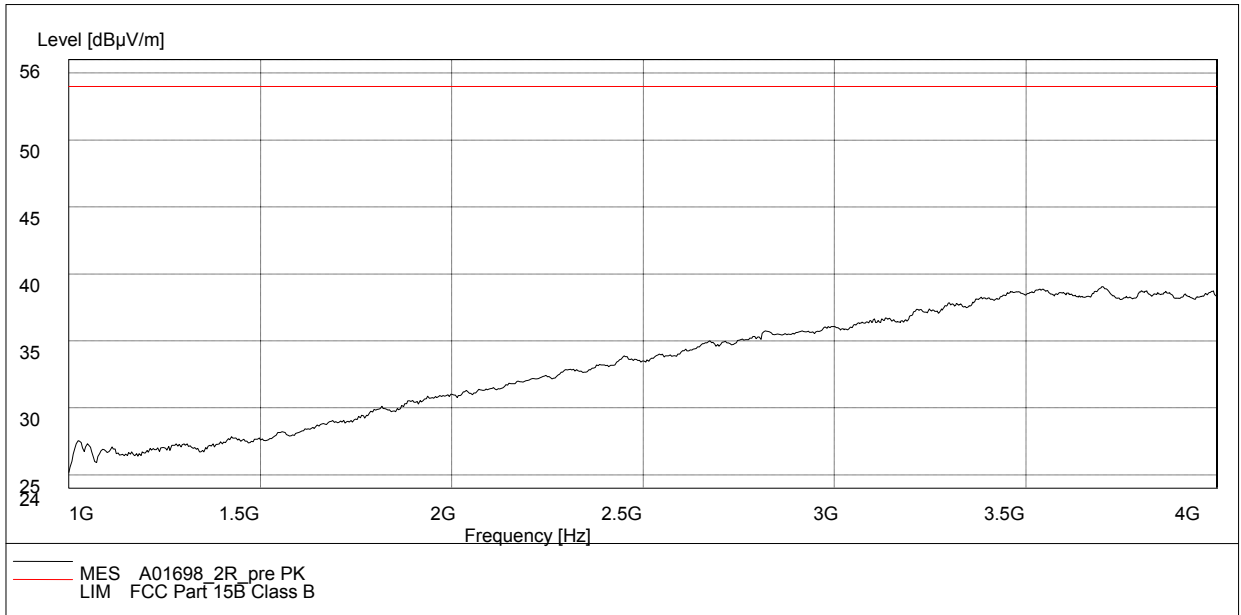

RBW / VBW 1 MHz

Idle Mode: 1GHz-4GHz

FCC 4-18G

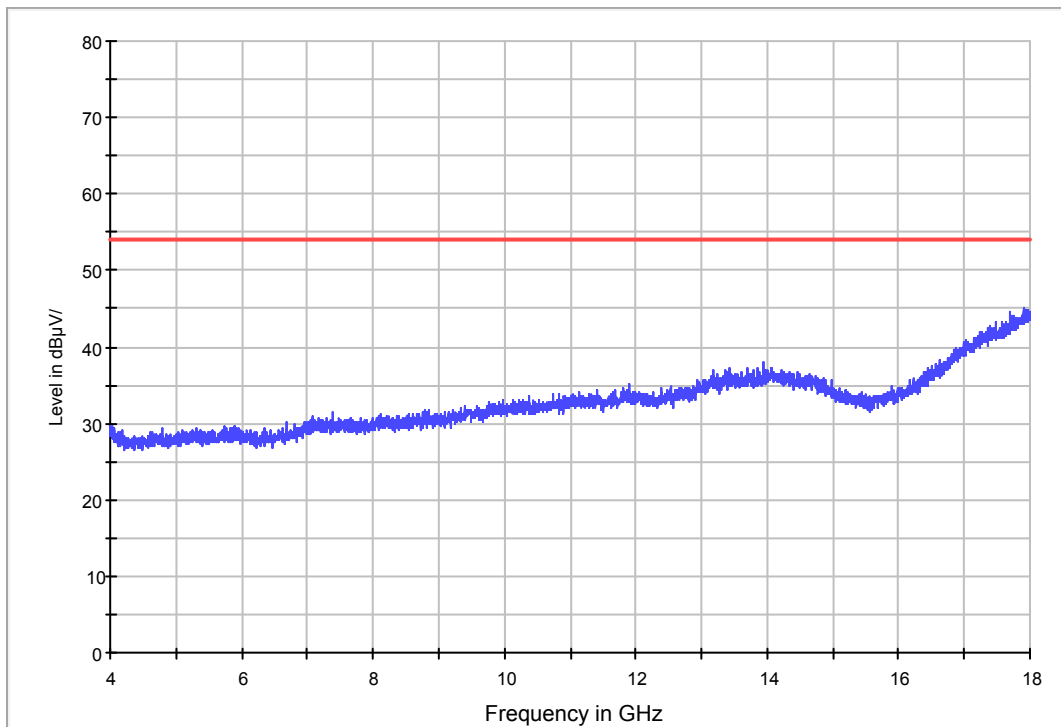

RBW / VBW 1 MHz

Idle Mode: 4GHz-18GHz

*****END OF REPORT*****